



FCC Part 96.47 TEST REPORT

FCC ID : 2AQ68T99W696
Equipment : 5G WWAN Module
Brand Name : Foxconn
Model Name : T99W696
Applicant : Hon Lin Technology Co., Ltd
11F, No.32, Jihu Rd., Neihu Dist., Taipei City 114, Taiwan R.O.C.
Manufacturer : Hon Lin Technology Co., Ltd
11F, No.32, Jihu Rd., Neihu Dist., Taipei City 114, Taiwan R.O.C.
Standard : FCC Part 96.47
RF Interface : NR n48, n78

The product was received on May 14, 2025, and testing was performed from Jun. 10, 2025 to Aug. 26, 2025. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Approved by: Jones Tsai

Sportun International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	5
1.3 Testing Laboratory.....	6
1.4 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test	7
2.1 Connection Diagram of Test System.....	7
3 End User Device additional requirement	8
3.1 Test Requirement	8
3.2 Test Procedure	8
3.3 Test Result.....	9
4 Measuring Equipment List	13
Appendix A. Setup Photographs	



History of this test report



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3	96.47	End User Device additional requirement	Pass	-

Conformity Assessment Condition:

The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Keven Cheng

Report Producer: Clio Lo



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
General Specs	
WCDMA/LTE/5G NR and GNSS.	

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

Brand	Model	HW
Foxconn	T99W696	Sample1: WCDMA+LTE+5G NR +w/o E-SIM
		Sample 2: WCDMA+LTE+5G NR +E-SIM

Note: All the tests were performed with Sample 1.

Support band and evaluated information	
Supported band	5G NR n48,n77,n78
Evaluated and Tested band	5G NR n48,n78
Band covered information	For the same modulation, power, mechanism and bandwidth coverage area, as shown below: ■ n78 cover n77(Part 96)

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

1.2 Modification of EUT

No modifications are made to the EUT during the entire test sessions.



1.3 Testing Laboratory

Test Site	Sportun International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sportun Site No.
	TH05-HY
Test Engineer	Alston Tsai
Temperature	22 ~ 25 °C
Relative Humidity	41 ~ 48 %

FCC designation No.: TW3786

1.4 Applicable Standards


- FCC Part 96.47
- FCC KDB 940660 D01 Part 96 CBRS Eqpt v03
- WINNF-TS-0122-V1.0.2 CBRS CBSD Test Specification

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. The TAF code is not including all the FCC KDB listed without accreditation.

2 Test Configuration of Equipment Under Test

2.1 Connection Diagram of Test System

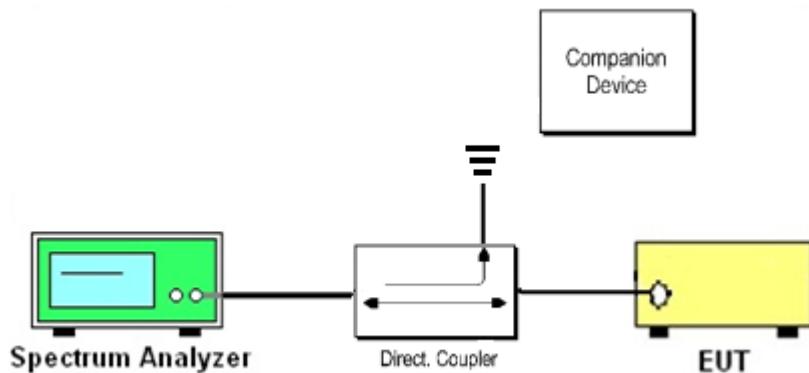

The companion device is a certified NR CBSD (FCC ID: WBK-RU4370)



3 End User Device additional requirement

3.1 Test Requirement

FCC Part 96.47

(a) End User Devices may operate only if they can positively receive and decode an authorization signal transmitted by a CBSD, including the frequencies and power limits for their operation.

(1) An End User Device must discontinue operations, change frequencies, or change its operational power level within 10 seconds of receiving instructions from its associated CBSD.

3.2 Test Procedure

The following procedure is following in accordance with WINNF-TS-0122-V1.0.2 CBRS CBSD Test Specification, using the certified Airspan NR CBSD (FCC ID: WBK-RU4370) as companion device to present compliance with Part 96.47 requirement for End User Device (EUD):

1. Configure SAS granted CBSD to operate at frequency 3560-3600 MHz and power level 20 dBm/MHz
2. Enable CBSD service from BTI management
3. Check EUD Tx Frequency and power
4. Disable CBSD service from BTI management
 - a. Check if EUD stops transmission within 10 seconds.
5. Configure SAS granted CBSD to operate at frequency 3650-3690 MHz and power level 30 dBm/MHz
6. Enable CBSD service from BTI management
7. Check EUD Tx Frequency and power
8. Disable CBSD service from BTI management
 - a. Check if EUD stops transmission within 10 seconds.



3.3 Test Result

For n48

[Step 1] Configure SAS granted CBSD to operate at frequency 3560-3600 MHz and power level 20 dBm/MHz

[Step 3] Check EUD Tx Frequency and power




[Step 4.a.] EUD stops transmission within 10 seconds right after receiving instructions from its associated CBSD.



[Step 5] Configure SAS granted CBSD to operate at frequency 3650-3690 MHz & power level 30 dBm/MHz

[Step 7] Check EUD Tx Frequency and power

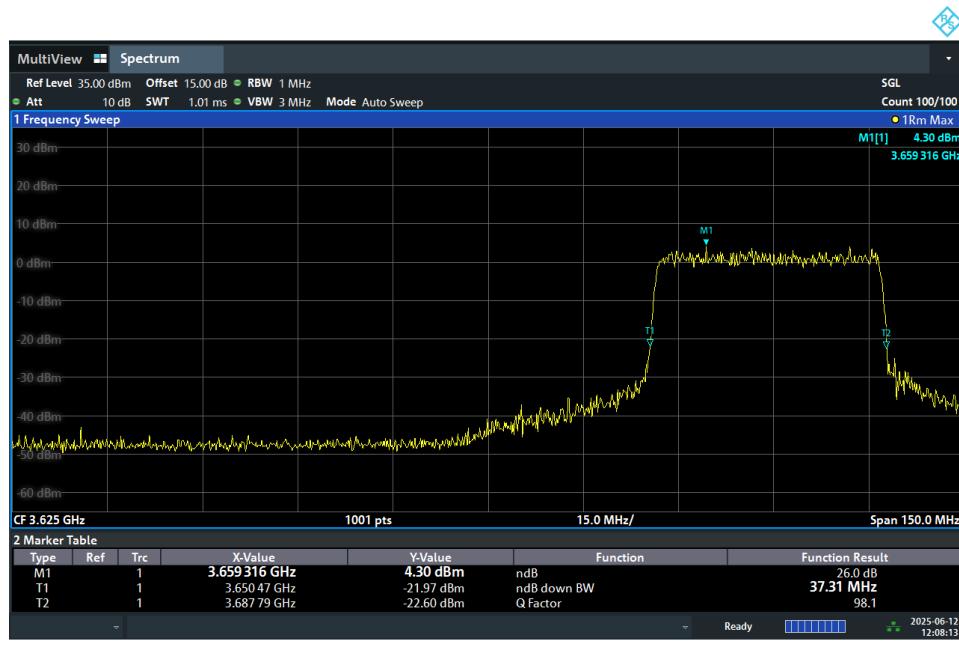

[Step 8.a.] After changing the frequency and power level,

The EUD discontinues operating, changes frequencies, or changes its operational power level within 10 seconds right after receiving instructions from its associated CBSD. Test result is a PASS.



For n78

[Step 1] Configure SAS granted CBSD to operate at frequency 3550-3650 MHz and power level 20 dBm/MHz

[Step 3] Check EUD Tx Frequency and power




[Step 4.a.] EUD stops transmission within 10 seconds right after receiving instructions from its associated CBSD.




[Step 5] Configure SAS granted CBSD to operate at frequency 3600-3700 MHz & power level 30 dBm/MHz

[Step 7] Check EUD Tx Frequency and power

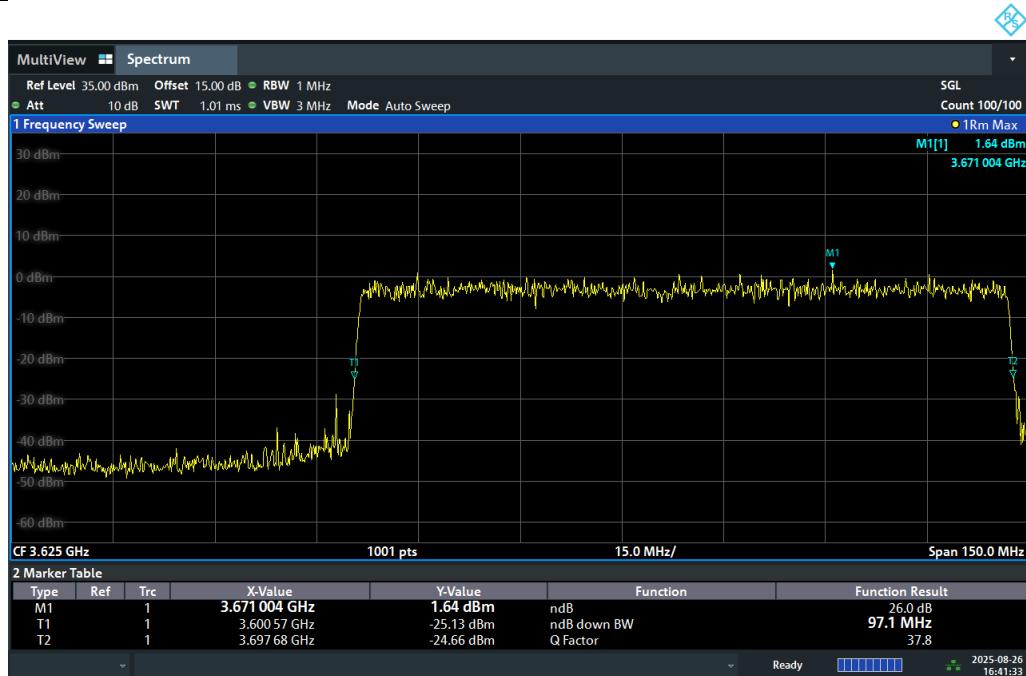

04:41:34 PM 08/26/2025

[Step 8.a.] After changing the frequency and power level, The EUD discontinues operating, changes frequencies, or changes its operational power level within 10 seconds right after receiving instructions from its associated CBSD. Test result is a PASS.

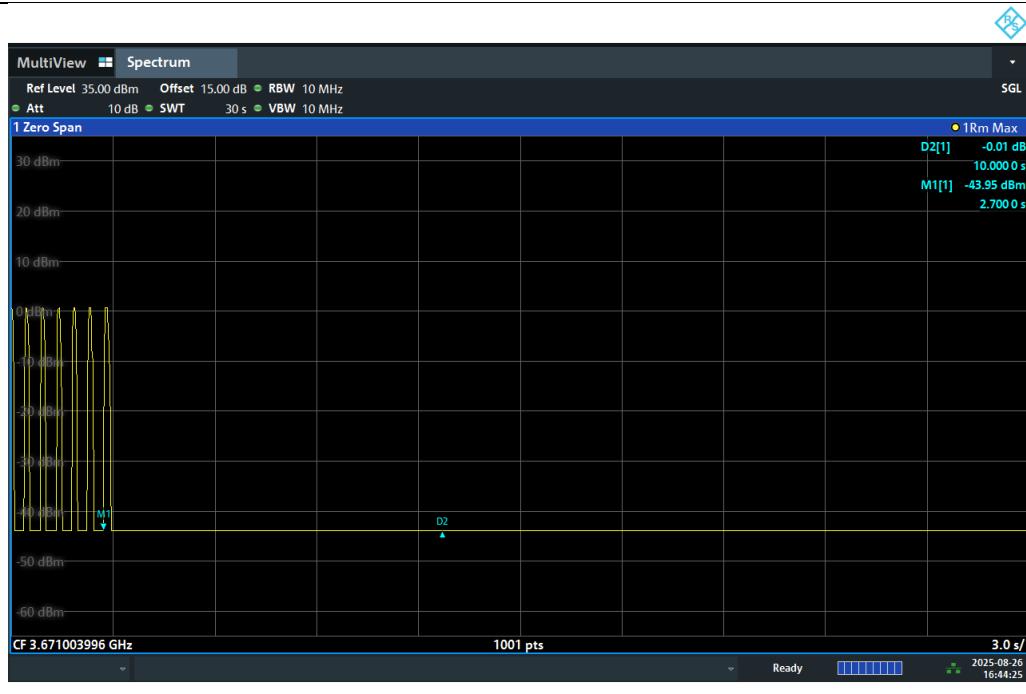

04:44:26 PM 08/26/2025



4 Measuring Equipment List

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV3044	101468	10Hz~44GHz	Mar. 13, 2025	Jun. 10, 2025 ~ Jun. 12, 2025	Mar. 12, 2026	Conducted (TH05-HY)
Spectrum Analyzer	R&S	FSV3044	101435	10Hz~44GHz	Oct. 28, 2024	Aug. 27, 2025	Oct. 27, 2025	Conducted (TH05-HY)
CBSD Base Station	BTI	M43700	B23000022S	FCC ID: WBK-RU4370	N/A	Jun. 10, 2025 ~ Aug. 27, 2025	N/A	Conducted (TH05-HY)
SAS Test harness	WInnForum	1.0.0.3	N/A	N/A	N/A	Jun. 10, 2025 ~ Aug. 27, 2025	N/A	Conducted (TH05-HY)