



RF TEST REPORT

Product Name: DTEN D7X 75"

Model Name: DBR1475, DBR1475-S1

FCC ID: 2AQ7Q-DBR1475

Issued For : DTEN Inc

97 E Brokaw Road suite 180 San Jose CA 95112

Issued By : Shenzhen LGT Test Service Co., Ltd.

Room 205, Building 13, Zone B, Chen Hsong Industrial Park,
No.177 Renmin West Road, Jinsha Community, Kengzi
Street, Pingshan New District, Shenzhen, China

Report Number: LGT22L023RF08

Sample Received Date: Sep. 28, 2022

Date of Test: Sep. 28, 2022 – Feb. 17, 2023

Date of Issue: Feb. 17, 2023

The test report is effective only with both signature and specialized stamp. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report only apply to the tested sample.



TEST REPORT CERTIFICATION

Applicant DTEN Inc
Address 97 E Brokaw Road suite 180 San Jose CA 95112
Manufacturer DTEN Inc
Address 97 E Brokaw Road suite 180 San Jose CA 95112
Product Name DTEN D7X 75"
Trade Mark DTEN
Model Name DBR1475, DBR1475-S1
Sample Status: Normal

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC Part 15.407 ANSI C63.10-2013	PASS

Prepared by:

Zane Shan

Zane Shan
Engineer

Approved by:

Vita Li

Vita Li
Technical Director





Table of Contents	Page
1 . SUMMARY OF TEST RESULTS	6
1.1 TEST FACTORY	7
1.2 MEASUREMENT UNCERTAINTY	7
2 . GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF THE EUT	8
2.2 TEST SOFTWARE AND POWER LEVEL	10
2.3 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	11
2.4 EQUIPMENTS LIST FOR ALL TEST ITEMS	12
3 . EMC EMISSION TEST	13
3.1 CONDUCTED EMISSION MEASUREMENT	13
3.2 RADIATED EMISSION AND (BANDEDGE) MEASUREMENT	16
4. BANDWIDTH MEASUREMENT	42
4.1 EMISSION BANDWIDTH (EBW) 26 BANDWID PROCEDURES/LIMIT	42
4.2 TEST PROCEDURE	42
4.3 DEVIATION FROM STANDARD	42
4.4 TEST SETUP	42
4.5 EUT OPERATION CONDITIONS	42
4.6 TEST RESULTS	42
5. MAXIMUM CONDUCTED OUTPUT POWER	43
5.1 LIMIT	43
5.2 TEST PROCEDURE	43
5.3 DEVIATION FROM STANDARD	43
5.4 TEST SETUP	43
5.5 EUT OPERATION CONDITIONS	43
5.6 TEST RESULTS	43
6. PEAK POWER SPECTRAL DENSITY	44
6.1 LIMIT	44
6.2 TEST PROCEDURES	44
6.3 TEST RESULTS	44
7. IN-BAND EMISSIONS	45
7.1 LIMIT	45
7.2 TEST PROCEDURES	45
7.3 TEST RESULTS	45
8. CONTENTION BASED PROTOCOL	46



Table of Contents	Page
8.1 LIMIT	46
8.2 TEST PROCEDURES	46
8.3 TEST RESULTS	46
9. ANTENNA REQUIREMENT	47
9.1 STANDARD REQUIREMENT	47
9.2 EUT ANTENNA	47
APPENDIX I - TEST RESULTS	48
DUTY CYCLE	48
MAXIMUM CONDUCTED OUTPUT POWER	111
OCCUPIED CHANNEL BANDWIDTH	195
MAXIMUM POWER SPECTRAL DENSITY LEVEL	240
CONDUCTED RF SPURIOUS EMISSION	323
POWER SPECTRAL MASK	368
CONTENTION BASED PROTOCOL	413



Revision History

Rev.	Issue Date	Contents
00	Feb. 17, 2023	Initial Issue



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

Part 15.407, KDB 789033 D02 General U-NII Test Procedures New Rules v02r01

FCC Part 15.407		
FCC standard	Test Item	Results
15.207	AC Conducted Emission	PASS
15.407 (a) /15.407 (e)	26dB/6dB &99% Bandwidth	PASS
15.407(a)	Maximum Conducted Output Power	PASS
15.407(b)/15.205/15.209	Radiated Emission And (bandedge Emissions) Measurement	PASS
15.407(a)	Power Spectral Density	PASS
15.407(c)	Automatically Discontinue Transmission	PASS
15.407(d)	Contention Based Protocol	PASS
15.407(g)	Frequency Stability	PASS
15.203/15.204	Antenna Requirement	PASS

NOTE:

- (1) 'N/A' denotes test is not applicable in this Test Report.
- (2) All tests are according to ANSI C63.10-2013.
- (3) For model DBR1475 and DBR1475-S1, the TP control board have two types of A and B, this do not affect RF parameters. DBR1475 with type A was selected as the typical model for all necessary tests performed. For the details of type A&B, please refer to the EUT photos.



1.1 TEST FACTORY

Company Name:	Shenzhen LGT Test Service Co., Ltd.
Address:	Room 205, Building 13, Zone B, Chen Hsong Industrial Park, No.177 Renmin West Road, Jinsha Community, Kengzi Street, Pingshan New District, Shenzhen, China
Accreditation Certificate	A2LA Certificate No.: 6727.01
	FCC Registration No.: 746540
	CAB ID: CN0136

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

Parameter	Uncertainty
Occupied Channel Bandwidth	$\pm 3.2 \%$
RF Output Power, Conducted	$\pm 0.71\text{dB}$
Power Spectral Density, Conducted	$\pm 1.57 \text{ dB}$
Unwanted Emission, Conducted	$\pm 0.63\text{dB}$
Conducted emission	$\pm 2.80\text{dB}$
All Emissions, Radiated (0.009-30MHz)	$\pm 2.16\text{dB}$
All Emissions, Radiated (30MHz-1GHz)	$\pm 4.40\text{dB}$
All Emissions, Radiated (1GHz-18GHz)	$\pm 5.49\text{dB}$
Temperature	$\pm 0.5^{\circ}\text{C}$
Humidity	$\pm 2\%$
Duty Cycle	$\pm 2.3\%$



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	DTEN D7X 75"	
Trade Mark	DTEN	
Model Name	DBR1475	
Series Model	DBR1475-S1	
Model Difference	Only the model name and shipping packaging method are different.	
Product Description	The EUT is a DTEN D7X 75"	
	Operation Frequency:	IEEE 802.11a/n/ac/ax(20MHz): 5.935GHz-7.115GHz IEEE 802.11n/ac/ax(40MHz): 5.969GHz-7.085GHz IEEE 802.11ac/ax(80MHz): 5.985GHz-7.025GHz IEEE 802.11ax(HE160): 6.025GHz-6.985GHz
	Modulation Type:	802.11a/n/ac/ax: OFDM-BPSK,QPSK,16-QAM,64-QAM,256-QAM and 1024QAM
	Antenna Designation:	Please refer to the Note 3.
	Antenna Gain	ANT 1: 4.18dBi ANT 2: 4.18dBi MIMO: 7.19dBi
More details of EUT technical specification, please refer to the User Manual.		
Test Channel	Please refer to the Note 2.	
Rating	Input: AC 100-240V~ 50/60Hz 4.0A	
Hardware Version	RK3588.6 Ver:1.3	
Software Version	0.6.4	
Connecting I/O Port(s)	Please refer to the Note 1.	

Note

1. For a more detailed features description, please refer to the manufacturer's specifications or the User Manual.



In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

802.11a/n/ac/ax HE20							
UNII-5		UNII-6		UNII-7		UNII-8	
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	5955	93	6415	117	6535	189	6895
45	6175	97	6435	149	6695	229	7095
93	6415	105	6475	181	6855		

802.11n/ac/ax HE40							
UNII-5		UNII-6		UNII-7		UNII-8	
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
3	5965	99	6445	123	6565	195	6925
43	6165	107	6485	147	6685	203	6965
91	6405	115	6525	179	6845	227	7085

802.11ac/ax HE80							
UNII-5		UNII-6		UNII-7		UNII-8	
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
7	5985	87	6385	119	6545	199	6945
39	6145	103	6465	139	6625	215	7025
				151	6705		
				163	6785		
				183	6865		

802.11ax HE160							
UNII-5		UNII-6		UNII-7		UNII-8	
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
3	5965	99	6445	123	6565	195	6925
43	6165	107	6485	147	6685	203	6965
91	6405	115	6525	179	6845	227	7085

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Carrier Frequency Channel

KDB 662911 D01 Multiple Transmitter Output v02r01

2) Directional Gain Calculations for In-Band Measurements

a) Basic methodology with NANT transmit antennas, each with the same directional gain GANT dBi, being driven by NANT transmitter outputs of equal power. Directional gain is to be computed as follows:

(i) If any transmit signals are correlated with each other,
Directional gain = $2.2 + 10 \log(2.2)$ dBi=5.23 dBi



Ant	Brand	Model Name	Ant Type	Connector	Gain (dBi)	NOTE
A	MARGENTECH	MAW-1Q5-0008	Dipole Antenna	N/A	ANT 1: 4.18dBi ANT 2: 4.18dBi MIMO: 7.19dBi	WLAN 6E ANT

Note: The antenna information refer the manufacturer provide report, applicable only to the tested sample identified in the report.

2.2 TEST SOFTWARE AND POWER LEVEL

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.

Test software Version	Test program: WIFI 6E		
CMD	a	SISO	10
	n20	SISO	10
	n20	MIMO	10
	n40	SISO	10
	n40	MIMO	10
	ac80	SISO	10
	ac80	MIMO	10
	ax80	SISO	10
	ax80	MIMO	10
	ax160	SISO	10
	ax160	MIMO	10



2.3 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Accessories Equipment

Description	Manufacturer	Model	S/N	Rating
USB C-to-C cable	DTEN	N/A	N/A	1.9m, shielded
stylus	DTEN	N/A	N/A	N/A
Power cord	XIEKANG ELECTRONIC	N/A	N/A	3m, US plug
Camera	DTEN	N/A	N/A	2pcs

Auxiliary Equipment

Description	Manufacturer	Model	S/N	Rating
Laptop	HUAWEI	HKF-16	N/A	N/A

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



2.4 EQUIPMENTS LIST FOR ALL TEST ITEMS

Conducted Emission					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Until
EMI Test Receiver	R&S	ESU8	100372	2022.04.12	2023.04.11
LISN	COM-POWER	LI-115	02032	2022.04.13	2023.04.12
LISN	SCHWARZBECK	NNLK 8121	00847	2022.08.19	2023.08.18
CE Cable	N.A	C01	N.A	2022.05.05	2023.05.04
Transient Limiter	CYBERTEK	EM5010A	E2250100049	2022.08.19	2023.08.18
Temperature & Humidity	KTJ	TA218B	N.A	2022.05.05	2023.05.04
Testing Software	EMC-I_V1.4.0.3_SKET				

RF Radiated Test equipment					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Until
EMI Test Receiver	R&S	ESU8	100372	2022.04.12	2023.04.11
Active loop Antenna	R&S	HFH2-Z2	POS871398181	2022.06.02	2024.06.01
Spectrum Analyzer	Kesight	N9010B	MY60242508	2022.04.29	2023.04.28
Bilog Antenna	SCHAFFNER	CBL6112B	2705	2022.06.05	2024.06.04
Bilog Antenna	SCHAFFNER	VULB 9168	01447	2022.12.12	2023.12.11
Horn Antenna	Schwarzbeck	3115	10SL0060	2022.06.02	2024.06.01
Pre-amplifier(0.1M -3GHz)	HP	8447D	2727A05655	2022.04.11	2023.04.10
Pre-amplifier(1-26 .5G)	Agilent	8449B	3008A4722	2022.04.13	2023.04.12
RE Cable (9K-1G)	N.A	R01	N.A	2022.05.05	2023.05.04
RE Cable (1-26G)	N.A	R02	N.A	2022.05.05	2023.05.04
Wireless Communications Test Set	R&S	CMW 500	137737	2022.04.29	2023.04.28
Temperature & Humidity	KTJ	TA218B	N.A	2022.05.05	2023.05.04
Testing Software	EMC-I_V1.4.0.3_SKET				

RF Conducted Test equipment					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Until
Signal Analyzer	Keysight	N9010B	MY60242508	2022.04.29	2023.04.28
RF Automatic Test system	MW	MW200-RFCB	MW220322LG	2022.04.29	2023.04.28
MXG Vector Signal Generator	Keysight	N5182B	MY59100717	2022.06.02	2023.06.01
Temperature & Humidity test chamber	AISRY	LX-1000L	171200018	2022.05.10	2023.05.09
Attenuator	eastsheep	90db	N.A	2022.04.29	2023.04.28
Router	TP-LINK(FCC ID:Q87-WRT320 0ACM)	TL-WR885N	1125074010735	N.C.R	N.C.R
Temperature & Humidity	KTJ	TA218B	N.A	2022.05.05	2023.05.04
Testing Software	MTS8310_V2.0.0.0_MW				



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class B (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	56.00	46.00	CISPR
5.0 -30.0	60.00	50.00	CISPR

0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of “ * ” marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2 TEST PROCEDURE

- The EUT is 0.8 m from the horizontal ground plane and 0.4 m from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments are powered from additional LISN(s). The LISN provides 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN is at least 80 cm from the nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

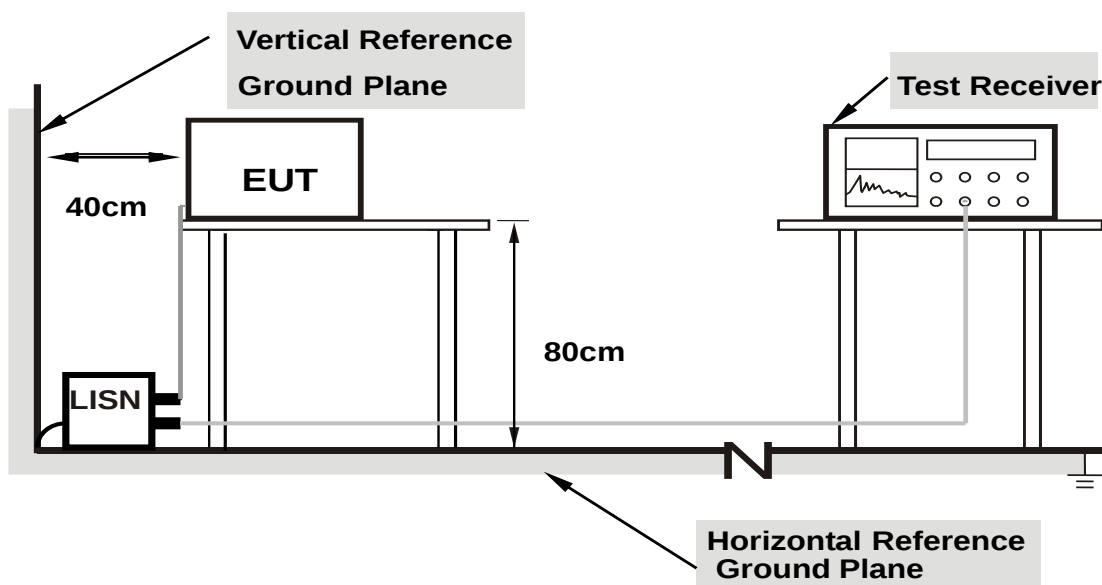

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes support units.


3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.




3.1.6 TEST RESULTS

Project: LGT22L023	Test Engineer: Dylan.shi
EUT: DTEN D7X 75"	Temperature: 17.2°C
M/N: DBR1475	Humidity: 55%RH
Test Voltage: AC 120V/60Hz	Test Data: 2023-01-03
Test Mode: TX 6GHz	
Note:	

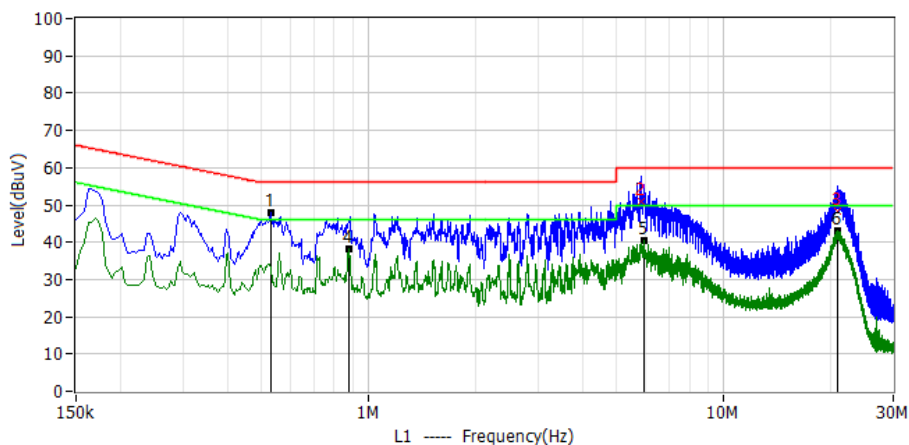

No.	Frequency	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Margin dB	Detector	Polar
1*	530.000kHz	37.56	10.51	48.07	56.00	-7.93	PK	L1
2	5.838MHz	40.03	10.80	50.83	60.00	-9.17	QP	L1
3	20.914MHz	37.23	11.10	48.33	60.00	-11.67	QP	L1
4*	878.000kHz	27.79	10.52	38.31	46.00	-7.69	AV	L1
5*	5.970MHz	29.48	10.84	40.32	50.00	-9.68	AV	L1
6*	20.878MHz	32.03	11.10	43.13	50.00	-6.87	AV	L1

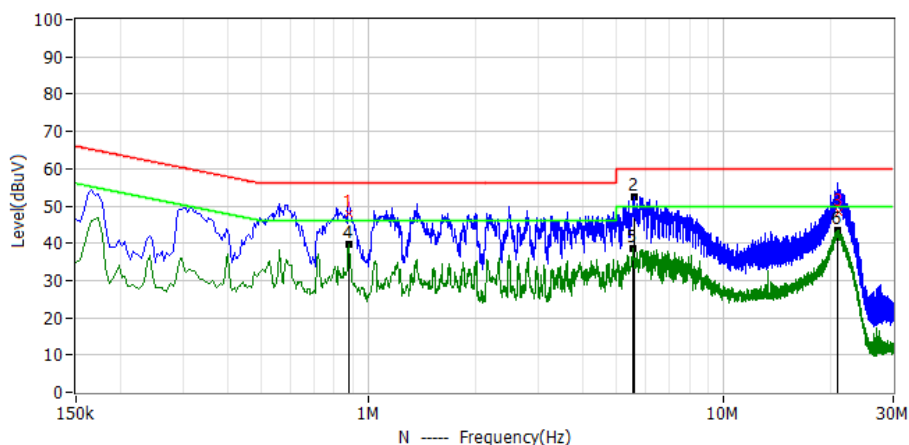

No.	Frequency	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Margin dB	Detector	Polar
1	878.000kHz	37.36	10.50	47.86	56.00	-8.14	QP	N
2*	5.582MHz	41.50	10.84	52.34	60.00	-7.66	PK	N
3	21.030MHz	37.37	11.10	48.47	60.00	-11.53	QP	N
4*	878.000kHz	29.14	10.52	39.66	46.00	-6.34	AV	N
5*	5.554MHz	27.57	10.84	38.41	50.00	-11.59	AV	N
6*	20.958MHz	32.31	11.11	43.42	50.00	-6.58	AV	N



3.2 RADIATED EMISSION AND (BANDEDGE) MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

In case the emission fall within the restricted band specified on 15.407(b)7&15.205/209(a), then the limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	68.2	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15E.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

LIMITS OF RESTRICTED FREQUENCY BANDS

FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (GHz)
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

Note: In case the emission radiated emission above 1000MHz fall within the restricted band the restricted frequency bands, the peak limit is 74 dBuV/m.



Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak
Start Frequency	1000 MHz(Peak/AV)
Stop Frequency	10th carrier harmonic (Peak/AV)
RB / VB (emission in restricted band)	1 MHz / 1 MHz, AV=1 MHz /3 MHz

For Band edge

Spectrum Parameter	Setting
Detector	Peak
RB / VB (emission in restricted band)	1 MHz / 1 MHz, AV=1 MHz /3 MHz

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	90kHz~110kHz / RB 200Hz for QP
Start ~ Stop Frequency	110kHz~490kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	490kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP



3.2.2 TEST PROCEDURE

- The measuring distance at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz.
- The EUT was placed on the top of a rotating table 0.8 m (above 1GHz is 1.5 m) above the ground at a 3 m anechoic chamber test site. The table was rotated 360 degree to determine the position of the highest radiation.
- The height of the equipment shall be 0.8 m (above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. Horizontal and vertical polarization of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and QuasiPeak detector mode will be re-measured.
- If the Peak Mode measured value is compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and no additional QP Mode measurement was performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

3.2.2 DEVIATION FROM TEST STANDARD


No deviation

3.2.3 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

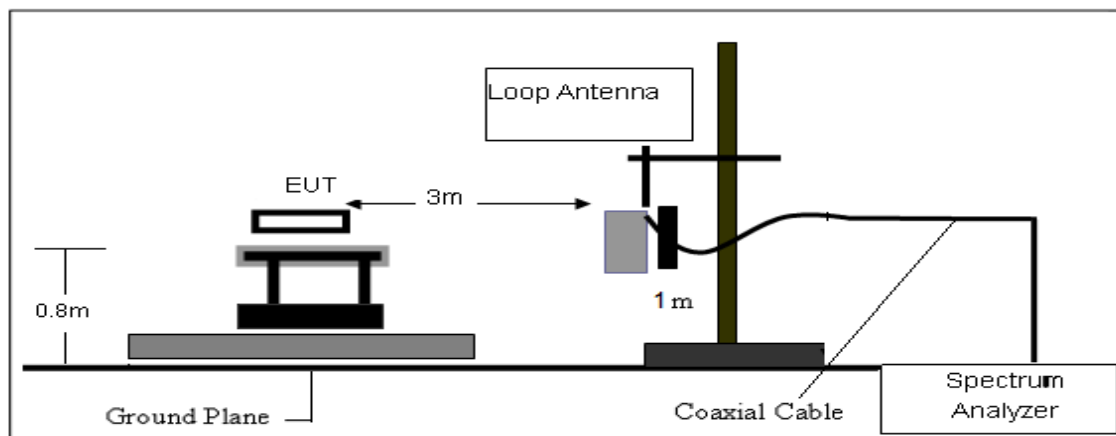

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

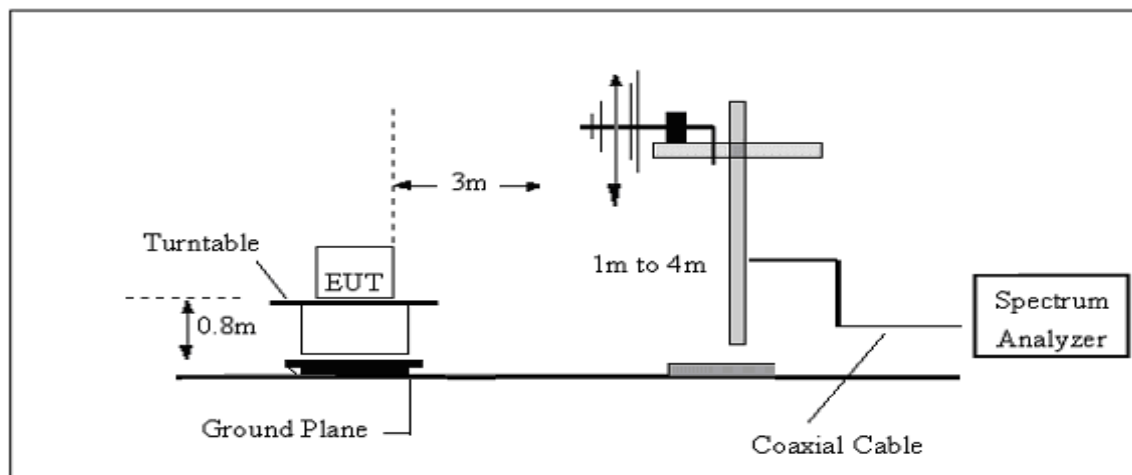

(C) Radiated Emission Test-Up Frequency Above 1GHz

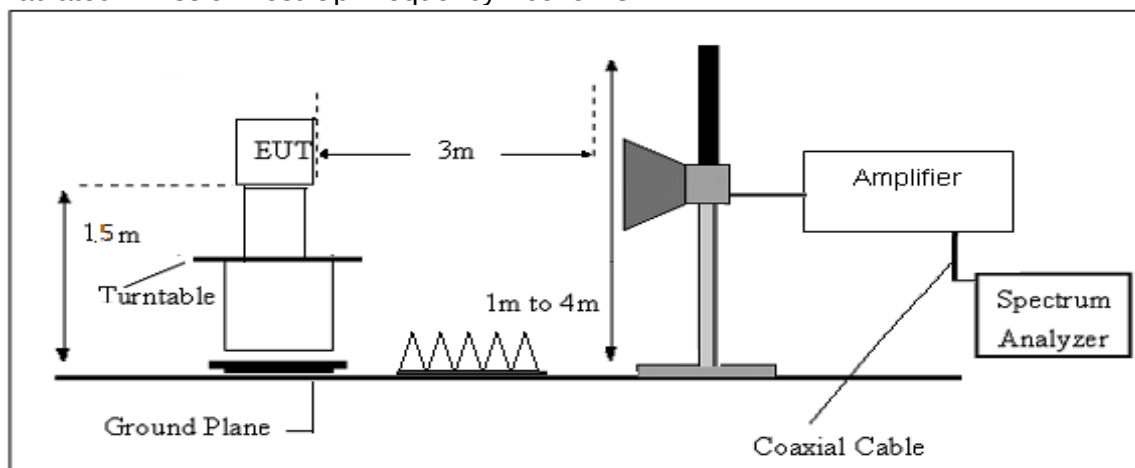



3.2.4 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

3.2.5 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where

FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude

AG = Amplifier Gain

AF = Antenna Factor

For example


Frequency	FS	RA	AF	CL	AG	Factor
(MHz)	(dBμV/m)	(dBμV/m)	(dB)	(dB)	(dB)	(dB)
300	40	58.1	12.2	1.6	31.9	-18.1

$$\text{Factor} = \text{AF} + \text{CL} - \text{AG}$$




3.2.6 TEST RESULTS

Project: LGT22L023	Test Engineer: Dylan.shi
EUT: DTEN D7X 75"	Temperature: 21.5°C
M/N: DBR1475	Humidity: 48%RH
Test Voltage: AC 120V/60Hz	Test Data: 2023-01-03
Test Mode: TX 6GHz	
Note:	

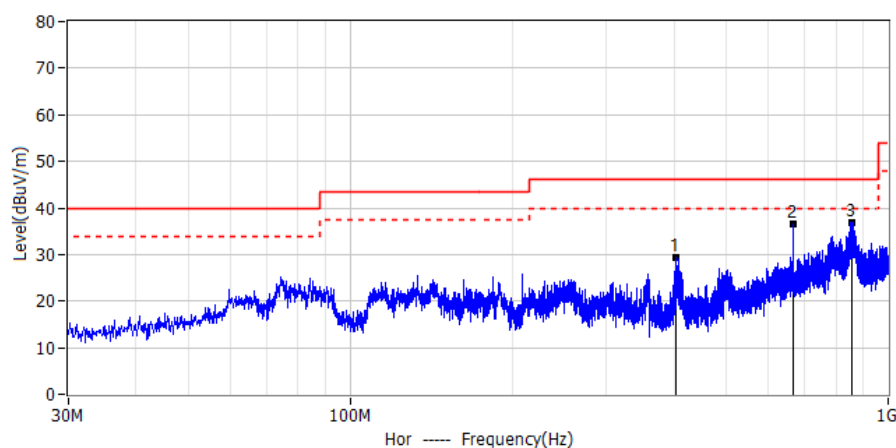


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	404.299MHz	12.14	17.17	29.31	46.00	-16.69	PK	Hor
2*	666.563MHz	13.35	23.14	36.49	46.00	-9.51	PK	Hor
3*	855.228MHz	10.82	26.17	36.99	46.00	-9.01	PK	Hor

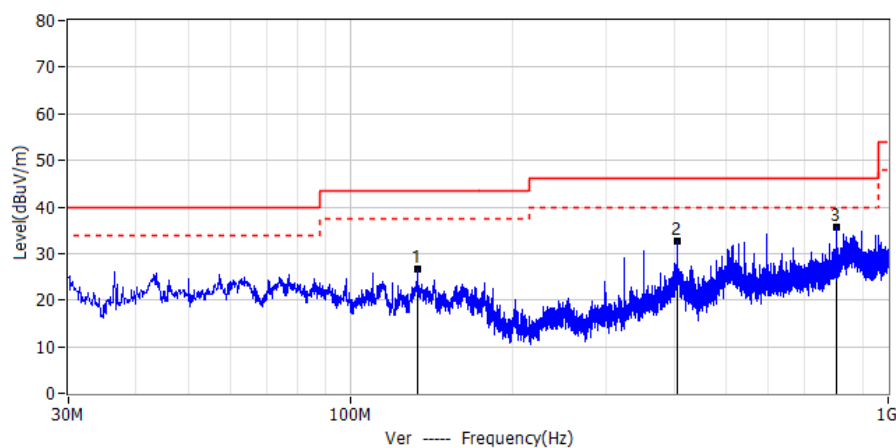


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	133.305MHz	13.51	13.07	26.58	43.50	-16.92	PK	Ver
2*	405.026MHz	15.45	17.19	32.64	46.00	-13.36	PK	Ver
3*	804.060MHz	9.86	25.69	35.55	46.00	-10.45	PK	Ver



Project: LGT22L023	Test Engineer: Dylan.shi
EUT: DTEN D7X 75"	Temperature: 19.2°C
M/N: DBR1475	Humidity: 35%RH
Test Voltage: AC 120V/60Hz	Test Data: 2023-01-30
Test Mode: 802.11n40 5965	
Note:	

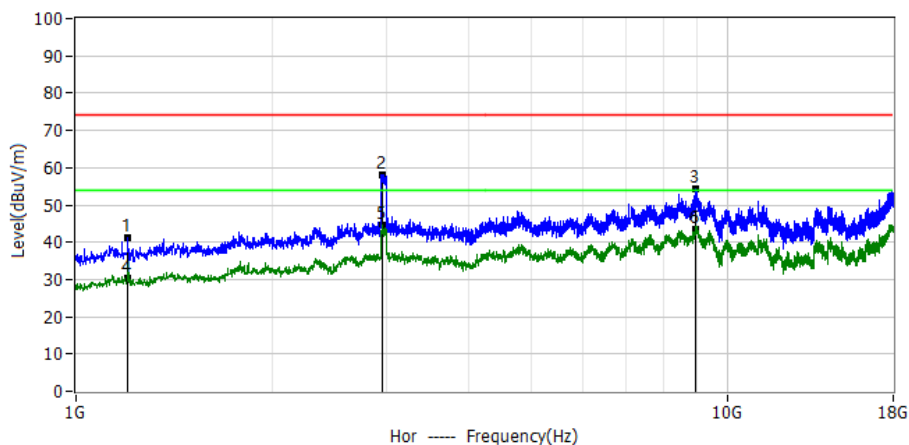


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.200GHz	64.23	-22.97	41.26	74.00	-32.74	PK	Hor
2*	2.953GHz	66.81	-8.59	58.22	74.00	-15.78	PK	Hor
3*	8.931GHz	55.79	-1.37	54.42	74.00	-19.58	PK	Hor
4*	1.200GHz	53.27	-22.97	30.30	54.00	-23.70	AV	Hor
5*	2.955GHz	53.01	-8.58	44.43	54.00	-9.57	AV	Hor
6*	8.931GHz	44.67	-1.37	43.30	54.00	-10.70	AV	Hor

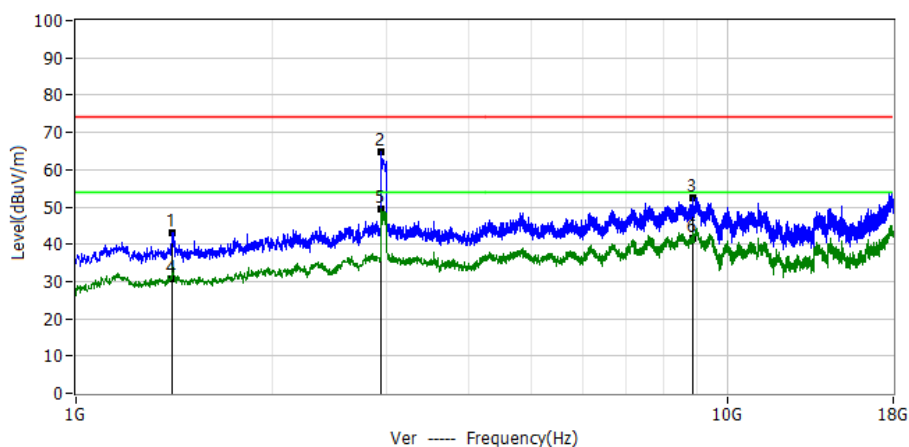


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.402GHz	64.58	-21.37	43.21	74.00	-30.79	PK	Ver
2*	2.940GHz	73.45	-8.66	64.79	74.00	-9.21	PK	Ver
3*	8.875GHz	54.08	-1.52	52.56	74.00	-21.44	PK	Ver
4*	1.402GHz	52.17	-21.37	30.80	54.00	-23.20	AV	Ver
5*	2.947GHz	57.98	-8.62	49.36	54.00	-4.64	AV	Ver
6*	8.875GHz	43.12	-1.52	41.60	54.00	-12.40	AV	Ver



Project: LGT22L023	Test Engineer: Dylan.shi
EUT: DTEN D7X 75"	Temperature: 19.2°C
M/N: DBR1475	Humidity: 35%RH
Test Voltage: AC 120V/60Hz	Test Data: 2023-01-30
Test Mode: 802.11n40 6165	
Note:	

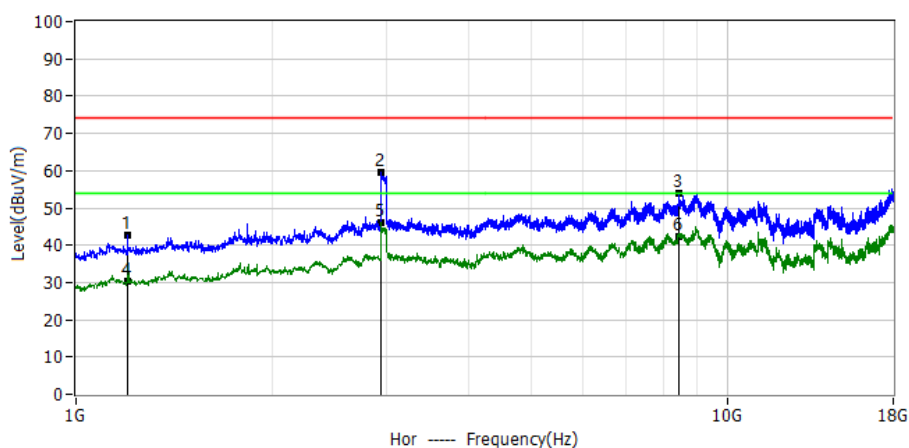


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.200GHz	65.78	-22.97	42.81	74.00	-31.19	PK	Hor
2*	2.940GHz	68.04	-8.66	59.38	74.00	-14.62	PK	Hor
3*	8.431GHz	56.68	-2.78	53.90	74.00	-20.10	PK	Hor
4*	1.200GHz	53.37	-22.97	30.40	54.00	-23.60	AV	Hor
5*	2.944GHz	54.56	-8.63	45.93	54.00	-8.07	AV	Hor
6*	8.431GHz	45.18	-2.78	42.40	54.00	-11.60	AV	Hor

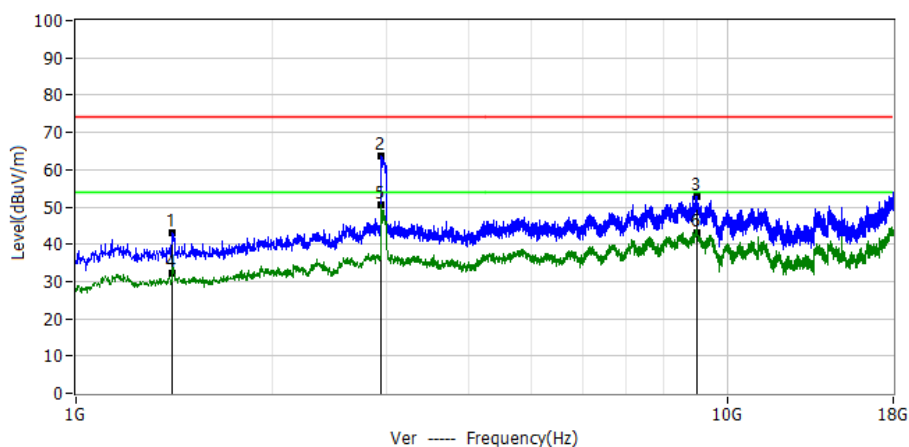


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.404GHz	64.58	-21.36	43.22	74.00	-30.78	PK	Ver
2*	2.942GHz	72.32	-8.65	63.67	74.00	-10.33	PK	Ver
3*	9.009GHz	54.09	-1.17	52.92	74.00	-21.08	PK	Ver
4*	1.404GHz	53.56	-21.36	32.20	54.00	-21.80	AV	Ver
5*	2.944GHz	59.32	-8.63	50.69	54.00	-3.31	AV	Ver
6*	9.009GHz	44.27	-1.17	43.10	54.00	-10.90	AV	Ver



Project: LGT22L023	Test Engineer: Dylan.shi
EUT: DTEN D7X 75"	Temperature: 19.2°C
M/N: DBR1475	Humidity: 35%RH
Test Voltage: AC 120V/60Hz	Test Data: 2023-01-30
Test Mode: 802.11n40 6405	
Note:	

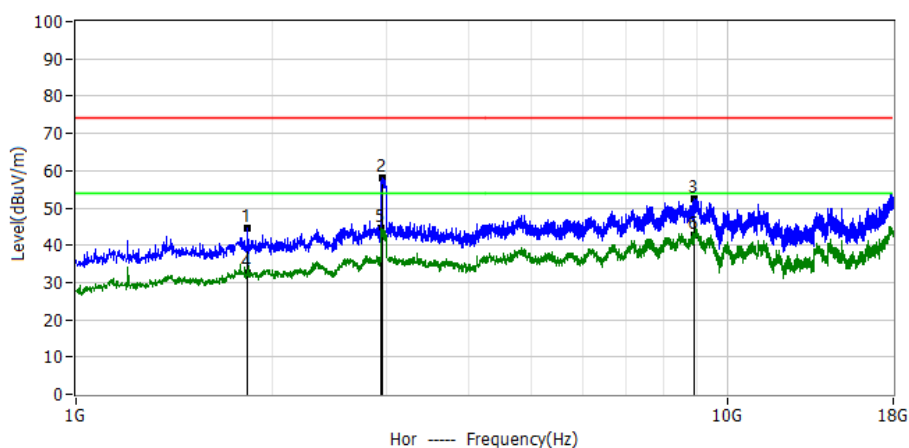


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.835GHz	62.62	-17.90	44.72	74.00	-29.28	PK	Hor
2*	2.951GHz	66.69	-8.60	58.09	74.00	-15.91	PK	Hor
3*	8.920GHz	53.78	-1.40	52.38	74.00	-21.62	PK	Hor
4*	1.835GHz	50.50	-17.90	32.60	54.00	-21.40	AV	Hor
5*	2.944GHz	53.23	-8.63	44.60	54.00	-9.40	AV	Hor
6*	8.920GHz	44.20	-1.40	42.80	54.00	-11.20	AV	Hor

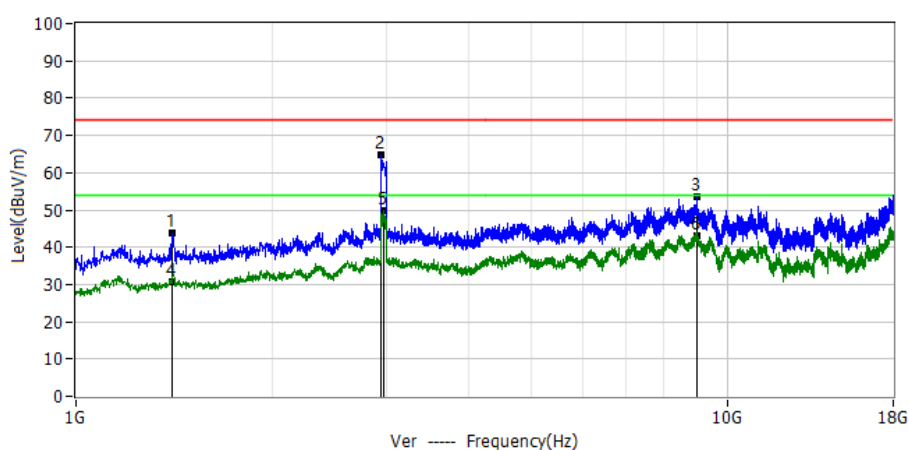


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.402GHz	65.22	-21.37	43.85	74.00	-30.15	PK	Ver
2*	2.940GHz	73.52	-8.66	64.86	74.00	-9.14	PK	Ver
3*	9.003GHz	54.57	-1.17	53.40	74.00	-20.60	PK	Ver
4*	1.402GHz	51.97	-21.37	30.60	54.00	-23.40	AV	Ver
5*	2.964GHz	58.32	-8.53	49.79	54.00	-4.21	AV	Ver
6*	9.003GHz	44.17	-1.17	43.00	54.00	-11.00	AV	Ver



Project: LGT22L023	Test Engineer: Dylan.shi
EUT: DTEN D7X 75"	Temperature: 19.2°C
M/N: DBR1475	Humidity: 35%RH
Test Voltage: AC 120V/60Hz	Test Data: 2023-01-30
Test Mode: 802.11n40 6445	
Note:	

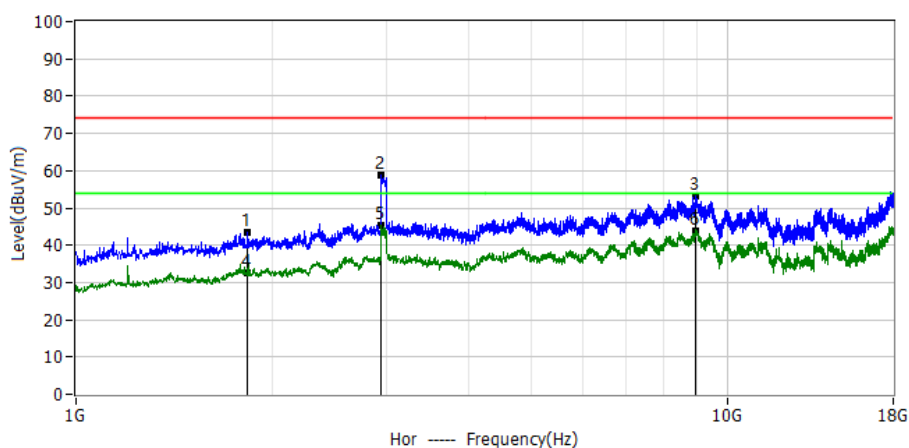


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.835GHz	61.41	-17.90	43.51	74.00	-30.49	PK	Hor
2*	2.940GHz	67.54	-8.66	58.88	74.00	-15.12	PK	Hor
3*	8.931GHz	54.39	-1.37	53.02	74.00	-20.98	PK	Hor
4*	1.835GHz	50.60	-17.90	32.70	54.00	-21.30	AV	Hor
5*	2.944GHz	53.77	-8.63	45.14	54.00	-8.86	AV	Hor
6*	8.931GHz	45.07	-1.37	43.70	54.00	-10.30	AV	Hor

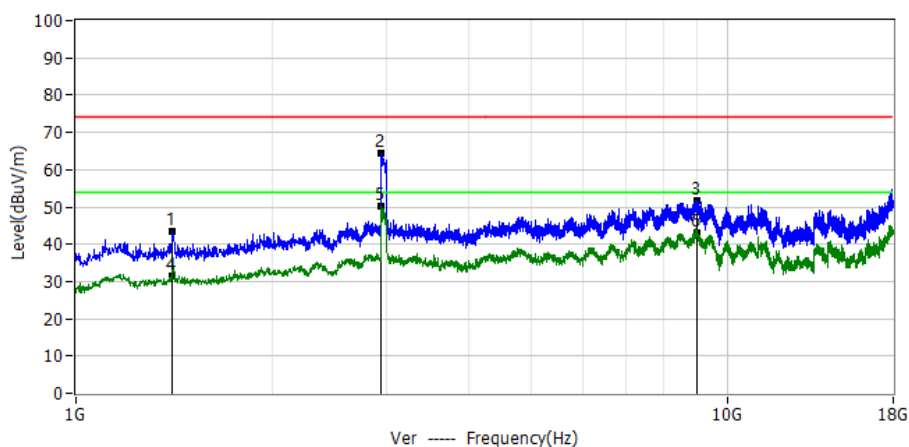


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.404GHz	64.69	-21.36	43.33	74.00	-30.67	PK	Ver
2*	2.940GHz	73.22	-8.66	64.56	74.00	-9.44	PK	Ver
3*	9.003GHz	52.87	-1.17	51.70	74.00	-22.30	PK	Ver
4*	1.404GHz	52.86	-21.36	31.50	54.00	-22.50	AV	Ver
5*	2.944GHz	58.66	-8.63	50.03	54.00	-3.97	AV	Ver
6*	9.003GHz	44.07	-1.17	42.90	54.00	-11.10	AV	Ver



Project: LGT22L023	Test Engineer: Dylan.shi
EUT: DTEN D7X 75"	Temperature: 19.2°C
M/N: DBR1475	Humidity: 35%RH
Test Voltage: AC 120V/60Hz	Test Data: 2023-01-30
Test Mode: 802.11n40 6485	
Note:	

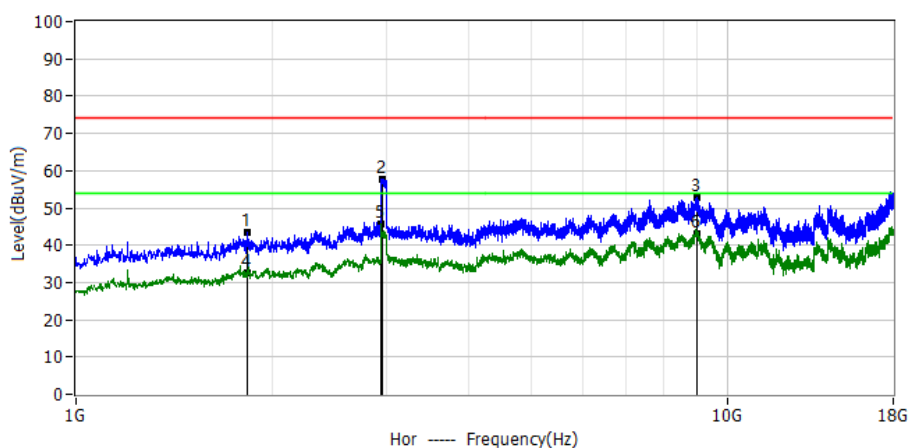


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.835GHz	61.51	-17.90	43.61	74.00	-30.39	PK	Hor
2*	2.953GHz	66.43	-8.59	57.84	74.00	-16.16	PK	Hor
3*	8.975GHz	54.10	-1.24	52.86	74.00	-21.14	PK	Hor
4*	1.835GHz	50.60	-17.90	32.70	54.00	-21.30	AV	Hor
5*	2.944GHz	54.16	-8.63	45.53	54.00	-8.47	AV	Hor
6*	8.975GHz	44.44	-1.24	43.20	54.00	-10.80	AV	Hor

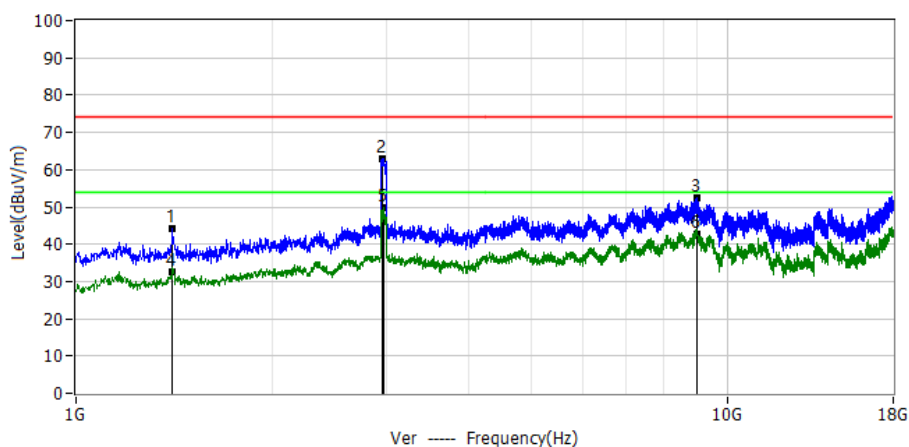


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.404GHz	65.68	-21.36	44.32	74.00	-29.68	PK	Ver
2*	2.957GHz	71.60	-8.57	63.03	74.00	-10.97	PK	Ver
3*	9.005GHz	53.68	-1.17	52.51	74.00	-21.49	PK	Ver
4*	1.404GHz	53.86	-21.36	32.50	54.00	-21.50	AV	Ver
5*	2.964GHz	58.37	-8.53	49.84	54.00	-4.16	AV	Ver
6*	9.005GHz	43.87	-1.17	42.70	54.00	-11.30	AV	Ver



Project: LGT22L023	Test Engineer: Dylan.shi
EUT: DTEN D7X 75"	Temperature: 19.2°C
M/N: DBR1475	Humidity: 35%RH
Test Voltage: AC 120V/60Hz	Test Data: 2023-01-30
Test Mode: 802.11n40 6525	
Note:	

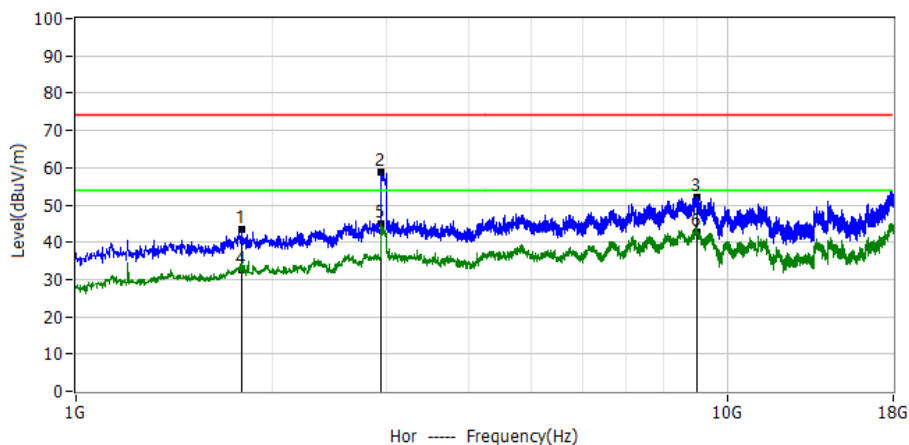


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.799GHz	61.58	-18.26	43.32	74.00	-30.68	PK	Hor
2*	2.940GHz	67.32	-8.66	58.66	74.00	-15.34	PK	Hor
3*	8.975GHz	53.38	-1.24	52.14	74.00	-21.86	PK	Hor
4*	1.799GHz	50.66	-18.26	32.40	54.00	-21.60	AV	Hor
5*	2.944GHz	53.45	-8.63	44.82	54.00	-9.18	AV	Hor
6*	8.975GHz	43.94	-1.24	42.70	54.00	-11.30	AV	Hor

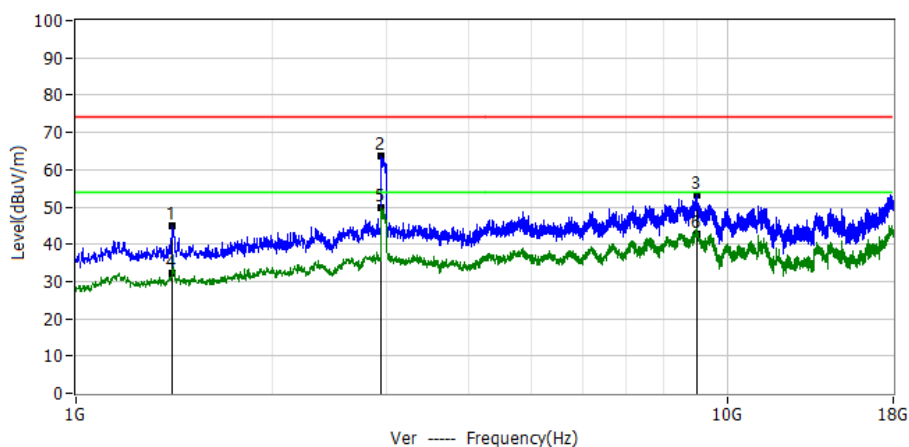


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.406GHz	66.28	-21.35	44.93	74.00	-29.07	PK	Ver
2*	2.942GHz	72.24	-8.65	63.59	74.00	-10.41	PK	Ver
3*	8.979GHz	54.32	-1.23	53.09	74.00	-20.91	PK	Ver
4*	1.406GHz	53.65	-21.35	32.30	54.00	-21.70	AV	Ver
5*	2.944GHz	58.36	-8.63	49.73	54.00	-4.27	AV	Ver
6*	8.979GHz	43.93	-1.23	42.70	54.00	-11.30	AV	Ver



Project: LGT22L023	Test Engineer: Dylan.shi
EUT: DTEN D7X 75"	Temperature: 19.2°C
M/N: DBR1475	Humidity: 35%RH
Test Voltage: AC 120V/60Hz	Test Data: 2023-01-30
Test Mode: 802.11n40 6565	
Note:	

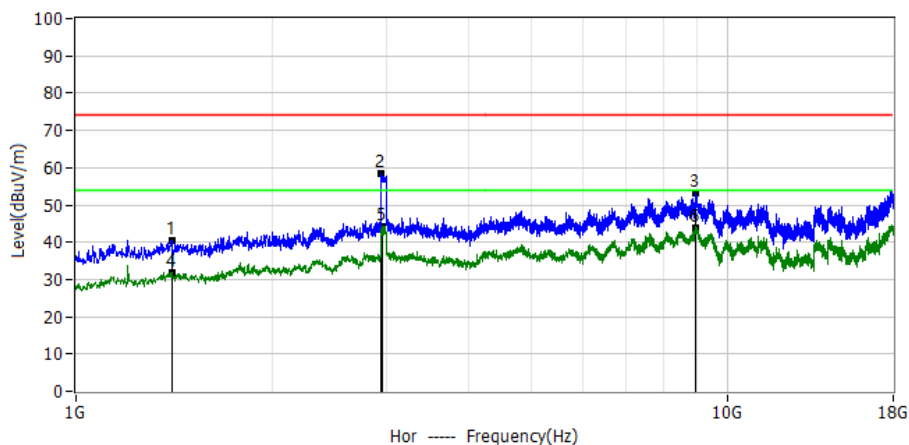


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.402GHz	61.84	-21.37	40.47	74.00	-33.53	PK	Hor
2*	2.940GHz	66.99	-8.66	58.33	74.00	-15.67	PK	Hor
3*	8.943GHz	54.33	-1.33	53.00	74.00	-21.00	PK	Hor
4*	1.402GHz	53.07	-21.37	31.70	54.00	-22.30	AV	Hor
5*	2.953GHz	52.80	-8.59	44.21	54.00	-9.79	AV	Hor
6*	8.943GHz	45.33	-1.33	44.00	54.00	-10.00	AV	Hor

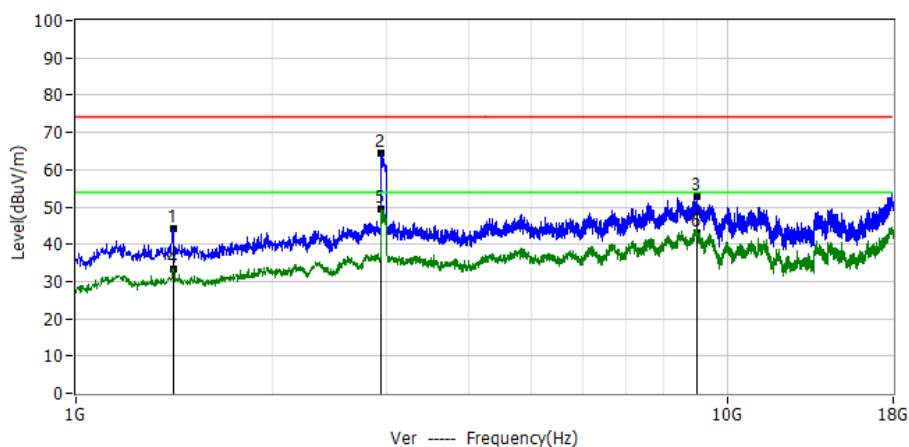


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.410GHz	65.35	-21.33	44.02	74.00	-29.98	PK	Ver
2*	2.940GHz	73.24	-8.66	64.58	74.00	-9.42	PK	Ver
3*	8.973GHz	53.96	-1.25	52.71	74.00	-21.29	PK	Ver
4*	1.410GHz	54.63	-21.33	33.30	54.00	-20.70	AV	Ver
5*	2.944GHz	58.06	-8.63	49.43	54.00	-4.57	AV	Ver
6*	8.973GHz	44.25	-1.25	43.00	54.00	-11.00	AV	Ver



Project: LGT22L023	Test Engineer: Dylan.shi
EUT: DTEN D7X 75"	Temperature: 19.2°C
M/N: DBR1475	Humidity: 35%RH
Test Voltage: AC 120V/60Hz	Test Data: 2023-01-30
Test Mode: 802.11n40 6685	
Note:	

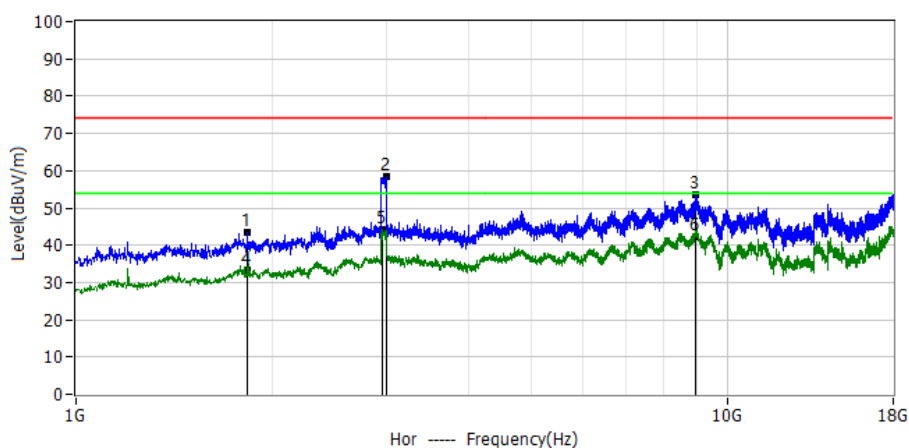


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.835GHz	61.51	-17.90	43.61	74.00	-30.39	PK	Hor
2*	3.000GHz	66.74	-8.34	58.40	74.00	-15.60	PK	Hor
3*	8.928GHz	54.76	-1.37	53.39	74.00	-20.61	PK	Hor
4*	1.835GHz	51.10	-17.90	33.20	54.00	-20.80	AV	Hor
5*	2.953GHz	52.97	-8.59	44.38	54.00	-9.62	AV	Hor
6*	8.928GHz	43.87	-1.37	42.50	54.00	-11.50	AV	Hor

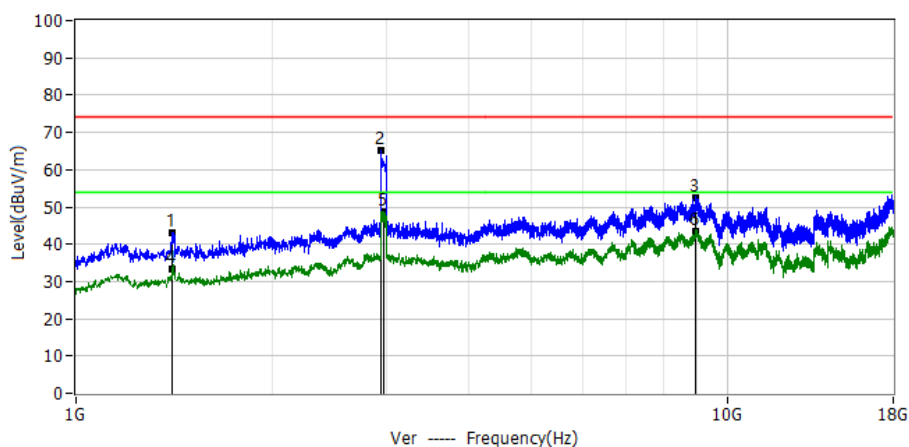


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.408GHz	64.45	-21.34	43.11	74.00	-30.89	PK	Ver
2*	2.940GHz	73.71	-8.66	65.05	74.00	-8.95	PK	Ver
3*	8.943GHz	53.95	-1.33	52.62	74.00	-21.38	PK	Ver
4*	1.408GHz	54.54	-21.34	33.20	54.00	-20.80	AV	Ver
5*	2.968GHz	57.27	-8.51	48.76	54.00	-5.24	AV	Ver
6*	8.943GHz	44.63	-1.33	43.30	54.00	-10.70	AV	Ver



Project: LGT22L023	Test Engineer: Dylan.shi
EUT: DTEN D7X 75"	Temperature: 19.2°C
M/N: DBR1475	Humidity: 35%RH
Test Voltage: AC 120V/60Hz	Test Data: 2023-01-30
Test Mode: 802.11n40 6845	
Note:	

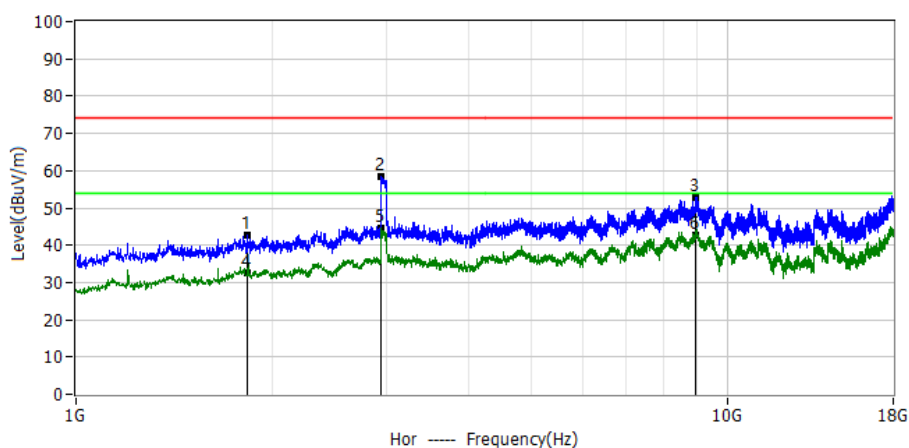


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.835GHz	60.43	-17.90	42.53	74.00	-31.47	PK	Hor
2*	2.940GHz	67.03	-8.66	58.37	74.00	-15.63	PK	Hor
3*	8.928GHz	54.20	-1.37	52.83	74.00	-21.17	PK	Hor
4*	1.835GHz	50.40	-17.90	32.50	54.00	-21.50	AV	Hor
5*	2.947GHz	53.19	-8.62	44.57	54.00	-9.43	AV	Hor
6*	8.928GHz	43.97	-1.37	42.60	54.00	-11.40	AV	Hor

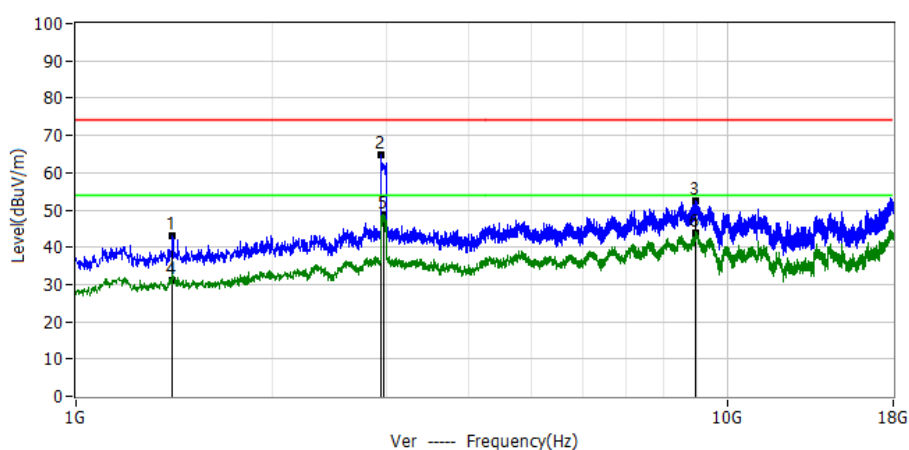


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.404GHz	64.27	-21.36	42.91	74.00	-31.09	PK	Ver
2*	2.940GHz	73.59	-8.66	64.93	74.00	-9.07	PK	Ver
3*	8.943GHz	53.74	-1.33	52.41	74.00	-21.59	PK	Ver
4*	1.404GHz	52.36	-21.36	31.00	54.00	-23.00	AV	Ver
5*	2.968GHz	57.11	-8.51	48.60	54.00	-5.40	AV	Ver
6*	8.943GHz	45.13	-1.33	43.80	54.00	-10.20	AV	Ver



Project: LGT22L023	Test Engineer: Dylan.shi
EUT: DTEN D7X 75"	Temperature: 19.2°C
M/N: DBR1475	Humidity: 35%RH
Test Voltage: AC 120V/60Hz	Test Data: 2023-01-30
Test Mode: 802.11n40 6885	
Note:	

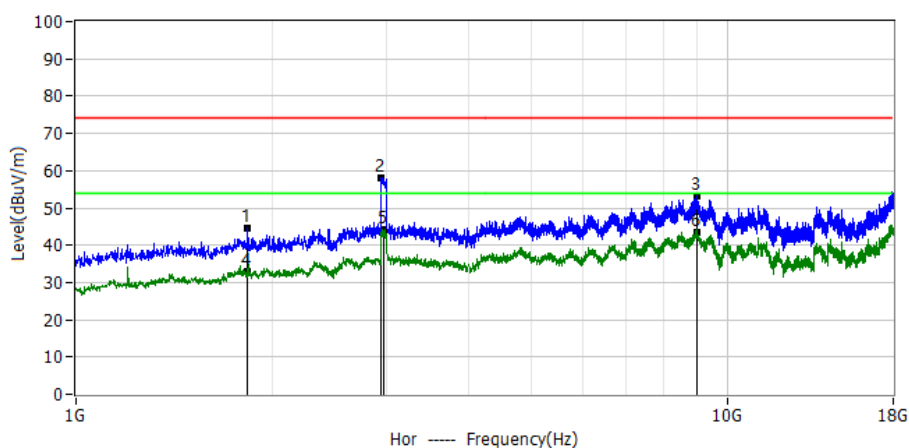


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.835GHz	62.35	-17.90	44.45	74.00	-29.55	PK	Hor
2*	2.940GHz	66.83	-8.66	58.17	74.00	-15.83	PK	Hor
3*	9.007GHz	54.34	-1.17	53.17	74.00	-20.83	PK	Hor
4*	1.835GHz	50.70	-17.90	32.80	54.00	-21.20	AV	Hor
5*	2.976GHz	52.68	-8.47	44.21	54.00	-9.79	AV	Hor
6*	9.007GHz	44.47	-1.17	43.30	54.00	-10.70	AV	Hor

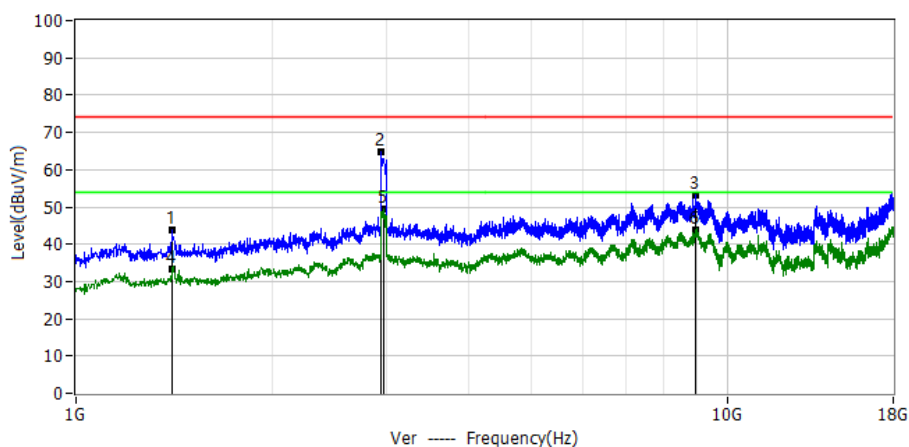


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.404GHz	65.32	-21.36	43.96	74.00	-30.04	PK	Ver
2*	2.940GHz	73.35	-8.66	64.69	74.00	-9.31	PK	Ver
3*	8.933GHz	54.57	-1.36	53.21	74.00	-20.79	PK	Ver
4*	1.404GHz	54.76	-21.36	33.40	54.00	-20.60	AV	Ver
5*	2.964GHz	57.94	-8.53	49.41	54.00	-4.59	AV	Ver
6*	8.933GHz	45.16	-1.36	43.80	54.00	-10.20	AV	Ver



Project: LGT22L023	Test Engineer: Dylan.shi
EUT: DTEN D7X 75"	Temperature: 19.2°C
M/N: DBR1475	Humidity: 35%RH
Test Voltage: AC 120V/60Hz	Test Data: 2023-01-30
Test Mode: 802.11n40 6925	
Note:	

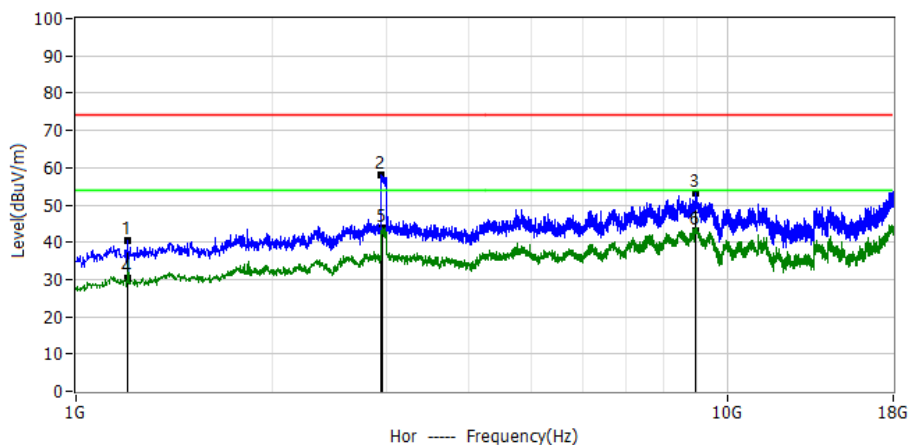


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.200GHz	63.25	-22.97	40.28	74.00	-33.72	PK	Hor
2*	2.940GHz	66.89	-8.66	58.23	74.00	-15.77	PK	Hor
3*	8.931GHz	54.37	-1.37	53.00	74.00	-21.00	PK	Hor
4*	1.200GHz	53.27	-22.97	30.30	54.00	-23.70	AV	Hor
5*	2.955GHz	52.49	-8.58	43.91	54.00	-10.09	AV	Hor
6*	8.931GHz	44.37	-1.37	43.00	54.00	-11.00	AV	Hor

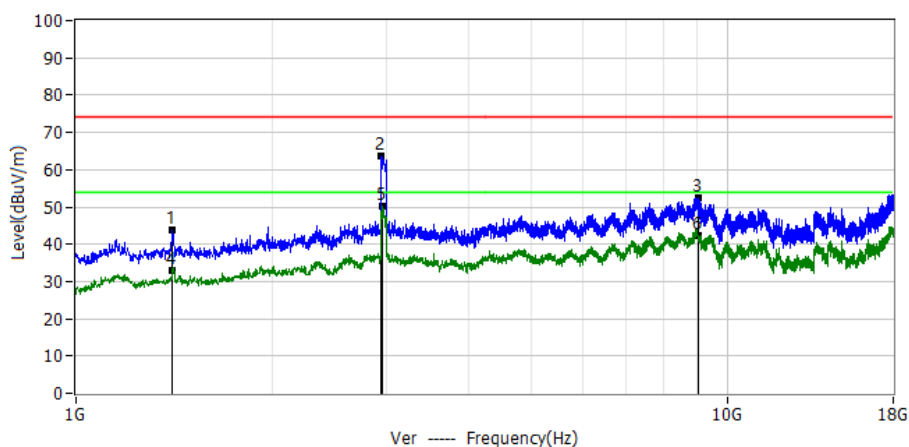


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.408GHz	65.06	-21.34	43.72	74.00	-30.28	PK	Ver
2*	2.942GHz	72.30	-8.65	63.65	74.00	-10.35	PK	Ver
3*	9.033GHz	53.65	-1.17	52.48	74.00	-21.52	PK	Ver
4*	1.408GHz	54.14	-21.34	32.80	54.00	-21.20	AV	Ver
5*	2.961GHz	58.60	-8.54	50.06	54.00	-3.94	AV	Ver
6*	9.033GHz	43.37	-1.17	42.20	54.00	-11.80	AV	Ver



Project: LGT22L023	Test Engineer: Dylan.shi
EUT: DTEN D7X 75"	Temperature: 19.2°C
M/N: DBR1475	Humidity: 35%RH
Test Voltage: AC 120V/60Hz	Test Data: 2023-01-30
Test Mode: 802.11n40 6965	
Note:	

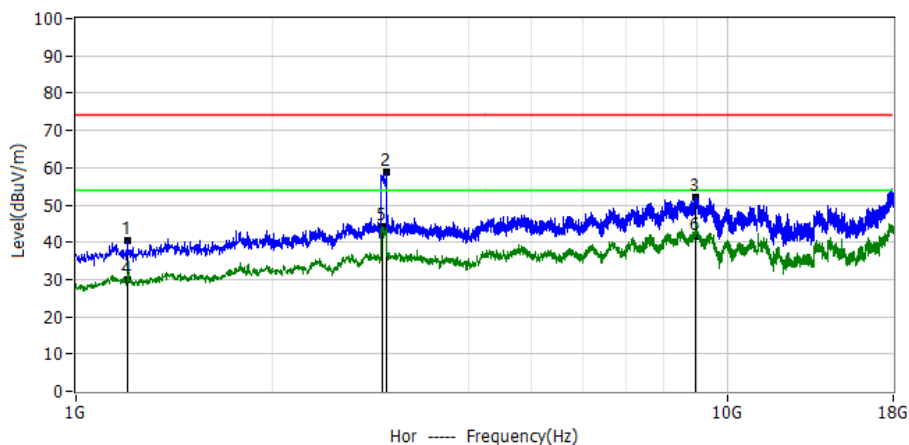


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.200GHz	63.29	-22.97	40.32	74.00	-33.68	PK	Hor
2*	3.000GHz	67.28	-8.34	58.94	74.00	-15.06	PK	Hor
3*	8.956GHz	53.49	-1.29	52.20	74.00	-21.80	PK	Hor
4*	1.200GHz	52.87	-22.97	29.90	54.00	-24.10	AV	Hor
5*	2.953GHz	52.72	-8.59	44.13	54.00	-9.87	AV	Hor
6*	8.956GHz	42.99	-1.29	41.70	54.00	-12.30	AV	Hor

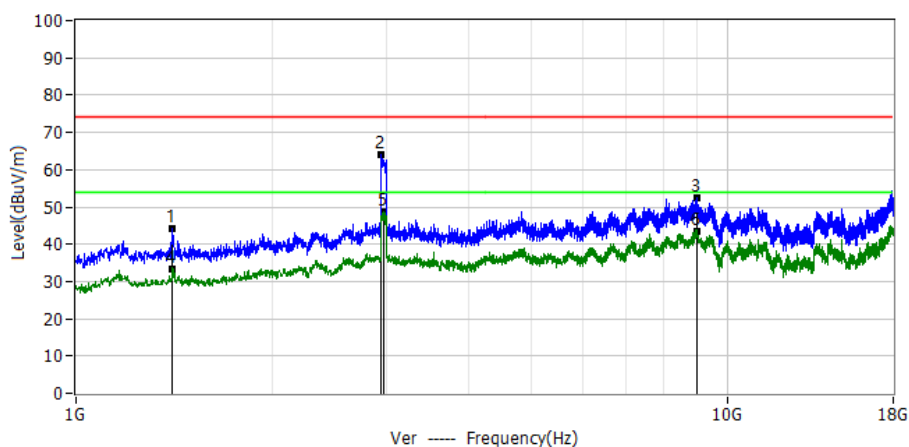


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.404GHz	65.64	-21.36	44.28	74.00	-29.72	PK	Ver
2*	2.940GHz	72.87	-8.66	64.21	74.00	-9.79	PK	Ver
3*	8.975GHz	53.65	-1.24	52.41	74.00	-21.59	PK	Ver
4*	1.404GHz	54.66	-21.36	33.30	54.00	-20.70	AV	Ver
5*	2.964GHz	57.32	-8.53	48.79	54.00	-5.21	AV	Ver
6*	8.975GHz	44.64	-1.24	43.40	54.00	-10.60	AV	Ver



Project: LGT22L023	Test Engineer: Dylan.shi
EUT: DTEN D7X 75"	Temperature: 19.2°C
M/N: DBR1475	Humidity: 35%RH
Test Voltage: AC 120V/60Hz	Test Data: 2023-01-30
Test Mode: 802.11n40 7085	
Note:	

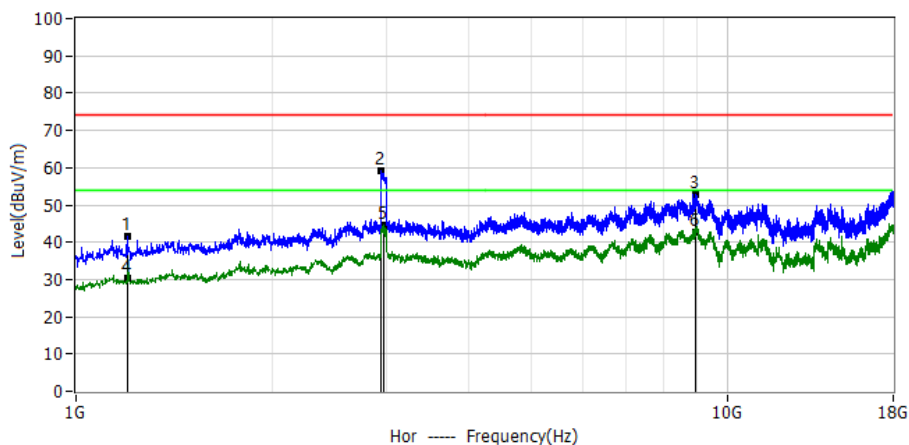

No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.200GHz	64.72	-22.97	41.75	74.00	-32.25	PK	Hor
2*	2.940GHz	67.80	-8.66	59.14	74.00	-14.86	PK	Hor
3*	8.958GHz	53.98	-1.29	52.69	74.00	-21.31	PK	Hor
4*	1.200GHz	53.47	-22.97	30.50	54.00	-23.50	AV	Hor
5*	2.972GHz	52.92	-8.49	44.43	54.00	-9.57	AV	Hor
6*	8.958GHz	44.09	-1.29	42.80	54.00	-11.20	AV	Hor

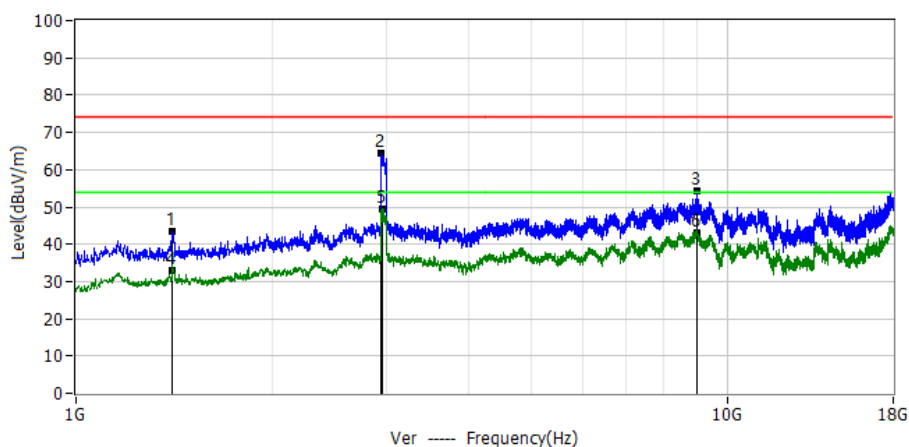


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.404GHz	64.81	-21.36	43.45	74.00	-30.55	PK	Ver
2*	2.940GHz	73.26	-8.66	64.60	74.00	-9.40	PK	Ver
3*	8.986GHz	55.66	-1.21	54.45	74.00	-19.55	PK	Ver
4*	1.404GHz	54.16	-21.36	32.80	54.00	-21.20	AV	Ver
5*	2.961GHz	58.02	-8.54	49.48	54.00	-4.52	AV	Ver
6*	8.986GHz	44.11	-1.21	42.90	54.00	-11.10	AV	Ver




3.2.7 Radiated Band Edge

Project: LGT22L023	Test Engineer: Dylan.shi
EUT: DTEN D7X 75"	Temperature: 20°C
M/N: DBR1475	Humidity: 34%RH
Test Voltage: AC 120V/60Hz	Test Data: 2023-01-30
Test Mode: 802.11n40 5965	
Note:	

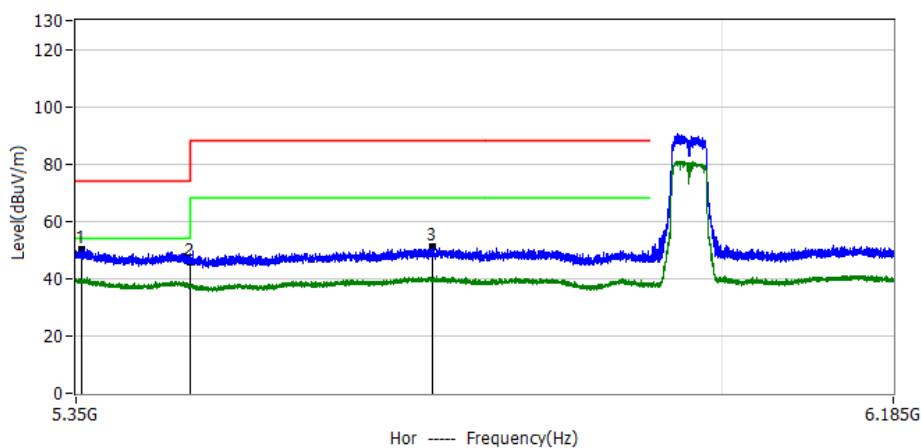


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	5.355GHz	57.59	-7.28	50.31	74.00	-23.69	PK	Hor
2*	5.460GHz	53.41	-7.61	45.80	86.70	-40.90	PK	Hor
3*	5.700GHz	58.94	-7.66	51.28	88.20	-36.92	PK	Hor

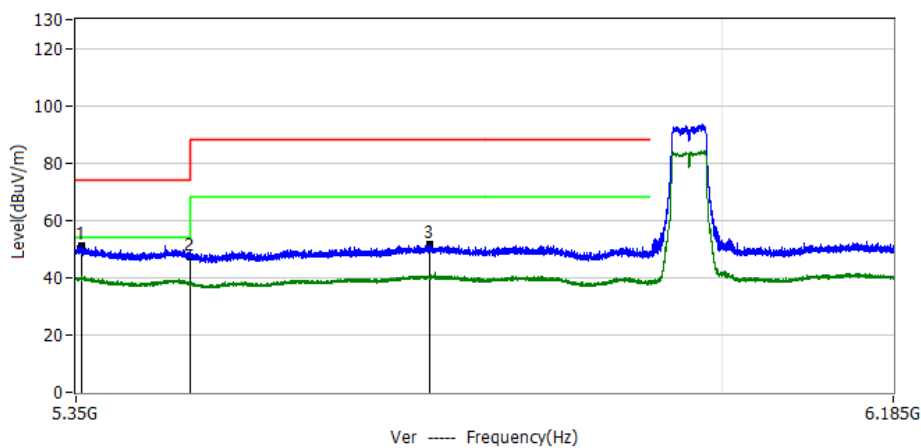


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	5.355GHz	58.34	-7.28	51.06	74.00	-22.94	PK	Ver
2*	5.460GHz	55.01	-7.61	47.40	86.70	-39.20	PK	Ver
3*	5.696GHz	59.49	-7.66	51.83	88.20	-36.37	PK	Ver



Project: LGT22L023	Test Engineer: Dylan.shi
EUT: DTEN D7X 75"	Temperature: 20°C
M/N: DBR1475	Humidity: 34%RH
Test Voltage: AC 120V/60Hz	Test Data: 2023-01-30
Test Mode: 802.11n40 6405	
Note:	

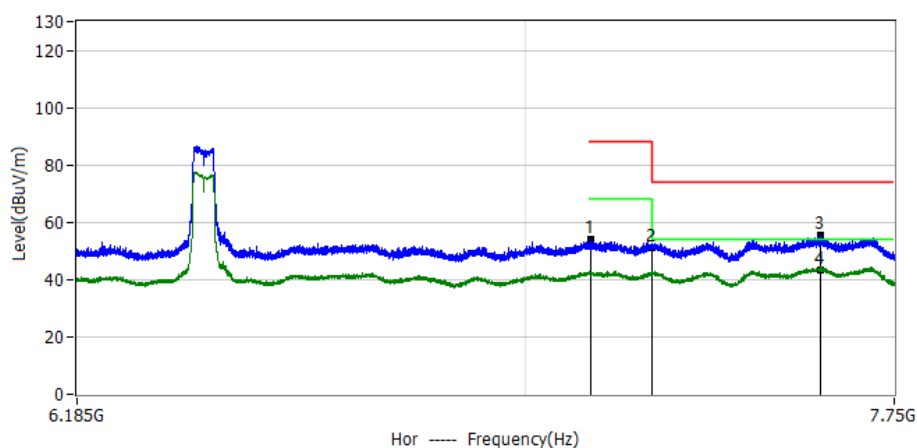


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	7.127GHz	59.31	-5.34	53.97	88.20	-34.23	PK	Hor
2*	7.250GHz	55.89	-4.99	50.90	86.90	-36.00	PK	Hor
3*	7.594GHz	59.51	-4.24	55.27	74.00	-18.73	PK	Hor
4*	7.594GHz	47.44	-4.24	43.20	54.00	-10.80	AV	Hor

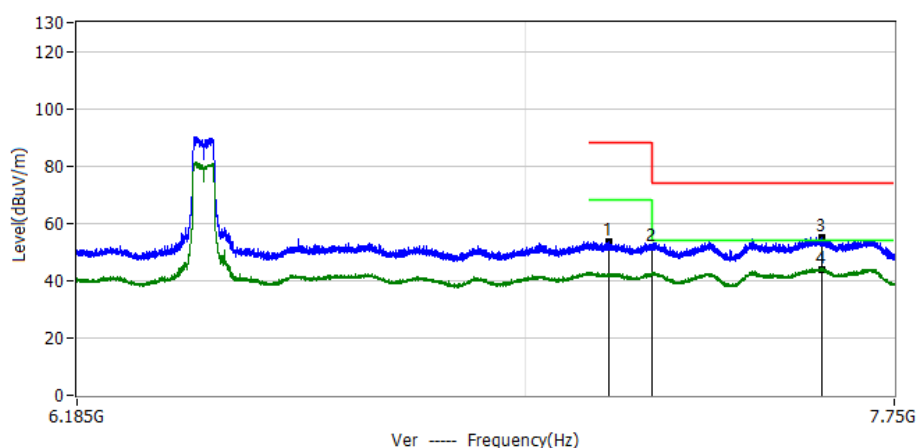


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	7.162GHz	58.88	-5.24	53.64	88.20	-34.56	PK	Ver
2*	7.250GHz	56.49	-4.99	51.50	86.90	-35.40	PK	Ver
3*	7.597GHz	59.28	-4.24	55.04	74.00	-18.96	PK	Ver
4*	7.597GHz	47.94	-4.24	43.70	54.00	-10.30	AV	Ver



Project: LGT22L023	Test Engineer: Dylan.shi
EUT: DTEN D7X 75"	Temperature: 20°C
M/N: DBR1475	Humidity: 34%RH
Test Voltage: AC 120V/60Hz	Test Data: 2023-01-30
Test Mode: 802.11n40 6445	
Note:	

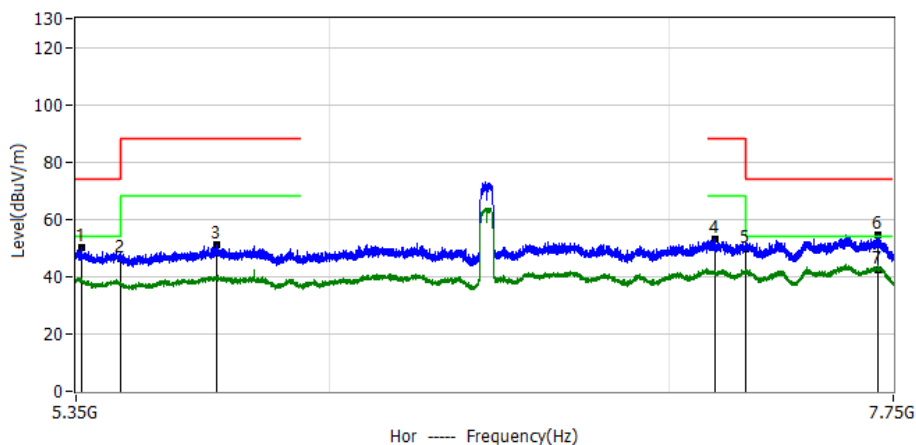


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	5.365GHz	57.40	-7.31	50.09	74.00	-23.91	PK	Hor
2*	5.460GHz	53.81	-7.61	46.20	83.50	-37.30	PK	Hor
3*	5.701GHz	58.63	-7.66	50.97	88.20	-37.23	PK	Hor
4*	7.150GHz	58.18	-5.27	52.91	88.20	-35.29	PK	Hor
5*	7.250GHz	54.89	-4.99	49.90	83.50	-33.50	PK	Hor
6*	7.697GHz	58.92	-4.18	54.74	74.00	-19.26	PK	Hor
7*	7.697GHz	46.68	-4.18	42.50	54.00	-11.50	AV	Hor

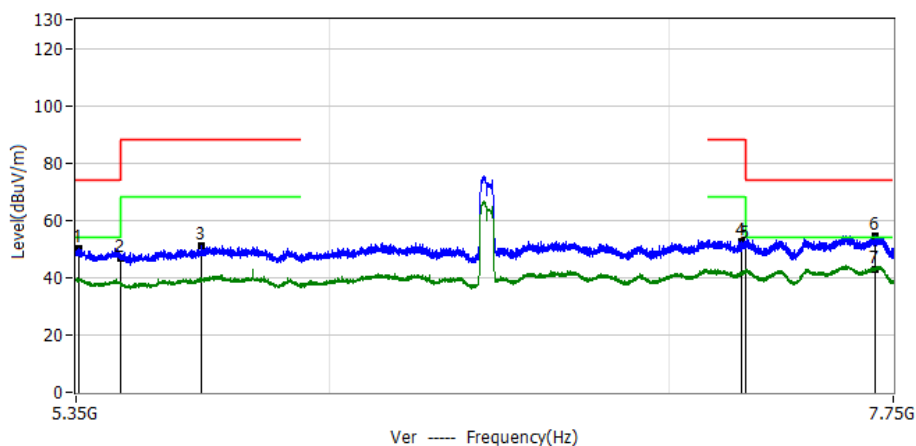


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	5.357GHz	57.57	-7.28	50.29	74.00	-23.71	PK	Ver
2*	5.460GHz	54.41	-7.61	46.80	83.50	-36.60	PK	Ver
3*	5.664GHz	58.94	-7.67	51.27	88.20	-36.93	PK	Ver
4*	7.235GHz	57.69	-5.03	52.66	88.20	-35.54	PK	Ver
5*	7.250GHz	56.59	-4.99	51.60	83.50	-31.90	PK	Ver
6*	7.686GHz	58.73	-4.19	54.54	74.00	-19.46	PK	Ver
7*	7.686GHz	46.89	-4.19	42.70	54.00	-11.30	AV	Ver



Project: LGT22L023	Test Engineer: Dylan.shi
EUT: DTEN D7X 75"	Temperature: 20°C
M/N: DBR1475	Humidity: 34%RH
Test Voltage: AC 120V/60Hz	Test Data: 2023-01-30
Test Mode: 802.11n40 6525	
Note:	

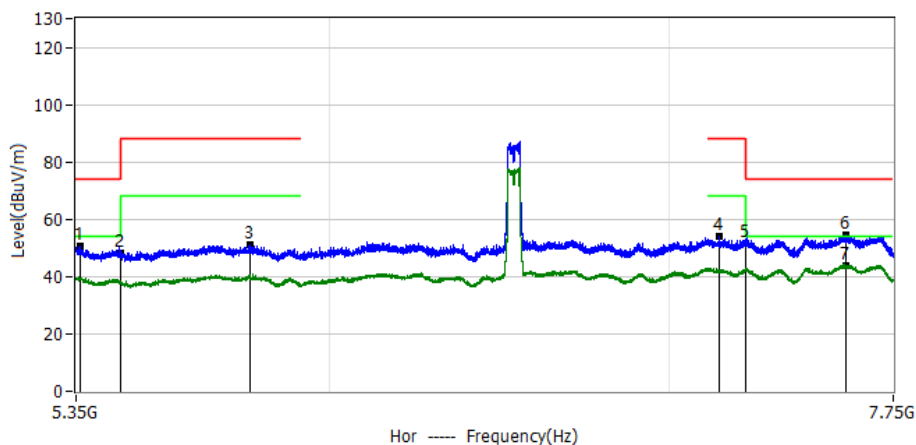


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	5.361GHz	57.86	-7.29	50.57	74.00	-23.43	PK	Hor
2*	5.460GHz	55.61	-7.61	48.00	83.50	-35.40	PK	Hor
3*	5.788GHz	58.59	-7.62	50.97	88.20	-37.23	PK	Hor
4*	7.161GHz	59.07	-5.24	53.83	88.20	-34.37	PK	Hor
5*	7.250GHz	56.79	-4.99	51.80	83.50	-31.60	PK	Hor
6*	7.587GHz	58.74	-4.24	54.50	74.00	-19.50	PK	Hor
7*	7.587GHz	47.94	-4.24	43.70	54.00	-10.30	AV	Hor

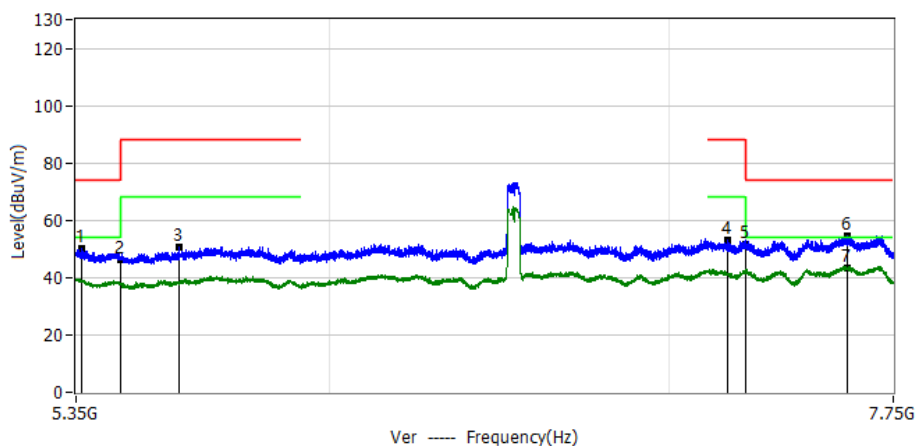


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	5.362GHz	57.22	-7.30	49.92	74.00	-24.08	PK	Ver
2*	5.460GHz	53.81	-7.61	46.20	83.50	-37.30	PK	Ver
3*	5.607GHz	58.57	-7.70	50.87	88.20	-37.33	PK	Ver
4*	7.189GHz	58.13	-5.16	52.97	88.20	-35.23	PK	Ver
5*	7.250GHz	56.39	-4.99	51.40	83.50	-32.10	PK	Ver
6*	7.591GHz	58.67	-4.24	54.43	74.00	-19.57	PK	Ver
7*	7.591GHz	47.54	-4.24	43.30	54.00	-10.70	AV	Ver



Project: LGT22L023	Test Engineer: Dylan.shi
EUT: DTEN D7X 75"	Temperature: 20°C
M/N: DBR1475	Humidity: 34%RH
Test Voltage: AC 120V/60Hz	Test Data: 2023-01-30
Test Mode: 802.11n40 6565	
Note:	

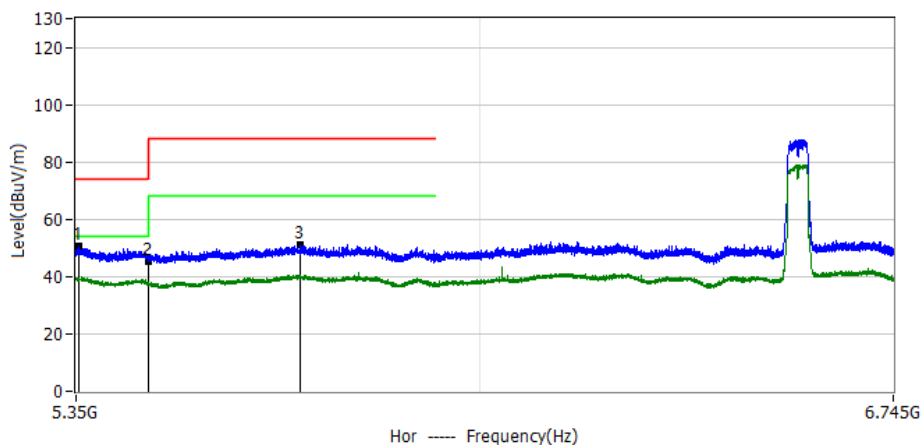


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	5.354GHz	57.77	-7.27	50.50	74.00	-23.50	PK	Hor
2*	5.460GHz	53.11	-7.61	45.50	85.70	-40.20	PK	Hor
3*	5.702GHz	58.84	-7.66	51.18	88.20	-37.02	PK	Hor

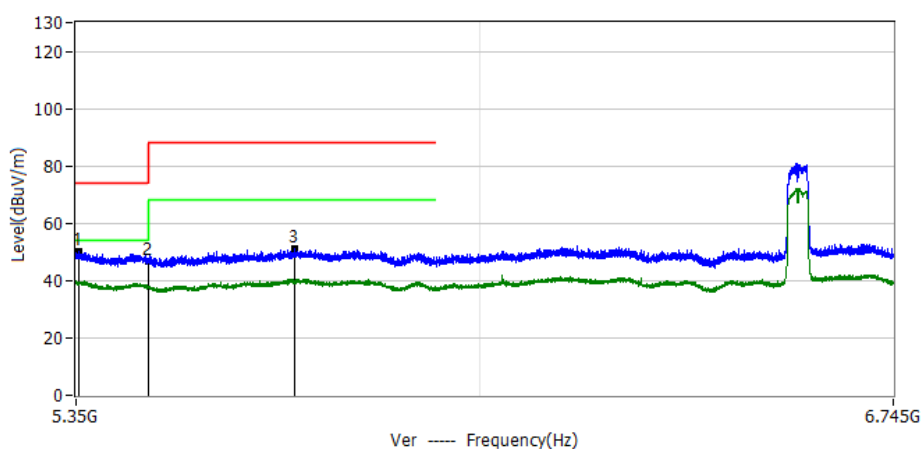


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	5.354GHz	57.29	-7.27	50.02	74.00	-23.98	PK	Ver
2*	5.460GHz	54.21	-7.61	46.60	85.70	-39.10	PK	Ver
3*	5.692GHz	58.62	-7.66	50.96	88.20	-37.24	PK	Ver



Project: LGT22L023	Test Engineer: Dylan.shi
EUT: DTEN D7X 75"	Temperature: 20°C
M/N: DBR1475	Humidity: 34%RH
Test Voltage: AC 120V/60Hz	Test Data: 2023-01-30
Test Mode: 802.11n40 6845	
Note:	

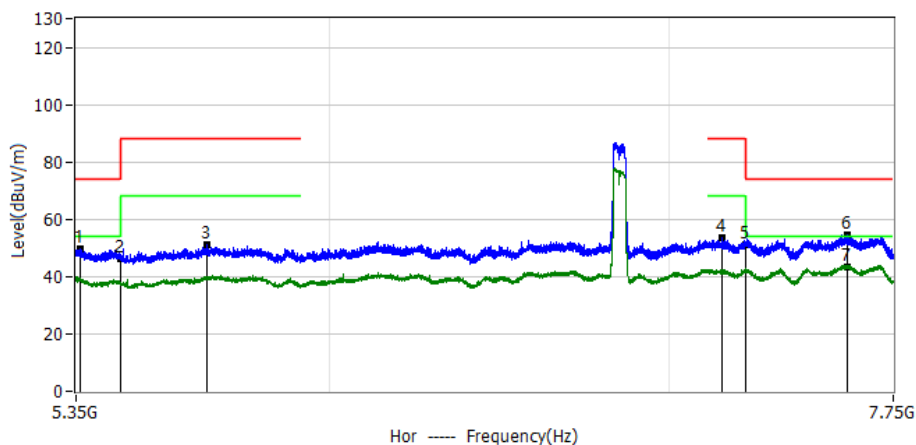


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	5.361GHz	57.11	-7.29	49.82	74.00	-24.18	PK	Hor
2*	5.460GHz	53.81	-7.61	46.20	83.50	-37.30	PK	Hor
3*	5.676GHz	58.98	-7.67	51.31	88.20	-36.89	PK	Hor
4*	7.173GHz	58.54	-5.21	53.33	88.20	-34.87	PK	Hor
5*	7.250GHz	55.99	-4.99	51.00	83.50	-32.40	PK	Hor
6*	7.589GHz	58.82	-4.24	54.58	74.00	-19.42	PK	Hor
7*	7.589GHz	47.54	-4.24	43.30	54.00	-10.70	AV	Hor

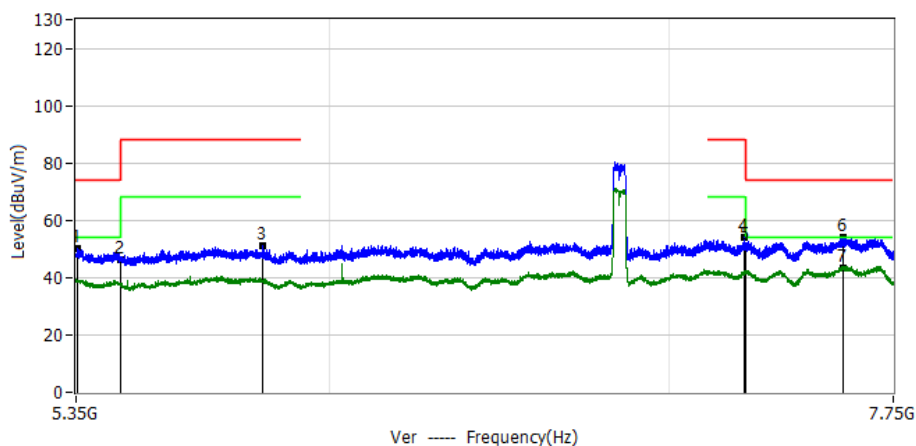


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	5.354GHz	57.43	-7.27	50.16	74.00	-23.84	PK	Ver
2*	5.460GHz	54.01	-7.61	46.40	83.50	-37.10	PK	Ver
3*	5.824GHz	58.65	-7.61	51.04	88.20	-37.16	PK	Ver
4*	7.244GHz	58.85	-5.01	53.84	88.20	-34.36	PK	Ver
5*	7.250GHz	55.99	-4.99	51.00	83.50	-32.50	PK	Ver
6*	7.577GHz	58.38	-4.25	54.13	74.00	-19.87	PK	Ver
7*	7.577GHz	47.65	-4.25	43.40	54.00	-10.60	AV	Ver



Project: LGT22L023	Test Engineer: Dylan.shi
EUT: DTEN D7X 75"	Temperature: 20°C
M/N: DBR1475	Humidity: 34%RH
Test Voltage: AC 120V/60Hz	Test Data: 2023-01-30
Test Mode: 802.11n40 7085	
Note:	

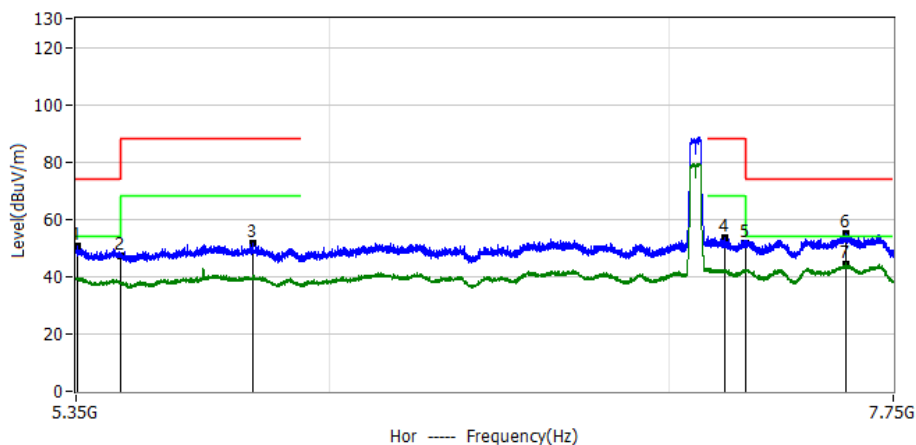

No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	5.355GHz	57.75	-7.27	50.48	74.00	-23.52	PK	Hor
2*	5.460GHz	54.91	-7.61	47.30	83.50	-36.20	PK	Hor
3*	5.796GHz	59.01	-7.62	51.39	88.20	-36.81	PK	Hor
4*	7.180GHz	58.59	-5.19	53.40	88.20	-34.80	PK	Hor
5*	7.250GHz	56.49	-4.99	51.50	83.50	-31.90	PK	Hor
6*	7.586GHz	59.31	-4.24	55.07	74.00	-18.93	PK	Hor
7*	7.586GHz	48.54	-4.24	44.30	54.00	-9.70	AV	Hor

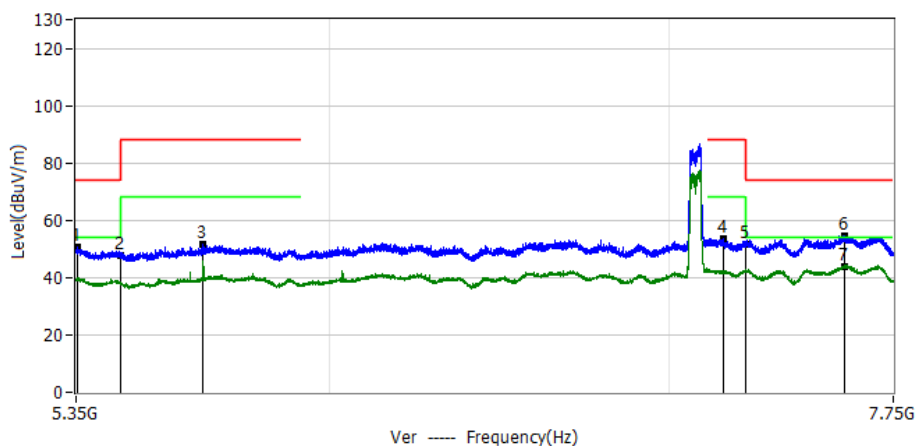

No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	5.355GHz	57.91	-7.28	50.63	74.00	-23.37	PK	Ver
2*	5.460GHz	55.31	-7.61	47.70	83.50	-35.80	PK	Ver
3*	5.668GHz	59.05	-7.67	51.38	88.20	-36.82	PK	Ver
4*	7.174GHz	58.74	-5.21	53.53	88.20	-34.67	PK	Ver
5*	7.250GHz	56.49	-4.99	51.50	83.50	-32.00	PK	Ver
6*	7.581GHz	58.69	-4.25	54.44	74.00	-19.56	PK	Ver
7*	7.581GHz	47.85	-4.25	43.60	54.00	-10.40	AV	Ver



4. BANDWIDTH MEASUREMENT

4.1 EMISSION BANDWIDTH (EBW) 26 BANDWID PROCEDURES/LIMIT

The maximum transmitter channel bandwidth for UNII devices in the 5.925-5.7125GHz band is 320MHz.

4.2 TEST PROCEDURE

26dB Bandwidth

1. Set RBW=approximately 1% of the emission bandwidth.
2. Set the VBW $\geq$ RBW.
3. Trace mode = max hold.
4. Measure the maximum width of the emission that is 26 dB down from the peak of the emission.

Occupied Bandwidth

- 1.Set RBW=1% to 5% of the OBW.
- 2 Set VBW $\geq$ 3RBW
- 3.Sample detection and single sweep modes shall be used
- 4.Use the 99% power bandwidth function of the instrument.

4.3 DEVIATION FROM STANDARD

No deviation.

4.4 TEST SETUP



4.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

4.6 TEST RESULTS

For the measurement records, refer to the appendix I.



5. MAXIMUM CONDUCTED OUTPUT POWER

5.1 LIMIT

Frequency Band	Operating Mode	Maximum EIRP Limit
5925-7125MHz	☒ Indoor access point	30
	☐ Subordinate Device	30
	☐ Client device	24

5.2 TEST PROCEDURE

Method PM-G(Measurement using using a gated average power meter)

1.Measurement is preformed using a wideband gated RF power meter provided that the gate parameters are adjusts such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.


Spectrum analyzer(For channel that extends across the 6.525/ 6.825G boundary)

- 1.Set RBW=1MHz, VBW=3MHz, Sweep time=Auto, Detector=RMS.
- 2.Trace average at least 100 trace in power averaging mode.
- 3.Compute power by integrating the spectrum across the 26dB EBW
- 4.Add $10 \log(1/X)$, X:Duty cycle if duty cycle is <98%)
- 5.EIRP=Measured conducted power+Antenna

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP

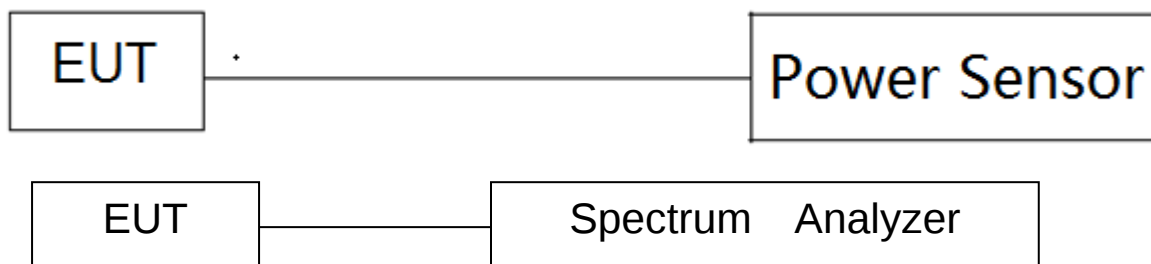

5.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 5 Unless otherwise a special operating condition is specified in the follows during the testing.

5.6 TEST RESULTS

For the measurement records, refer to the appendix I.



6. PEAK POWER SPECTRAL DENSITY

6.1 LIMIT

Frequency Band	Operating Mode	Maximum EIRP Limit
5925-7125MHz	☒ Indoor access point	30
	☐ Subordinate Device	30
	☐ Client device	24

6.2 TEST PROCEDURES

Duty cycle $\geq 98\%$

1. Set RBW=1MHz/VBW=3MHz, Sweptime=auto Detector=RMS
2. Trace average 100 traces.
3. Use the peak marker function to determine the maximum amplitude level
4. EIRPPSD=Measured conducted power density+Antenna gain

Duty cycle < 98%

1. Set RBW=1MHz/VBW=3MHz Detector=RMS
2. Set sweep time $\geq 10 \times (\text{number of points in sweep}) \times (\text{total on/off period of the transmitted signal})$
3. Perform a single sweep.
4. Use the peak marker function to determine the maximum amplitude level
5. Add $10 \log(1/x)$ where x is the duty cycle.
6. EIRP PSD=Measured conducted power density+Antenna gain.

6.3 TEST RESULTS

For the measurement records, refer to the appendix I.



7. IN-BAND EMISSIONS

7.1 LIMIT

Power spectral density must be suppressed by 20 dB at 1MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB.

7.2 TEST PROCEDURES

1. Connect output of the antenna port to a spectrum analyzer
2. Set the reference level of the measuring equipment
3. Measure the 26 dB EBW
4. Measure the power spectral density (which will be used for emissions mask reference) using the following procedure:
 - a) Set the span to encompass the entire 26 dB EBW of the signal
 - b) Set RBW=same RBW used for 26 dB EBW measurement.
 - c) Set VBW $\geq 3X$ RBW
 - d) Number of points in sweep $\geq [2X \text{ span/RBW}]$
 - e) Sweep time=auto.
 - f) Detector=RMS (i.e., power averaging)
 - g) Trace average at least 100 traces in power averaging (rms) mode.
 - h) Use the peak search function on the instrument to find the peak of the spectrum
5. For the purposes of developing the emission mask the channel bandwidth is defined as the 26 dB EBW
6. Using the measuring equipment limit line function develop the emissions mask based on the power spectral density (in dB) as follows following
 - a. Suppressed by 20 dB at 1 MHz outside of the channel edge. (The channel edge is defined as the 26-dB point on either side of the carrier center frequency)
 - b. Suppressed by 28 dB at one channel bandwidth from the channel center.
 - c. Suppressed by 40 dB at one- and one-half times the channel bandwidth from the channel center
7. Adjust the span to encompass the entire mask as necessary
8. Clear trace
9. Trace average at least 100 traces in power averaging (rms) mode
10. Adjust the reference level as necessary so that the crest of the channel touches the top of the emission mask

7.3 TEST RESULTS

For the measurement records, refer to the appendix I.




8. CONTENTION BASED PROTOCOL

8.1 LIMIT

Unlicensed low-power indoor devices must detect co-channel radio frequency power that is at least -62 dBm or lower. Upon detection of energy in the band, unlicensed low power indoor devices must vacate the channel (in which incumbent signal is transmitted) and stay off the incumbent channel as long as detected radio frequency power is equal to or greater than the threshold (-62 dBm)¹. The -62 dBm (or lower) threshold is referenced to a 0 dBi antenna gain.

To ensure incumbent operations are reliably detected in the band, low power indoor devices must detect RF energy throughout their intended operating channel. For example, an 802.11 device that plans to transmit a 40 MHz- wide signal (on a primary 20 MHz channel and a secondary 20 MHz channel) must detect energy throughout the entire 40 MHz channel. Additionally, low-power indoor devices must detect co-channel energy with 90% or greater certainty.

8.2 TEST PROCEDURES

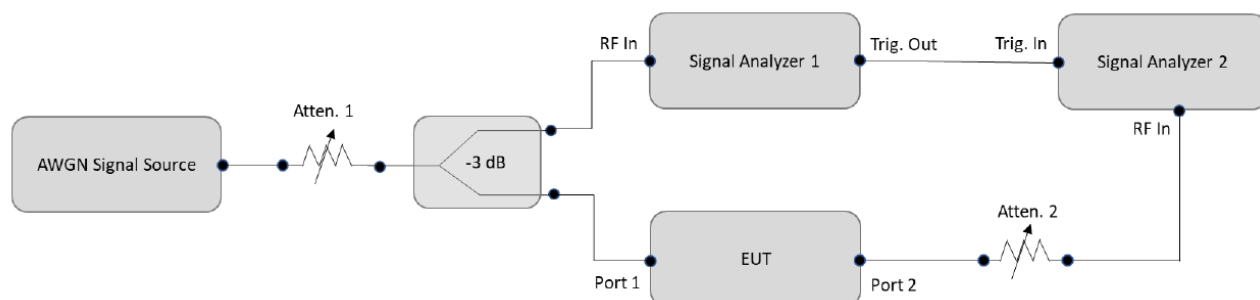

1. Configure the EUT to transmit with a constant duty cycle.
2. Set the operating parameters of the EUT including power level, operating frequency, modulation and bandwidth.
3. Set the signal analyzer center frequency to the nominal EUT channel center frequency. The span range of the signal analyzer shall be between two times and five times the OBW of the EUT. Connect the output port of the EUT to the signal analyzer 2, as shown in Figure 2. Ensure that the attenuator 2 provides enough attenuation to not overload the signal analyzer 2 receiver.
4. Monitoring the signal analyzer 2, verify the EUT is operating and transmitting with the parameters set at step two.
5. Using an AWGN signal source, generate (but do not transmit, i.e., RF OFF) a 10 MHz-wide AWGN signal. Use Table 1 to determine the center frequency of the 10 MHz AWGN signal relative to the EUT's channel bandwidth and center frequency.
6. Set the AWGN signal power to an extremely low level (more than 20 dB below the -62 dBm threshold). Connect the AWGN signal source, via a 3-dB splitter, to the signal analyzer 1 and the EUT as shown in Figure 2.
7. Transmit the AWGN signal (RF ON) and verify its characteristics on the signal analyzer 1.
8. Monitor the signal analyzer 2 to verify if the AWGN signal has been detected and the EUT has ceased transmission. If the EUT continues to transmit, then incrementally increase the AWGN signal power level until the EUT stops transmitting.
9. (Including all losses in the RF paths) Determine and record the AWGN signal power level (at the EUT's antenna port) at which the EUT ceased transmission. Repeat the procedure at least 10 times to verify the EUT can detect an AWGN signal with 90% (or better) level of certainty.
10. Refer to Table 1 to determine number of times the detection threshold testing needs to be repeated. If testing is required more than once, then go back to step 5, choose a different center frequency for the AWGN signal and repeat the process.

Note: Detection Level = Injected AWGN Power (dBm) – Antenna Gain (dBi) + Path Loss (dB)

8.3 TEST RESULTS

For the measurement records, refer to the appendix I.



9. ANTENNA REQUIREMENT

9.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

9.2 EUT ANTENNA

The EUT antenna is Dipole Antenna with RP-SMA connector. It comply with the standard requirement.



APPENDIX I - TEST RESULTS

DUTY CYCLE

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5955	Ant1	99.24	0	0.48
NVNT	a	6175	Ant1	99.24	0	0.48
NVNT	a	6415	Ant1	99.24	0	0.48
NVNT	a	6435	Ant1	99.24	0	0.48
NVNT	a	6475	Ant1	99.2	0	0.48
NVNT	a	6515	Ant1	99.24	0	0.48
NVNT	a	6535	Ant1	99.24	0	0.48
NVNT	a	6695	Ant1	99.24	0	0.48
NVNT	a	6855	Ant1	99.24	0	0.48
NVNT	a	6895	Ant1	99.24	0	0.48
NVNT	a	7115	Ant1	99.24	0	0.48
NVNT	a	5955	Ant2	99.24	0	0.48
NVNT	a	6175	Ant2	99.2	0	0.48
NVNT	a	6415	Ant2	99.2	0	0.48
NVNT	a	6435	Ant2	99.24	0	0.48
NVNT	a	6475	Ant2	99.2	0	0.48
NVNT	a	6515	Ant2	99.24	0	0.48
NVNT	a	6535	Ant2	99.24	0	0.48
NVNT	a	6695	Ant2	99.2	0	0.48
NVNT	a	6855	Ant2	99.2	0	0.48
NVNT	a	6895	Ant2	99.2	0	0.48
NVNT	a	7115	Ant2	99.24	0	0.48
NVNT	n20	5955	Ant1	99.69	0	0.18
NVNT	n20	6175	Ant1	99.71	0	0.18
NVNT	n20	6415	Ant1	99.71	0	0.18
NVNT	n20	6435	Ant1	99.71	0	0.18
NVNT	n20	6475	Ant1	99.7	0	0.19
NVNT	n20	6515	Ant1	99.71	0	0.18
NVNT	n20	6535	Ant1	99.71	0	0.18
NVNT	n20	6695	Ant1	99.71	0	0.18
NVNT	n20	6855	Ant1	99.71	0	0.18
NVNT	n20	6895	Ant1	99.69	0	0.18
NVNT	n20	7115	Ant1	99.71	0	0.18
NVNT	n20	5955	Ant2	99.71	0	0.18
NVNT	n20	6175	Ant2	99.71	0	0.18
NVNT	n20	6415	Ant2	99.71	0	0.18
NVNT	n20	6435	Ant2	99.69	0	0.18
NVNT	n20	6475	Ant2	99.71	0	0.18
NVNT	n20	6515	Ant2	99.71	0	0.18
NVNT	n20	6535	Ant2	99.69	0	0.18
NVNT	n20	6695	Ant2	99.71	0	0.18
NVNT	n20	6855	Ant2	99.71	0	0.18
NVNT	n20	6895	Ant2	99.71	0	0.18
NVNT	n20	7115	Ant2	99.71	0	0.18
NVNT	n20	5955	Sum	99.71	0	0.18
NVNT	n20	6175	Sum	99.71	0	0.18
NVNT	n20	6415	Sum	99.74	0	0.18
NVNT	n20	6435	Sum	99.71	0	0.18
NVNT	n20	6475	Sum	99.71	0	0.18
NVNT	n20	6515	Sum	99.71	0	0.18
NVNT	n20	6535	Sum	99.69	0	0.18
NVNT	n20	6695	Sum	99.69	0	0.18
NVNT	n20	6855	Sum	99.71	0	0.18
NVNT	n20	6895	Sum	99.69	0	0.18
NVNT	n20	7115	Sum	99.71	0	0.18
NVNT	n40	5965	Ant1	99.74	0	0.18
NVNT	n40	6165	Ant1	99.74	0	0.18
NVNT	n40	6405	Ant1	99.74	0	0.18
NVNT	n40	6445	Ant1	99.71	0	0.18
NVNT	n40	6485	Ant1	99.71	0	0.18
NVNT	n40	6525	Ant1	99.74	0	0.18
NVNT	n40	6565	Ant1	99.71	0	0.18
NVNT	n40	6685	Ant1	99.74	0	0.18



NVNT	n40	6845	Ant1	99.71	0	0.18
NVNT	n40	6885	Ant1	99.71	0	0.18
NVNT	n40	6925	Ant1	99.71	0	0.18
NVNT	n40	6965	Ant1	99.71	0	0.18
NVNT	n40	7085	Ant1	99.74	0	0.18
NVNT	n40	5965	Ant2	99.71	0	0.18
NVNT	n40	6165	Ant2	99.71	0	0.18
NVNT	n40	6405	Ant2	99.72	0	0.18
NVNT	n40	6445	Ant2	99.72	0	0.18
NVNT	n40	6485	Ant2	99.71	0	0.18
NVNT	n40	6525	Ant2	99.72	0	0.18
NVNT	n40	6565	Ant2	99.71	0	0.18
NVNT	n40	6685	Ant2	99.71	0	0.18
NVNT	n40	6845	Ant2	99.72	0	0.18
NVNT	n40	6885	Ant2	99.72	0	0.18
NVNT	n40	6925	Ant2	99.72	0	0.18
NVNT	n40	6965	Ant2	99.72	0	0.18
NVNT	n40	7085	Ant2	99.71	0	0.18
NVNT	n40	5965	Sum	99.72	0	0.18
NVNT	n40	6165	Sum	99.71	0	0.18
NVNT	n40	6405	Sum	99.71	0	0.18
NVNT	n40	6445	Sum	99.71	0	0.18
NVNT	n40	6485	Sum	99.71	0	0.18
NVNT	n40	6525	Sum	99.74	0	0.18
NVNT	n40	6565	Sum	99.71	0	0.18
NVNT	n40	6685	Sum	99.74	0	0.18
NVNT	n40	6845	Sum	99.72	0	0.18
NVNT	n40	6885	Sum	99.72	0	0.18
NVNT	n40	6925	Sum	99.72	0	0.18
NVNT	n40	6965	Sum	99.71	0	0.18
NVNT	n40	7085	Sum	99.71	0	0.18
NVNT	ac80	5985	Ant1	99.74	0	0.18
NVNT	ac80	6145	Ant1	99.71	0	0.18
NVNT	ac80	6385	Ant1	99.72	0	0.18
NVNT	ac80	6465	Ant1	99.72	0	0.18
NVNT	ac80	6545	Ant1	99.71	0	0.18
NVNT	ac80	6625	Ant1	99.72	0	0.18
NVNT	ac80	6705	Ant1	99.74	0	0.18
NVNT	ac80	6785	Ant1	99.71	0	0.18
NVNT	ac80	6865	Ant1	99.71	0	0.18
NVNT	ac80	6945	Ant1	99.74	0	0.18
NVNT	ac80	7025	Ant1	99.71	0	0.18
NVNT	ac80	5985	Ant2	99.72	0	0.18
NVNT	ac80	6145	Ant2	99.72	0	0.18
NVNT	ac80	6465	Ant2	99.74	0	0.18
NVNT	ac80	6545	Ant2	99.71	0	0.18
NVNT	ac80	6625	Ant2	99.74	0	0.18
NVNT	ac80	6705	Ant2	99.71	0	0.18
NVNT	ac80	6785	Ant2	99.71	0	0.18
NVNT	ac80	6865	Ant2	99.74	0	0.18
NVNT	ac80	6945	Ant2	99.74	0	0.18
NVNT	ac80	7025	Ant2	99.74	0	0.18
NVNT	ac80	5985	Sum	99.71	0	0.18
NVNT	ac80	6145	Sum	99.74	0	0.18
NVNT	ac80	6385	Sum	99.74	0	0.18
NVNT	ac80	6465	Sum	99.71	0	0.18
NVNT	ac80	6545	Sum	99.74	0	0.18
NVNT	ac80	6625	Sum	99.71	0	0.18
NVNT	ac80	6705	Sum	99.74	0	0.18
NVNT	ac80	6785	Sum	99.74	0	0.18
NVNT	ac80	6865	Sum	99.74	0	0.18
NVNT	ac80	6945	Sum	99.71	0	0.18
NVNT	ac80	7025	Sum	99.74	0	0.18
NVNT	ax80	5985	Ant1	99.71	0	0.18
NVNT	ax80	6145	Ant1	99.73	0	0.18
NVNT	ax80	6385	Ant1	99.71	0	0.18
NVNT	ax80	6465	Ant1	99.74	0	0.18
NVNT	ax80	6545	Ant1	99.74	0	0.18



NVNT	ax80	6625	Ant1	99.74	0	0.18
NVNT	ax80	6705	Ant1	99.74	0	0.18
NVNT	ax80	6785	Ant1	99.71	0	0.18
NVNT	ax80	6865	Ant1	99.74	0	0.18
NVNT	ax80	6945	Ant1	99.74	0	0.18
NVNT	ax80	7025	Ant1	99.71	0	0.18
NVNT	ax80	5985	Ant2	99.73	0	0.18
NVNT	ax80	6145	Ant2	99.73	0	0.18
NVNT	ax80	6385	Ant2	99.73	0	0.18
NVNT	ax80	6465	Ant2	99.74	0	0.18
NVNT	ax80	6545	Ant2	99.74	0	0.18
NVNT	ax80	6625	Ant2	99.74	0	0.18
NVNT	ax80	6705	Ant2	99.74	0	0.18
NVNT	ax80	6785	Ant2	99.73	0	0.18
NVNT	ax80	6865	Ant2	99.74	0	0.18
NVNT	ax80	6945	Ant2	99.73	0	0.18
NVNT	ax80	7025	Ant2	99.73	0	0.18
NVNT	ax80	5985	Sum	99.74	0	0.18
NVNT	ax80	6145	Sum	99.74	0	0.18
NVNT	ax80	6385	Sum	99.74	0	0.18
NVNT	ax80	6465	Sum	99.74	0	0.18
NVNT	ax80	6545	Sum	99.74	0	0.18
NVNT	ax80	6625	Sum	99.73	0	0.18
NVNT	ax80	6705	Sum	99.74	0	0.18
NVNT	ax80	6785	Sum	99.71	0	0.18
NVNT	ax80	6865	Sum	99.71	0	0.18
NVNT	ax80	6945	Sum	99.74	0	0.18
NVNT	ax80	7025	Sum	99.74	0	0.18
NVNT	ax160	6025	Ant1	99.74	0	0.18
NVNT	ax160	6185	Ant1	99.71	0	0.18
NVNT	ax160	6345	Ant1	99.74	0	0.18
NVNT	ax160	6505	Ant1	99.74	0	0.18
NVNT	ax160	6665	Ant1	99.71	0	0.18
NVNT	ax160	6825	Ant1	99.74	0	0.18
NVNT	ax160	6985	Ant1	99.74	0	0.18
NVNT	ax160	6025	Ant2	99.73	0	0.18
NVNT	ax160	6185	Ant2	99.74	0	0.18
NVNT	ax160	6345	Ant2	99.74	0	0.18
NVNT	ax160	6505	Ant2	99.71	0	0.18
NVNT	ax160	6665	Ant2	99.74	0	0.18
NVNT	ax160	6825	Ant2	99.73	0	0.18
NVNT	ax160	6985	Ant2	99.73	0	0.18
NVNT	ax160	6025	Sum	99.74	0	0.18
NVNT	ax160	6185	Sum	99.71	0	0.18
NVNT	ax160	6345	Sum	99.74	0	0.18
NVNT	ax160	6505	Sum	99.74	0	0.18
NVNT	ax160	6665	Sum	99.74	0	0.18
NVNT	ax160	6825	Sum	99.74	0	0.18
NVNT	ax160	6985	Sum	99.74	0	0.18

