



FCC / IC Test Report

FOR:
MP CONSULTING LLC

Model Name:
84000100019_04

Product Description:
Daughterboard: A communications module capable of WIFI and Bluetooth communications

FCC ID: 2AQ89-APT0001
IC ID: 24336-APT0001

Applied Rules and Standards:
47 CFR Part 15.247
RSS-247 Issue 2 & RSS-Gen Issue 5

REPORT #: EMC_ACTIV-001-18001_FCC_15.247_WLAN

DATE: 2019-08-07



A2LA Accredited

IC recognized #
3462B-1

CETECOM Inc.

411 Dixon Landing Road • Milpitas, CA 95035 • U.S.A.

Phone: + 1 (408) 586 6200 • Fax: + 1 (408) 586 6299 • E-mail: info@cetecom.com • <http://www.cetecom.com>
CETECOM Inc. is a Delaware Corporation with Corporation number: 2905571

TABLE OF CONTENTS

1	ASSESSMENT	3
2	ADMINISTRATIVE DATA	4
2.1	IDENTIFICATION OF THE TESTING LABORATORY ISSUING THE EMC TEST REPORT	4
2.2	IDENTIFICATION OF THE CLIENT	4
2.3	IDENTIFICATION OF THE MANUFACTURER	4
3	EQUIPMENT UNDER TEST (EUT)	5
3.1	EUT SPECIFICATIONS	5
3.2	EUT SAMPLE DETAILS	6
3.3	TEST SUPPORT EQUIPMENT (TSE) DETAILS	6
3.4	TEST SAMPLE CONFIGURATION	6
3.5	MODE OF OPERATION DETAILS	6
3.6	JUSTIFICATION FOR WORST CASE MODE OF OPERATION	7
4	SUBJECT OF INVESTIGATION	8
5	MEASUREMENT RESULTS SUMMARY	8
6	MEASUREMENT UNCERTAINTY	9
6.1	ENVIRONMENTAL CONDITIONS DURING TESTING:	9
6.2	DATES OF TESTING:	9
7	MEASUREMENT PROCEDURES	10
7.1	RADIATED MEASUREMENT	10
8	TEST RESULT DATA	13
8.1	RADIATED TRANSMITTER SPURIOUS EMISSIONS AND RESTRICTED BANDS	13
9	TEST SETUP PHOTOS	27
10	TEST EQUIPMENT AND ANCILLARIES USED FOR TESTING	27
11	REVISION HISTORY	28

1 **Assessment**

The following device was evaluated the radiated spurious emission against the applicable criteria specified in FCC rules Parts 15.247 of Title 47 of the Code of Federal Regulations and the relevant ISED Canada standard RSS-247. No deviations were ascertained.

Company	Description	Model #
AVCTIVE PROTECTIVE TECHNOLOGIES, INC.	Daughterboard: A communications module capable of WIFI and Bluetooth communications	84000100019_04 (DB Module)

Responsible for Testing Laboratory:

2019-08-07	Compliance	Cindy Li (EMC Lab Manager)	
Date	Section	Name	Signature

Responsible for the Report:

2019-08-07	Compliance	Kevin Wang (Senior EMC Engineer)	
Date	Section	Name	Signature

The test results of this test report relate exclusively to the test item specified in Section 3.
CETECOM Inc. USA does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM Inc. USA.

2 Administrative Data

2.1 Identification of the Testing Laboratory Issuing the EMC Test Report

Company Name:	CETECOM Inc.
Department:	Compliance
Street Address:	411 Dixon Landing Road
City/Zip Code	Milpitas, CA 95035
Country	USA
Telephone:	+1 (408) 586 6200
Fax:	+1 (408) 586 6299
Director Radio Com. and EMC:	Cindy Li
Responsible Project Leader:	Rami Saman

2.2 Identification of the Client

Applicant's Name:	MP CONSULTING LLC
Street Address:	21805 W. FIELD PKWY, SUITE #160
City/Zip Code	DEER PARK, IL 60010
Country	USA

2.3 Identification of the Manufacturer

Manufacturer's Name:	ACTIVE PROTECTIVE TECHNOLOGIES, INC.
Manufacturers Address:	580 Virginia Dr., Suite 230
City/Zip Code	Fort Washington, PA 19034
Country	USA

3 Equipment under Test (EUT)

3.1 EUT Specifications

Model No:	84000100019_04
HW Version :	84000100019_A
SW Version :	Daughterboard REV.A
FCC-ID :	2AQ89-APT0001
IC-ID:	24336-APT0001
FVIN:	Daughterboard REV.A
HVIN:	84000100019_04
PMN:	APT BELT CONNECTIVITY MODULE V1
Product Description:	Daughterboard (Module Integrated)
Frequency Range / number of channels:	Murata LBEE5KL1DX: Nominal band: 2400 MHz – 2483.5 MHz; 2412 MHz (Ch. 1) – 2462 (Ch.11), 11 channels
Type(s) of Modulation:	802.11b/g/n with CCK, DQPSK, DBPSK + DSSS QBSK, BPSK, 16 QAM, 64 QAM + OFDM
Modes of Operation:	Fix channel transmission
Antenna Information as declared:	PCB Chip Antenna (PULSE), Max Gain=2.2dBi
Max. Peak Conducted Output Power:	22.34dBm ¹
Power Supply/ Rated Operating Voltage Range:	USB / Vmin: 3.25 VDC/ Vnom: 3.6 VDC / Vmax: 4.2 VDC
Operating Temperature Range	-30-70°C
Other Radios included in the device:	Bluetooth BR / EDR Bluetooth 4.2 Low Energy (BTLE)
Sample Revision	☐ Prototype Unit; ☒ Production Unit; ☐ Pre-Production
EUT Dimensions	1mm X 25mm X 20mm (daughterboard), R42xL400 (End Product)

Note1: Leverage form module report "RF151228C18B"

3.2 EUT Sample details

EUT #	Serial Number	HW Version	SW Version	Notes/Comments
1	P18370004	84000100019_A	Daughterboard REV.A	Radiated Emissions

3.3 Test Support Equipment (TSE) details

AE #	Type	Model	Manufacturer	Part Number
1	Laptop	Dell	Latitude E55400	NA

3.4 Test Sample Configuration

EUT Set-up #	Combination of TSE used for test set up	Comments
1	EUT#1 + TSE#1	The radio of the EUT was configured to a fixed channel with highest possible duty cycle using software provided by client that is not available to the end user.

3.5 Mode of Operation details

Mode of Operation	Description of Operating modes	Additional Information
Op. 1	802.11b, 1Mbps	Radiated Emission

3.6 Justification for Worst Case Mode of Operation

During the testing process the EUT was tested with transmitter sets on low, mid and high channels. For radiated measurements, all data in this report shows the worst case between horizontal and vertical antenna polarizations and for all orientations of the EUT.

From the module report “RF151228C18B”, the maximum conducted average power happened @ 802.11b mode with 1Mbps data rate, thus this mode is selected as worst case for Radiated Spurious Emission test.

4 Subject of Investigation

The objective of the measurements done by CETECOM Inc. was to assess the transmitter spurious emission of the EUT according to the relevant requirements specified in FCC rules Part 15.247 of Title 47 of the Code of Federal Regulations and Radio Standard Specification RSS-247 Issue 2 of ISED Canada.

This test report is to support a request for new equipment authorization under the:

- FCC ID: 2AQ89-APT001
- IC ID: 24336-APT0001

5 Measurement Results Summary

Test Specification	Test Case	Temperature and Voltage Conditions	Mode	Pass	NA	NP	Result
§15.247(d) §15.209(a) RSS-Gen 6.13	TX Spurious emissions- Radiated	Nominal	802.11b	■	□	□	Complies
§15.207(a) RSS Gen 8.8	AC Conducted Emissions	Nominal	802.11b	□	□	■	NA

Note: NA= Not Applicable; NP= Not Performed.

6 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus, with 95% confidence interval (in dB delta to result), based on a coverage factor k=1.

Radiated measurement

9 kHz to 30 MHz	±2.5 dB (Magnetic Loop Antenna)
30 MHz to 1000 MHz	±2.0 dB (Biconilog Antenna)
1 GHz to 40 GHz	±2.3 dB (Horn Antenna)

Conducted measurement

RF conducted measurement	±0.5 dB
--------------------------	---------

According to TR 102 273 a multiplicative propagation of error is assumed for RF measurement systems. For this reason the RMS method is applied to dB values and not to linear values as appropriate for additive propagation of error. Also used: <http://physics.nist.gov/cuu/Uncertainty/typeb.html>. The above calculated uncertainties apply to direct application of the Substitution method. The Substitution method is always used when the EUT comes closer than 3 dB to the limit.

6.1 Environmental Conditions during Testing:

The following environmental conditions were maintained during the course of testing:

- Ambient Temperature: 20-25° C
- Relative humidity: 40-60%

6.2 Dates of Testing:


11/20/2018

7 Measurement Procedures


7.1 Radiated Measurement

The radiated measurement is performed according to ANSI C63.10 (2013)


- The exploratory measurement is accomplished by running a matrix of 16 sweeps over the required frequency range with R&S Test-SW EMC32 for 4 positions of the turntable, two orthogonal positions of the EUT and both antenna polarizations. This procedure exceeds the requirement of the above standards to cover the 3 orthogonal axis of the EUT. A max peak detector is utilized during the exploratory measurement. The Test-SW creates an overall maximum trace for all 12 sweeps and saves the settings for each point of this trace. The maximum trace is part of the test report.
- The 10 highest emissions are selected with an automatic algorithm of EMC32 searching for peaks in the noise floor and ensuring that broadband signals are not selected multiple times.
- The maxima are then put through the final measurement and again maximized in a 90deg range of the turntable, fine search in frequency domain and height scan between 1m and 4m.
- The above procedure is repeated for all possible ways of power supply to EUT and for all supported modulations.
- In case there are no emissions above noise floor level only the maximum trace is reported as described above.
- The results are split up into up to 4 frequency ranges due to antenna bandwidth restrictions. A magnetic loop is used from 9 kHz to 30 MHz, a Biconilog antenna is used from 30 MHz to 1 GHz, and two different horn antennas are used to cover frequencies up to 40 GHz.

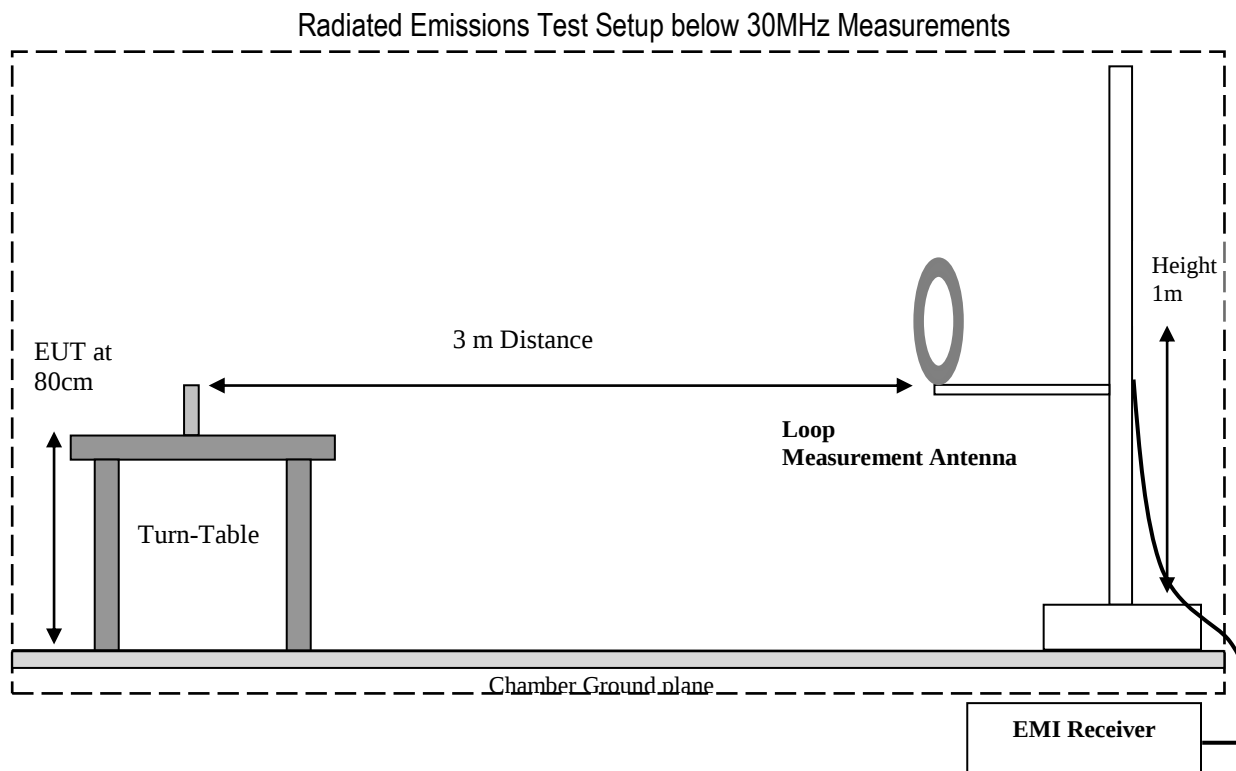

Radiated Emissions Test Setup 30MHz-1GHz Measurements

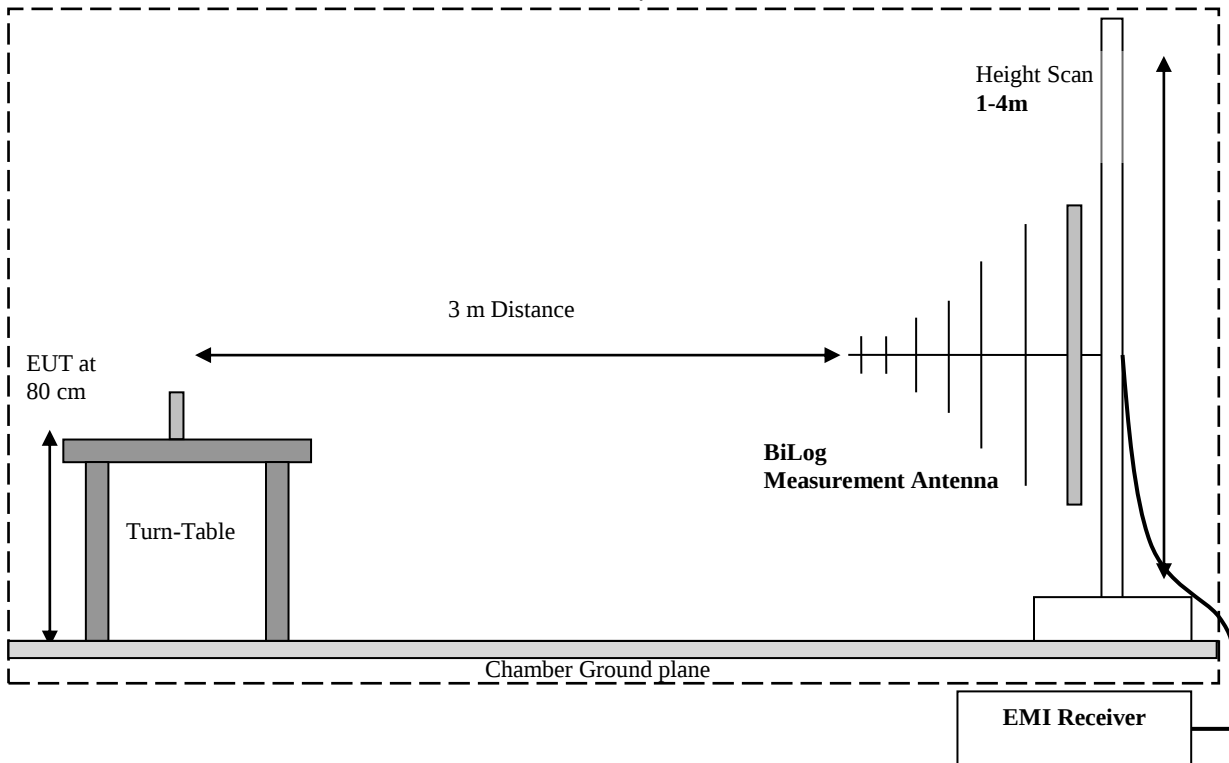

Radiated Emissions Test Setup above 1GHz Measurements

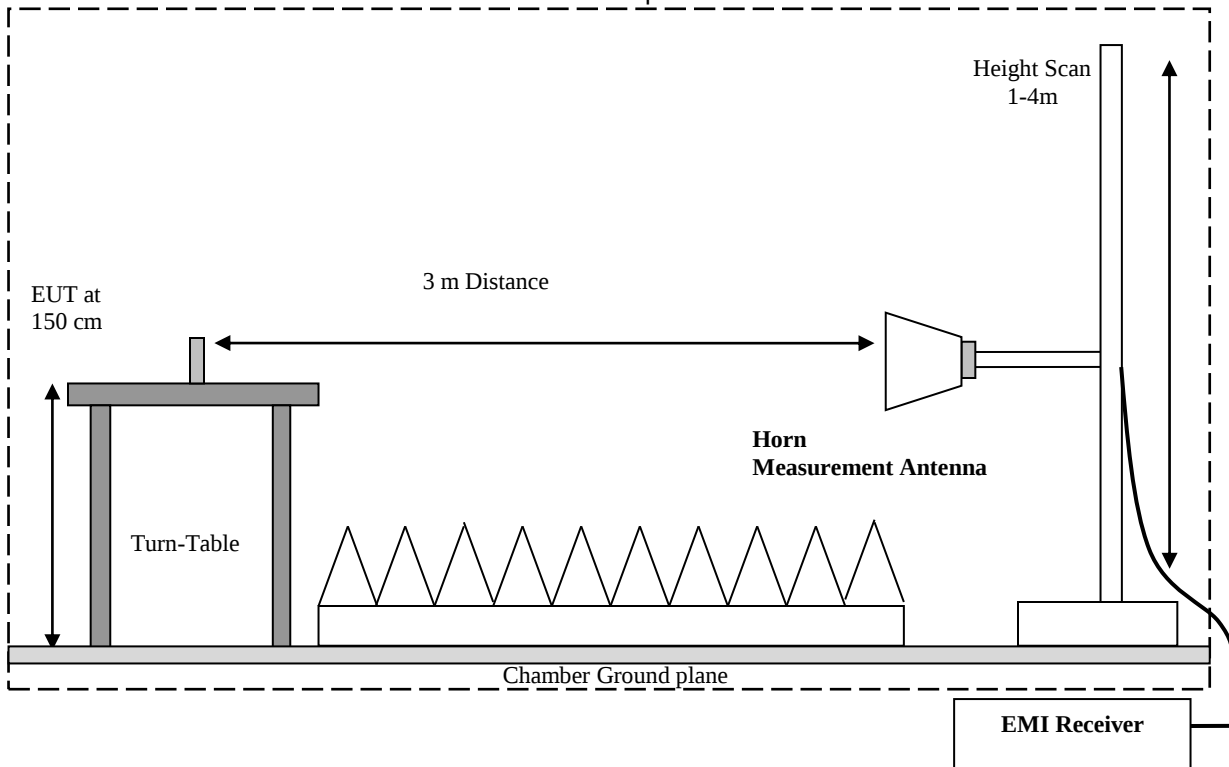

7.1.1 Sample Calculations for Field Strength Measurements

Field Strength is calculated from the Spectrum Analyzer/ Receiver readings, taking into account the following parameters:

1. Measured reading in dB μ V
2. Cable Loss between the receiving antenna and SA in dB and
3. Antenna Factor in dB/m

All radiated measurement plots in this report are taken from a test SW that calculates the Field Strength based on the following equation:

$$\text{FS (dB}\mu\text{V/m)} = \text{Measured Value on SA (dB}\mu\text{V)} - \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}$$

Example:

Frequency (MHz)	Measured SA (dB μ V)	Cable Loss (dB)	Antenna Factor Correction (dB)	Field Strength Result (dB μ V/m)
1000	80.5	3.5	14	98.0

8 Test Result Data

8.1 Radiated Transmitter Spurious Emissions and Restricted Bands

8.1.1 Measurement according to ANSI C63.10 (2013)

Spectrum Analyzer Settings:

- Frequency = 9 KHz – 30 MHz
- RBW = 9 KHz
- Detector: Peak

- Frequency = 30 MHz – 1 GHz
- Detector = Peak / Quasi-Peak
- RBW= 120 KHz (<1GHz)

- Frequency > 1 GHz
- Detector = Peak / Average
- RBW = 1 MHz

- Radiated spurious emissions shall be measured for the transmit frequencies, transmit power, and data rate for the lowest, middle and highest channel in each frequency band of operation and for the highest gain antenna for each antenna type, and using the appropriate parameters and test requirements.
- The highest (or worst-case) data rate shall be recorded for each measurement.
- For testing at distance other than the specified in the standard, the limit conversion is calculated by using 40 dB/decade extrapolation factor as follow: Conversion factor (CF) = $40 \log (D/d) = 40 \log (300\text{m} / 3\text{m}) = 80\text{dB}$

8.1.2 Limits:

FCC §15.247

- In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

FCC §15.209 & RSS-Gen 8.9

- Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency of emission (MHz)	Field strength (μV/m)	Measurement Distance (m)	Field strength @ 3m (dBμV/m)
0.009–0.490	2400/F(kHz) / -----	300	-
0.490–1.705	24000/F(kHz) / -----	30	-
1.705–30.0	30 / (29.5)	30	-
30–88	100	3	40 dBμV/m
88–216	150	3	43.5 dBμV/m
216–960	200	3	46 dBμV/m
Above 960	500	3	54 dBμV/m

FCC §15.205 & RSS-Gen 8.10

- Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

- Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

*PEAK LIMIT= 74 dBμV/m

*AVG. LIMIT= 54 dBμV/m


8.1.3 Test conditions and setup:


Ambient Temperature	EUT Set-Up #	EUT operating mode	Power Input
22° C	1	1	3.6 VDC

8.1.4 Measurement result:


Plot #	Mode	Channel #	Scan Frequency	Limit	Result
1-3	802.11b	Low	30 MHz – 18 GHz	See section 8.1.2	Pass
4-8	802.11b	Mid	9 kHz – 26 GHz	See section 8.1.2	Pass
9-11	802.11b	High	30 MHz – 18 GHz	See section 8.1.2	Pass

8.1.5 Measurement Plots:

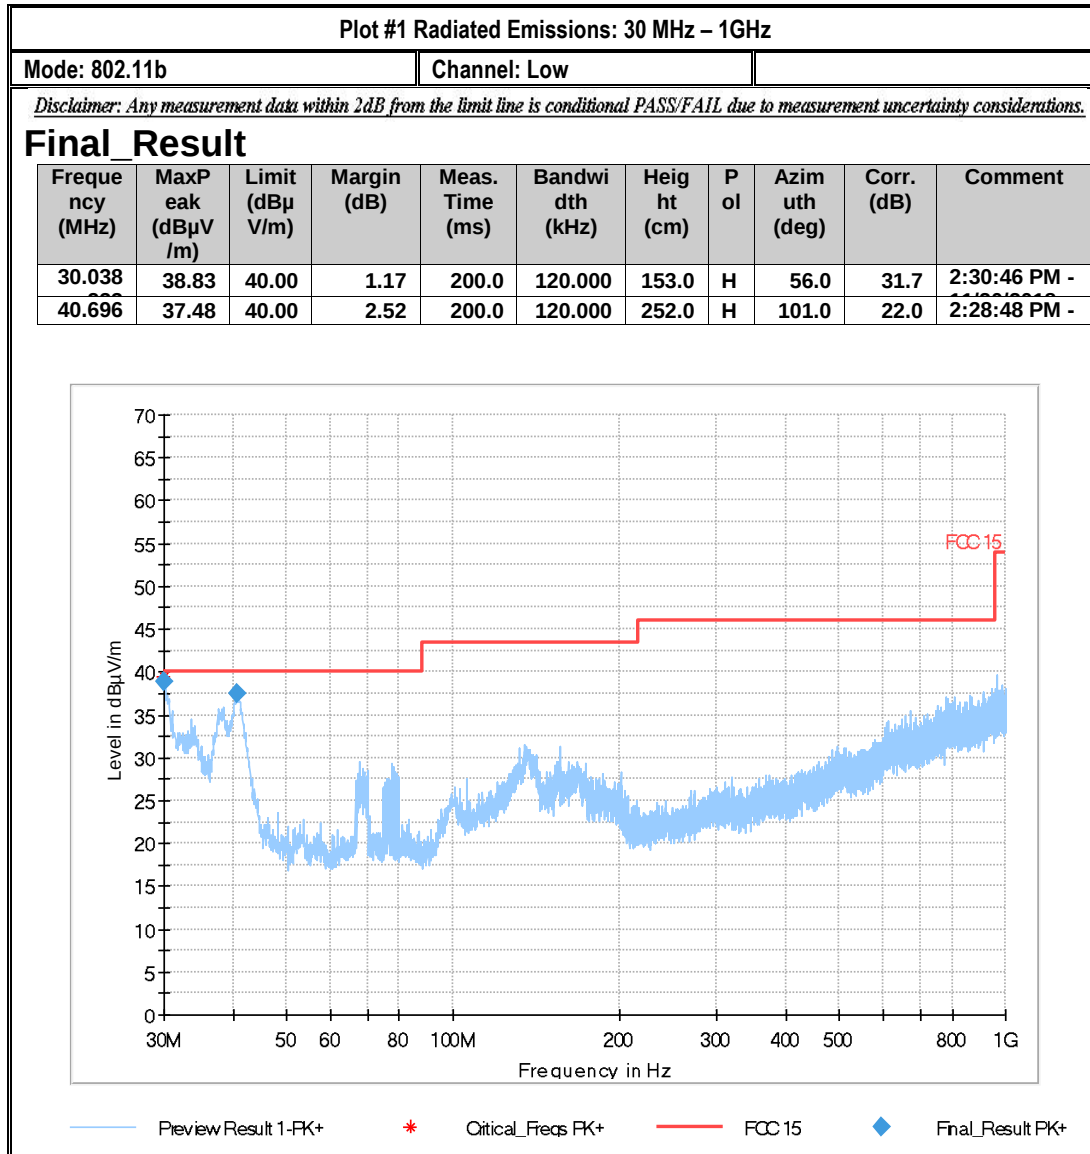

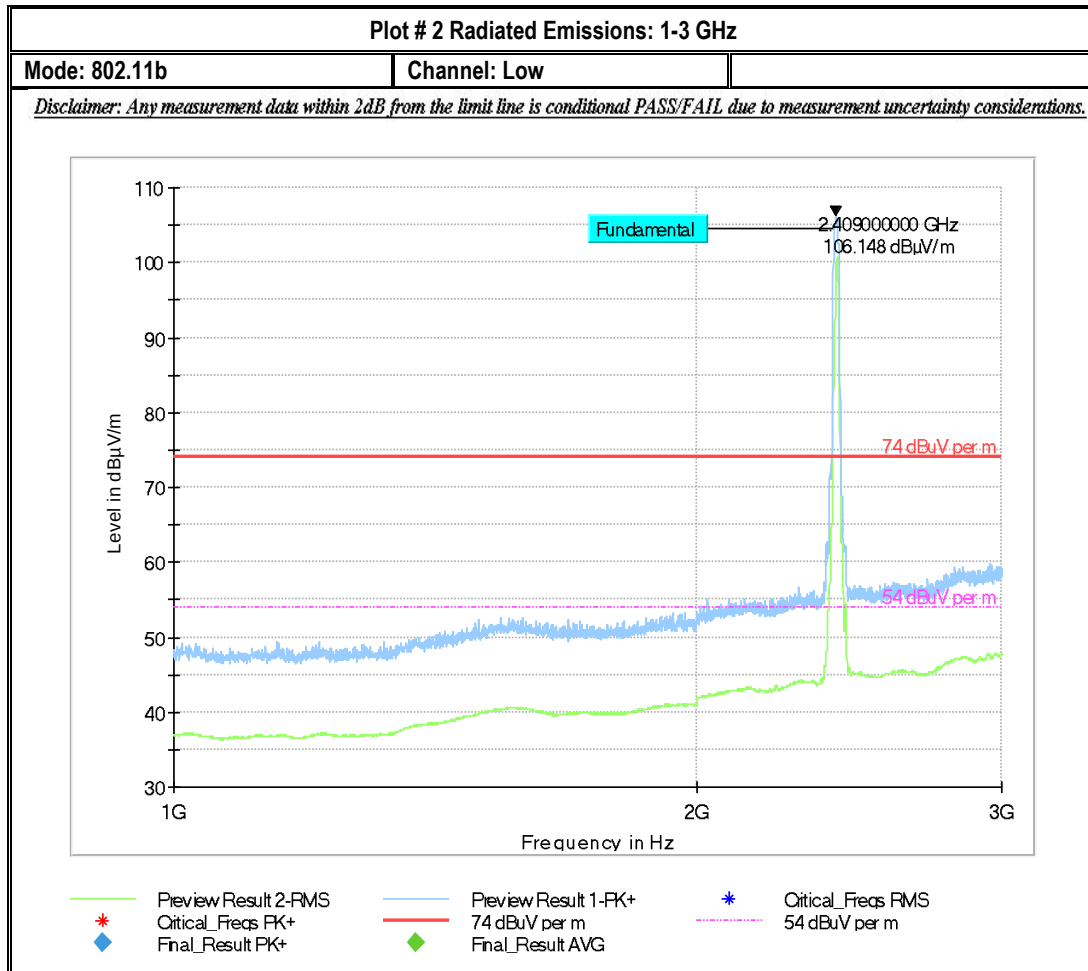


Note: The peak signal above is the transmit channel.

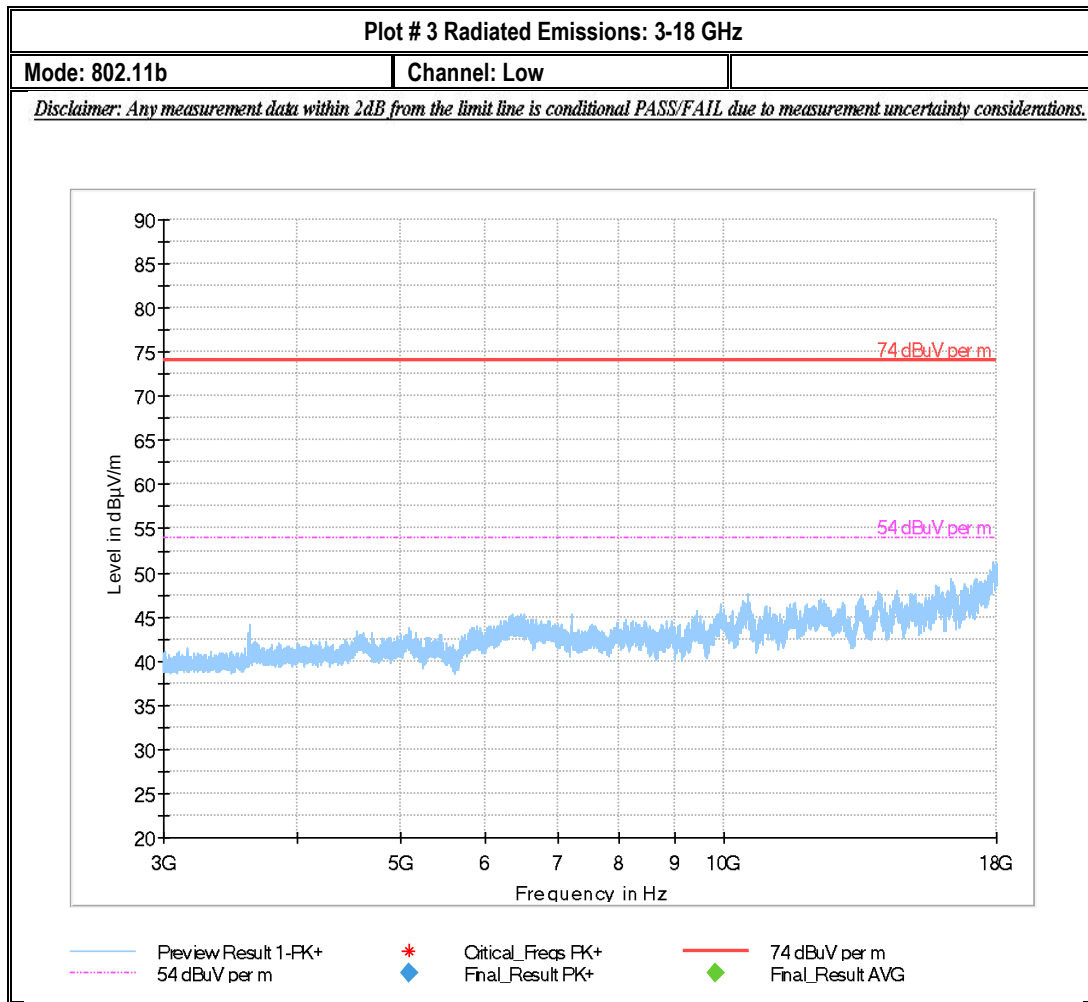

Plot # 4 Radiated Emissions: 9 KHz – 30 MHz

Mode: 802.11b

Channel: Mid

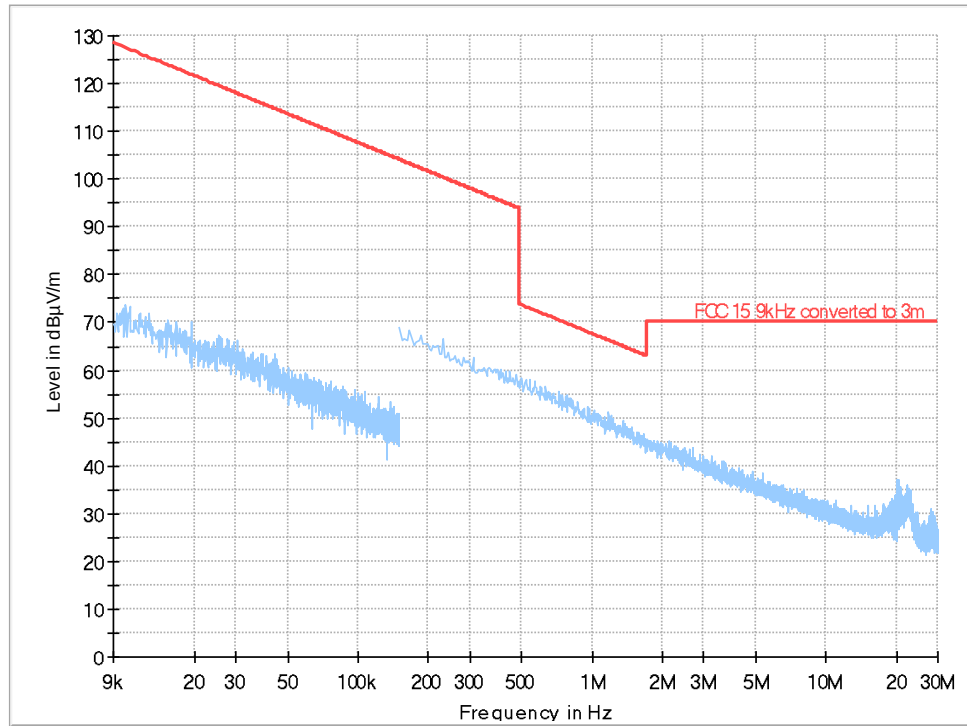Disclaimer: Any measurement data within 2dB from the limit line is conditional PASS/FAIL due to measurement uncertainty considerations.

Preview Result 1-PK+

FCC 15.9kHz converted to 3m



Critical_Freqs PK+



Final_Result PK+

Plot #5 Radiated Emissions: 30 MHz – 1GHz


Mode: 802.11b

Channel: Mid

Disclaimer: Any measurement data within 2dB from the limit line is conditional PASS/FAIL due to measurement uncertainty considerations.

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)	Comment
30.040	39.83	40.00	0.17	200.0	120.000	248.0	H	134.0	31.7	2:52:41 PM -
40.717	37.61	40.00	2.39	200.0	120.000	243.0	H	111.0	21.9	2:54:36 PM -

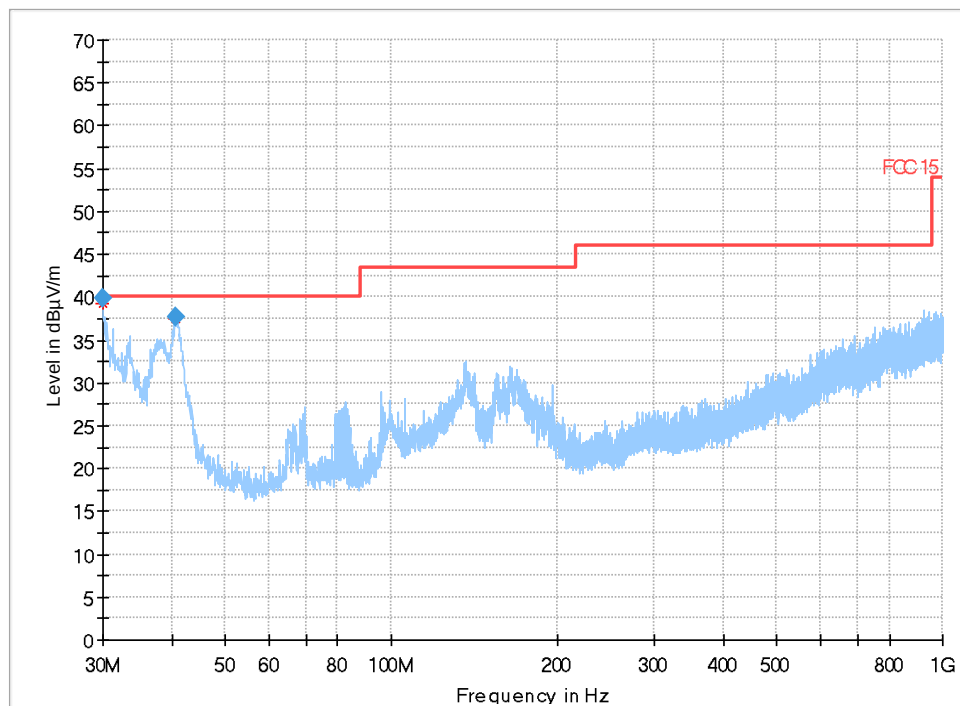

Preview Result 1-PK+


*

Critical_Freqs PK+

FCC 15

◆

Fna_Result PK+

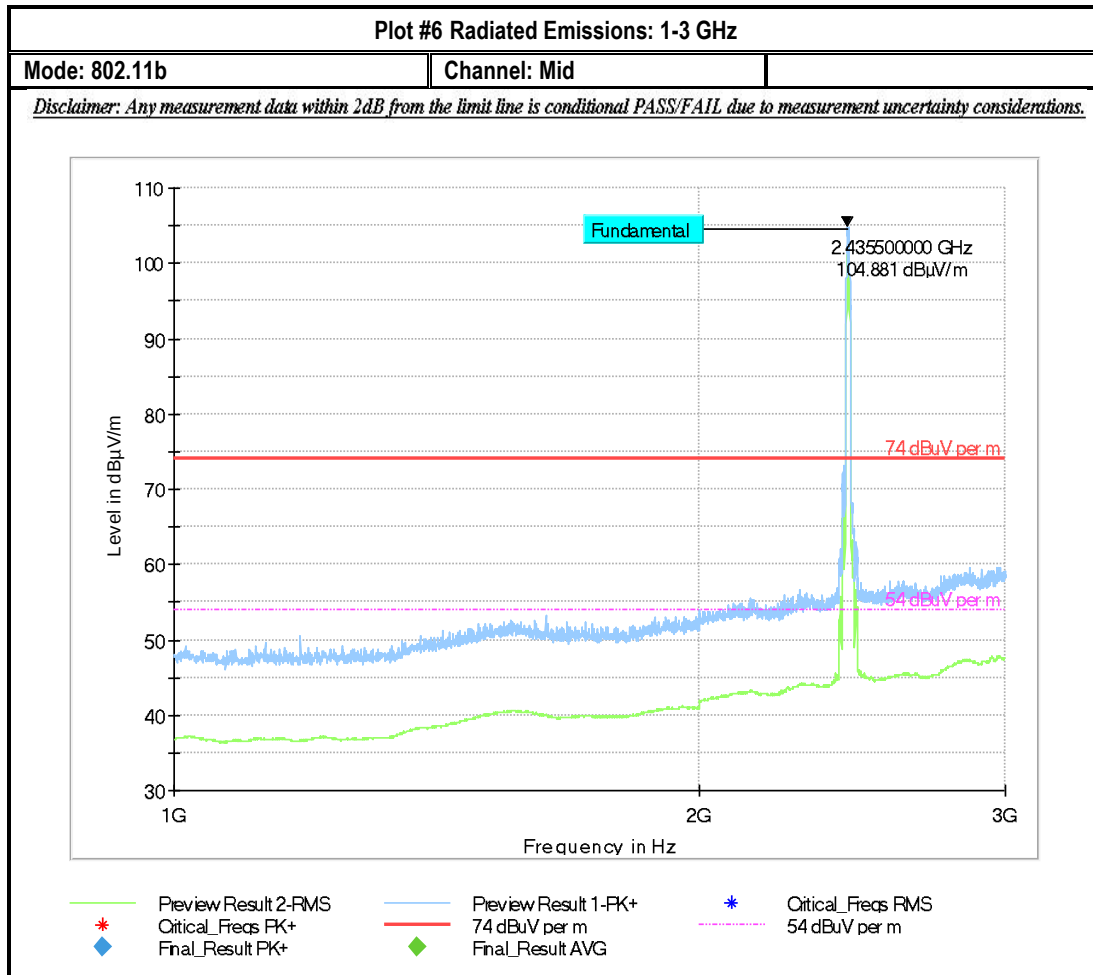


Note: The peak signal above is the transmit channel.

Plot #7 Radiated Emissions: 3-18 GHz

Mode: 802.11b


Channel: Mid

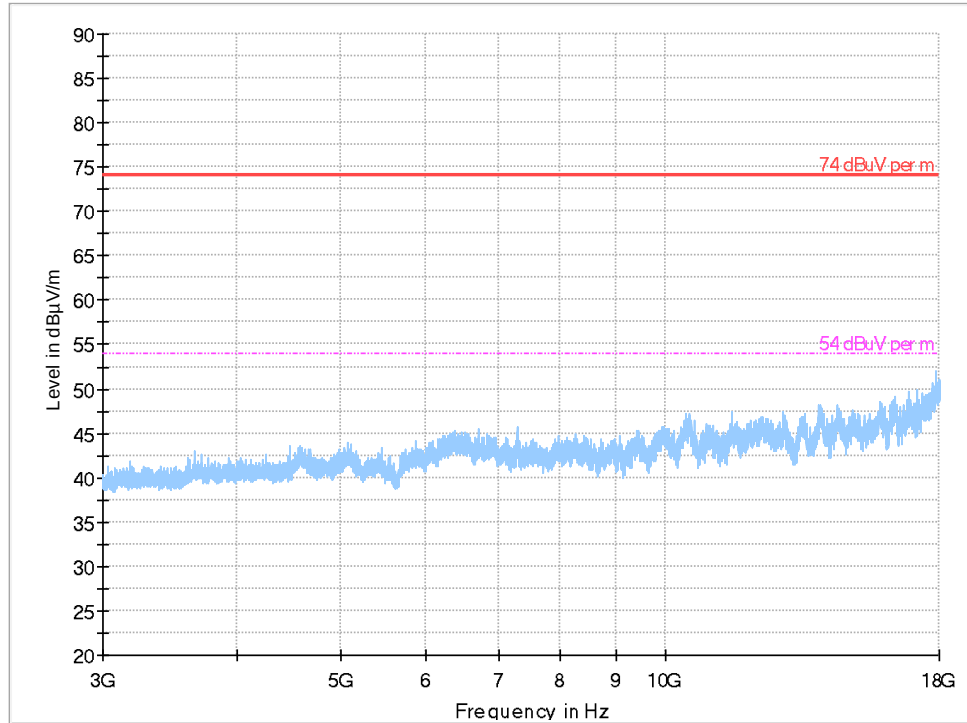Disclaimer: Any measurement data within 2dB from the limit line is conditional PASS/FAIL due to measurement uncertainty considerations.Preview Result 1-PK+
54 dBuV per m* Critical_Freqs PK+
◆ Final_Result PK+— 74 dBuV per m
◆ Final_Result AVG

Plot #8 Radiated Emissions: 18-26 GHz

Mode: 802.11b

Channel: Mid

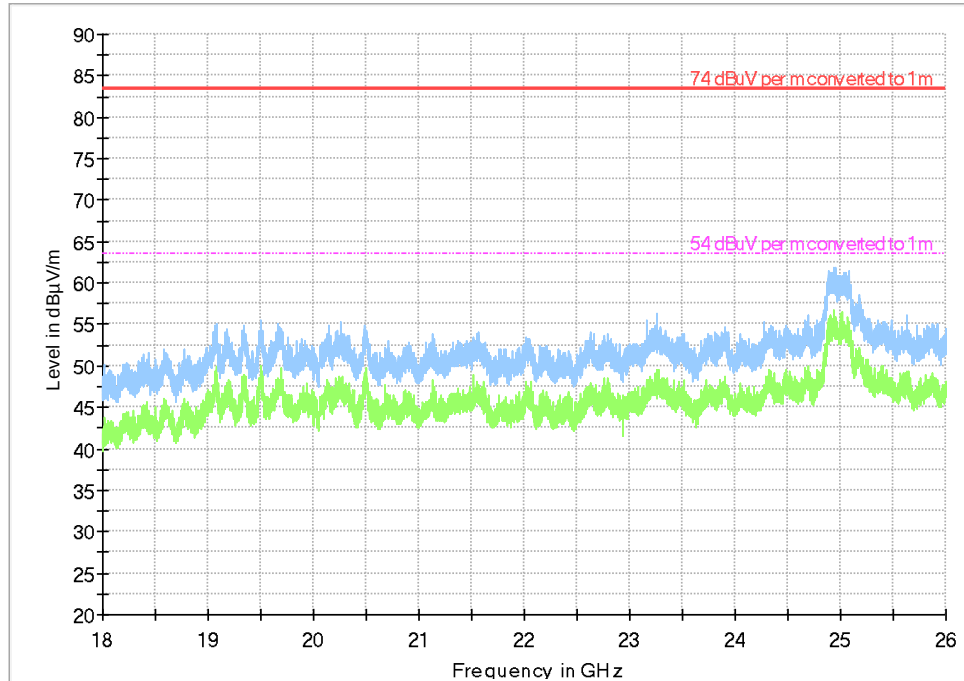Disclaimer: Any measurement data within 2dB from the limit line is conditional PASS/FAIL due to measurement uncertainty considerations.

Preview Result 2-RMS

Critical_Freqs RMS

74 dBuV per m converted to 1m

Final_Result PK+

Preview Result 1-PK+

Critical_Freqs PK+

54 dBuV per m converted to 1m

Final_Result AVG

Plot #9 Radiated Emissions: 30 MHz – 1GHz


Mode: 802.11b

Channel: High


Disclaimer: Any measurement data within 2dB from the limit line is conditional PASS/FAIL due to measurement uncertainty considerations.

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)	Comment
30.240	38.57	40.00	1.43	200.0	120.00	154.0	H	49.0	31.5	2:41:44 PM -
40.409	36.81	40.00	3.19	200.0	120.00	196.0	H	73.0	22.1	2:39:40 PM -

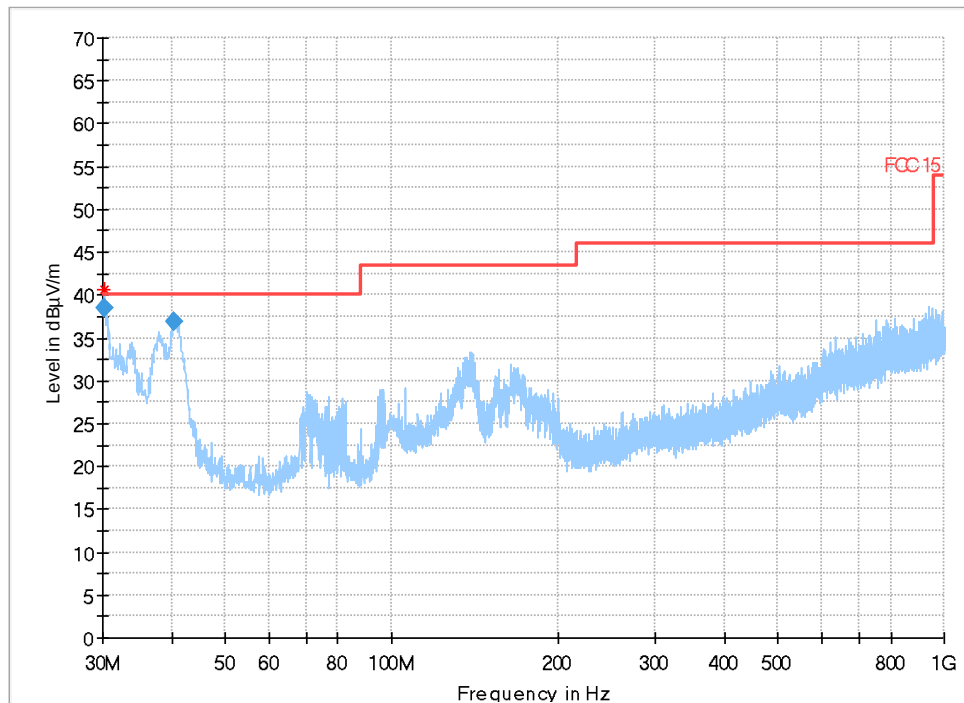

— Preview Result 1-PK+ * Critical_Freqs PK+ — FCC 15 ◆ Final_Result PK+

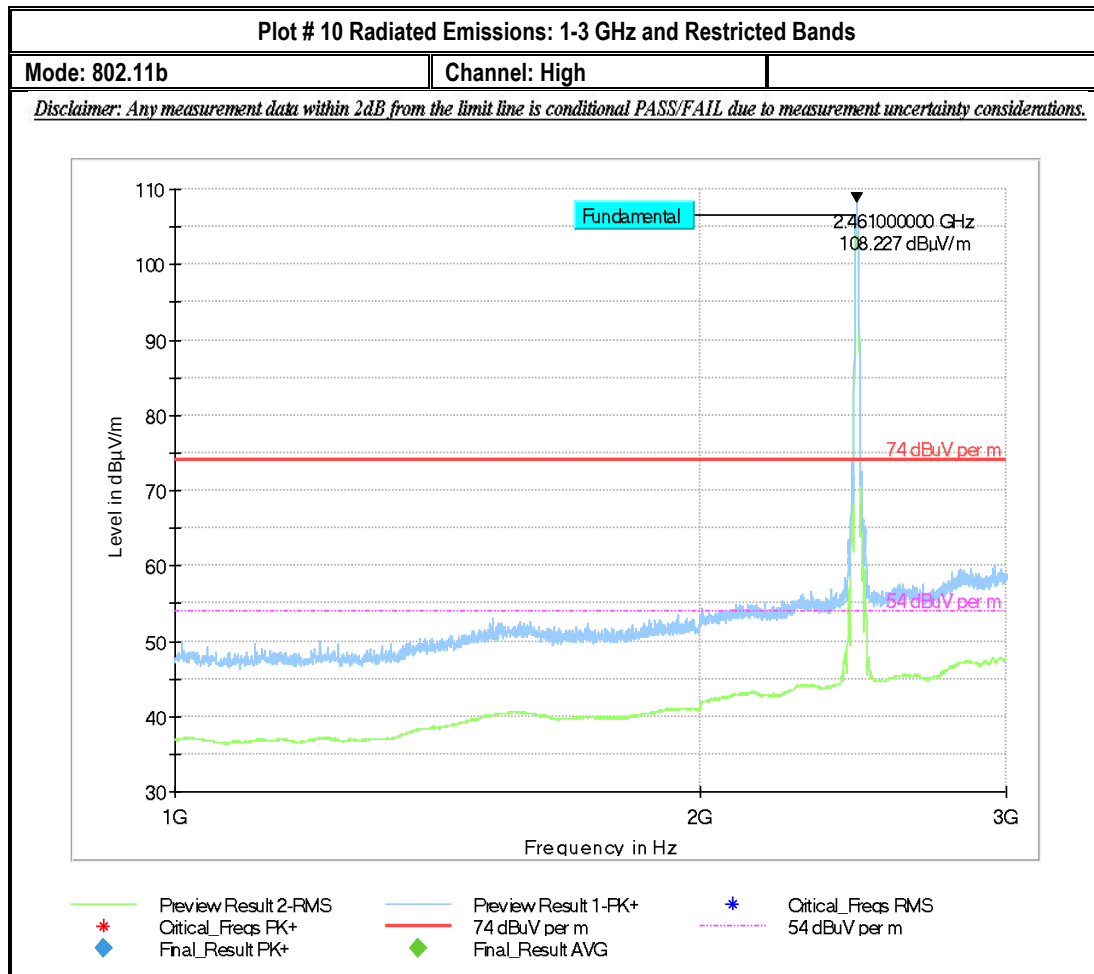


Note: The peak signal above is the transmit channel.

Plot #11 Radiated Emissions: 3-18 GHz

Mode: 802.11b

Channel: High

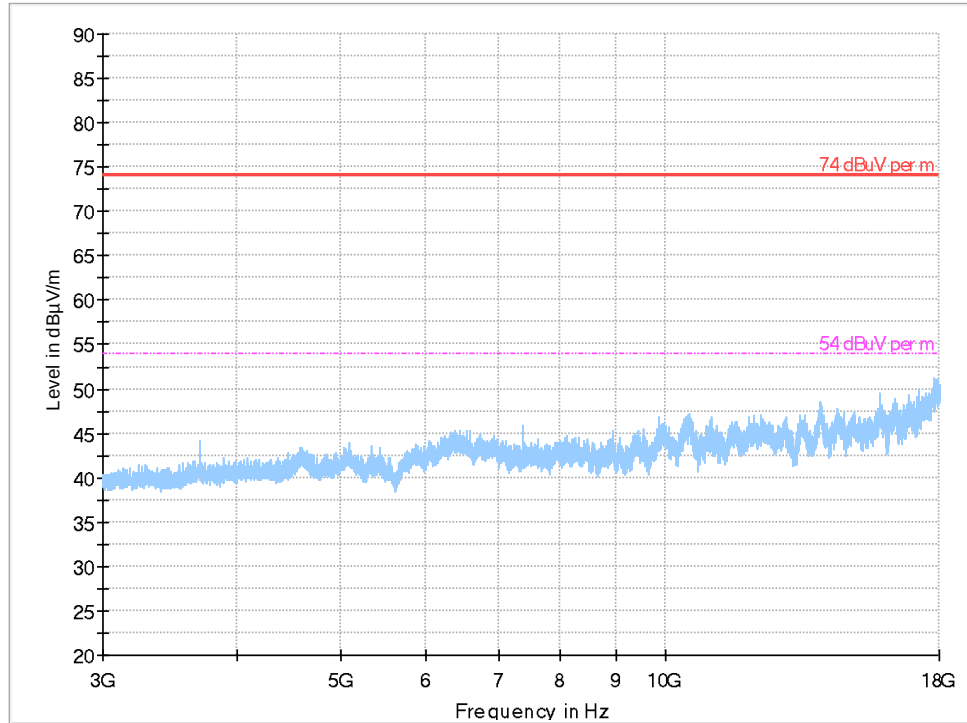Disclaimer: Any measurement data within 2dB from the limit line is conditional PASS/FAIL due to measurement uncertainty considerations.Preview Result 1-PK+
54 dBuV per m* Critical_Freqs PK+
◆ Final_Result PK+— 74 dBuV per m
◆ Final_Result AVG

9 Test setup photos

Setup photos are included in supporting file name: "EMC_ACTIV-001-18001_FCC_15.247_Setup_Photos.pdf"

10 Test Equipment And Ancillaries Used For Testing

Item Name	Equipment Type	Manufacturer	Model	Serial #	Calibration Cycle	Last Calibration Date
Antenna Biconilog 3142E	Biconlog Antenna	EMCO	3142E	166067	3 years	6/28/2017
Active Loop 6507	Loop Antenna	ETS Lindgren	6507	00161344	3 years	10/26/2017
Antenna Horn 3115	Horn Antenna	EMCO	3115	35114	3 years	7/31/2017
Antenna Horn 3117	Horn Antenna	ETS Lindgren	3117 PA	169547	3 years	10/31/2017
Digital Barometer	Compact Digital Barometer	Control Company	35519-055	91119547	3 Years	6/20/2017
CMU 200	Universal Communication Tester	R&S	CMU 200	110229	3 years	5/18/2017
FSU	Spectrum Analyzer	R&S	FSU	200302	2 Years	7/5/2017
ESU	EMI Test Receiver	R&S	ESU	1302.6005K40 -100251-KB	2 years	7/10/2017
Thermometer Humidity	Thermometer Humidity	Dickson	TM320	5280063	2 Year	11/2/2017

Note:

1. Equipment used meets the measurement uncertainty requirements as required per applicable standards for 95% confidence levels. Calibration due dates, unless defined specifically, falls on the last day of the month. Items indicated "N/A" for cal status either do not specifically require calibration or is internally characterized before use.

11 Revision History

Date	Report Name	Changes to report	Report prepared by
2019-08-07	EMC_ACTIV-001-18001_FCC_15.247_WLAN	Initial Version	Kevin Wang