



FCC TEST REPORT

FCC ID: 2AQ93-WP07A01

On Behalf of

SHENZHEN GOODWIN TECHNOLOGY CO., LTD.

Wireless charger

Model No.: PWERFLIP-BLK, WP17, WP07

Prepared for : SHENZHEN GOODWIN TECHNOLOGY CO., LTD.
Address : 4/F, Building A, Huayuan Industrial Park, Fenghuang NO.1 Industrial Area, Fuyong, Bao'an Dist, Shenzhen, China

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.
Address : Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103, Shenzhen, Guangdong, China

Report Number : A2012216-C01-R01
Date of Receipt : January 26, 2021
Date of Test : January 26, 2021–January 28, 2021
Date of Report : February 1, 2021
Version Number : V0

TABLE OF CONTENTS

1. Test Result Summary	5
2. General Information.....	6
2.1. Description of Device (EUT)	6
2.2. Accessories of Device (EUT)	7
2.3. Tested Supporting System Details	7
2.4. Block Diagram of Connection between EUT and Simulators	7
2.5. Description of Test Modes	7
2.6. Test Conditions	7
2.7. Test Facility	8
2.8. Measurement Uncertainty	8
2.9. Test Equipment List	9
3. Test Results and Measurement Data	10
3.1. Conducted Emission.....	10
3.2. Radiated Spurious Emission Measurement	13
3.3. Test Specification.....	21
4. Photos of Test Setup	23
5. Photographs of EUT	25

TEST REPORT DECLARATION

Applicant : SHENZHEN GOODWIN TECHNOLOGY CO., LTD.
Address : 4/F, Building A, Huayuan Industrial Park, Fenghuang NO.1 Industrail Area,
Fuyong, Bao' an Dist, Shenzhen, China
Manufacturer : SHENZHEN GOODWIN TECHNOLOGY CO., LTD.
Address : 4/F, Building A, Huayuan Industrial Park, Fenghuang NO.1 Industrail Area,
Fuyong, Bao' an Dist, Shenzhen, China
EUT Description : Wireless charger
(A) Model No. : PWERFLIP-BLK, WP17, WP07
(B) Trademark : 

Measurement Standard Used:

FCC CFR Title 47 Part 15 Subpart C Section 15.209

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed full responsibility for the accuracy and completeness of test. Also, this report shows that the EUT is technically compliant with the FCC CFR Title 47 Part 15 Subpart C Section 15.209 requirements.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....:

Lucas Pang
Project Engineer



Approved by (name + signature).....:

Simple Guan
Project Manager



Date of issue.....

February 1, 2021

Revision History

Revision	Issue Date	Revisions	Revised By
V0	February 1, 2021	Initial released Issue	Lucas Pang

1. Test Result Summary

Requirement	CFR 47 Section	Result
Antenna requirement	§15.203	PASS
AC Power Line Conducted Emission	§15.207	PASS
Spurious Emission	§15.209(a)(f)	PASS
Occupied Bandwidth	§15.215 (c)	PASS

Note:

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

2. General Information

2.1. Description of Device (EUT)

EUT Name	:	Wireless charger
Model No.	:	PWERFLIP-BLK, WP17, WP07
DIFF.	:	There is no difference except the name of the model. All tests are made with the PWERFLIP-BLK model.
Trademark	:	
Power supply	:	Input : 5V =2A, 9V =2A, 12V =2A Output : 15W(Max)
Operation frequency	:	112~205KHz
Modulation	:	MSK
Antenna Type	:	Coil Antenna, Maximum Gain is 0dBi (This value is supplied by applicant).
Software version	:	V1.0
Hardware version	:	V1.0
Connector cable loss	:	0.5dB (This value is supplied by applicant).
Intend use environment	:	Residential, commercial and light industrial environment


2.2. Accessories of Device (EUT)

Accessories1 : /
 Manufacturer : /
 Model : /
 Ratings : /

2.3. Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number	Certification
1	Wireless load	--	--	--	--
2	Adapter	--	MDY-10-EH	--	--

2.4. Block Diagram of Connection between EUT and Simulators

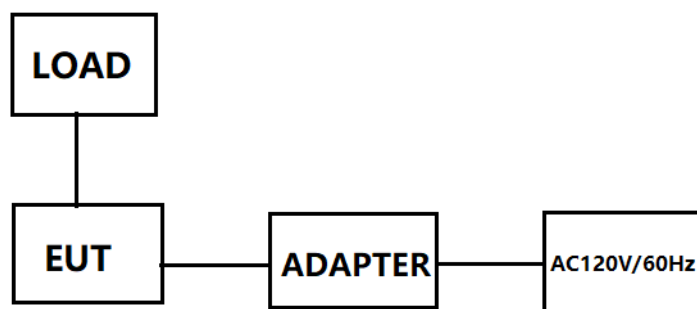

2.5. Description of Test Modes

Channel	Frequency (KHz)
1	140

2.6. Test Conditions

Items	Required	Actual
Temperature range:	15-35°C	24°C
Humidity range:	25-75%	56%
Pressure range:	86-106kPa	98kPa

2.7. Test Facility

Shenzhen Alpha Product Testing Co., Ltd

Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103, Shenzhen, Guangdong, China

June 21, 2018 File on Federal Communication Commission

Registration Number: 293961

July 15, 2019 Certificated by IC

Registration Number: CN0085

2.8. Measurement Uncertainty

(95% confidence levels, k=2)

Item	MU	Remark
Uncertainty for Conducted Emission Test	2.74dB	
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	2.13 dB	Polarize: V
	2.57dB	Polarize: H
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.77dB	Polarize: V
	3.80dB	Polarize: H
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	4.13dB	Polarize: H
	4.16dB	Polarize: V
Uncertainty for radio frequency	5.4×10^{-8}	
Uncertainty for conducted RF Power	0.37dB	

2.9. Test Equipment List


Equipment	Manufacture	Model No.	Serial No.	Last cal.	Cal Interval
9*6*6 anechoic chamber	CHENYU	9*6*6	N/A	2020.09.02	1Year
Spectrum analyzer	R&S	FSU	1166.1660.26	2020.09.02	1Year
Spectrum analyzer	Agilent	N9020A	MY499100060	2020.09.02	1Year
Receiver	R&S	ESR	1316.3003K03-10208 2-Wa	2020.09.02	1Year
Receiver	R&S	ESCI	101165	2020.09.02	1Year
Bilog Antenna	Schwarzbeck	VULB 9168	VULB9168-438	2019.09.07	2Year
Horn Antenna	SCHWARZBEC K	BBHA 9120 D	BBHA 9120 D(1201)	2020.04.12	2Year
Active Loop Antenna	SCHWARZBEC K	FMZB 1519B	00059	2019.09.07	2Year
Cable	Resenberger	N/A	No.1	2020.09.02	1Year
Cable	Resenberger	N/A	No.2	2020.09.02	1Year
Cable	Resenberger	N/A	No.3	2020.09.02	1Year
Pre-amplifier	HP	HP8347A	2834A00455	2020.09.02	1Year
Pre-amplifier	Agilent	8449B	3008A02664	2020.09.02	1Year
L.I.S.N.#1	Schwarzbeck	NSLK8126	8126-466	2020.09.02	1Year
L.I.S.N.#2	R&S	ENV216	101043	2020.09.02	1 Year
20db Attenuator	ICPROBING	IATS1	82347	2020.09.02	1 Year

Software Information			
Test Item	Software Name	Manufacturer	Version
RE	EZ-EMC	EZ	Alpha-3A1
CE	EZ-EMC	EZ	Alpha-3A1
RF-CE	MTS 8310	MW	V2.0.0.0

3. Test Results and Measurement Data

3.1. Conducted Emission

3.1.1. Test Specification

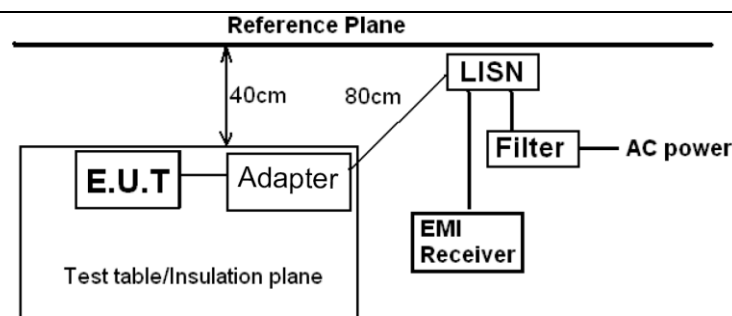Test Requirement:	FCC Part15 C Section 15.207														
Test Method:	ANSI C63.10:2013														
Frequency Range:	150 kHz to 30 MHz														
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto														
Limits:	<table><tr><th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBuV)</th></tr><tr><th>Quasi-peak</th><th>Average</th></tr><tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr><tr><td>0.5-5</td><td>56</td><td>46</td></tr><tr><td>5-30</td><td>60</td><td>50</td></tr></table>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
Test Setup:	Reference Plane  Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m														
Test Mode:	Charging + Transmitting Mode														
Test Procedure:	1. The E.U.T is connected to an adapter through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.														
Test Result:	PASS														


3.1.2. Test Data

Please refer to following diagram for individual

Test Mode	: Full Load, Empty Load
Test Result	: PASS
Note:	The test results are listed in next pages. All test modes has been tested, this report only reflected the worst mode. (Full Load) If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector and quasi-peak detector need not be carried out. If the limits for the measurement with the average detector are met when using a receiver with a quasi-peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.

Pol


Line

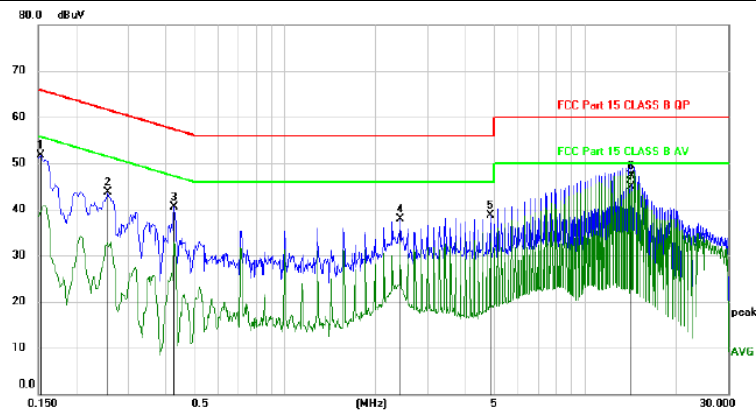

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1529	41.71	9.94	51.65	65.84	-14.19	peak	
2		0.2550	33.66	9.96	43.62	61.59	-17.97	peak	
3		0.4259	30.49	9.95	40.44	57.33	-16.89	peak	
4		2.4239	27.92	9.90	37.82	56.00	-18.18	peak	
5		4.8448	28.65	10.02	38.67	56.00	-17.33	peak	
6		14.2440	37.00	10.31	47.31	60.00	-12.69	QP	
7	*	14.2440	34.54	10.31	44.85	50.00	-5.15	AVG	

Pol

Neutral

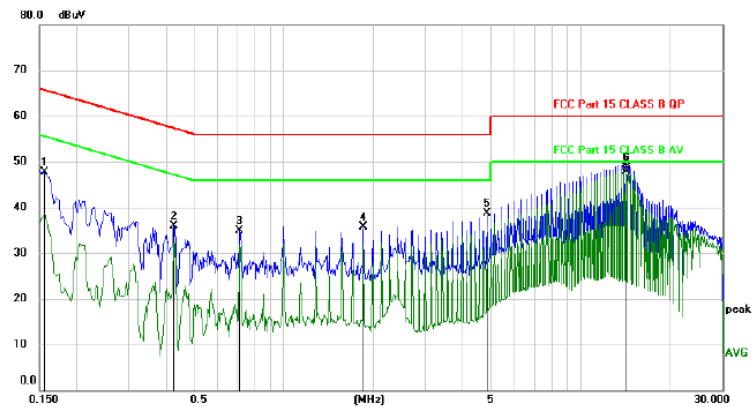


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1559	37.86	9.94	47.80	65.68	-17.88	peak	
2		0.4259	25.92	9.95	35.87	57.33	-21.46	peak	
3		0.7109	25.02	9.93	34.95	56.00	-21.05	peak	
4		1.8508	25.74	9.88	35.62	56.00	-20.38	peak	
5		4.8390	28.71	10.02	38.73	56.00	-17.27	peak	
6		14.2320	38.38	10.31	48.69	60.00	-11.31	QP	
7	*	14.2320	37.68	10.31	47.99	50.00	-2.01	AVG	


*:Maximum data x:Over limit !:over margin

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable


3.2. Radiated Spurious Emission Measurement

3.2.1. Test Specification

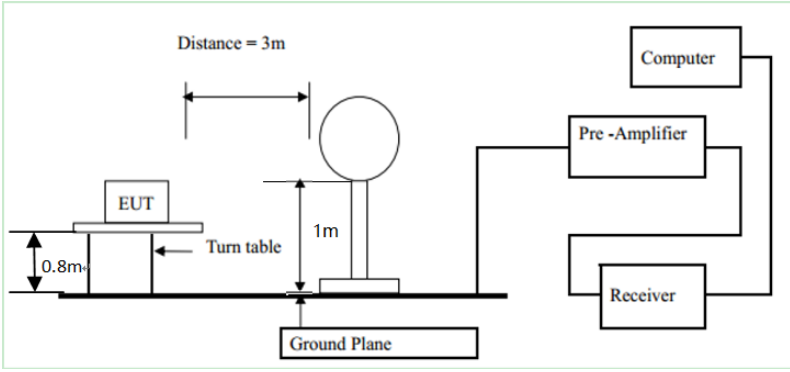Test Requirement:	FCC Part15 C Section 15.209			
Test Method:	ANSI C63.10: 2013			
Frequency Range:	9 kHz to 25 GHz			
Measurement Distance:	3 m			
Antenna Polarization:	Horizontal & Vertical			
Operation mode:	Refer to item 4.1			
Receiver Setup:	Frequency	Detector	RBW	VBW
	9kHz- 150kHz	Quasi-peak	200Hz	1kHz
	150kHz- 30MHz	Quasi-peak	9kHz	30kHz
	30MHz-1GHz	Quasi-peak	100KHz	300KHz
	Above 1GHz	Peak	1MHz	3MHz
Limit:				Remark
				Quasi-peak Value
				Quasi-peak Value
				Quasi-peak Value
				Peak Value
				Average Value
Test setup:	Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)	
	0.009-0.490	2400/F(KHz)	300	
	0.490-1.705	24000/F(KHz)	30	
	1.705-30	30	30	
	30-88	100	3	
	88-216	150	3	
	216-960	200	3	
	Above 960	500	3	
	Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)	Detector
	Above 1GHz	500	3	Average
		5000	3	Peak
	For radiated emissions below 30MHz			
				
	30MHz to 1GHz			

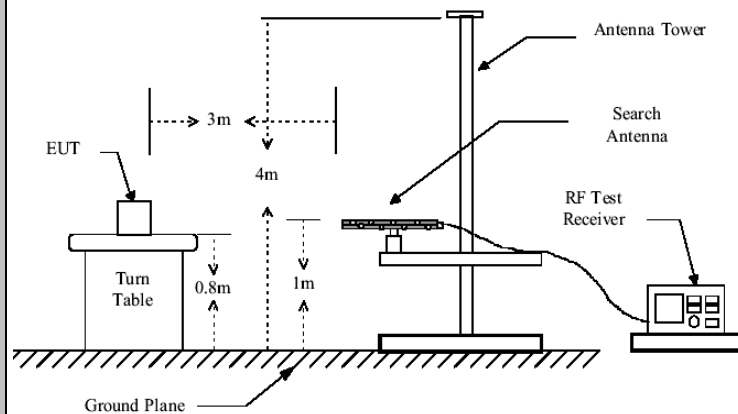

Above 1GHz

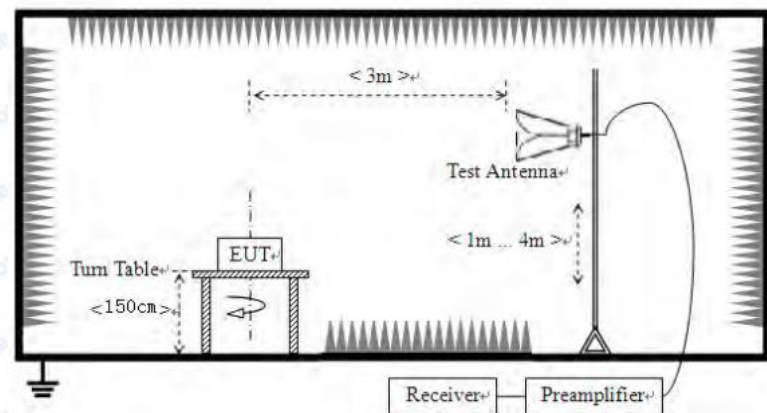

Test Procedure:


1. For the radiated emission test below 1GHz:
The EUT was placed on a turntable with 0.8 meter above ground. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high PASS filter are used for the test in order to get better signal level.
For the radiated emission test above 1GHz:
Place the measurement antenna on a turntable with 1.5 meter above ground, which is away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement

	antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. 2. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level 3. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported. 4. Use the following spectrum analyzer settings: (1) Span shall wide enough to fully capture the emission being measured; (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold; (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement. For average measurement: VBW = 10 Hz, when duty cycle is no less than 98 percent. VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
Test mode:	Refer to section 4.1 for details
Test results:	PASS


3.2.2. Test Data

Please refer to following diagram for individual

Frequency Range	: 9KHz~30MHz
Test Mode	: TX: 140KHz
Test Results	: PASS
Note: 1. The test results are listed in next pages. 2. This mode is worst case mode, so this report only reflected the worst mode. (Full Load) 3. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the quasi-peak detector need not be carried out.	

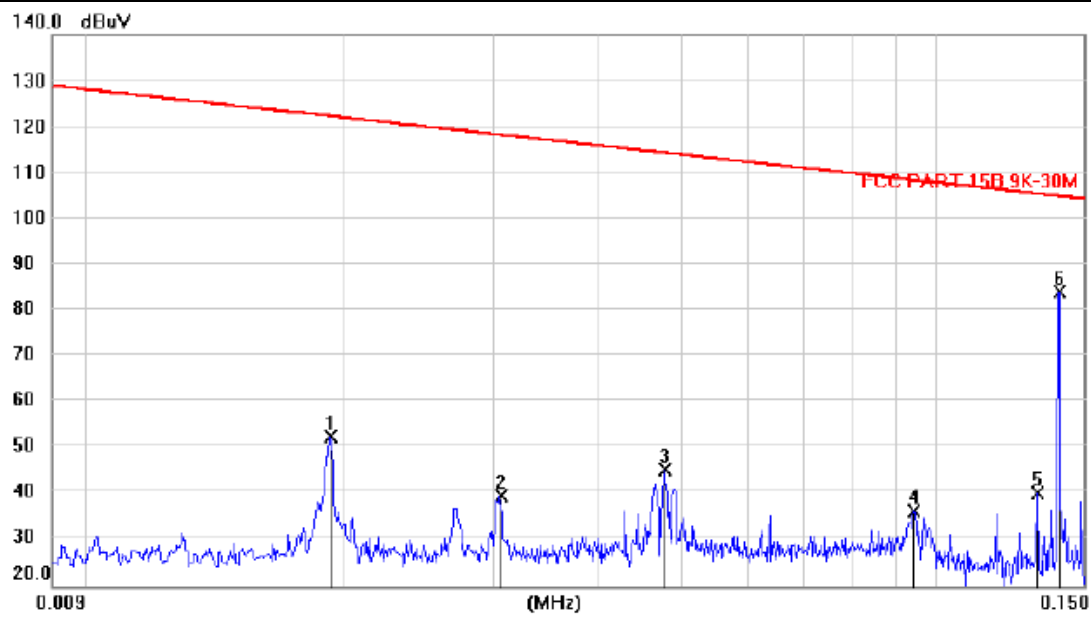

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Antenna Height cm	Table Degree	Comment
1		0.0192	31.27	21.27	52.54	122.2	-69.67	peak		
2		0.0305	18.82	20.96	39.78	118.1	-78.40	peak		
3		0.0478	25.24	20.02	45.26	114.2	-69.01	peak		
4		0.0944	16.51	19.85	36.36	108.3	-71.98	peak		
5		0.1323	20.25	19.93	40.18	105.4	-65.22	peak		
6	*	0.1402	64.14	20.05	84.19	104.9	-20.71	peak		

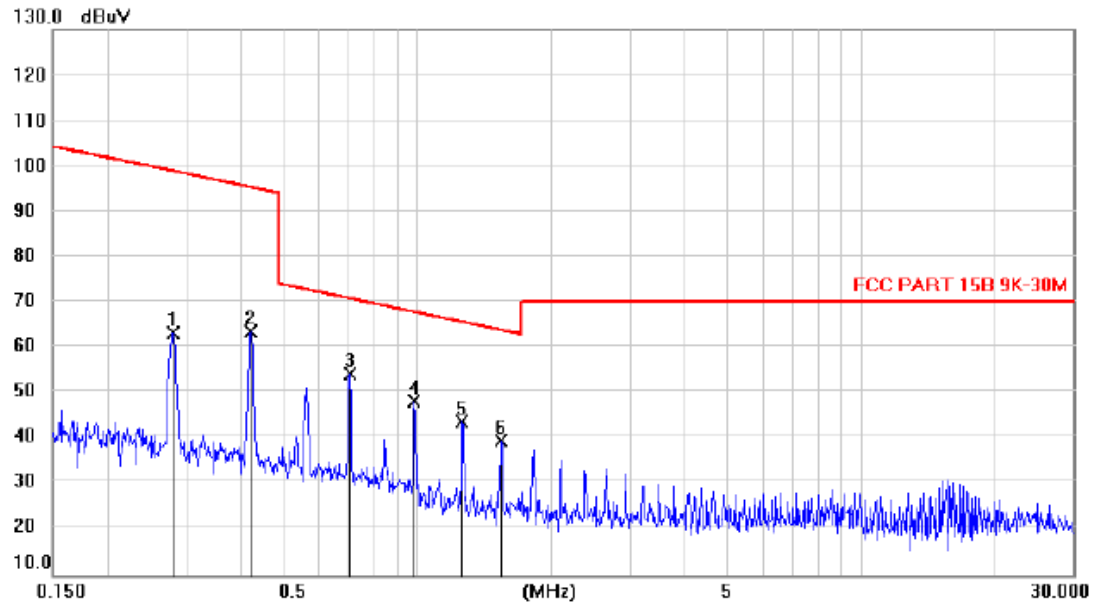

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV	dBuV	dB	Detector	cm	degree
1		0.2804	43.26	20.01	63.27	98.86	-35.59	peak		
2		0.4207	43.79	19.81	63.60	95.33	-31.73	peak		
3	*	0.7012	34.52	19.82	54.34	70.84	-16.50	peak		
4		0.9806	28.38	19.99	48.37	67.88	-19.51	peak		
5		1.2606	23.54	20.06	43.60	65.66	-22.06	peak		
6		1.5420	19.46	20.14	39.60	63.89	-24.29	peak		

*:Maximum data x:Over limit !:over margin


Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

Frequency Range	: 30MHz~1000MHz
Test Mode	: Full Load, Half Load, Empty Load
Test Results	: PASS
Note: 1. The test results are listed in next pages. 2. All test modes has been tested, this report only reflected the worst mode. (Full Load) 3. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the quasi-peak detector need not be carried out.	

Frequency Range	: Above 1GHz	
EUT	: /	Test Date : /
M/N	: /	Temperature : /
Test Engineer	: /	Humidity : /
Test Mode	: /	
Test Results	: N/A	
Note:	1. The highest frequency of the internal sources of the EUT is less than 108 MHz, the measurement shall only be made up to 1 GHz. So the frequency rang above 1GHz radiation test not applicable.	


30MHz-1GHz

Pol	Vertical
-----	----------

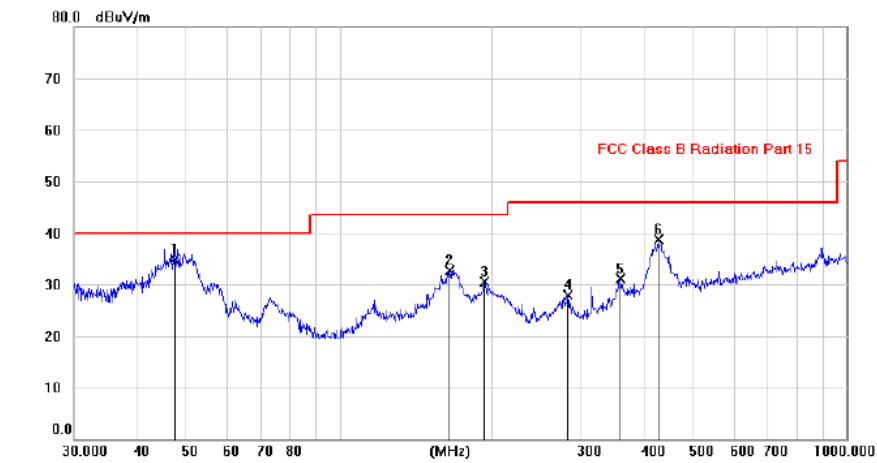


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	47.3255	20.77	14.07	34.84	40.00	-5.16	QP		
2		165.1581	18.15	14.54	32.69	43.50	-10.81	peak		
3		193.4783	19.32	11.27	30.59	43.50	-12.91	peak		
4		282.5885	14.17	13.65	27.82	46.00	-18.18	peak		
5		358.4728	15.75	15.40	31.15	46.00	-14.85	peak		
6		425.9730	21.73	16.94	38.67	46.00	-7.33	peak		

Pol	Horizontal
-----	------------

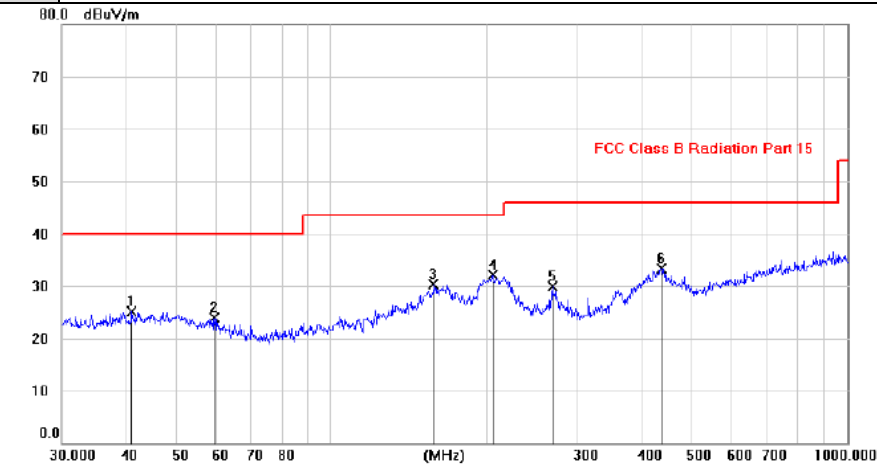

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		41.1128	10.71	14.34	25.05	40.00	-14.95	peak		
2		59.3711	10.71	13.25	23.96	40.00	-16.04	peak		
3		158.0754	15.18	15.04	30.22	43.50	-13.28	peak		
4	*	205.5069	21.09	10.99	32.08	43.50	-11.42	peak		
5		268.1716	16.62	13.23	29.85	46.00	-16.15	peak		
6		436.9667	16.09	17.25	33.34	46.00	-12.66	peak		


3.3. Test Specification

Test Requirement:	FCC Part15 C Section 15.215(c)
Test Method:	ANSI C63.10: 2013
Limit:	N/A
Test Procedure:	1. According to the follow Test-setup, keep the relative position between the artificial antenna and the EUT. 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Use the following spectrum analyzer settings for 20dB Bandwidth measurement. Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel; RBW $\geq$ 1% of the 20 dB bandwidth; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold. 4. Measure and record the results in the test report.
Test setup:	 The diagram illustrates the test setup. On the left is a green Spectrum Analyzer with a blue screen and two small circular ports. A black cable connects one of these ports to a small white rectangular component. This component is further connected by another black cable to a yellow rectangular box on the right, which is labeled 'EUT'. Spectrum Analyzer EUT
Test Mode:	Refer to section 4.1 for details
Test results:	PASS

3.3.1. Test Data


Frequency(KHz)	20dB Occupy Bandwidth (kHz)	Limit (kHz)	Conclusion
140	3.562	---	PASS

Test plots as follows:

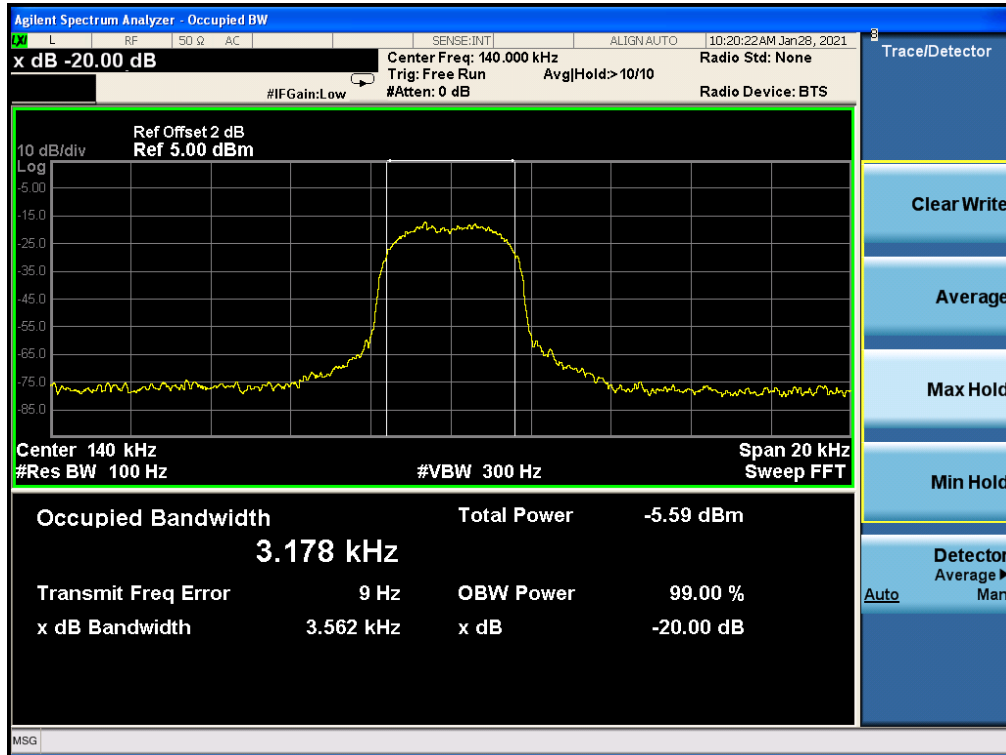

4. Photos of Test Setup

Radiated Emission

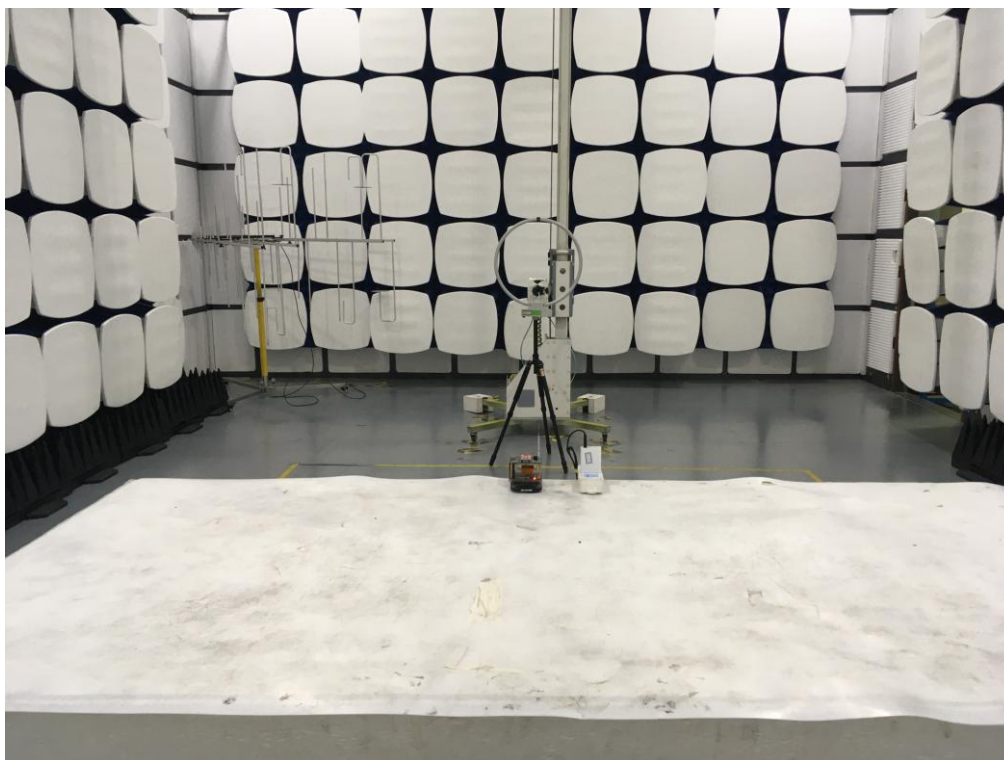

Conducted Emission




5. Photographs of EUT















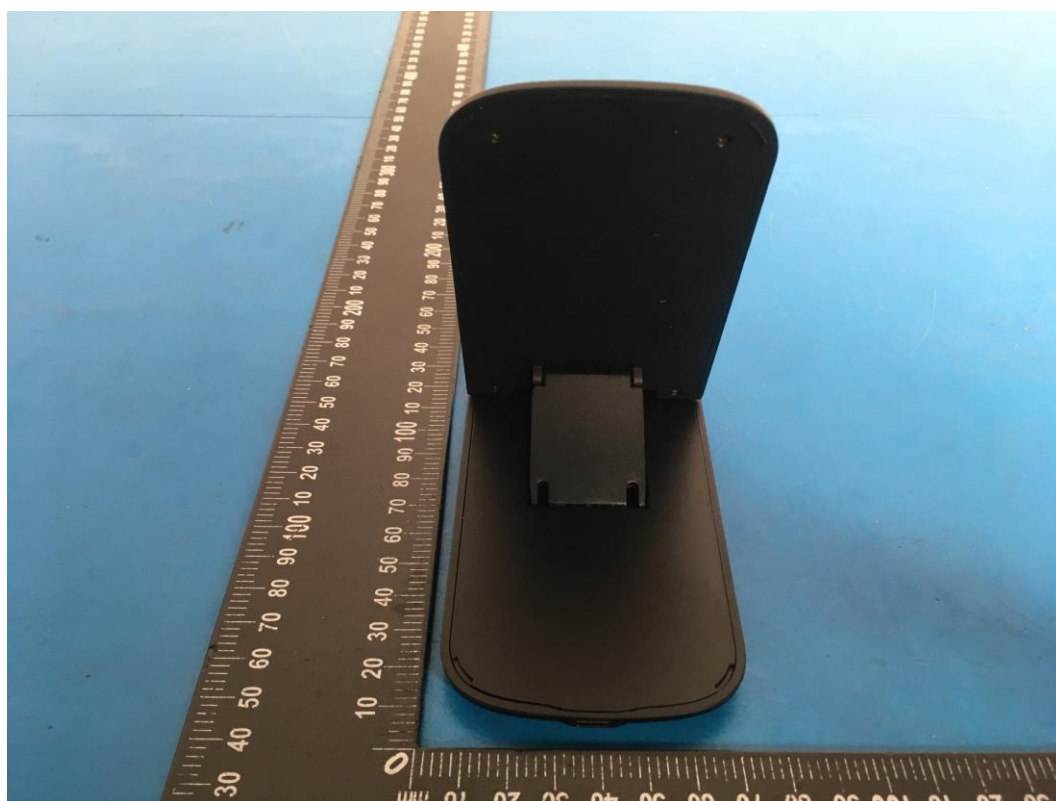



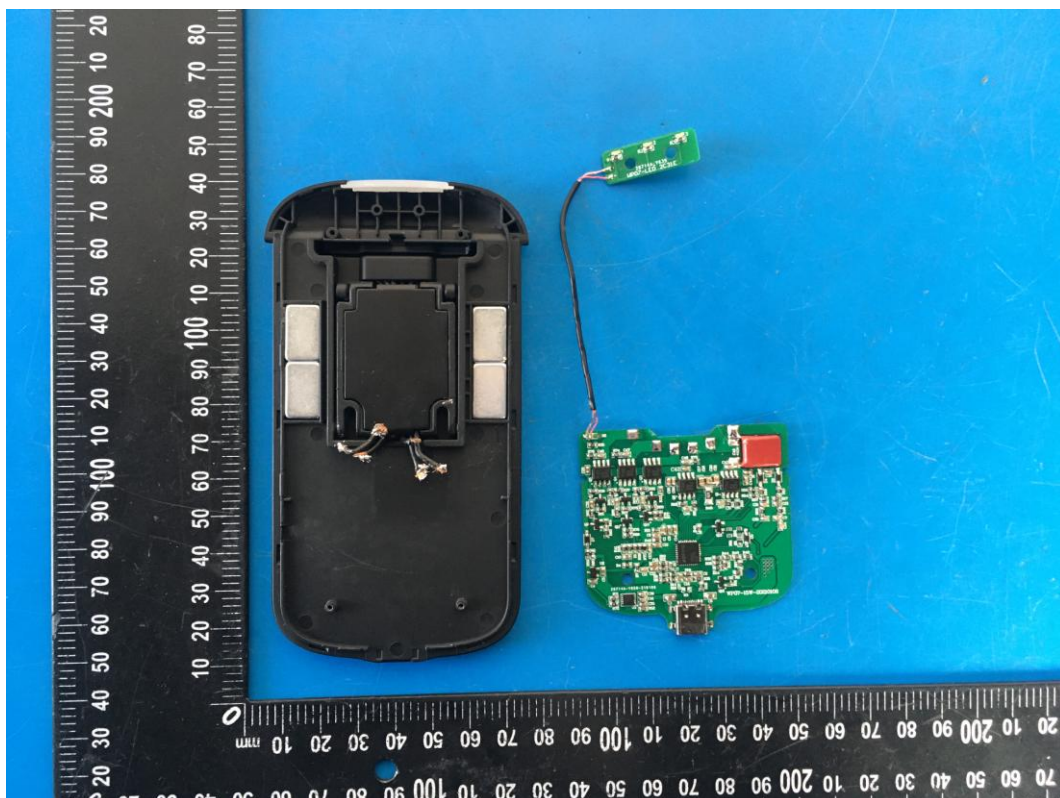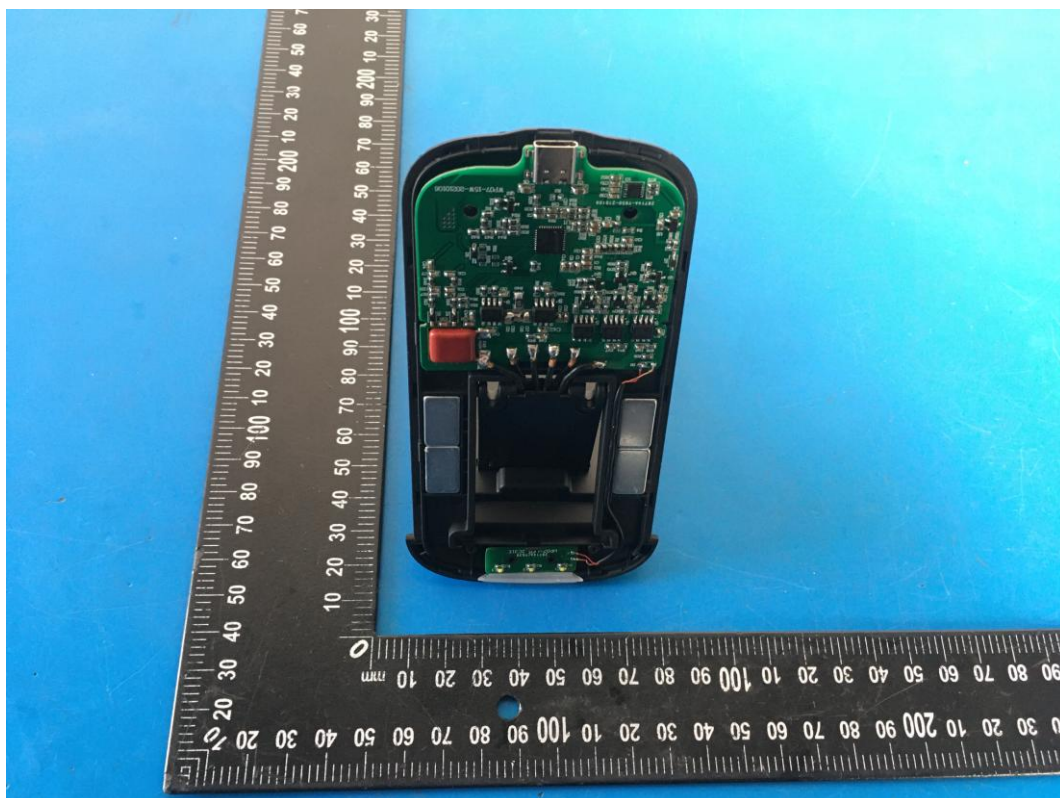

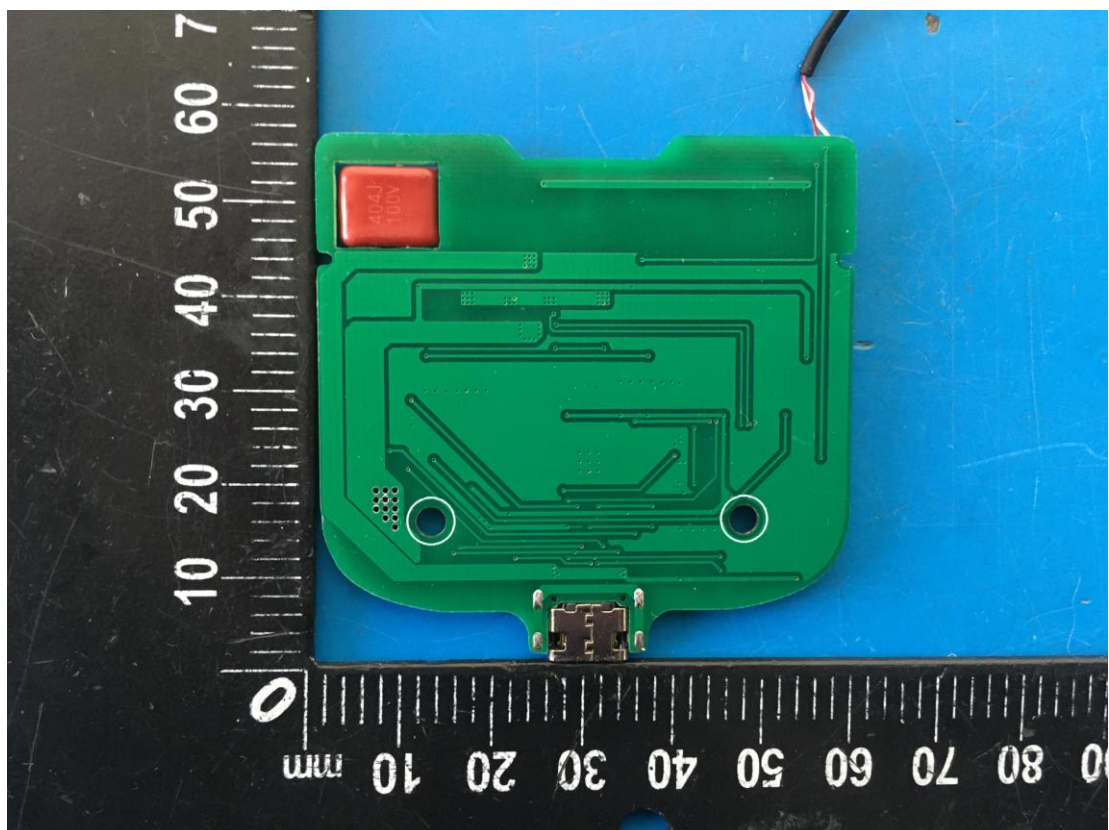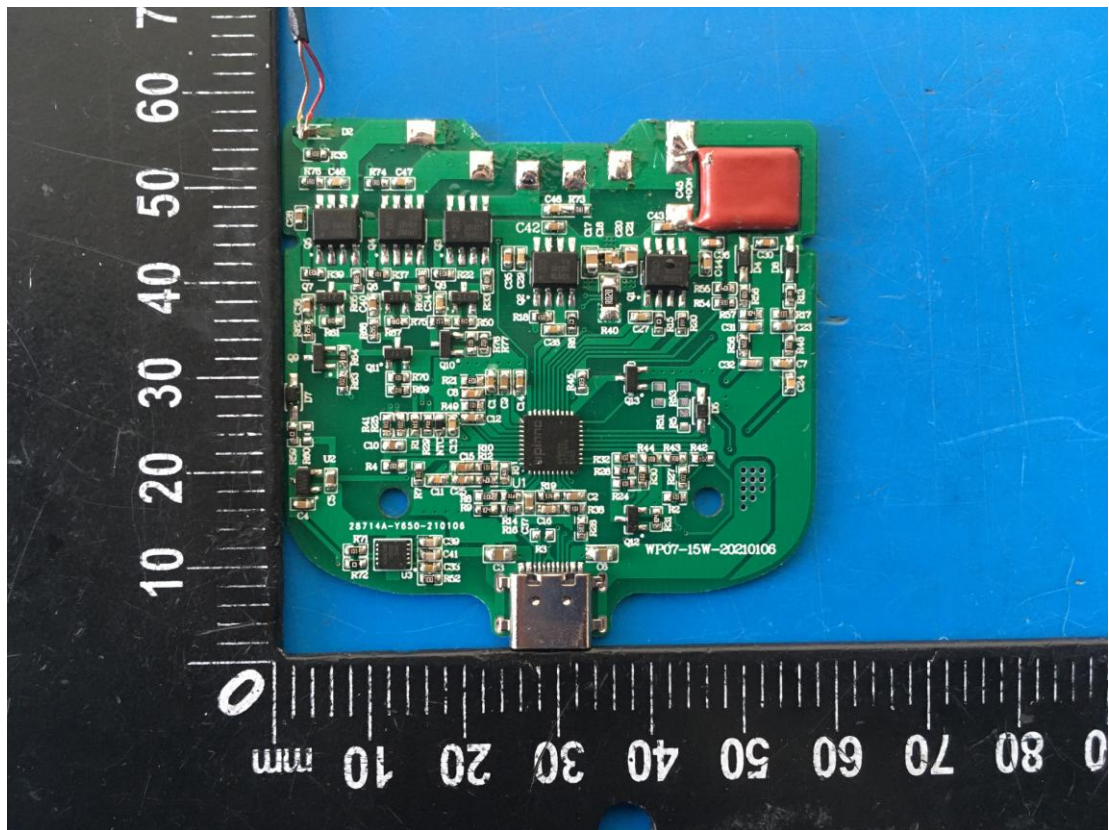

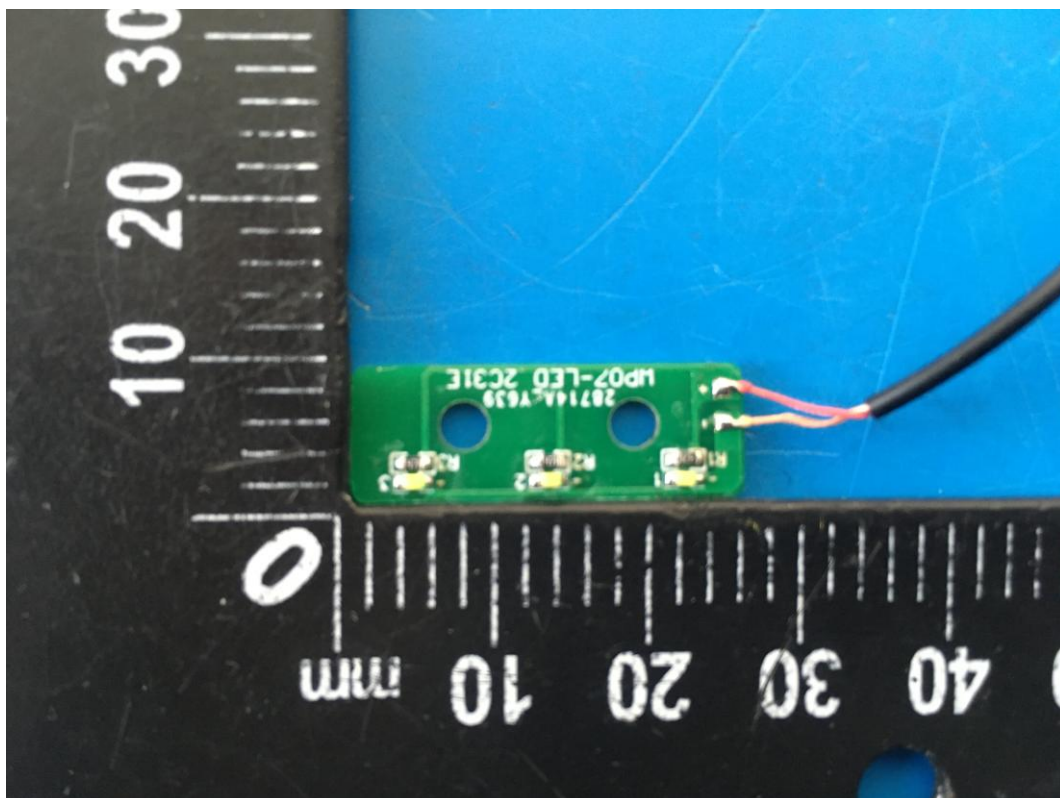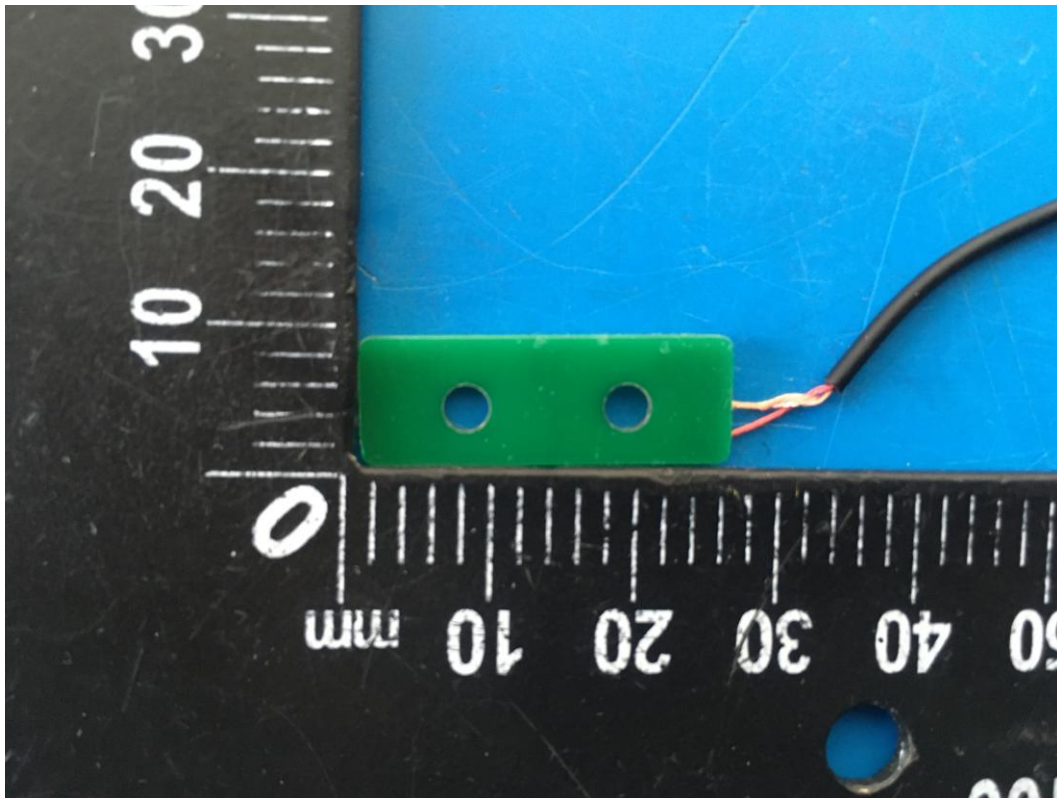

-----End-----