

FCC Test Report

Report No.: 2405V87275EH

Applicant: Shenzhen Intellirocks Tech. Co., Ltd.

Address: No.2901-2904, 3002, Block C, Section 1, Chuangzhi, Yuncheng Building, Liuxian Avenue, Xili Community, Xili Street, Nanshan District, Shenzhen, Guangdong, China

Product Name: Wi-Fi Thermo-Hygrometer

Product Model: H5179

Multiple Models: N/A

Trade Mark: Govee

FCC ID: 2AQA6-H5179A

Standards: FCC CFR Title 47 Part 15C (§15.247)

Test Date: 2024-07-31 to 2024-08-02

Test Result: Complied

Report Date: 2024-08-06

Reviewed by:

Abel Chen

Abel Chen
Project Engineer

Approved by:

Jacob Kong

Jacob Kong
Manager

Prepared by:

World Alliance Testing & Certification (Shenzhen) Co., Ltd

No. 1002, East Block, Laobing Building, Xingye Road 3012, Xixiang street, Bao'an District, Shenzhen, Guangdong, People's Republic of China



This report may contain data that are not covered by the NVLAP accreditation and shall be marked with an asterisk “★”

Announcement

1. This test report shall not be reproduced except in full, without the written approval of World Alliance Testing & Certification (Shenzhen) Co., Ltd
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the limits of the above regulation.
4. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.
5. The information marked “#” is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.

Revision History

Version No.	Issued Date	Description
00	2024-08-06	Original

Contents

1	General Information	4
1.1	Client Information	4
1.2	Product Description of EUT	4
1.3	Antenna information	4
1.4	Related Submittal(s)/Grant(s).....	5
1.5	Measurement Uncertainty	5
1.6	Laboratory Location.....	5
1.7	Test Methodology	5
2	Description of Measurement.....	6
2.1	Test Configuration.....	6
2.2	Test Auxiliary Equipment	6
2.3	Interconnecting Cables.....	6
2.4	Block Diagram of Connection between EUT and AE	7
2.5	Test Setup.....	7
2.6	Test Procedure	9
2.7	Measurement Method.....	10
2.8	Measurement Equipment	11
3	Test Results	12
3.1	Test Summary.....	12
3.2	Limit	13
3.3	AC Line Conducted Emissions Test Data.....	14
3.4	Radiated emission Test Data.....	15
3.5	RF Conducted Test Data	29
3.5.1	6 dB Emission Bandwidth	29
3.5.2	99% Occupied Bandwidth.....	29
3.5.3	Maximum Conducted Peak Output Power.....	29
3.5.4	Power Spectral Density.....	30
3.5.5	100 kHz Bandwidth of Frequency Band Edge	30
3.5.6	Duty Cycle.....	30
4	Test Setup Photo.....	36
5	E.U.T Photo	37

1 General Information

1.1 Client Information

Applicant:	Shenzhen Intellirocks Tech. Co., Ltd.
Address:	No.2901-2904, 3002, Block C, Section 1, Chuangzhi, Yuncheng Building, Liuxian Avenue,Xili Community, Xili Street, Nanshan District, Shenzhen, Guangdong, China
Manufacturer:	Shenzhen Intellirocks Tech. Co., Ltd.
Address:	No.2901-2904, 3002, Block C, Section 1, Chuangzhi, Yuncheng Building, Liuxian Avenue,Xili Community, Xili Street, Nanshan District, Shenzhen, Guangdong, China

1.2 Product Description of EUT

The EUT is Wi-Fi Thermo-Hygrometer that contains BLE and 2.4G WLAN radio, this report covers the full testing of the BLE radio.

Sample Serial Number	2OVQ-3 for RE test, 2OVQ-4 for RF conducted test(assigned by WATC)
Sample Received Date	2024-07-23
Sample Status	Good Condition
Frequency Range	2402MHz - 2480MHz(BLE1M)
Maximum Conducted Peak Output Power	1.51dBm
Modulation Technology	GFSK
Spatial Streams	SISO (1TX, 1RX)
Antenna Gain [#]	2.28dBi
Power Supply	DC 4.5V from battery
Adapter Information	N/A
Modification	Sample No Modification by the test lab

1.3 Antenna information

15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
Device Antenna information:	
The BLE antenna is an internal antenna which cannot replace by end-user, please see product internal photos for details.	

1.4 Related Submittal(s)/Grant(s)

No related submittal(s)/Grant(s)

1.5 Measurement Uncertainty

Parameter		Expanded Uncertainty (Confidence of 95%(U = 2Uc(y)))
AC Power Lines Conducted Emissions		±3.14dB
Emissions, Radiated	Below 30MHz	±2.78dB
	Below 1GHz	±4.84dB
	Above 1GHz	±5.44dB
Emissions, Conducted		1.75dB
Conducted Power		0.74dB
Frequency Error		150Hz
Bandwidth		0.34%
Power Spectral Density		0.74dB
Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.		

1.6 Laboratory Location

World Alliance Testing & Certification (Shenzhen) Co., Ltd

No. 1002, East Block, Laobing Building, Xingye Road 3012, Xixiang street, Bao'an District, Shenzhen, Guangdong, People's Republic of China

Tel: +86-755-29691511, Email: qa@watc.com.cn

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 463912, the FCC Designation No. : CN5040.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0160.

1.7 Test Methodology

FCC CFR 47 Part 2

FCC CFR 47 Part 15

KDB 558074 D01 DTS Meas Guidance v05r02

ANSI C63.10-2013

2 Description of Measurement

2.1 Test Configuration

Operating channels:					
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
0	2402	19	2440	38	2478
1	2404	20	2442	39	2480
...	...	...	...	/	/
18	2438	...	...	/	/
According to ANSI C63.10-2013 chapter 5.6.1 Table 11 requirement, select lowest channel, middle channel, and highest channel in the frequency range in which device operates for testing. The detailed frequency points are as follows:					
Lowest channel		Middle channel		Highest channel	
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
0	2402	19	2440	39	2480

Test Mode:				
Transmitting mode:		Keep the EUT in continuous transmitting with modulation		
Exercise software [#] :		SSCOM		
Mode	Data rate	Power Level Setting [#]		
		Low Channel	Middle Channel	High Channel
BLE 1M	1Mbps	0x0f	0x0f	0x0f
The exercise software and the maximum power setting that provided by manufacturer.				

Worst-Case Configuration:
For radiated emissions, EUT was investigated in three orthogonal orientation, the worst-case orientation was recorded in report
For radiated emission 9kHz-1GHz and above 18GHz were performed with the EUT transmits at the channel with highest output power as worst-case scenario.


2.2 Test Auxiliary Equipment

Manufacturer	Description	Model	Serial Number
/	/	/	/

2.3 Interconnecting Cables

Manufacturer	Description	Length(m)	From	To
/	/	/	/	/


2.4 Block Diagram of Connection between EUT and AE



Note: for reference only, the actual connection setup used for testing please refer to the test photos.

2.5 Test Setup


1) Conducted emission measurement:

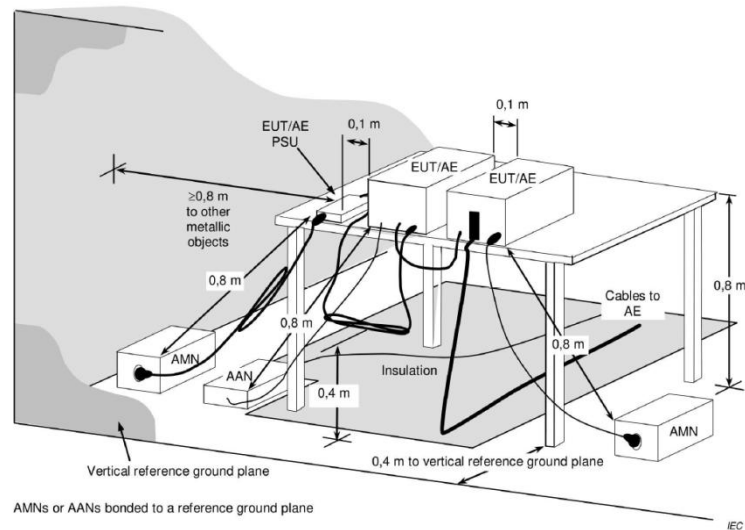


Note: The 0.8 m distance specified between EUT/AE/PSU and AMN/AAN, is applicable only to the EUT being measured. If the device is AE then it shall be >0.8 m.

2) Radiated emission measurement:


Below 30MHz (3m SAC)

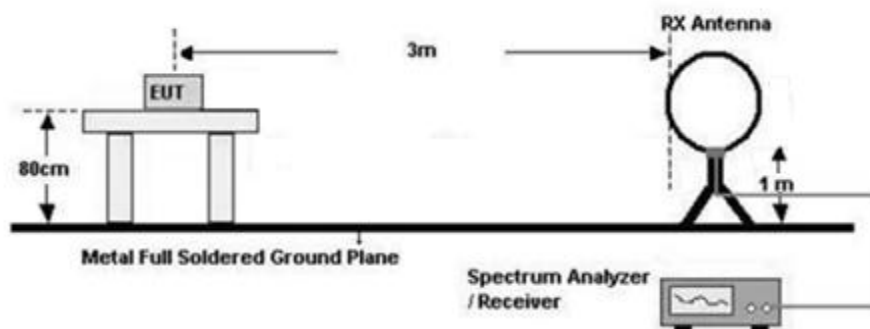


30MHz-1GHz (3m SAC)

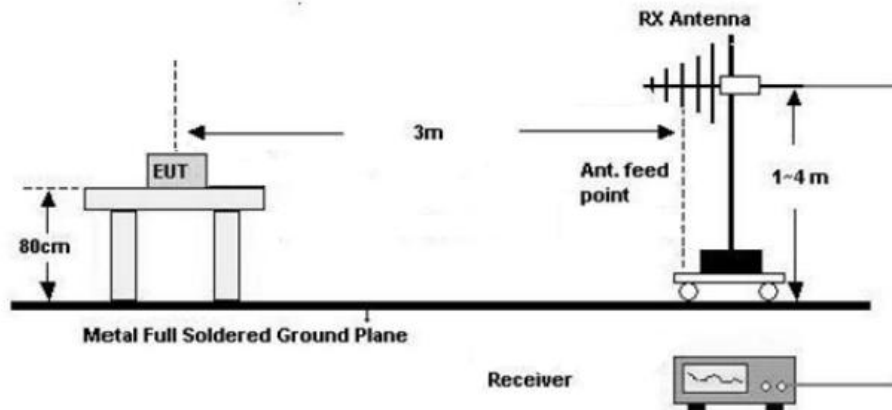


1GHz-18GHz(3m FAC)

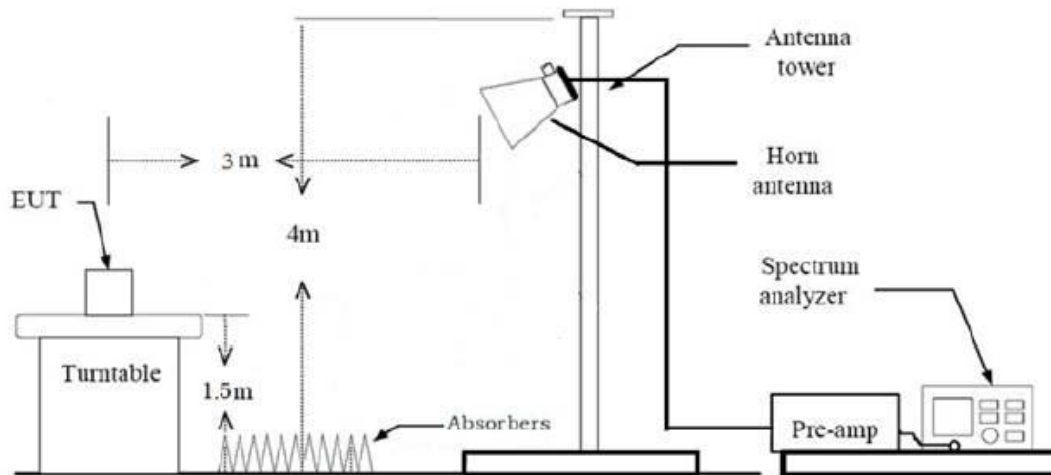

Above 18GHz (3m FAC)

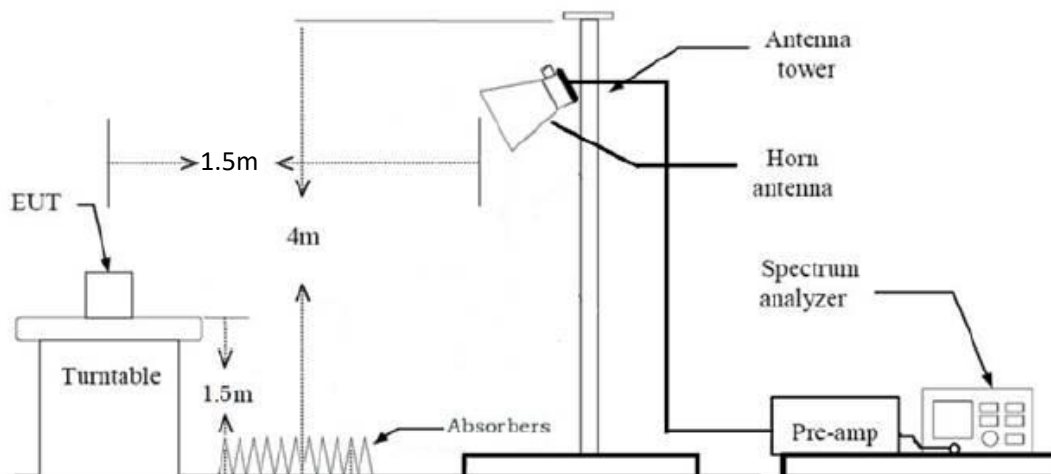

3) RF Conducted Test

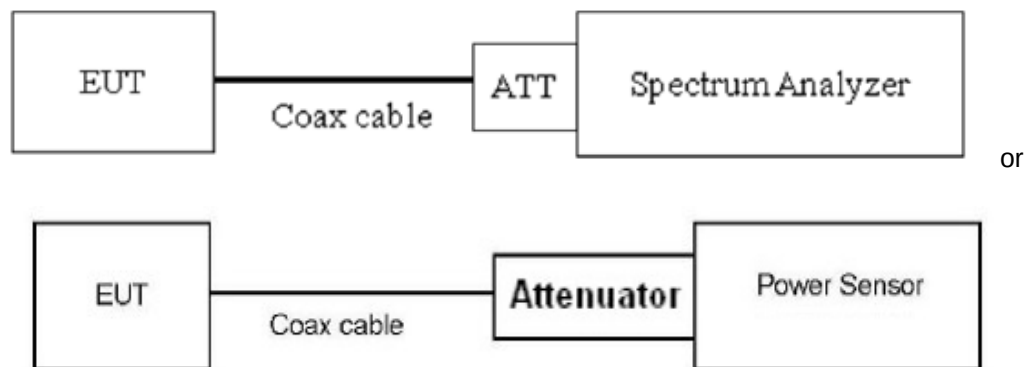

2.6 Test Procedure

Conducted emission:

1. The E.U.T is placed on a non-conducting table 40cm from the vertical ground plane and 80cm above the horizontal ground plane (Please refer to the block diagram of the test setup and photographs).
2. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.
3. Line conducted data is recorded for both Line and Neutral

Radiated Emission Procedure:

a) For below 30MHz

1. All measurements were made at a test distance of 3 m. The measured data was extrapolated from the test distance (3m) to the specification distance (300 m from 9-490 kHz and 30 m from 490 kHz- 30 MHz) to clearly show the relative levels of fundamental and spurious emissions and demonstrate compliance with the requirement that the level of any spurious emissions be below the level of the intentionally transmitted signal. The extrapolation factor for the limits were $40 \cdot \log(\text{test distance} / \text{specification distance})$.
2. Loop antenna use, investigation was done on the three antenna orientations (parallel, perpendicular, ground-parallel)

b) For 30MHz-1GHz:

1. The EUT was placed on the tabletop of a rotating table 0.8 m the ground at a 3 m semi anechoic chamber. The measurement distance from the EUT to the receiving antenna is 3 m.
2. EUT works in each mode of operation that needs to be tested. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations.

c) For above 1GHz:

1. The EUT was placed on the tabletop of a rotating table 1.5 m the ground at a 3 m fully anechoic room. The measurement distance from the EUT to the receiving antenna is 3 m (1-18GHz) and 1.5 m (above

18GHz).

2. EUT works in each mode of operation that needs to be tested, and having the EUT continuously working. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations.
3. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data.
4. Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

RF Conducted Test:

1. The antenna port of EUT was connected to the RF port of the test equipment (Power Meter or Spectrum analyzer) through Attenuator and RF cable.
2. The cable assembly insertion loss of 6.5dB (including 6.0dB Attenuator and 0.5 dB cable) was entered as an offset in the power meter. Note: Actual cable loss was unavailable at the time of testing, therefore a loss of 0.5dB was assumed as worst case. This was later verified to be true by laboratory. (if the RF cable provided by client, the cable loss declared by client)
3. The EUT is keeping in continuous transmission mode and tested in all modulation modes.

2.7 Measurement Method

Description of Test	Measurement Method
AC Line Conducted Emissions	ANSI C63.10-2013 Section 6.2
Maximum Conducted Output Power	ANSI C63.10-2013 Section 11.9.1.1
Power Spectral Density	ANSI C63.10-2013 Section 11.10.2
6 dB Emission Bandwidth	ANSI C63.10-2013 Section 11.8.1
99% Occupied Bandwidth	ANSI C63.10-2013 Section 6.9.3
100kHz Bandwidth of Frequency Band Edge	ANSI C63.10-2013 Section 6.10
Radiated emission	ANSI C63.10-2013 Section 11.11&11.12.1
Duty Cycle	ANSI C63.10-2013 Section 11.6

2.8 Measurement Equipment

Manufacturer	Description	Model	Management No.	Calibration Date	Calibration Due Date
Radiated Emission Test					
R&S	EMI test receiver	ESR3	102758	2024/6/4	2025/6/3
ROHDE& SCHWARZ	SPECTRUM ANALYZER	FSV40-N	101608	2024/6/4	2025/6/3
SONOMA INSTRUMENT	Low frequency amplifier	310	186014	2024/6/4	2025/6/3
COM-POWER	preamplifier	PAM-118A	18040152	2024/6/4	2025/6/3
COM-POWER	Amplifier	PAM-840A	461306	2023/8/8	2024/8/7
BACL	Loop Antenna	1313-1A	4010611	2024/2/7	2027/2/6
SCHWARZBECK	Log - periodic wideband antenna	VULB 9163	9163-872	2023/7/7	2026/7/6
Astro Antenna Ltd	Horn antenna	AHA-118S	3015	2023/7/6	2026/7/5
Ducommun technologies	Horn Antenna	ARH-4223-02	1007726-03	2023/7/10	2026/7/9
Oulitong	Band Reject Filter	OBSF-2400-248 3.5-50N	OE02103119	2024/6/4	2025/6/3
N/A	Coaxial Cable	NO.9	N/A	2024/6/4	2025/6/3
N/A	Coaxial Cable	NO.13	N/A	2023/8/8	2024/8/7
N/A	Coaxial Cable	NO.14	N/A	2024/6/4	2025/6/3
N/A	Coaxial Cable	NO.15	N/A	2024/6/4	2025/6/3
N/A	Coaxial Cable	NO.16	N/A	2024/6/4	2025/6/3
N/A	Coaxial Cable	NO.17	N/A	2024/6/4	2025/6/3
Audix	Test Software	E3	191218 V9	/	/
RF Conducted Test					
ROHDE& SCHWARZ	SPECTRUM ANALYZER	FSU-26	200680/026	2024/6/4	2025/6/3
narda	6dB attenuator	603-06-1	N/A	2024/6/4	2025/6/3

Note: All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or International standards.

3 Test Results

3.1 Test Summary

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Not Applicable
§15.247(b)(3)	Maximum Conducted Output Power	Compliance
§15.247(e)	Power Spectral Density	Compliance
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliance
-	99% Occupied Bandwidth	Report only
§15.247(d)	100kHz Bandwidth of Frequency Band Edge	Compliance
§15.205, §15.209, §15.247(d)	Radiated emission	Compliance
-	Duty Cycle	Report only

3.2 Limit

Test items	Limit
AC Line Conducted Emissions	See details §15.207 (a)
Conducted Output Power	For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt.
6dB Emission Bandwidth	The minimum 6 dB bandwidth shall be at least 500 kHz.
Power Spectral Density	For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
Spurious Emissions, 100kHz Bandwidth of Frequency Band Edge	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

3.3 AC Line Conducted Emissions Test Data

Not Applicable, the device only powered by battery

3.4 Radiated emission Test Data


9 kHz-30MHz:


Test Date:	2024-07-31	Test By:	Bard Huang
Environment condition:	Temperature: 23°C; Relative Humidity:64%; ATM Pressure: 100kPa		

For radiated emissions below 30MHz, there were no emissions found within 20dB of limit.

30MHz-1GHz:

Test Date:	2024-07-31	Test By:	Bard Huang
Environment condition:	Temperature: 23°C; Relative Humidity:64%; ATM Pressure: 100kPa		

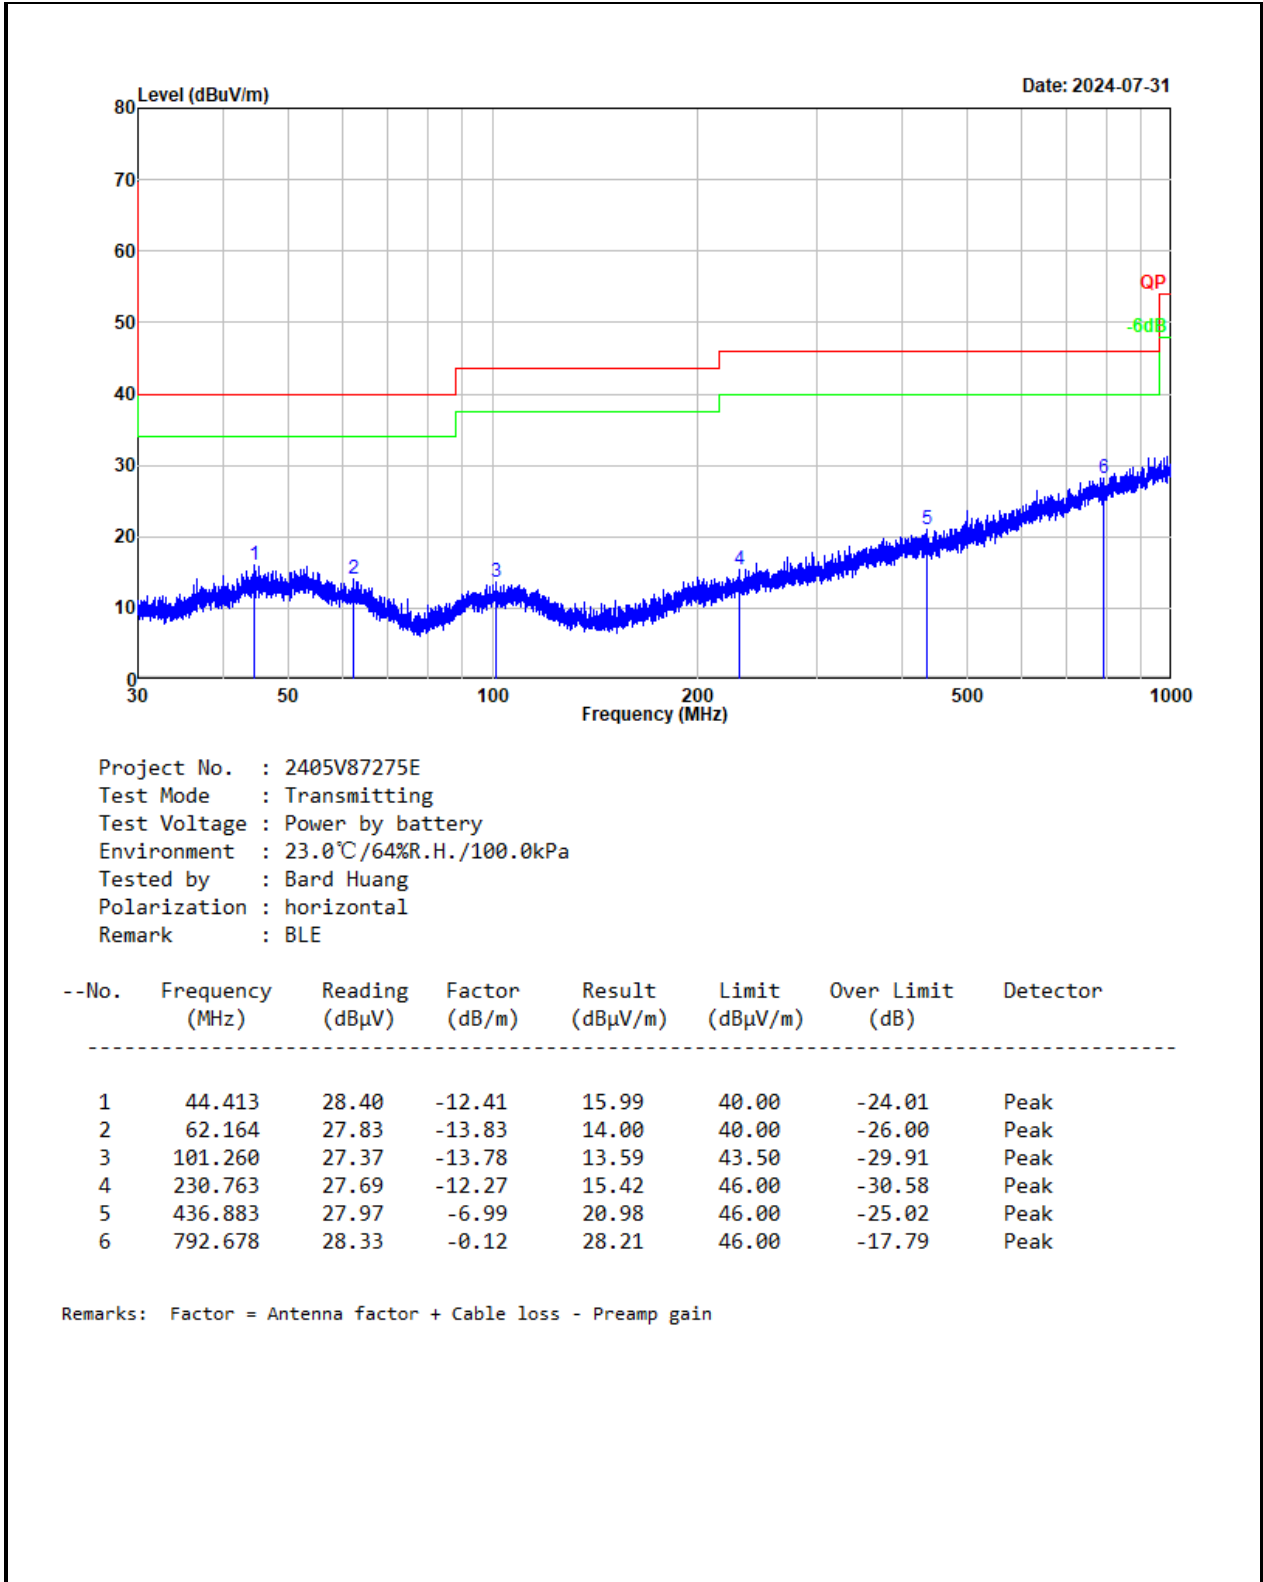

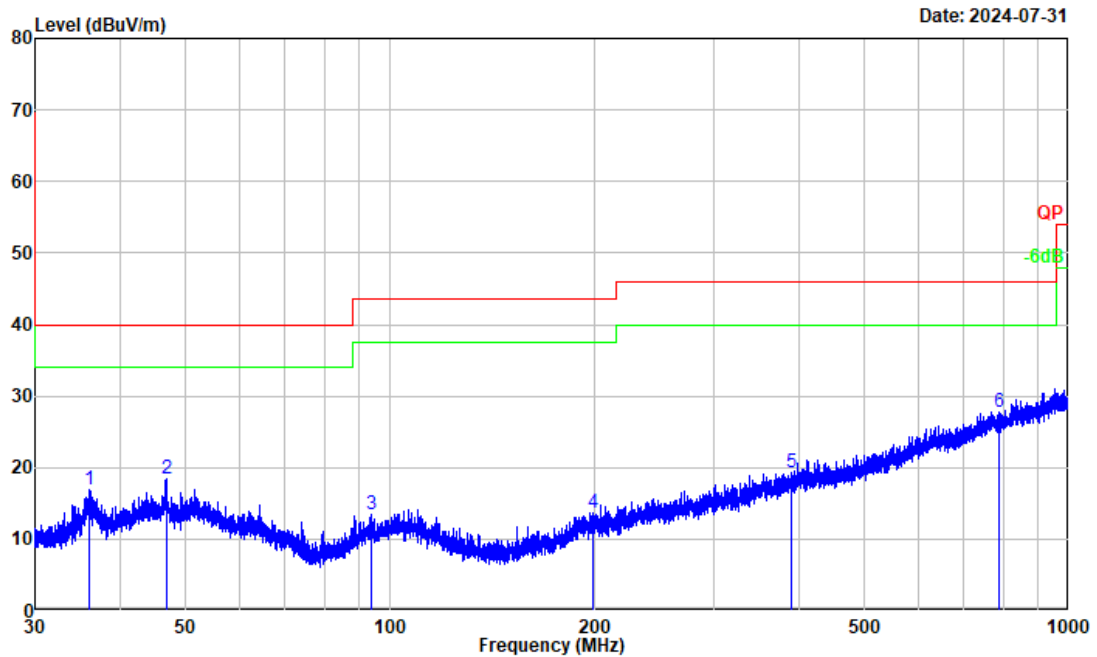

Project No. : 2405V87275E
Test Mode : Transmitting
Test Voltage : Power by battery
Environment : 23.0°C/64%R.H./100.0kPa
Tested by : Bard Huang
Polarization : vertical
Remark : BLE

--No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Over Limit (dB)	Detector
1	36.081	31.68	-14.72	16.96	40.00	-23.04	Peak
2	46.812	30.67	-12.21	18.46	40.00	-21.54	Peak
3	93.905	28.15	-14.65	13.50	43.50	-30.00	Peak
4	198.896	26.91	-13.17	13.74	43.50	-29.76	Peak
5	390.677	27.07	-7.76	19.31	46.00	-26.69	Peak
6	787.483	27.98	-0.19	27.79	46.00	-18.21	Peak

Remarks: Factor = Antenna factor + Cable loss - Preamp gain

Remark:

Result = Reading + Factor

Factor = Antenna factor + Cable loss – Amplifier gain

Over Limit = Result – Limit

Above 1GHz:

Test Date:	2024-07-31	Test By:	Bard Huang
Environment condition:	Temperature: 23°C; Relative Humidity:64%; ATM Pressure: 100kPa		

Frequency (MHz)	Reading level (dBμV)	Polar	Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
BLE 1M							
Low Channel							
2377.816	40.07	horizontal	7.19	47.26	54.00	-6.74	Average
2377.816	50.65	horizontal	7.19	57.84	74.00	-16.16	Peak
2377.864	38.27	vertical	7.19	45.46	54.00	-8.54	Average
2377.864	50.00	vertical	7.19	57.19	74.00	-16.81	Peak
4804.000	48.86	horizontal	-0.21	48.65	74.00	-25.35	Peak
4804.000	48.09	vertical	-0.21	47.88	74.00	-26.12	Peak
Middle Channel							
4880.000	49.24	horizontal	0.08	49.32	74.00	-24.68	Peak
4880.000	48.07	vertical	0.08	48.15	74.00	-25.85	Peak
High Channel							
2483.500	37.64	horizontal	7.25	44.89	54.00	-9.11	Average
2483.500	50.14	horizontal	7.25	57.39	74.00	-16.61	Peak
2483.500	37.39	vertical	7.25	44.64	54.00	-9.36	Average
2483.500	49.33	vertical	7.25	56.58	74.00	-17.42	Peak
4960.000	47.56	horizontal	0.28	47.84	74.00	-26.16	Peak
4960.000	48.48	vertical	0.28	48.76	74.00	-25.24	Peak

Remark:

Corrected Amplitude= Reading level + corrected Factor

Corrected Factor = Antenna factor + Cable loss – Amplifier gain


Margin = Corrected Amplitude – Limit


For the test result of Peak below the Peak limit more than 20dB, which can compliance with the average limit, just the Peak level was recorded.


The emission levels of other frequencies that were lower than the limit 20dB, not show in test report.


For emissions in 18GHz-25GHz range, all emissions were investigated and in the noise floor level.


Test plot for example as below:

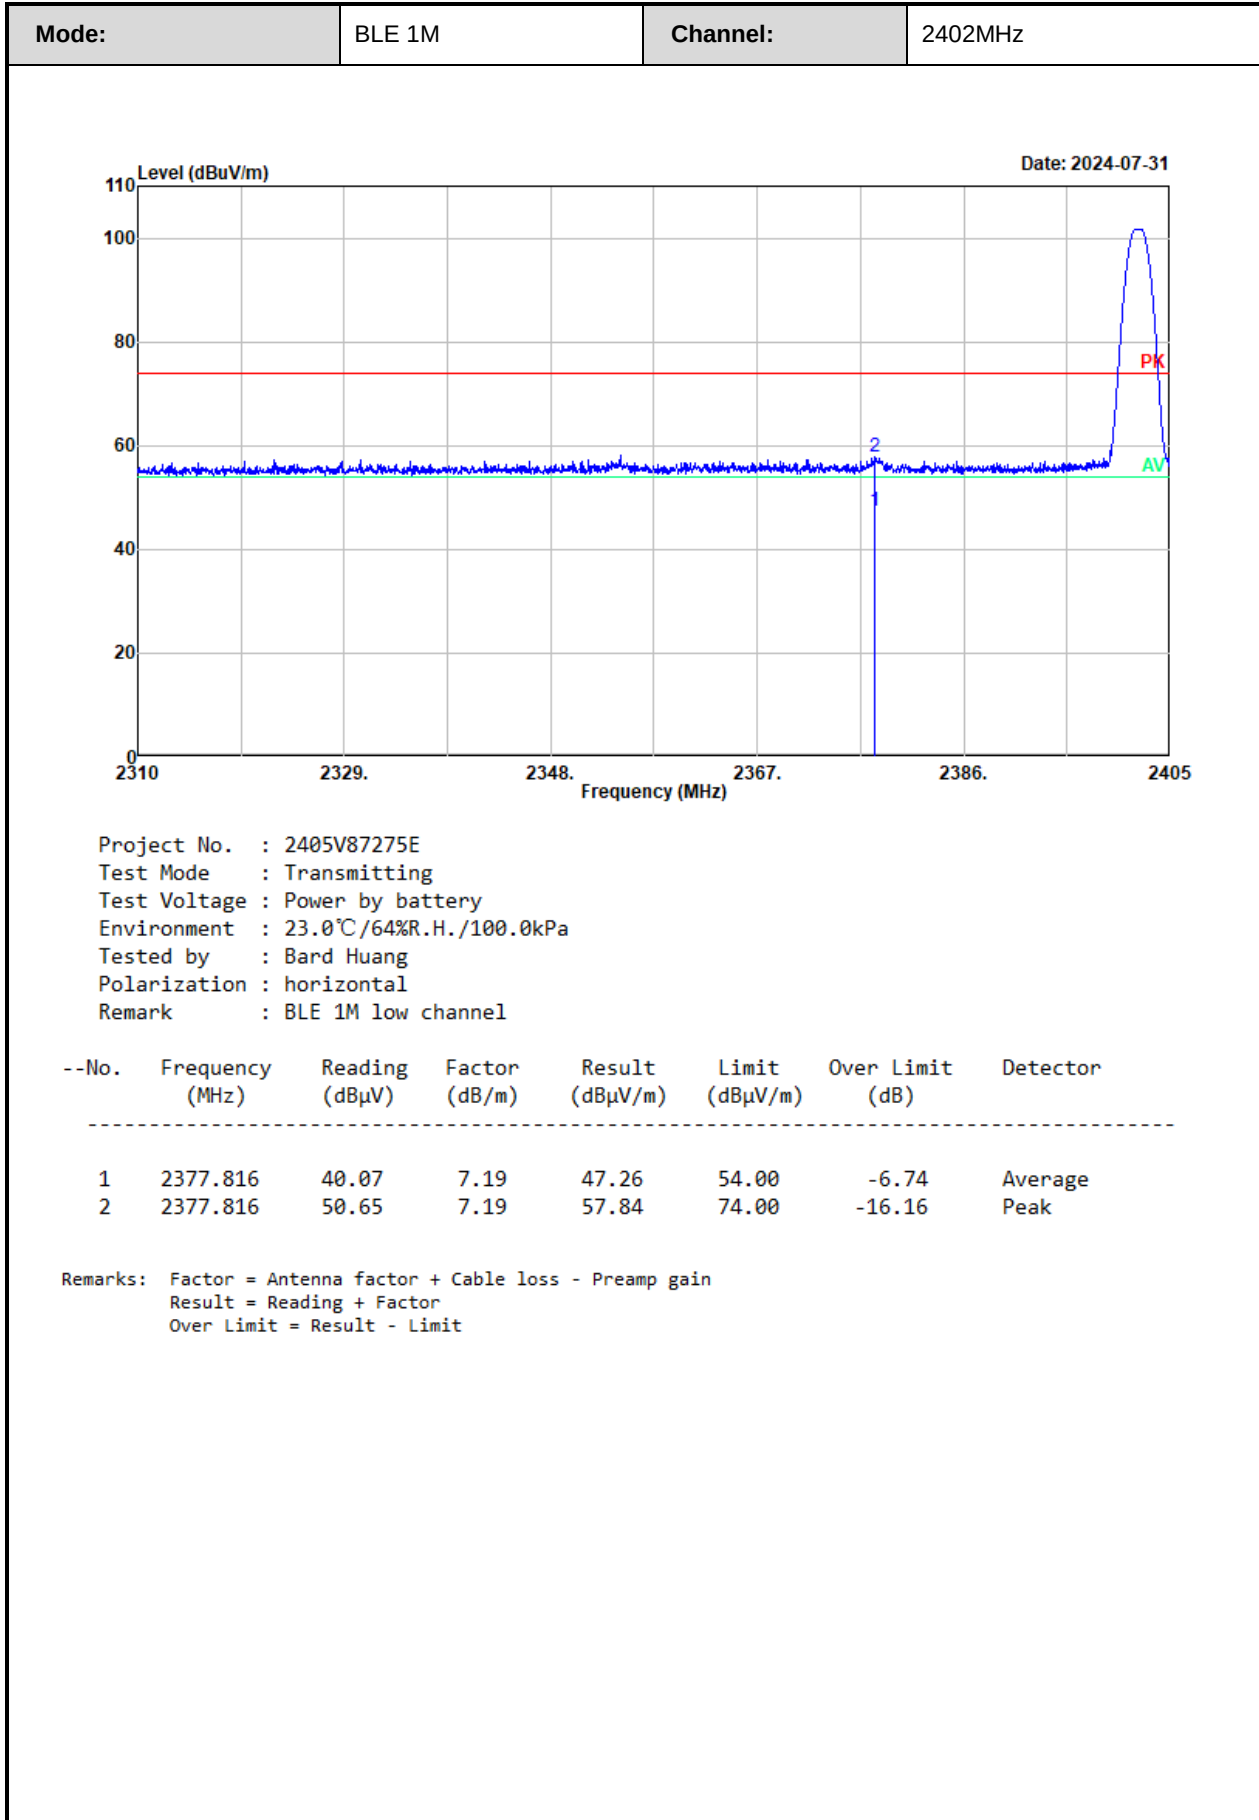


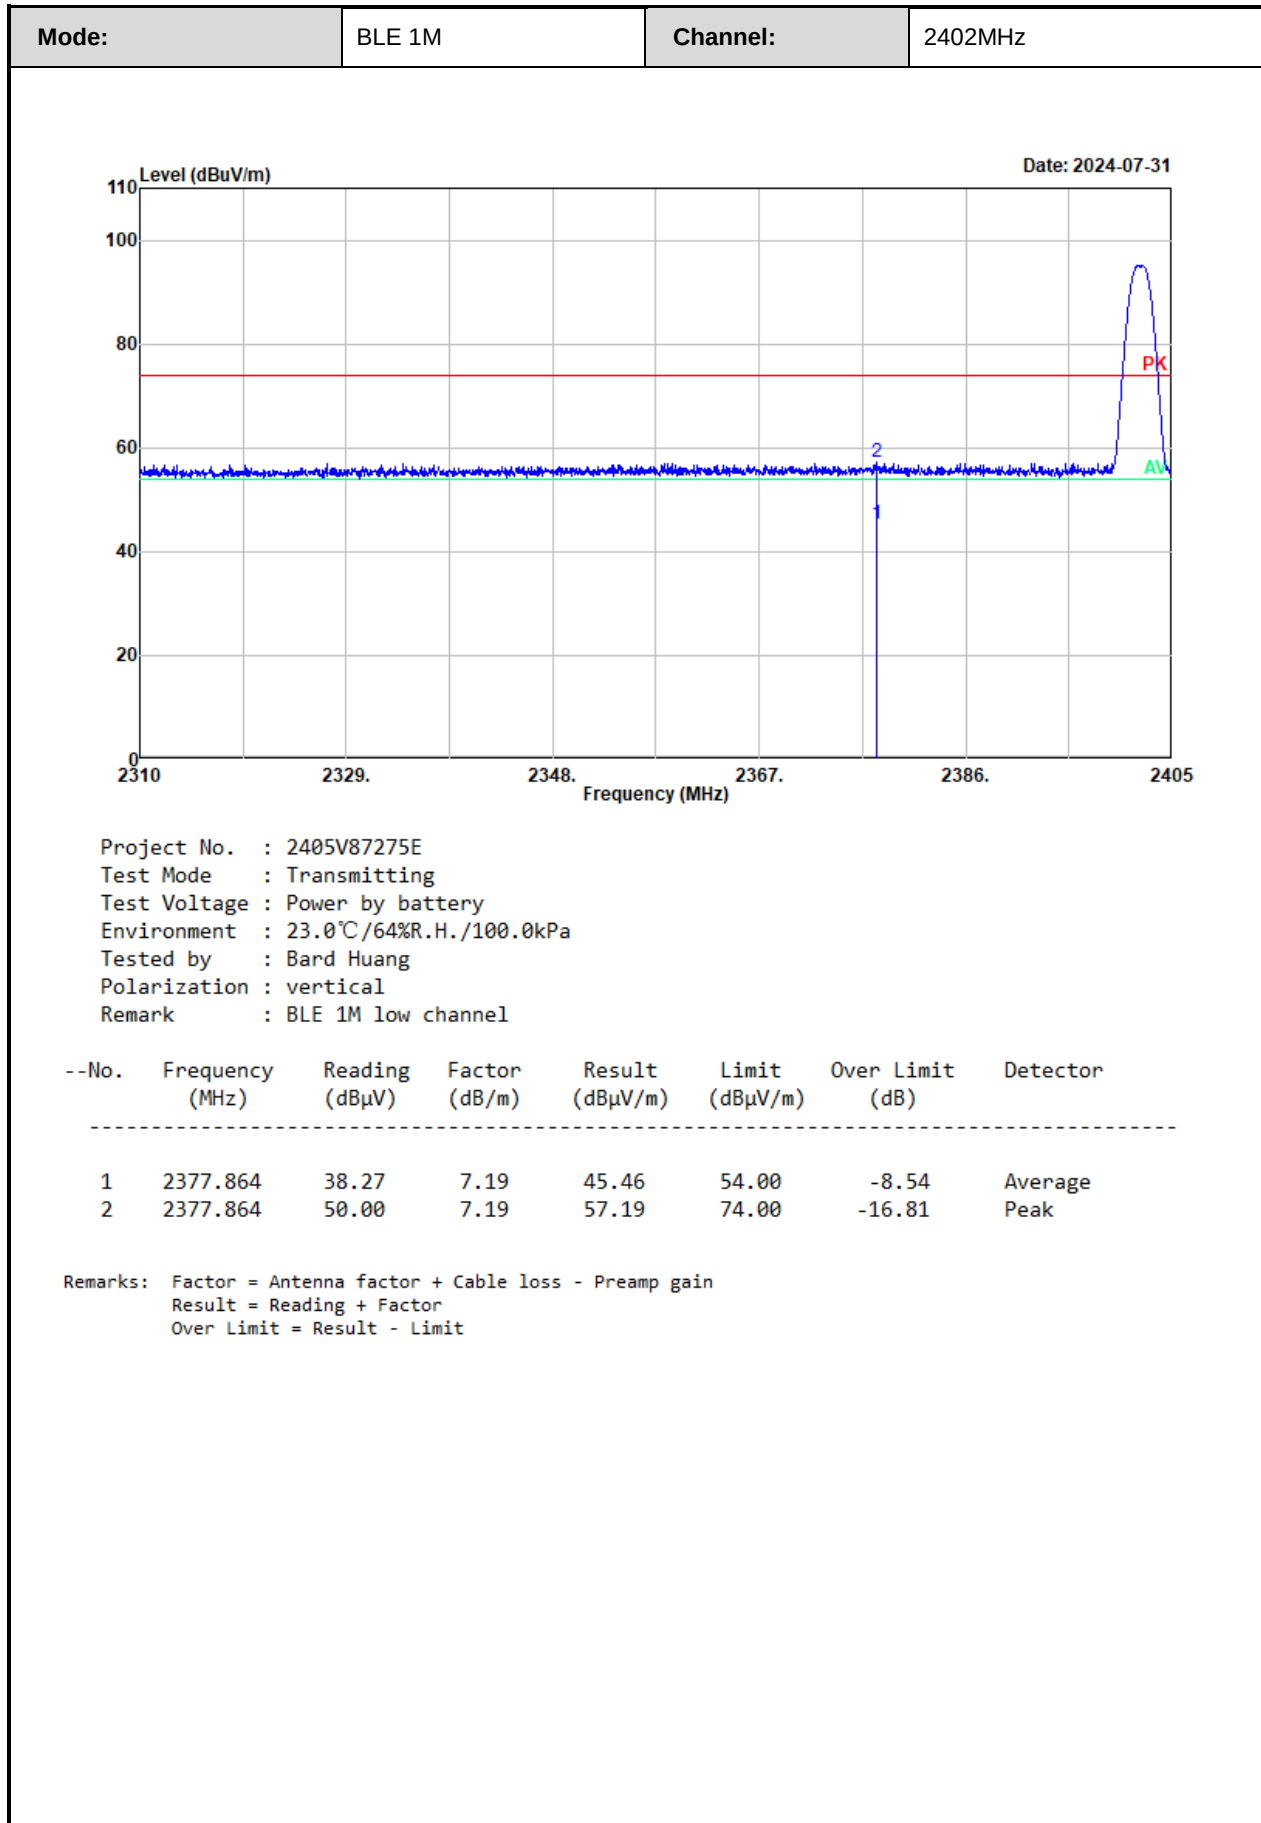


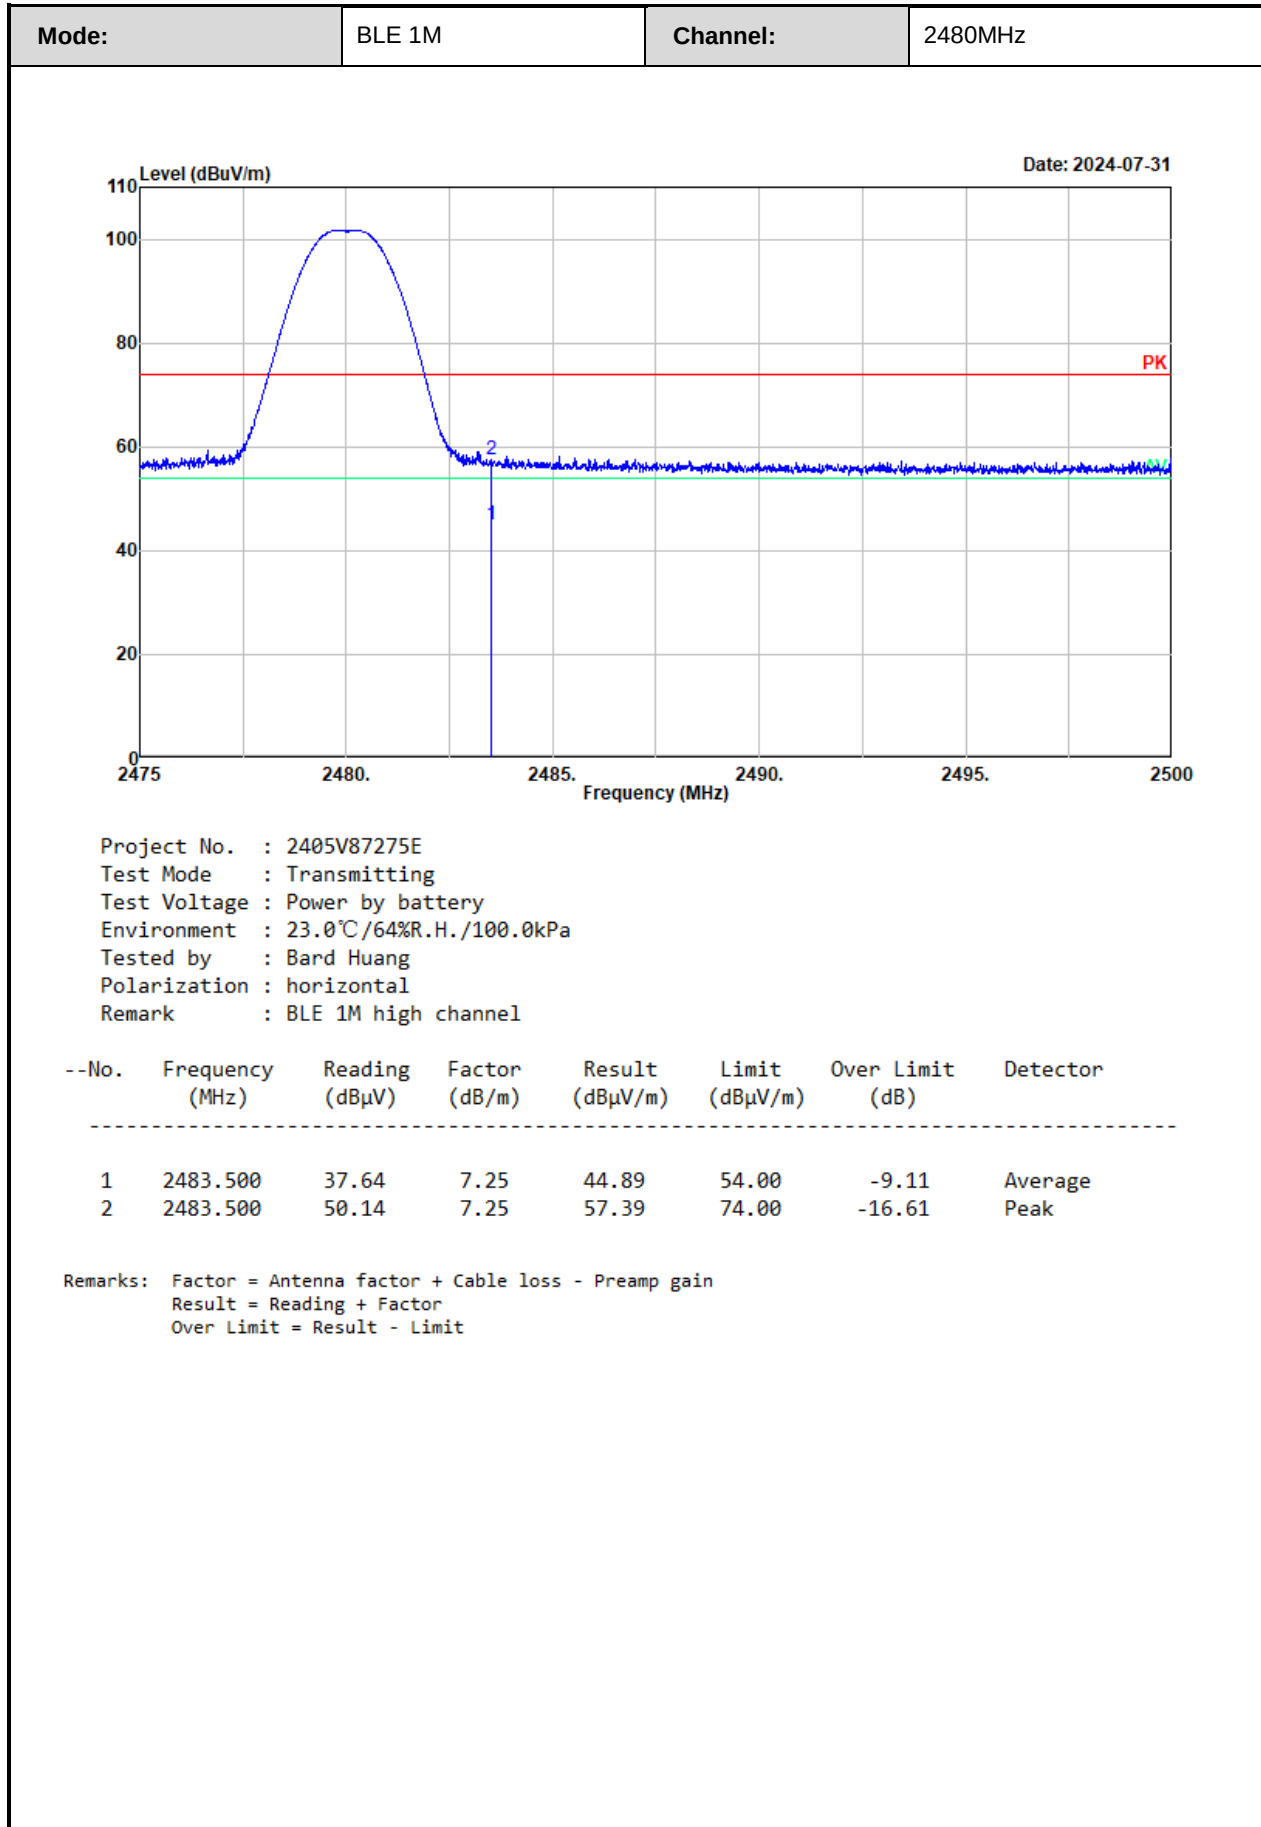


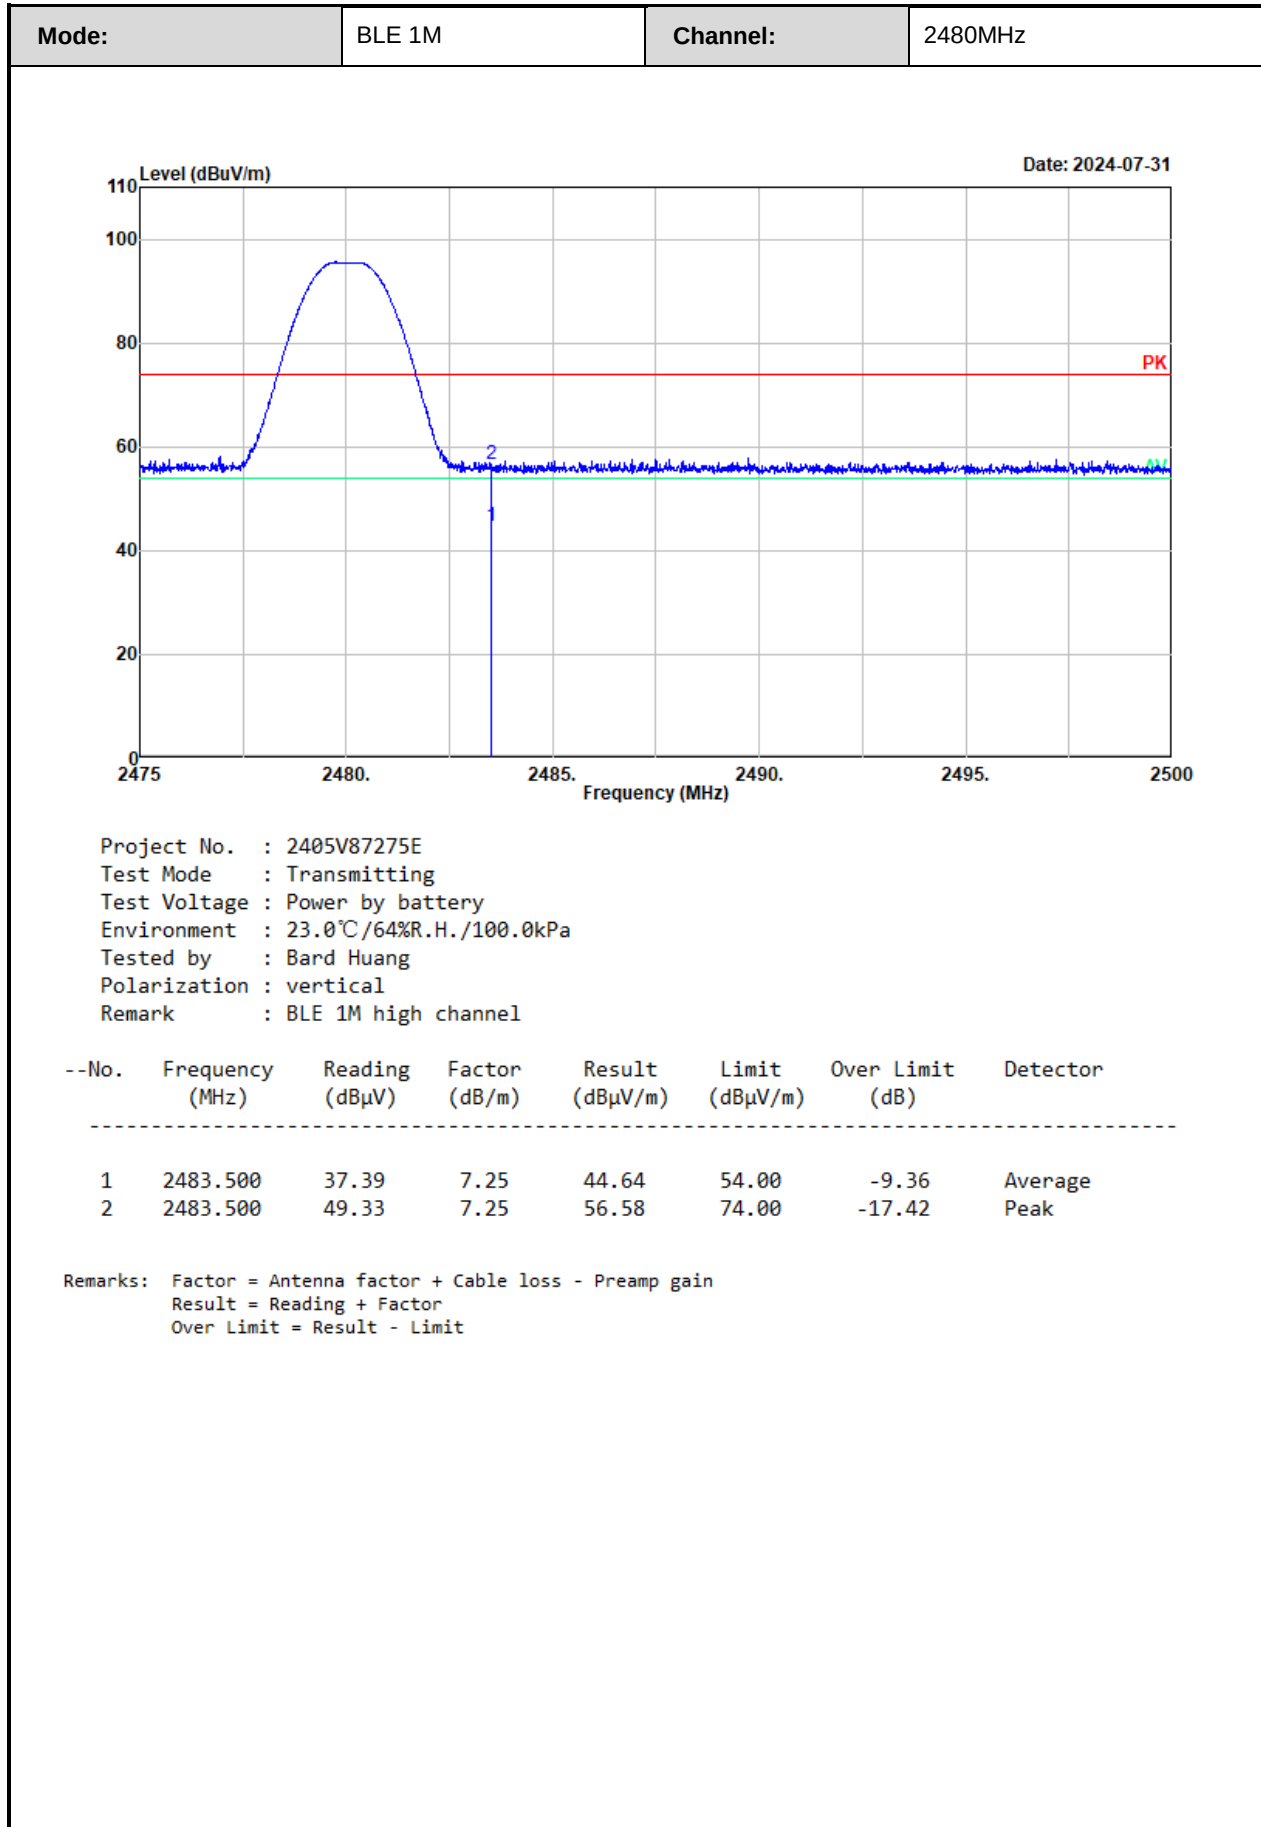


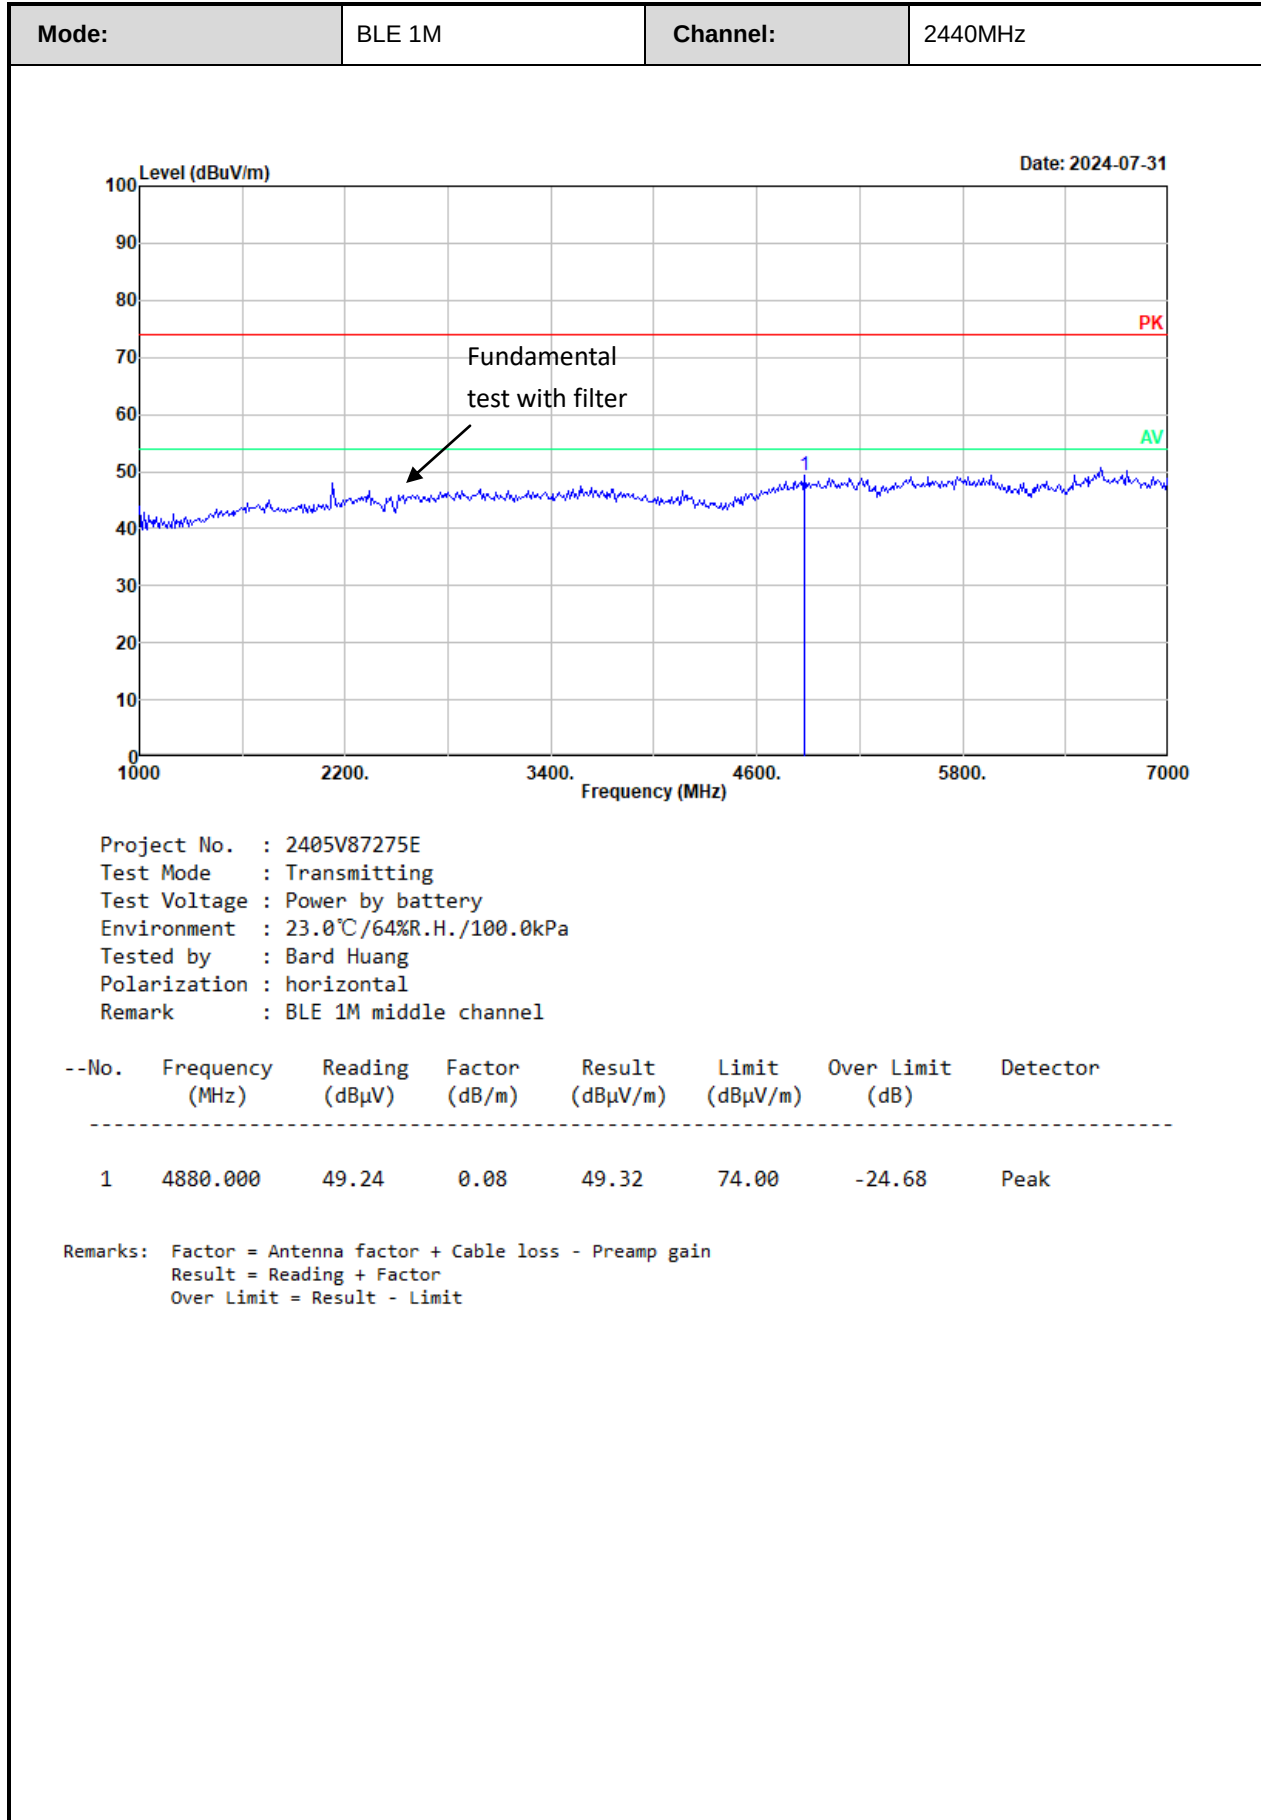


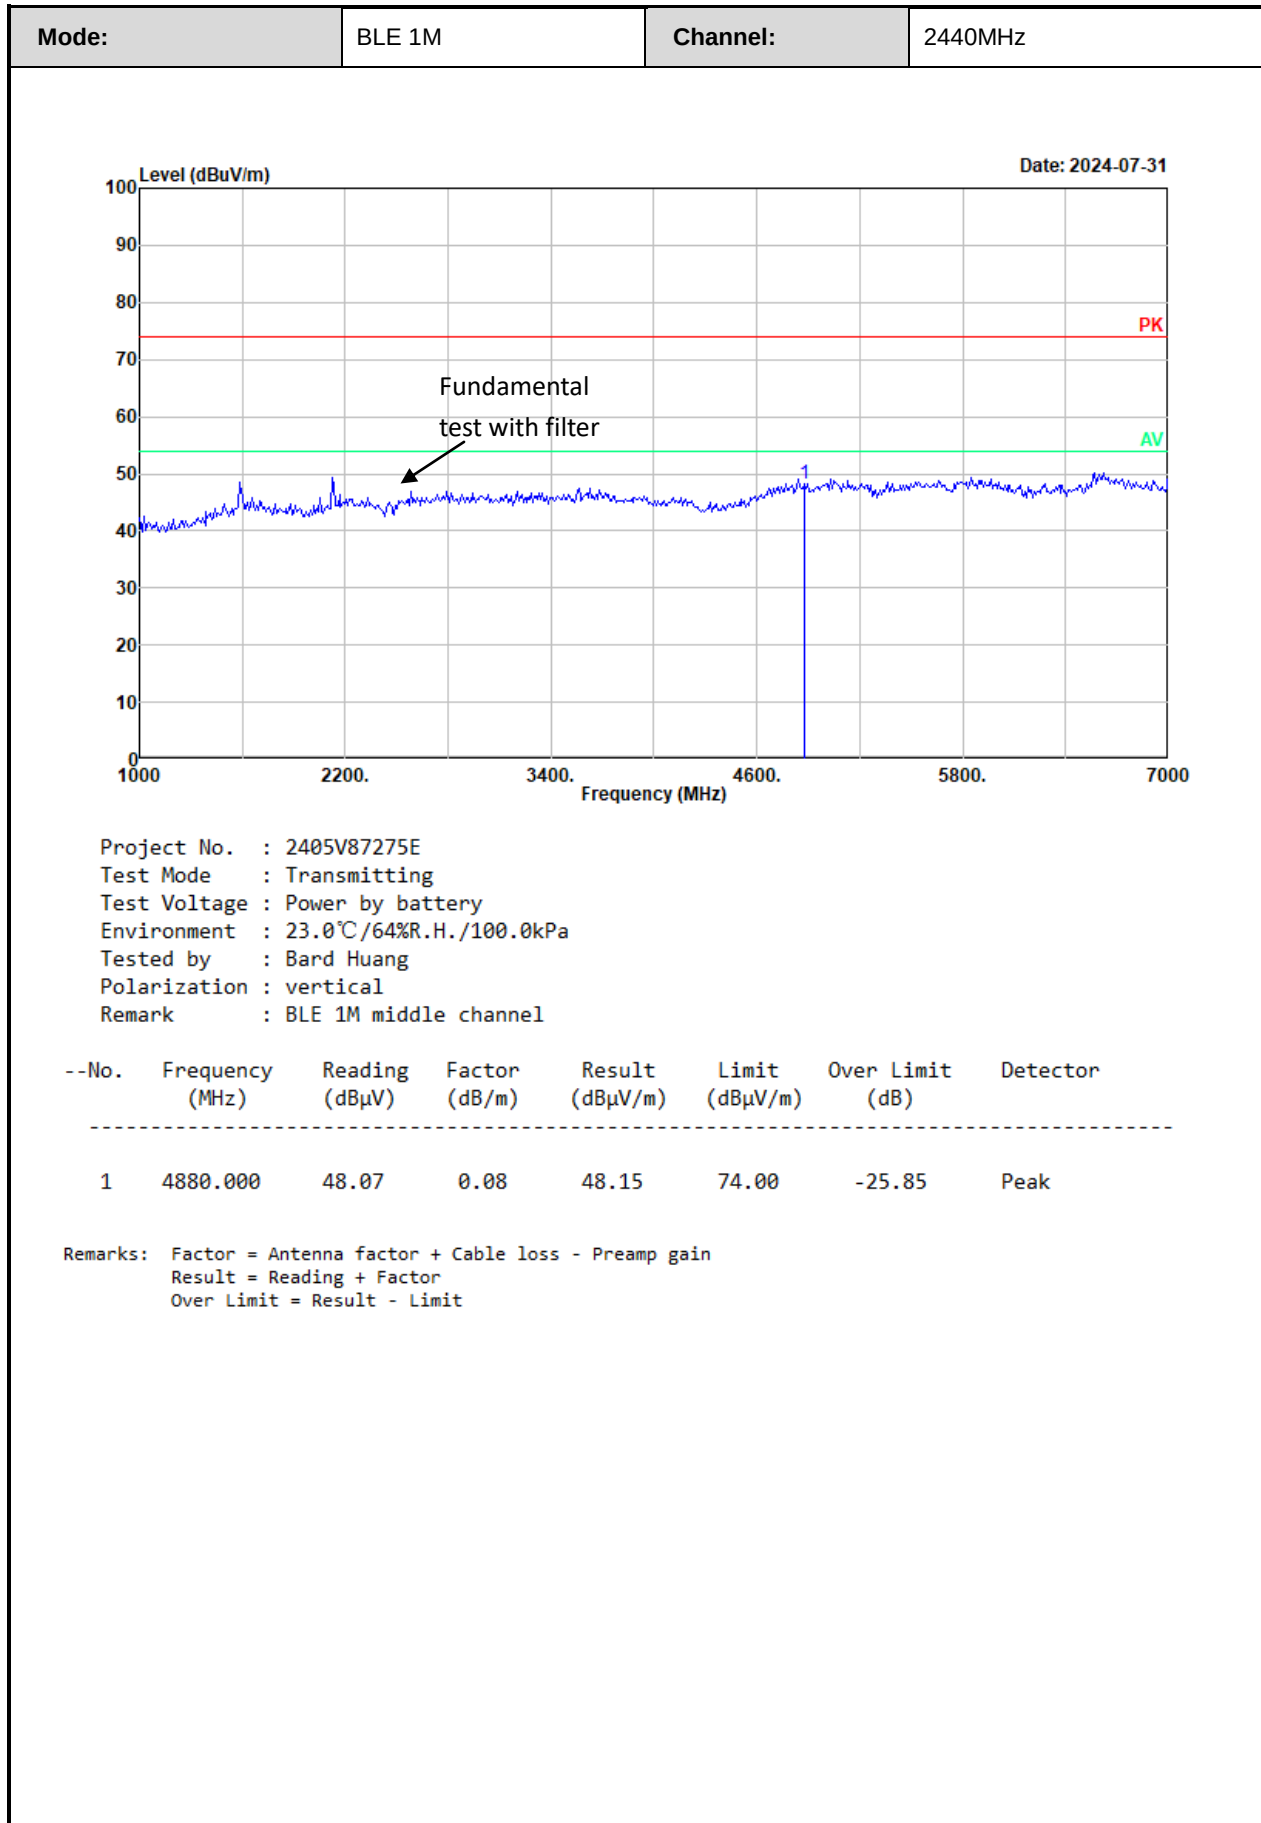

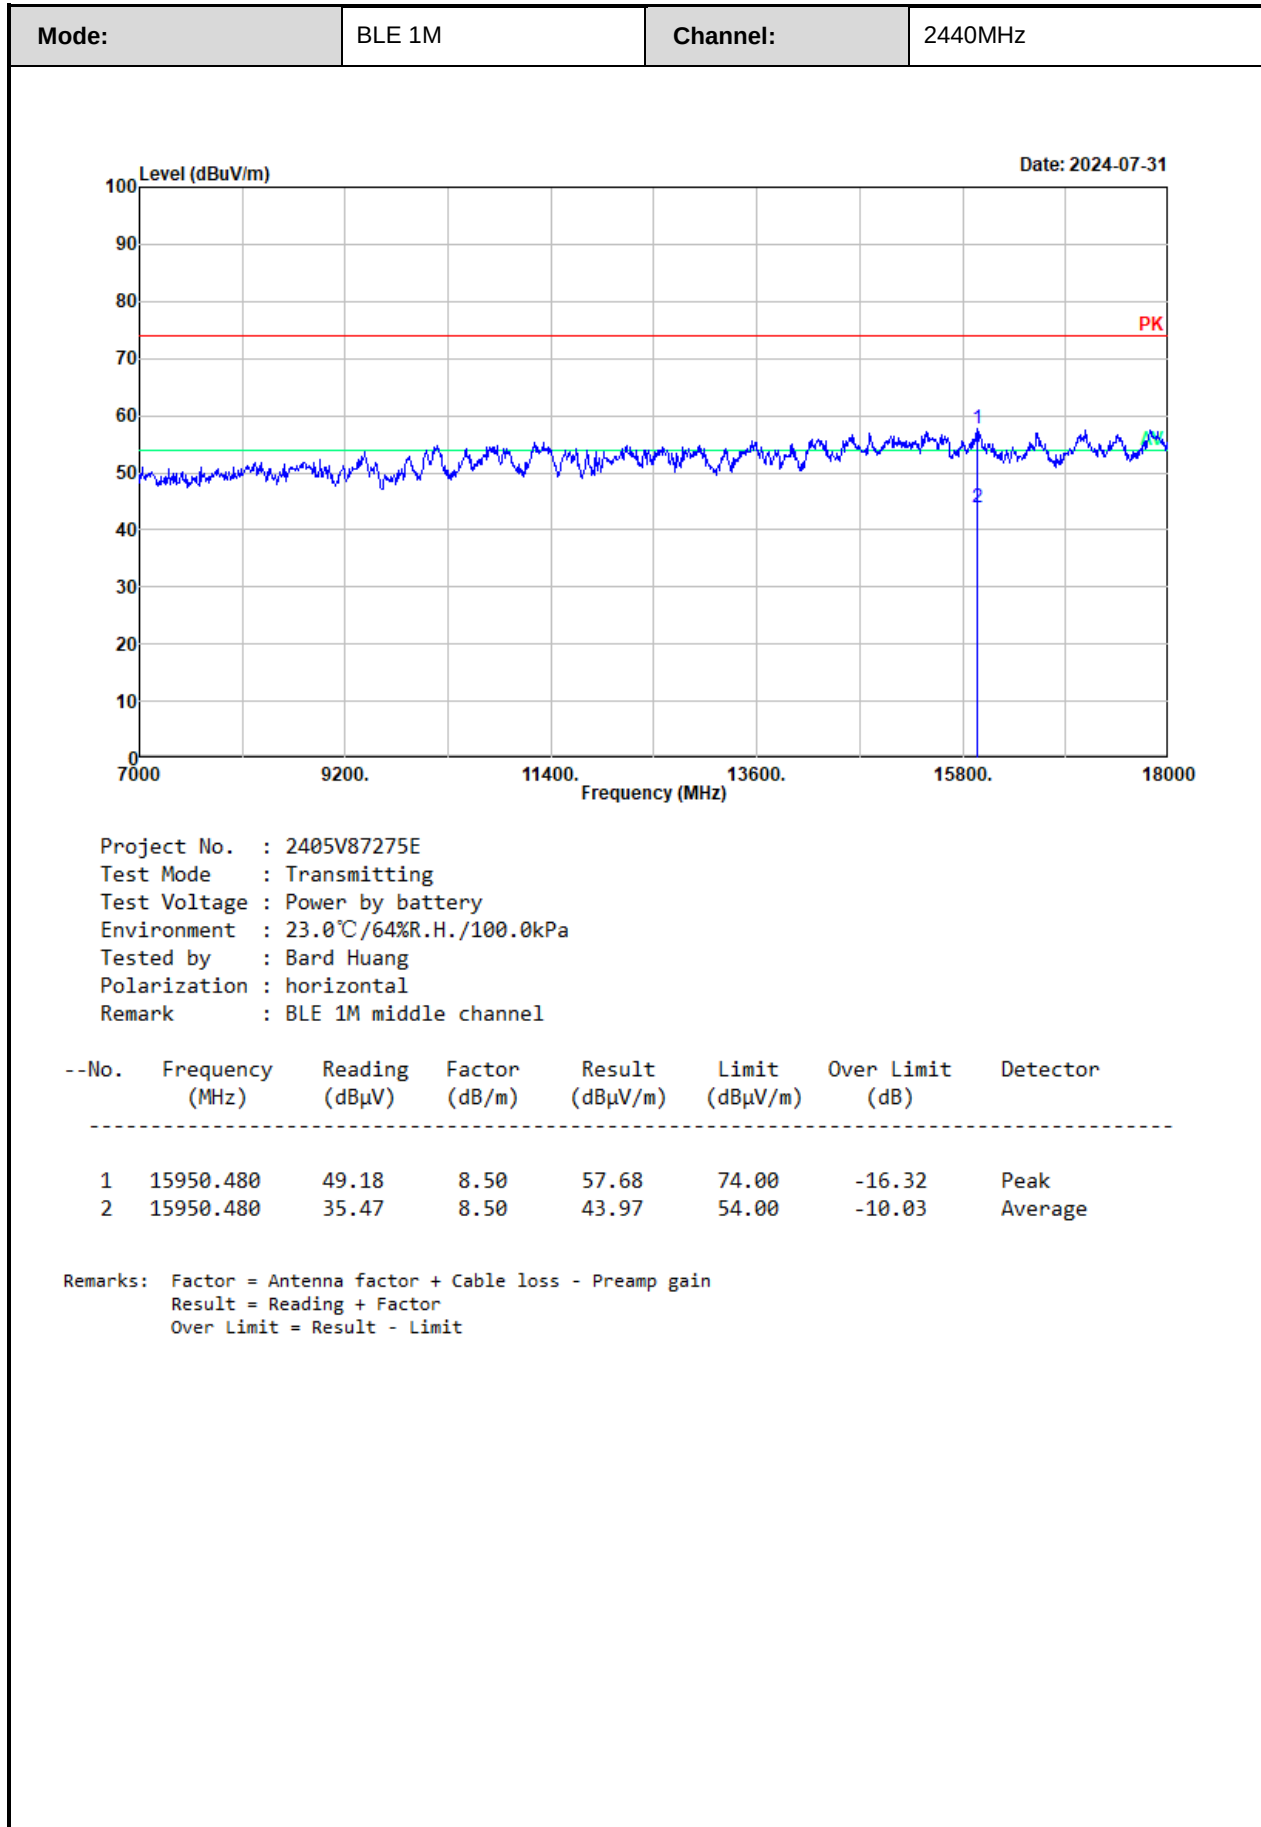

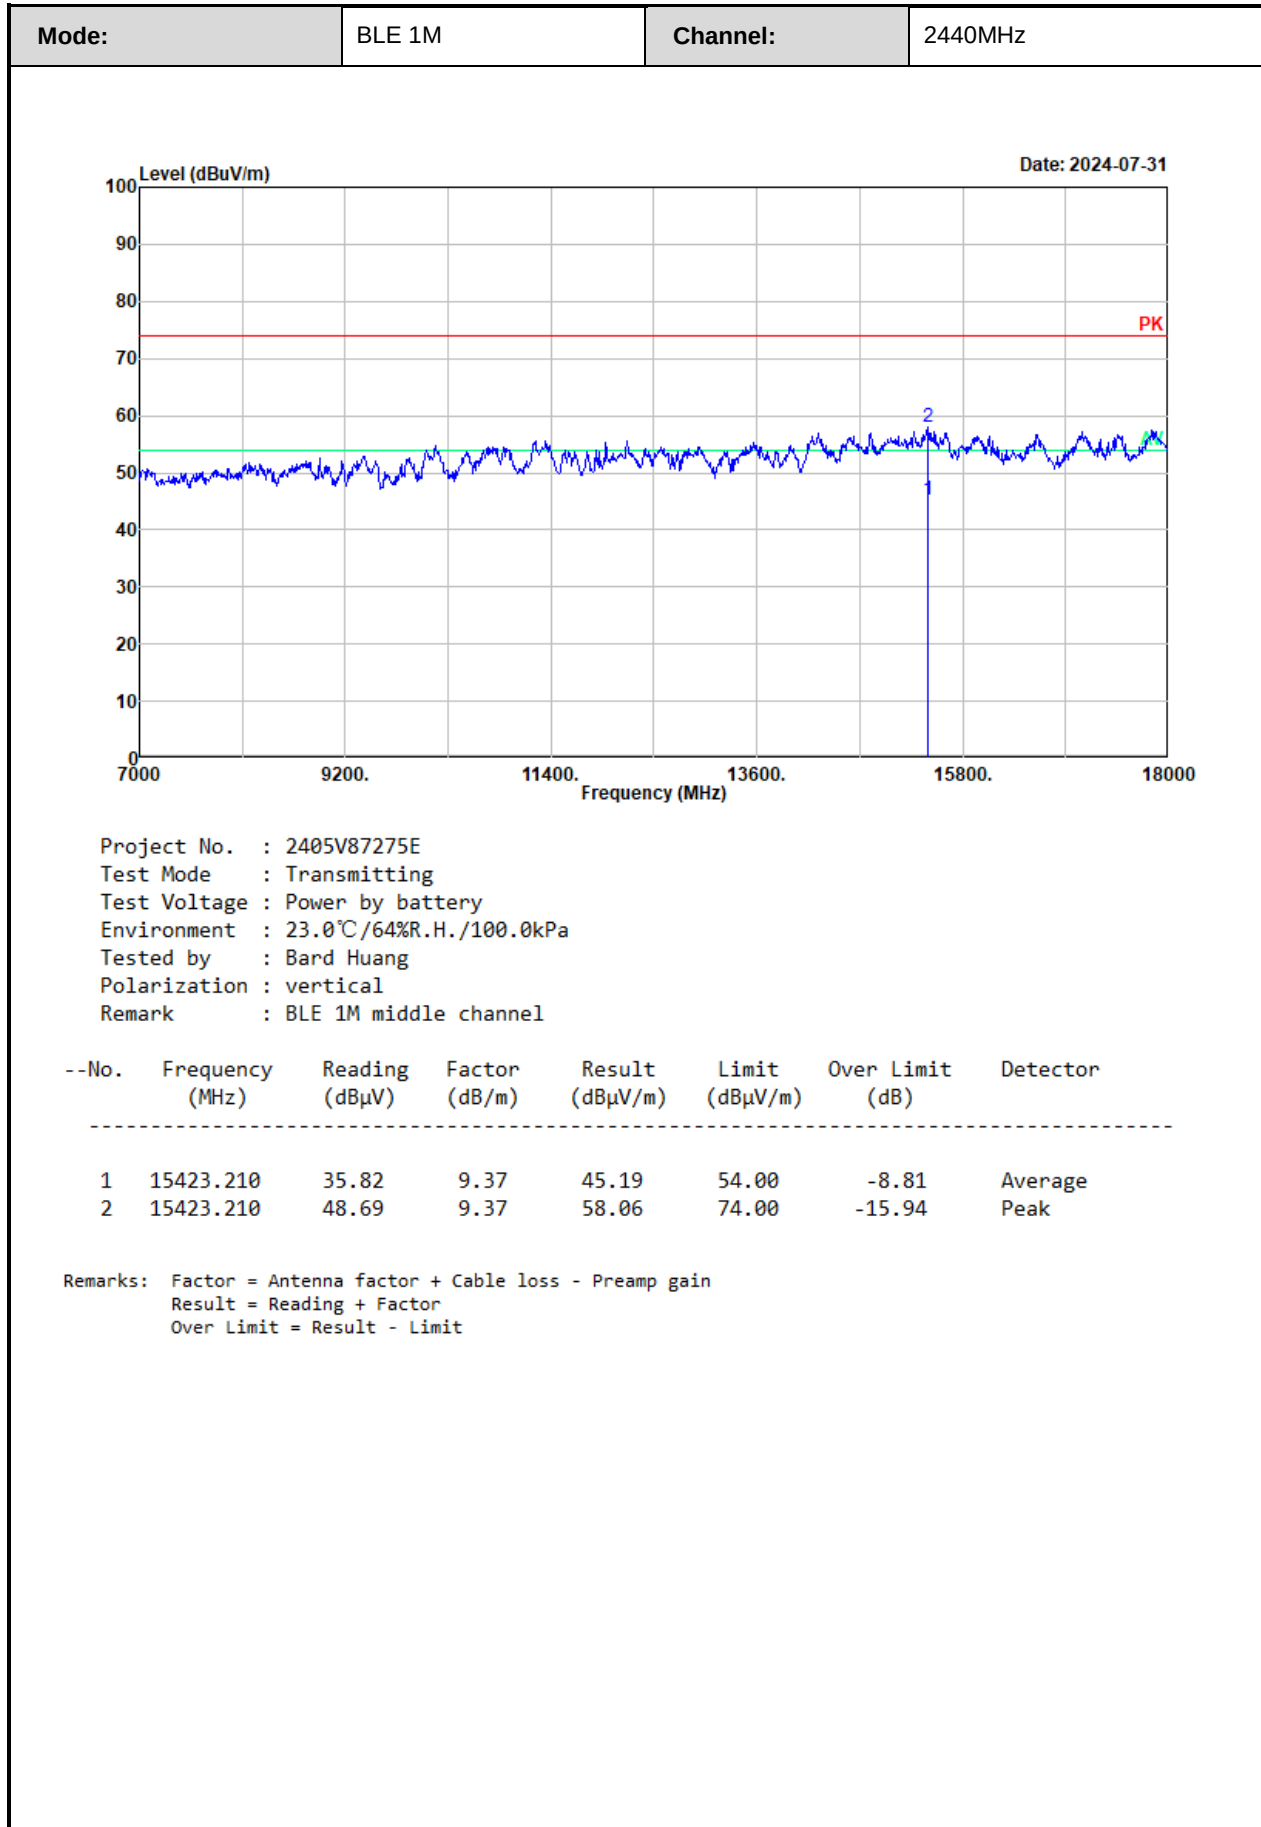

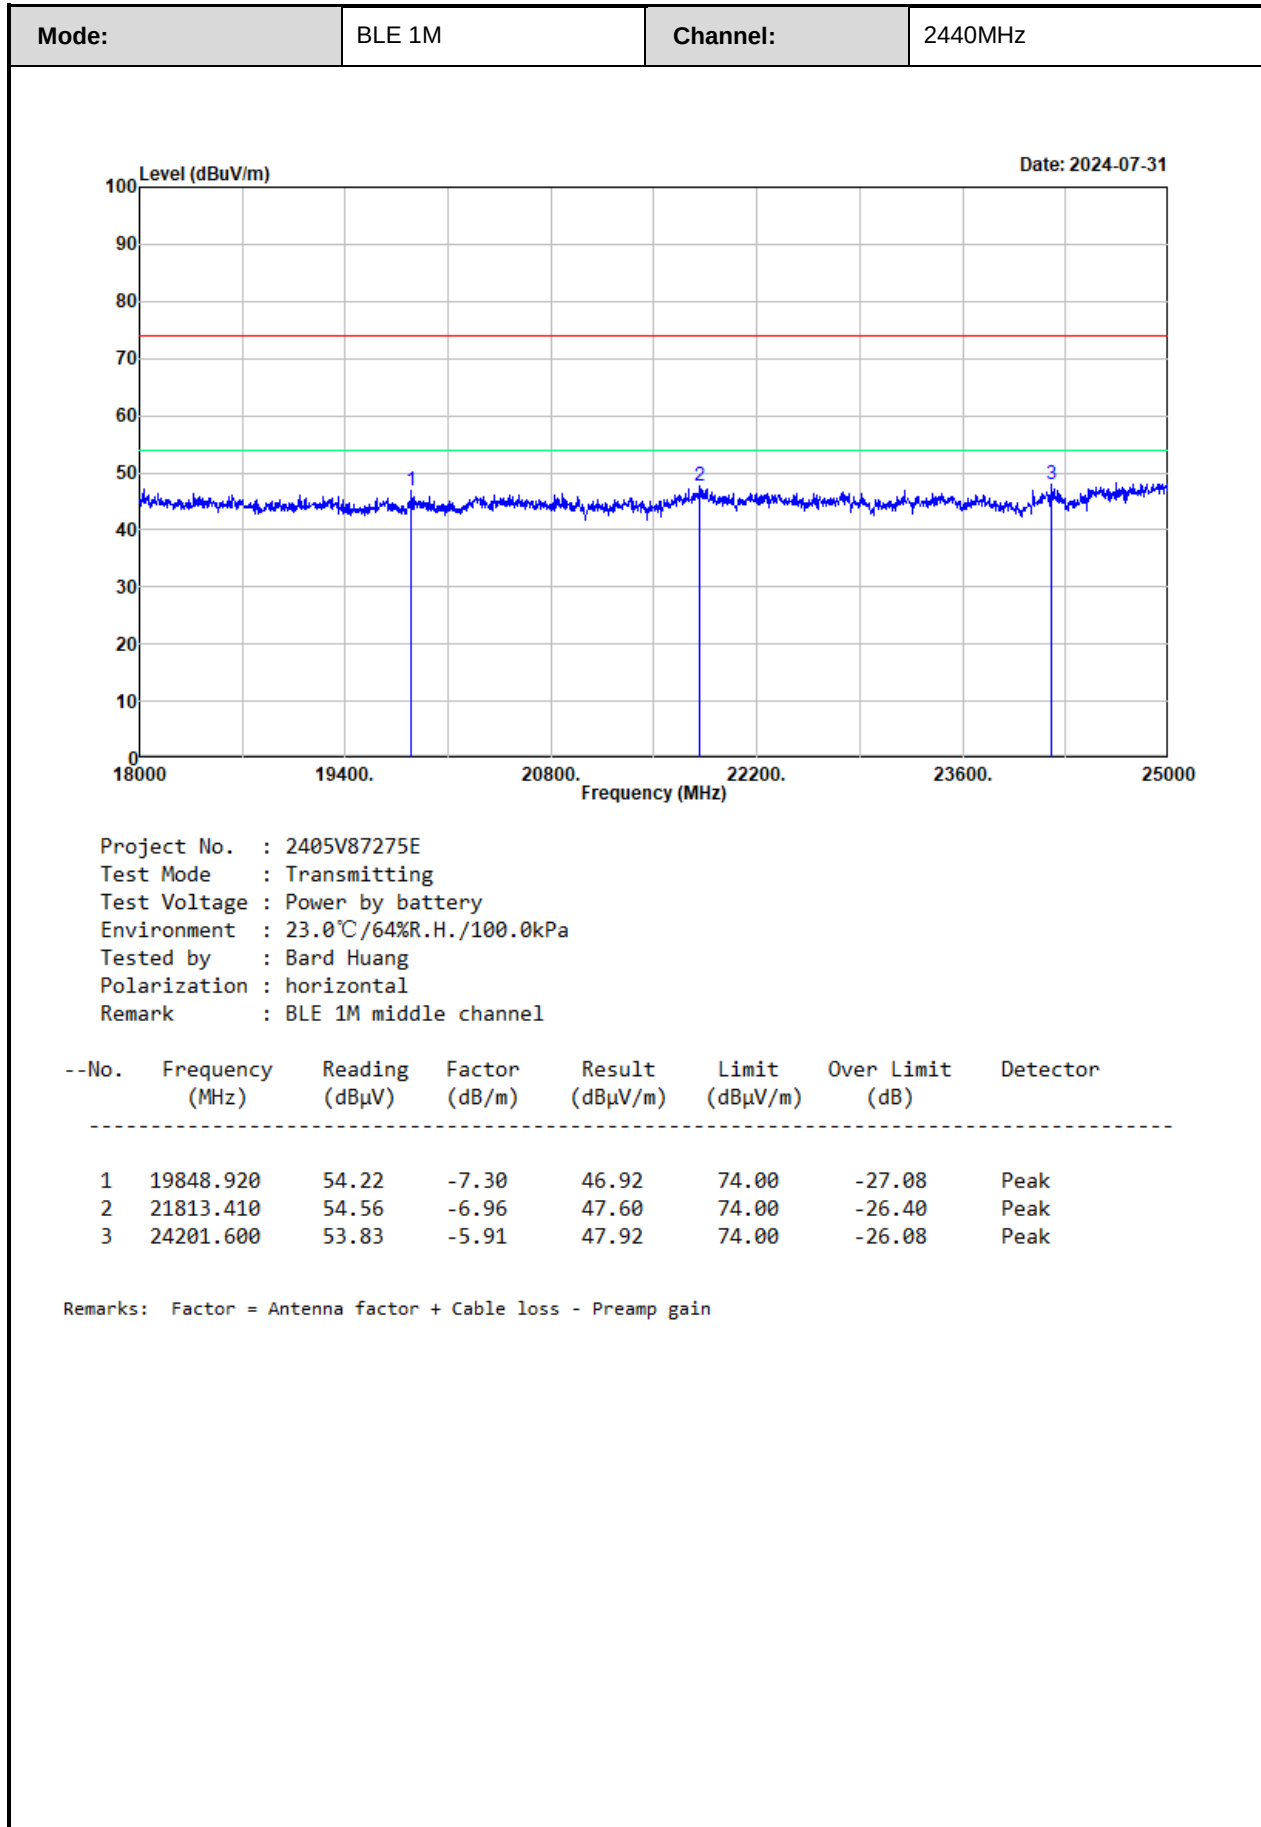

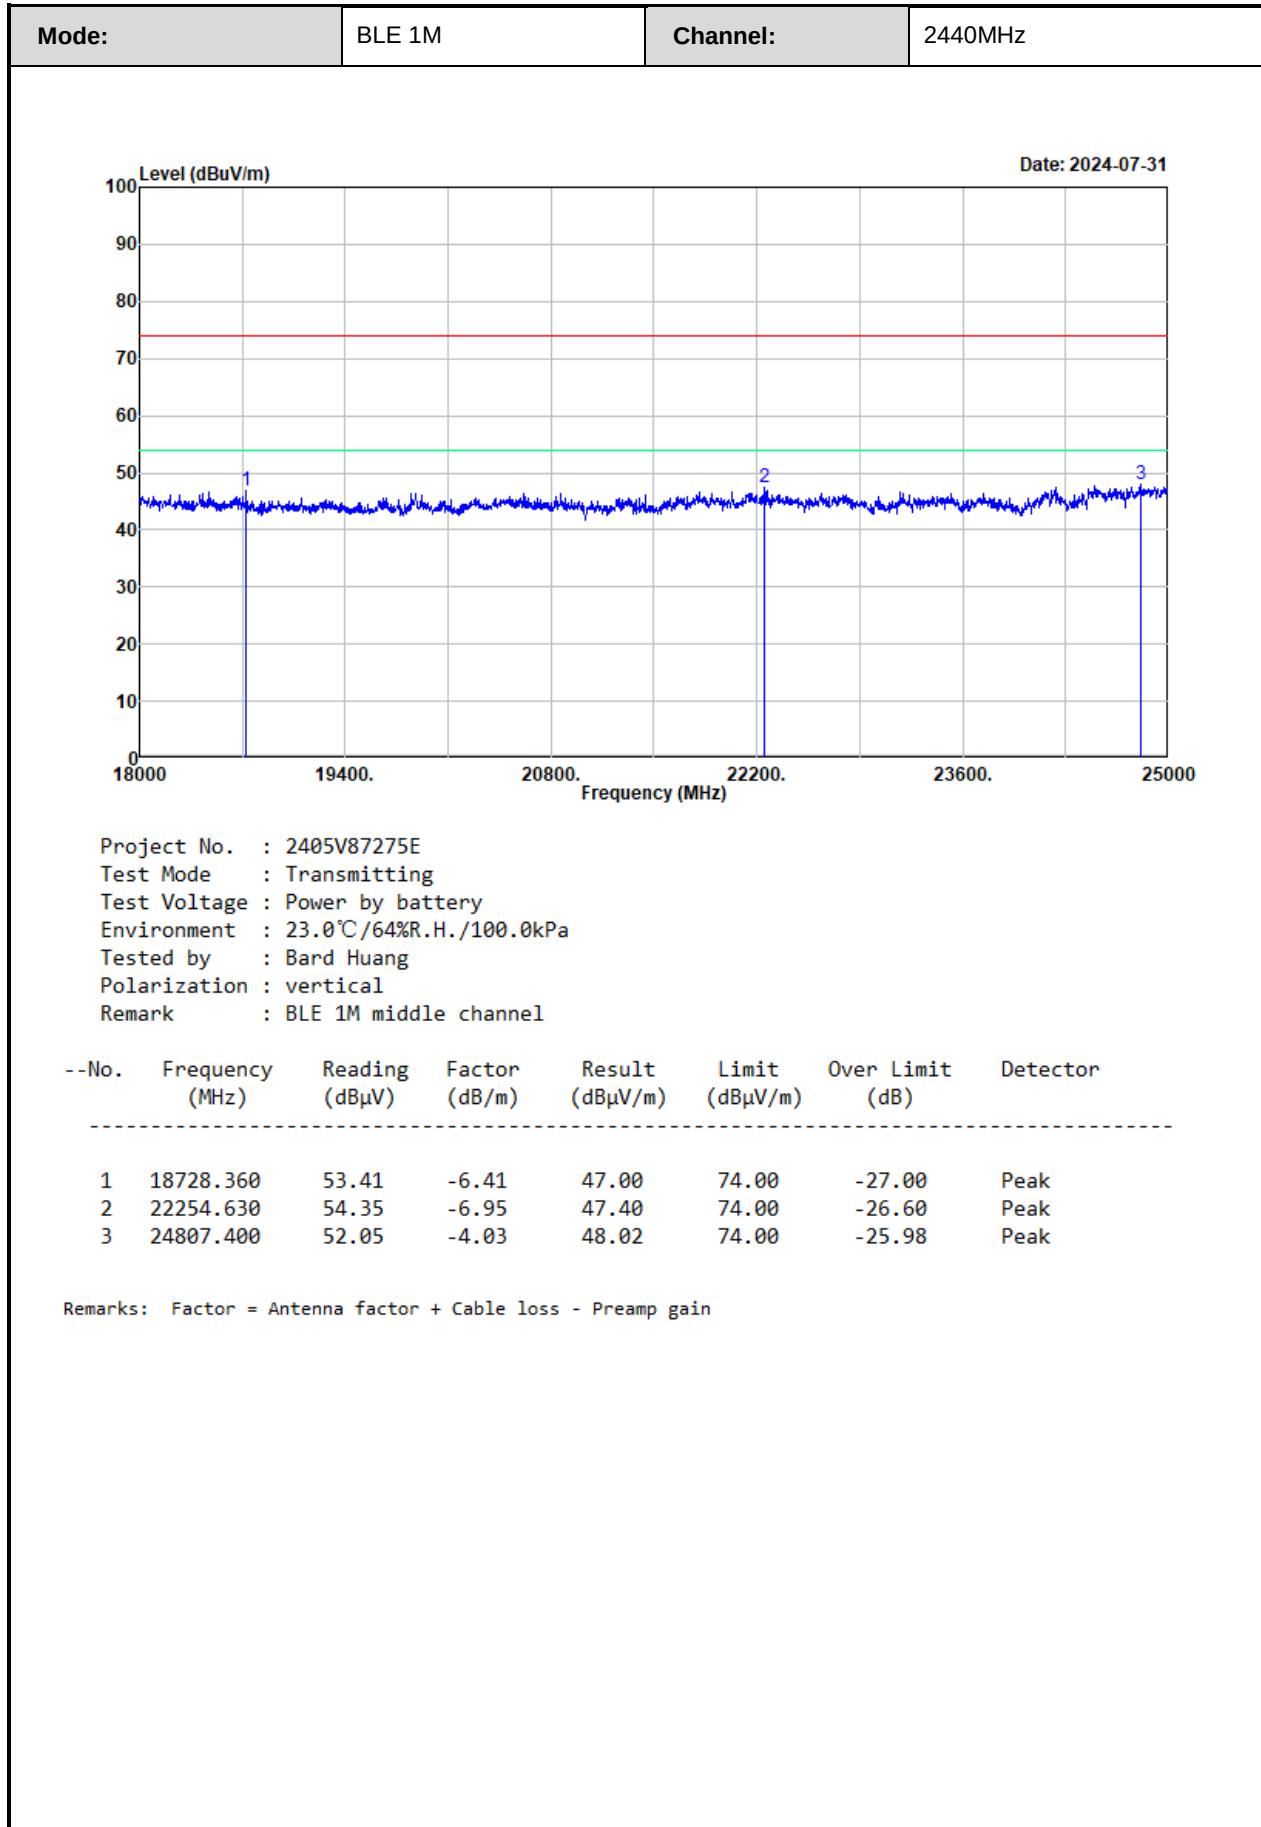

3.5 RF Conducted Test Data

Test Date:	2024-08-02	Test By:	Ryan Zhang
Environment condition:	Temperature: 23.8°C; Relative Humidity:60%; ATM Pressure: 100.2kPa		

3.5.1 6 dB Emission Bandwidth

Mode	Value (MHz)	Limit (MHz)	Result
Low	0.628	≥ 0.5	Pass
Middle	0.632	≥ 0.5	Pass
High	0.648	≥ 0.5	Pass

3.5.2 99% Occupied Bandwidth

Mode	99% OBW (MHz)
Low	1.056
Middle	1.068
High	1.098

3.5.3 Maximum Conducted Peak Output Power

Mode	Value (dBm)	Limit (dBm)	Result
Low	1.51	30.00	Pass
Middle	1.44	30.00	Pass
High	1.21	30.00	Pass

3.5.4 Power Spectral Density

Mode	Value (dBm/3kHz)	Limit (dBm/3kHz)	Result
Low	-15.16	8	Pass
Middle	-15.52	8	Pass
High	-15.80	8	Pass

3.5.5 100 kHz Bandwidth of Frequency Band Edge

Mode	Value (dB)	Limit (dB)	Result
Low	48.66	20	Pass
High	48.31	20	Pass

3.5.6 Duty Cycle

Mode	Ton (ms)	Ton+Toff (ms)	Duty Cycle (%)	Duty Cycle Factor (dB)	1/Ton (Hz)	VBW Setting (kHz)
Middle	100	100	100	0	NA	0.010


Duty Cycle = Ton/(Ton+Toff)*100%

Test Plots:

6 dB Emission Bandwidth:


BLE 1M

Low 0.628MHz

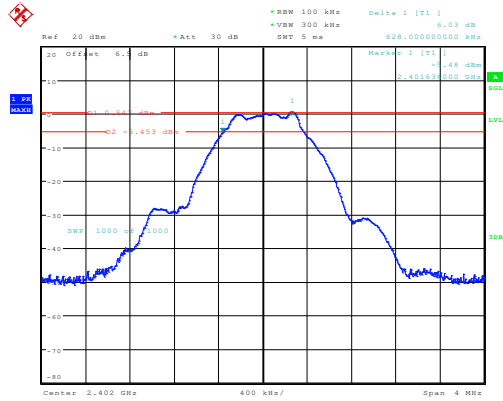


ProjectNo.:2405V87275E-RF Tester:Ryan Zhang
Date: 2.AUG.2024 11:24:33

Middle 0.632MHz

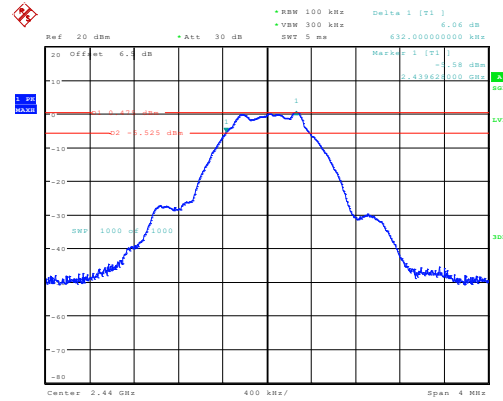

ProjectNo.:2405V87275E-RF Tester:Ryan Zhang
Date: 2.AUG.2024 11:29:04

High 0.648MHz

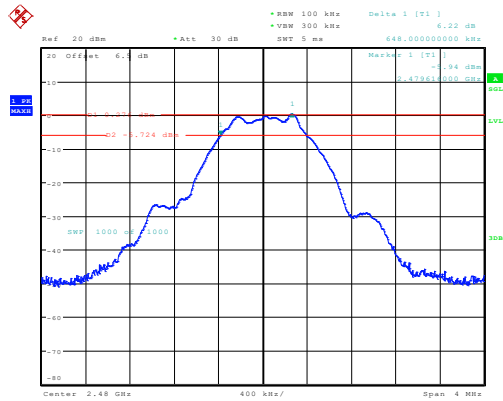


ProjectNo.:2405V87275E-RF Tester:Ryan Zhang
Date: 2.AUG.2024 11:33:42

99% Occupied Bandwidth:


BLE 1M

Low 1.056MHz

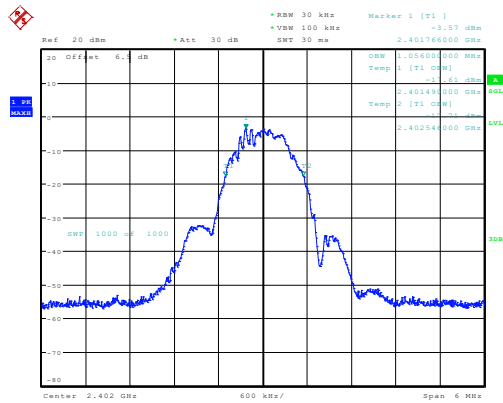


ProjectNo.:2405V87275E-RF Tester:Ryan Zhang
Date: 2.AUG.2024 11:25:31

Middle 1.068MHz

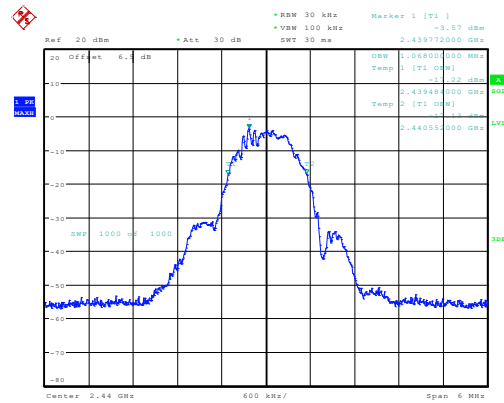

ProjectNo.:2405V87275E-RF Tester:Ryan Zhang
Date: 2.AUG.2024 11:29:59

High 1.098MHz

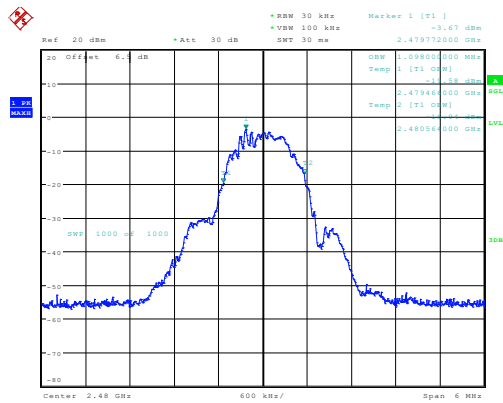


ProjectNo.:2405V87275E-RF Tester:Ryan Zhang
Date: 2.AUG.2024 11:34:54

Maximum Conducted Peak Output Power:


BLE 1M

Low 1.51dBm

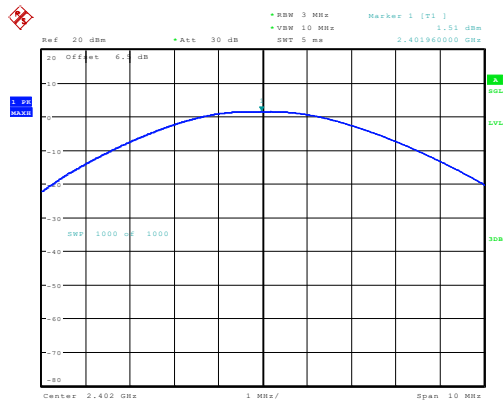


ProjectNo.:2405V87275E-RF Tester:Ryan Zhang
Date: 2.AUG.2024 11:26:58

Middle 1.44dBm

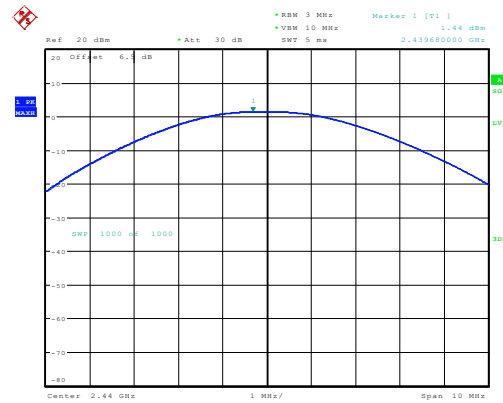

ProjectNo.:2405V87275E-RF Tester:Ryan Zhang
Date: 2.AUG.2024 11:30:45

High 1.21dBm

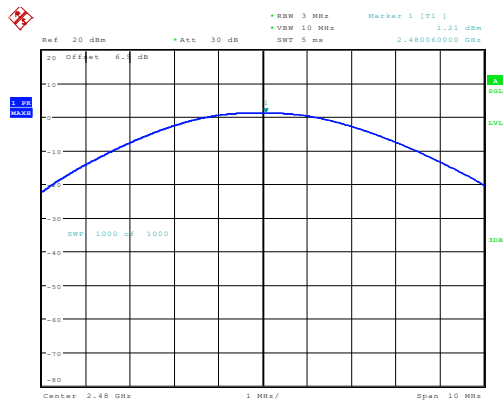


ProjectNo.:2405V87275E-RF Tester:Ryan Zhang
Date: 2.AUG.2024 11:35:29

Power Spectral Density:


BLE 1M

Low -15.16dBm/3kHz

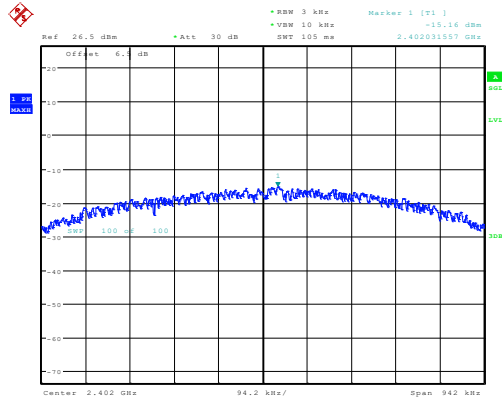


ProjectNo.:2405V87275E-RF Tester:Ryan Zhang
Date: 2.AUG.2024 11:27:19

Middle -15.52dBm/3kHz

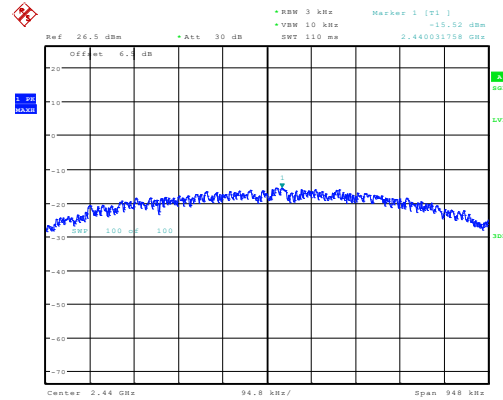

ProjectNo.:2405V87275E-RF Tester:Ryan Zhang
Date: 2.AUG.2024 11:31:06


High -15.80dBm/3kHz

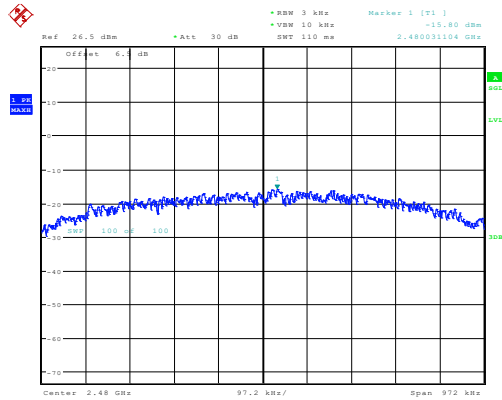

ProjectNo.:2405V87275E-RF Tester:Ryan Zhang
Date: 2.AUG.2024 11:35:51

BLE 1M

High 48.31dB

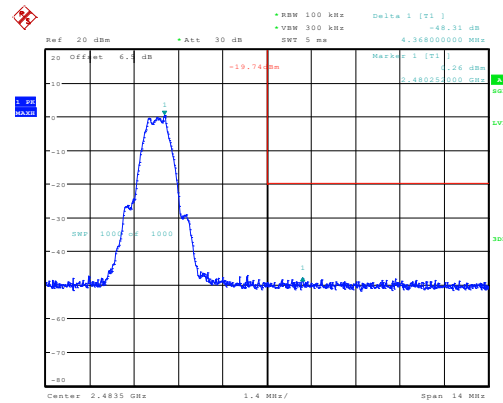

ProjectNo.:2405V87275E-RF Tester:Ryan Zhang
Date: 2.AUG.2024 11:32:57

BLE 1M


 ZSMW 10 MHz
 * Att 40 dB
 SWR 100 ms
 Marker 1 [71]
 1.66 dBm
 10.748000 ms

10 Offset 6.5 dB
 20
 30
 40
 50
 60
 70
 80
 90
 100
 110
 120
 130
 140
 150
 160
 170
 180
 190
 200
 210
 220
 230
 240
 250
 260
 270
 280
 290
 300
 310
 320
 330
 340
 350
 360
 370
 380
 390
 400
 410
 420
 430
 440
 450
 460
 470
 480
 490
 500
 510
 520
 530
 540
 550
 560
 570
 580
 590
 600
 610
 620
 630
 640
 650
 660
 670
 680
 690
 700
 710
 720
 730
 740
 750
 760
 770
 780
 790
 800
 810
 820
 830
 840
 850
 860
 870
 880
 890
 900
 910
 920
 930
 940
 950
 960
 970
 980
 990
 1000
 1010
 1020
 1030
 1040
 1050
 1060
 1070
 1080
 1090
 1100
 1110
 1120
 1130
 1140
 1150
 1160
 1170
 1180
 1190
 1200
 1210
 1220
 1230
 1240
 1250
 1260
 1270
 1280
 1290
 1300
 1310
 1320
 1330
 1340
 1350
 1360
 1370
 1380
 1390
 1400
 1410
 1420
 1430
 1440
 1450
 1460
 1470
 1480
 1490
 1500
 1510
 1520
 1530
 1540
 1550
 1560
 1570
 1580
 1590
 1600
 1610
 1620
 1630
 1640
 1650
 1660
 1670
 1680
 1690
 1700
 1710
 1720
 1730
 1740
 1750
 1760
 1770
 1780
 1790
 1800
 1810
 1820
 1830
 1840
 1850
 1860
 1870
 1880
 1890
 1900
 1910
 1920
 1930
 1940
 1950
 1960
 1970
 1980
 1990
 2000
 2010
 2020
 2030
 2040
 2050
 2060
 2070
 2080
 2090
 2100
 2110
 2120
 2130
 2140
 2150
 2160
 2170
 2180
 2190
 2200
 2210
 2220
 2230
 2240
 2250
 2260
 2270
 2280
 2290
 2300
 2310
 2320
 2330
 2340
 2350
 2360
 2370
 2380
 2390
 2400
 2410
 2420
 2430
 2440
 2450
 2460
 2470
 2480
 2490
 2500
 2510
 2520
 2530
 2540
 2550
 2560
 2570
 2580
 2590
 2600
 2610
 2620
 2630
 2640
 2650
 2660
 2670
 2680
 2690
 2700
 2710
 2720
 2730
 2740
 2750
 2760
 2770
 2780
 2790
 2800
 2810
 2820
 2830
 2840
 2850
 2860
 2870
 2880
 2890
 2900
 2910
 2920
 2930
 2940
 2950
 2960
 2970
 2980
 2990
 3000
 3010
 3020
 3030
 3040
 3050
 3060
 3070
 3080
 3090
 3100
 3110
 3120
 3130
 3140
 3150
 3160
 3170
 3180
 3190
 3200
 3210
 3220
 3230
 3240
 3250
 3260
 3270
 3280
 3290
 3300
 3310
 3320
 3330
 3340
 3350
 3360
 3370
 3380
 3390
 3400
 3410
 3420
 3430
 3440
 3450
 3460
 3470
 3480
 3490
 3500
 3510
 3520
 3530
 3540
 3550
 3560
 3570
 3580
 3590
 3600
 3610
 3620
 3630
 3640
 3650
 3660
 3670
 3680
 3690
 3700
 3710
 3720
 3730
 3740
 3750
 3760
 3770
 3780
 3790
 3800
 3810
 3820
 3830
 3840
 3850
 3860
 3870
 3880
 3890
 3900
 3910
 3920
 3930
 3940
 3950
 3960
 3970
 3980
 3990
 4000
 4010
 4020
 4030
 4040
 4050
 4060
 4070
 4080
 4090
 4100
 4110
 4120
 4130
 4140
 4150
 4160
 4170
 4180
 4190
 4200
 4210
 42

Date: 2.AUG.2024 11:38:00

4 Test Setup Photo

Please refer to the attachment 2405V87275E Test Setup photo.

5 E.U.T Photo

Please refer to the attachment 2405V87275E External photo and 2405V87275E Internal photo.

---End of Report---