

# FCC Measurement/Technical Report on

## 20050-1 Link Master

Tested partly together with

## 20051-1 Link Client (Tag)

FCC ID: 2AQBA20050-1 (Link Master)

**Test Report Reference:** MDE\_NORBIT\_1801\_FCCa\_rev2

**Test Laboratory:**  
7layers GmbH  
Borsigstrasse 11  
40880 Ratingen  
Germany



**Note:**  
The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the test laboratory.

**7layers GmbH**

Borsigstraße 11  
40880 Ratingen, Germany  
T +49 (0) 2102 749 0  
F +49 (0) 2102 749 350

Geschäftsführer/

Managing Directors:  
Frank Spiller  
Bernhard Retka  
Alexandre Norré-Oudard

Registergericht/registered:

Düsseldorf HRB 75554  
USt-Id.-Nr./VAT-No. DE203159652  
Steuer-Nr./TAX-No. 147/5869/0385

*a Bureau Veritas*

*Group Company*

[www.7layers.com](http://www.7layers.com)

## Table of Contents

<b>1 Applied Standards and Test Summary</b>	<b>3</b>
1.1 Applied Standards	3
1.2 FCC-IC Correlation Table	4
1.3 Measurement Summary / Signatures	5
<b>2 Administrative Data</b>	<b>8</b>
2.1 Testing Laboratory	8
2.2 Project Data	8
2.3 Applicant Data	8
2.4 Manufacturer Data	8
<b>3 Test object Data</b>	<b>9</b>
3.1 General EUT Description	9
3.2 EUT Main components	10
3.3 Ancillary Equipment	10
3.4 Auxiliary Equipment	11
3.5 EUT Setups	11
3.6 Operating Modes	12
3.7 Product labelling	12
<b>4 Test Results</b>	<b>13</b>
4.1 AC Conducted Emissions	13
4.2 26 dB Bandwidth	15
4.3 6 dB Bandwidth	17
4.4 99 % Bandwidth	19
4.5 Maximum Conducted Output Power	21
4.6 Peak Power Spectral Density	24
4.7 Undesirable Emissions; General Field Strength Limits	27
4.8 Band Edge	34
<b>5 Test Equipment</b>	<b>36</b>
<b>6 Antenna Factors, Cable Loss and Sample Calculations</b>	<b>40</b>
6.1 LISN R&S ESH3-Z5 (150 kHz – 30 MHz)	40
6.2 Antenna R&S HFH2-Z2 (9 kHz – 30 MHz)	41
6.3 Antenna R&S HL562 (30 MHz – 1 GHz)	42
6.4 Antenna R&S HF907 (1 GHz – 18 GHz)	43
6.5 Antenna EMCO 3160-09 (18 GHz – 26.5 GHz)	44
6.6 Antenna EMCO 3160-10 (26.5 GHz – 40 GHz)	45
<b>7 Setup Drawings</b>	<b>46</b>
<b>8 Measurement Uncertainties</b>	<b>47</b>
<b>9 Photo Report</b>	<b>47</b>

## 1 APPLIED STANDARDS AND TEST SUMMARY

### 1.1 APPLIED STANDARDS

#### **Type of Authorization**

Certification for an Intentional Radiator (Digital Device / Spread Spectrum).

#### **Applicable FCC Rules**

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 2 (10-1-15 Edition) and 15 (10-1-15 Edition). The following subparts are applicable to the results in this test report.

Part 2, Subpart J - Equipment Authorization Procedures, Certification

Part 15, Subpart C – Intentional Radiators

§ 15.201 Equipment authorization requirement

§ 15.207 Conducted limits

§ 15.209 Radiated emission limits; general requirements

Part 15, Subpart E – Unlicensed National Information Infrastructure Devices

§ 15.403 Definitions

§ 15.407 General technical requirements

#### Note:

The tests were selected and performed with reference to the FCC Public Notice "Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E, 789033 D02 General U-NII Test Procedures v02r01, 2017-12-14".

ANSI C63.10-2013 is applied.

FCC ET Docket No. 13-49, FIRST REPORT AND ORDER, April 1, 2014 ("new rules") is applied.

**Summary Test Results:**

**The EUT complied with all performed tests as listed in chapter 1.3 Measurement Summary / Signatures.**

**1.2 FCC-IC CORRELATION TABLE**

**Correlation of measurement requirements for  
UNII / LE-LAN (e.g. WLAN 5 GHz) equipment  
from  
FCC and IC**

**UNII equipment**

<b>Measurement</b>	<b>FCC reference</b>	<b>IC reference</b>
Conducted emissions on AC Mains	§ 15.207	RSS-Gen Issue 4: 8.8
Occupied bandwidth	§ 15.403 (i) (26 dB) / § 15.407 (e) (6 dB)	RSS-247 Issue 2: 6.2.1.1, 6.2.2.1, 6.2.3.1 (99%) RSS-247 Issue 2: 6.2.4.1 (6 dB)
Maximum conducted output power	§ 15.407 (a) (1),(2),(3),(4)	RSS-247 Issue 2: 6.2.1.1, 6.2.2.1, 6.2.3.1, 6.2.4.1
Maximum power spectral density	§ 15.407 (a) (1),(2),(3),(5)	RSS-247 Issue 2: 6.2.1.1, 6.2.2.1, 6.2.3.1, 6.2.4.1
Transmitter undesirable emissions; General Field Strength Limits, Restricted Bands	§ 15.407 (b) § 15.209 (a)	RSS-Gen Issue 4: 6.13/8.9/8.10; RSS-247 Issue 2: 3.3/6.2 6.2.1.2, 6.2.2.2, 6.2.3.2, 6.2.4.2
Frequency stability	§ 15.407 (g)	RSS-Gen Issue 4: 6.11/8.11
Transmit Power Control (TPC) and Dynamic Frequency Selection (DFS)	§ 15.407 (h)	RSS-247 Issue 2: 6.2.2.1, 6.2.3.1, 6.3
Antenna requirement	§ 15.203 / 15.204	RSS-Gen Issue 4: 8.3
Receiver spurious emissions	-	-

### 1.3 MEASUREMENT SUMMARY / SIGNATURES

#### **47 CFR CHAPTER I FCC PART 15 Subpart E §15.407**

#### **FCC §15.207**

AC Conducted Emissions

The measurement was performed according to ANSI C63.10

#### **Final Result**

##### **OP-Mode**

Operating mode

worst case

##### **Setup**

##### **FCC**

##### **IC**

S04\_AA01

Passed

Passed

#### **47 CFR CHAPTER I FCC PART 15 Subpart E §15.407**

#### **FCC §15.31, §15.403 (i)**

26 dB Bandwidth

The measurement was performed according to ANSI C63.10

#### **Final Result**

##### **OP-Mode**

Radio Technology, Operating Frequency, Subband

Carrier only, high, U-NII-3

##### **Setup**

##### **FCC**

##### **IC**

S02\_AA01

Performed

N/A

Carrier only, low, U-NII-3

S02\_AA01

Performed

N/A

Carrier only, mid, U-NII-3

S02\_AA01

Performed

N/A

Carrier and Data, high, U-NII-3

S02\_AA01

Performed

N/A

Carrier and Data, low, U-NII-3

S02\_AA01

Performed

N/A

Carrier and Data, mid, U-NII-3

S02\_AA01

Performed

N/A

#### **47 CFR CHAPTER I FCC PART 15 Subpart E §15.407**

#### **FCC §15.31, §15.407 (e)**

6 dB Bandwidth

The measurement was performed according to ANSI C63.10

#### **Final Result**

##### **OP-Mode**

Radio Technology, Operating Frequency, Subband

Carrier only, high, U-NII-3

##### **Setup**

##### **FCC**

##### **IC**

S02\_AA01

Passed

Passed

Carrier only, low, U-NII-3

S02\_AA01

Passed

Passed

Carrier only, mid, U-NII-3

S02\_AA01

Passed

Passed

Carrier and Data, high, U-NII-3

S02\_AA01

Passed

Passed

Carrier and Data, low, U-NII-3

S02\_AA01

Passed

Passed

Carrier and Data, mid, U-NII-3

S02\_AA01

Passed

Passed

#### **47 CFR CHAPTER I FCC PART 15 Subpart E §15.407**

#### **FCC §15.31, IC RSS 247 Ch. 6.2.x**

99 % Bandwidth

The measurement was performed according to ANSI C63.10

#### **Final Result**

##### **OP-Mode**

Radio Technology, Operating Frequency, Subband

Carrier only, high, U-NII-3

##### **Setup**

##### **FCC**

##### **IC**

S02\_AA01

N/A

Performed

Carrier only, low, U-NII-3

S02\_AA01

N/A

Performed

Carrier only, mid, U-NII-3

S02\_AA01

N/A

Performed

Carrier and Data, high, U-NII-3

S02\_AA01

N/A

Performed

**47 CFR CHAPTER I FCC PART 15 Subpart E**  
**§15.407**
**FCC §15.31, IC RSS 247 Ch.**  
**6.2.x**

99 % Bandwidth

The measurement was performed according to ANSI C63.10

**Final Result**
**OP-Mode**

Radio Technology, Operating Frequency, Subband

Carrier and Data, low, U-NII-3

Setup	FCC	IC
S02_AA01	N/A	Performed
S02_AA01	N/A	Performed

Carrier and Data, mid, U-NII-3

**47 CFR CHAPTER I FCC PART 15 Subpart E**  
**§15.407**
**FCC §15.31, §15.407 (a)(1)**

Maximum Conducted Output Power

The measurement was performed according to ANSI C63.10

**Final Result**
**OP-Mode**

Radio Technology, Operating Frequency, Subband

Carrier only, high, U-NII-3

Setup	FCC	IC
S02_AA01	Passed	Passed

Carrier only, low, U-NII-3

Carrier only, mid, U-NII-3

Carrier and Data, high, U-NII-3

Carrier and Data, low, U-NII-3

Carrier and Data, mid, U-NII-3

**47 CFR CHAPTER I FCC PART 15 Subpart E**  
**§15.407**
**FCC §15.31, §15.407 (a)(1),(5)**

Peak Power Spectral Density

The measurement was performed according to ANSI C63.10

**Final Result**
**OP-Mode**

Radio Technology, Operating Frequency, Subband

Carrier only, high, U-NII-3

Setup	FCC	IC
S02_AA01	Passed	Passed

Carrier only, low, U-NII-3

Carrier only, mid, U-NII-3

Carrier and Data, high, U-NII-3

Carrier and Data, low, U-NII-3

Carrier and Data, mid, U-NII-3

**47 CFR CHAPTER I FCC PART 15 Subpart E**  
**§15.407**
**FCC §15.407 (b), (1),(2),(3),(4); FCC §15.205, §15.209, §15.407 (b) (5),(6)**

Undesirable Emissions; General Field Strength Limits

The measurement was performed according to ANSI C63.10

**Final Result**
**OP-Mode**

Radio Technology, Operating Frequency, Measurement range, Subband

Setup	FCC	IC
S01_AA01	Passed	Passed

Carrier and Data, high, 1GHz - 26GHz, U-NII-3

Carrier and Data, high, 26GHz - 40GHz, U-NII-3

Carrier and Data, high, 30MHz - 1GHz, U-NII-3

Carrier and Data, low, 1GHz - 26GHz, U-NII-3

Carrier and Data, low, 26GHz - 40GHz, U-NII-3

**47 CFR CHAPTER I FCC PART 15 Subpart E**  
**§15.407**
**FCC §15.407 (b),  
 (1),(2),(3),(4); FCC §15.205,  
 §15.209, §15.407 (b) (5),(6)**

 Undesirable Emissions; General Field Strength Limits  
 The measurement was performed according to ANSI C63.10

**Final Result**
**OP-Mode**

 Radio Technology, Operating Frequency, Measurement range,  
 Subband

**Setup**
**FCC**
**IC**

Carrier and Data, low, 30MHz - 1GHz, U-NII-3	S01_AA01	Passed	Passed
Carrier and Data, mid, 1GHz - 26GHz, U-NII-3	S01_AA01	Passed	Passed
Carrier and Data, mid, 26GHz - 40GHz, U-NII-3	S01_AA01	Passed	Passed
Carrier and Data, mid, 30MHz - 1GHz, U-NII-3	S01_AA01	Passed	Passed
Carrier and Data, mid, 9kHz - 30MHz, U-NII-3	S01_AA01	Passed	Passed

**47 CFR CHAPTER I FCC PART 15 Subpart E**  
**§15.407**
**FCC §15.407 (b),  
 (1),(2),(3),(4)**

Band Edge

The measurement was performed according to ANSI C63.10

**Final Result**
**OP-Mode**

Radio Technology, Operating Frequency, Subband

**Setup**
**FCC**
**IC**

Carrier and Data, high, U-NII-3	S01_AA01	Passed	Passed
Carrier and Data, low, U-NII-3	S01_AA01	Passed	Passed

N/A: Not applicable

N/P: Not performed

**Revision History**

Report version control			
Version	Release date	Change Description	Version validity
initial	2018-07-11	--	invalid
rev1	2018-08-09	Changed FCC ID on front page	invalid
rev2	2018-08-09	Changed Product Name on front page	valid


 7 layers GmbH, Borsigstr. 11  
 40880 Ratingen, Germany  
 Phone +49 (0)2102 749 0

 (responsible for accreditation scope)  
 Dipl.-Ing. Daniel Gall

 (responsible for testing and report)  
 B.Sc. Jens Dörwald

## 2 ADMINISTRATIVE DATA

### 2.1 TESTING LABORATORY

Company Name: 7layers GmbH  
Address: Borsigstr. 11  
40880 Ratingen  
Germany

This facility has been fully described in a report submitted to the ISED and accepted under the registration number: Site# 3699A-1.

The test facility is also accredited by the following accreditation organisation:

Laboratory accreditation no: DAkkS D-PL-12140-01-00

FCC Designation Number: DE0015

FCC Test Firm Registration: 929146

Responsible for accreditation scope: Dipl.-Ing. Daniel Gall

Report Template Version: 2018-01-10

### 2.2 PROJECT DATA

Responsible for testing and report: B.Sc. Jens Dörwald

Employees who performed the tests: documented internally at 7Layers

Date of Report: 2018-08-09

Testing Period: 2018-06-07 to 2018-06-18

### 2.3 APPLICANT DATA

Company Name: Norbit Technology

Address: Stiklestadveien 1  
7041 Trondheim  
Norway

Contact Person: Mr. Martin Kirknes

### 2.4 MANUFACTURER DATA

Company Name: Please see applicant data

Address:

Contact Person:

### 3 TEST OBJECT DATA

#### 3.1 GENERAL EUT DESCRIPTION

Kind of Device product description	Transponder Tag System working in the U-NII band 3
Product name	Transponder Tag System
Type	20050-1 Link Master 20051-1 Link Client (Tag)
<b>Declared EUT data by the supplier</b>	
Voltage Type	DC
Voltage Level	12 V
Tested Modulation Type	FM modulation (Carrier only and with Data traffic)
General product description	The EUT is a tagging system working in the U-NII 3 band with a 5 MHz channel Bandwidth.
Specific product description	The EUT uses 4 channels starting at 5797.5 MHz up to 5812.5 MHz with a channel separation of 5 MHz
Ports of the device	Link Master: RS 485 (not used in end product); shielded twisted pair 1.4m RS 232; shielded 1.8m DC; unshielded 2m USB; shielded 1m Enclosure LAN RJ45; shielded CAT.6 3m  Link Client: Enclosure
Antenna Link Master	Integral, 16 dBi gain
Tested Datarates	250kBit/s
Special software used for testing	The modes were set by commands set in the EUTs software by terminal software of a remote mobile computer.

**The main components of the EUT are listed and described in chapter 3.2 EUT Main components.**

### 3.2 EUT MAIN COMPONENTS

Sample Name	Sample Code	Description
EUTA	DE1306000aa01	Interrogator
Sample Parameter	Value	
Serial No.	0001	
HW Version	20050-1 Link Master	
SW Version	81056 Combiinterrogator	
Comment		
Integral Antenna	16 dBi gain	

Sample Name	Sample Code	Description
EUTB	DE1306000bb01	Passive Tag
Sample Parameter	Value	
Serial No.	272 [P]	
HW Version	20051-1 Link Client	
SW Version	80102 application program	
Comment		

NOTE: The short description is used to simplify the identification of the EUT in this test report.

### 3.3 ANCILLARY EQUIPMENT

For the purposes of this test report, ancillary equipment is defined as equipment which is used in conjunction with the EUT to provide operational and control features to the EUT. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Ancillary Equipment can influence the test results.

Device	Details (Manufacturer, Type Model, OUT Code)	Description
-	-	-

### 3.4 AUXILIARY EQUIPMENT

For the purposes of this test report, auxiliary equipment is defined as equipment which is used temporarily to enable operational and control features especially used for the tests of the EUT which is not used during normal operation or equipment that is used during the tests in combination with the EUT but is not subject of this test report. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Auxiliary Equipment can influence the test results.

Device	Details (Manufacturer, HW, SW, S/N)	Description
AUX1	Fujitsu Ltd., -, -, 05335621F	AC Adapter (for Laptop RE 02) Model SEB100P2-19.0
AUX2	PONTIS Messtechnik GmbH, -, -, 182-018	Fibre optic link Transceiver (Aux)
AUX3	PONTIS Messtechnik GmbH, -, -, 181-018	Fibre optic link Satellite (Aux)
AUX4	Fujitsu Ltd., -, -, DSCM004672	Laptop RE 02 (Fujitsu) Lifebook E series E782
AUX5	LG, -, -, 412WAPL0U560	TFT Display EMC TFT 5 L17MB-P
AUX6	Conrad, -, -, -	Laboratory Power Supply

### 3.5 EUT SETUPS

This chapter describes the combination of EUTs and equipment used for testing. The rationale for selecting the EUTs, ancillary and auxiliary equipment and interconnecting cables, is to test a representative configuration meeting the requirements of the referenced standards.

Setup	Combination of EUTs	Description and Rationale
S02_AA01	EUTA, AUX1, AUX4	Conducted Setup
S04_AA01	EUTA, EUT B, AUX1, AUX 4 to 6	Setup Conducted Emissions AC
S01_AA01	EUTA, EUT B, AUX 1 to 5	Radiated Setup

### 3.6 OPERATING MODES

This chapter describes the operating modes of the EUTs used for testing.

#### 3.6.1 TEST CHANNELS

Nom. BW	U-NII-Subband 3 5725 - 5850 MHz		
5 MHz	low	mid	high
Channel No.	1	2	4
MHz	5797.5	5802.5	5812.5

#### 3.6.2 TESTED MODES

“Carrier only”: The FM modulated carrier of the link master is active that is supplying the tag (link client) with power.

“Carrier and Data”: Data is send to the tag in addition to the carrier providing the power.

### 3.7 PRODUCT LABELLING

#### 3.7.1 FCC ID LABEL

Please refer to the documentation of the applicant.

#### 3.7.2 LOCATION OF THE LABEL ON THE EUT

Please refer to the documentation of the applicant.

## 4 TEST RESULTS

### 4.1 AC CONDUCTED EMISSIONS

Standard **FCC Part 15 Subpart E**

**The test was performed according to:**

ANSI C63.10

#### 4.1.1 TEST DESCRIPTION

The test set-up was made in accordance to the general provisions of ANSI C 63.10. The Equipment Under Test (EUT) was setup in a shielded room to perform the conducted emissions measurements in a typical installation configuration. The EUT was powered from 50 $\mu$ H || 50 Ohm Line Impedance Stabilization Network (LISN). The LISN's unused connections were terminated with 50 Ohm loads.

The measurement procedure consists of two steps. It is implemented into the EMI test software EMC-32 from R&S.

#### **Step 1: Preliminary scan**

Intention of this step is, to determine the conducted EMI-profile of the EUT.

EMI receiver settings:

- Detector: Peak – Maxhold & Average
- Frequency range: 150 kHz – 30 MHz
- Frequency steps: 2.5 kHz
- IF-Bandwidth: 9 kHz
- Measuring time / Frequency step: 100 ms (FFT-based)
- Measurement on phase + neutral lines of the power cords

On basis of this preliminary scan the highest amplitudes and the corresponding frequencies relative to the limit are identified. Emissions above the limit and emissions which are in the 10 dB range below the limit are considered.

#### **Step 2: Final measurement**

Intention of this step is, to determine the highest emissions with the settings defined in the test specification for the frequencies identified in step 1.

EMI receiver settings:

- Detector: Quasi-Peak
- IF Bandwidth: 9 kHz
- Measuring time: 1 s / frequency

At each frequency determined in step 1, four measurements are performed in the following combinations:

- 1) Neutral lead - reference ground (PE grounded)
- 2) Phase lead - reference ground (PE grounded)
- 3) Neutral lead - reference ground (PE floating)
- 4) Phase lead - reference ground (PE floating)

The highest value is reported.

#### 4.1.2 TEST REQUIREMENTS / LIMITS

FCC Part 15, Subpart C, §15.207

Frequency (MHz)	QP Limits (dB $\mu$ V)	AV Limits (dB $\mu$ V)
0.15 - 0.5	66 - 56	56 - 46
0.5 - 5	56	46
5 - 30	60	50

#### 4.1.3 TEST PROTOCOL


Temperature: 26 °C  
 Air Pressure: 1015 hPa  
 Humidity: 43 %

Power line	PE	Frequency [MHz]	Measured value QP [dB $\mu$ V]	Measured value AV [dB $\mu$ V]	Limit [dB $\mu$ V]	Margin [dB]
L1	GND	18.1	41.0	-	60.0	19.0

Remark: Please see next sub-clause for the measurement plot.

#### 4.1.4 MEASUREMENT PLOT

Carrier and Data Traffic active

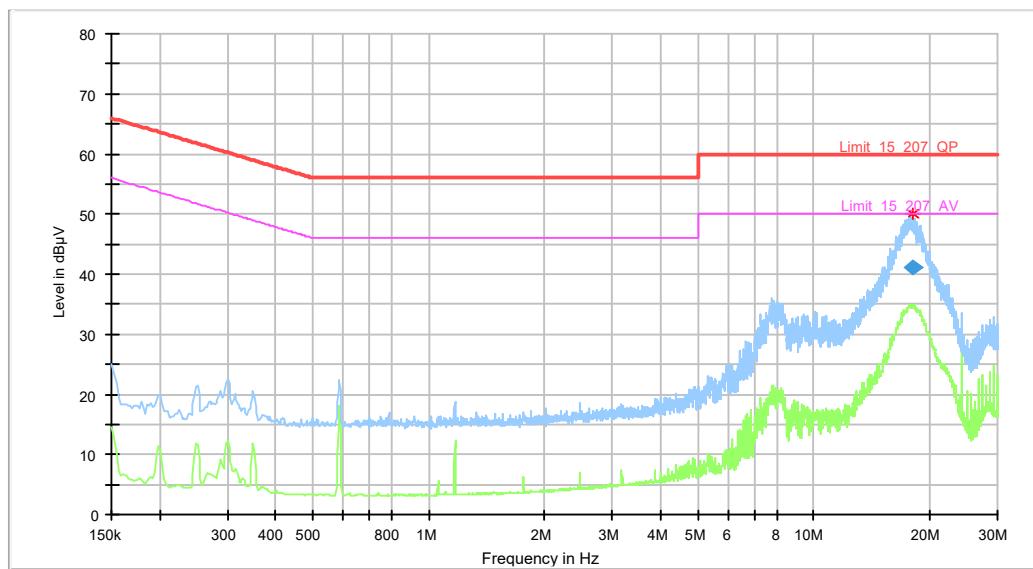

#### Final Result

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	CAverage (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	PE	Corr. (dB)	Corr. (dB)
18.147750	41.04	---	60.00	18.96	1000.0	9.000	L1	GND	10.9	---

#### 4.1.5 TEST EQUIPMENT USED

- Conducted Emissions FCC

## 4.2 26 DB BANDWIDTH

Standard **FCC Part 15 Subpart E**

**The test was performed according to:**

ANSI C63.10

### 4.2.1 TEST DESCRIPTION

The Equipment Under Test (EUT) was set up to perform the occupied bandwidth measurements.

The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.

The results recorded were measured with the modulation which produce the worst-case (widest) emission bandwidth.

The EUT was connected to spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Resolution Bandwidth (RBW): 5 / 20 kHz (carrier / carrier + data)
- Video Bandwidth (VBW): > RBW
- Span: 1 / 4 MHz (carrier / carrier + data)
- Trace: Maxhold
- Sweeps: till stable, at least 200
- Sweptime: coupled
- Detector: Max Peak

### 4.2.2 TEST REQUIREMENTS / LIMITS

FCC Part 15, Subpart E, §15.403 (i)

There exist no applicable limits for the U-NII subbands 1, 2A and 2C. The test was performed to determine the limits for the "Maximum Conducted Output Power" test case. Therefore no result was applied.

#### 4.2.3 TEST PROTOCOL


Ambient temperature: 25 °C  
 Air Pressure: 1007 hPa  
 Humidity: 42 %

Mode	Operating Frequency	Subband	26 dB Bandwidth [MHz]
Carrier only	low	U-NII-3	0.63
Carrier only	mid	U-NII-3	0.62
Carrier only	high	U-NII-3	0.63
Carrier and Data	low	U-NII-3	1.90
Carrier and Data	mid	U-NII-3	1.90
Carrier and Data	high	U-NII-3	1.90

Remark: Please see next sub-clause for the measurement plot.

#### 4.2.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

Mode = Carrier and Data, Operating Frequency = mid, Subband = U-NII-3  
 (S02\_AA01)

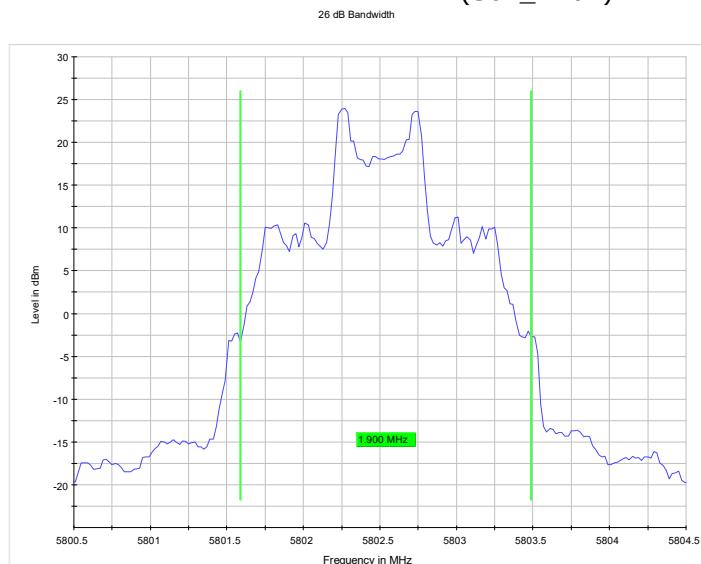

Setting	Instrument Value
Start Frequency	5.80050 GHz
Stop Frequency	5.80450 GHz
Span	4.000 MHz
RBW	20.000 kHz
VBW	100.000 kHz
SweepPoints	200
Sweptime	94.810 µs
Reference Level	10.000 dBm
Attenuation	30.000 dB
Detector	MaxPeak
SweepCount	200
Filter	3 dB
Trace Mode	Max Hold
Sweptype	FFT
Preamp	off
Stablemode	Trace
Stablevalue	0.30 dB
Run	39 / max. 150
Stable	5 / 5
Max Stable Difference	0.00 dB

#### 4.2.5 TEST EQUIPMENT USED

- R&S TS8997

### 4.3 6 DB BANDWIDTH

Standard **FCC Part 15 Subpart E**

**The test was performed according to:**

ANSI C63.10

#### 4.3.1 TEST DESCRIPTION

The Equipment Under Test (EUT) was setup in a shielded room to perform the occupied bandwidth measurements.

The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.

The results recorded were measured with the modulation which produce the worst-case (smallest) emission bandwidth.

The EUT was connected to spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Resolution Bandwidth (RBW): 100 kHz
- Video Bandwidth (VBW): 300 kHz
- Span: 1 / 4 MHz (carrier / carrier + data)
- Trace: Maxhold
- Sweeps: till stable, at least 200
- Sweptime: coupled
- Detector: Peak

#### 4.3.2 TEST REQUIREMENTS / LIMITS

FCC Part 15, Subpart E, §15.407 (e)

Within the 5.725-5.850 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

#### 4.3.3 TEST PROTOCOL


Ambient temperature: 25 °C  
 Air Pressure: 1007 hPa  
 Humidity: 42 %

Mode	Operating Frequency	6 dB Bandwidth [MHz]	Limit [MHz]	Margin [MHz]	Min. 6 dB Frequency [MHz]	Max. 6 dB Frequency [MHz]
Carrier only	low	0.684	0.5	0.184	5797.163	5797.847
Carrier only	mid	0.664	0.5	0.164	5802.173	5802.837
Carrier only	high	0.664	0.5	0.164	5812.173	5812.837
Carrier and Data	low	0.712	0.5	0.212	5797.144	5797.856
Carrier and Data	mid	0.712	0.5	0.212	5802.144	5802.856
Carrier and Data	high	0.712	0.5	0.212	5812.144	5812.856

Remark: Please see next sub-clause for the measurement plot.

#### 4.3.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

Mode = Carrier only, Operating Frequency = mid, Subband = U-NII-3  
 (S02\_AA01)

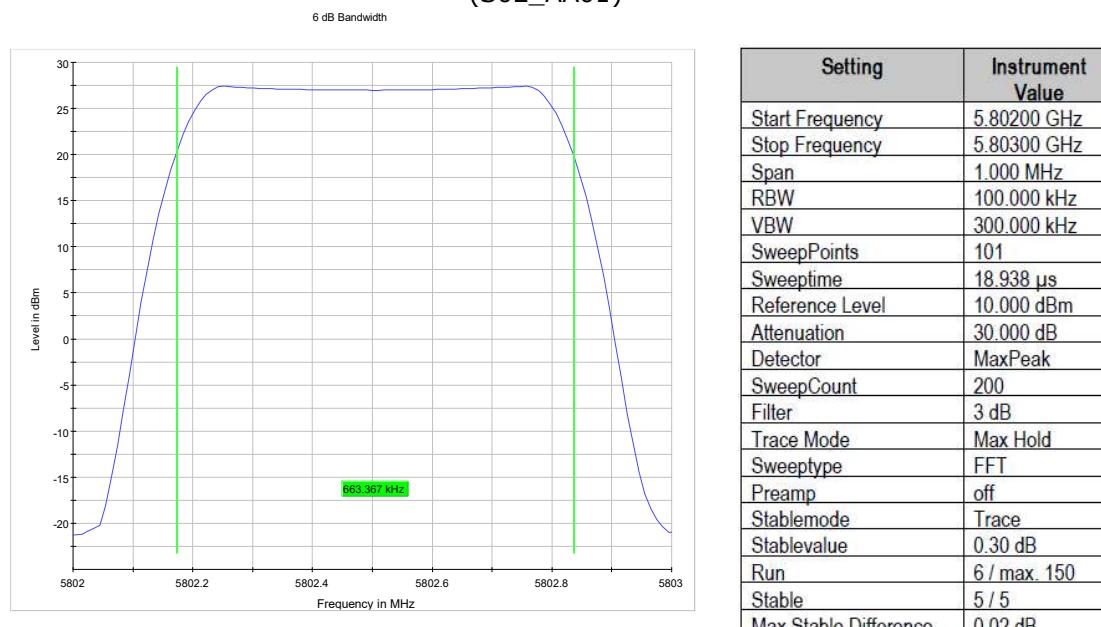

#### 4.3.5 TEST EQUIPMENT USED

- R&S TS8997

#### 4.4 99 % BANDWIDTH

Standard **FCC Part 15 Subpart E**

**The test was performed according to:**

ANSI C63.10

##### 4.4.1 TEST DESCRIPTION

The Equipment Under Test (EUT) was set up to perform the occupied bandwidth measurements.

The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.

The results recorded were measured with the modulation which produce the worst-case (widest) emission bandwidth.

The EUT was connected to spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Resolution Bandwidth (RBW): approx.  $\geq 1\%$  of the span, but not below
- Video Bandwidth (VBW):  $\geq 3$  times the RBW
- Span: 1.5 / 3 MHz (carrier / carrier + data)
- Trace: Maxhold
- Sweeps: till stable
- Sweptime: coupled
- Detector: Peak

The 99 % measurement function of the spectrum analyser function was used to determine the 99 % bandwidth.

##### 4.4.2 TEST REQUIREMENTS / LIMITS

No applicable limit:

#### 4.4.3 TEST PROTOCOL


Ambient temperature: 25 °C  
 Air Pressure: 1007 hPa  
 Humidity: 42 %

Mode	Operating Frequency	Subband	99% Bandwidth [MHz]
Carrier only	low	U-NII-3	0.53
Carrier only	mid	U-NII-3	0.54
Carrier only	high	U-NII-3	0.55
Carrier and Data	low	U-NII-3	1.53
Carrier and Data	mid	U-NII-3	1.53
Carrier and Data	high	U-NII-3	1.50

Remark: Please see next sub-clause for the measurement plot.

#### 4.4.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

Radio Technology = Carrier and Data, Operating Frequency = mid, Subband = U-NII-3  
 (S02\_AA01)

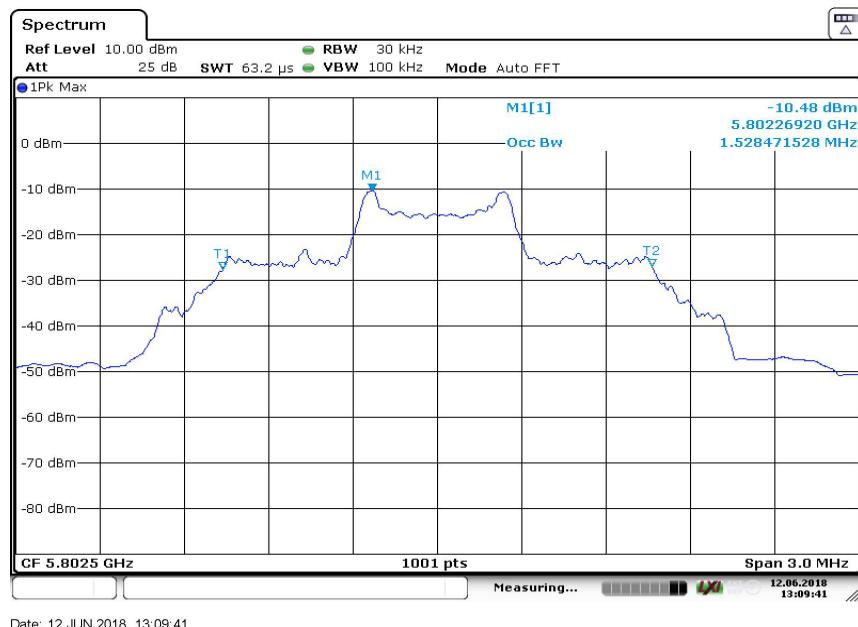

#### 4.4.5 TEST EQUIPMENT USED

- R&S TS8997

## 4.5 MAXIMUM CONDUCTED OUTPUT POWER

Standard **FCC Part 15 Subpart E**

**The test was performed according to:**  
ANSI C63.10

### 4.5.1 TEST DESCRIPTION

The Equipment Under Test (EUT) was set up to perform the output power measurements.

The EUT was connected to a power meter via a short coax cable with a known loss.

Note:

The measurement was performed using a gated average power meter according FCC Public Note "Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E, 789033 D02", method **PM-G**.

### 4.5.2 TEST REQUIREMENTS / LIMITS

#### **A) FCC**

For systems using digital modulation techniques in the 5.15 – 5.25 GHz bands:

§15.407 (a) (1)

Limit: 50 mW (17 dBm) or  $4 \text{ dBm} + 10 \log (26 \text{ dB bandwidth/MHz})$  whatever is the lesser.

FCC ET Docket No. 13-49, FIRST REPORT AND ORDER, April 1, 2014 ("new rules"):

§15.407 (a) (1) (i): Outdoor access point:

Limit: 1 W (30 dBm) provided the maximum antenna gain does not exceed 6 dBi.

The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

§15.407 (a) (1) (ii): Indoor access point:

Limit: 1 W (30 dBm) provided the maximum antenna gain does not exceed 6 dBi.

§15.407 (a) (1) (iv): Mobile and portable client devices:

Limit: 250 mW (24 dBm) provided the maximum antenna gain does not exceed 6 dBi.

For systems using digital modulation techniques in the 5.25 – 5.35 GHz and 5.47 – 5.725 GHz bands:

§15.407 (a) (2)

Limit: 250 mW (24 dBm) or  $11 \text{ dBm} + 10 \log (26 \text{ dB bandwidth/MHz})$  whatever is the lesser.

For systems using digital modulation techniques in the 5.725 – 5.850 GHz bands:

§15.407 (a) (3)

Limit: 1 W (30 dBm) or  $17 \text{ dBm} + 10 \log (26 \text{ dB bandwidth/MHz})$  whatever is the lesser.

FCC ET Docket No. 13-49, FIRST REPORT AND ORDER, April 1, 2014 ("new rules"):

§15.407 (a) (3):

Limit: 1 W (30 dBm).

§15.407 (a) (4):

The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

**B) IC**

Different frequency bands and limits apply, as compared to the FCC requirements.

RSS-247, 6.2.1 (1), Band 5150-5250 MHz, indoor operation only:

Limit (e.i.r.p.): 200 mW (23 dBm) or  $10 + 10 \log_{10} B$  [dBm], whichever power is less.  
B is the 99% emission bandwidth in MHz.

RSS-247, 6.2.2 (1), Band 5250-5350 MHz:

Limits:

Maximum conducted Power: 250 mW (24 dBm) or  $11 + 10 \log_{10} B$  [dBm], whichever power is less.

e.i.r.p.: 1.0 W (30 dBm) or  $17 + 10 \log_{10} B$  [dBm], whichever power is less.

Note: For EUTs operating at a higher e.i.r.p. than 200 mW (23 dBm), compliance with the e.i.r.p. elevation mask is required.

RSS-247, 6.2.3 (1), Bands 5470-5600 MHz and 5650-5725 MHz:

Limits:

Maximum conducted Power: 250 mW (24 dBm) or  $11 + 10 \log_{10} B$  [dBm], whichever power is less.

e.i.r.p.: 1.0 W (30 dBm) or  $17 + 10 \log_{10} B$  [dBm], whichever power is less.

RSS-247, 6.2.4 (1), Band 5725-5825 MHz:

Limits:

Maximum conducted Power: 1W (30 dBm) or  $17 + 10 \log_{10} B$  [dBm], whichever power is less.

e.i.r.p.: 4.0 W (36 dBm) or  $23 + 10 \log_{10} B$  [dBm], whichever power is less.

All frequency bands: B is the 99% emission bandwidth in MHz.

#### 4.5.3 TEST PROTOCOL

Ambient temperature: 25 °C  
 Air Pressure: 1007 hPa  
 Humidity: 42 %

Tagging System Interrogator Transmitting Constant Carrier

U-NII-Subband	Ch. No.	Freq. [MHz]	Cond. Power [dBm]	EIRP [dBm]	FCC Cond. Limit [dBm]	Margin [dB]	IC Cond. Limit [dBm]	Margin [dB]	EIRP Limit [dBm]	Margin [dB]
3	1	5797.5	11.5	27.5	20.0	8.5	20.0	8.5	36.0	8.5
	2	5802.5	11.3	27.3	20.0	8.7	20.0	8.7	36.0	8.7
	4	5812.5	11.4	27.4	20.0	8.6	20.0	8.6	36.0	8.6

Tagging System Interrogator Transmitting Constant Carrier and Data

U-NII-Subband	Ch. No.	Freq. [MHz]	Cond. Power [dBm]	EIRP [dBm]	FCC Cond. Limit [dBm]	Margin [dB]	IC Cond. Limit [dBm]	Margin [dB]	EIRP Limit [dBm]	Margin [dB]
3	1	5797.5	11.0	27.0	20.0	9.0	20.0	9.0	36.0	9.0
	2	5802.5	11.0	27.0	20.0	9.0	20.0	9.0	36.0	9.0
	4	5812.5	11.1	27.1	20.0	8.9	20.0	8.9	36.0	8.9

Remark: None.

#### 4.5.4 TEST EQUIPMENT USED

- R&S TS8997

## 4.6 PEAK POWER SPECTRAL DENSITY

Standard **FCC Part 15 Subpart E**

**The test was performed according to:**

ANSI C63.10

### 4.6.1 TEST DESCRIPTION

The Equipment Under Test (EUT) was set up in a shielded room to perform the Maximum Power Spectral Density measurements.

The results recorded were measured with the modulation which produces the worst-case (highest) output power.

The EUT was connected to the spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Resolution Bandwidth (RBW): 500 kHz
- Video Bandwidth (VBW): 2 MHz
- Trace: Average, RMS power averaging mode
- Sweeps: 101
- Sweeptime: 2s
- Detector: RMS

Note:

The analyser settings are according FCC Public Note "Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E, 789033 D02", method **SA-1**.

### 4.6.2 TEST REQUIREMENTS / LIMITS

#### **A) FCC**

FCC Part 15, Subpart E, §15.407 (a) (1)

For systems using digital modulation techniques in the 5.15 – 5.25 GHz bands:

(i) and (ii), outdoor and indoor access points: Limit: 17 dBm/MHz.

(iv), mobile and portable client devices: Limit: 11 dBm/MHz.

FCC Part 15, Subpart E, §15.407 (a) (2)

For systems using digital modulation techniques in the 5.25 – 5.35 GHz and 5.47 – 5.725 GHz bands:

Limit: 11 dBm/MHz.

FCC Part 15, Subpart E, §15.407 (a) (3)

For systems using digital modulation techniques in the 5.725 – 5.850 GHz bands:

Limit: 30 dBm/500 kHz.

Note: The limit will be also fulfilled when measuring at any bandwidth greater than 500 kHz.

This applies to signals where the maximum conducted output power was measured at a bandwidth exceeding 500 kHz and which fulfil that limit of 30 dBm.

#### **B) IC**

Different frequency bands and limits apply, as compared to the FCC requirements.

RSS-247, 6.2.1 (1), Band 5150-5250 MHz, indoor operation only:  
Limit (e.i.r.p.): 10 dBm/MHz.

RSS-247, 6.2.2 (1), Band 5250-5350 MHz:  
Limit: 11 dBm/MHz.

RSS-247, 6.2.3 (1), Bands 5470-5600 MHz and 5650-5725 MHz:  
Limit: 11 dBm/MHz.

RSS-247, 6.2.4 (1), Band 5725-5850 MHz:  
Limit: 30 dBm/500 kHz.

#### 4.6.3 TEST PROTOCOL

Ambient temperature: 25 °C  
 Air Pressure: 1007 hPa

Humidity: 42 %

Tagging System Interrogator Transmitting Constant Carrier

U-NII-Subband	Ch. No.	Freq. [MHz]	MPSD [dBm/MHz]	FCC Limit [dBm/MHz]	Margin [dB]	IC Limit [dBm/MHz]	Margin [dB]
3	1	5797.5	10.2	20.0	9.8	20.0	9.8
	2	5802.5	10.1	20.0	9.9	20.0	9.9
	4	5812.5	10.2	20.0	9.8	20.0	9.8


Tagging System Interrogator Transmitting Constant Carrier and Data

U-NII-Subband	Ch. No.	Freq. [MHz]	MPSD [dBm/MHz]	FCC Limit [dBm/MHz]	Margin [dB]	IC Limit [dBm/MHz]	Margin [dB]
3	1	5797.5	9.9	20.0	10.1	20.0	10.1
	2	5802.5	9.9	20.0	10.1	20.0	10.1
	4	5812.5	9.9	20.0	10.1	20.0	10.1

Remark: Please see next sub-clause for the measurement plot.

#### 4.6.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

Radio Technology = Carrier only, Operating Frequency = low, Subband = U-NII-3 (S02\_AA01)

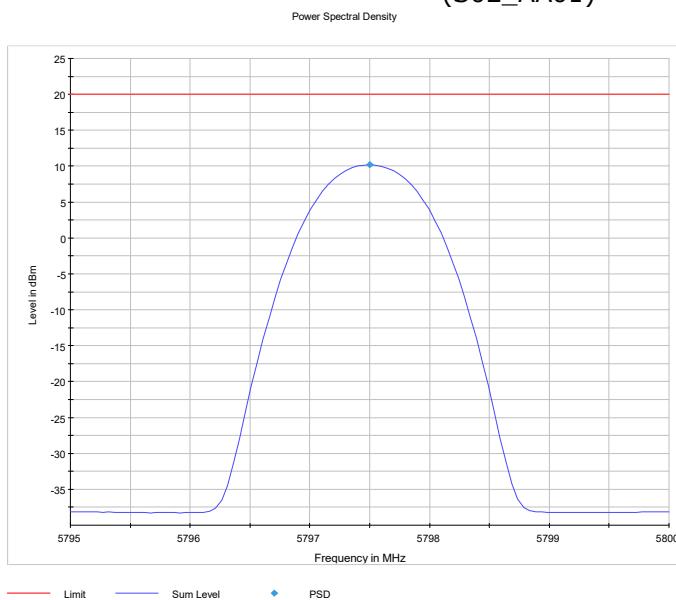

Setting	Instrument Value
Start Frequency	5.79725 GHz
Stop Frequency	5.79775 GHz
Span	500.000 kHz
RBW	500.000 kHz
VBW	2.000 MHz
SweepPoints	101
Sweptime	2.020 s
Reference Level	10.000 dBm
Attenuation	30.000 dB
Detector	RMS
SweepCount	3
Filter	3 dB
Trace Mode	Max Hold
Sweeptype	Sweep
Preamp	off
Stablemode	Trace
Stablevalue	0.30 dB
Run	4 / max. 15
Stable	3 / 3
Max Stable Difference	0.00 dB

#### 4.6.5 TEST EQUIPMENT USED

- R&S TS8997

## 4.7 UNDESIRABLE EMISSIONS; GENERAL FIELD STRENGTH LIMITS

Standard **FCC Part 15 Subpart E**

**The test was performed according to:**

ANSI C63.10

### 4.7.1 TEST DESCRIPTION

The test set-up was made in accordance to the general provisions of ANSI C63.10 in a typical installation configuration. The Equipment Under Test (EUT) was set up on a non-conductive table 1.0 x 2.0 m<sup>2</sup> in the semi-anechoic chamber. The influence of the EUT support table that is used between 30–1000 MHz was evaluated.

The measurement procedure is implemented into the EMI test software EMC32 from R&S. Exploratory tests are performed at 3 orthogonal axes to determine the worst-case orientation of a body-worn or handheld EUT. The final test on all kind of EUTs is also performed at 3 axes. A pre-check is performed while the EUT is powered from a DC power source.

#### **1. Measurement up to 30 MHz**

The Loop antenna HFH2-Z2 is used.

##### **Step 1:** pre measurement

- Anechoic chamber
- Antenna distance: 3 m
- Detector: Peak-Maxhold
- Frequency range: 0.009 - 0.15 MHz and 0.15 – 30 MHz
- Frequency steps: 0.05 kHz and 2.25 kHz
- IF-Bandwidth: 0.2 kHz and 9 kHz
- Measuring time / Frequency step: 100 ms (FFT-based)

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

##### **Step 2:** final measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is to find the maximum emission level.

- Open area test side
- Antenna distance: according to the Standard
- Detector: Quasi-Peak
- Frequency range: 0.009 – 30 MHz
- Frequency steps: measurement at frequencies detected in step 1
- IF-Bandwidth: 0.2 - 10 kHz
- Measuring time / Frequency step: 1 s

#### **2. Measurement above 30 MHz and up to 1 GHz**

##### **Step 1:** Preliminary scan

This is a preliminary test to identify the highest amplitudes relative to the limit.

Settings for step 1:

- Antenna distance: 3 m
- Detector: Peak-Maxhold / Quasipeak (FFT-based)
- Frequency range: 30 – 1000 MHz
- Frequency steps: 30 kHz
- IF-Bandwidth: 120 kHz
- Measuring time / Frequency step: 100 ms

- Turntable angle range:  $-180^\circ$  to  $90^\circ$
- Turntable step size:  $90^\circ$
- Height variation range: 1 – 3 m
- Height variation step size: 2 m
- Polarisation: Horizontal + Vertical

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

#### **Step 2:** Adjustment measurement

In this step the accuracy of the turntable azimuth and antenna height will be improved. This is necessary to find out the maximum value of every frequency.

For each frequency, which was determined the turntable azimuth and antenna height will be adjusted. The turntable azimuth will slowly vary by  $\pm 45^\circ$  around this value. During this action, the value of emission is continuously measured. The turntable azimuth at the highest emission will be recorded and adjusted. In this position, the antenna height will also slowly vary by  $\pm 100$  cm around the antenna height determined. During this action, the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range:  $\pm 45^\circ$  around the determined value
- Height variation range:  $\pm 100$  cm around the determined value
- Antenna Polarisation: max. value determined in step 1

#### **Step 3:** Final measurement with QP detector

With the settings determined in step 3, the final measurement will be performed:

EMI receiver settings for step 4:

- Detector: Quasi-Peak (< 1 GHz)
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 1 s

After the measurement a plot will be generated which contains a diagram with the results of the preliminary scan and a chart with the frequencies and values of the results of the final measurement.

### **3. Measurement above 1 GHz**

The following modifications apply to the measurement procedure for the frequency range above 1 GHz:

#### **Step 1:**

The Equipment Under Test (EUT) was set up on a non-conductive support (tilt device) at 1.5 m height in the fully-anechoic chamber.

All steps were performed with one height (1.5 m) of the receiving antenna only.

The EUT is turned during the preliminary measurement across the elevation axis, with a step size of  $90^\circ$ .

The turn table step size (azimuth angle) for the preliminary measurement is  $45^\circ$ .

Above 26 GHz the measurement distance is reduced to 1 m.

#### **Step 2:**

Due to the fact, that in this frequency range the test is performed in a fully anechoic room, the height scan of the receiving antenna instep 2 is omitted. Instead of this, a maximum search with a step size  $\pm 45^\circ$  for the elevation axis is performed.

The turn table azimuth will slowly vary by  $\pm 22.5^\circ$ .

The elevation angle will slowly vary by  $\pm 45^\circ$

EMI receiver settings (for all steps):

- Detector: Peak, Average
- IF Bandwidth = 1 MHz

**Step 3:**

Spectrum analyser settings for step 3:

- Detector: Peak / Average
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 1 MHz
- Measuring time: 1 s

#### 4.7.2 TEST REQUIREMENTS / LIMITS

##### **A) FCC**

FCC Part 15 Subpart E, §15.407 (b)(1)

For transmitters operating in the 5150–5250 MHz band:

Limit: -27 dBm/MHz EIRP outside of the band 5150–5350 MHz.

FCC Part 15 Subpart E, §15.407 (b)(2)

For transmitters operating in the 5250–5350 MHz band:

Limit: -27 dBm/MHz EIRP outside of the band 5150–5350 MHz.

FCC Part 15 Subpart E, §15.407 (b)(3)

For transmitters operating in the 5470–5725 MHz band:

Limit: -27 dBm/MHz EIRP outside of the band 5470–5725 MHz.

FCC Part 15 Subpart E, §15.407 (b)(4)

For transmitters operating in the 5725–5850 MHz band:

Limit: -27 dBm/MHz EIRP outside of the band 5715–5860 MHz and additionally

Limit: -17 dBm/MHz EIRP within the frequency ranges 5715–5725 and 5850–5860 MHz.

##### **B) IC**

Different frequency bands and limits apply, as compared to the FCC requirements.

RSS-247, 6.2.1 (2), Emissions outside the band 5150–5250 MHz, indoor operation only:

Limit: -27 dBm/MHz EIRP outside of the band 5150–5250 MHz.

RSS-247, 6.2.2 (2), Emissions outside the band 5250–5350 MHz:

Limit: -27 dBm/MHz EIRP outside of the band 5250–5350 MHz.

RSS-247, 6.2.3 (2), Emissions outside the bands 5470–5600 MHz and 5650–5725 MHz:

Limit: -27 dBm/MHz EIRP outside of the band 5470–5725 MHz.

Note: No operation is permitted for the frequency range 5600–5650 MHz.

RSS-247, 6.2.4 (2), Emissions outside the band 5725–5825 MHz:

Limit: -27 dBm/MHz EIRP outside of the band 5715–5835 MHz and additionally

Limit: -17 dBm/MHz EIRP within the frequency ranges 5715–5725 and 5825–5835 MHz.

##### **C) FCC & IC**

FCC Part 15 Subpart E, §15.405

The provisions of §§ 15.203 and 15.205 are included.

**§15.407 (b)(6)**

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209.

**§15.407 (b)(7)**

The provisions of §15.205 apply to intentional radiators operating under this section

FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

Frequency in MHz	Limit ( $\mu$ V/m)	Measurement distance (m)	Limits ( $\text{dB}\mu$ V/m)
0.009 – 0.49	2400/F(kHz)@300m	3	(48.5 – 13.8)@300m
0.49 – 1.705	24000/F(kHz)@30m	3	(33.8 – 23.0)@30m
1.705 – 30	30@30m	3	29.5@30m

The measured values are corrected with an inverse linear distance extrapolation factor (40 dB/decade) according FCC 15.31 (2).

Frequency in MHz	Limit ( $\mu$ V/m)	Measurement distance (m)	Limits ( $\text{dB}\mu$ V/m)
30 – 88	100@3m	3	40.0@3m
88 – 216	150@3m	3	43.5@3m
216 – 960	200@3m	3	46.0@3m
960 – 26000	500@3m	3	54.0@3m
26000 – 40000	500@3m	1	54.0@3m

The measured values above 26 GHz are corrected with an inverse linear distance extrapolation factor (20 dB/decade).

§15.35(b) ..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor:

- Limit ( $\text{dB}\mu$ V/m) =  $20 \log (\text{Limit} (\mu\text{V}/\text{m})/1\mu\text{V}/\text{m})$
- Limit ( $\text{dB}\mu$ V/m) = EIRP [dBm] –  $20 \log (d [\text{m}]) + 104.8$

Limit types (in result tables on next page):

RB – Emissions falls into a “Restricted Band” according FCC §§15.205 and 15.209 \*)

UE – “Undesirable Emission Limit” according FCC §15.407

BE-RB – Band Edge Limit basing on “Restricted Band Limits”

BE-UE – Band Edge Limit basing on “Undesirable Emission Limit”

\*) Below 1 GHz the limits of §15.209 are applied for all frequencies.

#### 4.7.3 TEST PROTOCOL


Ambient temperature: 26 - 27 °C  
 Air Pressure: 1008 - 1015 hPa  
 Humidity: 43 - 44 %  
 Tagging System Interrogator Transmitting Constant Carrier and Data  
 Applied duty cycle correction (AV): 0 dB

Ch. No.	Ch. Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dB $\mu$ V/m]	Detector	RBW [kHz]	Limit [dB $\mu$ V/m]	Margin [dB]	Limit Type
1	5798	35.7	30.3	QP	120	40.0	9.7	RB
1	5798	61.5	34.8	QP	120	40.0	5.2	RB
1	5798	63.2	33.0	QP	120	40.0	7.0	RB
1	5798	77.3	31.9	QP	120	40.0	8.1	RB
1	5798	94.8	33.1	QP	120	43.5	10.4	RB
1	5798	125.9	36.6	QP	120	43.5	6.9	RB
1	5798	136.4	39.0	QP	120	43.5	4.5	RB
1	5798	201.4	31.0	QP	120	43.5	12.5	RB
1	5798	375.0	34.6	QP	120	46.0	11.4	RB
1	5798	500.0	37.2	QP	120	46.0	8.8	RB
1	5798	640.0	40.7	QP	120	46.0	5.3	RB
1	5798	17391.9	67.3	PEAK	1000	68.2	0.9	UE
1	5798	23189.1	60.2	PEAK	1000	68.2	8.0	UE
2	5803	40.4	31.5	QP	120	40.0	8.5	RB
2	5803	77.3	37.8	QP	120	40.0	2.2	RB
2	5803	142.8	37.0	QP	120	43.5	6.5	RB
2	5803	640.0	37.3	QP	120	46.0	8.7	RB
2	5803	17406.9	67.7	PEAK	1000	68.2	0.5	UE
2	5803	23209.2	57.6	PEAK	1000	68.2	10.6	UE
4	5813	39.8	31.8	QP	120	40.0	8.2	RB
4	5813	77.3	38.4	QP	120	40.0	1.6	RB
4	5813	121.8	33.5	QP	120	43.5	10.0	RB
4	5813	139.3	36.5	QP	120	43.5	7.0	RB
4	5813	195.5	27.6	QP	120	43.5	15.9	RB
4	5813	640.0	33.7	QP	120	46.0	12.3	RB
4	5813	17436.9	66.4	PEAK	1000	68.2	1.8	UE
4	5813	23250.4	61.7	PEAK	1000	68.2	6.5	UE

Remark: Please see next sub-clause for the measurement plot.


#### 4.7.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

Radio Technology = Carrier and Data, Operating Frequency = mid, Subband = U-NII-3  
 (S02\_AA01)

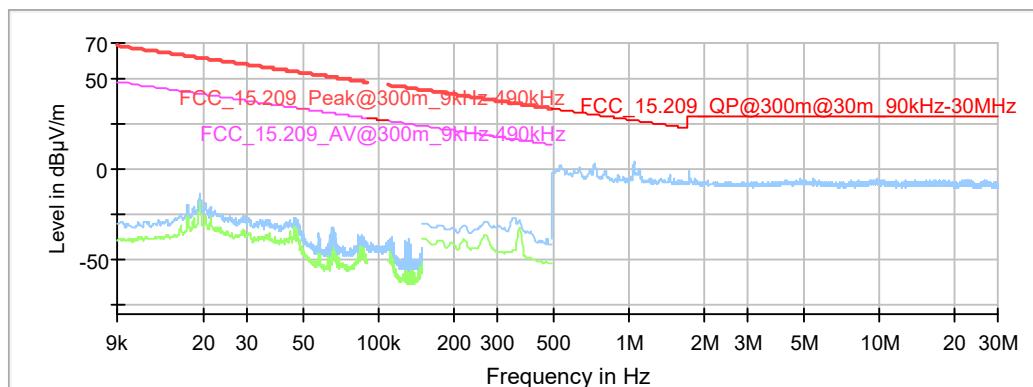


#### Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment
---	---	---	---	---	---	---	---	---	---	---	---

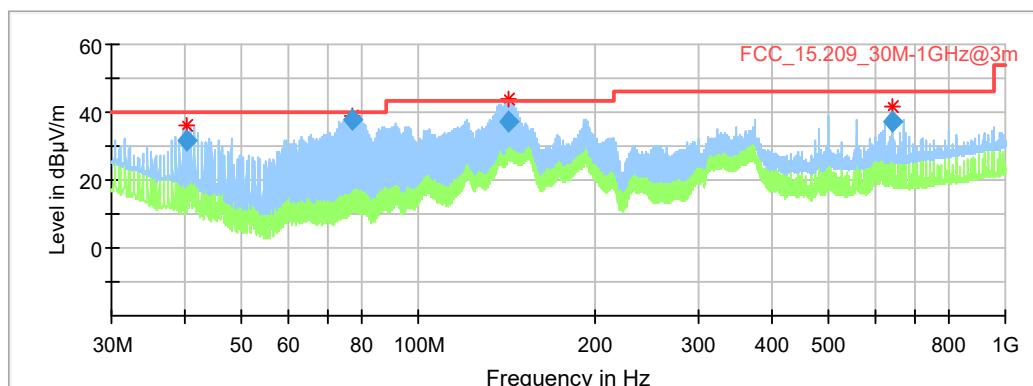


#### Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment
40.380000	31.54	40.00	8.46	1000.0	120.000	103.0	V	-120.0	13.5	
77.280000	37.76	40.00	2.24	1000.0	120.000	116.0	V	-131.0	9.8	
142.830000	37.03	43.50	6.47	1000.0	120.000	100.0	V	-175.0	9.7	
639.990000	37.25	46.00	8.75	1000.0	120.000	108.0	V	-112.0	21.1	

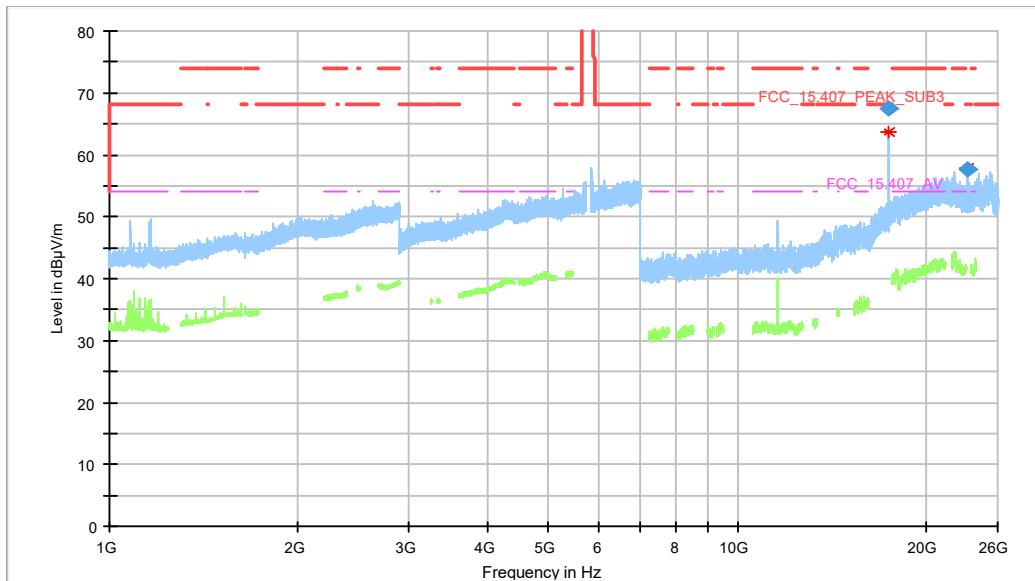

### Final Result

Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	CAverage (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	MARGIN (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)
17406.857	67.6	---	68.20	0.62	1000.0	1000.000	150.0	H	140.0	-10.0
23209.184	57.6	---	68.20	10.64	1000.0	1000.000	150.0	V	131.0	-2.0

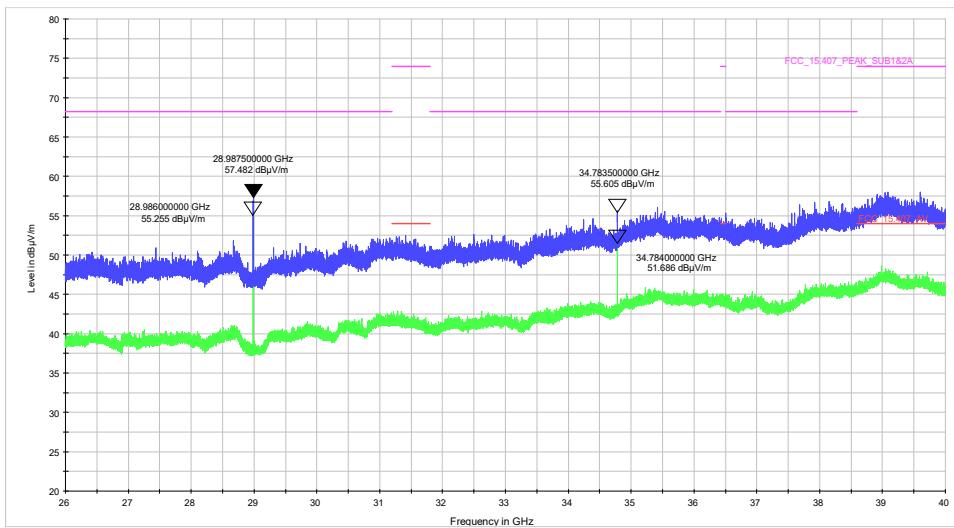

### 4.7.5 TEST EQUIPMENT USED

- Radiated Emissions

## 4.8 BAND EDGE

Standard **FCC Part 15 Subpart E**

**The test was performed according to:**  
 ANSI C63.10

### 4.8.1 TEST DESCRIPTION

Please see test description for the test case "Spurious Radiated Emissions"

### 4.8.2 TEST REQUIREMENTS / LIMITS

For band edges connected to a restricted band, the limits are specified in Section 15.209(a)

FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

Frequency in MHz	Limit ( $\mu$ V/m)	Measurement distance (m)	Limits (dB $\mu$ V/m)
0.009 – 0.49	2400/F(kHz)@300m	3	(48.5 – 13.8)@300m
0.49 – 1.705	24000/F(kHz)@30m	3	(33.8 – 23.0)@30m
1.705 – 30	30@30m	3	29.5@30m

The measured values are corrected with an inverse linear distance extrapolation factor (40 dB/decade) according FCC 15.31 (2).

Frequency in MHz	Limit ( $\mu$ V/m)	Measurement distance (m)	Limits (dB $\mu$ V/m)
30 – 88	100@3m	3	40.0@3m
88 – 216	150@3m	3	43.5@3m
216 – 960	200@3m	3	46.0@3m
960 – 26000	500@3m	3	54.0@3m
26000 - 40000	500@3m	1	54.0@3m

The measured values above 26 GHz are corrected with an inverse linear distance extrapolation factor (20 dB/decade).

§15.35(b) ..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor: Limit (dB $\mu$ V/m) = 20 log (Limit ( $\mu$ V/m)/1 $\mu$ V/m)

#### 4.8.3 TEST PROTOCOL


Ambient temperature: 27 °C  
 Air Pressure: 1008 hPa  
 Humidity: 43 %  
 Tagging System Interrogator Transmitting Constant Carrier and Data  
 Applied duty cycle correction (AV): 0 dB

U-NII-Subband	Ch. No.	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dB $\mu$ V/m]	Detector	RBW [kHz]	Limit [dB $\mu$ V/m]	Margin [dB]	Limit Type	FCC /IC?
3	1	5797.5	5725.0	52.4	PEAK	1000	68.2	15.8	BE-UE	FCC&IC
	4	5812.5	5850.0	57.6	PEAK	1000	68.2	10.6	BE-UE	FCC&IC

Remark: Please see next sub-clause for the measurement plot.

The value given is the closest value of trace to limit in the range of the descending limit at the corresponding band edge of U-NII-Subband 3 in the ranges 5648 MHz – 5725 MHz or 5850 – 5927 MHz.

#### 4.8.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

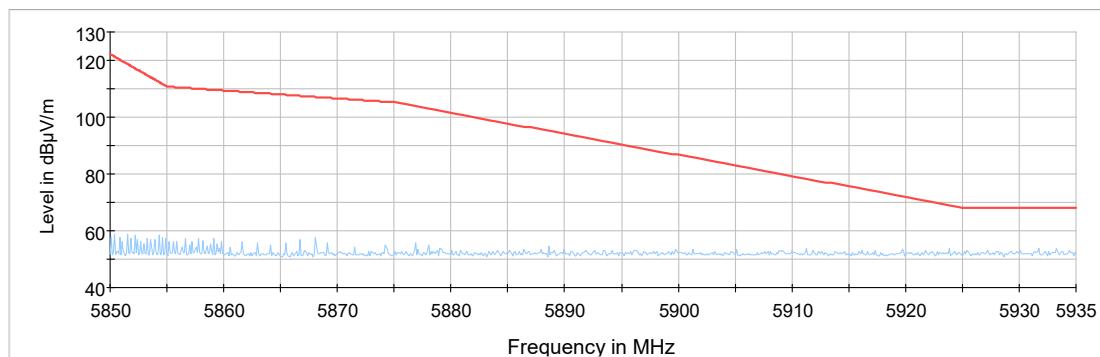

#### 4.8.5 TEST EQUIPMENT USED

- Radiated Emissions

## 5 TEST EQUIPMENT

1      Conducted Emissions FCC  
 Conducted Emissions power line for FCC standards

Ref.No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
1.1	Opus10 TPR (8253.00)	ThermoAirpres sure Datalogger 13 (Environ)	Lufft Mess- und Regeltechnik GmbH	13936	2017-04	2019-04
1.2	Fluke 177	Digital Multimeter 03 (Multimeter)	Fluke Europe B.V.	86670383	2018-04	2020-04
1.3	ESH3-Z5	Two-Line V-Network	Rohde & Schwarz	828304/029	2017-05	2019-05
1.4	EP 1200/B, NA/B1	Amplifier with integrated variable Oscillator	Spitzenberger & Spieß	B6278	2015-07	2018-07
1.5	Chroma 6404	AC Power Source	Chroma ATE INC.	64040001304		
1.6	Shielded Room 02	Shielded Room for conducted testing, 12qm	Frankonia	-		
1.7	ESH3-Z5	Two-Line V-Network	Rohde & Schwarz	829996/002	2017-05	2019-05
1.8	ESR 7	EMI Receiver / Spectrum Analyzer	Rohde & Schwarz	101424	2016-11	2018-11
1.9	Opus10 THI (8152.00)	ThermoHygro Datalogger 02 (Environ)	Lufft Mess- und Regeltechnik GmbH	7489	2017-04	2019-04
1.10	ESIB 26	Spectrum Analyzer	Rohde & Schwarz	830482/004	2018-01	2020-01

2      R&S TS8997  
 EN300328/301893 Test Lab

Ref.No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
2.1	SMB100A	Signal Generator 9 kHz - 6 GHz	Rohde & Schwarz	107695	2017-07	2020-07
2.2	MFS	Rubidium Frequency Standard	Datum-Beverly	5489/001	2017-07	2018-07
2.3	1515 / 93459	Broadband Power Divider SMA (Aux)	Weinschel Associates	LN673		
2.4	FSV30	Signal Analyzer 10 Hz - 30 GHz	Rohde & Schwarz	103005	2018-04	2020-04
2.5	Fluke 177	Digital Multimeter 03 (Multimeter)	Fluke Europe B.V.	86670383	2018-04	2020-04
2.6	VT 4002	Temperature Chamber	Vötsch	58566002150010	2018-04	2020-04
2.7	A8455-4	4 Way Power Divider (SMA)		-		

Ref.No	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
2.8	Opus10 THI (8152.00)	ThermoHygro Datalogger 03 (Environ)	Lufft Mess- und Regeltechnik GmbH	7482	2017-03	2019-03
2.9	SMBV100A	Vector Signal Generator 9 kHz - 6 GHz	Rohde & Schwarz	259291	2016-10	2019-10
2.10	OSP120	Switching Unit with integrated power meter	Rohde & Schwarz	101158	2016-11	2018-11

3 Radiated Emissions  
 Lab to perform radiated emission tests

Ref.No	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
3.1	MFS	Rubidium Frequency Normal MFS	Datum GmbH	002	2017-10	2018-10
3.2	Opus10 TPR (8253.00)	ThermoAirpres sure Datalogger 13 (Environ)	Lufft Mess- und Regeltechnik GmbH	13936	2017-04	2019-04
3.3	ESW44	EMI Test Receiver	Rohde & Schwarz GmbH & Co. KG	101603	2018-05	2019-05
3.4	Anechoic Chamber	10.58 x 6.38 x 6.00 m <sup>3</sup>	Frankonia	none	2016-05 2018-06	2018-05 2021-06
3.5	FS-Z60	Harmonic Mixer 40 - 60 GHz	Rohde & Schwarz Messgerätebau GmbH	100178	2016-12	2019-12
3.6	FS-Z220	Harmonic Mixer 140 - 220 GHz	Rohde & Schwarz Messgerätebau GmbH	101005	2017-03	2020-03
3.7	SGH-05	Standard Gain / Pyramidal Horn Antenna (140 - 220 GHz)		075		
3.8	HL 562	Ultralog new biconicals	Rohde & Schwarz	830547/003	2015-06	2018-06
3.9	5HC2700/12750 -1.5-KK	High Pass Filter	Trilithic	9942012		
3.10	ASP 1.2/1.8-10 kg	Antenna Mast	Maturo GmbH	-		
3.11	Fully Anechoic Room	8.80m x 4.60m x 4.05m (l x w x h)	Albatross Projects	P26971-647-001-PRB	2015-06	2018-06
3.12	Fluke 177	Digital Multimeter 03 (Multimeter)	Fluke Europe B.V.	86670383	2018-04	2020-04
3.13	JS4-18002600-32-5P	Broadband Amplifier 18 GHz - 26 GHz	Miteq	849785		
3.14	FSW 43	Spectrum Analyzer	Rohde & Schwarz	103779	2016-12	2018-12

Ref.No	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
3.15	3160-09	Standard Gain / Pyramidal Horn Antenna 26.5 GHz	EMCO Elektronic GmbH	00083069		
3.16	SGH-19	Standard Gain / Pyramidal Horn Antenna (40 - 60 GHz)		093		
3.17	WHKX 7.0/18G-8SS	High Pass Filter	Wainwright	09		
3.18	4HC1600/12750 -1.5-KK	High Pass Filter	Trilithic	9942011		
3.19	Chroma 6404	AC Power Source	Chroma ATE INC.	64040001304		
3.20	JS4-00102600-42-5A	Broadband Amplifier 30 MHz - 26 GHz	Miteq	619368		
3.21	TT 1.5 WI	Turn Table	Maturo GmbH	-		
3.22	HL 562 Ultralog	Log.-per. Antenna	Rohde & Schwarz	100609	2016-04	2019-04
3.23	FS-Z325	Harmonic Mixer 220 - 325 GHz	Rohde & Schwarz Messgerätebau GmbH	101006	2017-03	2020-03
3.24	3160-10	Standard Gain / Pyramidal Horn Antenna 40 GHz	EMCO Elektronic GmbH	00086675		
3.25	SGH-08	Standard Gain / Pyramidal Horn Antenna (90 - 140 GHz)		064		
3.26	SGH-12	Standard Gain / Pyramidal HornAntenna (60 - 90 GHz)		326		
3.27	5HC3500/18000 -1.2-KK	High Pass Filter	Trilithic	200035008		
3.28	FS-Z140	Harmonic Mixer 90 -140 GHz	Rohde & Schwarz Messgerätebau GmbH	101007	2017-02	2020-02
3.29	HFH2-Z2	Loop Antenna	Rohde & Schwarz	829324/006	2018-01	2021-01
3.30	Opus10 THI (8152.00)	ThermoHygro Datalogger 12 (Environ)	Lufft Mess- und Regeltechnik GmbH	12482	2017-03	2019-03
3.31	ESR 7	EMI Receiver / Spectrum Analyzer	Rohde & Schwarz	101424	2016-11	2018-11
3.32	JS4-00101800-35-5P	Broadband Amplifier 30 MHz - 18 GHz	Miteq	896037		
3.33	AS 620 P	Antenna mast	HD GmbH	620/37		
3.34	Tilt device Maturo (Rohacell)	Antrieb TD1.5-10kg	Maturo GmbH	TD1.5-10kg/024/3790709		

Ref.No	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
3.35	SGH-03	Standard Gain / Pyramidal Horn Antenna (220 - 325 GHz)		060		
3.36	FS-Z90	Harmonic Mixer 60 - 90 GHz	Rohde & Schwarz Messgerätebau GmbH	101686	2017-03	2020-03
3.37	ESIB 26	Spectrum Analyzer	Rohde & Schwarz	830482/004	2018-01	2020-01
3.38	PAS 2.5 - 10 kg	Antenna Mast	Maturo GmbH	-		
3.39	AFS42-00101800-25-S-42	Broadband Amplifier 25 MHz - 18 GHz	Miteq	2035324		
3.40	AM 4.0	Antenna mast	Maturo GmbH	AM4.0/180/1192 0513		
3.41	HF 906	Double-ridged horn	Rohde & Schwarz	357357/001	2018-03	2021-03

The calibration interval is the time interval between "Last Calibration" and "Calibration Due"

## 6 ANTENNA FACTORS, CABLE LOSS AND SAMPLE CALCULATIONS

This chapter contains the antenna factors with their corresponding path loss of the used measurement path for all antennas as well as the insertion loss of the LISN.

### 6.1 LISN R&S ESH3-Z5 (150 KHZ – 30 MHZ)

Frequency	Corr.	LISN insertion loss ESH3-Z5	cable loss (incl. 10 dB attenuator)
MHz	dB	dB	dB
0.15	10.1	0.1	10.0
5	10.3	0.1	10.2
7	10.5	0.2	10.3
10	10.5	0.2	10.3
12	10.7	0.3	10.4
14	10.7	0.3	10.4
16	10.8	0.4	10.4
18	10.9	0.4	10.5
20	10.9	0.4	10.5
22	11.1	0.5	10.6
24	11.1	0.5	10.6
26	11.2	0.5	10.7
28	11.2	0.5	10.7
30	11.3	0.5	10.8

#### Sample calculation

$$U_{\text{LISN}} (\text{dB } \mu\text{V}) = U (\text{dB } \mu\text{V}) + \text{Corr. (dB)}$$

U = Receiver reading

LISN Insertion loss = Voltage Division Factor of LISN

Corr. = sum of single correction factors of used LISN, cables, switch units (if used)

Linear interpolation will be used for frequencies in between the values in the table.

## 6.2 ANTENNA R&S HFH2-Z2 (9 KHZ – 30 MHZ)

Frequency	AF HFH-Z2)	Corr.	cable loss 1 (inside chamber)	cable loss 2 (outside chamber)	cable loss 3 (switch unit)	cable loss 4 (to receiver)	distance corr. (-40 dB/ decade)	d <sub>limit</sub> (meas. distance (limit))	d <sub>used</sub> (meas. distance (used))
			dB	dB	dB	dB	dB	m	m
0.009	20.50	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.01	20.45	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.015	20.37	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.02	20.36	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.025	20.38	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.03	20.32	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.05	20.35	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.08	20.30	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.1	20.20	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.2	20.17	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.3	20.14	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.49	20.12	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.490001	20.12	-39.6	0.1	0.1	0.1	0.1	-40	30	3
0.5	20.11	-39.6	0.1	0.1	0.1	0.1	-40	30	3
0.8	20.10	-39.6	0.1	0.1	0.1	0.1	-40	30	3
1	20.09	-39.6	0.1	0.1	0.1	0.1	-40	30	3
2	20.08	-39.6	0.1	0.1	0.1	0.1	-40	30	3
3	20.06	-39.6	0.1	0.1	0.1	0.1	-40	30	3
4	20.05	-39.5	0.2	0.1	0.1	0.1	-40	30	3
5	20.05	-39.5	0.2	0.1	0.1	0.1	-40	30	3
6	20.02	-39.5	0.2	0.1	0.1	0.1	-40	30	3
8	19.95	-39.5	0.2	0.1	0.1	0.1	-40	30	3
10	19.83	-39.4	0.2	0.1	0.2	0.1	-40	30	3
12	19.71	-39.4	0.2	0.1	0.2	0.1	-40	30	3
14	19.54	-39.4	0.2	0.1	0.2	0.1	-40	30	3
16	19.53	-39.3	0.3	0.1	0.2	0.1	-40	30	3
18	19.50	-39.3	0.3	0.1	0.2	0.1	-40	30	3
20	19.57	-39.3	0.3	0.1	0.2	0.1	-40	30	3
22	19.61	-39.3	0.3	0.1	0.2	0.1	-40	30	3
24	19.61	-39.3	0.3	0.1	0.2	0.1	-40	30	3
26	19.54	-39.3	0.3	0.1	0.2	0.1	-40	30	3
28	19.46	-39.2	0.3	0.1	0.3	0.1	-40	30	3
30	19.73	-39.1	0.4	0.1	0.3	0.1	-40	30	3

### Sample calculation

$$E (\text{dB } \mu\text{V/m}) = U (\text{dB } \mu\text{V}) + AF (\text{dB } 1/\text{m}) + \text{Corr. (dB)}$$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

distance correction =  $-40 * \text{LOG} (\frac{d_{\text{limit}}}{d_{\text{used}}})$

Linear interpolation will be used for frequencies in between the values in the table.

Table shows an extract of values

### 6.3 ANTENNA R&S HL562 (30 MHZ – 1 GHZ)

( $d_{\text{Limit}} = 3 \text{ m}$ )

Frequency	AF R&S HL562	Corr.
MHz	dB (1/m)	dB
30	18.6	0.6
50	6.0	0.9
100	9.7	1.2
150	7.9	1.6
200	7.6	1.9
250	9.5	2.1
300	11.0	2.3
350	12.4	2.6
400	13.6	2.9
450	14.7	3.1
500	15.6	3.2
550	16.3	3.5
600	17.2	3.5
650	18.1	3.6
700	18.5	3.6
750	19.1	4.1
800	19.6	4.1
850	20.1	4.4
900	20.8	4.7
950	21.1	4.8
1000	21.6	4.9

cable loss 1 (inside chamber)	cable loss 2 (outside chamber)	cable loss 3 (switch unit)	cable loss 4 (to receiver)	distance corr. (-20 dB/ decade)	$d_{\text{Limit}}$ (meas. distance (limit))	$d_{\text{used}}$ (meas. distance (used))
dB	dB	dB	dB	dB	m	m
0.29	0.04	0.23	0.02	0.0	3	3
0.39	0.09	0.32	0.08	0.0	3	3
0.56	0.14	0.47	0.08	0.0	3	3
0.73	0.20	0.59	0.12	0.0	3	3
0.84	0.21	0.70	0.11	0.0	3	3
0.98	0.24	0.80	0.13	0.0	3	3
1.04	0.26	0.89	0.15	0.0	3	3
1.18	0.31	0.96	0.13	0.0	3	3
1.28	0.35	1.03	0.19	0.0	3	3
1.39	0.38	1.11	0.22	0.0	3	3
1.44	0.39	1.20	0.19	0.0	3	3
1.55	0.46	1.24	0.23	0.0	3	3
1.59	0.43	1.29	0.23	0.0	3	3
1.67	0.34	1.35	0.22	0.0	3	3
1.67	0.42	1.41	0.15	0.0	3	3
1.87	0.54	1.46	0.25	0.0	3	3
1.90	0.46	1.51	0.25	0.0	3	3
1.99	0.60	1.56	0.27	0.0	3	3
2.14	0.60	1.63	0.29	0.0	3	3
2.22	0.60	1.66	0.33	0.0	3	3
2.23	0.61	1.71	0.30	0.0	3	3

( $d_{\text{Limit}} = 10 \text{ m}$ )

30	18.6	-9.9
50	6.0	-9.6
100	9.7	-9.2
150	7.9	-8.8
200	7.6	-8.6
250	9.5	-8.3
300	11.0	-8.1
350	12.4	-7.9
400	13.6	-7.6
450	14.7	-7.4
500	15.6	-7.2
550	16.3	-7.0
600	17.2	-6.9
650	18.1	-6.9
700	18.5	-6.8
750	19.1	-6.3
800	19.6	-6.3
850	20.1	-6.0
900	20.8	-5.8
950	21.1	-5.6
1000	21.6	-5.6

0.29	0.04	0.23	0.02	-10.5	10	3
0.39	0.09	0.32	0.08	-10.5	10	3
0.56	0.14	0.47	0.08	-10.5	10	3
0.73	0.20	0.59	0.12	-10.5	10	3
0.84	0.21	0.70	0.11	-10.5	10	3
0.98	0.24	0.80	0.13	-10.5	10	3
1.04	0.26	0.89	0.15	-10.5	10	3
1.18	0.31	0.96	0.13	-10.5	10	3
1.28	0.35	1.03	0.19	-10.5	10	3
1.39	0.38	1.11	0.22	-10.5	10	3
1.44	0.39	1.20	0.19	-10.5	10	3
1.55	0.46	1.24	0.23	-10.5	10	3
1.59	0.43	1.29	0.23	-10.5	10	3
1.67	0.34	1.35	0.22	-10.5	10	3
1.67	0.42	1.41	0.15	-10.5	10	3
1.87	0.54	1.46	0.25	-10.5	10	3
1.90	0.46	1.51	0.25	-10.5	10	3
1.99	0.60	1.56	0.27	-10.5	10	3
2.14	0.60	1.63	0.29	-10.5	10	3
2.22	0.60	1.66	0.33	-10.5	10	3
2.23	0.61	1.71	0.30	-10.5	10	3

#### Sample calculation

$$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + \text{Corr. (dB)}$$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)  
distance correction =  $-20 * \text{LOG} \left( \frac{d_{\text{Limit}}}{d_{\text{used}}} \right)$

Linear interpolation will be used for frequencies in between the values in the table.

Tables show an extract of values.

## 6.4 ANTENNA R&S HF907 (1 GHZ – 18 GHZ)

Frequency	AF R&S HF907	Corr.
MHz	dB (1/m)	dB
1000	24.4	-19.4
2000	28.5	-17.4
3000	31.0	-16.1
4000	33.1	-14.7
5000	34.4	-13.7
6000	34.7	-12.7
7000	35.6	-11.0

cable loss 1 (relay + cable inside chamber)	cable loss 2 (outside chamber)	cable loss 3 (switch unit, atten- uator & pre-amp)	cable loss 4 (to receiver)		
dB	dB	dB	dB		
0.99	0.31	-21.51	0.79		
1.44	0.44	-20.63	1.38		
1.87	0.53	-19.85	1.33		
2.41	0.67	-19.13	1.31		
2.78	0.86	-18.71	1.40		
2.74	0.90	-17.83	1.47		
2.82	0.86	-16.19	1.46		

Frequency	AF R&S HF907	Corr.
MHz	dB (1/m)	dB
3000	31.0	-23.4
4000	33.1	-23.3
5000	34.4	-21.7
6000	34.7	-21.2
7000	35.6	-19.8

cable loss 1 (relay inside chamber)	cable loss 2 (inside chamber)	cable loss 3 (outside chamber)	cable loss 4 (switch unit, atten- uator & pre-amp)	cable loss 5 (to receiver)	used for FCC 15.247
dB	dB	dB	dB	dB	
0.47	1.87	0.53	-27.58	1.33	
0.56	2.41	0.67	-28.23	1.31	
0.61	2.78	0.86	-27.35	1.40	
0.58	2.74	0.90	-26.89	1.47	
0.66	2.82	0.86	-25.58	1.46	

Frequency	AF R&S HF907	Corr.
MHz	dB (1/m)	dB
7000	35.6	-57.3
8000	36.3	-56.3
9000	37.1	-55.3
10000	37.5	-56.2
11000	37.5	-55.3
12000	37.6	-53.7
13000	38.2	-53.5
14000	39.9	-56.3
15000	40.9	-54.1
16000	41.3	-54.1
17000	42.8	-54.4
18000	44.2	-54.7

cable loss 1 (relay inside chamber)	cable loss 2 (High Pass)	cable loss 3 (pre- amp)	cable loss 4 (inside chamber)	cable loss 5 (outside chamber)	cable loss 6 (to receiver)
dB	dB	dB	dB	dB	dB
0.56	1.28	-62.72	2.66	0.94	1.46
0.69	0.71	-61.49	2.84	1.00	1.53
0.68	0.65	-60.80	3.06	1.09	1.60
0.70	0.54	-61.91	3.28	1.20	1.67
0.80	0.61	-61.40	3.43	1.27	1.70
0.84	0.42	-59.70	3.53	1.26	1.73
0.83	0.44	-59.81	3.75	1.32	1.83
0.91	0.53	-63.03	3.91	1.40	1.77
0.98	0.54	-61.05	4.02	1.44	1.83
1.23	0.49	-61.51	4.17	1.51	1.85
1.36	0.76	-62.36	4.34	1.53	2.00
1.70	0.53	-62.88	4.41	1.55	1.91

### Sample calculation

$$E (\text{dB } \mu\text{V/m}) = U (\text{dB } \mu\text{V}) + AF (\text{dB } 1/\text{m}) + \text{Corr. (dB)}$$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

Linear interpolation will be used for frequencies in between the values in the table.

Tables show an extract of values.

## 6.5 ANTENNA EMCO 3160-09 (18 GHZ – 26.5 GHZ)

Frequency	AF EMCO 3160-09	Corr.
MHz	dB (1/m)	dB
18000	40.2	-23.5
18500	40.2	-23.2
19000	40.2	-22.0
19500	40.3	-21.3
20000	40.3	-20.3
20500	40.3	-19.9
21000	40.3	-19.1
21500	40.3	-19.1
22000	40.3	-18.7
22500	40.4	-19.0
23000	40.4	-19.5
23500	40.4	-19.3
24000	40.4	-19.8
24500	40.4	-19.5
25000	40.4	-19.3
25500	40.4	-20.4
26000	40.5	-21.3
26500	40.5	-21.1

cable loss 1 (inside chamber)	cable loss 2 (pre- amp)	cable loss 3 (inside chamber)	cable loss 4 (switch unit)	cable loss 5 (to receiver)
dB	dB	dB	dB	dB
0.72	-35.85	6.20	2.81	2.65
0.69	-35.71	6.46	2.76	2.59
0.76	-35.44	6.69	3.15	2.79
0.74	-35.07	7.04	3.11	2.91
0.72	-34.49	7.30	3.07	3.05
0.78	-34.46	7.48	3.12	3.15
0.87	-34.07	7.61	3.20	3.33
0.90	-33.96	7.47	3.28	3.19
0.89	-33.57	7.34	3.35	3.28
0.87	-33.66	7.06	3.75	2.94
0.88	-33.75	6.92	3.77	2.70
0.90	-33.35	6.99	3.52	2.66
0.88	-33.99	6.88	3.88	2.58
0.91	-33.89	7.01	3.93	2.51
0.88	-33.00	6.72	3.96	2.14
0.89	-34.07	6.90	3.66	2.22
0.86	-35.11	7.02	3.69	2.28
0.90	-35.20	7.15	3.91	2.36

### Sample calculation

$$E (\text{dB } \mu\text{V/m}) = U (\text{dB } \mu\text{V}) + AF (\text{dB } 1/\text{m}) + \text{Corr. (dB)}$$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

Linear interpolation will be used for frequencies in between the values in the table.

Table shows an extract of values.

## 6.6 ANTENNA EMCO 3160-10 (26.5 GHZ – 40 GHZ)

Frequency	AF EMCO 3160-10	Corr.	cable loss 1 (inside chamber)	cable loss 2 (outside chamber)	cable loss 3 (switch unit)	cable loss 4 (to receiver)	distance corr. (-20 dB/ decade)	$d_{\text{limit}}$ (meas. distance (limit))	$d_{\text{used}}$ (meas. distance (used))
GHz	dB (1/m)	dB	dB	dB	dB	dB	dB	m	m
26.5	43.4	-11.2	4.4				-15.6	3	0.5
27.0	43.4	-11.2	4.4				-15.6	3	0.5
28.0	43.4	-11.1	4.5				-15.6	3	0.5
29.0	43.5	-11.0	4.6				-15.6	3	0.5
30.0	43.5	-10.9	4.7				-15.6	3	0.5
31.0	43.5	-10.8	4.7				-15.6	3	0.5
32.0	43.5	-10.7	4.8				-15.6	3	0.5
33.0	43.6	-10.7	4.9				-15.6	3	0.5
34.0	43.6	-10.6	5.0				-15.6	3	0.5
35.0	43.6	-10.5	5.1				-15.6	3	0.5
36.0	43.6	-10.4	5.1				-15.6	3	0.5
37.0	43.7	-10.3	5.2				-15.6	3	0.5
38.0	43.7	-10.2	5.3				-15.6	3	0.5
39.0	43.7	-10.2	5.4				-15.6	3	0.5
40.0	43.8	-10.1	5.5				-15.6	3	0.5

### Sample calculation

$$E (\text{dB } \mu\text{V/m}) = U (\text{dB } \mu\text{V}) + AF (\text{dB } 1/\text{m}) + \text{Corr. (dB)}$$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)


Linear interpolation will be used for frequencies in between the values in the table.

distance correction =  $-20 * \text{LOG} (d_{\text{limit}} / d_{\text{used}})$

Linear interpolation will be used for frequencies in between the values in the table.

Table shows an extract of values.

## 7 SETUP DRAWINGS

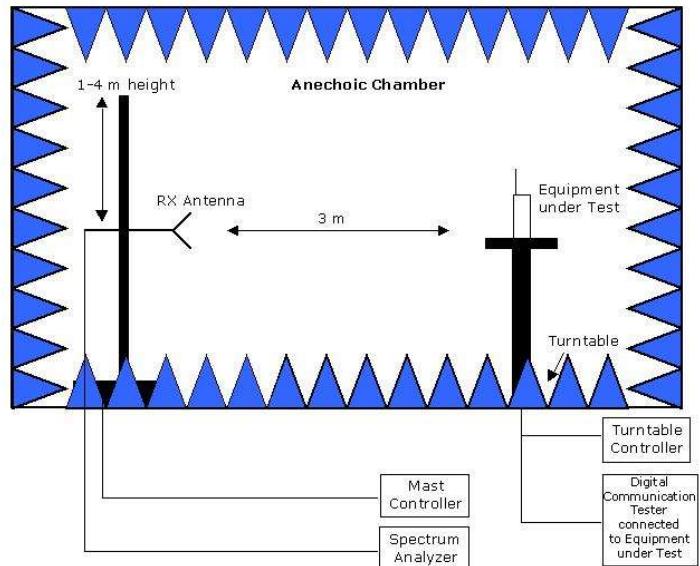

Remark: Depending on the frequency range suitable antenna types, attenuators or preamplifiers are used.

**Drawing 1:** Setup in the Anechoic chamber. For measurements below 1 GHz the ground was replaced by a conducting groundplane.

## 8 MEASUREMENT UNCERTAINTIES

Test Case	Parameter	Uncertainty
AC Power Line	Power	± 3.4 dB
Field Strength of spurious radiation	Power	± 5.5 dB
6 dB / 26 dB / 99% Bandwidth	Power Frequency	± 2.9 dB ± 11.2 kHz
Conducted Output Power	Power	± 2.2 dB
Band Edge Compliance	Power Frequency	± 2.2 dB ± 11.2 kHz
Frequency Stability	Frequency	± 25 Hz
Power Spectral Density	Power	± 2.2 dB

## 9 PHOTO REPORT

Please see separate photo report.