



中国认可
国际互认
检测
TESTING
CNAS L6791

TEST REPORT

Applicant: Ugreen Group Limited
Address: URGEEN Building, Longcheng Industrial Park,
Longguanxi Road, Longhua, ShenZhen, China
Equipment Type: AC1300 USB Dual Band Wi-Fi Adapter
Model Name: CM492 (refer to section 2.4)
Brand Name: **UGREEN**
FCC ID: 2AQI5-50340
Test Standard: 47 CFR Part 15 Subpart C
(refer to section 3.1)
Sample Arrival Date: Mar. 03, 2025
Test Date: Mar. 07, 2025 - Mar. 11, 2025
Date of Issue: Apr. 16, 2025

ISSUED BY:

Shenzhen BALUN Technology Co., Ltd.

Tested by: Julie Zhu**Checked by:** Ye Hongji**Approved by:** Sunny Zou
(Technical Director)

Revision History

Version	Issue Date	Revisions
<u>Rev. 01</u>	<u>Apr. 16, 2025</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1	GENERAL INFORMATION	4
1.1	Test Laboratory	4
1.2	Test Location	4
2	PRODUCT INFORMATION	5
2.1	Applicant Information	5
2.2	Manufacturer Information	5
2.3	Factory Information	5
2.4	General Description for Equipment under Test (EUT)	5
2.5	Technical Information	6
3	SUMMARY OF TEST RESULTS	8
3.1	Test Standards	8
3.2	Test Verdict	8
4	GENERAL TEST CONFIGURATIONS	9
4.1	Test Environments	9
4.2	Test Equipment List	9
4.3	Test Software List	10
4.4	Measurement Uncertainty	10
4.5	Description of Test Setup	11
4.6	Measurement Results Explanation Example	14
5	TEST ITEMS	15
5.1	Antenna Requirements	15
5.2	Output Power	16
5.3	Occupied Bandwidth	28
5.4	Conducted Spurious Emission	34

5.5	Band Edge (Authorized-band band-edge).....	45
5.6	Conducted Emission	51
5.7	Radiated Spurious Emission	54
5.8	Band Edge (Restricted-band band-edge).....	73
5.9	Power Spectral density (PSD).....	77
ANNEX A	TEST SETUP PHOTOS	81
1	Radiated Test Photo.....	81
2	Conducted Test Photo.....	84
3	Conducted Emissions.....	84
ANNEX B	EUT EXTERNAL PHOTOS	86
ANNEX C	EUT INTERNAL PHOTOS	90

1 GENERAL INFORMATION

1.1 Test Laboratory

Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

1.2 Test Location

Name	Shenzhen BALUN Technology Co., Ltd.
Location	☒ Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
	☐ 1/F, Building B, Ganghongji High-tech Intelligent Industrial Park, No. 1008, Songbai Road, Yangguang Community, Xili Sub-district, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	Ugreen Group Limited
Address	URGEEN Building, Longcheng Industrial Park, Longguanxi Road, Longhua, ShenZhen, China

2.2 Manufacturer Information

Manufacturer	Ugreen Group Limited
Address	URGEEN Building, Longcheng Industrial Park, Longguanxi Road, Longhua, ShenZhen, China

2.3 Factory Information

Factory	Dingnan county Fulong Technology Co., Ltd.
Address	Yingtang industry park, Qinghua Blvd Liangfu industry district, Lishi town, Dingnan, GanZhou, JiangXi province

2.4 General Description for Equipment under Test (EUT)

EUT Name	AC1300 USB Dual Band Wi-Fi Adapter
Model Name Under Test	CM492
Series Model Name	50340
Description of Model name differentiation	All models are same with electrical parameters and internal circuit structure, but only differ in model name. (this information provided by the applicant)
Hardware Version	N/A
Software Version	N/A
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

Remark:

- Product Number (P/N) code in the below table, for marketing purpose, will be marked on the marking plate.

50340	50340EU	50340UK	50340US	50340JP	50340CN	50340KC
50340A	50340B	50340C	50340P	50340X	50340U	KC-50340

2.5 Technical Information

Network and Wireless connectivity	WIFI 802.11a, 802.11b, 802.11g, 802.11n and 802.11ac
-----------------------------------	--

The requirement for the following technical information of the EUT was tested in this report:

Frequency Range	802.11b/g/n(20 MHz): 2.412 GHz - 2.462 GHz $f_c = 2412 \text{ MHz} + (N-1)*5 \text{ MHz}$, where - f_c = "Operating Frequency" in MHz, - N = "Channel Number" with the range from 1 to 11. 802.11n(40 MHz): 2.422 GHz - 2.452 GHz $f_c = 2412 \text{ MHz} + (N-1)*5 \text{ MHz}$, where - f_c = "Operating Frequency" in MHz, - N = "Channel Number" with the range from 3 to 9.	
Modulation Type	DSSS, OFDM	
Product Type	☐ Mobile ☒ Portable ☐ Fix Location	
Antenna System (eg., MIMO, Smart Antenna)	Cyclic Delay Diversity (CDD) for 802.11b/g Multi Input Multi Output (MIMO) for 802.11n	
Categorization as Correlated or Completely Uncorrelated	Categorization as Correlated for 802.11b/g Categorization as Uncorrelated for 802.11n	
Antenna Type	SISO-ANT0 SISO-ANT1	Shrapnel Antenna
Antenna Gain	SISO-ANT0 SISO-ANT1	4.57 dBi
Total directional gain	For power spectral density (PSD) measurements	Correlated: 7.58 dBi Formulas: Directional gain = $G_{ANT} + 10 \log(N_{ANT})$ dBi Uncorrelated: 4.57 dBi Formulas: Directional gain = G_{ANT}
	For power measurements	Correlated: 7.58 dBi Formulas: Directional gain = $G_{ANT} + 10 \log(N_{ANT})$ dBi Uncorrelated: 4.57 dBi Formulas: Directional gain = G_{ANT}
	For Conducted Out-of-Band and Spurious Measureme	Correlated: 7.58 dBi Formulas: Directional gain = $G_{ANT} + 10 \log(N_{ANT})$ dBi Uncorrelated: 4.57 dBi Formulas: Directional gain = G_{ANT}

	nts	
About the Product	Only the WIFI 802.11b, 802.11g and 802.11n (HT20/40) was tested in this report.	

Mode	Antenna		
	SISO-ANT0	SISO-ANT1	MIMO
802.11b	√	√	√
802.11g	√	√	√
802.11n20	√	√	√
802.11n40	√	√	√
Note: All the configurations were tested, but only the worst case was reported in this report.			

Modulation technology	Modulation Type	Transfer Rate (Mbps)(Single RF path)
DSSS (802.11b)	DBPSK	1
	DQPSK	2
	CCK	5.5/11
OFDM (802.11g)	BPSK	6/9
	QPSK	12/18
	16QAM	24/36
	64QAM	48/54
OFDM (802.11n-20 MHz)	BPSK	6.5/7.2
	QPSK	13/19.5/14.4/21.7
	16QAM	26/39/28.9/43.3
	64QAM	52/58.5/65/57.8/65/72.2
OFDM (802.11n-40 MHz)	BPSK	13.5/15
	QPSK	27/40.5/30/45
	16QAM	54/81/60/90
	64QAM	108/121.5/135/120/150

Note: Preliminary tests were performed in different data rate in above table to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	
Output Power	11b/11g/11n20/11n40	1/6/6.5/13.5 Mbps	1/6/11	3/6/9
Occupied Bandwidth	11b/11g/11n20/11n40	1/6/6.5/13.5 Mbps	1/6/11	3/6/9
Conducted Spurious Emission	11b/11g/11n20/11n40	1/6/6.5/13.5 Mbps	1/6/11	3/6/9
Conducted Emission	11b/11g/11n20/11n40	1/6/6.5/13.5 Mbps	1/6/11	3/6/9
Radiated Spurious Emission	11b/11g/11n20/11n40	1/6/6.5/13.5 Mbps	1/6/11	3/6/9
Band Edge	11b/11g/11n20/11n40	1/6/6.5/13.5 Mbps	1/6/11	3/6/9
Power spectral density (PSD)	11b/11g/11n20/11n40	1/6/6.5/13.5 Mbps	1/6/11	3/6/9

Note: The above EUT information in section 2.5 was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C	Intentional radiators of radio frequency equipment
2 ☆	KDB Publication 662911 D01v02r01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band (e.g., MIMO, Smart Antenna, etc)
3	ANSI C63.10-2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
4 ☆	KDB Publication 558074 D01v05r02	GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES

3.2 Test Verdict

No.	Description	FCC Part No.	Test Result	Verdict
1	Antenna Requirement	15.203	N/A	Pass ^{Note}
2	Output Power	15.247 (b)	5.2.4	Pass
3	Occupied Bandwidth	15.247 (a)	5.3.4	Pass
4	Conducted Spurious Emission	15.247 (d)	5.4.4	Pass
5	Band Edge(Authorized-band band-edge)	15.247 (d)	5.5.4	Pass
6	Conducted Emission	15.207	5.6.4	Pass
7	Radiated Spurious Emission	15.209; 15.247 (d)	5.7.4	Pass
8	Band Edge(Restricted-band band-edge)	15.209; 15.247 (d)	5.8.4	Pass
9	Power spectral density (PSD)	15.247 (e)	5.9.4	Pass

Note: The EUT has a permanently and irreplaceable attached antenna, which complies with the requirement FCC 15.203.

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	43% to 57%	
Atmospheric Pressure	100 kPa to 102 kPa	
Temperature	NT (Normal Temperature)	+17.4°C to +24.2°C
Working Voltage of the EUT	NV (Normal Voltage)	5.0 V

4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	KEYSIGHT	N9020A	MY46471071	2024.07.04	2025.07.03
Spectrum Analyzer	ROHDE&SCHWARZ	FSV-40	101544	2024.12.16	2025.12.15
Power Sensor	KEYSIGHT	U2063XA	MY58000247	2024.07.04	2025.07.03
Spectrum Analyzer	KEYSIGHT	N9020A	MY52510065	2024.08.01	2025.07.31
Test Antenna-Horn	SCHWARZBECK	BBHA 9120D	02460	2024.05.16	2027.05.15
Test Antenna-Horn	A-INFO	LB-180400KF	J211060273	2024.06.15	2027.06.14
Anechoic Chamber	RAINFORD	9m*6m*6m	144	2022.02.19	2025.09.03
Amplifier	COM-MV	LSCX_LNA1-12G-01	180602	2024.08.01	2025.07.31
Amplifier	COM-MV	XKu_LNA7-18G-01	180601	2024.08.01	2025.07.31
Amplifier	COM-MV	KA LNA18 40G-01	18050001	2024.12.05	2025.12.04
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2024.08.01	2025.07.31
Test Antenna-Loop	SCHWARZBECK	FMZB 1519	1519-037	2024.01.23	2027.01.22
Amplifier	COM-MV	ZT30-1000M	B2018054558	2024.11.28	2025.11.27
Anechoic Chamber	EMC Electronic Co., Ltd	20.10*11.60*7.35m	130	2024.07.13	2027.07.12
EMI Receiver	Agilent	N9038A	MY55330120	2024.08.01	2025.07.31
Test Antenna-Bi-Log	SCHWARZBECK	VULB 9168	9168-00867	2022.04.12	2025.04.11
Amplifier	COM-MV	ZT30-1000M	B2017119081	2024.11.28	2025.11.27
Anechoic Chamber	YiHeng	9m*6m*6m	142	2024.07.21	2027.07.20
EMI Receiver	KEYSIGHT	N9010B	MY57110309	2024.08.01	2025.07.31
LISN	SCHWARZBECK	NSLK 8127	8127-687	2024.05.09	2025.05.08
Shielded Enclosure	YiHeng Electronic Co., Ltd	3.5m*3.1m*2.8 m	112	2025.02.14	2028.01.13

4.3 Test Software List

Description	Manufacturer	Software Version	Serial No.	Applicable test Setup
BL410R	BALUN	V2.1.1.488	N/A	The section 4.5.1
BL410E	BALUN	V22.930	N/A	The section 4.5.2&4.5.3&4.5.4&4.5.5

4.4 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Parameters	Uncertainty
Occupied Channel Bandwidth	2.8%
RF output power, conducted	1.28 dB
Power Spectral Density, conducted	1.30 dB
Unwanted Emissions, conducted	1.84 dB
All emissions, radiated	5.36 dB
Temperature	0.8℃
Humidity	4%


4.5 Description of Test Setup

4.5.1 For Antenna Port Test

Conducted value (dBm) = Measurement value (dBm) + cable loss (dB)


For example: the measurement value is 10 dBm and the cable 0.5dBm used, then the final result of EUT:

Conducted value (dBm) = 10 dBm + 0.5 dB = 10.5 dBm

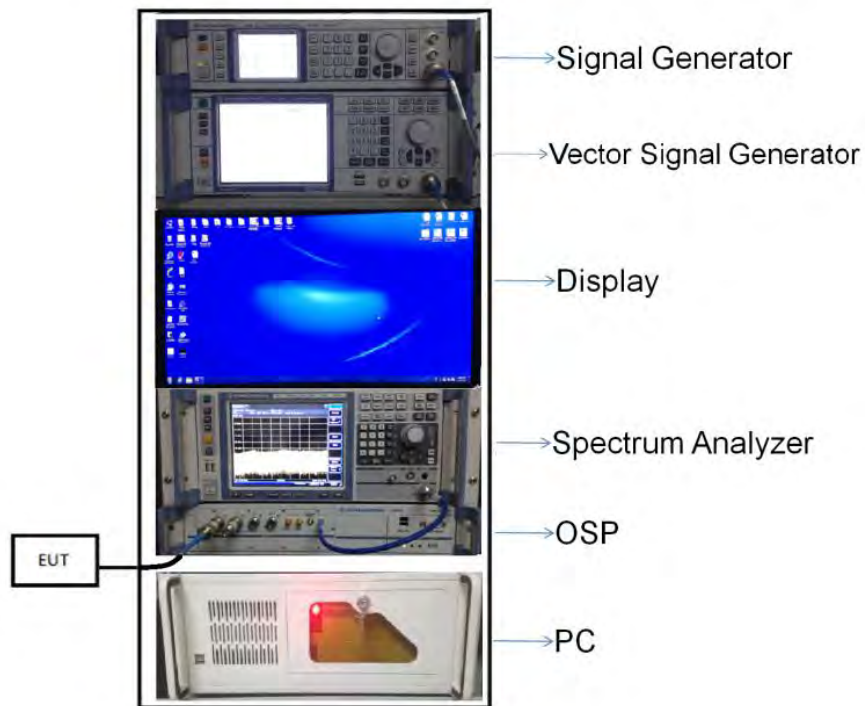


(Diagram 1)

4.5.2 For AC Power Supply Port Test

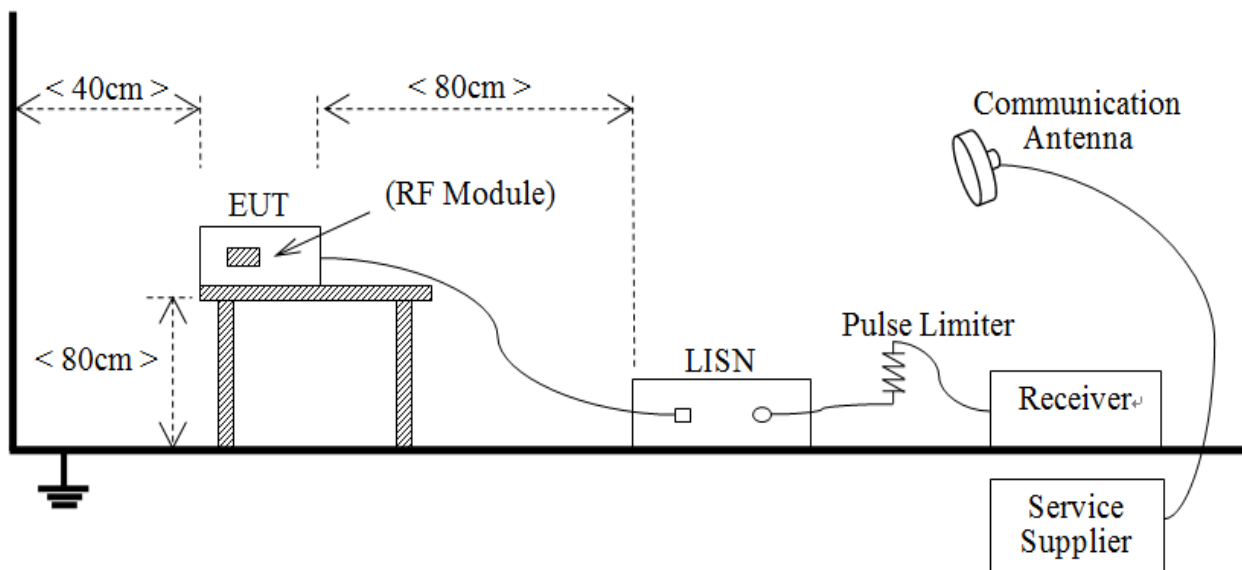


(Diagram 2)

4.5.3 For Radiated Test (Below 30 MHz)

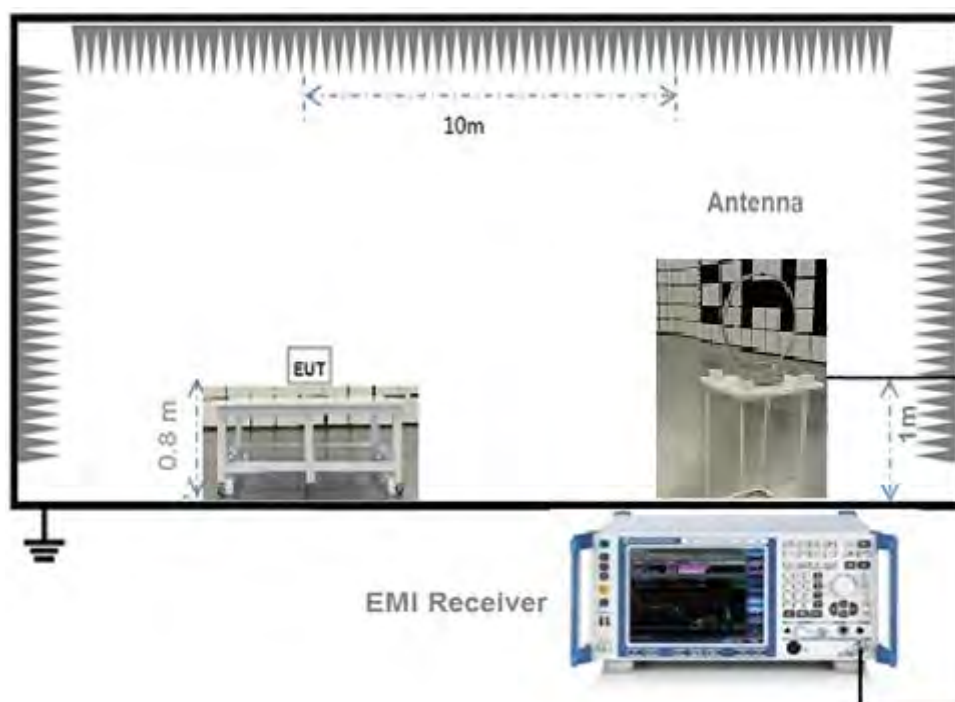


(Diagram 3)

4.5.4 For Radiated Test (30 MHz-1 GHz)

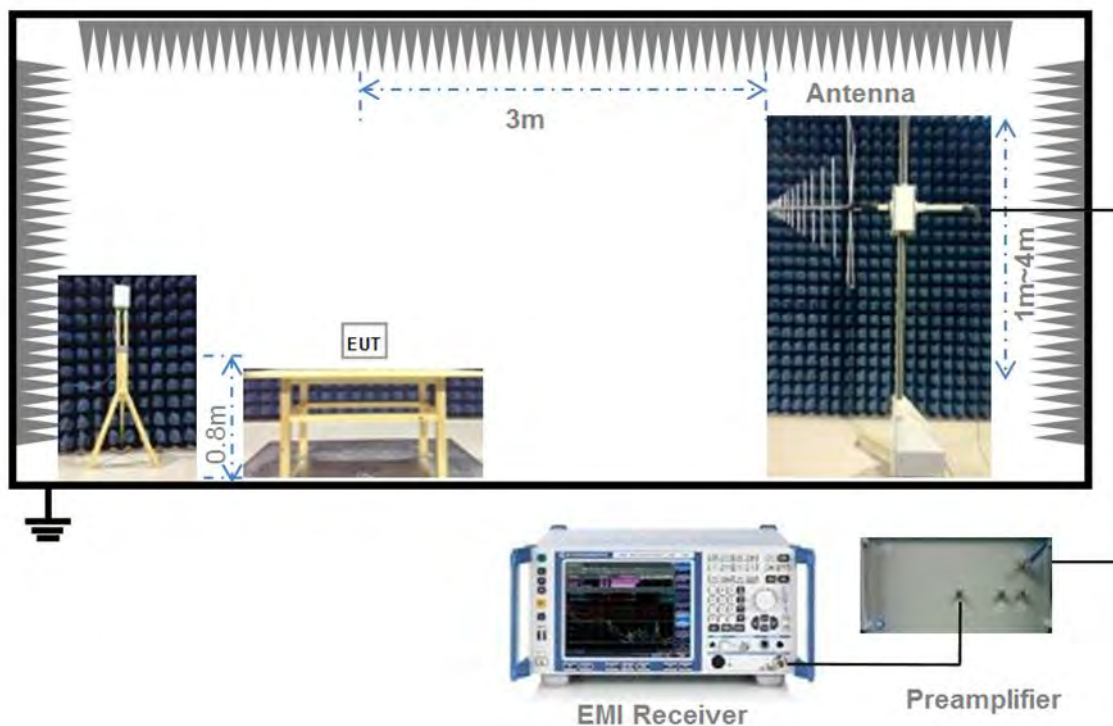

(Diagram 4)

4.5.5 For Radiated Test (Above 1 GHz)

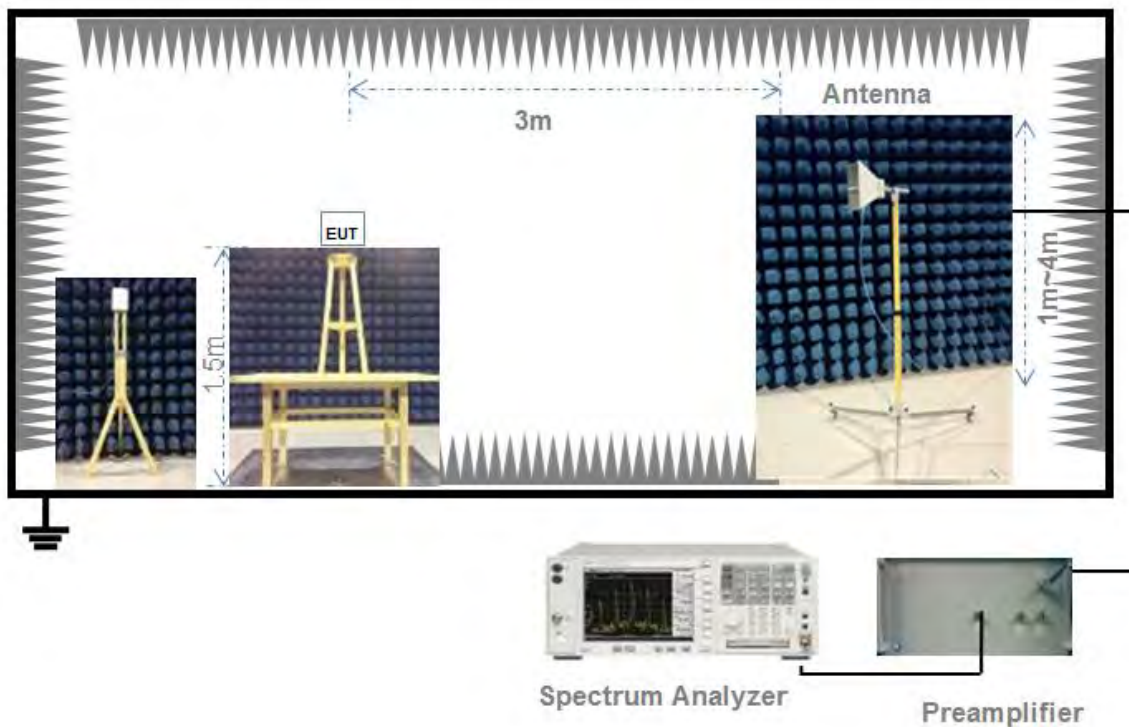

(Diagram 5)

4.6 Measurement Results Explanation Example

4.6.1 For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

4.6.2 For radiated band edges and spurious emission test:

$$E = \text{EIRP} - 20 \log D + 104.8$$

where:

E = electric field strength in dB μ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

EIRP = Measure Conducted output power Value (dBm) + Maximum transmit antenna gain (dBi) + the appropriate maximum ground reflection factor (dB)

5 TEST ITEMS

5.1 Antenna Requirements

5.1.1 Relevant Standards

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
The antenna is embedded in the product.	An embedded-in antenna design is used.

Reference Documents	Item
Photo	Please refer to the EUT Photo documents.

5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

5.2 Output Power

5.2.1 Test Limit

FCC § 15.247(b)

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements.

5.2.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX A.

5.2.3 Test Procedure

Maximum peak conducted output power

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

The EUT shall be transmitted at its maximum power control level.

Maximum conducted (average) output power (Reporting Only)

a) As an alternative to spectrum analyzer or EMI receiver measurements, measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied.

- 1) The EUT is configured to transmit continuously, or to transmit with a constant duty factor.
- 2) At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
- 3) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.

b) If the transmitter does not transmit continuously, measure the duty cycle (x) of the transmitter output signal.

c) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.

d) Adjust the measurement in dBm by adding $10\log(1/x)$, where x is the duty cycle.

Measurements of duty cycle

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal.

Set the center frequency of the instrument to the center frequency of the transmission.

Set RBW $\geq$ OBW if possible; otherwise, set RBW to the largest available value.

Set VBW $\geq$ RBW. Set detector = peak or average.

The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

5.2.4 Test Result

Duty Cycle

Test Mode	On Time (ms)	On+Off time (ms)	Duty Cycle	Duty Factor
802.11b	100	100	100.00%	0.00
802.11g	100	100	100.00%	0.00
802.11n-20 MHz	100	100	100.00%	0.00
802.11n-40 MHz	100	100	100.00%	0.00

SISO-ANT0Peak Power Test Data

802.11b Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	16.80	47.86	30	1000	Pass
Middle	16.91	49.09			Pass
High	16.72	46.99			Pass

802.11g Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	20.60	114.82	30	1000	Pass
Middle	20.41	109.90			Pass
High	20.53	112.98			Pass

802.11n-20 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	18.76	75.16	30	1000	Pass
Middle	19.42	87.50			Pass
High	19.36	86.30			Pass

802.11n-40 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	17.43	55.34	30	1000	Pass
Middle	18.23	66.53			Pass
High	17.51	56.36			Pass

Average Power Test Data

802.11b Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	13.74	23.66	30	1000	Pass
Middle	13.81	24.04			Pass
High	13.72	23.55			Pass

802.11g Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	13.77	23.82	30	1000	Pass
Middle	13.92	24.66			Pass
High	13.79	23.93			Pass

802.11n-20 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	12.91	19.54	30	1000	Pass
Middle	12.93	19.63			Pass
High	12.84	19.23			Pass

802.11n-40 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	12.82	19.14	30	1000	Pass
Middle	12.91	19.54			Pass
High	12.90	19.50			Pass

SISO-ANT1Peak Power Test Data

802.11b Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	16.62	45.92	30	1000	Pass
Middle	16.51	44.77			Pass
High	16.32	42.85			Pass

802.11g Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	20.42	110.15	30	1000	Pass
Middle	20.41	109.90			Pass
High	20.13	103.04			Pass

802.11n-20 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	18.36	68.55	30	1000	Pass
Middle	19.02	79.80			Pass
High	19.06	80.54			Pass

802.11n-40 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	17.63	57.94	30	1000	Pass
Middle	18.33	68.08			Pass
High	17.41	55.08			Pass

Average Power Test Data

802.11b Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	13.84	24.21	30	1000	Pass
Middle	13.77	23.82			Pass
High	13.86	24.32			Pass

802.11g Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	13.88	24.43	30	1000	Pass
Middle	13.84	24.21			Pass
High	13.79	23.93			Pass

802.11n-20 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	12.77	18.92	30	1000	Pass
Middle	12.79	19.01			Pass
High	12.87	19.36			Pass

802.11n-40 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	12.88	19.41	30	1000	Pass
Middle	12.81	19.10			Pass
High	12.84	19.23			Pass

MIMO-ANT0Peak Power Test Data

802.11b Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	13.70	23.44	28.42	695.02	Pass
Middle	13.71	23.50			Pass
High	13.62	23.01			Pass

802.11g Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	17.60	57.54	28.42	695.02	Pass
Middle	17.61	57.68			Pass
High	17.63	57.94			Pass

802.11n-20 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	15.66	36.81	30	1000	Pass
Middle	16.32	42.85			Pass
High	16.46	44.26			Pass

802.11n-40 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	14.53	28.38	30	1000	Pass
Middle	15.23	33.34			Pass
High	14.41	27.61			Pass

Average Power Test Data

802.11b Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	10.80	12.02	28.42	695.02	Pass
Middle	10.88	12.25			Pass
High	10.90	12.30			Pass

802.11g Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	10.58	11.43	28.42	695.02	Pass
Middle	10.84	12.13			Pass
High	10.50	11.22			Pass

802.11n-20 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	9.64	9.20	30	1000	Pass
Middle	9.84	9.64			Pass
High	9.77	9.48			Pass

802.11n-40 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	9.71	9.35	30	1000	Pass
Middle	9.83	9.62			Pass
High	9.89	9.75			Pass

MIMO-ANT1Peak Power Test Data

802.11b Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	13.90	24.55	28.42	695.02	Pass
Middle	13.31	21.43			Pass
High	13.52	22.49			Pass

802.11g Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	17.70	58.88	28.42	695.02	Pass
Middle	17.81	60.39			Pass
High	17.53	56.62			Pass

802.11n-20 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	15.56	35.97	30	1000	Pass
Middle	15.92	39.08			Pass
High	16.66	46.34			Pass

802.11n-40 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	14.13	25.88	30	1000	Pass
Middle	15.23	33.34			Pass
High	14.41	27.61			Pass

Average Power Test Data

802.11b Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	10.65	11.61	28.42	695.02	Pass
Middle	10.64	11.59			Pass
High	10.80	12.02			Pass

802.11g Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	10.58	11.43	28.42	695.02	Pass
Middle	10.74	11.86			Pass
High	10.83	12.11			Pass

802.11n-20 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	9.73	9.40	30	1000	Pass
Middle	9.28	8.47			Pass
High	9.75	9.44			Pass

802.11n-40 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	9.40	8.71	30	1000	Pass
Middle	9.73	9.40			Pass
High	9.84	9.64			Pass

MIMOPeak Power Test Data

802.11b Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	16.81	47.99	28.42	695.02	Pass
Middle	16.52	44.93			Pass
High	16.58	45.50			Pass

802.11g Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	20.66	116.43	28.42	695.02	Pass
Middle	20.72	118.07			Pass
High	20.59	114.57			Pass

802.11n-20 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	18.62	72.79	30	1000	Pass
Middle	19.13	81.94			Pass
High	19.57	90.60			Pass

802.11n-40 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	17.34	54.26	30	1000	Pass
Middle	18.24	66.69			Pass
High	17.42	55.21			Pass

Average Power Test Data

802.11b Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	13.74	23.64	28.42	695.02	Pass
Middle	13.77	23.83			Pass
High	13.86	24.33			Pass

802.11g Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	13.59	22.86	28.42	695.02	Pass
Middle	13.80	23.99			Pass
High	13.68	23.33			Pass

802.11n-20 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	12.70	18.60	30	1000	Pass
Middle	12.58	18.11			Pass
High	12.77	18.92			Pass

802.11n-40 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	12.57	18.06	30	1000	Pass
Middle	12.79	19.01			Pass
High	12.88	19.39			Pass

5.3 Occupied Bandwidth

5.3.1 Limit

FCC §15.247(a)

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW. The 6 dB bandwidth must be greater than 500 kHz.

5.3.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX A.

5.3.3 Test Procedure

Use the following spectrum analyzer settings:

Set RBW = 100 kHz.

Set the video bandwidth (VBW) ≥ 3 RBW.

Detector = Peak.

Trace mode = max hold.

Sweep = auto couple.

Allow the trace to stabilize.

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.3.4 Test Result

Test Data

Note: All antenna were tested, but only the worst case has been reported in this report.

SISO-ANT0

802.11b Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
Low	9.300000	13.288000	≥500
Middle	9.300000	13.326000	≥500
High	9.200000	13.344000	≥500

802.11g Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
Low	16.600000	17.011000	≥500
Middle	16.600000	16.847000	≥500
High	16.600000	16.970000	≥500

802.11n-20MHz Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
Low	17.800000	17.852000	≥500
Middle	17.800000	17.859000	≥500
High	17.800000	17.838000	≥500

802.11n-40MHz Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
Low	36.600000	36.376000	≥500
Middle	36.600000	36.374000	≥500
High	36.600000	36.363000	≥500

Test Plots

SISO-ANT0

6 dB Bandwidth

802.11b LOW CHANNEL



802.11b MIDDLE CHANNEL



802.11b HIGH CHANNEL



802.11g LOW CHANNEL



802.11g MIDDLE CHANNEL



802.11g HIGH CHANNEL




802.11n-20 MHz LOW CHANNEL




802.11n-20 MHz MIDDLE CHANNEL



802.11n-20 MHz HIGH CHANNEL

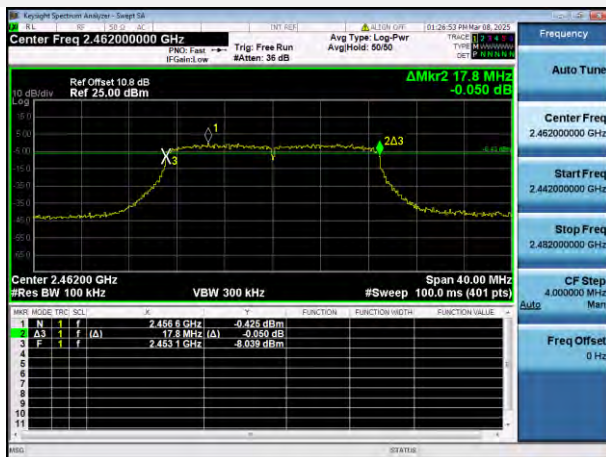


802.11n-40 MHz LOW CHANNEL

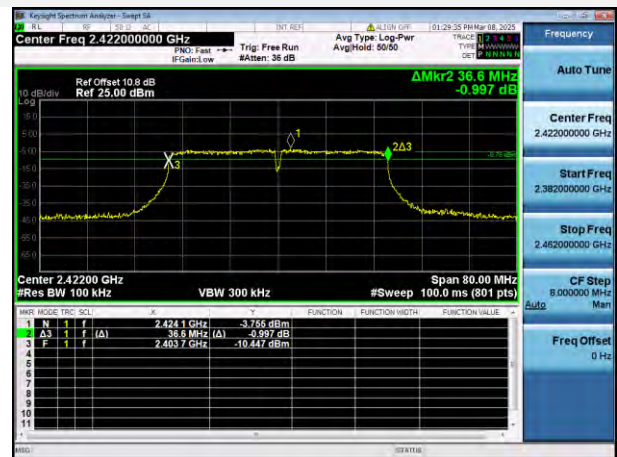

802.11n-40 MHz MIDDLE CHANNEL




802.11n-40 MHz HIGH CHANNEL

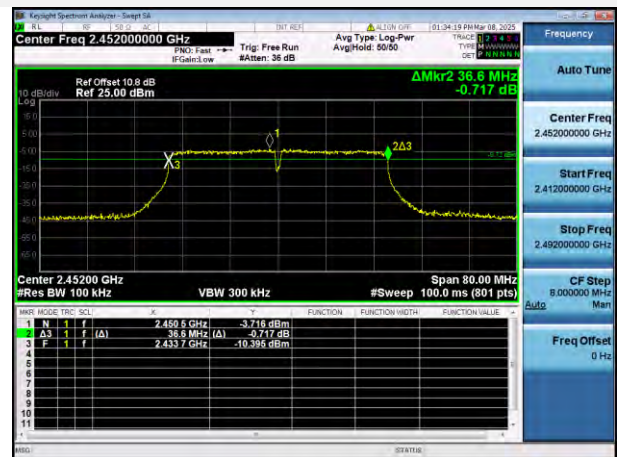


99% Bandwidth


802.11b LOW CHANNEL

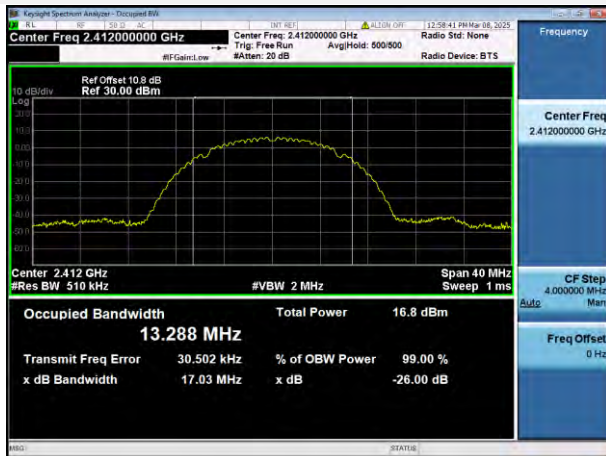

802.11b MIDDLE CHANNEL

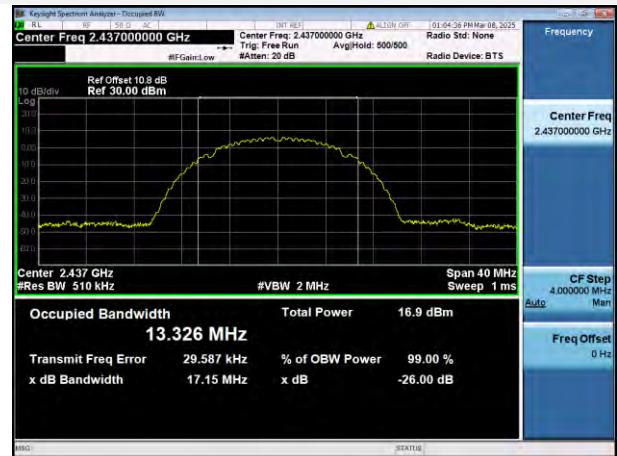

802.11b HIGH CHANNEL

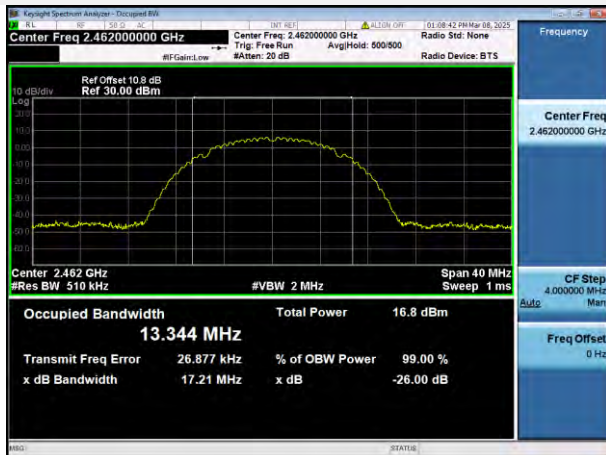

802.11g LOW CHANNEL



802.11g MIDDLE CHANNEL




802.11g HIGH CHANNEL



802.11n-20 MHz LOW CHANNEL




802.11n-20 MHz MIDDLE CHANNEL

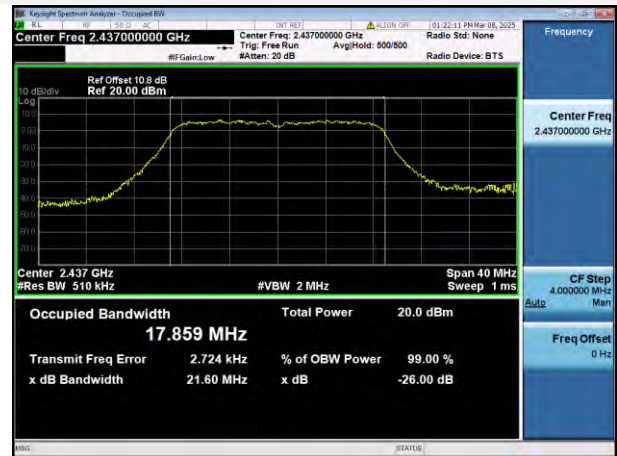

802.11n-20 MHz HIGH CHANNEL



802.11n-40 MHz LOW CHANNEL

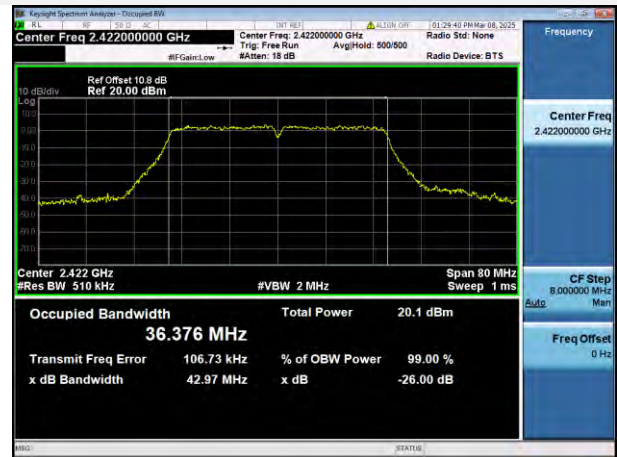

802.11n-40 MHz MIDDLE CHANNEL



802.11n-40 MHz HIGH CHANNEL



5.4 Conducted Spurious Emission

5.4.1 Limit

FCC §15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.4.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX A.

5.4.3 Test Procedure

The DTS rules specify that in any 100 kHz bandwidth outside of the authorized frequency band, the power shall be attenuated according to the following conditions:

- a) If the maximum peak conducted output power procedure was used to demonstrate compliance as described in 9.1, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).
- b) If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).
- c) In either case, attenuation to levels below the 15.209 general radiated emissions limits is not required.

The following procedures shall be used to demonstrate compliance to these limits. Note that these procedures can be used in either an antenna-port conducted or radiated test set-up. Radiated tests must conform to the test site requirements and utilize maximization procedures defined herein.

Reference level measurement

Establish a reference level by using the following procedure:

Set instrument center frequency to DTS channel center frequency.

Set the span to ≥ 1.5 times the DTS bandwidth.

Set the RBW = 100 kHz.

Set the VBW $\geq 3 \times$ RBW.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum PSD level.

Emission level measurement

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

Set the RBW = 100 kHz.

Set the VBW $\geq 3 \times$ RBW.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in 11.1 a) or 11.1 b). Report the three highest emissions relative to the limit.

5.4.4 Test Result

Test Data

Note: All antenna were tested, but only the worst case has been reported in this report.

SISO-ANT0

802.11b Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-44.17	4.70	-15.30	Pass
Middle	-39.00	4.77	-15.23	Pass
High	-40.14	4.70	-15.30	Pass

802.11g Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-44.50	0.13	-19.87	Pass
Middle	-40.48	0.32	-19.68	Pass
High	-40.38	0.31	-19.69	Pass

802.11n-20MHz Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-39.43	0.27	-19.73	Pass
Middle	-39.03	-0.19	-20.19	Pass
High	-39.77	-0.22	-20.22	Pass

802.11n-40MHz Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-39.19	-3.23	-23.23	Pass
Middle	-38.66	-3.19	-23.19	Pass
High	-39.65	-3.19	-23.19	Pass


Test Plots

SISO-ANT0


802.11b LOW CHANNEL CARRIER LEVEL



802.11b LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

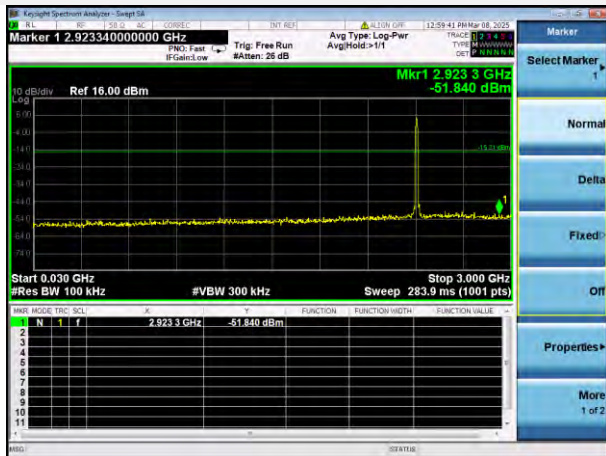


802.11b LOW CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

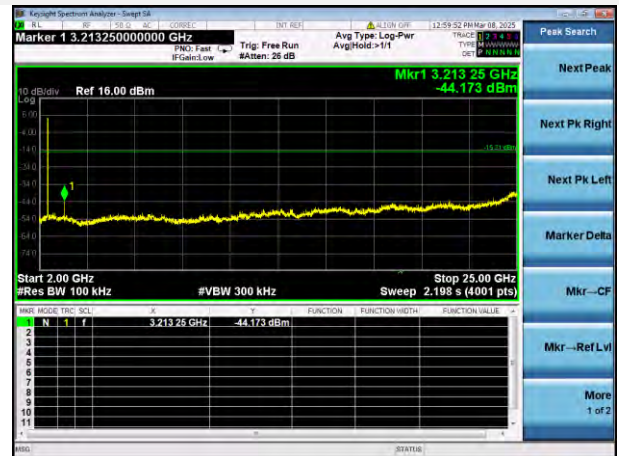


802.11b MIDDLE CHANNEL CARRIER LEVEL



802.11b MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

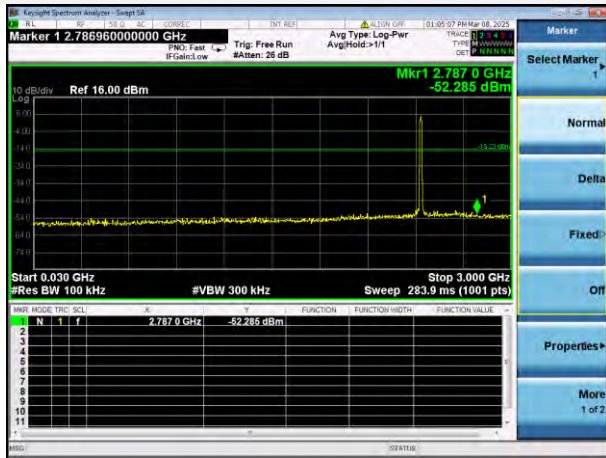


802.11b MIDDLE CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

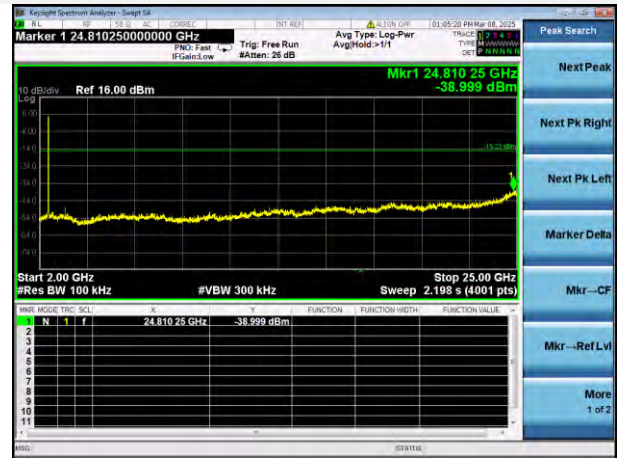


802.11b HIGH CHANNEL CARRIER LEVEL




802.11b HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

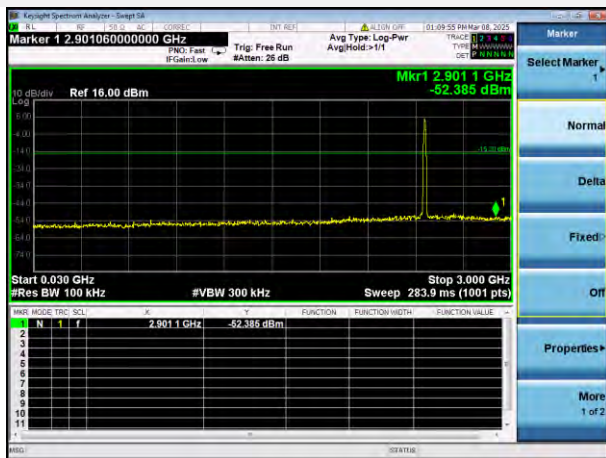



802.11b HIGH CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

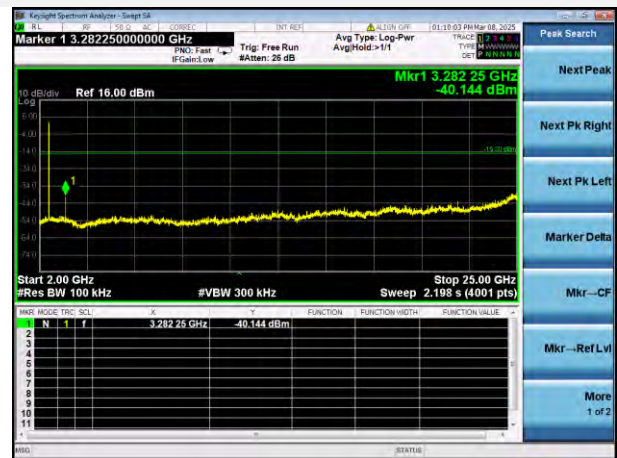


802.11g LOW CHANNEL CARRIER LEVEL

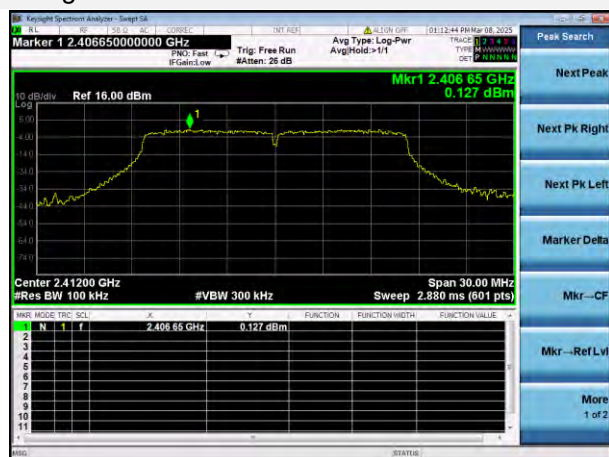


802.11g LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz 802.11g LOW CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

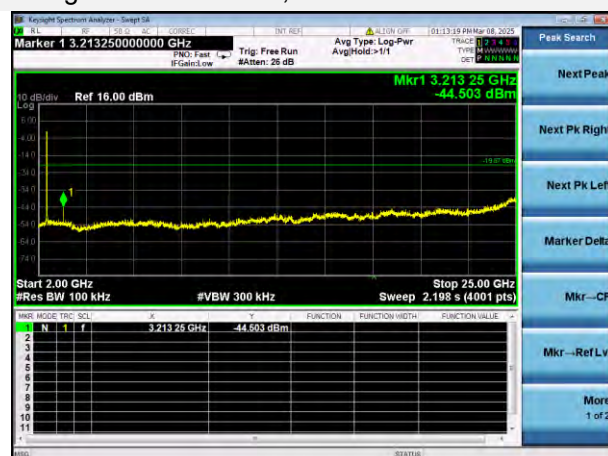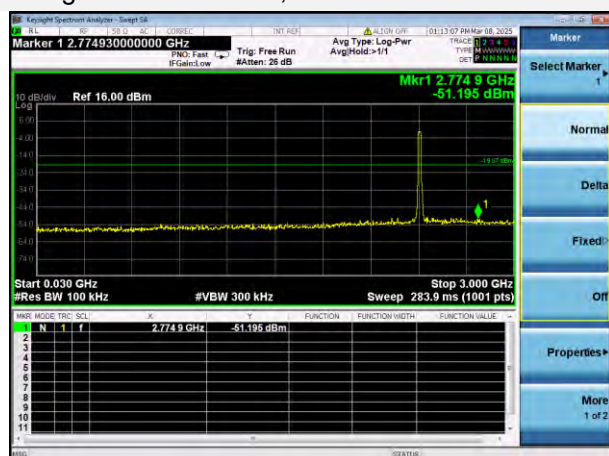


802.11g MIDDLE CHANNEL CARRIER LEVEL

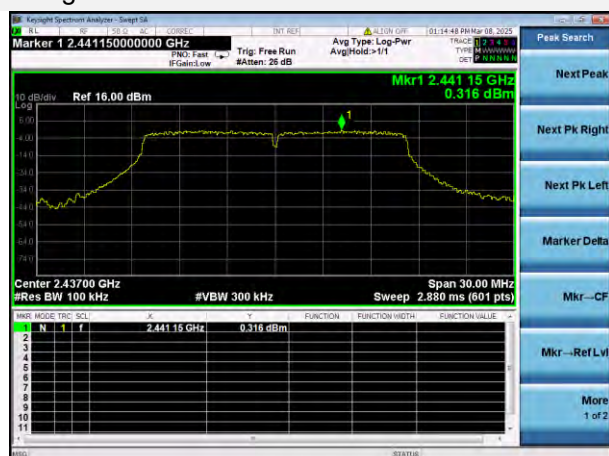


802.11g MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

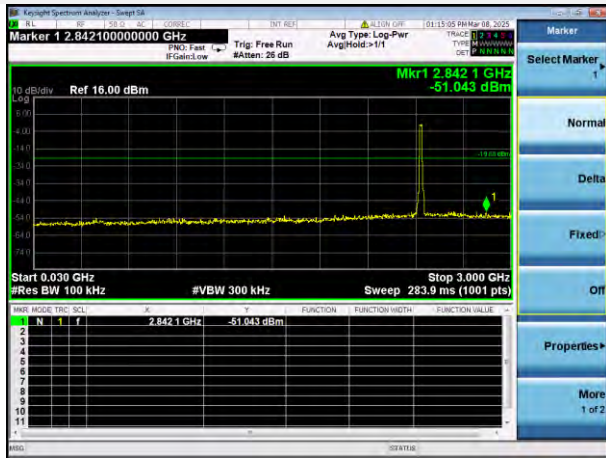


802.11g MIDDLE CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

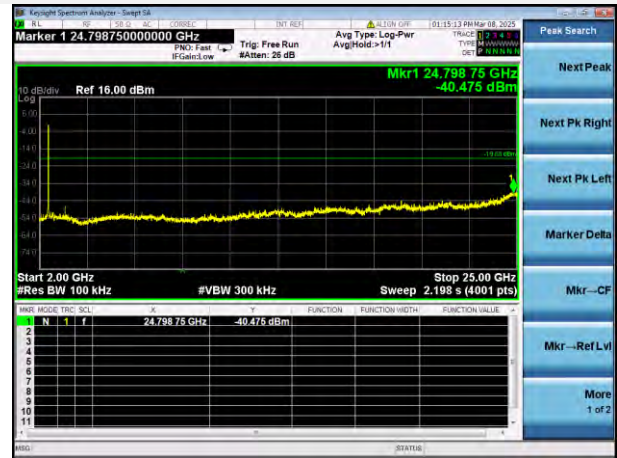


802.11g HIGH CHANNEL CARRIER LEVEL

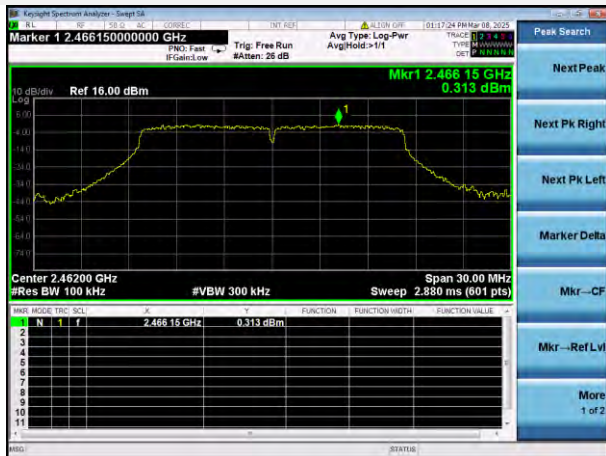




802.11g HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

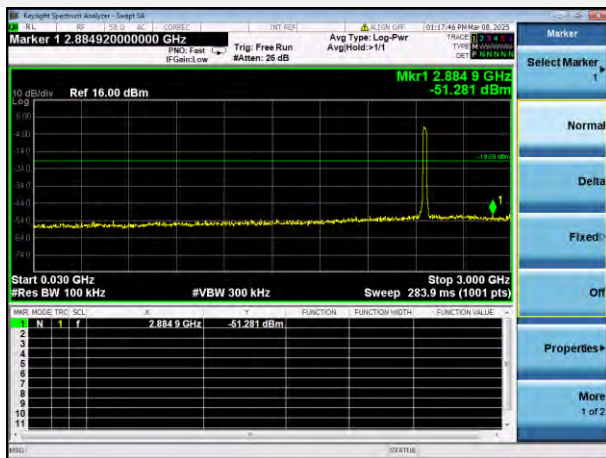


802.11g HIGH CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

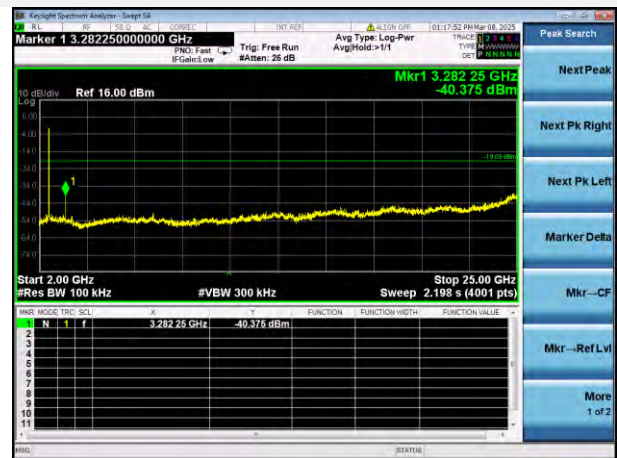


802.11n-20 MHz LOW CHANNEL CARRIER LEVEL

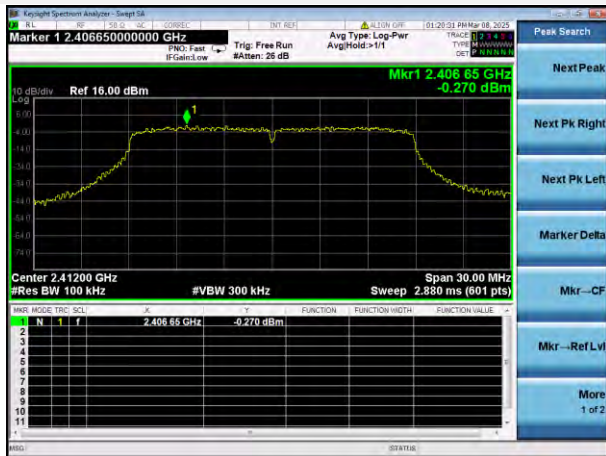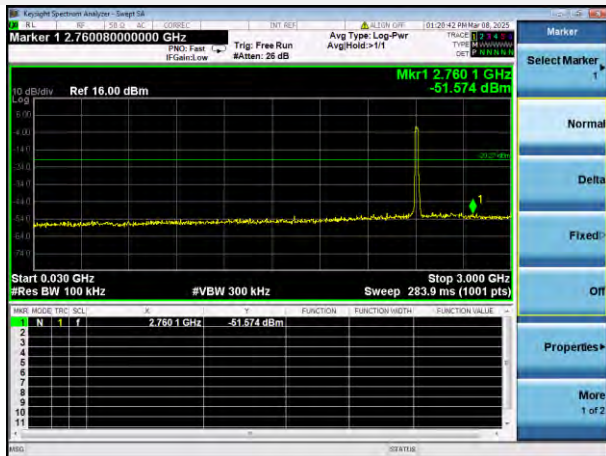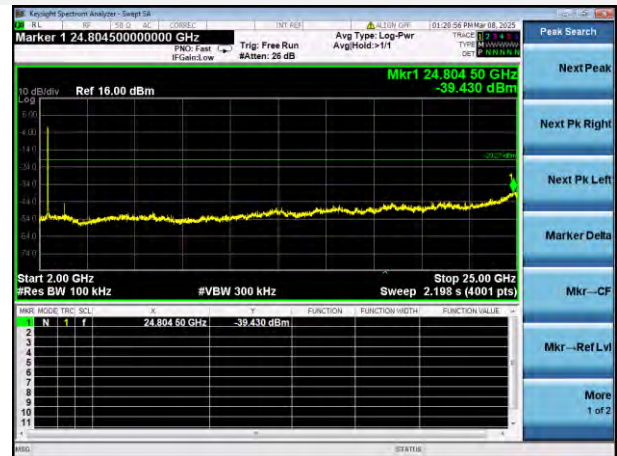802.11n-20 MHz LOW CHANNEL, SPURIOUS
30 MHz ~ 3 GHz802.11n-20 MHz LOW CHANNEL, SPURIOUS
2 GHz ~ 25 GHz


802.11n-20 MHz MIDDLE CHANNEL CARRIER LEVEL

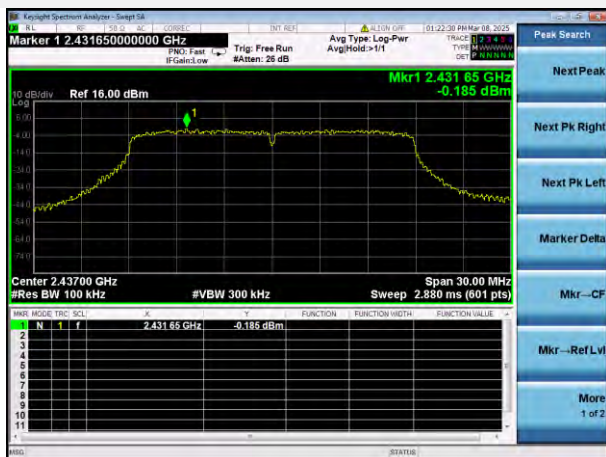


802.11n-20 MHz MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

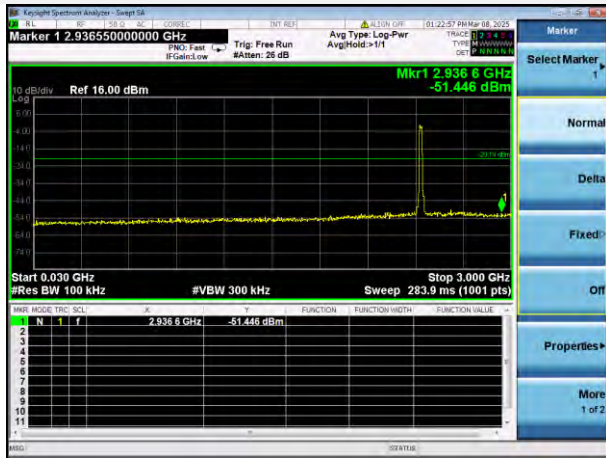


802.11n-20 MHz MIDDLE CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

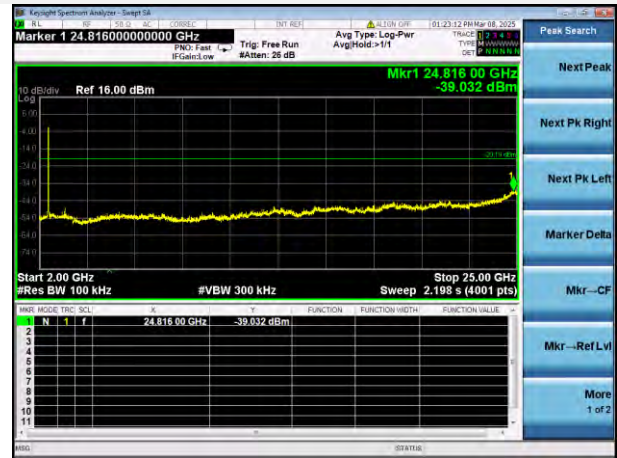


802.11n-20 MHz HIGH CHANNEL CARRIER LEVEL

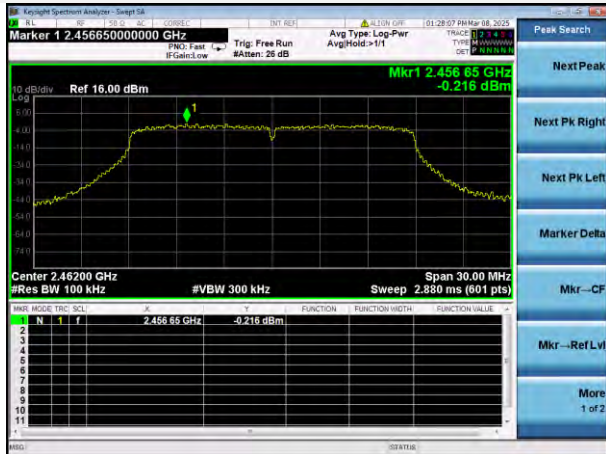




802.11n-20 MHz HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

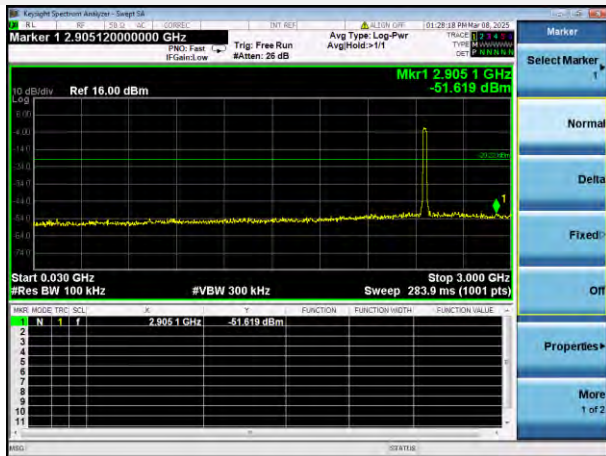


802.11n-20 MHz HIGH CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

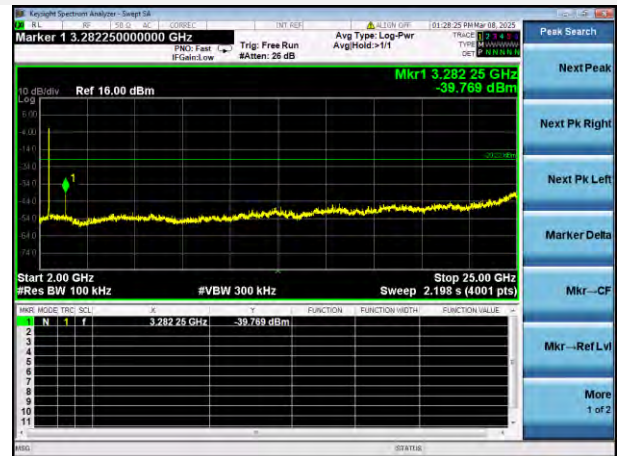


802.11n-40 MHz LOW CHANNEL CARRIER LEVEL

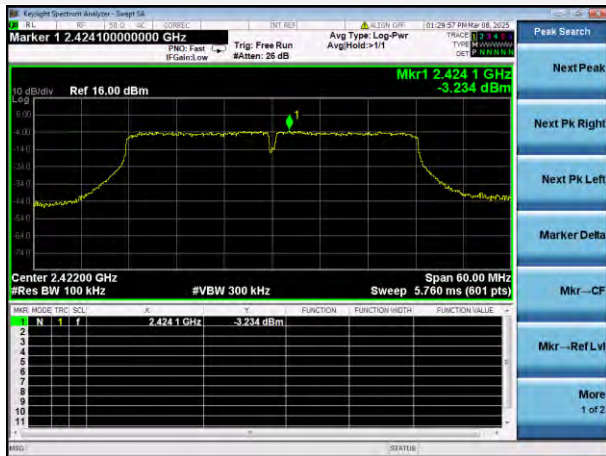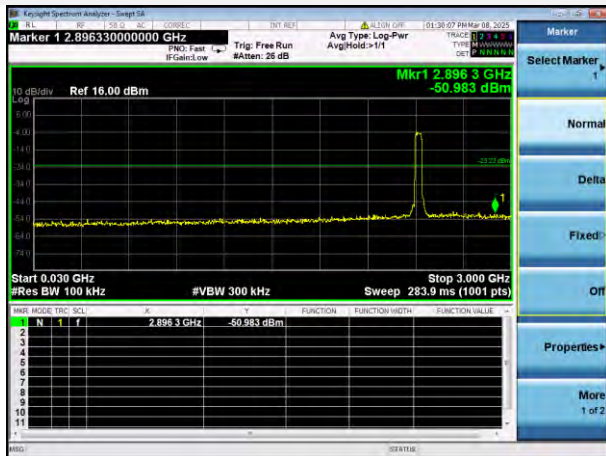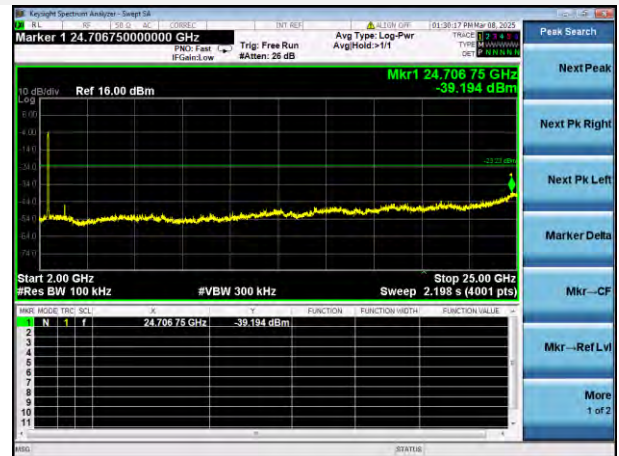802.11n-40 MHz LOW CHANNEL, SPURIOUS
30 MHz ~ 3 GHz802.11n-40 MHz LOW CHANNEL, SPURIOUS
2 GHz ~ 25 GHz


802.11n-40 MHz MIDDLE CHANNEL CARRIER LEVEL

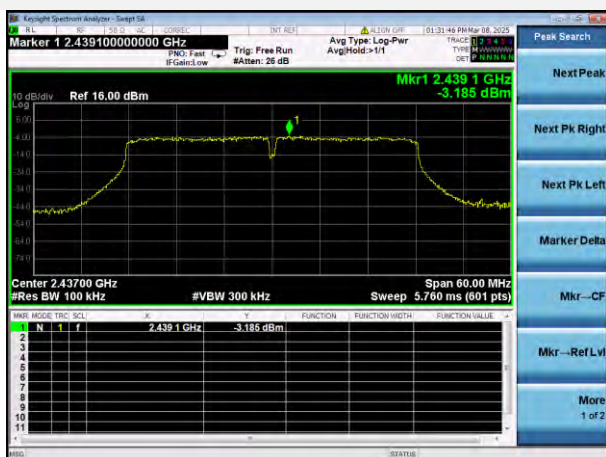


802.11n-40 MHz MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

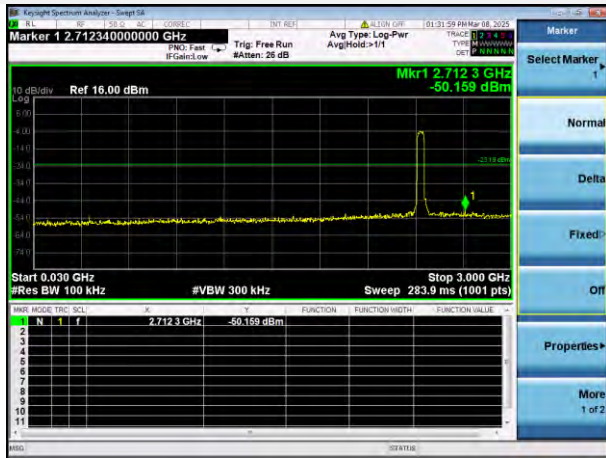


802.11n-40 MHz MIDDLE CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

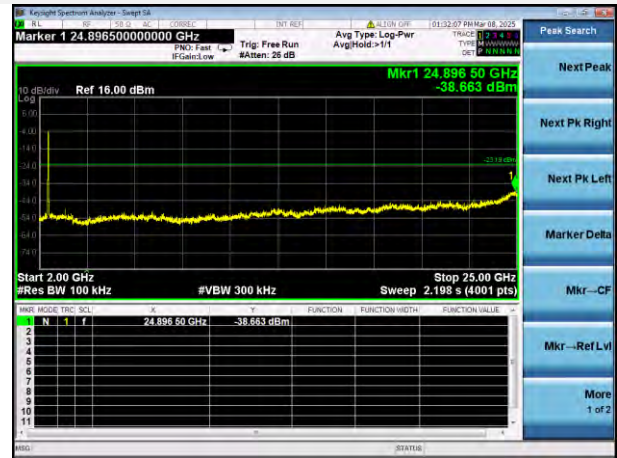


802.11n-40 MHz HIGH CHANNEL CARRIER LEVEL

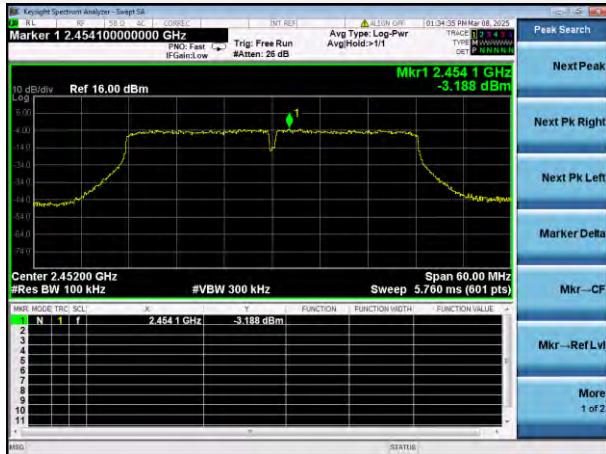

802.11n-40 MHz HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

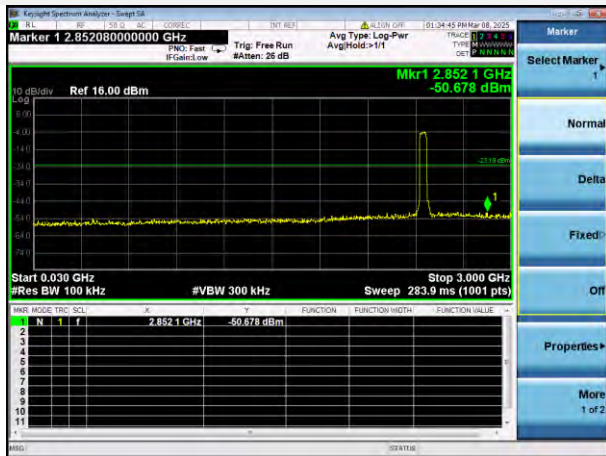

802.11n-40 MHz HIGH CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

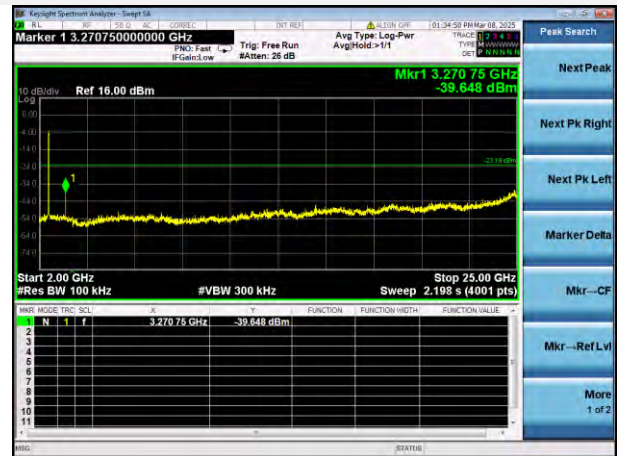

5.5 Band Edge (Authorized-band band-edge)

5.5.1 Limit

FCC §15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.5.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX A.

5.5.3 Test Procedure

The following procedures may be used to determine the peak or average field strength or power of an unwanted emission that is within 2 MHz of the authorized band edge. If a peak detector is utilized, use the procedure described in 13.2.1. Use the procedure described in 13.2.2 when using an average detector and the EUT can be configured to transmit continuously (i.e., duty cycle $\geq 98\%$). Use the procedure described in 13.2.3 when using an average detector and the EUT cannot be configured to transmit continuously but the duty cycle is constant (i.e., duty cycle variations are less than ± 2 percent). Use the procedure described in 13.2.4 when using an average detector for those cases where the EUT cannot be configured to transmit continuously and the duty cycle is not constant (duty cycle variations equal or exceed 2 percent).

When using a peak detector to measure unwanted emissions at or near the band edge (within 2 MHz of the authorized band), the following integration procedure can be used.

Set instrument center frequency to the frequency of the emission to be measured (must be within 2 MHz of the authorized band edge).

Set span to 2 MHz

RBW = 100 kHz.

VBW $\geq 3 \times$ RBW.

Detector = peak.

Sweep time = auto.

Trace mode = max hold.

Allow sweep to continue until the trace stabilizes (required measurement time may increase for low duty cycle applications)

Compute the power by integrating the spectrum over 1 MHz using the analyzer's band power measurement function with band limits set equal to the emission frequency (femission) ± 0.5 MHz. If the instrument does not have a band power function, then sum the amplitude levels (in power units) at 100 kHz intervals extending across the 1 MHz spectrum defined by femission ± 0.5 MHz.

Standard method(The 99% OBW of the fundamental emission is without 2 MHz of the authorized band):

Span: Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products that fall outside of the authorized band of operation.

Reference level: As required to keep the signal from exceeding the maximum instrument input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (\text{OBW/RBW})]$ below the reference level. Specific guidance is given in 4.1.5.2.

Attenuation: Auto (at least 10 dB preferred).

Sweep time: Coupled.

Resolution bandwidth: 100 kHz.

Video bandwidth: 300 kHz.

Detector: Peak.

Trace: Max hold.

5.5.4 Test Result

Test Data

Note 1: The 99% OBW of the fundamental emission is without 2 MHz of the authorized band.

Note 2: All antenna were tested, but only the worst case has been reported in this report.

SISO-ANT0

802.11b Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-45.70	4.70	-15.30	Pass
High Channel	-46.78	4.70	-15.30	Pass

802.11g Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-36.96	0.13	-29.87	Pass
High Channel	-47.17	0.31	-29.69	Pass

802.11n-20 MHz Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-37.45	0.27	-29.73	Pass
High Channel	-46.56	-0.22	-30.22	Pass

802.11n-40 MHz Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-36.83	-3.23	-33.23	Pass
High Channel	-42.40	-3.19	-33.19	Pass

Test Plots

SISO-ANT0

802.11b LOW CHANNEL, CARRIER LEVEL




802.11b LOW CHANNEL, BAND EDGE




802.11b HIGH CHANNEL, CARRIER LEVEL




802.11b HIGH CHANNEL, BAND EDGE

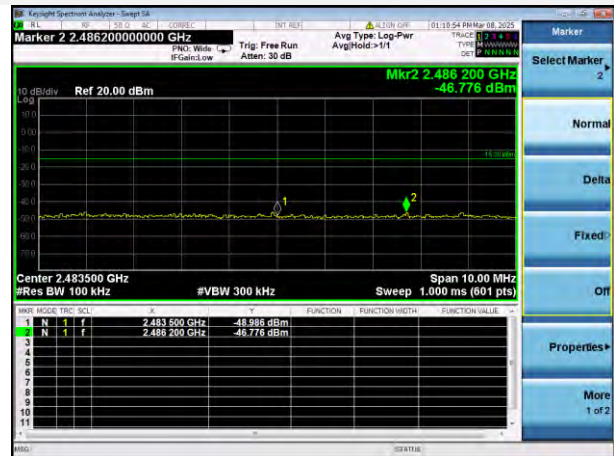


802.11g LOW CHANNEL, CARRIER LEVEL

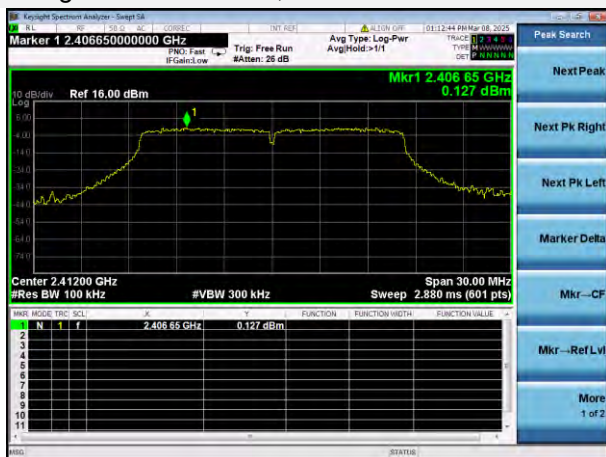


802.11g LOW CHANNEL, BAND EDGE

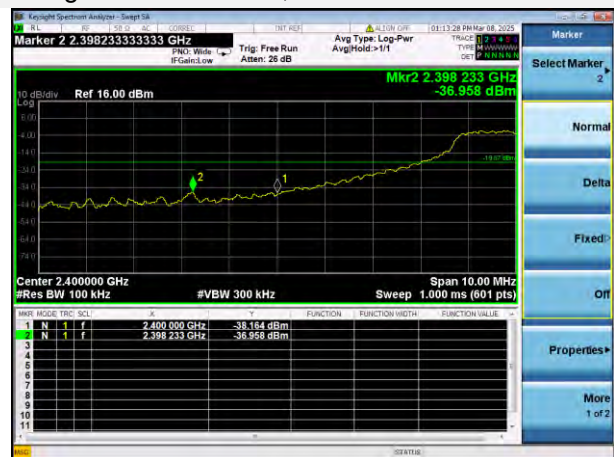


802.11g HIGH CHANNEL, CARRIER LEVEL

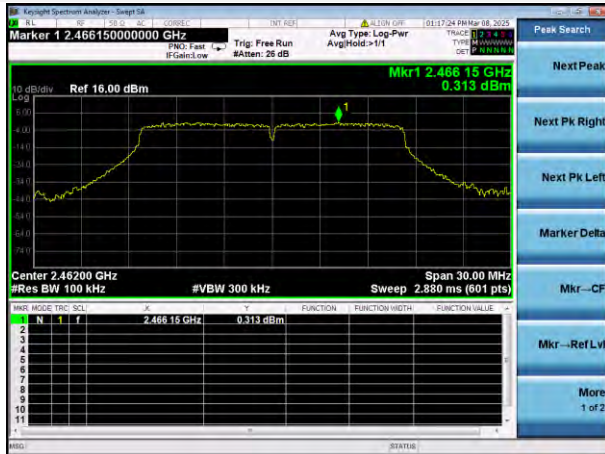


802.11g HIGH CHANNEL, BAND EDGE

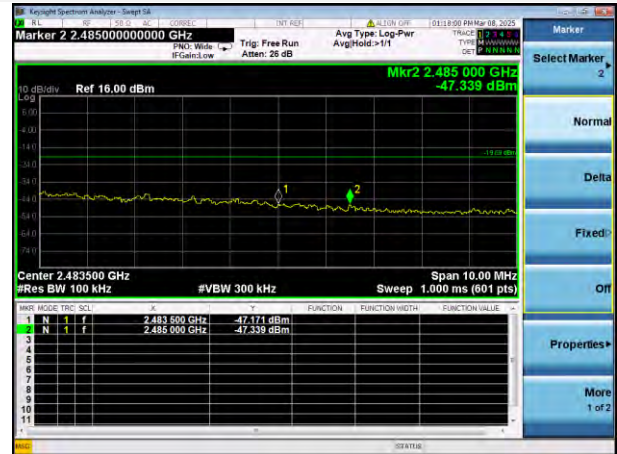


802.11n-20 MHz LOW CHANNEL, CARRIER LEVEL

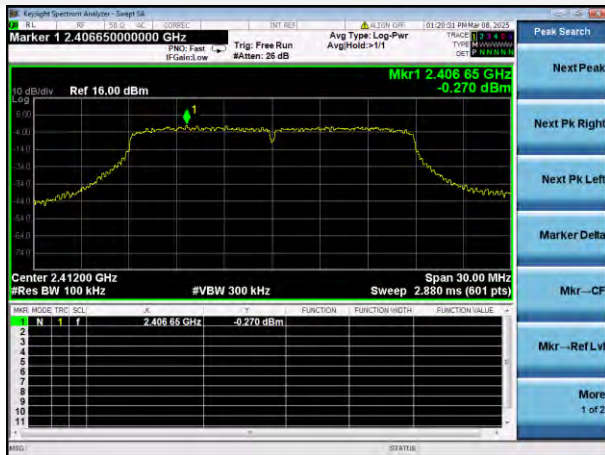


802.11n-20 MHz LOW CHANNEL, BAND EDGE

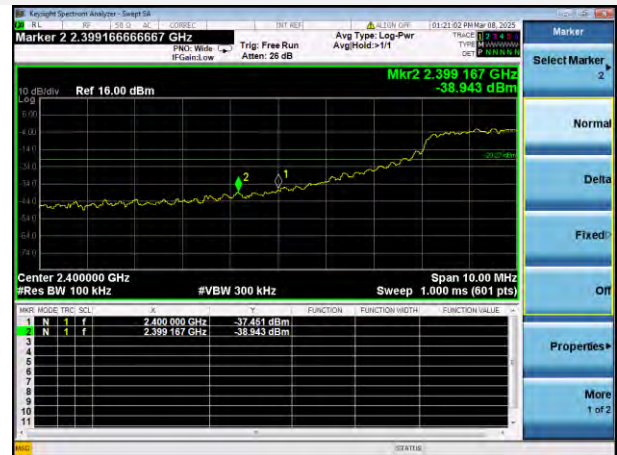


802.11n-20 MHz HIGH CHANNEL, CARRIER LEVEL

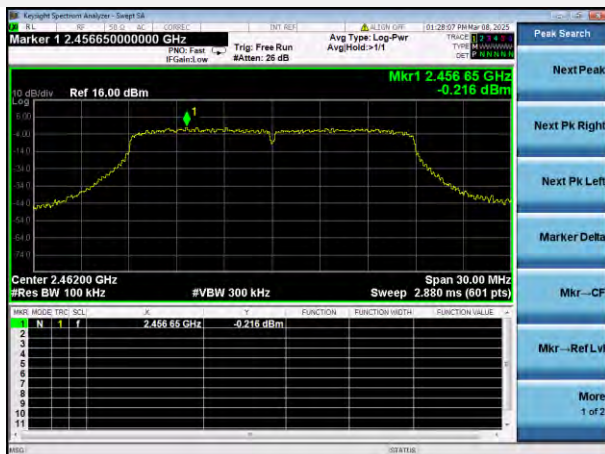

802.11n-20 MHz HIGH CHANNEL, BAND EDGE

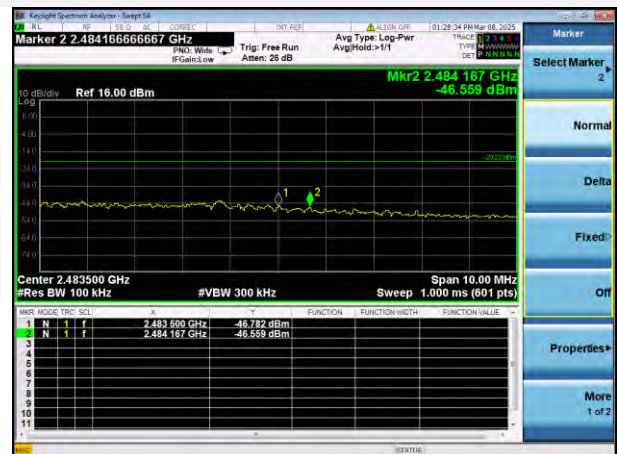


802.11n-40 MHz LOW CHANNEL, CARRIER LEVEL

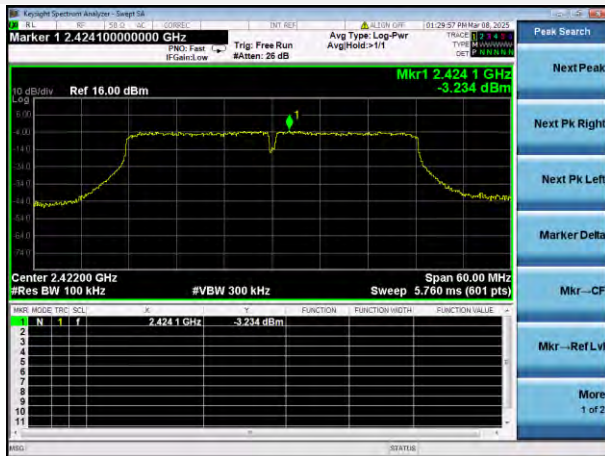


802.11n-40 MHz LOW CHANNEL, BAND EDGE



802.11n-40 MHz HIGH CHANNEL, CARRIER LEVEL

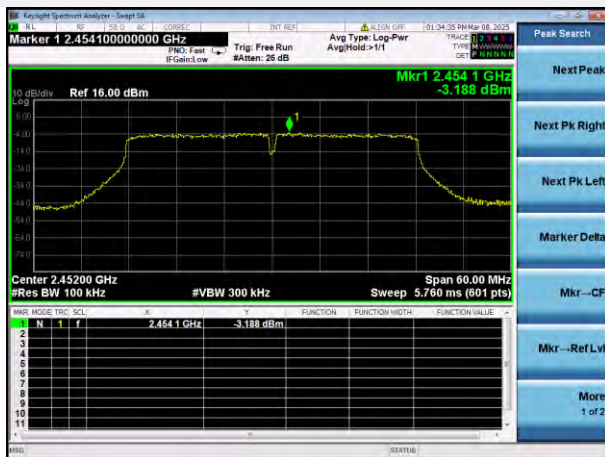

802.11n-40 MHz HIGH CHANNEL, BAND EDGE

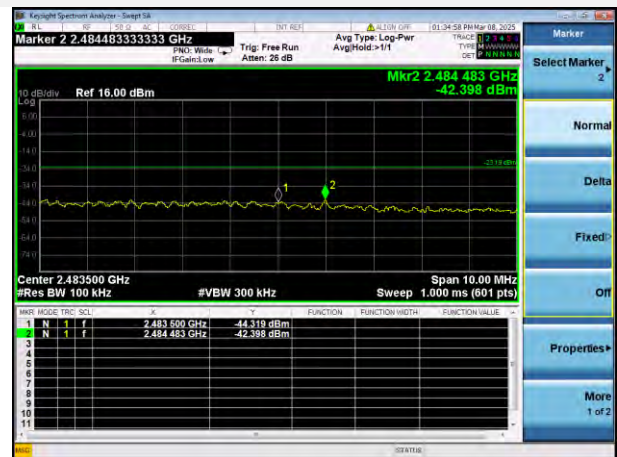

5.6 Conducted Emission

5.6.1 Limit

FCC §15.207

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

5.6.2 Test Setup

See section 4.5.2 for test setup description for the AC power supply port. The photo of test setup please refer to ANNEX A.

5.6.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

5.6.4 Test Result

Note ¹: The EUT was tested in charging mode.


Note ²: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.

Note ³: Results (dBuV) = Original reading level of Spectrum Analyzer (dBuV) + Factor (dB)

Test Data and Plots

PHASE L


CE Test case_FCC_CE_FCC PART 15C

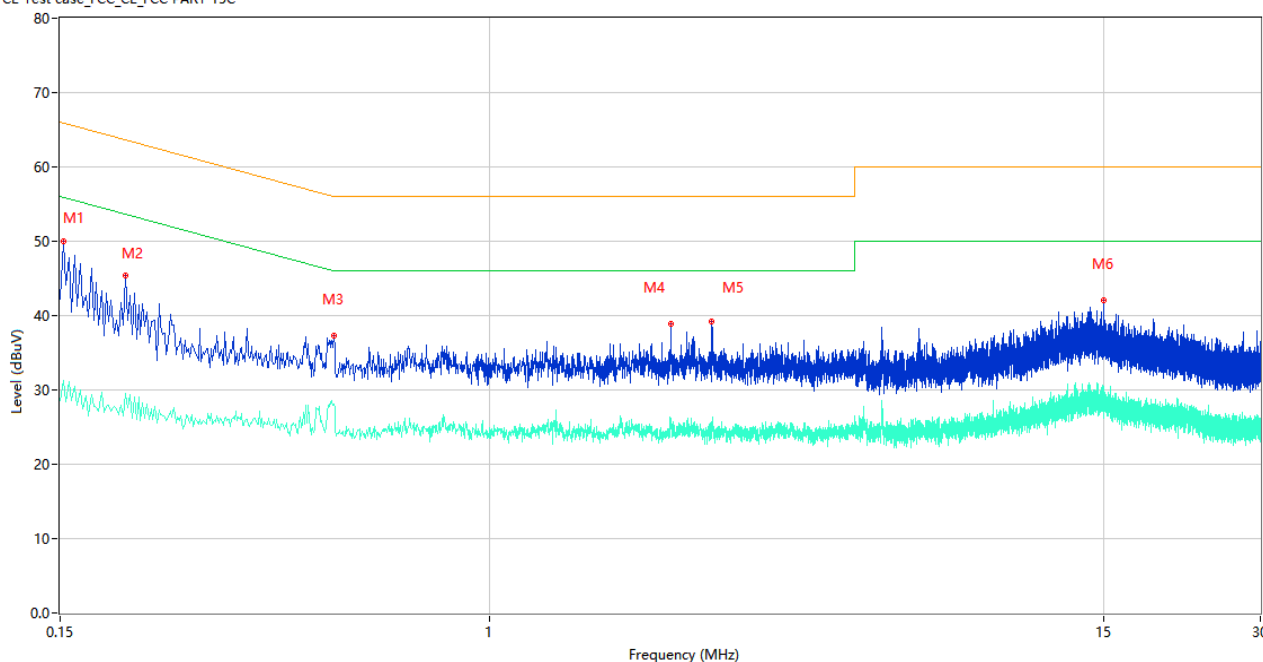

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.152	49.96	9.78	65.89	15.93	Peak	L	Pass
1**	0.152	31.26	9.78	55.89	24.63	AV	L	Pass
2	0.200	45.34	9.77	63.61	18.27	Peak	L	Pass
2**	0.200	29.51	9.77	53.61	24.10	AV	L	Pass
3	0.502	37.27	9.98	56.00	18.73	Peak	L	Pass
3**	0.502	28.04	9.98	46.00	17.96	AV	L	Pass
4	2.226	38.89	10.05	56.00	17.11	Peak	L	Pass
4**	2.226	26.19	10.05	46.00	19.81	AV	L	Pass
5	2.666	39.27	10.14	56.00	16.73	Peak	L	Pass
5**	2.666	25.00	10.14	46.00	21.00	AV	L	Pass
6	15.000	42.03	10.46	60.00	17.97	Peak	L	Pass
6**	15.000	30.50	10.46	50.00	19.50	AV	L	Pass

PHASE N

CE Test case_FCC_CE_FCC PART 15C

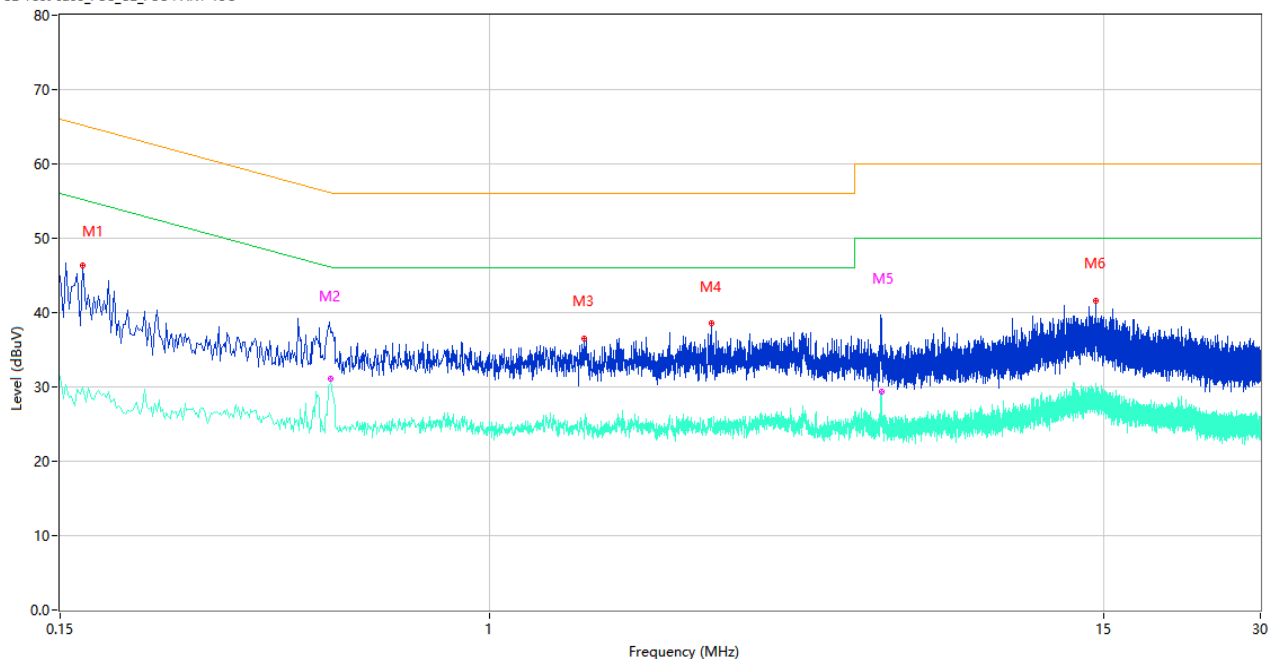

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.166	46.27	9.78	65.16	18.89	Peak	N	Pass
1**	0.166	30.03	9.78	55.16	25.13	AV	N	Pass
2	0.496	37.92	9.98	56.07	18.15	Peak	N	Pass
2**	0.496	31.11	9.98	46.07	14.96	AV	N	Pass
3	1.514	36.53	10.23	56.00	19.47	Peak	N	Pass
3**	1.514	23.97	10.23	46.00	22.03	AV	N	Pass
4	2.654	38.51	10.18	56.00	17.49	Peak	N	Pass
4**	2.654	25.91	10.18	46.00	20.09	AV	N	Pass
5	5.636	39.15	10.43	60.00	20.85	Peak	N	Pass
5**	5.636	29.44	10.43	50.00	20.56	AV	N	Pass
6	14.542	41.62	10.73	60.00	18.38	Peak	N	Pass
6**	14.542	29.06	10.73	50.00	20.94	AV	N	Pass

5.7 Radiated Spurious Emission

5.7.1 Limit

FCC §15.209&15.247(d)

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
2. For above 1000 MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).

5.7.2 Test Setup

See section 4.5.3 to 4.5.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX A.

5.7.3 Test Procedure

Since the emission limits are specified in terms of radiated field strength levels, measurements performed to demonstrate compliance have traditionally relied on a radiated test configuration. Radiated measurements remain the principal method for demonstrating compliance to the specified limits; however antenna-port conducted measurements are also now acceptable to demonstrate compliance (see below for details). When radiated measurements are utilized, test site requirements and procedures for maximizing and measuring radiated emissions that are described in ANSI C63.10 shall be followed.

Antenna-port conducted measurements may also be used as an alternative to radiated measurements for demonstrating compliance in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case spurious emissions is required.

General Procedure for conducted measurements in restricted bands

- a) Measure the conducted output power (in dBm) using the detector specified (see guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).
- b) Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see guidance on determining the applicable antenna gain)
- c) Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies ≤ 30 MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies > 1000 MHz).
- d) For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (e.g., Watts, mW).
- e) Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:

$$E = \text{EIRP} - 20\log D + 104.8$$

where:

E = electric field strength in dB μ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

- f) Compare the resultant electric field strength level to the applicable limit.
- g) Perform radiated spurious emission test.

Quasi-Peak measurement procedure

The specifications for measurements using the CISPR quasi-peak detector can be found in Publication 16 of the International Special Committee on Radio Frequency Interference (CISPR) of the International Electrotechnical Commission.

As an alternative to CISPR quasi-peak measurement, compliance can be demonstrated to the applicable emission limits using a peak detector.

Peak power measurement procedure

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 1.
- b) VBW $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be

longer for low duty cycle applications).

Table 1—RBW as a function of frequency

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

Trace averaging across on and off times of the EUT transmissions followed by duty cycle correction

If continuous transmission of the EUT (i.e., duty cycle ≥ 98 percent) cannot be achieved and the duty cycle is constant (i.e., duty cycle variations are less than ± 2 percent), then the following procedure shall be used:

- a) The EUT shall be configured to operate at the maximum achievable duty cycle.
- b) Measure the duty cycle, x , of the transmitter output signal as described in section 6.0.
- c) RBW = 1 MHz (unless otherwise specified).
- d) VBW $\geq 3 \times$ RBW.
- e) Detector = RMS, if $\text{span}/(\# \text{ of points in sweep}) \leq (\text{RBW}/2)$. Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
- f) Averaging type = power (i.e., RMS).
 - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
 - 2) Some instruments require linear display mode in order to use linear voltage averaging. Log or dB averaging shall not be used.
- g) Sweep time = auto.
- h) Perform a trace average of at least 100 traces.
- i) A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle. The correction factor is computed as follows:
 - 1) If power averaging (RMS) mode was used in step f), then the applicable correction factor is $10 \log(1/x)$, where x is the duty cycle.
 - 2) If linear voltage averaging mode was used in step f), then the applicable correction factor is $20 \log(1/x)$, where x is the duty cycle.
 - 3) If a specific emission is demonstrated to be continuous (≥ 98 percent duty cycle) rather than turning on and off with the transmit cycle, then no duty cycle correction is required for that emission.

NOTE: Reduction of the measured emission amplitude levels to account for operational duty factor is not permitted. Compliance is based on emission levels occurring during transmission - not on an average across on and off times of the transmitter.

Determining the applicable transmit antenna gain

A conducted power measurement will determine the maximum output power associated with a restricted band emission; however, in order to determine the associated EIRP level, the gain of the transmitting antenna (in dBi) must be added to the measured output power (in dBm).

Since the out-of-band characteristics of the EUT transmit antenna will often be unknown, the use of a conservative antenna gain value is necessary. Thus, when determining the EIRP based on the measured conducted power, the upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands, or 2 dBi, whichever is greater. However, for devices that operate in multiple frequency bands while using the same transmit antenna, the highest gain of the antenna within the operating band nearest in frequency to the restricted band emission being measured may be used in lieu of the overall highest gain when the emission is at a frequency that is within 20 percent of the nearest band edge frequency, but in no case shall a value less than 2 dBi be used.

See KDB 662911 for guidance on calculating the additional array gain term when determining the effective antenna gain for a EUT with multiple outputs occupying the same or overlapping frequency ranges in the same band.

Radiated spurious emission test

An additional consideration when performing conducted measurements of restricted band emissions is that unwanted emissions radiating from the EUT cabinet, control circuits, power leads, or intermediate circuit elements will likely go undetected in a conducted measurement configuration. To address this concern, a radiated test shall be performed to ensure that emissions emanating from the EUT cabinet (rather than the antenna port) also comply with the applicable limits.

For these cabinet radiated spurious emission measurements the EUT transmit antenna may be replaced with a termination matching the nominal impedance of the antenna. Procedures for performing radiated measurements are specified in ANSI C63.10. All detected emissions shall comply with the applicable limits.

The measurement frequency range is from 30 MHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

5.7.4 Test Result

Note¹: The symbol of “--” in the table which means not application.

Note²: For the test data above 1 GHz, According the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.


Note³: The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

Note⁴: The EUT was tested in Link mode and the charging.

Test Data and Plots

30 MHz to 1 GHz, ANT H


RE Test case_FCC Part 15C_FCC Part 15C-30MHz-1GHz

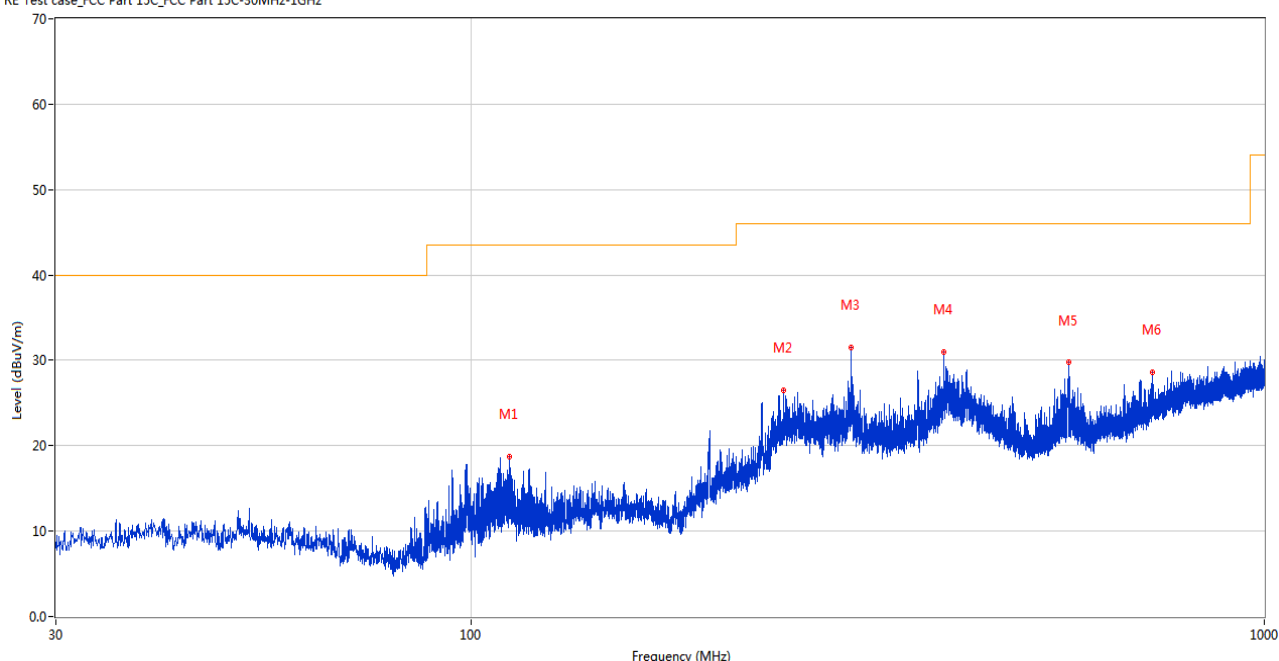

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	111.771	18.68	-28.65	43.5	24.82	Peak	307.00	200	Horizontal	Pass
2	247.814	26.53	-26.86	46.0	19.47	Peak	360.00	100	Horizontal	Pass
3	301.261	31.51	-24.66	46.0	14.49	Peak	177.00	100	Horizontal	Pass
4	394.672	30.97	-21.38	46.0	15.03	Peak	189.00	100	Horizontal	Pass
5	566.458	29.73	-17.27	46.0	16.27	Peak	325.00	200	Horizontal	Pass
6	721.950	28.61	-13.83	46.0	17.39	Peak	289.00	100	Horizontal	Pass

30 MHz to 1 GHz, ANT V

RE Test case_FCC Part 15C_FCC Part 15C-30MHz-1GHz

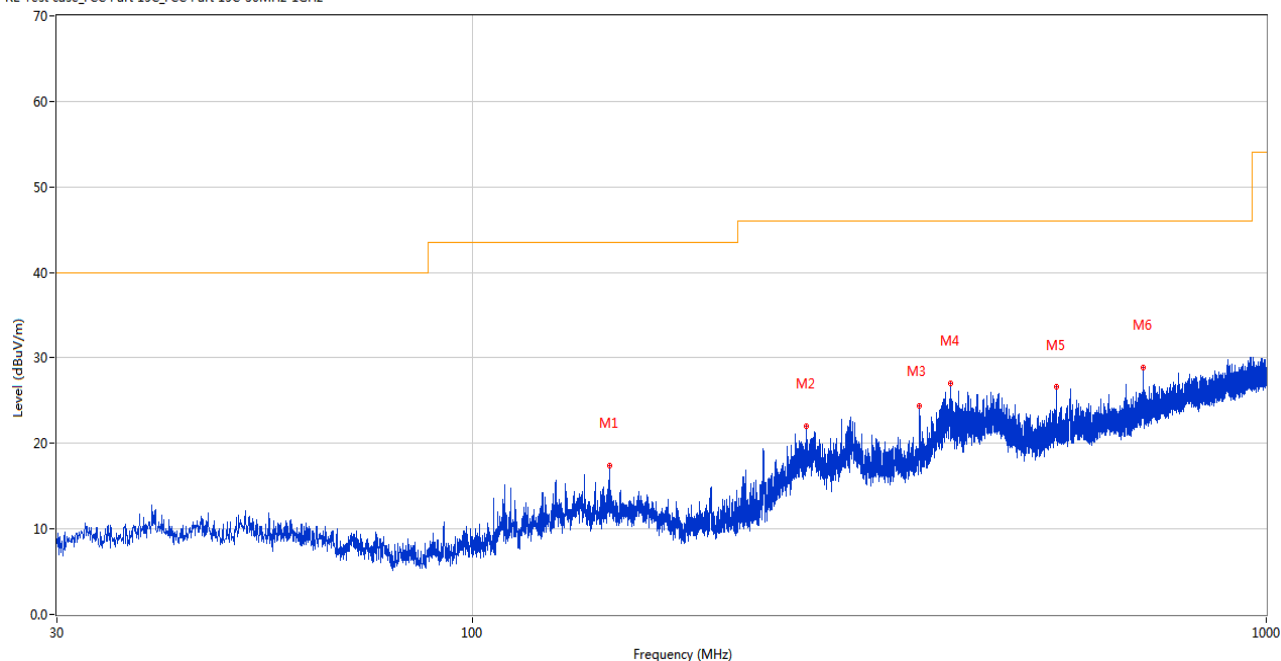

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	148.777	17.36	-25.63	43.5	26.14	Peak	87.00	100	Vertical	Pass
2	263.576	22.05	-26.31	46.0	23.95	Peak	245.00	200	Vertical	Pass
3	365.426	24.40	-22.52	46.0	21.60	Peak	232.00	100	Vertical	Pass
4	400.685	27.01	-21.47	46.0	18.99	Peak	123.00	100	Vertical	Pass
5	544.876	26.56	-17.82	46.0	19.44	Peak	99.00	100	Vertical	Pass
6	699.785	28.84	-14.50	46.0	17.16	Peak	167.00	100	Vertical	Pass

Note 1: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

Note 2: The spurious above 18G is noise only, do not show on the report.

Note 3: All antenna were tested, but only the worst case has been reported in this report.

SISO-ANT0

1 GHz to 18 GHz, ANT H 802.11b Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1502.000	42.99	74.0	31.01	Peak	282.00	200	Horizontal	Pass
1**	1502.000	32.17	54.0	21.83	AV	282.00	200	Horizontal	Pass
2	2411.800	100.96	74.0	-26.96	Peak	26.00	200	Horizontal	N/A
2**	2411.800	96.33	54.0	-42.33	AV	26.00	200	Horizontal	N/A
3	4792.800	51.65	74.0	22.35	Peak	55.00	150	Horizontal	Pass
3**	4792.800	41.73	54.0	12.27	AV	55.00	150	Horizontal	Pass
4	6975.600	55.32	74.0	18.68	Peak	112.00	400	Horizontal	Pass
4**	6975.600	46.06	54.0	7.94	AV	112.00	400	Horizontal	Pass
5	13594.724	54.68	74.0	19.32	Peak	81.00	150	Horizontal	Pass
5**	13594.724	43.11	54.0	10.89	AV	81.00	150	Horizontal	Pass
6	17412.526	55.25	74.0	18.75	Peak	200.00	400	Horizontal	Pass
6**	17412.526	46.30	54.0	7.70	AV	200.00	400	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11b Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1333.000	47.29	74.0	26.71	Peak	71.00	200	Vertical	Pass
1**	1333.000	33.97	54.0	20.03	AV	71.00	200	Vertical	Pass
2	2412.000	93.37	74.0	-19.37	Peak	156.00	100	Vertical	N/A
2**	2412.000	89.38	54.0	-35.38	AV	156.00	100	Vertical	N/A
3	4996.000	51.97	74.0	22.03	Peak	265.00	150	Vertical	Pass
3**	4996.000	42.47	54.0	11.53	AV	265.00	150	Vertical	Pass
4	6980.600	55.53	74.0	18.47	Peak	228.00	400	Vertical	Pass
4**	6980.600	46.89	54.0	7.11	AV	228.00	400	Vertical	Pass
5	12323.350	51.57	74.0	22.43	Peak	309.00	100	Vertical	Pass
5**	12323.350	43.38	54.0	10.62	AV	309.00	100	Vertical	Pass
6	17418.824	55.60	74.0	18.40	Peak	234.00	200	Vertical	Pass
6**	17418.824	46.04	54.0	7.96	AV	234.00	200	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11b Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1578.700	42.25	74.0	31.75	Peak	270.00	400	Horizontal	Pass
1**	1578.700	32.07	54.0	21.93	AV	270.00	400	Horizontal	Pass
2	2436.700	99.93	74.0	-25.93	Peak	26.00	150	Horizontal	N/A
2**	2436.700	96.11	54.0	-42.11	AV	26.00	150	Horizontal	N/A
3	4809.400	52.68	74.0	21.32	Peak	157.00	150	Horizontal	Pass
3**	4809.400	43.55	54.0	10.45	AV	157.00	150	Horizontal	Pass
4	6979.800	54.86	74.0	19.14	Peak	273.00	300	Horizontal	Pass
4**	6979.800	46.82	54.0	7.18	AV	273.00	300	Horizontal	Pass
5	11212.450	51.92	74.0	22.08	Peak	260.00	300	Horizontal	Pass
5**	11212.450	43.45	54.0	10.55	AV	260.00	300	Horizontal	Pass
6	17439.302	55.86	74.0	18.14	Peak	199.00	300	Horizontal	Pass
6**	17439.302	46.93	54.0	7.07	AV	199.00	300	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11b Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1164.300	47.11	74.0	26.89	Peak	96.00	300	Vertical	Pass
1**	1164.300	39.40	54.0	14.60	AV	96.00	300	Vertical	Pass
2	2437.000	92.43	74.0	-18.43	Peak	157.00	150	Vertical	N/A
2**	2437.000	87.72	54.0	-33.72	AV	157.00	150	Vertical	N/A
3	4984.600	51.72	74.0	22.28	Peak	48.00	150	Vertical	Pass
3**	4984.600	42.71	54.0	11.29	AV	48.00	150	Vertical	Pass
4	6978.800	55.37	74.0	18.63	Peak	312.00	100	Vertical	Pass
4**	6978.800	46.74	54.0	7.26	AV	312.00	100	Vertical	Pass
5	11951.325	52.67	74.0	21.33	Peak	345.00	400	Vertical	Pass
5**	11951.325	43.16	54.0	10.84	AV	345.00	400	Vertical	Pass
6	17434.313	56.09	74.0	17.91	Peak	340.00	300	Vertical	Pass
6**	17434.313	46.53	54.0	7.47	AV	340.00	300	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11b High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1416.100	42.19	74.0	31.81	Peak	227.00	400	Horizontal	Pass
1**	1416.100	32.18	54.0	21.82	AV	227.00	400	Horizontal	Pass
2	2462.100	98.53	74.0	-24.53	Peak	24.00	150	Horizontal	N/A
2**	2462.100	94.52	54.0	-40.52	AV	24.00	150	Horizontal	N/A
3	4981.600	51.87	74.0	22.13	Peak	0.00	150	Horizontal	Pass
3**	4981.600	44.05	54.0	9.95	AV	0.00	150	Horizontal	Pass
4	6973.400	55.45	74.0	18.55	Peak	123.00	100	Horizontal	Pass
4**	6973.400	45.71	54.0	8.29	AV	123.00	100	Horizontal	Pass
5	12732.750	51.91	74.0	22.09	Peak	0.00	200	Horizontal	Pass
5**	12732.750	42.82	54.0	11.18	AV	0.00	200	Horizontal	Pass
6	15815.213	55.39	74.0	18.61	Peak	37.00	400	Horizontal	Pass
6**	15815.213	45.26	54.0	8.74	AV	37.00	400	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11b High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1166.000	48.89	74.0	25.11	Peak	84.00	200	Vertical	Pass
1**	1166.000	33.62	54.0	20.38	AV	84.00	200	Vertical	Pass
2	2462.000	89.75	74.0	-15.75	Peak	156.00	100	Vertical	N/A
2**	2462.000	84.04	54.0	-30.04	AV	156.00	100	Vertical	N/A
3	4780.400	51.75	74.0	22.25	Peak	180.00	100	Vertical	Pass
3**	4780.400	42.17	54.0	11.83	AV	180.00	100	Vertical	Pass
4	6979.000	54.86	74.0	19.14	Peak	0.00	200	Vertical	Pass
4**	6979.000	46.34	54.0	7.66	AV	0.00	200	Vertical	Pass
5	10927.825	51.88	74.0	22.12	Peak	293.00	100	Vertical	Pass
5**	10927.825	42.75	54.0	11.25	AV	293.00	100	Vertical	Pass
6	17436.676	54.95	74.0	19.05	Peak	0.00	400	Vertical	Pass
6**	17436.676	45.79	54.0	8.21	AV	0.00	400	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11g Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1328.300	42.04	74.0	31.96	Peak	191.00	100	Horizontal	Pass
1**	1328.300	32.32	54.0	21.68	AV	191.00	100	Horizontal	Pass
2	2412.200	102.89	74.0	-28.89	Peak	27.00	150	Horizontal	N/A
2**	2412.200	95.13	54.0	-41.13	AV	27.00	150	Horizontal	N/A
3	4984.200	51.93	74.0	22.07	Peak	127.00	200	Horizontal	Pass
3**	4984.200	43.42	54.0	10.58	AV	127.00	200	Horizontal	Pass
4	6980.600	55.29	74.0	18.71	Peak	252.00	400	Horizontal	Pass
4**	6980.600	45.93	54.0	8.07	AV	252.00	400	Horizontal	Pass
5	12607.400	51.87	74.0	22.13	Peak	61.00	300	Horizontal	Pass
5**	12607.400	42.03	54.0	11.97	AV	61.00	300	Horizontal	Pass
6	16885.426	55.75	74.0	18.25	Peak	17.00	100	Horizontal	Pass
6**	16885.426	45.57	54.0	8.43	AV	17.00	100	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11g Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1165.500	49.63	74.0	24.37	Peak	91.00	100	Vertical	Pass
1**	1165.500	33.87	54.0	20.13	AV	91.00	100	Vertical	Pass
2	2405.600	94.87	74.0	-20.87	Peak	153.00	200	Vertical	N/A
2**	2405.600	87.72	54.0	-33.72	AV	153.00	200	Vertical	N/A
3	4988.000	51.78	74.0	22.22	Peak	196.00	100	Vertical	Pass
3**	4988.000	42.49	54.0	11.51	AV	196.00	100	Vertical	Pass
4	6980.000	55.03	74.0	18.97	Peak	91.00	300	Vertical	Pass
4**	6980.000	46.57	54.0	7.43	AV	91.00	300	Vertical	Pass
5	12843.187	52.63	74.0	21.37	Peak	285.00	100	Vertical	Pass
5**	12843.187	42.05	54.0	11.95	AV	285.00	100	Vertical	Pass
6	17438.511	55.28	74.0	18.72	Peak	344.00	100	Vertical	Pass
6**	17438.511	46.50	54.0	7.50	AV	344.00	100	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11g Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1485.900	41.76	74.0	32.24	Peak	331.00	300	Horizontal	Pass
1**	1485.900	32.79	54.0	21.21	AV	331.00	300	Horizontal	Pass
2	2434.100	102.28	74.0	-28.28	Peak	25.00	200	Horizontal	N/A
2**	2434.100	93.73	54.0	-39.73	AV	25.00	200	Horizontal	N/A
3	4791.600	51.62	74.0	22.38	Peak	317.00	150	Horizontal	Pass
3**	4791.600	42.18	54.0	11.82	AV	317.00	150	Horizontal	Pass
4	6812.000	54.88	74.0	19.12	Peak	0.00	300	Horizontal	Pass
4**	6812.000	46.07	54.0	7.93	AV	0.00	300	Horizontal	Pass
5	11330.612	53.33	74.0	20.67	Peak	278.00	400	Horizontal	Pass
5**	11330.612	43.08	54.0	10.92	AV	278.00	400	Horizontal	Pass
6	17416.462	55.79	74.0	18.21	Peak	177.00	400	Horizontal	Pass
6**	17416.462	45.91	54.0	8.09	AV	177.00	400	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11g Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1162.400	46.26	74.0	27.74	Peak	46.00	300	Vertical	Pass
1**	1162.400	37.11	54.0	16.89	AV	46.00	300	Vertical	Pass
2	2432.200	93.46	74.0	-19.46	Peak	154.00	200	Vertical	N/A
2**	2432.200	85.39	54.0	-31.39	AV	154.00	200	Vertical	N/A
3	4972.800	52.36	74.0	21.64	Peak	215.00	200	Vertical	Pass
3**	4972.800	43.10	54.0	10.90	AV	215.00	200	Vertical	Pass
4	6806.400	55.50	74.0	18.50	Peak	171.00	100	Vertical	Pass
4**	6806.400	47.07	54.0	6.93	AV	171.00	100	Vertical	Pass
5	12494.125	51.96	74.0	22.04	Peak	20.00	400	Vertical	Pass
5**	12494.125	43.07	54.0	10.93	AV	20.00	400	Vertical	Pass
6	17419.874	55.26	74.0	18.74	Peak	75.00	100	Vertical	Pass
6**	17419.874	46.69	54.0	7.31	AV	75.00	100	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11g High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1561.900	42.82	74.0	31.18	Peak	91.00	400	Horizontal	Pass
1**	1561.900	33.23	54.0	20.77	AV	91.00	400	Horizontal	Pass
2	2467.800	100.24	74.0	-26.24	Peak	30.00	150	Horizontal	N/A
2**	2467.800	93.32	54.0	-39.32	AV	30.00	150	Horizontal	N/A
3	4979.200	52.01	74.0	21.99	Peak	54.00	200	Horizontal	Pass
3**	4979.200	43.75	54.0	10.25	AV	54.00	200	Horizontal	Pass
4	6973.600	55.43	74.0	18.57	Peak	360.00	100	Horizontal	Pass
4**	6973.600	46.23	54.0	7.77	AV	360.00	100	Horizontal	Pass
5	12735.625	52.31	74.0	21.69	Peak	330.00	200	Horizontal	Pass
5**	12735.625	42.71	54.0	11.29	AV	330.00	200	Horizontal	Pass
6	16462.801	54.83	74.0	19.17	Peak	99.00	150	Horizontal	Pass
6**	16462.801	44.78	54.0	9.22	AV	99.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11g High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1163.200	46.11	74.0	27.89	Peak	89.00	100	Vertical	Pass
1**	1163.200	32.62	54.0	21.38	AV	89.00	100	Vertical	Pass
2	2454.900	92.66	74.0	-18.66	Peak	149.00	200	Vertical	N/A
2**	2454.900	84.55	54.0	-30.55	AV	149.00	200	Vertical	N/A
3	4814.400	51.42	74.0	22.58	Peak	284.00	100	Vertical	Pass
3**	4814.400	42.82	54.0	11.18	AV	284.00	100	Vertical	Pass
4	6806.600	55.72	74.0	18.28	Peak	89.00	100	Vertical	Pass
4**	6806.600	46.94	54.0	7.06	AV	89.00	100	Vertical	Pass
5	10921.213	51.99	74.0	22.01	Peak	74.00	300	Vertical	Pass
5**	10921.213	42.97	54.0	11.03	AV	74.00	300	Vertical	Pass
6	17346.636	55.14	74.0	18.86	Peak	139.00	200	Vertical	Pass
6**	17346.636	45.11	54.0	8.89	AV	139.00	200	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n20 Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1585.600	41.94	74.0	32.06	Peak	91.00	400	Horizontal	Pass
1**	1585.600	33.38	54.0	20.62	AV	91.00	400	Horizontal	Pass
2	2414.800	101.01	74.0	-27.01	Peak	17.00	150	Horizontal	N/A
2**	2414.800	92.62	54.0	-38.62	AV	17.00	150	Horizontal	N/A
3	4983.400	51.46	74.0	22.54	Peak	268.00	100	Horizontal	Pass
3**	4983.400	43.17	54.0	10.83	AV	268.00	100	Horizontal	Pass
4	6808.000	55.22	74.0	18.78	Peak	243.00	200	Horizontal	Pass
4**	6808.000	45.99	54.0	8.01	AV	243.00	200	Horizontal	Pass
5	11930.050	51.79	74.0	22.21	Peak	360.00	100	Horizontal	Pass
5**	11930.050	42.54	54.0	11.46	AV	360.00	100	Horizontal	Pass
6	17466.337	55.05	74.0	18.95	Peak	346.00	100	Horizontal	Pass
6**	17466.337	46.24	54.0	7.76	AV	346.00	100	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n20 Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1165.500	47.75	74.0	26.25	Peak	98.00	100	Vertical	Pass
1**	1165.500	36.61	54.0	17.39	AV	98.00	100	Vertical	Pass
2	2416.000	92.75	74.0	-18.75	Peak	159.00	200	Vertical	N/A
2**	2416.000	85.21	54.0	-31.21	AV	159.00	200	Vertical	N/A
3	4816.400	51.66	74.0	22.34	Peak	149.00	100	Vertical	Pass
3**	4816.400	42.01	54.0	11.99	AV	149.00	100	Vertical	Pass
4	6805.600	55.33	74.0	18.67	Peak	264.00	300	Vertical	Pass
4**	6805.600	46.28	54.0	7.72	AV	264.00	300	Vertical	Pass
5	10921.500	52.53	74.0	21.47	Peak	295.00	400	Vertical	Pass
5**	10921.500	43.03	54.0	10.97	AV	295.00	400	Vertical	Pass
6	17414.363	55.85	74.0	18.15	Peak	116.00	300	Vertical	Pass
6**	17414.363	45.85	54.0	8.15	AV	116.00	300	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n20 Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1441.200	43.45	74.0	30.55	Peak	49.00	400	Horizontal	Pass
1**	1441.200	33.49	54.0	20.51	AV	49.00	400	Horizontal	Pass
2	2440.300	100.62	74.0	-26.62	Peak	29.00	150	Horizontal	N/A
2**	2440.300	92.70	54.0	-38.70	AV	29.00	150	Horizontal	N/A
3	4991.800	51.80	74.0	22.20	Peak	130.00	150	Horizontal	Pass
3**	4991.800	42.10	54.0	11.90	AV	130.00	150	Horizontal	Pass
4	6975.600	55.32	74.0	18.68	Peak	303.00	300	Horizontal	Pass
4**	6975.600	46.37	54.0	7.63	AV	303.00	300	Horizontal	Pass
5	11893.537	51.96	74.0	22.04	Peak	296.00	300	Horizontal	Pass
5**	11893.537	42.42	54.0	11.58	AV	296.00	300	Horizontal	Pass
6	17428.802	55.44	74.0	18.56	Peak	360.00	100	Horizontal	Pass
6**	17428.802	46.66	54.0	7.34	AV	360.00	100	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n20 Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1166.100	48.44	74.0	25.56	Peak	51.00	100	Vertical	Pass
1**	1166.100	34.22	54.0	19.78	AV	51.00	100	Vertical	Pass
2	2431.400	91.98	74.0	-17.98	Peak	154.00	150	Vertical	N/A
2**	2431.400	83.94	54.0	-29.94	AV	154.00	150	Vertical	N/A
3	4957.800	51.82	74.0	22.18	Peak	215.00	200	Vertical	Pass
3**	4957.800	42.70	54.0	11.30	AV	215.00	200	Vertical	Pass
4	6807.400	55.24	74.0	18.76	Peak	308.00	100	Vertical	Pass
4**	6807.400	46.88	54.0	7.12	AV	308.00	100	Vertical	Pass
5	10922.937	51.45	74.0	22.55	Peak	161.00	400	Vertical	Pass
5**	10922.937	43.31	54.0	10.69	AV	161.00	400	Vertical	Pass
6	17426.698	56.09	74.0	17.91	Peak	252.00	300	Vertical	Pass
6**	17426.698	47.66	54.0	6.34	AV	252.00	300	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n20 High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1444.500	42.40	74.0	31.60	Peak	341.00	300	Horizontal	Pass
1**	1444.500	32.17	54.0	21.83	AV	341.00	300	Horizontal	Pass
2	2465.400	99.52	74.0	-25.52	Peak	22.00	100	Horizontal	N/A
2**	2465.400	91.47	54.0	-37.47	AV	22.00	100	Horizontal	N/A
3	4934.800	52.48	74.0	21.52	Peak	46.00	150	Horizontal	Pass
3**	4934.800	42.70	54.0	11.30	AV	46.00	150	Horizontal	Pass
4	6825.600	55.18	74.0	18.82	Peak	137.00	300	Horizontal	Pass
4**	6825.600	45.70	54.0	8.30	AV	137.00	300	Horizontal	Pass
5	12391.200	52.08	74.0	21.92	Peak	346.00	100	Horizontal	Pass
5**	12391.200	42.63	54.0	11.37	AV	346.00	100	Horizontal	Pass
6	15565.050	55.41	74.0	18.59	Peak	36.00	400	Horizontal	Pass
6**	15565.050	44.65	54.0	9.35	AV	36.00	400	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n20 High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1162.800	46.98	74.0	27.02	Peak	56.00	100	Vertical	Pass
1**	1162.800	38.21	54.0	15.79	AV	56.00	100	Vertical	Pass
2	2455.800	90.99	74.0	-16.99	Peak	152.00	150	Vertical	N/A
2**	2455.800	84.06	54.0	-30.06	AV	152.00	150	Vertical	N/A
3	5164.800	53.66	74.0	20.34	Peak	140.00	150	Vertical	Pass
3**	5164.800	43.54	54.0	10.46	AV	140.00	150	Vertical	Pass
4	6976.600	55.79	74.0	18.21	Peak	269.00	400	Vertical	Pass
4**	6976.600	46.34	54.0	7.66	AV	269.00	400	Vertical	Pass
5	10923.800	52.02	74.0	21.98	Peak	74.00	100	Vertical	Pass
5**	10923.800	43.36	54.0	10.64	AV	74.00	100	Vertical	Pass
6	16111.313	55.80	74.0	18.20	Peak	104.00	150	Vertical	Pass
6**	16111.313	44.76	54.0	9.24	AV	104.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n40 Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1488.300	42.43	74.0	31.57	Peak	120.00	200	Horizontal	Pass
1**	1488.300	32.99	54.0	21.01	AV	120.00	200	Horizontal	Pass
2	2420.000	98.12	74.0	-24.12	Peak	16.00	150	Horizontal	N/A
2**	2420.000	90.13	54.0	-36.13	AV	16.00	150	Horizontal	N/A
3	4939.800	51.61	74.0	22.39	Peak	204.00	150	Horizontal	Pass
3**	4939.800	42.43	54.0	11.57	AV	204.00	150	Horizontal	Pass
4	6974.600	55.14	74.0	18.86	Peak	0.00	100	Horizontal	Pass
4**	6974.600	45.95	54.0	8.05	AV	0.00	100	Horizontal	Pass
5	12007.388	52.12	74.0	21.88	Peak	142.00	200	Horizontal	Pass
5**	12007.388	42.19	54.0	11.81	AV	142.00	200	Horizontal	Pass
6	17457.938	54.89	74.0	19.11	Peak	79.00	200	Horizontal	Pass
6**	17457.938	46.07	54.0	7.93	AV	79.00	200	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n40 Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1161.400	48.34	74.0	25.66	Peak	100.00	300	Vertical	Pass
1**	1161.400	35.36	54.0	18.64	AV	100.00	300	Vertical	Pass
2	2423.100	89.60	74.0	-15.60	Peak	153.00	100	Vertical	N/A
2**	2423.100	80.51	54.0	-26.51	AV	153.00	100	Vertical	N/A
3	4983.200	51.43	74.0	22.57	Peak	247.00	200	Vertical	Pass
3**	4983.200	42.87	54.0	11.13	AV	247.00	200	Vertical	Pass
4	6979.800	55.17	74.0	18.83	Peak	294.00	100	Vertical	Pass
4**	6979.800	46.28	54.0	7.72	AV	294.00	100	Vertical	Pass
5	11936.950	51.52	74.0	22.48	Peak	19.00	200	Vertical	Pass
5**	11936.950	42.45	54.0	11.55	AV	19.00	200	Vertical	Pass
6	17456.099	55.86	74.0	18.14	Peak	118.00	400	Vertical	Pass
6**	17456.099	46.25	54.0	7.75	AV	118.00	400	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n40 Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1000.100	43.78	74.0	30.22	Peak	141.00	200	Horizontal	Pass
1**	1000.100	31.18	54.0	22.82	AV	141.00	200	Horizontal	Pass
2	2434.500	98.19	74.0	-24.19	Peak	21.00	200	Horizontal	N/A
2**	2434.500	89.44	54.0	-35.44	AV	21.00	200	Horizontal	N/A
3	4963.000	52.04	74.0	21.96	Peak	0.00	100	Horizontal	Pass
3**	4963.000	42.20	54.0	11.80	AV	0.00	100	Horizontal	Pass
4	6806.000	55.21	74.0	18.79	Peak	9.00	100	Horizontal	Pass
4**	6806.000	46.49	54.0	7.51	AV	9.00	100	Horizontal	Pass
5	10927.825	52.23	74.0	21.77	Peak	260.00	200	Horizontal	Pass
5**	10927.825	43.61	54.0	10.39	AV	260.00	200	Horizontal	Pass
6	17428.275	55.35	74.0	18.65	Peak	360.00	300	Horizontal	Pass
6**	17428.275	46.98	54.0	7.02	AV	360.00	300	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n40 Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1163.100	47.96	74.0	26.04	Peak	78.00	200	Vertical	Pass
1**	1163.100	39.75	54.0	14.25	AV	78.00	200	Vertical	Pass
2	2420.300	89.91	74.0	-15.91	Peak	147.00	100	Vertical	N/A
2**	2420.300	81.99	54.0	-27.99	AV	147.00	100	Vertical	N/A
3	4976.600	52.41	74.0	21.59	Peak	43.00	200	Vertical	Pass
3**	4976.600	42.67	54.0	11.33	AV	43.00	200	Vertical	Pass
4	6995.000	55.62	74.0	18.38	Peak	171.00	200	Vertical	Pass
4**	6995.000	46.28	54.0	7.72	AV	171.00	200	Vertical	Pass
5	10921.787	52.15	74.0	21.85	Peak	330.00	100	Vertical	Pass
5**	10921.787	42.73	54.0	11.27	AV	330.00	100	Vertical	Pass
6	17426.698	55.97	74.0	18.03	Peak	314.00	100	Vertical	Pass
6**	17426.698	46.40	54.0	7.60	AV	314.00	100	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n40 High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1541.700	41.96	74.0	32.04	Peak	14.00	200	Horizontal	Pass
1**	1541.700	32.72	54.0	21.28	AV	14.00	200	Horizontal	Pass
2	2449.800	97.36	74.0	-23.36	Peak	28.00	150	Horizontal	N/A
2**	2449.800	88.75	54.0	-34.75	AV	28.00	150	Horizontal	N/A
3	4982.400	51.94	74.0	22.06	Peak	319.00	150	Horizontal	Pass
3**	4982.400	43.06	54.0	10.94	AV	319.00	150	Horizontal	Pass
4	6977.000	55.44	74.0	18.56	Peak	100.00	100	Horizontal	Pass
4**	6977.000	46.33	54.0	7.67	AV	100.00	100	Horizontal	Pass
5	12443.813	52.07	74.0	21.93	Peak	138.00	400	Horizontal	Pass
5**	12443.813	41.52	54.0	12.48	AV	138.00	400	Horizontal	Pass
6	15819.150	55.45	74.0	18.55	Peak	59.00	400	Horizontal	Pass
6**	15819.150	45.70	54.0	8.30	AV	59.00	400	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n40 High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1162.400	48.91	74.0	25.09	Peak	99.00	300	Vertical	Pass
1**	1162.400	32.01	54.0	21.99	AV	99.00	300	Vertical	Pass
2	2455.100	89.24	74.0	-15.24	Peak	156.00	200	Vertical	N/A
2**	2455.100	81.74	54.0	-27.74	AV	156.00	200	Vertical	N/A
3	4966.600	51.80	74.0	22.20	Peak	312.00	200	Vertical	Pass
3**	4966.600	43.20	54.0	10.80	AV	312.00	200	Vertical	Pass
4	6993.000	55.02	74.0	18.98	Peak	159.00	300	Vertical	Pass
4**	6993.000	46.90	54.0	7.10	AV	159.00	300	Vertical	Pass
5	10921.787	52.21	74.0	21.79	Peak	74.00	200	Vertical	Pass
5**	10921.787	42.78	54.0	11.22	AV	74.00	200	Vertical	Pass
6	17423.550	56.63	74.0	17.37	Peak	292.00	300	Vertical	Pass
6**	17423.550	46.39	54.0	7.61	AV	292.00	300	Vertical	Pass

5.8 Band Edge (Restricted-band band-edge)

5.8.1 Limit

FCC §15.209&15.247(d)

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

5.8.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX A.

5.8.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

For transmitters operating above 1 GHz repeat the measurement with an average detector.

5.8.4 Test Result

Note ¹: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.

Note ²: The test data all are tested in the vertical and horizontal antenna which the trace is max hold. So these plots have shown the worst case.

Note ³: According the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note ⁴: All antenna were tested, but only the worst case has been reported in this report.

Test DataSISO-ANT0

802.11b LOW CHANNEL

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2385.000	57.70	74.0	16.30	Peak	26.00	200	Horizontal	Pass
1**	2385.000	46.13	54.0	7.87	AV	26.00	200	Horizontal	Pass
2	2389.950	56.01	74.0	17.99	Peak	65.00	150	Horizontal	Pass
2**	2389.950	45.95	54.0	8.05	AV	65.00	150	Horizontal	Pass

802.11b HIGH CHANNEL

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.575	55.49	74.0	18.51	Peak	305.00	200	Horizontal	Pass
1**	2483.575	45.70	54.0	8.30	AV	305.00	200	Horizontal	Pass
2	2486.785	56.83	74.0	17.17	Peak	42.00	200	Horizontal	Pass
2**	2486.785	45.40	54.0	8.60	AV	42.00	200	Horizontal	Pass

802.11g LOW CHANNEL

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2386.650	58.61	74.0	15.39	Peak	35.00	200	Horizontal	Pass
1**	2386.650	46.59	54.0	7.41	AV	35.00	200	Horizontal	Pass
2	2389.950	57.19	74.0	16.81	Peak	38.00	150	Horizontal	Pass
2**	2389.950	47.33	54.0	6.67	AV	38.00	150	Horizontal	Pass

802.11g HIGH CHANNEL

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.560	56.85	74.0	17.15	Peak	181.00	150	Horizontal	Pass
1**	2483.560	46.02	54.0	7.98	AV	181.00	150	Horizontal	Pass
2	2483.875	57.93	74.0	16.07	Peak	10.00	100	Horizontal	Pass
2**	2483.875	45.99	54.0	8.01	AV	10.00	100	Horizontal	Pass

802.11n20 LOW CHANNEL

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2389.800	59.15	74.0	14.85	Peak	21.00	200	Horizontal	Pass
1**	2389.800	46.91	54.0	7.09	AV	21.00	200	Horizontal	Pass
2	2389.950	57.59	74.0	16.41	Peak	30.00	150	Horizontal	Pass
2**	2389.950	47.29	54.0	6.71	AV	30.00	150	Horizontal	Pass

802.11n20 HIGH CHANNEL

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.530	56.67	74.0	17.33	Peak	41.00	200	Horizontal	Pass
1**	2483.530	46.01	54.0	7.99	AV	41.00	200	Horizontal	Pass
2	2497.105	57.15	74.0	16.85	Peak	21.00	150	Horizontal	Pass
2**	2497.105	45.43	54.0	8.57	AV	21.00	150	Horizontal	Pass

802.11n40 LOW CHANNEL

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2387.100	61.78	74.0	12.22	Peak	23.00	150	Horizontal	Pass
1**	2387.100	50.78	54.0	3.22	AV	23.00	150	Horizontal	Pass
2	2389.950	60.77	74.0	13.23	Peak	34.00	100	Horizontal	Pass
2**	2389.950	50.61	54.0	3.39	AV	34.00	100	Horizontal	Pass

802.11n40 HIGH CHANNEL

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.545	57.45	74.0	16.55	Peak	19.00	150	Horizontal	Pass
1**	2483.545	46.64	54.0	7.36	AV	19.00	150	Horizontal	Pass
2	2487.415	58.35	74.0	15.65	Peak	10.00	150	Horizontal	Pass
2**	2487.415	46.43	54.0	7.57	AV	10.00	150	Horizontal	Pass

5.9 Power Spectral density (PSD)

5.9.1 Limit

FCC §15.247(e)

The same method of determining the conducted output power shall be used to determine the power spectral density. If a peak output power is measured, then a peak power spectral density measurement is required. If an average output power is measured, then an average power spectral density measurement should be used.

5.9.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX A.

5.9.3 Test Procedure

Set analyzer center frequency to DTS channel center frequency.

Set the span to 1.5 times the DTS bandwidth.

Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.

Set the VBW $\geq 3 \text{ RBW}$.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

5.9.4 Test Result

Test Data

Note: All antenna were tested, but only the worst case has been reported in this report.

SISO-ANT0

802.11b Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-15.56	6.42
Middle	-15.41	6.42
High	-15.45	6.42

802.11g Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-14.51	6.42
Middle	-14.66	6.42
High	-14.09	6.42

802.11n-20 MHz Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-14.24	8
Middle	-14.19	8
High	-14.39	8

802.11n-40 MHz Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-14.83	8
Middle	-16.90	8
High	-17.42	8


Test Plots

SISO-ANT0


802.11b LOW CHANNEL




802.11b MIDDLE CHANNEL

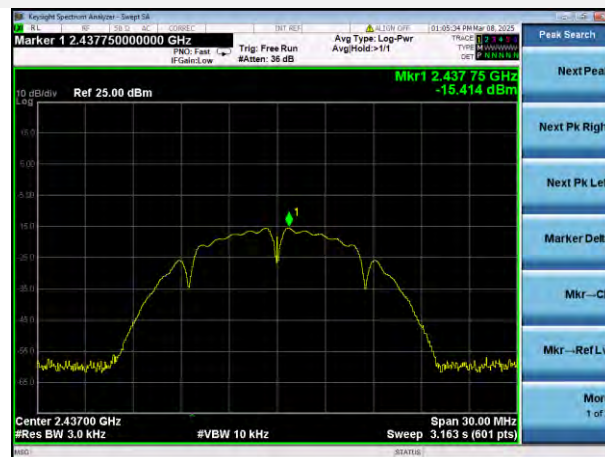


802.11b HIGH CHANNEL

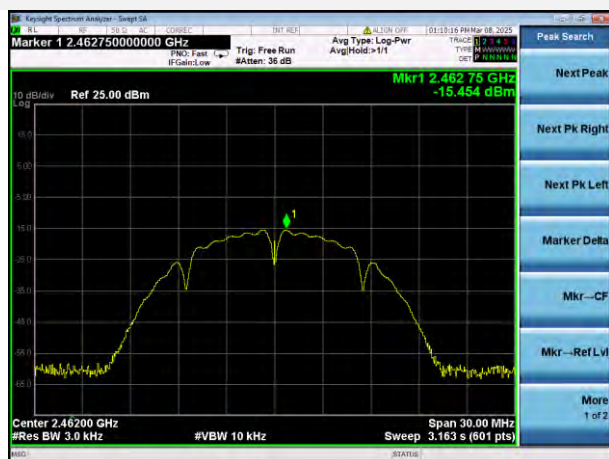

802.11g LOW CHANNEL

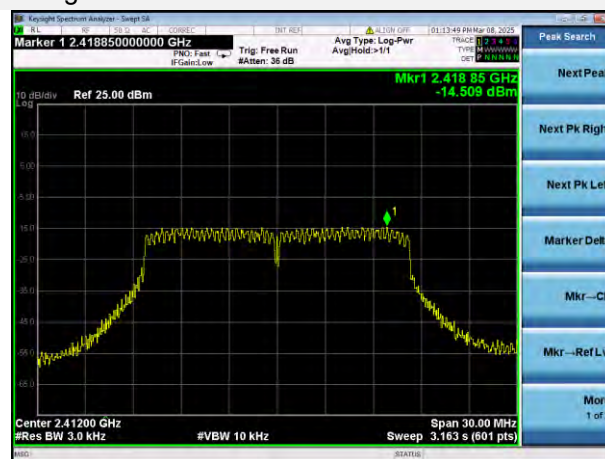


802.11g MIDDLE CHANNEL

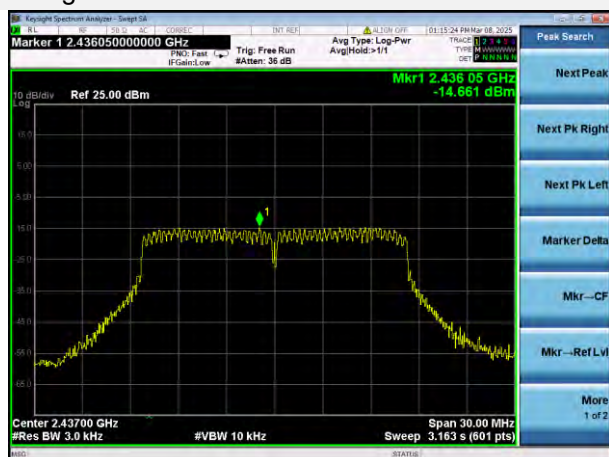


802.11g HIGH CHANNEL




802.11n-20 MHz LOW CHANNEL

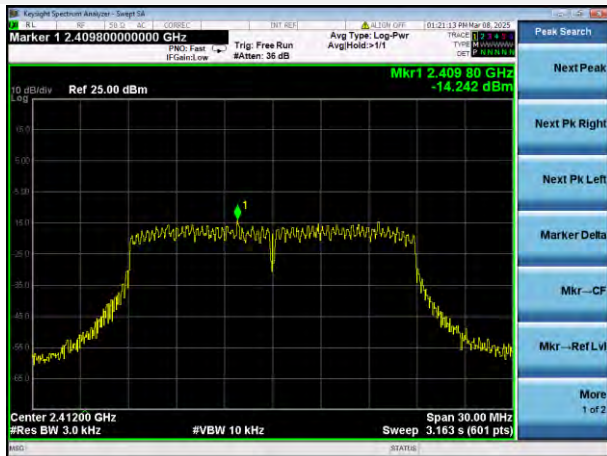


802.11n-20 MHz MIDDLE CHANNEL

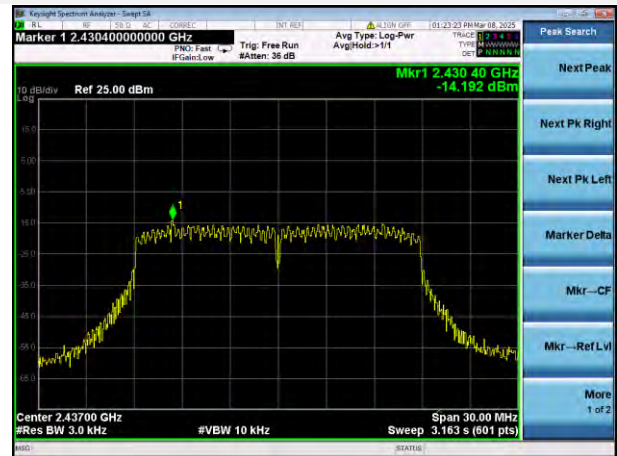


802.11n-20 MHz HIGH CHANNEL

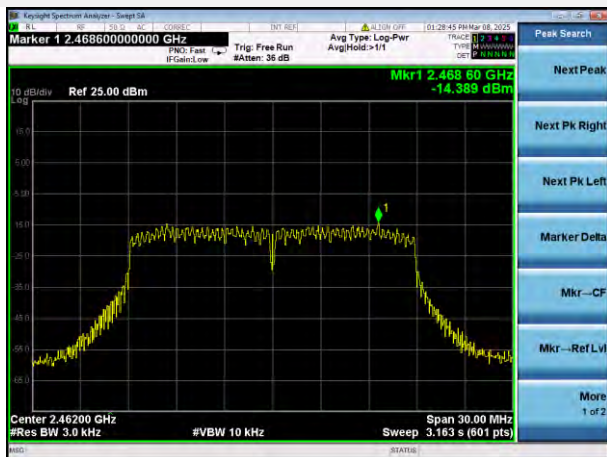


802.11n-40 MHz LOW CHANNEL

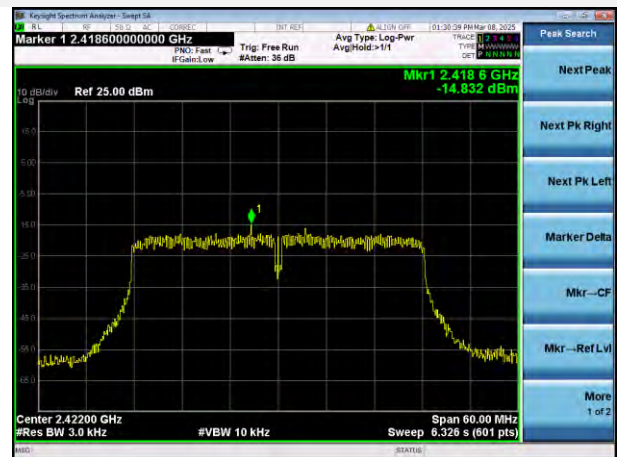

802.11n-40 MHz MIDDLE CHANNEL

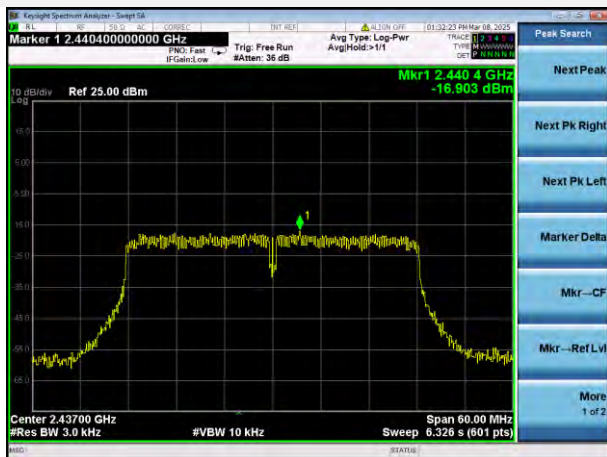


802.11n-40 MHz HIGH CHANNEL

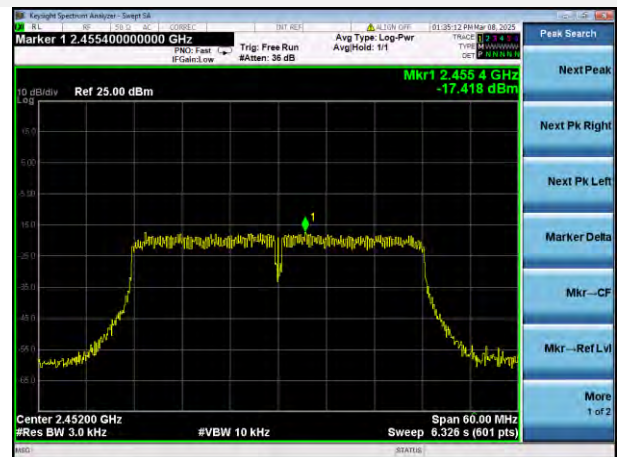

ANNEX A TEST SETUP PHOTOS

1 Radiated Test Photo


Below 30MHz

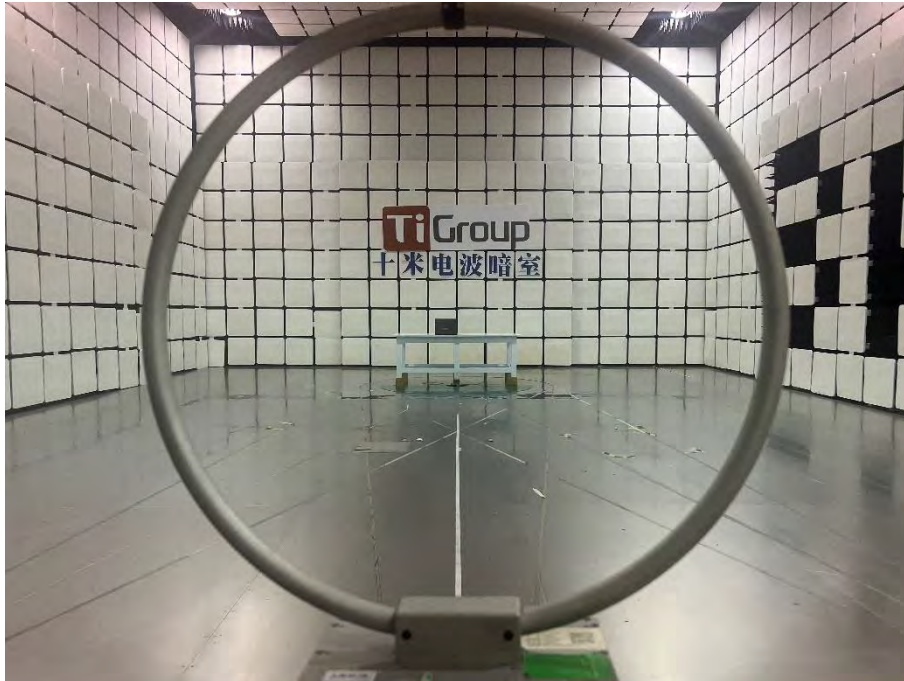

Close-up



30MHz-1GHz

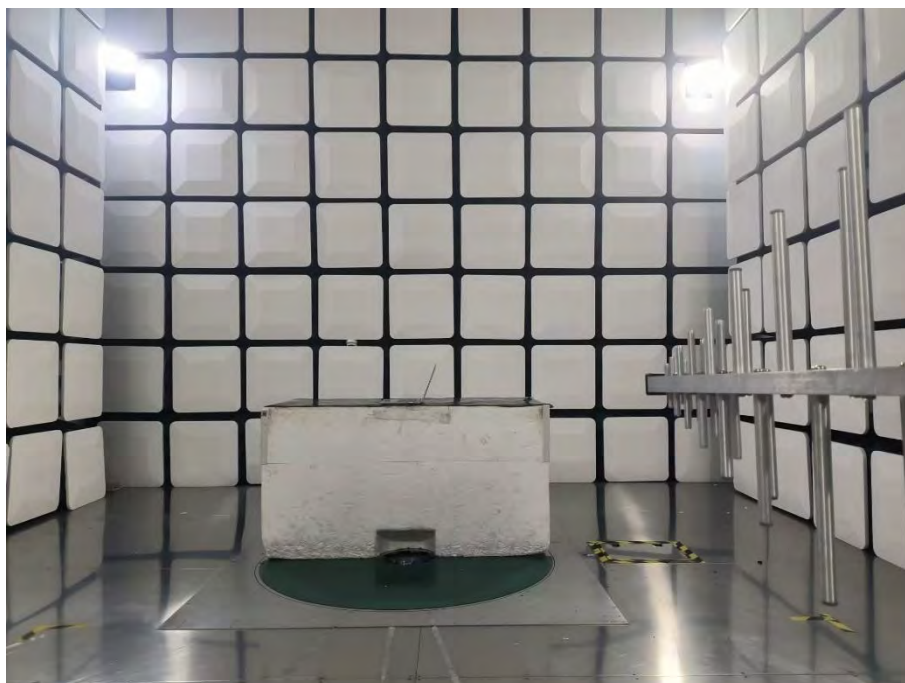

Close-up



Above 1GHz



Close-up




2 Conducted Test Photo

Conducted Test



3 Conducted Emissions

Test Photo 1

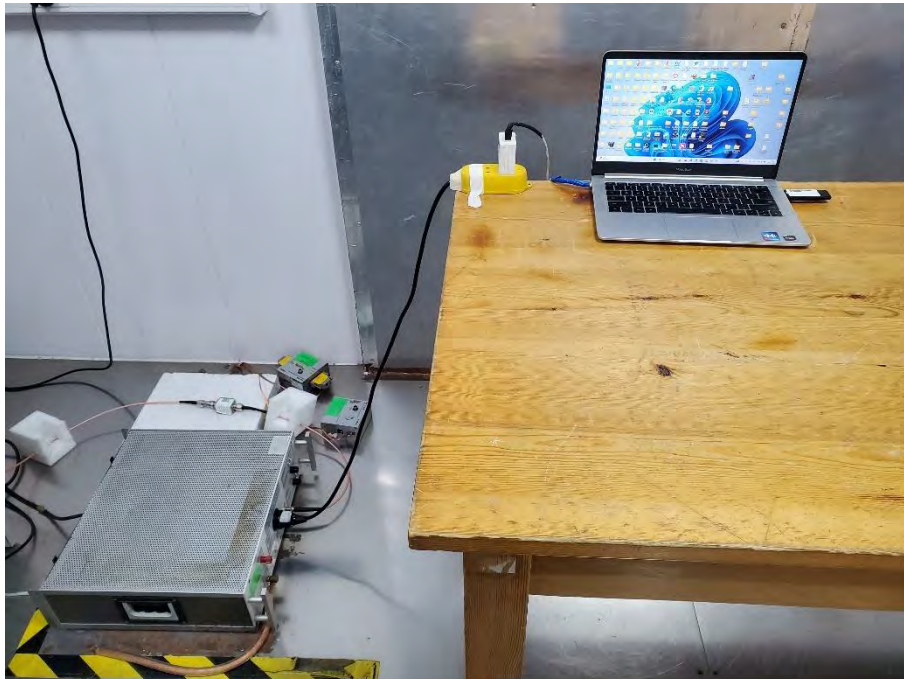

Test Photo 2



ANNEX B EUT EXTERNAL PHOTOS


FRONT VIEW OF EUT



REAR VIEW OF EUT



LEFT VIEW OF EUT

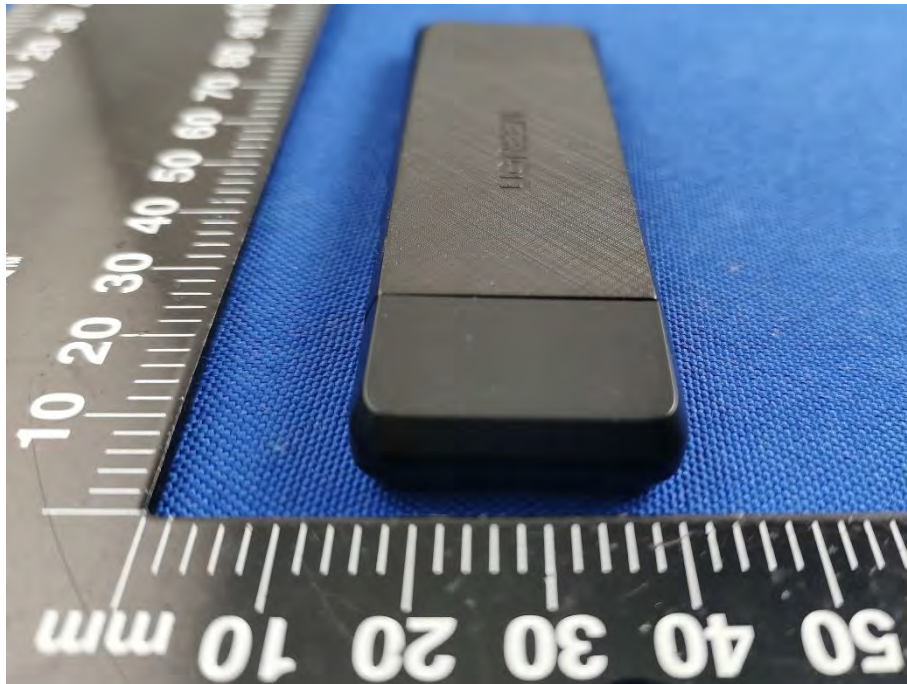

LEFT VIEW OF EUT




RIGHT VIEW OF EUT



TOP VIEW OF EUT




BOTTOM VIEW OF EUT

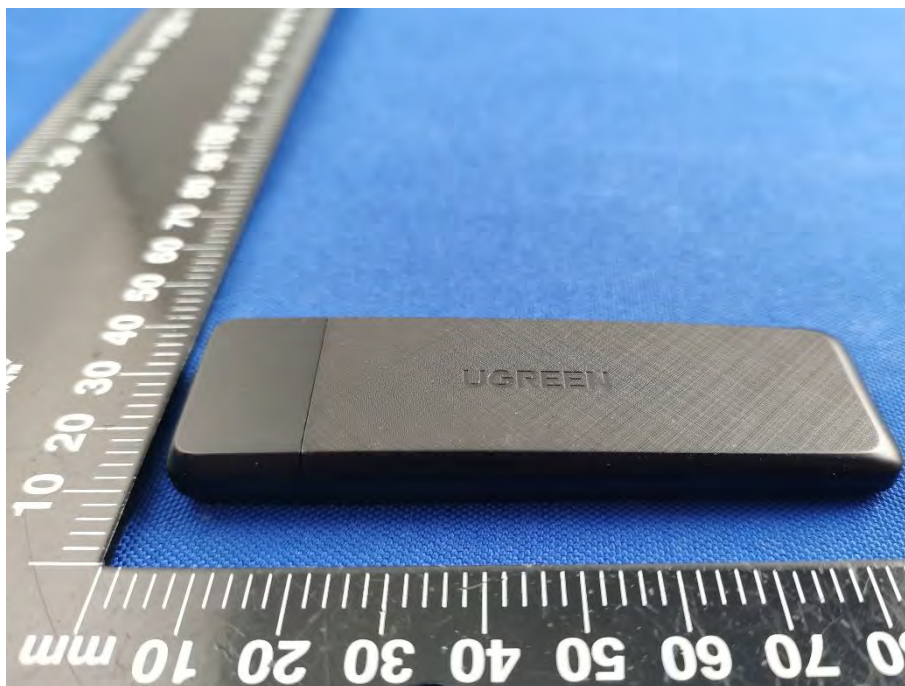


ANNEX C EUT INTERNAL PHOTOS


EUT UNCOVER VIEW 1

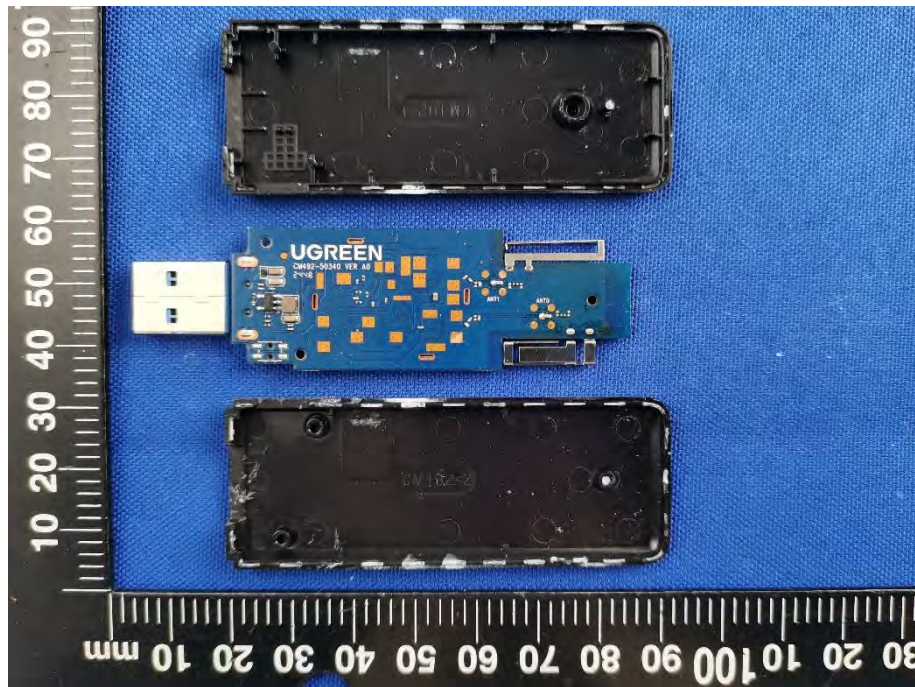


MAIN BOARD TOP VIEW (WITH SHIELDING)

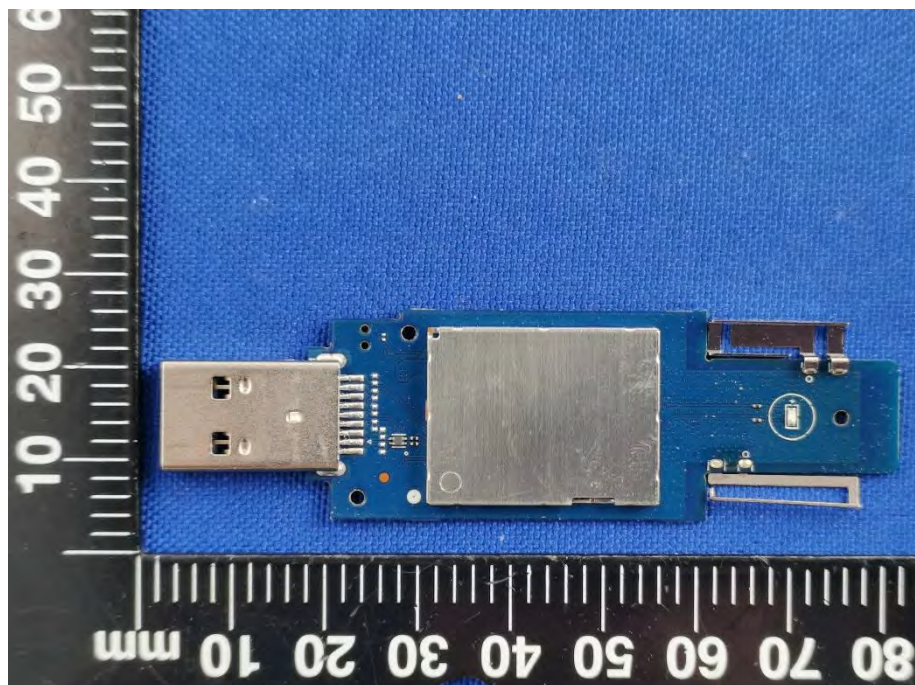

MAIN BOARD TOP VIEW (WITHOUT SHIELDING)

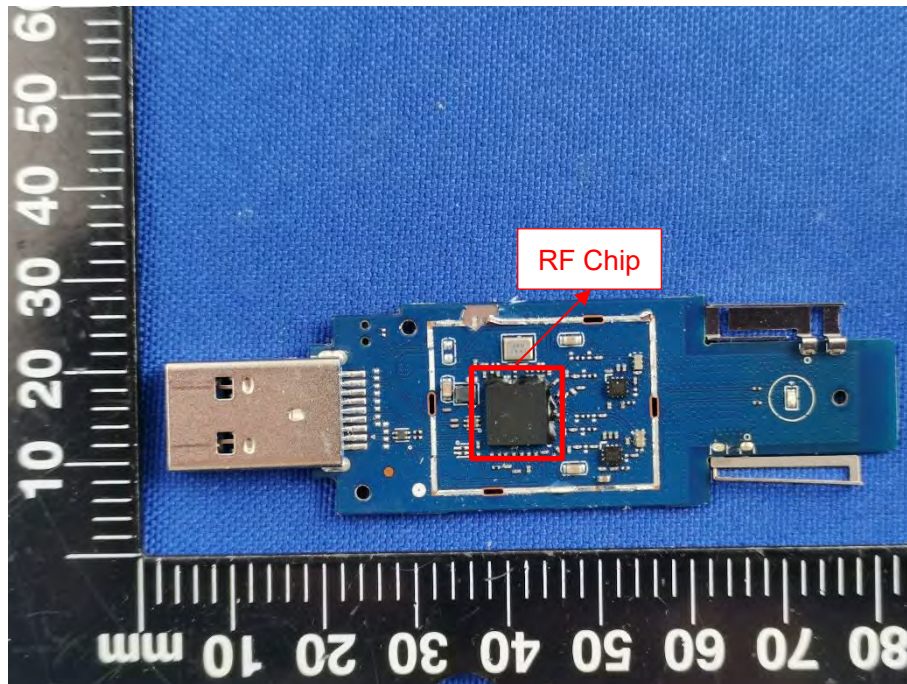

MAIN BOARD REAR VIEW

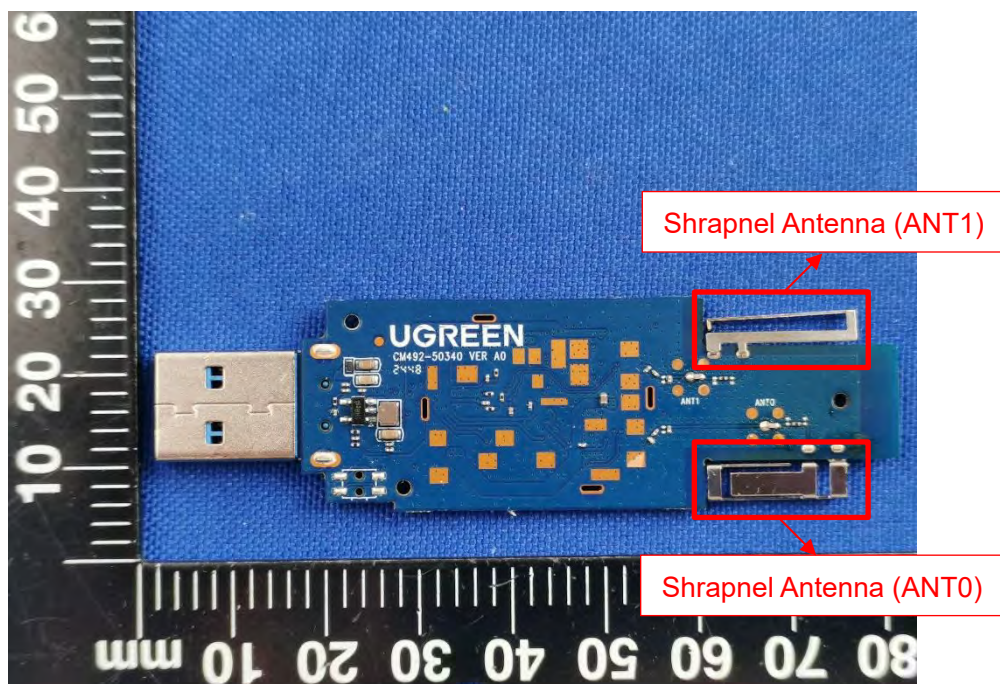

Statement

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. The report without China inspection body and laboratory Mandatory Approval (CMA) mark has no effect of proving to the society.
3. For the report with CNAS mark or A2LA mark, the items marked with "☆" are not within the accredited scope.
4. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the "inspection and testing dedicated stamp" or test report stamp.
5. The test data and results are only valid for the tested samples provided by the customer.
6. This report shall not be partially reproduced without the written permission of the laboratory.
7. Any objection shall be raised to the laboratory within 30 days after receiving the report.

--END OF REPORT--