

# TEST REPORT

Report No.: BCTC2504668210-3E

---

Applicant: Ugreen Group Limited

---

Product Name: BE6500 Wi-Fi 7 Bluetooth Wireless PCIe Adapter

---

Test Model: CM822

---

Tested Date: 2025-04-21 to 2025-05-14

---

Issued Date: 2025-05-15

---

**Shenzhen BCTC Testing Co., Ltd.**



# FCC ID: 2AQI5-CM822

Product Name: BE6500 Wi-Fi 7 Bluetooth Wireless PCIe Adapter

Trademark: **UGREEN**

Model/Type reference: CM822

Prepared For: Ugreen Group Limited

Address: Ugreen Building, Longcheng Industrial Park, Longguanxi Road, Longhua, ShenZhen, China

Manufacturer: Ugreen Group Limited

Address: Ugreen Building, Longcheng Industrial Park, Longguanxi Road, Longhua, ShenZhen, China

Factory: Huizhou MTN Weiye Technology Development Co., Ltd.

Address: No. 1 Factory Building, No. 2 Factory Building, No. 1, Huaxing Avenue, ChenjiangStreet, Zhongkai High tech Zone, Huizhou City, Guangdong Province, China

Prepared By: Shenzhen BCTC Testing Co., Ltd.

Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Sample Received Date: 2025-04-21

Sample tested Date: 2025-04-21 to 2025-05-14

Issue Date: 2025-05-15


Report No.: BCTC2504668210-3E

Test Standards: CFR 47 FCC Part 15.247  
ANSI C63.10:2013

Test Results: PASS

Remark: This is WIFI-2.4GHz band radio test report.

Tested by:



Brave Zeng/ Project Handler

Approved by:



Zero Zhou/Reviewer

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

## Table Of Content

| Test Report Declaration                                                       | Page |
|-------------------------------------------------------------------------------|------|
| 1. Version .....                                                              | 4    |
| 2. Test Summary .....                                                         | 5    |
| 3. Measurement Uncertainty .....                                              | 6    |
| 4. Product Information And Test Setup .....                                   | 7    |
| 4.1 Product Information .....                                                 | 7    |
| 4.2 Test Setup Configuration .....                                            | 7    |
| 4.3 Support Equipment .....                                                   | 8    |
| 4.4 Channel List .....                                                        | 8    |
| 4.5 Test Mode .....                                                           | 9    |
| 4.6 Table Of Parameters Of Text Software Setting .....                        | 9    |
| 5. Test Facility And Test Instrument Used .....                               | 10   |
| 5.1 Test Facility .....                                                       | 10   |
| 5.2 Test Instrument Used .....                                                | 10   |
| 6. Conducted Emissions .....                                                  | 12   |
| 6.1 Block Diagram Of Test Setup .....                                         | 12   |
| 6.2 Limit .....                                                               | 12   |
| 6.3 Test Procedure .....                                                      | 12   |
| 6.4 EUT Operating Conditions .....                                            | 12   |
| 6.5 Test Result .....                                                         | 13   |
| 7. Radiated Emissions .....                                                   | 15   |
| 7.1 Block Diagram Of Test Setup .....                                         | 15   |
| 7.2 Limit .....                                                               | 16   |
| 7.3 Test Procedure .....                                                      | 17   |
| 7.4 EUT Operating Conditions .....                                            | 18   |
| 7.5 Test Result .....                                                         | 18   |
| 8. Radiated Band Emission Measurement And Restricted Bands Of Operation ..... | 29   |
| 8.1 Block Diagram Of Test Setup .....                                         | 29   |
| 8.2 Limit .....                                                               | 29   |
| 8.3 Test Procedure .....                                                      | 30   |
| 8.4 EUT operating Conditions .....                                            | 30   |
| 8.5 Test Result .....                                                         | 31   |
| 9. Antenna Requirement .....                                                  | 35   |
| 9.1 Limit .....                                                               | 35   |
| 9.2 Test Result .....                                                         | 35   |
| 10. EUT Photographs .....                                                     | 36   |
| 11. EUT Test Setup Photographs .....                                          | 37   |

(Note: N/A means not applicable)

**1. Version**

| Report No.        | Issue Date | Description | Approved |
|-------------------|------------|-------------|----------|
| BCTC2504668210-3E | 2025-05-15 | Original    | Valid    |
|                   |            |             |          |

## 2. Test Summary

The Product has been tested according to the following specifications:

| No. | Test Parameter                    | Clause No. | Results |
|-----|-----------------------------------|------------|---------|
| 1   | Conducted Emission                | 15.207     | PASS    |
| 2   | Radiated Spurious Emission        | 15.247 (d) | PASS    |
| 3   | Restricted Band of Operation      | 15.205     | PASS    |
| 4   | Band Edge (Out of Band Emissions) | 15.247 (d) | PASS    |
| 5   | Antenna Requirement               | 15.203     | PASS    |

Note: According to the following changes in the product, change the antenna, Therefore, conducted emission and radiation emission, radiation stray and radiation sideband tests were only carried out in this report on the original report (RFBARR-WTW-P23040352).



New

### 3. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

| No. | Item                                               | Uncertainty |
|-----|----------------------------------------------------|-------------|
| 1   | 3m chamber Radiated spurious emission(9kHz-30MHz)  | U=3.7dB     |
| 2   | 3m chamber Radiated spurious emission(30MHz-1GHz)  | U=4.3dB     |
| 3   | 3m chamber Radiated spurious emission(1GHz-18GHz)  | U=4.5dB     |
| 4   | 3m chamber Radiated spurious emission(18GHz-40GHz) | U=3.34dB    |
| 5   | Conducted Emission(150kHz-30MHz)                   | U=3.20dB    |
| 6   | Conducted Adjacent channel power                   | U=1.38dB    |
| 7   | Conducted output power uncertainty Above 1G        | U=1.576dB   |
| 8   | Conducted output power uncertainty below 1G        | U=1.28dB    |
| 9   | humidity uncertainty                               | U=5.3%      |
| 10  | Temperature uncertainty                            | U=0.59°C    |

## 4. Product Information And Test Setup

### 4.1 Product Information

|                         |                                                                                                                                                                                                                                                                                                                                                       |
|-------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Model/Type reference:   | CM822                                                                                                                                                                                                                                                                                                                                                 |
| P/N code Differences:   | All the P/N code and test models are the same circuit and RF module, except for the sales platform.                                                                                                                                                                                                                                                   |
| Hardware Version:       | N/A                                                                                                                                                                                                                                                                                                                                                   |
| Software Version:       | N/A                                                                                                                                                                                                                                                                                                                                                   |
| Operation Frequency:    | 802.11b/g/n20/ax20/be20MHz:2412~2462 MHz<br>802.11n40/ax40/be40MHz:2422~2452 MHz                                                                                                                                                                                                                                                                      |
| Bit Rate of Transmitter | 802.11b: up to 11Mbps<br>802.11g: up to 54Mbps<br>802.11n: up to 300Mbps<br>VHT: up to 400Mbps<br>802.11ax: up to 573.5Mbps<br>802.11be: up to 688.2Mbps<br>CCK,DQPSK,DBPSK for DSSS<br>64QAM, 16QAM, QPSK, BPSK for OFDM                                                                                                                             |
| Type of Modulation:     | 1024QAM for OFDM in VHT mode<br>4096QAM for OFDMA in 11ax mode<br>4096QAM for OFDMA in 11be mode                                                                                                                                                                                                                                                      |
| Antenna installation:   | External antenna                                                                                                                                                                                                                                                                                                                                      |
| Resource Unit(RU):      | Single RU:26-tone,52-tone, 106-tone, 242-tone, 484-tone<br>Multi-RU(Small RU): 52-tone +26-tone, 106-tone +26-tone<br>1.67 dBi                                                                                                                                                                                                                        |
| Antenna Gain:           | Remark:<br><input checked="" type="checkbox"/> The antenna gain of the product comes from the antenna report provided by the customer, and the test data is affected by the customer information.<br><input type="checkbox"/> The antenna gain of the product is provided by the customer, and the test data is affected by the customer information. |
| Ratings:                | DC 3.3V                                                                                                                                                                                                                                                                                                                                               |

Remark:

- P/N code in the below table, for marketing purpose, will be marked on the marking plate.

|        |         |         |         |         |          |         |        |
|--------|---------|---------|---------|---------|----------|---------|--------|
| 55204  | 55204EU | 55204UK | 55204US | 55204JP | 55204CN  | 55204KC | 55204A |
| 55204B | 55204C  | 55204P  | 55204X  | 55204U  | KC-55204 |         |        |
| 65785  | 65785EU | 65785UK | 65785US | 65785JP | 65785CN  | 65785KC | 65785A |
| 65785B | 65785C  | 65785P  | 65785X  | 65785U  | KC-65785 |         |        |

### 4.2 Test Setup Configuration

See test photographs attached in *EUT TEST SETUP PHOTOGRAPHS* for the actual connections between Product and support equipment.

#### 4.3 Support Equipment

| Item | Equipment                                      | Mfr/Brand             | Model/Type No. | Series No. | Note      |
|------|------------------------------------------------|-----------------------|----------------|------------|-----------|
| E-1  | BE6500 Wi-Fi 7 Bluetooth Wireless PCIe Adapter | <b>UGREEN</b>         | CM822          | N/A        | EUT       |
| E-2  | HDMI cable                                     | UGREEN                | /              | ---        | Auxiliary |
| E-3  | Display                                        | AOC                   | U27V5C         | ---        | Auxiliary |
| E-4  | Host                                           | Assemble the computer | D9A            | ---        | Auxiliary |
| E-5  | Keyboard                                       | Logitech              | M-U0026        | ---        | Auxiliary |
| E-6  | Mouse                                          | Logitech              | YU0036         | ---        | Auxiliary |
| E-7  | Router                                         | XiaoMi                | R4A            | ---        | Auxiliary |

| Item | Shielded Type | Ferrite Core | Length | Note                |
|------|---------------|--------------|--------|---------------------|
| C-1  | NO            | NO           | 0M     | DC cable unshielded |

##### Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

#### 4.4 Channel List

| Channel List for 802.11b/g/n(20)/ax(20) /be(20) |                 |         |                 |         |                 |
|-------------------------------------------------|-----------------|---------|-----------------|---------|-----------------|
| Channel                                         | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 01                                              | 2412            | 02      | 2417            | 03      | 2422            |
| 04                                              | 2427            | 05      | 2432            | 06      | 2437            |
| 07                                              | 2442            | 08      | 2447            | 09      | 2452            |
| 10                                              | 2457            | 11      | 2462            |         |                 |

| Channel List for 802.11n (40)/ax(40) / be(40) |                 |         |                 |         |                 |
|-----------------------------------------------|-----------------|---------|-----------------|---------|-----------------|
| Channel                                       | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 03                                            | 2422            | 04      | 2427            | 05      | 2432            |
| 06                                            | 2437            | 07      | 2442            | 08      | 2447            |
| 09                                            | 2452            |         |                 |         |                 |

#### 4.5 Test Mode

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

| Pretest Mode | Description                                        |
|--------------|----------------------------------------------------|
| Mode 1       | 802.11b CH1/ CH6/ CH11                             |
| Mode 2       | 802.11g CH1/ CH6/ CH11                             |
| Mode 3       | 802.11n20/ax20/be20 CH1/ CH6/ CH11                 |
| Mode 4       | 802.11n40/ax40/be40 CH3/ CH6/ CH9                  |
| Mode 5       | WIFI Link (Conducted emission & Radiated emission) |

Note:

(1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.

#### 4.6 Table Of Parameters Of Test Software Setting

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters

| Test software Version | CMD      |          |          |
|-----------------------|----------|----------|----------|
| Frequency             | 2412 MHz | 2437 MHz | 2462 MHz |
| Parameters            | DEF      | DEF      | DEF      |
| Frequency             | 2422MHz  | 2437MHz  | 2452MHz  |
| Parameters            | DEF      | DEF      | DEF      |

## 5. Test Facility And Test Instrument Used

### 5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: 712850

A2LA certificate registration number is: CN1212

ISED Registered No.: 23583

ISED CAB identifier: CN0017

### 5.2 Test Instrument Used

| Conducted Emissions Test |              |            |             |              |              |
|--------------------------|--------------|------------|-------------|--------------|--------------|
| Equipment                | Manufacturer | Model#     | Serial#     | Last Cal.    | Next Cal.    |
| Receiver                 | R&S          | ESR        | 102075      | May 16, 2024 | May 15, 2025 |
| LISN                     | R&S          | ENV216     | 101375      | May 16, 2024 | May 15, 2025 |
| Software                 | Frad         | EZ-EMC     | EMC-CON 3A1 | \            | \            |
| Pulse limiter            | Schwarzbeck  | VTSD9561-F | 01323       | May 16, 2024 | May 15, 2025 |


| RF Conducted Test            |              |             |            |              |              |
|------------------------------|--------------|-------------|------------|--------------|--------------|
| Equipment                    | Manufacturer | Model#      | Serial#    | Last Cal.    | Next Cal.    |
| Power meter                  | Keysight     | E4419       | \          | May 16, 2024 | May 15, 2025 |
| Power Sensor (AV)            | Keysight     | E9300A      | \          | May 16, 2024 | May 15, 2025 |
| Signal Analyzer20kHz-26.5GHz | Keysight     | N9020A      | MY49100060 | May 16, 2024 | May 15, 2025 |
| Spectrum Analyzer9kHz-40GHz  | R&S          | FSP40       | 100363     | May 16, 2024 | May 15, 2025 |
| Radio frequency control box  | MAIWEI       | MW100-RFC B | \          | \            | \            |
| Software                     | MAIWEI       | MTS 8310    | \          | \            | \            |

| Radiated Emissions Test (966 Chamber02) |              |                      |                  |               |               |
|-----------------------------------------|--------------|----------------------|------------------|---------------|---------------|
| Equipment                               | Manufacturer | Model#               | Serial#          | Last Cal.     | Next Cal.     |
| 966 chamber                             | SKET         | 966 Room             | 966              | Oct. 31. 2024 | Oct. 30. 2027 |
| Receiver                                | R&S          | ESR                  | 102075           | May 16, 2024  | May 15, 2025  |
| Receiver                                | R&S          | ESR17                | 100010           | Oct. 31. 2024 | Oct. 30. 2025 |
| Amplifier                               | SKET         | LNPA-30M01<br>G-30   | SK2021082004     | Oct. 31. 2024 | Oct. 30. 2025 |
| TRILOG<br>Broadband<br>Antenna          | Schwarzbeck  | VULB9168             | 1323             | Feb. 28, 2025 | Feb. 27, 2026 |
| Loop<br>Antenna(9KHz<br>-30MHz)         | Schwarzbeck  | FMZB1519B            | 00014            | May 21, 2024  | May 20, 2025  |
| Amplifier                               | SKET         | LAPA_01G18<br>G-45dB | SK202104090<br>1 | May 16, 2024  | May 15, 2025  |
| Horn Antenna                            | Schwarzbeck  | BBHA9120D            | 1541             | May 21, 2024  | May 20, 2025  |
| Amplifier(18G<br>Hz-40GHz)              | MITEQ        | TTA1840-35-<br>HG    | 2034381          | May 16, 2024  | May 15, 2025  |
| Horn<br>Antenna(18G<br>Hz-40GHz)        | Schwarzbeck  | BBHA9170             | 00822            | May 21, 2024  | May 20, 2025  |
| Spectrum<br>Analyzer9kHz-<br>40GHz      | R&S          | FSP40                | 100363           | May 16, 2024  | May 15, 2025  |
| Software                                | Frad         | EZ-EMC               | FA-03A2 RE       | \             | \             |

STING  
ED

## 6. Conducted Emissions

### 6.1 Block Diagram Of Test Setup

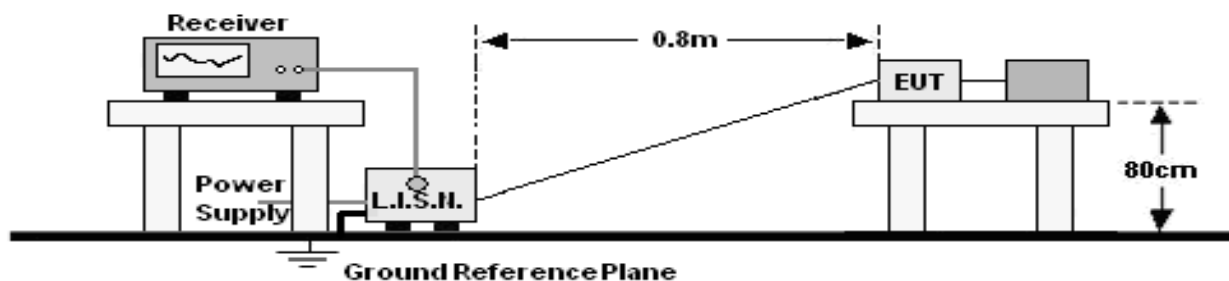

### 6.2 Limit

| FREQUENCY (MHz) | Limit (dBuV) |           |
|-----------------|--------------|-----------|
|                 | Quas-peak    | Average   |
| 0.15 -0.5       | 66 - 56 *    | 56 - 46 * |
| 0.50 -5.0       | 56.00        | 46.00     |
| 5.0 -30.0       | 60.00        | 50.00     |

Notes:

- \*Decreasing linearly with logarithm of frequency.
- The lower limit shall apply at the transition frequencies.

### 6.3 Test Procedure

| Receiver Parameters | Setting  |
|---------------------|----------|
| Attenuation         | 10 dB    |
| Start Frequency     | 0.15 MHz |
| Stop Frequency      | 30 MHz   |
| IF Bandwidth        | 9 kHz    |


- The Product was placed on a nonconductive table 0.8 m above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N).
- The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.
- For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.

### 6.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

## 6.5 Test Result

|              |        |                    |         |
|--------------|--------|--------------------|---------|
| Temperature: | 26 °C  | Relative Humidity: | 54%     |
| Pressure:    | 101KPa | Phase :            | L       |
| Test Mode:   | Mode 5 | Test Voltage :     | DC 3.3V |

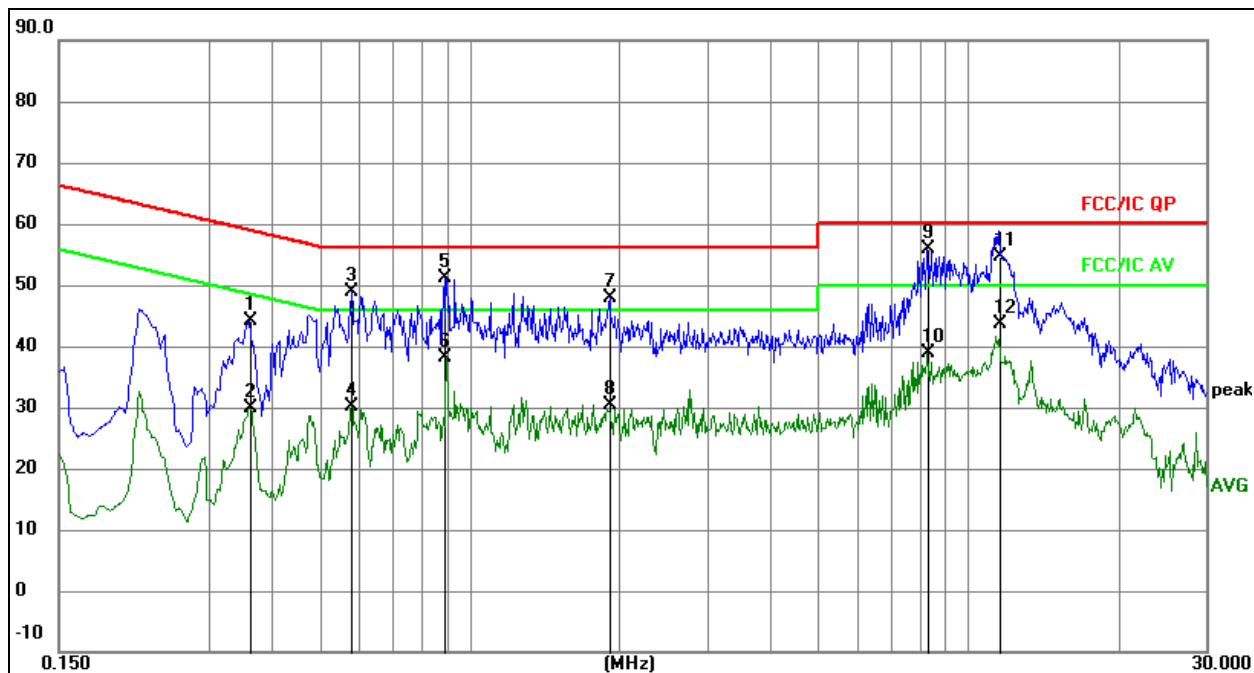


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement=Reading Level+ Correct Factor
4. Over=Measurement-Limit

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dB | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Over<br>dB | Detector |
|-----|-----|--------------|------------------------|-------------------------|--------------------------|---------------|------------|----------|
| 1   |     | 0.3615       | 24.07                  | 20.08                   | 44.15                    | 58.69         | -14.54     | QP       |
| 2   |     | 0.3615       | 9.84                   | 20.08                   | 29.92                    | 48.69         | -18.77     | AVG      |
| 3   |     | 0.5792       | 28.79                  | 20.08                   | 48.87                    | 56.00         | -7.13      | QP       |
| 4   |     | 0.5792       | 10.08                  | 20.08                   | 30.16                    | 46.00         | -15.84     | AVG      |
| 5   |     | 0.8944       | 31.04                  | 20.09                   | 51.13                    | 56.00         | -4.87      | QP       |
| 6   |     | 0.8944       | 18.12                  | 20.09                   | 38.21                    | 46.00         | -7.79      | AVG      |
| 7   |     | 1.9080       | 27.85                  | 20.10                   | 47.95                    | 56.00         | -8.05      | QP       |
| 8   |     | 1.9080       | 10.22                  | 20.10                   | 30.32                    | 46.00         | -15.68     | AVG      |
| 9   | *   | 8.2789       | 35.75                  | 20.16                   | 55.91                    | 60.00         | -4.09      | QP       |
| 10  |     | 8.2789       | 18.63                  | 20.16                   | 38.79                    | 50.00         | -11.21     | AVG      |
| 11  |     | 11.5190      | 34.36                  | 20.21                   | 54.57                    | 60.00         | -5.43      | QP       |
| 12  |     | 11.5190      | 23.39                  | 20.21                   | 43.60                    | 50.00         | -6.40      | AVG      |

|              |        |                    |         |
|--------------|--------|--------------------|---------|
| Temperature: | 26 °C  | Relative Humidity: | 54%     |
| Pressure:    | 101KPa | Phase :            | N       |
| Test Mode:   | Mode 5 | Test Voltage :     | DC 3.3V |

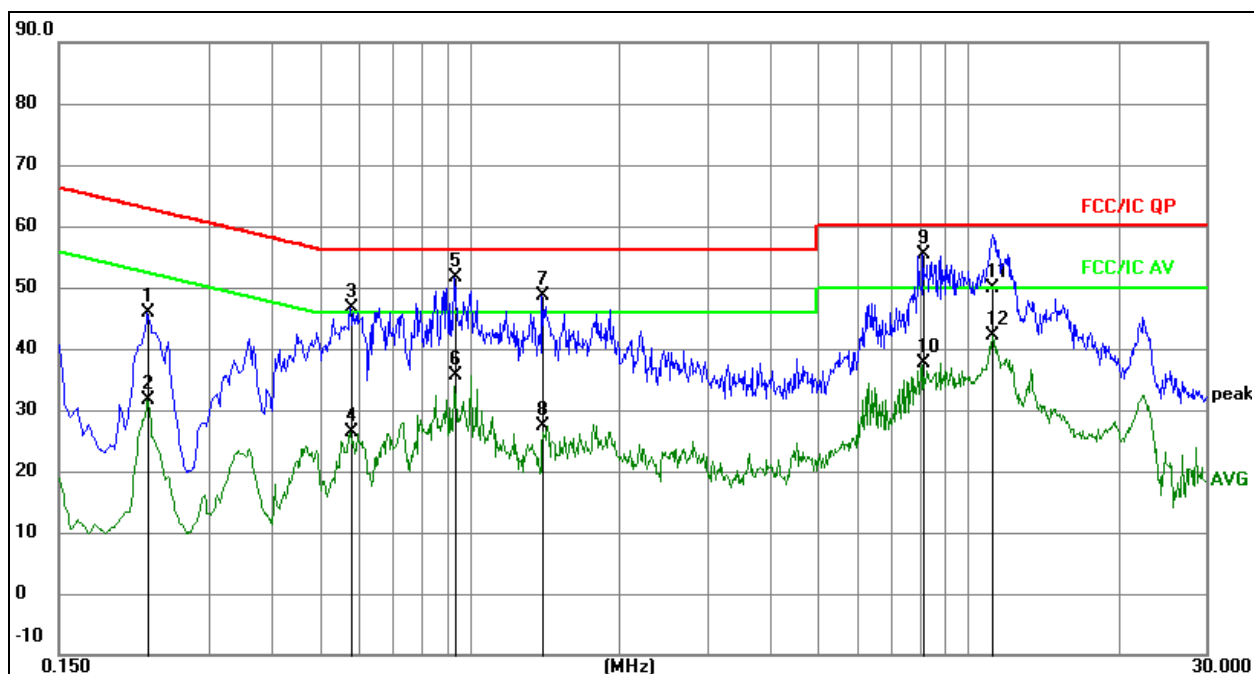

Remark:


1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement=Reading Level+ Correct Factor
4. Over=Measurement-Limit

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dB | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Over<br>dB | Detector |
|-----|-----|--------------|------------------------|-------------------------|--------------------------|---------------|------------|----------|
| 1   |     | 0.2265       | 25.87                  | 20.07                   | 45.94                    | 62.58         | -16.64     | QP       |
| 2   |     | 0.2265       | 11.54                  | 20.07                   | 31.61                    | 52.58         | -20.97     | AVG      |
| 3   |     | 0.5775       | 26.43                  | 20.08                   | 46.51                    | 56.00         | -9.49      | QP       |
| 4   |     | 0.5775       | 6.37                   | 20.08                   | 26.45                    | 46.00         | -19.55     | AVG      |
| 5   | *   | 0.9375       | 31.43                  | 20.09                   | 51.52                    | 56.00         | -4.48      | QP       |
| 6   |     | 0.9375       | 15.58                  | 20.09                   | 35.67                    | 46.00         | -10.33     | AVG      |
| 7   |     | 1.4010       | 28.60                  | 20.09                   | 48.69                    | 56.00         | -7.31      | QP       |
| 8   |     | 1.4010       | 7.34                   | 20.09                   | 27.43                    | 46.00         | -18.57     | AVG      |
| 9   |     | 8.1420       | 35.22                  | 20.16                   | 55.38                    | 60.00         | -4.62      | QP       |
| 10  |     | 8.1420       | 17.45                  | 20.16                   | 37.61                    | 50.00         | -12.39     | AVG      |
| 11  |     | 11.1950      | 29.60                  | 20.20                   | 49.80                    | 60.00         | -10.20     | QP       |
| 12  |     | 11.1950      | 21.98                  | 20.20                   | 42.18                    | 50.00         | -7.82      | AVG      |


## 7. Radiated Emissions

### 7.1 Block Diagram Of Test Setup


(A) Radiated Emission Test-Up Frequency Below 30MHz

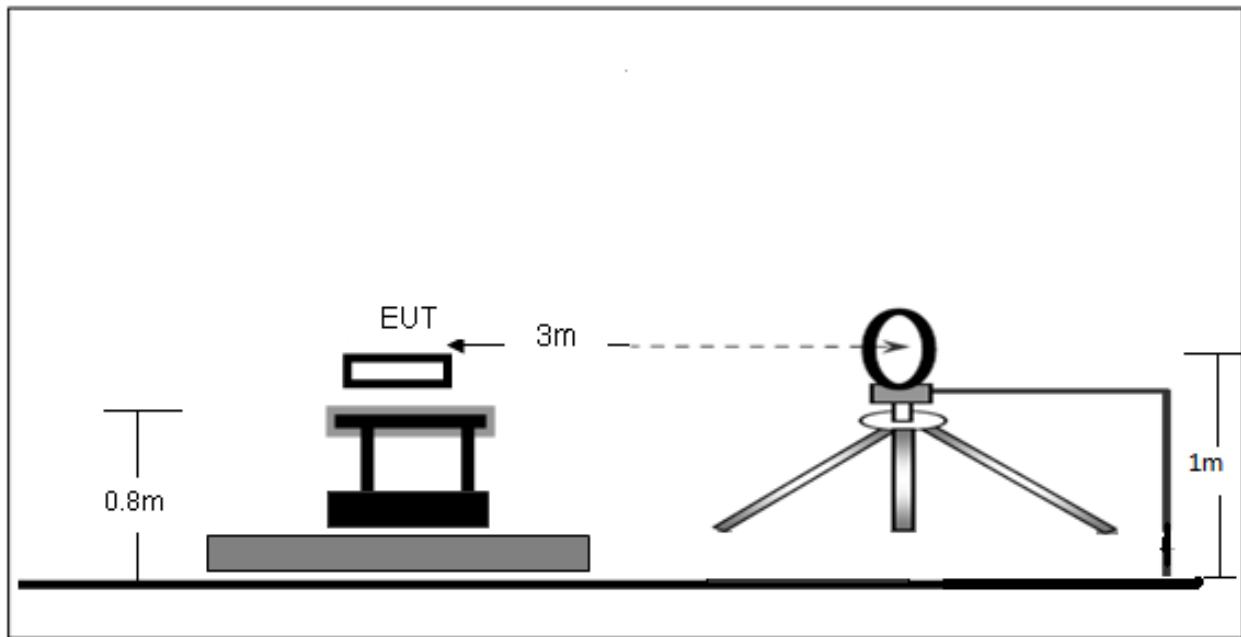

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

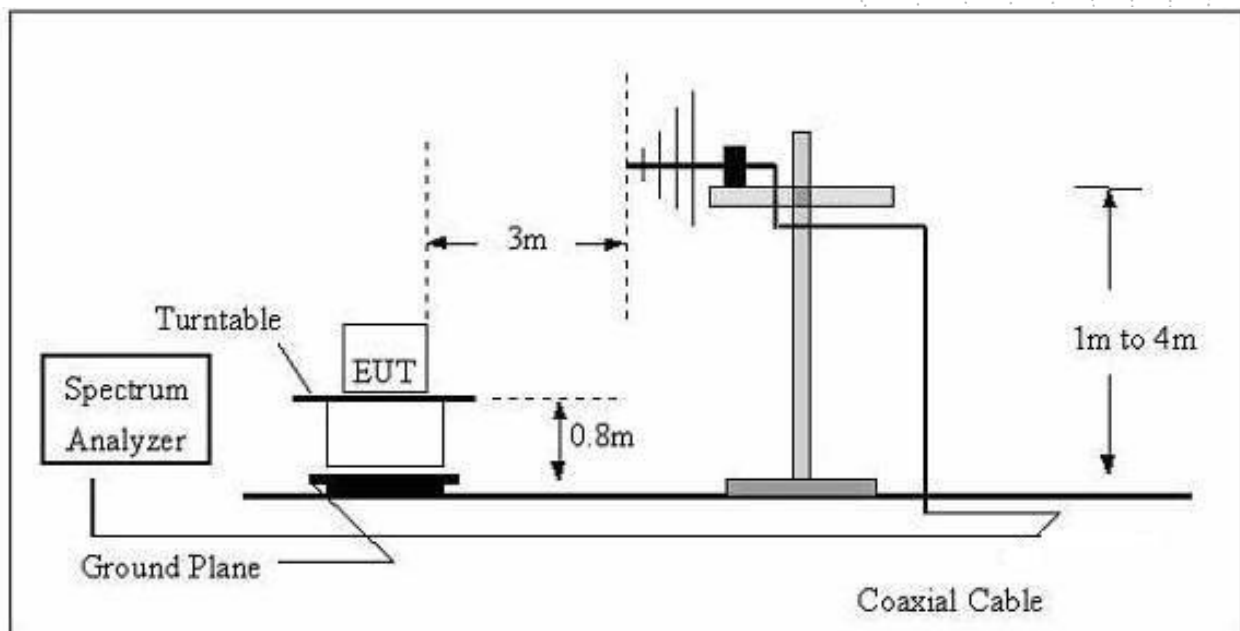

(C) Radiated Emission Test-Up Frequency Above 1GHz

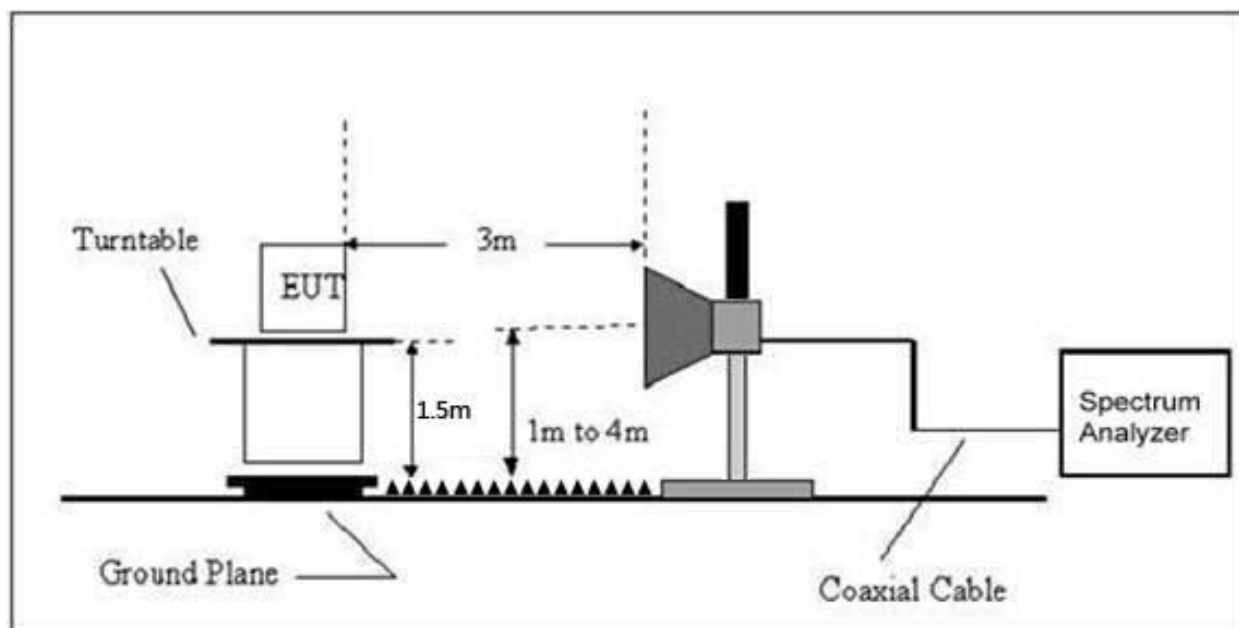

## 7.2 Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Frequency<br>(MHz) | Field Strength<br>uV/m | Distance<br>(m) | Field Strength Limit at 3m Distance |                                    |
|--------------------|------------------------|-----------------|-------------------------------------|------------------------------------|
|                    |                        |                 | uV/m                                | dBuV/m                             |
| 0.009 ~ 0.490      | $2400/F(\text{kHz})$   | 300             | $10000 * 2400/F(\text{kHz})$        | $20\log(2400/F(\text{kHz})) + 80$  |
| 0.490 ~ 1.705      | $24000/F(\text{kHz})$  | 30              | $100 * 24000/F(\text{kHz})$         | $20\log(24000/F(\text{kHz})) + 40$ |
| 1.705 ~ 30         | 30                     | 30              | $100 * 30$                          | $20\log(30) + 40$                  |
| 30 ~ 88            | 100                    | 3               | 100                                 | $20\log(100)$                      |
| 88 ~ 216           | 150                    | 3               | 150                                 | $20\log(150)$                      |
| 216 ~ 960          | 200                    | 3               | 200                                 | $20\log(200)$                      |
| Above 960          | 500                    | 3               | 500                                 | $20\log(500)$                      |

### LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

| FREQUENCY (MHz) | Limit (dBuV/m) (at 3M) |         |
|-----------------|------------------------|---------|
|                 | PEAK                   | AVERAGE |
| Above 1000      | 74                     | 54      |

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

# FREQUENCY RANGE OF RADIATED MEASUREMENT (For unintentional radiators)

| Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz) | Range (MHz)                                                                     |
|---------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------|
| Below 1.705                                                                                                                     | 30                                                                              |
| 1.705 – 108                                                                                                                     | 1000                                                                            |
| 108 – 500                                                                                                                       | 2000                                                                            |
| 500 – 1000                                                                                                                      | 5000                                                                            |
| Above 1000                                                                                                                      | 5 <sup>th</sup> harmonic of the highest frequency or 40 GHz, whichever is lower |

## 7.3 Test Procedure

| Receiver Parameter | Setting           |
|--------------------|-------------------|
| Attenuation        | Auto              |
| 9kHz~150kHz        | RBW 200Hz for QP  |
| 150kHz~30MHz       | RBW 9kHz for QP   |
| 30MHz~1000MHz      | RBW 120kHz for QP |

| Spectrum Parameter | Setting                                                            |
|--------------------|--------------------------------------------------------------------|
| 1-25GHz            | RBW 1 MHz /VBW 1 MHz for Peak,<br>RBW 1 MHz / VBW 10Hz for Average |

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre).
- Test the EUT in the lowest channel, the middle channel, the Highest channel.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

Above 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- Test the EUT in the lowest channel, the Highest channel.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

## 7.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

## 7.5 Test Result

Below 30MHz

|              |        |                    |         |
|--------------|--------|--------------------|---------|
| Temperature: | 26 °C  | Relative Humidity: | 54%     |
| Pressure:    | 101KPa | Test Voltage:      | DC 3.3V |
| Test Mode:   | Mode 5 | Polarization :     | --      |

| Freq.<br>(MHz) | Reading<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | State<br>P/F |
|----------------|---------------------|-------------------|----------------|--------------|
| --             | --                  | --                | --             | PASS         |
| --             | --                  | --                | --             | PASS         |

Note:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log (\text{specific distance/test distance})(\text{dB})$ ;

Limit line = specific limits(dBuv) + distance extrapolation factor.

Between 30MHz – 1GHz

|              |        |                    |            |
|--------------|--------|--------------------|------------|
| Temperature: | 26 °C  | Relative Humidity: | 54%        |
| Pressure:    | 101KPa | Phase :            | Horizontal |
| Test Mode:   | Mode 5 | Test Voltage:      | DC 3.3V    |

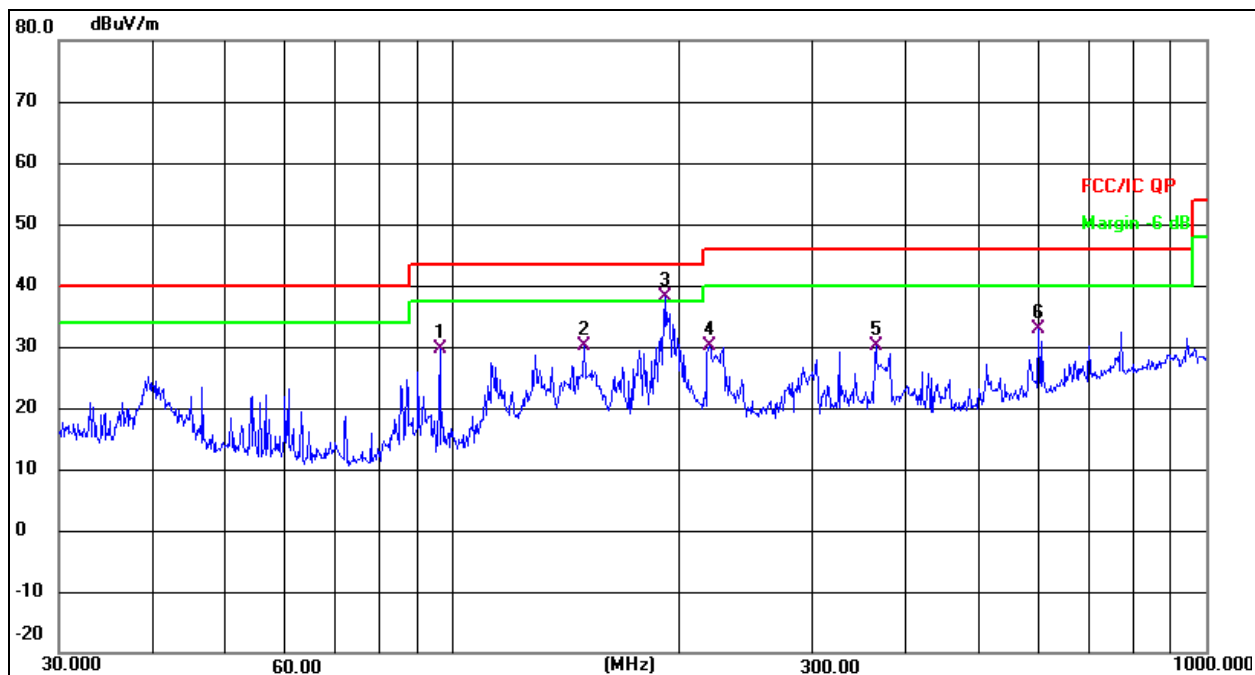


Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement=Reading Level+ Correct Factor
3. Over=Measurement-Limit

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|
| 1   | 96.0986         | 45.16          | -15.43        | 29.73          | 43.50          | -13.77      | QP       |
| 2   | 149.4857        | 41.09          | -10.94        | 30.15          | 43.50          | -13.35      | QP       |
| 3 * | 191.7450        | 52.22          | -13.99        | 38.23          | 43.50          | -5.27       | QP       |
| 4   | 219.0753        | 44.07          | -13.84        | 30.23          | 46.00          | -15.77      | QP       |
| 5   | 364.2595        | 38.92          | -8.67         | 30.25          | 46.00          | -15.75      | QP       |
| 6   | 599.3212        | 35.45          | -2.62         | 32.83          | 46.00          | -13.17      | QP       |

|              |        |                    |          |
|--------------|--------|--------------------|----------|
| Temperature: | 26 °C  | Relative Humidity: | 54%      |
| Pressure:    | 101KPa | Phase :            | Vertical |
| Test Mode:   | Mode 5 | Test Voltage:      | DC 3.3V  |

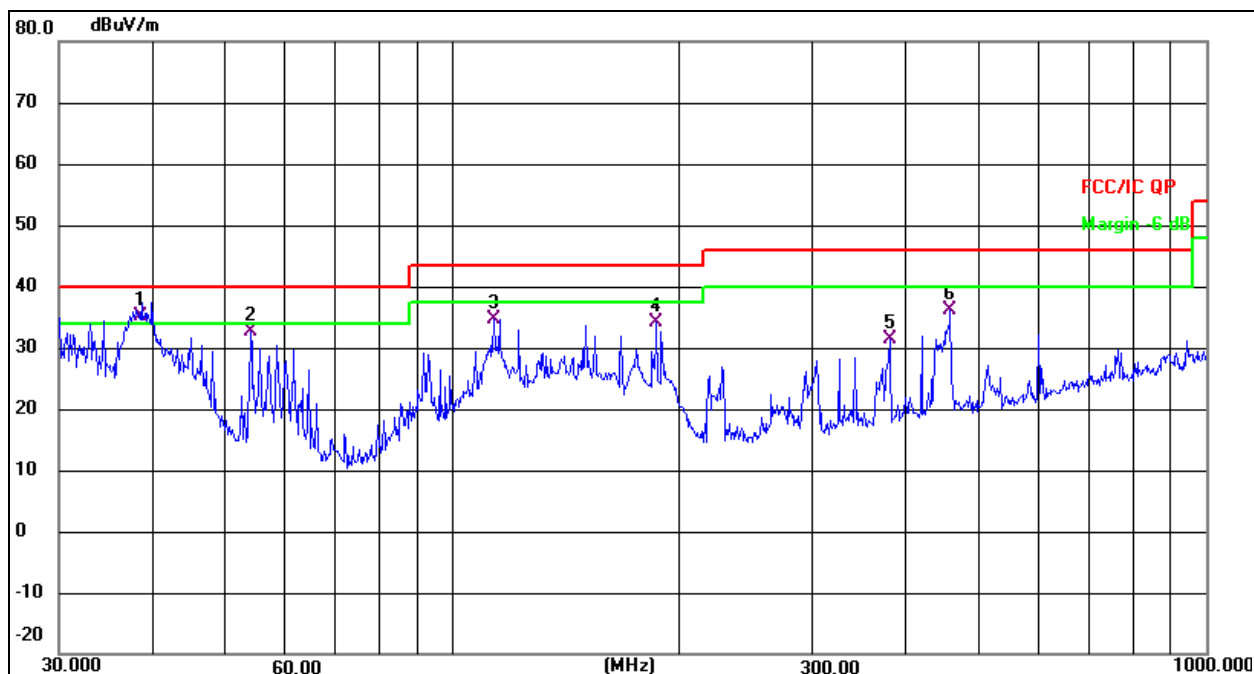

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement=Reading Level+ Correct Factor
3. Over=Measurement-Limit

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|
| 1 * | 38.6160         | 48.03          | -12.82        | 35.21          | 40.00          | -4.79       | QP       |
| 2   | 53.8818         | 46.51          | -13.93        | 32.58          | 40.00          | -7.42       | QP       |
| 3   | 113.3163        | 48.75          | -14.05        | 34.70          | 43.50          | -8.80       | QP       |
| 4   | 186.4409        | 47.82          | -13.60        | 34.22          | 43.50          | -9.28       | QP       |
| 5   | 379.9141        | 39.59          | -8.20         | 31.39          | 46.00          | -14.61      | QP       |
| 6   | 457.5073        | 42.33          | -6.22         | 36.11          | 46.00          | -9.89       | QP       |

Between 1GHz – 25GHz  
802.11b

| Polar<br>(H/V)         | Fre-<br>quency<br>(MHz) | Reading<br>Level<br>(dBuV/m) | Correct<br>Factor<br>(dB) | Measure-<br>ment<br>(dBuV/m) | Limits<br>(dBuV/m) | Over<br>(dB) | Detector<br>Type |
|------------------------|-------------------------|------------------------------|---------------------------|------------------------------|--------------------|--------------|------------------|
| Low channel:2412MHz    |                         |                              |                           |                              |                    |              |                  |
| V                      | 4824.00                 | 64.19                        | -19.95                    | 44.24                        | 74.00              | -29.76       | PK               |
| V                      | 4824.00                 | 59.28                        | -19.95                    | 39.33                        | 54.00              | -14.67       | AV               |
| V                      | 7236.00                 | 69.34                        | -14.14                    | 55.20                        | 74.00              | -18.80       | PK               |
| V                      | 7236.00                 | 57.37                        | -14.14                    | 43.23                        | 54.00              | -10.77       | AV               |
| H                      | 4824.00                 | 69.47                        | -19.95                    | 49.52                        | 74.00              | -24.48       | PK               |
| H                      | 4824.00                 | 58.04                        | -19.95                    | 38.09                        | 54.00              | -15.91       | AV               |
| H                      | 7236.00                 | 66.68                        | -14.14                    | 52.54                        | 74.00              | -21.46       | PK               |
| H                      | 7236.00                 | 57.08                        | -14.14                    | 42.94                        | 54.00              | -11.06       | AV               |
| Middle channel:2437MHz |                         |                              |                           |                              |                    |              |                  |
| V                      | 4874.00                 | 66.11                        | -19.85                    | 46.26                        | 74.00              | -27.74       | PK               |
| V                      | 4874.00                 | 56.46                        | -19.85                    | 36.61                        | 54.00              | -17.39       | AV               |
| V                      | 7311.00                 | 67.66                        | -13.93                    | 53.73                        | 74.00              | -20.27       | PK               |
| V                      | 7311.00                 | 56.56                        | -13.93                    | 42.63                        | 54.00              | -11.37       | AV               |
| H                      | 4874.00                 | 67.96                        | -19.85                    | 48.11                        | 74.00              | -25.89       | PK               |
| H                      | 4874.00                 | 54.50                        | -19.85                    | 34.65                        | 54.00              | -19.35       | AV               |
| H                      | 7311.00                 | 68.05                        | -13.93                    | 54.12                        | 74.00              | -19.88       | PK               |
| H                      | 7311.00                 | 56.21                        | -13.93                    | 42.28                        | 54.00              | -11.72       | AV               |
| High channel:2462MHz   |                         |                              |                           |                              |                    |              |                  |
| V                      | 4924.00                 | 65.12                        | -19.75                    | 45.37                        | 74.00              | -28.63       | PK               |
| V                      | 4924.00                 | 57.15                        | -19.75                    | 37.40                        | 54.00              | -16.60       | AV               |
| V                      | 7386.00                 | 69.71                        | -13.72                    | 55.99                        | 74.00              | -18.01       | PK               |
| V                      | 7386.00                 | 54.55                        | -13.72                    | 40.83                        | 54.00              | -13.17       | AV               |
| H                      | 4924.00                 | 66.01                        | -19.75                    | 46.26                        | 74.00              | -27.74       | PK               |
| H                      | 4924.00                 | 55.06                        | -19.75                    | 35.31                        | 54.00              | -18.69       | AV               |
| H                      | 7386.00                 | 66.26                        | -13.72                    | 52.54                        | 74.00              | -21.46       | PK               |
| H                      | 7386.00                 | 57.46                        | -13.72                    | 43.74                        | 54.00              | -10.26       | AV               |

**Remark:**

1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier,  
Over= Measurement – Limit
- 2.If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
5. The worst case is Antenna A.

**802.11g**

| Polar (H/V)            | Frequency (MHz) | Reading Level (dBUV/m) | Correct Factor (dB) | Measurement (dBUV/m) | Limits (dBUV/m) | Over (dB) | Detector Type |
|------------------------|-----------------|------------------------|---------------------|----------------------|-----------------|-----------|---------------|
| Low channel:2412MHz    |                 |                        |                     |                      |                 |           |               |
| V                      | 4824.00         | 67.83                  | -19.95              | 47.88                | 74.00           | -26.12    | PK            |
| V                      | 4824.00         | 57.67                  | -19.95              | 37.72                | 54.00           | -16.28    | AV            |
| V                      | 7236.00         | 64.04                  | -14.14              | 49.90                | 74.00           | -24.10    | PK            |
| V                      | 7236.00         | 56.67                  | -14.14              | 42.53                | 54.00           | -11.47    | AV            |
| H                      | 4824.00         | 65.86                  | -19.95              | 45.91                | 74.00           | -28.09    | PK            |
| H                      | 4824.00         | 54.24                  | -19.95              | 34.29                | 54.00           | -19.71    | AV            |
| H                      | 7236.00         | 68.95                  | -14.14              | 54.81                | 74.00           | -19.19    | PK            |
| H                      | 7236.00         | 56.31                  | -14.14              | 42.17                | 54.00           | -11.83    | AV            |
| Middle channel:2437MHz |                 |                        |                     |                      |                 |           |               |
| V                      | 4874.00         | 67.15                  | -19.85              | 47.30                | 74.00           | -26.70    | PK            |
| V                      | 4874.00         | 56.65                  | -19.85              | 36.80                | 54.00           | -17.20    | AV            |
| V                      | 7311.00         | 69.60                  | -13.93              | 55.67                | 74.00           | -18.33    | PK            |
| V                      | 7311.00         | 57.12                  | -13.93              | 43.19                | 54.00           | -10.81    | AV            |
| H                      | 4874.00         | 69.30                  | -19.85              | 49.45                | 74.00           | -24.55    | PK            |
| H                      | 4874.00         | 58.04                  | -19.85              | 38.19                | 54.00           | -15.81    | AV            |
| H                      | 7311.00         | 69.45                  | -13.93              | 55.52                | 74.00           | -18.48    | PK            |
| H                      | 7311.00         | 59.26                  | -13.93              | 45.33                | 54.00           | -8.67     | AV            |
| High channel:2462MHz   |                 |                        |                     |                      |                 |           |               |
| V                      | 4924.00         | 64.58                  | -19.75              | 44.83                | 74.00           | -29.17    | PK            |
| V                      | 4924.00         | 55.21                  | -19.75              | 35.46                | 54.00           | -18.54    | AV            |
| V                      | 7386.00         | 64.09                  | -13.72              | 50.37                | 74.00           | -23.63    | PK            |
| V                      | 7386.00         | 59.97                  | -13.72              | 46.25                | 54.00           | -7.75     | AV            |
| H                      | 4924.00         | 66.44                  | -19.75              | 46.69                | 74.00           | -27.31    | PK            |
| H                      | 4924.00         | 59.66                  | -19.75              | 39.91                | 54.00           | -14.09    | AV            |
| H                      | 7386.00         | 69.33                  | -13.72              | 55.61                | 74.00           | -18.39    | PK            |
| H                      | 7386.00         | 59.20                  | -13.72              | 45.48                | 54.00           | -8.52     | AV            |

**Remark:**

1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier,  
Over= Measurement – Limit
- 2.If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
5. The worst case is Antenna A.

**802.11n20**

| Polar (H/V)            | Frequency (MHz) | Reading Level (dBUV/m) | Correct Factor (dB) | Measurement (dBUV/m) | Limits (dBUV/m) | Over (dB) | Detector Type |
|------------------------|-----------------|------------------------|---------------------|----------------------|-----------------|-----------|---------------|
| Low channel:2412MHz    |                 |                        |                     |                      |                 |           |               |
| V                      | 4824.00         | 67.19                  | -19.95              | 47.24                | 74.00           | -26.76    | PK            |
| V                      | 4824.00         | 58.71                  | -19.95              | 38.76                | 54.00           | -15.24    | AV            |
| V                      | 7236.00         | 69.72                  | -14.14              | 55.58                | 74.00           | -18.42    | PK            |
| V                      | 7236.00         | 55.85                  | -14.14              | 41.71                | 54.00           | -12.29    | AV            |
| H                      | 4824.00         | 67.76                  | -19.95              | 47.81                | 74.00           | -26.19    | PK            |
| H                      | 4824.00         | 54.83                  | -19.95              | 34.88                | 54.00           | -19.12    | AV            |
| H                      | 7236.00         | 64.95                  | -14.14              | 50.81                | 74.00           | -23.19    | PK            |
| H                      | 7236.00         | 57.72                  | -14.14              | 43.58                | 54.00           | -10.42    | AV            |
| Middle channel:2437MHz |                 |                        |                     |                      |                 |           |               |
| V                      | 4874.00         | 67.19                  | -19.85              | 47.34                | 74.00           | -26.66    | PK            |
| V                      | 4874.00         | 58.97                  | -19.85              | 39.12                | 54.00           | -14.88    | AV            |
| V                      | 7311.00         | 64.64                  | -13.93              | 50.71                | 74.00           | -23.29    | PK            |
| V                      | 7311.00         | 59.21                  | -13.93              | 45.28                | 54.00           | -8.72     | AV            |
| H                      | 4874.00         | 66.08                  | -19.85              | 46.23                | 74.00           | -27.77    | PK            |
| H                      | 4874.00         | 55.63                  | -19.85              | 35.78                | 54.00           | -18.22    | AV            |
| H                      | 7311.00         | 65.86                  | -13.93              | 51.93                | 74.00           | -22.07    | PK            |
| H                      | 7311.00         | 55.03                  | -13.93              | 41.10                | 54.00           | -12.90    | AV            |
| High channel:2462MHz   |                 |                        |                     |                      |                 |           |               |
| V                      | 4924.00         | 64.87                  | -19.75              | 45.12                | 74.00           | -28.88    | PK            |
| V                      | 4924.00         | 54.05                  | -19.75              | 34.30                | 54.00           | -19.70    | AV            |
| V                      | 7386.00         | 64.09                  | -13.72              | 50.37                | 74.00           | -23.63    | PK            |
| V                      | 7386.00         | 54.35                  | -13.72              | 40.63                | 54.00           | -13.37    | AV            |
| H                      | 4924.00         | 68.22                  | -19.75              | 48.47                | 74.00           | -25.53    | PK            |
| H                      | 4924.00         | 59.76                  | -19.75              | 40.01                | 54.00           | -13.99    | AV            |
| H                      | 7386.00         | 66.61                  | -13.72              | 52.89                | 74.00           | -21.11    | PK            |
| H                      | 7386.00         | 57.99                  | -13.72              | 44.27                | 54.00           | -9.73     | AV            |

**Remark:**

1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier,  
Over= Measurement – Limit
- 2.If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
5. Test Mode is MIMO Mode.

**802.11n40**

| Polar<br>(H/V)         | Fre-<br>quency<br>(MHz) | Reading<br>Level<br>(dBuV/m) | Correct<br>Factor<br>(dB) | Measure-<br>ment<br>(dBuV/m) | Limits<br>(dBuV/m) | Over<br>(dB) | Detector<br>Type |
|------------------------|-------------------------|------------------------------|---------------------------|------------------------------|--------------------|--------------|------------------|
| Low channel:2422MHz    |                         |                              |                           |                              |                    |              |                  |
| V                      | 4844.00                 | 68.41                        | -19.91                    | 48.50                        | 74.00              | -25.50       | PK               |
| V                      | 4844.00                 | 55.60                        | -19.91                    | 35.69                        | 54.00              | -18.31       | AV               |
| V                      | 7266.00                 | 64.60                        | -14.06                    | 50.54                        | 74.00              | -23.46       | PK               |
| V                      | 7266.00                 | 54.33                        | -14.06                    | 40.27                        | 54.00              | -13.73       | AV               |
| H                      | 4844.00                 | 68.93                        | -19.91                    | 49.02                        | 74.00              | -24.98       | PK               |
| H                      | 4844.00                 | 58.42                        | -19.91                    | 38.51                        | 54.00              | -15.49       | AV               |
| H                      | 7266.00                 | 64.57                        | -14.06                    | 50.51                        | 74.00              | -23.49       | PK               |
| H                      | 7266.00                 | 55.72                        | -14.06                    | 41.66                        | 54.00              | -12.34       | AV               |
| Middle channel:2437MHz |                         |                              |                           |                              |                    |              |                  |
| V                      | 4874.00                 | 67.54                        | -19.85                    | 47.69                        | 74.00              | -26.31       | PK               |
| V                      | 4874.00                 | 57.70                        | -19.85                    | 37.85                        | 54.00              | -16.15       | AV               |
| V                      | 7311.00                 | 65.25                        | -13.93                    | 51.32                        | 74.00              | -22.68       | PK               |
| V                      | 7311.00                 | 59.25                        | -13.93                    | 45.32                        | 54.00              | -8.68        | AV               |
| H                      | 4874.00                 | 68.56                        | -19.85                    | 48.71                        | 74.00              | -25.29       | PK               |
| H                      | 4874.00                 | 54.93                        | -19.85                    | 35.08                        | 54.00              | -18.92       | AV               |
| H                      | 7311.00                 | 67.33                        | -13.93                    | 53.40                        | 74.00              | -20.60       | PK               |
| H                      | 7311.00                 | 55.47                        | -13.93                    | 41.54                        | 54.00              | -12.46       | AV               |
| High channel:2452MHz   |                         |                              |                           |                              |                    |              |                  |
| V                      | 4904.00                 | 69.63                        | -19.79                    | 49.84                        | 74.00              | -24.16       | PK               |
| V                      | 4904.00                 | 59.15                        | -19.79                    | 39.36                        | 54.00              | -14.64       | AV               |
| V                      | 7356.00                 | 65.22                        | -13.80                    | 51.42                        | 74.00              | -22.58       | PK               |
| V                      | 7356.00                 | 58.81                        | -13.80                    | 45.01                        | 54.00              | -8.99        | AV               |
| H                      | 4904.00                 | 64.20                        | -19.79                    | 44.41                        | 74.00              | -29.59       | PK               |
| H                      | 4904.00                 | 55.88                        | -19.79                    | 36.09                        | 54.00              | -17.91       | AV               |
| H                      | 7356.00                 | 69.36                        | -13.80                    | 55.56                        | 74.00              | -18.44       | PK               |
| H                      | 7356.00                 | 59.21                        | -13.80                    | 45.41                        | 54.00              | -8.59        | AV               |

**Remark:**

1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier,  
Over= Measurement – Limit
- 2.If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
5. Test Mode is MIMO Mode.

**802.11ax20**

| Polar<br>(H/V)         | Fre-<br>quency<br>(MHz) | Reading<br>Level<br>(dBuV/m) | Correct<br>Factor<br>(dB) | Measure-<br>ment<br>(dBuV/m) | Limits<br>(dBuV/m) | Over<br>(dB) | Detector<br>Type |
|------------------------|-------------------------|------------------------------|---------------------------|------------------------------|--------------------|--------------|------------------|
| Low channel:2412MHz    |                         |                              |                           |                              |                    |              |                  |
| V                      | 4824.00                 | 66.25                        | -19.95                    | 46.30                        | 74.00              | -27.70       | PK               |
| V                      | 4824.00                 | 55.29                        | -19.95                    | 35.34                        | 54.00              | -18.66       | AV               |
| V                      | 7236.00                 | 64.04                        | -14.14                    | 49.90                        | 74.00              | -24.10       | PK               |
| V                      | 7236.00                 | 58.02                        | -14.14                    | 43.88                        | 54.00              | -10.12       | AV               |
| H                      | 4824.00                 | 65.71                        | -19.95                    | 45.76                        | 74.00              | -28.24       | PK               |
| H                      | 4824.00                 | 59.88                        | -19.95                    | 39.93                        | 54.00              | -14.07       | AV               |
| H                      | 7236.00                 | 68.70                        | -14.14                    | 54.56                        | 74.00              | -19.44       | PK               |
| H                      | 7236.00                 | 54.21                        | -14.14                    | 40.07                        | 54.00              | -13.93       | AV               |
| Middle channel:2437MHz |                         |                              |                           |                              |                    |              |                  |
| V                      | 4874.00                 | 64.61                        | -19.85                    | 44.76                        | 74.00              | -29.24       | PK               |
| V                      | 4874.00                 | 57.76                        | -19.85                    | 37.91                        | 54.00              | -16.09       | AV               |
| V                      | 7311.00                 | 68.96                        | -13.93                    | 55.03                        | 74.00              | -18.97       | PK               |
| V                      | 7311.00                 | 54.40                        | -13.93                    | 40.47                        | 54.00              | -13.53       | AV               |
| H                      | 4874.00                 | 67.51                        | -19.85                    | 47.66                        | 74.00              | -26.34       | PK               |
| H                      | 4874.00                 | 57.89                        | -19.85                    | 38.04                        | 54.00              | -15.96       | AV               |
| H                      | 7311.00                 | 67.88                        | -13.93                    | 53.95                        | 74.00              | -20.05       | PK               |
| H                      | 7311.00                 | 55.18                        | -13.93                    | 41.25                        | 54.00              | -12.75       | AV               |
| High channel:2462MHz   |                         |                              |                           |                              |                    |              |                  |
| V                      | 4924.00                 | 68.27                        | -19.75                    | 48.52                        | 74.00              | -25.48       | PK               |
| V                      | 4924.00                 | 57.36                        | -19.75                    | 37.61                        | 54.00              | -16.39       | AV               |
| V                      | 7386.00                 | 64.33                        | -13.72                    | 50.61                        | 74.00              | -23.39       | PK               |
| V                      | 7386.00                 | 58.28                        | -13.72                    | 44.56                        | 54.00              | -9.44        | AV               |
| H                      | 4924.00                 | 66.42                        | -19.75                    | 46.67                        | 74.00              | -27.33       | PK               |
| H                      | 4924.00                 | 59.08                        | -19.75                    | 39.33                        | 54.00              | -14.67       | AV               |
| H                      | 7386.00                 | 64.02                        | -13.72                    | 50.30                        | 74.00              | -23.70       | PK               |
| H                      | 7386.00                 | 54.30                        | -13.72                    | 40.58                        | 54.00              | -13.42       | AV               |

**Remark:**

1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier,  
Over= Measurement – Limit
- 2.If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
5. Test Mode is MIMO Mode.

**802.11ax40**

| Polar (H/V)            | Frequency (MHz) | Reading Level (dBUV/m) | Correct Factor (dB) | Measurement (dBUV/m) | Limits (dBUV/m) | Over (dB) | Detector Type |
|------------------------|-----------------|------------------------|---------------------|----------------------|-----------------|-----------|---------------|
| Low channel:2422MHz    |                 |                        |                     |                      |                 |           |               |
| V                      | 4844.00         | 68.06                  | -19.91              | 48.15                | 74.00           | -25.85    | PK            |
| V                      | 4844.00         | 57.43                  | -19.91              | 37.52                | 54.00           | -16.48    | AV            |
| V                      | 7266.00         | 66.47                  | -14.06              | 52.41                | 74.00           | -21.59    | PK            |
| V                      | 7266.00         | 59.76                  | -14.06              | 45.70                | 54.00           | -8.30     | AV            |
| H                      | 4844.00         | 69.39                  | -19.91              | 49.48                | 74.00           | -24.52    | PK            |
| H                      | 4844.00         | 54.15                  | -19.91              | 34.24                | 54.00           | -19.76    | AV            |
| H                      | 7266.00         | 69.72                  | -14.06              | 55.66                | 74.00           | -18.34    | PK            |
| H                      | 7266.00         | 54.56                  | -14.06              | 40.50                | 54.00           | -13.50    | AV            |
| Middle channel:2437MHz |                 |                        |                     |                      |                 |           |               |
| V                      | 4874.00         | 65.38                  | -19.85              | 45.53                | 74.00           | -28.47    | PK            |
| V                      | 4874.00         | 55.87                  | -19.85              | 36.02                | 54.00           | -17.98    | AV            |
| V                      | 7311.00         | 66.55                  | -13.93              | 52.62                | 74.00           | -21.38    | PK            |
| V                      | 7311.00         | 58.96                  | -13.93              | 45.03                | 54.00           | -8.97     | AV            |
| H                      | 4874.00         | 67.84                  | -19.85              | 47.99                | 74.00           | -26.01    | PK            |
| H                      | 4874.00         | 54.35                  | -19.85              | 34.50                | 54.00           | -19.50    | AV            |
| H                      | 7311.00         | 66.79                  | -13.93              | 52.86                | 74.00           | -21.14    | PK            |
| H                      | 7311.00         | 56.19                  | -13.93              | 42.26                | 54.00           | -11.74    | AV            |
| High channel:2452MHz   |                 |                        |                     |                      |                 |           |               |
| V                      | 4904.00         | 68.90                  | -19.79              | 49.11                | 74.00           | -24.89    | PK            |
| V                      | 4904.00         | 59.50                  | -19.79              | 39.71                | 54.00           | -14.29    | AV            |
| V                      | 7356.00         | 66.62                  | -13.80              | 52.82                | 74.00           | -21.18    | PK            |
| V                      | 7356.00         | 57.01                  | -13.80              | 43.21                | 54.00           | -10.79    | AV            |
| H                      | 4904.00         | 69.69                  | -19.79              | 49.90                | 74.00           | -24.10    | PK            |
| H                      | 4904.00         | 58.73                  | -19.79              | 38.94                | 54.00           | -15.06    | AV            |
| H                      | 7356.00         | 69.00                  | -13.80              | 55.20                | 74.00           | -18.80    | PK            |
| H                      | 7356.00         | 58.57                  | -13.80              | 44.77                | 54.00           | -9.23     | AV            |

**Remark:**

1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier,  
Over= Measurement – Limit
- 2.If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
5. Test Mode is MIMO Mode.

**802.11be20**

| Polar (H/V)            | Frequency (MHz) | Reading Level (dBuV/m) | Correct Factor (dB) | Measurement (dBuV/m) | Limits (dBuV/m) | Over (dB) | Detector Type |
|------------------------|-----------------|------------------------|---------------------|----------------------|-----------------|-----------|---------------|
| Low channel:2412MHz    |                 |                        |                     |                      |                 |           |               |
| V                      | 4824.00         | 67.35                  | -19.95              | 47.40                | 74.00           | -26.60    | PK            |
| V                      | 4824.00         | 54.94                  | -19.95              | 34.99                | 54.00           | -19.01    | AV            |
| V                      | 7236.00         | 65.67                  | -14.14              | 51.53                | 74.00           | -22.47    | PK            |
| V                      | 7236.00         | 57.73                  | -14.14              | 43.59                | 54.00           | -10.41    | AV            |
| H                      | 4824.00         | 67.23                  | -19.95              | 47.28                | 74.00           | -26.72    | PK            |
| H                      | 4824.00         | 56.91                  | -19.95              | 36.96                | 54.00           | -17.04    | AV            |
| H                      | 7236.00         | 65.96                  | -14.14              | 51.82                | 74.00           | -22.18    | PK            |
| H                      | 7236.00         | 58.99                  | -14.14              | 44.85                | 54.00           | -9.15     | AV            |
| Middle channel:2437MHz |                 |                        |                     |                      |                 |           |               |
| V                      | 4874.00         | 66.17                  | -19.85              | 46.32                | 74.00           | -27.68    | PK            |
| V                      | 4874.00         | 55.57                  | -19.85              | 35.72                | 54.00           | -18.28    | AV            |
| V                      | 7311.00         | 67.58                  | -13.93              | 53.65                | 74.00           | -20.35    | PK            |
| V                      | 7311.00         | 57.08                  | -13.93              | 43.15                | 54.00           | -10.85    | AV            |
| H                      | 4874.00         | 65.18                  | -19.85              | 45.33                | 74.00           | -28.67    | PK            |
| H                      | 4874.00         | 55.04                  | -19.85              | 35.19                | 54.00           | -18.81    | AV            |
| H                      | 7311.00         | 65.48                  | -13.93              | 51.55                | 74.00           | -22.45    | PK            |
| H                      | 7311.00         | 58.03                  | -13.93              | 44.10                | 54.00           | -9.90     | AV            |
| High channel:2462MHz   |                 |                        |                     |                      |                 |           |               |
| V                      | 4924.00         | 64.07                  | -19.75              | 44.32                | 74.00           | -29.68    | PK            |
| V                      | 4924.00         | 56.01                  | -19.75              | 36.26                | 54.00           | -17.74    | AV            |
| V                      | 7386.00         | 64.77                  | -13.72              | 51.05                | 74.00           | -22.95    | PK            |
| V                      | 7386.00         | 59.42                  | -13.72              | 45.70                | 54.00           | -8.30     | AV            |
| H                      | 4924.00         | 64.57                  | -19.75              | 44.82                | 74.00           | -29.18    | PK            |
| H                      | 4924.00         | 55.41                  | -19.75              | 35.66                | 54.00           | -18.34    | AV            |
| H                      | 7386.00         | 69.11                  | -13.72              | 55.39                | 74.00           | -18.61    | PK            |
| H                      | 7386.00         | 55.07                  | -13.72              | 41.35                | 54.00           | -12.65    | AV            |

**Remark:**

1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier,  
Over= Measurement – Limit
- 2.If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
5. Test Mode is MIMO Mode.

**802.11be40**

| Polar (H/V)            | Frequency (MHz) | Reading Level (dBuV/m) | Correct Factor (dB) | Measurement (dBuV/m) | Limits (dBuV/m) | Over (dB) | Detector Type |
|------------------------|-----------------|------------------------|---------------------|----------------------|-----------------|-----------|---------------|
| Low channel:2422MHz    |                 |                        |                     |                      |                 |           |               |
| V                      | 4844.00         | 69.65                  | -19.91              | 49.74                | 74.00           | -24.26    | PK            |
| V                      | 4844.00         | 54.62                  | -19.91              | 34.71                | 54.00           | -19.29    | AV            |
| V                      | 7266.00         | 69.80                  | -14.06              | 55.74                | 74.00           | -18.26    | PK            |
| V                      | 7266.00         | 56.13                  | -14.06              | 42.07                | 54.00           | -11.93    | AV            |
| H                      | 4844.00         | 69.32                  | -19.91              | 49.41                | 74.00           | -24.59    | PK            |
| H                      | 4844.00         | 56.94                  | -19.91              | 37.03                | 54.00           | -16.97    | AV            |
| H                      | 7266.00         | 66.26                  | -14.06              | 52.20                | 74.00           | -21.80    | PK            |
| H                      | 7266.00         | 58.66                  | -14.06              | 44.60                | 54.00           | -9.40     | AV            |
| Middle channel:2437MHz |                 |                        |                     |                      |                 |           |               |
| V                      | 4874.00         | 68.11                  | -19.85              | 48.26                | 74.00           | -25.74    | PK            |
| V                      | 4874.00         | 56.40                  | -19.85              | 36.55                | 54.00           | -17.45    | AV            |
| V                      | 7311.00         | 64.53                  | -13.93              | 50.60                | 74.00           | -23.40    | PK            |
| V                      | 7311.00         | 58.79                  | -13.93              | 44.86                | 54.00           | -9.14     | AV            |
| H                      | 4874.00         | 64.99                  | -19.85              | 45.14                | 74.00           | -28.86    | PK            |
| H                      | 4874.00         | 54.51                  | -19.85              | 34.66                | 54.00           | -19.34    | AV            |
| H                      | 7311.00         | 65.37                  | -13.93              | 51.44                | 74.00           | -22.56    | PK            |
| H                      | 7311.00         | 58.07                  | -13.93              | 44.14                | 54.00           | -9.86     | AV            |
| High channel:2452MHz   |                 |                        |                     |                      |                 |           |               |
| V                      | 4904.00         | 68.08                  | -19.79              | 48.29                | 74.00           | -25.71    | PK            |
| V                      | 4904.00         | 55.07                  | -19.79              | 35.28                | 54.00           | -18.72    | AV            |
| V                      | 7356.00         | 67.89                  | -13.80              | 54.09                | 74.00           | -19.91    | PK            |
| V                      | 7356.00         | 58.36                  | -13.80              | 44.56                | 54.00           | -9.44     | AV            |
| H                      | 4904.00         | 69.94                  | -19.79              | 50.15                | 74.00           | -23.85    | PK            |
| H                      | 4904.00         | 57.85                  | -19.79              | 38.06                | 54.00           | -15.94    | AV            |
| H                      | 7356.00         | 65.99                  | -13.80              | 52.19                | 74.00           | -21.81    | PK            |
| H                      | 7356.00         | 58.35                  | -13.80              | 44.55                | 54.00           | -9.45     | AV            |


**Remark:**

1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier,  
Over= Measurement – Limit
- 2.If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
5. Test Mode is MIMO Mode.

## 8. Radiated Band Emission Measurement And Restricted Bands Of Operation

### 8.1 Block Diagram Of Test Setup

Radiated Emission Test-Up Frequency Above 1GHz

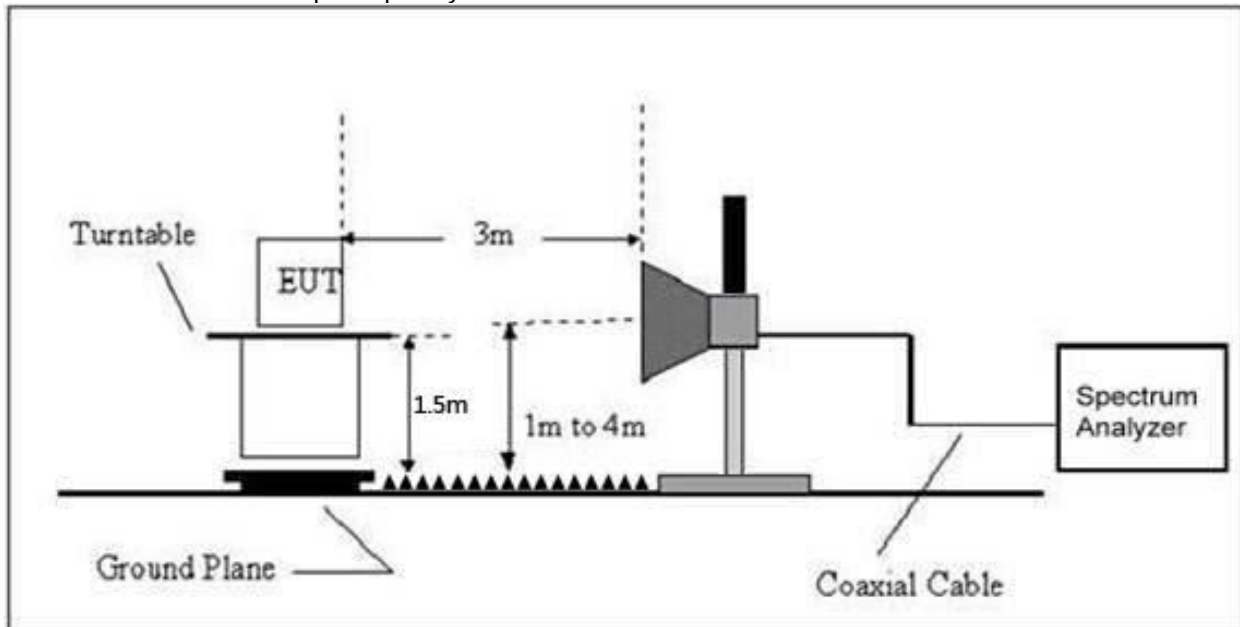

### 8.2 Limit

FCC Part15 C Section 15.209 and 15.205

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

| MHz               | MHz                 | MHz           | GHz              |
|-------------------|---------------------|---------------|------------------|
| 0.090-0.110       | 16.42-16.423        | 399.9-410     | 4.5-5.15         |
| 0.495-0.505       | 16.69475-16.69525   | 608-614       | 5.35-5.46        |
| 2.1735-2.1905     | 16.80425-16.80475   | 960-1240      | 7.25-7.75        |
| 4.125-4.128       | 25.5-25.67          | 1300-1427     | 8.025-8.5        |
| 4.17725-4.17775   | 37.5-38.25          | 1435-1626.5   | 9.0-9.2          |
| 4.20725-4.20775   | 73-74.6             | 1645.5-1646.5 | 9.3-9.5          |
| 6.215-6.218       | 74.8-75.2           | 1660-1710     | 10.6-12.7        |
| 6.26775-6.26825   | 108-121.94          | 1718.8-1722.2 | 13.25-13.4       |
| 6.31175-6.31225   | 123-138             | 2200-2300     | 14.47-14.5       |
| 8.291-8.294       | 149.9-150.05        | 2310-2390     | 15.35-16.2       |
| 8.362-8.366       | 156.52475-156.52525 | 2483.5-2500   | 17.7-21.4        |
| 8.37625-8.38675   | 156.7-156.9         | 2690-2900     | 22.01-23.12      |
| 8.41425-8.41475   | 162.0125-167.17     | 3260-3267     | 23.6-24.0        |
| 12.29-12.293      | 167.72-173.2        | 3332-3339     | 31.2-31.8        |
| 12.51975-12.52025 | 240-285             | 3345.8-3358   | 36.43-36.5       |
| 12.57675-12.57725 | 322-335.4           | 3600-4400     | ( <sup>2</sup> ) |
| 13.36-13.41       |                     |               |                  |

## LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

| FREQUENCY (MHz) | Limit (dBuV/m) (at 3M) |         |
|-----------------|------------------------|---------|
|                 | PEAK                   | AVERAGE |
| Above 1000      | 74                     | 54      |

## Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

### 8.3 Test Procedure

| Receiver Parameter                    | Setting                                          |
|---------------------------------------|--------------------------------------------------|
| Attenuation                           | Auto                                             |
| Start Frequency                       | 2300MHz                                          |
| Stop Frequency                        | 2520                                             |
| RB / VB (emission in restricted band) | 1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average |

Above 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the Highest channel.

## Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

### 8.4 EUT operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

## 8.5 Test Result

|         | Polar<br>(H/V)       | Fre-<br>quency<br>(MHz) | Reading<br>Level<br>(dBuV/m) | Correct<br>Factor<br>(dB) | Measure-<br>ment<br>(dBuV/m) | Measure-<br>ment (dBuV/m) |       | Over   | Result |
|---------|----------------------|-------------------------|------------------------------|---------------------------|------------------------------|---------------------------|-------|--------|--------|
|         |                      |                         |                              |                           | PK                           | PK                        | AV    | PK     |        |
| 802.11b | Low Channel 2412MHz  |                         |                              |                           |                              |                           |       |        |        |
|         | H                    | 2390.00                 | 71.06                        | -25.43                    | 45.63                        | 74.00                     | 54.00 | -28.37 | PASS   |
|         | H                    | 2400.00                 | 75.42                        | -25.40                    | 50.02                        | 74.00                     | 54.00 | -23.98 | PASS   |
|         | V                    | 2390.00                 | 76.97                        | -25.43                    | 51.54                        | 74.00                     | 54.00 | -22.46 | PASS   |
|         | V                    | 2400.00                 | 72.16                        | -25.40                    | 46.76                        | 74.00                     | 54.00 | -27.24 | PASS   |
|         | High Channel 2462MHz |                         |                              |                           |                              |                           |       |        |        |
|         | H                    | 2483.50                 | 72.00                        | -25.15                    | 46.85                        | 74.00                     | 54.00 | -27.15 | PASS   |
|         | H                    | 2500.00                 | 75.54                        | -25.10                    | 50.44                        | 74.00                     | 54.00 | -23.56 | PASS   |
|         | V                    | 2483.50                 | 70.72                        | -25.15                    | 45.57                        | 74.00                     | 54.00 | -28.43 | PASS   |
|         | V                    | 2500.00                 | 72.89                        | -25.10                    | 47.79                        | 74.00                     | 54.00 | -26.21 | PASS   |
| 802.11g | Low Channel 2412MHz  |                         |                              |                           |                              |                           |       |        |        |
|         | H                    | 2390.00                 | 73.37                        | -25.43                    | 47.94                        | 74.00                     | 54.00 | -26.06 | PASS   |
|         | H                    | 2400.00                 | 74.22                        | -25.40                    | 48.82                        | 74.00                     | 54.00 | -25.18 | PASS   |
|         | V                    | 2390.00                 | 75.09                        | -25.43                    | 49.66                        | 74.00                     | 54.00 | -24.34 | PASS   |
|         | V                    | 2400.00                 | 77.54                        | -25.40                    | 52.14                        | 74.00                     | 54.00 | -21.86 | PASS   |
|         | High Channel 2462MHz |                         |                              |                           |                              |                           |       |        |        |
|         | H                    | 2483.50                 | 74.95                        | -25.15                    | 49.80                        | 74.00                     | 54.00 | -24.20 | PASS   |
|         | H                    | 2500.00                 | 75.91                        | -25.10                    | 50.81                        | 74.00                     | 54.00 | -23.19 | PASS   |
|         | V                    | 2483.50                 | 73.20                        | -25.15                    | 48.05                        | 74.00                     | 54.00 | -25.95 | PASS   |
|         | V                    | 2500.00                 | 70.02                        | -25.10                    | 44.92                        | 74.00                     | 54.00 | -29.08 | PASS   |

**Remark:**

1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier,  
Over= Measurement – Limit
2. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.
- 3 In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
5. The worst case is Antenna A.

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Polar<br>(H/V)       | Fre-<br>quency<br>(MHz) | Reading<br>Level<br>(dBuV/m) | Correct<br>Factor<br>(dB) | Measure-<br>ment<br>(dBuV/m) | Measure-<br>ment (dBuV/m) |       | Over   | Result |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|-------------------------|------------------------------|---------------------------|------------------------------|---------------------------|-------|--------|--------|
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                      |                         |                              |                           | PK                           | PK                        | AV    | PK     |        |
| 802.11<br>n20                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Low Channel 2412MHz  |                         |                              |                           |                              |                           |       |        |        |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | H                    | 2390.00                 | 73.40                        | -25.43                    | 47.97                        | 74.00                     | 54.00 | -26.03 | PASS   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | H                    | 2400.00                 | 73.29                        | -25.40                    | 47.89                        | 74.00                     | 54.00 | -26.11 | PASS   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | V                    | 2390.00                 | 76.23                        | -25.43                    | 50.80                        | 74.00                     | 54.00 | -23.20 | PASS   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | V                    | 2400.00                 | 73.76                        | -25.40                    | 48.36                        | 74.00                     | 54.00 | -25.64 | PASS   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | High Channel 2462MHz |                         |                              |                           |                              |                           |       |        |        |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | H                    | 2483.50                 | 75.25                        | -25.15                    | 50.10                        | 74.00                     | 54.00 | -23.90 | PASS   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | H                    | 2500.00                 | 72.84                        | -25.10                    | 47.74                        | 74.00                     | 54.00 | -26.26 | PASS   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | V                    | 2483.50                 | 75.90                        | -25.15                    | 50.75                        | 74.00                     | 54.00 | -23.25 | PASS   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | V                    | 2500.00                 | 70.79                        | -25.10                    | 45.69                        | 74.00                     | 54.00 | -28.31 | PASS   |
| 802.11<br>n40                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Low Channel 2422MHz  |                         |                              |                           |                              |                           |       |        |        |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | H                    | 2390.00                 | 73.23                        | -25.43                    | 47.80                        | 74.00                     | 54.00 | -26.20 | PASS   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | H                    | 2400.00                 | 74.63                        | -25.40                    | 49.23                        | 74.00                     | 54.00 | -24.77 | PASS   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | V                    | 2390.00                 | 75.77                        | -25.43                    | 50.34                        | 74.00                     | 54.00 | -23.66 | PASS   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | V                    | 2400.00                 | 77.09                        | -25.40                    | 51.69                        | 74.00                     | 54.00 | -22.31 | PASS   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | High Channel 2452MHz |                         |                              |                           |                              |                           |       |        |        |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | H                    | 2483.50                 | 73.98                        | -25.15                    | 48.83                        | 74.00                     | 54.00 | -25.17 | PASS   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | H                    | 2500.00                 | 76.05                        | -25.10                    | 50.95                        | 74.00                     | 54.00 | -23.05 | PASS   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | V                    | 2483.50                 | 71.94                        | -25.15                    | 46.79                        | 74.00                     | 54.00 | -27.21 | PASS   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | V                    | 2500.00                 | 71.12                        | -25.10                    | 46.02                        | 74.00                     | 54.00 | -27.98 | PASS   |
| Remark:<br>1. Measurement = Reading Level + Correct Factor,<br>Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier,<br>Over= Measurement – Limit<br>2. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.<br>3 In restricted bands of operation, The spurious emissions below the permissible value more than 20dB<br>4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.<br>5. Test Mode is MIMO Mode. |                      |                         |                              |                           |                              |                           |       |        |        |

SHENZHEN

|                                                                                                                                                | Polar<br>(H/V)       | Fre-<br>quency<br>(MHz) | Reading<br>Level<br>(dBuV/m) | Correct<br>Factor<br>(dB) | Measure-<br>ment<br>(dBuV/m) | Measure-<br>ment (dBuV/m) |       | Over   | Result |
|------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|-------------------------|------------------------------|---------------------------|------------------------------|---------------------------|-------|--------|--------|
|                                                                                                                                                |                      |                         |                              |                           | PK                           | PK                        | AV    | PK     |        |
| 802.11<br>ax20                                                                                                                                 | Low Channel 2412MHz  |                         |                              |                           |                              |                           |       |        |        |
|                                                                                                                                                | H                    | 2390.00                 | 69.83                        | -25.43                    | 44.40                        | 74.00                     | 54.00 | -29.60 | PASS   |
|                                                                                                                                                | H                    | 2400.00                 | 74.92                        | -25.40                    | 49.52                        | 74.00                     | 54.00 | -24.48 | PASS   |
|                                                                                                                                                | V                    | 2390.00                 | 72.33                        | -25.43                    | 46.90                        | 74.00                     | 54.00 | -27.10 | PASS   |
|                                                                                                                                                | V                    | 2400.00                 | 72.69                        | -25.40                    | 47.29                        | 74.00                     | 54.00 | -26.71 | PASS   |
|                                                                                                                                                | High Channel 2462MHz |                         |                              |                           |                              |                           |       |        |        |
|                                                                                                                                                | H                    | 2483.50                 | 73.64                        | -25.15                    | 48.49                        | 74.00                     | 54.00 | -25.51 | PASS   |
|                                                                                                                                                | H                    | 2500.00                 | 72.08                        | -25.10                    | 46.98                        | 74.00                     | 54.00 | -27.02 | PASS   |
|                                                                                                                                                | V                    | 2483.50                 | 72.81                        | -25.15                    | 47.66                        | 74.00                     | 54.00 | -26.34 | PASS   |
|                                                                                                                                                | V                    | 2500.00                 | 69.07                        | -25.10                    | 43.97                        | 74.00                     | 54.00 | -30.03 | PASS   |
| 802.11<br>ax40                                                                                                                                 | Low Channel 2422MHz  |                         |                              |                           |                              |                           |       |        |        |
|                                                                                                                                                | H                    | 2390.00                 | 74.94                        | -25.43                    | 49.51                        | 74.00                     | 54.00 | -24.49 | PASS   |
|                                                                                                                                                | H                    | 2400.00                 | 73.53                        | -25.40                    | 48.13                        | 74.00                     | 54.00 | -25.87 | PASS   |
|                                                                                                                                                | V                    | 2390.00                 | 73.43                        | -25.43                    | 48.00                        | 74.00                     | 54.00 | -26.00 | PASS   |
|                                                                                                                                                | V                    | 2400.00                 | 76.07                        | -25.40                    | 50.67                        | 74.00                     | 54.00 | -23.33 | PASS   |
|                                                                                                                                                | High Channel 2452MHz |                         |                              |                           |                              |                           |       |        |        |
|                                                                                                                                                | H                    | 2483.50                 | 76.21                        | -25.15                    | 51.06                        | 74.00                     | 54.00 | -22.94 | PASS   |
|                                                                                                                                                | H                    | 2500.00                 | 76.60                        | -25.10                    | 51.50                        | 74.00                     | 54.00 | -22.50 | PASS   |
|                                                                                                                                                | V                    | 2483.50                 | 70.86                        | -25.15                    | 45.71                        | 74.00                     | 54.00 | -28.29 | PASS   |
|                                                                                                                                                | V                    | 2500.00                 | 72.71                        | -25.10                    | 47.61                        | 74.00                     | 54.00 | -26.39 | PASS   |
| Remark:                                                                                                                                        |                      |                         |                              |                           |                              |                           |       |        |        |
| 1. Measurement = Reading Level + Correct Factor,<br>Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier,<br>Over= Measurement – Limit |                      |                         |                              |                           |                              |                           |       |        |        |
| 2. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.                       |                      |                         |                              |                           |                              |                           |       |        |        |
| 3 In restricted bands of operation, The spurious emissions below the permissible value more than 20dB                                          |                      |                         |                              |                           |                              |                           |       |        |        |
| 4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.          |                      |                         |                              |                           |                              |                           |       |        |        |
| 5. Test Mode is MIMO Mode.                                                                                                                     |                      |                         |                              |                           |                              |                           |       |        |        |

|                | Polar<br>(H/V)       | Fre-<br>quency<br>(MHz) | Reading<br>Level<br>(dBuV/m) | Correct<br>Factor<br>(dB) | Measure-<br>ment<br>(dBuV/m) | Measure-<br>ment (dBuV/m) |       | Over   | Result |
|----------------|----------------------|-------------------------|------------------------------|---------------------------|------------------------------|---------------------------|-------|--------|--------|
|                |                      |                         |                              |                           | PK                           | PK                        | AV    | PK     |        |
| 802.11<br>be20 | Low Channel 2412MHz  |                         |                              |                           |                              |                           |       |        |        |
|                | H                    | 2390.00                 | 73.04                        | -25.43                    | 47.61                        | 74.00                     | 54.00 | -26.39 | PASS   |
|                | H                    | 2400.00                 | 70.46                        | -25.40                    | 45.06                        | 74.00                     | 54.00 | -28.94 | PASS   |
|                | V                    | 2390.00                 | 74.14                        | -25.43                    | 48.71                        | 74.00                     | 54.00 | -25.29 | PASS   |
|                | V                    | 2400.00                 | 76.12                        | -25.40                    | 50.72                        | 74.00                     | 54.00 | -23.28 | PASS   |
|                | High Channel 2462MHz |                         |                              |                           |                              |                           |       |        |        |
|                | H                    | 2483.50                 | 76.59                        | -25.15                    | 51.44                        | 74.00                     | 54.00 | -22.56 | PASS   |
|                | H                    | 2500.00                 | 76.60                        | -25.10                    | 51.50                        | 74.00                     | 54.00 | -22.50 | PASS   |
|                | V                    | 2483.50                 | 72.77                        | -25.15                    | 47.62                        | 74.00                     | 54.00 | -26.38 | PASS   |
|                | V                    | 2500.00                 | 69.68                        | -25.10                    | 44.58                        | 74.00                     | 54.00 | -29.42 | PASS   |
| 802.11<br>be40 | Low Channel 2422MHz  |                         |                              |                           |                              |                           |       |        |        |
|                | H                    | 2390.00                 | 71.13                        | -25.43                    | 45.70                        | 74.00                     | 54.00 | -28.30 | PASS   |
|                | H                    | 2400.00                 | 70.09                        | -25.40                    | 44.69                        | 74.00                     | 54.00 | -29.31 | PASS   |
|                | V                    | 2390.00                 | 75.77                        | -25.43                    | 50.34                        | 74.00                     | 54.00 | -23.66 | PASS   |
|                | V                    | 2400.00                 | 74.64                        | -25.40                    | 49.24                        | 74.00                     | 54.00 | -24.76 | PASS   |
|                | High Channel 2452MHz |                         |                              |                           |                              |                           |       |        |        |
|                | H                    | 2483.50                 | 73.46                        | -25.15                    | 48.31                        | 74.00                     | 54.00 | -25.69 | PASS   |
|                | H                    | 2500.00                 | 75.48                        | -25.10                    | 50.38                        | 74.00                     | 54.00 | -23.62 | PASS   |
|                | V                    | 2483.50                 | 74.56                        | -25.15                    | 49.41                        | 74.00                     | 54.00 | -24.59 | PASS   |
|                | V                    | 2500.00                 | 69.87                        | -25.10                    | 44.77                        | 74.00                     | 54.00 | -29.23 | PASS   |

**Remark:**

1. Measurement = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Cable Loss – Pre-amplifier,  
Over= Measurement – Limit
2. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.
- 3 In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
5. Test Mode is MIMO Mode.


## 9. Antenna Requirement

### 9.1 Limit

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 9.2 Test Result

The EUT antenna is External antenna, fulfill the requirement of this section.

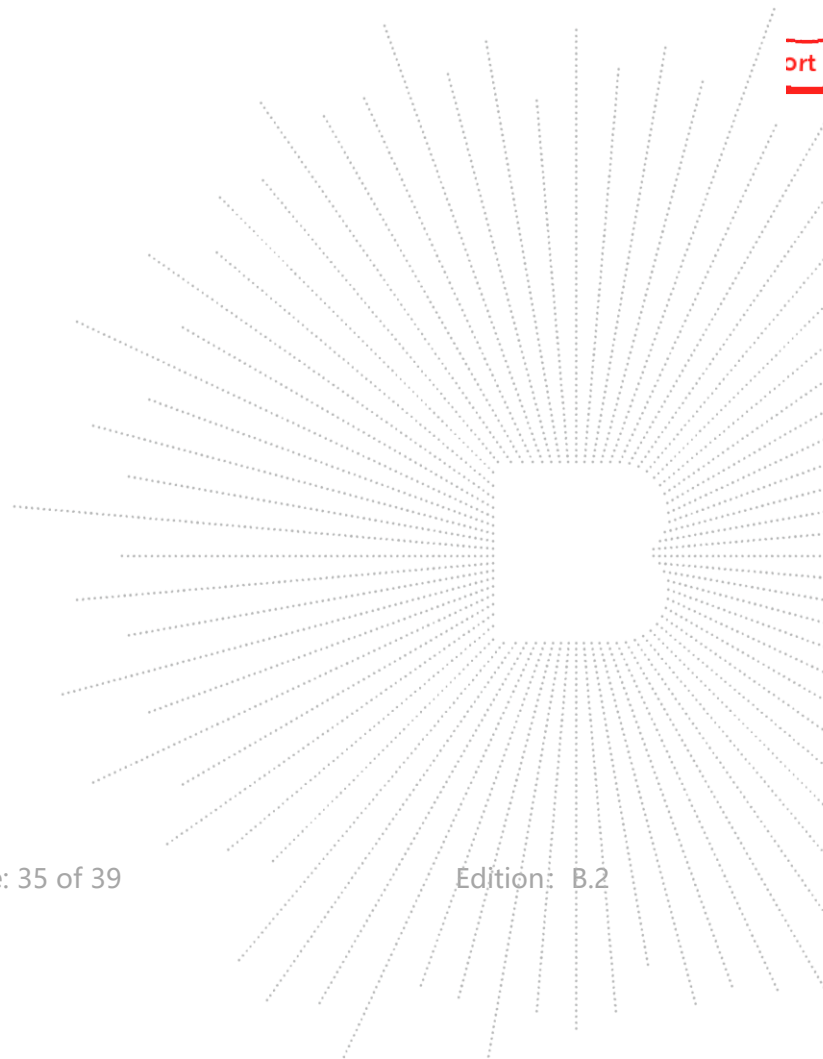


## 10. EUT Photographs

EUT Photo 1



EUT Photo 2

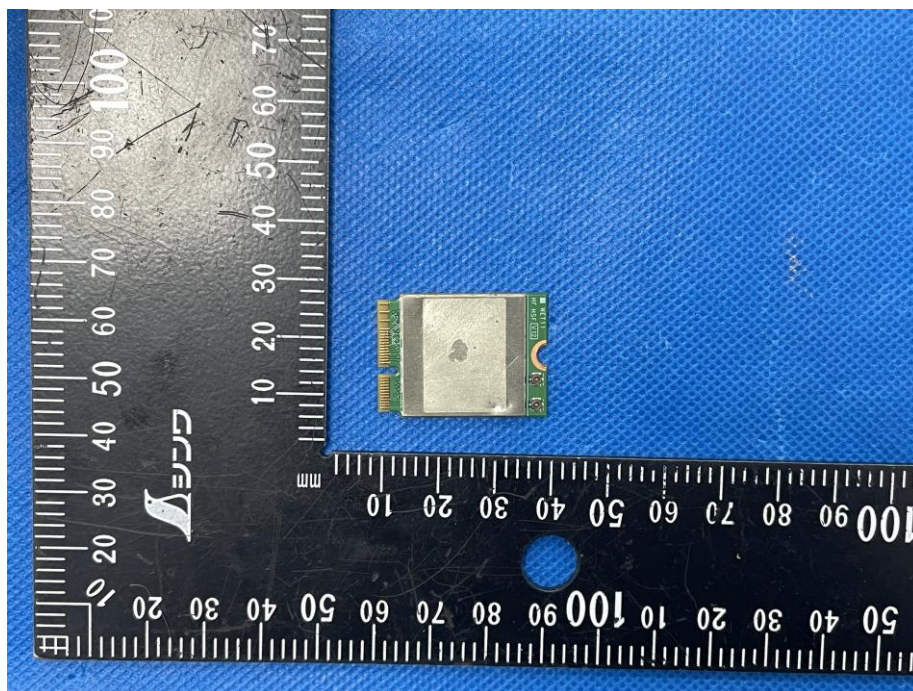


NOTE: Appendix-Photographs Of EUT Constructional Details.


## 11. EUT Test Setup Photographs

### Conducted Emissions Photo



### Radiated Measurement Photos

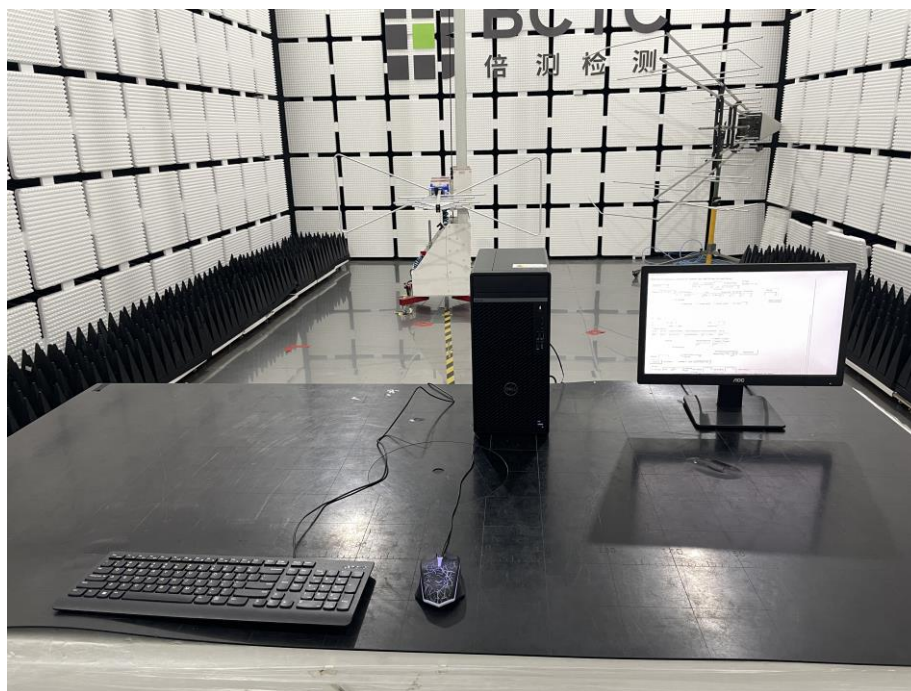

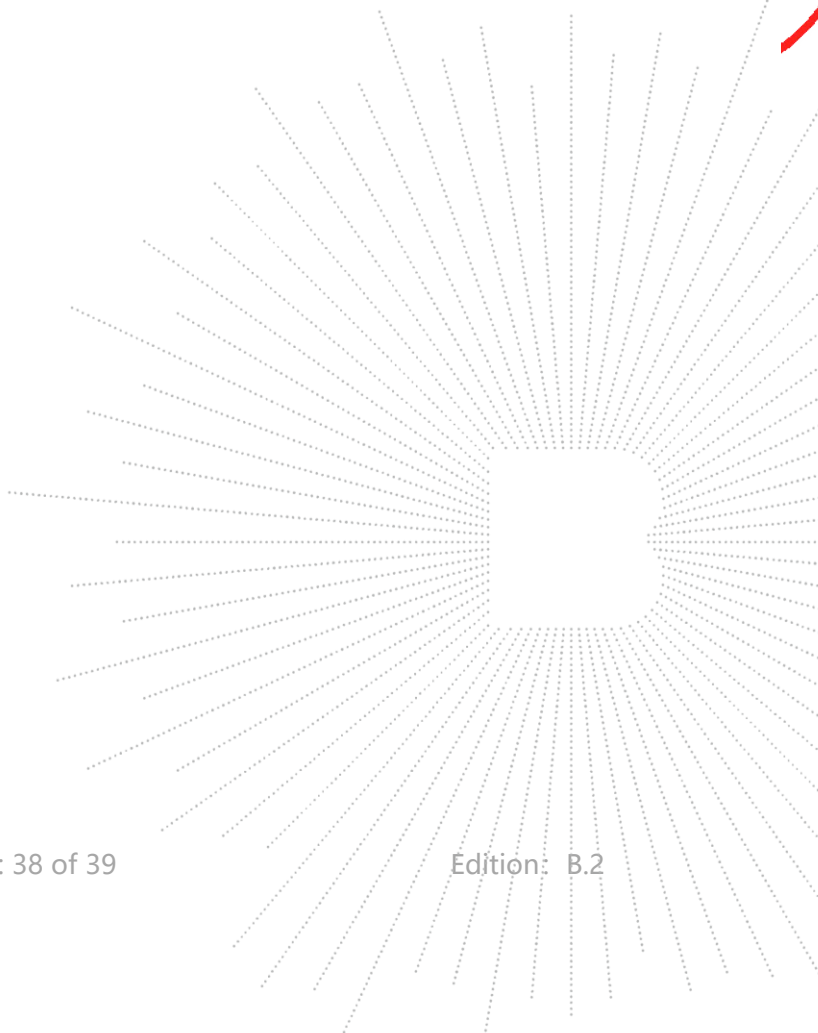

## STATEMENT

1. The equipment lists are traceable to the national reference standards.
2. The test report can not be partially copied unless prior written approval is issued from our lab.
3. The test report is invalid without the "special seal for inspection and testing".
4. The test report is invalid without the signature of the approver.
5. The test process and test result is only related to the Unit Under Test.
6. Sample information is provided by the client and the laboratory is not responsible for its authenticity.
7. The quality system of our laboratory is in accordance with ISO/IEC17025.
8. If there is any objection to this test report, the client should inform issuing laboratory within 15 days from the date of receiving test report.

Address:

1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

TEL: 400-788-9558

P.C.: 518103

FAX: 0755-33229357

Website: <http://www.chnbctc.com>

Consultation E-mail: [bctc@bctc-lab.com.cn](mailto:bctc@bctc-lab.com.cn)

Complaint/Advice E-mail: [advice@bctc-lab.com.cn](mailto:advice@bctc-lab.com.cn)

\*\*\*\*\* END \*\*\*\*\*