

## RF EXPOSURE TEST REPORT

|           |                                                                                       |
|-----------|---------------------------------------------------------------------------------------|
| Applicant | Ugreen Group Limited                                                                  |
| Address   | Ugreen Building, Longcheng Industrial Park, Longguanxi Road, Longhua, ShenZhen, China |

|                                     |                                                                                       |
|-------------------------------------|---------------------------------------------------------------------------------------|
| Manufacturer or Supplier            | Ugreen Group Limited                                                                  |
| Address                             | Ugreen Building, Longcheng Industrial Park, Longguanxi Road, Longhua, ShenZhen, China |
| Product                             | 2-in-1 Magnetic Wireless Charger                                                      |
| Brand Name                          | <b>UGREEN</b>                                                                         |
| Model                               | W756                                                                                  |
| Additional Model & Model Difference | N/A                                                                                   |
| P/N Code:                           | 55963, 55963P, 55963X, 55963A, 55963B, 55963U, 55963JP, 55963ZD, 55963T, KC-55963     |
| Date of tests                       | Jul. 01, 2025 ~ Jul. 11, 2025                                                         |

The submitted sample of the above equipment has been tested according to the requirements of the following standard:

- ☒ 47 CFR PART 1, Subpart I, Section 1.1310
- ☒ KDB 680106 D01

**CONCLUSION: The submitted sample was found to COMPLY with the test requirement**

|                                                                                     |                                                                                      |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| Prepared by Andrew Sha<br>Project Engineer / EMC Department                         | Approved by Glyn He<br>Assistant Manager/ EMC Department                             |
|  |  |
|                                                                                     | Date: Aug. 12, 2025                                                                  |

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

## TABLE OF CONTENTS

|                                                      |           |
|------------------------------------------------------|-----------|
| <b>RF EXPOSURE TEST REPORT .....</b>                 | <b>1</b>  |
| <b>RELEASE CONTROL RECORD.....</b>                   | <b>3</b>  |
| <b>1. GENERAL INFORMATION.....</b>                   | <b>4</b>  |
| 1.1. GENERAL DESCRIPTION OF EUT .....                | 4         |
| <b>2. RF EXPOSURE MEASUREMENT .....</b>              | <b>5</b>  |
| 2.1 LIMITS .....                                     | 5         |
| 2.2 DESCRIPTION OF SUPPORT UNITS.....                | 6         |
| 2.3 CONFIGURATION OF SYSTEM UNDER TEST.....          | 7         |
| 2.4 TEST SETUP FOR WPC .....                         | 8         |
| 2.5 EQUIPMENTS USED DURING TEST .....                | 8         |
| 2.6 TEST POINT DESCRIPTION .....                     | 8         |
| 2.7 TEST RESULTS.....                                | 9         |
| <b>3. PHOTOGRAPHS OF THE TEST CONFIGURATION.....</b> | <b>14</b> |



Test Report No.: FM2506WDG0293

## RELEASE CONTROL RECORD

| ISSUE NO.     | REASON FOR CHANGE | DATE ISSUED   |
|---------------|-------------------|---------------|
| FM2506WDG0293 | Original release  | Aug. 12, 2025 |

## 1. GENERAL INFORMATION

### 1.1. GENERAL DESCRIPTION OF EUT

|                                  |                                                                                                                                                                             |
|----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>FCC ID</b>                    | 2AQI5-W756                                                                                                                                                                  |
| <b>PRODUCT</b>                   | 2-in-1 Magnetic Wireless Charger                                                                                                                                            |
| <b>MODEL NO.</b>                 | W756                                                                                                                                                                        |
| <b>ADDITIONAL MODEL</b>          | N/A                                                                                                                                                                         |
| <b>POWER SUPPLY</b>              | USB-C (IN) Input: 9.0V=3.0A/12.0V=3.0A/15.0V=3.0A<br>Wireless Charging Output Power:<br>iPhone 25.0W Max, AirPods 5.0W Max<br>Wireless Charging Total Output Power: 30W Max |
| <b>MODULATION TECHNOLOGY</b>     | FSK                                                                                                                                                                         |
| <b>OPERATING FREQUENCY RANGE</b> | 25W Charging Coil:127.8kHz & 360kHz<br>5W Charging Coil:110.5-148.5kHz                                                                                                      |
| <b>ANTENNA TYPE</b>              | Coil Antenna*2                                                                                                                                                              |
| <b>I/O PORTS</b>                 | Refer to user's manual                                                                                                                                                      |
| <b>CABLE SUPPLIED</b>            | USB-C cable: Shielded, Detachable, 1.0m                                                                                                                                     |

#### NOTES:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. For the test results, the EUT had been tested with all conditions, but only the worst case was shown in test report.
3. Please refer to the EUT photo document (Reference No.: 2506WDG0293 for detailed product photo.

## 2. RF EXPOSURE MEASUREMENT

### 2.1 LIMITS

§ 1.1310 The criteria listed in table 1 shall be used to evaluate the environmental impact of human exposure to radiofrequency(RF) radiation as specified in § 1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of § 2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

| Frequency range<br>(MHz)                                       | Electric field<br>strength<br>(V/m) | Magnetic field<br>strength<br>(A/m) | Power density<br>(mW/cm <sup>2</sup> ) | Averaging time<br>(minutes) |
|----------------------------------------------------------------|-------------------------------------|-------------------------------------|----------------------------------------|-----------------------------|
| <b>(A) Limits for Occupational/Controlled Exposures</b>        |                                     |                                     |                                        |                             |
| 0.3–3.0 .....                                                  | 614                                 | 1.63                                | *(100)                                 | 6                           |
| 3.0–30 .....                                                   | 1842/f                              | 4.89/f                              | *(900/f <sup>2</sup> )                 | 6                           |
| 30–300 .....                                                   | 61.4                                | 0.163                               | 1.0                                    | 6                           |
| 300–1500 .....                                                 | .....                               | .....                               | f/300                                  | 6                           |
| 1500–100,000 .....                                             | .....                               | .....                               | 5                                      | 6                           |
| <b>(B) Limits for General Population/Uncontrolled Exposure</b> |                                     |                                     |                                        |                             |
| 0.3–1.34 .....                                                 | 614                                 | 1.63                                | *(100)                                 | 30                          |
| 1.34–30 .....                                                  | 824/f                               | 2.19/f                              | *(180/f <sup>2</sup> )                 | 30                          |
| 30–300 .....                                                   | 27.5                                | 0.073                               | 0.2                                    | 30                          |
| 300–1500 .....                                                 | .....                               | .....                               | f/1500                                 | 30                          |
| 1500–100,000 .....                                             | .....                               | .....                               | 1.0                                    | 30                          |

f = frequency in MHz

\* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

#### Reference KDB 680106 D01 RF Exposure Wireless Charging App v04

The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.

## 2.2 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested with associated equipment below:

| NO. | PRODUCT       | BRAND   | MODEL NO.         | SERIAL NO.   | Provided by |
|-----|---------------|---------|-------------------|--------------|-------------|
| 1   | 25W RX Load   | CPS     | N/A               | N/A          | Lab.        |
| 2   | iPhone 16 Pro | Apple   | A3083 (MYM93LL/A) | C57JWWWYG0   | Lab.        |
| 3   | Mobile        | Samsung | SM-S936U/DS       | R5CXC30YGFH  | Lab.        |
| 4   | AirPods Pro   | Apple   | A2968             | CM9000NQH9   | Lab.        |
| 5   | AirPods Pro   | Apple   | A2968             | H9QYKWTV9C   | Lab.        |
| 6   | Adapter       | Ugreen  | W0453             | S41003900054 | Client      |
| 7   | Adapter       | Ugreen  | W0454             | S41003900067 | Client      |
| 8   | Adapter       | Ugreen  | W0452             | S63003900010 | Client      |


| NO. | DESCRIPTION OF THE ABOVE SUPPORT UNITS |
|-----|----------------------------------------|
| 6-8 | USB cable: Shielded, Detachable, 1.0m  |

## 2.3 CONFIGURATION OF SYSTEM UNDER TEST


Mode A:

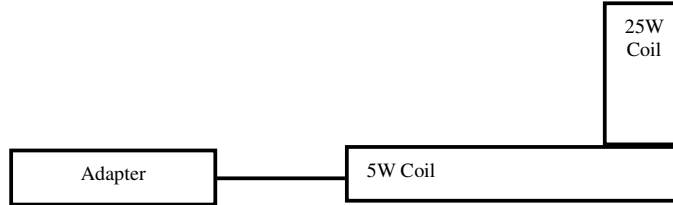


Mode B:

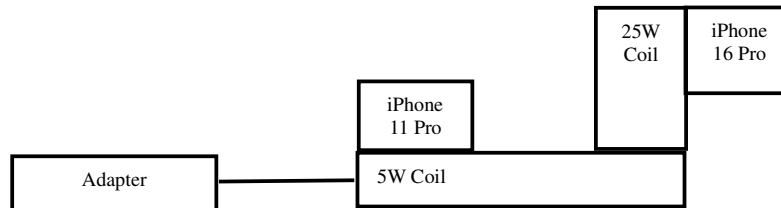


Mode C:

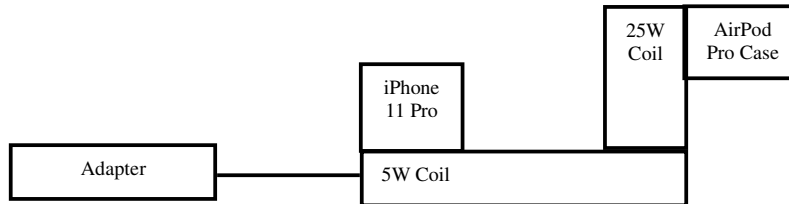

Mode D:

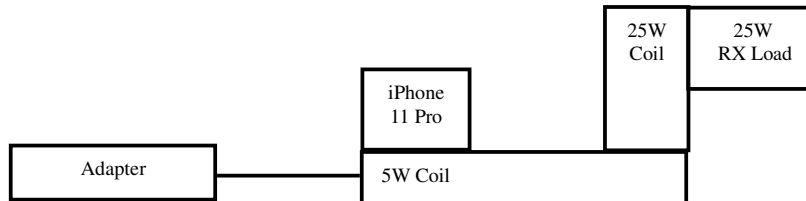

## 2.4 TEST SETUP FOR WPC

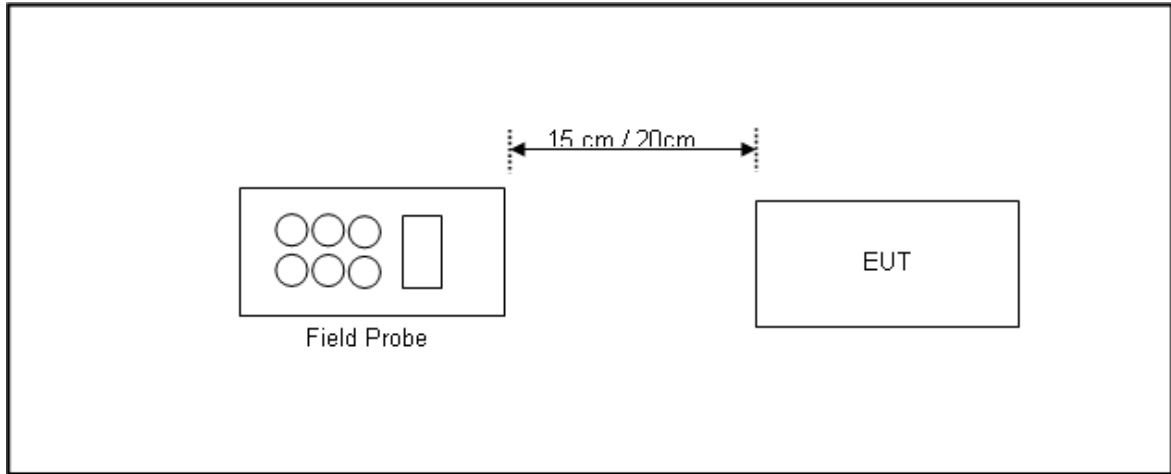


Note: Measurements should be made from all sides and the top of the primary/client pair, with the 15 cm or 20 cm measured from the center of the probe(s) to the edge of the device.

## 2.5 EQUIPMENTS USED DURING TEST

| Equipment                    | Manufacturer  | Model No. | Serial No. | Next Cal.   |
|------------------------------|---------------|-----------|------------|-------------|
| Signal and Spectrum Analyzer | Rohde&Schwarz | FSV40     | 101094     | Oct. 09, 25 |
| Current Probe                | FCC           | F-52      | 160055     | Apr. 07, 26 |
| Signal Generator             | Agilent       | N5183A    | MY50140980 | Jul. 06, 26 |
| Loop Antenna                 | PHX           | HLA50-2M  | LA210301   | N/A         |
| Coaxial RF Cable             | VIMA          | MIL-C-17  | RG58       | Sep. 25, 25 |

**NOTE:** 1. The test was performed in RS chamber.  
2. Equipment are calibrated by calibration laboratory accredited to ISO/IEC 17025 by a mutually recognized Accreditation and all tests are conducted within a valid calibration cycle.

## 2.6 TEST POINT DESCRIPTION

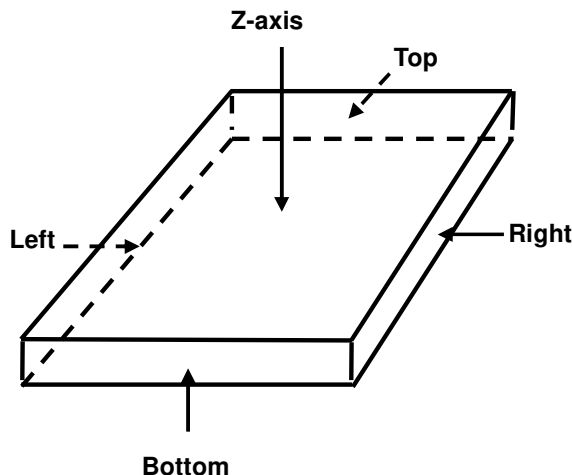



## 2.7 TEST RESULTS

### Mode1: Standby for 25W Coil

| E-Field Measurement |           |           |           |           |           |
|---------------------|-----------|-----------|-----------|-----------|-----------|
| Distance            | 15cm      |           |           |           | 20cm      |
| EUT Side            | Left      | Right     | Top       | Bottom    | Z-axis    |
| Max E-field (V/m)   | 0.5226    | 0.2674    | 0.5244    | 0.4669    | 0.5904    |
| Limit (V/m)         | 614       | 614       | 614       | 614       | 614       |
| Margin (V/m)        | -613.4774 | -613.7326 | -613.4756 | -613.5331 | -613.4096 |
| 50% Limit (V/m)     | 307       | 307       | 307       | 307       | 307       |
| 50% Margin (V/m)    | -306.4774 | -306.7326 | -306.4756 | -306.5331 | -306.4096 |

| H-Field Measurement |        |        |        |        |        |
|---------------------|--------|--------|--------|--------|--------|
| Distance            | 15cm   |        |        |        | 20cm   |
| EUT Side            | Left   | Right  | Top    | Bottom | Z-axis |
| Max H-field (A/m)   | 0.023  | 0.016  | 0.021  | 0.039  | 0.043  |
| Limit (A/m)         | 1.63   | 1.63   | 1.63   | 1.63   | 1.63   |
| Margin (A/m)        | -1.607 | -1.614 | -1.609 | -1.591 | -1.587 |
| 50% Limit (A/m)     | 0.815  | 0.815  | 0.815  | 0.815  | 0.815  |
| 50% Margin (A/m)    | -0.792 | -0.799 | -0.794 | -0.776 | -0.772 |

### Mode1: Standby for 5W Coil

| E-Field Measurement |           |           |           |           |           |
|---------------------|-----------|-----------|-----------|-----------|-----------|
| Distance            | 15cm      |           |           |           | 20cm      |
| EUT Side            | Left      | Right     | Top       | Bottom    | Z-axis    |
| Max E-field (V/m)   | 0.4825    | 0.2406    | 0.5607    | 0.4988    | 0.5507    |
| Limit (V/m)         | 614       | 614       | 614       | 614       | 614       |
| Margin (V/m)        | -613.5175 | -613.7594 | -613.4393 | -613.5012 | -613.4493 |
| 50% Limit (V/m)     | 307       | 307       | 307       | 307       | 307       |
| 50% Margin (V/m)    | -306.5175 | -306.7594 | -306.4393 | -306.5012 | -306.4493 |

| H-Field Measurement |        |        |        |        |        |
|---------------------|--------|--------|--------|--------|--------|
| Distance            | 15cm   |        |        |        | 20cm   |
| EUT Side            | Left   | Right  | Top    | Bottom | Z-axis |
| Max H-field (A/m)   | 0.022  | 0.018  | 0.019  | 0.017  | 0.029  |
| Limit (A/m)         | 1.63   | 1.63   | 1.63   | 1.63   | 1.63   |
| Margin (A/m)        | -1.608 | -1.612 | -1.611 | -1.613 | -1.601 |
| 50% Limit (A/m)     | 0.815  | 0.815  | 0.815  | 0.815  | 0.815  |
| 50% Margin (A/m)    | -0.793 | -0.797 | -0.796 | -0.798 | -0.786 |

Mode2: charging mode for 25W Coil:  
25W Coil (iPhone 16 Pro 10% Battery Charging)  
5W Coil (iPhone 11 Pro 10% Battery Charging)

| E-Field Measurement |           |           |           |           |           |
|---------------------|-----------|-----------|-----------|-----------|-----------|
| Distance            | 15cm      |           |           |           | 20cm      |
| EUT Side            | Left      | Right     | Top       | Bottom    | Z-axis    |
| Max E-field (V/m)   | 0.2699    | 0.1997    | 0.2298    | 0.1597    | 0.3325    |
| Limit (V/m)         | 614       | 614       | 614       | 614       | 614       |
| Margin (V/m)        | -613.7301 | -613.8003 | -613.7702 | -613.8403 | -613.6675 |
| 50% Limit (V/m)     | 307       | 307       | 307       | 307       | 307       |
| 50% Margin (V/m)    | -306.7301 | -306.8003 | -306.7702 | -306.8403 | -306.6675 |

| H-Field Measurement |        |        |        |        |        |
|---------------------|--------|--------|--------|--------|--------|
| Distance            | 15cm   |        |        |        | 20cm   |
| EUT Side            | Left   | Right  | Top    | Bottom | Z-axis |
| Max H-field (A/m)   | 0.029  | 0.028  | 0.044  | 0.035  | 0.089  |
| Limit (A/m)         | 1.63   | 1.63   | 1.63   | 1.63   | 1.63   |
| Margin (A/m)        | -1.601 | -1.602 | -1.586 | -1.595 | -1.541 |
| 50% Limit (A/m)     | 0.815  | 0.815  | 0.815  | 0.815  | 0.815  |
| 50% Margin (A/m)    | -0.786 | -0.787 | -0.771 | -0.780 | -0.726 |

Mode2: charging mode for 5W Coil  
25W Coil (iPhone 16 Pro 10% Battery Charging)  
5W Coil (iPhone 11 Pro 10% Battery Charging)

| E-Field Measurement |           |           |          |           |           |
|---------------------|-----------|-----------|----------|-----------|-----------|
| Distance            | 15cm      |           |          |           | 20cm      |
| EUT Side            | Left      | Right     | Top      | Bottom    | Z-axis    |
| Max E-field (V/m)   | 0.2806    | 0.2299    | 0.235    | 0.1799    | 0.2968    |
| Limit (V/m)         | 614       | 614       | 614      | 614       | 614       |
| Margin (V/m)        | -613.7194 | -613.7701 | -613.765 | -613.8201 | -613.7032 |
| 50% Limit (V/m)     | 307       | 307       | 307      | 307       | 307       |
| 50% Margin (V/m)    | -306.7194 | -306.7701 | -306.765 | -306.8201 | -306.7032 |

| H-Field Measurement |        |        |        |        |        |
|---------------------|--------|--------|--------|--------|--------|
| Distance            | 15cm   |        |        |        | 20cm   |
| EUT Side            | Left   | Right  | Top    | Bottom | Z-axis |
| Max H-field (A/m)   | 0.029  | 0.033  | 0.038  | 0.033  | 0.068  |
| Limit (A/m)         | 1.63   | 1.63   | 1.63   | 1.63   | 1.63   |
| Margin (A/m)        | -1.601 | -1.597 | -1.592 | -1.597 | -1.562 |
| 50% Limit (A/m)     | 0.815  | 0.815  | 0.815  | 0.815  | 0.815  |
| 50% Margin (A/m)    | -0.786 | -0.782 | -0.777 | -0.782 | -0.747 |

Mode3: charging mode for 25W Coil  
 25W Coil (iPhone 16 Pro 90% Battery Charging)  
 5W Coil (iPhone 11 Pro 90% Battery Charging)

| E-Field Measurement |           |           |           |           |          |
|---------------------|-----------|-----------|-----------|-----------|----------|
| Distance            | 15cm      |           |           |           | 20cm     |
| EUT Side            | Left      | Right     | Top       | Bottom    | Z-axis   |
| Max E-field (V/m)   | 0.7888    | 0.4922    | 0.5933    | 0.4666    | 0.582    |
| Limit (V/m)         | 614       | 614       | 614       | 614       | 614      |
| Margin (V/m)        | -613.2112 | -613.5078 | -613.4067 | -613.5334 | -613.418 |
| 50% Limit (V/m)     | 307       | 307       | 307       | 307       | 307      |
| 50% Margin (V/m)    | -306.2112 | -306.5078 | -306.4067 | -306.5334 | -306.418 |

| H-Field Measurement |        |        |        |        |        |
|---------------------|--------|--------|--------|--------|--------|
| Distance            | 15cm   |        |        |        | 20cm   |
| EUT Side            | Left   | Right  | Top    | Bottom | Z-axis |
| Max H-field (A/m)   | 0.029  | 0.018  | 0.021  | 0.022  | 0.021  |
| Limit (A/m)         | 1.63   | 1.63   | 1.63   | 1.63   | 1.63   |
| Margin (A/m)        | -1.601 | -1.612 | -1.609 | -1.608 | -1.609 |
| 50% Limit (A/m)     | 0.815  | 0.815  | 0.815  | 0.815  | 0.815  |
| 50% Margin (A/m)    | -0.786 | -0.797 | -0.794 | -0.793 | -0.794 |

Mode3: charging mode for 5W Coil  
 25W Coil (iPhone 16 Pro 90% Battery Charging)  
 5W Coil (iPhone 11 Pro 90% Battery Charging)

| E-Field Measurement |           |          |           |           |           |
|---------------------|-----------|----------|-----------|-----------|-----------|
| Distance            | 15cm      |          |           |           | 20cm      |
| EUT Side            | Left      | Right    | Top       | Bottom    | Z-axis    |
| Max E-field (V/m)   | 0.5524    | 0.409    | 0.7488    | 0.6961    | 0.4906    |
| Limit (V/m)         | 614       | 614      | 614       | 614       | 614       |
| Margin (V/m)        | -613.4476 | -613.591 | -613.2512 | -613.3039 | -613.5094 |
| 50% Limit (V/m)     | 307       | 307      | 307       | 307       | 307       |
| 50% Margin (V/m)    | -306.4476 | -306.591 | -306.2512 | -306.3039 | -306.5094 |

| H-Field Measurement |        |        |        |        |        |
|---------------------|--------|--------|--------|--------|--------|
| Distance            | 15cm   |        |        |        | 20cm   |
| EUT Side            | Left   | Right  | Top    | Bottom | Z-axis |
| Max H-field (A/m)   | 0.023  | 0.022  | 0.017  | 0.019  | 0.018  |
| Limit (A/m)         | 1.63   | 1.63   | 1.63   | 1.63   | 1.63   |
| Margin (A/m)        | -1.607 | -1.608 | -1.613 | -1.611 | -1.612 |
| 50% Limit (A/m)     | 0.815  | 0.815  | 0.815  | 0.815  | 0.815  |
| 50% Margin (A/m)    | -0.792 | -0.793 | -0.798 | -0.796 | -0.797 |

Mode4: charging mode for 25W Coil  
 25W Coil(AirPods Pro Case 10% Battery Charging)  
 5W Coil (iPhone11 Pro Case 10% Battery Charging)

| E-Field Measurement |           |           |           |           |           |
|---------------------|-----------|-----------|-----------|-----------|-----------|
| Distance            | 15cm      |           |           |           | 20cm      |
| EUT Side            | Left      | Right     | Top       | Bottom    | Z-axis    |
| Max E-field (V/m)   | 0.5107    | 0.2144    | 0.5509    | 0.4062    | 0.4588    |
| Limit (V/m)         | 614       | 614       | 614       | 614       | 614       |
| Margin (V/m)        | -613.4893 | -613.7856 | -613.4491 | -613.5938 | -613.5412 |
| 50% Limit (V/m)     | 307       | 307       | 307       | 307       | 307       |
| 50% Margin (V/m)    | -306.4893 | -306.7856 | -306.4491 | -306.5938 | -306.5412 |

| H-Field Measurement |        |        |        |        |        |
|---------------------|--------|--------|--------|--------|--------|
| Distance            | 15cm   |        |        |        | 20cm   |
| EUT Side            | Left   | Right  | Top    | Bottom | Z-axis |
| Max H-field (A/m)   | 0.022  | 0.039  | 0.038  | 0.044  | 0.068  |
| Limit (A/m)         | 1.63   | 1.63   | 1.63   | 1.63   | 1.63   |
| Margin (A/m)        | -1.608 | -1.591 | -1.592 | -1.586 | -1.562 |
| 50% Limit (A/m)     | 0.815  | 0.815  | 0.815  | 0.815  | 0.815  |
| 50% Margin (A/m)    | -0.793 | -0.776 | -0.777 | -0.771 | -0.747 |

Mode5: charging mode for 25W Coil  
 25W Coil (AirPods Pro Case 90% Battery Charging)  
 5W Coil (iPhone11 Pro Case 90% Battery Charging)

| E-Field Measurement |           |           |           |           |           |
|---------------------|-----------|-----------|-----------|-----------|-----------|
| Distance            | 15cm      |           |           |           | 20cm      |
| EUT Side            | Left      | Right     | Top       | Bottom    | Z-axis    |
| Max E-field (V/m)   | 0.4869    | 0.2174    | 0.5211    | 0.4106    | 0.4114    |
| Limit (V/m)         | 614       | 614       | 614       | 614       | 614       |
| Margin (V/m)        | -613.5131 | -613.7826 | -613.4789 | -613.5894 | -613.5886 |
| 50% Limit (V/m)     | 307       | 307       | 307       | 307       | 307       |
| 50% Margin (V/m)    | -306.5131 | -306.7826 | -306.4789 | -306.5894 | -306.5886 |

| H-Field Measurement |        |        |        |        |        |
|---------------------|--------|--------|--------|--------|--------|
| Distance            | 15cm   |        |        |        | 20cm   |
| EUT Side            | Left   | Right  | Top    | Bottom | Z-axis |
| Max H-field (A/m)   | 0.023  | 0.035  | 0.044  | 0.028  | 0.044  |
| Limit (A/m)         | 1.63   | 1.63   | 1.63   | 1.63   | 1.63   |
| Margin (A/m)        | -1.607 | -1.595 | -1.586 | -1.602 | -1.586 |
| 50% Limit (A/m)     | 0.815  | 0.815  | 0.815  | 0.815  | 0.815  |
| 50% Margin (A/m)    | -0.792 | -0.780 | -0.771 | -0.787 | -0.771 |

Mode6: charging mode for 25W Coil  
 25W Coil (25W RX Load)  
 5W Coil (iPhone11 Pro Case 10% Battery Charging)

| E-Field Measurement |           |           |           |           |           |
|---------------------|-----------|-----------|-----------|-----------|-----------|
| Distance            | 15cm      |           |           |           | 20cm      |
| EUT Side            | Left      | Right     | Top       | Bottom    | Z-axis    |
| Max E-field (V/m)   | 0.2138    | 0.2014    | 0.2177    | 0.2082    | 0.3017    |
| Limit (V/m)         | 614       | 614       | 614       | 614       | 614       |
| Margin (V/m)        | -613.7862 | -613.7986 | -613.7823 | -613.7918 | -613.6983 |
| 50% Limit (V/m)     | 307       | 307       | 307       | 307       | 307       |
| 50% Margin (V/m)    | -306.7862 | -306.7986 | -306.7823 | -306.7918 | -306.6983 |

| H-Field Measurement |        |        |        |        |        |
|---------------------|--------|--------|--------|--------|--------|
| Distance            | 15cm   |        |        |        | 20cm   |
| EUT Side            | Left   | Right  | Top    | Bottom | Z-axis |
| Max H-field (A/m)   | 0.033  | 0.023  | 0.032  | 0.029  | 0.108  |
| Limit (A/m)         | 1.63   | 1.63   | 1.63   | 1.63   | 1.63   |
| Margin (A/m)        | -1.597 | -1.607 | -1.598 | -1.601 | -1.522 |
| 50% Limit (A/m)     | 0.815  | 0.815  | 0.815  | 0.815  | 0.815  |
| 50% Margin (A/m)    | -0.782 | -0.792 | -0.783 | -0.786 | -0.707 |



Test Report No.: FM2506WDG0293

### 3. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).

--- END ---