

TEST REPORT

Applicant	Ugreen Group Limited
Address	Ugreen Building, Longcheng Industrial Park, Longguanxi Road, Longhua, ShenZhen, China

Manufacturer or Supplier	Ugreen Group Limited
Address	Ugreen Building, Longcheng Industrial Park, Longguanxi Road, Longhua, ShenZhen, China
Product	3-in-1 Wireless Charger
Brand Name	UGREEN
Model	W757
Additional Model & Model Difference	N/A
P/N Code:	65901, 65901P, 65901X, 65901A, 65901B, 65901U, 65901JP, 65901ZD, 65901T, KC-65901, 55964, 55964P, 55964X, 55964A, 55964B, 55964U, 55964JP, 55964ZD, 55964T, KC-55964, 55965, 55965P, 55965X, 55965A, 55965B, 55965U, 55965JP, 55965ZD, 55965T, KC-55965, 55966, 55966P, 55966X, 55966A, 55966B, 55966U, 55966JP, 55966ZD, 55966T, KC-55966
Date of tests	Jul. 14, 2025 ~ Jul. 25, 2025

The submitted sample of the above equipment has been tested for according to the requirements of the following standards:

☒ **FCC Part 15, Subpart C**

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Andrew Sha Project Engineer / EMC Department	Approved by Glyn He Assistant Manager/ EMC Department
	
	Date: Aug. 06, 2025

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

TABLE OF CONTENTS

RELEASE CONTROL RECORD	3
1 SUMMARY OF TEST RESULTS	4
2 MEASUREMENT UNCERTAINTY	4
3 GENERAL INFORMATION.....	5
3.1 GENERAL DESCRIPTION OF EUT	5
3.2 DESCRIPTION OF TEST MODES	6
3.3 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	6
3.4 DESCRIPTION OF SUPPORT UNITS	8
3.5 CONFIGURATION OF SYSTEM UNDER TEST	9
3.6 GENERAL DESCRIPTION OF APPLIED STANDARDS	10
4 EMISSION TEST.....	11
4.1 CONDUCTED EMISSION MEASUREMENT	11
4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	11
4.1.2 TEST INSTRUMENTS.....	11
4.1.3 TEST PROCEDURE.....	12
4.1.4 DEVIATION FROM TEST STANDARD	12
4.1.5 TEST SETUP.....	13
4.1.6 EUT OPERATING CONDITIONS	13
4.1.7 TEST RESULTS	14
4.2 RADIATED EMISSION MEASUREMENT	16
4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	16
4.2.2 TEST INSTRUMENTS.....	17
4.2.3 TEST PROCEDURE.....	18
4.2.4 DEVIATION FROM TEST STANDARD	19
4.2.5 TEST SETUP.....	19
4.2.6 EUT OPERATING CONDITIONS	19
4.2.7 TEST RESULTS	20
4.3 20DB BANDWIDTH MEASUREMENT	44
4.3.1 LIMITS OF 20DB BANDWIDTH MEASUREMENT	44
4.3.2 TEST INSTRUMENTS.....	44
4.3.3 TEST PROCEDURE.....	44
4.3.4 DEVIATION FROM TEST STANDARD	45
4.3.5 TEST SETUP.....	45
4.3.6 EUT OPERATING CONDITION	45
4.3.7 TEST RESULTS	46
5 PHOTOGRAPHS OF THE TEST CONFIGURATION	58
6 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	59



Test Report No.: RF2506WDG0296

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF2506WDG0296	Original release	Aug. 06, 2025

1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
§15.203	Antenna Requirement	PASS	No antenna connector is used.
§15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit.
§15.209	Radiated Emission	PASS	Meet the requirement of limit.
§15.215 (c)	20dB Bandwidth	PASS	Meet the requirement of limit.

2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	0.15MHz ~ 30MHz	3.36 dB
Radiated emissions	9KHz ~ 30MHz	2.48 dB
	30MHz ~ 1GMHz	4.32 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	3-in-1 Wireless Charger
MODEL NO.	W757
ADDITIONAL MODEL	N/A
SAMPLE STATUS	Engineering sample
FCC ID	2AQI5-W757
POWER SUPPLY	USB-C (IN) Input: 9.0V=3.0A/12.0V=3.0A/15.0V=3.0A Wireless Charging Output Power: iPhone 25.0W Max, Apple Watch 5.0W Max, AirPods 5.0W Max Wireless Charging Total Output Power: 35W Max
MODULATION TYPE	FSK
OPERATING FREQUENCY RANGE	25W Charging Coil:127.8kHz & 360kHz 5W Charging Coil:110.5-148.5kHz Apple Watch Charging Coil:326.5kHz & 1.778MHz
I/O PORTS	Coil Antenna*3
FIELD STRENGTH	75.95dBuV/m
MAXIMUM POWER OUTPUT FROM THE CHARGING COIL	Max Power is 25W
CABLE SUPPLIED	USB-C cable: Shielded, Detachable, 1.0m

NOTES:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.
3. Please refer to the EUT photo document (Reference No.: 2506WDG0296) for detailed product photo.

3.2 DESCRIPTION OF TEST MODES

The following test frequencies are provided to this EUT:

Configure	Mode			Operating Frequency Range(KHz)		
	25W Coil	5W Coil	Watch Coil	25W Coil	5W Coil	Watch Coil
A	Standby	Standby	Standby	127.8	130	326.5
B	25W RX Load	Standby	Standby	360	130	326.5
C	25W RX Load	AirPods Pro Case	Apple Watch S7	360	133.7	1778
D	AirPods Pro Case	AirPods Pro Case	Apple Watch S7	127.8	143.4	1778

3.3 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO			DESCRIPTION		
	RE<1G	PLC	20BW			
				25W Coil	5W Coil	Watch Coil
A	√	-	√	Standby + Standby + Standby		
B	√	-	√	25W RX Load + Standby + Standby		
C	√	√	√	25W RX Load + AirPods Pro Case + Apple Watch S7		
D	√	-	√	AirPods Pro Case + AirPods Pro Case + Apple Watch S7		

Where **RE<1G**: Radiated Emission below 1GHz

PLC: Power Line Conducted Emission

20BW: 20dB Bandwidth

Power Line Conducted Emission Test :

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the worst final test as listed below.

EUT configure mode	Operating Frequency Range(kHz)			Test Frequency(kHz)			Modulation Type
	25W Coil	5W Coil	Watch Coil	25W Coil	5W Coil	Watch Coil	
C	127.8 & 360	110.5-148.5	326.5 & 1778	360	133.7	1778	FSK

Radiated Emission Test (Below 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT configure mode	Operating Frequency Range(kHz)			Test Frequency(kHz)			Modulation Type
	25W Coil	5W Coil	Watch Coil	25W Coil	5W Coil	Watch Coil	
A	127.8 & 360	110.5-148.5	326.5 & 1778	127.8	130	326.5	FSK
B	127.8 & 360	110.5-148.5	326.5 & 1778	360	130	326.5	FSK
C	127.8 & 360	110.5-148.5	326.5 & 1778	360	133.7	1778	FSK
D	127.8 & 360	110.5-148.5	326.5 & 1778	127.8	143.4	1778	FSK

20dB Bandwidth TEST:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT configure mode	Operating Frequency Range(kHz)			Test Frequency(kHz)			Modulation Type
	25W Coil	5W Coil	Watch Coil	25W Coil	5W Coil	Watch Coil	
A	127.8 & 360	110.5-148.5	326.5 & 1778	127.8	130	326.5	FSK
B	127.8 & 360	110.5-148.5	326.5 & 1778	360	130	326.5	FSK
C	127.8 & 360	110.5-148.5	326.5 & 1778	360	133.7	1778	FSK
D	127.8 & 360	110.5-148.5	326.5 & 1778	127.8	143.4	1778	FSK

TEST CONDITION:

Applicable to	Environmental conditions	Input Power	Tested by
RE<1G	25 °C, 56% RH/27 °C, 58% RH	DC 15V from adapter	Roy/Ludius
PLC	25 °C, 45RH	DC 15V from adapter	Summer
20BW	24 °C, 58% RH	DC 15V from adapter	Jeffery

3.4 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as a dependent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	Provided by
1	25W RX Load	CPS	N/A	N/A	Lab.
2	AirPods Pro	Apple	A2968	CM9000NQH9	Lab.
3	AirPods Pro	Apple	A2968	H9QYKWTV9C	Lab.
4	iWatch S7	Apple	A2474	T9VJ36WRRV	Lab.
5	Adapter	Ugreen	W0453	S41003900054	Client
6	Adapter	Ugreen	W0454	S41003900067	Client
7	Adapter	Ugreen	W0452	S63003900010	Client


NO.	DESCRIPTION OF THE ABOVE SUPPORT UNITS
5-7	USB cable: Shielded, Detachable, 1.0m

3.5 CONFIGURATION OF SYSTEM UNDER TEST


Mode A:

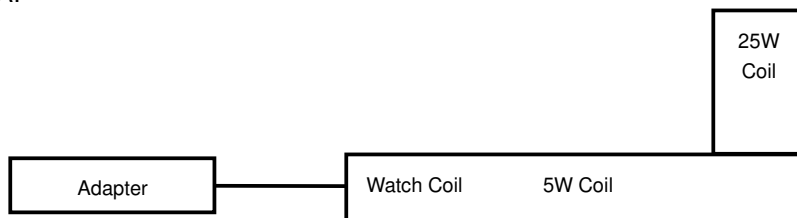


Mode B:

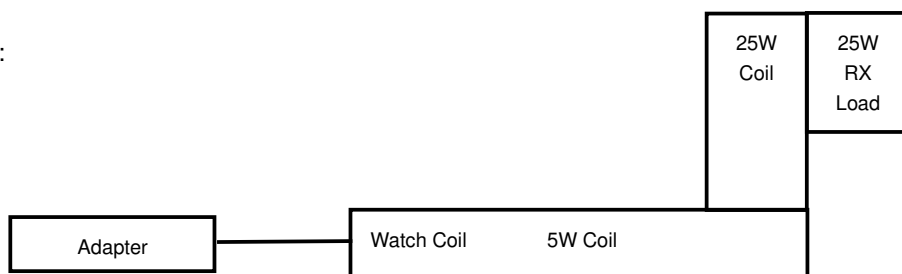

Mode C:

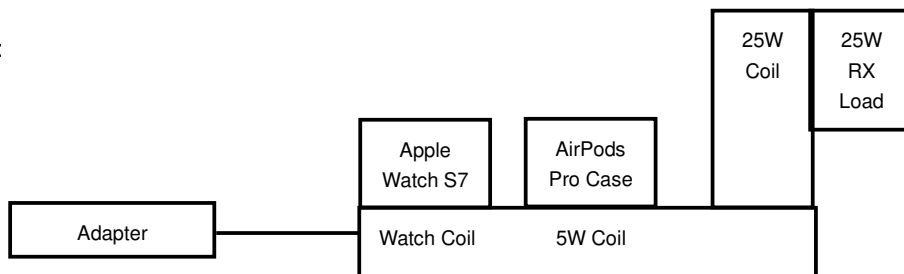

Mode D:

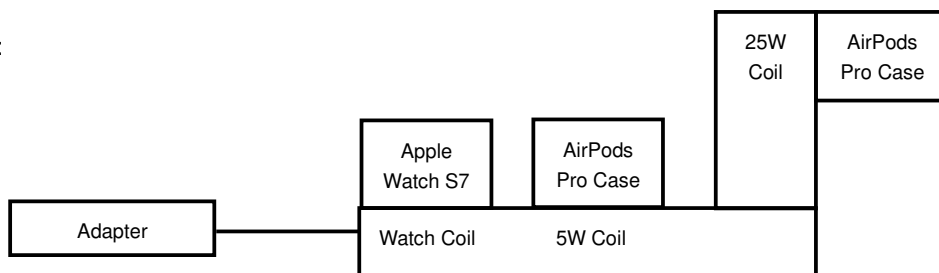



Test Report No.: RF2506WDG0296

3.6 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.207/15.209)
ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.



4 EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

- NOTES:**
- (1) The lower limit shall apply at the transition frequencies.
 - (2) The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 - (3) All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR7	101494	Oct. 09, 25
Artificial Mains Network	Rohde&Schwarz	ENV216	101173	Oct. 10, 25
Artificial Mains Network	Rohde&Schwarz	ESH3-Z5	100317	Oct. 09, 25
Artificial Mains Network	SCHWARZBECK	NSLK 8122	8122-05001	Apr. 09, 26
V-LISN (CISPR 25)	SCHWARZBECK	NNBM 8124-200	8124-200 05857	Apr. 09, 26
V-LISN (CISPR 25)	SCHWARZBECK	NNBM 8124-200	8124-200 05858	Apr. 09, 26
Voltage probe	SCHWARZBECK	TK 9421	TK 9421-176	Jul. 06, 26
Coaxial RF Cable	SUHNER	RG 223/U-CE	C2310066DG	Jun. 22, 26
Test software	ADT	ADT_Cond_V7.3.7	N/A	N/A

- NOTE:**
1. Equipment are calibrated by calibration laboratory accredited to ISO/IEC 17025 by a mutually recognized Accreditation and all tests are conducted within a valid calibration cycle.
 2. The test was performed in shielding room 553.

4.1.3 TEST PROCEDURE

The basic test procedure was in accordance with ANSI C63.4:2014 (section 7).

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20dB) were not recorded.

NOTE:


1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

4.1.4 DEVIATION FROM TEST STANDARD

No deviation.



4.1.5 TEST SETUP

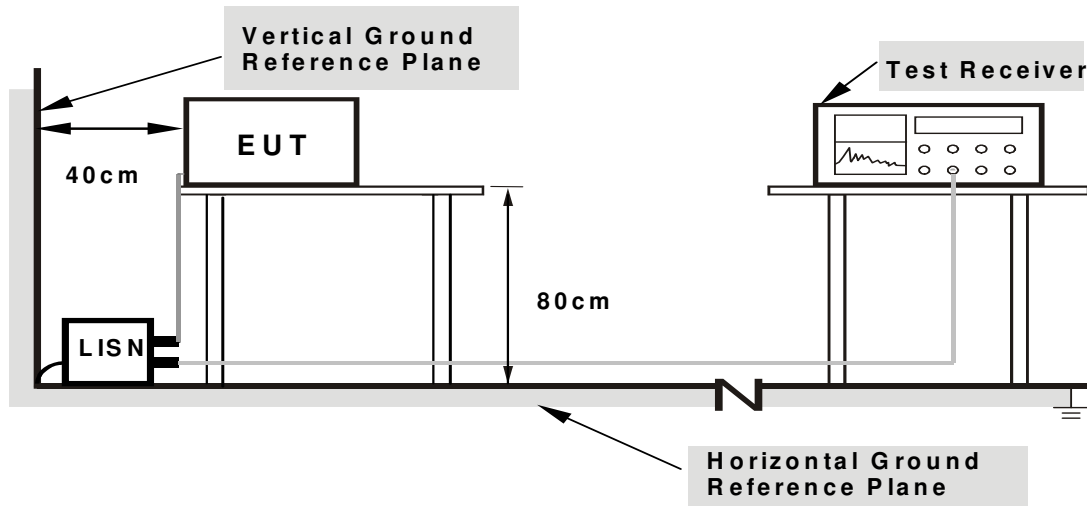

Note: 1.Support units were connected to second LISN.
2.Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.

4.1.6 EUT OPERATING CONDITIONS


- a. Turned on the power of all equipment.
- b. EUT was operated according to the type description in manufacturer's specifications or the User's Manual.

4.1.7 TEST RESULTS

TEST MODE	Mode C	6DB BANDWIDTH	9 kHz
TEST VOLTAGE	DC 15V from adapter input AC 120V/60Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	25deg. C, 75% RH	TESTED BY	Summer
TEST DATE	Jul. 14, 2025		

No.	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17791	9.79	40.19	14.72	49.98	24.51	64.58	54.58	-14.60	-30.07
2	0.20850	9.82	42.66	24.46	52.48	34.28	63.26	53.26	-10.79	-18.99
3	0.35911	9.81	38.94	34.15	48.75	43.96	58.75	48.75	-10.00	-4.79
4	3.26175	10.01	36.22	31.35	46.23	41.36	56.00	46.00	-9.77	-4.64
5	4.00650	10.05	35.85	30.90	45.90	40.95	56.00	46.00	-10.10	-5.05
6	6.18675	10.16	34.34	27.77	44.50	37.93	60.00	50.00	-15.50	-12.07


REMARKS: The emission levels of other frequencies were very low against the limit.

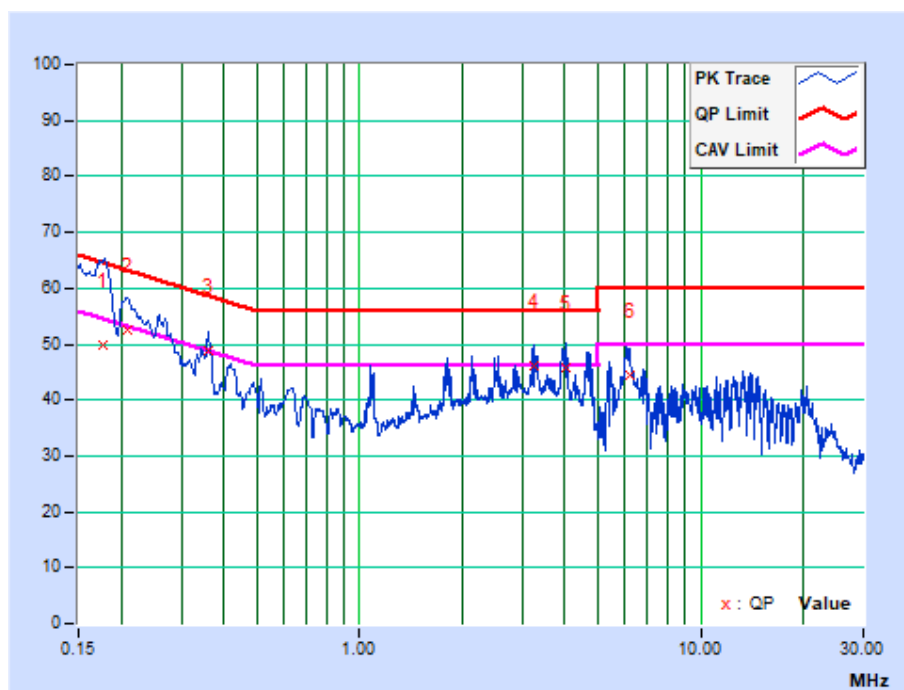

TEST MODE	Mode C	6DB BANDWIDTH	9 kHz
TEST VOLTAGE	DC 15V from adapter input AC 120V/60Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	25deg. C, 75% RH	TESTED BY	Summer
TEST DATE	Jul. 14, 2025		

No.	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17700	9.77	45.57	18.02	55.34	27.79	64.63	54.63	-9.29	-26.84
2	0.20627	9.75	45.41	27.32	55.16	37.07	63.35	53.35	-8.20	-16.29
3	0.26229	9.72	33.93	15.64	43.65	25.36	61.36	51.36	-17.71	-26.00
4	0.35925	9.69	37.17	30.90	46.86	40.59	58.75	48.75	-11.89	-8.16
5	0.43800	9.69	25.71	8.60	35.40	18.29	57.10	47.10	-21.70	-28.81
6	3.26175	9.88	31.71	28.50	41.59	38.38	56.00	46.00	-14.41	-7.62

REMARKS: The emission levels of other frequencies were very low against the limit.

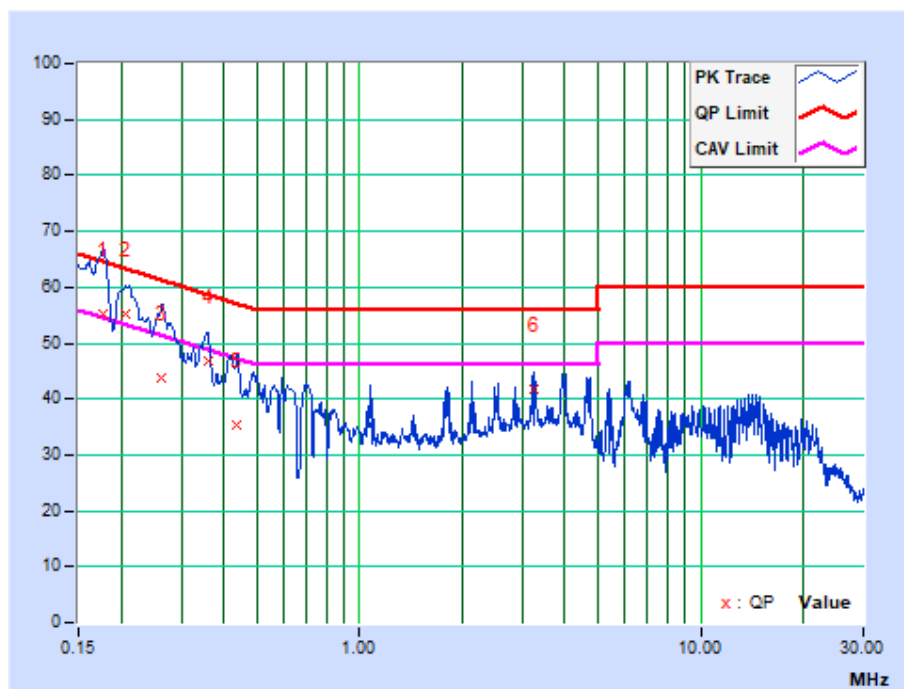



4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

TEST STANDARD: FCC Part 15, Subpart C, Section 15.209

Emissions radiated outside of the specified bands, shall be according to the general radiated limits as following:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

NOTES:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.
4. The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

**4.2.2 TEST INSTRUMENTS****FREQUENCY 9KHz-30MHz**

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR7	101564	Nov. 28, 25
Active Loop Antenna	SCHWARZBECK	FMZB 1519B	1519B-045	May 10, 26
Amplifier	Burgeon	BPA-530	100210	Feb. 21, 26
Coaxial RF Cable	Yaohong	Cable below 30MHz	C2310019DG	Jun. 26, 26
Test Software	ADT	ADT_Radiated_V8.7.07	N/A	N/A

- NOTES:** 1. The test was performed in 10m Chamber.
2. Equipment are calibrated by calibration laboratory accredited to ISO/IEC 17025 by a mutually recognized Accreditation and all tests are conducted within a valid calibration cycle.
3. The FCC Site Registration No. is 749762. Designation Number: CN1174.

FREQUENCY 30MHz-1GHz

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESU40	100449	Oct. 10, 25
Trilog-Broadband Antenna	SCHWARZBECK	VULB 9168	9168-554	Dec. 25, 25
Pre-Amplifier	Burgeon	BPA-530	100220	Feb. 21, 26
3m Semi-anechoic Chamber	Burgeon	9m*6m*6m	NSEMC003	May 17, 26
Coaxial RF Cable(3m Below 1G)	Yaohong	966 below 1GHz	C2310017DG	Jun. 22, 26
Coaxial RF Cable(3m Below 1G)	Yaohong	966 below 1GHz	C2310087DG	Jun. 22, 26
Test software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A

- NOTES:** 1. The test was performed in 966 Chamber
2. Equipment are calibrated by calibration laboratory accredited to ISO/IEC 17025 by a mutually recognized Accreditation and all tests are conducted within a valid calibration cycle.
3. The FCC Site Registration No. is 749762. Designation Number: CN1174.

4.2.3 TEST PROCEDURE

< Below 30MHz >

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meters Semi-anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1.3 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.

<30MHz~1GHz >

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTES:

1. The resolution bandwidth of test receiver/spectrum analyzer is 200Hz for Quasi-peak detection (QP/AV) at fundamental frequency 9K-150KHz;
2. The resolution bandwidth of test receiver/spectrum analyzer is 9KHz for Quasi-peak detection (QP/AV) at fundamental frequency 150K-30MHz;
3. The resolution bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at radiated spurious emission frequency 30MHz-1GHz.
4. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.




4.2.4 DEVIATION FROM TEST STANDARD


No deviation.

4.2.5 TEST SETUP

Below 30MHz test setup

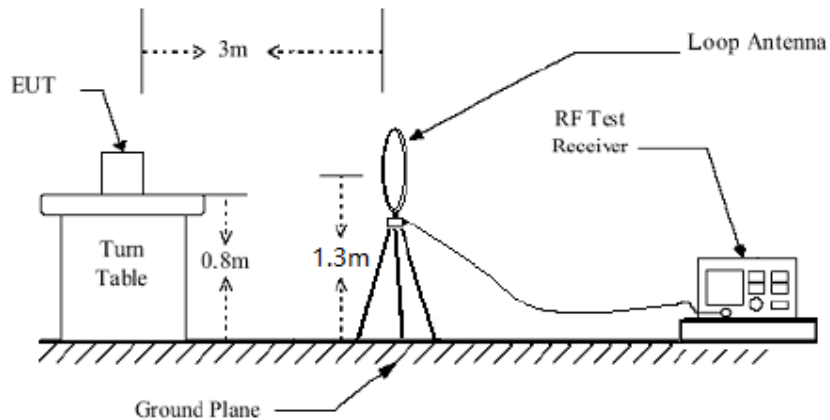

Below 1GHz test setup

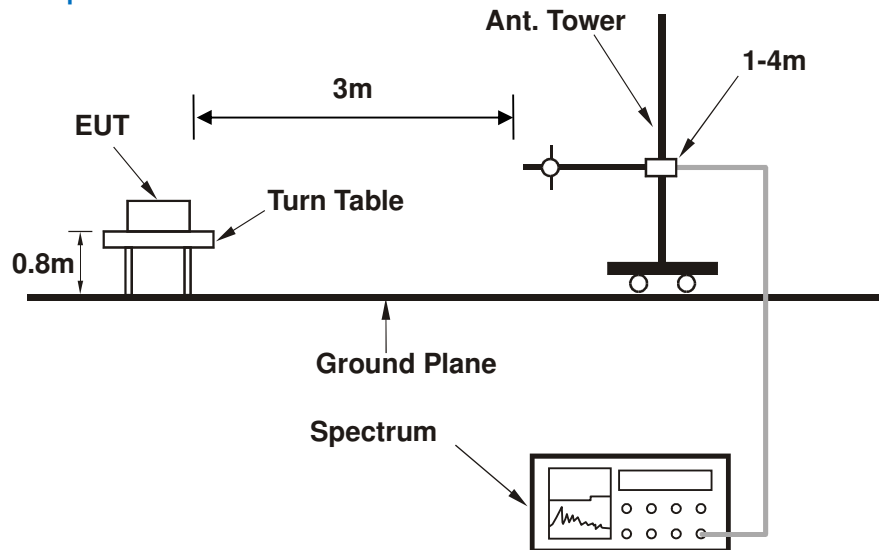

Note: For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS

- a. Turn on the EUT.
- b. The EUT tested in charging mode and standby mode respectively.




4.2.7 TEST RESULTS

Standby Mode

Test Mode	A	Frequency Range	9 kHz ~ 150 KHz
Test Voltage	DC 15V from adapter input AC 120V 60Hz	Detector Function	QP&AV
Environmental Conditions	25deg. C, 54% RH	Tested By	Roy
Test date	Jul. 09, 2025		


ANTENNA POLARITY & TEST DISTANCE: LOOP ANTENNA PARALLEL AT 3m

No	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	0.0230 AV	-10.97	48.30	37.33	120.36	-83.03	100	6
2	0.0352 AV	-11.48	43.64	32.16	116.66	-84.50	100	90
3	0.0811 AV	-11.69	38.88	27.19	109.42	-82.23	100	152
4	0.1072 QP	-11.80	33.54	21.74	107.00	-85.26	100	11
5	0.1278 AV	-11.78	83.42	71.64	105.47	-33.83	100	174
6	0.1301 AV	-11.78	73.44	61.66	105.32	-43.66	100	69
7	0.1357 AV	-11.78	35.94	24.16	104.95	-80.79	100	143

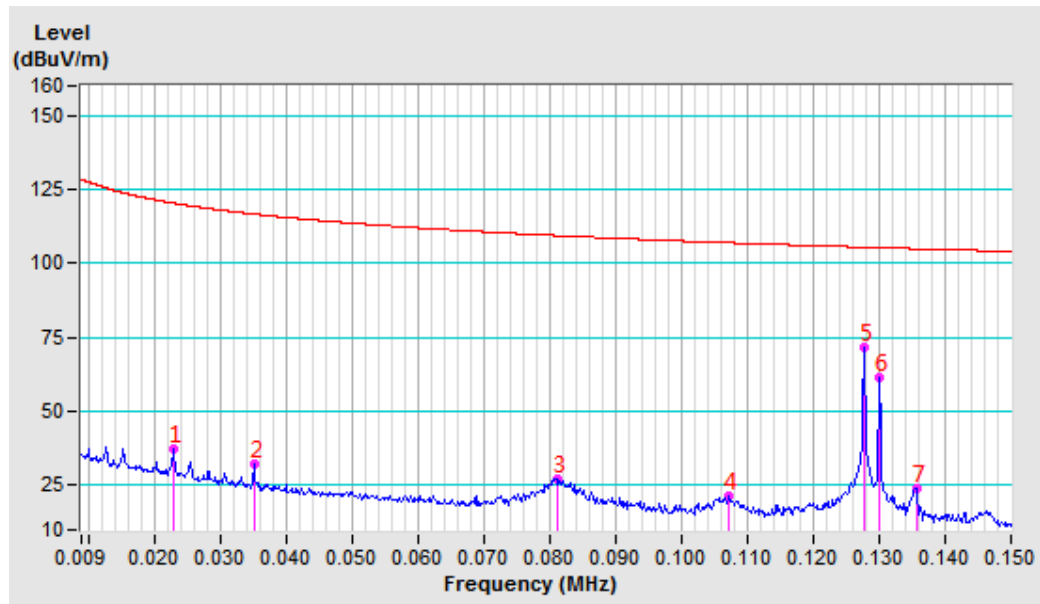


Test Mode	A	Frequency Range	9 kHz ~ 150 KHz
Test Voltage	DC 15V from adapter input AC 120V 60Hz	Detector Function	QP&AV
Environmental Conditions	25deg. C, 54% RH	Tested By	Roy
Test date	Jul. 09, 2025		

ANTENNA POLARITY & TEST DISTANCE: LOOP ANTENNA PARALLEL AT 3m								
No	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	0.0230 AV	-10.97	49.39	38.42	120.36	-81.94	100	192
2	0.0352 AV	-11.48	47.93	36.45	116.66	-80.21	100	360
3	0.0525 AV	-11.52	38.84	27.32	113.20	-85.88	100	300
4	0.0811 AV	-11.69	42.53	30.84	109.42	-78.58	100	345
5	0.1058 QP	-11.79	38.16	26.37	107.11	-80.74	100	360
6	0.1278 AV	-11.78	87.73	75.95	105.47	-29.52	100	173
7	0.1301 AV	-11.78	77.89	66.11	105.32	-39.21	100	360
8	0.1349 AV	-11.79	41.39	29.60	105.00	-75.40	100	182

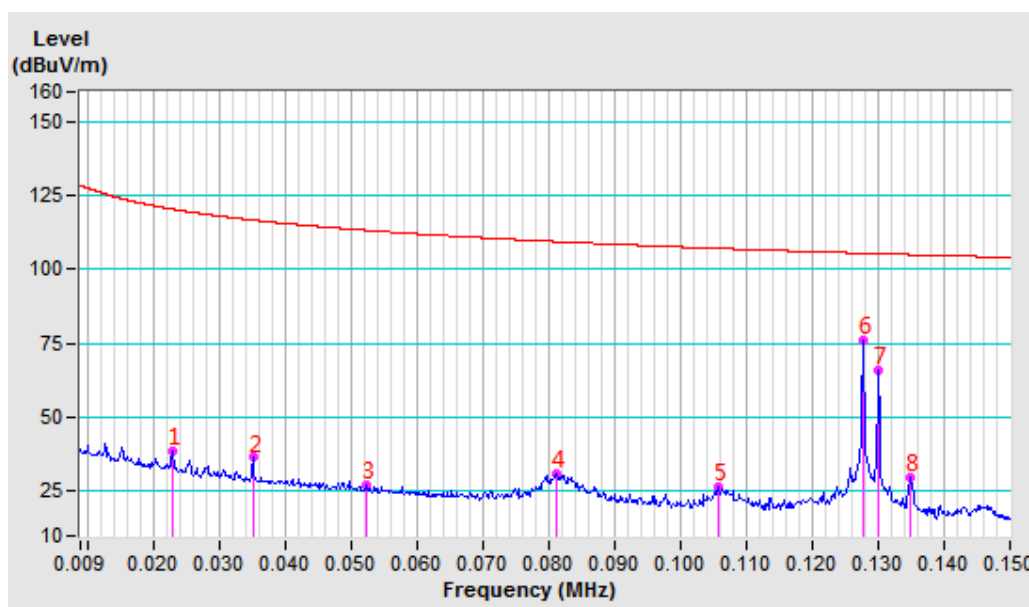


Test Mode	A	Frequency Range	150 kHz ~ 30MHz
Test Voltage	DC 15V from adapter input AC 120V 60Hz	Detector Function	QP&AV
Environmental Conditions	25deg. C, 54% RH	Tested By	Roy
Test date	Jul. 09, 2025		

ANTENNA POLARITY & TEST DISTANCE: LOOP ANTENNA PERPENDICULAR AT 3m								
No	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	0.2545 AV	-11.60	78.09	66.49	99.49	-33.00	100	179
2	0.3265 AV	-11.52	70.39	58.87	97.33	-38.46	100	180
3	5.6785 QP	-11.64	29.93	18.29	69.54	-51.25	100	98
4	8.7666 QP	-11.67	29.52	17.85	69.54	-51.69	100	290
5	15.4280 QP	-11.68	29.10	17.42	69.54	-52.12	100	53
6	21.6102 QP	-11.34	28.77	17.43	69.54	-52.11	100	244
7	25.2357 QP	-11.33	28.36	17.03	69.54	-52.51	100	190

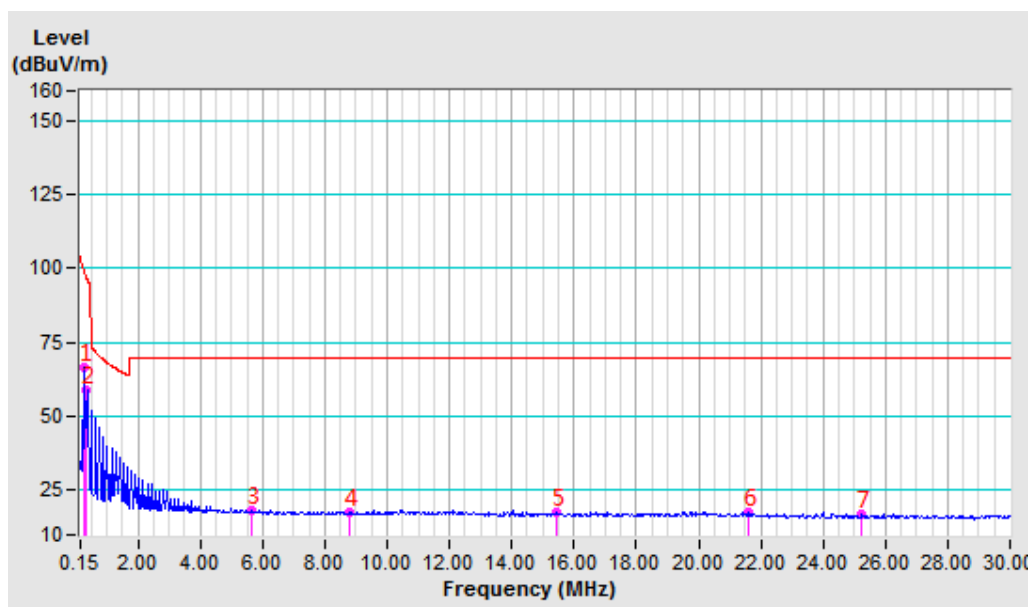

Test Mode	A	Frequency Range	150 kHz ~ 30MHz
Test Voltage	DC 15V from adapter input AC 120V 60Hz	Detector Function	QP&AV
Environmental Conditions	25deg. C, 54% RH	Tested By	Roy
Test date	Jul. 09, 2025		


ANTENNA POLARITY & TEST DISTANCE: LOOP ANTENNA PERPENDICULAR AT 3m								
No	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	0.2545 AV	-11.60	78.06	66.46	99.49	-33.03	100	168
2	0.3265 AV	-11.52	70.38	58.86	97.33	-38.47	100	180
3	7.2651 QP	-11.67	29.52	17.85	69.54	-51.69	100	224
4	12.6817 QP	-11.68	29.28	17.60	69.54	-51.94	100	66
5	18.7788 QP	-11.26	29.01	17.75	69.54	-51.79	100	148
6	23.1461 QP	-11.46	27.93	16.47	69.54	-53.07	100	44
7	27.0447 QP	-11.27	27.94	16.67	69.54	-52.87	100	230

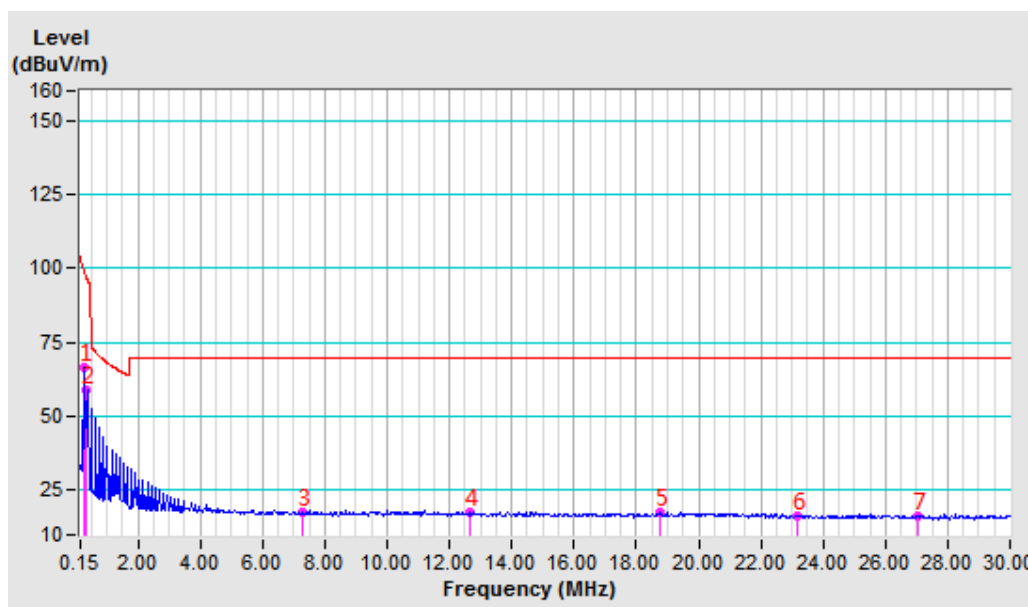

Test Mode	A	Frequency Range	30MHz ~ 1000MHz
Test Voltage	DC 15V from adapter input AC 120V 60Hz	Detector Function	Quasi-Peak (QP)
Environmental Conditions	25deg. C, 56% RH	Tested By	Ludius
Test date	Jul. 22, 2025		

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	160.58	-16.72	45.52	28.80	43.50	-14.70	208	256
2	214.98	-19.00	48.00	29.00	43.50	-14.50	193	270
3	288.04	-15.65	46.99	31.34	46.00	-14.66	179	284
4	334.68	-14.61	47.75	33.14	46.00	-12.86	165	298
5	378.21	-13.23	43.56	30.33	46.00	-15.67	152	310
6	429.50	-11.39	43.98	32.59	46.00	-13.41	135	327

REMARKS: 1. Peak detector quick scan is showed on the graph and final quasi-peak detector data is measured corresponding to relevant limit and recorded in the data table.
2. Negative sign (-) in the margin column signify levels below the limit.
3. Frequency range scanned: 30-1000MHz.
4. Only emissions significantly above equipment noise floor are reported.

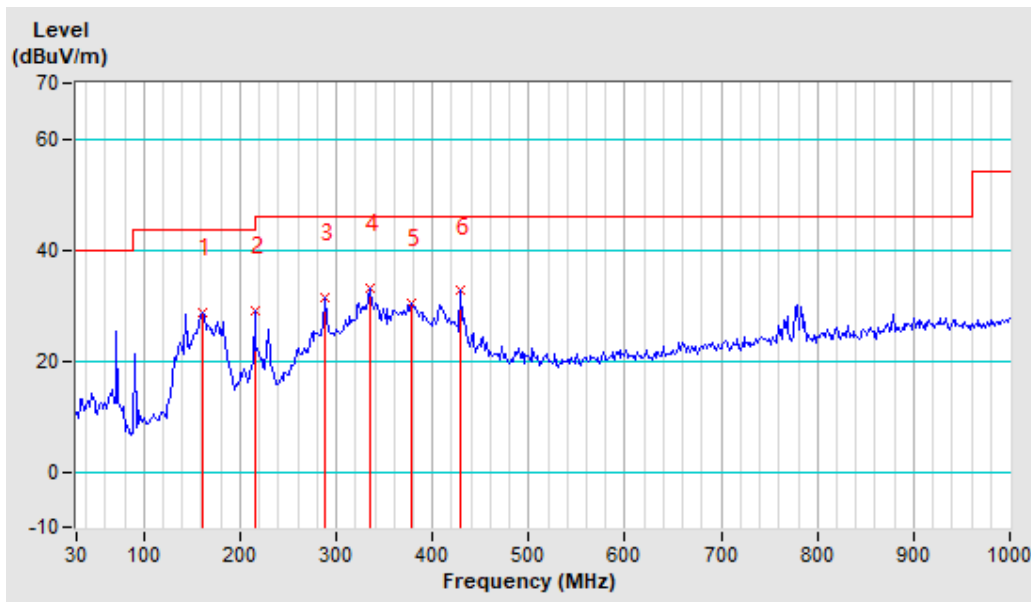




BUREAU
VERITAS

Test Report No.: RF2506WDG0296

Test Mode	A	Frequency Range	30MHz ~ 1000MHz
Test Voltage	DC 15V from adapter input AC 120V 60Hz	Detector Function	Quasi-Peak (QP)
Environmental Conditions	25deg. C, 56% RH	Tested By	Ludius
Test date	Jul. 22, 2025		

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	40.88	-18.31	53.59	35.28	40.00	-4.72	115	331
2	71.97	-20.00	51.69	31.69	40.00	-8.31	129	344
3	90.62	-22.97	45.83	22.86	43.50	-20.64	146	359
4	160.58	-16.72	38.98	22.26	43.50	-21.24	159	0
5	214.98	-19.00	40.84	21.84	43.50	-21.66	172	1
6	431.06	-11.35	41.89	30.54	46.00	-15.46	189	4

REMARKS: 1. Peak detector quick scan is showed on the graph and final quasi-peak detector data is measured corresponding to relevant limit and recorded in the data table.
2. Negative sign (-) in the margin column signify levels below the limit.
3. Frequency range scanned: 30-1000MHz.
4. Only emissions significantly above equipment noise floor are reported.

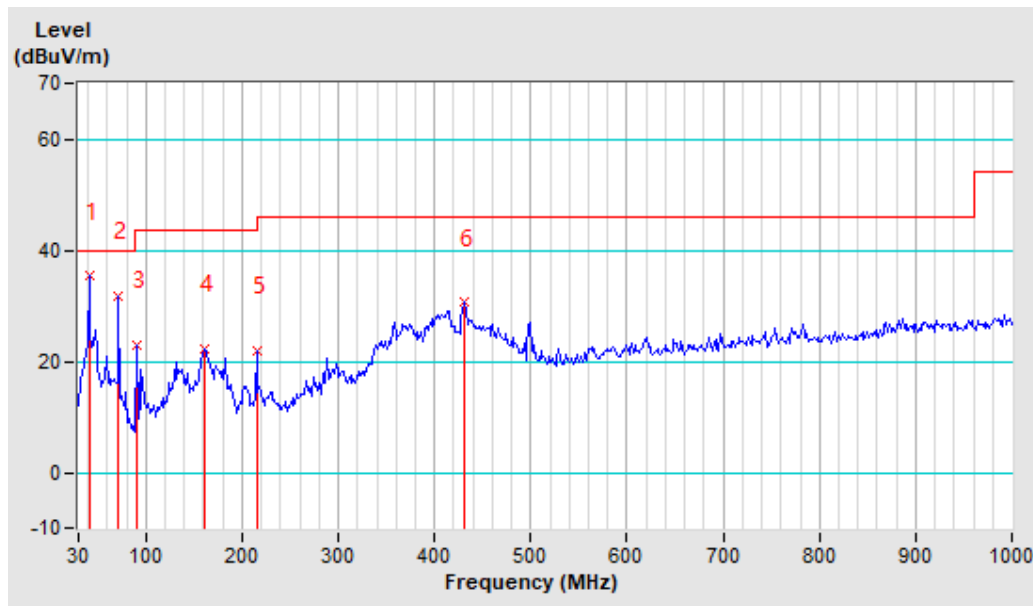




BUREAU
VERITAS

Test Report No.: RF2506WDG0296

Charging Mode


Test Mode	B	Frequency Range	9 kHz ~ 150 KHz
Test Voltage	DC 15V from adapter input AC 120V 60Hz	Detector Function	QP&AV
Environmental Conditions	25deg. C, 56% RH	Tested By	Roy
Test Date	Jul. 09, 2025		

ANTENNA POLARITY & TEST DISTANCE: LOOP ANTENNA PARALLEL AT 3m								
No	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	0.0153 AV	-10.42	50.77	40.35	123.90	-83.55	100	60
2	0.0230 AV	-10.97	50.30	39.33	120.37	-81.04	100	5
3	0.0546 AV	-11.54	43.60	32.06	112.86	-80.80	100	245
4	0.0677 AV	-11.61	40.82	29.21	110.99	-81.78	100	265
5	0.1085 QP	-11.80	37.74	25.94	106.89	-80.95	100	258
6	0.1301 AV	-11.78	77.21	65.43	105.32	-39.89	100	9
7	0.1352 AV	-11.78	38.89	27.11	104.98	-77.87	100	165

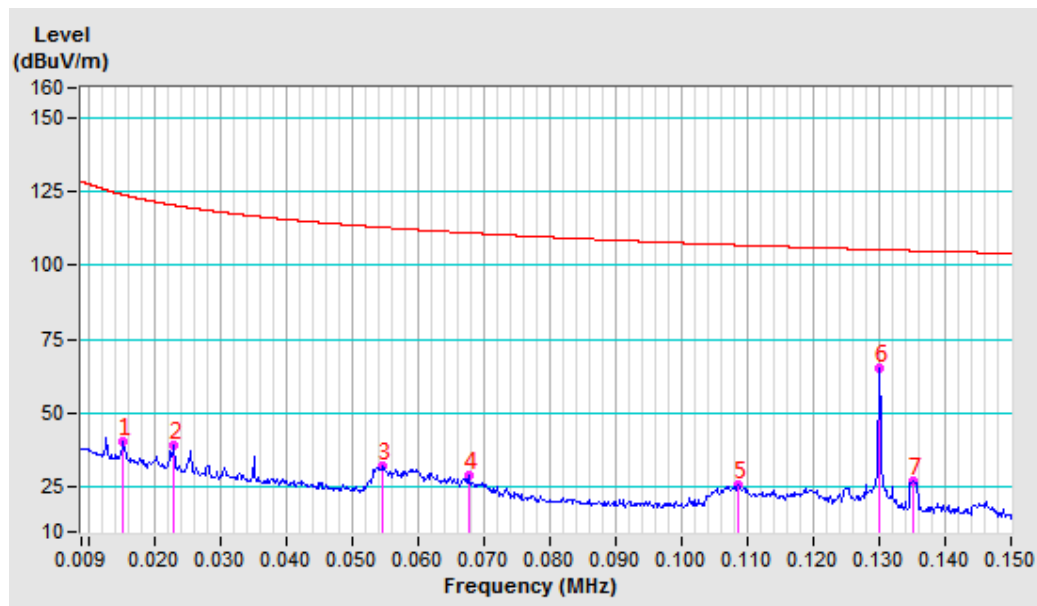

Test Mode	B	Frequency Range	9 kHz ~ 150 KHz
Test Voltage	DC 15V from adapter input AC 120V 60Hz	Detector Function	QP&AV
Environmental Conditions	25deg. C, 56% RH	Tested By	Roy
Test Date	Jul. 09, 2025		

ANTENNA POLARITY & TEST DISTANCE: LOOP ANTENNA PARALLEL AT 3m								
No	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	0.0230 AV	-10.97	51.91	40.94	120.36	-79.42	100	76
2	0.0593 AV	-11.56	45.07	33.51	112.15	-78.64	100	272
3	0.0960 QP	-11.78	40.19	28.41	107.96	-79.55	100	251
4	0.1091 QP	-11.80	40.54	28.74	106.85	-78.11	100	274
5	0.1301 AV	-11.78	78.37	66.59	105.32	-38.73	100	360
6	0.1337 AV	-11.79	53.99	42.20	105.08	-62.88	100	154
7	0.1351 AV	-11.78	41.33	29.55	29.55	104.99	100	188

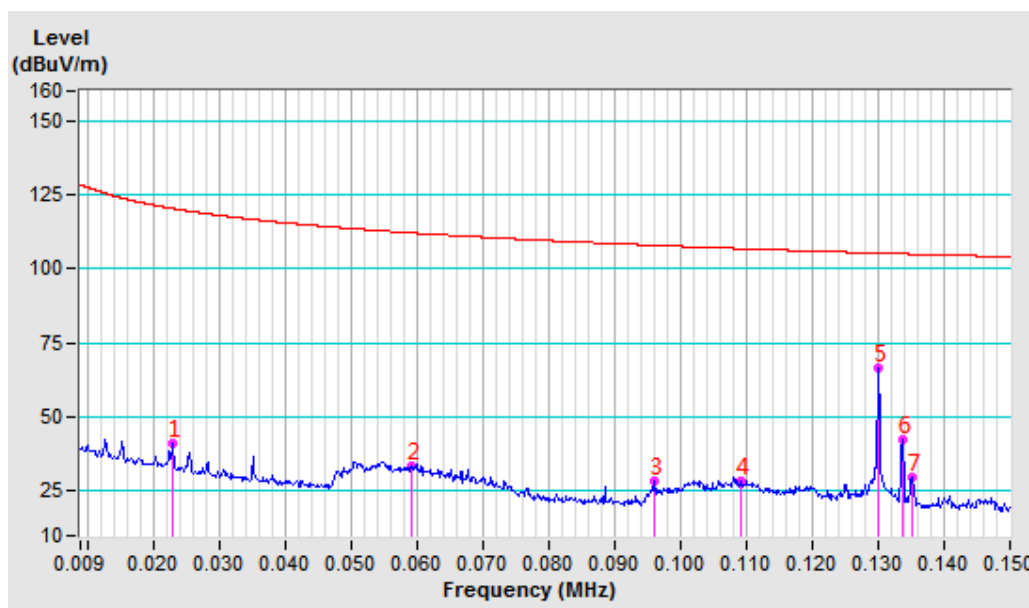




**BUREAU
VERITAS**

Test Report No.: RF2506WDG0296

Test Mode	B	Frequency Range	150 kHz ~ 30 MHz
Test Voltage	DC 15V from adapter input AC 120V 60Hz	Detector Function	QP&AV
Environmental Conditions	25deg. C, 56% RH	Tested By	Roy
Test Date	Jul. 09, 2025		

ANTENNA POLARITY & TEST DISTANCE: LOOP ANTENNA PERPENDICULAR AT 3m								
No	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	0.3265 AV	-11.52	66.50	54.98	97.33	-42.35	100	174
2	0.3590 AV	-11.53	66.51	54.98	96.50	-41.52	100	174
3	0.6530 QP	-11.71	53.77	42.06	71.54	-29.48	100	98
4	0.9784 QP	-11.94	48.53	36.59	68.35	-31.76	100	102
5	4.7232 QP	-11.57	30.20	18.63	69.54	-50.91	100	77
6	14.0399 QP	-11.74	32.18	20.44	69.54	-49.10	100	74
7	19.8684 QP	-11.07	29.18	18.11	69.54	-51.43	100	99
8	24.8357 QP	-11.39	27.95	16.56	69.54	-52.98	100	210

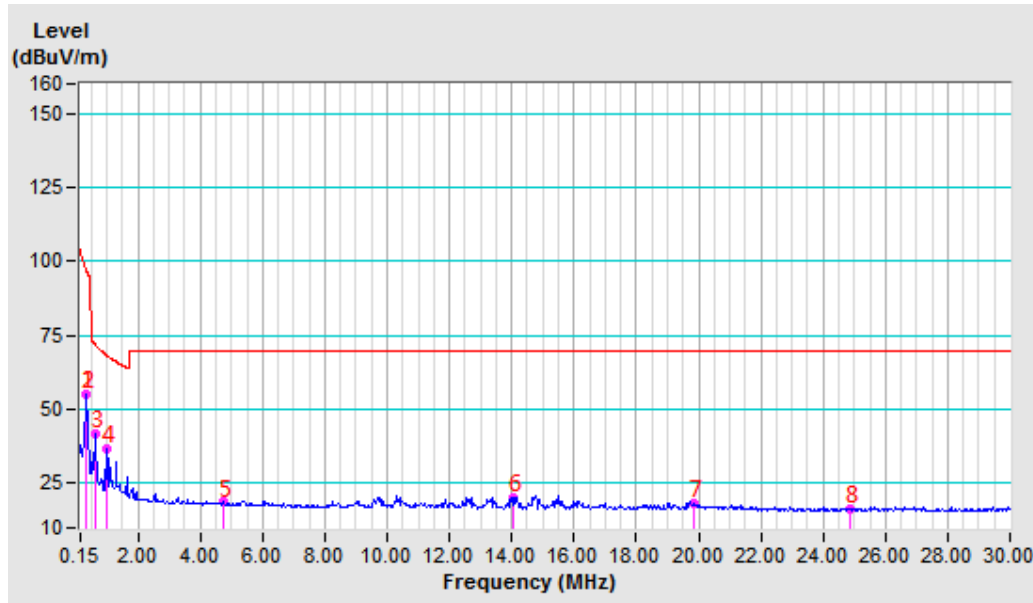


**Bureau Veritas Shenzhen
Co., Ltd. Dongguan Branch**

No. 96, Guantai Road (Houjie Section), Houjie Town,
Dongguan City, Guangdong Province. 523942. People's
Republic of China.

Tel: +86 769 8998 2098
Fax: +86 769 8593 1080
Email: customerservice.dg@bureauveritas.com

Test Mode	B	Frequency Range	150 kHz ~ 30 MHz
Test Voltage	DC 15V from adapter input AC 120V 60Hz	Detector Function	QP&AV
Environmental Conditions	25deg. C, 56% RH	Tested By	Roy
Test Date	Jul. 09, 2025		


ANTENNA POLARITY & TEST DISTANCE: LOOP ANTENNA PERPENDICULAR AT 3m								
No	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	0.3265 AV	-11.52	66.16	54.64	97.33	-42.69	100	166
2	0.3590 AV	-11.53	66.17	54.64	96.50	-41.86	100	166
3	0.6530 QP	-11.71	53.44	41.73	71.54	-29.81	100	106
4	0.9784 QP	-11.94	48.32	36.38	68.35	-31.97	100	102
5	7.6368 QP	-11.68	29.85	18.17	69.54	-51.37	100	93
6	13.9951 QP	-11.74	31.78	20.04	69.54	-49.50	100	89
7	18.2908 QP	-11.35	29.35	18.00	69.54	-51.54	100	142
8	23.1177 QP	-11.46	28.72	17.26	69.54	-52.28	100	282

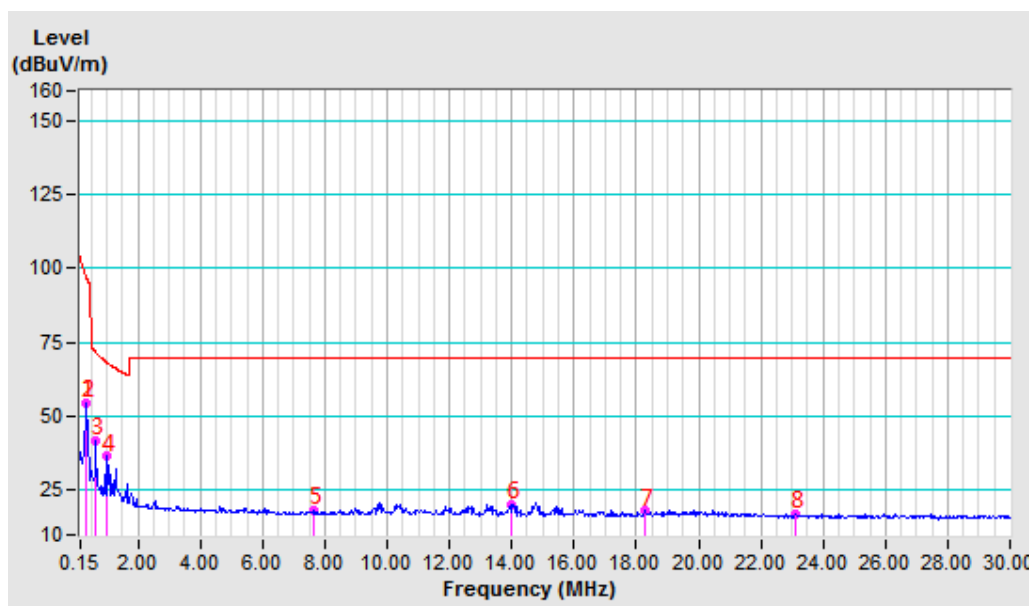

Test Mode	B	Frequency Range	30MHz ~ 1000MHz
Test Voltage	DC 15V from adapter input AC 120V 60Hz	Detector Function	Quasi-Peak (QP)
Environmental Conditions	25deg. C, 56% RH	Tested By	Ludius
Test date	Jul. 22, 2025		

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	71.97	-20.00	45.60	25.60	40.00	-14.40	190	0
2	159.02	-16.66	46.83	30.17	43.50	-13.33	206	0
3	214.98	-19.00	48.57	29.57	43.50	-13.93	174	354
4	288.04	-15.65	46.04	30.39	46.00	-15.61	151	332
5	326.91	-14.73	47.05	32.32	46.00	-13.68	139	320
6	418.62	-11.77	42.01	30.24	46.00	-15.76	122	304

REMARKS: 1. Peak detector quick scan is showed on the graph and final quasi-peak detector data is measured corresponding to relevant limit and recorded in the data table.
2. Negative sign (-) in the margin column signify levels below the limit.
3. Frequency range scanned: 30-1000MHz.
4. Only emissions significantly above equipment noise floor are reported.

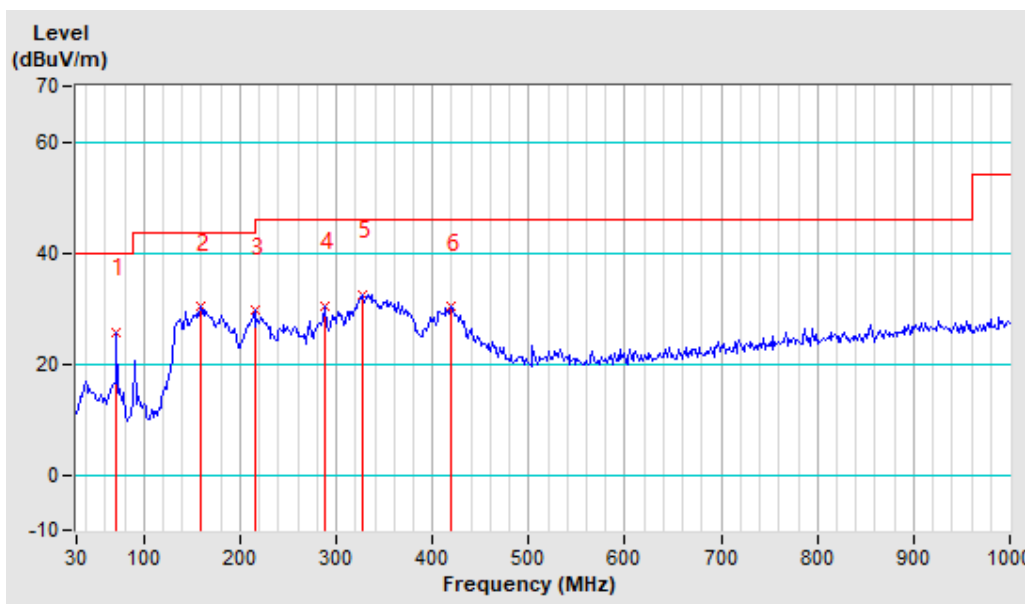




BUREAU
VERITAS

Test Report No.: RF2506WDG0296

Test Mode	B	Frequency Range	30MHz ~ 1000MHz
Test Voltage	DC 15V from adapter input AC 120V 60Hz	Detector Function	Quasi-Peak (QP)
Environmental Conditions	25deg. C, 56% RH	Tested By	Ludius
Test date	Jul. 22, 2025		

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	39.33	-18.49	53.11	34.62	40.00	-5.38	167	89
2	71.97	-20.00	53.31	33.31	40.00	-6.69	181	102
3	135.71	-17.60	40.68	23.08	43.50	-20.42	210	132
4	159.02	-16.66	41.25	24.59	43.50	-18.91	197	118
5	364.21	-13.77	43.56	29.79	46.00	-16.21	226	147
6	396.86	-12.53	41.81	29.28	46.00	-16.72	248	169

REMARKS: 1. Peak detector quick scan is showed on the graph and final quasi-peak detector data is measured corresponding to relevant limit and recorded in the data table.
2. Negative sign (-) in the margin column signify levels below the limit.
3. Frequency range scanned: 30-1000MHz.
4. Only emissions significantly above equipment noise floor are reported.

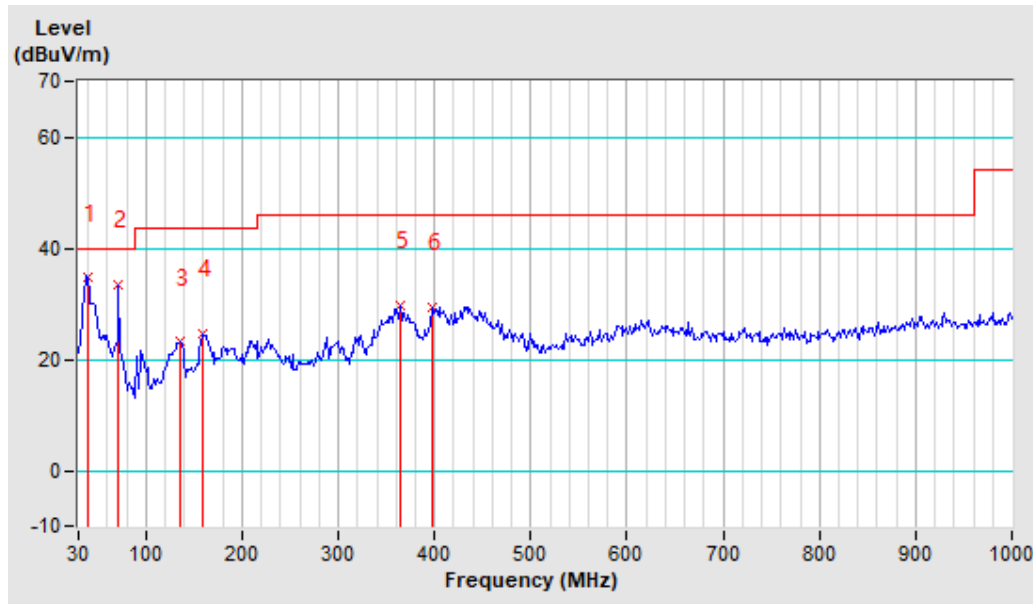




BUREAU
VERITAS

Test Report No.: RF2506WDG0296


Test Mode	C	Frequency Range	9 kHz ~ 150 KHz
Test Voltage	DC 15V from adapter input AC 120V 60Hz	Detector Function	QP&AV
Environmental Conditions	25deg. C, 56% RH	Tested By	Roy
Test Date	Jul. 09, 2025		

ANTENNA POLARITY & TEST DISTANCE: LOOP ANTENNA PARALLEL AT 3m								
No	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	0.0230 AV	-10.96	52.02	41.06	120.38	-79.32	100	206
2	0.0352 AV	-11.48	49.80	38.32	116.67	-78.35	100	12
3	0.0586 AV	-11.55	48.55	37.00	112.25	-75.25	100	267
4	0.0851 AV	-11.71	49.02	37.31	109.01	-71.70	100	6
5	0.0976 QP	-11.79	40.48	28.69	107.81	-79.12	100	15
6	0.1166 AV	-11.79	42.58	30.79	106.27	-75.48	100	276
7	0.1337 AV	-11.79	57.65	45.86	105.08	-59.22	100	21

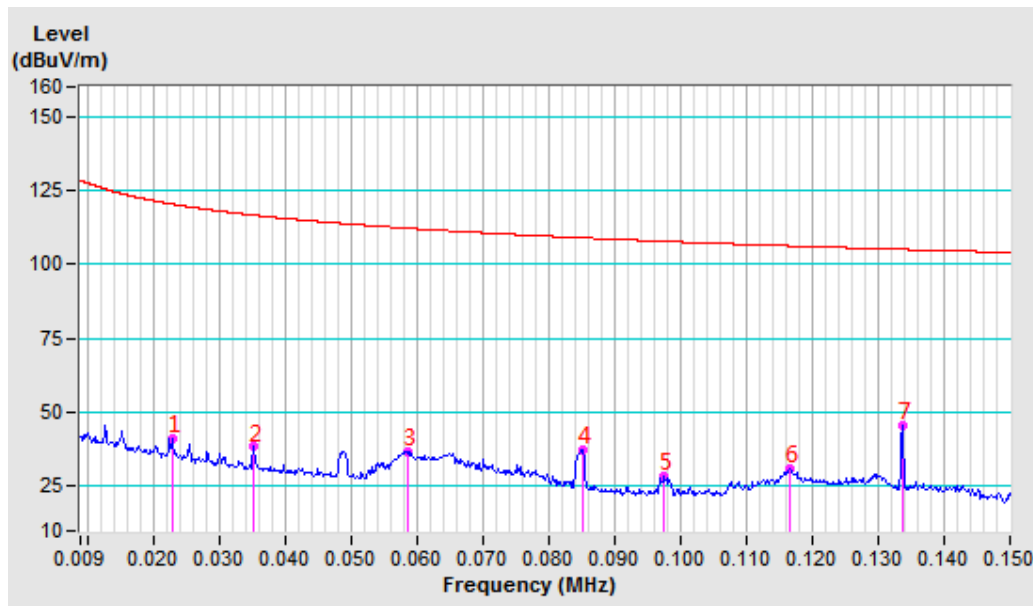

Test Mode	C	Frequency Range	9 kHz ~ 150 KHz
Test Voltage	DC 15V from adapter input AC 120V 60Hz	Detector Function	QP&AV
Environmental Conditions	25deg. C, 56% RH	Tested By	Roy
Test Date	Jul. 09, 2025		

ANTENNA POLARITY & TEST DISTANCE: LOOP ANTENNA PARALLEL AT 3m								
No	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	0.0128 AV	-10.23	55.85	45.62	125.46	-79.84	100	275
2	0.0230 AV	-10.96	52.38	41.42	120.38	-78.96	100	316
3	0.0352 AV	-11.48	50.28	38.80	116.66	-77.86	100	88
4	0.0585 AV	-11.55	48.09	36.54	112.25	-75.71	100	285
5	0.0849 AV	-11.71	48.77	37.06	109.02	-71.96	100	8
6	0.1083 QP	-11.80	42.97	31.17	106.91	-75.74	100	262
7	0.1337 AV	-11.79	58.45	46.66	105.08	-58.42	100	176

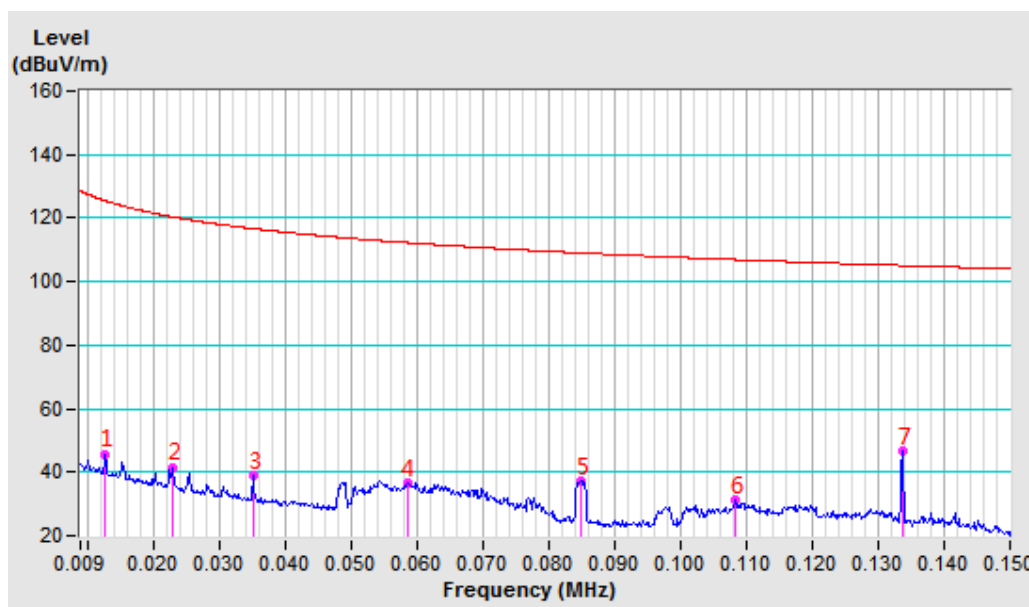




BUREAU
VERITAS

Test Report No.: RF2506WDG0296


Test Mode	C	Frequency Range	150 kHz ~ 30 MHz
Test Voltage	DC 15V from adapter input AC 120V 60Hz	Detector Function	QP&AV
Environmental Conditions	25deg. C, 56% RH	Tested By	Roy
Test Date	Jul. 09, 2025		

ANTENNA POLARITY & TEST DISTANCE: LOOP ANTENNA PERPENDICULAR AT 3m								
No	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	0.3590 AV	-11.53	65.72	54.19	96.50	-42.31	100	160
2	1.7780 QP	-11.77	53.80	42.03	69.54	-27.51	100	69
3	5.3322 QP	-11.61	32.18	20.57	69.54	-48.97	100	90
4	10.4398 QP	-11.64	31.09	19.45	69.54	-50.09	100	20
5	16.7519 QP	-11.54	28.05	16.51	69.54	-53.03	100	243
6	19.6191 QP	-11.12	28.56	17.44	69.54	-52.10	100	231
7	23.4685 QP	-11.46	27.94	16.48	69.54	-53.06	100	71
8	27.1357 QP	-11.28	27.18	15.90	69.54	-53.64	100	343

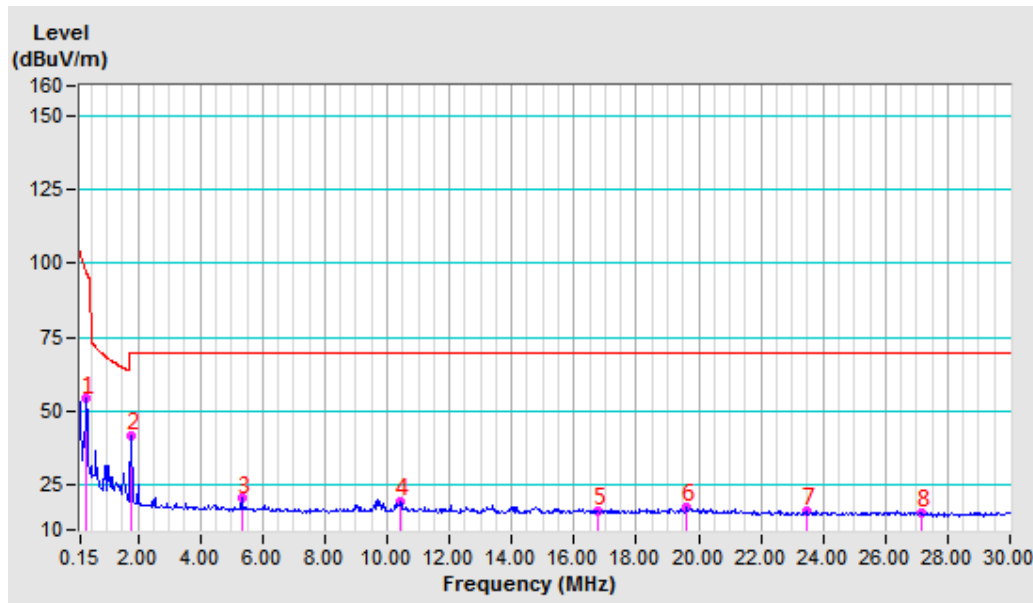

Test Mode	C	Frequency Range	150 kHz ~ 30 MHz
Test Voltage	DC 15V from adapter input AC 120V 60Hz	Detector Function	QP&AV
Environmental Conditions	25deg. C, 56% RH	Tested By	Roy
Test Date	Jul. 09, 2025		


ANTENNA POLARITY & TEST DISTANCE: LOOP ANTENNA PERPENDICULAR AT 3m								
No	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	0.1530 AV	-11.78	82.71	70.93	103.91	-32.98	100	152
2	0.3590 AV	-11.53	66.14	54.61	96.50	-41.89	100	144
3	1.7780 QP	-11.77	53.45	41.68	69.54	-27.86	100	244
4	6.0293 QP	-11.66	31.82	20.16	69.54	-49.38	100	174
5	12.6906 QP	-11.68	31.86	20.18	69.54	-49.36	100	55
6	19.1729 QP	-11.19	30.53	19.34	69.54	-50.20	100	275
7	24.1402 QP	-11.48	29.89	18.41	69.54	-51.13	100	285
8	28.0641 QP	-11.33	29.96	18.63	69.54	-50.91	100	166

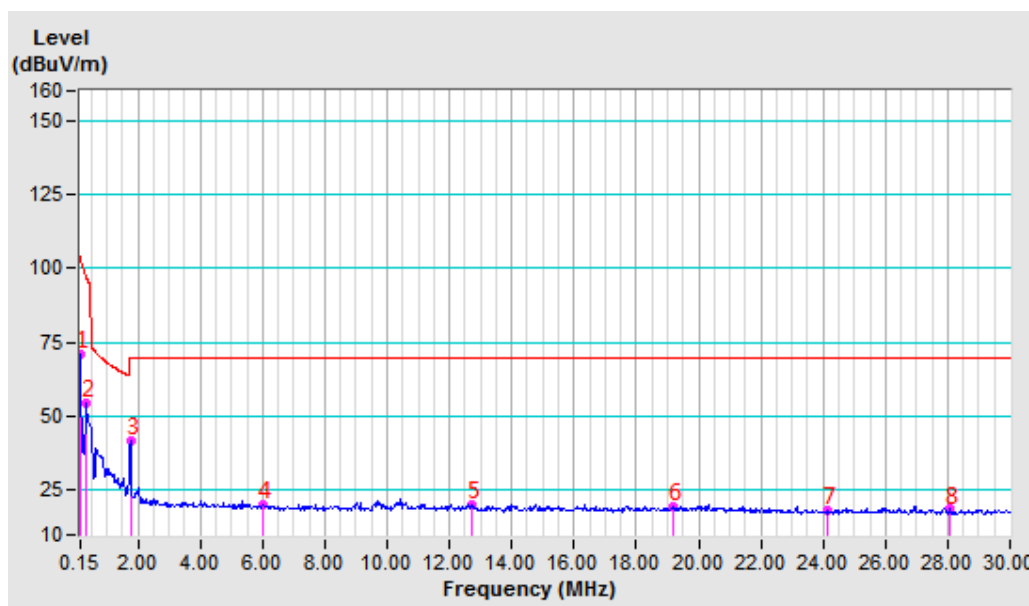

Test Mode	C	Frequency Range	30MHz ~ 1000MHz
Test Voltage	DC 15V from adapter input AC 120V 60Hz	Detector Function	Quasi-Peak (QP)
Environmental Conditions	25deg. C, 56% RH	Tested By	Ludius
Test date	Jul. 22, 2025		

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	71.97	-20.00	46.15	26.15	40.00	-13.85	182	306
2	155.91	-16.58	45.18	28.60	43.50	-14.90	168	292
3	214.98	-19.00	48.32	29.32	43.50	-14.18	208	332
4	330.02	-14.68	47.11	32.43	46.00	-13.57	122	247
5	417.07	-11.83	41.85	30.02	46.00	-15.98	136	261
6	539.87	-9.45	35.72	26.27	46.00	-19.73	151	275

REMARKS: 1. Peak detector quick scan is showed on the graph and final quasi-peak detector data is measured corresponding to relevant limit and recorded in the data table.
2. Negative sign (-) in the margin column signify levels below the limit.
3. Frequency range scanned: 30-1000MHz.
4. Only emissions significantly above equipment noise floor are reported.

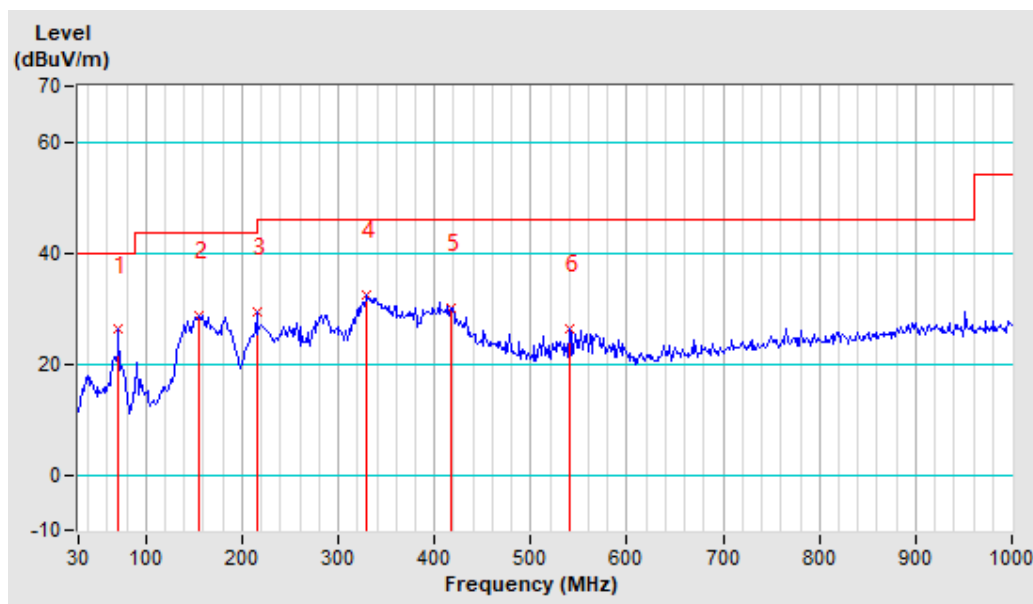




BUREAU
VERITAS

Test Report No.: RF2506WDG0296

Test Mode	C	Frequency Range	30MHz ~ 1000MHz
Test Voltage	DC 15V from adapter input AC 120V 60Hz	Detector Function	Quasi-Peak (QP)
Environmental Conditions	25deg. C, 56% RH	Tested By	Ludius
Test date	Jul. 22, 2025		


Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	39.33	-18.49	52.83	34.34	40.00	-5.66	147	75
2	71.97	-20.00	48.67	28.67	40.00	-11.33	165	56
3	95.29	-22.22	48.59	26.37	43.50	-17.13	179	43
4	348.67	-14.35	41.99	27.64	46.00	-18.36	109	112
5	365.77	-13.71	41.67	27.96	46.00	-18.04	128	94
6	539.87	-9.45	40.89	31.44	46.00	-14.56	196	26

REMARKS: 1. Peak detector quick scan is showed on the graph and final quasi-peak detector data is measured corresponding to relevant limit and recorded in the data table.
2. Negative sign (-) in the margin column signify levels below the limit.
3. Frequency range scanned: 30-1000MHz.
4. Only emissions significantly above equipment noise floor are reported.

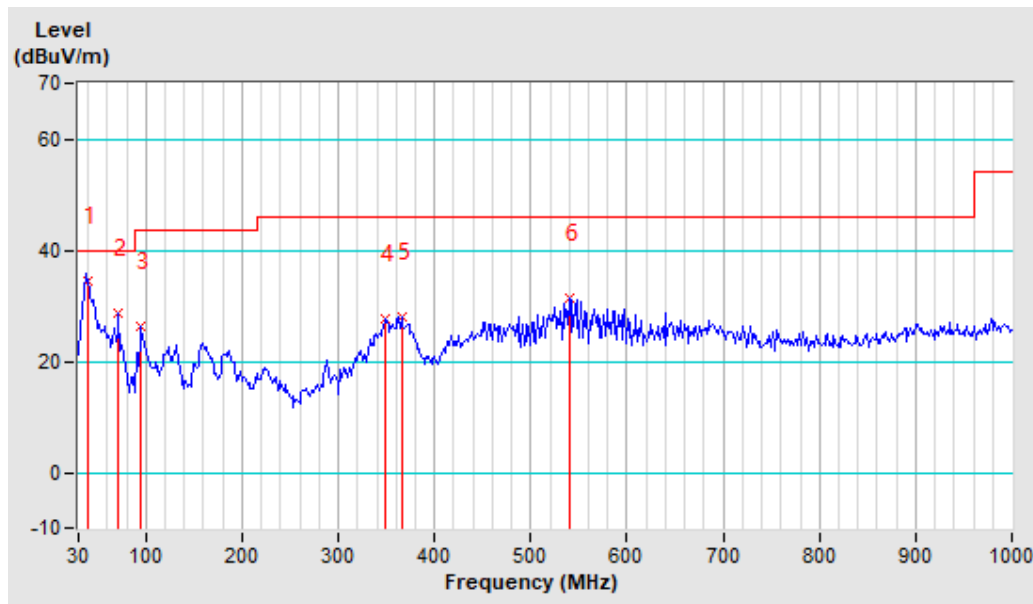


Test Mode	D	Frequency Range	9 kHz ~ 150 KHz
Test Voltage	DC 15V from adapter input AC 120V 60Hz	Detector Function	QP&AV
Environmental Conditions	25deg. C, 56% RH	Tested By	Roy
Test Date	Jul. 09, 2025		

ANTENNA POLARITY & TEST DISTANCE: LOOP ANTENNA PARALLEL AT 3m								
No	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	0.0230 AV	-10.97	50.41	39.44	120.37	-80.93	100	360
2	0.0478 AV	-11.51	42.77	31.26	114.01	-82.75	100	264
3	0.0717 AV	-11.63	41.76	30.13	110.49	-80.36	100	275
4	0.0956 QP	-11.77	40.98	29.21	107.99	-78.78	100	278
5	0.1195 AV	-11.80	39.53	27.73	106.06	-78.33	100	286
6	0.1278 AV	-11.78	80.61	68.83	105.47	-36.64	100	170
7	0.1434 AV	-11.78	39.18	27.40	104.47	-77.07	100	268

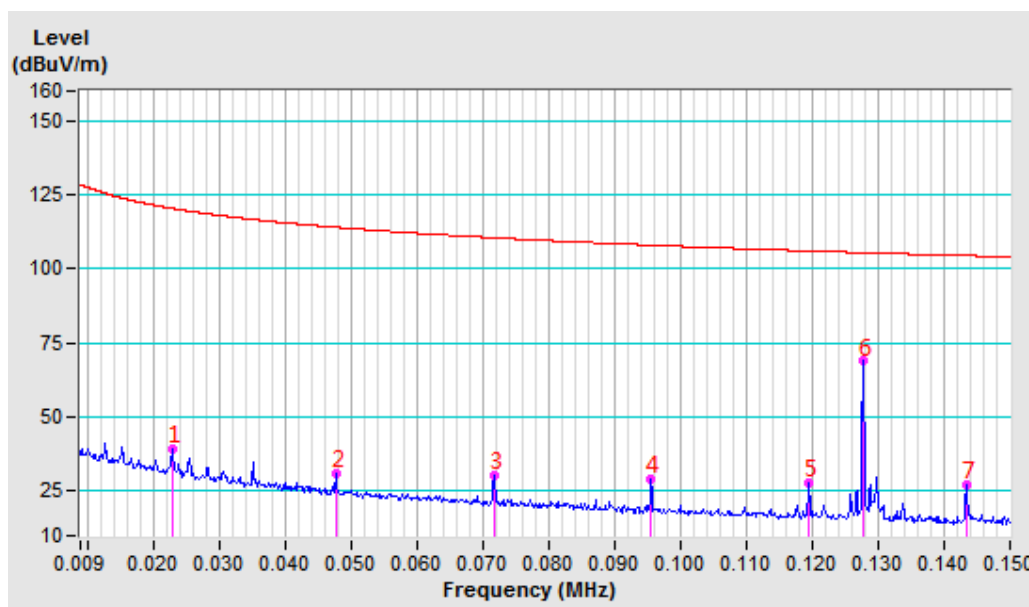


Test Mode	D	Frequency Range	9 kHz ~ 150 KHz
Test Voltage	DC 15V from adapter input AC 120V 60Hz	Detector Function	QP&AV
Environmental Conditions	25deg. C, 56% RH	Tested By	Roy
Test Date	Jul. 09, 2025		

ANTENNA POLARITY & TEST DISTANCE: LOOP ANTENNA PARALLEL AT 3m								
No	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	0.0230 AV	-10.96	51.19	40.23	120.38	-80.15	100	132
2	0.0352 AV	-11.48	47.92	36.44	116.66	-80.22	100	18
3	0.0717 AV	-11.63	42.86	31.23	110.50	-79.27	100	266
4	0.0956 QP	-11.77	42.00	30.23	107.99	-77.76	100	262
5	0.1195 AV	-11.80	40.60	28.80	106.06	-77.26	100	292
6	0.1278 AV	-11.78	82.25	70.47	105.47	-35.00	100	165
7	0.1434 AV	-11.78	39.60	27.82	104.47	-76.65	100	251

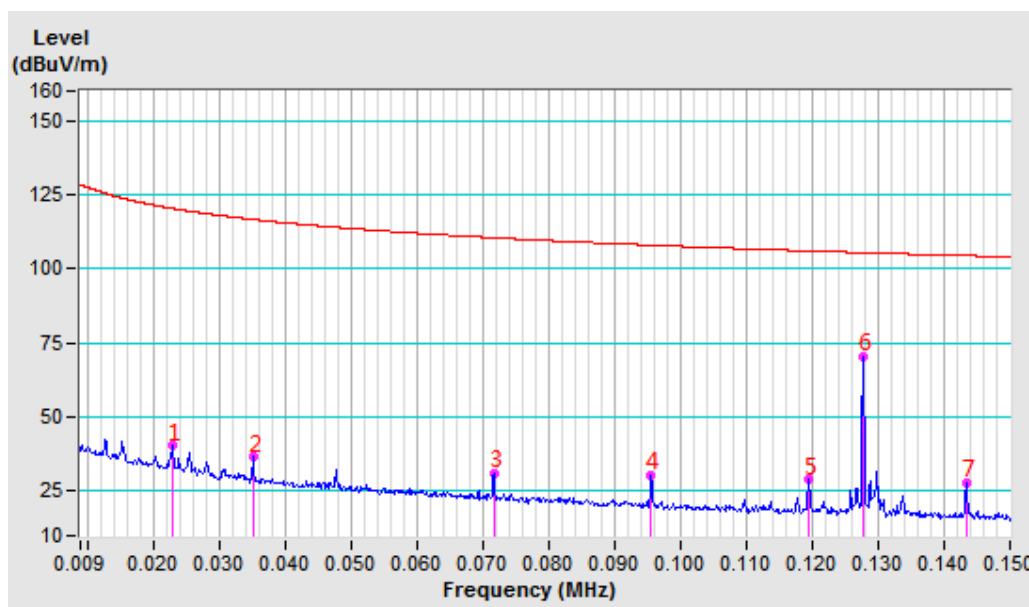

Test Mode	D	Frequency Range	150 kHz ~ 30 MHz
Test Voltage	DC 15V from adapter input AC 120V 60Hz	Detector Function	QP&AV
Environmental Conditions	25deg. C, 56% RH	Tested By	Roy
Test Date	Jul. 09, 2025		

ANTENNA POLARITY & TEST DISTANCE: LOOP ANTENNA PERPENDICULAR AT 3m								
No	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	0.2545 AV	-11.60	73.04	61.44	99.49	-38.05	100	170
2	0.3600 AV	-11.53	48.38	36.85	96.48	-59.63	100	170
3	1.7780 QP	-11.77	54.44	42.67	69.54	-26.87	100	93
4	6.5979 QP	-11.66	29.63	17.97	69.54	-51.57	100	118
5	12.4757 QP	-11.67	30.01	18.34	69.54	-51.20	100	314
6	18.5848 QP	-11.30	28.44	17.14	69.54	-52.40	100	180
7	23.8416 QP	-11.48	28.08	16.60	69.54	-52.94	100	12
8	27.6074 QP	-11.30	28.13	16.83	69.54	-52.71	100	89

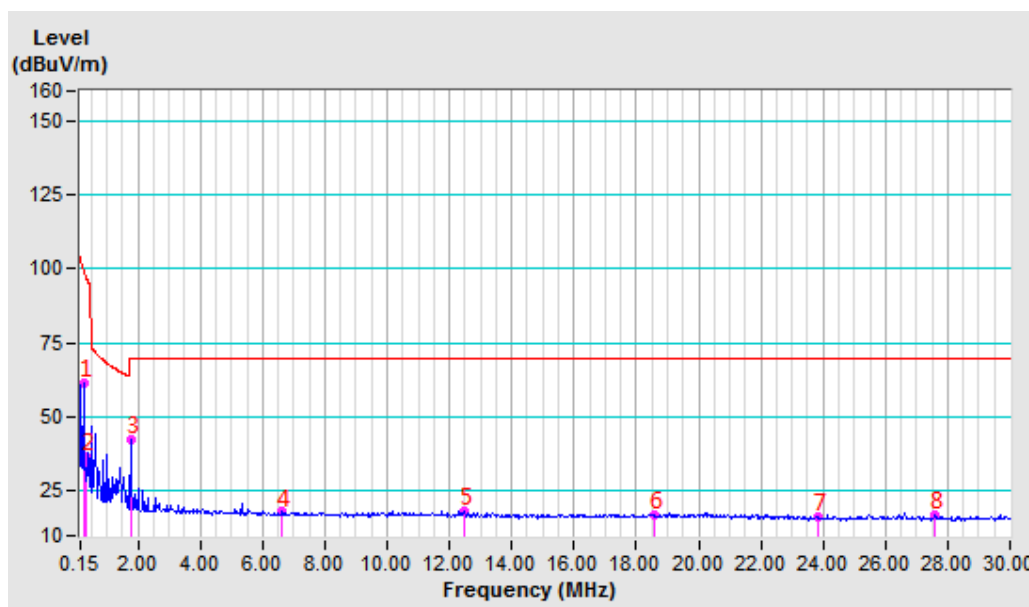




BUREAU
VERITAS

Test Report No.: RF2506WDG0296

Test Mode	D	Frequency Range	150 kHz ~ 30 MHz
Test Voltage	DC 15V from adapter input AC 120V 60Hz	Detector Function	QP&AV
Environmental Conditions	25deg. C, 56% RH	Tested By	Roy
Test Date	Jul. 09, 2025		


ANTENNA POLARITY & TEST DISTANCE: LOOP ANTENNA PERPENDICULAR AT 3m								
No	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	0.2545 AV	-11.60	73.01	61.41	99.49	-38.08	100	170
2	0.3600 AV	-11.53	49.30	37.77	96.48	-58.71	100	174
3	1.7780 QP	-11.77	54.38	42.61	69.54	-26.93	100	93
4	8.2457 QP	-11.69	29.30	17.61	69.54	-51.93	100	346
5	10.9428 QP	-11.65	29.17	17.52	69.54	-52.02	100	173
6	16.8161 QP	-11.54	28.79	17.25	69.54	-52.29	100	269
7	22.9162 QP	-11.45	28.00	16.55	69.54	-52.99	100	224
8	27.5701 QP	-11.31	27.87	16.56	69.54	-52.98	100	71

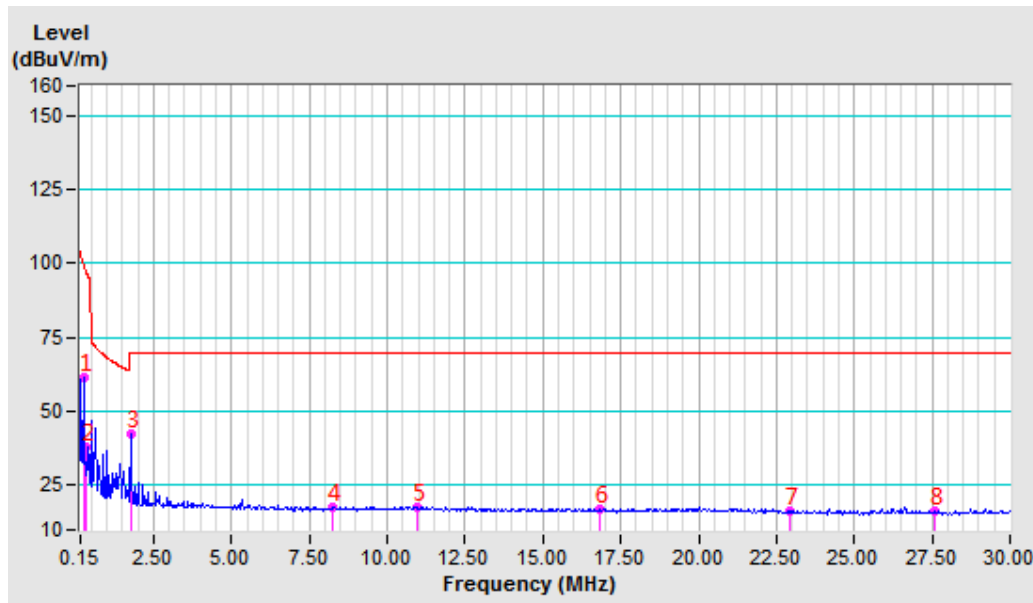

Test Mode	D	Frequency Range	30MHz ~ 1000MHz
Test Voltage	DC 15V from adapter input AC 120V 60Hz	Detector Function	Quasi-Peak (QP)
Environmental Conditions	25deg. C, 56% RH	Tested By	Ludius
Test date	Jul. 22, 2025		

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	143.48	-16.86	41.74	24.88	43.50	-18.62	122	310
2	159.02	-16.66	40.10	23.44	43.50	-20.06	136	324
3	214.98	-19.00	41.47	22.47	43.50	-21.03	108	296
4	260.06	-16.80	43.92	27.12	46.00	-18.88	101	282
5	288.04	-15.65	44.60	28.95	46.00	-17.05	100	256
6	356.44	-14.07	44.92	30.85	46.00	-15.15	100	241

REMARKS: 1. Peak detector quick scan is showed on the graph and final quasi-peak detector data is measured corresponding to relevant limit and recorded in the data table.
2. Negative sign (-) in the margin column signify levels below the limit.
3. Frequency range scanned: 30-1000MHz.
4. Only emissions significantly above equipment noise floor are reported.

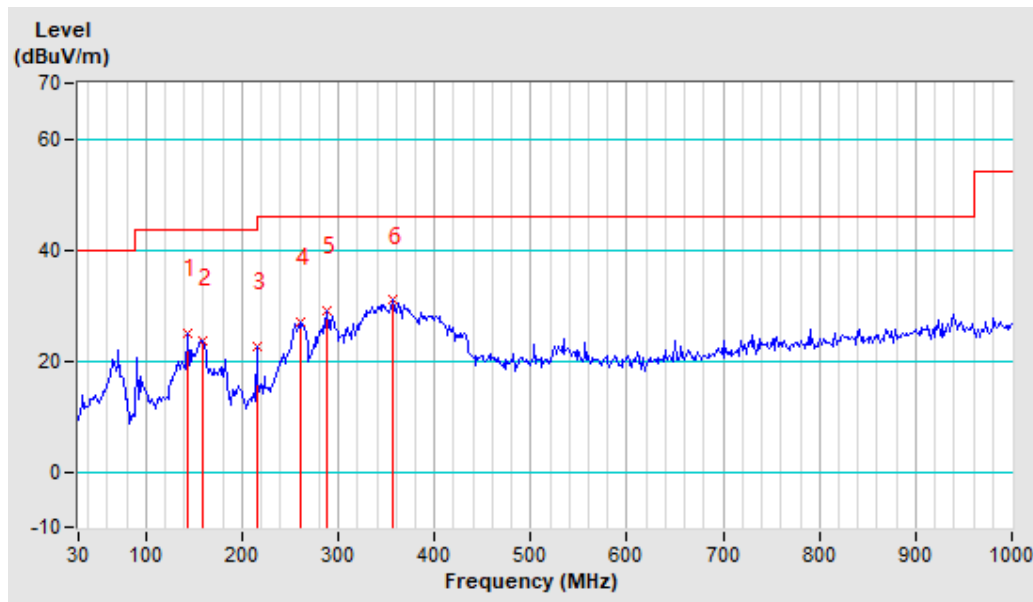




**BUREAU
VERITAS**

Test Report No.: RF2506WDG0296

Test Mode	D	Frequency Range	30MHz ~ 1000MHz
Test Voltage	DC 15V from adapter input AC 120V 60Hz	Detector Function	Quasi-Peak (QP)
Environmental Conditions	25deg. C, 56% RH	Tested By	Ludius
Test date	Jul. 22, 2025		

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	37.77	-18.63	49.91	31.28	40.00	-8.72	138	73
2	71.97	-20.00	49.16	29.16	40.00	-10.84	153	59
3	155.91	-16.58	40.88	24.30	43.50	-19.20	167	45
4	214.98	-19.00	42.69	23.69	43.50	-19.81	124	87
5	288.04	-15.65	40.15	24.50	46.00	-21.50	111	100
6	371.99	-13.48	42.95	29.47	46.00	-16.53	200	12

REMARKS: 1. Peak detector quick scan is showed on the graph and final quasi-peak detector data is measured corresponding to relevant limit and recorded in the data table.
2. Negative sign (-) in the margin column signify levels below the limit.
3. Frequency range scanned: 30-1000MHz.
4. Only emissions significantly above equipment noise floor are reported.

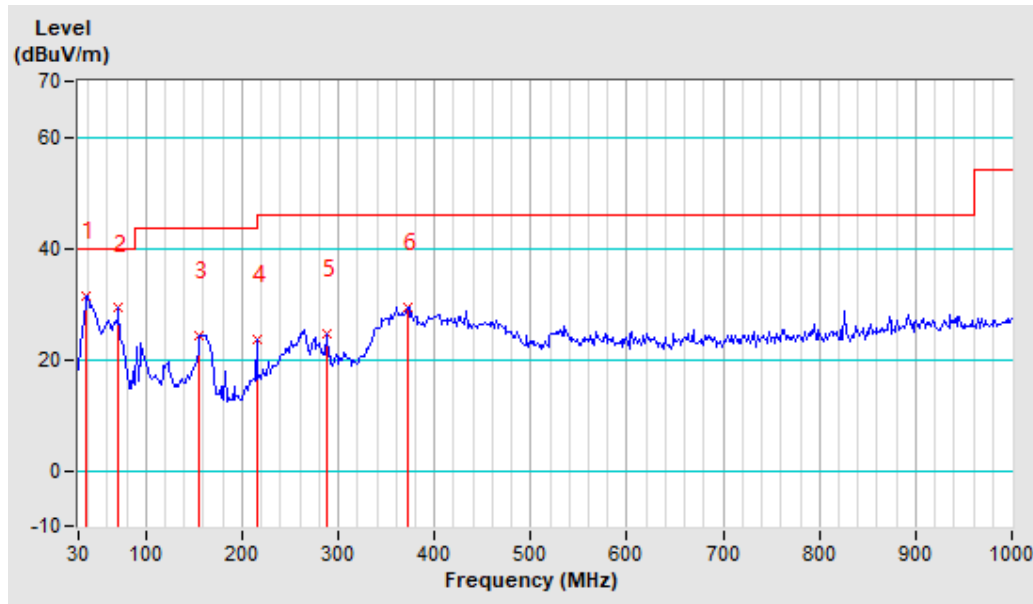

4.3 20dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 20dB BANDWIDTH MEASUREMENT

The field strength of any emissions appearing between the band edges and out of band shall be attenuated at least 20 dB below the level of the unmodulated carrier or to the general limits in Section 15.209.

4.3.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
Power Sensor	Keysight	U2021XA	MY57320002	Apr. 07, 26
Digital Multimeter	FLUKE	15B	A1220010DG	N/A
Humid & Temp Programmable Tester	Haida	HD-225T	110807201	Oct. 10, 25
Oscilloscope	Agilent	DSO9254A	MY51260160	Jul. 06, 26
Signal and Spectrum Analyzer	Rohde&Schwarz	FSV40	101094	Oct. 09, 25
Signal Generator	Agilent	N5183A	MY50140980	Jul. 06, 26
MXG-B RF Vector Signal Generator	Keysight	N5182B	MY56200288	Jul. 06, 26
BLUETOOTH TESTER	Rohde&Schwarz	CBT32	100811	N/A
Attenuator	MINI	BW-S10W2+	S130129FGE2	N/A
DC Source	Keysight	E3642A	MY56146098	N/A
Test software	ADT	ADT_RF Test Software V6.6.5.3	N/A	N/A

NOTES: 1. Equipment are calibrated by calibration laboratory accredited to ISO/IEC 17025 by a mutually recognized Accreditation and all tests are conducted within a valid calibration cycle.
2. The test was performed in RF Oven room.


4.3.3 TEST PROCEDURE

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- Repeat above procedures until all frequencies measured were complete.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation.

4.3.5 TEST SETUP

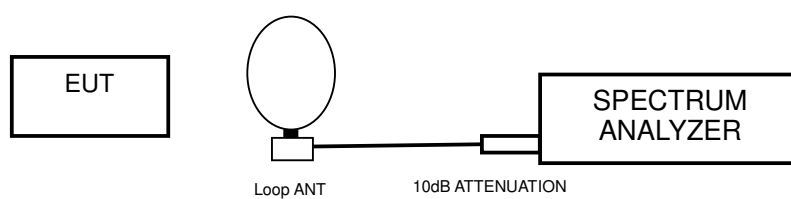

4.3.6 EUT OPERATING CONDITION


- a. Turn on the EUT.
- b. The EUT tested in charging mode and standby mode respectively.



4.3.7 TEST RESULTS


Test Mode	Frequency (kHz)	20dB Bandwidth (Hz)
A	127.8 (25W Coil)	738.1

Test Plot:

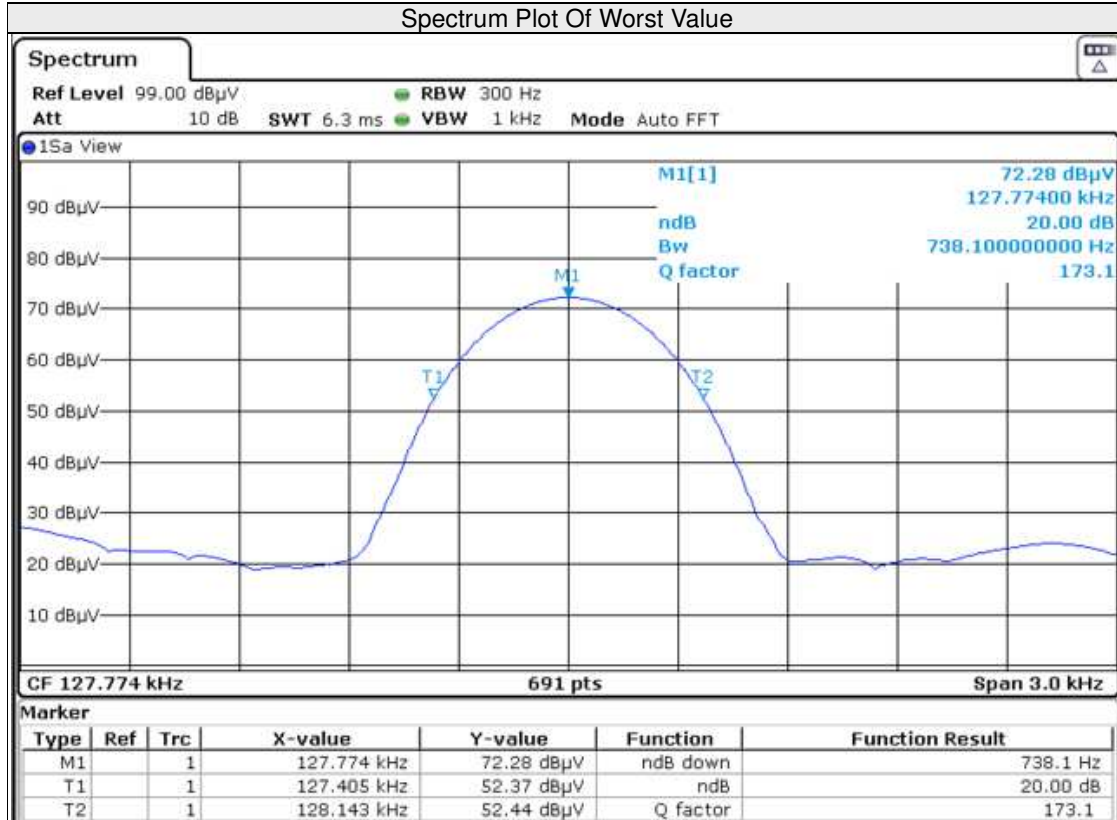


Test Mode	Frequency (kHz)	20dB Bandwidth (Hz)
A	130 (5W Coil)	746.7

Test Plot:

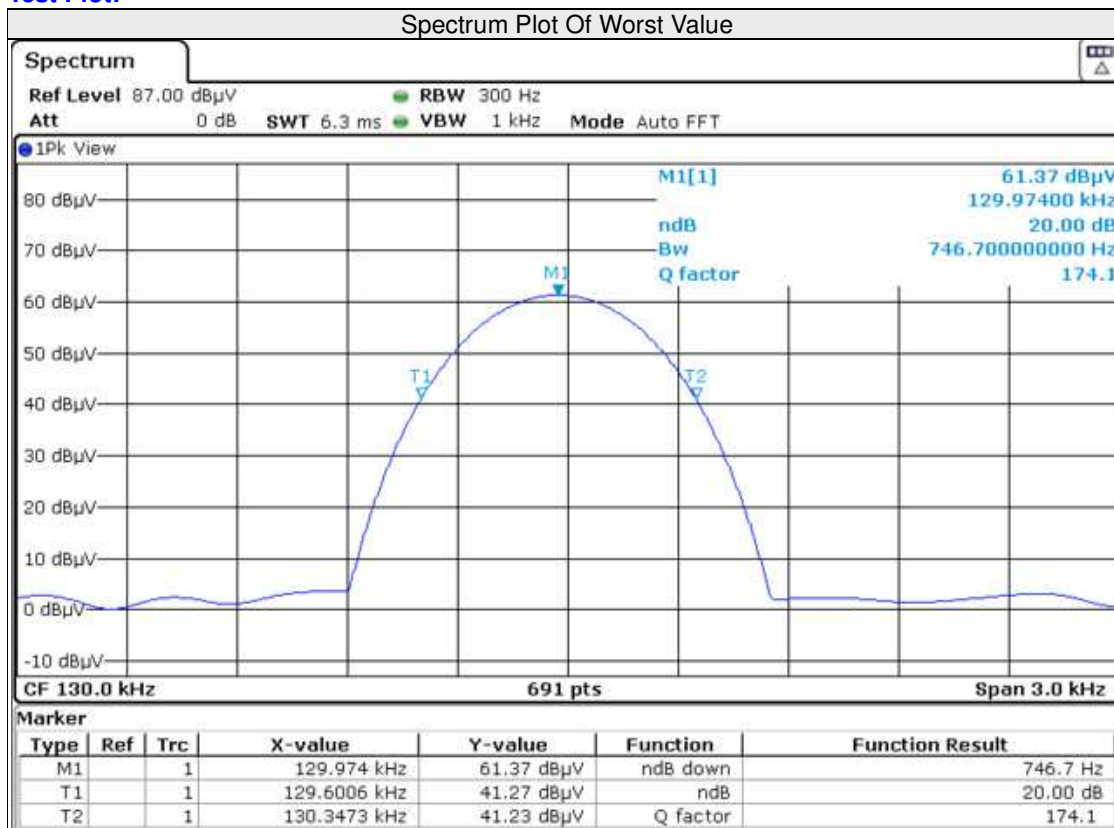


Test Mode	Frequency (kHz)	20dB Bandwidth (Hz)
A	326.5 (Watch Coil)	742.4

Test Plot:

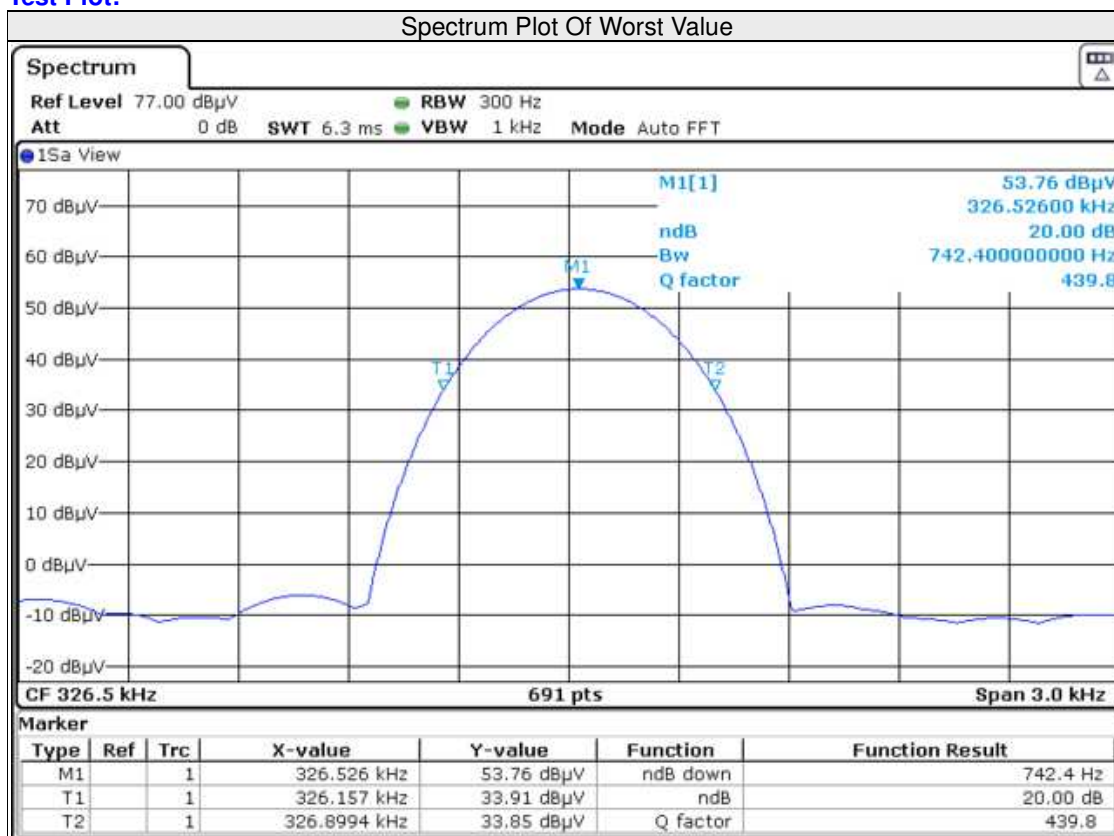


Test Mode	Frequency (kHz)	20dB Bandwidth (Hz)
B	360 (25W Coil)	744.4

Test Plot:

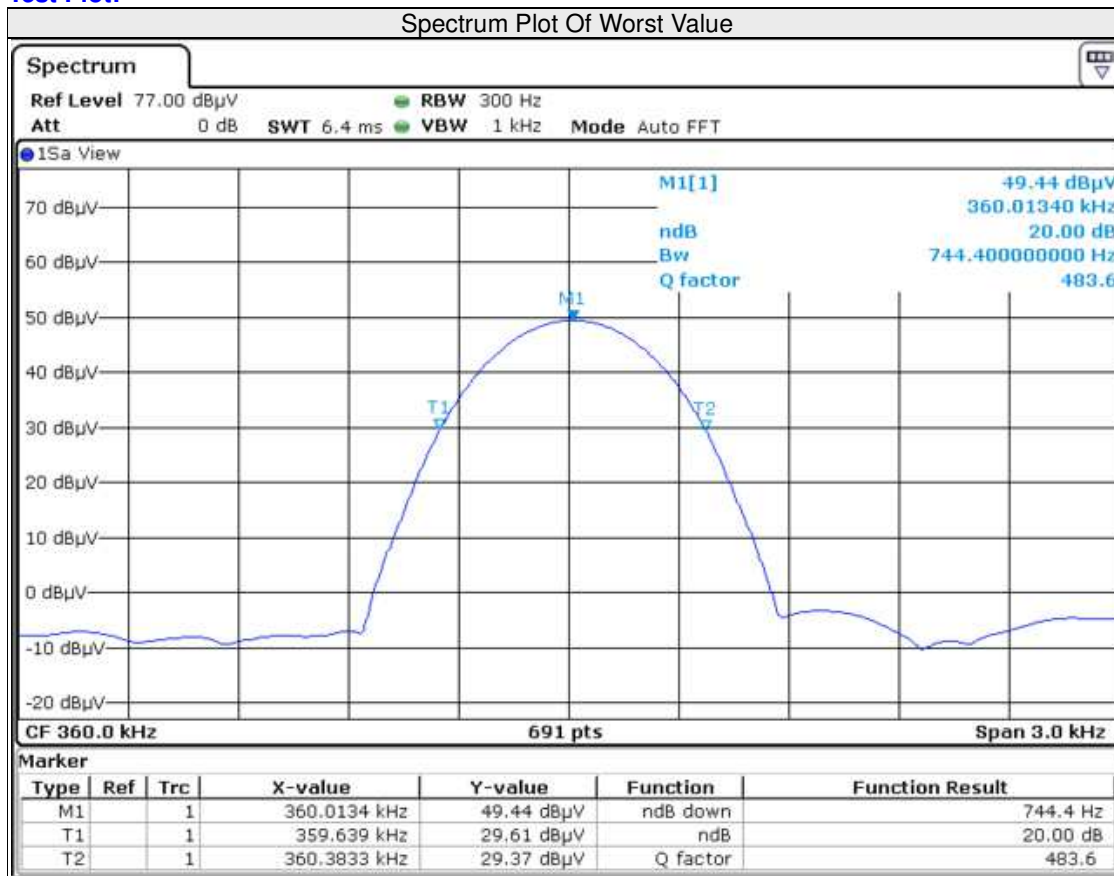


Test Mode	Frequency (kHz)	20dB Bandwidth (Hz)
B	130 (5W Coil)	766.7

Test Plot:

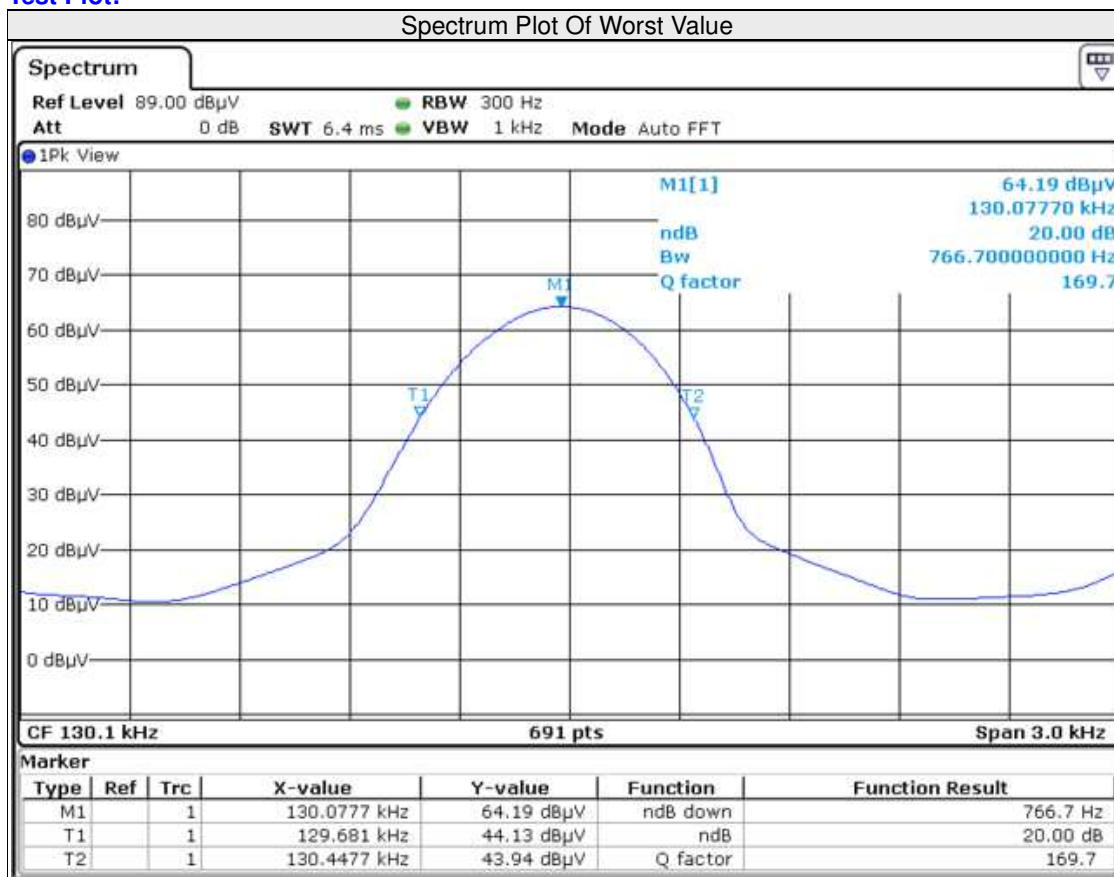


Test Mode	Frequency (kHz)	20dB Bandwidth (Hz)
B	326.5 (Watch Coil)	739.9

Test Plot:

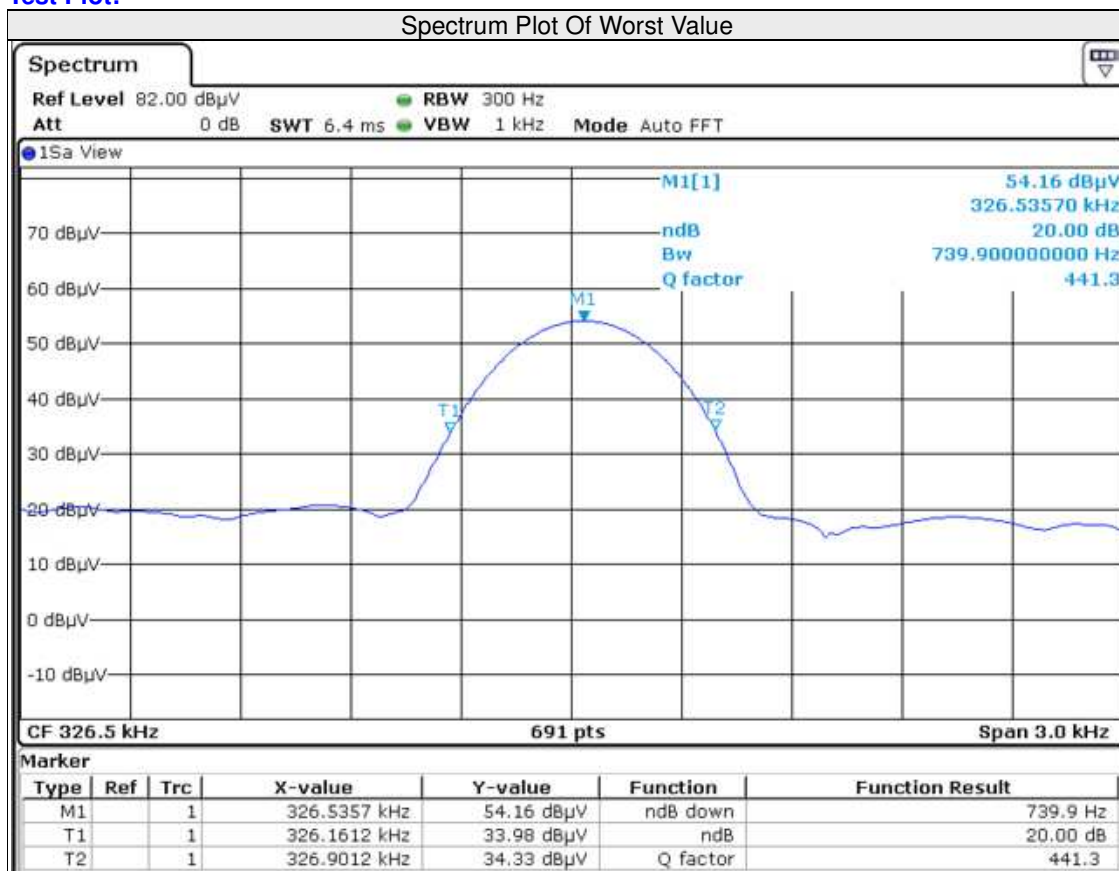


Test Mode	Frequency (kHz)	20dB Bandwidth (Hz)
C	360 (25W Coil)	744.4

Test Plot:

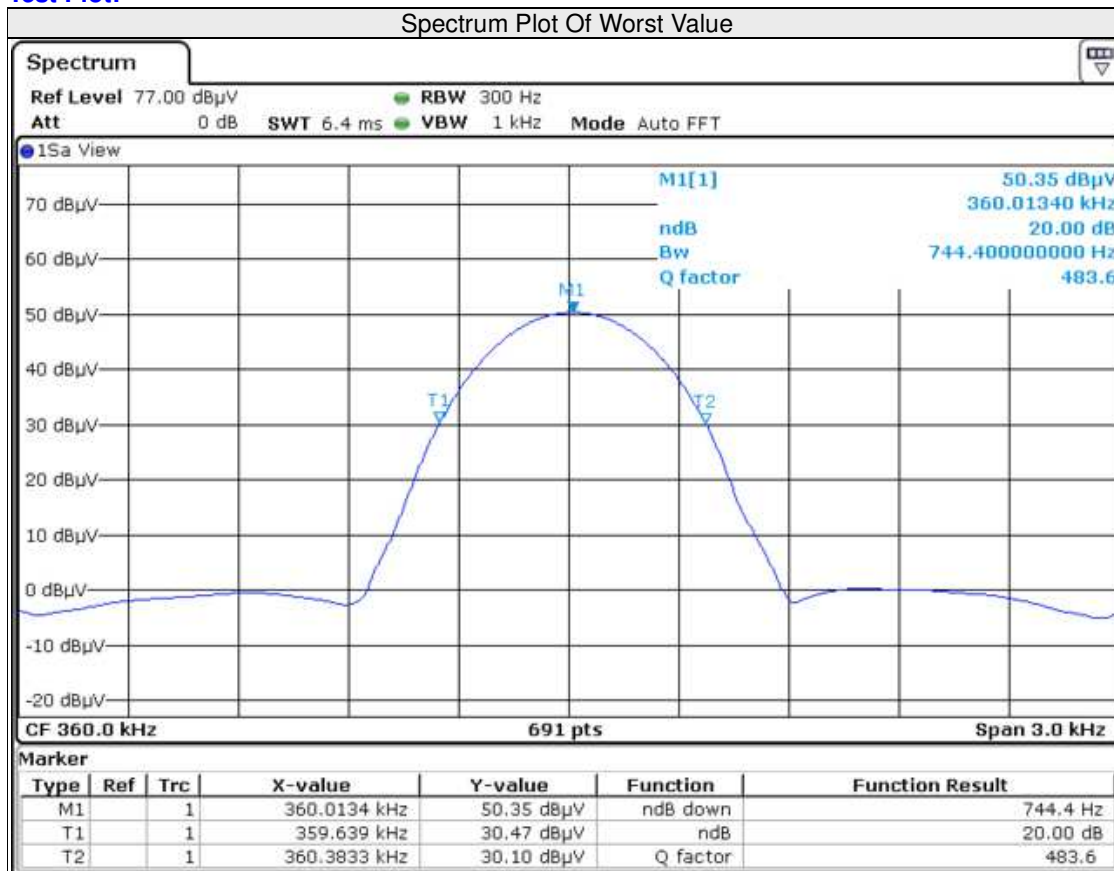


Test Mode	Frequency (kHz)	20dB Bandwidth (Hz)
C	133.7 (5W Coil)	739.9

Test Plot:

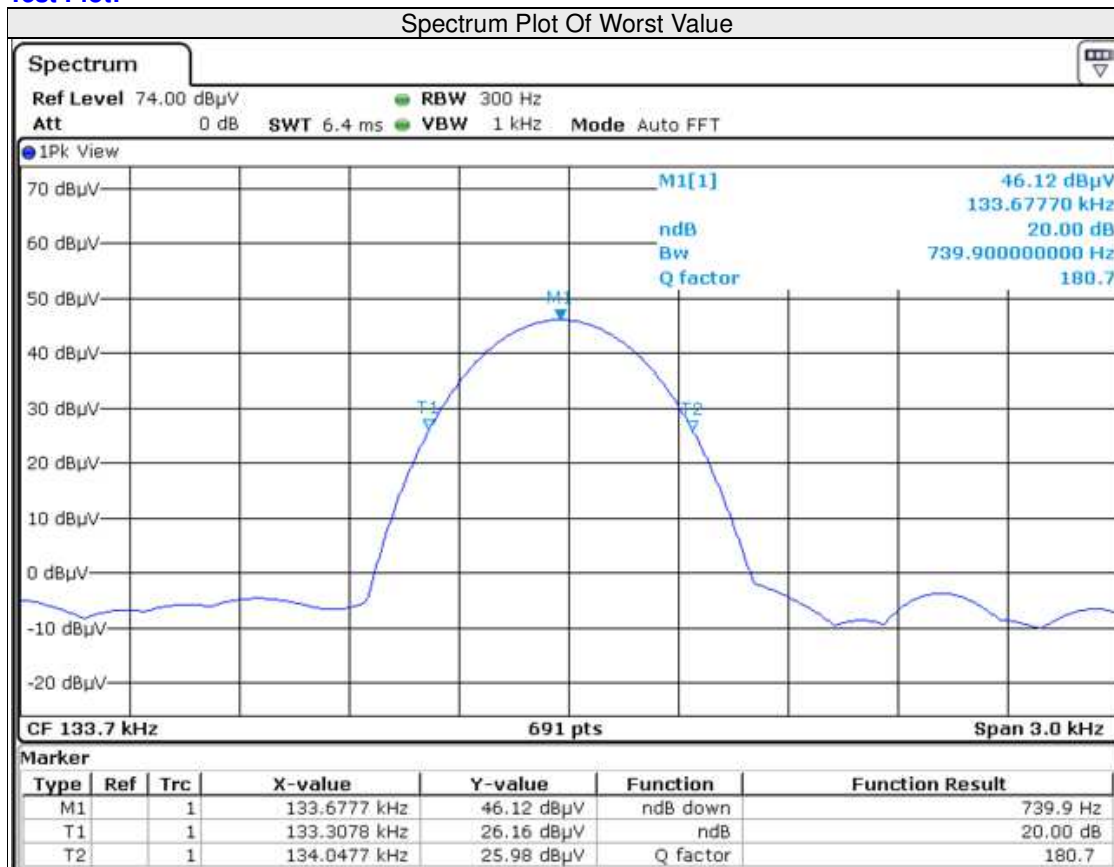


Test Mode	Frequency (kHz)	20dB Bandwidth (Hz)
C	1778 (Watch Coil)	746.7

Test Plot:

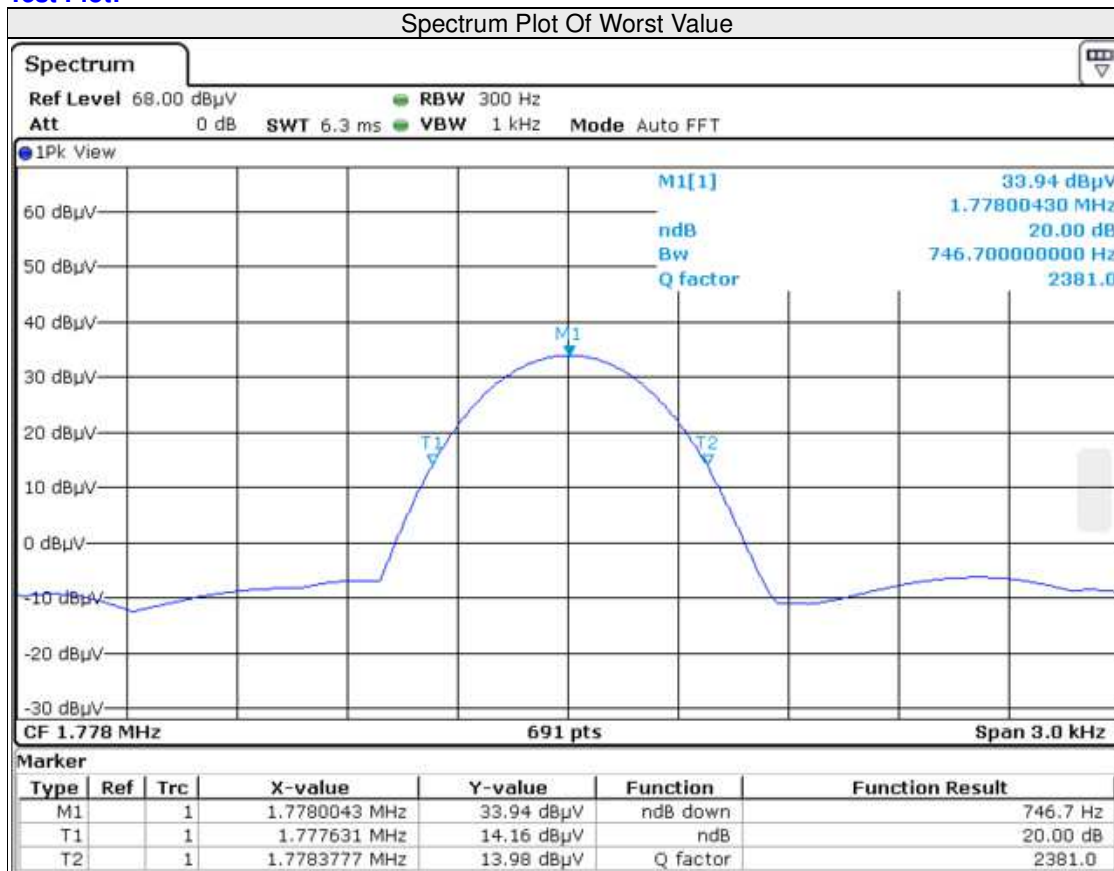


Test Mode	Frequency (kHz)	20dB Bandwidth (Hz)
D	127.8 (25W Coil)	739.9

Test Plot:

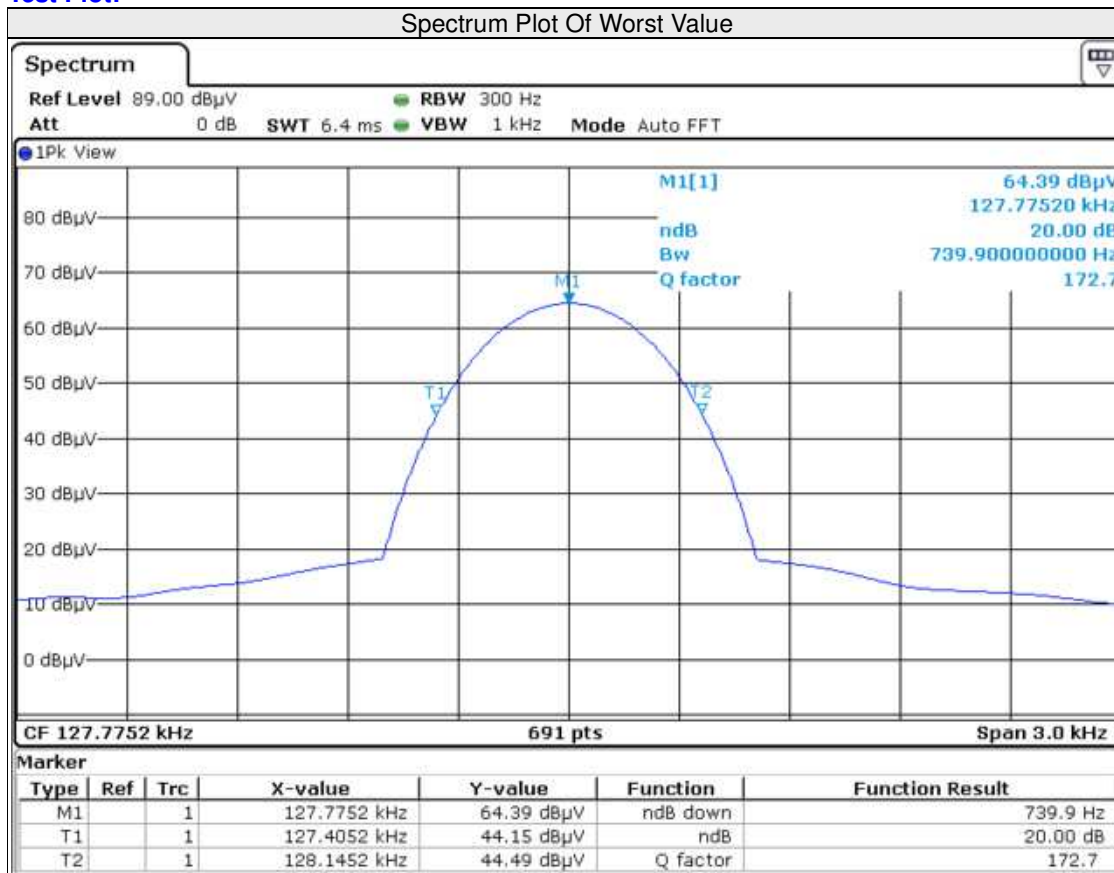


Test Mode	Frequency (kHz)	20dB Bandwidth (Hz)
D	143.4 (5W Coil)	735.5

Test Plot:

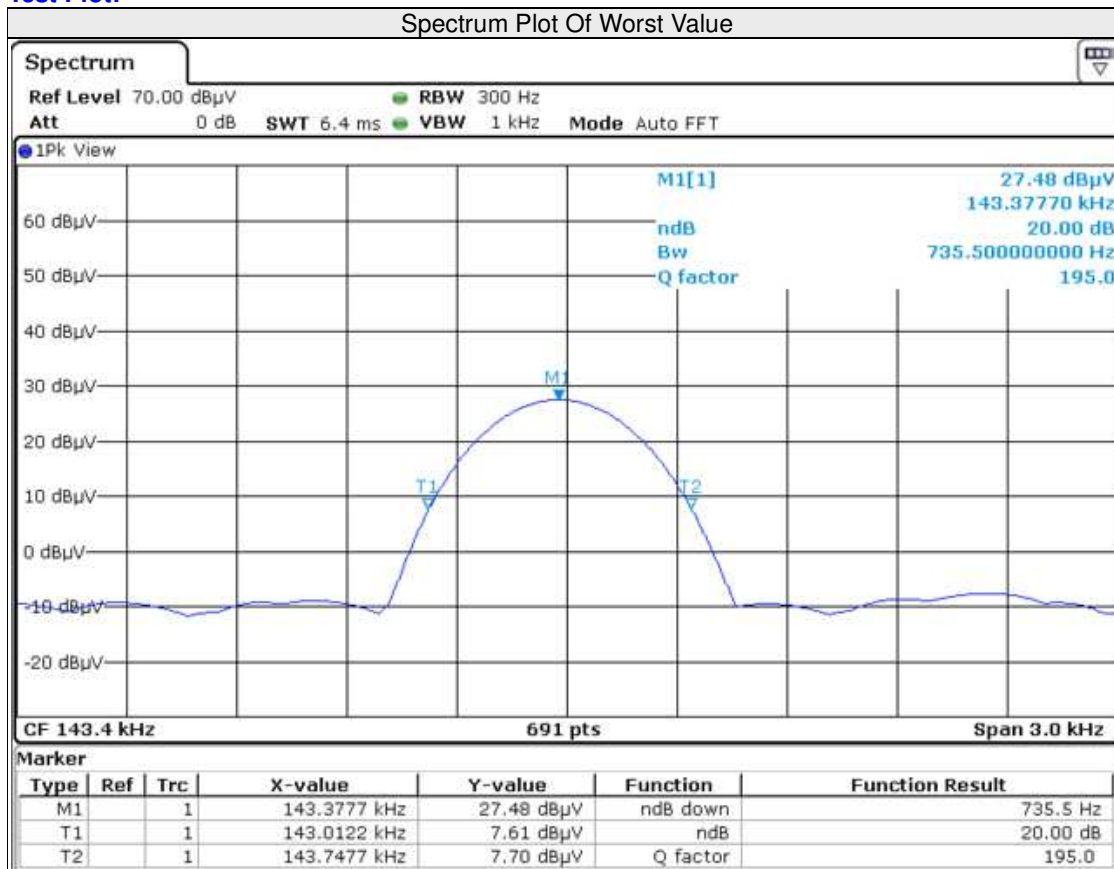

Test Mode	Frequency (kHz)	20dB Bandwidth (Hz)
D	1778 (Watch Coil)	746.7

Test Plot:

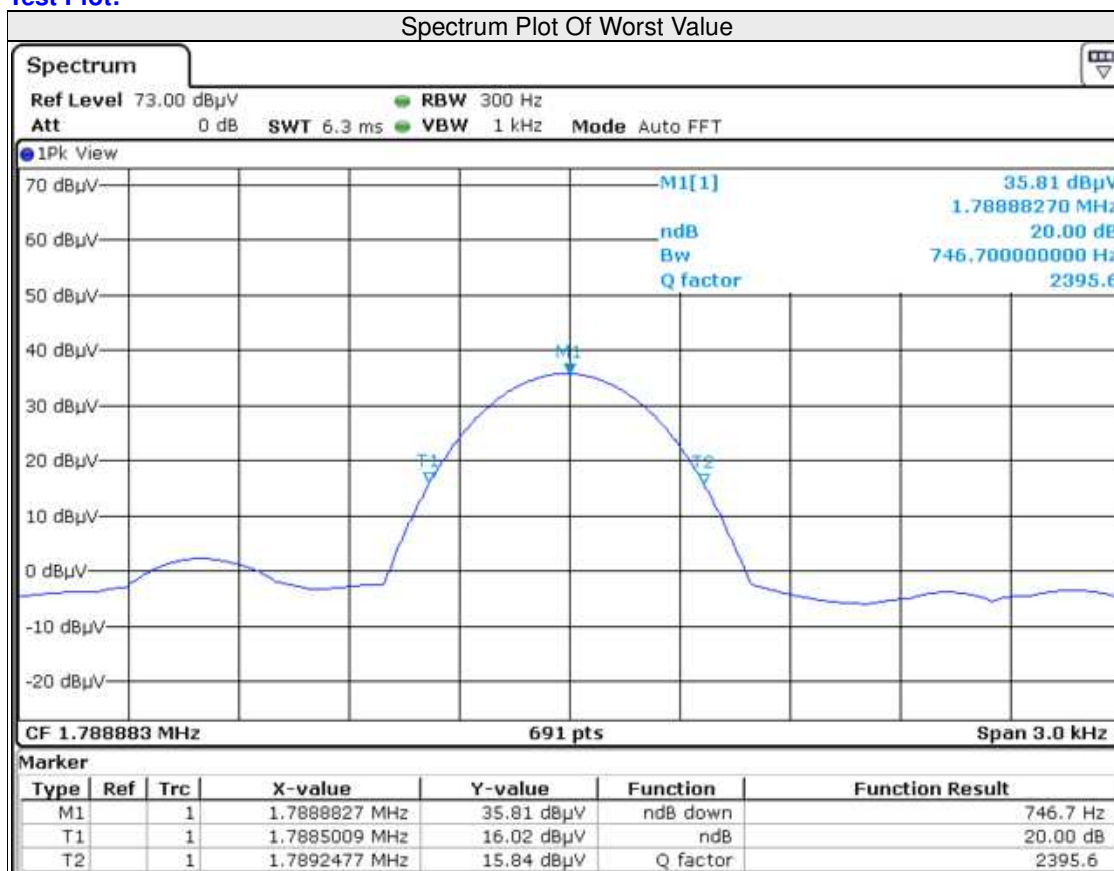



Test Report No.: RF2506WDG0296

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



Test Report No.: RF2506WDG0296

6 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications were made to the EUT by the lab during the test.

---END---