MET Laboratories, Inc. ***Safety Certification - EMI - Telecom Environmental Simulation***
914 WEST PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230-3432 • PHONE (410) 354-3300 • FAX (410) 354-3313
33439 WESTERN AVENUE • UNION CITY, CALIFORNIA 94587 • PHONE (510) 489-6300 • FAX (510) 489-6372
3162 BELICK STREET • SANTA CLARA, CA 95054 • PHONE (408) 748-3585 • FAX (510) 489-6372
13501 MCCALLEN PASS • AUSTIN, TEXAS 78753 • PHONE (512) 287-2500 • FAX (512) 287-2513

November 27, 2018

NoiseAware
2800 Routh Street STE. 215
Dallas, TX 75201

Dear Jake Umbrage,

Enclosed is the EMC Wireless test report for compliance testing of the NoiseAware, Gen 3 Collector as tested to the requirements of Title 47 of the CFR, Ch. 1 (10-1-06 ed.), Part 15 Subpart C for Intentional Radiators.

Thank you for using the services of MET Laboratories, Inc. If you have any questions regarding these results or if MET can be of further service to you, please feel free to contact me.

Sincerely yours,
MET LABORATORIES, INC.

Joel Huna
Documentation Department

Reference: (\NoiseAware\EMCA100836-FCC247 WLAN Rev. 3)

Electromagnetic Compatibility Criteria
Test Report

for the

NoiseAware
Gen 3 Collector

Tested under
the FCC Certification Rules
contained in
15.247 Subpart C for Intentional Radiators

MET Report: EMCA100836-FCC247 WLAN Rev. 3

November 27, 2018

Prepared For:

NoiseAware
2800 Routh Street STE. 215
Dallas, TX 75201

Prepared By:
MET Laboratories, Inc.
13501 McCallen Pass
Austin, TX 78753

Electromagnetic Compatibility Criteria
Test Report

for the

NoiseAware
Gen 3 Collector

Tested under
the FCC Certification Rules
contained in
15.247 Subpart C for Intentional Radiators

Giuliano Messina, Project Engineer
Electromagnetic Compatibility Lab

Joel Huna
Documentation Department

Engineering Statement: The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules Part 15.247 under normal use and maintenance.

John Mason,
Director, Electromagnetic Compatibility Lab

Report Status Sheet

Revision	Report Date	Reason for Revision
∅	November 15, 2018	Initial Issue.
1	November 27, 2018	Customer Comments.
2	January 26, 2019	TCB Corrections
3	January 30, 2019	TCB Corrections

Table of Contents

List of Tables

List of Plots

List of Figures

List of Terms and Abbreviations

AC	**A**lternating **C**urrent
ACF	**A**ntenna **C**orrection **F**actor
Cal	**Cal**ibration
d	**M**easurement **D**istance
dB	**D**eci**b**els
dBµA	**D**eci**b**els above one **micro**amp
dBµV	**D**eci**b**els above one **micro**volt
dBµA/m	**D**eci**b**els above one **micro**amp **per m**eter
dBµV/m	**D**eci**b**els above one **micro**volt **per m**eter
DC	**D**irect **C**urrent
E	**E**lectric Field
DSL	**D**igital **S**ubscriber **L**ine
ESD	**E**lectro**s**tatic **D**ischarge
EUT	**E**quipment **U**nder **T**est
f	**F**requency
FCC	**F**ederal **C**ommunications **C**ommission
GRP	**G**round **R**eference **P**lane
H	Magnetic Field
HCP	**H**orizontal **C**oupling **P**lane
Hz	**H**ert**z**
IEC	**I**nternational **E**lectrotechnical **C**ommission
kHz	**k**ilo**h**ert**z**
kPa	**k**ilo**pa**scal
kV	**k**ilo**v**olt
LISN	**L**ine **I**mpedance **S**tabilization **N**etwork
MHz	**M**ega**h**ertz
µH	**microh**enry
µ	**microf**arad
µs	**micros**econds
NEBS	**N**etwork **E**quipment-**B**uilding **S**ystem
PRF	**P**ulse **R**epetition **F**requency
RF	**R**adio **F**requency
RMS	**R**oot-**M**ean-**S**quare
TWT	**T**raveling **W**ave **T**ube
V/m	**V**olts **per m**eter
VCP	**V**ertical **C**oupling **P**lane

-

I. Executive Summary

A. Purpose of Test

An EMC evaluation was performed to determine compliance of the NoiseAware Gen 3 Collector, with the requirements of Part 15, §15.247. All references are to the most current version of Title 47 of the Code of Federal Regulations in effect. In accordance with §2.1033, the following data is presented in support of the Certification of the Gen 3 Collector. NoiseAware should retain a copy of this document which should be kept on file for at least two years after the manufacturing of the Gen 3 Collector, has been **permanently** discontinued.

B. Executive Summary

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, §15.247, in accordance with NoiseAware, purchase order number 180910-1. All tests were conducted using measurement procedure ANSI C63.10-2013.

FCC Reference 47 CFR Part 15.247:2005	Description	Compliance
Title 47 of the CFR, Part 15 §15.203	Antenna Requirement	Compliant
Title 47 of the CFR, Part 15 §15.207(a)	Conducted Emission Limits	Compliant
Title 47 of the CFR, Part 15 §15.247(a)(2)	6dB Occupied Bandwidth	Compliant
Title 47 of the CFR, Part 15 §15.247(b)	Maximum Power Output	Compliant
Title 47 of the CFR, Part 15 §15.247(c)	Spurious Emissions in Non-restricted Bands	Compliant
Title 47 of the CFR, Part 15 §15.247(d); §15.209; §15.205	Radiated Spurious Emissions Requirements	Compliant
Title 47 of the CFR, Part 15; §15.247(e)	Peak Power Spectral Density	Compliant
Title 47 of the CFR, Part 15 §15.247(i)	Maximum Permissible Exposure (MPE)	Compliant

Table 1. Executive Summary of EMC Part 15.247 Compliance Testing

II. Equipment Configuration

A. Overview

MET Laboratories, Inc. was contracted by NoiseAware to perform testing on the Gen 3 Collector, under NoiseAware's purchase order number 180910-1.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the NoiseAware, Gen 3 Collector.

The results obtained relate only to the item(s) tested.

Model(s) Tested:	Gen 3 Collector	
Model(s) Covered:	Gen 3 Collector	
EUT Specifications:	Primary Power: 120 VAC 50 Hz	
	FCC ID: 2AQIP-NA3N101	
	Type of Modulations:	OFDM, QPSK
	Equipment Code:	DTS
	Peak RF Output Power:	5.45 dBm
	EUT Frequency Ranges:	2412-2462 MHz
Analysis:	The results obtained relate only to the item(s) tested.	
Environmental Test Conditions:	Temperature: 15-35º C	
	Relative Humidity: 30-60%	
	Barometric Pressure: 860-1060 mbar	
Evaluated by:	Giuliano Messina	
Report Date(s):	November 27, 2018	

Table 2. EUT Summary Table

B. References

CFR 47, Part 15, Subpart C	Federal Communication Commission, Code of Federal Regulations, Title 47, Part 15: General Rules and Regulations, Allocation, Assignment, and Use of Radio Frequencies
ANSI C63.4:2014	Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical And Electronic Equipment in the Range of 9 kHz to 40 GHz
ISO/IEC 17025:2005	General Requirements for the Competence of Testing and Calibration Laboratories
ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
KDB 558074 v04	Guidance For Performing Compliance Measurements On Digital Transmission Systems (DTS) Operating Under Section 15.247

Table 3. References

C. Test Site

All testing was performed at MET Laboratories, Inc., 13501 McCallen Pass, Austin, TX 78753. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

Radiated Emissions measurements were performed in a10 meter semi-anechoic chamber (equivalent to an Open Area Test Site). In accordance with §2.948(a)(3), a complete site description is contained at MET Laboratories.

D. Measurement Uncertainty

Test Method	Typical Expanded Uncertainty	K	Confidence Level
RF Frequencies	±4.52 Hz	2	95%
RF Power Conducted Emissions	±2.97 dB	2	95%
RF Power Radiated Emissions, < 1GHz	±2.95 dB	2	95%
RF Power Radiated Emissions > 1GHz	±3.54 dB	2	95%

Table 4. Uncertainty Calculations Summary

E. Description of Test Sample

The NoiseAware Gen 3 Collector, Equipment Under Test (EUT), is a WiFi-enabled noise monitoring device that mounts to most common US power outlets with an included screw. The device monitors volume levels and also acts as a gateway for the Outdoor Noise Sensor (Gen 3 Node), receiving data over Sub-1 GHz and relaying it over WiFi. It is intended to be used by professional property managers in indoor areas of short-term rental residences.

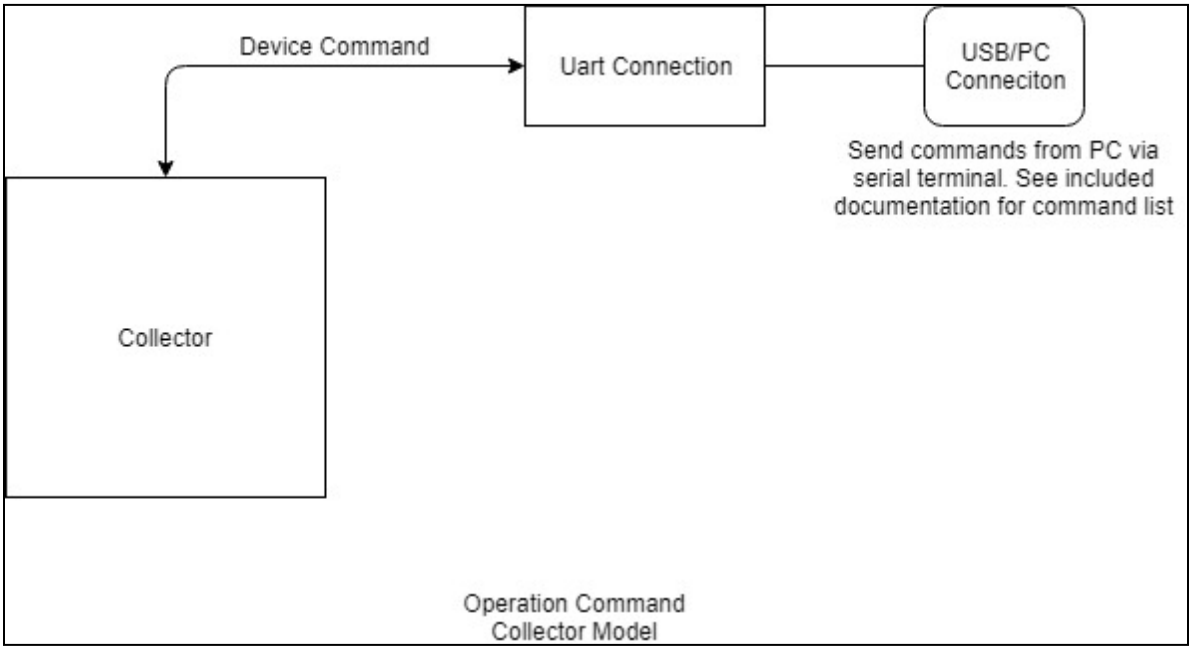

Figure 1. Block Diagram of Test Configuration

F. Equipment Configuration

The EUT was set up as outlined in Figure 1, Block Diagram of Test Setup. All cards, racks, etc., incorporated as part of the EUT is included in the following list.

Ref. ID	Slot #	Name / Description	Model Number	Part Number	Serial Number	Revision
N/A	N/A	Gen 3 Collector "UART" (x2)	NA3N101	N/A	N/A	N/A

Table 5. Equipment Configuration

G. Support Equipment

Support equipment necessary for the operation and testing of the EUT is included in the following list.

Ref. ID	Name / Description	Manufacturer	Model Number	*Customer Supplied Calibration Data
N/A	Laptop	Asus	TP200S	N/A
The 'Customer Supplied Calibration Data' column will be marked as either not applicable, not available, or will contain the calibration date supplied by the customer.				

Table 6. Support Equipment

H. Mode of Operation

The EUT was set to transmit at the required frequency. Channel, power, and mode were controllable via UART connection to a laptop.

I. Method of Monitoring EUT Operation

The EUT transmitting frequency was monitored via EMI receiver. While the device is powered, the LED indicator at the rear of the device indicates two modes of operation: 1) During normal operation the LED is off. 2) During setup mode the LED will blink periodically to indicate it is broadcasting a discoverable AP.

J. Modifications

a) Modifications to EUT

No modifications were made to the EUT.

b) Modifications to Test Standard

No modifications were made to the test standard.

K. Disposition of EUT

The test sample including all support equipment submitted to the Electro-Magnetic Compatibility Lab for testing was returned to NoiseAware upon completion of testing.

III. Electromagnetic Compatibility Criteria for Intentional Radiators

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.203 Antenna Requirement

Test Requirement: **§ 15.203:** An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

The structure and application of the EUT were analyzed to determine compliance with Section 15.203 of the Rules. Section 15.203 states that the subject device must meet at least one of the following criteria:

a.) Antenna must be permanently attached to the unit.

b.) Antenna must use a unique type of connector to attach to the EUT.

c.) Unit must be professionally installed. Installer shall be responsible for verifying that the correct antenna is employed with the unit.

Results: The EUT as tested is compliant the criteria of §15.203. The EUT utilizes an integrated antenna.

Test Engineer(s): Giuliano Messina

Test Date(s): September 21, 2018

Antenna Type	Antenna Gain
Trace	3 dBi

Table 7. Antenna List

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.207(a) Conducted Emissions Limits

Test Requirement(s): **§ 15.207 (a):** For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30MHz, shall not exceed the limits in the following table, as measured using a 50 μH/50 Ω line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency range (MHz)	§ 15.207(a), Conducted Limit (dBμV)	
	Quasi-Peak	Average
* 0.15- 0.5	66 - 56	56 - 46
0.5 - 5	56	46
5 - 30	60	50

Table 8. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a)

Test Procedure: The EUT was placed on a 0.8 m-high wooden table inside a screen room. The EUT was situated such that the back of the EUT was 0.4 m from one wall of the vertical ground plane, and the remaining sides of the EUT were no closer than 0.8 m from any other conductive surface. The EUT was powered from a 50 Ω/50 μH Line Impedance Stabilization Network (LISN). The EMC receiver scanned the frequency range from 150 kHz to 30 MHz. Conducted Emissions measurements were made in accordance with *ANSI C63.4-2014 "Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40 GHz"*. The measurements were performed over the frequency range of 0.15 MHz to 30 MHz using a 50 Ω/50 μH LISN as the input transducer to an EMI receiver. For the purpose of this testing, scans were performed with the transmitter on.

Test Results: The EUT was compliant with this requirement. Measured emissions were within applicable limits.

Test Engineer(s): Giuliano Messina

Test Date(s): September 27, 2018

Meas. Location	Meas. m	Limit	Pass/Fail
Bonding measurement from LISN ground to ground plane	1.13	< 2.5 mΩ	Pass

Table 9. Conducted Emissions, 802.11 b and g, Bonding Measurements

Meas. Location	Meas. m	Limit	Pass/Fail
Bonding measurement from LISN ground to ground plane	1.11	< 2.5 mΩ	Pass

Table 10. Conducted Emissions, 802.11n 20 and n 40, Bonding Measurements

15.207(a) Conducted Emissions Test Results

Line	Freq (MHz)	QP Amplitude	QP Limit	Delta	Pass	Average Amplitude	Average Limit	Delta	Pass
ACLine - 802.11b - 2412	0.150	65	66	-1	Pass	51.2	56	-4.8	Pass
ACLine - 802.11b - 2412	0.178	58.9	64.582	-5.682	Pass	41.4	54.582	-13.182	Pass
ACLine - 802.11b - 2412	0.190	56.9	64.042	-7.142	Pass	39.9	54.042	-14.142	Pass
ACLine - 802.11b - 2412	0.210	54.7	63.213	-8.513	Pass	39.6	53.213	-13.613	Pass
ACLine - 802.11b - 2412	2.206	37	56	-19	Pass	26.8	46	-19.2	Pass
ACLine - 802.11b - 2412	22.110	47.8	60	-12.2	Pass	38.2	50	-11.8	Pass
ACNeutral - 802.11b - 2412	0.174	56.3	64.771	-8.471	Pass	40.1	54.771	-14.671	Pass
ACNeutral - 802.11b - 2412	0.210	52.8	63.213	-10.413	Pass	38	53.213	-15.213	Pass
ACNeutral - 802.11b - 2412	0.242	49.9	62.038	-12.138	Pass	35.1	52.038	-16.938	Pass
ACNeutral - 802.11b - 2412	0.430	36.8	57.277	-20.477	Pass	29.7	47.277	-17.577	Pass
ACNeutral - 802.11b - 2412	14.398	39.3	60	-20.7	Pass	32.7	50	-17.3	Pass
ACNeutral - 802.11b - 2412	21.986	50.3	60	-9.7	Pass	40.4	50	-9.6	Pass
ACLine - 802.11g - 2412	0.170	53.3	64.963	-11.663	Pass	38.7	54.963	-16.263	Pass
ACLine - 802.11g - 2412	0.218	48.2	62.903	-14.703	Pass	35	52.903	-17.903	Pass
ACLine - 802.11g - 2412	0.282	43.6	60.771	-17.171	Pass	31.7	50.771	-19.071	Pass
ACLine - 802.11g - 2412	0.298	44.7	60.314	-15.614	Pass	32.8	50.314	-17.514	Pass
ACLine - 802.11g - 2412	8.434	36.5	60	-23.5	Pass	26.4	50	-23.6	Pass
ACLine - 802.11g - 2412	22.134	49.4	60	-10.6	Pass	39.7	50	-10.3	Pass
ACNeutral - 802.11g - 2412	0.150	60.3	66	-5.7	Pass	47.4	56	-8.6	Pass
ACNeutral - 802.11g - 2412	0.166	52.6	65.16	-12.56	Pass	38.4	55.16	-16.76	Pass
ACNeutral - 802.11g - 2412	0.194	52.5	63.869	-11.369	Pass	39.1	53.869	-14.769	Pass
ACNeutral - 802.11g - 2412	0.246	48.4	61.902	-13.502	Pass	36	51.902	-15.902	Pass
ACNeutral - 802.11g - 2412	0.778	34.4	56	-21.6	Pass	28.7	46	-17.3	Pass
ACNeutral - 802.11g - 2412	22.146	49.9	60	-10.1	Pass	39.6	50	-10.4	Pass

Table 11. Conducted Emissions, 15.207(a), 802.11b and g, Test Results

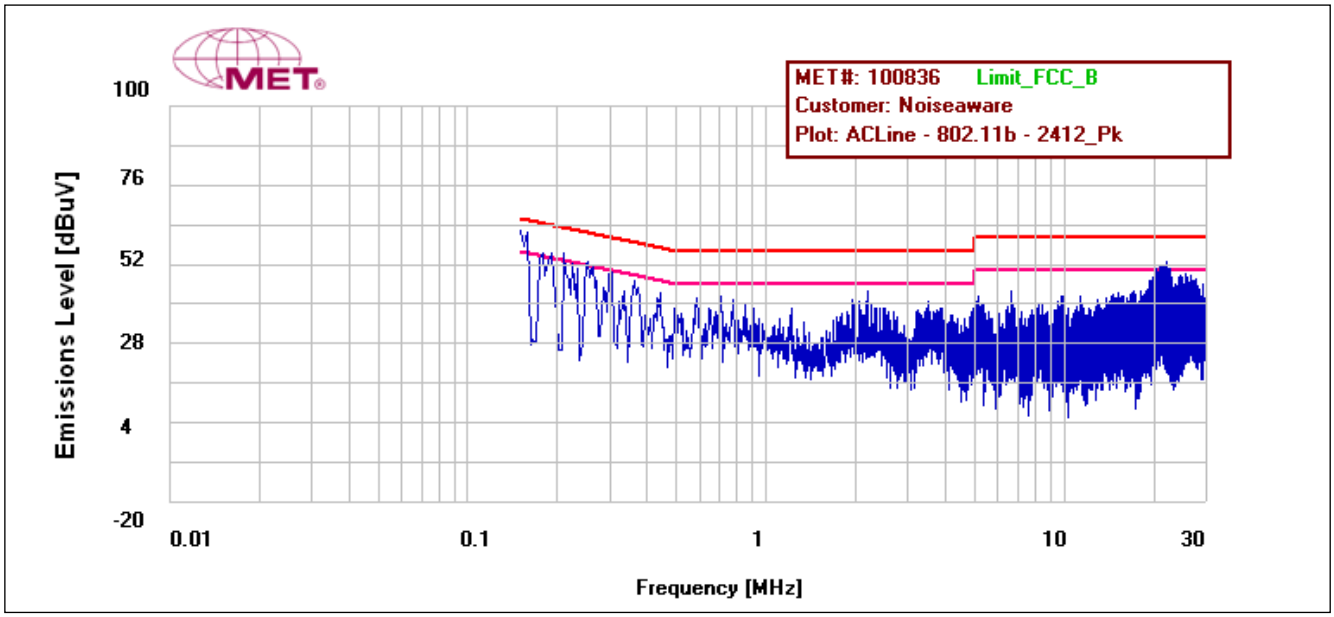

Plot 1. Conducted Emissions, 15.207(a), 802.11b, Phase Line

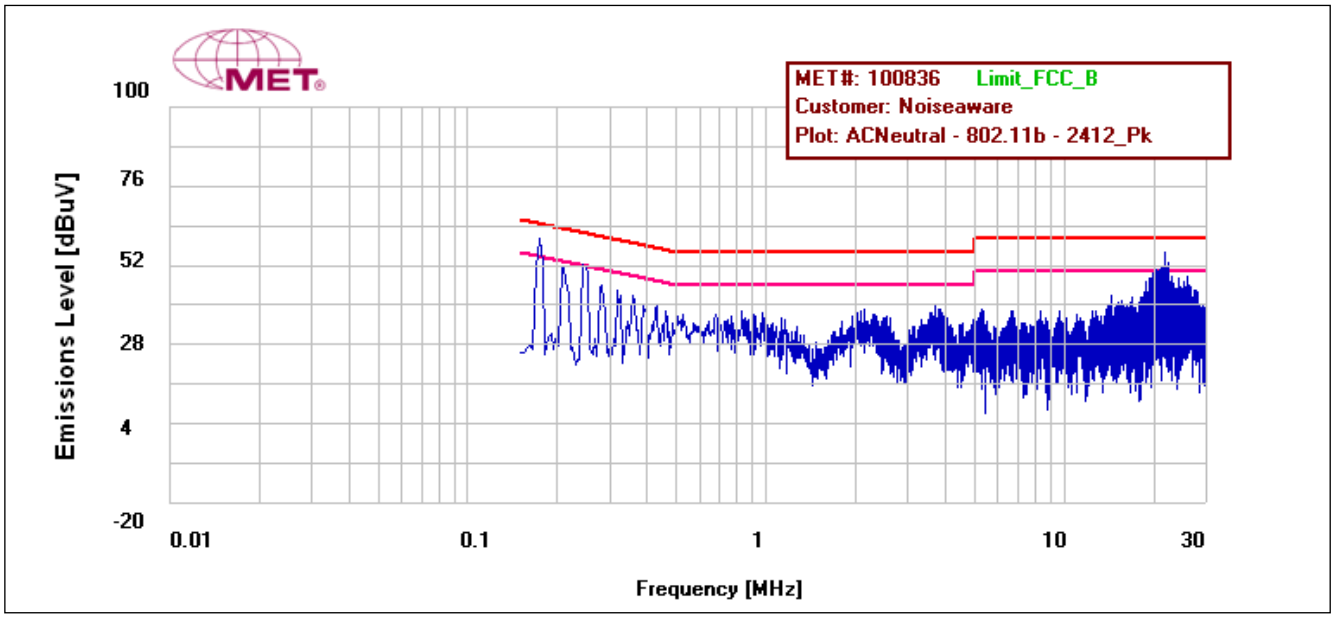

Plot 2. Conducted Emissions, 15.207(a), 802.11b, Neutral Line

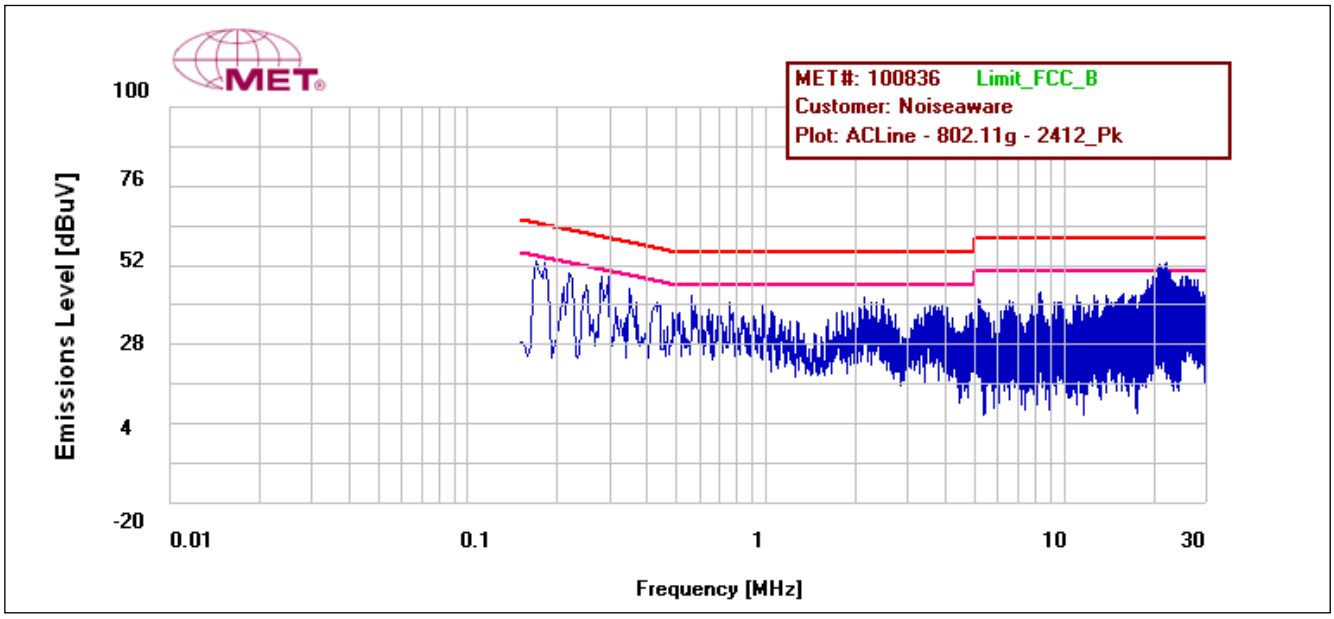

Plot 3. Conducted Emissions, 15.207(a), 802.11g, Phase Line

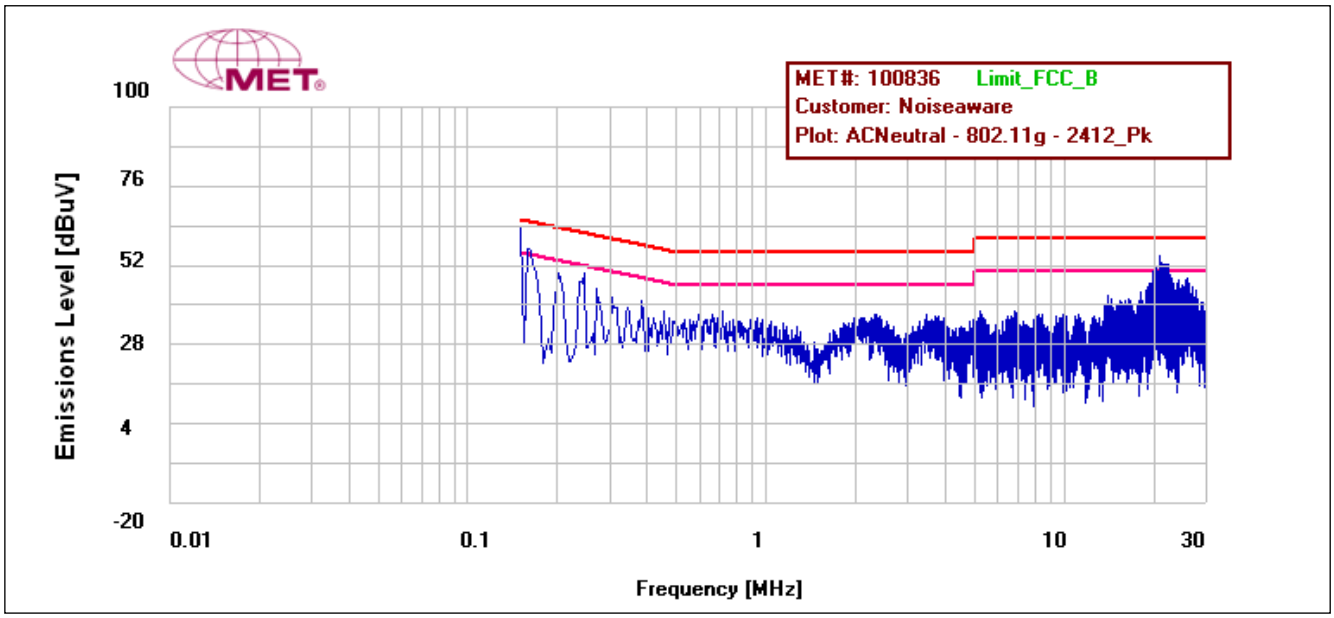

Plot 4. Conducted Emissions, 15.207(a), 802.11g, Neutral Line

15.207(a) Conducted Emissions Test Results

Line	Freq (MHz)	QP Amplitude	QP Limit	Delta	Pass	Average Amplitude	Average Limit	Delta	Pass
ACLine - 802.11n 20 - 2437	0.150	60.8	66	-5.2	Pass	47.9	56	-8.1	Pass
ACLine - 802.11n 20 - 2437	0.170	52.9	64.963	-12.063	Pass	38.3	54.963	-16.663	Pass
ACLine - 802.11n 20 - 2437	0.186	53.3	64.218	-10.918	Pass	36.9	54.218	-17.318	Pass
ACLine - 802.11n 20 - 2437	0.194	52.8	63.869	-11.069	Pass	39	53.869	-14.869	Pass
ACLine - 802.11n 20 - 2437	0.294	44.8	60.426	-15.626	Pass	32.4	50.426	-18.026	Pass
ACLine - 802.11n 20 - 2437	21.734	50.1	60	-9.9	Pass	40.9	50	-9.1	Pass
ACNeutral - 802.11n 20 - 2437	0.174	54.1	64.771	-10.671	Pass	38.2	54.771	-16.571	Pass
ACNeutral - 802.11n 20 - 2437	0.210	50	63.213	-13.213	Pass	35.7	53.213	-17.513	Pass
ACNeutral - 802.11n 20 - 2437	0.250	47.6	61.769	-14.169	Pass	35.6	51.769	-16.169	Pass
ACNeutral - 802.11n 20 - 2437	0.286	42.3	60.654	-18.354	Pass	31.4	50.654	-19.254	Pass
ACNeutral - 802.11n 20 - 2437	14.206	35.4	60	-24.6	Pass	29.4	50	-20.6	Pass
ACNeutral - 802.11n 20 - 2437	20.978	47.8	60	-12.2	Pass	35.7	50	-14.3	Pass
ACLine - 802.11n 40 - 2437	0.174	56	64.771	-8.771	Pass	38.7	54.771	-16.071	Pass
ACLine - 802.11n 40 - 2437	0.206	53.2	63.372	-10.172	Pass	37.5	53.372	-15.872	Pass
ACLine - 802.11n 40 - 2437	0.238	50.3	62.176	-11.876	Pass	34.5	52.176	-17.676	Pass
ACLine - 802.11n 40 - 2437	0.318	43	59.776	-16.776	Pass	30.1	49.776	-19.676	Pass
ACLine - 802.11n 40 - 2437	10.966	37	60	-23	Pass	26.4	50	-23.6	Pass
ACLine - 802.11n 40 - 2437	21.746	50.9	60	-9.1	Pass	41.8	50	-8.2	Pass
ACNeutral - 802.11n 40 - 2437	0.150	61.6	66	-4.4	Pass	48.4	56	-7.6	Pass
ACNeutral - 802.11n 40 - 2437	0.194	53.5	63.869	-10.369	Pass	37.7	53.869	-16.169	Pass
ACNeutral - 802.11n 40 - 2437	0.230	49.1	62.459	-13.359	Pass	34.6	52.459	-17.859	Pass
ACNeutral - 802.11n 40 - 2437	0.262	45.9	61.38	-15.48	Pass	31.8	51.38	-19.58	Pass
ACNeutral - 802.11n 40 - 2437	0.302	44.1	60.204	-16.104	Pass	33	50.204	-17.204	Pass
ACNeutral - 802.11n 40 - 2437	21.906	50.2	60	-9.8	Pass	40.2	50	-9.8	Pass

Table 12. Conducted Emissions, 15.207(a), Neutral Line, Test Results

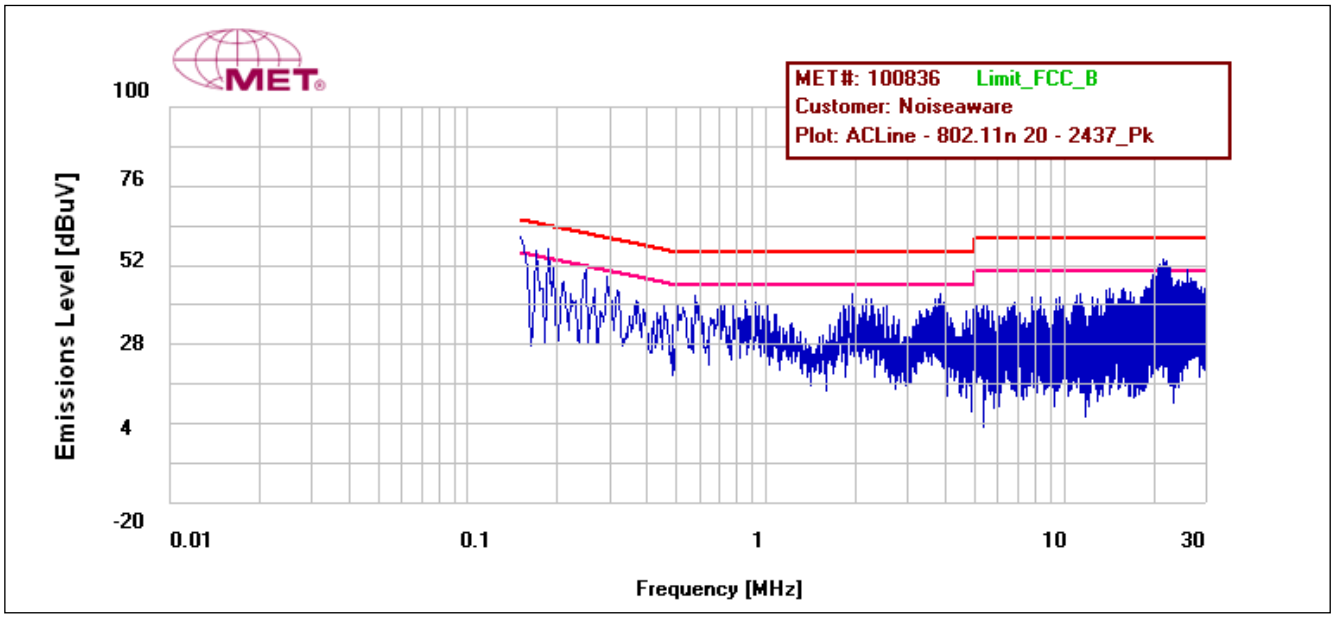

Plot 5. Conducted Emissions, 15.207(a), 802.11n 20, Phase Line

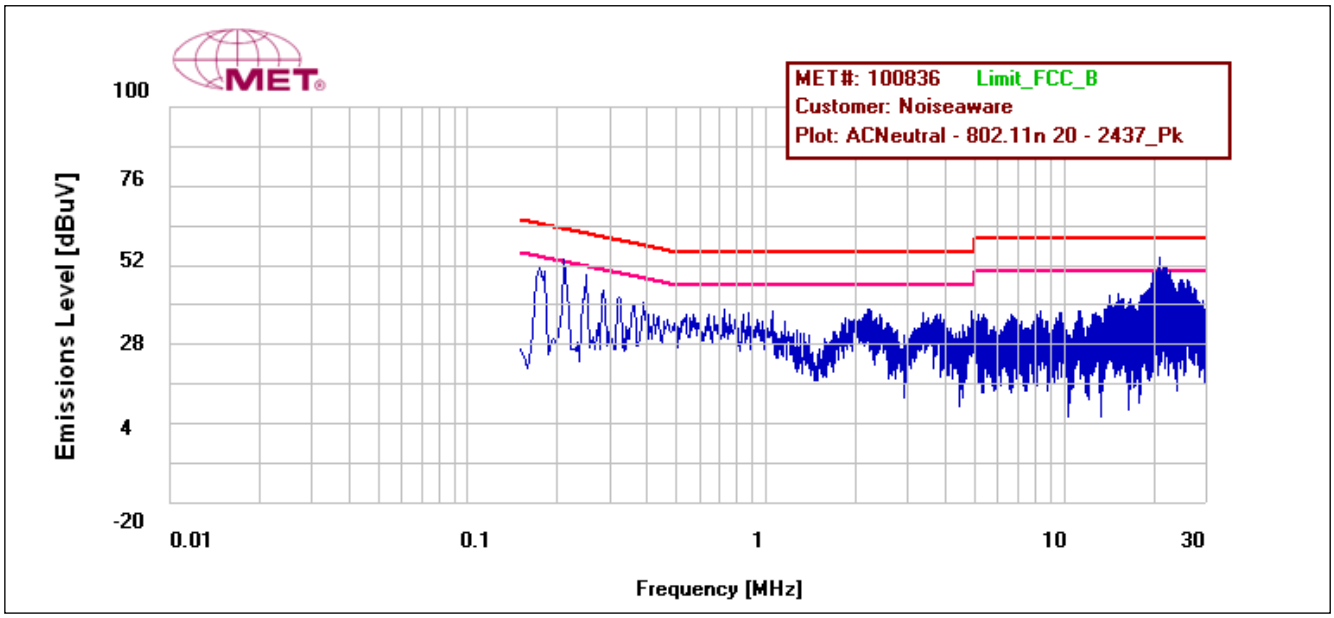

Plot 6. Conducted Emissions, 15.207(a), 802.11n 20, Neutral Line

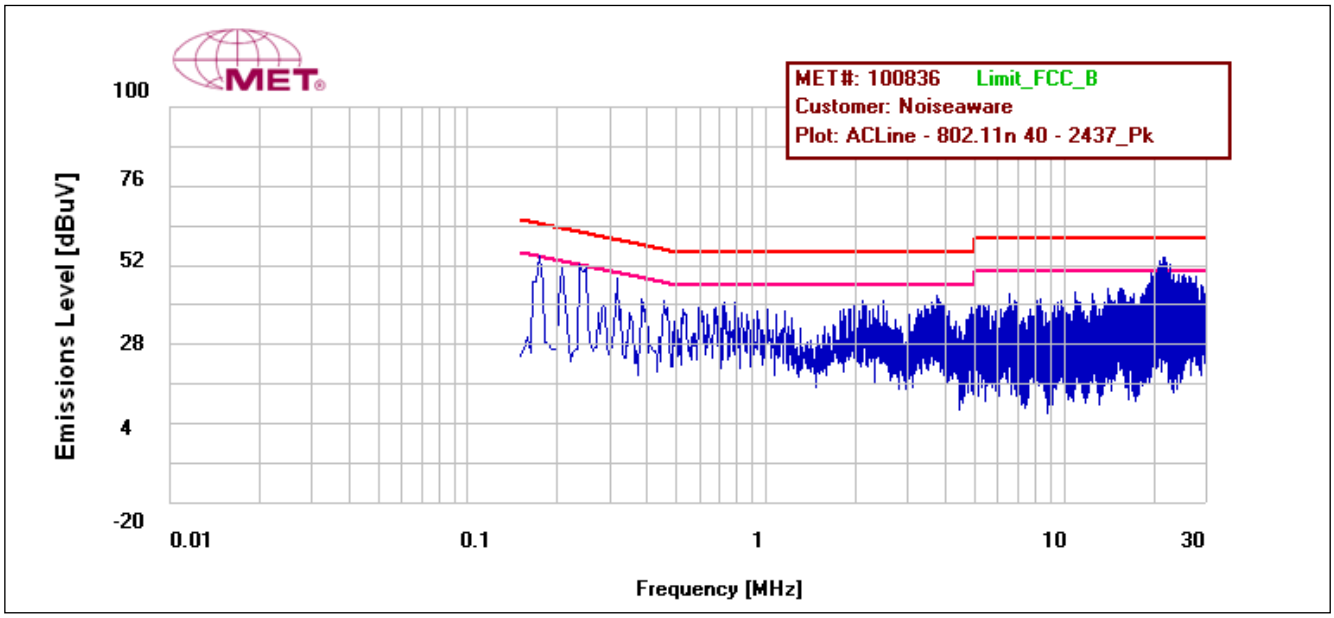

Plot 7. Conducted Emissions, 15.207(a), 802.11n 40, Phase Line

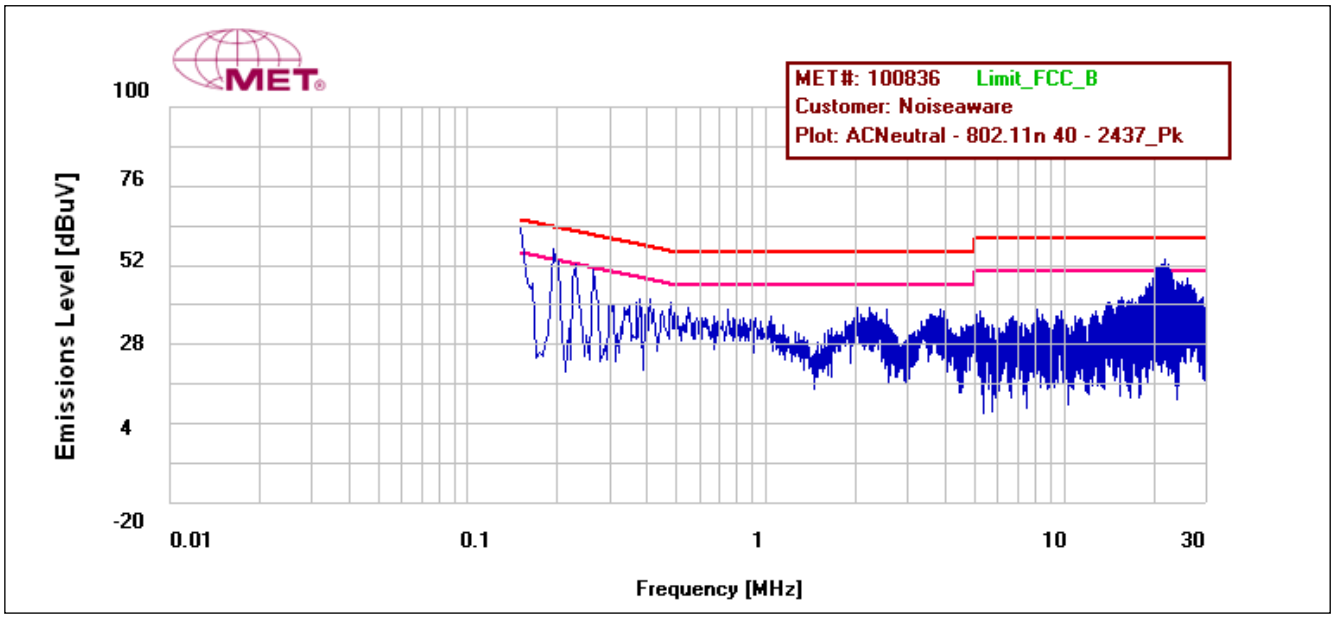

Plot 8. Conducted Emissions, 15.207(a), 802.11n, 40, Neutral Line

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(a)(2) 6 dB Bandwidth

Test Requirements: **§ 15.247(a)(2):** Operation under the provisions of this section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:

For systems using digital modulation techniques, the EUT may operate in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

Test Procedure: The transmitter was on and transmitting at the highest output power. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using a RBW = 100kHz, VBW = 3*RBW. The 6 dB Bandwidth was measured and recorded. The measurements were performed on the low, mid, and high channels.

Test Results The EUT was compliant with § 15.247 (a)(2).

The 6 dB Bandwidth was determined from the plots on the following pages.

Test Engineer(s): Giuliano Messina

Test Date(s): September 21, 2018



Figure 2. Block Diagram, Occupied Bandwidth Test Setup

6 dB Occupied Bandwidth Test Results

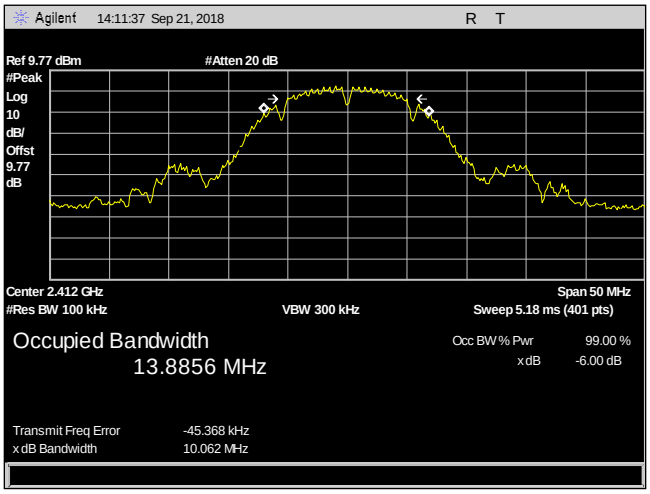

Plot 9. 6 dB Occupied Bandwidth, 802.11b, 2412 MHz

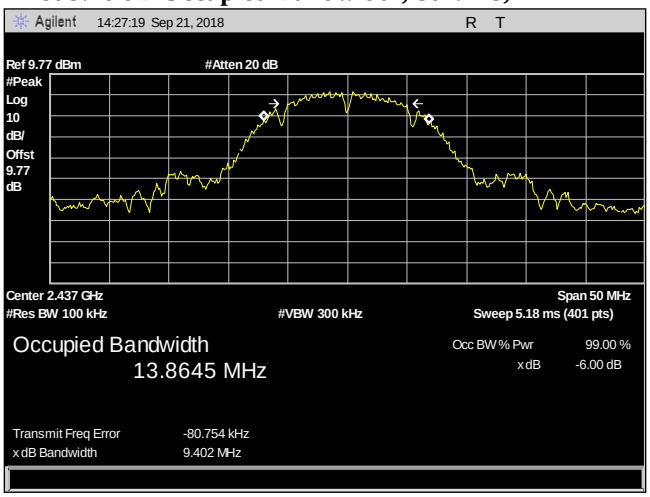

Plot 10. 6 dB Occupied Bandwidth, 802.11b, 2437 MHz

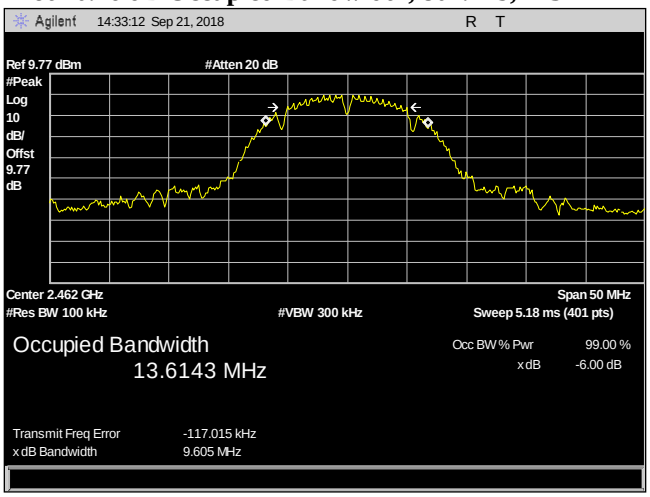

Plot 11. 6 dB Occupied Bandwidth, 802.11b, 2462 MHz

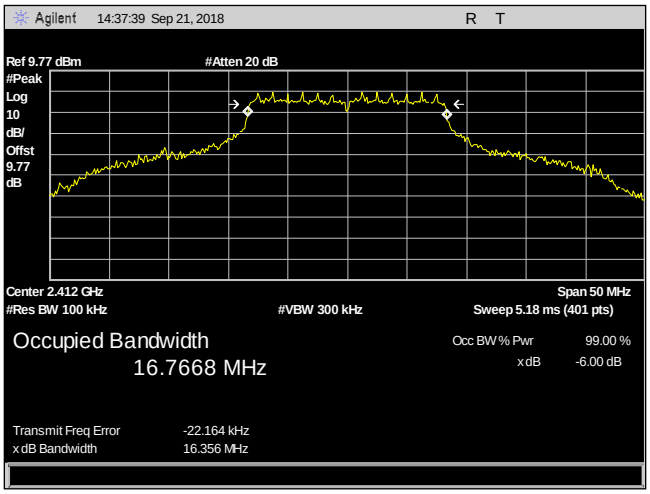

Plot 12. 6 dB Occupied Bandwidth, 802.11g, 2412 MHz

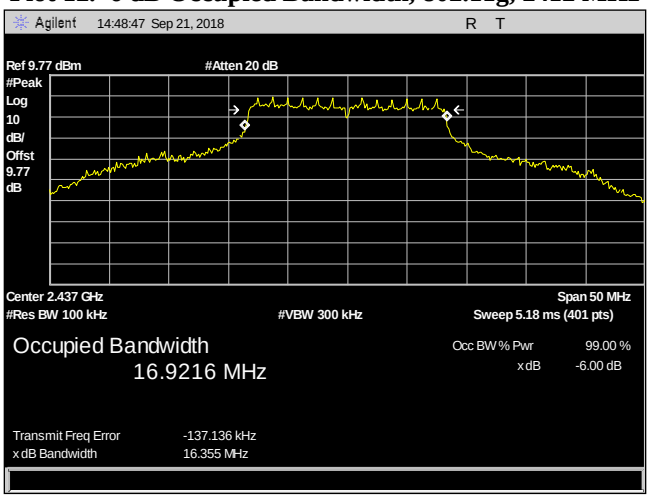

Plot 13. 6 dB Occupied Bandwidth, 802.11g, 2437 MHz

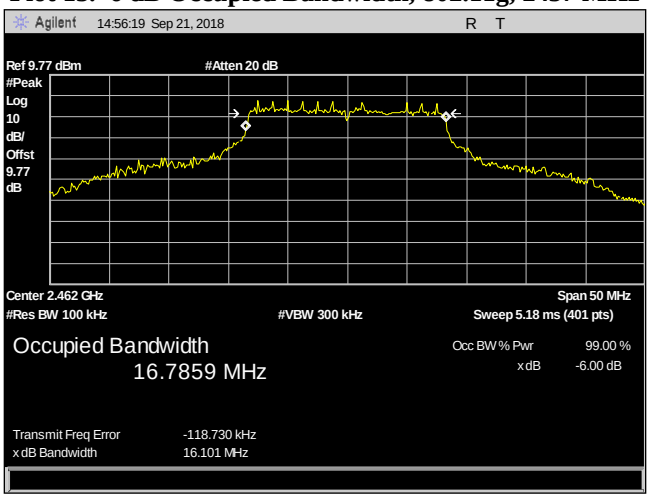

Plot 14. 6 dB Occupied Bandwidth, 802.11g, 2462 MHz

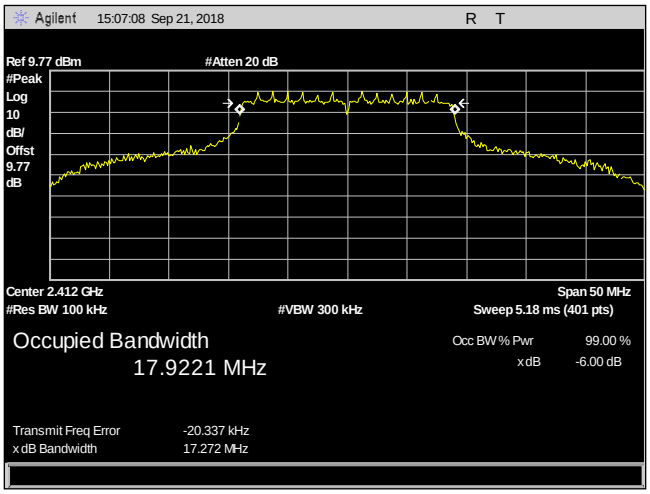

Plot 15. 6 dB Occupied Bandwidth, 802.11n HT20, 2412 MHz

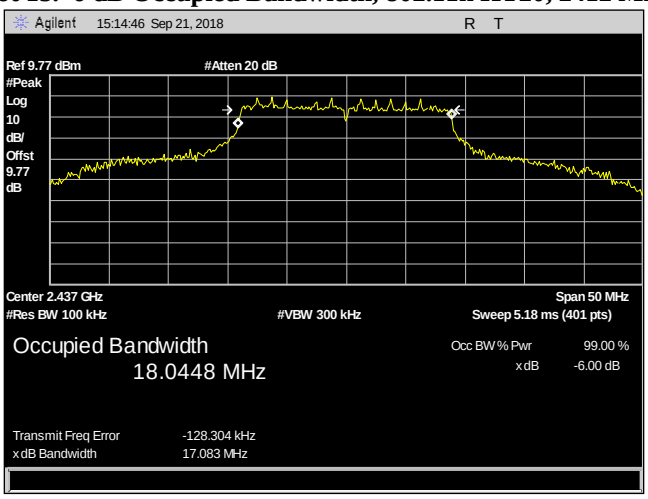

Plot 16. 6 dB Occupied Bandwidth, 802.11n HT20, 2437 MHz

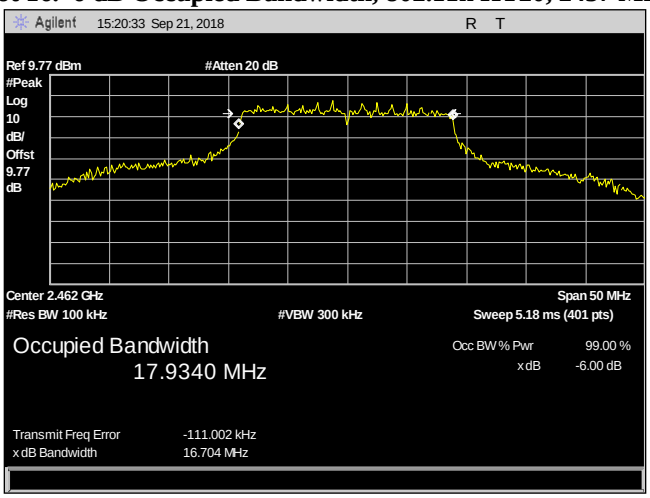

Plot 17. 6 dB Occupied Bandwidth, 802.11n HT20, 2462 MHz

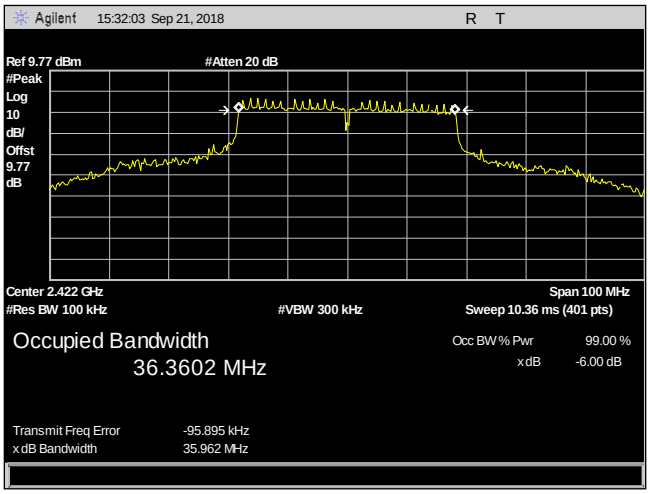

Plot 18. 6 dB Occupied Bandwidth, 802.11n HT40, 2422MHz

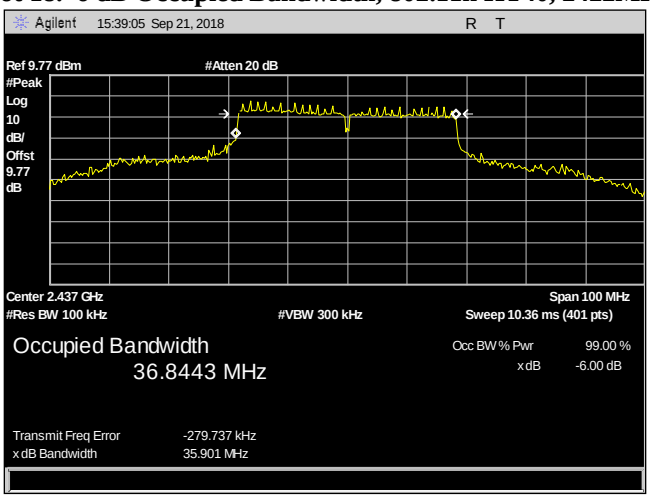

Plot 19. 6 dB Occupied Bandwidth, 802.11n HT40, 2437 MHz

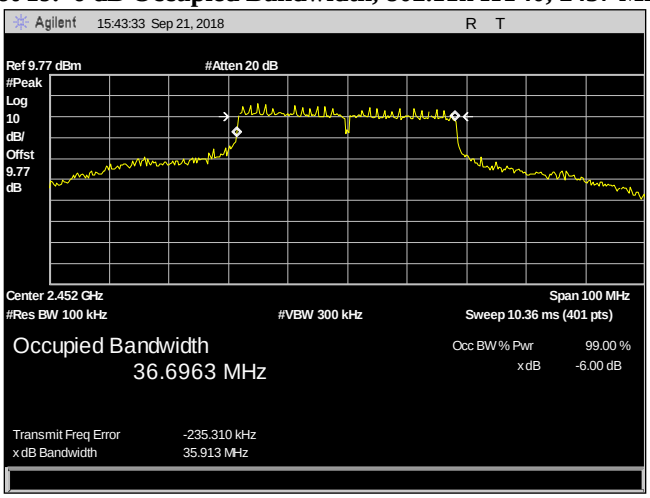

Plot 20. 6 dB Occupied Bandwidth, 802.11n HT40, 2452 MHz

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(b) Maximum Power Output

Test Requirements: **§15.247(b):** The maximum peak output power of the intentional radiator shall not exceed the following:

Digital Transmission Systems (MHz)	Output Limit (Watts)
2400–2483.5	1.000

Table 13. Output Power Requirements from §15.247(b)

§15.247(c): if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in the 9, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Procedure: The EUT was measured at the low, mid and high channels of each band at the maximum power level.

Test Results: The EUT was compliant with the Maximum Power Output limits of **§15.247(b)**.

Test Engineer(s): Giuliano Messina

Test Date(s): September 21, 2018

Average Conducted Output Power		
Carrier Channel	**Frequency (MHz)**	**Measured Average Output Power dBm**
802.11b – 1	2412	5.45
802.11b – 6	2437	4.22
802.11b – 11	2462	3.03
802.11g – 1	2412	3.50
802.11g – 6	2437	2.61
802.11g – 11	2462	1.68
802.11n HT20 – 1	2412	2.17
802.11n HT20 – 6	2437	1.85
802.11n HT20 – 11	2462	0.60
802.11n HT40 – 3	2422	2.26
802.11n HT40 – 6	2437	1.87
802.11n HT40 – 9	2452	1.46

Table 14. Maximum Power Output, Test Results

Maximum Power Output Test Results

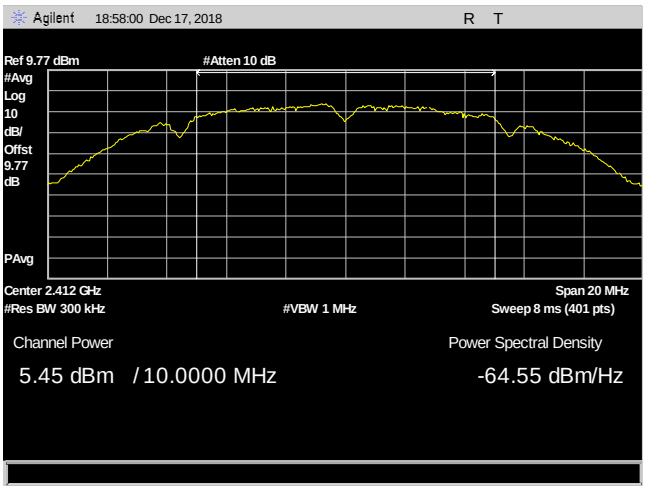

Plot 21. Maximum Power Output, 802.11b, 2412 MHz

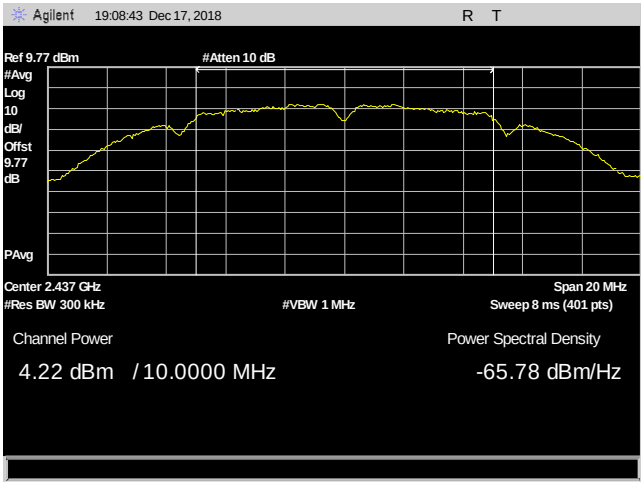

Plot 22. Maximum Power Output, 802.11b, 2437 MHz

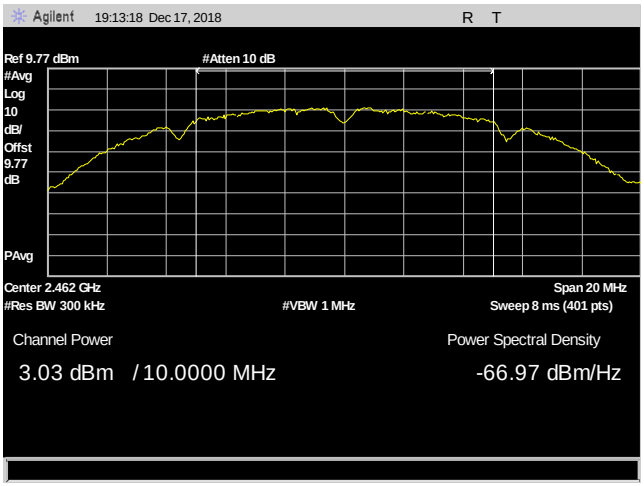

Plot 23. Maximum Power Output, 802.11b, 2462 MHz

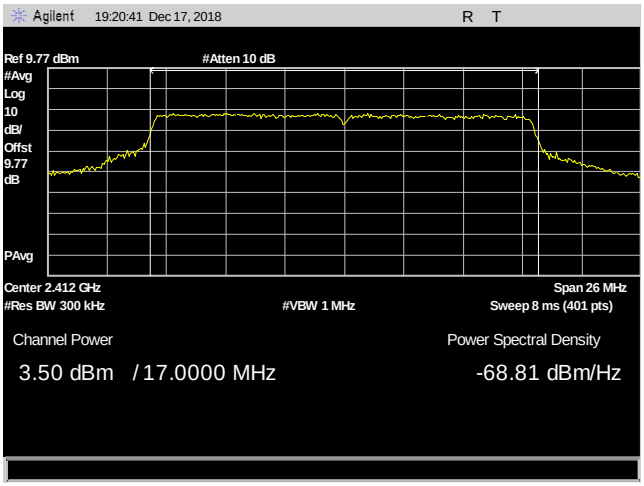

Plot 24. Maximum Power Output, 802.11g, 2412 MHz

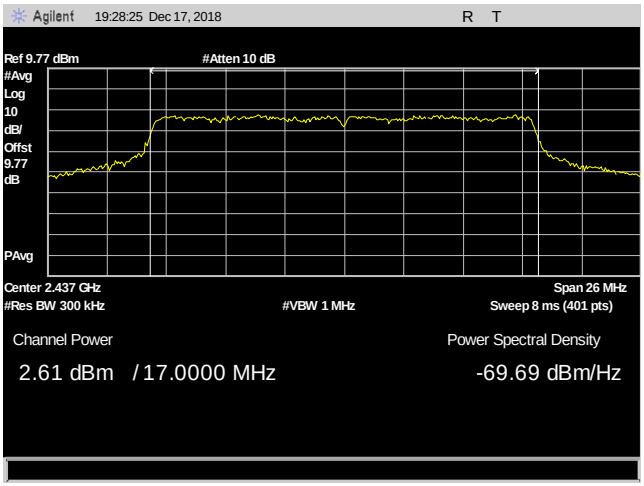

Plot 25. Maximum Power Output, 802.11g, 2437 MHz

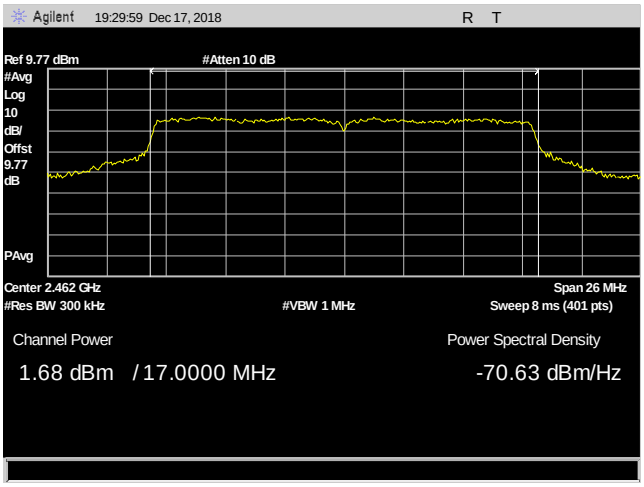

Plot 26. Maximum Power Output, 802.11g, 2462 MHz

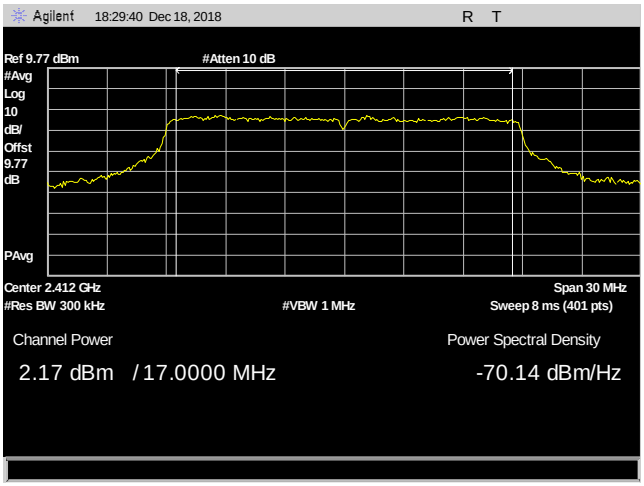

Plot 27. Maximum Power Output, 802.11n HT20, 2412 MHz

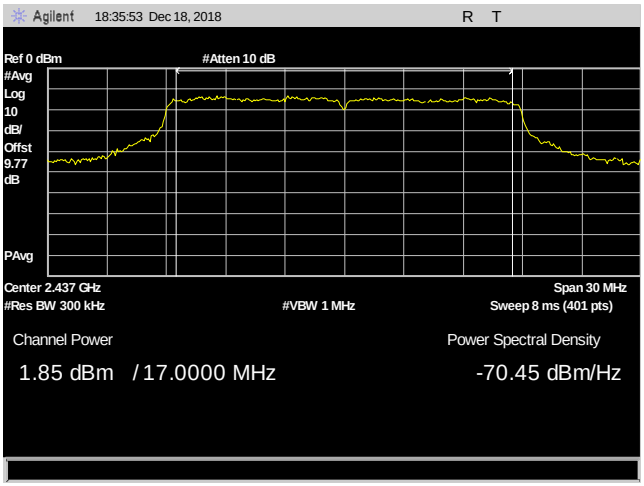

Plot 28. Maximum Power Output, 802.11n HT20, 2437 MHz

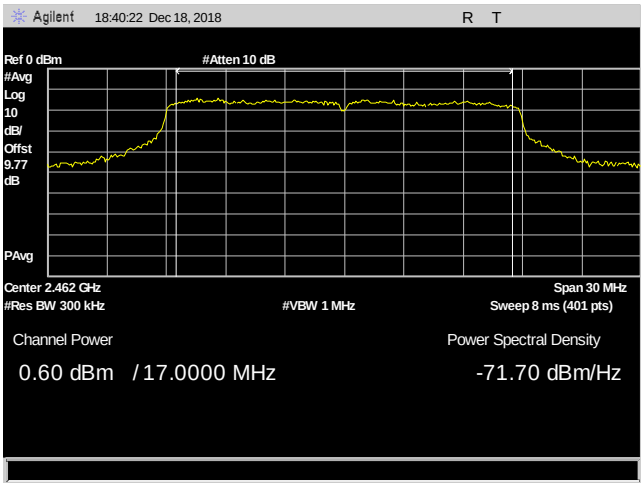

Plot 29. Maximum Power Output, 802.11n HT20, 2462 MHz

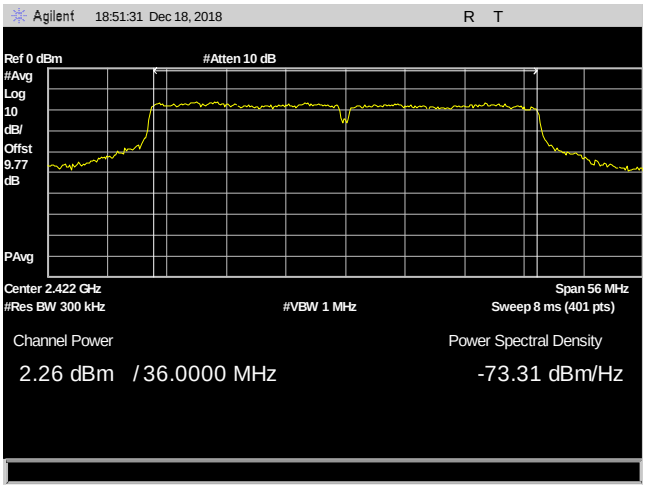

Plot 30. Maximum Power Output, 802.11n HT40, 2422 MHz

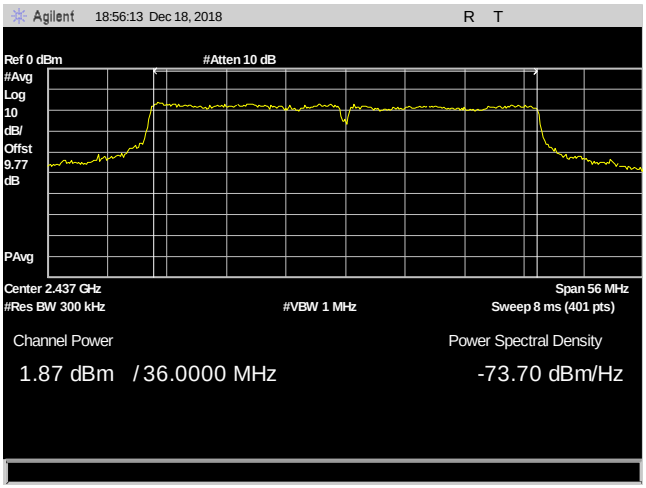

Plot 31. Maximum Power Output, 802.11n HT40, 2437 MHz

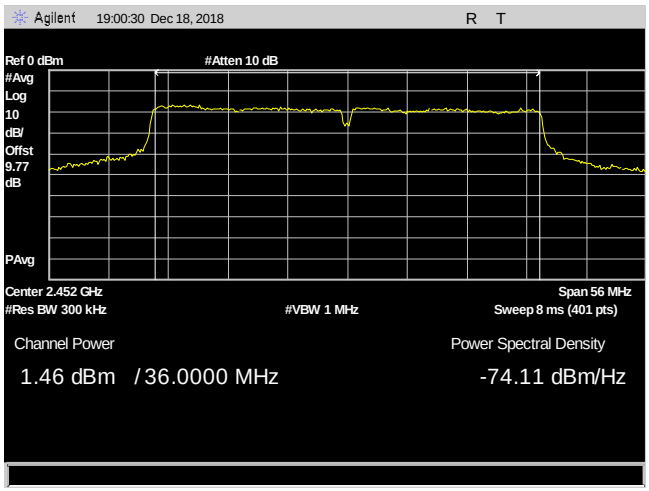

Plot 32. Maximum Power Output, 802.11n HT40, 2452 MHz

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.209 Radiated Spurious Emissions Requirements and Band Edge

Test Requirements: **§15.247(d); §15.205:** Emissions outside the frequency band.

§15.205(a): Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090–0.110----------	16.42–16.423	399.9–410	4.5–5.15
0.495–0.505----------	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905----------	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128----------	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775----------	37.5–38.25	1435–1626.5	9.0–9.2
4.20725–4.20775----------	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218----------	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825----------	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225----------	123–138	2200–2300	14.47–14.5
8.291–8.294----------	149.9–150.05	2310–2390	15.35–16.2
8.362–8.366----------	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625–8.38675----------	156.7–156.9	2655–2900	22.01–23.12
8.41425–8.41475----------	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293----------	167.72–173.2	3332–3339	31.2–31.8
12.51975–12.52025----------	240–285	3345.8–3358 36.	43–36.5
12.57675–12.57725----------	322–335.4	3600–4400	([2])

Table 15. Restricted Bands of Operation

[2] Above 38.6

Test Requirement(s): **§ 15.209 (a):** Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in Table 16.

Frequency (MHz)	§ 15.209(a),Radiated Emission Limits (dBµV) @ 3m
30 - 88	40.00
88 - 216	43.50
216 - 960	46.00
Above 960	54.00

Table 16. Radiated Emissions Limits Calculated from FCC Part 15, § 15.209 (a)

Test Procedures: The transmitter was turned on. Measurements were performed of the low, mid and high Channels. The EUT was rotated orthogonally through all three axes. Plots shown are corrected for both antenna correction factor and distance and compared to a 3 m limit line. Only noise floor was measured above 18 GHz.

Test Results: The EUT was compliant with the Radiated Spurious Emission limits of **§ 15.247(d) and § 15.209**. Measured emissions were within applicable limits.

Test Engineer(s): Giuliano Messina

Test Date(s): September 20, 2018

Radiated Spurious Emissions, Test Results

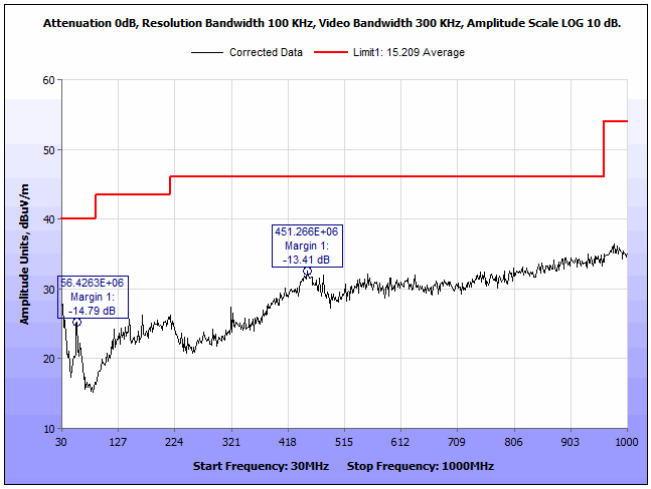

Plot 33. Radiated Spurious Emissions, 802.11b, 2412 MHz, 30 MHz – 1 GHz, H

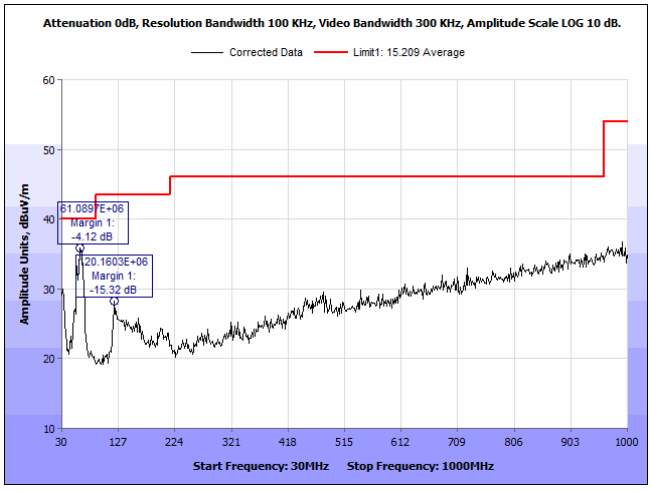

Plot 34. Radiated Spurious Emissions, 802.11b, 2412 MHz, 30 MHz – 1 GHz, V

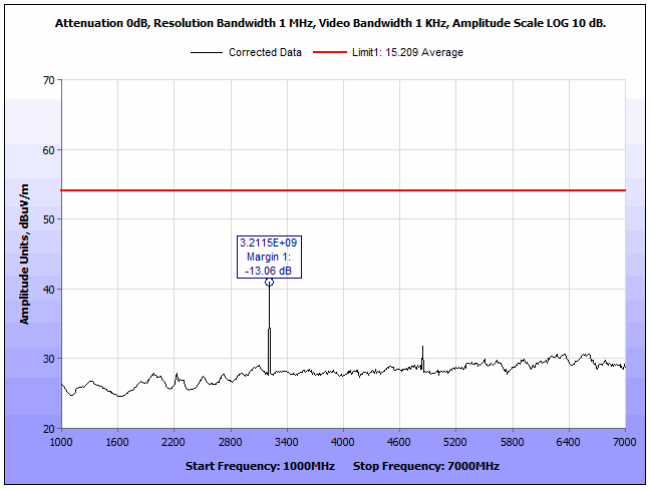

Plot 35. Radiated Spurious Emissions, 802.11b, 2412 MHz, 1 – 7GHz, H, Average

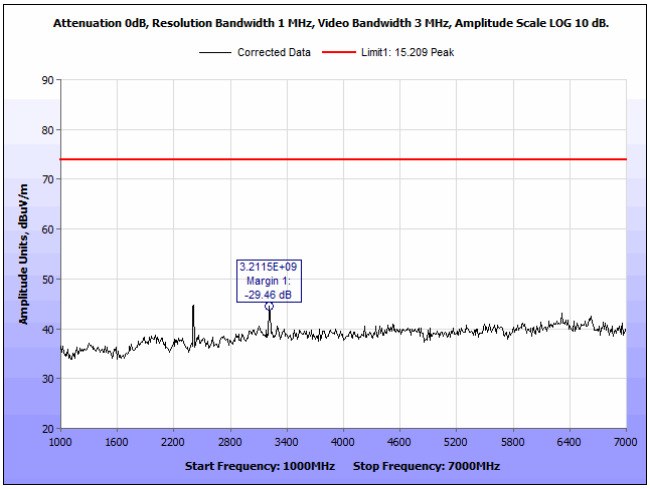

Plot 36. Radiated Spurious Emissions, 802.11b, 2412 MHz, 1 – 7 GHz, H, Peak

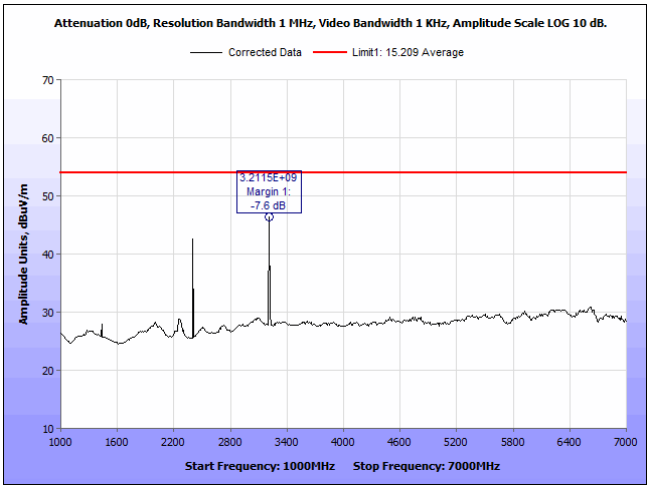

Plot 37. Radiated Spurious Emissions, 802.11b, 2412 MHz, 1 – 7 GHz, V, Average

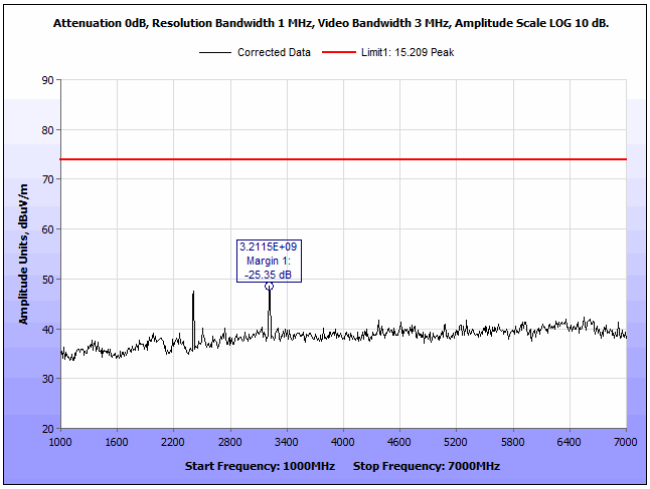

Plot 38. Radiated Spurious Emissions, 802.11b, 2412 MHz, 1 – 7 GHz, V, Peak

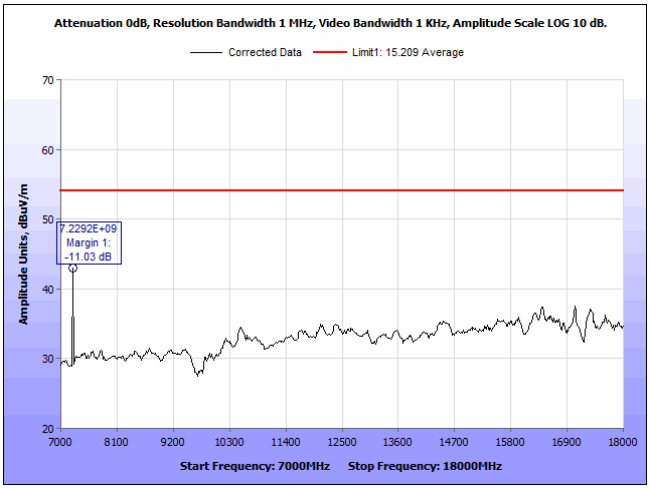

Plot 39. Radiated Spurious Emissions, 802.11b, 2412 MHz, 7 – 18 GHz, H, Average

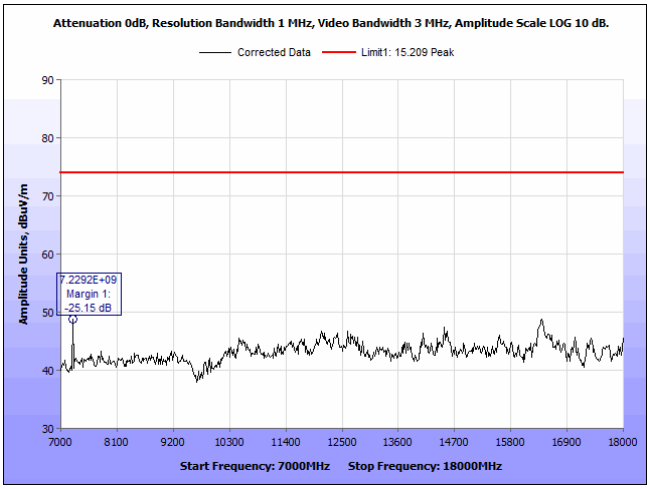

Plot 40. Radiated Spurious Emissions, 802.11b, 2412 MHz, 7 – 18 GHz, H, Peak

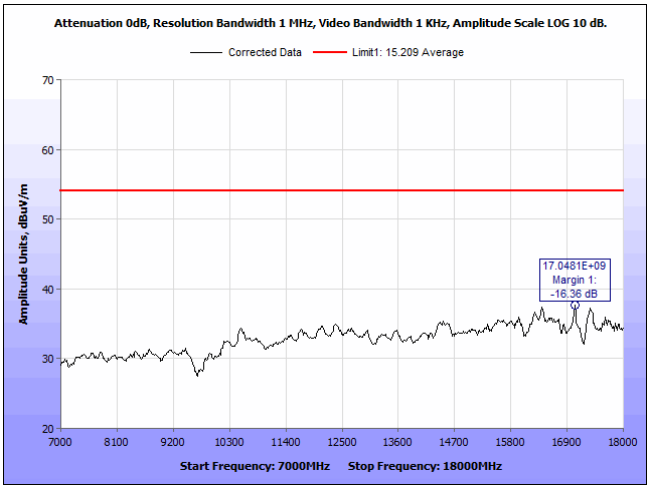

Plot 41. Radiated Spurious Emissions, 802.11b, 2412 MHz, 7 – 18 GHz, V, Average

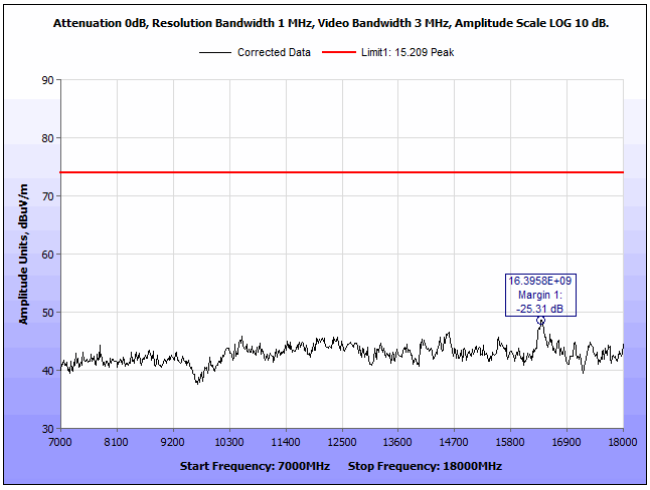

Plot 42. Radiated Spurious Emissions, 802.11b, 2412 MHz, 7 – 18 GHz, V, Peak

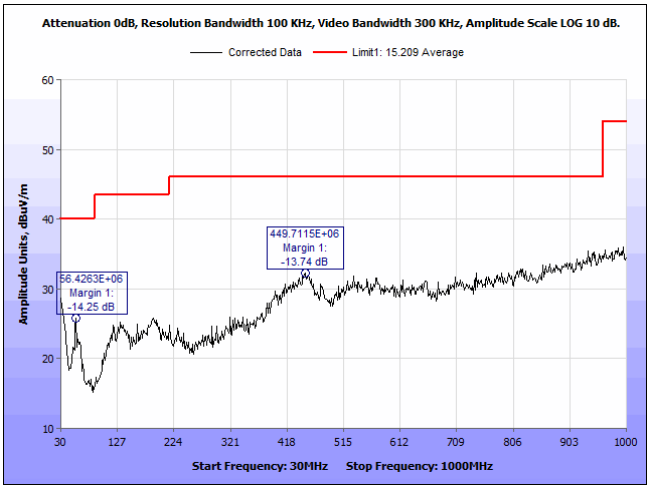

Plot 43. Radiated Spurious Emissions, 802.11b, 2437 MHz, 30 MHz – 1 GHz, H

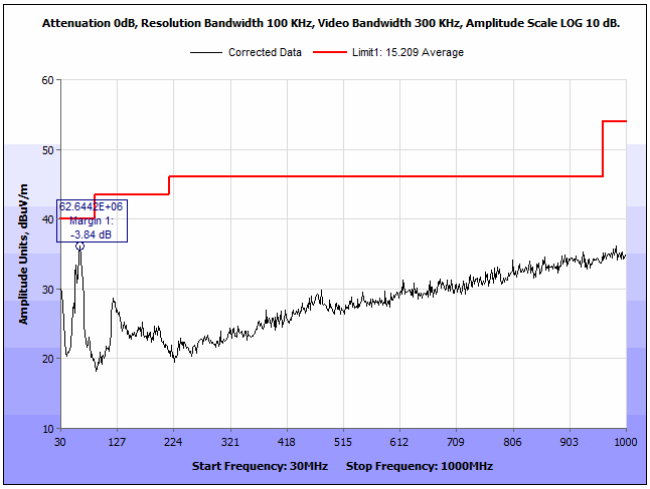

Plot 44. Radiated Spurious Emissions, 802.11b, 2437 MHz, 30 MHz – 1 GHz, V

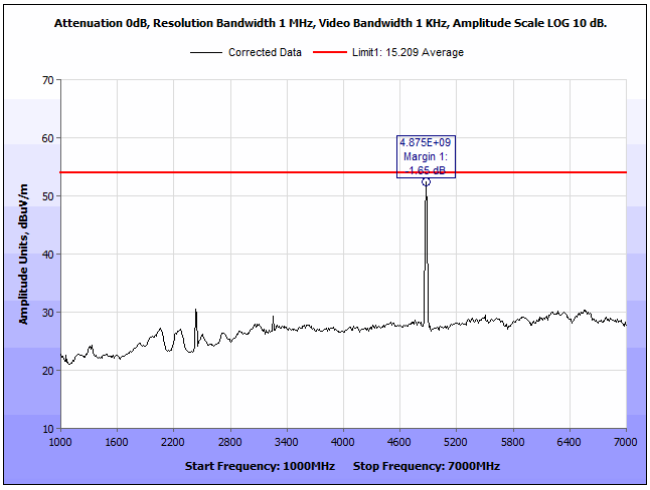

Plot 45. Radiated Spurious Emissions, 802.11b, 2437 MHz, 1 – 7 GHz, H, Average

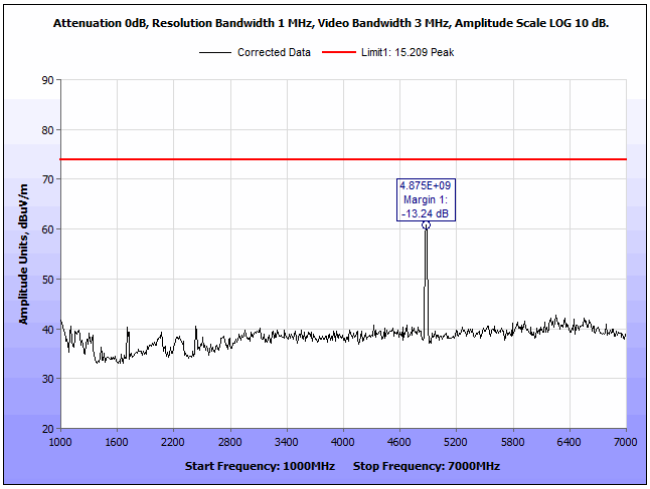

Plot 46. Radiated Spurious Emissions, 802.11b, 2437 MHz, 1- 7 GHz, H, Peak

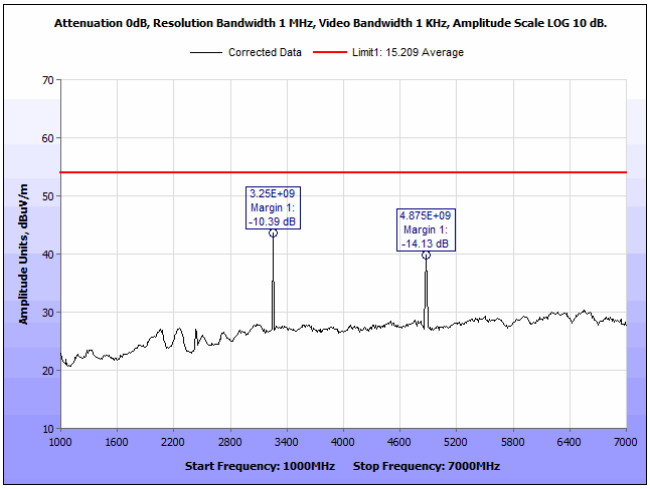

Plot 47. Radiated Spurious Emissions, 802.11b, 2437 MHz, 1 – 7 GHz, V, Average

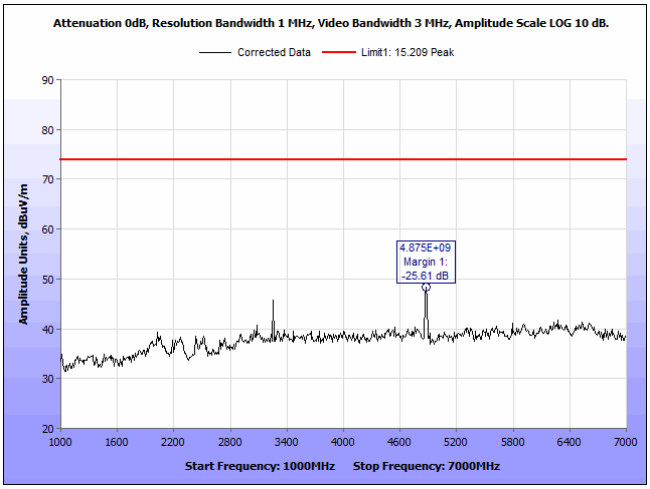

Plot 48. Radiated Spurious Emissions, 802.11b, 2437 MHz, 1 – 7 GHz, V, Peak

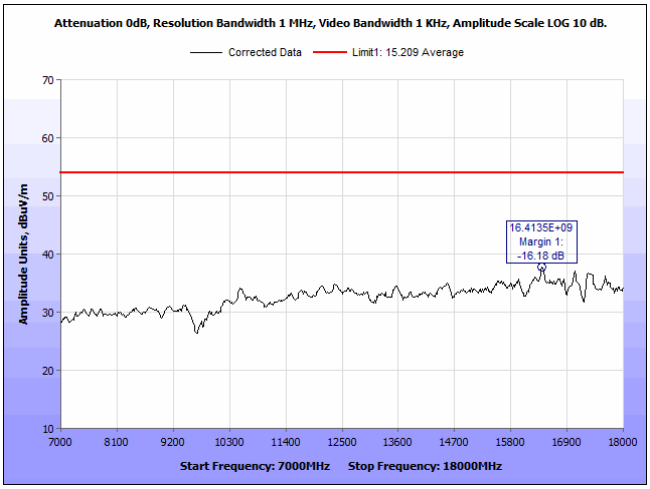

Plot 49. Radiated Spurious Emissions, 802.11b, 2437 MHz, 7 – 18 GHz, H, Average

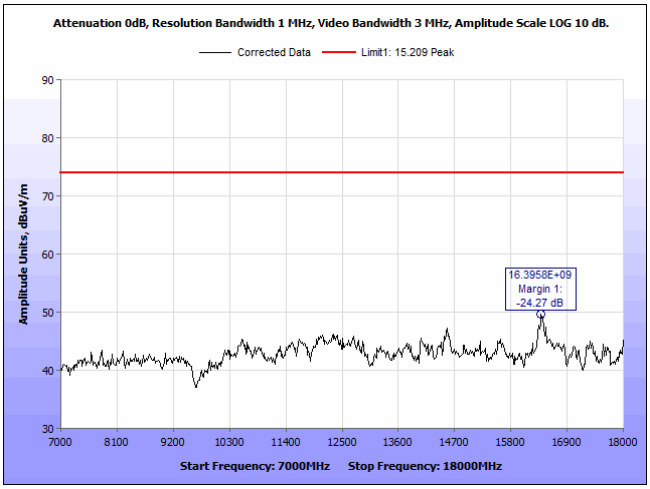

Plot 50. Radiated Spurious Emissions, 802.11b, 2437 MHz, 7 – 18 GHz, H, Peak

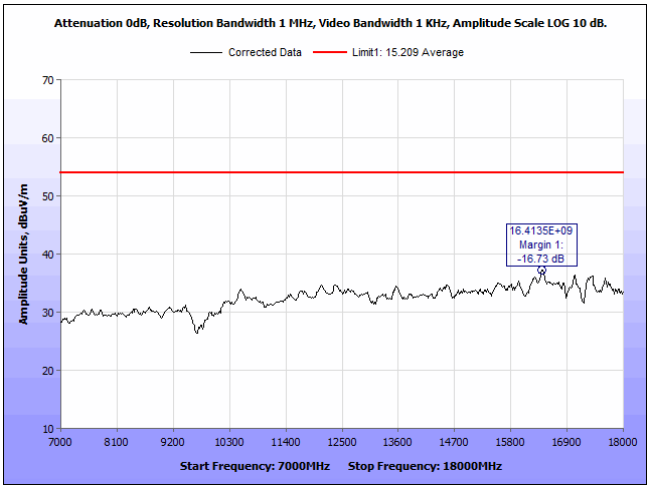

Plot 51. Radiated Spurious Emissions, 802.11b, 2437 MHz, 7 – 18 GHz, V, Average

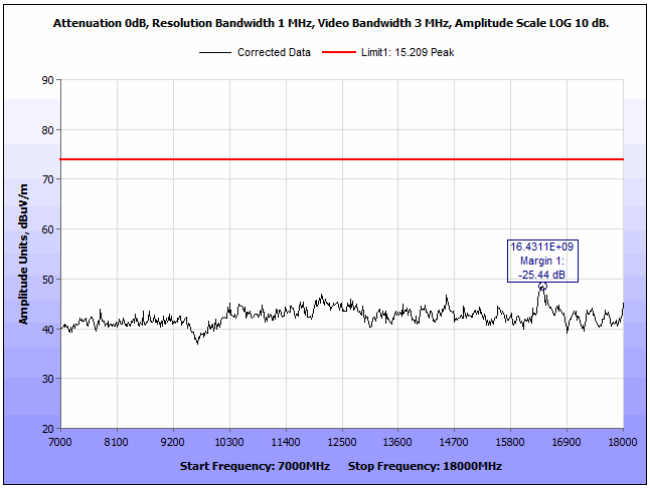

Plot 52. **Radiated Spurious Emissions, 802.11b, 2437 MHz, 7 – 18 GHz, V, Peak**

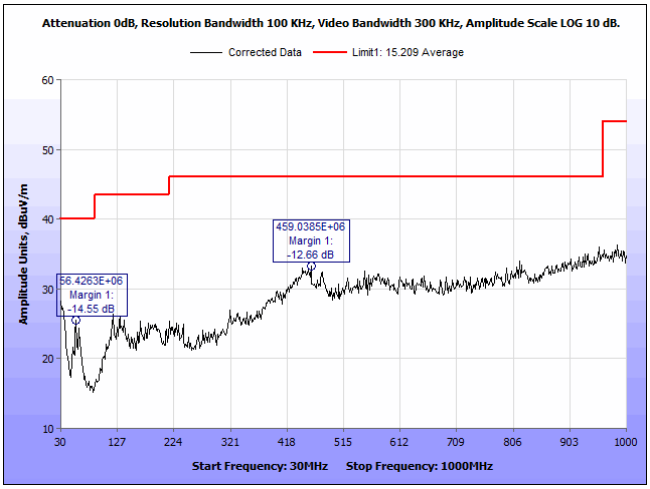

Plot 53. Radiated Spurious Emissions, 802.11b, 2462 MHz, 30 MHz – 1 GHz, H

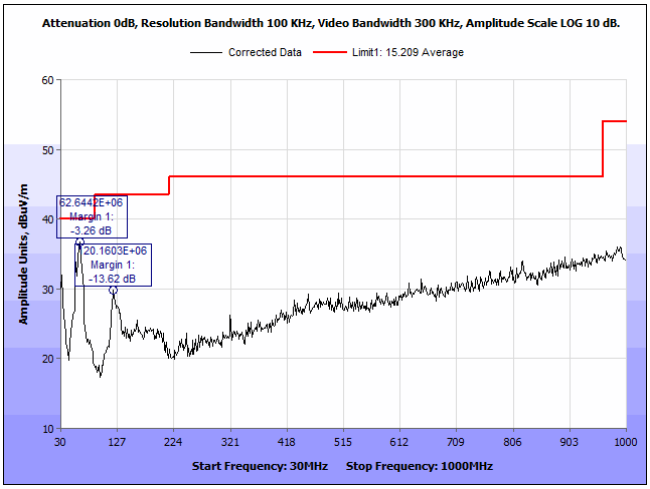

Plot 54. Radiated Spurious Emissions, 802.11b, 2462 MHz, 30 MHz – 1 GHz, V

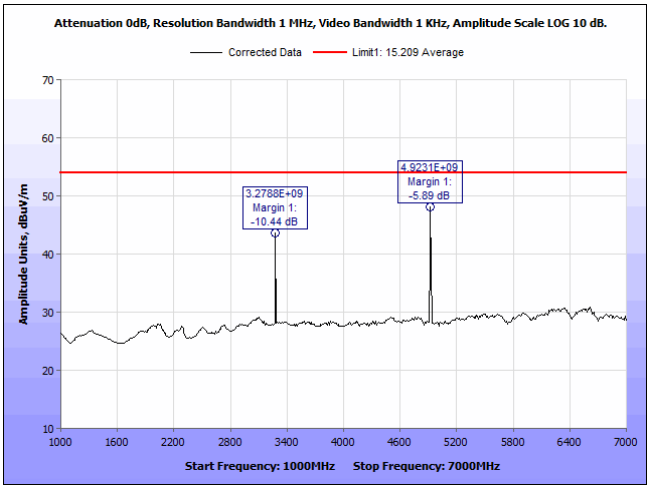

Plot 55. Radiated Spurious Emissions, 802.11b, 2462 MHz, 1 – 7 GHz, H, Average

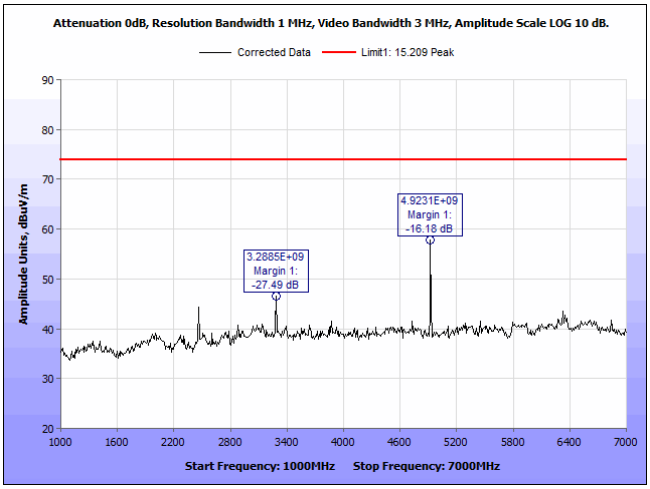

Plot 56. Radiated Spurious Emissions, 802.11b, 2462 MHz, 1 – 7 GHz, H, Peak

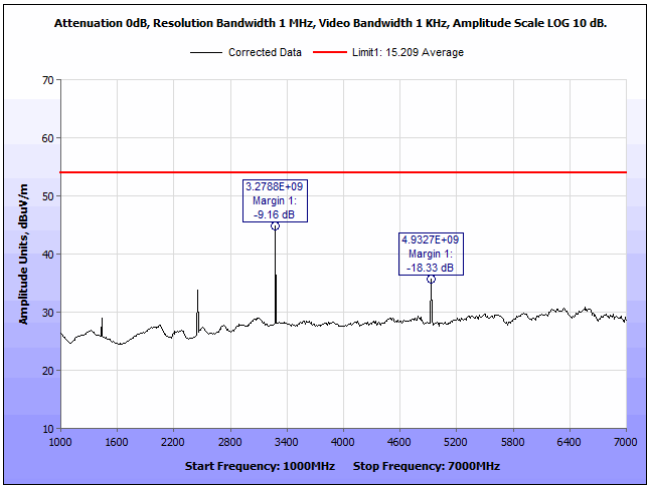

Plot 57. Radiated Spurious Emissions, 802.11b, 2462 MHz, 1 – 7 GHz, V, Average

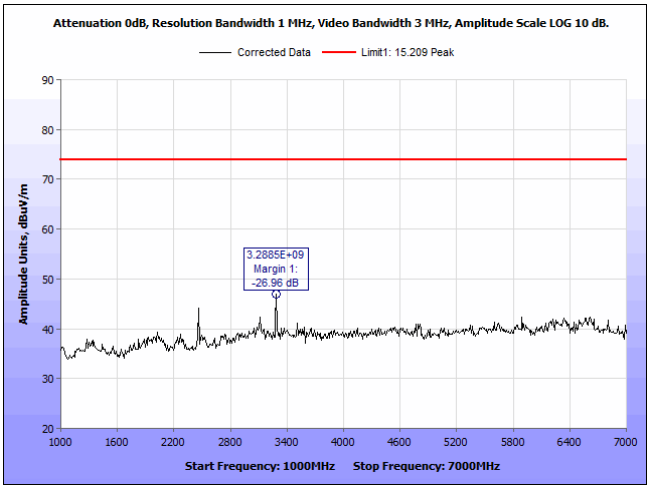

Plot 58. Radiated Spurious Emissions, 802.11b, 2462 MHz, 1- 7 GHz, V, Peak

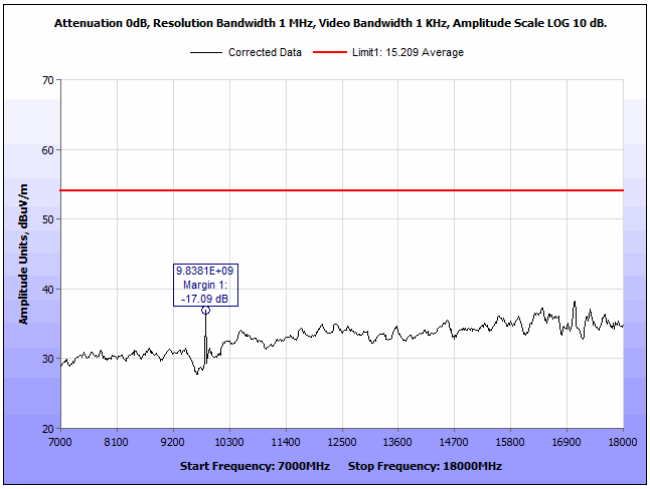

Plot 59. Radiated Spurious Emissions, 802.11b, 2462 MHz, 7 – 18 GHz, H, Average

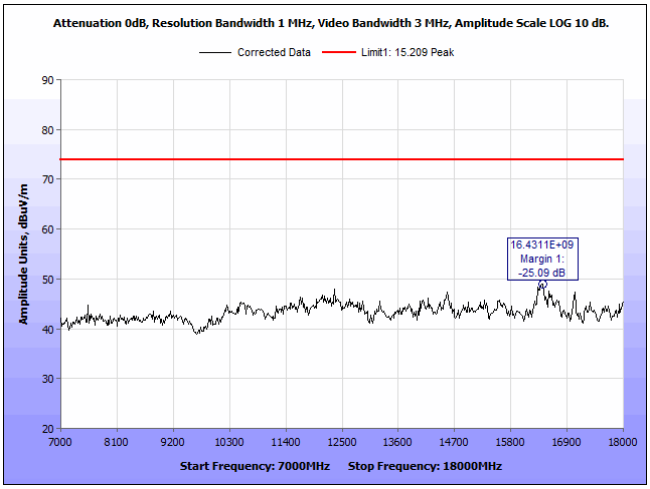

Plot 60. Radiated Spurious Emissions, 802.11b, 2462 MHz, 7 – 18 GHz, H, Peak

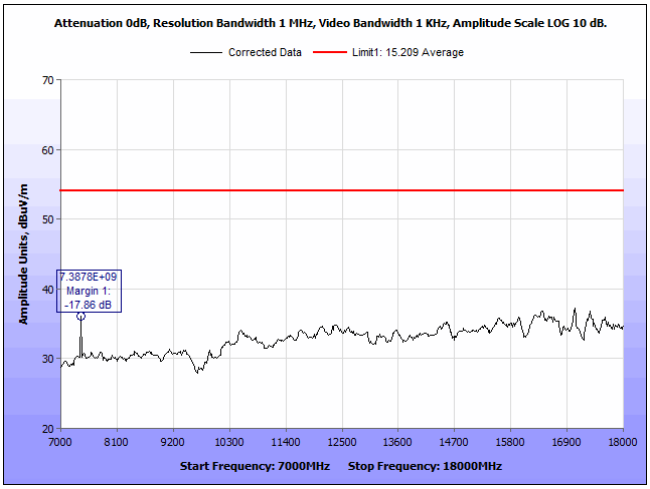

Plot 61. Radiated Spurious Emissions, 802.11b, 2462 MHz, 7 – 18 GHz, V, Average

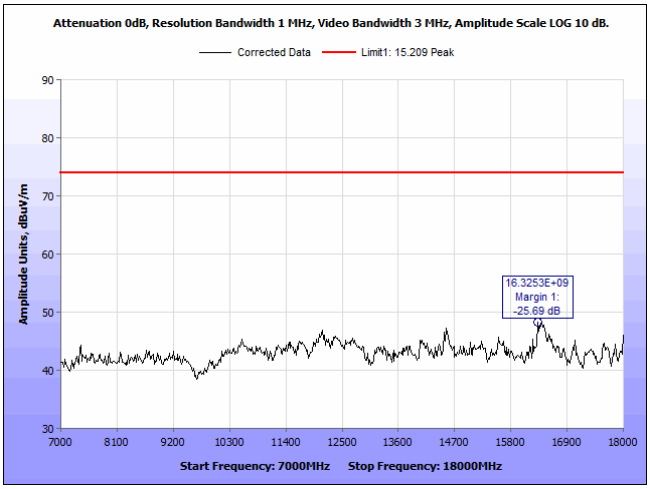

Plot 62. Radiated Spurious Emissions, 802.11b, 2462 MHz, 7 – 18 GHz, V, Peak

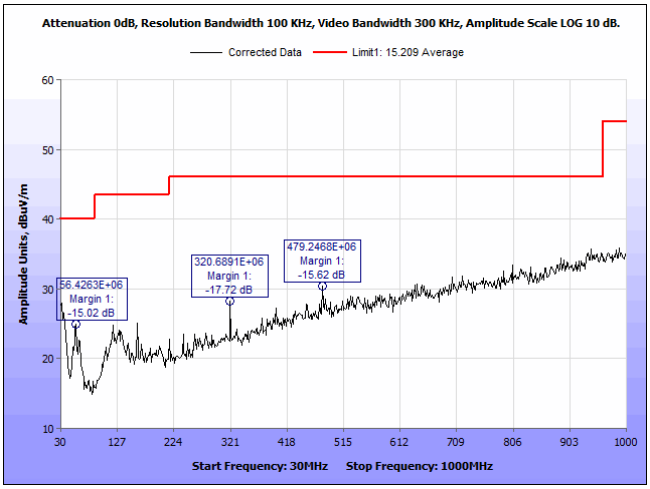

Plot 63. Radiated Spurious Emissions, 802.11b, Standby, 30 MHz – 1 GHz, H

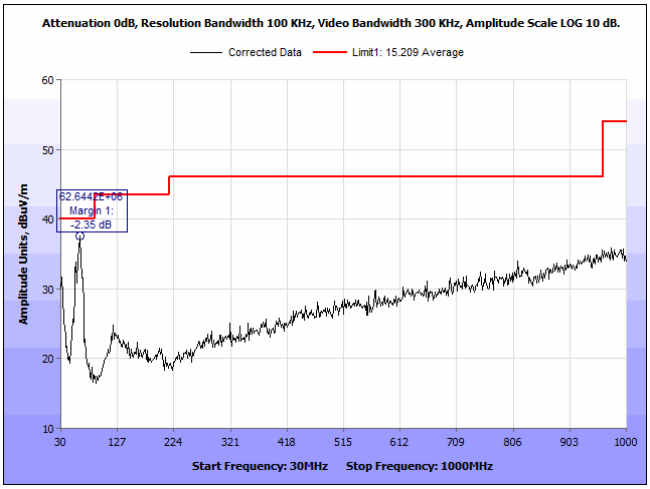

Plot 64. Radiated Spurious Emissions, 802.11b, Standby, 30 MHz – 1 GHz, V

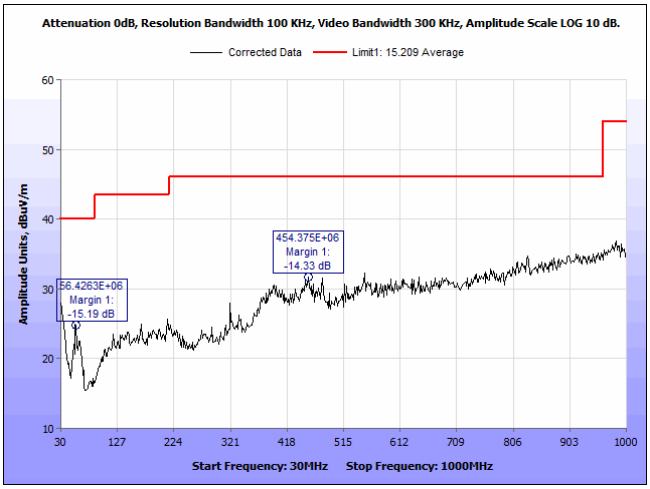

Plot 65. Radiated Spurious Emissions, 802.11g, 2412 MHz, 30 MHz – 1 GHz, H

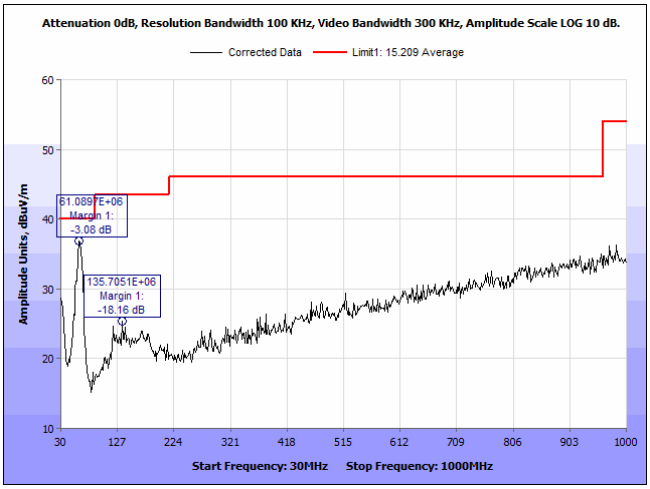

Plot 66. Radiated Spurious Emissions, 802.11g, 2412 MHz, 30 MHz – 1 GHz, V

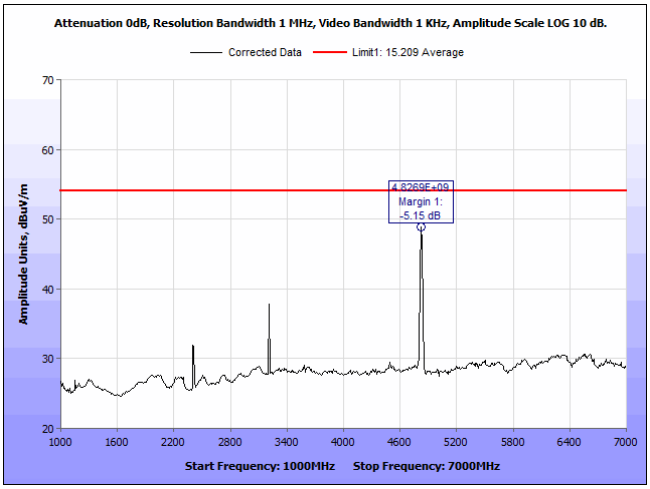

Plot 67. Radiated Spurious Emissions, 802.11g, 2412 MHz, 1 – 7 GHz, H, Average

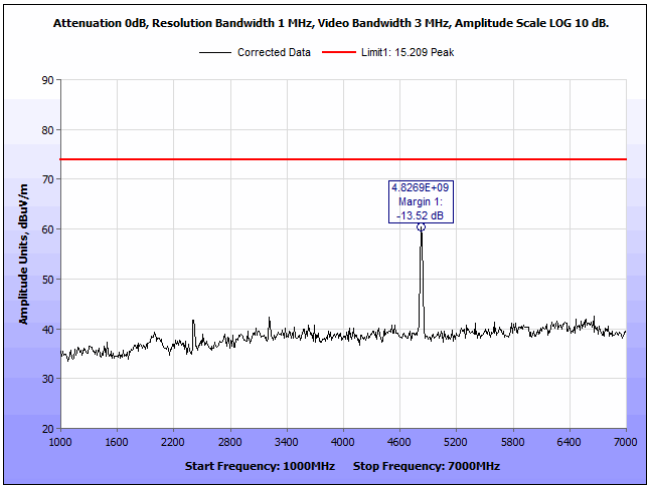

Plot 68. Radiated Spurious Emissions, 802.11g, 2412 MHz, 1 – 7 GHz, H, Peak

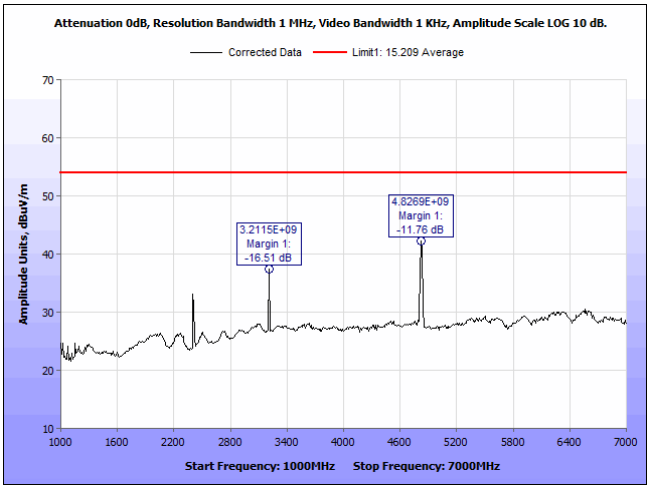

Plot 69. Radiated Spurious Emissions, 802.11g, 2412 MHz, 1 – 7 GHz, V, Average

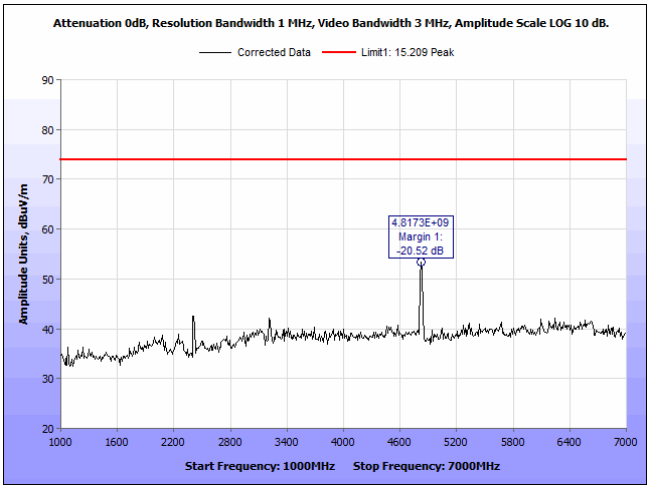

Plot 70. Radiated Spurious Emissions, 802.11g, 2412 MHz, 1- 7 GHz, V, Peak

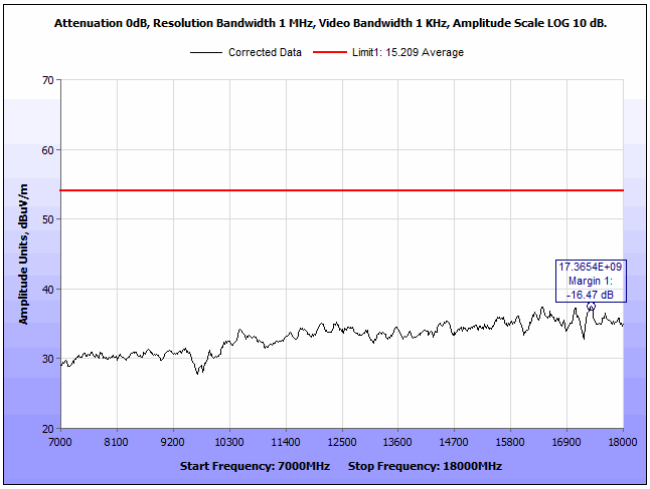

Plot 71. Radiated Spurious Emissions, 802.11g, 2412 MHz, 7 – 18 GHz, H, Average

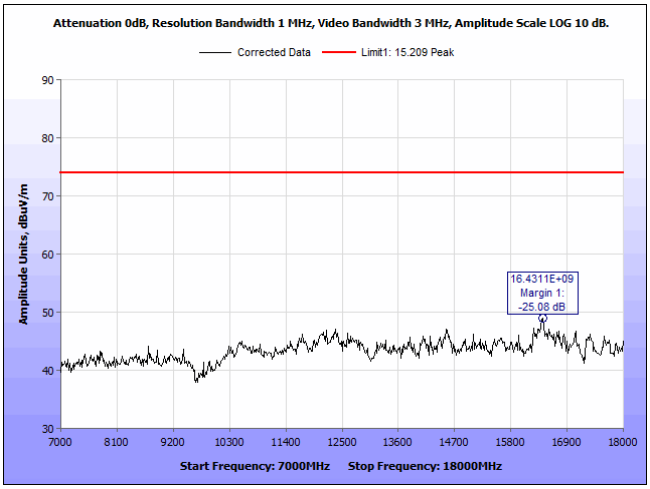

Plot 72. Radiated Spurious Emissions, 802.11g, 2412 MHz, 7 – 18 GHz, H, Peak

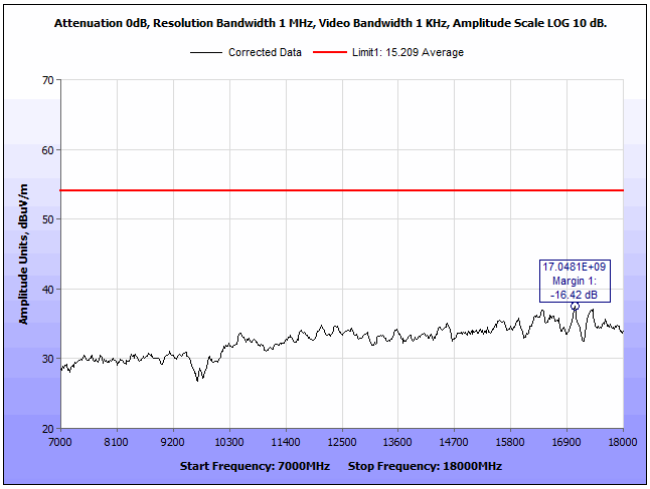

Plot 73. Radiated Spurious Emissions, 802.11g, 2412 MHz, 7 – 18 GHz, V, Average

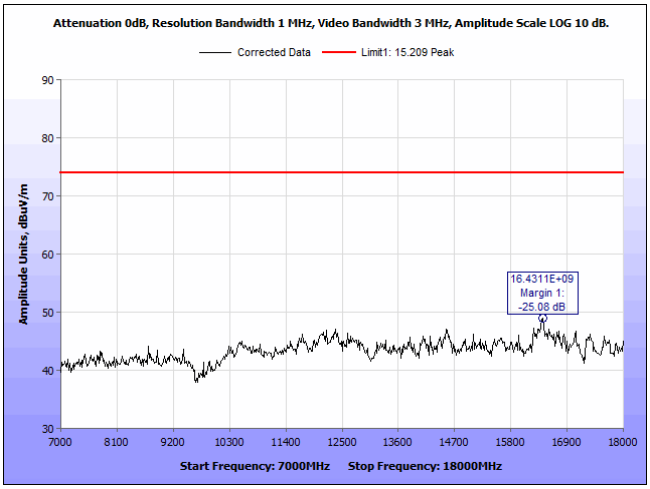

Plot 74. Radiated Spurious Emissions, 802.11g, 2412 MHz, 7 – 18 GHz, V, Peak

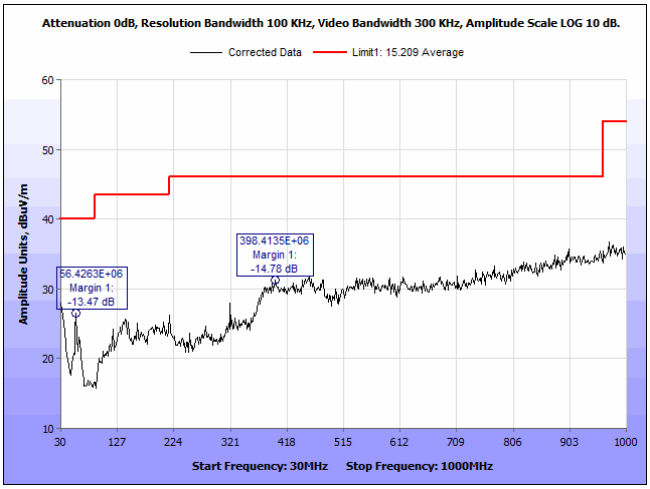

Plot 75. Radiated Spurious Emissions, 802.11g, 2437 MHz, 30 MHz – 1 GHz, H

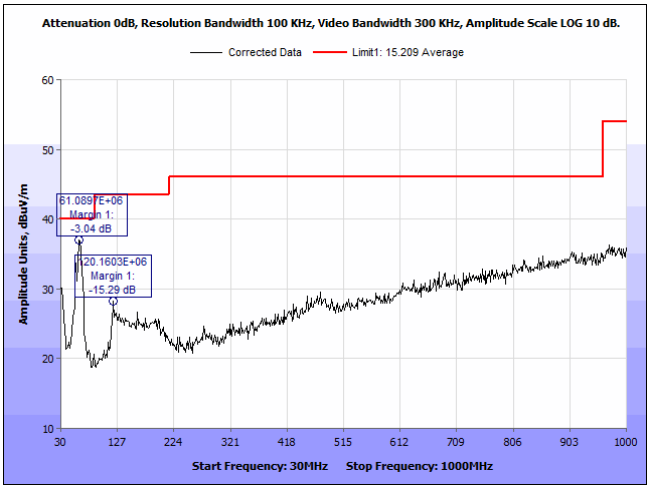

Plot 76. Radiated Spurious Emissions, 802.11g, 2437 MHz, 30 MHz – 1 GHz, V

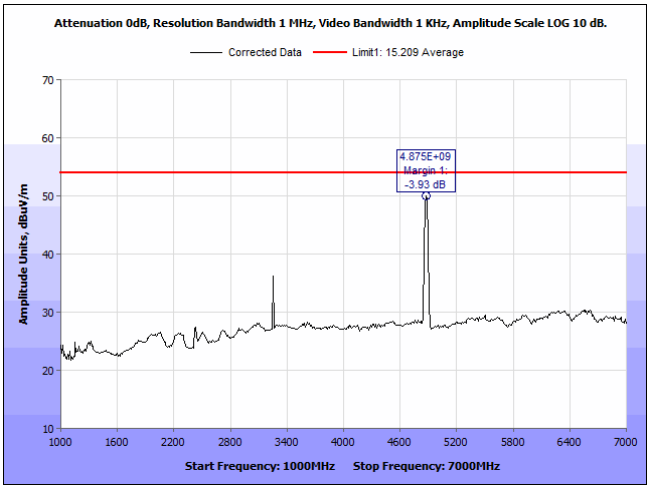

Plot 77. Radiated Spurious Emissions, 802.11g, 2437 MHz, 1 – 7 GHz, H, Average

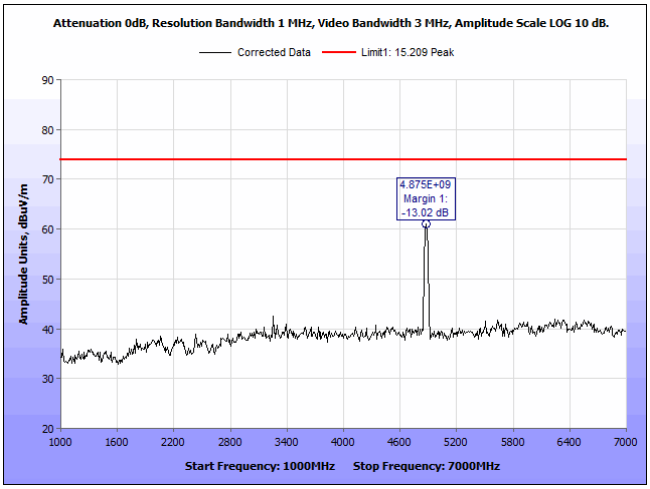

Plot 78. Radiated Spurious Emissions, 802.11g, 2437 MHz, 1 – 7 GHz, H, Peak

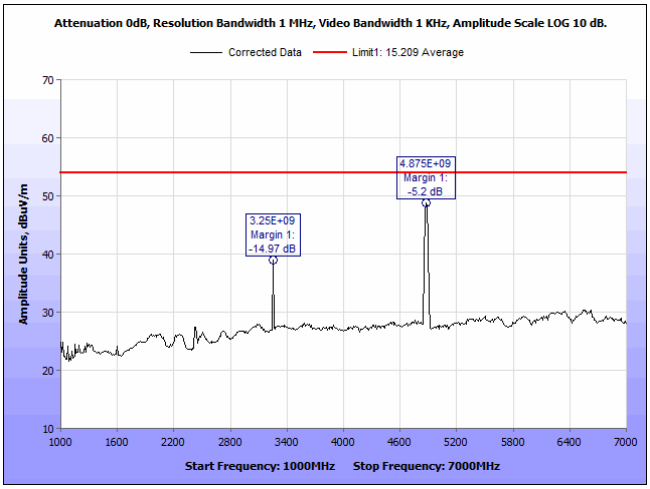

Plot 79. Radiated Spurious Emissions, 802.11g, 2437 MHz, 1 – 7 GHz, V, Average

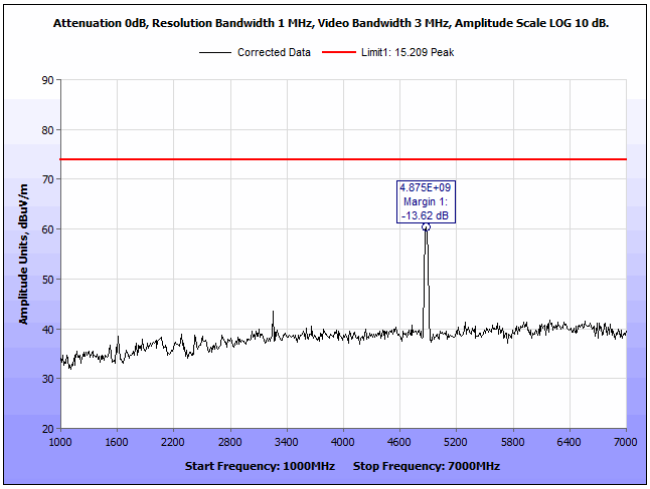

Plot 80. Radiated Spurious Emissions, 802.11g, 2437 MHz, 1- 7 GHz, V, Peak

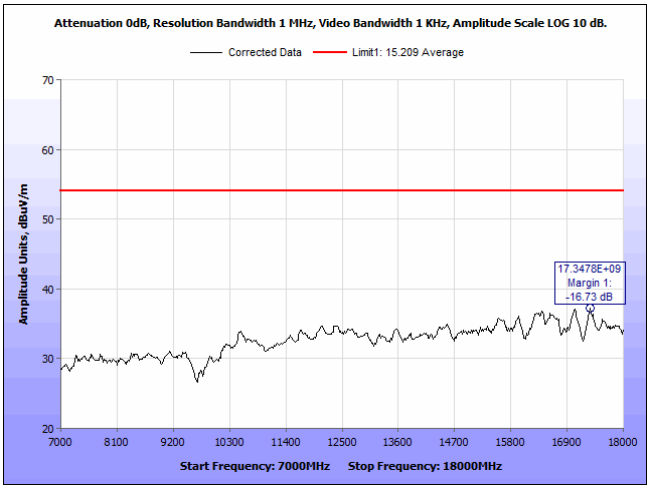

Plot 81. Radiated Spurious Emissions, 802.11g, 2437 MHz, 7 – 18 GHz, H, Average

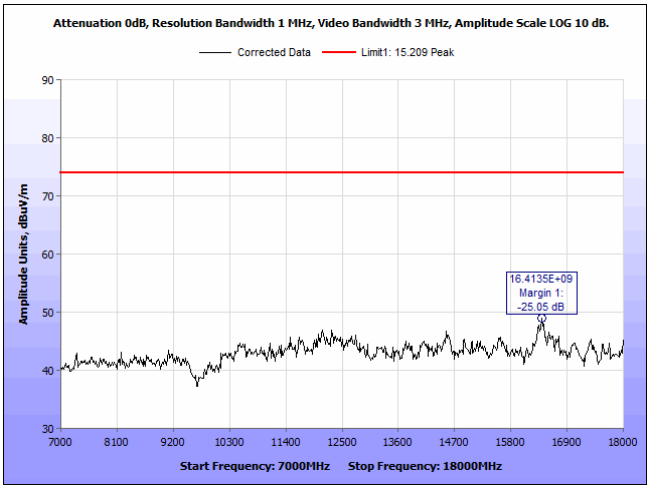

Plot 82. Radiated Spurious Emissions, 802.11g, 2437 MHz, 7 – 18 GHz, H, Peak

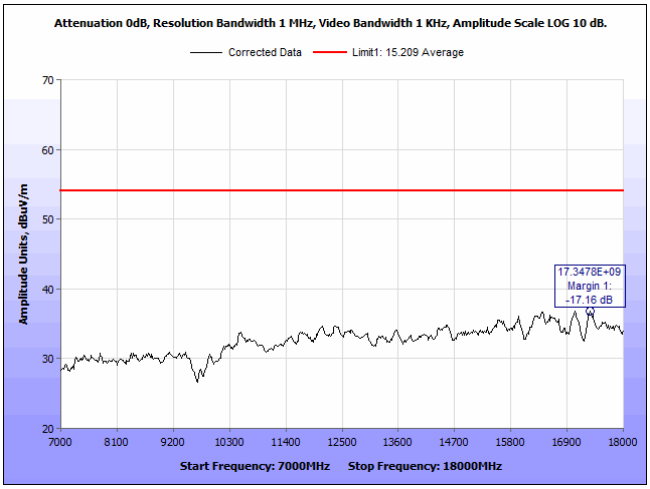

Plot 83. Radiated Spurious Emissions, 802.11g, 2437 MHz, 7 – 18 GHz, V, Average

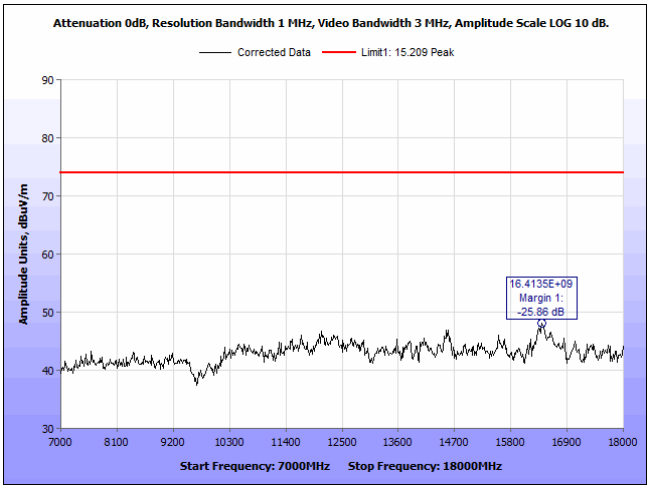

Plot 84. Radiated Spurious Emissions, 802.11g, 2437 MHz, 7 – 18 GHz, V, Peak

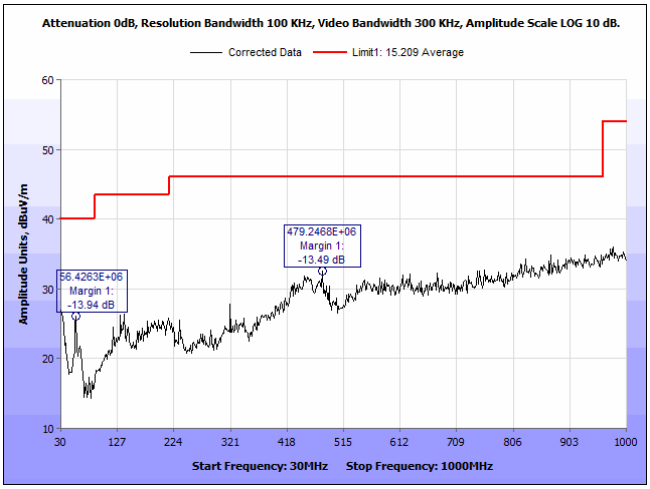

Plot 85. Radiated Spurious Emissions, 802.11g, 2462 MHz, 30 MHz – 1 GHz, H

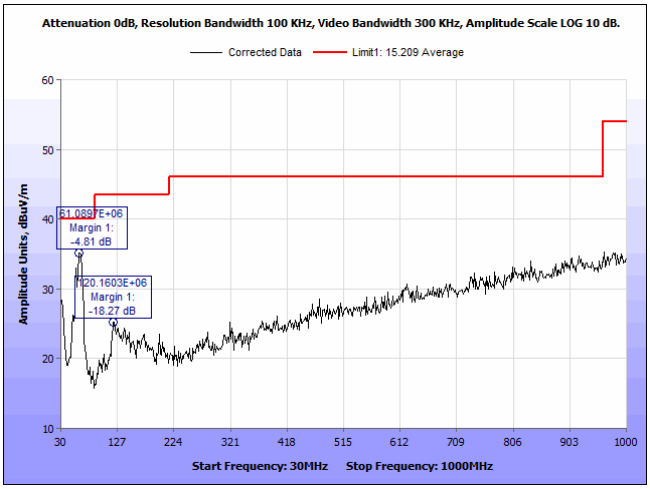

Plot 86. Radiated Spurious Emissions, 802.11g, 2462 MHz, 30 MHz – 1 GHz, V

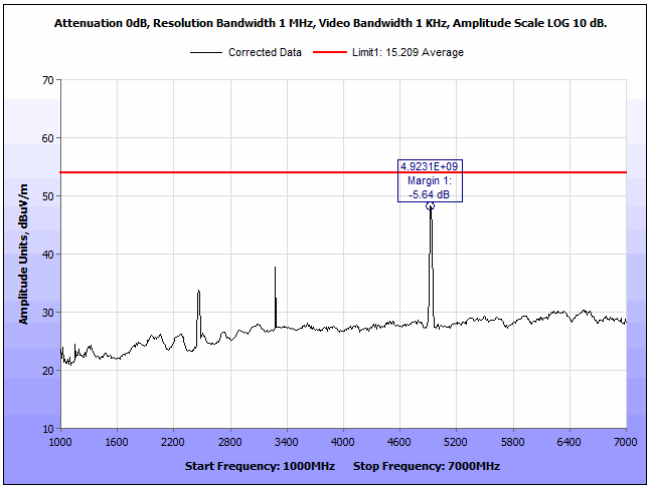

Plot 87. Radiated Spurious Emissions, 802.11g, 2462 MHz, 1 – 7 GHz, H, Average

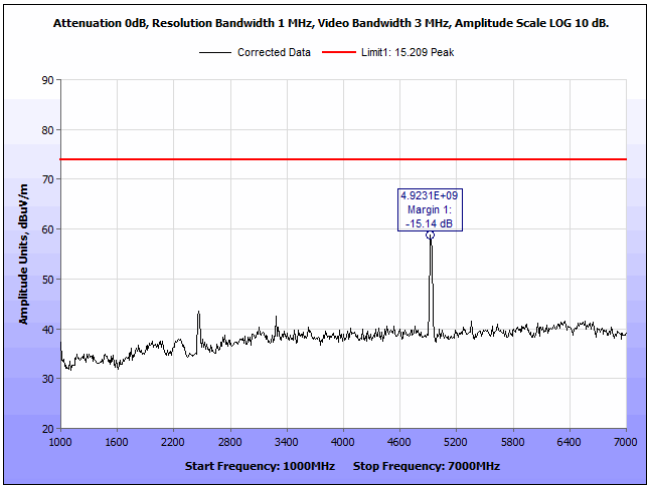

Plot 88. Radiated Spurious Emissions, 802.11g, 2462 MHz, 1 – 7 GHz, H, Peak

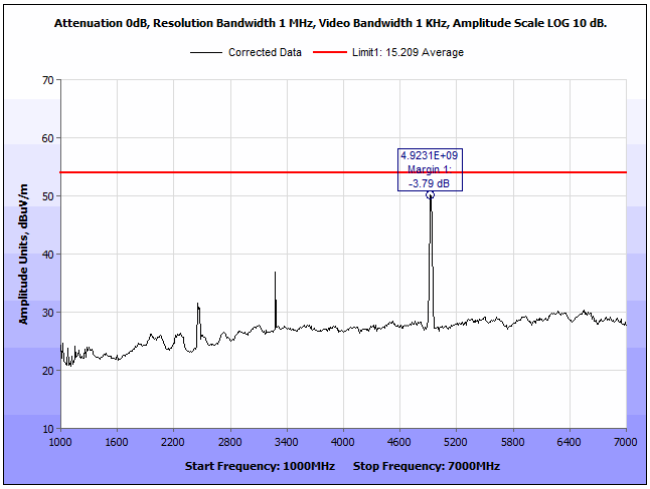

Plot 89. Radiated Spurious Emissions, 802.11g, 2462 MHz, 1 – 7 GHz, V, Average

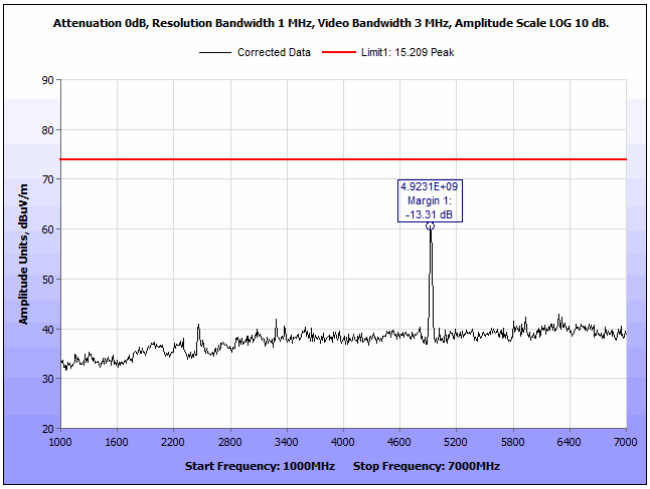

Plot 90. Radiated Spurious Emissions, 802.11g, 2462 MHz, 1- 7 GHz, V, Peak

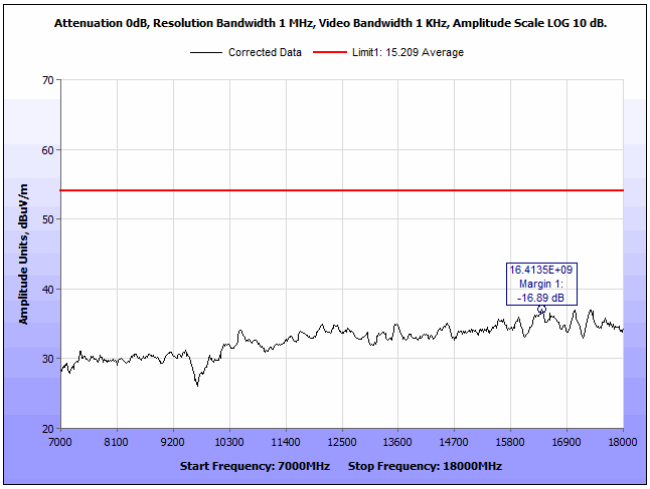

Plot 91. Radiated Spurious Emissions, 802.11g, 2462 MHz, 7 – 18 GHz, H, Average

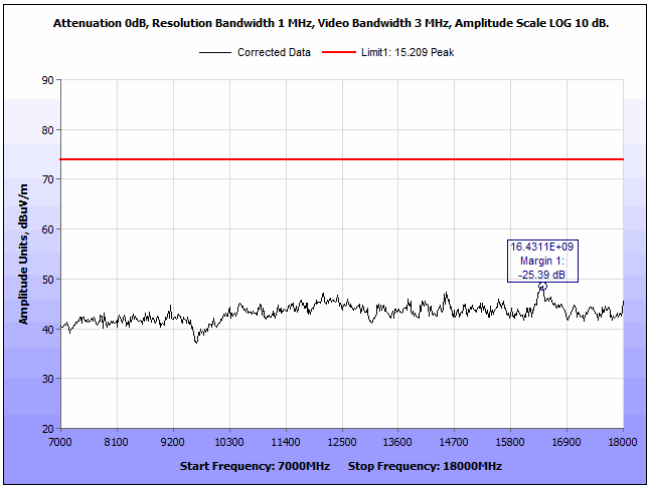

Plot 92. Radiated Spurious Emissions, 802.11g, 2462 MHz, 7 – 18 GHz, H, Peak

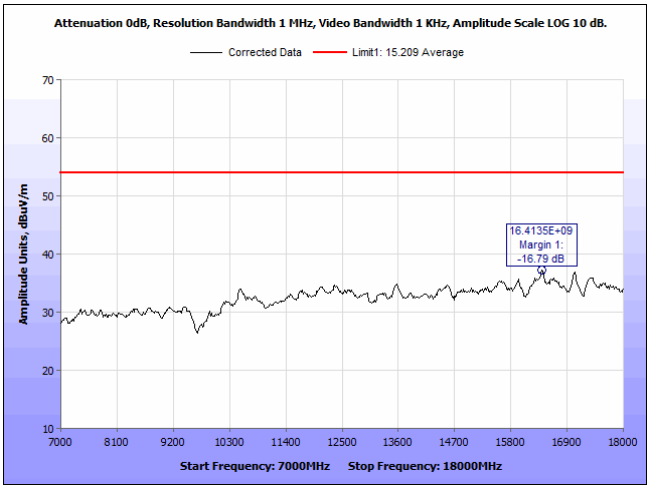

Plot 93. Radiated Spurious Emissions, 802.11g, 2462 MHz, 7 – 18 GHz, V, Average

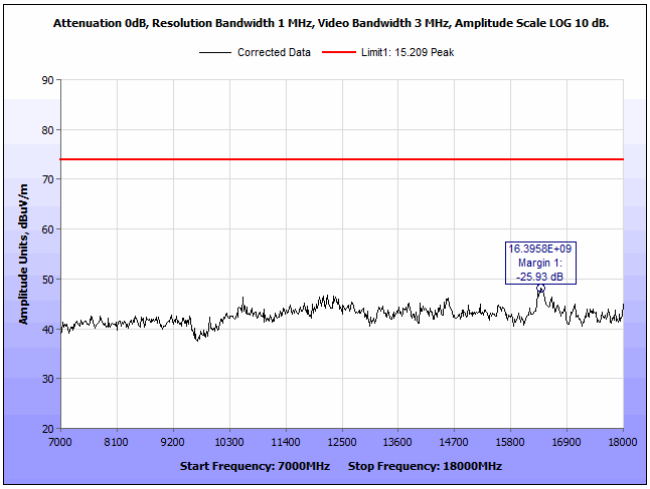

Plot 94. Radiated Spurious Emissions, 802.11g, 2462 MHz, 7 – 18 GHz, V, Peak

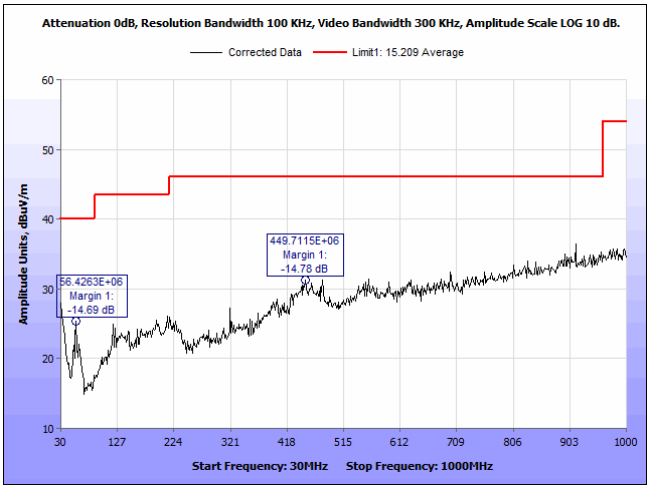

Plot 95. Radiated Spurious Emissions, 802.11n HT20, 2412 MHz, 30 MHz – 1 GHz, H

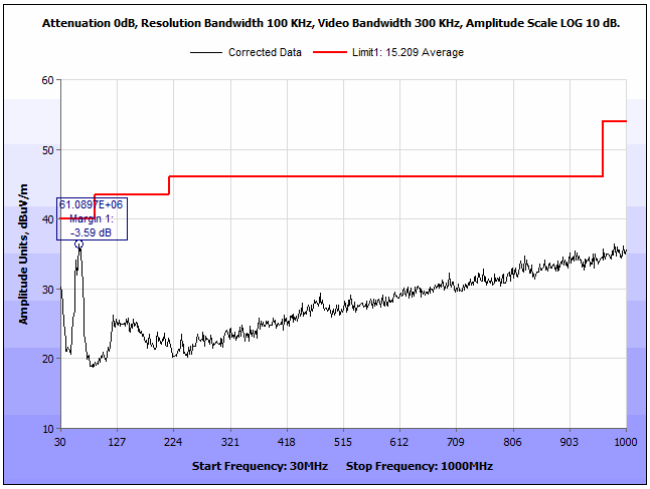

Plot 96. Radiated Spurious Emissions, 802.11n HT20, 2412 MHz, 30 MHz – 1 GHz, V

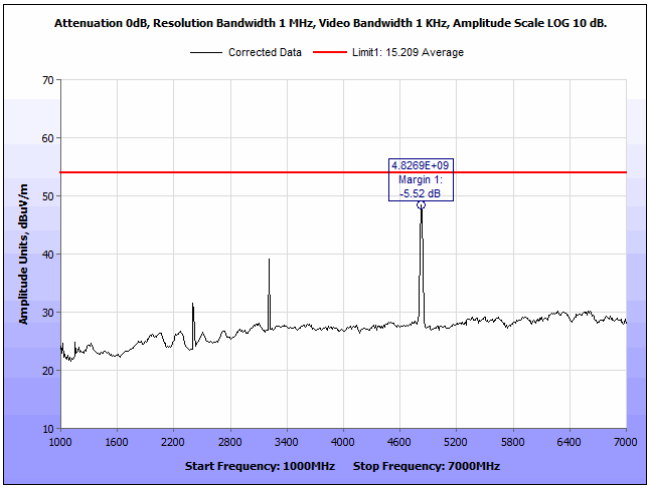

Plot 97. Radiated Spurious Emissions, 802.11n HT20, 2412 MHz, 1 – 7 GHz, H, Average

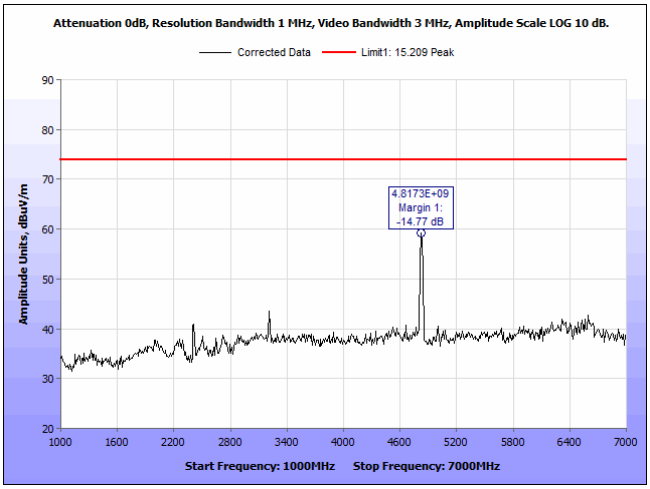

Plot 98. Radiated Spurious Emissions, 802.11n HT20, 2412 MHz, 1 – 7 GHz, H, Peak

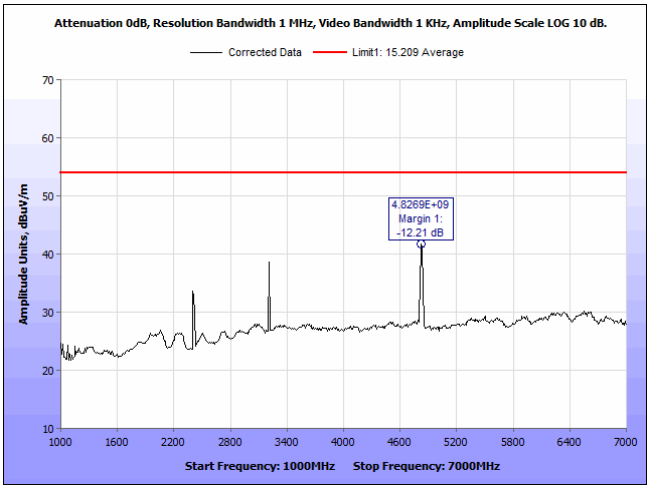

Plot 99. Radiated Spurious Emissions, 802.11n HT20, 2412 MHz, 1 – 7 GHz, V, Average

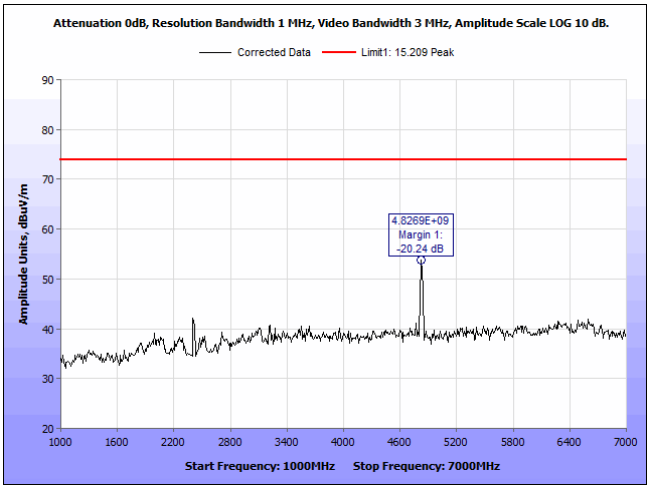

Plot 100. Radiated Spurious Emissions, 802.11n HT20, 2412 MHz, 1- 7 GHz, V, Peak

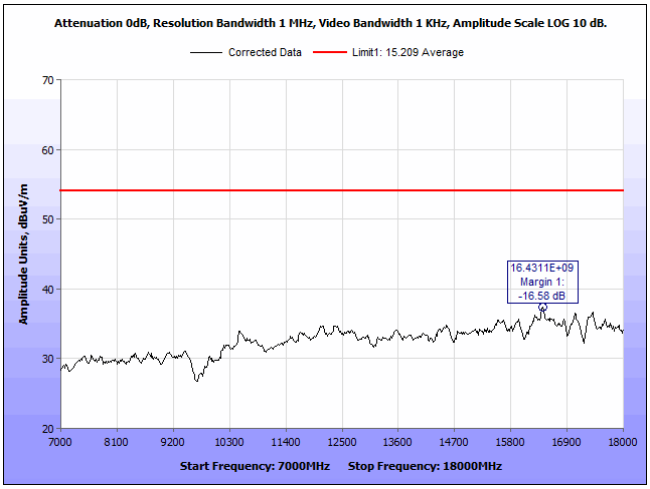

Plot 101. Radiated Spurious Emissions, 802.11n HT20, 2412 MHz, 7 – 18 GHz, H, Average

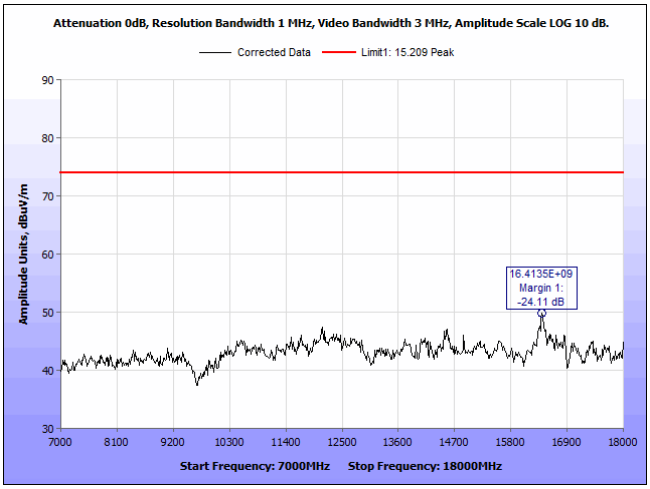

Plot 102. Radiated Spurious Emissions, 802.11n HT20, 2412 MHz, 7 – 18 GHz, H, Peak

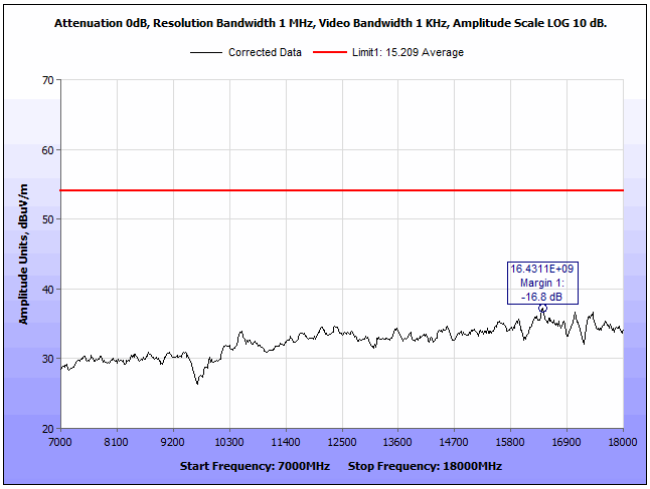

Plot 103. Radiated Spurious Emissions, 802.11n HT20, 2412 MHz, 7 – 18 GHz, V, Average

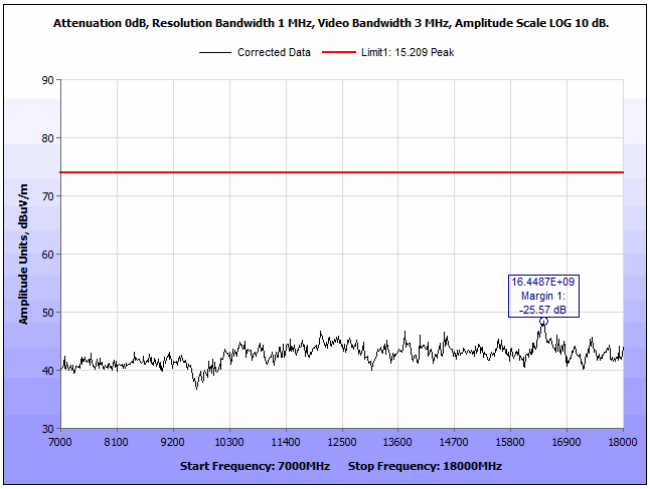

Plot 104. Radiated Spurious Emissions, 802.11n HT20, 2412 MHz, 7 – 18 GHz, V, Peak

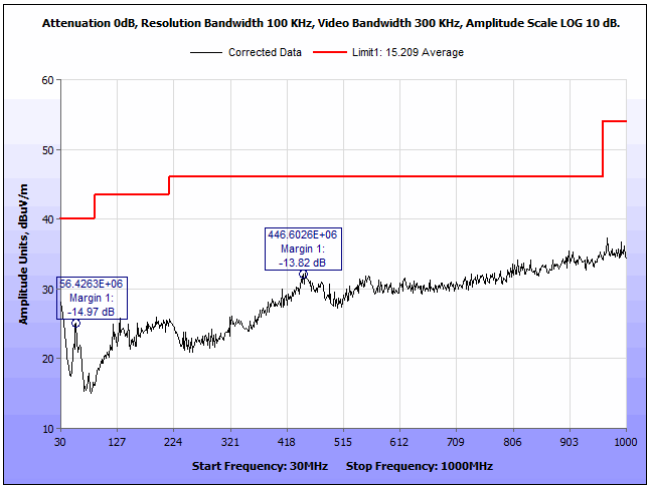

Plot 105. Radiated Spurious Emissions, 802.11n HT20, 2437 MHz, 30 MHz – 1 GHz, H

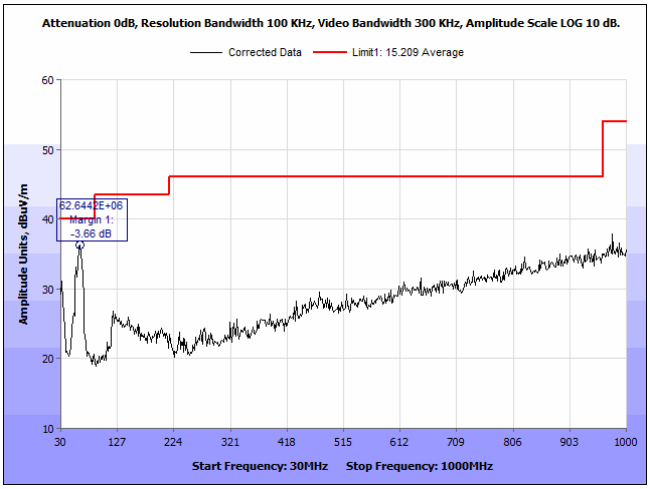

Plot 106. Radiated Spurious Emissions, 802.11n HT20, 2437 MHz, 30 MHz – 1 GHz, V

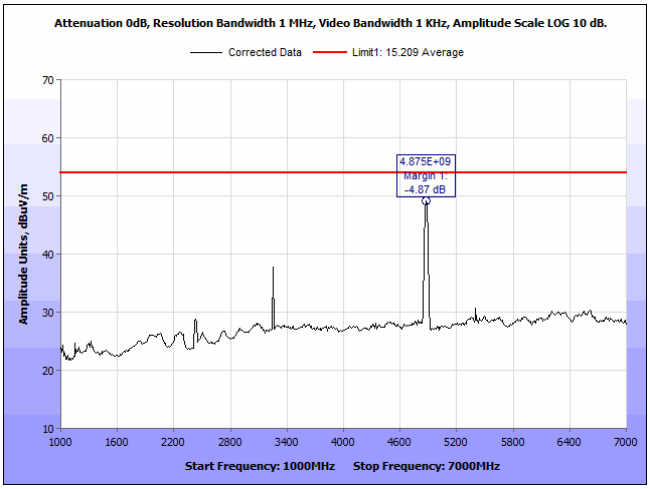

Plot 107. Radiated Spurious Emissions, 802.11n HT20, 2437 MHz, 1 – 7 GHz, H, Average

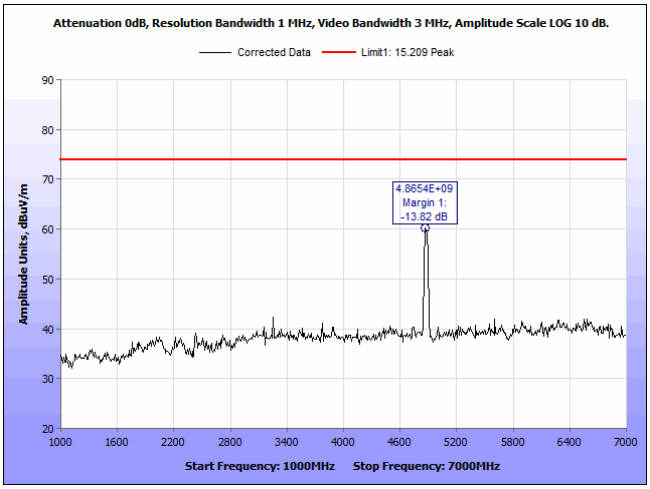

Plot 108. Radiated Spurious Emissions, 802.11n HT20, 2437 MHz, 1 – 7 GHz, H, Peak

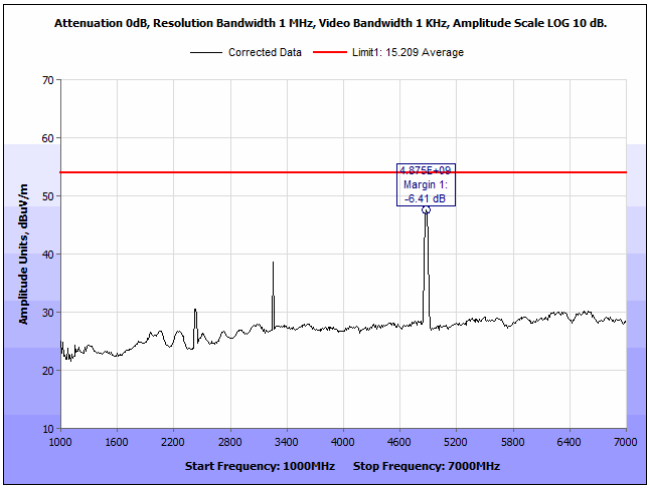

Plot 109. Radiated Spurious Emissions, 802.11n HT20, 2437 MHz, 1 – 7 GHz, V, Average

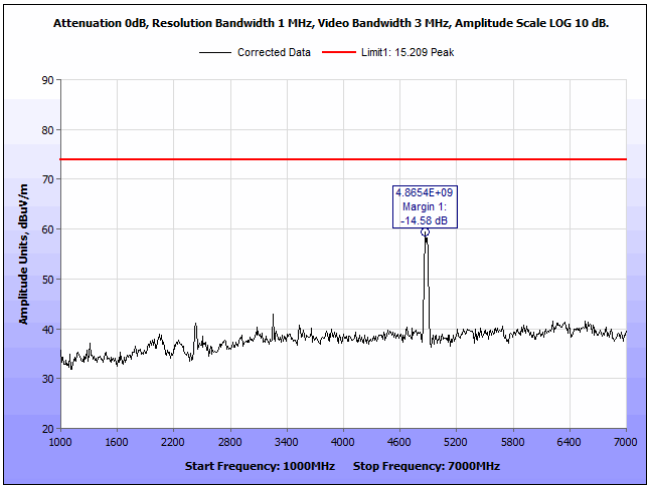

Plot 110. Radiated Spurious Emissions, 802.11n HT20, 2437 MHz, 1- 7 GHz, V, Peak

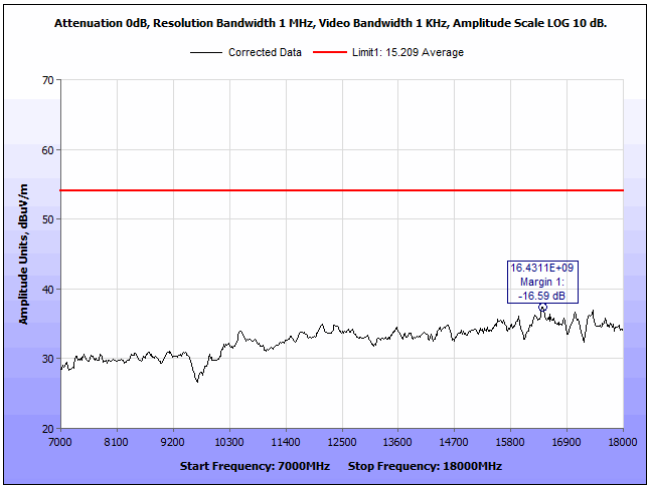

Plot 111. Radiated Spurious Emissions, 802.11n HT20, 2437 MHz, 7 – 18 GHz, H, Average

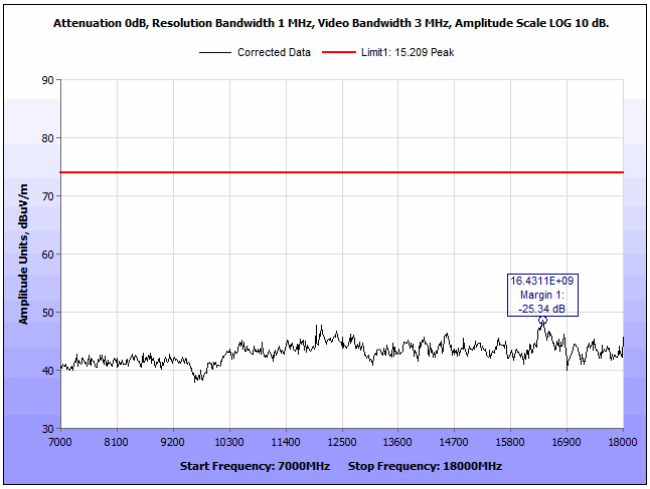

Plot 112. Radiated Spurious Emissions, 802.11n HT20, 2437 MHz, 7 – 18 GHz, H, Peak

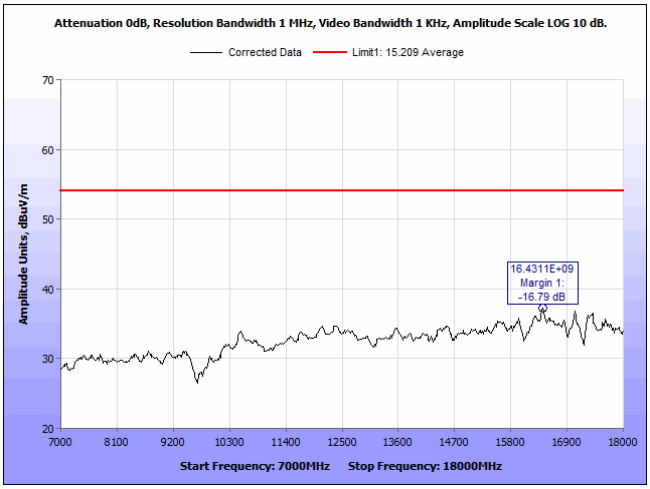

Plot 113. Radiated Spurious Emissions, 802.11n HT20, 2437 MHz, 7 – 18 GHz, V, Average

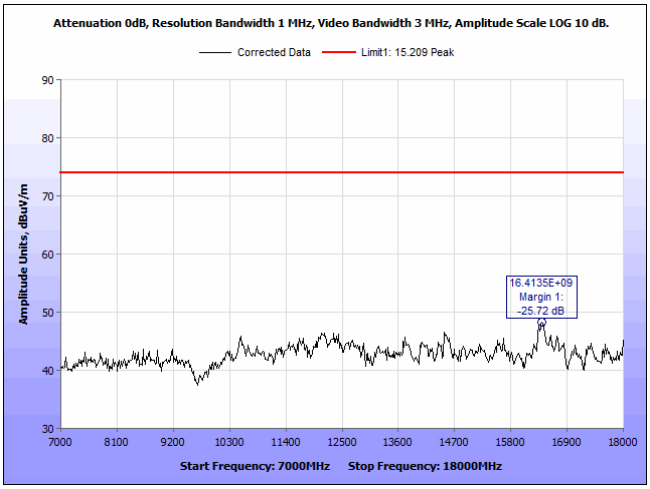

Plot 114. Radiated Spurious Emissions, 802.11n HT20, 2437 MHz, 7 – 18 GHz, V, Peak

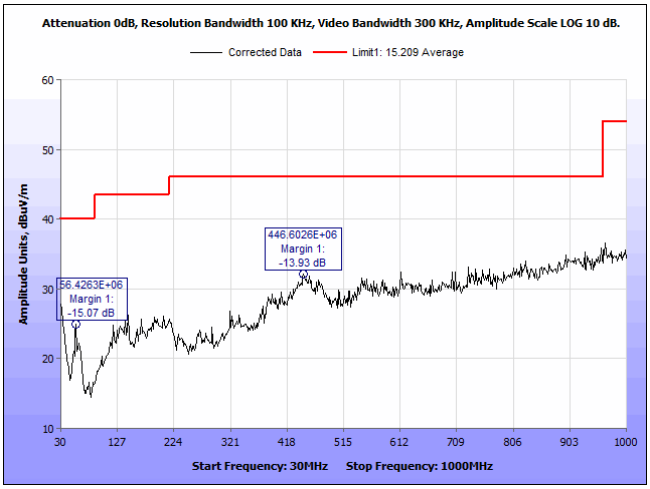

Plot 115. Radiated Spurious Emissions, 802.11n HT20, 2462 MHz, 30 MHz – 1 GHz, H

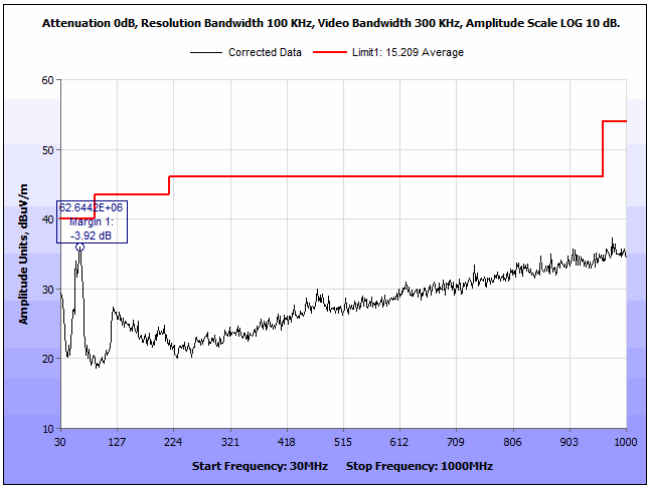

Plot 116. Radiated Spurious Emissions, 802.11n HT20, 2462 MHz, 30 MHz – 1 GHz, V

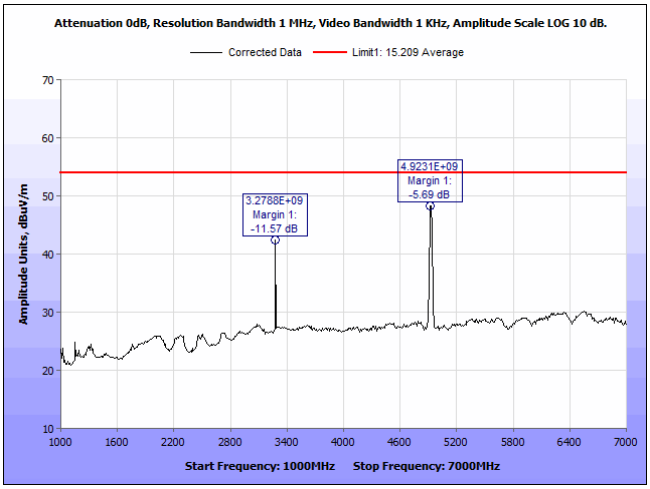

Plot 117. Radiated Spurious Emissions, 802.11n HT20, 2462 MHz, 1 – 7 GHz, H, Average

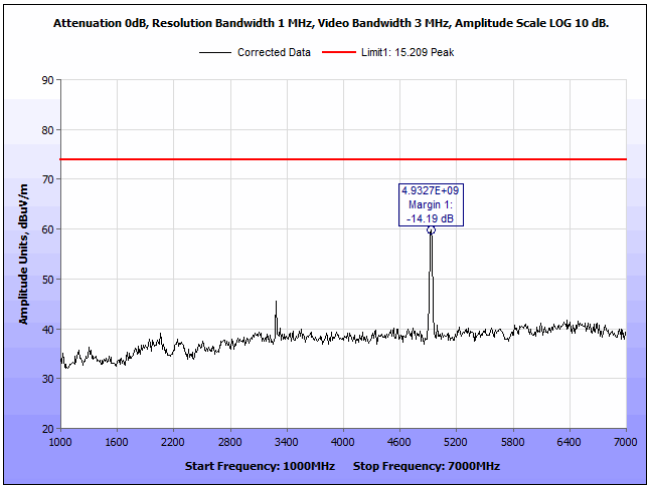

Plot 118. Radiated Spurious Emissions, 802.11n HT20, 2462 MHz, 1 – 7 GHz, H, Peak

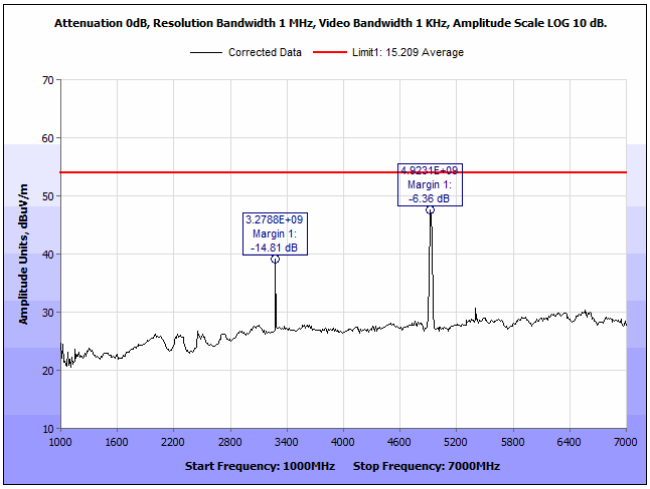

Plot 119. Radiated Spurious Emissions, 802.11n HT20, 2462 MHz, 1 – 7 GHz, V, Average

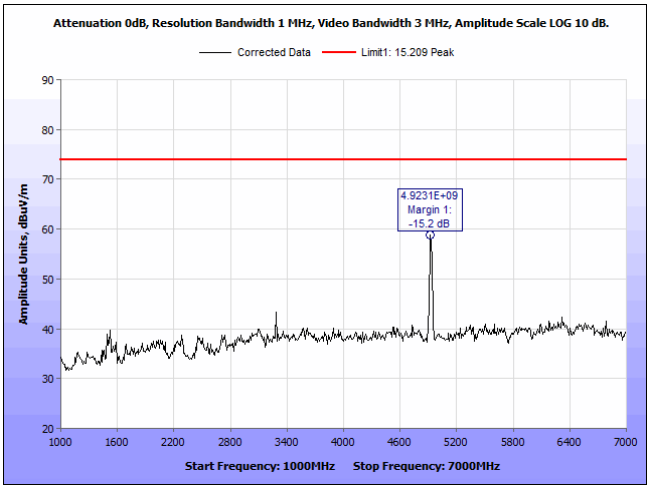

Plot 120. Radiated Spurious Emissions, 802.11n HT20, 2462 MHz, 1 – 7 GHz, V, Peak

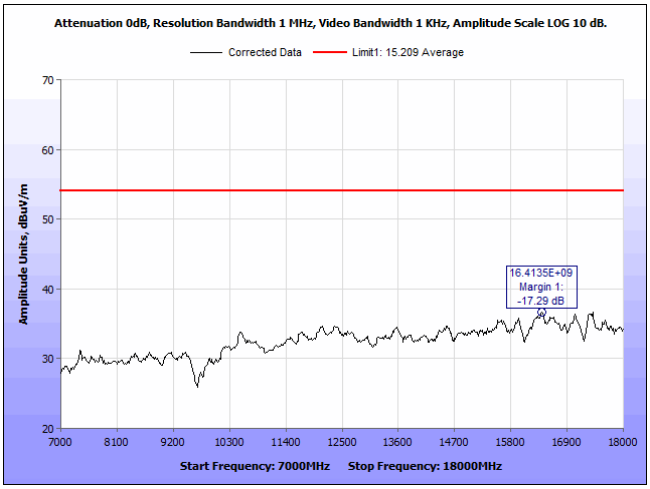

Plot 121. Radiated Spurious Emissions, 802.11n HT20, 2462 MHz, 7 – 18 GHz, H, Average

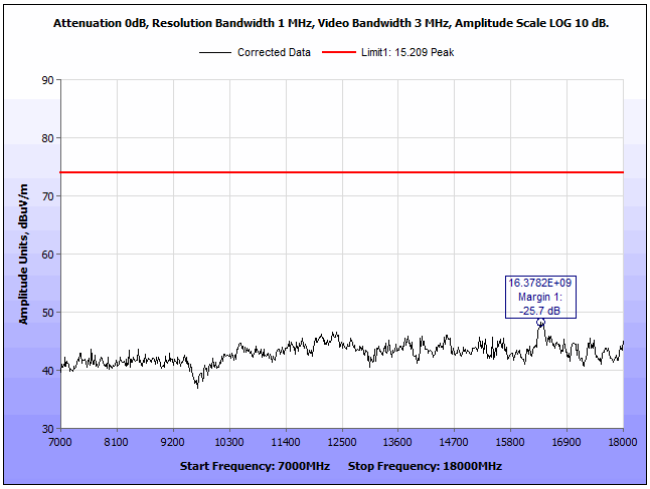

Plot 122. Radiated Spurious Emissions, 802.11n HT20, 2462 MHz, 7 – 18 GHz, H, Peak

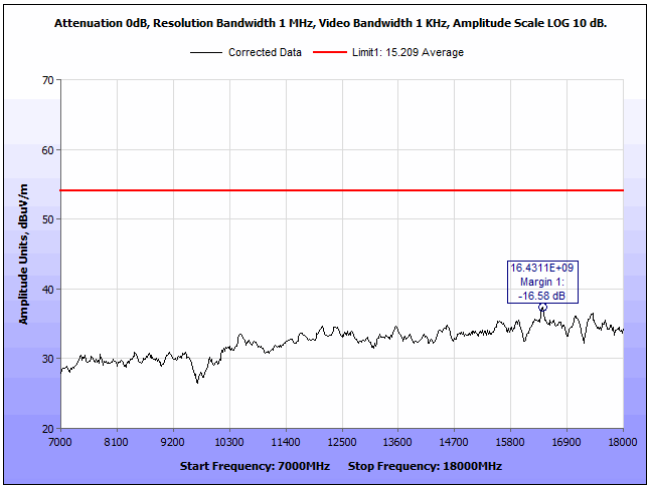

Plot 123. Radiated Spurious Emissions, 802.11n HT20, 2462 MHz, 7 – 18 GHz, V, Average

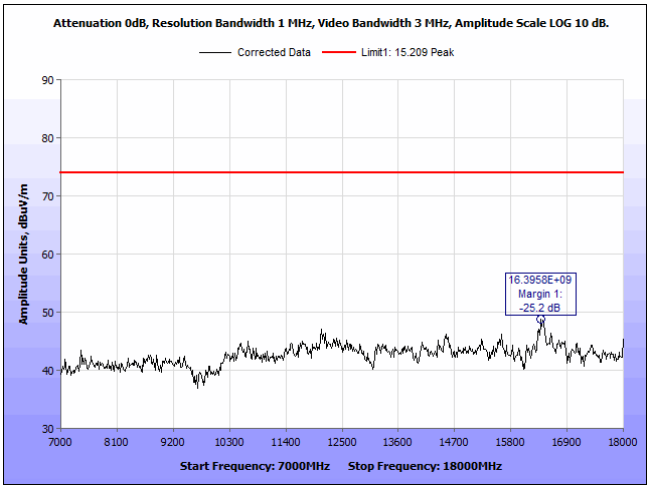

Plot 124. Radiated Spurious Emissions, 802.11n HT20, 2462 MHz, 7 – 18 GHz, V, Peak

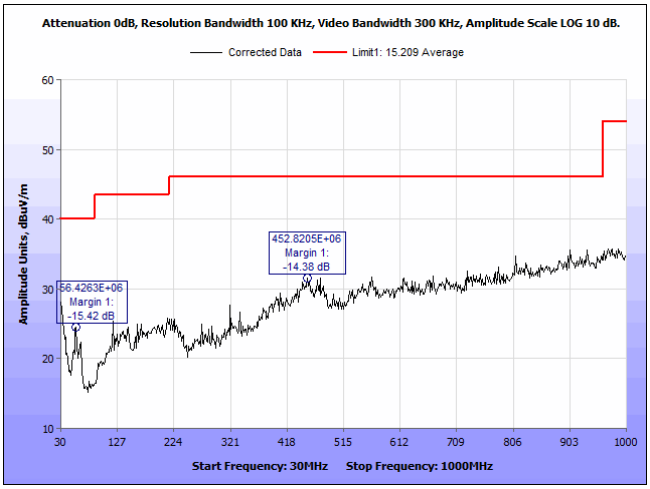

Plot 125. Radiated Spurious Emissions, 802.11n HT40, 2422 MHz, 30 MHz – 1 GHz, H

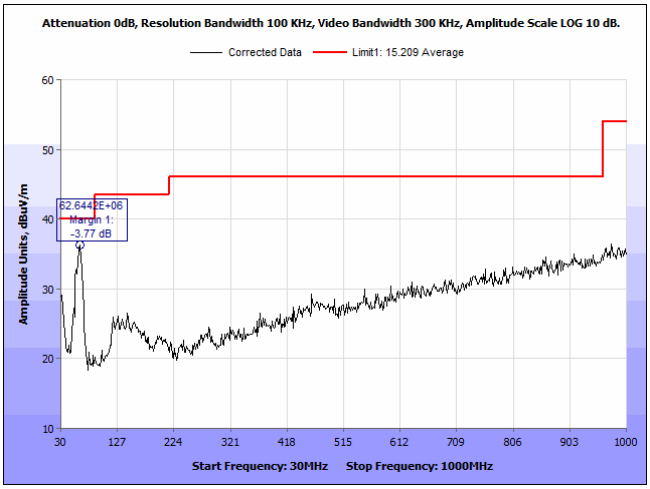

Plot 126. Radiated Spurious Emissions, 802.11n HT40, 2422 MHz, 30 MHz – 1 GHz, V

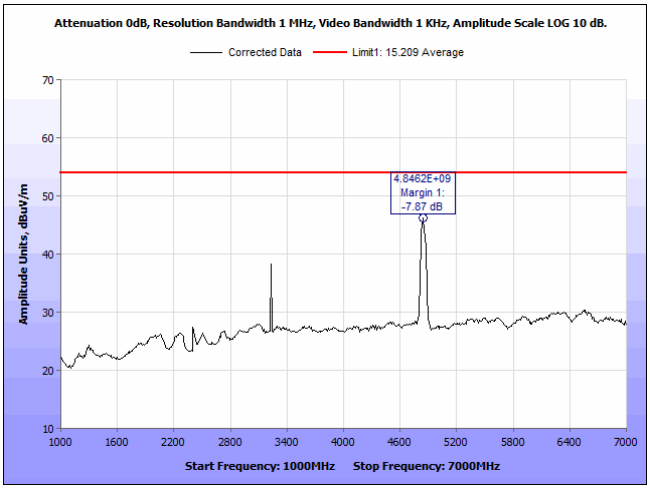

Plot 127. Radiated Spurious Emissions, 802.11n HT40, 2422 MHz, 1 – 7 GHz, H, Average

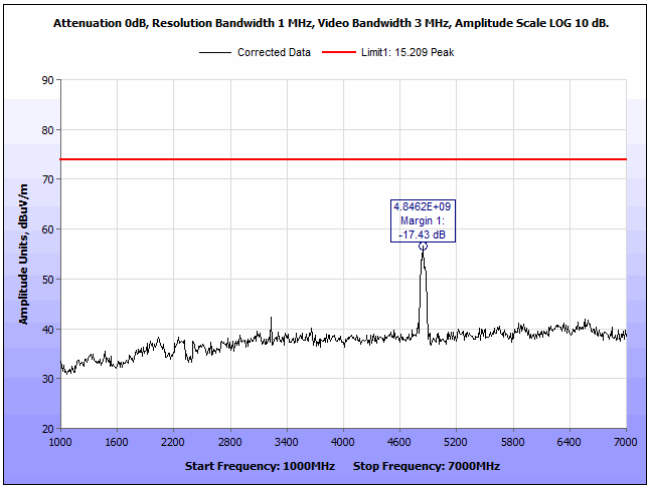

Plot 128. Radiated Spurious Emissions, 802.11n HT40, 2422 MHz, 1 – 7 GHz, H, Peak

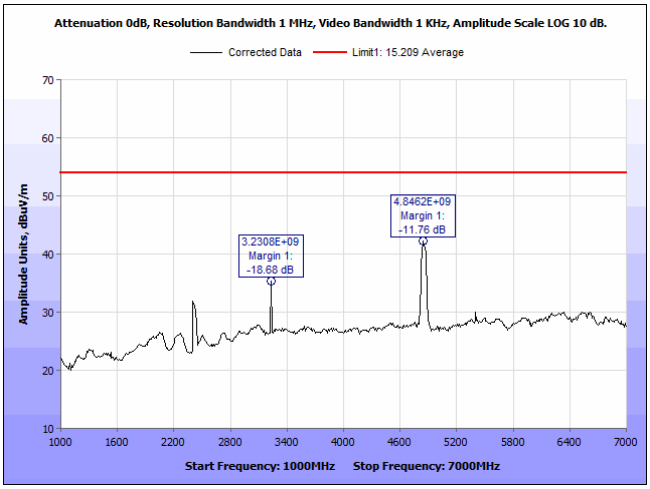

Plot 129. Radiated Spurious Emissions, 802.11n HT40, 2422 MHz, 1 – 7 GHz, V, Average

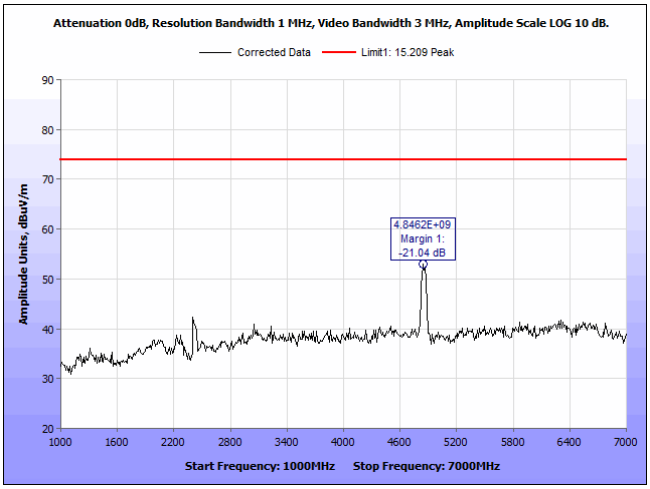

Plot 130. Radiated Spurious Emissions, 802.11n HT40, 2422 MHz, 1- 7 GHz, V, Peak

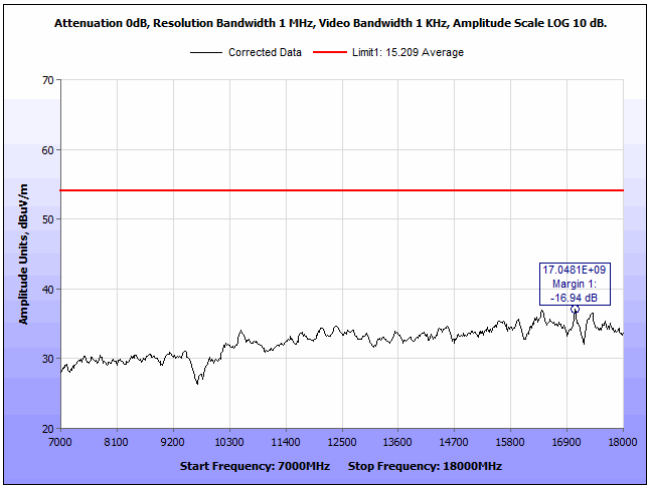

Plot 131. Radiated Spurious Emissions, 802.11n HT40, 2422 MHz, 7 – 18 GHz, H, Average

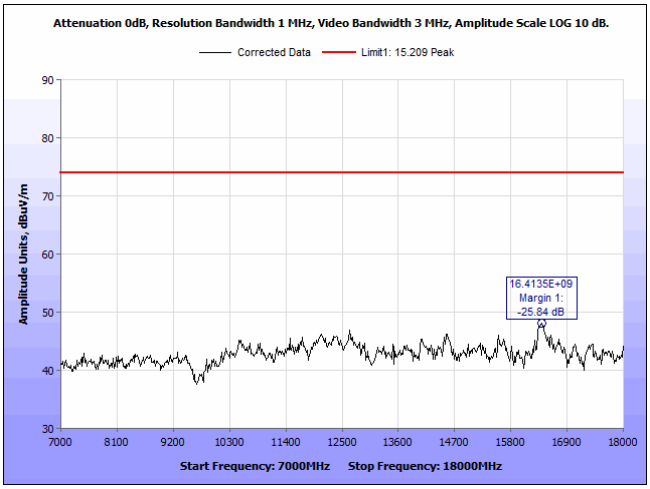

Plot 132. Radiated Spurious Emissions, 802.11n HT40, 2422 MHz, 7 – 18 GHz, H, Peak

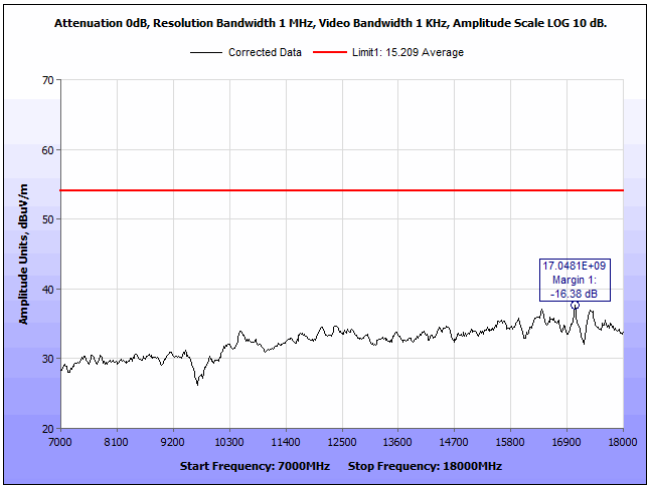

Plot 133. Radiated Spurious Emissions, 802.11n HT40, 2422 MHz, 7 – 18 GHz, V, Average

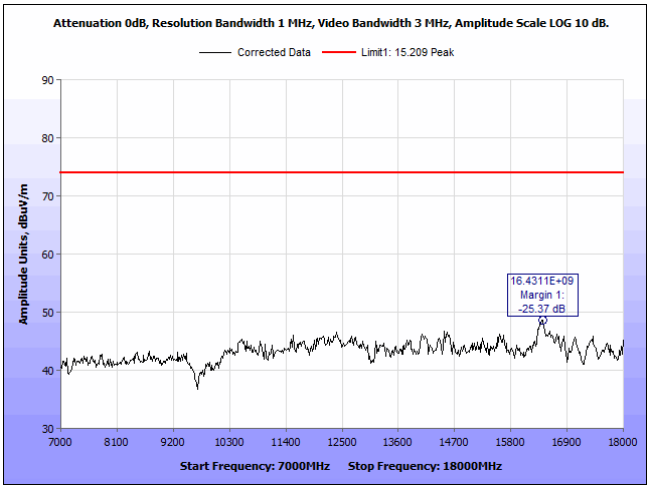

Plot 134. Radiated Spurious Emissions, 802.11n HT40, 2422 MHz, 7 – 18 GHz, V, Peak

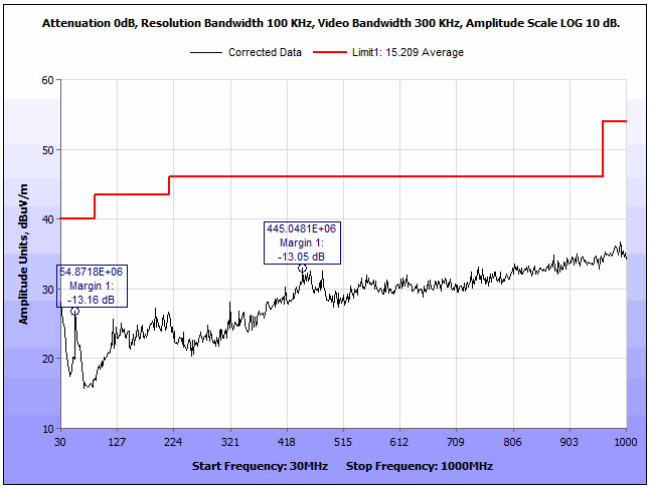

Plot 135. Radiated Spurious Emissions, 802.11n HT40, 2437 MHz, 30 MHz – 1 GHz, H

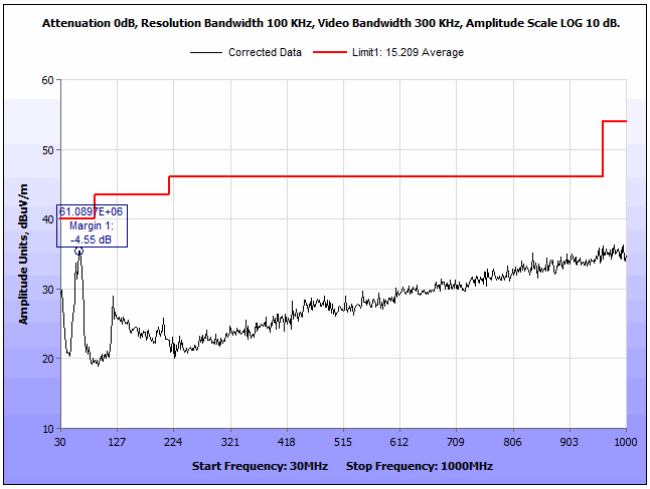

Plot 136. Radiated Spurious Emissions, 802.11n HT40, 2437 MHz, 30 MHz – 1 GHz, V

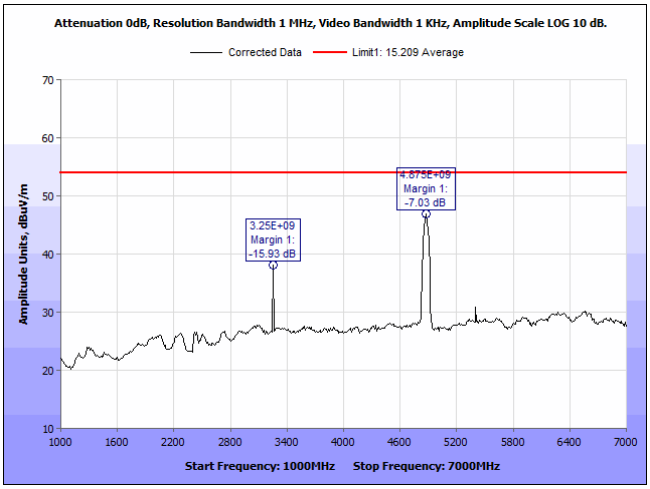

Plot 137. Radiated Spurious Emissions, 802.11n HT40, 2437 MHz, 1 – 7 GHz, H, Average

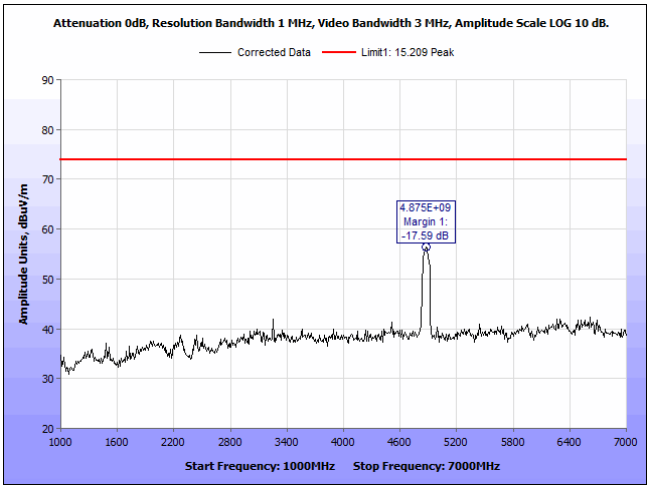

Plot 138. Radiated Spurious Emissions, 802.11n HT40, 2437 MHz, 1 – 7 GHz, H, Peak

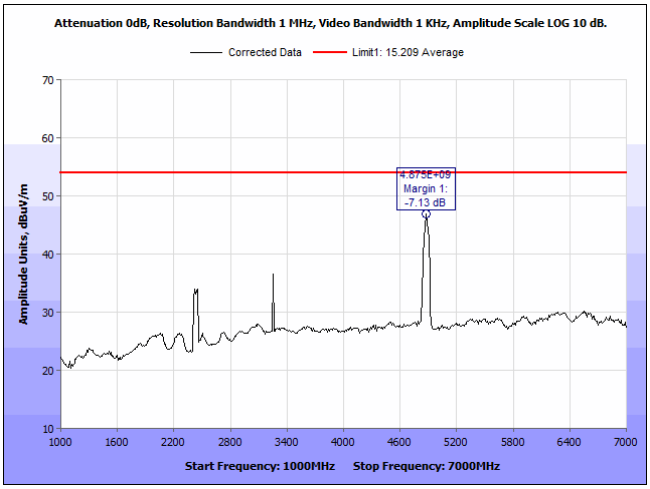

Plot 139. Radiated Spurious Emissions, 802.11n HT40, 2437 MHz, 1 – 7 GHz, V, Average

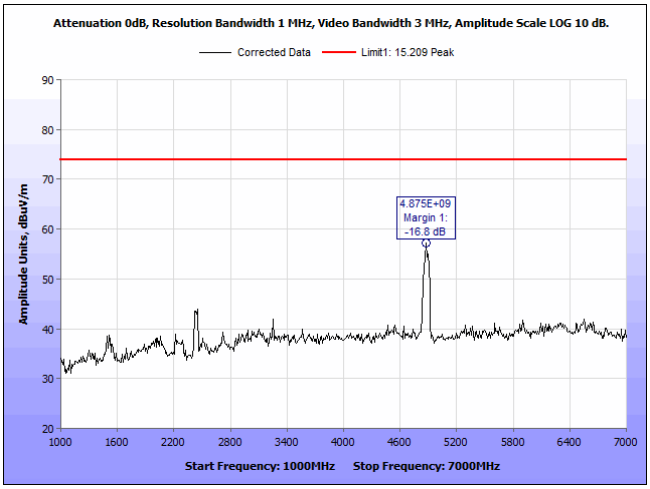

Plot 140. Radiated Spurious Emissions, 802.11n HT40, 2437 MHz, 1- 7 GHz, V, Peak

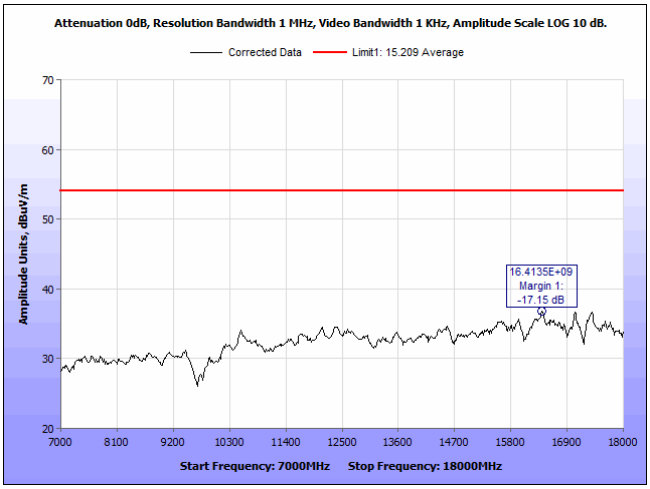

Plot 141. Radiated Spurious Emissions, 802.11n HT40, 2437 MHz, 7 – 18 GHz, H, Average

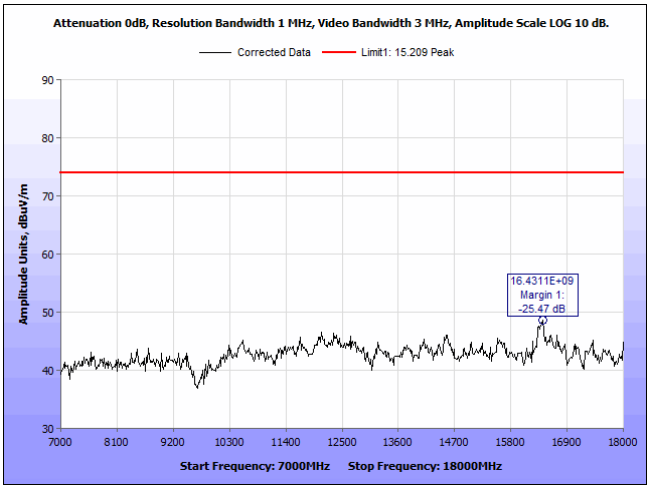

Plot 142. Radiated Spurious Emissions, 802.11n HT40, 2437 MHz, 7 – 18 GHz, H, Peak

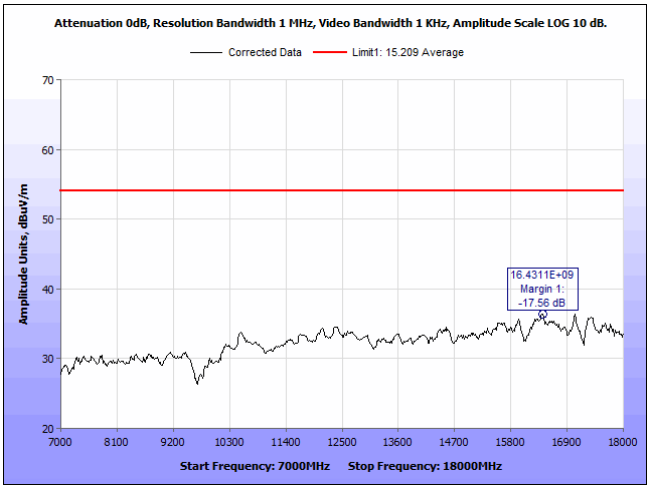

Plot 143. Radiated Spurious Emissions, 802.11n HT40, 2437 MHz, 7 – 18 GHz, V, Average

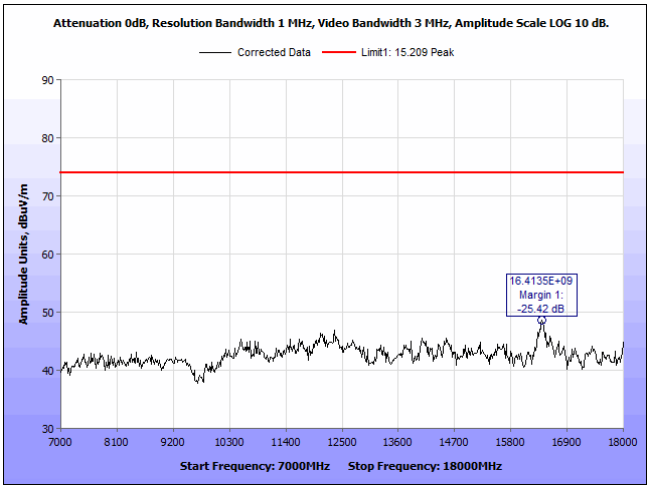

Plot 144. Radiated Spurious Emissions, 802.11n HT40, 2437 MHz, 7 – 18 GHz, V, Peak

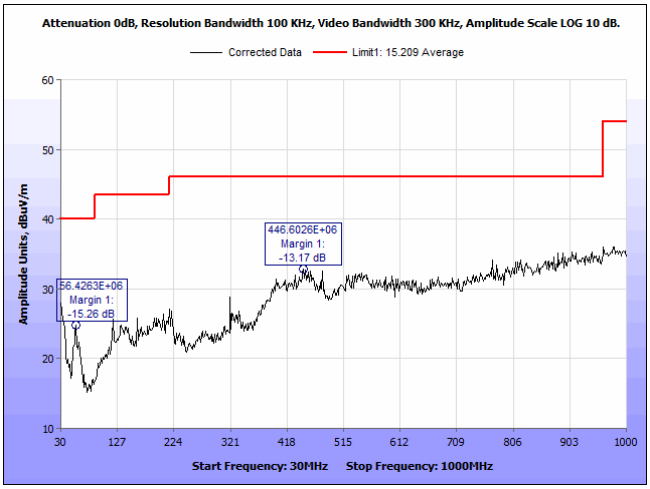

Plot 145. Radiated Spurious Emissions, 802.11n HT40, 2452 MHz, 30 MHz – 1 GHz, H

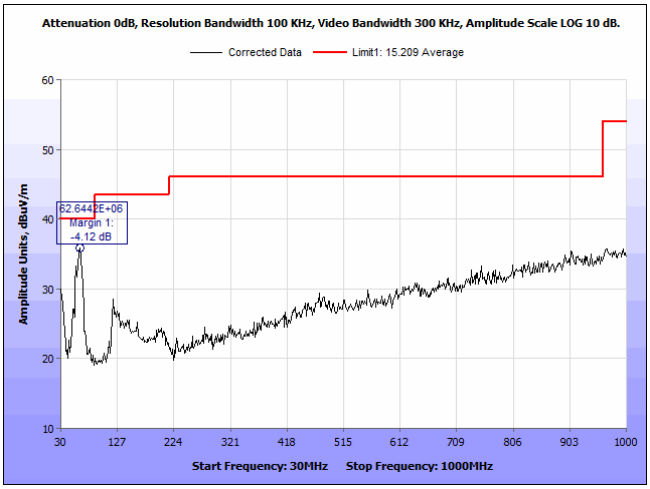

Plot 146. Radiated Spurious Emissions, 802.11n HT40, 2452 MHz, 30 MHz – 1 GHz, V

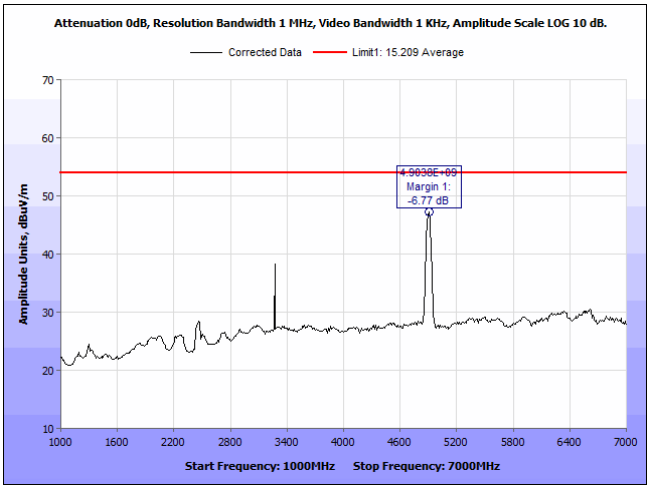

Plot 147. Radiated Spurious Emissions, 802.11n HT40, 2452 MHz, 1 – 7 GHz, H, Average

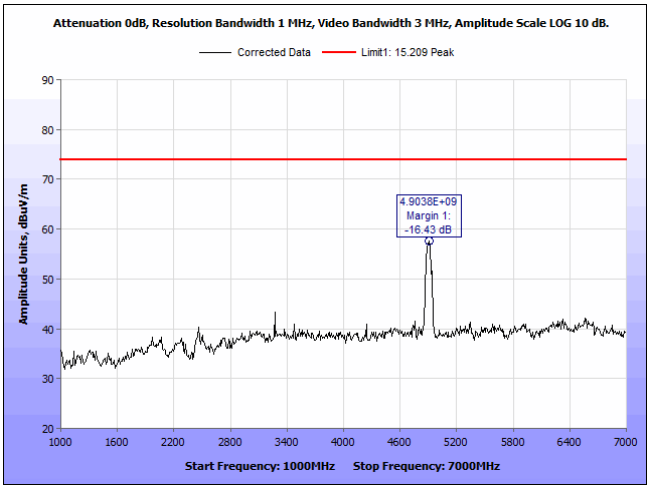

Plot 148. Radiated Spurious Emissions, 802.11n HT40, 2452 MHz, 1 – 7 GHz, H, Peak

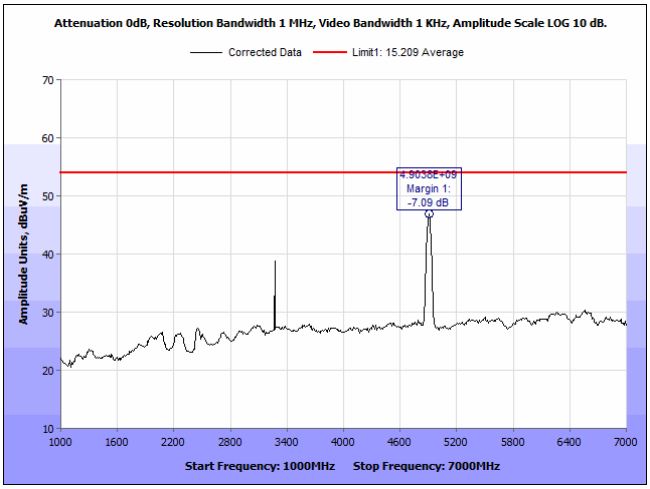

Plot 149. Radiated Spurious Emissions, 802.11n HT40, 2452 MHz, 1 – 7 GHz, V, Average

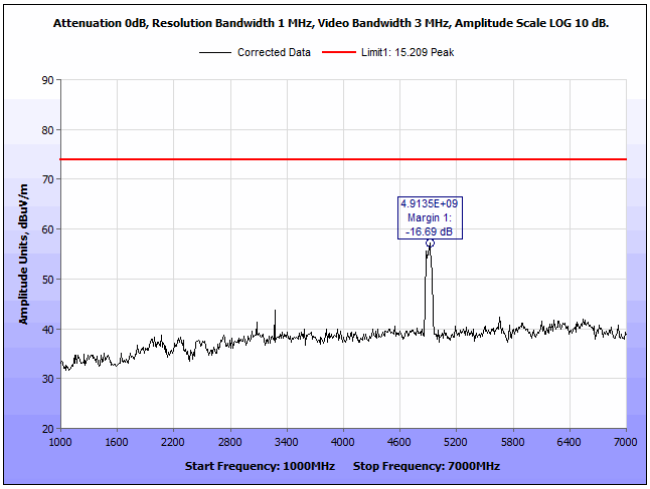

Plot 150. Radiated Spurious Emissions, 802.11n HT40, 2452 MHz, 1- 7 GHz, V, Peak

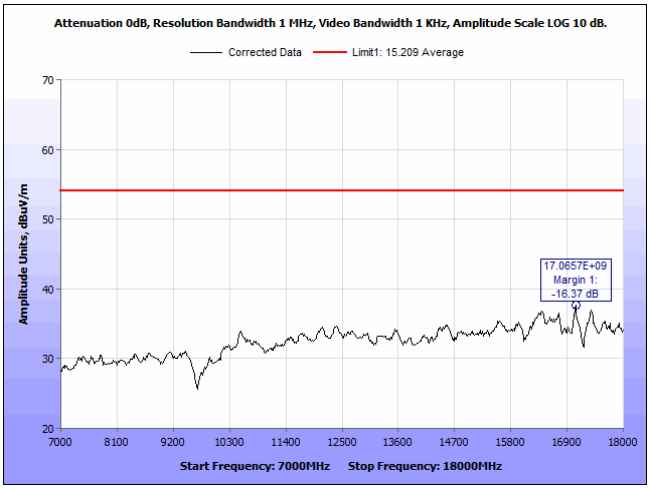

Plot 151. Radiated Spurious Emissions, 802.11n HT40, 2452 MHz, 7 – 18 GHz, H, Average

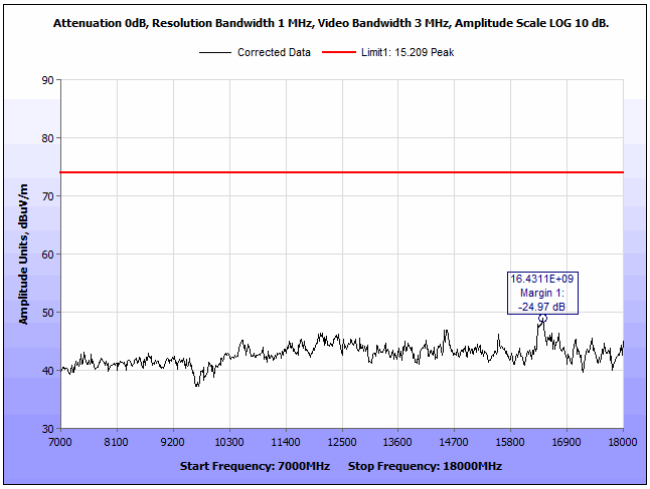

Plot 152. Radiated Spurious Emissions, 802.11n HT40, 2452 MHz, 7 – 18 GHz, H, Peak

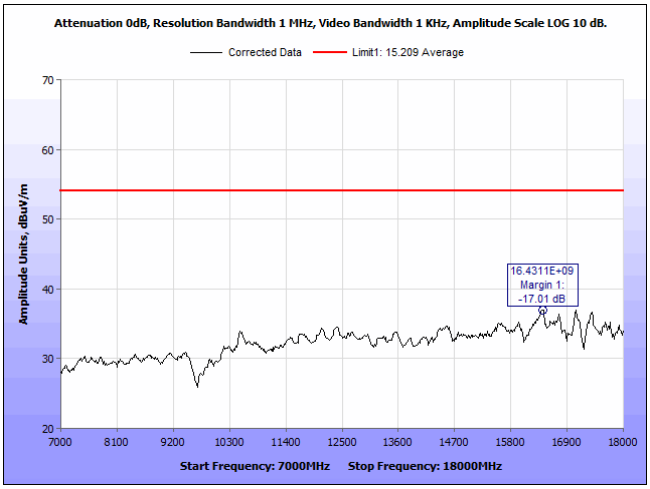

Plot 153. Radiated Spurious Emissions, 802.11n HT40, 2452 MHz, 7 – 18 GHz, V, Average

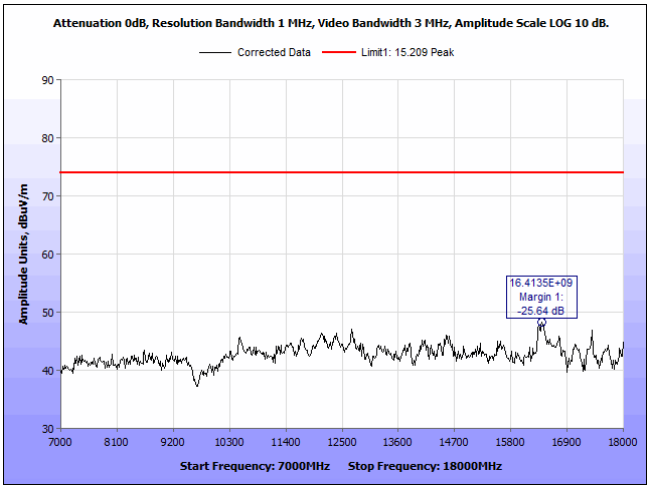

Plot 154. Radiated Spurious Emissions, 802.11n HT40, 2452 MHz, 7 – 18 GHz, V, Peak

Note: The below plots represent 18-25 GHz plots overall. No measurements in this range contained measurable spurious emissions.

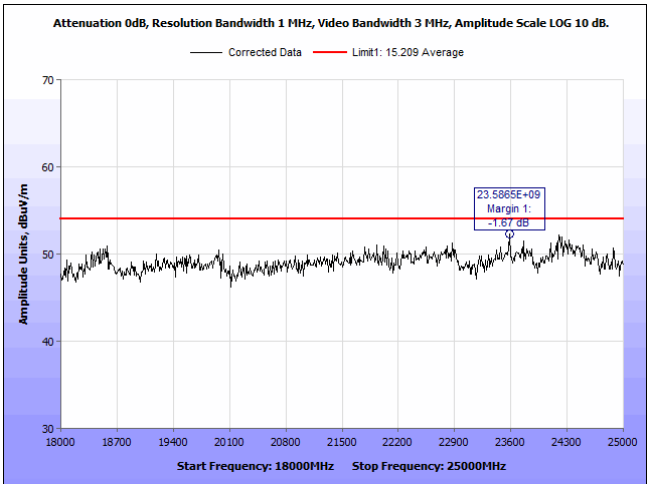

Plot 155. Radiated Spurious Emissions, 18 – 25 GHz, H

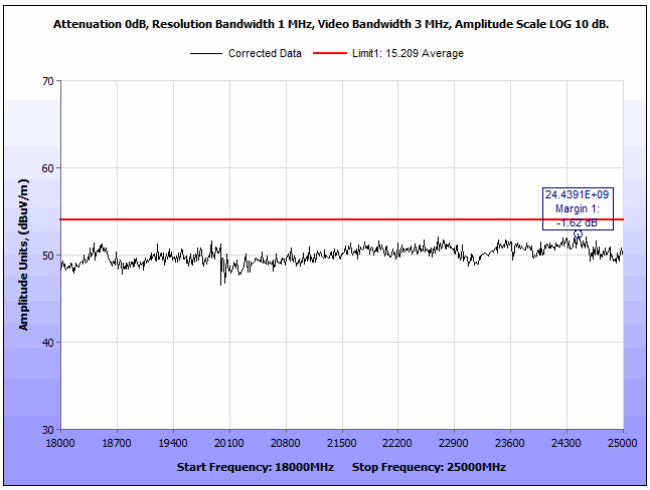

Plot 156. Radiated Spurious Emissions, 18 – 25 GHz, V

Radiated Band Edge Measurements

Test Procedures: The transmitter was turned on. Measurements were performed of the low and high Channels. The EUT was rotated orthogonally through all three axes. Plots shown are corrected for both antenna correction factor and preamplifier gain. Measurements were taken at 3m.

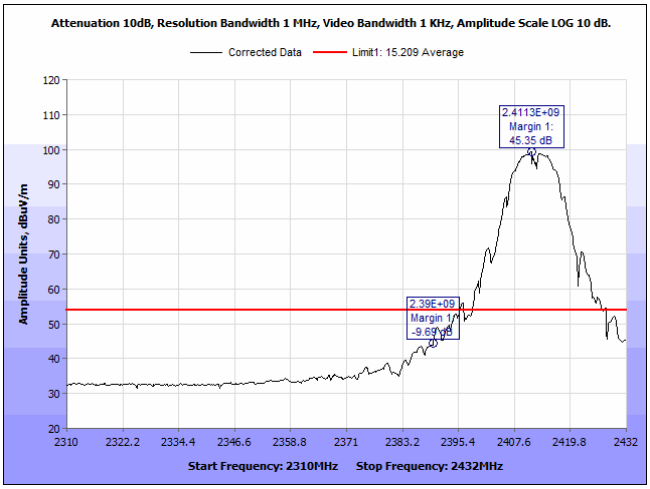

Plot 157. Radiated Band Edge, 802.11b, 2412 MHz, Low, H, Average

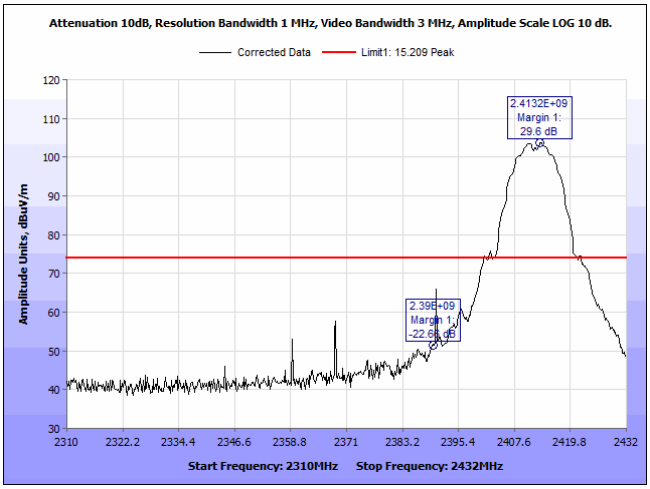

Plot 158. Radiated Band Edge, 802.11b, 2412 MHz, Low, H, Peak

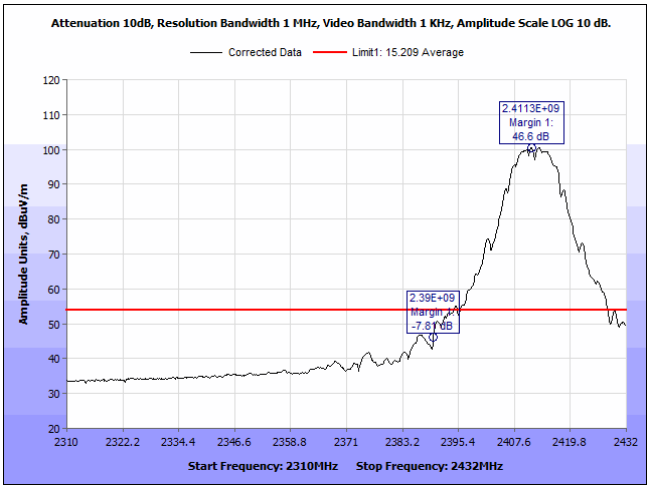

Plot 159. Radiated Band Edge, 802.11b, 2412 MHz, Low, V, Average

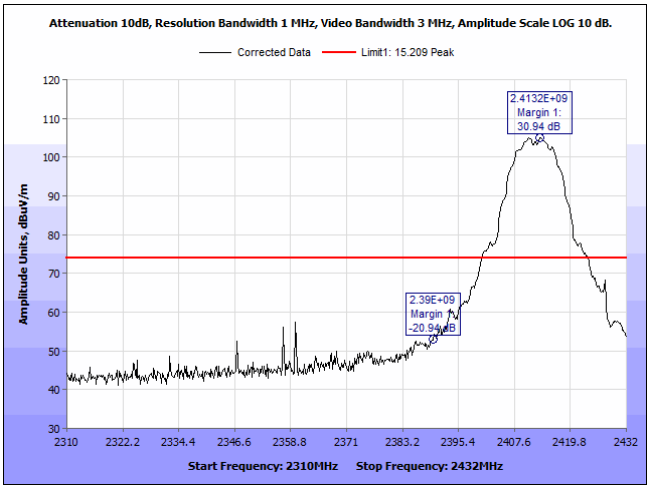

Plot 160. Radiated Band Edge, 802.11b, 2412 MHz, Low, V, Peak

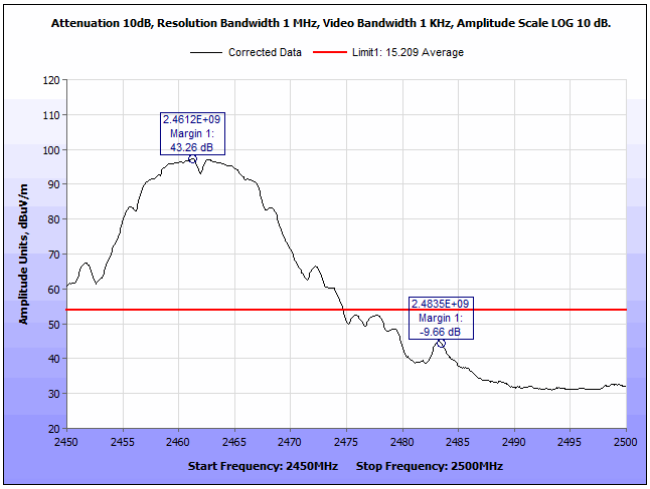

Plot 161. Radiated Band Edge, 802.11b, 2462 MHz, High, H, Average

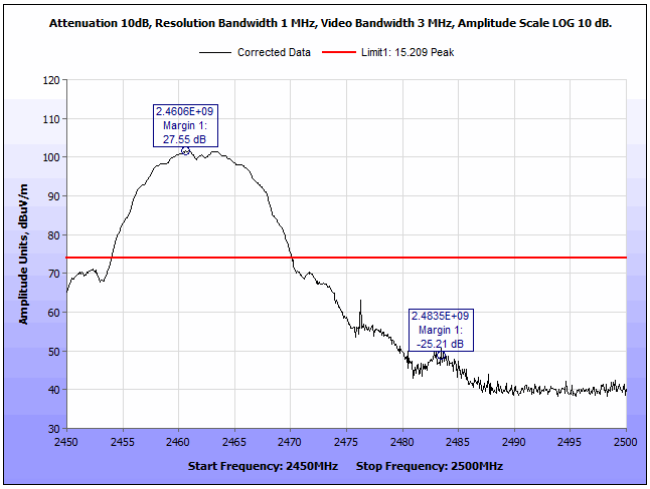

Plot 162. Radiated Band Edge, 802.11b, 2462 MHz, High, H, Peak

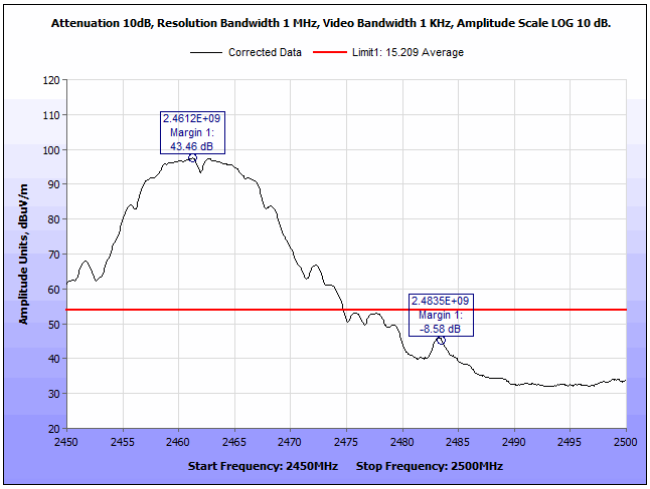

Plot 163. Radiated Band Edge, 802.11b, 2462 MHz, High, V, Average

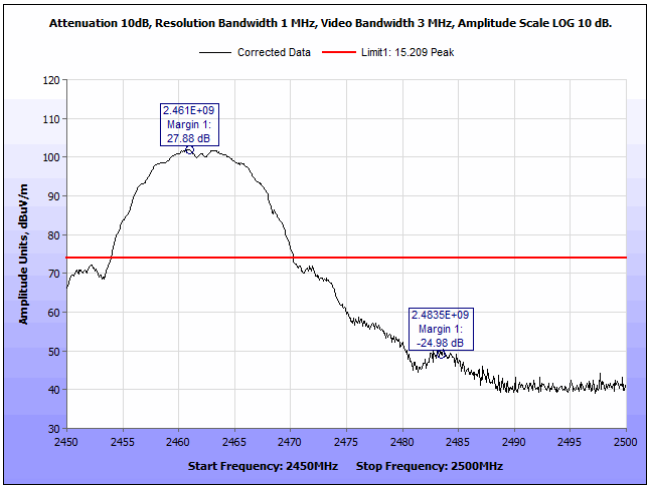

Plot 164. Radiated Band Edge, 802.11b, 2462 MHz, High, V, Peak

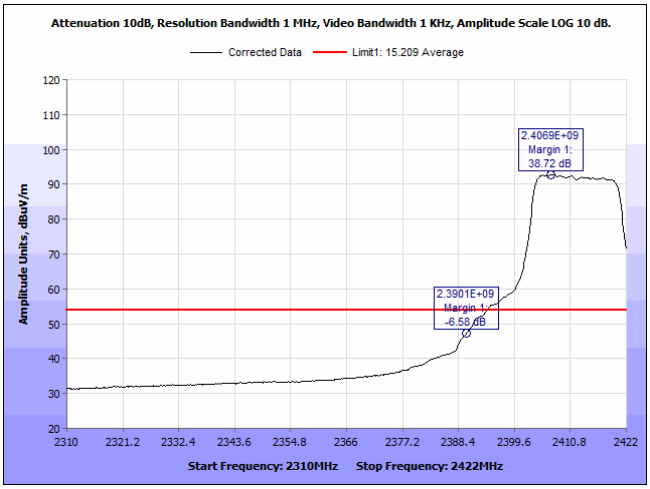

Plot 165. Radiated Band Edge,802.11g, 2412 MHz, Low, H, Average

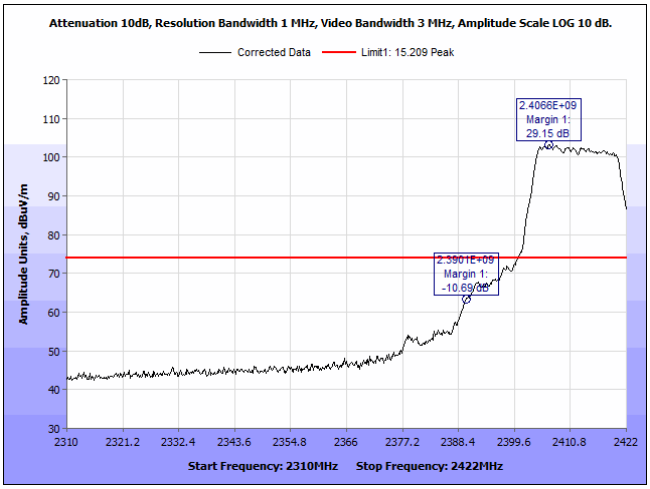

Plot 166. Radiated Band Edge,802.11g, 2412 MHz, Low, H, Peak

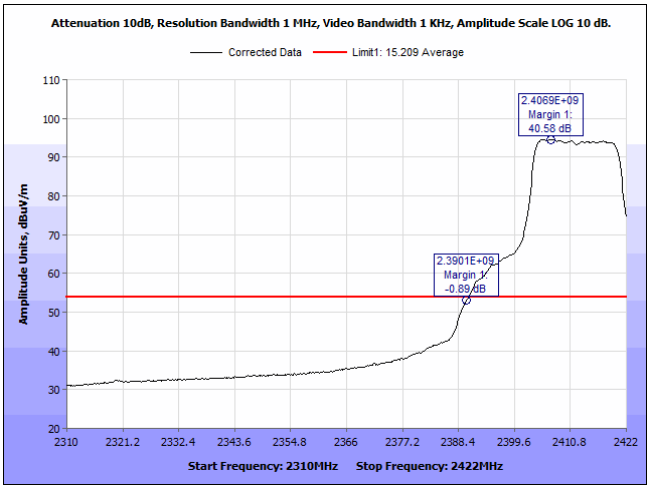

Plot 167. Radiated Band Edge,802.11g, 2412 MHz, Low, V, Average

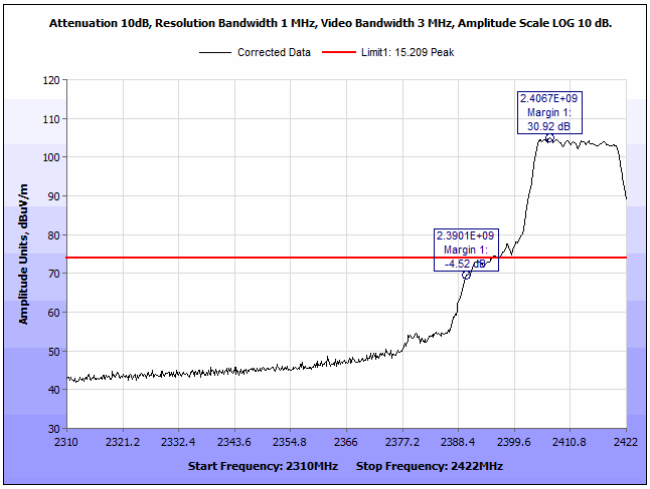

Plot 168. Radiated Band Edge,802.11g, 2412 MHz, Low, V, Peak

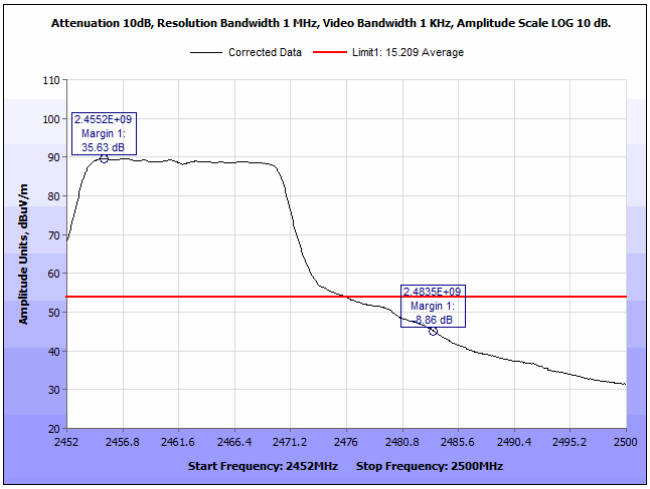

Plot 169. Radiated Band Edge, 802.11g, 2462 MHz, High, H, Average

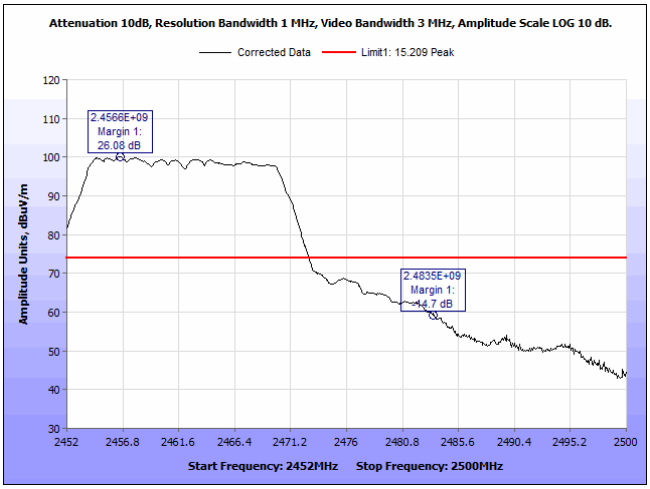

Plot 170. Radiated Band Edge, 802.11g, 2462 MHz, High, H, Peak

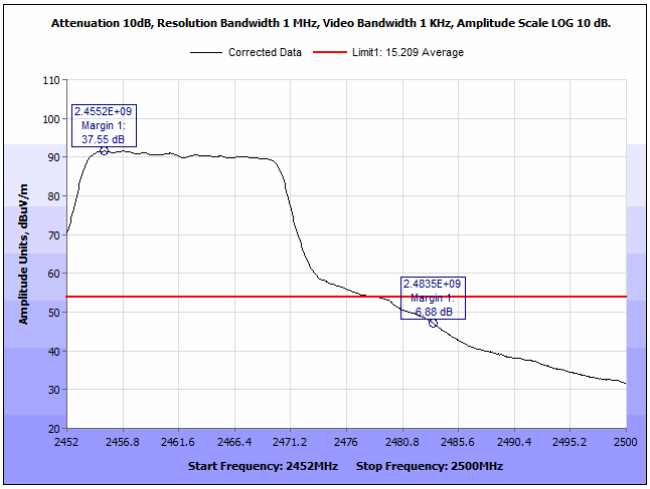

Plot 171. Radiated Band Edge, 802.11g, 2462 MHz, High, V, Average

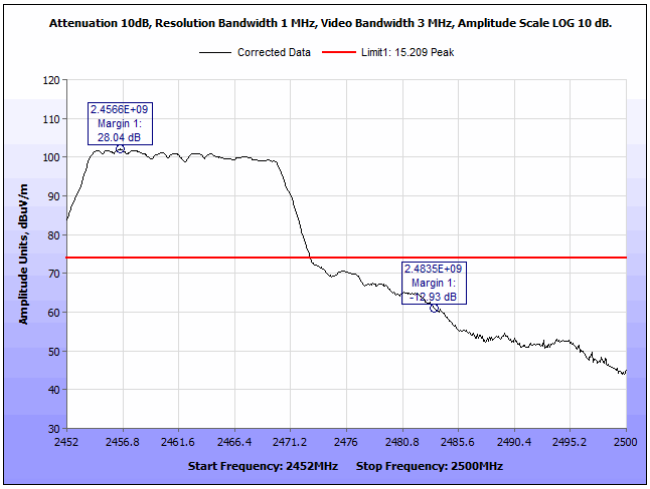

Plot 172. Radiated Band Edge, 802.11g, 2462 MHz, High, V, Peak

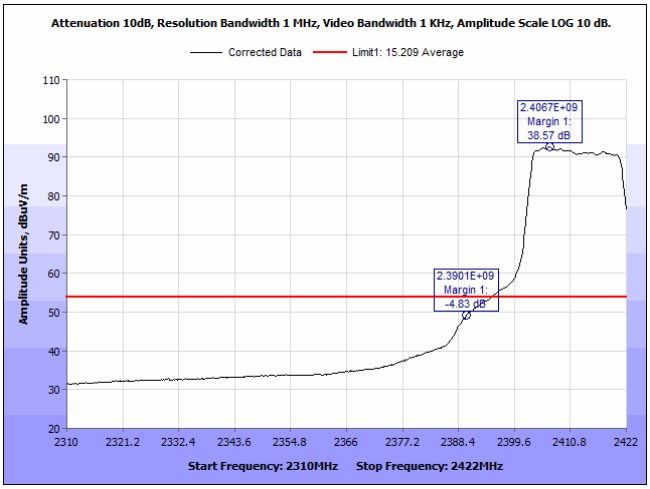

Plot 173. Radiated Band Edge, 802.11n HT20, 2412 MHz, Low, H, Average

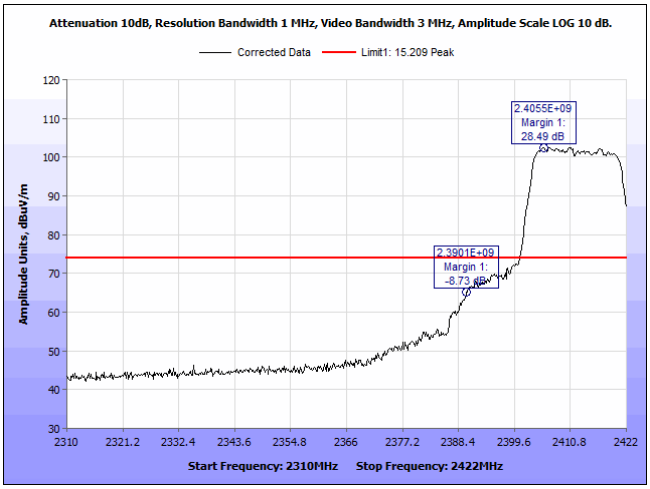

Plot 174. Radiated Band Edge, 802.11n HT20, 2412 MHz, Low, H, Peak

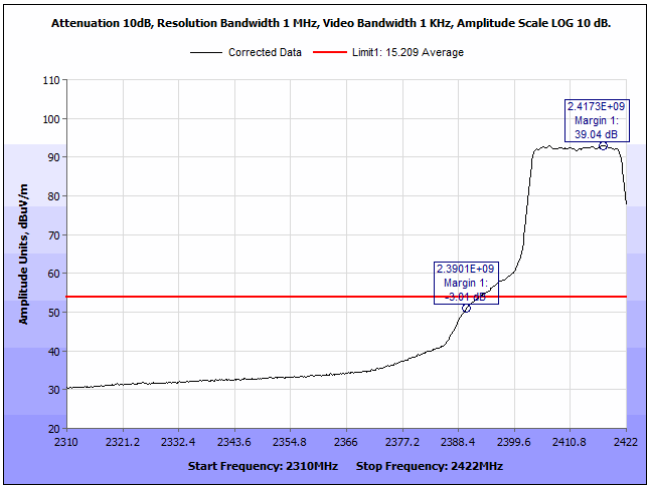

Plot 175. Radiated Band Edge, 802.11n HT20, 2412 MHz, Low, V, Average

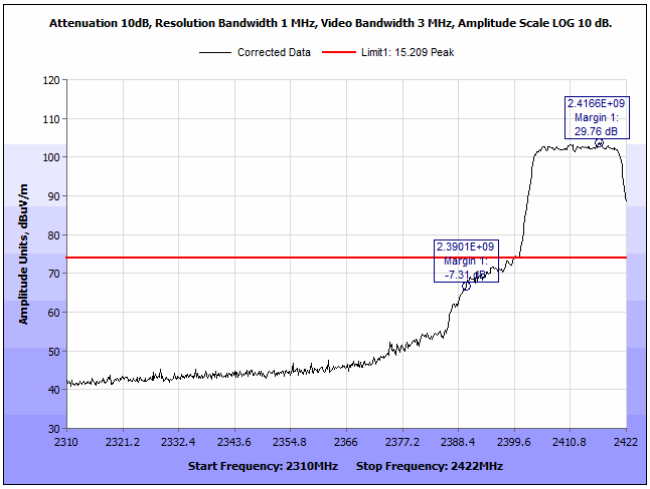

Plot 176. Radiated Band Edge, 802.11n HT20, 2412 MHz, Low, V, Peak

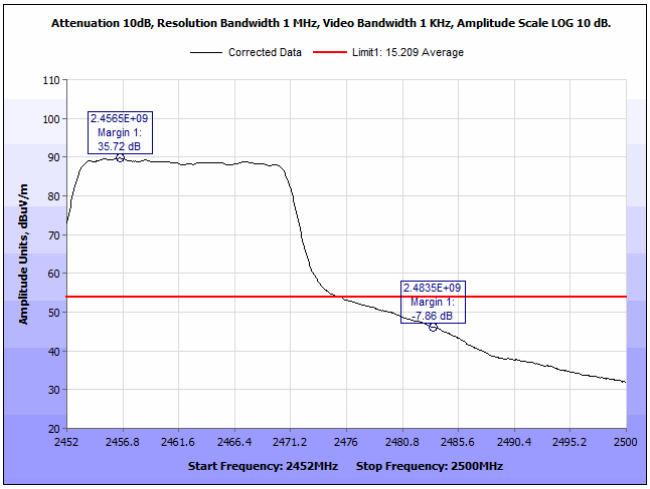

Plot 177. Radiated Band Edge, 802.11n HT20, 2462 MHz, High, H, Average

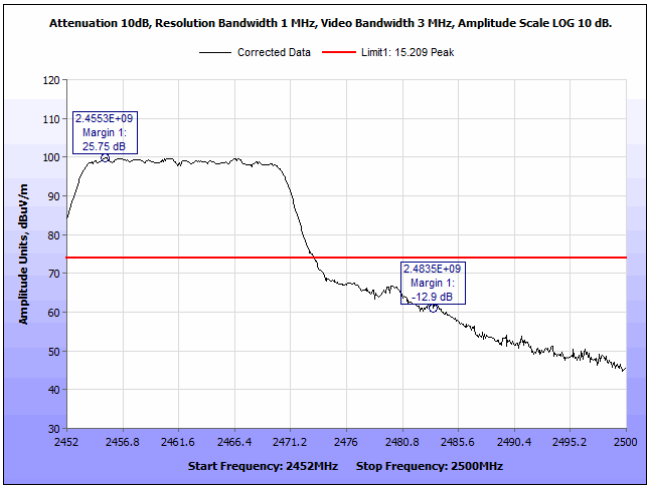

Plot 178. Radiated Band Edge, 802.11n HT20, 2462 MHz, High, H, Peak

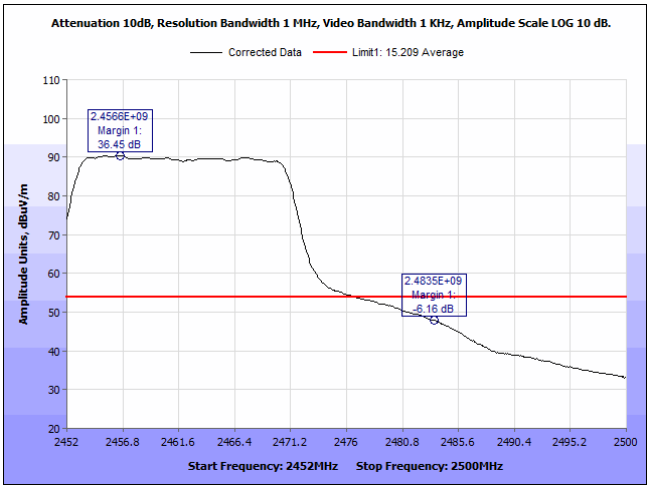

Plot 179. Radiated Band Edge, 802.11n HT20, 2462 MHz, High, V, Average

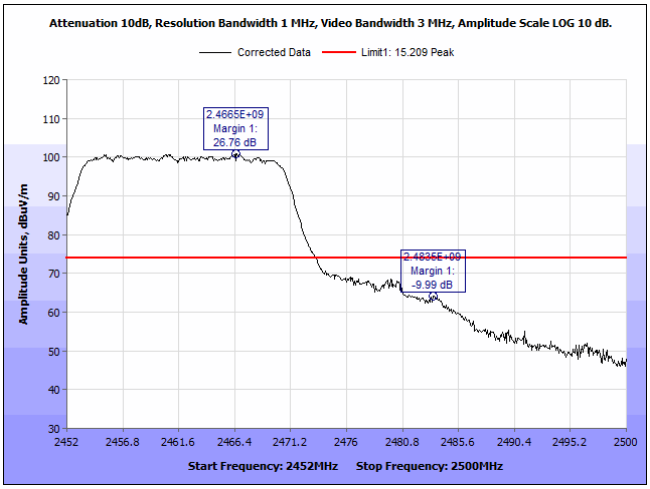

Plot 180. Radiated Band Edge, 802.11n HT20, 2462 MHz, High, V, Peak

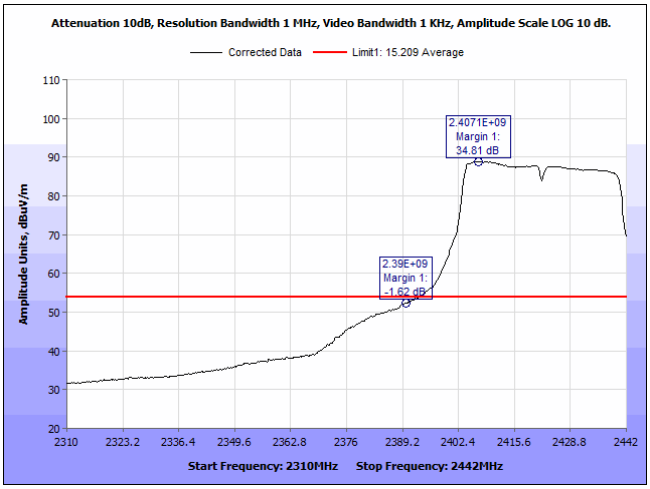

Plot 181. Radiated Band Edge, 802.11n HT40, 2422 MHz, Low, H, Average

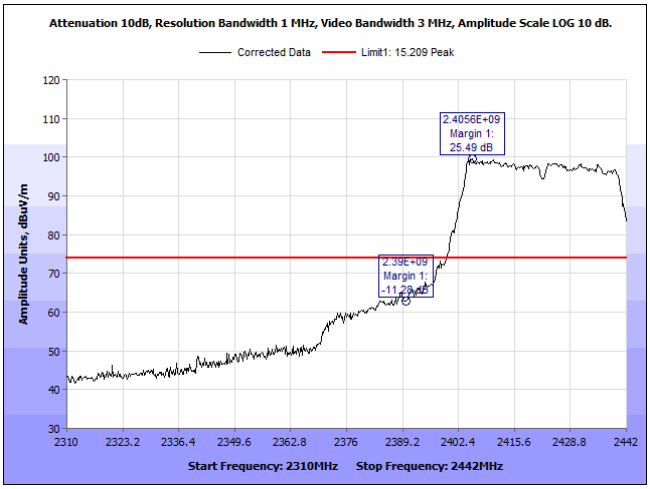

Plot 182. Radiated Band Edge, 802.11n HT40, 2422 MHz, Low, H, Peak

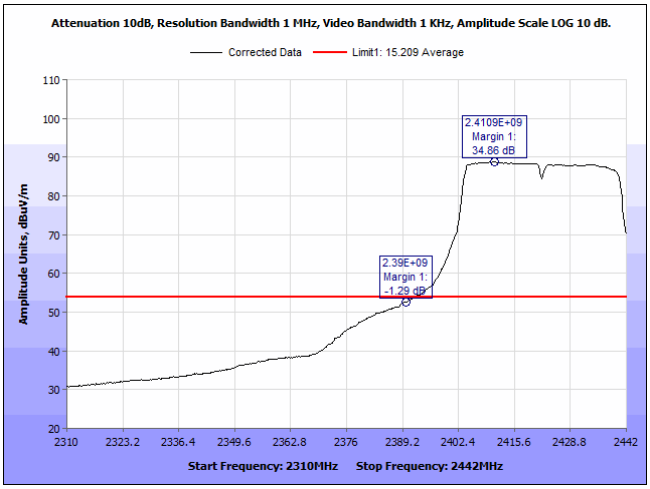

Plot 183. Radiated Band Edge, 802.11n HT40, 2422 MHz, Low, V, Average

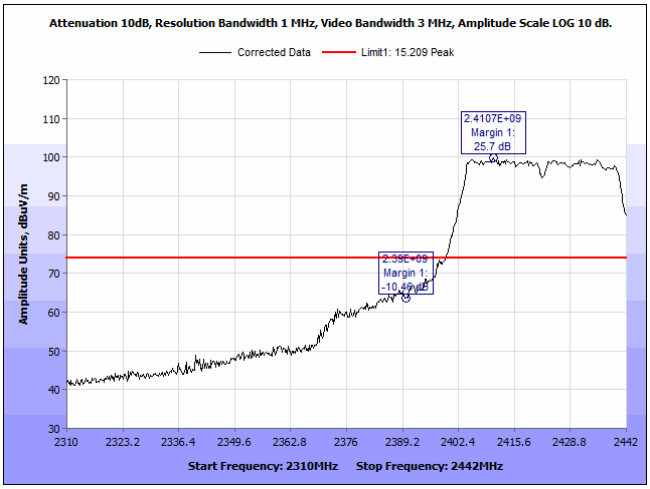

Plot 184. Radiated Band Edge, 802.11n HT40, 2422 MHz, Low, V, Peak

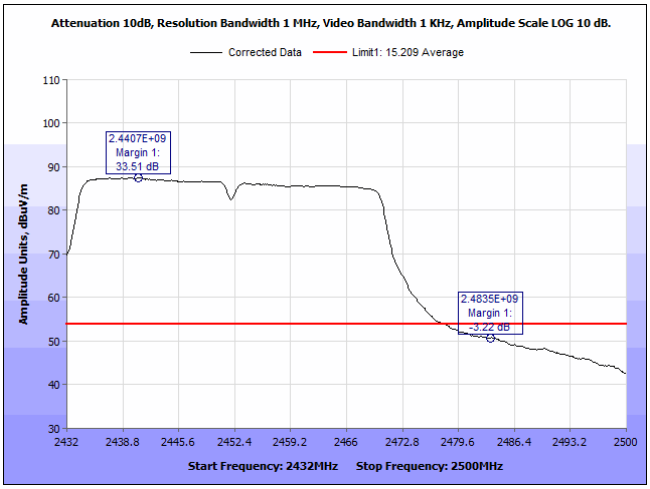

Plot 185. Radiated Band Edge, 802.11n HT40, 2452 MHz, High, H, Average

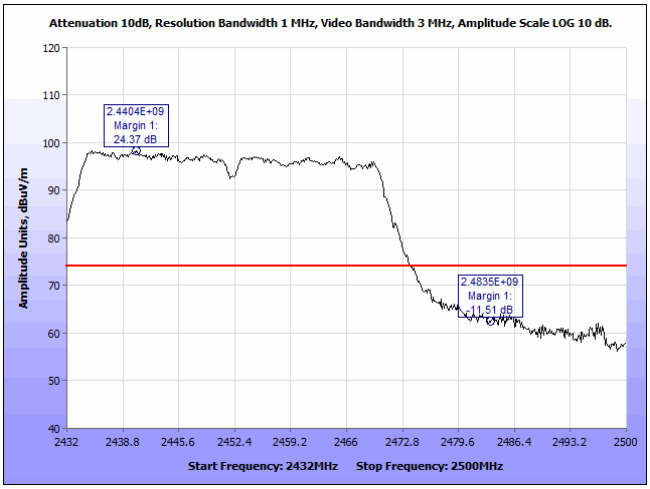

Plot 186. Radiated Band Edge, 802.11n HT40, 2452 MHz, High, H, Peak

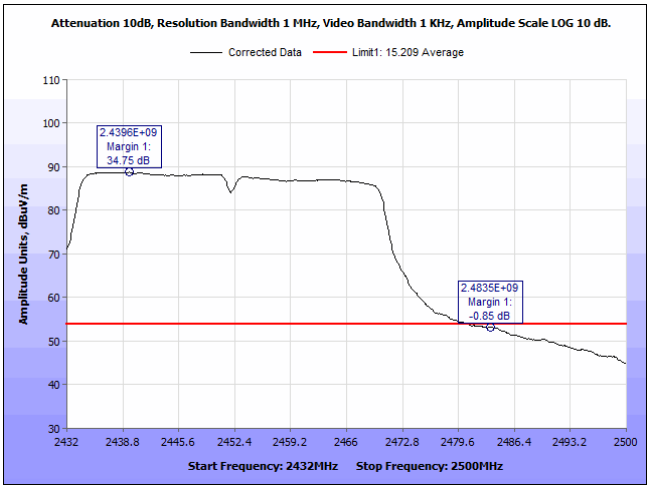

Plot 187. Radiated Band Edge, 802.11n HT40, 2452 MHz, High, V, Average

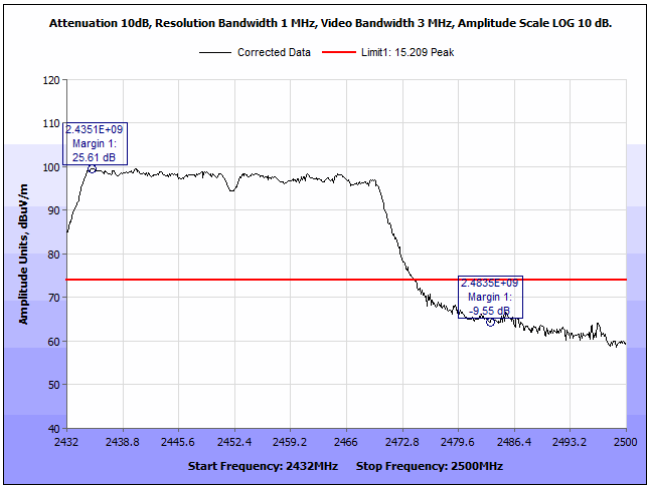

Plot 188. Radiated Band Edge, 802.11n HT40, 2452 MHz, High, V, Peak

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(d) Spurious Emissions in Non-restricted Bands

Test Requirement: **15.247(d)** In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

Test Procedure: For intentional radiators with a digital device portion which operates below 10 GHz, the spectrum was investigated as per §15.33(a)(1) and §15.33(a)(4); i.e., the lowest RF signal generated or used in the device up to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

Test Results: The EUT was compliant with the Spurious Emission limits of **§15.247(d)**. Measured emissions were within applicable limits.

Test Engineer(s): Giuliano Messina

Test Date(s): September 25, 2018

Note: The following plots show a reference line 20dB down from the measured peak. According to part 15.247(d), if RMS averaging is used, the required attenuation is 30dB down from the peak. The following plots meet this more stringent requirement.

Spurious Emissions in Non-restricted Bands, Test Results

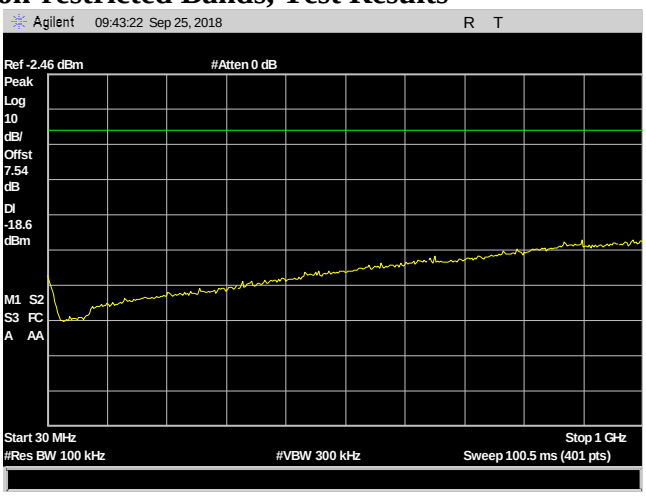

Plot 189. Conducted Spurious Emissions, 802.11b, 2412 MHz, 30 MHz – 1 GHz

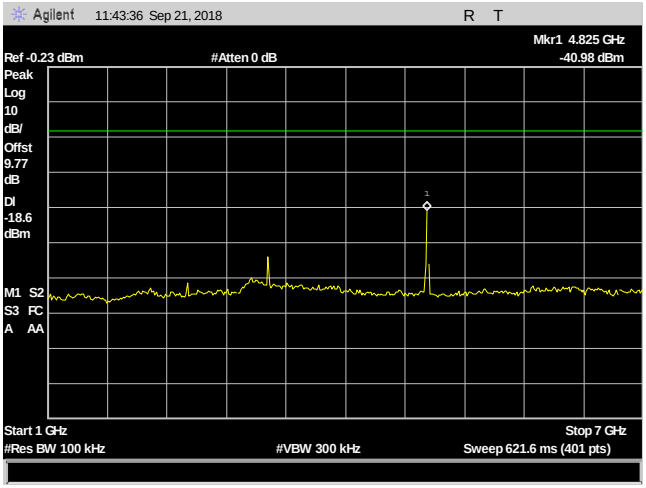

Plot 190. Conducted Spurious Emissions, 802.11b, 2412 MHz, 1 – 7 GHz

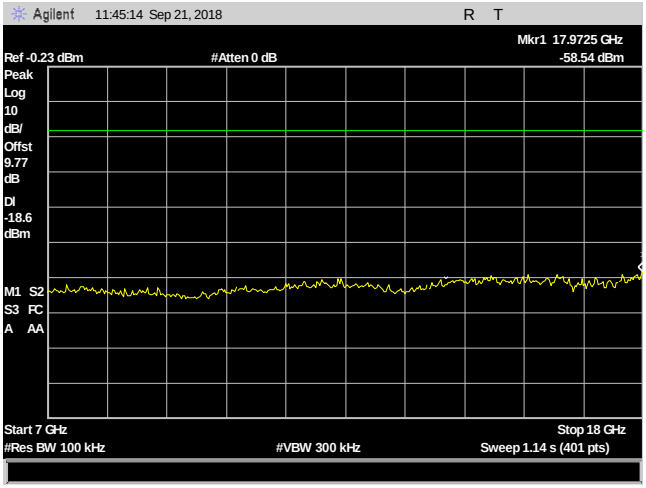

Plot 191. Conducted Spurious Emissions, 802.11b, 2412 MHz, 7 – 18 GHz

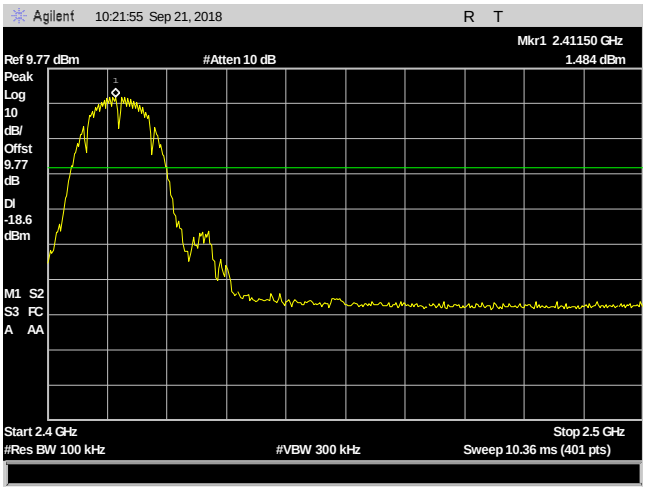

Plot 192. Conducted Spurious Emissions, 802.11b, 2412 MHz, Reference

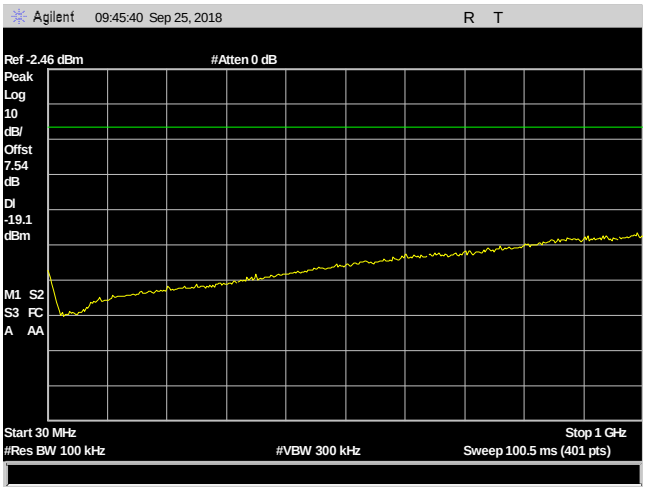

Plot 193. Conducted Spurious Emissions, 802.11b, 2437 MHz, 30 MHz – 1 GHz

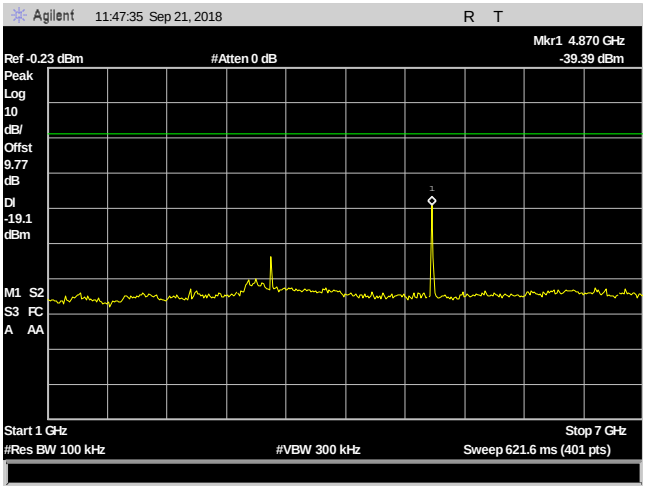

Plot 194. Conducted Spurious Emissions, 802.11b, 2437 MHz, 1 – 7 GHz

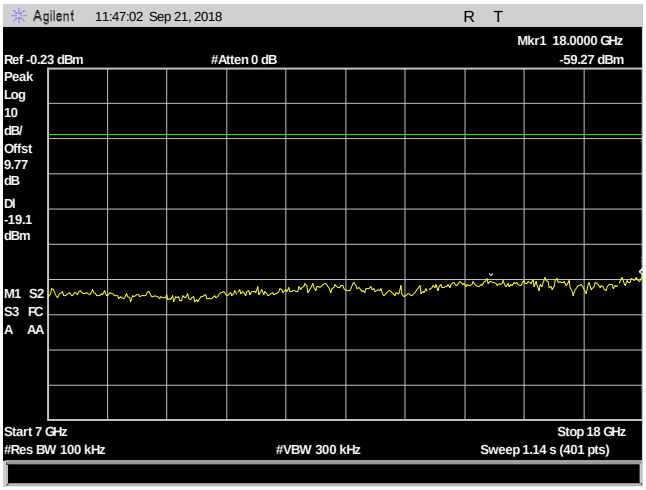

Plot 195. Conducted Spurious Emissions, 802.11b, 2437 MHz, 7 – 18 GHz

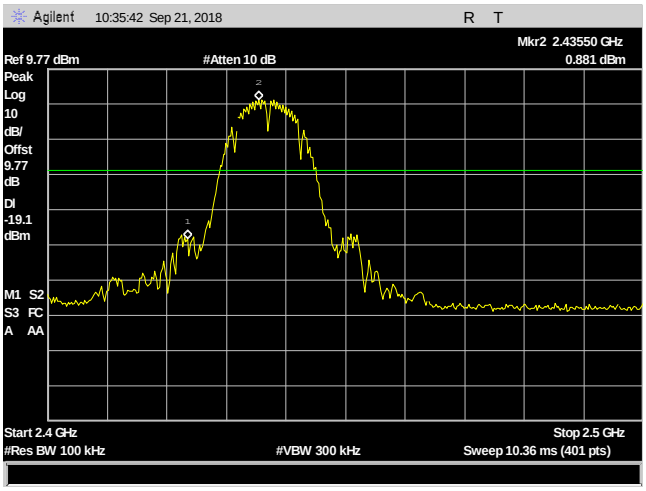

Plot 196. Conducted Spurious Emissions, 802.11b, 2437 MHz, Reference

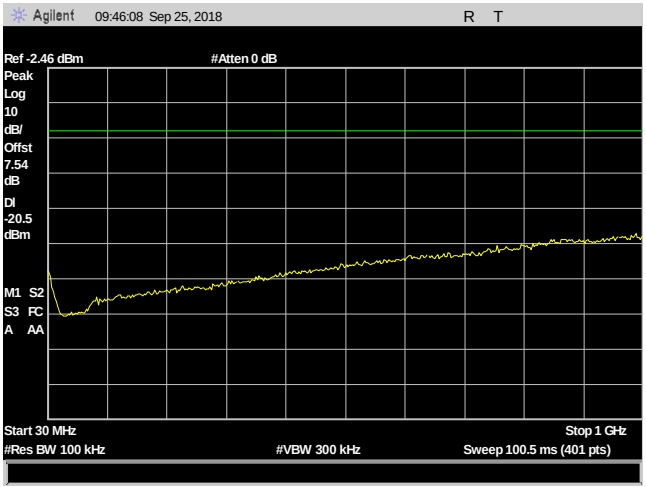

Plot 197. Conducted Spurious Emissions, 802.11b, 2462 MHz, 30 MHz – 1 GHz

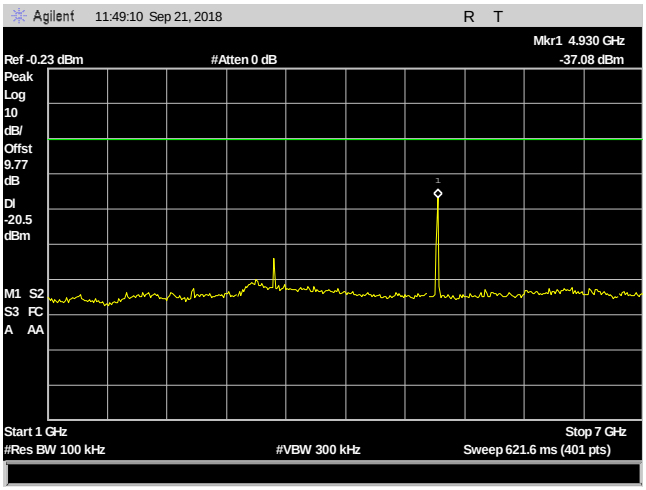

Plot 198. Conducted Spurious Emissions, 802.11b, 2462 MHz, 1 – 7 GHz

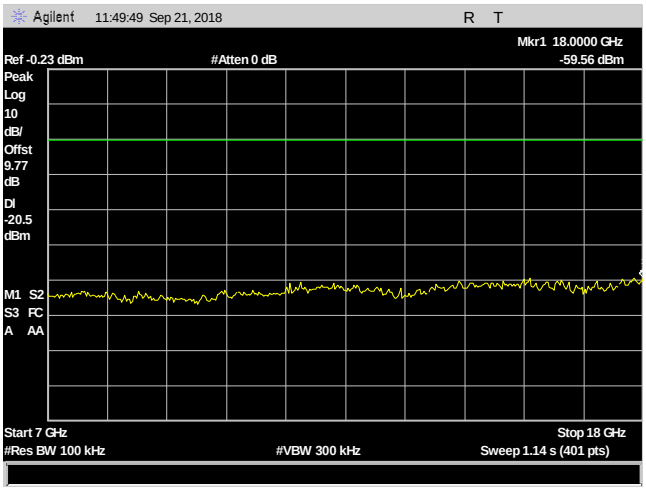

Plot 199. Conducted Spurious Emissions, 802.11b, 2462 MHz, 7 – 18 GHz

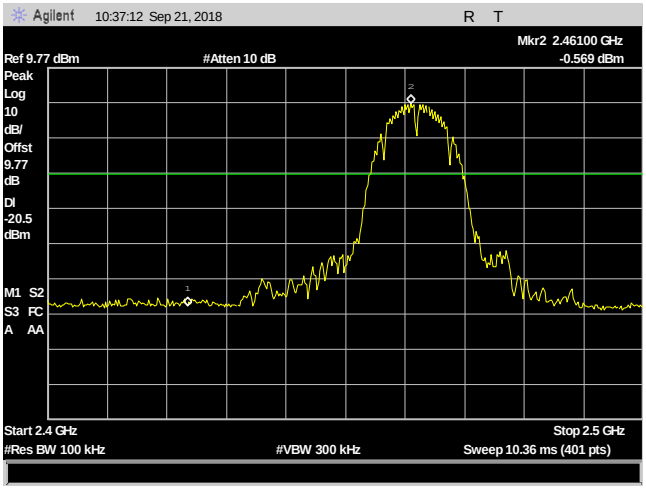

Plot 200. Conducted Spurious Emissions, 802.11b, 2462 MHz, Reference

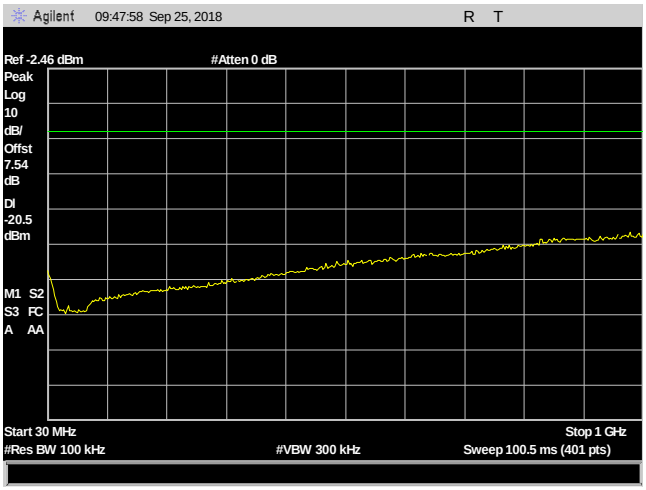

Plot 201. Conducted Spurious Emissions, 802.11g, 2412 MHz, 30 MHz – 1 GHz

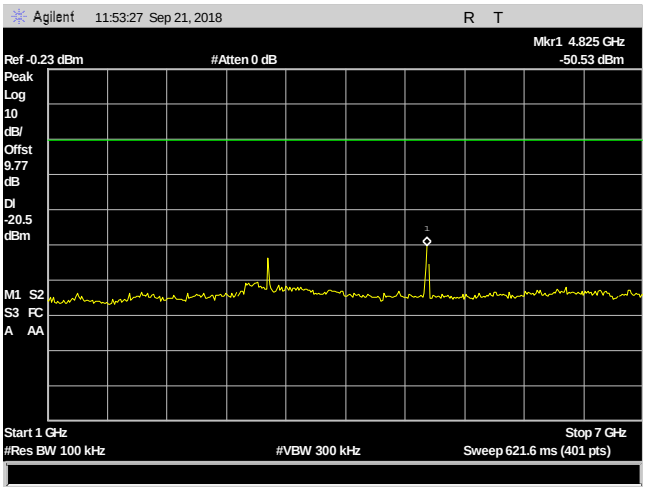

Plot 202. Conducted Spurious Emissions, 802.11g, 2412 MHz, 1 – 7 GHz

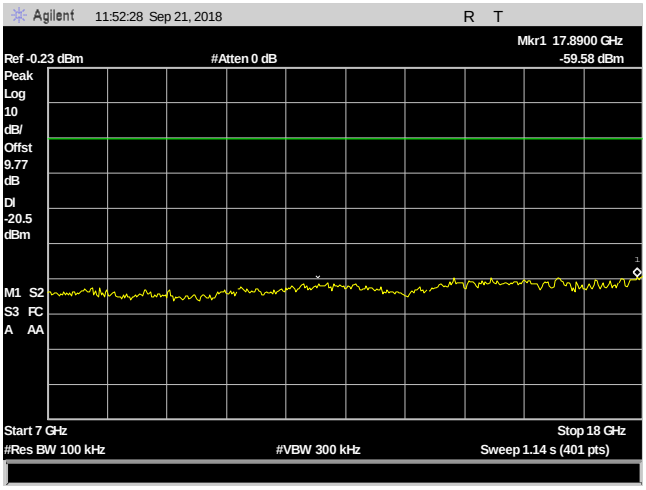

Plot 203. Conducted Spurious Emissions, 802.11g, 2412 MHz, 7 – 18 GHz

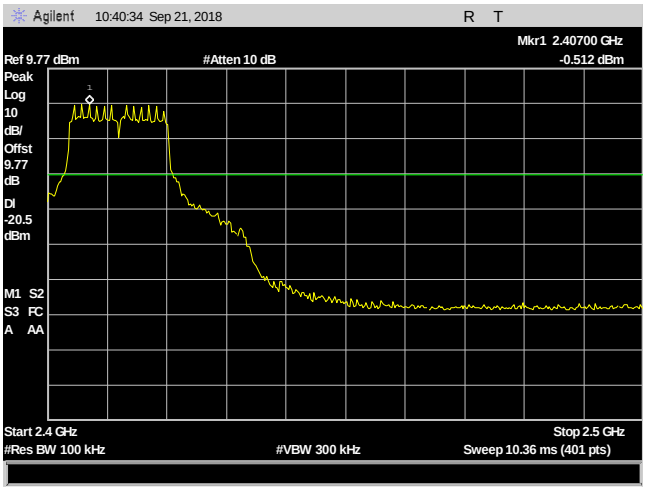

Plot 204. Conducted Spurious Emissions, 802.11g, 2412 MHz, Reference

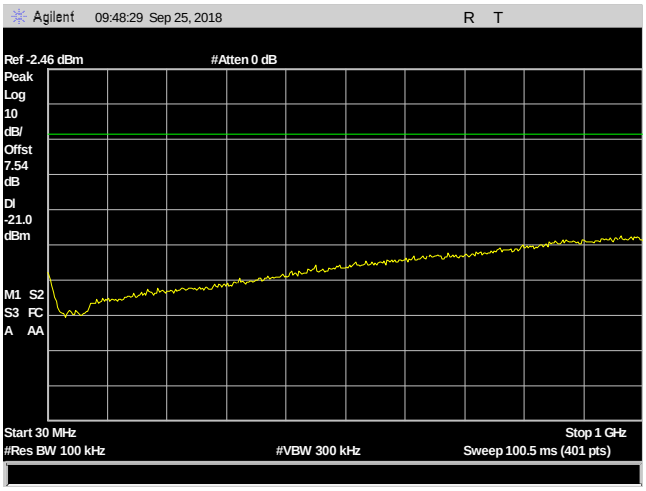

Plot 205. Conducted Spurious Emissions, 802.11g, 2437 MHz, 30 MHz – 1 GHz

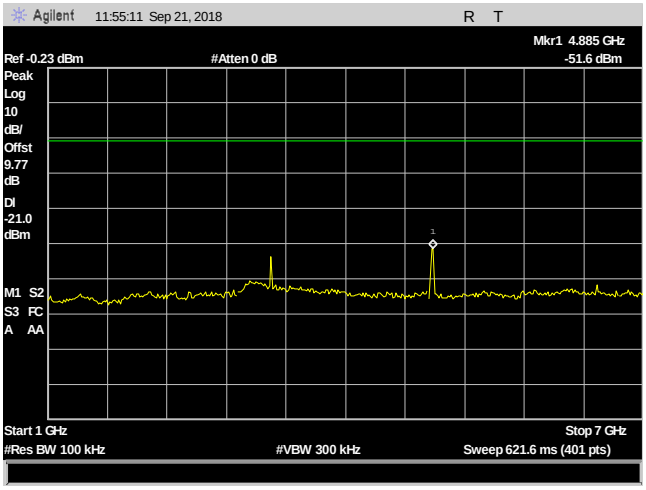

Plot 206. Conducted Spurious Emissions, 802.11g, 2437 MHz, 1 – 7 GHz

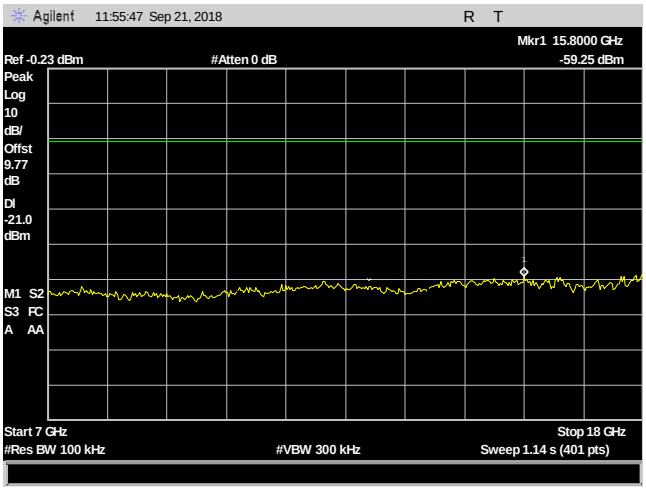

Plot 207. Conducted Spurious Emissions, 802.11g, 2437 MHz, 7 – 18 GHz

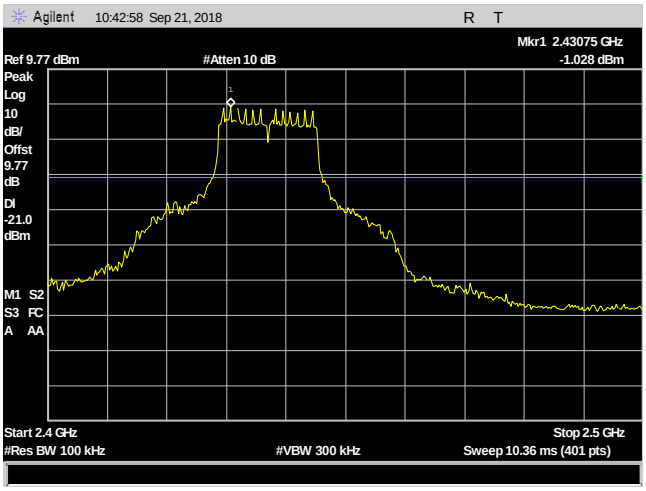

Plot 208. Conducted Spurious Emissions, 802.11g, 2437 MHz, Reference

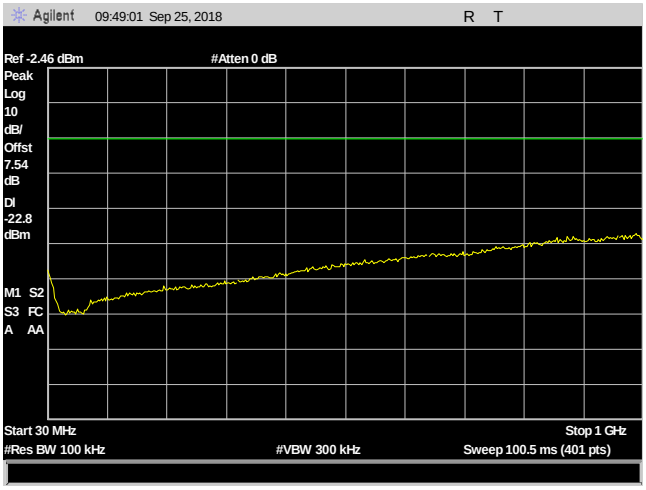

Plot 209. Conducted Spurious Emissions, 802.11g, 2462 MHz, 30 MHz – 1 GHz

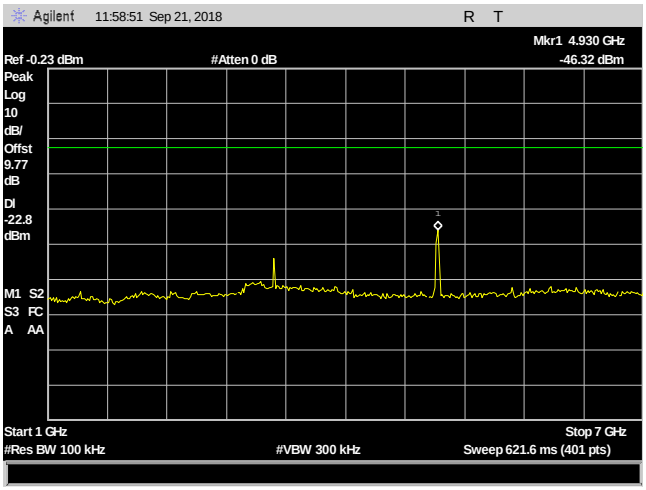

Plot 210. Conducted Spurious Emissions, 802.11g, 2462 MHz, 1 – 7 GHz

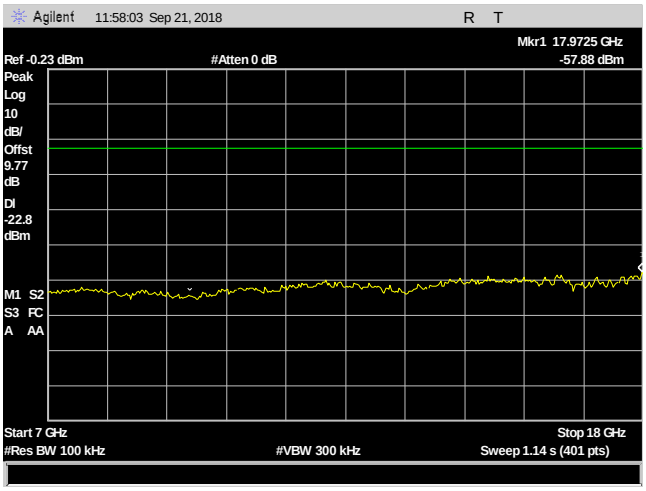

Plot 211. Conducted Spurious Emissions, 802.11g, 2462 MHz, 7 – 18 GHz

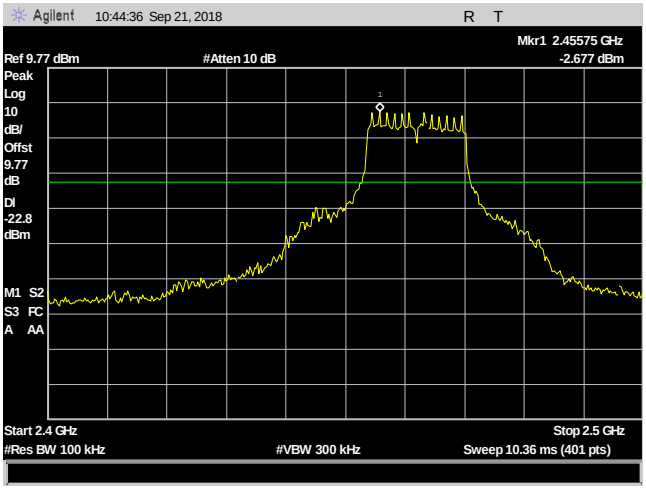

Plot 212. Conducted Spurious Emissions, 802.11g, 2462 MHz, Reference

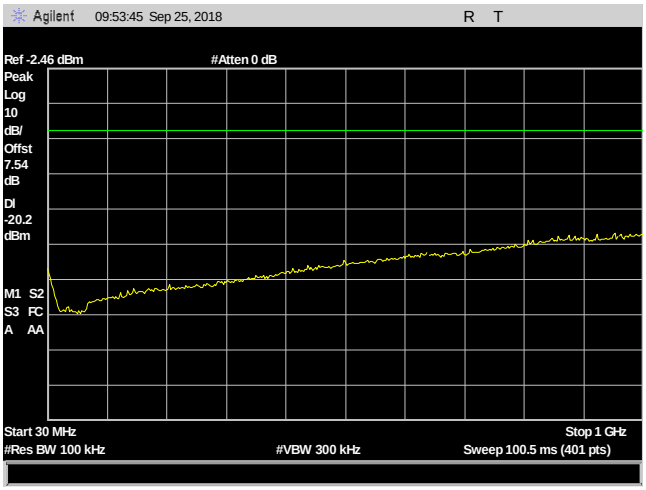

Plot 213. Conducted Spurious Emissions, 802.11n HT20, 2412 MHz, 30 MHz – 1 GHz

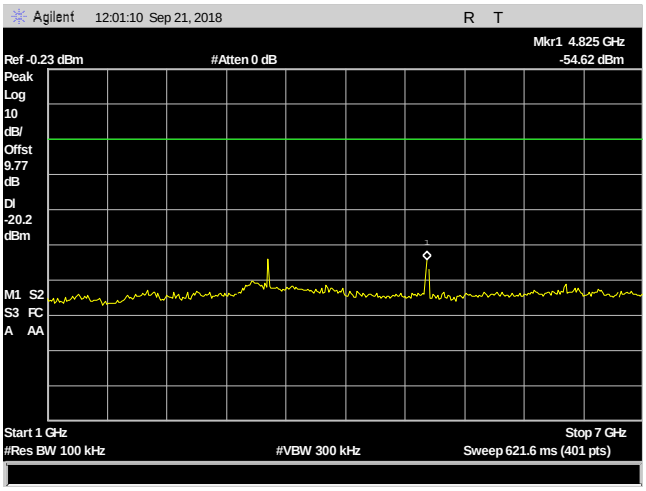

Plot 214. Conducted Spurious Emissions, 802.11n HT20, 2412 MHz, 1 – 7 GHz

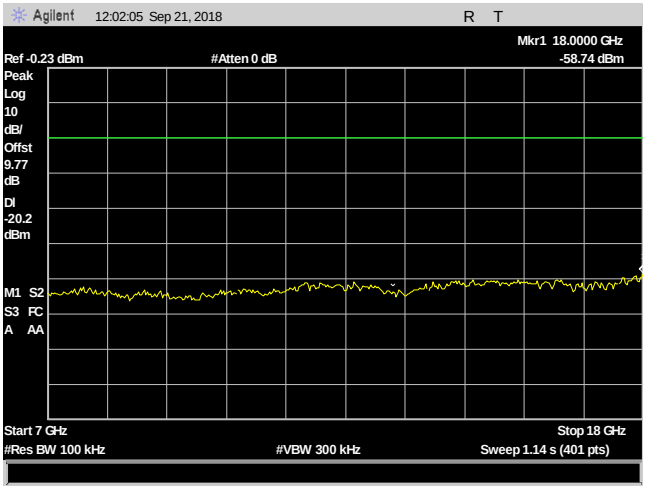

Plot 215. Conducted Spurious Emissions, 802.11n HT20, 2412 MHz, 7 – 18 GHz

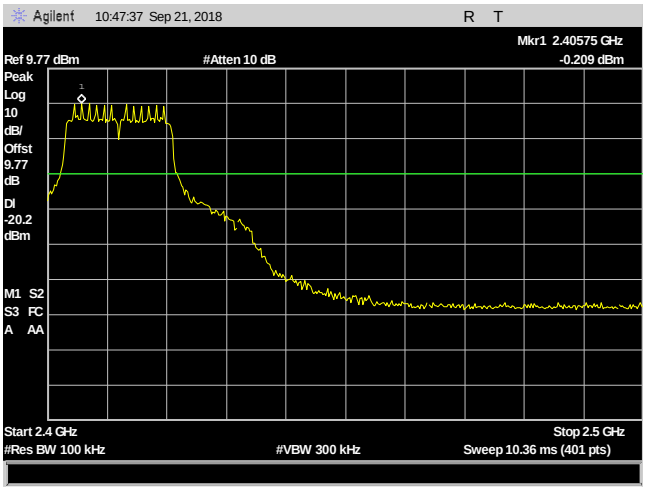

Plot 216. Conducted Spurious Emissions, 802.11n HT20, 2412 MHz, Reference

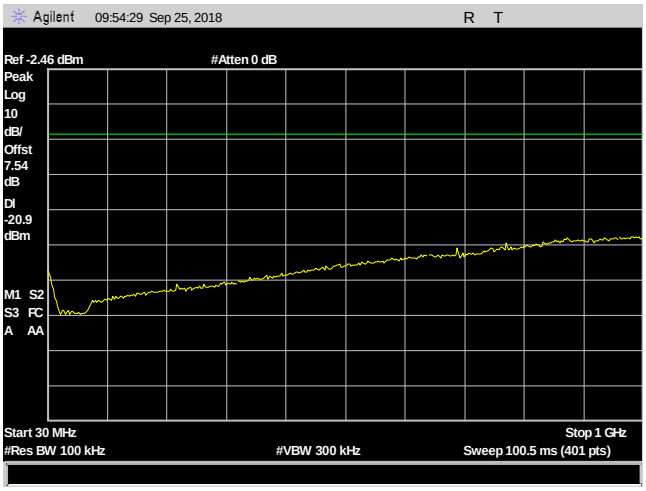

Plot 217. Conducted Spurious Emissions, 802.11n HT20, 2437 MHz, 30 MHz – 1 GHz

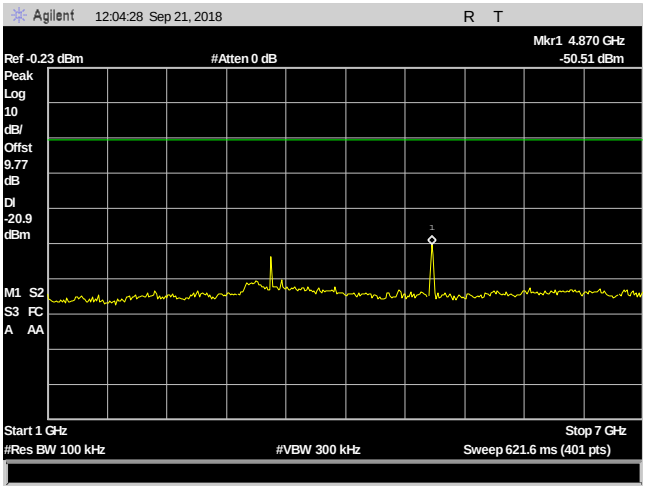

Plot 218. Conducted Spurious Emissions, 802.11n HT20, 2437 MHz, 1 – 7 GHz

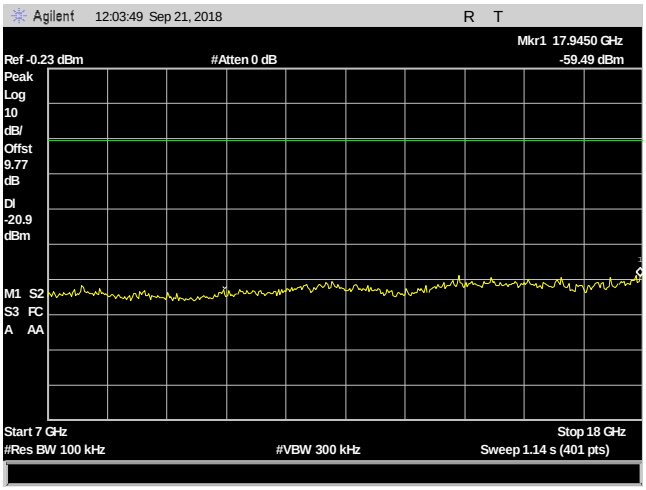

Plot 219. Conducted Spurious Emissions, 802.11n HT20, 2437 MHz, 7 – 18 GHz

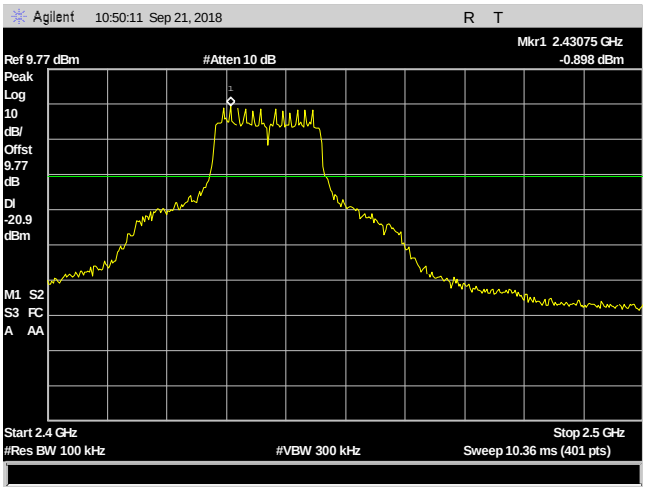

Plot 220. Conducted Spurious Emissions, 802.11n HT20, 2437 MHz, Reference

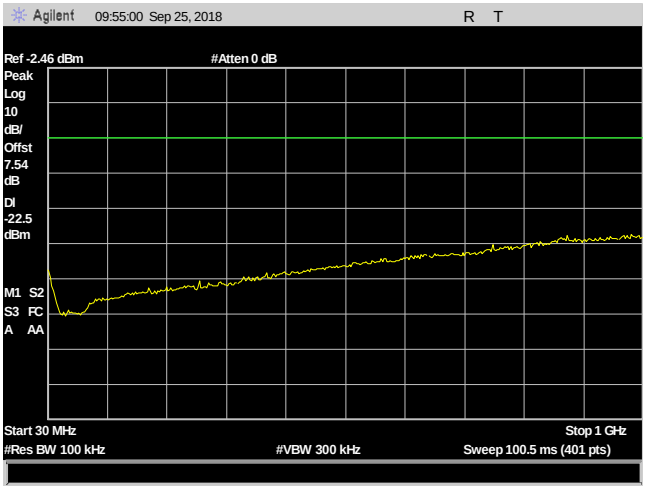

Plot 221. Conducted Spurious Emissions, 802.11n HT20, 2462 MHz, 30 MHz – 1 GHz

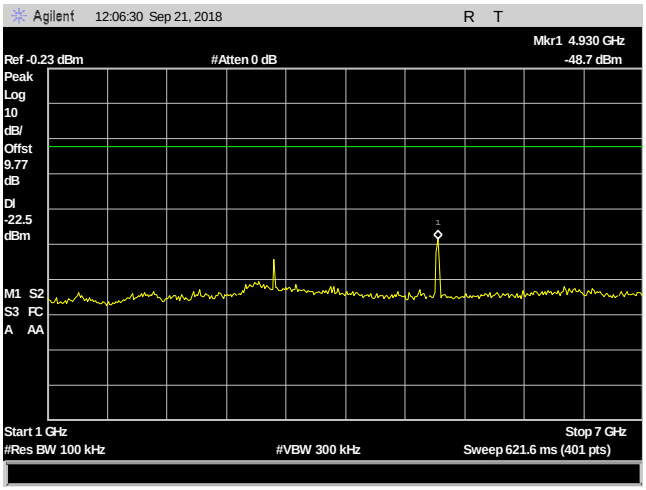

Plot 222. Conducted Spurious Emissions, 802.11n HT20, 2462 MHz, 1 – 7 GHz

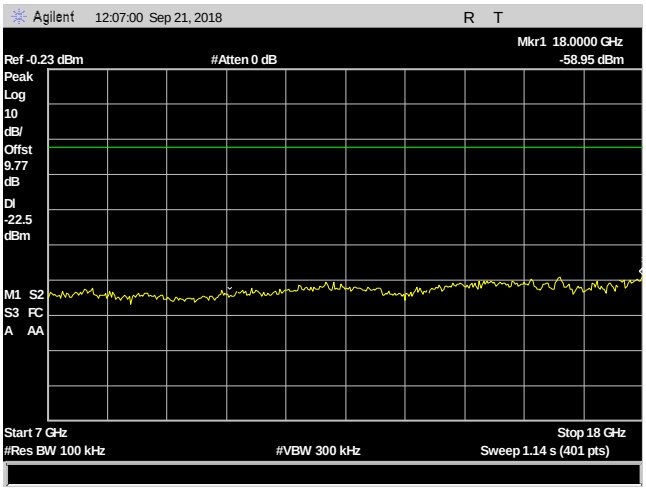

Plot 223. Conducted Spurious Emissions, 802.11n HT20, 2462 MHz, 7 – 18 GHz

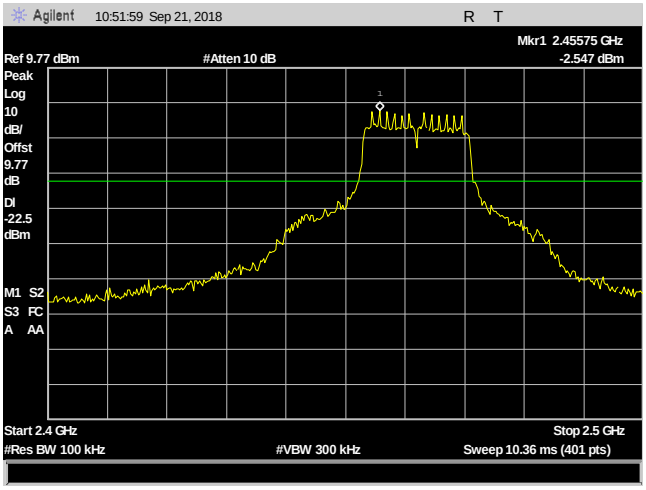

Plot 224. Conducted Spurious Emissions, 802.11n HT20, 2462 MHz, Reference

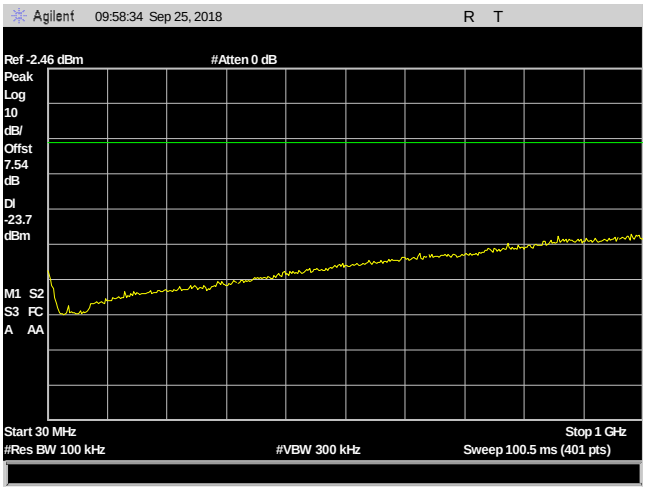

Plot 225. Conducted Spurious Emissions, 802.11n HT40, 2422 MHz, 30 MHz – 1 GHz

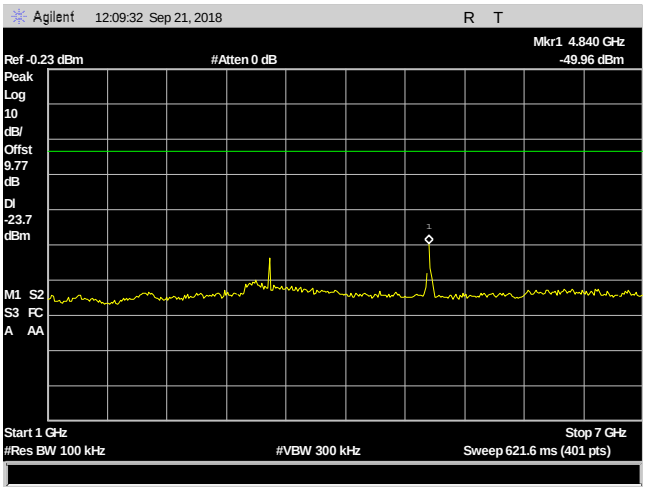

Plot 226. Conducted Spurious Emissions, 802.11n HT40, 2422 MHz, 1 – 7 GHz

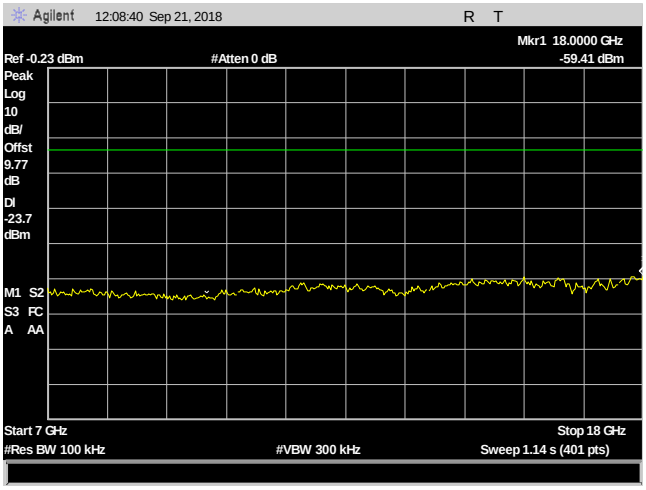

Plot 227. Conducted Spurious Emissions, 802.11n HT40, 2422 MHz, 7 – 18 GHz

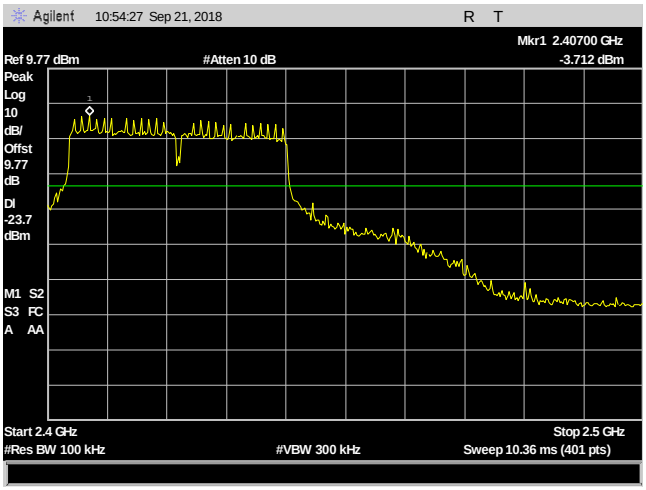

Plot 228. Conducted Spurious Emissions, 802.11n HT40, 2422 MHz, Reference

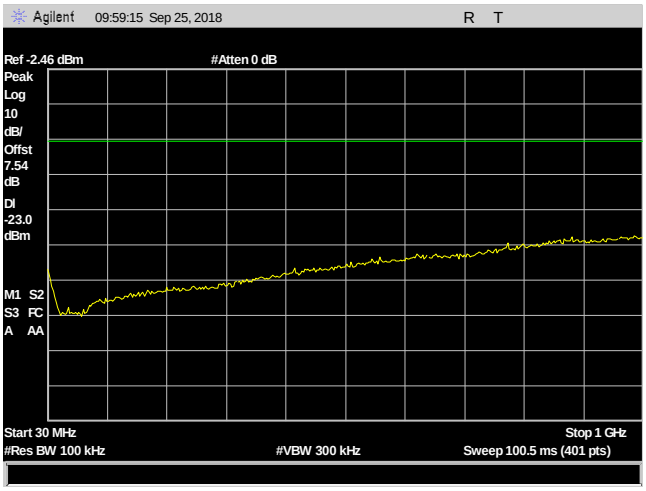

Plot 229. Conducted Spurious Emissions, 802.11n HT40, 2437 MHz, 30 MHz – 1 GHz

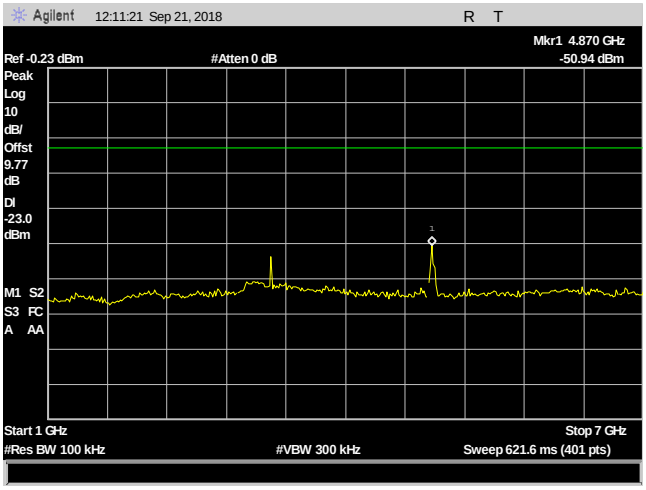

Plot 230. Conducted Spurious Emissions, 802.11n HT40, 2437 MHz, 1 – 7 GHz

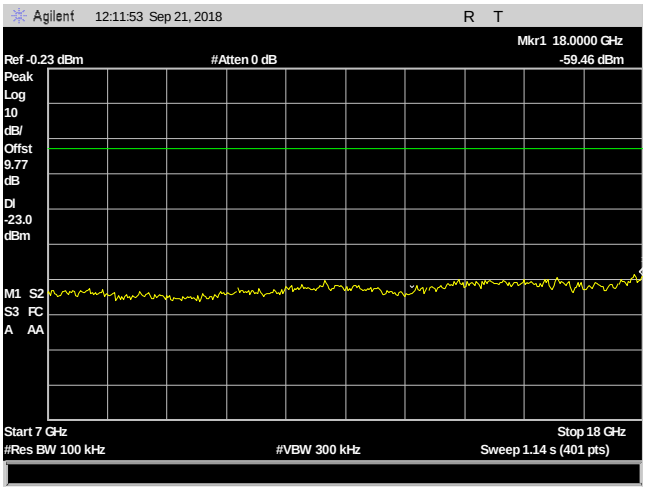

Plot 231. Conducted Spurious Emissions, 802.11n HT40, 2437 MHz, 7 – 18 GHz

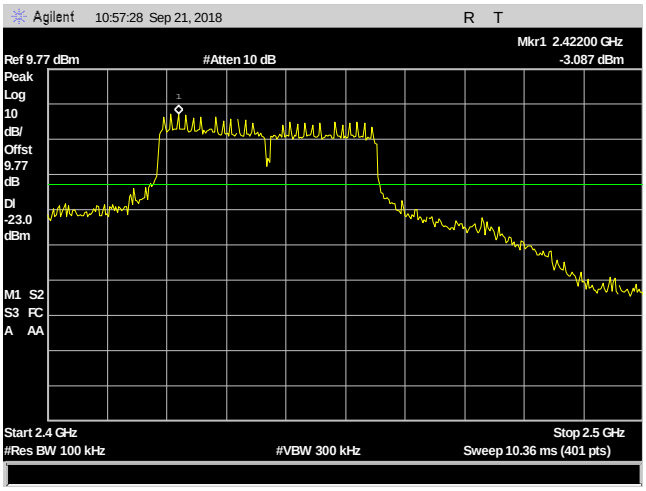

Plot 232. Conducted Spurious Emissions, 802.11n HT40, 2437 MHz, Reference

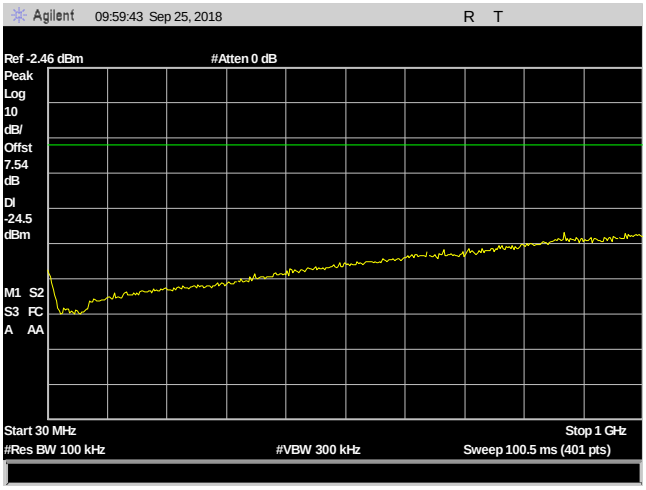

Plot 233. Conducted Spurious Emissions, 802.11n HT40, 2452 MHz, 30 MHz – 1 GHz

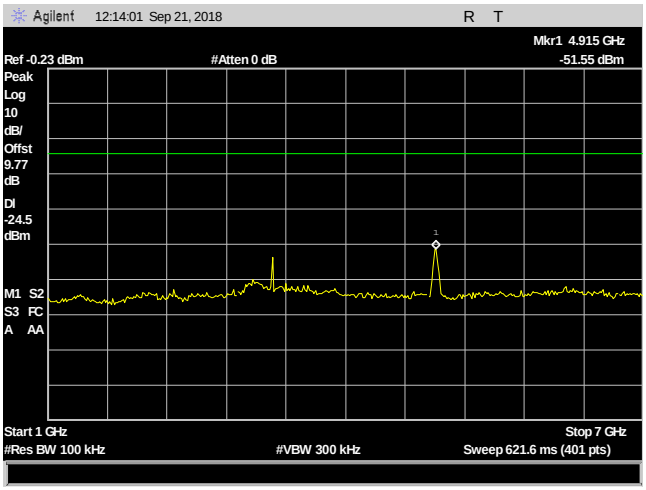

Plot 234. Conducted Spurious Emissions, 802.11n HT40, 2452 MHz, 1 – 7 GHz

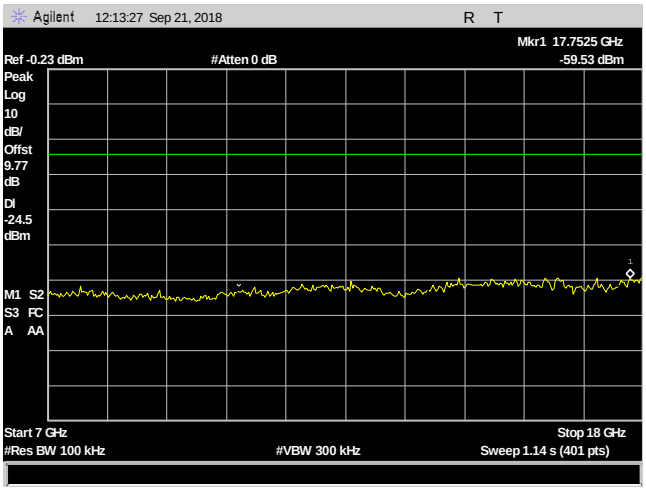

Plot 235. Conducted Spurious Emissions, 802.11n HT40, 2452 MHz, 7 – 18 GHz

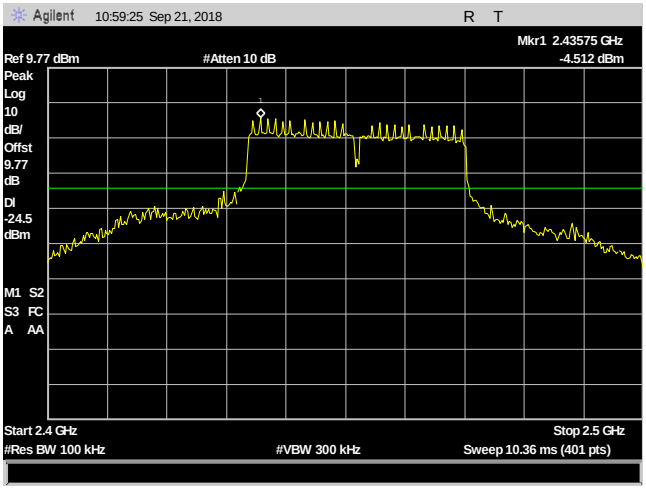

Plot 236. Conducted Spurious Emissions, 802.11n HT40, 2452 MHz, Reference

Conducted Band Edge

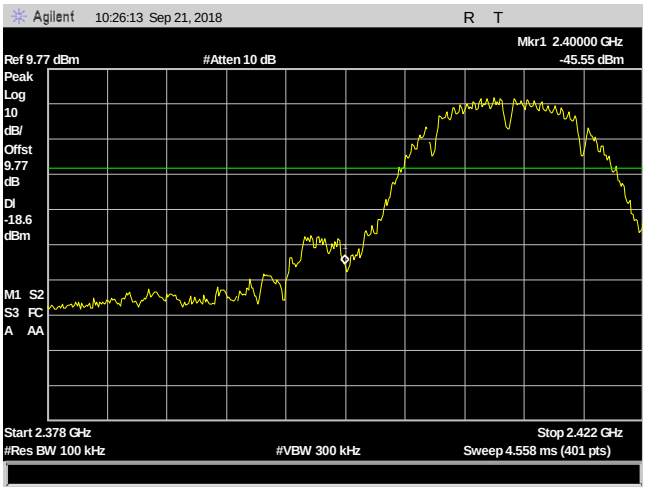

Plot 237. Conducted Band Edge, 802.11b, 2412 MHz, Low

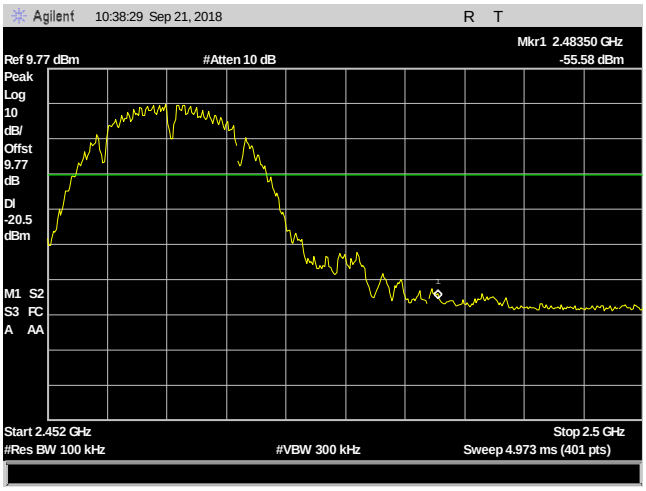

Plot 238. Conducted Band Edge, 802.11b, 2462 MHz, High

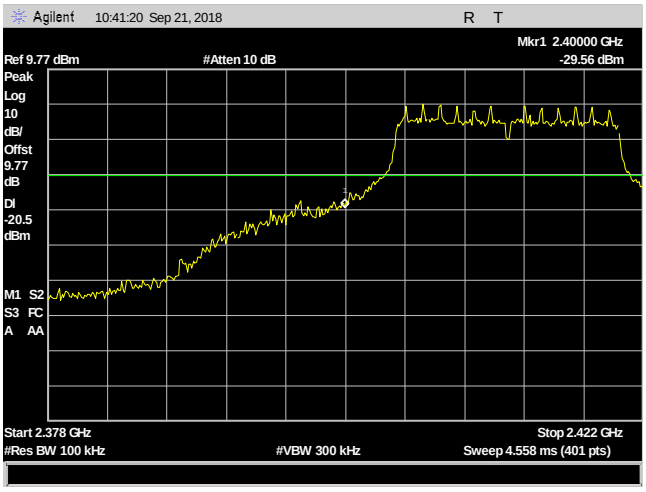

Plot 239. Conducted Band Edge, 802.11g, 2412 MHz, Low

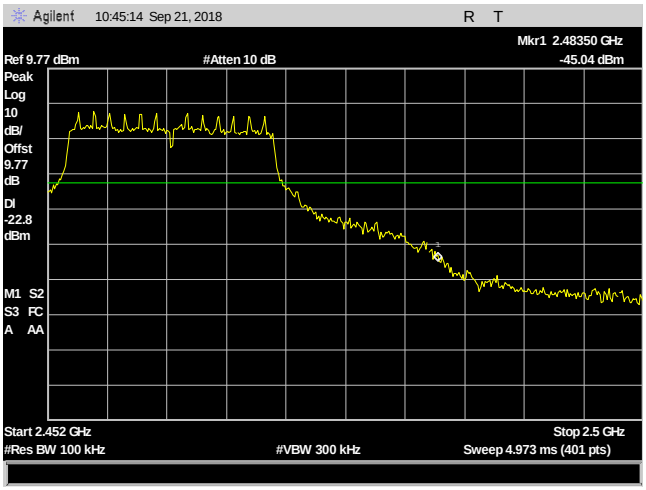

Plot 240. Conducted Band Edge, 802.11g, 2462 MHz, High

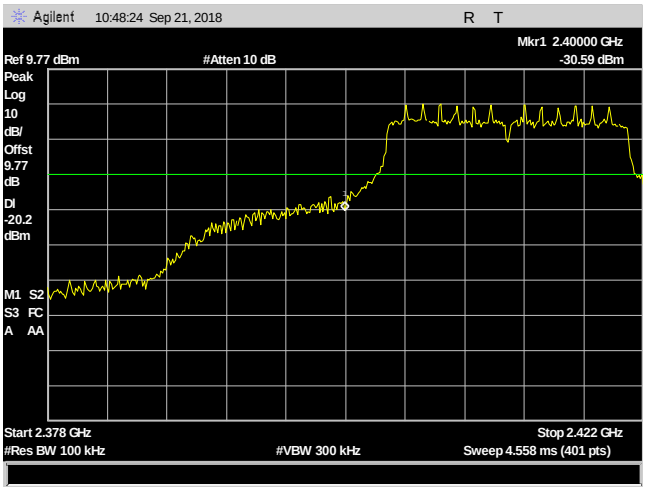

Plot 241. Conducted Band Edge, 802.11n HT20, 2412 MHz, Low

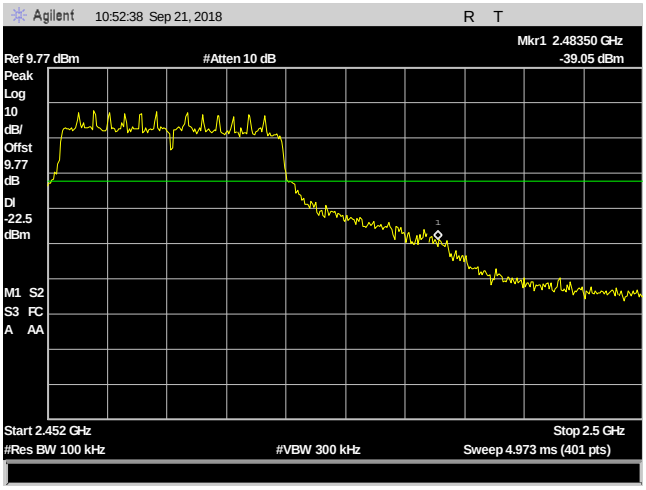

Plot 242. Conducted Band Edge, 802.11n HT20, 2462 MHz, High

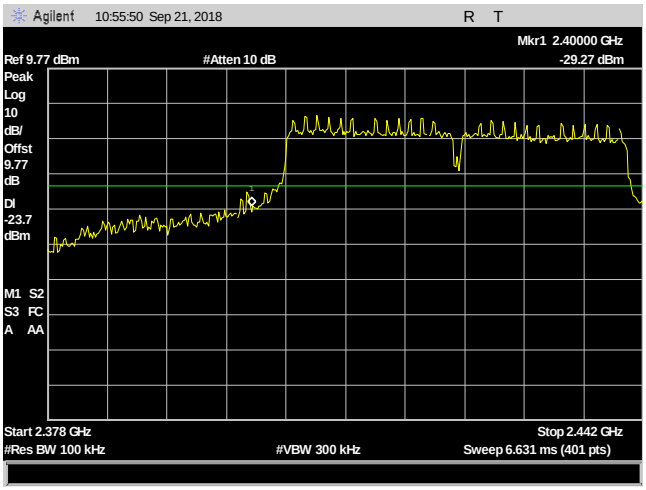

Plot 243. Conducted Band Edge, 802.11n HT40, 2422 MHz, Low

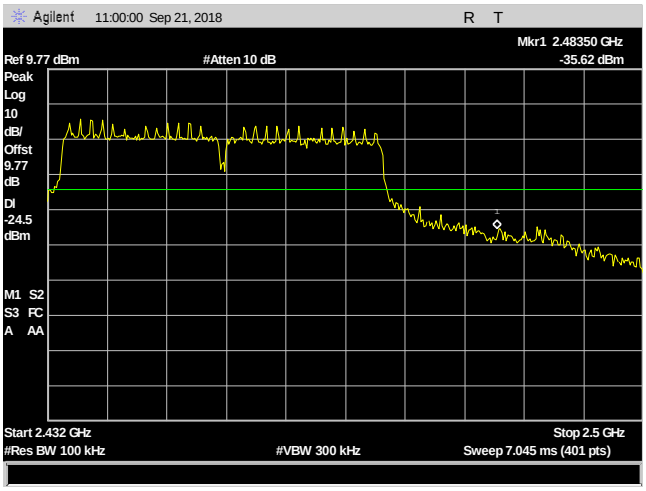

Plot 244. Conducted Band Edge, 802.11n HT40, 2452 MHz, High

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(e) Peak Power Spectral Density

Test Requirements: **§15.247(e):** For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

Test Procedure: The RBW was set to 100 kHz and a VBW set to 300 kHz. The spectrum analyzer was set to an auto sweep time and a peak detector was used. Measurements were carried out at the low, mid and high channels.

Test Results: The EUT was compliant with the peak power spectral density limits of **§ 15.247 (e)**.

The peak power spectral density was determined from plots on the following page(s).

Test Engineer: Giuliano Messina

Test Date: September 21, 2018

Peak Power Spectral Density

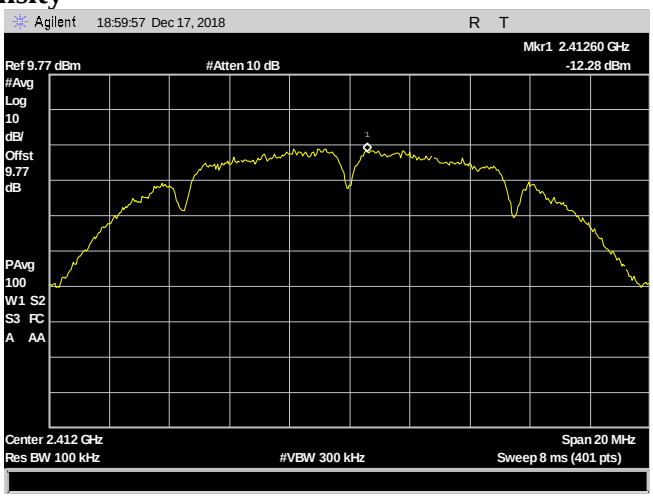

Plot 245. Power Density, 802.11b, 2412 MHz

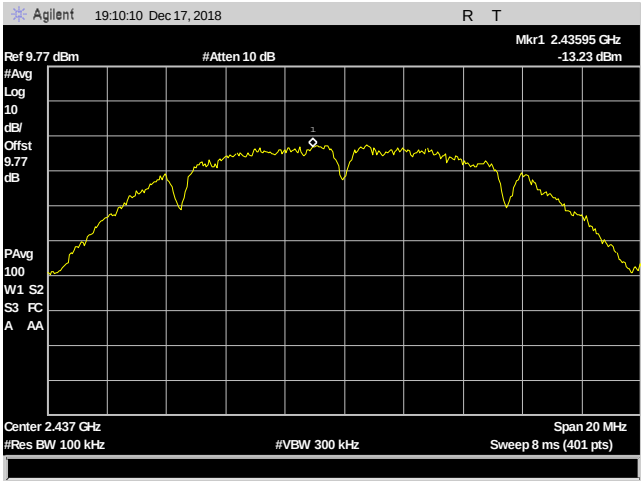

Plot 246. Power Density, 802.11b, 2437 MHz

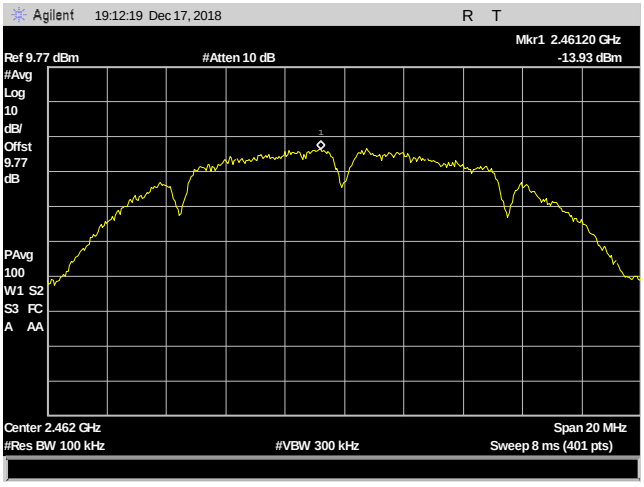

Plot 247. Power Density, 802.11b, 2462 MHz

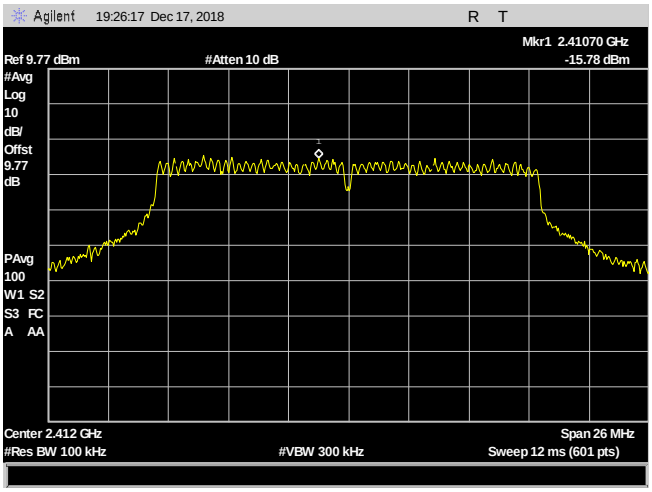

Plot 248. Power Density, 802.11g, 2412 MHz

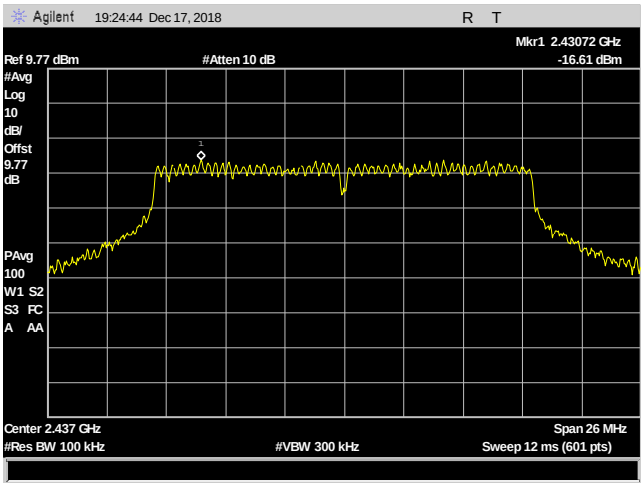

Plot 249. Power Density, 802.11g, 2437 MHz

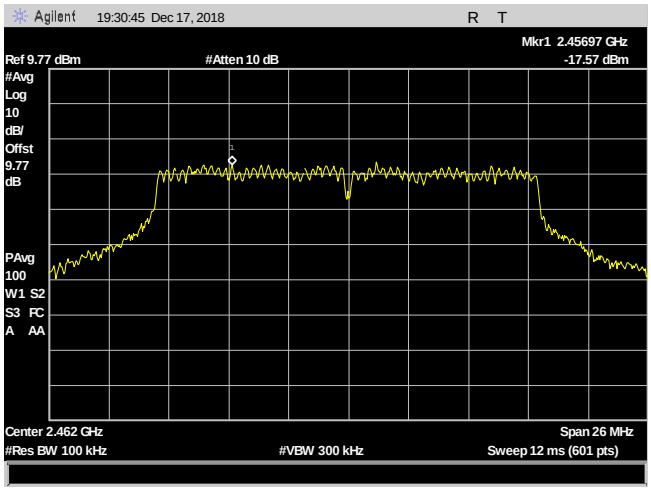

Plot 250. Power Density, 802.11g, 2462 MHz

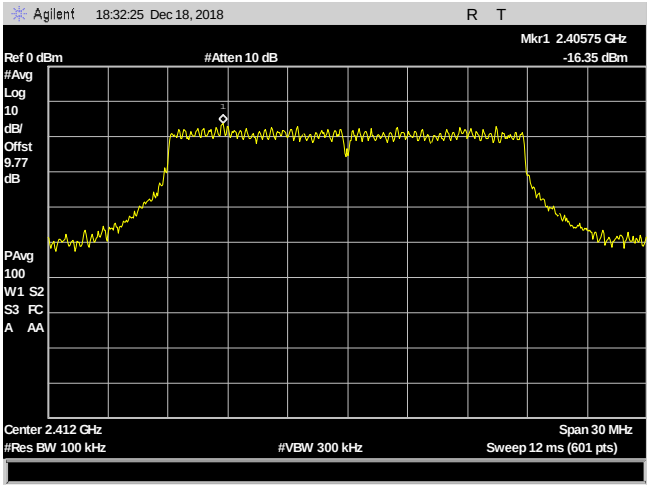

Plot 251. Power Density, 802.11n HT20, 2412 MHz

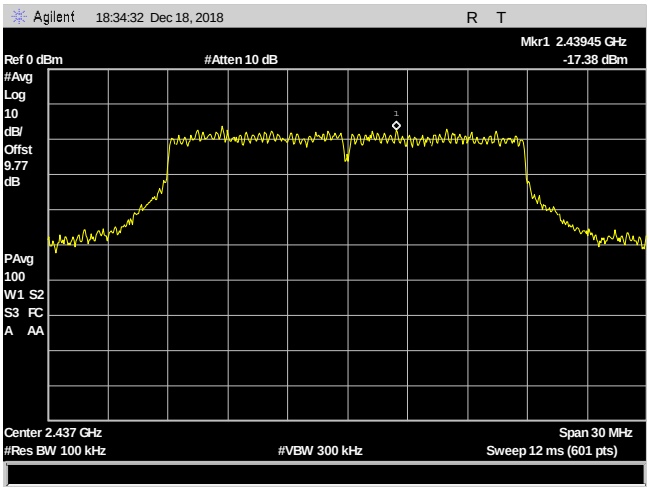

Plot 252. Power Density, 802.11n HT20, 2437 MHz

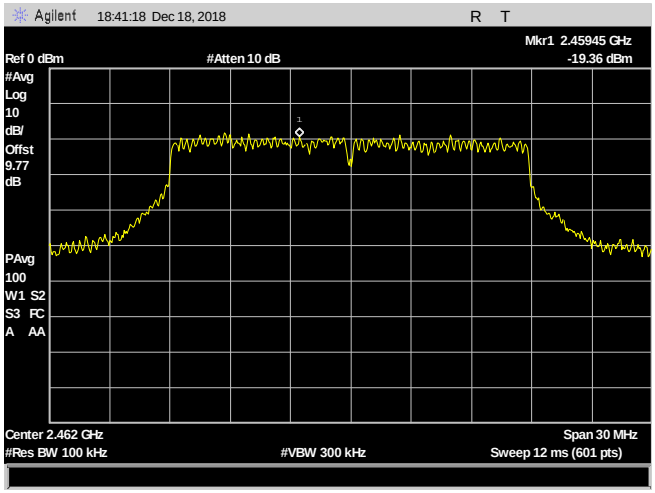

Plot 253. Power Density, 802.11n HT20, 2462 MHz

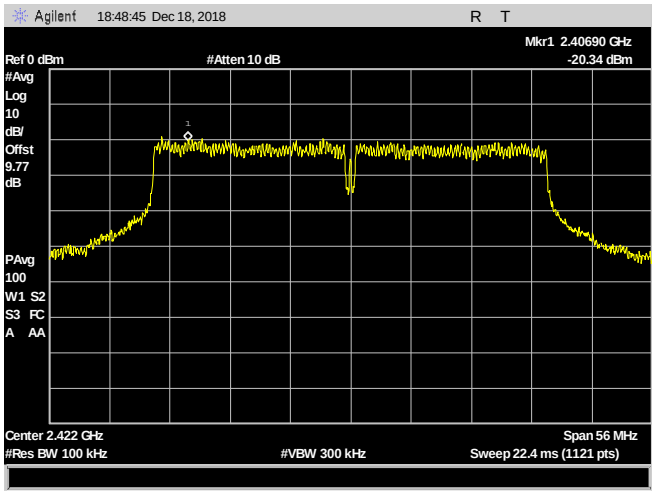

Plot 254. Power Density, 802.11n HT40, 2422 MHz

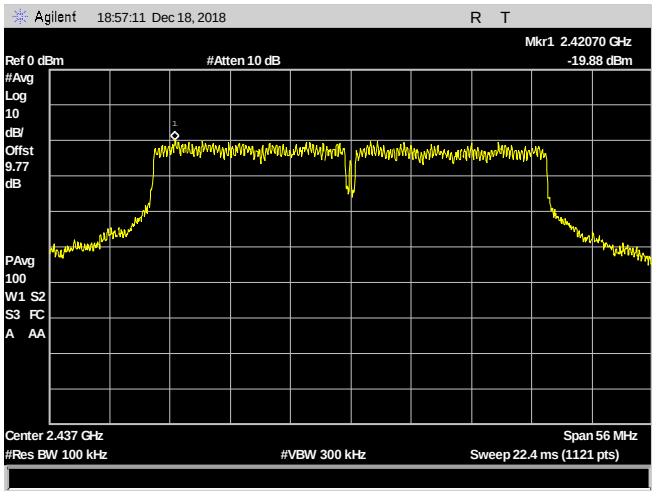

Plot 255. Power Density, 802.11n HT40, 2437 MHz

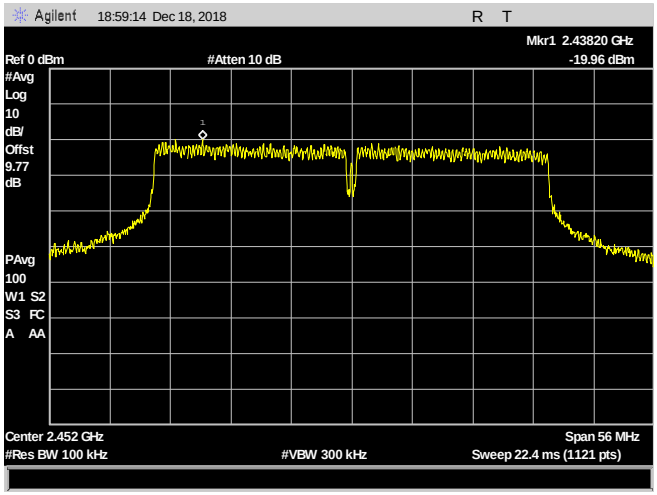

Plot 256. Power Density, 802.11n HT40, 2452 MHz

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(i) Maximum Permissible Exposure

RF Exposure Requirements: **§1.1307(b)(1) and §1.1307(b)(2):** Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines.

RF Radiation Exposure Limit: **§1.1310:** As specified in this section, the Maximum Permissible Exposure (MPE) Limit shall be used to evaluate the environmental impact of human exposure to radiofrequency (RF) radiation as specified in Sec. 1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of Sec. 2.1093 of this chapter.

MPE Limit: EUT's operating frequencies @ 2400-2483.5 MHz; **Limit for Uncontrolled exposure: 1 mW/cm^2 or 10 W/m^2**

Equation from page 18 of OET 65, Edition 97-01

$$S = PG / 4\pi R^2 \quad \text{or} \quad R = \sqrt{(PG / 4\pi S)}$$

where, S = Power Density (mW/cm^2)
P = Power Input to antenna (mW)
G = Antenna Gain (numeric value)
R = Distance (cm)

Test Results:

FCC										
Frequency (MHz)	**Con. Pwr. (dBm)**	**Con. Pwr. (mW)**	**Ant. Gain (dBi)**	**Ant. Gain numeric**	**Pwr. Density (mW/cm^2)**	**Limit (mW/cm^2)**	**Margin**	**Distance (cm)**	**Result**	**802.11 Mode**
2412	5.45	3.508	3	1.995	0.00139	1	0.99861	20	Pass	b
2412	3.5	2.239	3	1.995	0.00089	1	0.99911	20	Pass	g
2412	2.17	1.648	3	1.995	0.00065	1	0.99935	20	Pass	n HT20
2422	2.26	1.683	3	1.995	0.00067	1	0.99933	20	Pass	n HT40

Table 17. MPE Calculation, Collector

The safe distance where Power Density is less than the MPE Limit listed above was found to be 20 cm.

IV. Test Equipment

Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ISO/IEC 17025:2005.

MET Asset #	Nomenclature	Manufacturer	Model	Last Cal Date	Cal Due Date
1A1184	Spectrum Analyzer	Agilent	E4407B	4/20/2018	4/20/2019
1A1065	EMI Receiver	Rohde & Schwarz	ESCI	3/23/2018	3/23/2019
1A1119	Test Area	Custom Made	N/A	See Note	
1A1122	LISN	Teseq	NNB 51	6/14/2018	6/14/2019
1A1149	Milliohm Meter	GW Instek	GOM-802	4/20/2018	4/20/2019
1A1079	Conducted Comb Generator	COM-Power Corp	CGC-255	See Note	
1A1087	Pulse Limiter	Rohde & Schwarz	ESH3Z2	4/4/2018	4/4/2019
1A1105	ISN	Fischer Custom	F-071115-1057-1-09	7/11/2017	1/11/2019
1A1083	EMI Test Receiver	Rohde & Schwarz	ESU40	10/17/2018	10/17/2019
1A1106	10m Chamber (FCC)	ETS	Semi-Anechoic	See Note	
1A1147	Bilog Antenna (30MHz to 1GHz)	Sunol Sciences Corp	JB3	3/9/2017	10/9/2018
1A1047	Horn Antenna	ETS	3117	2/23/2017	10/23/2018
1A1099	Generator	COM-Power Corp	CGO-51000	See Note	
1A1088	Pre-Amp	Rohde & Schwarz	TS-PR1	See Note	
1A1044	Generator	COM-Power Corp	CG-520	See Note	
1A1073	Multi Device Controller	ETS EMCO	2090	See Note	
1A1074	System Controller	Panasonic	WV-CU101	See Note	
1A1080	Multi Device Controller	ETS EMCO	2090	See Note	
1A1180	Pre-Amp	Miteq	AMF-7D-01001800-22-10P	See Note	

Table 18. Test Equipment List

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.

V. Certification & User's Manual Information

Certification & User's Manual Information

A. Certification Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart I — Marketing of Radio frequency devices:

§ 2.801 Radio-frequency device defined.

As used in this part, a radio-frequency device is any device which in its operation is capable of Emitting radio-frequency energy by radiation, conduction, or other means. Radio- frequency devices include, but are not limited to:

(a) The various types of radio communication transmitting devices described throughout this chapter.

(b) The incidental, unintentional and intentional radiators defined in Part 15 of this chapter.

(c) The industrial, scientific, and medical equipment described in Part 18 of this chapter.

(d) Any part or component thereof which in use emits radio-frequency energy by radiation, conduction, or other means.

§ 2.803 Marketing of radio frequency devices prior to equipment authorization.

(a) Except as provided elsewhere in this chapter, no person shall sell or lease, or offer for sale or lease (including advertising for sale or lease), or import, ship or distribute for the purpose of selling or leasing or offering for sale or lease, any radio frequency device unless:

(1) In the case of a device subject to certification, such device has been authorized by the Commission in accordance with the rules in this chapter and is properly identified and labeled as required by §2.925 and other relevant sections in this chapter; or

(2) In the case of a device that is not required to have a grant of equipment authorization issued by the Commission, but which must comply with the specified technical standards prior to use, such device also complies with all applicable administrative (including verification of the equipment or authorization under a Declaration of Conformity, where required), technical, labeling and identification requirements specified in this chapter.

(d) Notwithstanding the provisions of paragraph (a) of this section, the offer for sale solely to business, commercial, industrial, scientific or medical users (but not an offer for sale to other parties or to end users located in a residential environment) of a radio frequency device that is in the conceptual, developmental, design or pre-production stage is permitted prior to equipment authorization or, for devices not subject to the equipment authorization requirements, prior to a determination of compliance with the applicable technical requirements *provided* that the prospective buyer is advised in writing at the time of the offer for sale that the equipment is subject to the FCC rules and that the equipment will comply with the appropriate rules before delivery to the buyer or to centers of distribution.

(e)(1) Notwithstanding the provisions of paragraph (a) of this section, prior to equipment authorization or determination of compliance with the applicable technical requirements any radio frequency device may be operated, but not marketed, for the following purposes and under the following conditions:

(i) Compliance testing;

(ii) Demonstrations at a trade show provided the notice contained in paragraph (c) of this section is displayed in a conspicuous location on, or immediately adjacent to, the device;

(iii) Demonstrations at an exhibition conducted at a business, commercial, industrial, scientific or medical location, but excluding locations in a residential environment, provided the notice contained in paragraphs (c) or (d) of this section, as appropriate, is displayed in a conspicuous location on, or immediately adjacent to, the device;

(iv) Evaluation of product performance and determination of customer acceptability, provided such operation takes place at the manufacturer's facilities during developmental, design or pre-production states; or

(v) Evaluation of product performance and determination of customer acceptability where customer acceptability of a radio frequency device cannot be determined at the manufacturer's facilities because of size or unique capability of the device, provided the device is operated at a business, commercial, industrial, scientific or medical user's site, but not at a residential site, during the development, design or pre-production stages.

(e)(2) For the purpose of paragraphs (e)(1)(iv) and (e)(1)(v) of this section, the term *manufacturer's facilities* includes the facilities of the party responsible for compliance with the regulations and the manufacturer's premises, as well as the facilities of other entities working under the authorization of the responsible party in connection with the development and manufacture, but not the marketing, of the equipment.

(f) For radio frequency devices subject to verification and sold solely to business, commercial, industrial, scientific and medical users (excluding products sold to other parties or for operation in a residential environment), parties responsible for verification of the devices shall have the option of ensuring compliance with the applicable technical specifications of this chapter at each end user's location after installation, provided that the purchase or lease agreement includes a proviso that such a determination of compliance be made and is the responsibility of the party responsible for verification of the equipment.

Certification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart J — Equipment Authorization Procedures:

§ 2.901 Basis and Purpose

(a) In order to carry out its responsibilities under the Communications Act and the various treaties and international regulations, and in order to promote efficient use of the radio spectrum, the Commission has developed technical standards for radio frequency equipment and parts or components thereof. The technical standards applicable to individual types of equipment are found in that part of the rules governing the service wherein the equipment is to be operated.[1] *In addition to the technical standards provided, the rules governing the service may require that such equipment be verified by the manufacturer or importer*, be authorized under a Declaration of Conformity, or receive an equipment authorization from the Commission by one of the following procedures: certification or registration.

(b) The following sections describe the verification procedure, the procedure for a Declaration of Conformity, and the procedures to be followed in obtaining certification from the Commission and the conditions attendant to such a grant.

§ 2.907 Certification.

(a) Certification is an equipment authorization issued by the Commission, based on representation and test data submitted by the applicant.

(b) Certification attaches to all units subsequently marketed by the grantee which are identical (see Section 2.908) to the sample tested except for permissive changes or other variations authorized by the Commission pursuant to Section 2.1043.

[1] In this case, the equipment is subject to the rules of Part 15. More specifically, the equipment falls under Subpart B (of Part 15), which deals with unintentional radiators.

Certification & User's Manual Information

§ 2.948 Description of measurement facilities.

(a) Each party making measurements of equipment that is subject to an equipment authorization under Part 15 or Part 18 of this chapter, regardless of whether the measurements are filed with the Commission or kept on file by the party responsible for compliance of equipment marketed within the U.S. or its possessions, shall compile a description of the measurement facilities employed.

(1) If the measured equipment is subject to the verification procedure, the description of the measurement facilities shall be retained by the party responsible for verification of the equipment.

(i) If the equipment is verified through measurements performed by an independent laboratory, it is acceptable for the party responsible for verification of the equipment to rely upon the description of the measurement facilities retained by or placed on file with the Commission by that laboratory. In this situation, the party responsible for the verification of the equipment is not required to retain a duplicate copy of the description of the measurement facilities.

(ii) If the equipment is verified based on measurements performed at the installation site of the equipment, no specific site calibration data is required. It is acceptable to retain the description of the measurement facilities at the site at which the measurements were performed.

(2) If the equipment is to be authorized by the Commission under the certification procedure, the description of the measurement facilities shall be filed with the Commission's Laboratory in Columbia, Maryland. The data describing the measurement facilities need only be filed once but must be updated as changes are made to the measurement facilities or as otherwise described in this section. At least every three years, the organization responsible for filing the data with the Commission shall certify that the data on file is current.

Certification & User's Manual Information

1. Label and User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart A — General:

§ 15.19 Labeling requirements.

(a) In addition to the requirements in Part 2 of this chapter, a device subject to certification or verification shall be labeled as follows:

(1) Receivers associated with the operation of a licensed radio service, e.g., FM broadcast under Part 73 of this chapter, land mobile operation under Part 90, etc., shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.

(2) A stand-alone cable input selector switch, shall bear the following statement in a conspicuous location on the device:

This device is verified to comply with Part 15 of the FCC Rules for use with cable television service.

(3) All other devices shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

(4) Where a device is constructed in two or more sections connected by wires and marketed together, the statement specified under paragraph (a) of this section is required to be affixed only to the main control unit.

(5) When the device is so small or for such use that it is not practicable to place the statement specified under paragraph (a) of this section on it, the information required by this paragraph shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed. However, the FCC identifier or the unique identifier, as appropriate, must be displayed on the device.

§ 15.21 Information to user.

The user's manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Verification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart B — Unintentional Radiators:

§ 15.105 Information to the user.

(a) For a Class A digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at own expense.

(b) For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a residential environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

– Reorient or relocate the receiving antenna.

– Increase the separation between the equipment and receiver.

– Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

– Consult the dealer or an experienced radio/TV technician for help.

End of Report