

FCC REPORT

Applicant: DZMY Holding LLC
Address of Applicant: 221 Brook Manor Court, Cary, North Carolina 27513, United States
Manufacturer: DZMY Holding LLC
Address of Manufacturer: 221 Brook Manor Court, Cary, North Carolina 27513, United States
Factory: Zhejiang Yankon Group Co.ltd
Address of Factory: 208 Tongjiang Zhong Road, Shangyu District, Shaoxing, Zhejiang, China, 312300

Equipment Under Test (EUT)

Product Name: Gateway
Model No.: G5-GW-UNV-Zig
Trade mark: G5Smart
FCC ID: 2AQIW-G5GWUNVZIG
Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247
Date of sample receipt: April 25, 2018
Date of Test: April 26, 2018-June 19, 2018
Date of report issued: June 20, 2018
Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Robinson Lo
Laboratory Manager

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

2 Version

Version No.	Date	Description
00	June 20, 2018	Original

Prepared By:

Bill. Yuan

Date:

June 20, 2018

Project Engineer

Check By:

Andy Wu

Date:

June 20, 2018

Reviewer

3 Contents

	Page
1 COVER PAGE	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
4.1 MEASUREMENT UNCERTAINTY	4
5 GENERAL INFORMATION	5
5.1 GENERAL DESCRIPTION OF EUT	5
5.2 TEST MODE	7
5.3 DESCRIPTION OF SUPPORT UNITS	7
5.4 TEST FACILITY	7
5.5 TEST LOCATION	7
6 TEST INSTRUMENTS LIST	8
7 TEST RESULTS AND MEASUREMENT DATA	9
7.1 ANTENNA REQUIREMENT	9
7.2 CONDUCTED EMISSIONS	10
7.3 CONDUCTED PEAK OUTPUT POWER	13
7.4 CHANNEL BANDWIDTH	15
7.5 POWER SPECTRAL DENSITY	17
7.6 BAND EDGES	19
7.6.1 Conducted Emission Method	19
7.6.2 Radiated Emission Method	21
7.7 SPURIOUS EMISSION	26
7.7.1 Conducted Emission Method	26
7.7.2 Radiated Emission Method	28
8 TEST SETUP PHOTO	39
9 EUT CONSTRUCTIONAL DETAILS	40

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.247 (b)(3)	Pass
Channel Bandwidth	15.247 (a)(2)	Pass
Power Spectral Density	15.247 (e)	Pass
Band Edge	15.247(d)	Pass
Spurious Emission	15.205/15.209	Pass

Pass: The EUT complies with the essential requirements in the standard.

Remark : Test according to ANSI C63.10:2013

N/A means not applicable.

4.1 Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	9kHz ~ 30MHz	± 4.34dB	(1)
Radiated Emission	30MHz ~ 1000MHz	± 4.24dB	(1)
Radiated Emission	1GHz ~ 26.5GHz	± 4.68dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	± 3.45dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

5 General Information

5.1 General Description of EUT

Product Name:	Gateway
Model No.:	G5-GW-UNV-Zig
Serial No.:	FFFFD43639833AED
Test sample(s) ID:	GTS201804000170-1
Sample(s) Status	Engineer sample
Hardware Version:	V1.1
Software Version:	V1.0.0
Operation Frequency:	2405MHz~2475MHz
Channel numbers:	15
Channel separation:	5MHz
Modulation type:	O-QPSK
Antenna Type:	External antenna
Antenna gain:	3.0dBi(Max)
Power supply:	Constant Voltage LED Driver Input: 120-277VAC, 50/60Hz, 0.32A(Max) Load Voltage Range: 12Vdc

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
11	2405MHz	15	2425MHz	19	2445MHz	23	2465MHz
12	2410MHz	16	2430MHz	20	2450MHz	24	2470MHz
13	2415MHz	17	2435MHz	21	2455MHz	25	2475MHz
14	2420MHz	18	2440MHz	22	2460MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2405MHz
The middle channel	2440MHz
The Highest channel	2475MHz

5.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
-------------------	-------------------------------------------------

Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.

5.3 Description of Support Units

None

5.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC —Registration No.: 381383**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 381383, January 08, 2018

- **Industry Canada (IC) —Registration No.: 9079A-2**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2, August 15, 2016.

5.5 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: No. 301-309, 3/F., Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China

Tel: 0755-27798480

Fax: 0755-27798960

6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July 03 2015	July 02 2020
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	Spectrum Analyzer	Agilent	E4440A	GTS533	June 28 2017	June 27 2018
4	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June 28 2017	June 27 2018
5	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June 28 2017	June 27 2018
6	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	9120D-829	GTS208	June 28 2017	June 27 2018
7	Horn Antenna	ETS-LINDGREN	3160	GTS217	June 28 2017	June 27 2018
8	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
9	Coaxial Cable	GTS	N/A	GTS213	June 28 2017	June 27 2018
10	Coaxial Cable	GTS	N/A	GTS211	June 28 2017	June 27 2018
11	Coaxial cable	GTS	N/A	GTS210	June 28 2017	June 27 2018
12	Coaxial Cable	GTS	N/A	GTS212	June 28 2017	June 27 2018
13	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June 28 2017	June 27 2018
14	Amplifier(2GHz-20GHz)	HP	8349B	GTS206	June 28 2017	June 27 2018
15	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June 28 2017	June 27 2018
16	Band filter	Amindeon	82346	GTS219	June 28 2017	June 27 2018
17	Power Meter	Anritsu	ML2495A	GTS540	June 28 2017	June 27 2018
18	Power Sensor	Anritsu	MA2411B	GTS541	June 28 2017	June 27 2018
19	Loop Antenna	ZHINAN	ZN30900A	GTS534	June 28 2017	June 27 2018

Conducted Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	May 16 2014	May 15 2019
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June 28 2017	June 27 2018
3	Pulse Limiter	R&S	ESH3-Z2	GTS224	June 28 2017	June 27 2018
4	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	June 28 2017	June 27 2018
5	Artificial Mains Network	SCHWARZBECK MESS	NSLK8127	GTS226	June 28 2017	June 27 2018
6	Coaxial Cable	GTS	N/A	GTS227	June 28 2017	June 27 2018
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
8	Thermo meter	KTJ	TA328	GTS233	June 28 2017	June 27 2018

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Barometer	ChangChun	DYM3	GTS257	June 28 2017	June 27 2018

7 Test results and Measurement Data


7.1 Antenna requirement

Standard requirement:	FCC Part15 C Section 15.203/247(c)
<p>15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.</p>	
<p>EUT Antenna: <i>The antenna is external antenna, the best case gain of the antenna is 3.0dBi</i></p> 	

7.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207		
Test Method:	ANSI C63.10:2013		
Test Frequency Range:	150KHz to 30MHz		
Class / Severity:	Class B		
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50


* Decreases with the logarithm of the frequency.

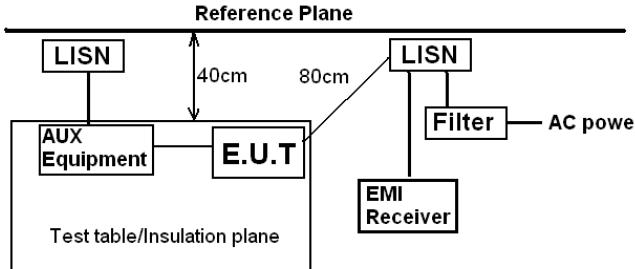Test setup:	 <p><i>Remark</i> <i>E.U.T: Equipment Under Test</i> <i>LISN: Line Impedance Stabilization Network</i> <i>Test table height=0.8m</i></p>
-------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Test procedure:	<ol style="list-style-type: none"> 1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


Measurement data

Line:

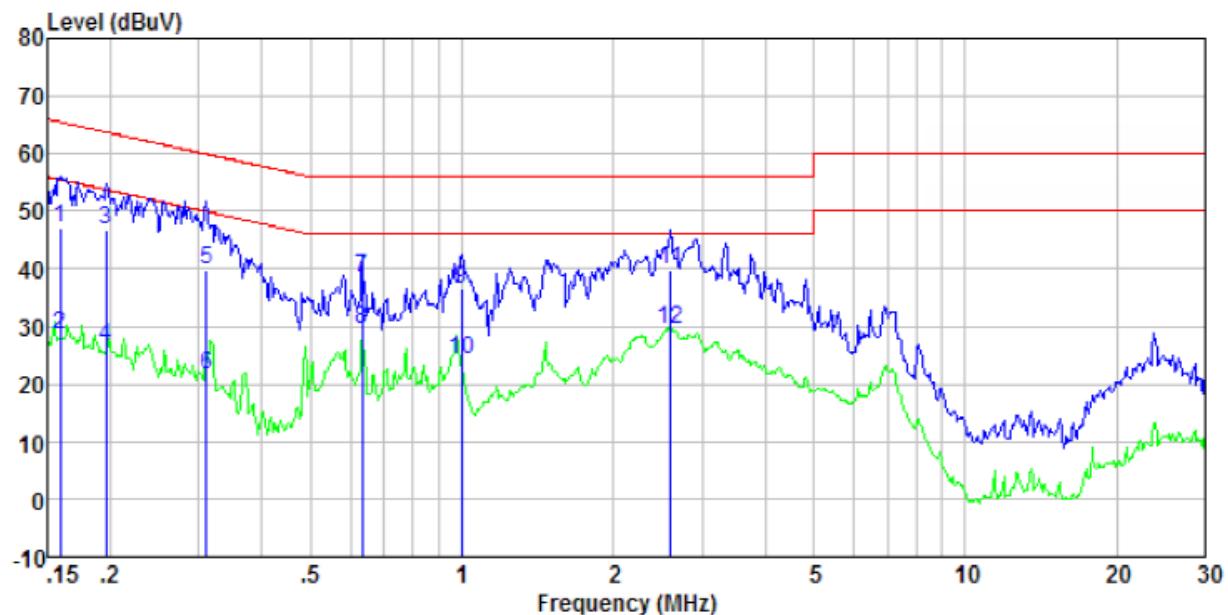

Freq MHz	Reading level dBuV	1ISN/ISN factor dB	Cable loss dB	level dBuV	Limit level dBuV	Over limit dB	Remark
0.159	46, 61	0.40	0.08	47.09	65.52	-18.43	QP
0.159	27.95	0.40	0.08	28.43	55.52	-27.09	Average
0.197	46.37	0.40	0.11	46.88	63.76	-16.88	QP
0.197	26.17	0.40	0.11	26.68	53.76	-27.08	Average
0.310	39.41	0.39	0.10	39.90	59.97	-20.07	QP
0.310	20.97	0.39	0.10	21.46	49.97	-28.51	Average
0.634	38.05	0.28	0.12	38.45	56.00	-17.55	QP
0.634	28.98	0.28	0.12	29.38	46.00	-16.62	Average
1.000	36.01	0.20	0.15	36.36	56.00	-19.64	QP
1.000	23.96	0.20	0.15	24.31	46.00	-21.69	Average
2.594	39.37	0.20	0.18	39.75	56.00	-16.25	QP
2.594	29.16	0.20	0.18	29.54	46.00	-16.46	Average

Neutral:

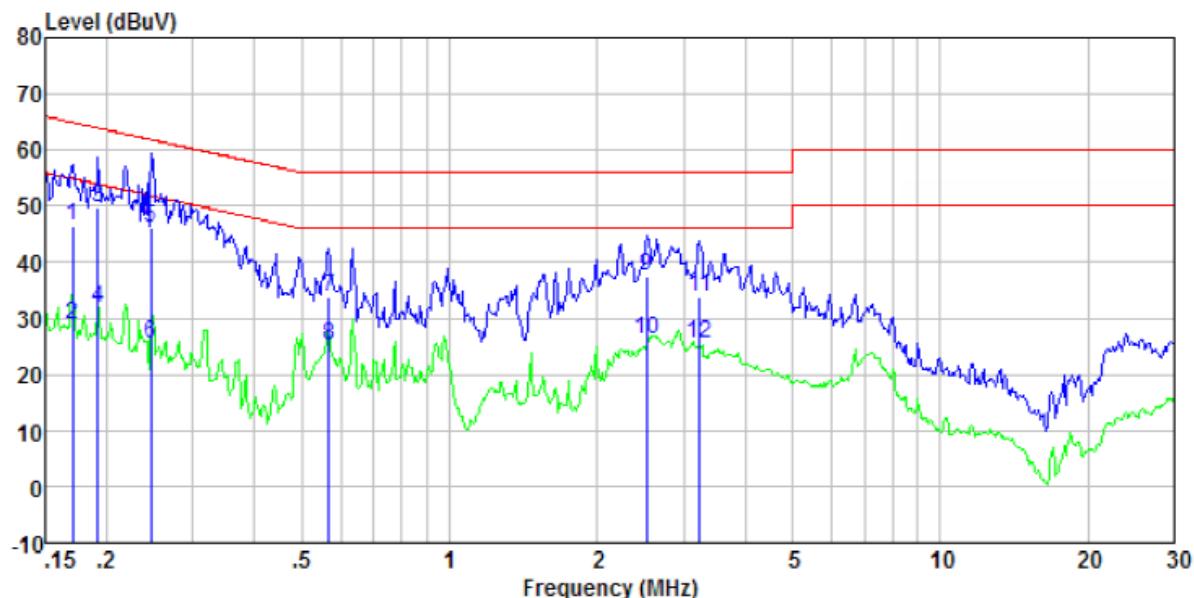


Freq MHz	Reading level dBuV	LISN/ISM factor dB	Cable loss dB	level dBuV	Limit level dBuV	Over limit dB	Remark
0.170	45.89	0.40	0.09	46.38	64.94	-18.56	QP
0.170	28.41	0.40	0.09	28.90	54.94	-26.04	Average
0.192	49.38	0.40	0.11	49.89	63.93	-14.04	QP
0.192	31.17	0.40	0.11	31.68	53.93	-22.25	Average
0.247	45.57	0.40	0.10	46.07	61.86	-15.79	QP
0.247	25.02	0.40	0.10	25.52	51.86	-26.34	Average
0.567	33.48	0.29	0.12	33.89	56.00	-22.11	QP
0.567	24.83	0.29	0.12	25.24	46.00	-20.76	Average
2.527	37.11	0.20	0.18	37.49	56.00	-18.51	QP
2.527	25.71	0.20	0.18	26.09	46.00	-19.91	Average
3.241	33.55	0.20	0.19	33.94	56.00	-22.06	QP
3.241	25.04	0.20	0.19	25.43	46.00	-20.57	Average

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level =Receiver Read level + LISN Factor + Cable Loss
4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.


7.3 Conducted Peak Output Power

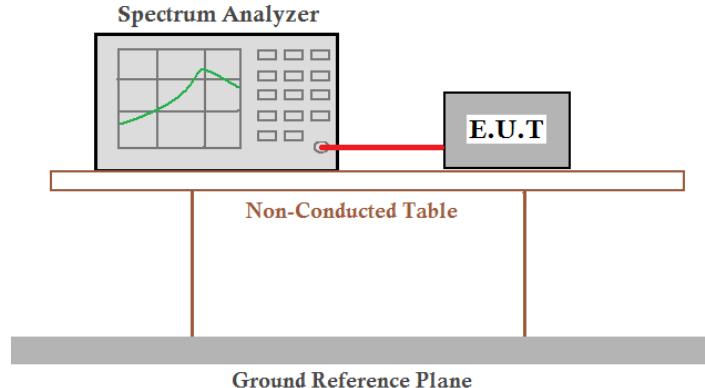Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V04
Limit:	30dBm
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


Measurement Data

Frequency (MHz)	Peak Output Power (dBm)	Limit(dBm)	Result
2405	18.21	30	PASS
2440	17.90		
2475	17.16		


Test plot as follows:

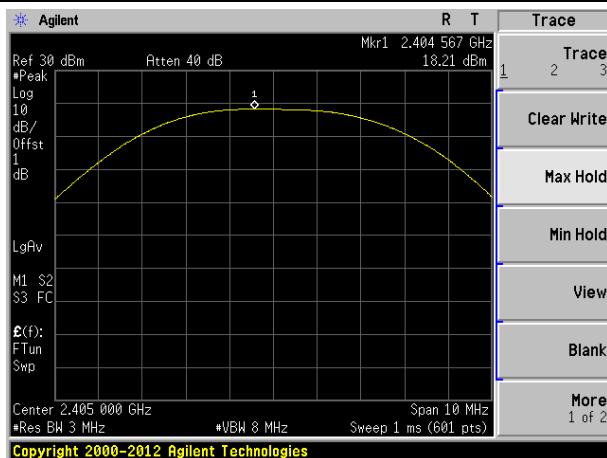

2405MHz

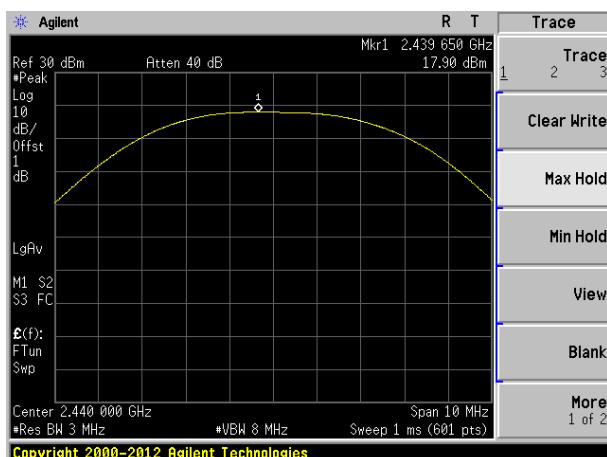


2440MHz

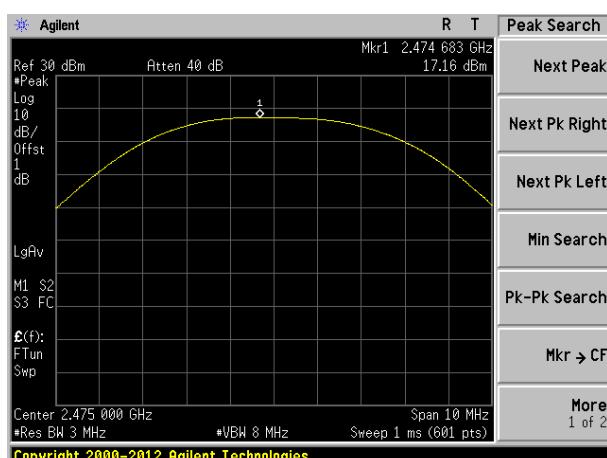

2475MHz


7.4 Channel Bandwidth

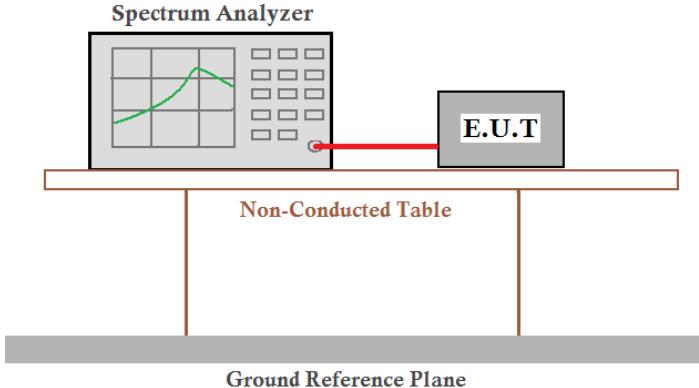Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V04
Limit:	>500KHz
Test setup:	 <p>The diagram illustrates the test setup for measuring channel bandwidth. A Spectrum Analyzer is connected to the E.U.T (Equipment Under Test) via a coaxial cable. The E.U.T is placed on a Non-Conducted Table. The entire setup is positioned above a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


Measurement Data

Frequency (MHz)	Channel Bandwidth (MHz)	Limit(KHz)	Result
2405	1.625	>500	Pass
2440	1.620		
2475	1.617		


Test plot as follows:

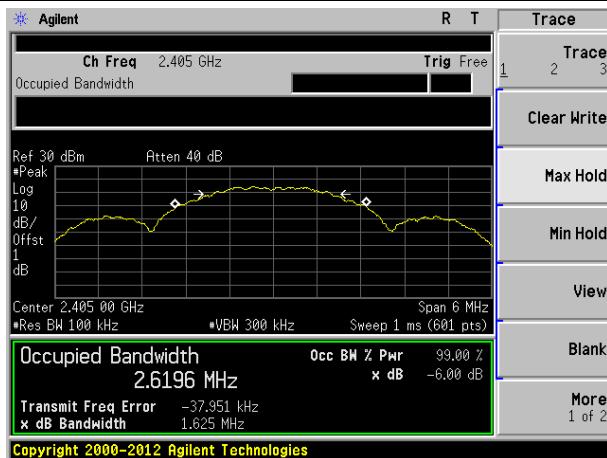

2405MHz

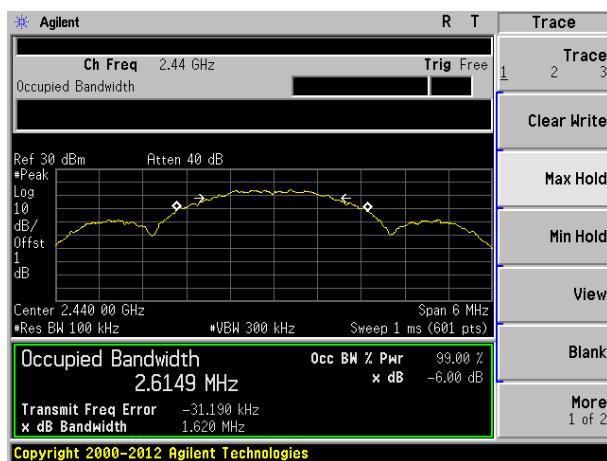


2440MHz

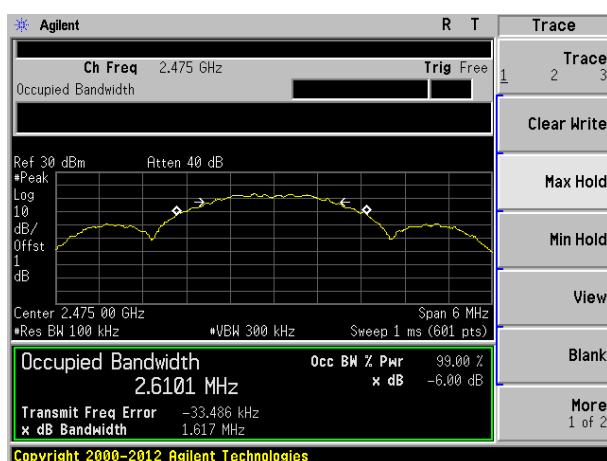

2475MHz


7.5 Power Spectral Density

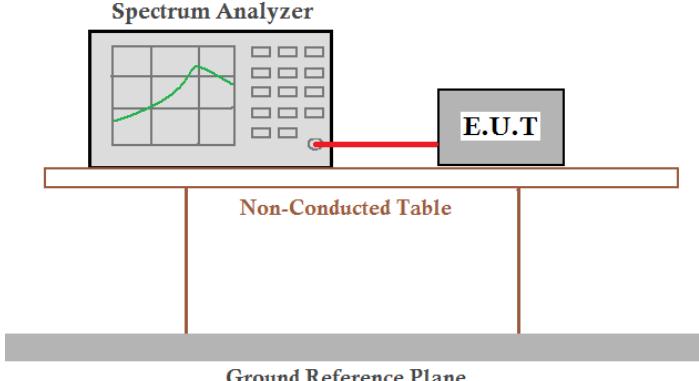Test Requirement:	FCC Part15 C Section 15.247 (e)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V04
Limit:	8dBm/3kHz
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


Measurement Data

Frequency (MHz)	Power Spectral Density (dBm)	Limit (dBm/3kHz)	Result
2405	3.01	8.00	Pass
2440	2.99		
2475	2.02		


Test plot as follows:

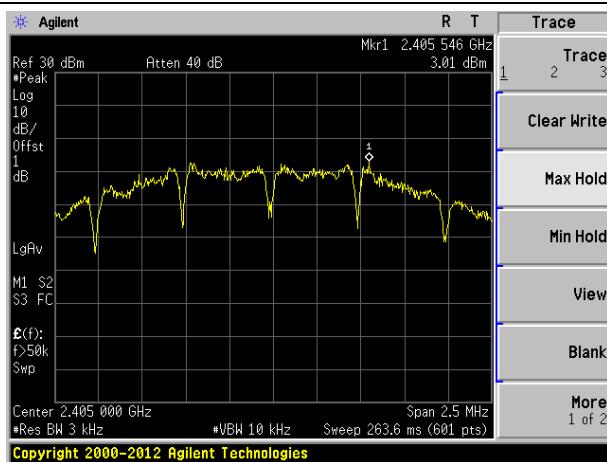

2405MHz

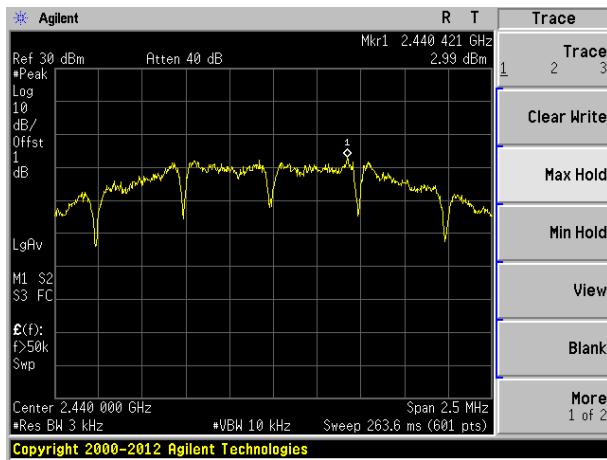


2440MHz

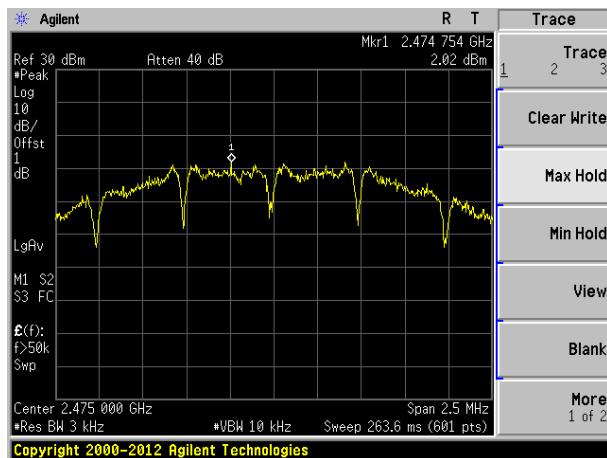


2475MHz

7.6 Band edges

7.6.1 Conducted Emission Method

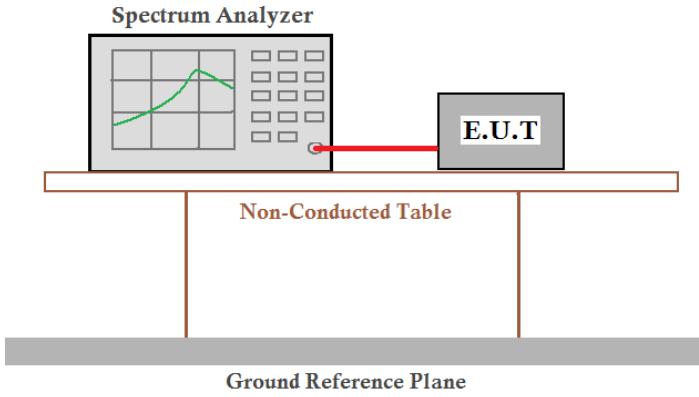Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V04
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


Test plot as follows:

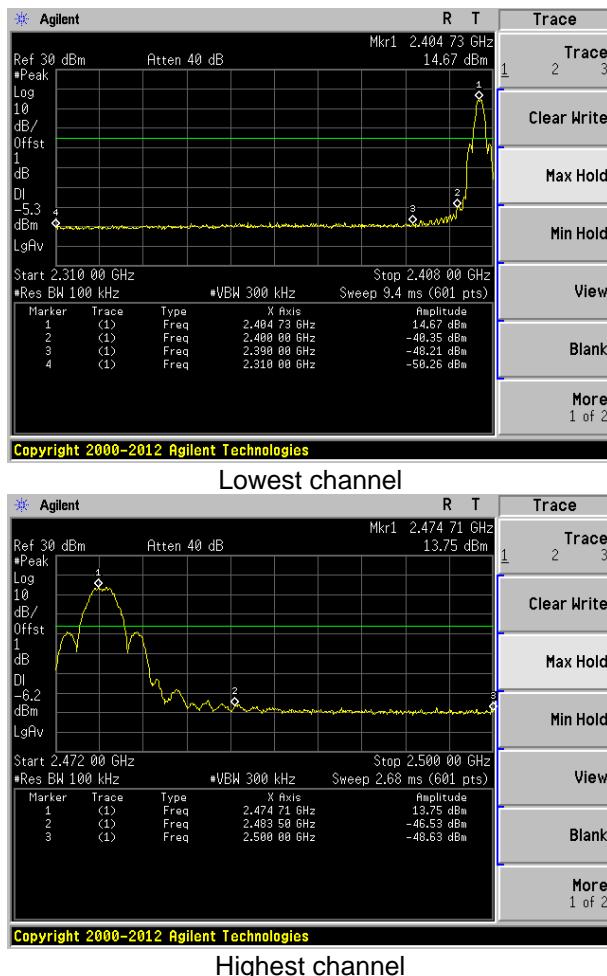

Lowest channel

Highest channel

7.6.2 Radiated Emission Method

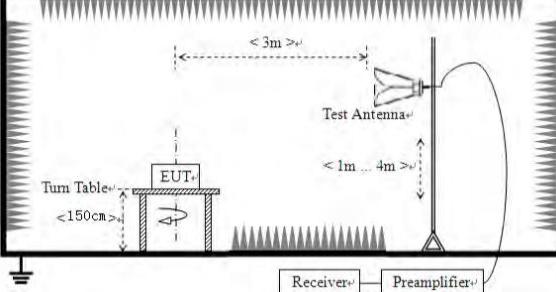
Test Requirement:	FCC Part15 C Section 15.209 and 15.205							
Test Method:	ANSI C63.10:2013							
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.							
Test site:	Measurement Distance: 3m							
Receiver setup:	Frequency	Detector	RBW	VBW	Value			
	Above 1GHz	Peak	1MHz	3MHz	Peak			
Limit:	Frequency	Limit (dBuV/m @3m)			Value			
	Above 1GHz	54.00			Average			
		74.00			Peak			
Test setup:								
Test Procedure:	<ol style="list-style-type: none"> The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. The radiation measurements are performed in X, Y, Z axis positioning. And found the Y axis positioning which it is worse case, only the test worst case mode is recorded in the report. 							
Test Instruments:	Refer to section 6.0 for details							
Test mode:	Refer to section 5.2 for details							
Test results:	Pass							

Measurement data:

Remark: The pre-test were performed on lowest, middle and highest frequencies, only the worst case's (lowest and highest frequencies) data was showed.


Test channel:	2405MHz
---------------	---------

Horizontal:

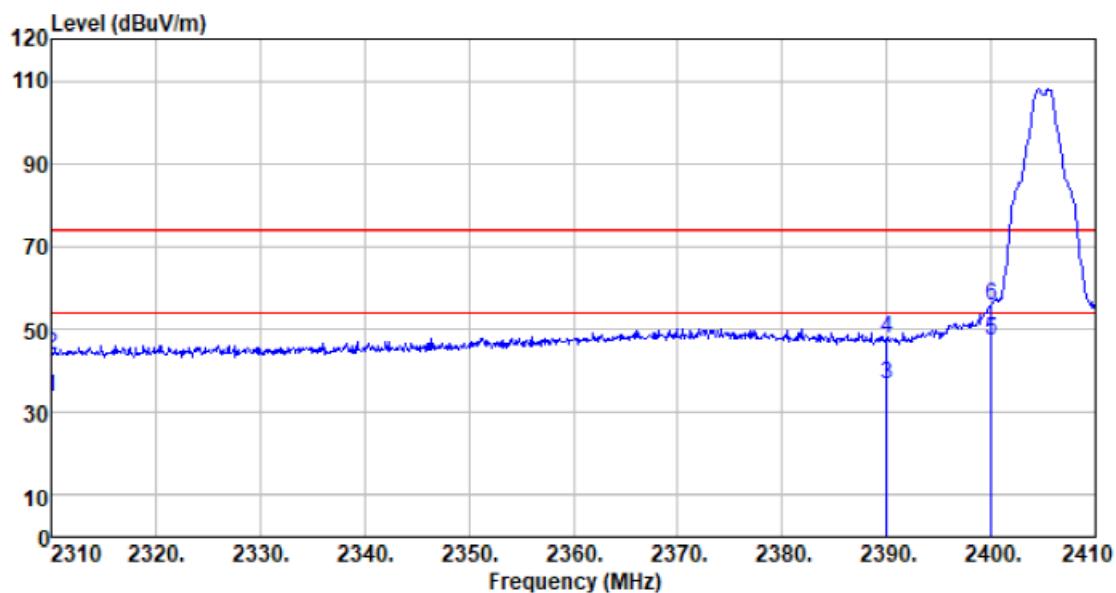

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
2310.000	28.24	27.14	2.81	24.64	33.55	54.00	-20.45	Average
2310.000	38.51	27.14	2.81	24.64	43.82	74.00	-30.18	Peak
2390.000	31.15	27.37	2.91	24.71	36.72	54.00	-17.28	Average
2390.000	42.36	27.37	2.91	24.71	47.93	74.00	-26.07	Peak
2400.000	42.00	27.41	2.91	24.72	47.60	54.00	-6.40	Average
2400.000	50.17	27.41	2.91	24.72	55.77	74.00	-18.23	Peak


Vertical:

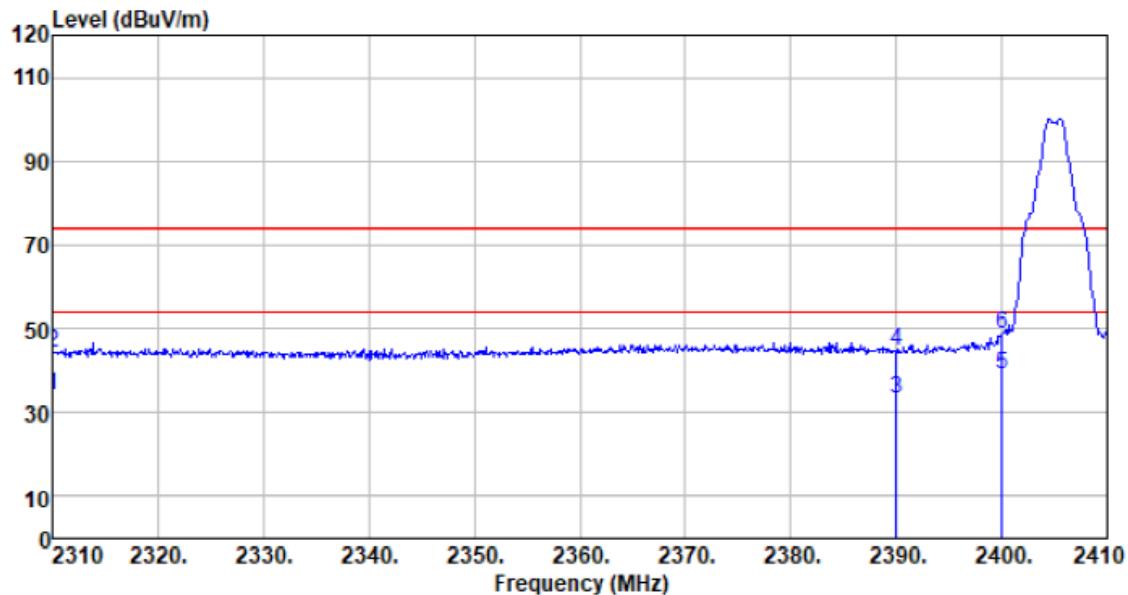


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
2310.000	28.80	27.14	2.81	24.64	34.11	54.00	-19.89	Average
2310.000	38.96	27.14	2.81	24.64	44.27	74.00	-29.73	Peak
2390.000	27.58	27.37	2.91	24.71	33.15	54.00	-20.85	Average
2390.000	38.94	27.37	2.91	24.71	44.51	74.00	-29.49	Peak
2400.000	33.29	27.41	2.91	24.72	38.89	54.00	-15.11	Average
2400.000	42.96	27.41	2.91	24.72	48.56	74.00	-25.44	Peak

Test channel:	2475MHz
---------------	---------

Horizontal:

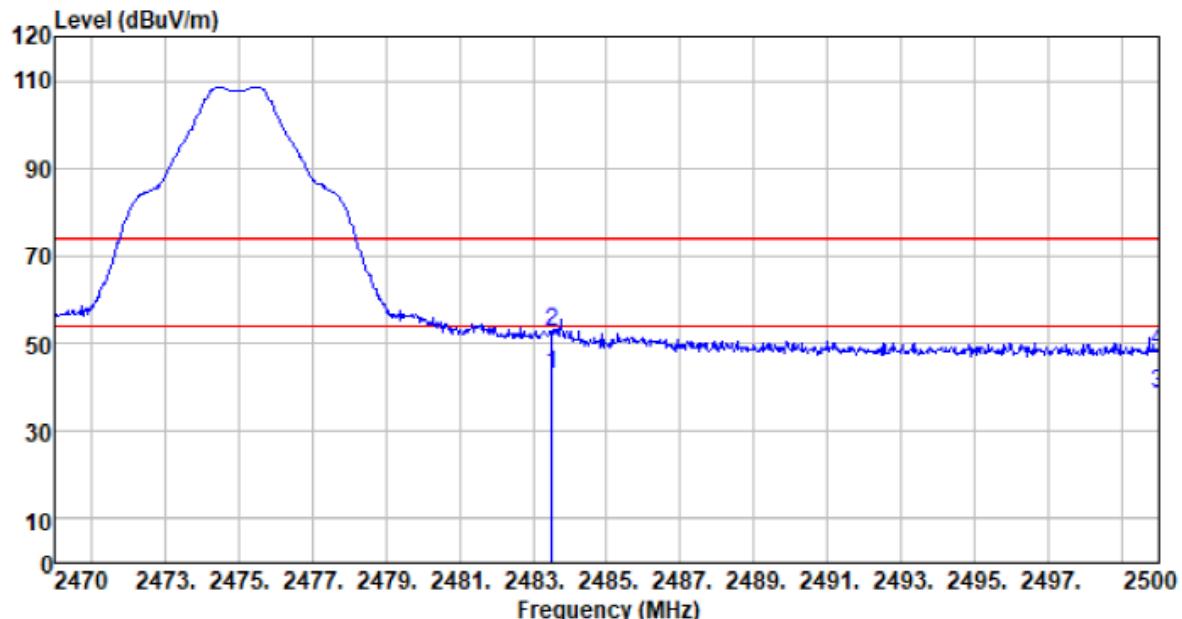

Vertical:

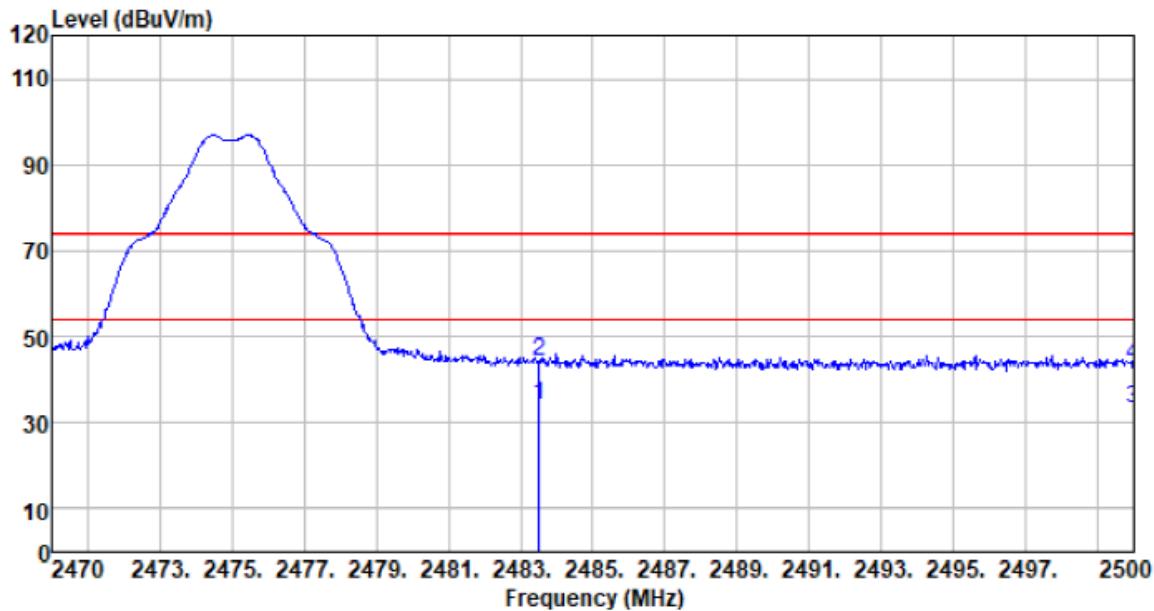


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
2483.500	28.14	27.66	2.99	24.80	33.99	54.00	-20.01	Average
2483.500	38.41	27.66	2.99	24.80	44.26	74.00	-29.74	Peak
2500.000	27.36	27.70	3.01	24.86	33.21	54.00	-20.79	Average
2500.000	37.69	27.70	3.01	24.86	43.54	74.00	-30.46	Peak

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.


7.7 Spurious Emission

7.7.1 Conducted Emission Method

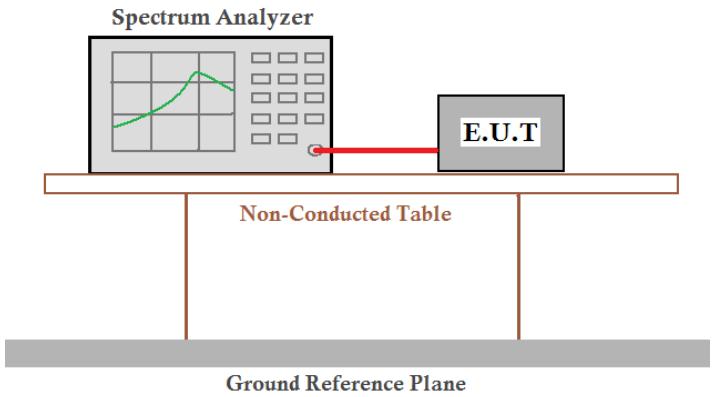Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V04
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


Test plot as follows:

Lowest channel

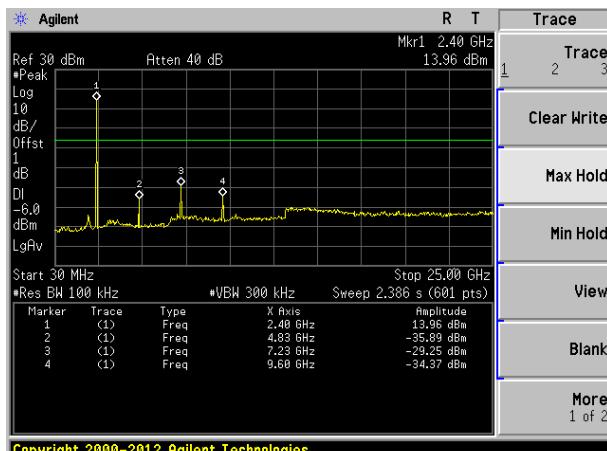


30MHz-25GHz

Middle channel

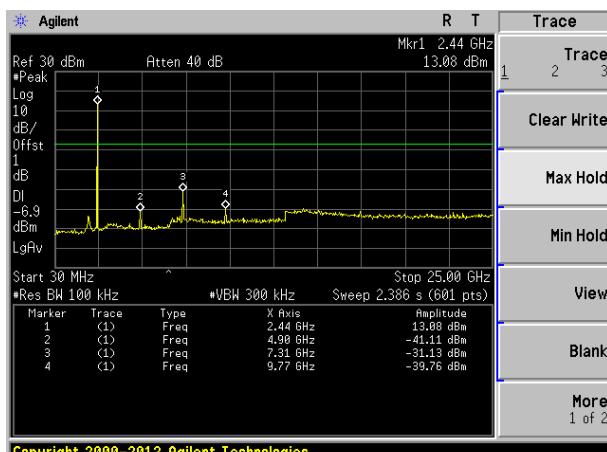


30MHz-25GHz


Highest channel

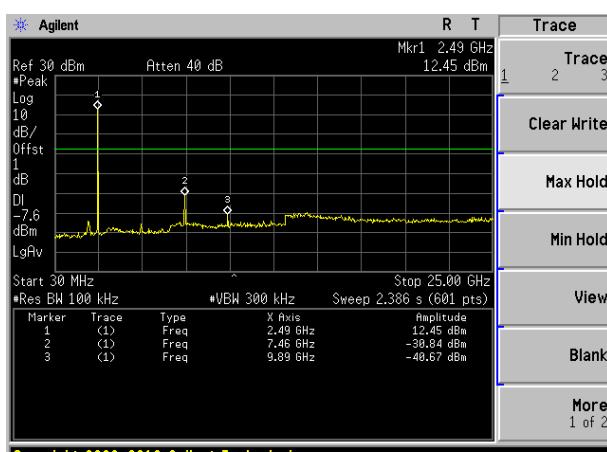


30MHz-25GHz

7.7.2 Radiated Emission Method

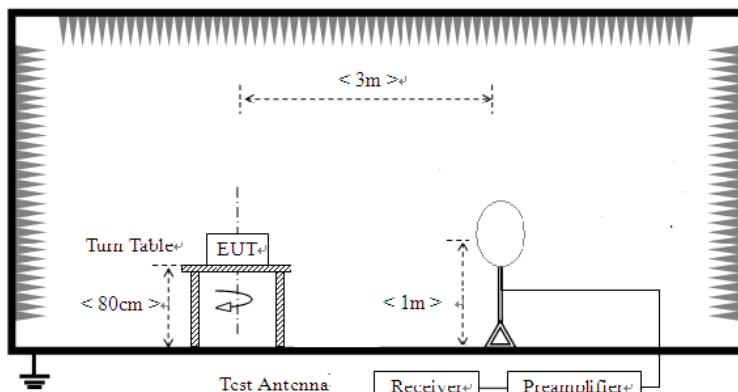Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
	Above 1GHz	Peak	1MHz	10Hz	Average
Limit: (Spurious Emissions)	Frequency	Limit (uV/m)	Value	Measurement Distance 3m	
	0.009MHz-0.490MHz	2400/F(KHz)	QP	300m	
	0.490MHz-1.705MHz	24000/F(KHz)	QP	300m	
	1.705MHz-30MHz	30	QP	30m	
	30MHz-88MHz	100	QP		
	88MHz-216MHz	150	QP		
	216MHz-960MHz	200	QP		
	960MHz-1GHz	500	QP		
	Above 1GHz	500	Average		
	Above 1GHz	5000	Peak		
Test setup:	Below 30MHz				
					
	Below 1GHz				

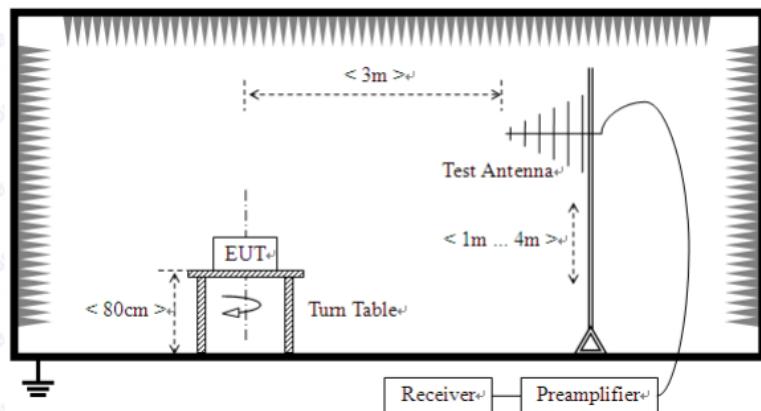

Above 1GHz

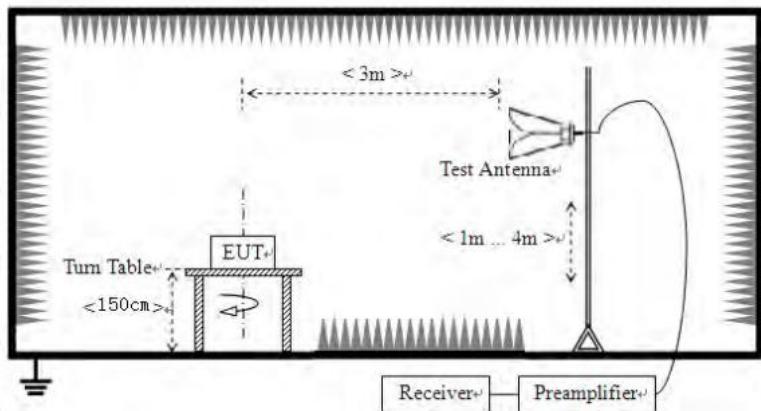

Test Procedure:

1. The EUT was placed on the top of a rotating table (0.8m for below 1G and 1.5m for above 1G) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the

	EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement data:

9 kHz ~ 30 MHz


The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

Remark:

Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.


■ Below 1GHz

Horizontal:

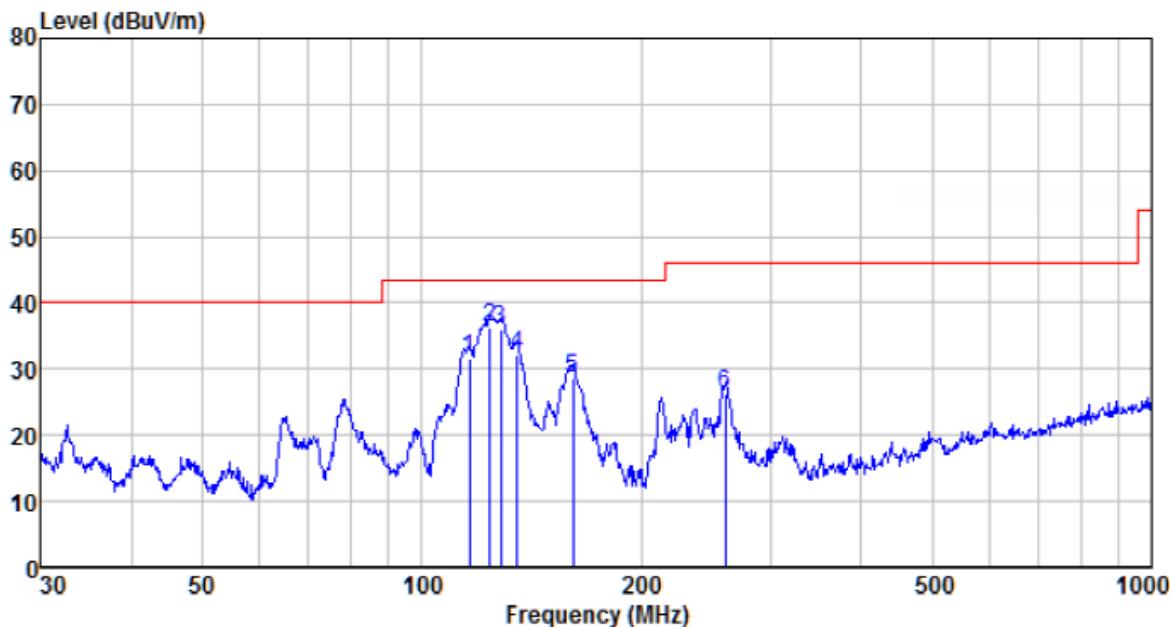

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
116.132	57.15	10.09	1.33	36.85	31.72	43.50	-11.78	QP
124.133	62.75	8.96	1.39	36.91	36.19	43.50	-7.31	QP
128.113	63.01	8.43	1.42	36.94	35.92	43.50	-7.58	QP
135.032	59.86	7.78	1.47	36.98	32.13	43.50	-11.37	QP
160.909	55.89	8.33	1.63	37.14	28.71	43.50	-14.79	QP
260.144	48.89	12.47	2.18	37.39	26.15	46.00	-19.85	QP

Vertical:

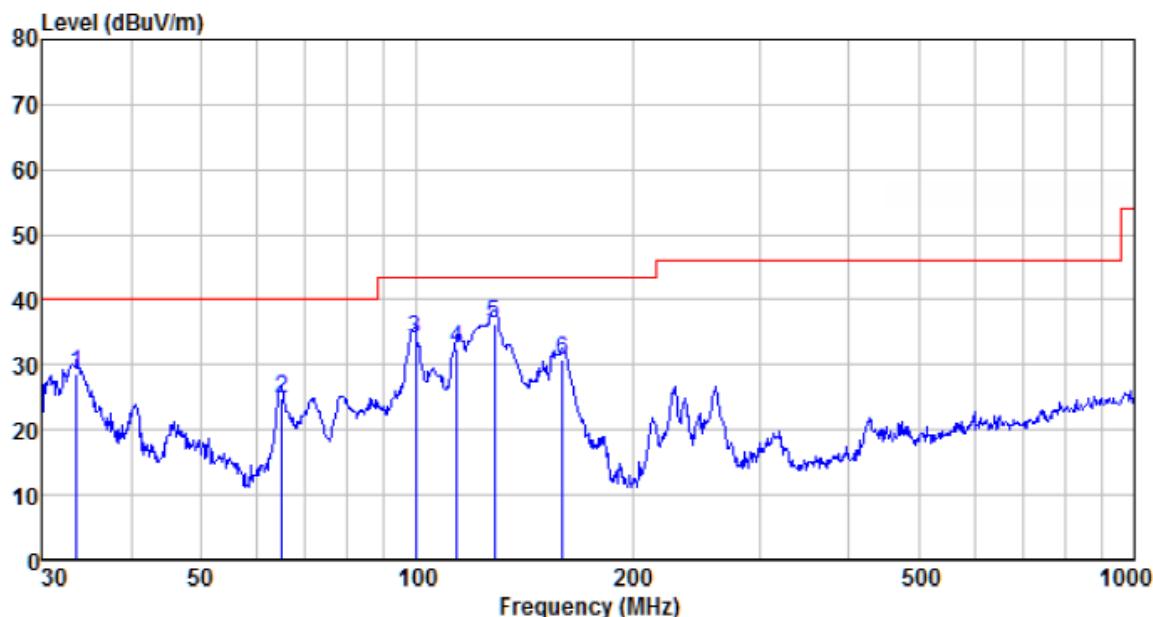


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
33.562	51.97	11.27	0.59	35.26	28.57	40.00	-11.43	QP
64.887	50.94	9.34	0.90	36.38	24.80	40.00	-15.20	QP
99.528	57.31	12.13	1.19	36.72	33.91	43.50	-9.59	QP
113.714	57.59	10.51	1.31	36.83	32.58	43.50	-10.92	QP
128.113	63.50	8.43	1.42	36.94	36.41	43.50	-7.09	QP
159.784	57.76	8.30	1.63	37.13	30.56	43.50	-12.94	QP

■ Above 1GHz


Test channel:	2405MHz
---------------	---------

Horizontal:

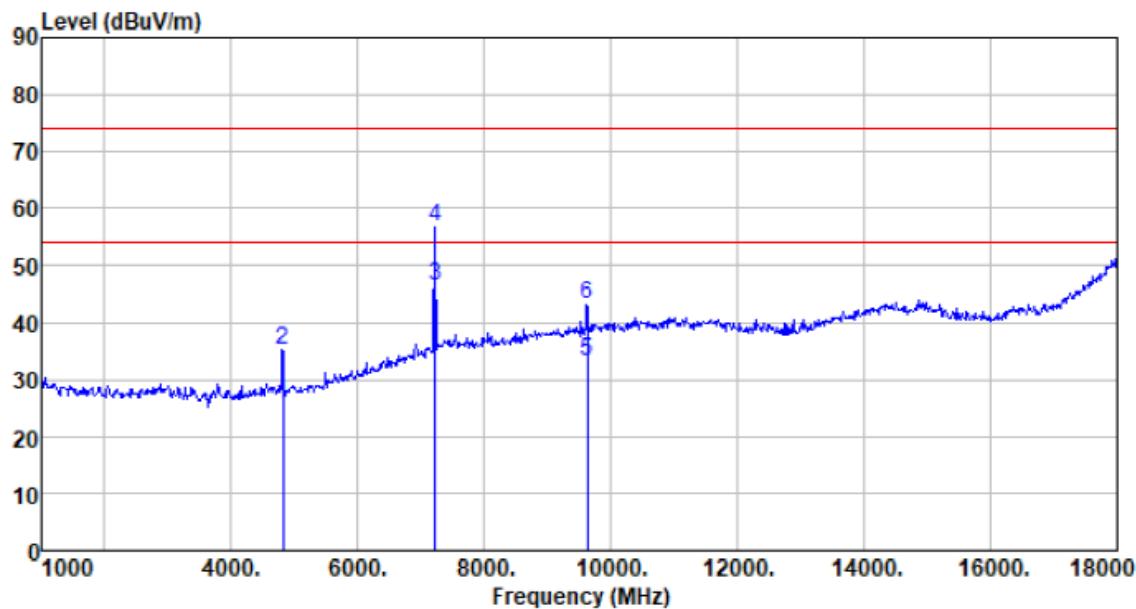

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
4810.250	27.44	31.20	4.61	37.73	25.52	54.00	-28.48	Average
4810.250	37.01	31.20	4.61	37.73	35.09	74.00	-38.91	Peak
7215.070	39.26	36.20	6.50	35.63	46.33	54.00	-7.67	Average
7215.070	49.69	36.20	6.50	35.63	56.76	74.00	-17.24	Peak
9620.000	22.14	37.93	7.98	34.94	33.11	54.00	-20.89	Average
9620.000	32.16	37.93	7.98	34.94	43.13	74.00	-30.87	Peak

Vertical:

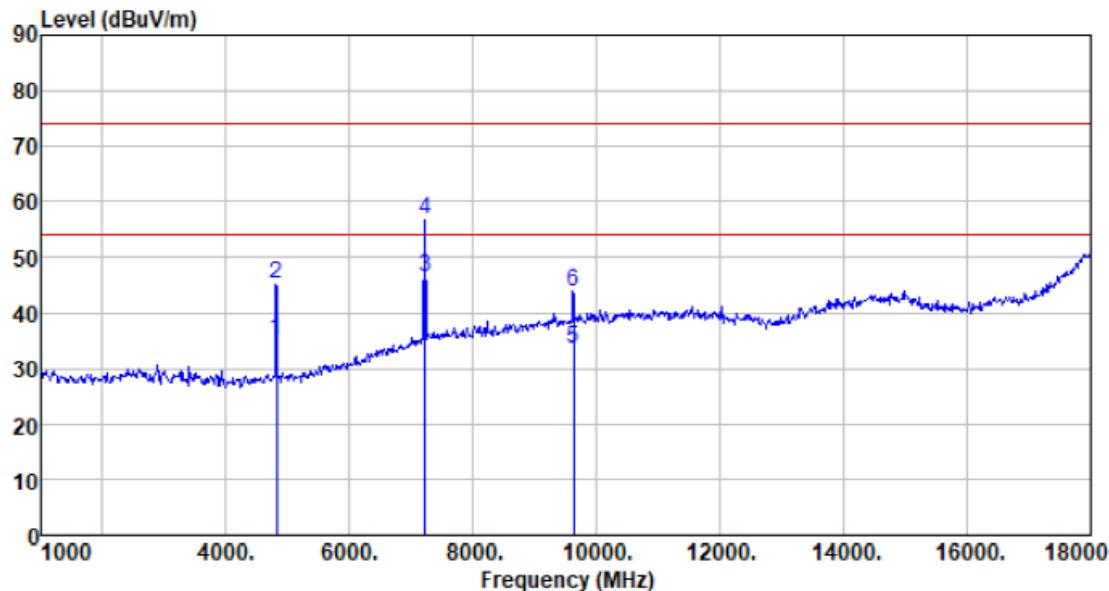

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
4810.190	37.17	31.20	4.61	37.73	35.25	54.00	-18.75	Average
4810.190	46.95	31.20	4.61	37.73	45.03	74.00	-28.97	Peak
7215.130	39.49	36.20	6.50	35.63	46.56	54.00	-7.44	Average
7215.130	49.68	36.20	6.50	35.63	56.75	74.00	-17.25	Peak
9620.000	22.64	37.93	7.98	34.94	33.61	54.00	-20.39	Average
9620.000	32.77	37.93	7.98	34.94	43.74	74.00	-30.26	Peak


Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. ** means this data is the too weak instrument of signal is unable to test.

Test channel:


2440MHz

Horizontal:

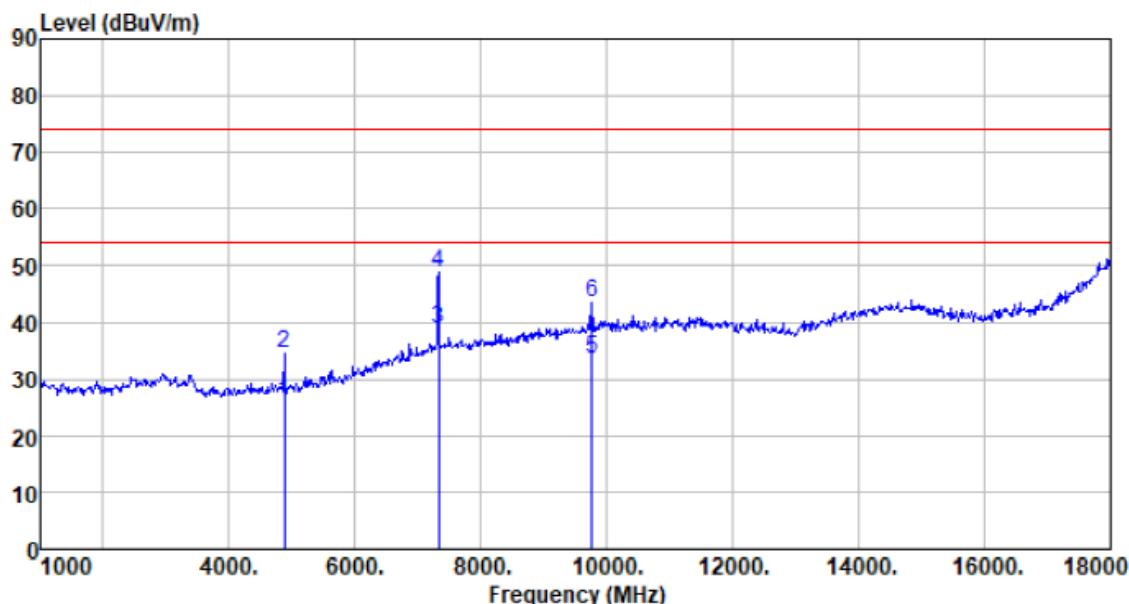

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
4880.083	27.69	31.31	4.69	37.75	25.94	54.00	-28.06	Average
4880.083	36.40	31.31	4.69	37.75	34.65	74.00	-39.35	Peak
7320.041	31.38	36.43	6.63	35.60	38.84	54.00	-15.16	Average
7320.041	41.22	36.43	6.63	35.60	48.68	74.00	-25.32	Peak
9760.000	22.28	38.10	8.03	35.03	33.38	54.00	-20.62	Average
9760.000	32.52	38.10	8.03	35.03	43.62	74.00	-30.38	Peak

Vertical:

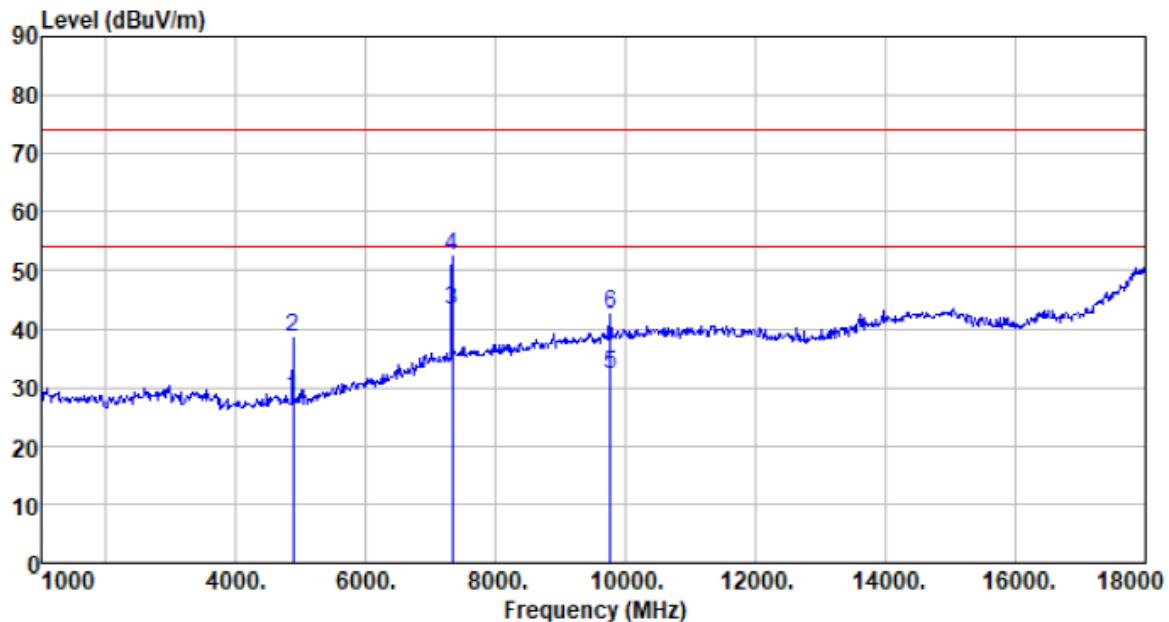

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
4880.035	29.99	31.31	4.69	37.75	28.24	54.00	-25.76	Average
4880.035	40.32	31.31	4.69	37.75	38.57	74.00	-35.43	Peak
7320.015	35.69	36.43	6.63	35.60	43.15	54.00	-10.85	Average
7320.015	44.90	36.43	6.63	35.60	52.36	74.00	-21.64	Peak
9760.000	21.17	38.10	8.03	35.03	32.27	54.00	-21.73	Average
9760.000	31.45	38.10	8.03	35.03	42.55	74.00	-31.45	Peak


Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. **, means this data is the too weak instrument of signal is unable to test.

Test channel:


2475MHz

Horizontal:

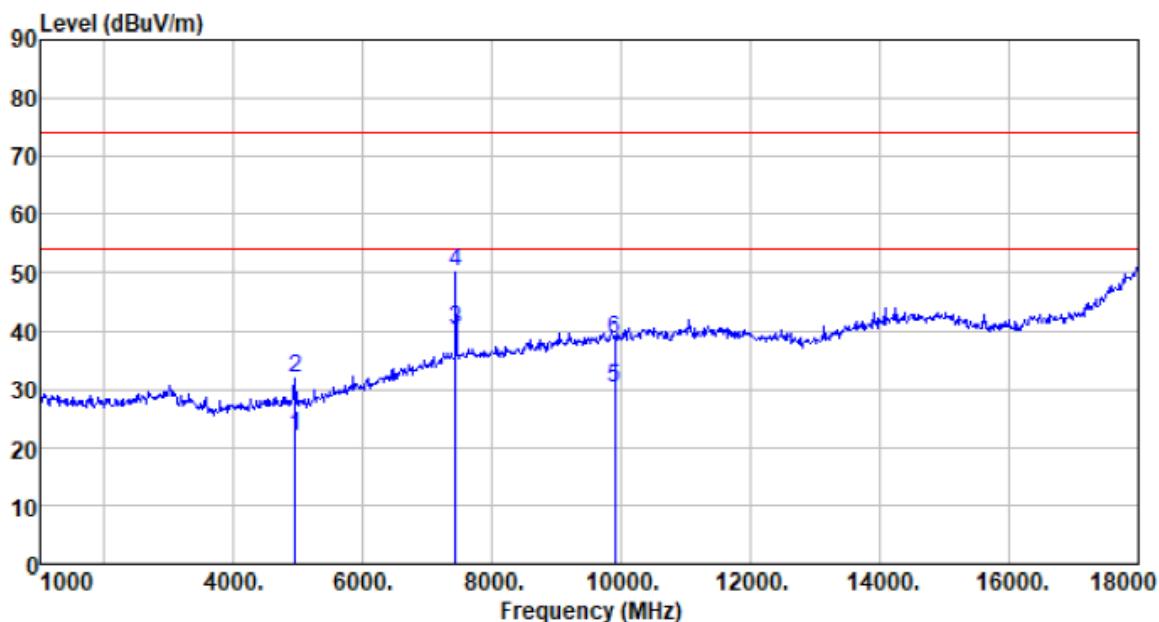

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
4950.087	23.47	31.41	4.77	37.78	21.87	54.00	-32.13	Average
4950.087	33.36	31.41	4.77	37.78	31.76	74.00	-42.24	Peak
7425.080	32.33	36.66	6.75	35.56	40.18	54.00	-13.82	Average
7425.080	42.38	36.66	6.75	35.56	50.23	74.00	-23.77	Peak
9900.000	19.03	38.27	8.09	35.12	30.27	54.00	-23.73	Average
9900.000	27.35	38.27	8.09	35.12	38.59	74.00	-35.41	Peak

Vertical:

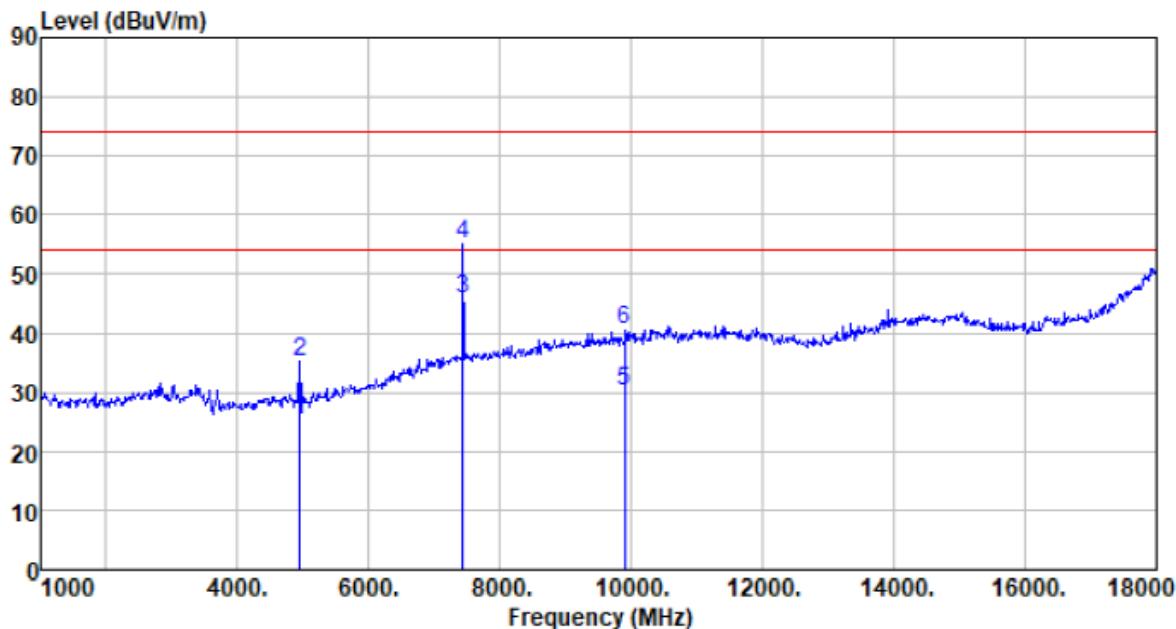

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
4950.140	26.97	31.41	4.77	37.78	25.37	54.00	-28.63	Average
4950.140	36.66	31.41	4.77	37.78	35.06	74.00	-38.94	Peak
7425.120	38.12	36.66	6.75	35.56	45.97	54.00	-8.03	Average
7425.120	47.31	36.66	6.75	35.56	55.16	74.00	-18.84	Peak
9900.000	19.09	38.27	8.09	35.12	30.33	54.00	-23.67	Average
9900.000	29.42	38.27	8.09	35.12	40.66	74.00	-33.34	Peak

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. **, means this data is the too weak instrument of signal is unable to test.

8 Test Setup Photo

Radiated Emission



Conducted Emission



9 EUT Constructional Details

Reference to the test report No. : GTS201804000170F01

-----End-----