

FCC TEST REPORT


Product Name: Deactivator
Trade Mark: N/A
Model No.: DB104/F4&DB112/F4
Report Number: 180522001RFC-1
Test Standards: FCC 47 CFR Part 15 Subpart C
FCC ID: 2AQJA-DB112-DB104
Test Result: PASS
Date of Issue: August 3, 2018


Prepared for:

Beijing CSS Technologies Development Co., Ltd. Hangzhou Branch
528 Xingqi Road, Yuhang Economic Development Area, Hangzhou,
P.R.China

Prepared by:

Shenzhen UnionTrust Quality and Technology Co., Ltd.
16/F, Block A, Building 6, Baoneng Science and Technology Park,
Qingxiang Road No.1, Longhua New District, Shenzhen, China
TEL: +86-755-2823 0888
FAX: +86-755-2823 0886

Tested by: 
Henry Lu
Project Engineer

Reviewed by: 
Kevin Liang
Assistant Manager

Approved by: 
Billy Li
Technical Director

Date: August 3, 2018



Version

Version No.	Date	Description
V1.0	August 3, 2018	Original



Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

[Http://www.uttlab.com](http://www.uttlab.com)

CONTENTS

1. GENERAL INFORMATION	4
1.1 CLIENT INFORMATION	4
1.2 EUT INFORMATION	4
1.2.1 GENERAL DESCRIPTION OF EUT	4
1.2.2 DESCRIPTION OF ACCESSORIES	4
1.2.3 DESCRIPTION OF SUPPORT UNITS	4
1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	4
1.4 TEST LOCATION	5
1.5 TEST FACILITY	5
1.6 DEVIATION FROM STANDARDS	5
1.7 ABNORMALITIES FROM STANDARD CONDITIONS	5
1.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER	5
1.9 MEASUREMENT UNCERTAINTY	6
2. TEST SUMMARY	7
3. EQUIPMENT LIST	7
4. TEST CONFIGURATION	8
4.1 ENVIRONMENTAL CONDITIONS FOR TESTING	8
4.1.1 NORMAL OR EXTREME TEST CONDITIONS	8
4.1.2 RECORD OF NORMAL ENVIRONMENT	8
4.2 TEST MODE	8
4.3 TEST SETUP	8
4.3.1 FOR RADIATED EMISSIONS TEST SETUP	8
4.3.2 FOR CONDUCTED EMISSIONS TEST SETUP	10
4.4 SYSTEM TEST CONFIGURATION	10
5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION	10
5.1 REFERENCE DOCUMENTS FOR TESTING	10
5.2 ANTENNA REQUIREMENT	10
5.3 RADIATED EMISSIONS	11
5.4 CONDUCTED EMISSION	20
APPENDIX 1 PHOTOS OF TEST SETUP	25
APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS	28
EUT EXTERNAL PHOTOS	28
EUT INTERNAL PHOTOS	33

1. GENERAL INFORMATION

1.1 CLIENT INFORMATION

Applicant:	Beijing CSS Technologies Development Co., Ltd. Hangzhou Branch
Address of Applicant:	528 Xingqi Road, Yuhang Economic Development Area, Hangzhou, P.R.China
Manufacturer:	Beijing CSS Technologies Development Co., Ltd. Hangzhou Branch
Address of Manufacturer:	528 Xingqi Road, Yuhang Economic Development Area, Hangzhou, P.R.China

1.2 EUT INFORMATION

1.2.1 General Description of EUT

Product Name:	Deactivator
Model No.:	DB104/F4&DB112/F4
Trade Mark:	N/A
DUT Stage:	Production Unit
Operating Frequency Range:	58KHz
Antenna Type:	Coil antenna
Power Supply	100-240 V~50/60 Hz 0.3 A
Sample Received Date:	May 22, 2018
Sample Tested Date:	May 22, 2018 to July 6, 2018

1.2.2 Description of Accessories

Cable	
AC Cable Type:	Unshielded without ferrite
Length:	1.20 Meter

1.2.3 Description of Support Units

The EUT has been tested with associated equipment below.

Description	Manufacturer	Model No.	Serial Number	Supplied by
Dummy load	N/A	E214887	N/A	UnionTrust

1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD

Frequency Range:	58KHz
Work in Modes:	Decoding

1.4 TEST LOCATION

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China 518109
Telephone: +86 (0) 755 2823 0888
Fax: +86 (0) 755 2823 0886

1.5 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L9069

The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable under the ISO/IEC/EN 17025 to international or national standards. Equipment has been calibrated by accredited calibration laboratories.

IC-Registration No.: 21600-1

The 3m Semi-anechoic chamber of Shenzhen UnionTrust Quality and Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 21600-1.

A2LA-Lab Certificate No.: 4312.01

Shenzhen UnionTrust Quality and Technology Co., Ltd. has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC Accredited Lab.

Designation Number: CN1194
Test Firm Registration Number: 259480

1.6 DEVIATION FROM STANDARDS

None.

1.7 ABNORMALITIES FROM STANDARD CONDITIONS

None.

1.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER

None.

1.9 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

No.	Item	Measurement Uncertainty
1	Conducted emission 9KHz-150KHz	± 3.8 dB
2	Conducted emission 150KHz-30MHz	± 3.4 dB
3	Radiated emission 9KHz-30MHz	± 4.9 dB
4	Radiated emission 30MHz-1GHz	± 4.7 dB
5	Radiated emission 1GHz-18GHz	± 5.1 dB
6	Radiated emission 18GHz-26GHz	± 5.2 dB
7	Radiated emission 26GHz-40GHz	± 5.2 dB

2. TEST SUMMARY

FCC 47 CFR Part 15 Subpart C Test Cases			
Test Item	Test Requirement	Test Method	Result
Antenna Requirement	FCC 47 CFR Part 15 Subpart C Section 15.203	ANSI C63.10-2013	PASS
Conducted Emission	FCC 47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Radiated Emission	FCC 47 CFR Part 15 Subpart C Section 15.209	ANSI C63.10-2013	PASS

3. EQUIPMENT LIST

Radiated Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm dd, yyyy)	Cal. Due date (mm dd, yyyy)
☒	3M Chamber & Accessory Equipment	ETS-LINDGREN	3M	N/A	Dec. 20, 2015	Dec. 19, 2018
☒	Receiver	R&S	ESIB26	100114	Dec. 22, 2017	Dec. 22, 2018
☒	Loop Antenna	ETS-LINDGREN	6502	00202525	Dec. 22, 2017	Dec. 22, 2018
☒	Broadband Antenna	ETS-LINDGREN	3142E	00201566	Dec. 17, 2017	Dec. 17, 2018
☒	Preamplifier	HP	8447F	2805A02960	Dec. 22, 2017	Dec. 22, 2018
☒	Multi device Controller	ETS-LINDGREN	7006-001	00160105	N/A	N/A

Conducted Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm dd, yyyy)	Cal. Due date (mm dd, yyyy)
☒	Receiver	R&S	ESR7	1316.3003K07-101181-K3	Dec. 22, 2017	Dec. 22, 2018
☒	Pulse Limiter	R&S	ESH3-Z2	0357.8810.54	Dec. 22, 2017	Dec. 22, 2018
☒	LISN	R&S	ESH2-Z5	860014/024	Dec. 22, 2017	Dec. 22, 2018

4. TEST CONFIGURATION

4.1 ENVIRONMENTAL CONDITIONS FOR TESTING

4.1.1 Normal or Extreme Test Conditions

Environment Parameter	Selected Values During Tests		
Test Condition	Ambient		
	Temperature (°C)	Voltage (Vac)	Relative Humidity (%)
NT/NV	+15 to +35	120	20 to 75
Remark: 1) NV: Normal Voltage; NT: Normal Temperature			

4.1.2 Record of Normal Environment

Test Item	Temperature (°C)	Relative Humidity (%)	Pressure (Kpa)	Tested by
Conducted Emission	23.7	37	100.02	Andy Lin
Radiated Emission	26.4	41	99.33	Andy Lin

4.2 TEST MODE

Test Item	EMI Test Modes
Radiated Emission	Mode 1 Charging+Decoding
Conducted Emission	Mode 1 Charging+Decoding

4.3 TEST SETUP

4.3.1 For Radiated Emissions test setup

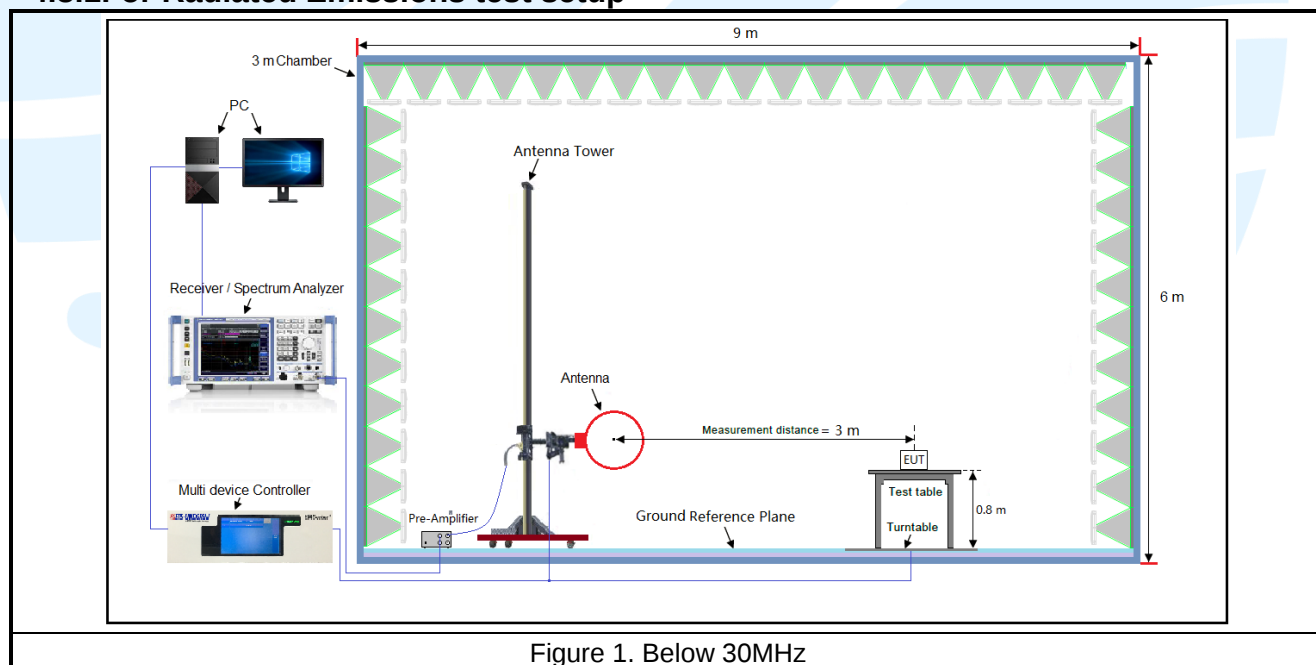


Figure 1. Below 30MHz

Figure 1. 30MHz to 1GHz



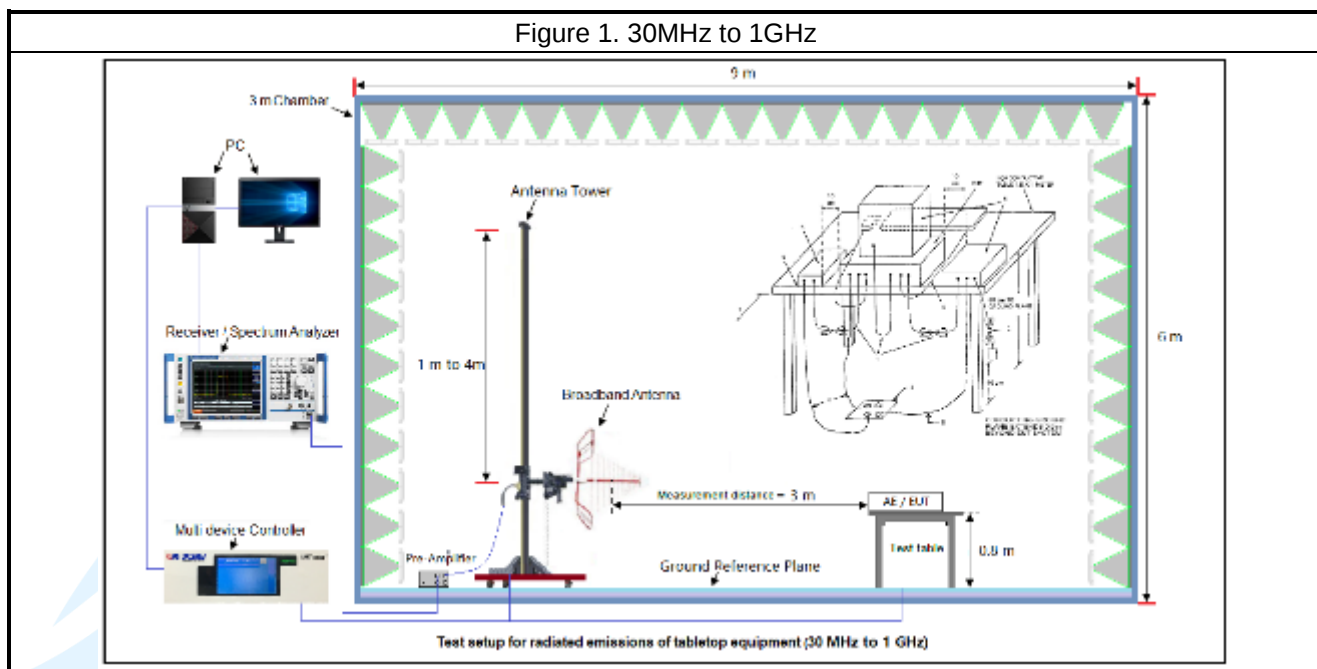


Figure 2. Above 1GHz

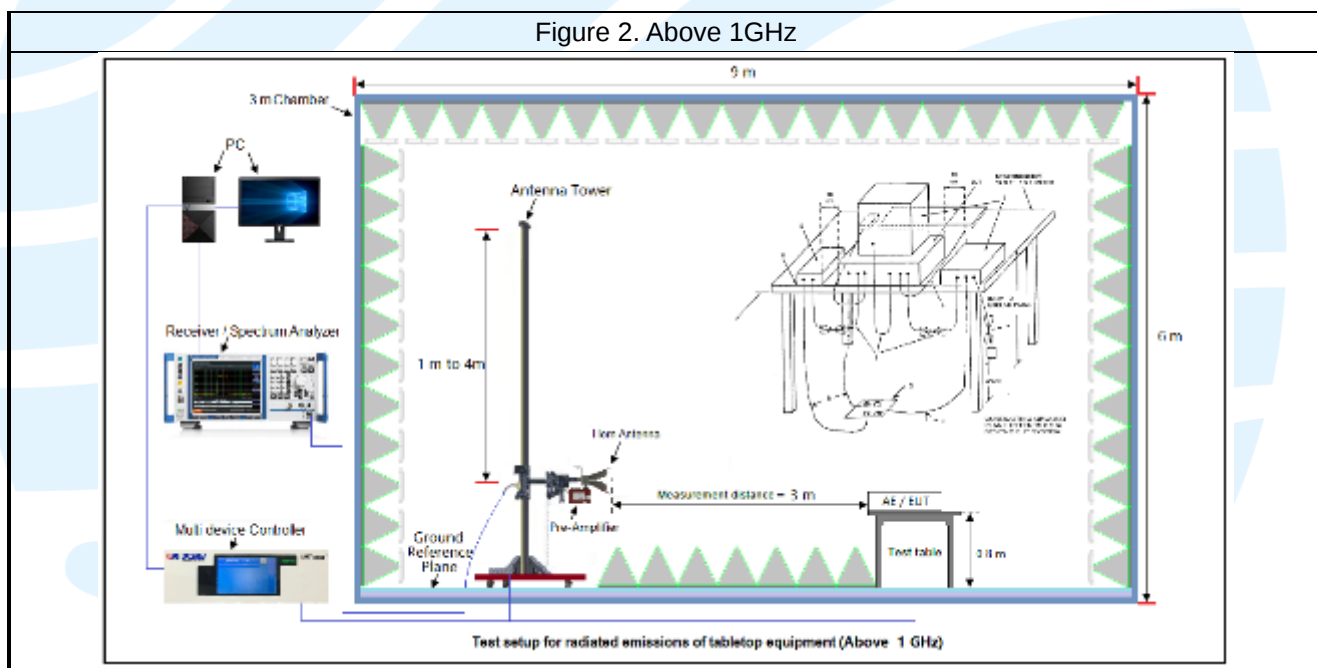

4.3.2 For Conducted Emissions test setup

Figure 3. Conducted Emissions setup

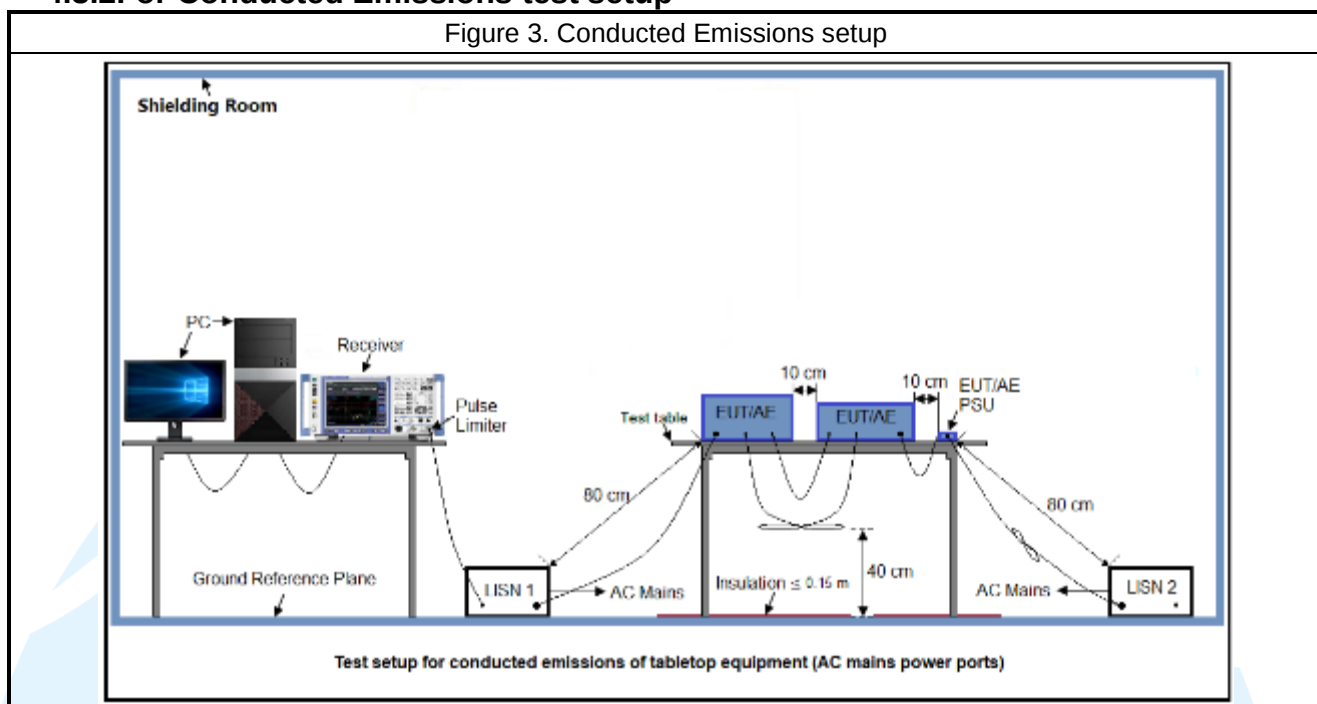

4.4 SYSTEM TEST CONFIGURATION

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, radiated emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario. It was powered by a AC adapter which output 5VDC . Only the worst case data were recorded in this test report.

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000 MHz. The resolution is 1 MHz or greater for frequencies above 1000 MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

Radiated emission measurement were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION

5.1 REFERENCE DOCUMENTS FOR TESTING

No.	Identity	Document Title
1	FCC 47 CFR Part 15	Radio Frequency Devices
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

5.2 ANTENNA REQUIREMENT

Standard Requirement
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

[Http://www.uttlab.com](http://www.uttlab.com)

antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

This product has a permanent antenna, fulfill the requirement of this section.

5.3 RADIATED EMISSIONS

Test Requirement: FCC 47 CFR Part 15 Subpart C Section 15.209

Test Method: ANSI C63.10-2013 Section 6.6.4.3

Receiver Setup:

Frequency	RBW
0.009 MHz-0.150 MHz	200/300 kHz
0.150 MHz -30 MHz	9/10 kHz
30 MHz-1 GHz	100/120 kHz
Above 1 GHz	1 MHz

Limits:

The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in §15.209.

Spurious Emissions

Frequency	Field strength (microvolt/meter)	Limit (dBμV/m)	Remark	Measurement distance (m)
0.009 MHz-0.490 MHz	2400/F(kHz)	--	--	300
0.490 MHz-1.705 MHz	24000/F(kHz)	--	--	30
1.705 MHz-30 MHz	30	--	--	30
30 MHz-88 MHz	100	40.0	Quasi-peak	3
88 MHz-216 MHz	150	43.5	Quasi-peak	3
216 MHz-960 MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1 GHz	500	54.0	Average	3

Remark:

- The lower limit shall apply at the transition frequencies.
- Emission level (dBμV/m) = 20 log Emission level (μV/m).
- For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.
- For Below 30MHz, the measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

Field strength limit for 13.56MHz = 15848 μV/m at 30m
= 84 dBμV/m at 30m
= 84 dBμV/m + 40log(30/3) dB at 3m
= 124 dBμV/m at 3m

Test Setup: Refer to section 4.5.1 for details.

Test Procedures:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

[Http://www.uttlab.com](http://www.uttlab.com)


- measurement.
- 4) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
 - 5) The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
 - 6) If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Equipment Used: Refer to section 3 for details.


Test Result: Pass (Only the worst case emissions reported)

For DB104/F4

Radiated Emission Test Data (9 KHz ~ 150 KHz):

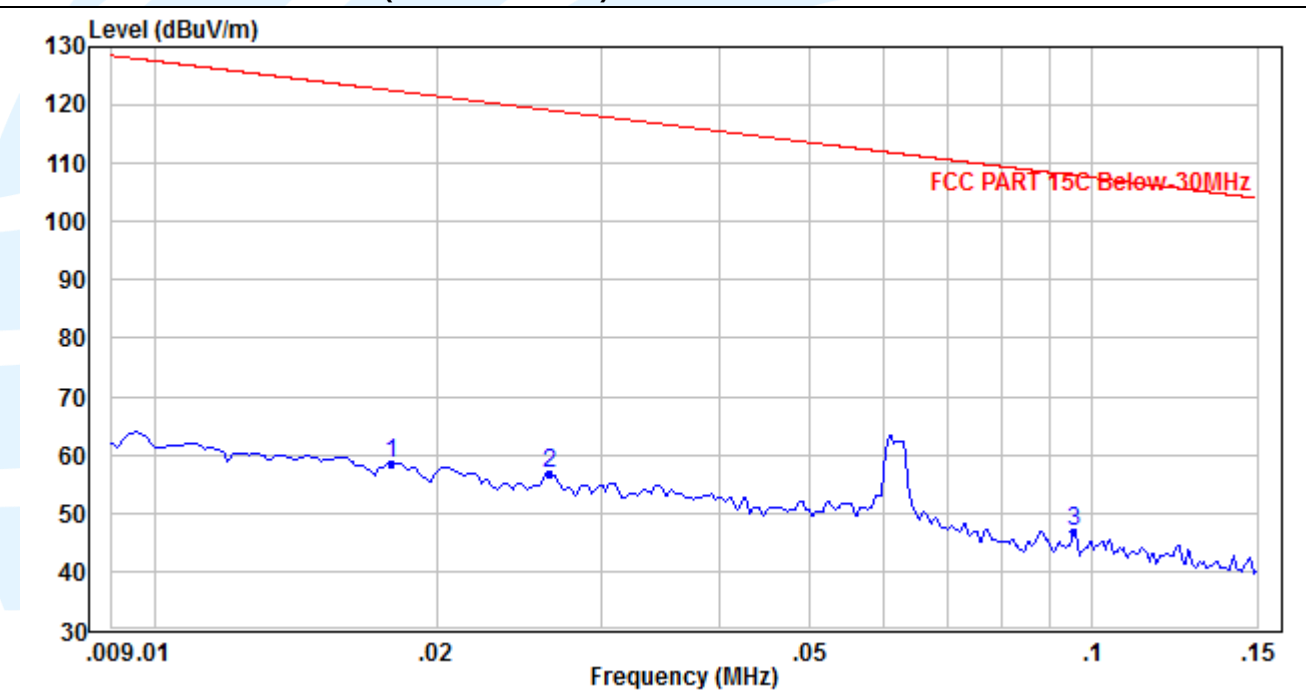


No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1*	0.0179	72.35	-13.7	58.65	122.53	63.88	Peak
2	0.02642	72.35	-15.5	56.85	119.15	62.3	Peak
3	0.09554	65.11	-18.21	46.9	107.99	61.09	Peak

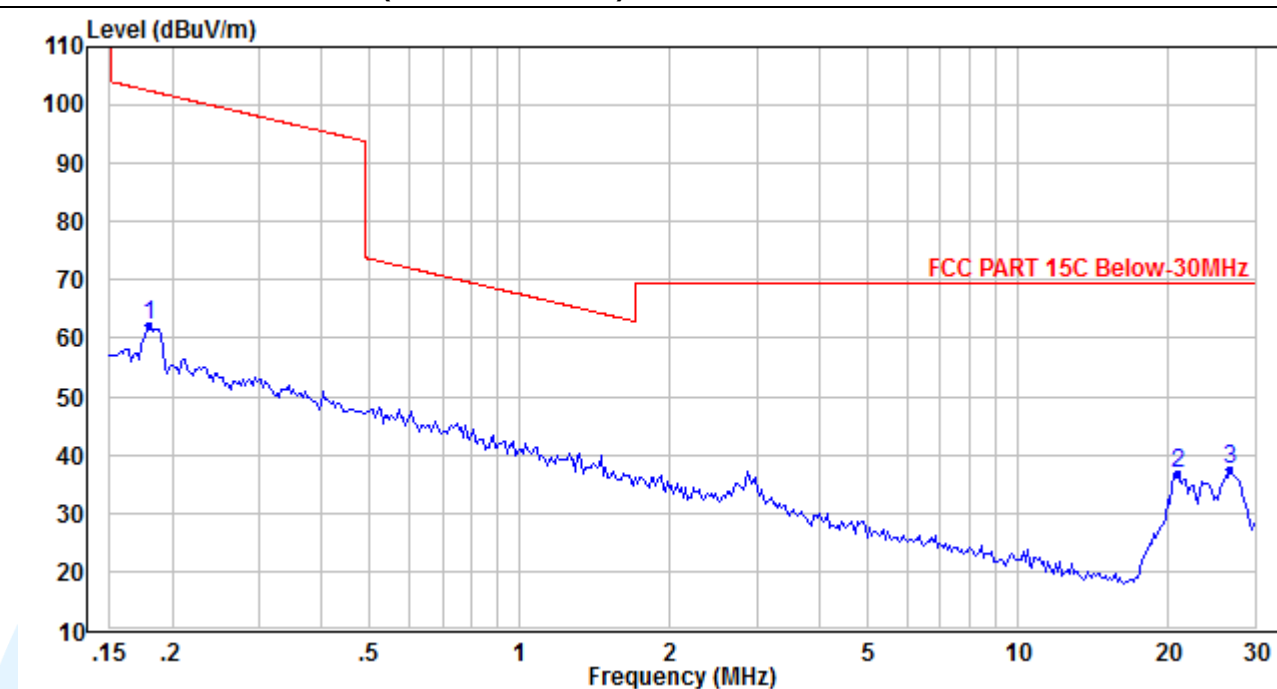Radiated Emission Test Data (150 KHz ~ 30 MHz):


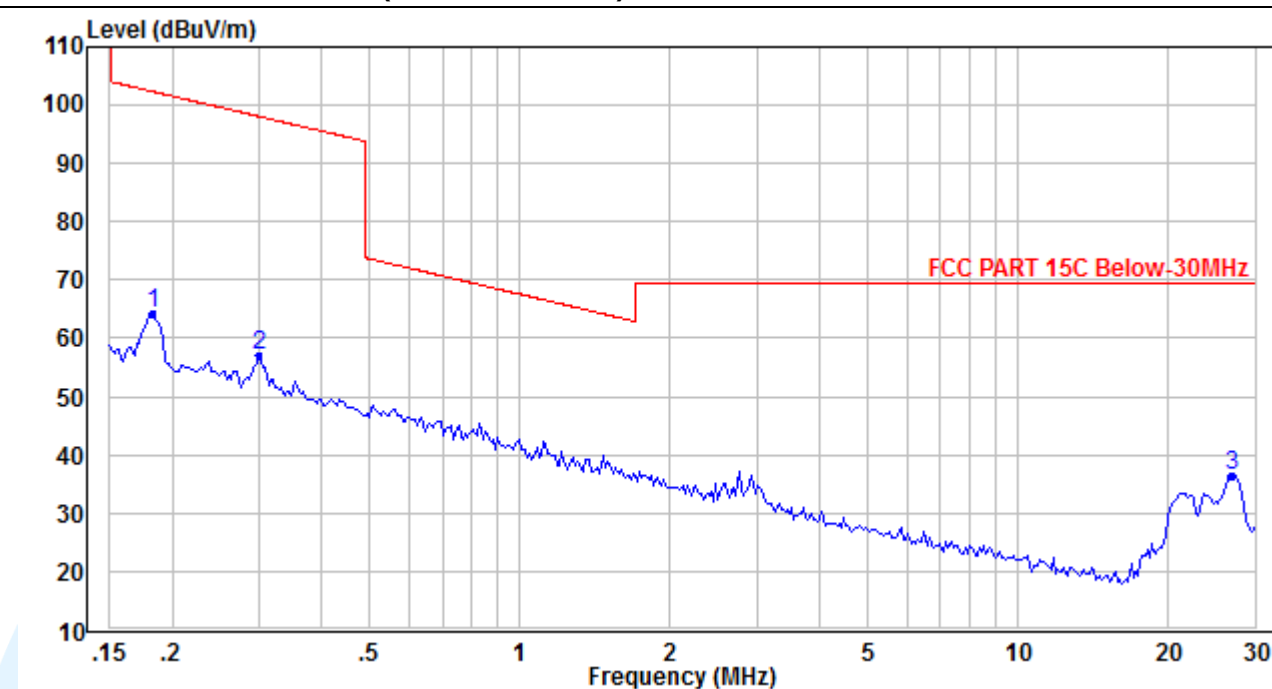
No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	0.17967	80.52	-18.12	62.4	102.51	40.11	Peak
2	20.909	56.41	-19.76	36.65	69.5	32.85	Peak
3	26.693	58.08	-20.65	37.43	69.5	32.07	Peak

For DB112/F4

Radiated Emission Test Data (9 KHz ~ 150 KHz):

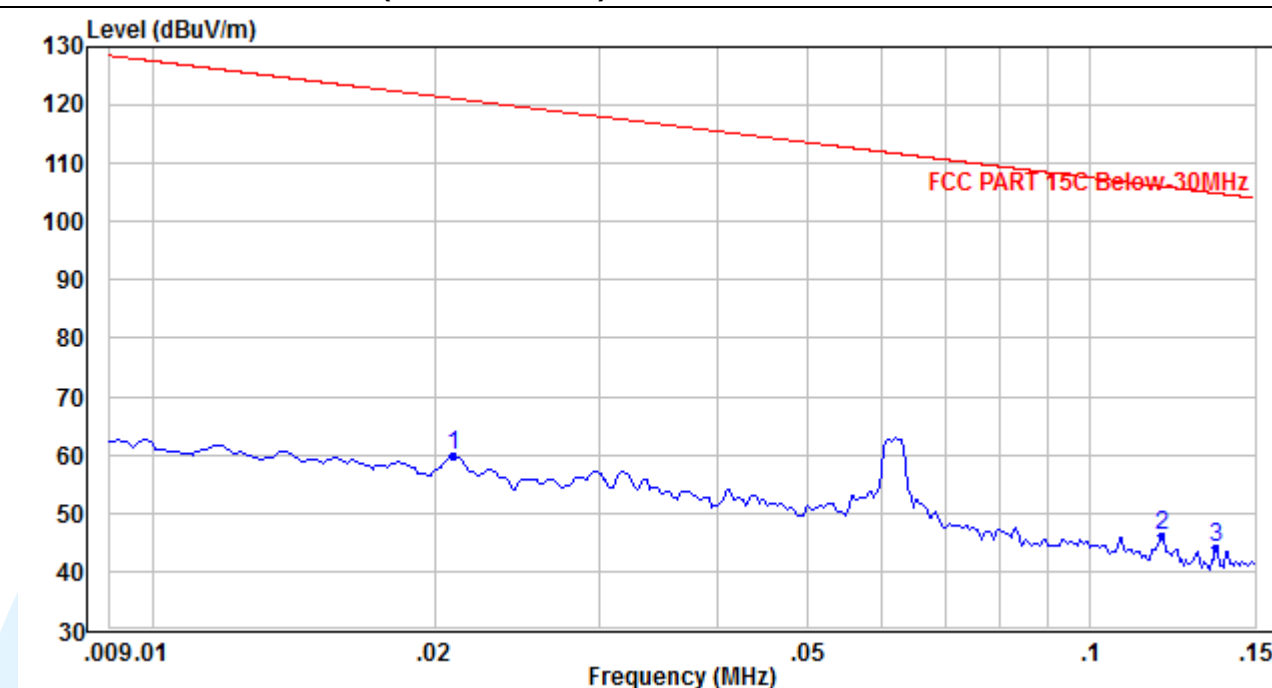


No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	0.02097	74.74	-14.97	59.77	121.16	61.39	Peak
2	0.11904	64.46	-18.18	46.28	106.08	59.8	Peak
3	0.13629	62.18	-18.14	44.04	104.91	60.87	Peak

Radiated Emission Test Data (150 KHz ~ 30 MHz):


No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	0.18353	82.38	-18.12	64.26	102.33	38.07	Peak
2	0.29911	75.22	-18.19	57.03	98.09	41.06	Peak
3	26.978	57.13	-20.7	36.43	69.5	33.07	Peak

For DB104/F4

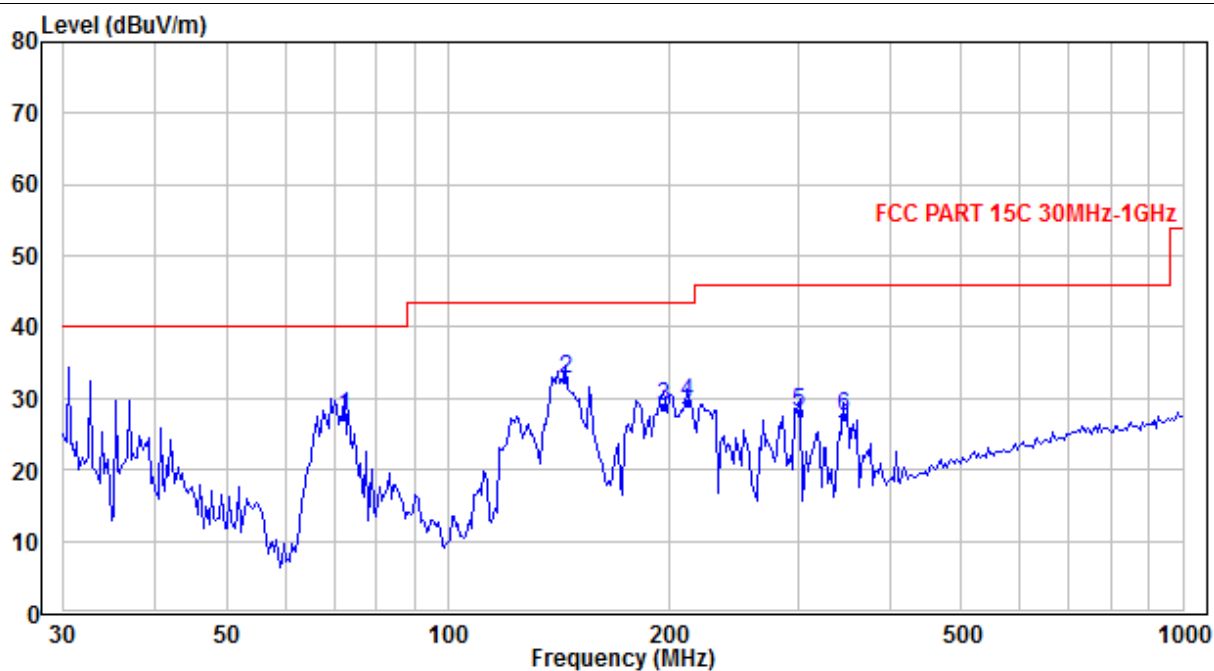Radiated Emission Test Data (30 MHz ~ 1 GHz):
Horizontal


No.	Frequency (MHz)	Reading (dBμV/m)	Correction factor (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	72.211	46.91	-19.52	27.39	40.00	-12.61	QP
2	144.790	50.18	-17.48	32.70	43.50	-10.80	QP
3	195.870	44.16	-15.24	28.92	43.50	-14.58	QP
4	211.611	43.92	-14.47	29.45	43.50	-14.05	QP
5	300.699	38.90	-10.90	28.00	46.00	-18.00	QP
6*	346.074	37.11	-9.70	27.41	46.00	-18.59	QP

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

[Http://www.uttlab.com](http://www.uttlab.com)

Vertical

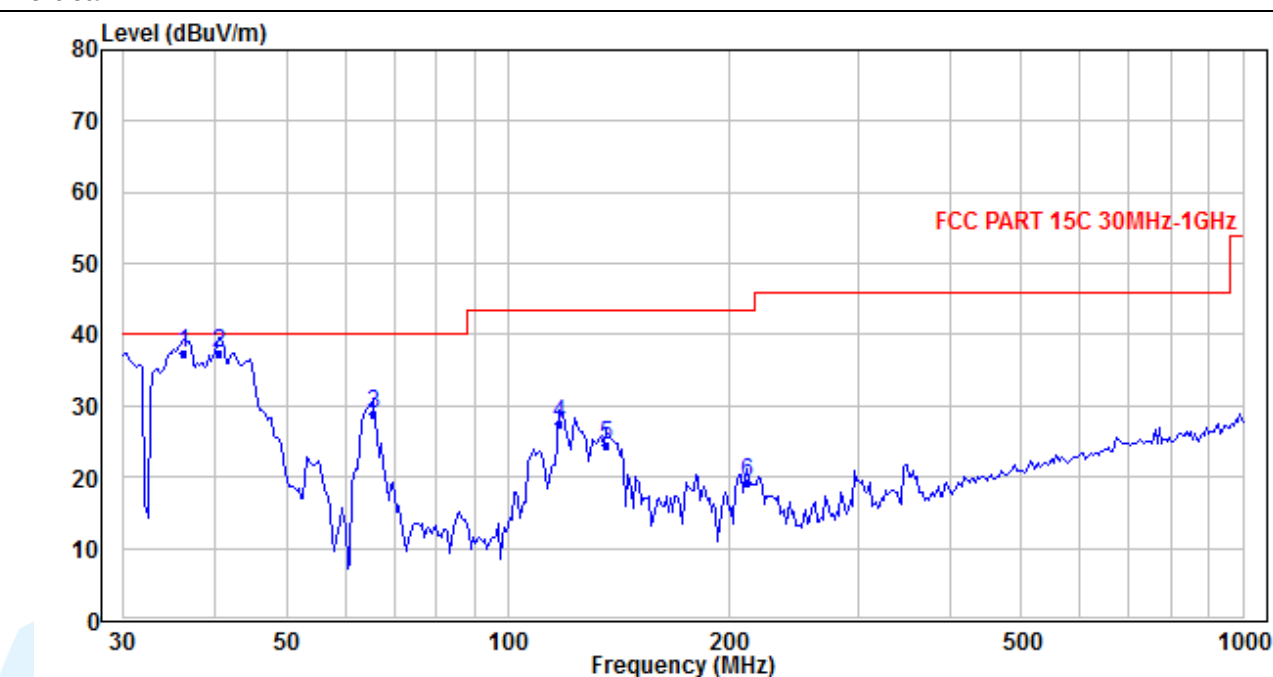


No.	Frequency (MHz)	Reading (dBμV/m)	Correction factor (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	36.268	51.72	-14.44	37.28	40.00	-2.72	QP
2	40.299	54.19	-16.70	37.49	40.00	-2.51	QP
3	65.445	48.92	-19.97	28.95	40.00	-11.05	QP
4	117.269	44.83	-17.44	27.39	43.50	-16.11	QP
5	135.916	42.34	-17.81	24.53	43.50	-18.97	QP
6*	211.611	33.68	-14.47	19.21	43.50	-24.29	QP

For DB112/F4

Radiated Emission Test Data (30 MHz ~ 1 GHz):

Horizontal

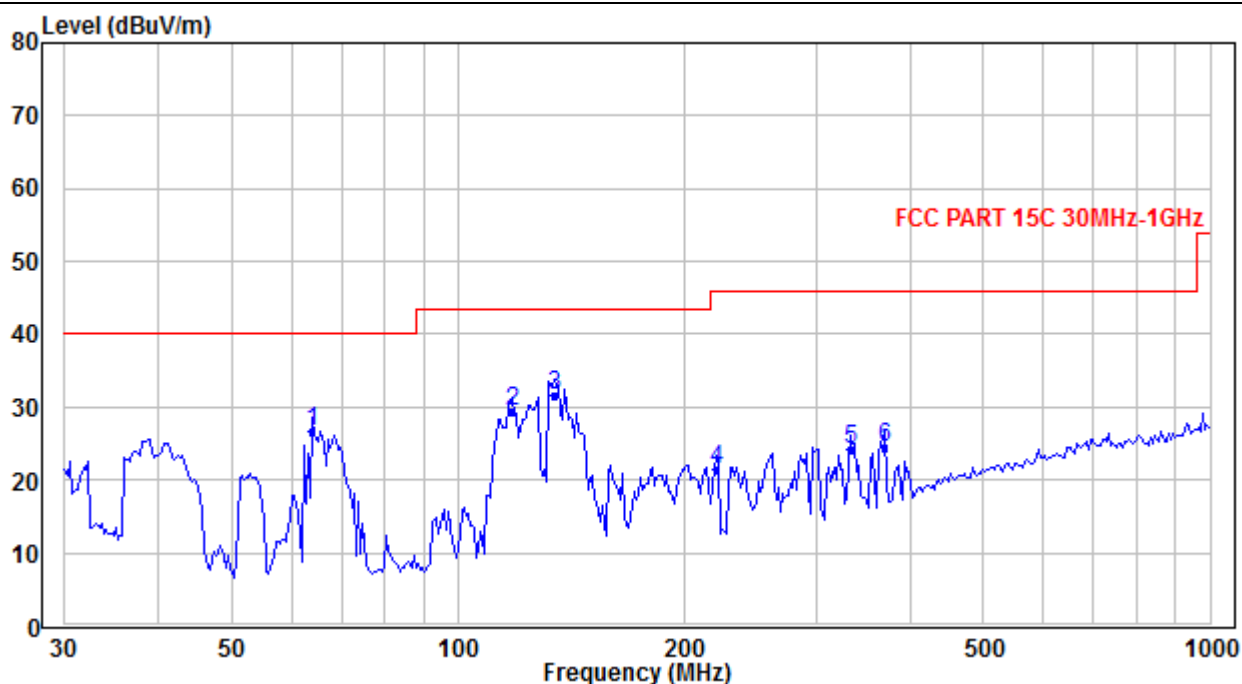

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	64.080	46.66	-20.07	26.59	40.00	-13.41	QP
2	118.096	46.85	-17.45	29.40	43.50	-14.10	QP
3	134.019	49.47	-17.76	31.71	43.50	-11.79	QP
4*	220.724	35.32	-14.00	21.32	46.00	-24.68	QP
5	331.786	34.22	-10.13	24.09	46.00	-21.91	QP
6	368.668	33.80	-9.27	24.53	46.00	-21.47	QP

Shenzhen UnionTrust Quality and Technology Co., Ltd.


Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

[Http://www.uttlab.com](http://www.uttlab.com)

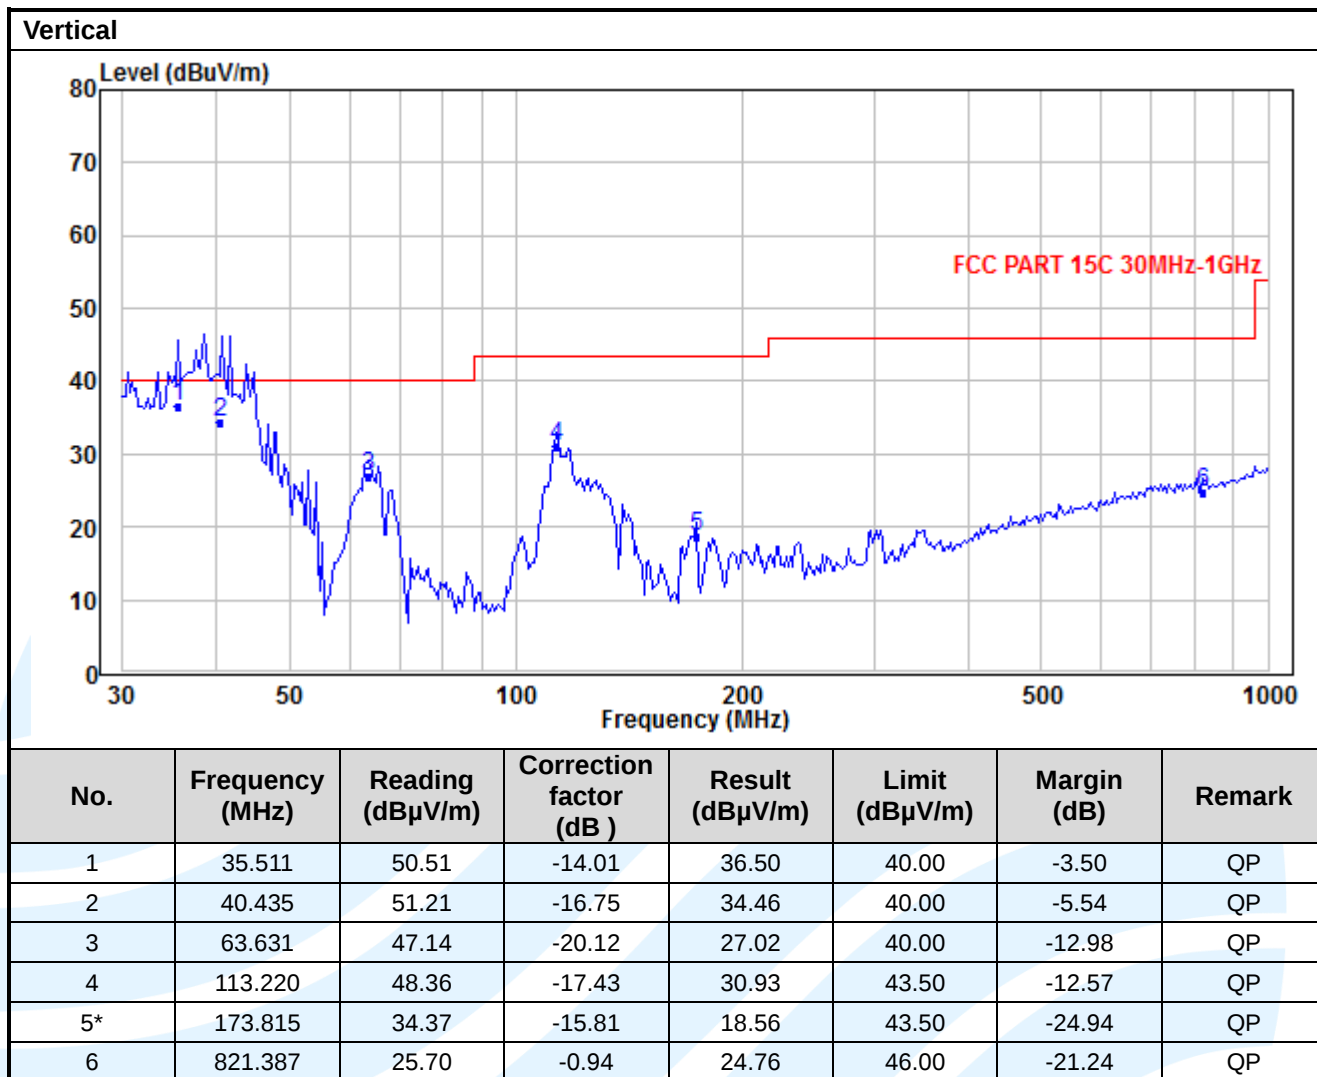

5.4 CONDUCTED EMISSION

Test Requirement: FCC 47 CFR Part 15 Subpart C Section 15.207

Test Method: ANSI C63.10-2013 Section 6.2

Limits:

Frequency range (MHz)	Limits (dB(μV))	
	Quasi-peak	Average
0,15 to 0,50	66 to 56	56 to 46
0,50 to 5	56	46
5 to 30	60	50

Remark:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 to 0.50 MHz.

Test Setup: Refer to section 4.5.2 for details.

Test Procedures:

Test frequency range :150KHz-30MHz

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Equipment Used: Refer to section 3 for details.


Test Result: Pass

The measurement data as follows:

Quasi Peak and Average:


For DB104/F4

Live Line

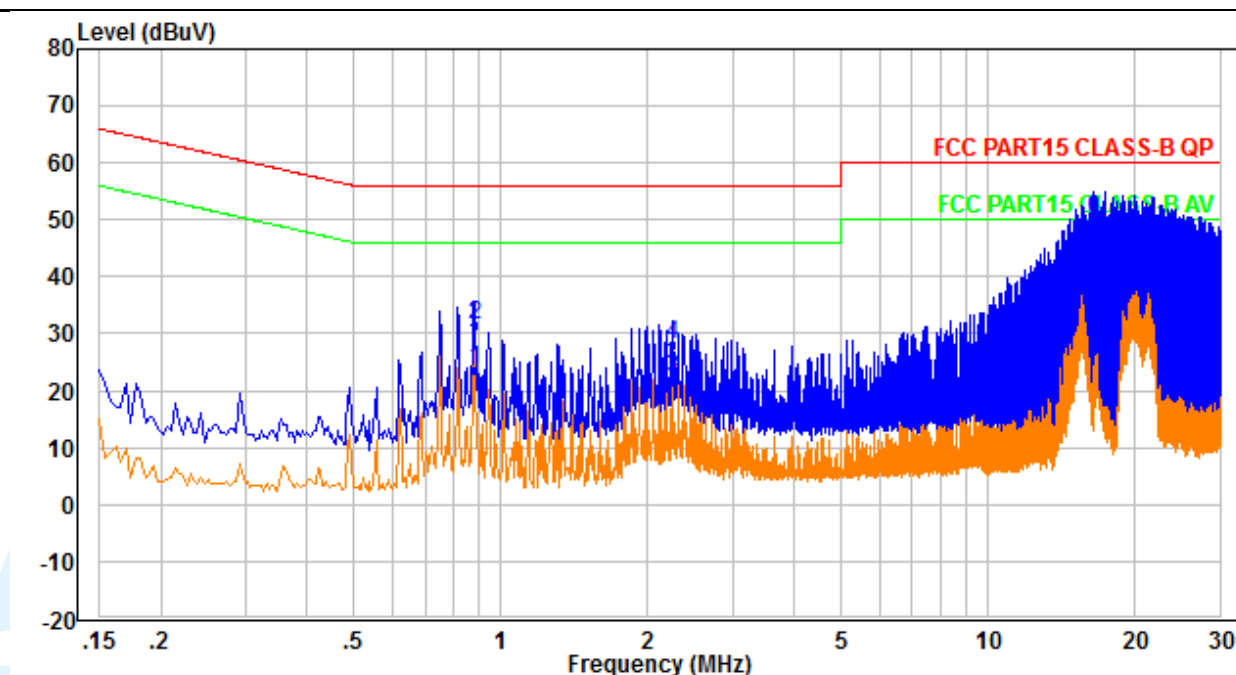

No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Remark
1	0.882	13.40	10.20	23.60	46.00	-22.40	Average
2	0.882	21.40	10.20	31.60	56.00	-24.40	QP
3	2.250	11.90	10.30	22.20	46.00	-23.80	Average
4*	2.250	17.90	10.30	28.20	56.00	-27.80	QP
5	16.553	27.90	12.20	40.10	50.00	-9.90	Average
6	16.553	37.90	12.20	50.10	60.00	-9.90	QP

Neutral Line

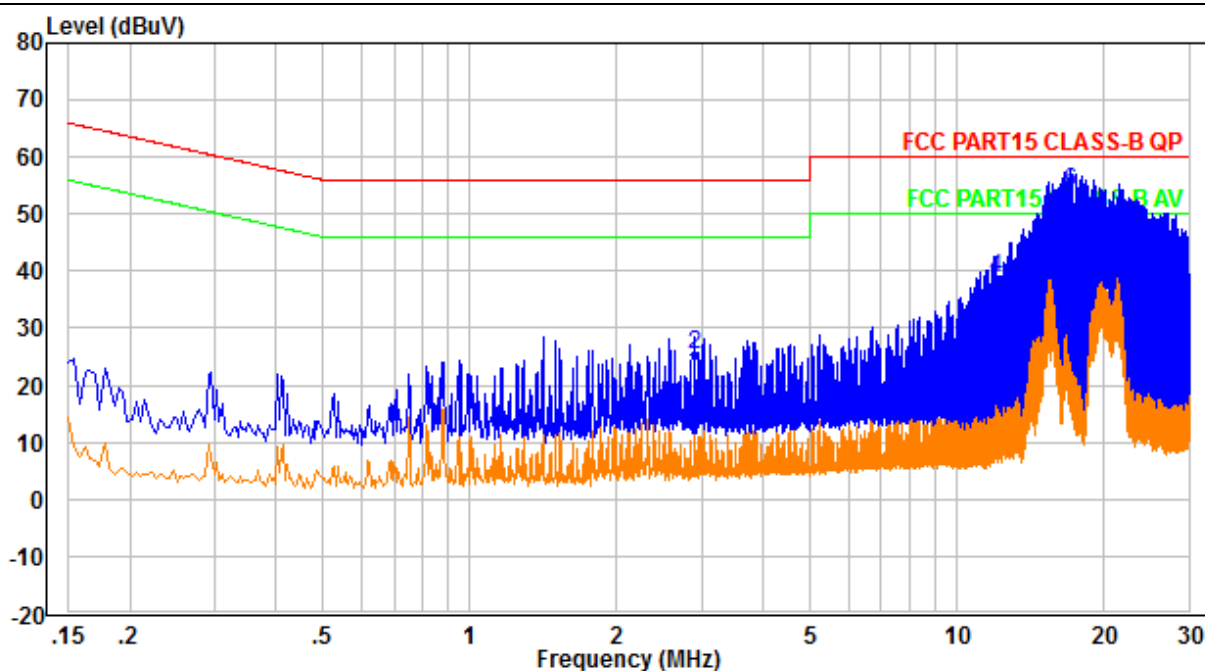


No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Remark
1*	2.906	1.90	10.50	12.40	46.00	-33.60	Average
2	2.906	14.90	10.50	25.40	56.00	-30.60	QP
3	12.053	9.30	11.40	20.70	50.00	-29.30	Average
4	12.053	27.30	11.40	38.70	60.00	-21.30	QP
5	17.141	29.60	12.40	42.00	50.00	-8.00	Average
6	17.141	41.60	12.40	54.00	60.00	-6.00	QP

Remark:

1. An initial pre-scan was performed on the Phase and neutral lines with peak detector. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.


For DB112/F4

Live Line

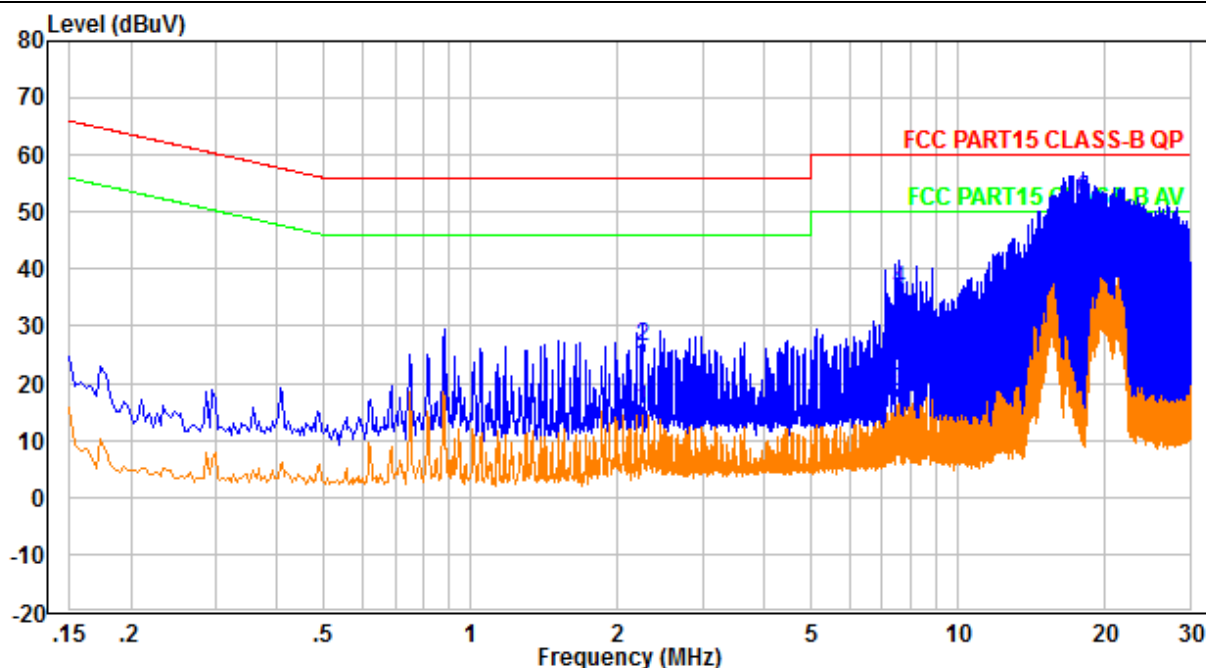

No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Remark
1	2.254	5.20	10.30	15.50	46.00	-30.50	Average
2	2.254	16.20	10.30	26.50	56.00	-29.50	QP
3*	7.574	7.60	10.80	18.40	50.00	-31.60	Average
4	7.574	25.60	10.80	36.40	60.00	-23.60	QP
5	18.101	26.60	12.50	39.10	50.00	-10.90	Average
6	18.101	39.60	12.50	52.10	60.00	-7.90	QP

Neutral Line

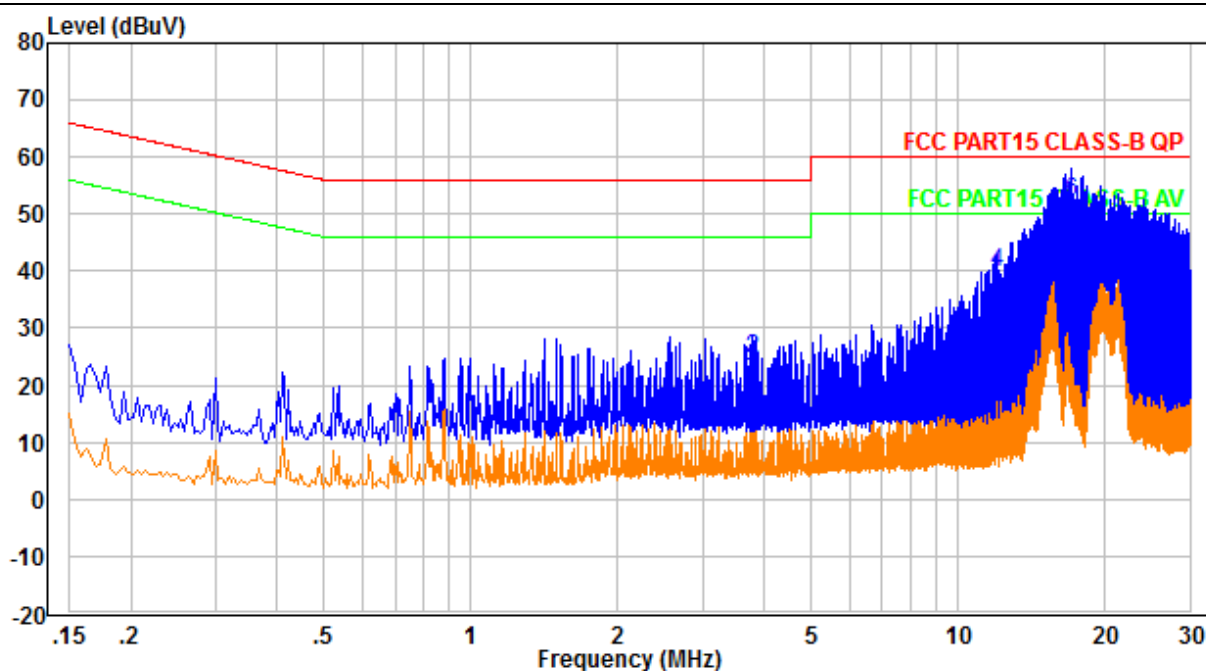


No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Remark
1*	3.802	2.00	10.60	12.60	46.00	-33.40	Average
2	3.802	14.00	10.60	24.60	56.00	-31.40	QP
3	12.053	9.40	11.40	20.80	50.00	-29.20	Average
4	12.053	28.40	11.40	39.80	60.00	-20.20	QP
5	17.141	27.70	12.40	40.10	50.00	-9.90	Average
6	17.141	39.70	12.40	52.10	60.00	-7.90	QP

Remark:


1. An initial pre-scan was performed on the Phase and neutral lines with peak detector. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

APPENDIX 1 PHOTOS OF TEST SETUP

For DB104/F4

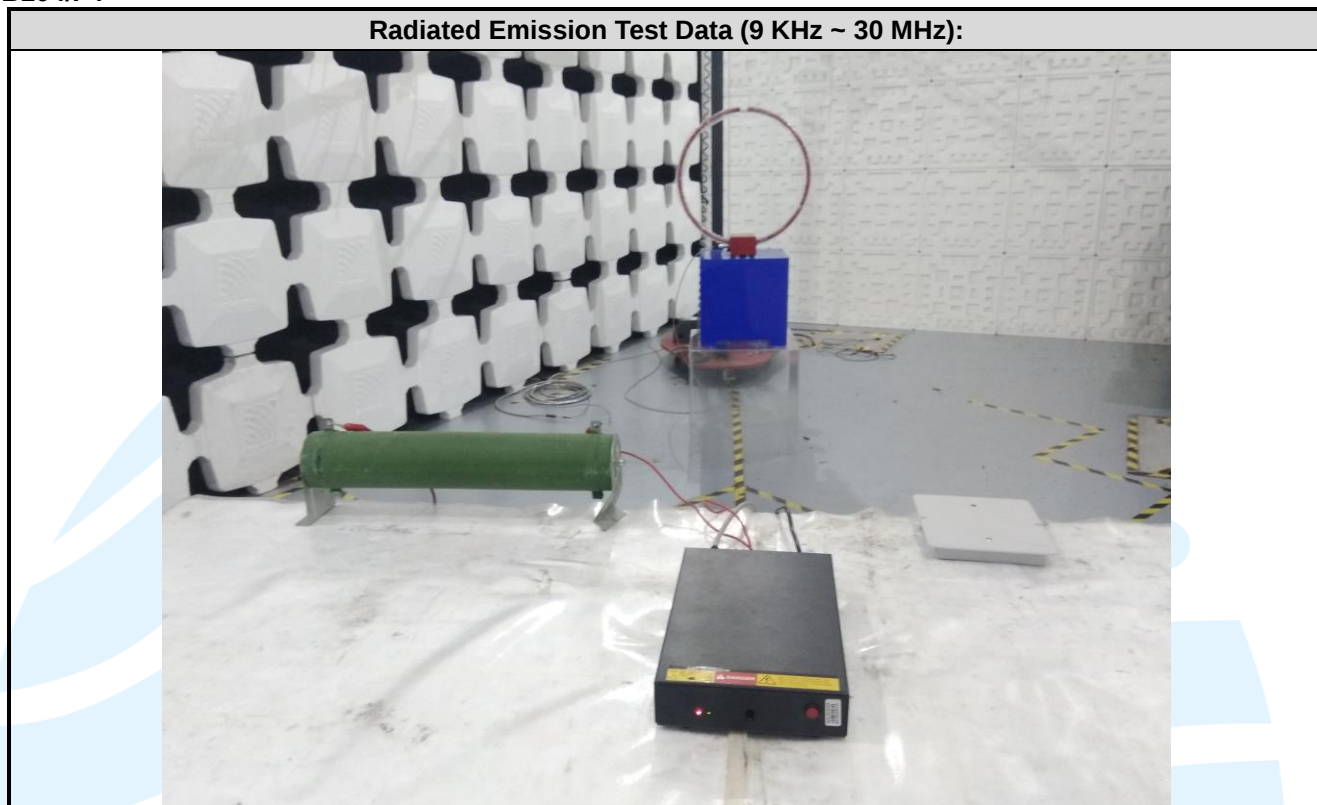

For DB112/F4

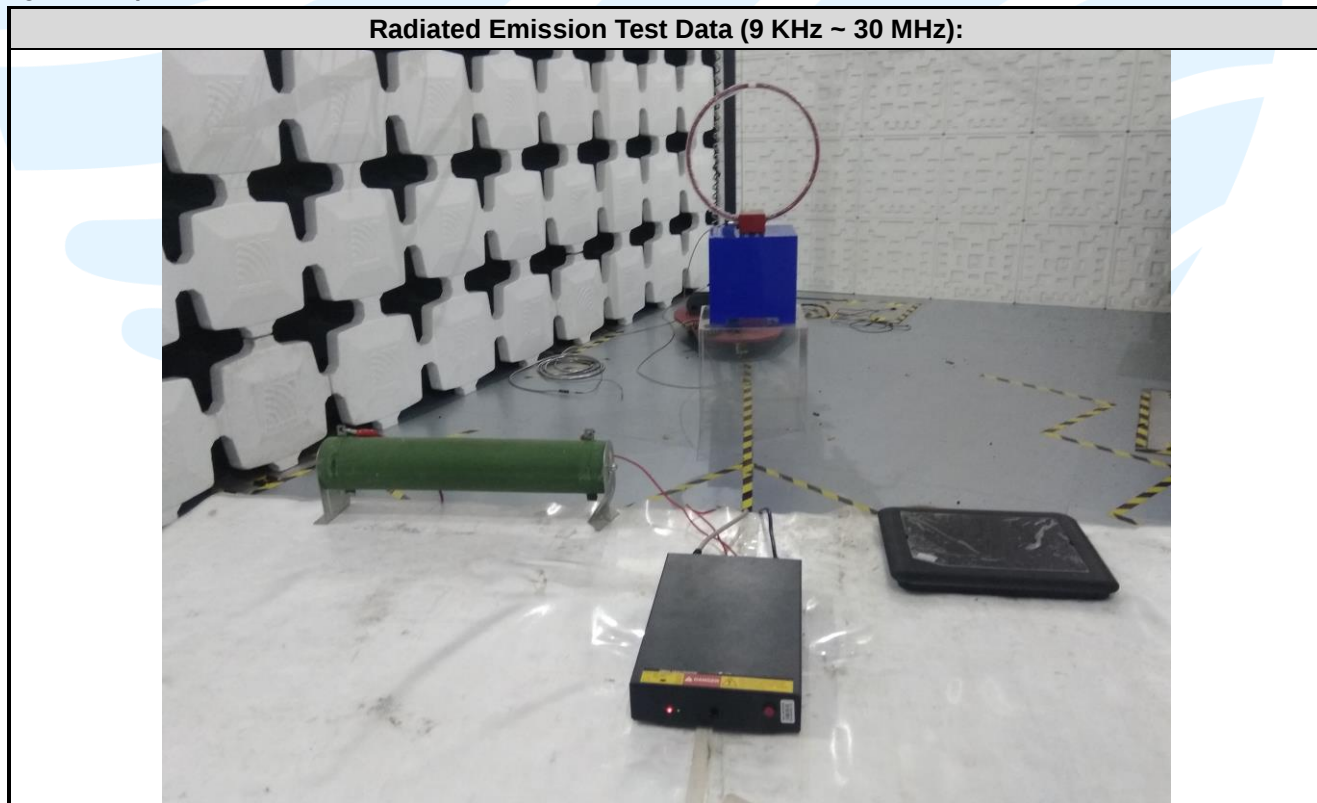

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com

[Http://www.uttlab.com](http://www.uttlab.com)

For DB104/F4

Radiated emission Test Setup-1 (30 MHz~1 GHz)

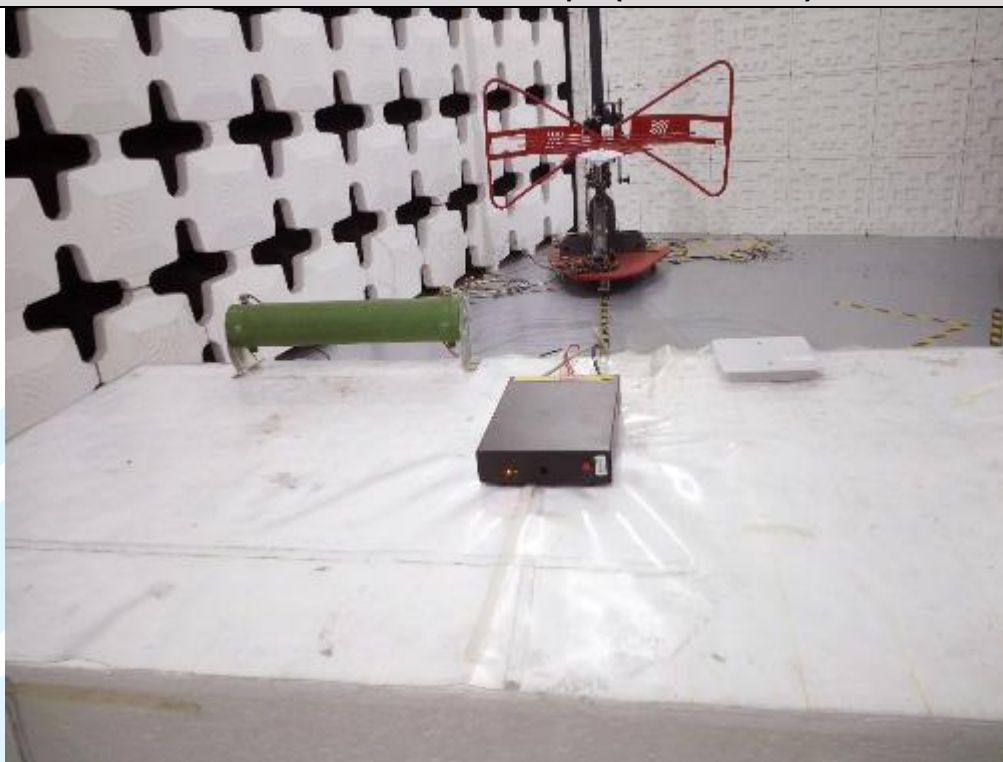


Conducted Emission Test Setup




For DB112/F4

Radiated emission Test Setup-1 (30 MHz~1 GHz)

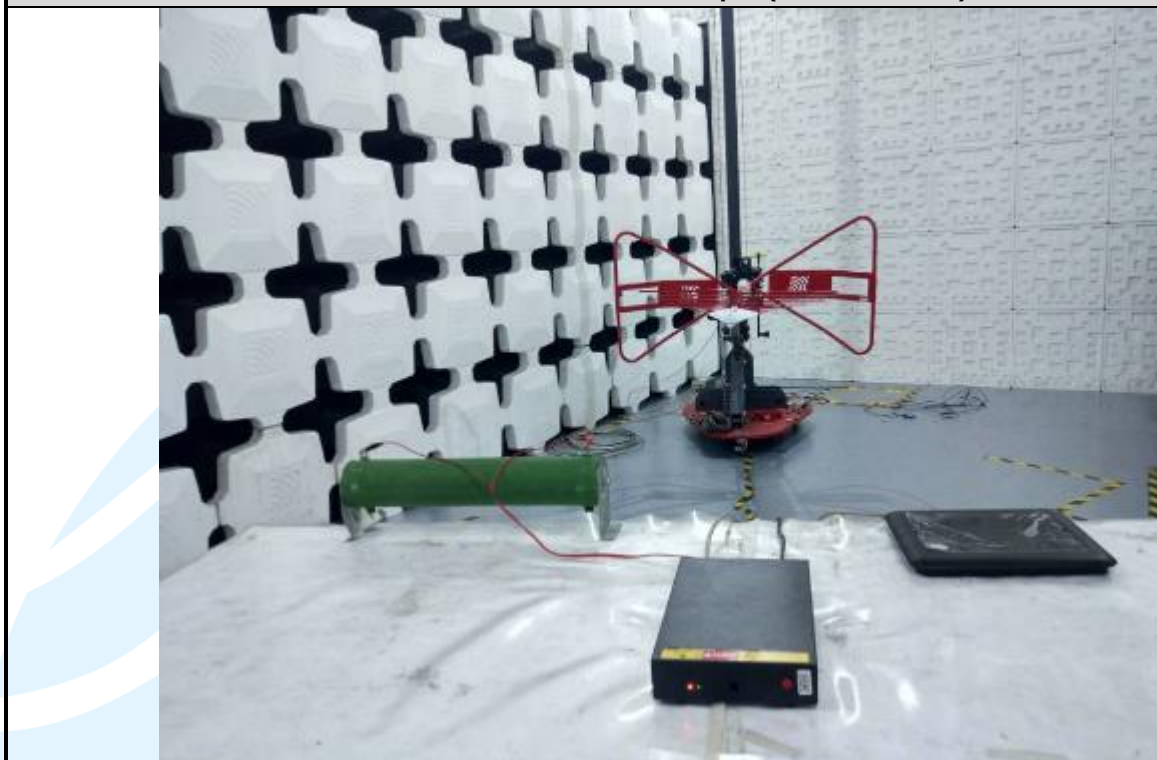


Conducted Emission Test Setu

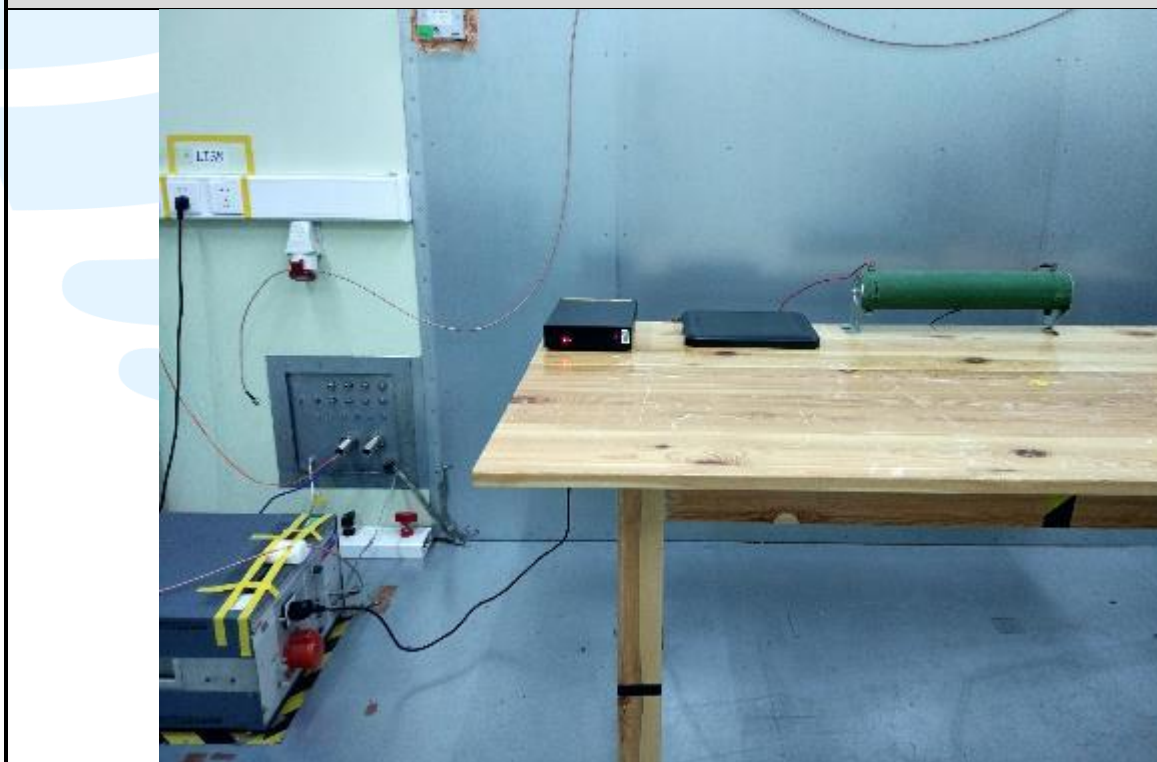


APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS

EUT EXTERNAL PHOTOS

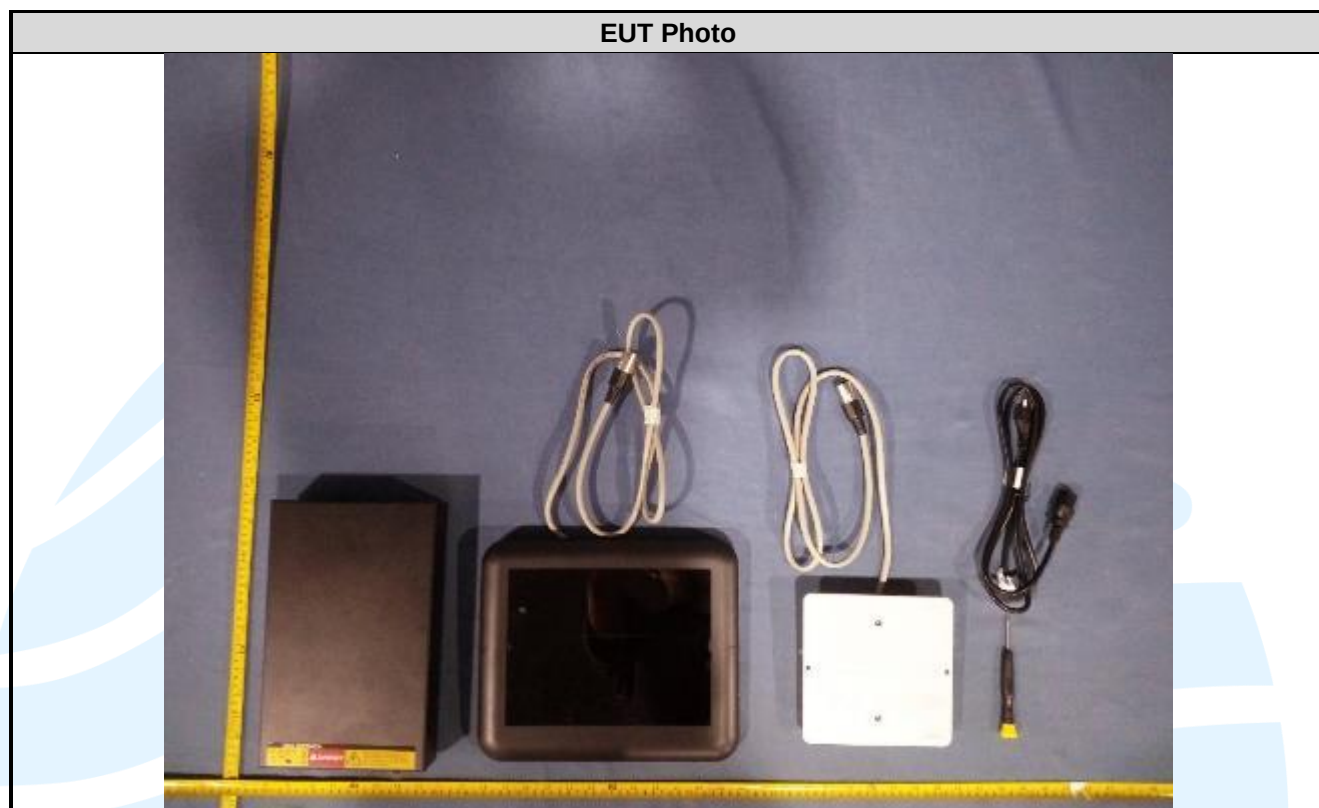

EUT Photo

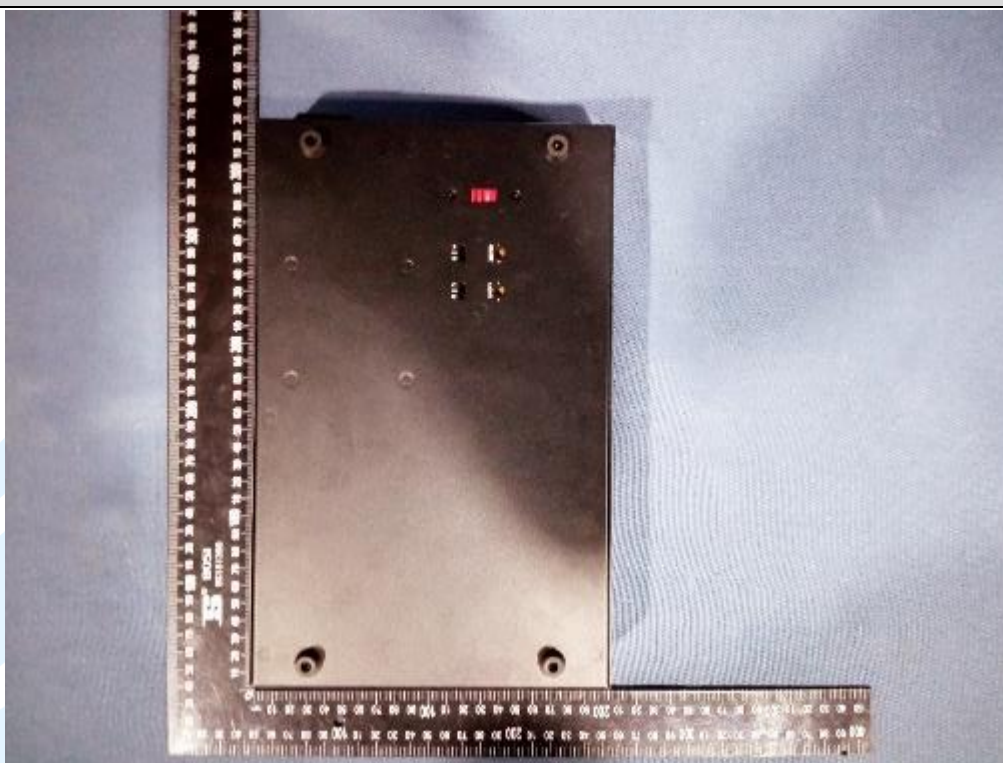

EUT Photo




EUT Photo




EUT Photo




EUT Photo

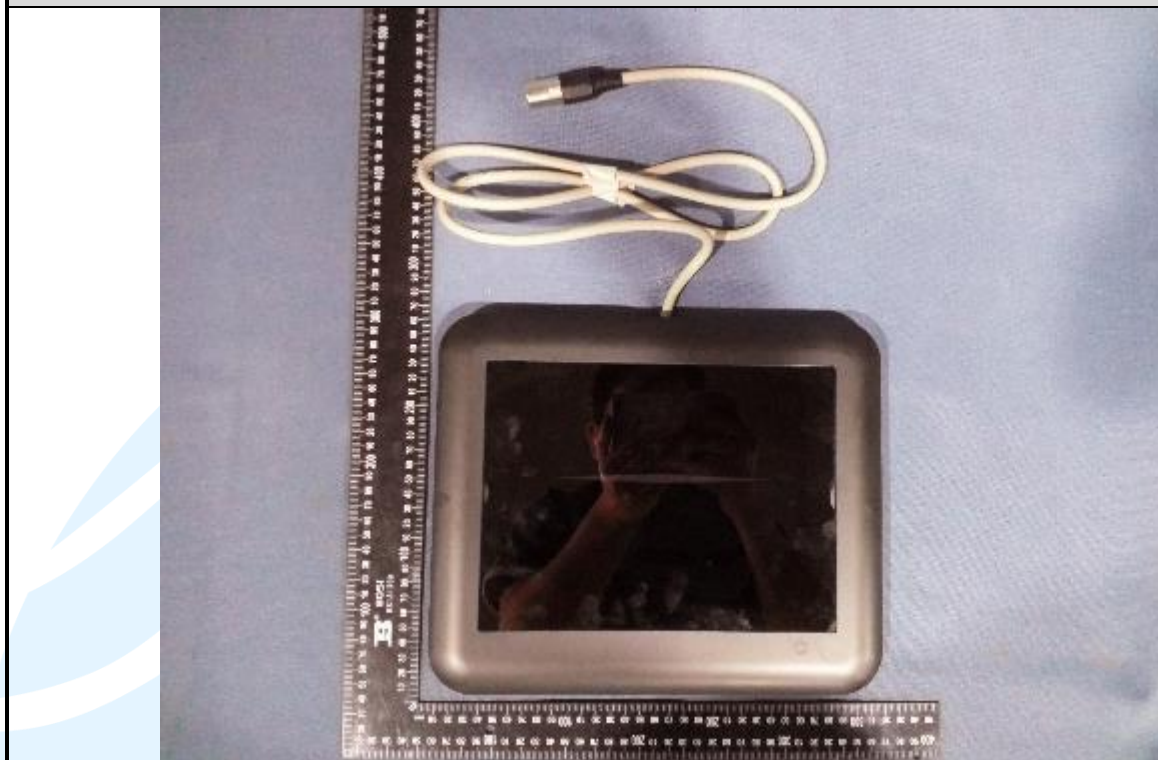

EUT Photo

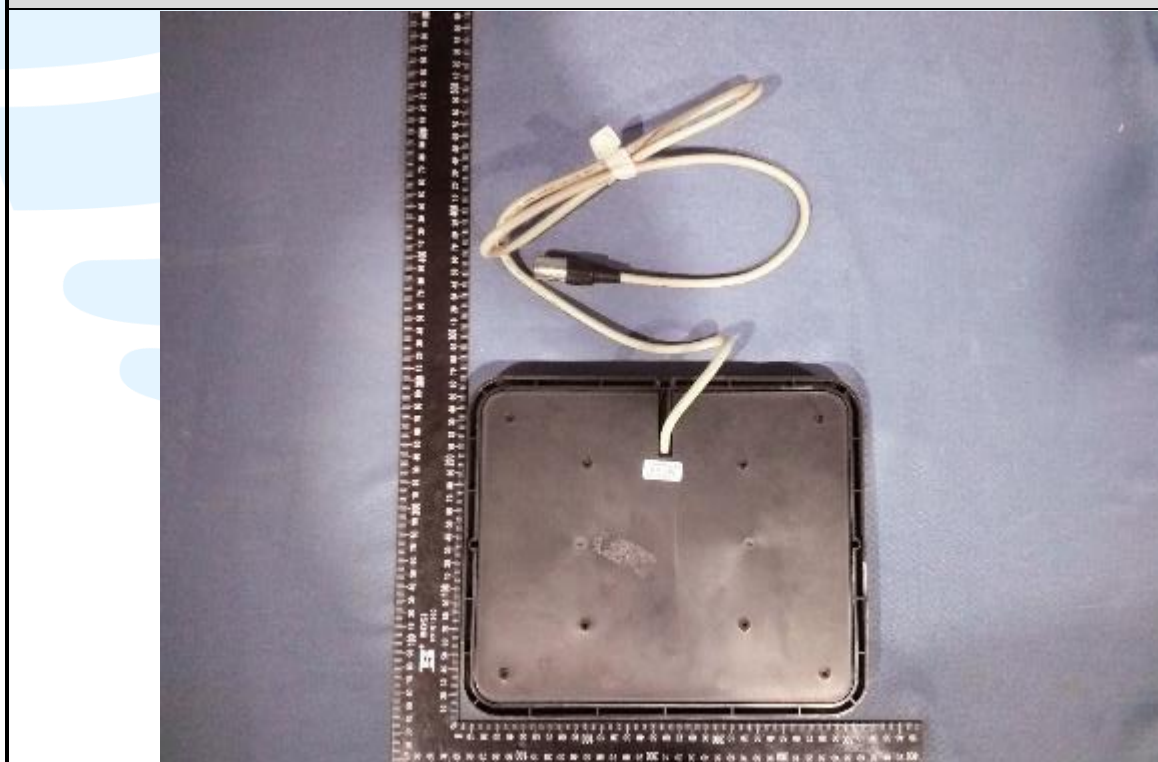

EUT Photo

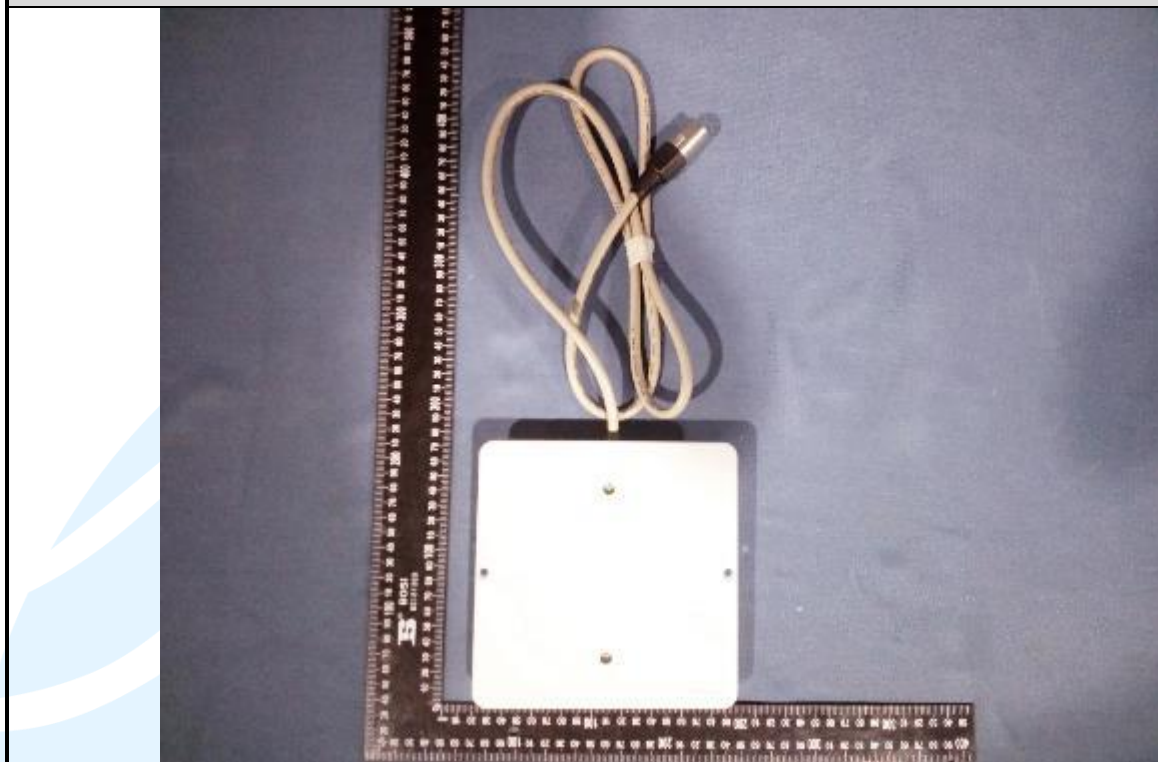


EUT Photo




EUT INTERNAL PHOTOS


EUT Photo

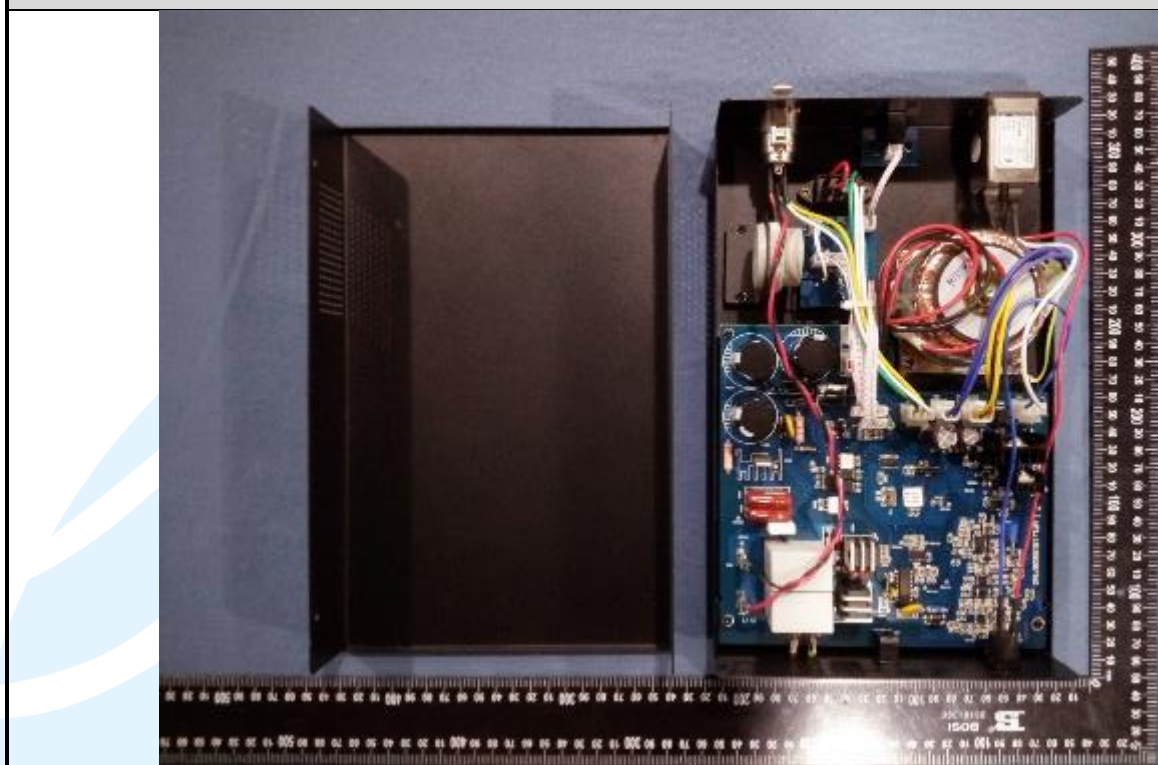


EUT Photo

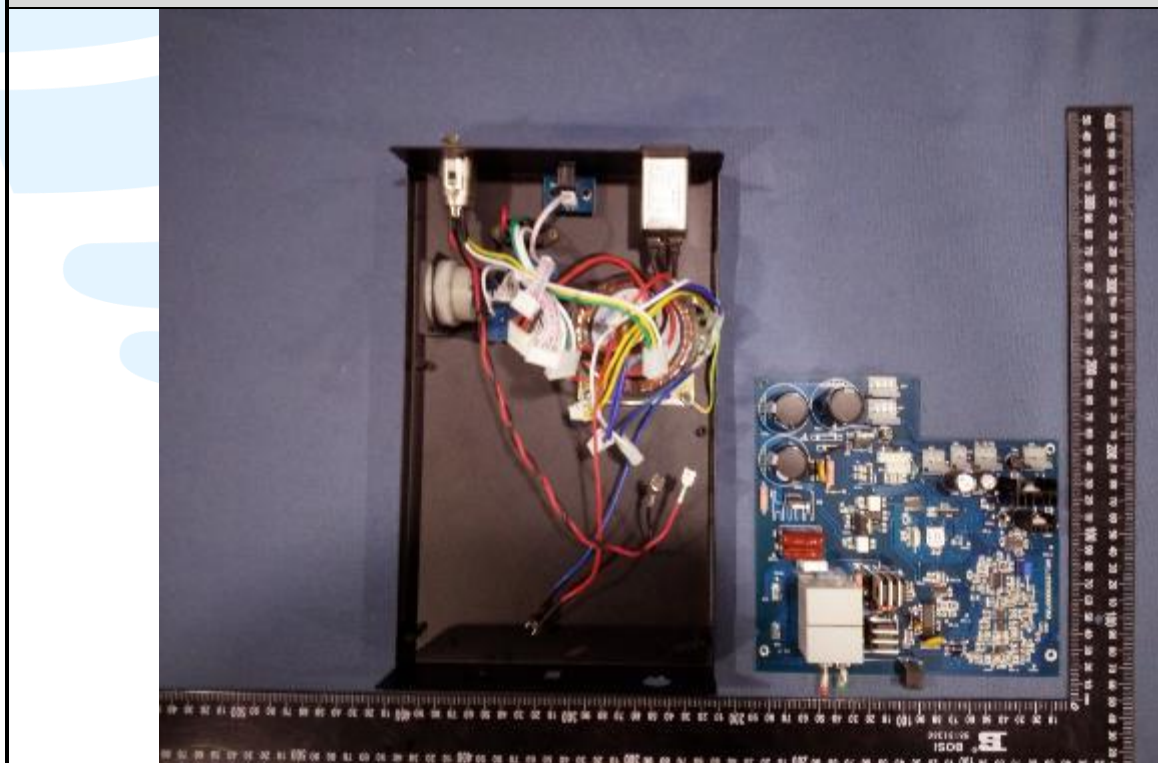


EUT Photo

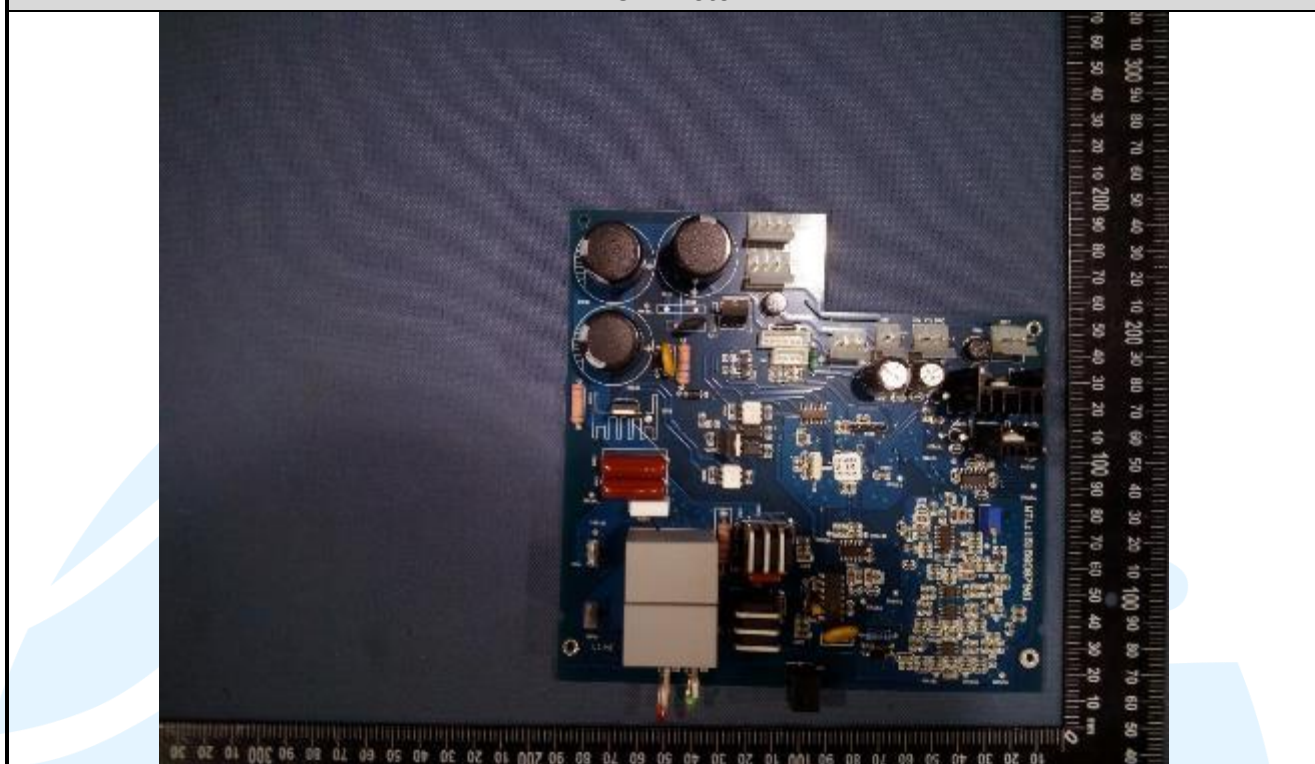


EUT Photo


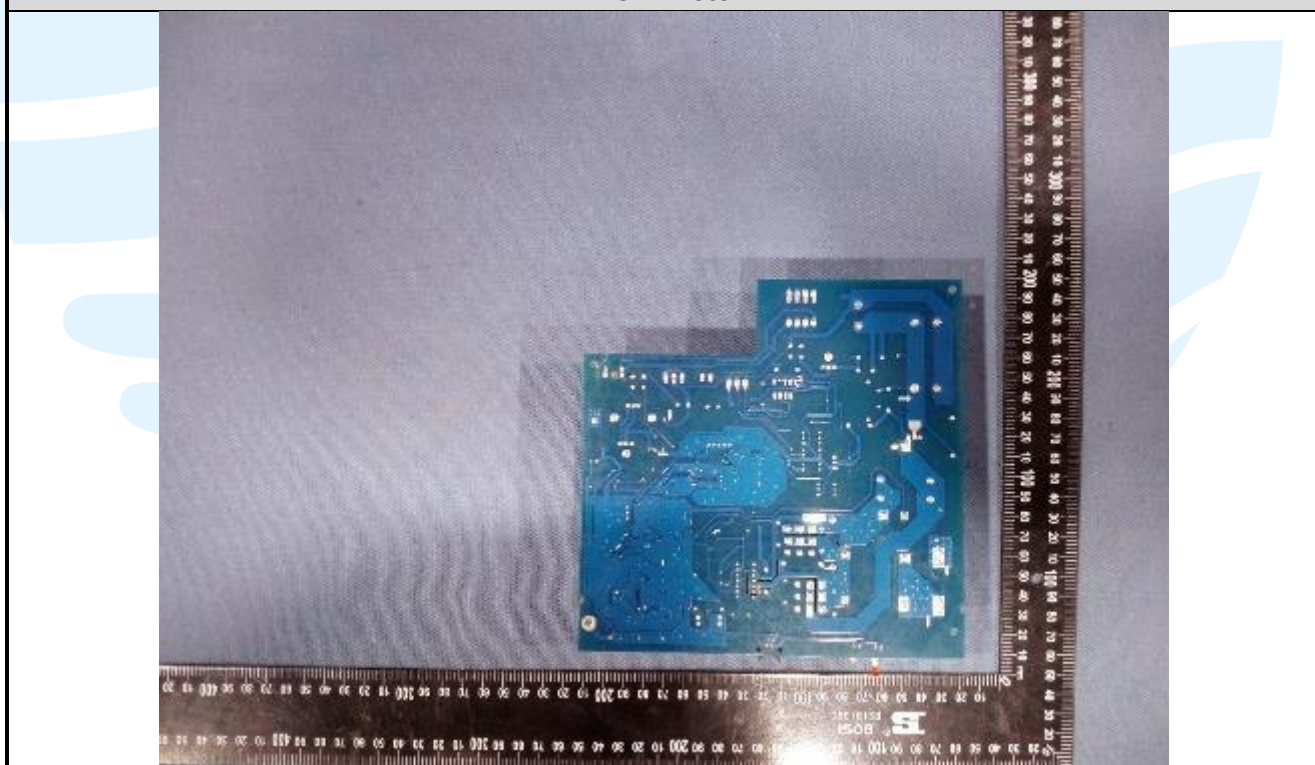


EUT Photo

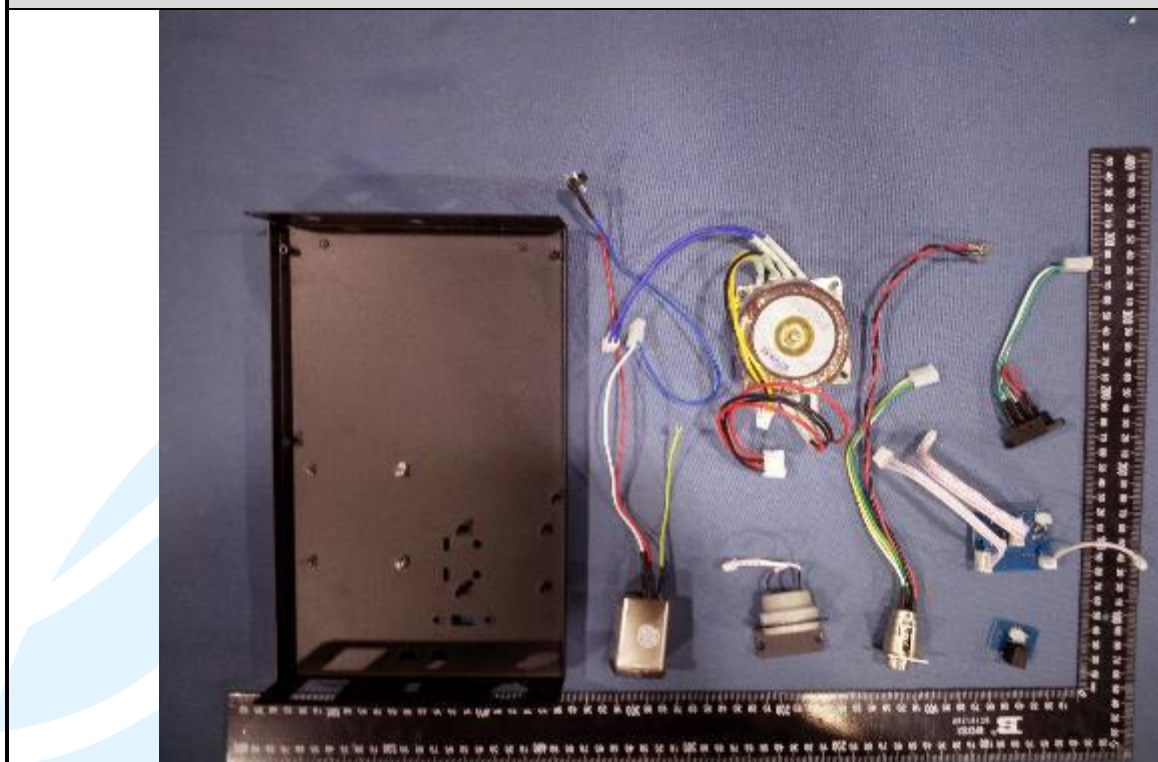


EUT Photo

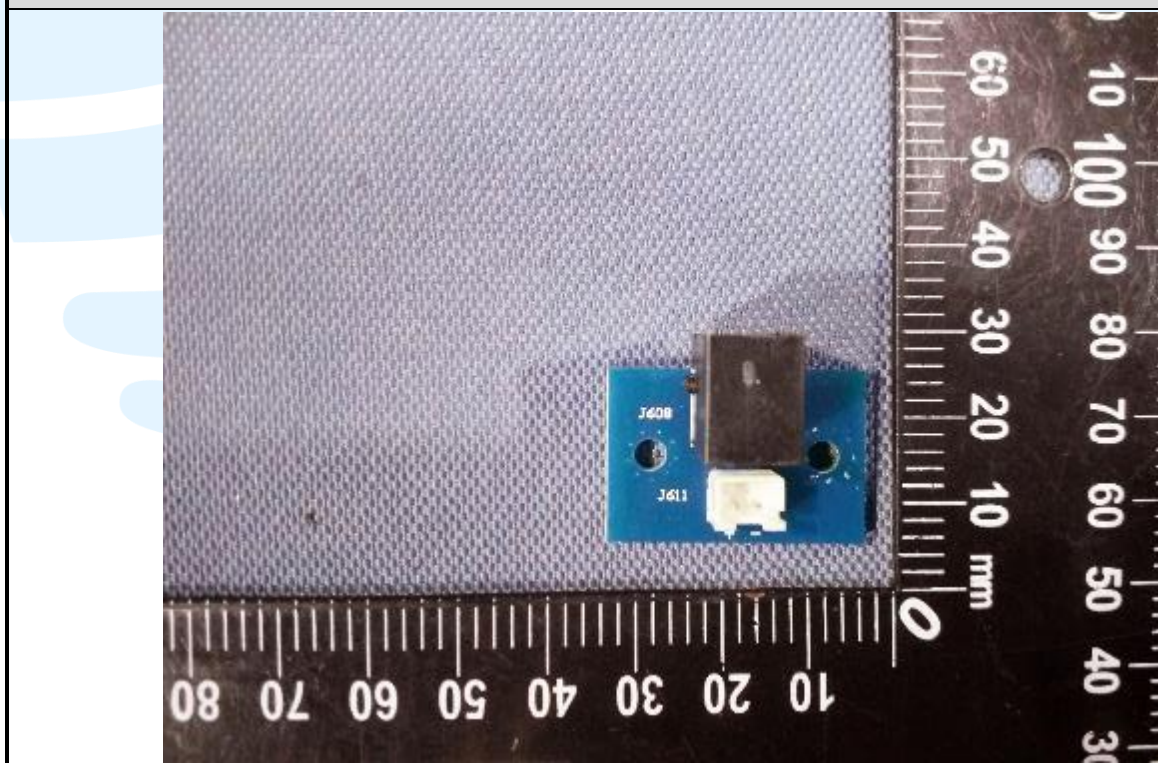


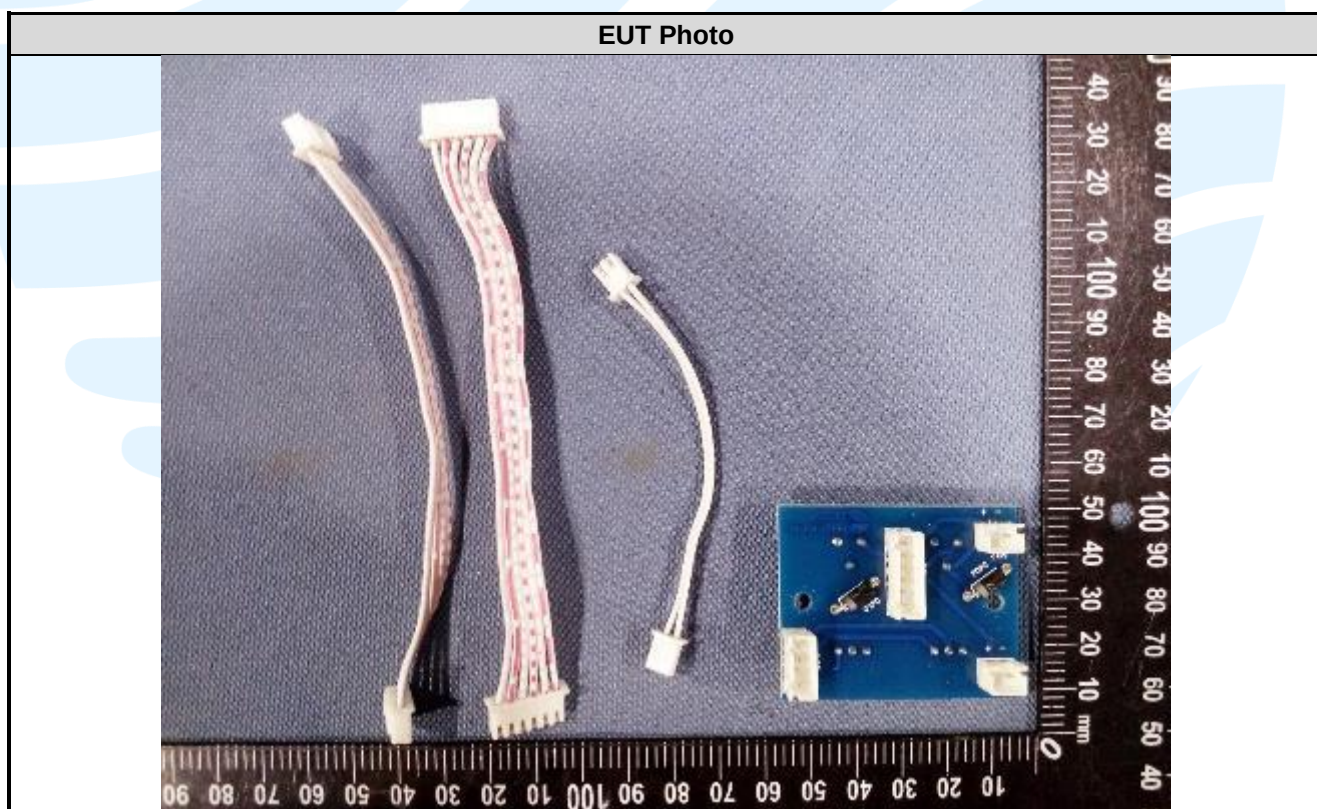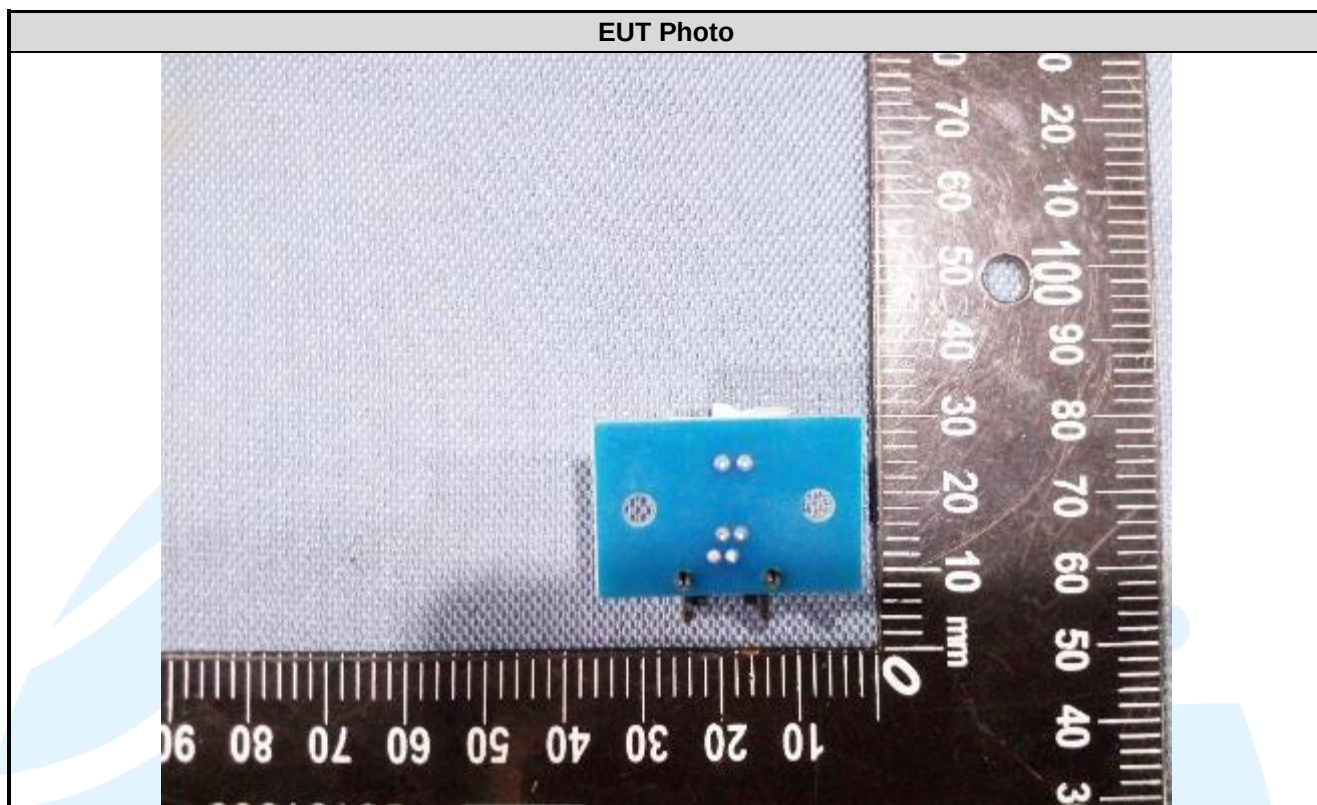


EUT Photo

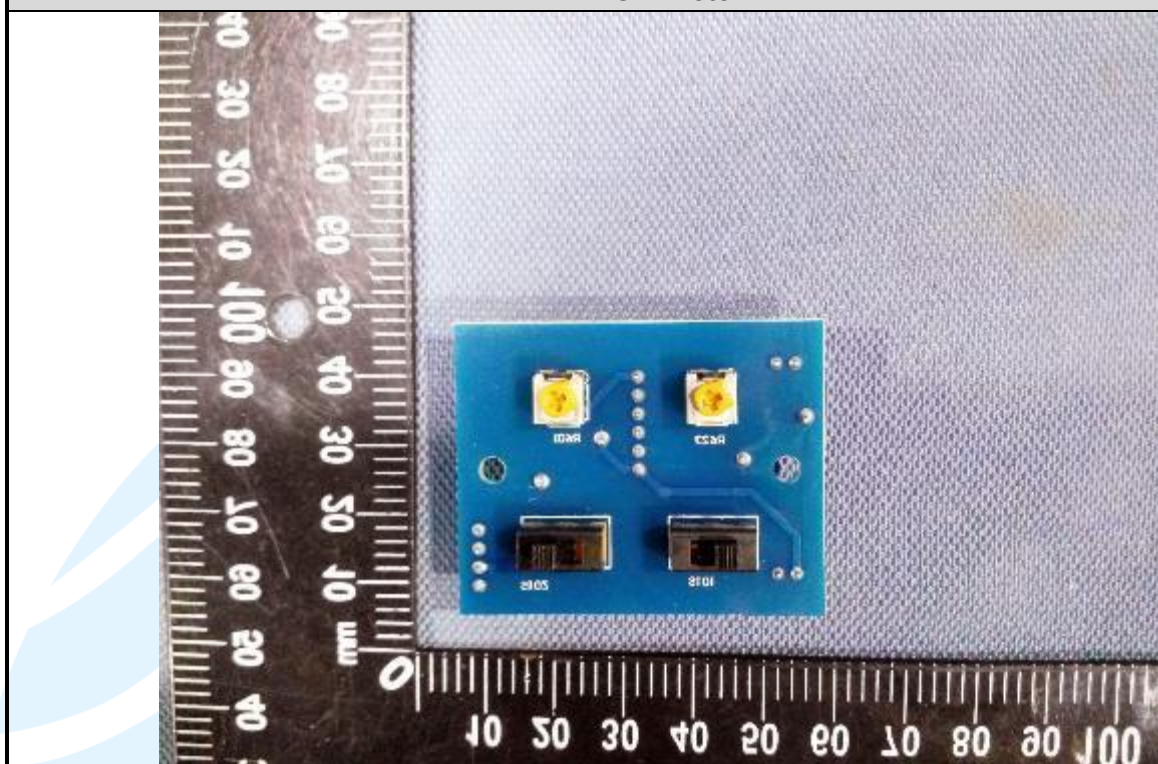

EUT Photo

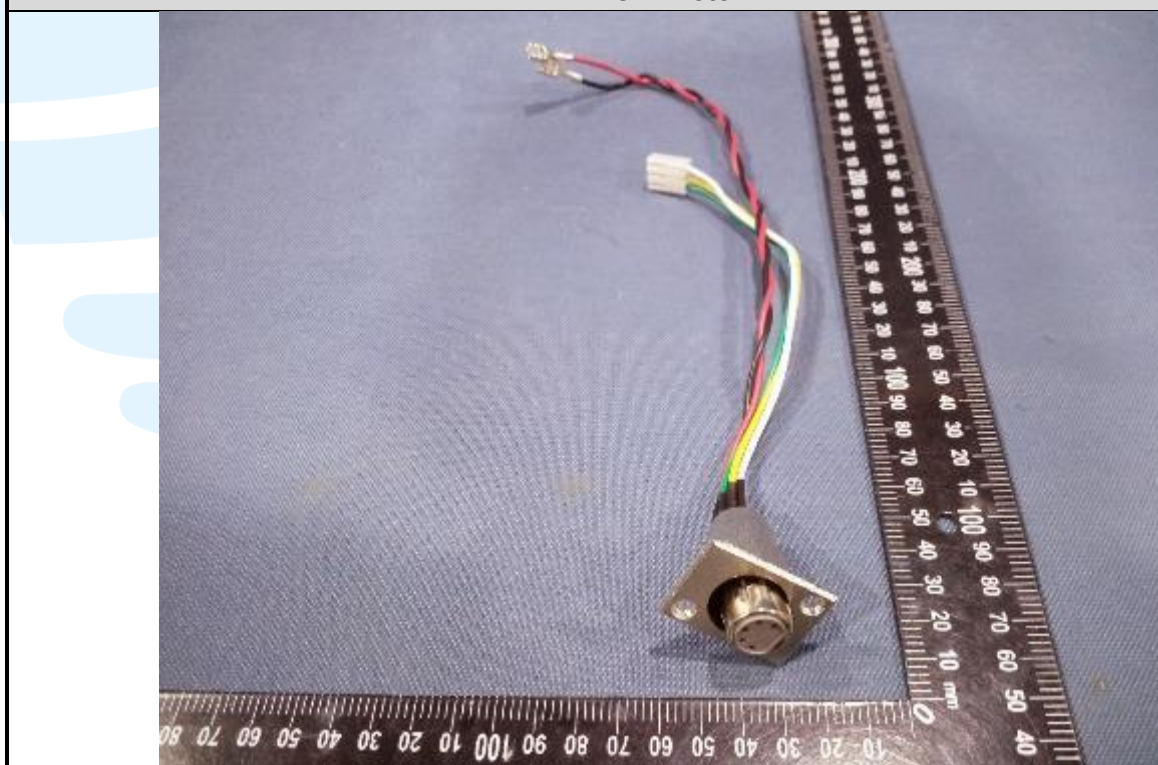


EUT Photo

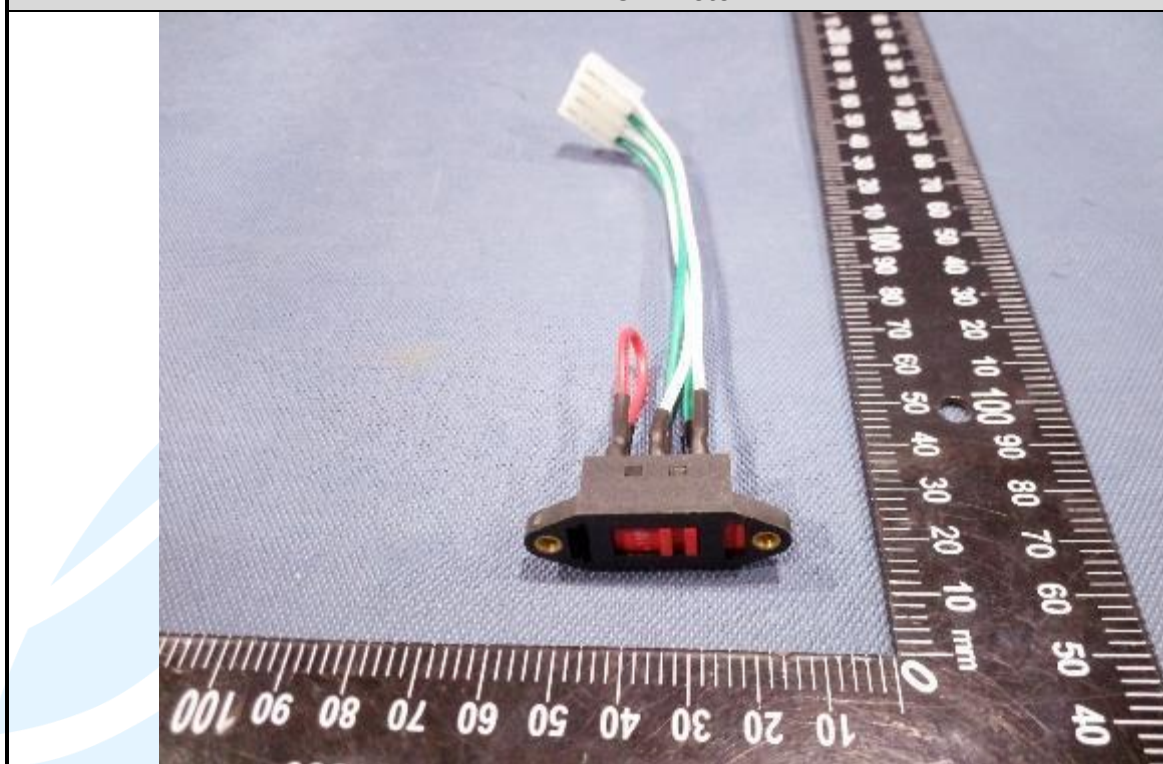


EUT Photo




EUT Photo

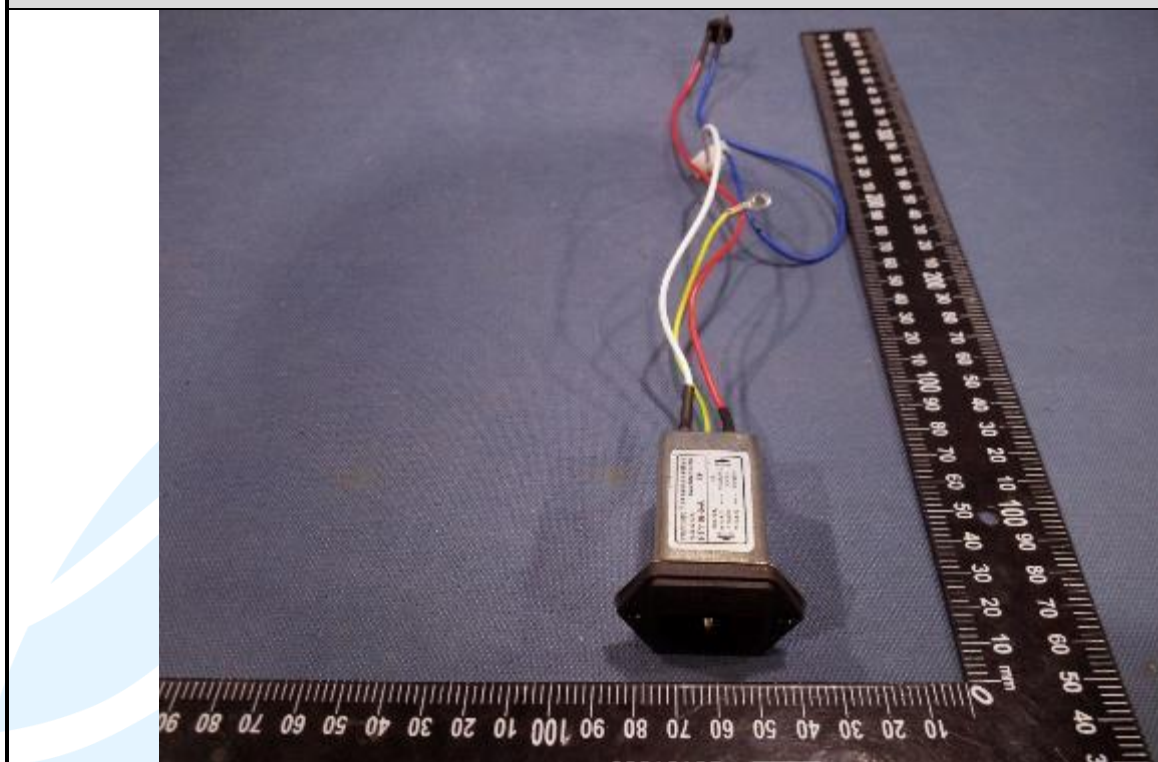


EUT Photo

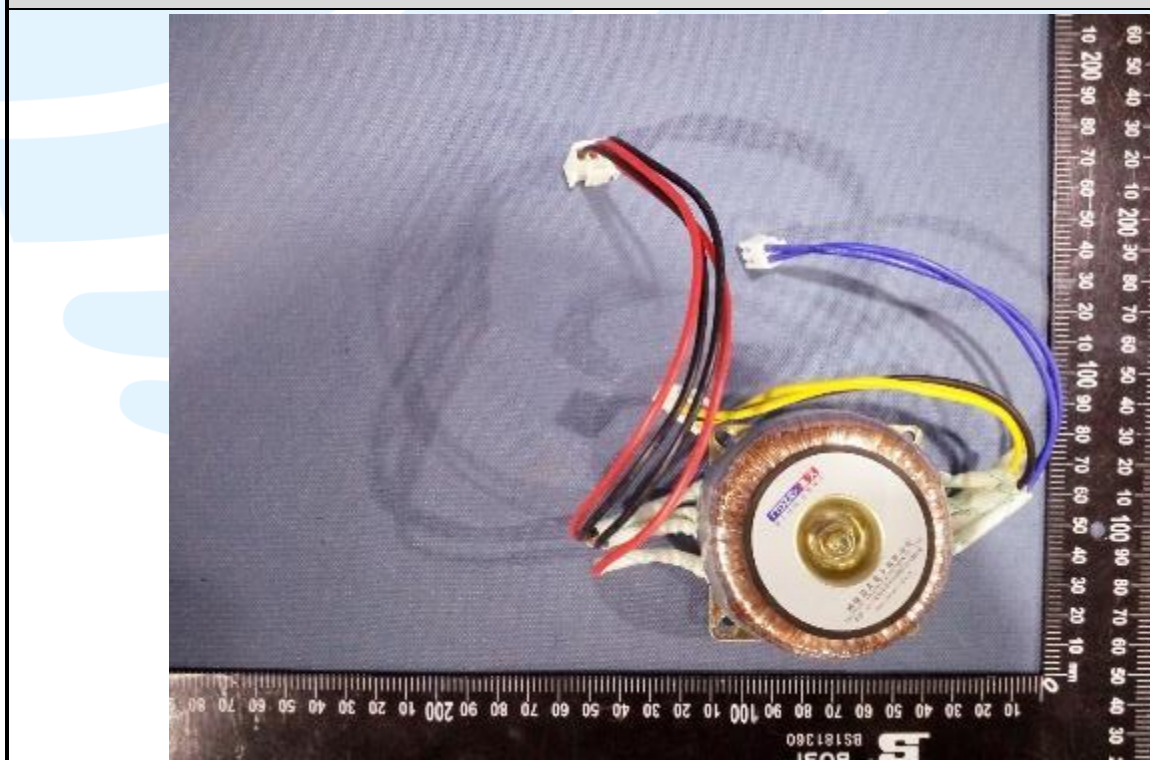


EUT Photo

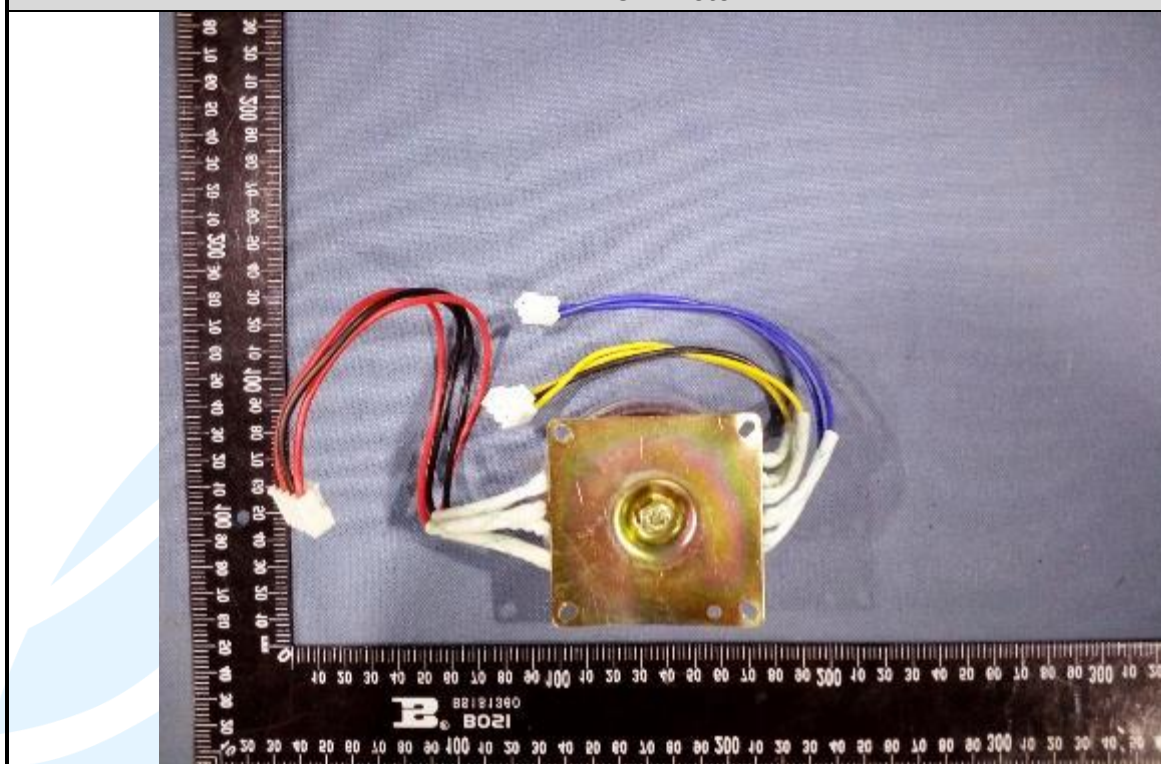

EUT Photo

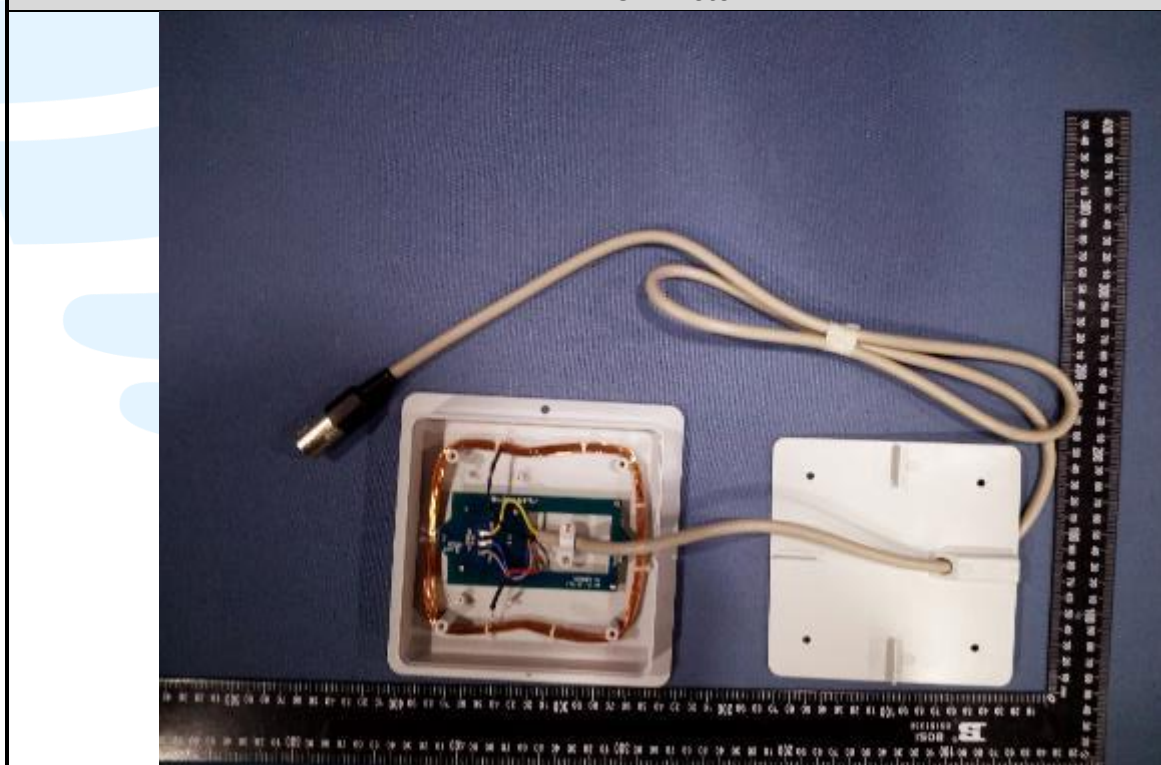


EUT Photo

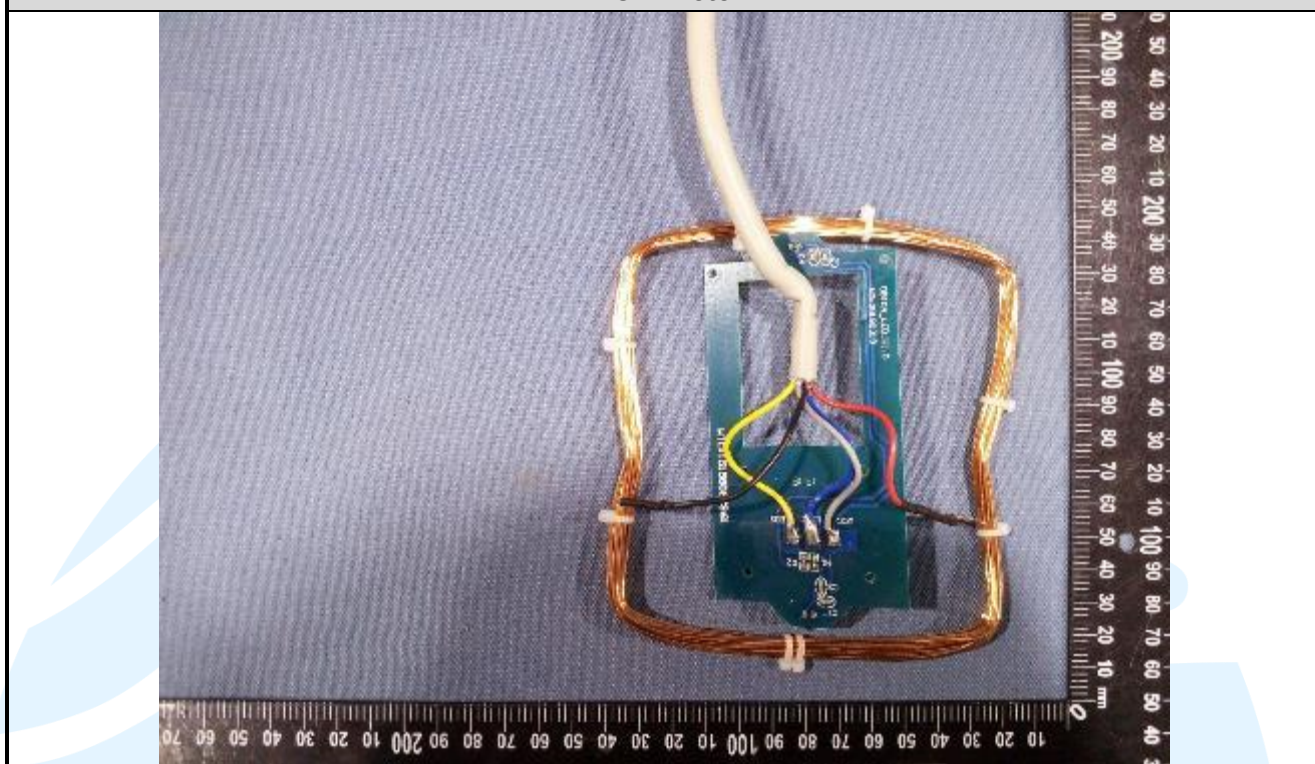


EUT Photo




EUT Photo

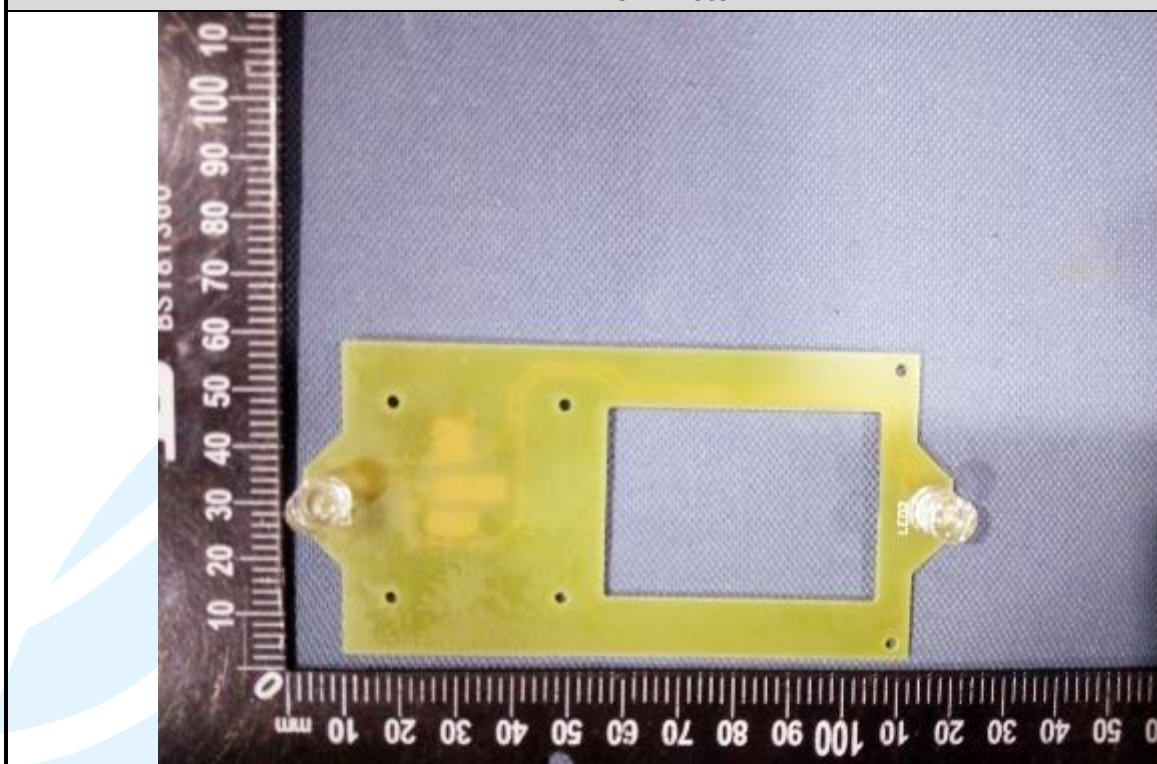


EUT Photo


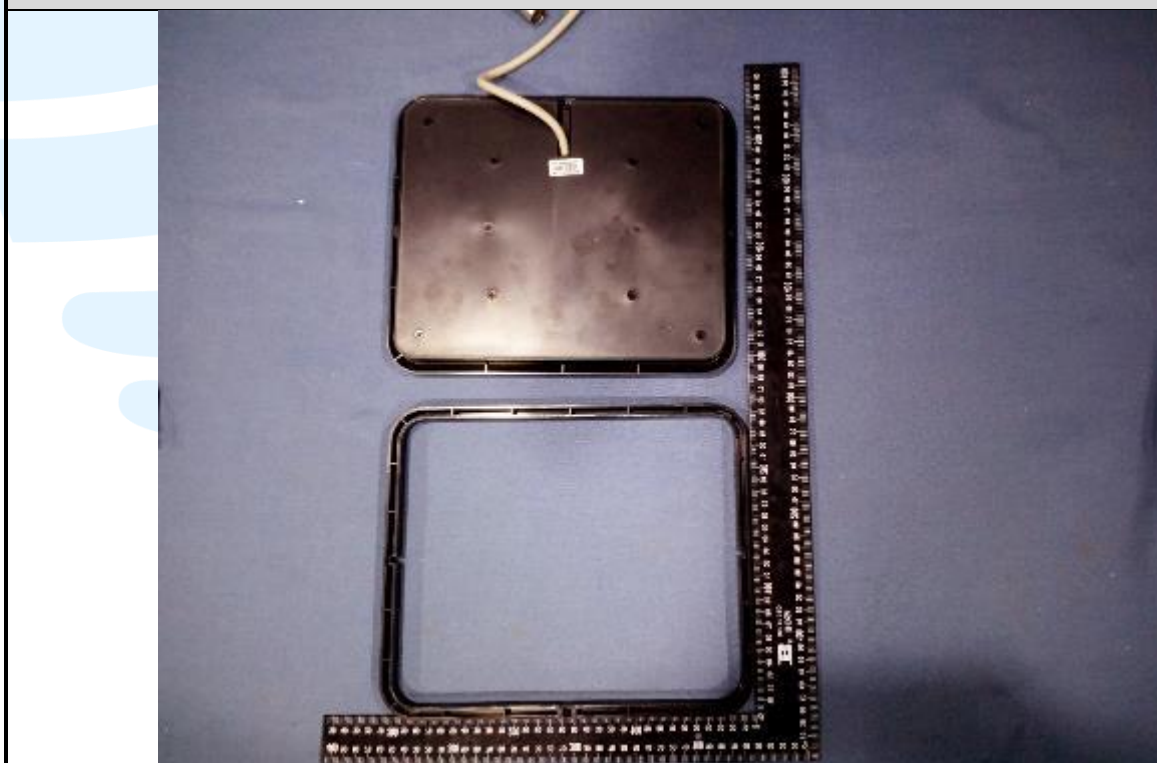




EUT Photo

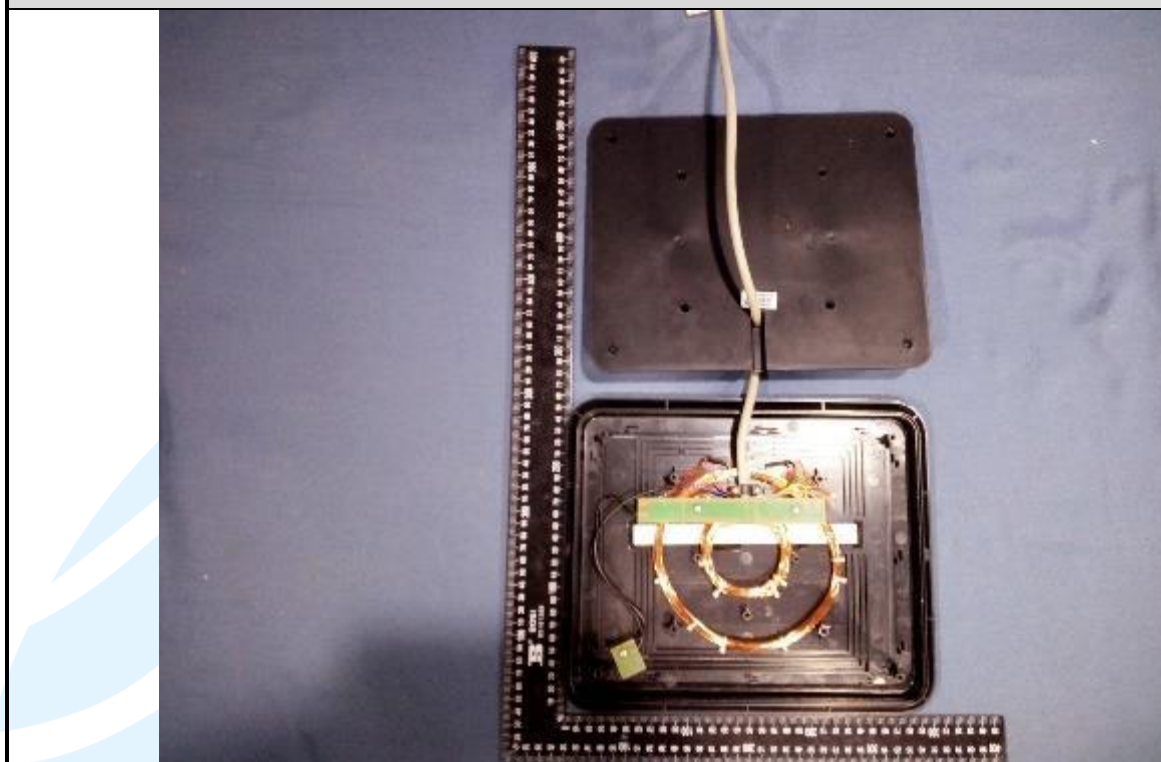

EUT Photo

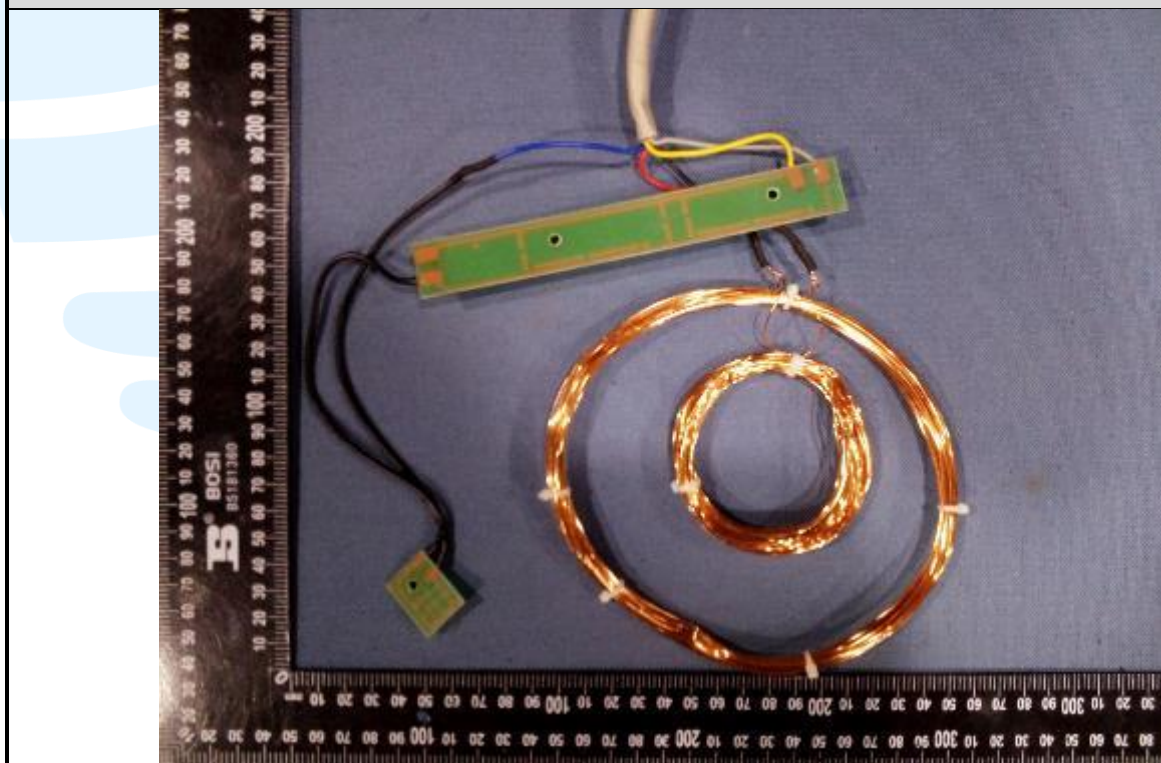

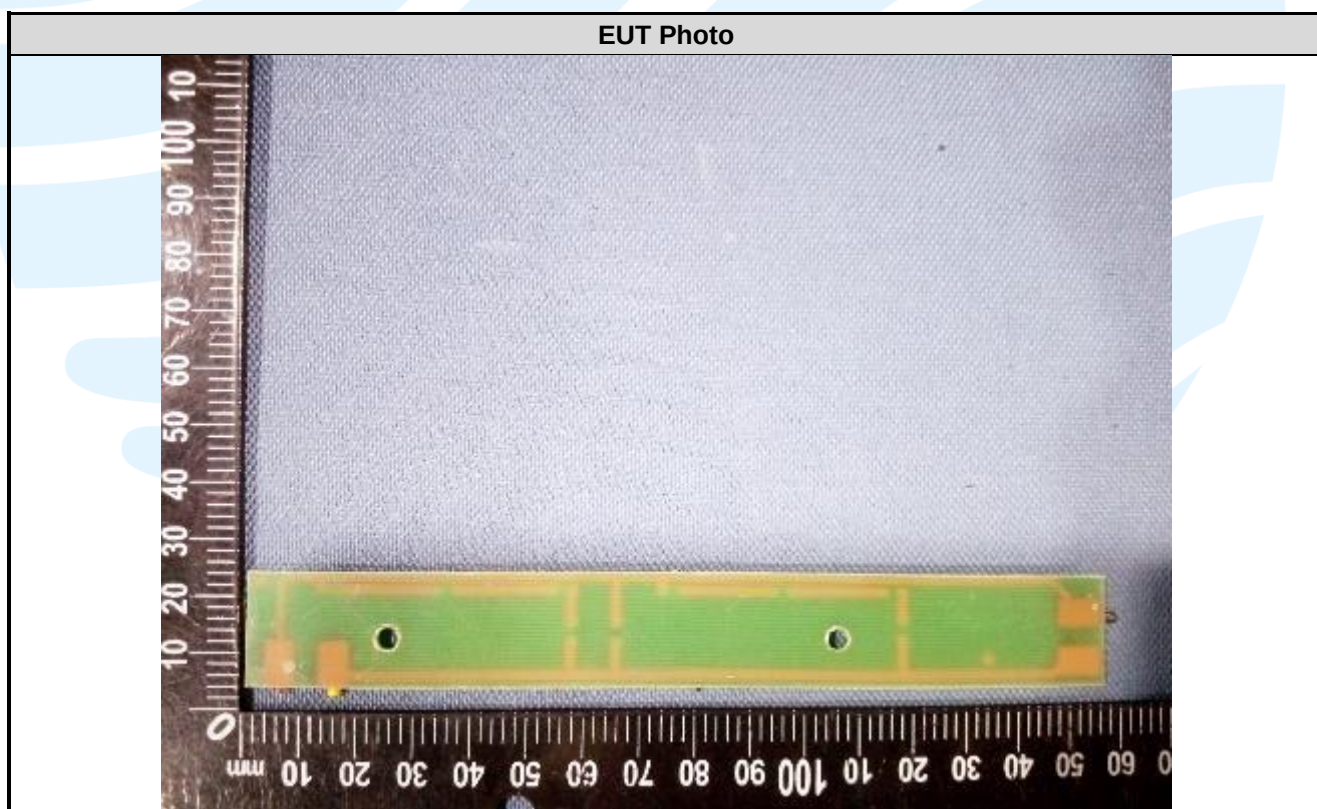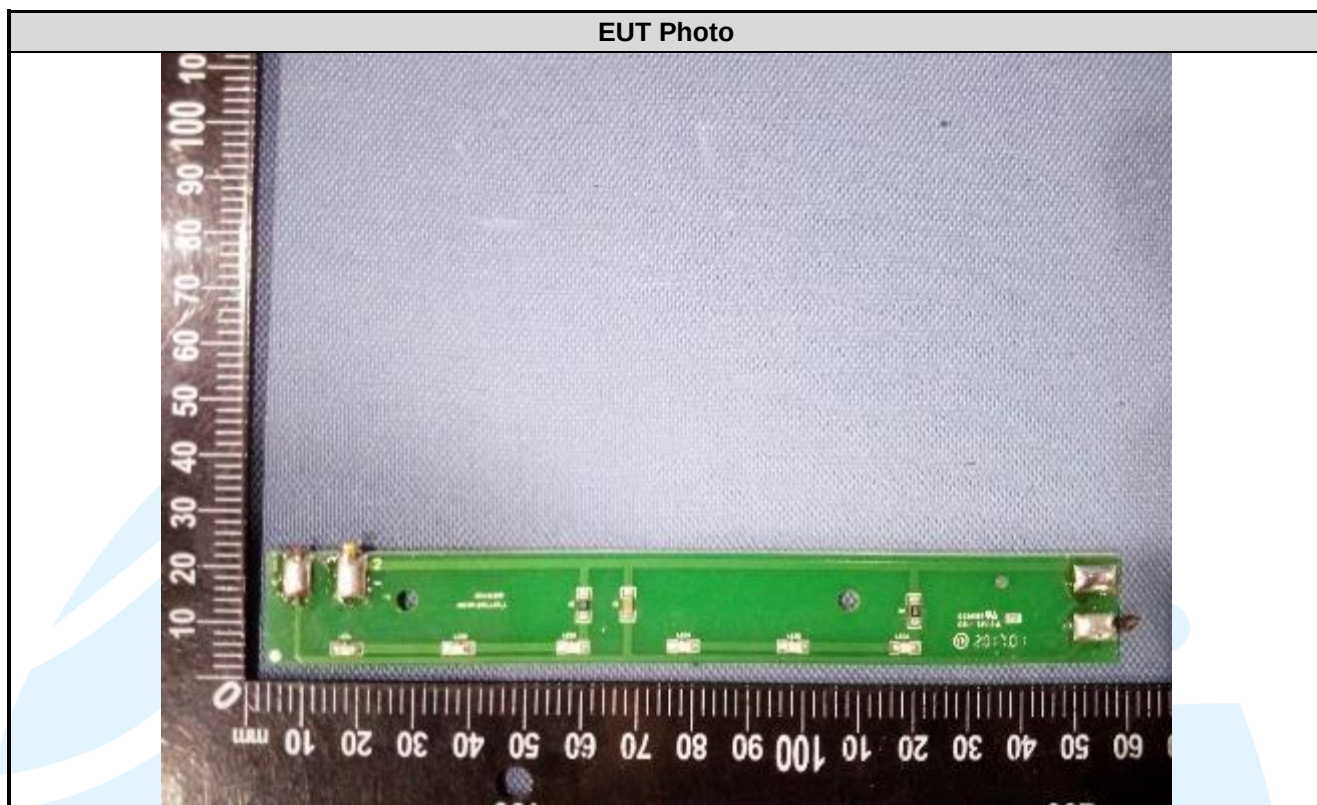

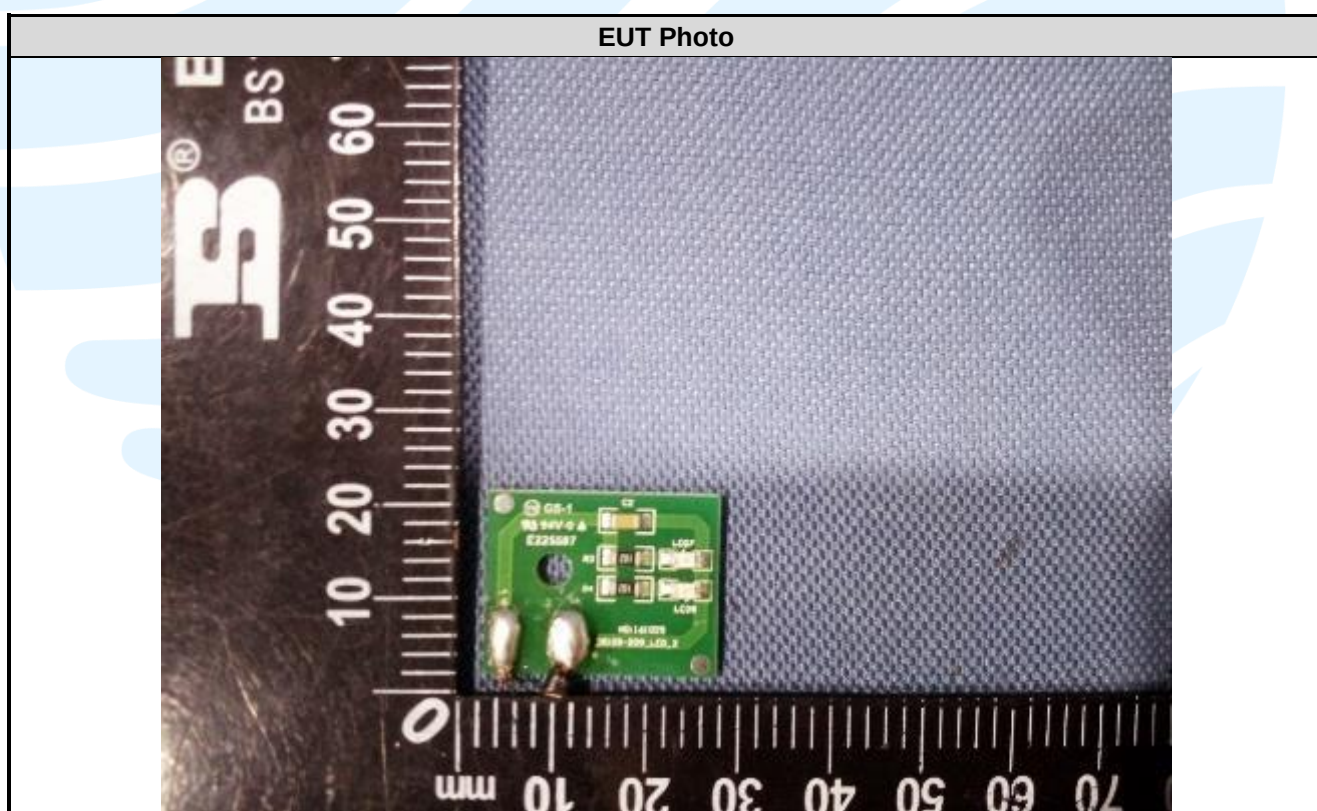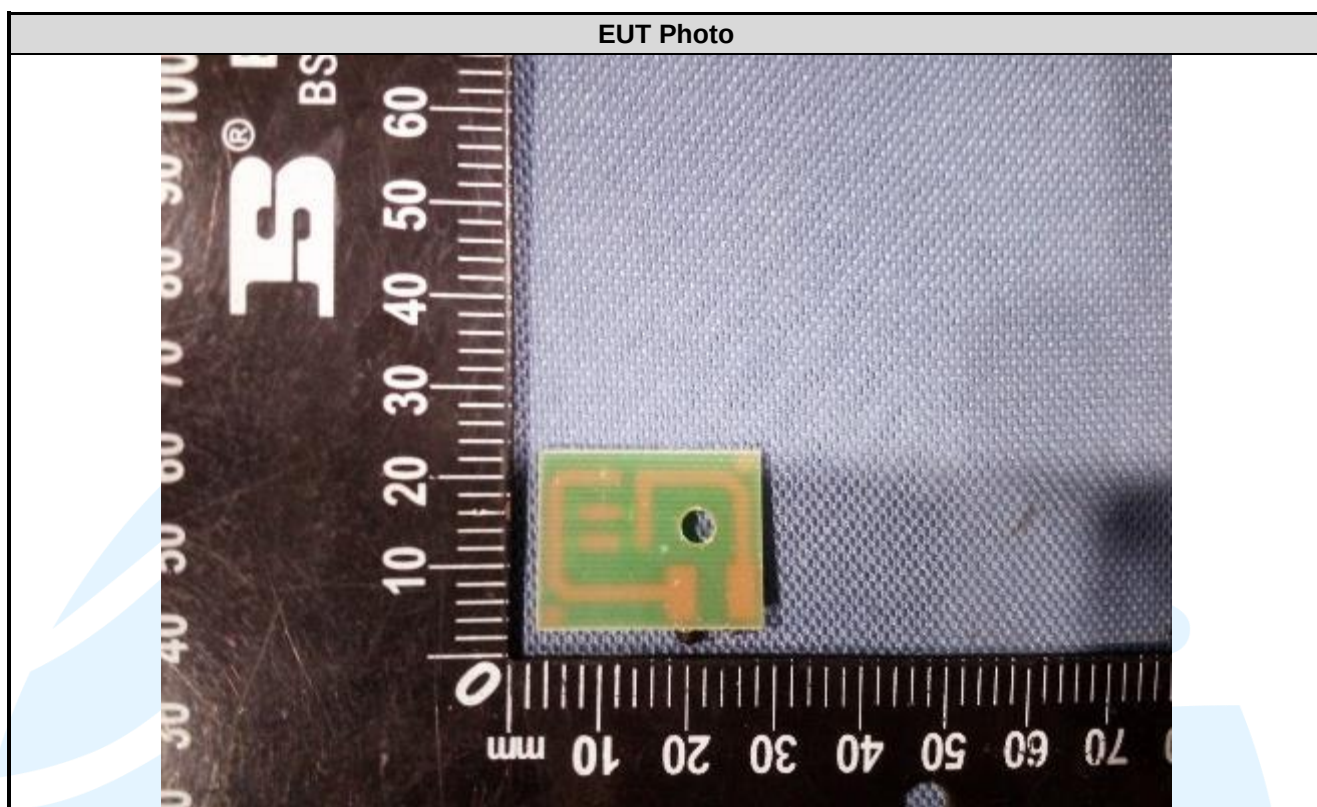

***** End of Report *****

The test report is effective only with both signature and specialized stamp. The result(s) shown in this report refer only to the sample(s) tested. Without written approval of UnionTrust, this report can't be reproduced except in full.

