

RF Exposure Evaluation for FCC ID: 2AQK5-GIMBAL220

Refer user manual this device is a 3-Axis Stabilized Handheld Gimbal for Camera, and this device was designed used in portable devices that the minimum distance between human's Hand is 10mm. The definition of the category as following:

The minimum test separation distance, please refer to the Appendix TX Antenna position and closest distance between human hand.

The EUT external, please refer to the BALUN report "BL-SZ2050480-AW".

FCC KDB 447498 D01 General RF Exposure Guidance v06 Limit

Unless specifically required by the published RF exposure KDB procedures, standalone 1-g head or body and 10-g extremity SAR evaluation for general population exposure conditions, by measurement or numerical simulation, is not required when the corresponding SAR Test Exclusion Threshold condition, listed below, is satisfied. These test exclusion conditions are based on sourcebased time-averaged maximum conducted output power of the RF channel requiring evaluation, adjusted for tune-up tolerance, and the minimum test separation distance required for the exposure conditions. The minimum test separation distance is determined by the smallest distance from the antenna and radiating structures or outer surface of the device, according to the host form factor, exposure conditions and platform requirements, to any part of the body or extremity of a user or bystander.

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR}$$

Where

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

The 1-g and 10-g SAR test exclusion thresholds for 1500 MHz to 6 GHz at test separation distances > 50 mm are determined by:

$$\{[\text{Power allowed at numeric threshold for } 50 \text{ mm}] + [(\text{test separation distance} - 50 \text{ mm}) \cdot 10]\} \text{ mW, for } > 1500 \text{ MHz and } \leq 6 \text{ GHz}$$

Where

- Power allowed at numeric threshold for 50 mm a is the max. power of channel threshold
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

The test exclusions are applicable only when the minimum test separation distance is > 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is 60 mm, a distance of 60 mm is applied to determine SAR test exclusion.

Output Power Test Data

Bluetooth				
Mode	BLE			
	GFSK			
	Low Channel	Middle Channel	High Channel	
Peak Power (dBm)	1.29		2.22	2.81
Note: This report listed the worst case peak power value, please refer to RF test report for more details.				

WIFI									
Mode	802.11b			802.11g			802.11n20		
	Low Channel	Middle Channel	High Channel	Low Channel	Middle Channel	High Channel	Low Channel	Middle Channel	
Average Power (dBm)	10.26	9.47	9.29	9.23	8.63	8.16	9.56	9.01	8.43
Note: This report listed the worst case average power value, please refer to RF test report for more details.									

Turn-up power

Mode	Conducted Average Range (dBm)
Bluetooth	(1.00) - (3.50)
WiFi	(8.00) - (10.50)

Evaluation Result


Mode	Min. Distance (mm)	Tune-up Limit Power (mW)	Calculated Value	Extremity Exclusion Value	RF Exposure Evaluation Result
Bluetooth	10.0	2.24	0.35	7.5	Compliance
2.4GHz WLAN	10.0	11.22	1.77	7.5	Compliance

Appendix : TX Antenna position and closest distance between human hand.

i) Front View



ii) Zoom View

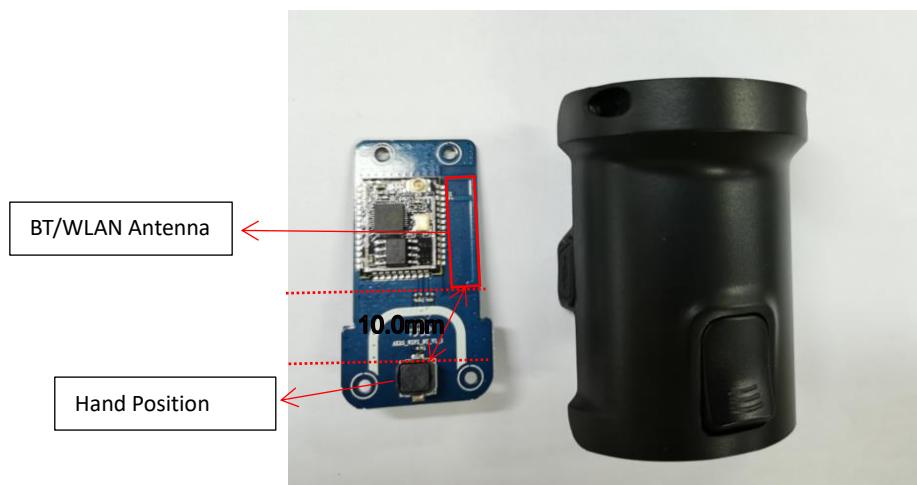

Note: According to hand-held condition the nearest distance between BT/WLAN Antenna to human hand is **10.0 mm**.