

FCC Test Report

Report No.: RF190620C21

FCC ID: 2AQLWYYCBV2

Test Model: Cubo2

Received Date: Jun. 20, 2019

Test Date: Jul. 31 ~ Oct. 21, 2019

Issued Date: Oct. 30, 2019

Applicant: Yun yun AI Baby camera Co., Ltd.

Address: 8F-7, No. 2, Ln. 150, Sec. 5, Xinyi Rd., Xinyi Dist., Taipei City 110, Taiwan (R.O.C.)

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location: No.19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City
33383, Taiwan

**FCC Registration /
Designation Number:** 788550 / TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results.....	6
2.1 Measurement Uncertainty.....	6
2.2 Modification Record	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Description of Test Modes.....	8
3.2.1 Test Mode Applicability and Tested Channel Detail.....	9
3.3 Duty Cycle of Test Signal	11
3.4 Description of Support Units	12
3.4.1 Configuration of System under Test	12
3.5 General Description of Applied Standards.....	13
4 Test Types and Results	14
4.1 Radiated Emission and Bandedge Measurement	14
4.1.1 Limits of Radiated Emission and Bandedge Measurement	14
4.1.2 Test Instruments	15
4.1.3 Test Procedures.....	16
4.1.4 Deviation from Test Standard	17
4.1.5 Test Set Up	17
4.1.6 EUT Operating Conditions.....	18
4.1.7 Test Results	19
4.2 Conducted Emission Measurement.....	35
4.2.1 Limits of Conducted Emission Measurement	35
4.2.2 Test Instruments	35
4.2.3 Test Procedures.....	36
4.2.4 Deviation from Test Standard	36
4.2.5 Test Setup.....	36
4.2.6 EUT Operating Conditions.....	36
4.2.7 Test Results	37
4.3 6 dB Bandwidth Measurement.....	41
4.3.1 Limits of 6 dB Bandwidth Measurement.....	41
4.3.2 Test Setup.....	41
4.3.3 Test Instruments	41
4.3.4 Test Procedure	41
4.3.5 Deviation from Test Standard	41
4.3.6 EUT Operating Conditions.....	41
4.3.7 Test Results	42
4.4 Occupied Bandwidth Measurement.....	44
4.4.1 Test Setup.....	44
4.4.2 Test Instruments	44
4.4.3 Test Procedure	44
4.4.4 Deviation from Test Standard	44
4.4.5 EUT Operating Conditions.....	44
4.4.6 Test Results	45
4.5 Conducted Output Power Measurement	47
4.5.1 Limits of Conducted Output Power Measurement.....	47
4.5.2 Test Setup.....	47
4.5.3 Test Instruments	47
4.5.4 Test Procedures.....	47
4.5.5 Deviation from Test Standard	47
4.5.6 EUT Operating Conditions.....	47
4.5.7 Test Results	48

4.6	Power Spectral Density Measurement	49
4.6.1	Limits of Power Spectral Density Measurement.....	49
4.6.2	Test Setup.....	49
4.6.3	Test Instruments	49
4.6.4	Test Procedure	49
4.6.5	Deviation from Test Standard	49
4.6.6	EUT Operating Condition	49
4.6.7	Test Results	50
4.7	Conducted Out of Band Emission Measurement	53
4.7.1	Limits of Conducted Out of Band Emission Measurement.....	53
4.7.2	Test Setup.....	53
4.7.3	Test Instruments	53
4.7.4	Test Procedure	53
4.7.5	Deviation from Test Standard	53
4.7.6	EUT Operating Condition	53
4.7.7	Test Results	54
5	Pictures of Test Arrangements.....	66
	Appendix – Information of the Testing Laboratories	67

Release Control Record

Issue No.	Description	Date Issued
RF190620C21	Original Release	Oct. 30, 2019

1 Certificate of Conformity

Product: Cubo AI Baby Monitor

Brand: CuboAi

Test Model: Cubo2

Sample Status: Production Unit

Applicant: Yun yun AI Baby camera Co., Ltd.

Test Date: Jul. 31 ~ Oct. 21, 2019

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10:2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by : Lena Wang , Date: Oct. 30, 2019
Lena Wang / Specialist

Approved by : Dylan Chiou , Date: Oct. 30, 2019
Dylan Chiou / Project Engineer

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	Pass	Meet the requirement of limit. Minimum passing margin is -9.33 dB at 0.45400 MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	Pass	Meet the requirement of limit. Minimum passing margin is -0.14 dB at 2389.94 MHz.
15.247(d)	Antenna Port Emission	Pass	Meet the requirement of limit.
15.247(a)(2)	6 dB Bandwidth	Pass	Meet the requirement of limit.
---	Occupied Bandwidth Measurement	Pass	Reference only
15.247(b)	Conducted power	Pass	Meet the requirement of limit.
15.247(e)	Power Spectral Density	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	No antenna connector is used.

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150 kHz ~ 30 MHz	2.94 dB
Radiated Emissions up to 1 GHz	9 kHz ~ 30 MHz	3.04 dB
	30 MHz ~ 200 MHz	2.93 dB
	200 MHz ~ 1000 MHz	2.95 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	2.26 dB
	18 GHz ~ 40 GHz	1.94 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Cubo AI Baby Monitor
Brand	CuboAi
Test Model	Cubo2
Status of EUT	Production Unit
Power Supply Rating	5.0 Vdc (adapter)
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
Modulation Technology	DSSS, OFDM
Transfer Rate	802.11b: 11.0 / 5.5 / 2.0 / 1.0 Mbps 802.11g: 54.0 / 48.0 / 36.0 / 24.0 / 18.0 / 12.0 / 9.0 / 6.0 Mbps 802.11n: up to 300 Mbps
Operating Frequency	2412 ~ 2462 MHz
Number of Channel	11 for 802.11b, 802.11g, 802.11n (HT20) 7 for 802.11n (HT40)
Output Power	602.306 mW
Antenna Type	FPC antenna with 1.78 dBi gain
Antenna Connector	ipex
Accessory Device	Refer to Note as below
Cable Supplied	Refer to Note as below

Note:

- The EUT incorporates a MIMO function. Physically, the EUT provides two completed transmitters and two receivers.

Modulation Mode	Tx Function
802.11b	1TX
802.11g	1TX
802.11n (HT20)	2TX
802.11n (HT40)	2TX

- The EUT contains following accessory devices.

Product	Brand	Model	Description
Adapter	CuboAi	MX15W-0502000UU	I/P: 100-240 Vac, 50/60 Hz, 0.4 A O/P: 5 Vdc, 2 A
Mobile stand	CuboAi	Mobile stand	--
USB Cable	CuboAi	Cubo cable	1.9 m shielded cable with 1 core

- The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437		

7 channels are provided for 802.11n (HT40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	7	2442
4	2427	8	2447
5	2432	9	2452
6	2437		

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable To				Description
	RE $\geq$ 1G	RE<1G	PLC	APCM	
A	√	√	√	√	With Charging stand
B	-	√	-	√	With Mobile stand

Where **RE $\geq$ 1G**: Radiated Emission above 1 GHz

RE<1G: Radiated Emission below 1 GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

NOTE: 1. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **X-plane**.
2. "-" means no effect.

Radiated Emission Test (Above 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
	802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

Radiated Emission Test (Below 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
A 、 B	802.11g	1 to 11	1	OFDM	BPSK	6.0

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
A 、 B	802.11g	1 to 11	1	OFDM	BPSK	6.0

Bandedge Measurement:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
A	802.11b	1 to 11	1, 11	DSSS	DBPSK	1.0
	802.11g	1 to 11	1, 11	OFDM	BPSK	6.0
	802.11n (HT20)	1 to 11	1, 11	OFDM	BPSK	6.5
	802.11n (HT40)	3 to 9	3, 9	OFDM	BPSK	13.5

Antenna Port Conducted Measurement:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
	802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

Test Condition:

Applicable To	Environmental Conditions	Input Power	Tested by
RE $\geq$ 1G	25 deg. C, 65 % RH	120 Vac, 60 Hz	Tim-Chen, Thomas Wei
RE<1G	25 deg. C, 65 % RH	120 Vac, 60 Hz	Getaz Yang
PLC	25 deg. C, 65 % RH	110 Vac, 60 Hz	Jisyong Wang
APCM	25 deg. C, 65 % RH	120 Vac, 60 Hz	Gavin Wu

3.3 Duty Cycle of Test Signal


Duty cycle of test signal is 100 %, duty factor is not required.

802.11b: Duty cycle = 10/10 = 1

802.11g: Duty cycle = 10/10 = 1

802.11n (HT20): Duty cycle = 10/10 = 1

802.11n (HT40): Duty cycle = 10/10 = 1

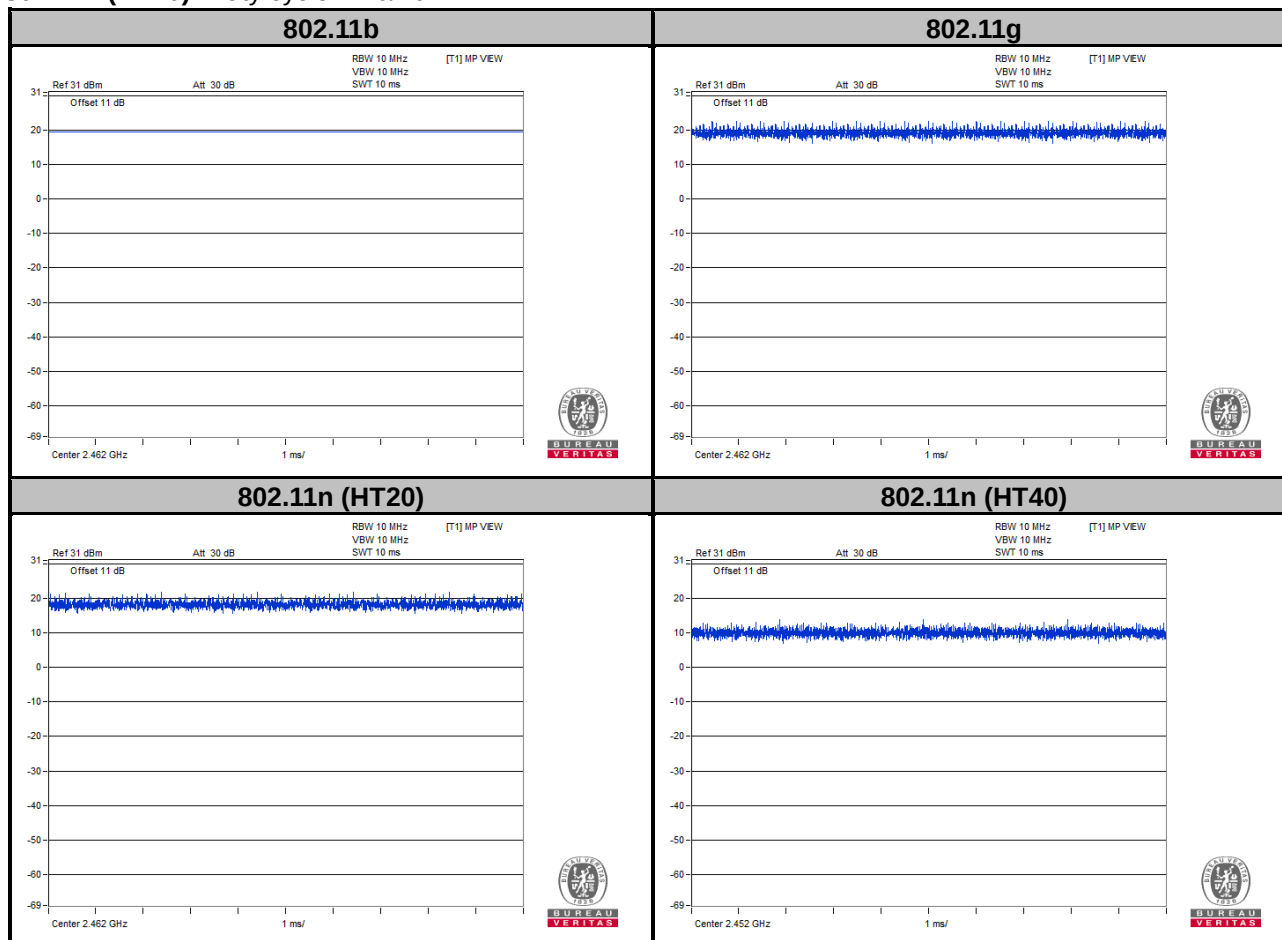

3.4 Description of Support Units


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Product	Brand	Model No.	Serial No.	FCC ID
1.	Mobile stand	CuboAi	Mobile stand	N/A	N/A
2.	Stand	N/A	N/A	N/A	N/A


No.	Signal Cable Description of The Above Support Units
1.	USB cable 1.15 m shielded cable with 1 core
2.	USB cable 1.9 m shielded cable with 1 core

3.4.1 Configuration of System under Test

Mode A

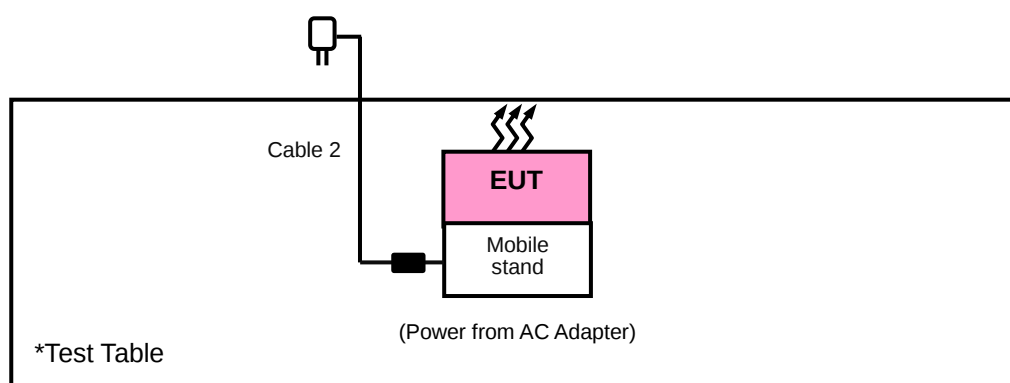

Mode B

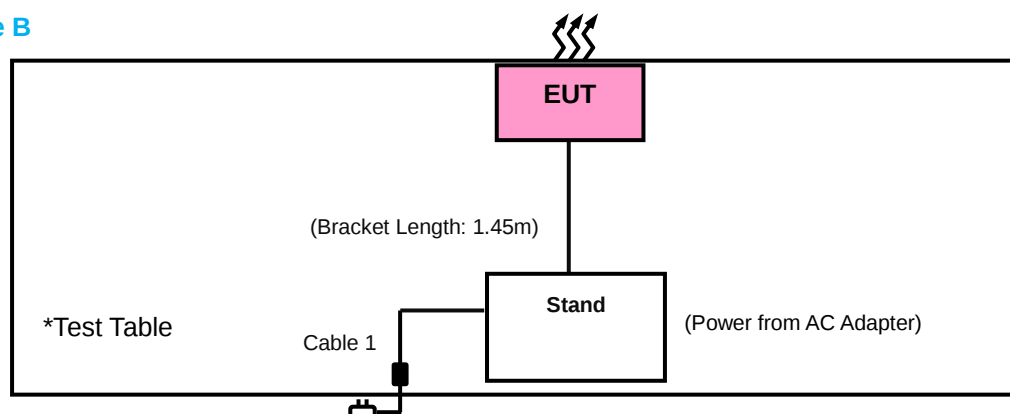

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)

KDB 558074 D01 15.247 Meas Guidance v05r02

KDB 662911 D01 Multiple Transmitter Output v02r01

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20 dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F (kHz)	300
0.490 ~ 1.705	24000/F (kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

4.1.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver Agilent	N9038A	MY51210203	Mar. 18, 2019	Mar. 17, 2020
Spectrum Analyzer Agilent	N9010A	MY52220314	Dec. 13, 2018	Dec. 12, 2019
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	101261	Apr. 15, 2019	Apr. 14, 2020
BILOG Antenna SCHWARZBECK	VULB 9168	9168-472	Nov. 23, 2018	Nov. 22, 2019
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-969	Nov. 25, 2018	Nov. 24, 2019
Broadband Horn Antenna SCHWARZBECK	BBHA 9170	148	Nov. 25, 2018	Nov. 24, 2019
Fixed Attenuator WOKEN	MDCS18N-10	MDCS18N-10-01	Apr. 15, 2019	Apr. 14, 2020
Loop Antenna	EM-6879	269	Sep. 07, 2018	Sep. 06, 2019
			Sep. 16, 2019	Sep. 15, 2020
Preamplifier EMCI	EMC001340	980201	Oct. 12, 2018	Oct. 11, 2019
			Oct. 14, 2019	Oct. 13, 2020
Preamplifier EMCI	EMC 012645	980115	Oct. 12, 2018	Oct. 11, 2019
			Oct. 08, 2019	Oct. 07, 2020
Preamplifier EMCI	EMC 184045	980116	Oct. 12, 2018	Oct. 11, 2019
			Oct. 08, 2019	Oct. 07, 2020
Preamplifier EMCI	EMC 330H	980112	Oct. 12, 2018	Oct. 11, 2019
			Oct. 08, 2019	Oct. 07, 2020
Power Meter Anritsu	ML2495A	1012010	Sep. 05, 2018	Sep. 04, 2019
			Sep. 04, 2019	Sep. 03, 2020
Power Sensor Anritsu	MA2411B	1315050	Sep. 04, 2018	Sep. 03, 2019
			Sep. 04, 2019	Sep. 03, 2020
RF Coaxial Cable HUBER+SUHNNER	EMC104-SM-SM-8000&3000	140811+170717	Oct. 12, 2018	Oct. 11, 2019
			Oct. 08, 2019	Oct. 07, 2020
RF Coaxial Cable HUBER+SUHNNER	SUCOFLEX 104	EMC104-SM-SM-1000(140807)	Oct. 12, 2018	Oct. 11, 2019
			Oct. 08, 2019	Oct. 07, 2020
RF Coaxial Cable WOKEN	8D-FB	Cable-Ch10-01	Oct. 12, 2018	Oct. 11, 2019
			Oct. 08, 2019	Oct. 07, 2020
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
Software BV ADT	E3 6.120103	NA	NA	NA
Antenna Tower MF	MFA-440H	NA	NA	NA
Turn Table MF	MFT-201SS	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 10.

4.1.3 Test Procedures

For Radiated Emission below 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz at frequency below 30 MHz.

For Radiated Emission above 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30 MHz ~ 1 GHz) / 1.5 meters (for above 1 GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) or Peak detection (PK) at frequency below 1 GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98 %) or 10 Hz (Duty cycle ≥ 98 %) for Average detection (AV) at frequency above 1 GHz.
(11b: RBW = 1 MHz, VBW = 100 Hz ; 11g: RBW = 1 MHz, VBW = 100 Hz ;
11n (HT20): RBW = 1 MHz, VBW = 100 Hz ; 11n (HT40): RBW = 1 MHz, VBW = 100 Hz)
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Set Up


<Radiated Emission below 30 MHz>

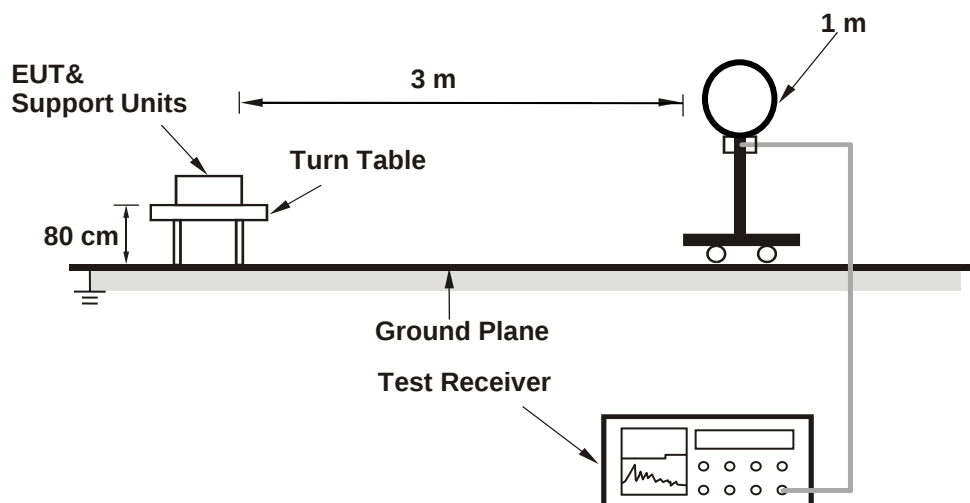

<Radiated Emission 30 MHz to 1 GHz>

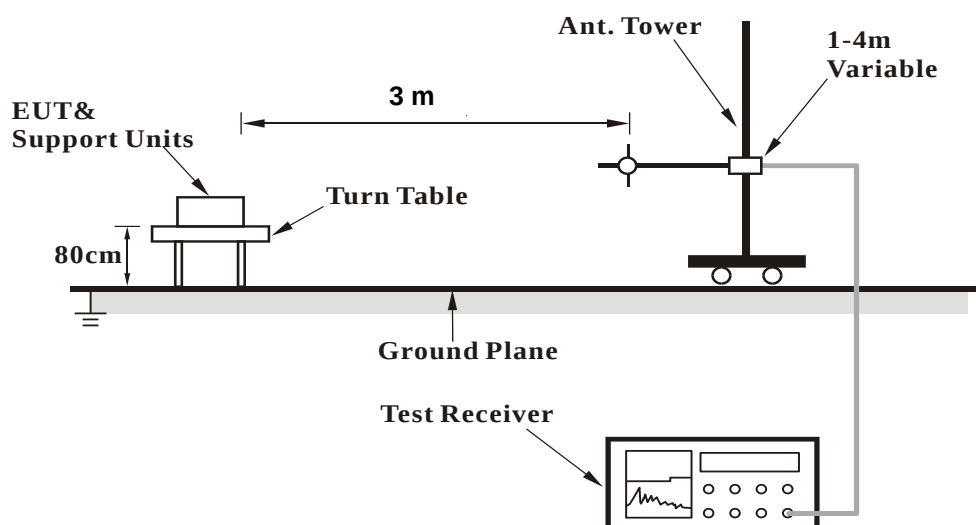

<Radiated Emission above 1 GHz>

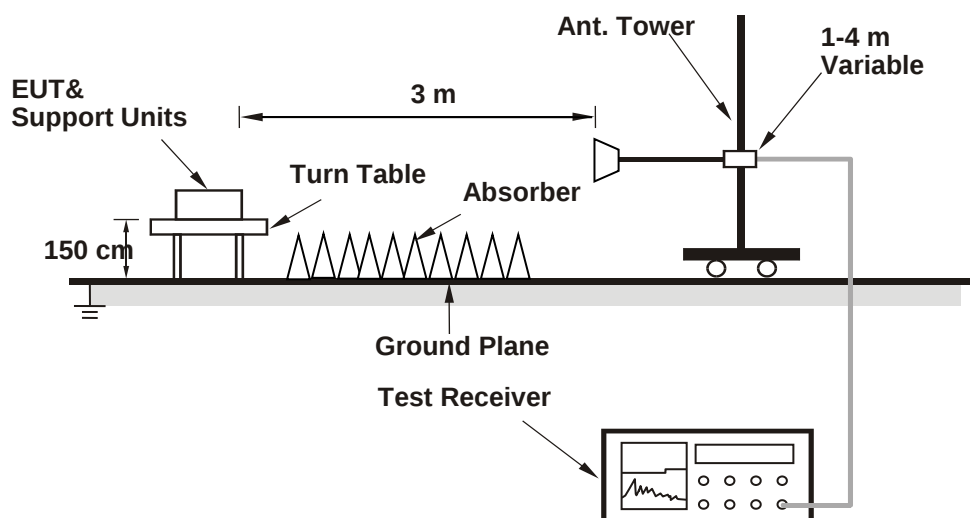

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- Placed the EUT on a testing table.
- Use the software to control the EUT under transmission condition continuously at specific channel frequency.

4.1.7 Test Results

Above 1 GHz Data : 802.11b

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	1 GHz ~ 25 GHz
Input Power	120 Vac, 60 Hz	Detector Function	Peak (PK) Average (AV)
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Tim-Chen

Antenna Polarity & Test Distance: Horizontal at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2386.02	47.63	52.61	-4.98	54	-6.37	252	341	Average
2386.02	53.79	58.77	-4.98	74	-20.21	252	341	Peak
2412	104.21	109.22	-5.01			252	341	Average
2412	105.58	110.59	-5.01			252	341	Peak
4824	46.53	60.91	-14.38	54	-7.47	181	355	Average
4824	50.89	65.27	-14.38	74	-23.11	181	355	Peak
Antenna Polarity & Test Distance: Vertical at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2386.3	43.71	48.69	-4.98	54	-10.29	290	308	Average
2386.3	50.76	55.74	-4.98	74	-23.24	290	308	Peak
2412	96.81	101.82	-5.01			290	308	Average
2412	99.72	104.73	-5.01			290	308	Peak
4824	42.11	56.49	-14.38	54	-11.89	100	62	Average
4824	48.29	62.67	-14.38	74	-25.71	100	62	Peak

Remarks:

- Emission Level = Read Level + Factor
Margin value = Emission level – Limit value
- 2412 MHz: Fundamental frequency.
- The emission levels of other frequencies were very low against the limit.

EUT Test Condition		Measurement Detail	
Channel	Channel 6	Frequency Range	1 GHz ~ 25 GHz
Input Power	120 Vac, 60 Hz	Detector Function	Peak (PK) Average (AV)
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Tim-Chen

Antenna Polarity & Test Distance: Horizontal at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2390	42.09	47.09	-5	54	-11.91	249	340	Average
2390	50.34	55.34	-5	74	-23.66	249	340	Peak
2437	105.61	110.59	-4.98			249	340	Average
2437	107.18	112.16	-4.98			249	340	Peak
2483.5	42.84	47.69	-4.85	54	-11.16	249	340	Average
2483.5	51.68	56.53	-4.85	74	-22.32	249	340	Peak
4874	48.62	62.7	-14.08	54	-5.38	191	354	Average
4874	52.34	66.42	-14.08	74	-21.66	191	354	Peak
Antenna Polarity & Test Distance: Vertical at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2375.8	42.17	47.06	-4.89	54	-11.83	375	110	Average
2375.8	50.2	55.09	-4.89	74	-23.8	375	110	Peak
2437	100.36	105.34	-4.98			375	110	Average
2437	102.81	107.79	-4.98			375	110	Peak
2483.5	39.59	44.44	-4.85	54	-14.41	375	110	Average
2483.5	49.82	54.67	-4.85	74	-24.18	375	110	Peak
4874	43.38	57.46	-14.08	54	-10.62	100	60	Average
4874	49.04	63.12	-14.08	74	-24.96	100	60	Peak

Remarks:

1. Emission Level = Read Level + Factor
Margin value = Emission level – Limit value
2. 2437 MHz: Fundamental frequency.
3. The emission levels of other frequencies were very low against the limit.

EUT Test Condition		Measurement Detail	
Channel	Channel 11	Frequency Range	1 GHz ~ 25 GHz
Input Power	120 Vac, 60 Hz	Detector Function	Peak (PK) Average (AV)
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Tim-Chen

Antenna Polarity & Test Distance: Horizontal at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2462	103.77	108.68	-4.91			243	340	Average
2462	106.73	111.64	-4.91			243	340	Peak
2486.84	50.82	55.67	-4.85	54	-3.18	243	340	Average
2486.84	63.46	68.31	-4.85	74	-10.54	243	340	Peak
4924	47.31	61.27	-13.96	54	-6.69	230	11	Average
4924	51.62	65.58	-13.96	74	-22.38	230	11	Peak
Antenna Polarity & Test Distance: Vertical at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2462	98.04	102.95	-4.91			400	109	Average
2462	100.88	105.79	-4.91			400	109	Peak
2486.88	47.49	52.34	-4.85	54	-6.51	400	109	Average
2486.88	59.59	64.44	-4.85	74	-14.41	400	109	Peak
4924	44.88	58.84	-13.96	54	-9.12	118	65	Average
4924	49.84	63.8	-13.96	74	-24.16	118	65	Peak

Remarks:

- Emission Level = Read Level + Factor
Margin value = Emission level – Limit value
- 2462 MHz: Fundamental frequency.
- The emission levels of other frequencies were very low against the limit.

802.11g

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	1 GHz ~ 25 GHz
Input Power	120 Vac, 60 Hz	Detector Function	Peak (PK) Average (AV)
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Thomas Wei

Antenna Polarity & Test Distance: Horizontal at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2389.94	53.86	58.86	-5	54	-0.14	100	333	Average
2389.94	65.37	70.37	-5	74	-8.63	100	333	Peak
2412	99.89	104.9	-5.01			100	333	Average
2412	106.62	111.63	-5.01			100	333	Peak
4824	36.01	50.39	-14.38	54	-17.99	133	355	Average
4824	45.88	60.26	-14.38	74	-28.12	133	355	Peak
Antenna Polarity & Test Distance: Vertical at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2389.94	47.78	52.78	-5	54	-6.22	164	151	Average
2389.94	58.11	63.11	-5	74	-15.89	164	151	Peak
2412	93.71	98.72	-5.01			164	151	Average
2412	99.67	104.68	-5.01			164	151	Peak
4824	35.04	49.42	-14.38	54	-18.96	142	118	Average
4824	44.87	59.25	-14.38	74	-29.13	142	118	Peak

Remarks:

- Emission Level = Read Level + Factor
Margin value = Emission level – Limit value
- 2412 MHz: Fundamental frequency.
- The emission levels of other frequencies were very low against the limit.

EUT Test Condition		Measurement Detail	
Channel	Channel 6	Frequency Range	1 GHz ~ 25 GHz
Input Power	120 Vac, 60 Hz	Detector Function	Peak (PK) Average (AV)
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Thomas Wei

Antenna Polarity & Test Distance: Horizontal at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2389.38	49.17	54.15	-4.98	54	-4.83	196	328	Average
2389.38	62.99	67.97	-4.98	74	-11.01	196	328	Peak
2437	107.06	112.04	-4.98			196	328	Average
2437	113.92	118.9	-4.98			196	328	Peak
2483.72	49.12	53.97	-4.85	54	-4.88	196	328	Average
2483.72	63.17	68.02	-4.85	74	-10.83	196	328	Peak
4874	38.61	52.69	-14.08	54	-15.39	176	356	Average
4874	47.21	61.29	-14.08	74	-26.79	176	356	Peak
Antenna Polarity & Test Distance: Vertical at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2389.8	42.04	47.04	-5	54	-11.96	132	130	Average
2389.8	55.15	60.15	-5	74	-18.85	132	130	Peak
2437	99.16	104.14	-4.98			132	130	Average
2437	105.17	110.15	-4.98			132	130	Peak
2484.12	42.69	47.54	-4.85	54	-11.31	132	130	Average
2484.12	56.22	61.07	-4.85	74	-17.78	132	130	Peak
4874	35.99	50.07	-14.08	54	-18.01	135	78	Average
4874	45.92	60	-14.08	74	-28.08	135	78	Peak

Remarks:

1. Emission Level = Read Level + Factor
Margin value = Emission level – Limit value
2. 2437 MHz: Fundamental frequency.
3. The emission levels of other frequencies were very low against the limit.

EUT Test Condition		Measurement Detail	
Channel	Channel 11	Frequency Range	1 GHz ~ 25 GHz
Input Power	120 Vac, 60 Hz	Detector Function	Peak (PK) Average (AV)
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Thomas Wei

Antenna Polarity & Test Distance: Horizontal at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2462	101.77	106.68	-4.91			190	327	Average
2462	108.12	113.03	-4.91			190	327	Peak
2483.52	53.46	58.31	-4.85	54	-0.54	190	327	Average
2483.52	68.36	73.21	-4.85	74	-5.64	190	327	Peak
4924	36.63	50.59	-13.96	54	-17.37	142	335	Average
4924	46.8	60.76	-13.96	74	-27.2	142	335	Peak
Antenna Polarity & Test Distance: Vertical at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2462	93.64	98.55	-4.91			126	128	Average
2462	99.72	104.63	-4.91			126	128	Peak
2484	44.79	49.64	-4.85	54	-9.21	126	128	Average
2484	59.78	64.63	-4.85	74	-14.22	126	128	Peak
4924	35.56	49.52	-13.96	54	-18.44	135	157	Average
4924	45.67	59.63	-13.96	74	-28.33	135	157	Peak

Remarks:

1. Emission Level = Read Level + Factor
Margin value = Emission level – Limit value
2. 2462 MHz: Fundamental frequency.
3. The emission levels of other frequencies were very low against the limit.

802.11n (HT20)

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	1 GHz ~ 25 GHz
Input Power	120 Vac, 60 Hz	Detector Function	Peak (PK) Average (AV)
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Tim-Chen

Antenna Polarity & Test Distance: Horizontal at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2390	48.3	53.3	-5	54	-5.7	160	346	Average
2390	59.52	64.52	-5	74	-14.48	160	346	Peak
2412	95.03	100.04	-5.01			160	346	Average
2412	103.08	108.09	-5.01			160	346	Peak
4824	36.76	51.14	-14.38	54	-17.24	159	214	Average
4824	46.57	60.95	-14.38	74	-27.43	159	214	Peak
Antenna Polarity & Test Distance: Vertical at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2390	45.49	50.49	-5	54	-8.51	100	312	Average
2390	55.45	60.45	-5	74	-18.55	100	312	Peak
2412	90.08	95.09	-5.01			100	312	Average
2412	97.39	102.4	-5.01			100	312	Peak
4824	35.72	50.1	-14.38	54	-18.28	103	91	Average
4824	43.43	57.81	-14.38	74	-30.57	103	91	Peak

Remarks:

- Emission Level = Read Level + Factor
Margin value = Emission level – Limit value
- 2412 MHz: Fundamental frequency.
- The emission levels of other frequencies were very low against the limit.

EUT Test Condition		Measurement Detail	
Channel	Channel 6	Frequency Range	1 GHz ~ 25 GHz
Input Power	120 Vac, 60 Hz	Detector Function	Peak (PK) Average (AV)
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Tim-Chen

Antenna Polarity & Test Distance: Horizontal at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2390	52.98	57.98	-5	54	-1.02	159	345	Average
2390	65.79	70.79	-5	74	-8.21	159	345	Peak
2437	104.9	109.88	-4.98			159	345	Average
2437	112.6	117.58	-4.98			159	345	Peak
2483.5	52.96	57.81	-4.85	54	-1.04	159	345	Average
2483.5	67.88	72.73	-4.85	74	-6.12	159	345	Peak
4874	47.08	61.16	-14.08	54	-6.92	167	357	Average
4874	57.27	71.35	-14.08	74	-16.73	167	357	Peak
Antenna Polarity & Test Distance: Vertical at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2390	49.97	54.97	-5	54	-4.03	100	303	Average
2390	61.27	66.27	-5	74	-12.73	100	303	Peak
2437	100.27	105.25	-4.98			100	303	Average
2437	107.89	112.87	-4.98			100	303	Peak
2483.5	52.82	57.67	-4.85	54	-1.18	100	303	Average
2483.5	66.18	71.03	-4.85	74	-7.82	100	303	Peak
4874	42.42	56.5	-14.08	54	-11.58	100	239	Average
4874	52.8	66.88	-14.08	74	-21.2	100	239	Peak

Remarks:

1. Emission Level = Read Level + Factor
Margin value = Emission level – Limit value
2. 2437 MHz: Fundamental frequency.
3. The emission levels of other frequencies were very low against the limit.

EUT Test Condition		Measurement Detail	
Channel	Channel 11	Frequency Range	1 GHz ~ 25 GHz
Input Power	120 Vac, 60 Hz	Detector Function	Peak (PK) Average (AV)
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Tim-Chen

Antenna Polarity & Test Distance: Horizontal at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2462	97.72	102.63	-4.91			180	343	Average
2462	104.82	109.73	-4.91			180	343	Peak
2483.5	52.67	57.52	-4.85	54	-1.33	180	343	Average
2483.5	64.19	69.04	-4.85	74	-9.81	180	343	Peak
4924	41.42	55.38	-13.96	54	-12.58	166	359	Average
4924	51.77	65.73	-13.96	74	-22.23	166	359	Peak
Antenna Polarity & Test Distance: Vertical at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2462	96.55	101.46	-4.91			100	294	Average
2462	103.5	108.41	-4.91			100	294	Peak
2483.5	53.24	58.09	-4.85	54	-0.76	100	294	Average
2483.5	67.19	72.04	-4.85	74	-6.81	100	294	Peak
4924	38.62	52.58	-13.96	54	-15.38	100	240	Average
4924	49.08	63.04	-13.96	74	-24.92	100	240	Peak

Remarks:

- Emission Level = Read Level + Factor
Margin value = Emission level – Limit value
- 2462 MHz: Fundamental frequency.
- The emission levels of other frequencies were very low against the limit.

802.11n (HT40)

EUT Test Condition		Measurement Detail	
Channel	Channel 3	Frequency Range	1 GHz ~ 25 GHz
Input Power	120 Vac, 60 Hz	Detector Function	Peak (PK) Average (AV)
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Thomas Wei

Antenna Polarity & Test Distance: Horizontal at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2385.6	53.06	58.04	-4.98	54	-0.94	247	331	Average
2385.6	63.66	68.64	-4.98	74	-10.34	247	331	Peak
2422	92.7	97.67	-4.97			247	331	Average
2422	99.25	104.22	-4.97			247	331	Peak
2485.68	40.76	45.61	-4.85	54	-13.24	247	331	Average
2485.68	50.14	54.99	-4.85	74	-23.86	247	331	Peak
4844	36.01	50.28	-14.27	54	-17.99	146	137	Average
4844	46.33	60.6	-14.27	74	-27.67	146	137	Peak
Antenna Polarity & Test Distance: Vertical at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2387	46.96	51.94	-4.98	54	-7.04	156	58	Average
2387	60.19	65.17	-4.98	74	-13.81	156	58	Peak
2422	87.73	92.7	-4.97			156	58	Average
2422	95.07	100.04	-4.97			156	58	Peak
2491.36	38.64	43.49	-4.85	54	-15.36	156	58	Average
2491.36	47.67	68.61	-20.94	74	-26.33	156	58	Peak
4844	35.31	49.58	-14.27	54	-18.69	125	203	Average
4844	44.94	59.21	-14.27	74	-29.06	125	203	Peak

Remarks:

- Emission Level = Read Level + Factor
Margin value = Emission level – Limit value
- 2422 MHz: Fundamental frequency.
- The emission levels of other frequencies were very low against the limit.

EUT Test Condition		Measurement Detail	
Channel	Channel 6	Frequency Range	1 GHz ~ 25 GHz
Input Power	120 Vac, 60 Hz	Detector Function	Peak (PK) Average (AV)
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Thomas Wei

Antenna Polarity & Test Distance: Horizontal at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2389.52	53.13	58.11	-4.98	54	-0.87	241	318	Average
2389.52	63.69	68.67	-4.98	74	-10.31	241	318	Peak
2437	97.49	102.47	-4.98			241	318	Average
2437	104.43	109.41	-4.98			241	318	Peak
2483.6	49.49	54.34	-4.85	54	-4.51	241	318	Average
2483.6	61.17	66.02	-4.85	74	-12.83	241	318	Peak
4874	41.26	55.34	-14.08	54	-12.74	159	336	Average
4874	49.62	63.7	-14.08	74	-24.38	159	336	Peak
Antenna Polarity & Test Distance: Vertical at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2389.94	47.72	52.72	-5	54	-6.28	248	291	Average
2389.94	59.49	64.49	-5	74	-14.51	248	291	Peak
2437	93.54	98.52	-4.98			248	291	Average
2437	100.56	105.54	-4.98			248	291	Peak
2485.08	50.72	55.57	-4.85	54	-3.28	248	291	Average
2485.08	67.27	72.12	-4.85	74	-6.73	248	291	Peak
4874	37.41	51.49	-14.08	54	-16.59	100	327	Average
4874	45.5	59.58	-14.08	74	-28.5	100	327	Peak

Remarks:

1. Emission Level = Read Level + Factor
Margin value = Emission level – Limit value
2. 2437 MHz: Fundamental frequency.
3. The emission levels of other frequencies were very low against the limit.

EUT Test Condition		Measurement Detail	
Channel	Channel 9	Frequency Range	1 GHz ~ 25 GHz
Input Power	120 Vac, 60 Hz	Detector Function	Peak (PK) Average (AV)
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Thomas Wei

Antenna Polarity & Test Distance: Horizontal at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2388.68	39.9	44.88	-4.98	54	-14.1	240	328	Average
2388.68	49.34	54.32	-4.98	74	-24.66	240	328	Peak
2452	93.73	98.64	-4.91			240	328	Average
2452	100.64	105.55	-4.91			240	328	Peak
2484.72	51.24	56.09	-4.85	54	-2.76	240	328	Average
2484.72	62.48	67.33	-4.85	74	-11.52	240	328	Peak
4904	36.1	50.08	-13.98	54	-17.9	155	132	Average
4904	46.3	60.28	-13.98	74	-27.7	155	132	Peak
Antenna Polarity & Test Distance: Vertical at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2375.94	41.03	45.92	-4.89	54	-12.97	251	289	Average
2375.94	48.05	52.94	-4.89	74	-25.95	251	289	Peak
2452	90.37	95.28	-4.91			251	289	Average
2452	98.41	103.32	-4.91			251	289	Peak
2487.36	49.47	54.32	-4.85	54	-4.53	251	289	Average
2487.36	60.45	65.3	-4.85	74	-13.55	251	289	Peak
4904	35.75	49.73	-13.98	54	-18.25	166	203	Average
4904	44.96	58.94	-13.98	74	-29.04	166	203	Peak

Remarks:

- Emission Level = Read Level + Factor
Margin value = Emission level – Limit value
- 2452 MHz: Fundamental frequency.
- The emission levels of other frequencies were very low against the limit.

9 kHz ~ 30 MHz Data:

The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

30 MHz ~ 1 GHz Worst-Case Data:

802.11g

Mode A


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	30 MHz ~ 1 GHz
Input Power	120 Vac, 60 Hz	Detector Function	Peak (PK) Quasi-peak (QP)
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Getaz Yang

Antenna Polarity & Test Distance: Horizontal at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
299.66	45	61.68	-16.68	46	-1	111	51	QP
399.57	44.74	58.78	-14.04	46	-1.26	126	295	QP
500.45	43.91	54.42	-10.51	46	-2.09	107	67	QP
600.36	45.41	53.7	-8.29	46	-0.59	117	339	QP
700.27	45.15	52.14	-6.99	46	-0.85	115	44	QP
800.18	45.01	50.28	-5.27	46	-0.99	114	170	QP
Antenna Polarity & Test Distance: Vertical at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
299.66	42.28	58.96	-16.68	46	-3.72	116	42	QP
399.57	44.43	58.47	-14.04	46	-1.57	108	226	QP
500.45	45.08	55.59	-10.51	46	-0.92	119	108	QP
600.36	45.2	53.49	-8.29	46	-0.8	137	136	QP
700.27	43.61	50.6	-6.99	46	-2.39	121	133	QP
800.18	43.89	49.16	-5.27	46	-2.11	113	113	QP


Remarks:

- Emission Level = Read Level + Factor
Margin value = Emission level – Limit value.
- The emission levels of other frequencies were very low against the limit.

Horizontal

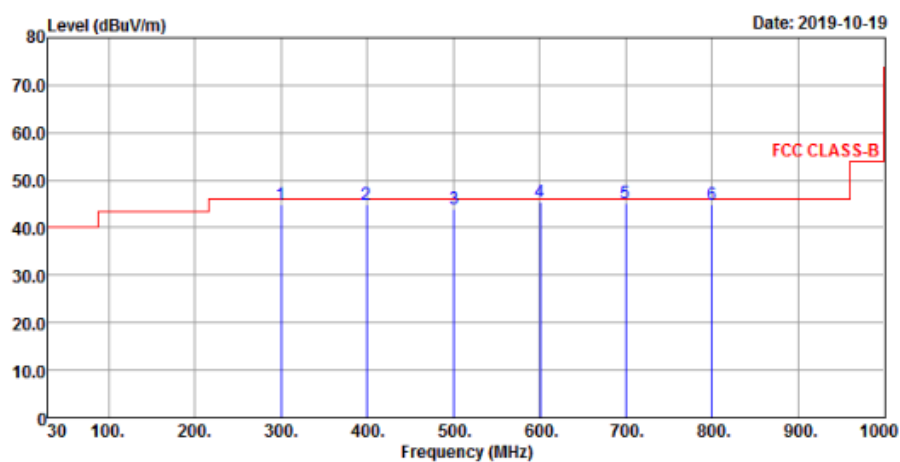

Vertical

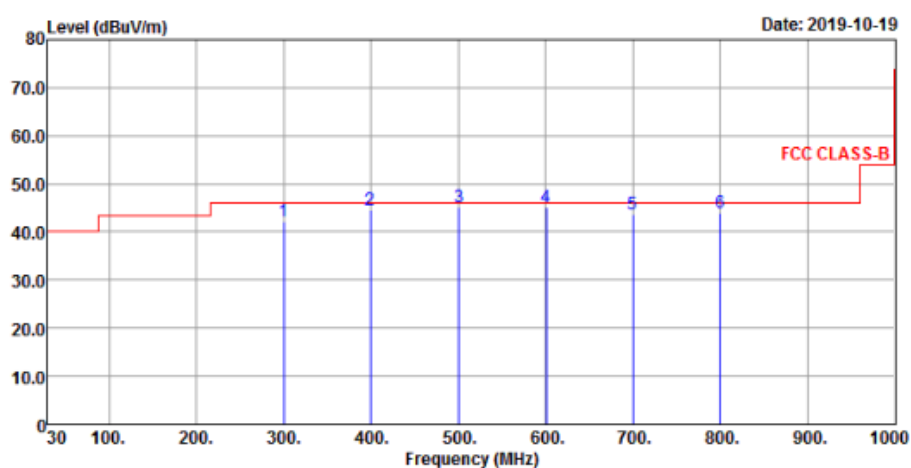

Mode B

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	30 MHz ~ 1 GHz
Input Power	120 Vac, 60 Hz	Detector Function	Peak (PK) Quasi-peak (QP)
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Getaz Yang

Antenna Polarity & Test Distance: Horizontal at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
482.99	45.05	56.73	-11.68	46	-0.95	101	75	QP
500.45	44.95	55.46	-10.51	46	-1.05	100	347	QP
600.36	44.84	53.13	-8.29	46	-1.16	101	244	QP
700.27	44.64	51.63	-6.99	46	-1.36	117	97	QP
800.18	45	50.27	-5.27	46	-1	115	104	QP
885.54	45.23	49.87	-4.64	46	-0.77	130	47	QP
Antenna Polarity & Test Distance: Vertical at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
399.57	44.86	58.9	-14.04	46	-1.14	126	269	QP
500.45	45.43	55.94	-10.51	46	-0.57	120	143	QP
600.36	44.93	53.22	-8.29	46	-1.07	101	152	QP
700.27	44.78	51.77	-6.99	46	-1.22	123	354	QP
800.18	45.31	50.58	-5.27	46	-0.69	138	299	QP
885.54	44.49	49.13	-4.64	46	-1.51	101	160	QP


Remarks:

3. Emission Level = Read Level + Factor


Margin value = Emission level – Limit value.

4. The emission levels of other frequencies were very low against the limit.

Horizontal

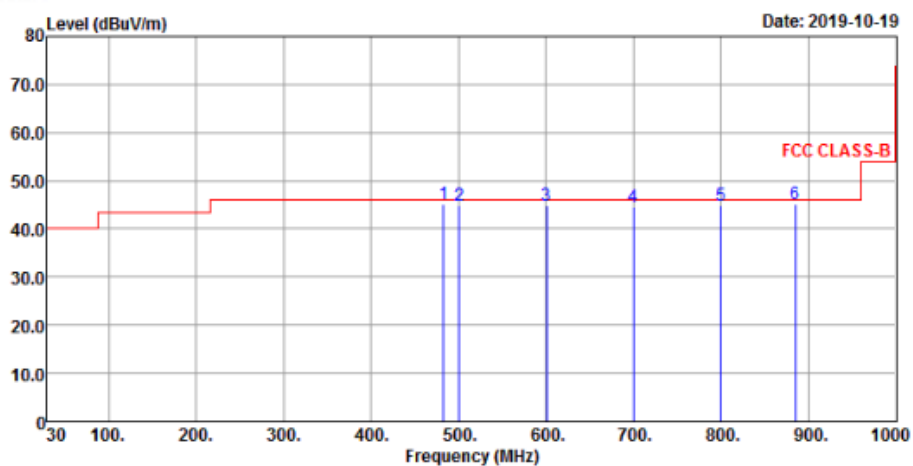

Vertical

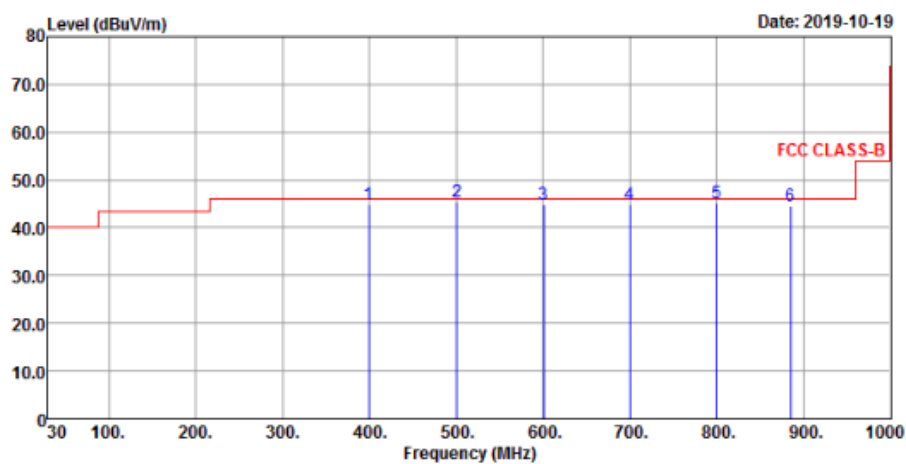

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

- Note: 1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver ROHDE & SCHWARZ	ESCI	100613	Dec. 10, 2018	Dec. 09, 2019
RF signal cable Woken	5D-FB	Cable-cond1-01	Sep. 05, 2019	Sep. 04, 2020
LISN ROHDE & SCHWARZ (EUT)	ENV216	101826	Feb. 21, 2019	Feb. 20, 2020
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100311	Aug. 22, 2019	Aug. 21, 2020
Software ADT	BV ADT_Cond_ V7.3.7.4	NA	NA	NA

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 1.
 3. The VCCI Site Registration No. is C-12040.

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/50 uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz – 30 MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

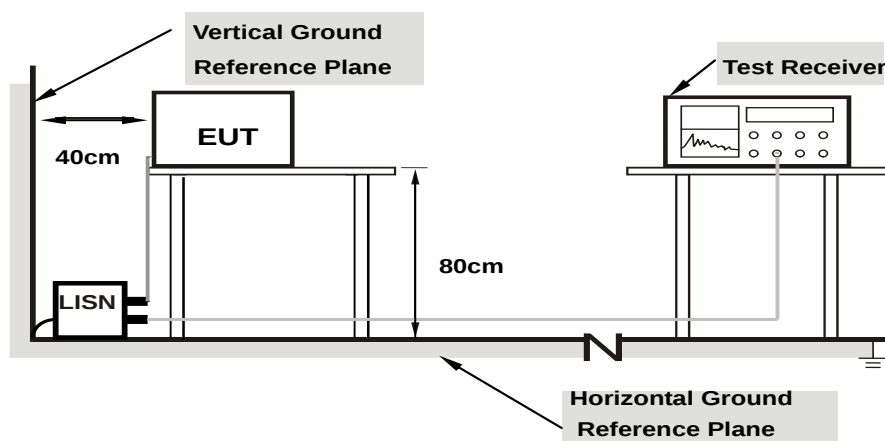

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

- Placed the EUT on a testing table.
- Use the software to control the EUT under transmission condition continuously at specific channel frequency.


4.2.7 Test Results

Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	110Vac, 60Hz	Environmental Conditions	25°C, 65%RH
Tested by	Jisyoung Wang	Test Date	2019/10/20
Test Mode	Mode A		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.67	43.28	35.61	52.95	45.28	66.00	56.00	-13.05	-10.72
2	0.18180	9.66	39.81	31.83	49.47	41.49	64.40	54.40	-14.93	-12.91
3	0.20201	9.66	34.59	27.96	44.25	37.62	63.53	53.53	-19.28	-15.91
4	0.27859	9.67	37.80	30.10	47.47	39.77	60.86	50.86	-13.39	-11.09
5	0.45476	9.69	33.46	27.26	43.15	36.95	56.79	46.79	-13.64	-9.84
6	9.23400	9.92	16.57	10.81	26.49	20.73	60.00	50.00	-33.51	-29.27

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

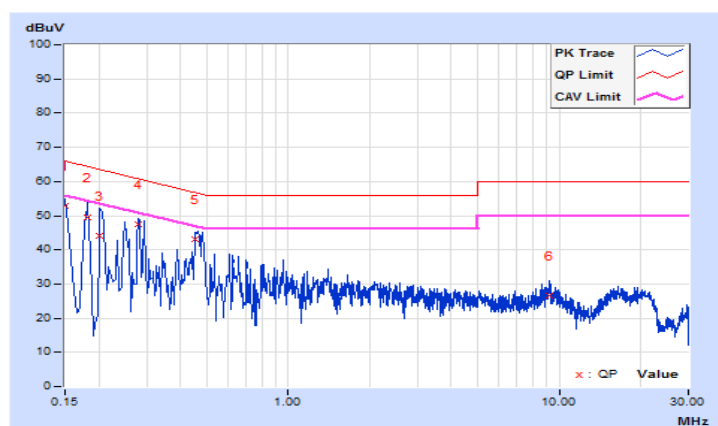


Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	110Vac, 60Hz	Environmental Conditions	25°C, 65%RH
Tested by	Jisyong Wang	Test Date	2019/10/20
Test Mode	Mode A		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.64	34.88	26.06	44.52	35.70	66.00	56.00	-21.48	-20.30
2	0.18200	9.64	35.28	27.98	44.92	37.62	64.39	54.39	-19.47	-16.77
3	0.21015	9.64	34.44	28.35	44.08	37.99	63.20	53.20	-19.12	-15.21
4	0.26200	9.65	29.32	21.23	38.97	30.88	61.37	51.37	-22.40	-20.49
5	0.33000	9.65	29.97	21.12	39.62	30.77	59.45	49.45	-19.83	-18.68
6	8.86600	9.89	21.05	16.86	30.94	26.75	60.00	50.00	-29.06	-23.25

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

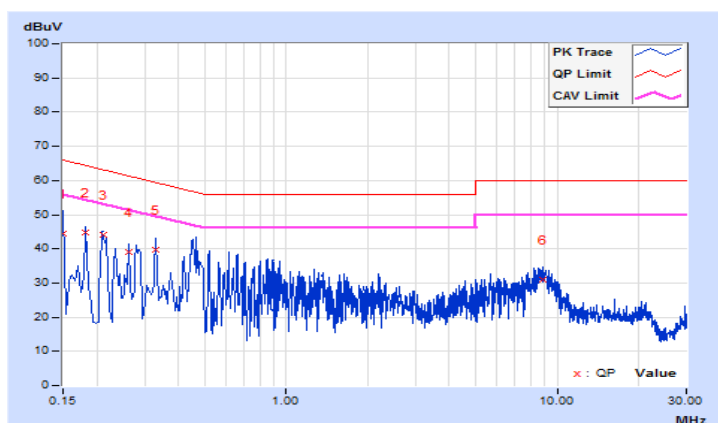


Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	110Vac, 60Hz	Environmental Conditions	25°C, 65%RH
Tested by	Jisyong Wang	Test Date	2019/10/20
Test Mode	Mode B		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16977	9.67	31.56	22.78	41.23	32.45	64.97	54.97	-23.74	-22.52
2	0.21406	9.66	35.15	27.97	44.81	37.63	63.05	53.05	-18.24	-15.42
3	0.24200	9.67	30.86	21.29	40.53	30.96	62.03	52.03	-21.50	-21.07
4	0.31000	9.68	30.53	22.27	40.21	31.95	59.97	49.97	-19.76	-18.02
5	0.45356	9.69	32.04	25.31	41.73	35.00	56.81	46.81	-15.08	-11.81
6	10.01000	9.93	22.86	19.36	32.79	29.29	60.00	50.00	-27.21	-20.71

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

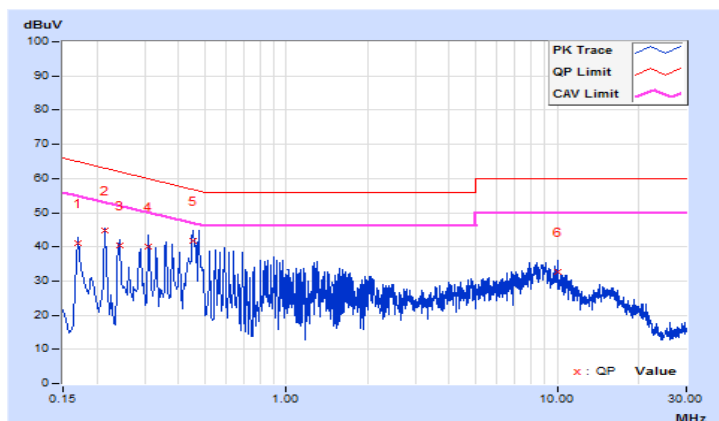


Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	110Vac, 60Hz	Environmental Conditions	25°C, 65%RH
Tested by	Jisyong Wang	Test Date	2019/10/20
Test Mode	Mode B		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17400	9.64	33.15	30.23	42.79	39.87	64.77	54.77	-21.98	-14.90
2	0.21805	9.64	36.97	29.43	46.61	39.07	62.89	52.89	-16.28	-13.82
3	0.28200	9.65	34.82	29.74	44.47	39.39	60.76	50.76	-16.29	-11.37
4	0.45400	9.66	35.35	27.81	45.01	37.47	56.80	46.80	-11.79	-9.33
5	0.59400	9.67	26.17	19.40	35.84	29.07	56.00	46.00	-20.16	-16.93
6	15.63000	10.00	16.36	9.79	26.36	19.79	60.00	50.00	-33.64	-30.21

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

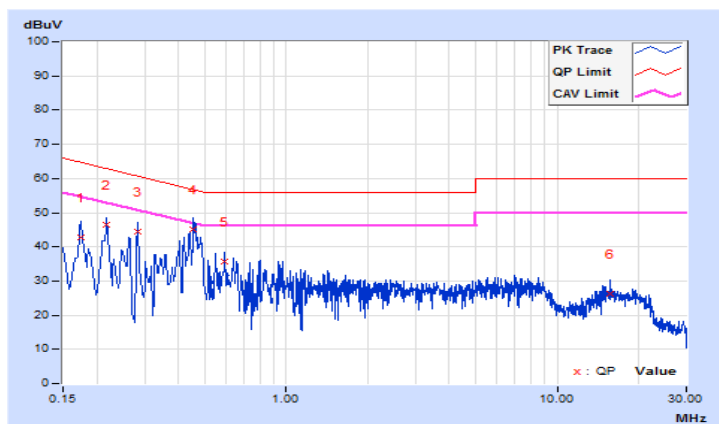


4.3 6 dB Bandwidth Measurement

4.3.1 Limits of 6 dB Bandwidth Measurement

The minimum of 6 dB Bandwidth Measurement is 0.5 MHz.

4.3.2 Test Setup



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

- Set resolution bandwidth (RBW) = 100 kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Results

802.11b

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
1	2412	10.06	0.5	Pass
6	2437	10.06	0.5	Pass
11	2462	10.09	0.5	Pass

802.11g

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
1	2412	16.54	0.5	Pass
6	2437	16.62	0.5	Pass
11	2462	16.61	0.5	Pass

802.11n (HT20)


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	17.64	17.63	0.5	Pass
6	2437	17.70	17.69	0.5	Pass
11	2462	17.68	17.67	0.5	Pass

802.11n (HT40)


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
3	2422	36.50	35.86	0.5	Pass
6	2437	36.49	35.92	0.5	Pass
9	2452	36.49	35.87	0.5	Pass

Spectrum Plot of Worst Value


802.11b

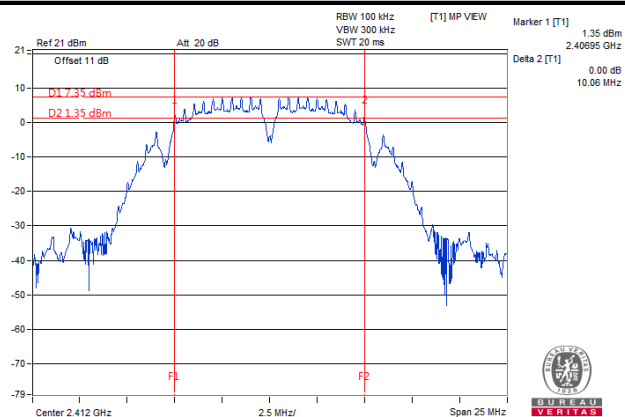


802.11g

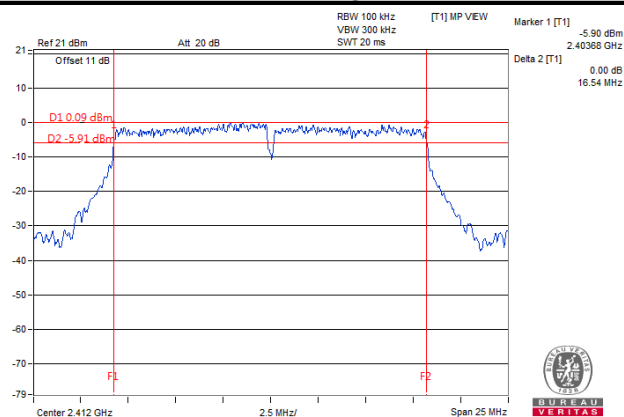

802.11n (HT20)

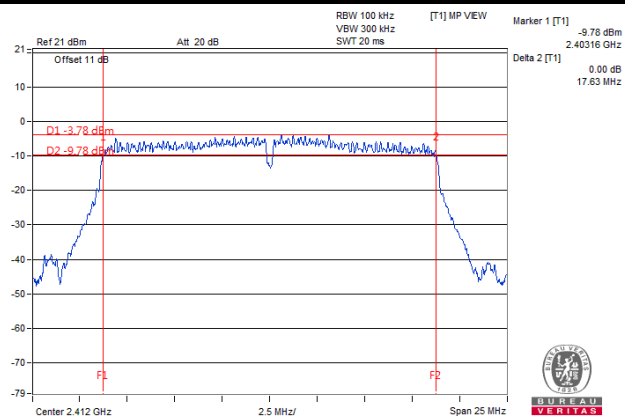


802.11n (HT40)

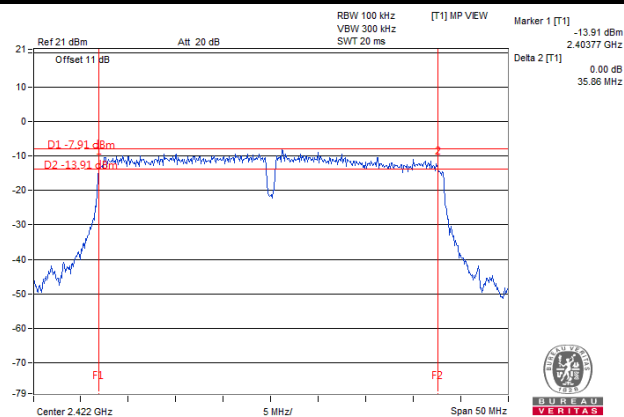

4.4 Occupied Bandwidth Measurement

4.4.1 Test Setup



4.4.2 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.3 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1 % to 5 % of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to PEAK. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

4.4.4 Deviation from Test Standard

No deviation.

4.4.5 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.4.6 Test Results

802.11b

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	Pass / Fail
1	2412	12.24	Pass
6	2437	12.24	Pass
11	2462	12.24	Pass

802.11g

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	Pass / Fail
1	2412	16.86	Pass
6	2437	17.64	Pass
11	2462	17.04	Pass

802.11n (HT20)


Channel	Frequency (MHz)	Occupied Bandwidth (MHz)		Pass / Fail
		Chain 0	Chain 1	
1	2412	17.70	17.64	Pass
6	2437	30.84	20.04	Pass
11	2462	17.64	17.64	Pass

802.11n (HT40)


Channel	Frequency (MHz)	Occupied Bandwidth (MHz)		Pass / Fail
		Chain 0	Chain 1	
3	2422	36.36	36.24	Pass
6	2437	36.72	36.48	Pass
9	2452	36.36	36.24	Pass

Spectrum Plot of Worst Value


802.11b

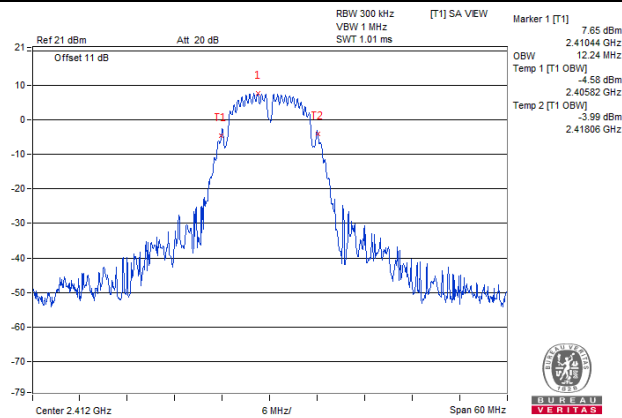


802.11g

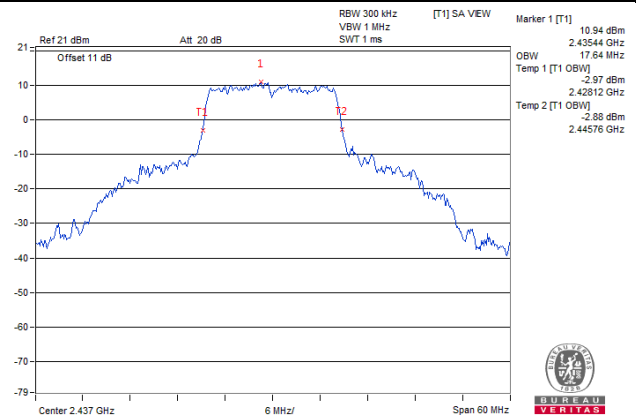

802.11n (HT20)

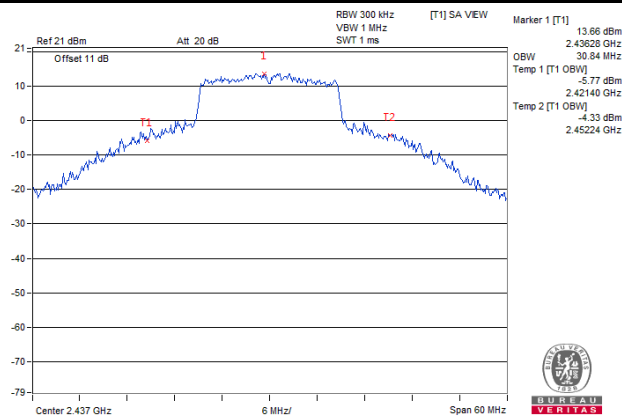

802.11n (HT40)

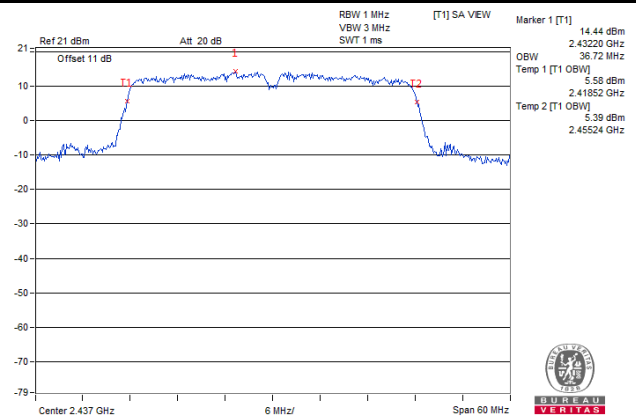

4.5 Conducted Output Power Measurement

4.5.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30 dBm)

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20 MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedures

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.5.7 Test Results

802.11b

Channel	Frequency (MHz)	Peak Power (mW)	Peak Power (dBm)	Limit (dBm)	Pass / Fail
1	2412	101.391	20.06	30	Pass
6	2437	175.792	22.45	30	Pass
11	2462	110.408	20.43	30	Pass

802.11g

Channel	Frequency (MHz)	Peak Power (mW)	Peak Power (dBm)	Limit (dBm)	Pass / Fail
1	2412	197.697	22.96	30	Pass
6	2437	326.588	25.14	30	Pass
11	2462	226.986	23.56	30	Pass

802.11n (HT20)

Channel	Frequency (MHz)	Peak Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	21.84	20.67	269.438	24.30	30	Pass
6	2437	25.19	24.10	587.41	27.69	30	Pass
11	2462	22.56	21.89	334.827	25.25	30	Pass

802.11n (HT40)


Channel	Frequency (MHz)	Peak Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
3	2422	21.03	19.01	206.381	23.15	30	Pass
6	2437	25.29	24.22	602.306	27.80	30	Pass
9	2452	19.10	20.21	186.237	22.70	30	Pass

4.6 Power Spectral Density Measurement

4.6.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8 dBm in any 3 kHz band during any time interval of continuous transmission.

4.6.2 Test Setup



4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set the VBW $\geq 3 \times \text{RBW}$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.

4.6.5 Deviation from Test Standard

No deviation.

4.6.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.6.7 Test Results

802.11b

Channel	Frequency (MHz)	PSD (dBm/3 kHz)	Limit (dBm/3 kHz)	Pass / Fail
1	2412	-5.61	8	Pass
6	2437	-14.33	8	Pass
11	2462	-5.09	8	Pass

802.11g

Channel	Frequency (MHz)	PSD (dBm/3 kHz)	Limit (dBm/3 kHz)	Pass / Fail
1	2412	-14.69	8	Pass
6	2437	-8.86	8	Pass
11	2462	-12.94	8	Pass

802.11n (HT20)

TX Chain	Channel	Freq. (MHz)	PSD (dBm/3 kHz)	10 log (N=2) dB	Total PSD (dBm/3 kHz)	Limit (dBm/3 kHz)	Pass / Fail
0	1	2412	-17.73	3.01	-14.72	8	Pass
	6	2437	-4.53	3.01	-1.52	8	Pass
	11	2462	-13.23	3.01	-10.22	8	Pass
1	1	2412	-18.25	3.01	-15.24	8	Pass
	6	2437	-5.42	3.01	-2.41	8	Pass
	11	2462	-12.41	3.01	-9.40	8	Pass

NOTE:

1. Directional gain = $1.78 \text{ dBi} + 10\log(2) = 4.79 \text{ dBi} < 6 \text{ dBi}$, so the limit no need to be reduced.
2. Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density.

802.11n (HT40)


TX Chain	Channel	Freq. (MHz)	PSD (dBm/3 kHz)	10 log (N=2) dB	Total PSD (dBm/3 kHz)	Limit (dBm/3 kHz)	Pass / Fail
0	3	2422	-19.28	3.01	-16.27	8	Pass
	6	2437	-8.91	3.01	-5.90	8	Pass
	9	2452	-20.54	3.01	-17.53	8	Pass
1	3	2422	-21.52	3.01	-18.51	8	Pass
	6	2437	-10.72	3.01	-7.71	8	Pass
	9	2452	-20.82	3.01	-17.81	8	Pass

NOTE:


1. Directional gain = $1.78 \text{ dBi} + 10\log(2) = 4.79 \text{ dBi} < 6 \text{ dBi}$, so the limit no need to be reduced.
2. Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density.

Spectrum Plot of Worst Value


802.11b

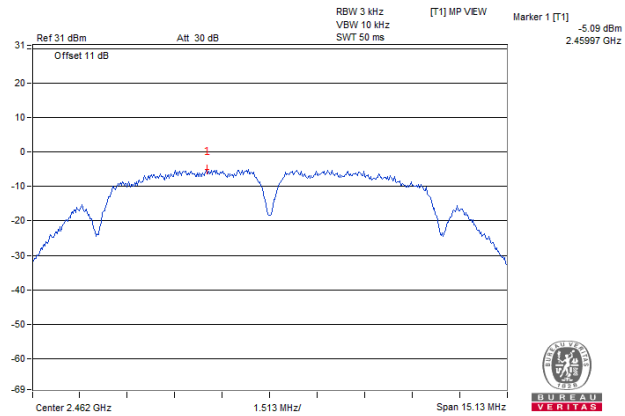


802.11g

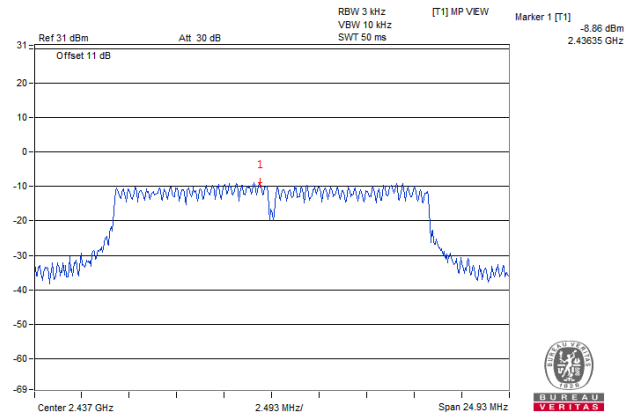

802.11n (HT20)

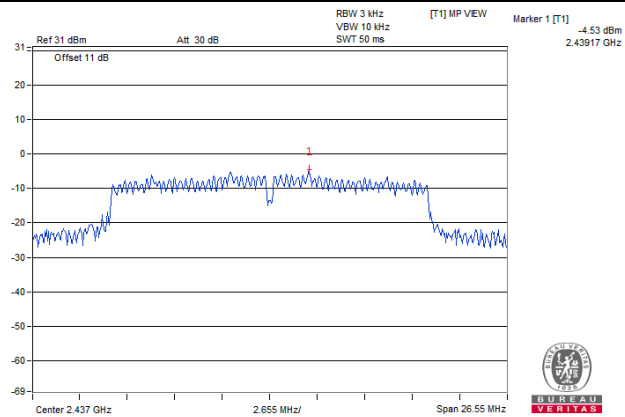

802.11n (HT40)

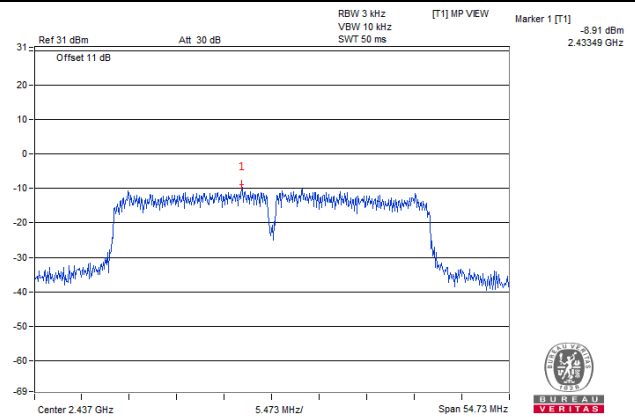


4.7 Conducted Out of Band Emission Measurement

4.7.1 Limits of Conducted Out of Band Emission Measurement

Below -20 dB of the highest emission level of operating band (in 100 kHz Resolution Bandwidth).

4.7.2 Test Setup



4.7.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.7.4 Test Procedure

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

4.7.5 Deviation from Test Standard

No deviation.


4.7.6 EUT Operating Condition


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.7.7 Test Results

The spectrum plots are attached on the following images. D1 line indicates the highest level, and D2 line indicates the 20 dB offset below D1. It shows compliance with the requirement.



802.11b

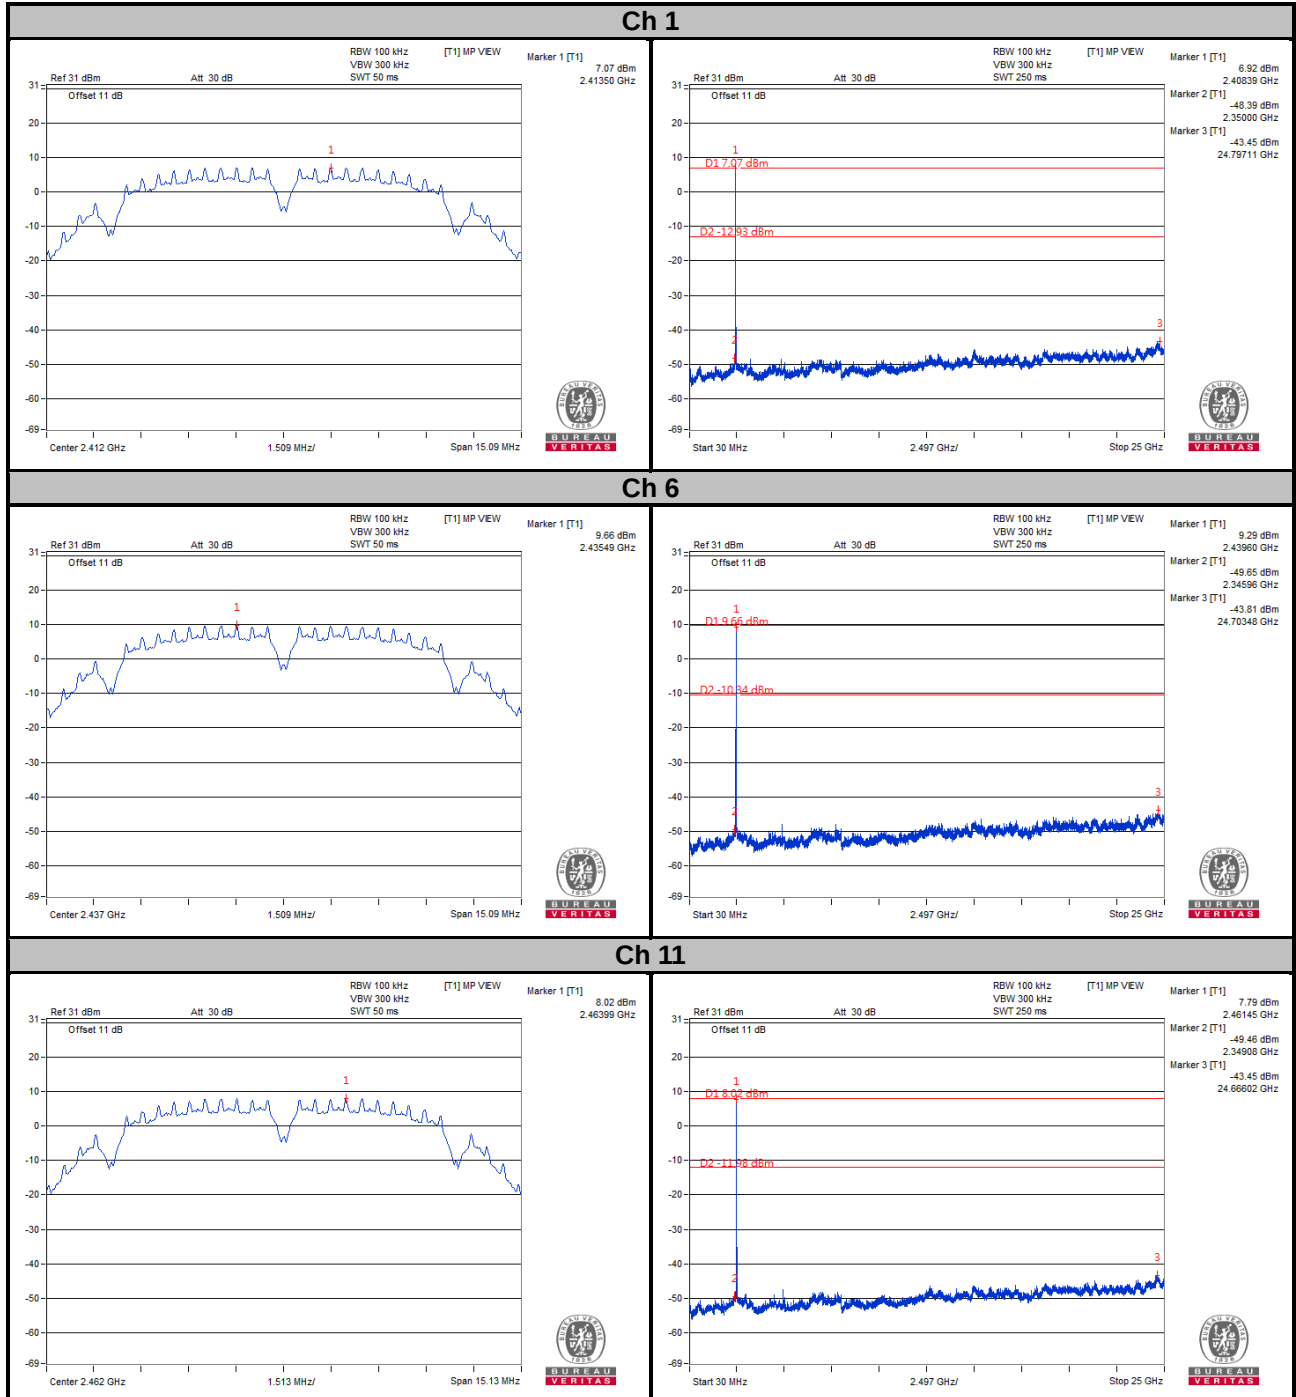


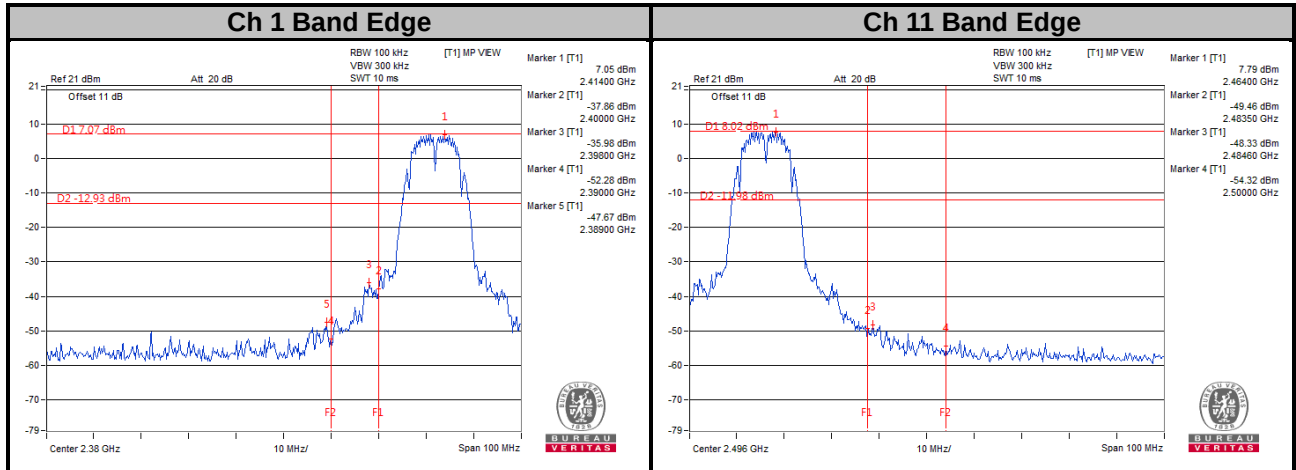


802.11g



Ch 1

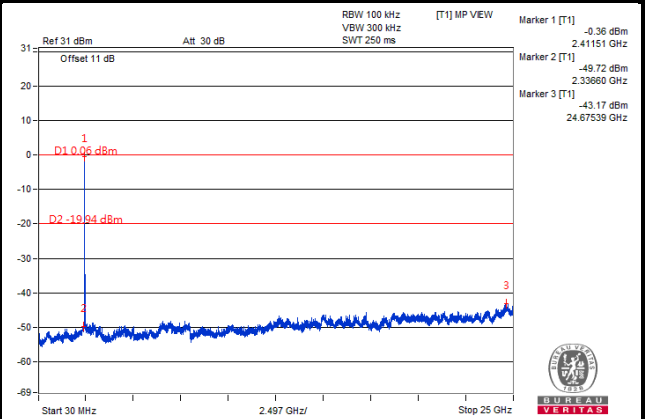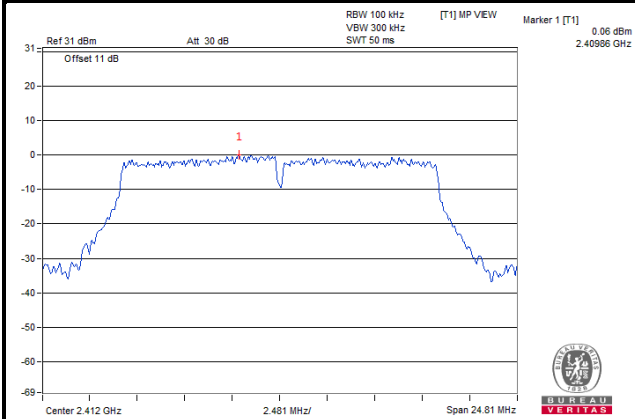


Ch 6

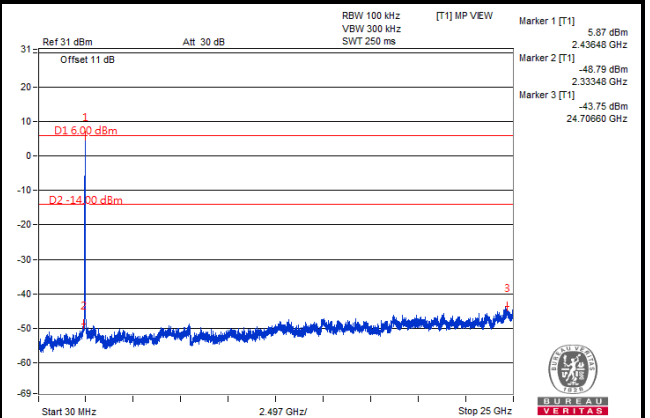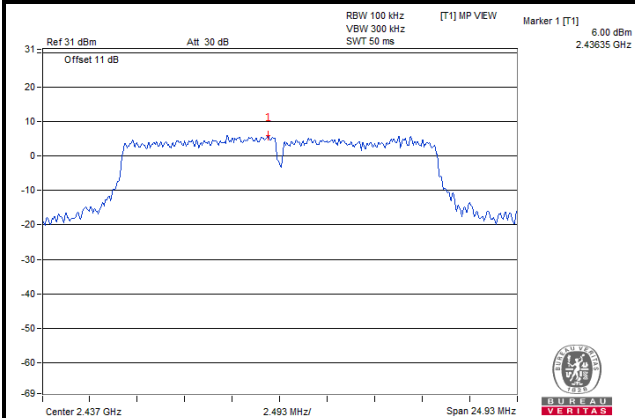


Ch 11

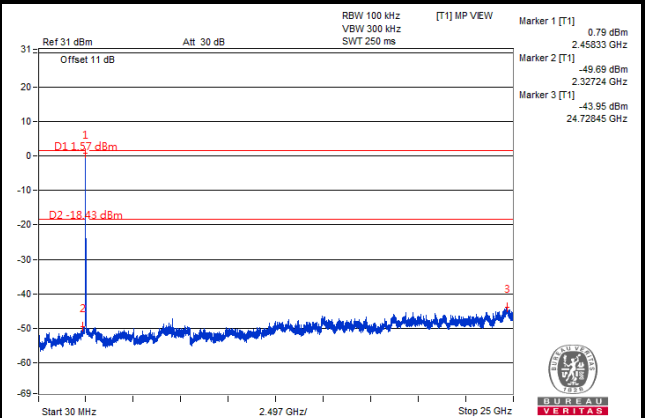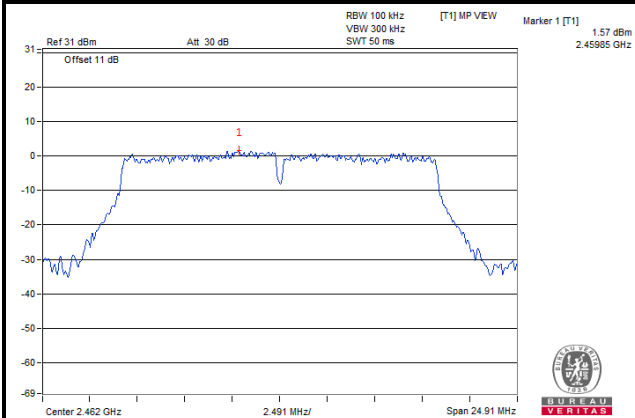


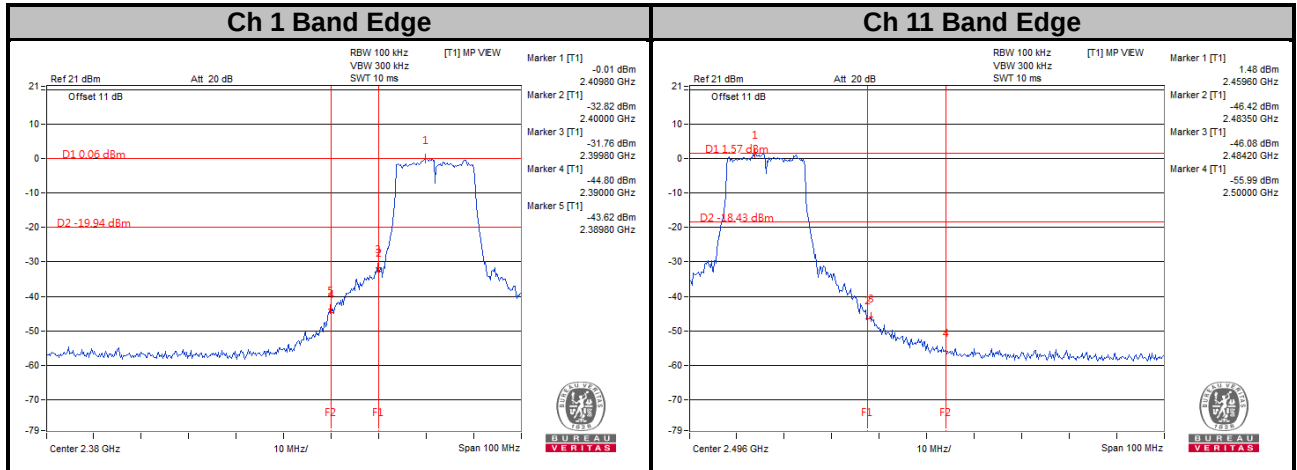


802.11n (HT20)


CHAIN 0

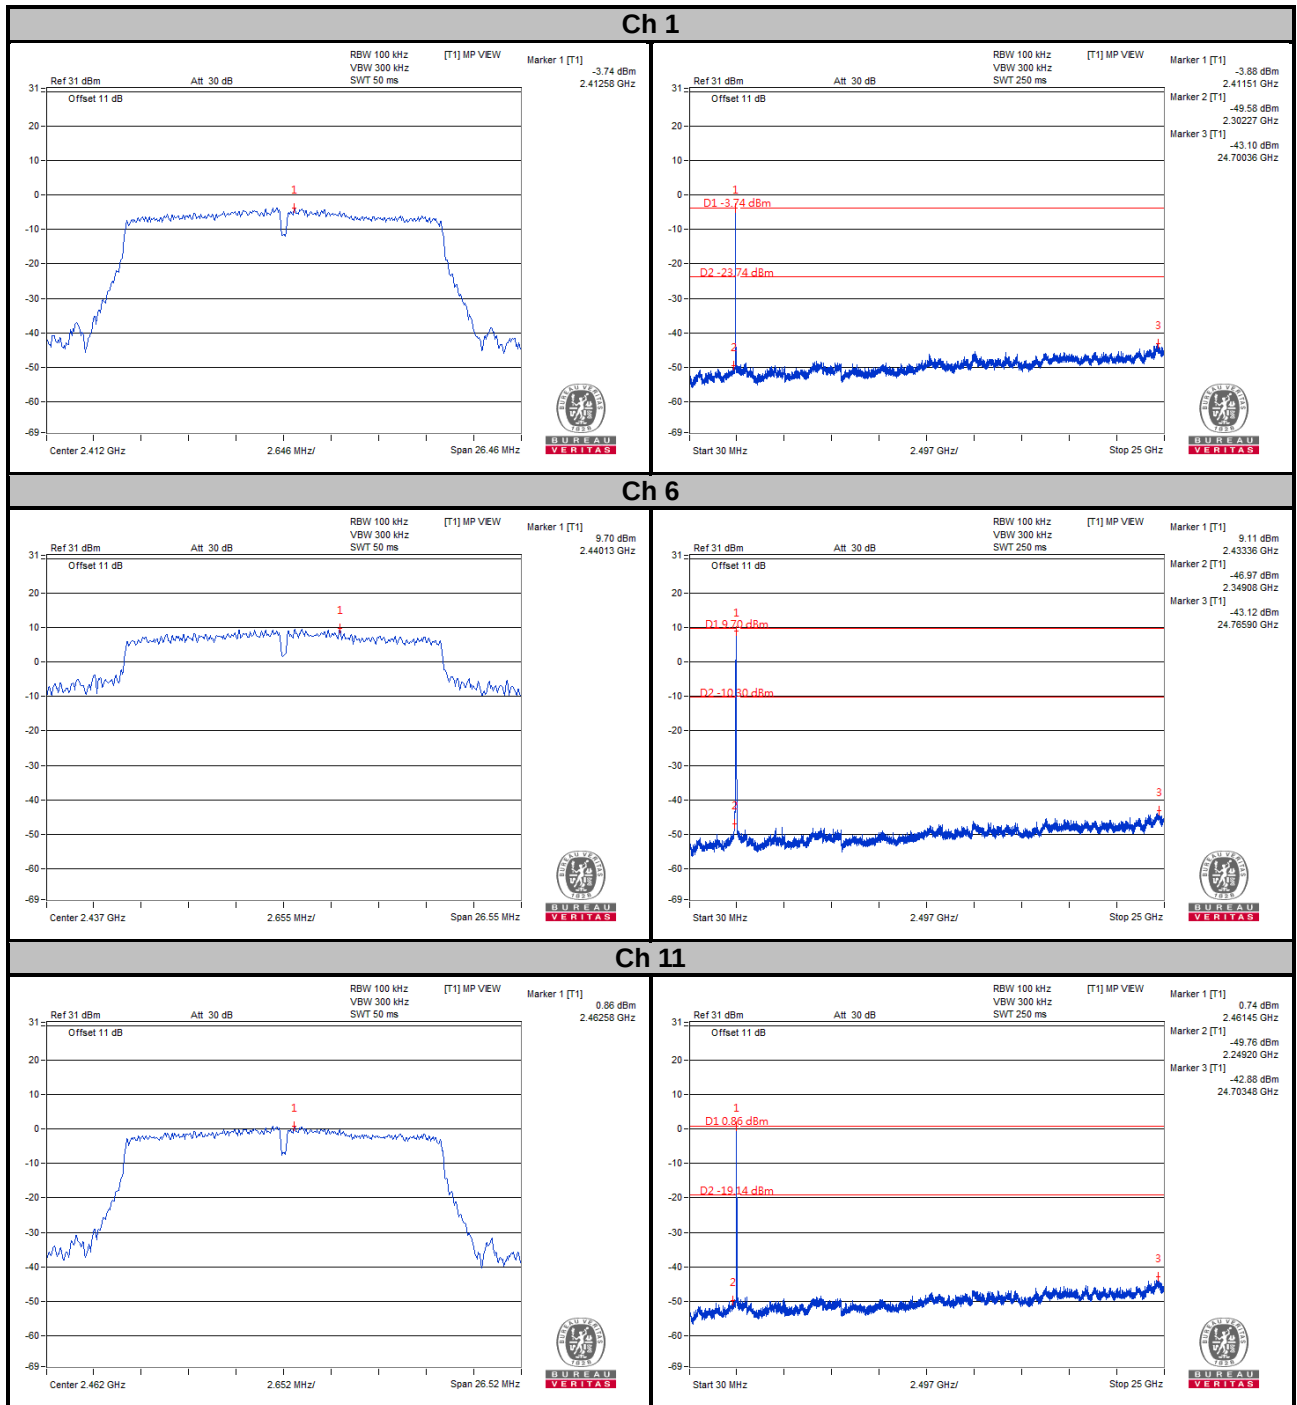

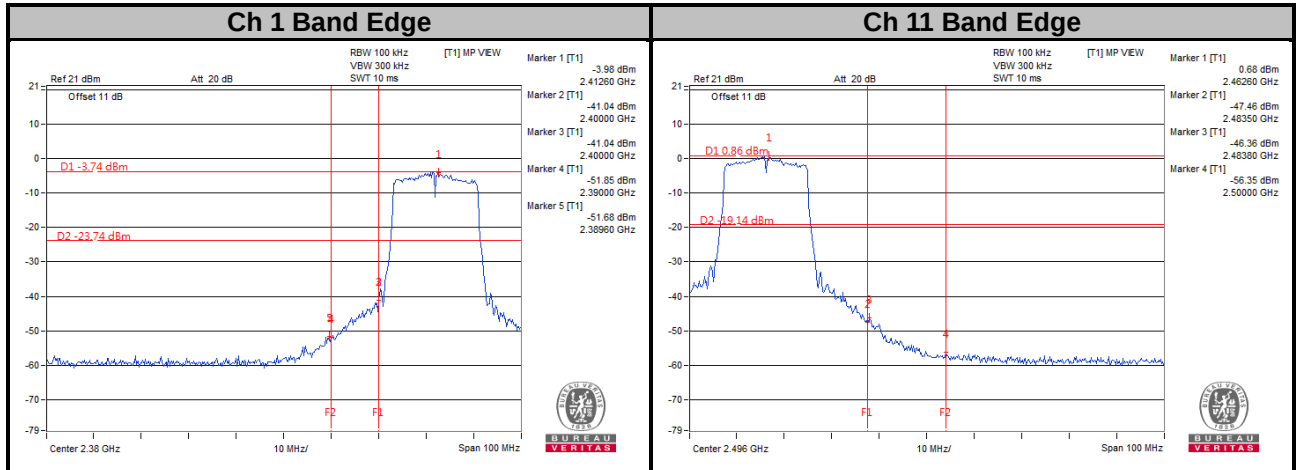



CHAIN 1

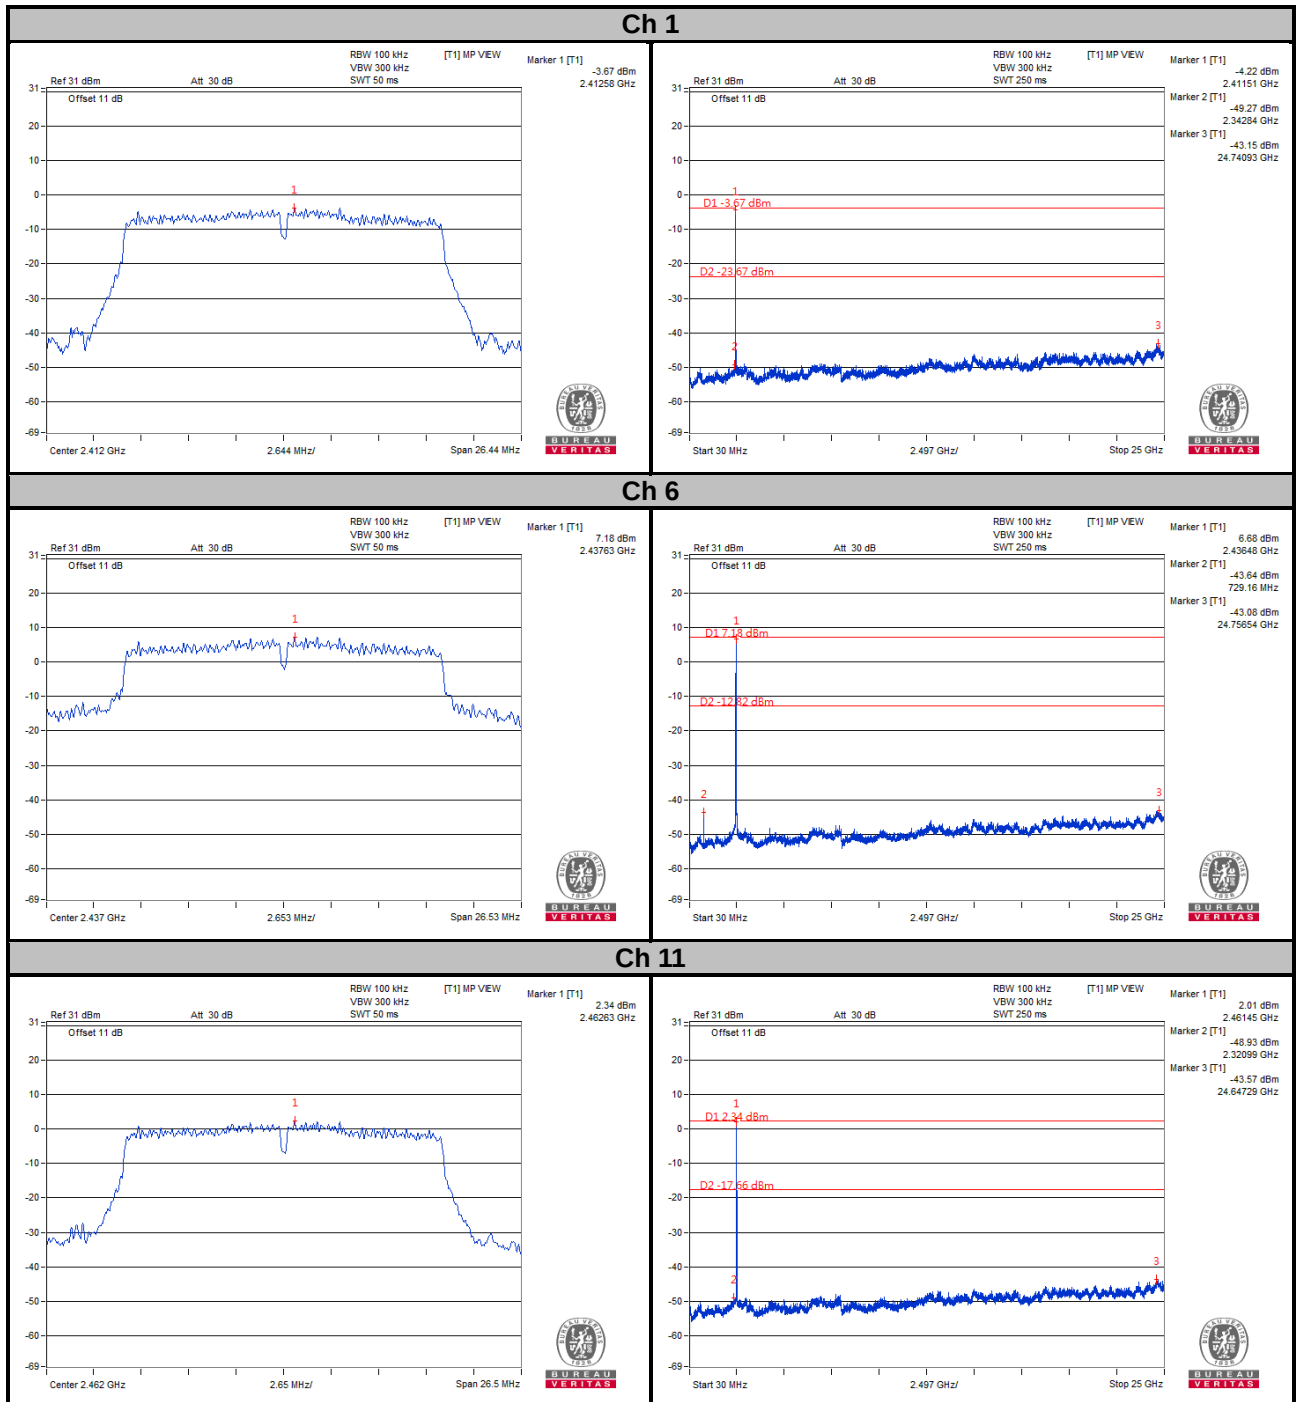

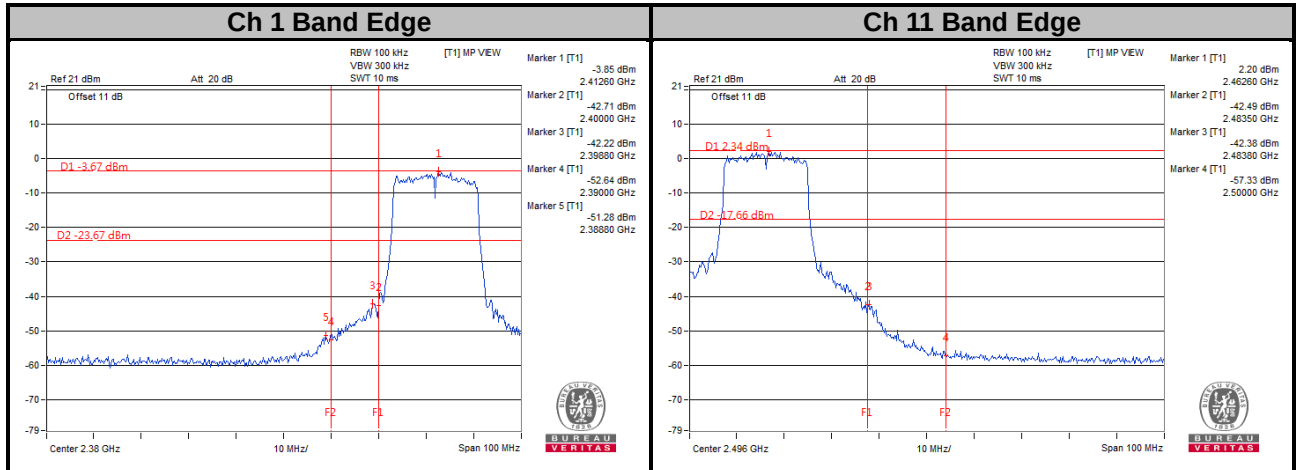



802.11n (HT40) CHAIN 0

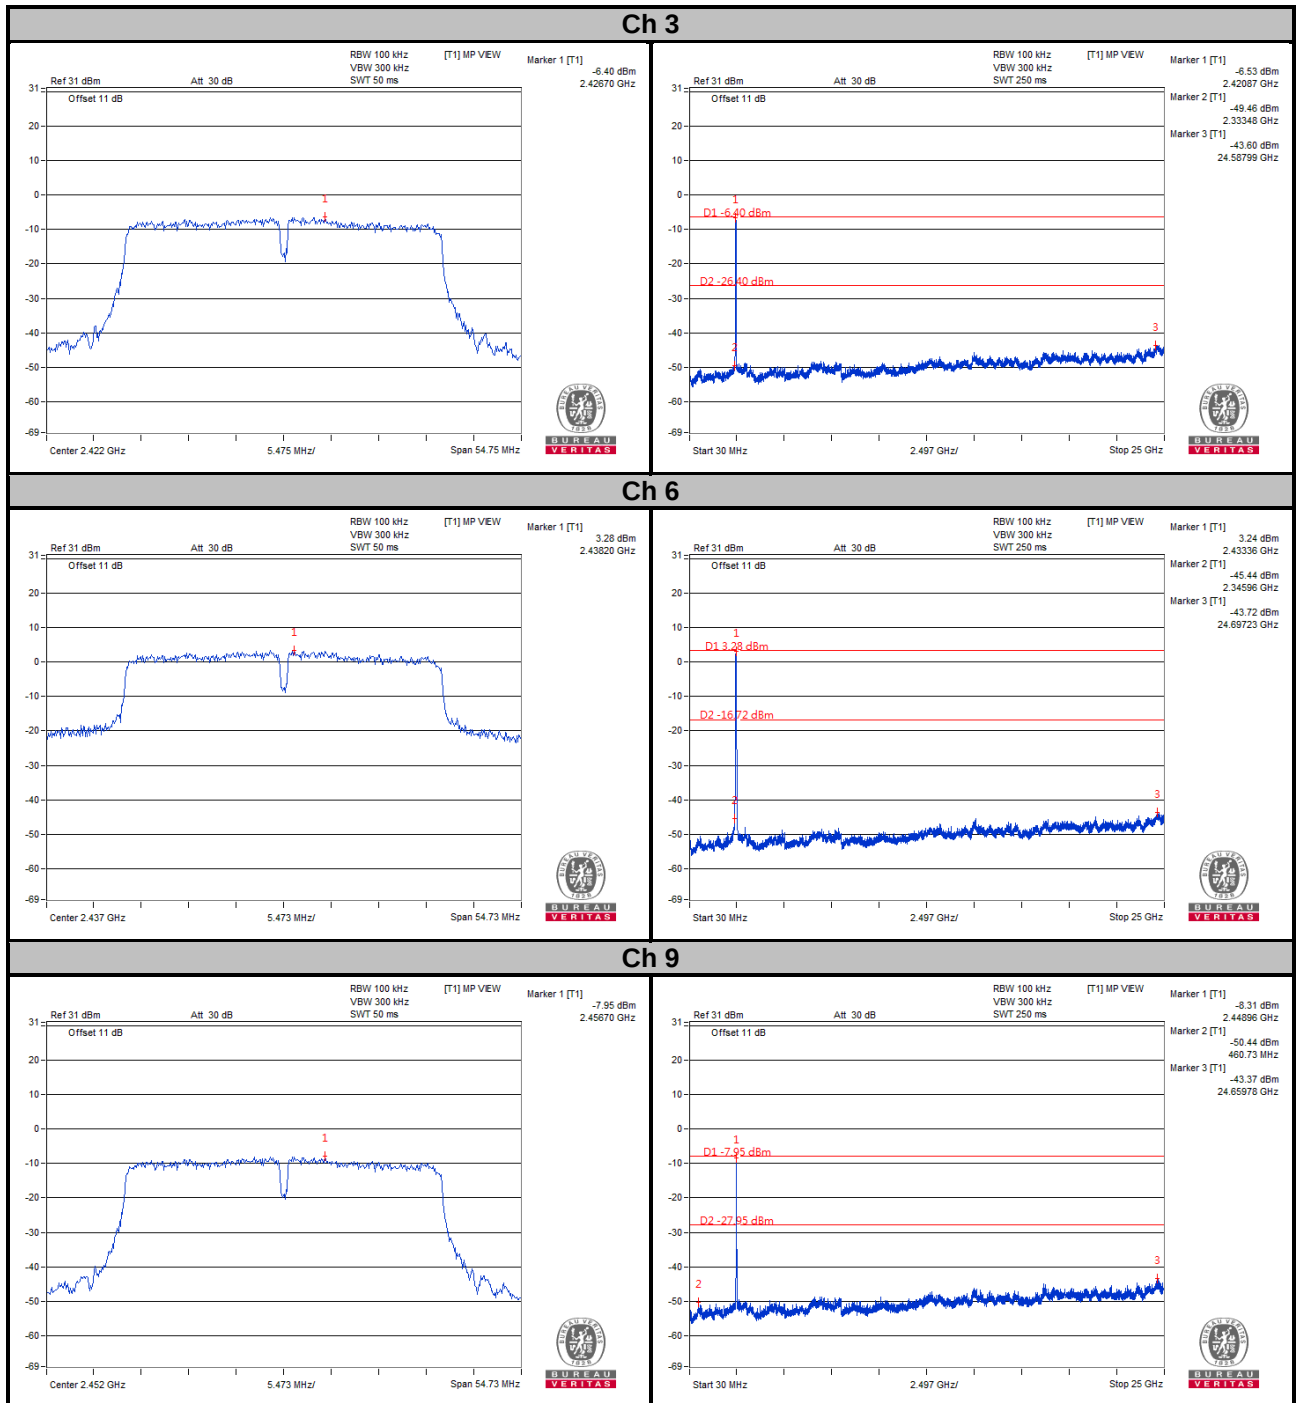


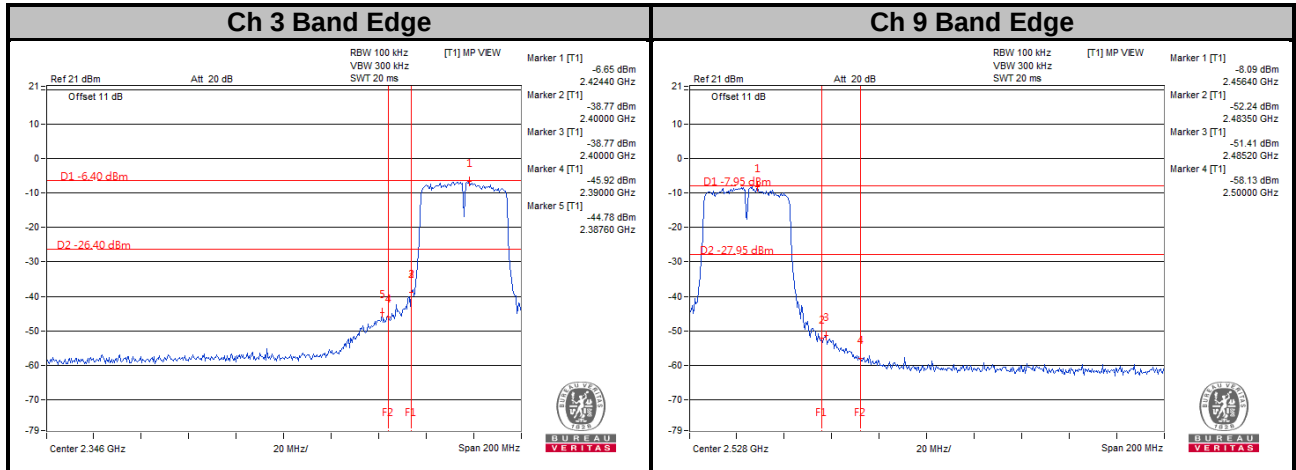


CHAIN 1



Ch 3

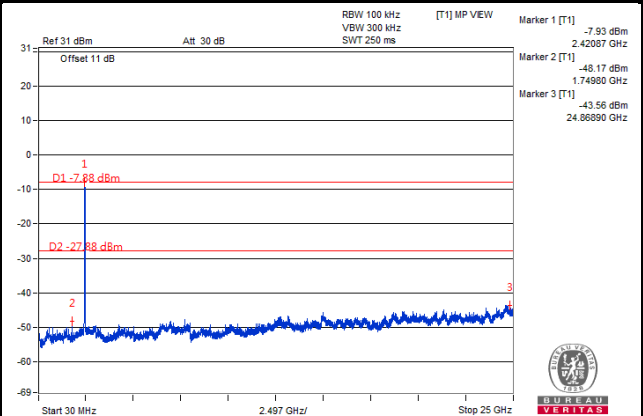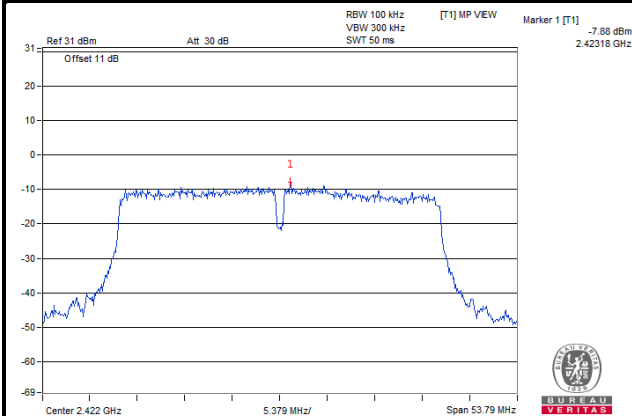


Ch 6

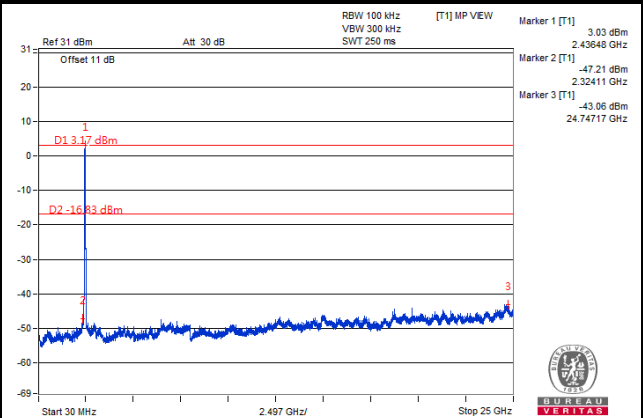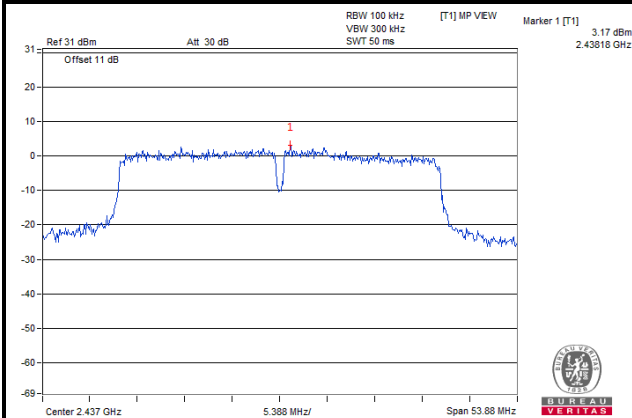

Ch 9

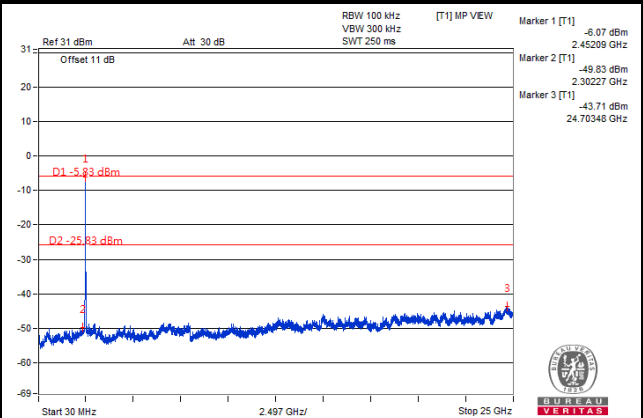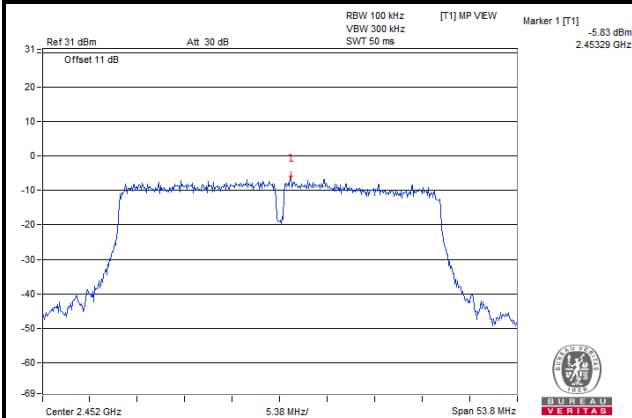

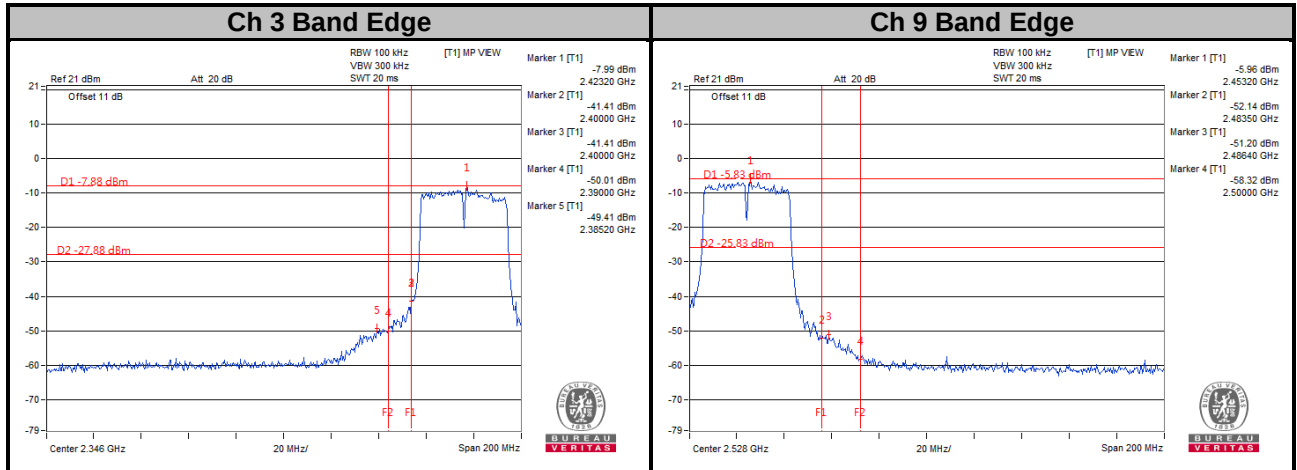

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---