

FCC PART 27
FCC PART 22H, PART 24E
MEASUREMENT AND TEST REPORT

For

ROKIT Corp Limited

ROK House, Kingswood Business Park, Holyhead Road, Albrighton, Wolverhampton, United Kingdom
WV7 3AU

FCC ID: 2AQNZ-IOLIGHT

Report Type: Original Report	Product Type: 3G Smart Phone
Test Engineer: Mark Yu <i>Mark Yu</i>	
Report Number: RSHA180620003-00C	
Report Date: 2018-08-16	
Reviewed By:	Oscar Ye <i>Oscar Ye</i> RF Leader
Prepared By: Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road,Kunshan,Jiangsu province,China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
OBJECTIVE	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY	3
MEASUREMENT UNCERTAINTY.....	4
TEST FACILITY	4
SYSTEM TEST CONFIGURATION.....	5
JUSTIFICATION	5
CHANNEL LIST	5
EQUIPMENT MODIFICATIONS	5
SUPPORT EQUIPMENT LIST AND DETAILS	5
EXTERNAL CABLE LIST AND DETAILS	6
BLOCK DIAGRAM OF TEST SETUP	6
SUMMARY OF TEST RESULTS.....	8
TEST EQUIPMENT LIST	9
FCC §1.1307(B) & §2.1093 - RF EXPOSURE INFORMATION.....	11
APPLICABLE STANDARD	11
TEST RESULT	11
FCC §2.1047 - MODULATION CHARACTERISTIC	12
FCC §2.1046; § 22.913 (A); § 24.232 (C); §27.50 (D) - RF OUTPUT POWER.....	13
APPLICABLE STANDARDS.....	13
TEST PROCEDURE	13
TEST DATA	14
FCC §2.1049, §22.917, §22.905 & §24.238; §27.53- OCCUPIED BANDWIDTH.....	19
APPLICABLE STANDARDS.....	19
TEST PROCEDURE	19
TEST DATA	19
FCC § 2.1051; § 22.917 (A); § 24.238 (A); §27.53 (H) (M) - SPURIOUS EMISSIONS AT ANTENNA TERMINALS.....	29
APPLICABLE STANDARDS.....	29
TEST PROCEDURE	29
TEST DATA	29
FCC § 2.1053; § 22.917 (A); § 24.238 (A); §27.53 (H) (M) - SPURIOUS RADIATED EMISSIONS.....	37
APPLICABLE STANDARDS.....	37
TEST PROCEDURE	37
TEST DATA	38
FCC § 22.917 (A); § 24.238 (A); §27.53 (H) (M) - BAND EDGES	40
APPLICABLE STANDARDS.....	40
TEST PROCEDURE	40
TEST DATA	41
FCC § 2.1055; § 22.355; § 24.235; §27.54- FREQUENCY STABILITY	58
APPLICABLE STANDARDS.....	58
TEST PROCEDURE	58
TEST DATA	59

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant:	ROKIT Corp Limited
Tested Model:	IO Light
Product Type:	3G Smart Phone
Dimension:	143mm (L)*73.5mm (W)*10.15mm(H)
Power Supply:	DC 3.8V from battery and DC 5.0V charging from adapter

Adapter information:

Model: A31A-050055U-US1

Input: AC 100-240V, 50/60Hz, 0.2A

Output: DC 5.0V, 550mA

**All measurement and test data in this report was gathered from production sample serial number: 20180620003.
(Assigned by the BACL. The EUT supplied by the applicant was received on 2018-06-20)*

Objective

This type approval report is prepared on behalf of ROKIT Corp Limited in accordance with Part 2, Part 22-Subpart H and Part 24-Subpart E and Part 27 of the Federal Communication Commission's rules.

The objective is to determine the compliance of EUT with FCC rules for output power, modulation characteristic, occupied bandwidth, and spurious emission at antenna terminal, spurious radiated emission, frequency stability, and band edge.

Related Submittal(s)/Grant(s)

FCC Part 15.247 DSS and DTS submissions with FCC ID: 2AQNZ-IOLIGHT.

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-Part J as well as the following parts:

Part 22 Subpart H - Public Mobile Services

Part 24 Subpart E - Personal Communication Services

Part 27 – Miscellaneous wireless communications services

Applicable Standards: TIA/EIA 603-D.

All radiated and conducted emissions measurements were performed at Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Item		Uncertainty
AC Power Lines Conducted Emissions		3.19dB
RF conducted test with spectrum		0.9dB
RF Output Power with Power meter		0.5dB
Radiated emission	30MHz~1GHz	5.91dB
	1GHz~6GHz	4.68dB
	6GHz~18GHz	4.92dB
	18GHz~40GHz	5.21dB
Occupied Bandwidth		0.5kHz
Temperature		1.0℃
Humidity		6%

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) Lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4323.01) and the FCC designation No. CN1185 under the FCC KDB 974614 D01. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

SYSTEM TEST CONFIGURATION

Justification

The EUT was configured for testing according to TIA/EIA-603-D.

The final qualification test was performed with the EUT operating at normal mode.

Channel List

Mode	Channel		Frequency (MHz)
GSM/GPRS 850	Low	128	824.2
	Middle	190	836.6
	High	251	848.8
GSM/GPRS 1900	Low	512	1850.2
	Middle	661	1880.0
	High	810	1909.8
WCDMA Band II	Low	9262	1852.4
	Middle	9400	1880.0
	High	9538	1907.6
WCDMA Band IV	Low	1312	1712.4
	Middle	1413	1732.6
	High	1513	1752.6
WCDMA Band V	Low	4132	826.4
	Middle	4183	836.6
	High	4233	846.6

Equipment Modifications

No modifications were made to the EUT.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Rohde & Schwarz	UNIVERSAL RADIO COMMUNICATION TESTER	CMU200	110605
Audio-technica	Earphone	ATH-FC707	/
TE CONNECTIVITY	Antenna	/	/

External Cable List and Details


Cable Description	Length (m)	From Port	To
USB Cable	0.8	EUT	Adapter

Block Diagram of Test Setup

For Radiated Emissions(Below 1GHz)

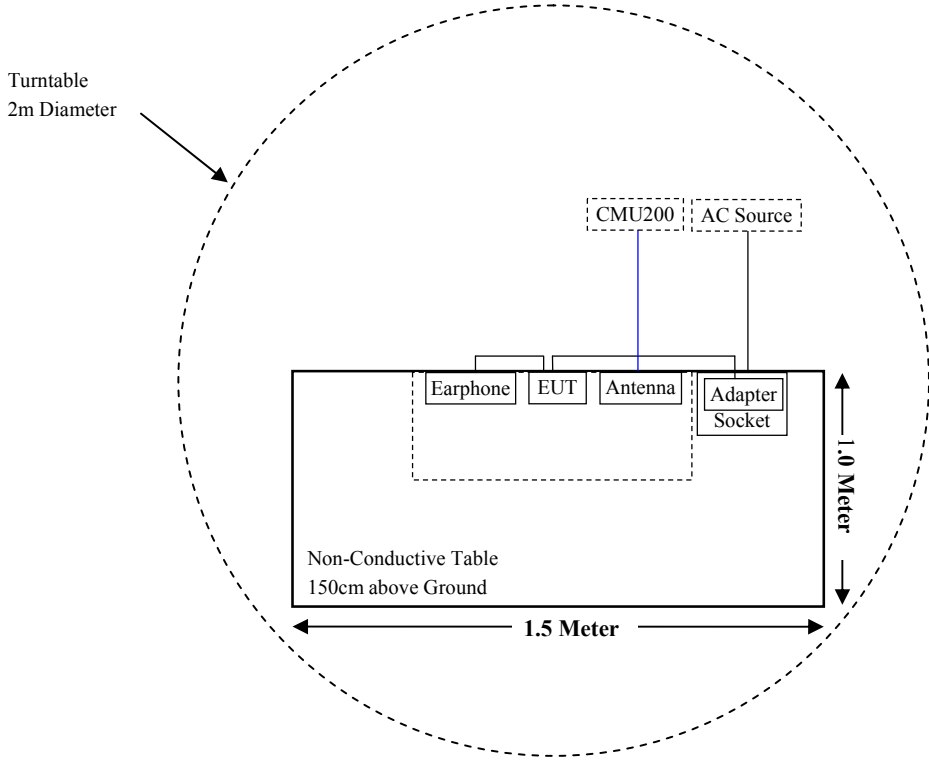

For Radiated Emissions(Above 1GHz):

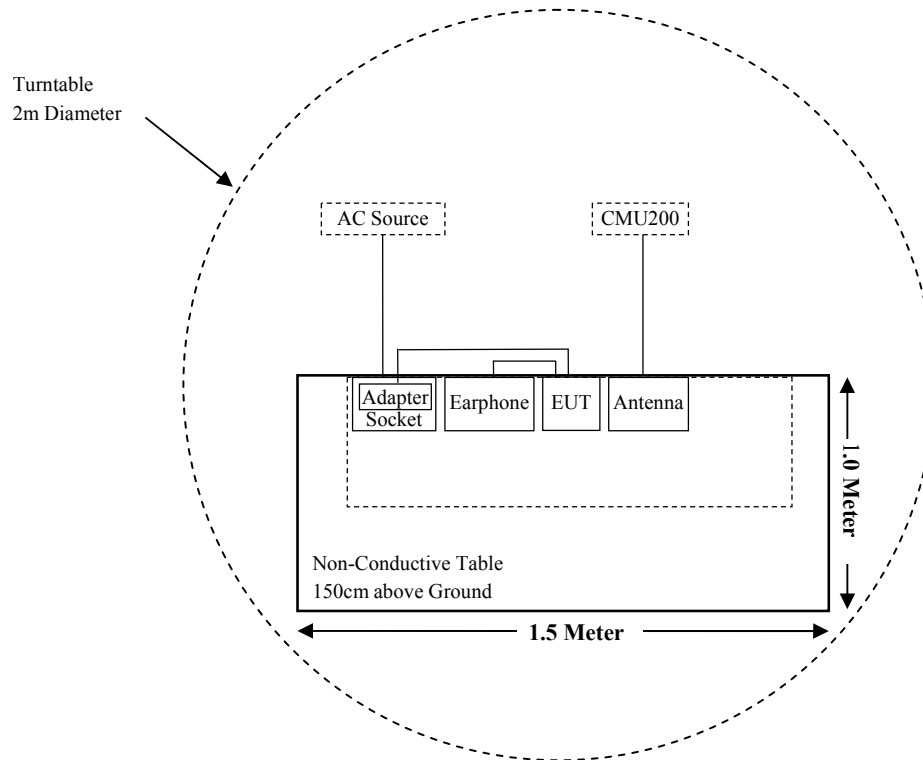

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1307(b)(1)& §2.1093	RF Exposure Information	Compliance
§2.1046; § 22.913 (a);§ 24.232 (c); § 27.50 (d)	RF Output Power	Compliant
§ 2.1047	Modulation Characteristics	Not Applicable
§ 2.1049; § 22.905; § 22.917; § 24.238; §27.53	Occupied Bandwidth	Compliant
§ 2.1051; § 22.917 (a); § 24.238 (a); §27.53	Spurious Emissions at Antenna Terminal	Compliant
§ 2.1053; § 22.917 (a); § 24.238 (a); §27.53 (h) (m)	Spurious Radiated Emissions	Compliant
§ 22.917 (a); § 24.238 (a); §27.53 (h) (m)	Band Edge	Compliant
§ 2.1055; § 22.355; § 24.235; §27.54	Frequency stability	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test (Chamber 1#)					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2017-11-12	2018-11-11
HP	Signal Generator	HP 8341B	2624A00116	2017-08-29	2018-08-28
Sunol Sciences	Broadband Antenna	JB3	A090413-1	2016-12-26	2019-12-25
Sunol Sciences	Broadband Antenna	JB3	A090314-2	2016-01-09	2019-01-08
Sonoma Instrunent	Pre-amplifier	310N	171205	2017-08-15	2018-08-14
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-6	006	2017-08-15	2018-08-14
MICRO-COAX	Coaxial Cable	Cable-8	008	2017-08-15	2018-08-14
MICRO-COAX	Coaxial Cable	Cable-9	009	2017-08-15	2018-08-14
MICRO-COAX	Coaxial Cable	Cable-10	010	2017-08-15	2018-08-14
Rohde & Schwarz	UNIVERSAL RADIO COMMUNICATION TESTER	CMU200	110605	2017-11-12	2018-11-11
Radiated Emission Test (Chamber 2#)					
HP	Signal Generator	HP 8341B	2624A00116	2017-08-29	2018-08-28
Rohde & Schwarz	EMI Test Receiver	ESU40	100207	2017-08-27	2018-08-26
ETS-LINDGREN	Horn Antenna	3115	9311-4159	2016-01-11	2019-01-10
ETS-LINDGREN	Horn Antenna	3115	6229	2016-01-11	2019-01-10
ETS-LINDGREN	Horn Antenna	3116	00084159	2016-10-18	2019-10-17
ETS-LINDGREN	Horn Antenna	3116	2516	2016-12-12	2019-12-12
Narda	Pre-amplifier	AFS42-00101800	2001270	2017-12-12	2018-12-11
EM Electronics Corporation	Amplifier	EM18G40G	060726	2018-03-22	2019-03-21
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-6	006	2017-08-15	2018-08-14
MICRO-COAX	Coaxial Cable	Cable-11	011	2017-08-15	2018-08-14
MICRO-COAX	Coaxial Cable	Cable-12	012	2017-08-15	2018-08-14
MICRO-COAX	Coaxial Cable	Cable-13	013	2017-08-15	2018-08-14
MICRO-COAX	Coaxial Cable	Cable-16	016	2017-08-15	2018-08-14
Rohde & Schwarz	UNIVERSAL RADIO COMMUNICATION TESTER	CMU200	110605	2017-11-12	2018-11-11

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
Rohde & Schwarz	Signal Analyzer	FSIQ26	836131/009	2017-09-21	2018-09-20
Rohde & Schwarz	UNIVERSAL RADIO COMMUNICATION TESTER	CMU200	110605	2017-11-12	2018-11-11
BACL	Temperature & Humidity Chamber	BTH-150	30023	2017-10-10	2018-10-09
EAST	Regulated DC Power Supply	MCH-303D-II	14070562	2017-10-10	2018-10-09
MOBIWIRE	RF Cable	/	/	Each Time	/

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1307(b) & §2.1093 - RF EXPOSURE INFORMATION

Applicable Standard

FCC §1.1307, §2.1093.

Test Result

Compliance, please refer to the SAR report: RSH180621050-20A.

FCC §2.1047 - MODULATION CHARACTERISTIC

According to FCC § 2.1047(d), Part 22H & 24E, Part 27 there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

FCC §2.1046; § 22.913 (a); § 24.232 (c); §27.50 (d) - RF OUTPUT POWER**Applicable Standards**

According to FCC §2.1046 and §22.913 (a), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts (38.45dBm).


According to FCC §2.1046 and §24.232 (c), mobile and portable stations are limited to 2 watts (33dBm) EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

According to §27.50(d), the maximum EIRP must not exceed 1Watts (30dBm) for 1710-1755MHz.

The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB.

Test Procedure***Conducted method:***

The RF output of the transmitter was connected to the CMU200 through sufficient attenuation.

***Radiated Output Power:***

The measurements procedures specified in ANSI/TIA-603-D were applied.

- a) Connect the equipment as illustrated. Mount the equipment with the manufacturer specified antenna in a vertical orientation on a manufacturer specified mounting surface located on a non-conducting rotating platform of a RF anechoic chamber (preferred) or a standard radiation site.
- b) Key the transmitter, then rotate the EUT 360o azimuthally and record spectrum analyzer power level (LVL) measurements at angular increments that are sufficiently small to permit resolution of all peaks. If a standard radiation test site is used, raise and lower the test antenna to obtain a maximum reading at each angular increment. (Note: several batteries may be needed to offset the effect of battery voltage droop, which should not exceed 5% of the manufactured specified battery voltage during transmission).
- c) Replace the transmitter under test with a vertically polarized half-wave dipole (or an antenna whose gain is known relative to an ideal half-wave dipole). The center of the antenna should be at the same location as the center of the antenna under test.
- d) Connect the antenna to a signal generator with a known output power and record the path loss (in dB) as LOSS. If a standard radiation test site is used,raise and lower the test antenna to obtain a maximum reading.
$$\text{LOSS} = \text{Generator Output Power (dBm)} - \text{Analyzer reading (dBm)}$$

e) Determine the effective radiated output power at each angular position from the readings in steps b) and d) using the following equation:

$$\text{ERP (dBm)} = \text{LVL (dBm)} + \text{LOSS (dB)}$$

f) The maximum ERP is the maximum value determined in the preceding step.

(Note: Effective Isotropic Radiated Power (EIRP) can be computed using the following:

$$\text{EIRP (dBm)} = \text{ERP (dBm)} + 2.15 \text{ (dB)}$$

Test Data

Environmental Conditions

Temperature:	23.2℃
Relative Humidity:	51 %
ATM Pressure:	101.3kPa

The testing was performed by Mark Yu on 2018-06-26 & 2018-07-24.

Conducted Power:

GSM 850 Band

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)	Limit (dBm)
GSM	128	824.2	31.89	38.45
	190	836.6	31.97	38.45
	251	848.8	31.76	38.45

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	
GPRS	128	824.2	32.02	31.30	29.38	28.13	38.45
	190	836.6	32.05	31.44	29.52	28.24	38.45
	251	848.8	32.13	31.54	29.61	28.44	38.45

WCDMA Band V

Mode	Test Condition	Test Mode	3GPP Sub Test	Average Output Power (dBm)		
				Low Frequency	Middle Frequency	High Frequency
WCDMA (Band V)	Normal	Rel 99	1	22.58	22.61	22.54
		HSDPA	1	22.01	22.39	22.17
			2	22.13	22.16	22.18
			3	22.09	22.15	22.12
			4	22.07	22.08	22.07
		HSUPA	1	22.27	22.51	22.46
			2	22.15	22.29	22.18
			3	22.17	22.15	22.24
			4	22.23	22.38	22.29
			5	22.16	22.35	22.34
		HSPA+	1	22.16	22.15	22.14

PCS 1900 Band

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)	Limit (dBm)
GSM	512	1850.2	29.09	33
	661	1880.0	29.24	33
	810	1909.8	29.16	33

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	
GPRS	512	1850.2	29.26	28.46	27.19	26.59	33
	661	1880.0	29.15	28.62	27.24	26.14	33
	810	1909.8	29.03	28.97	27.34	26.68	33

WCDMA Band II

Mode	Test Condition	Test Mode	3GPP Sub Test	Average Output Power (dBm)		
				Low Frequency	Middle Frequency	High Frequency
WCDMA (Band II)	Normal	Rel 99	1	22.56	22.37	22.47
		HSDPA	1	22.35	22.06	21.70
			2	22.17	22.09	22.01
			3	22.21	22.13	22.06
			4	22.04	22.07	22.12
		HSUPA	1	22.38	22.27	22.32
			2	21.87	21.96	22.01
			3	21.96	21.92	21.73
			4	21.87	21.84	21.69
			5	21.92	21.76	21.65
		HSPA+	1	21.86	21.82	21.95

WCDMA Band IV

Mode	Test Condition	Test Mode	3GPP Sub Test	Average Output Power (dBm)		
				Low Frequency	Middle Frequency	High Frequency
WCDMA (Band IV)	Normal	Rel 99	1	22.67	22.36	22.46
		HSDPA	1	22.38	22.28	22.32
			2	22.23	22.06	22.24
			3	22.15	22.27	22.12
			4	22.16	22.28	22.07
		HSUPA	1	22.37	22.42	22.42
			2	22.26	22.23	22.28
			3	22.17	22.31	22.29
			4	21.57	22.19	22.28
			5	22.19	22.12	22.25
		HSPA+	1	22.16	22.17	22.21

Peak-to-average ratio (PAR):**PCS 1900 Band**

Mode	Channel	PAR (dB)	Limit (dB)
GSM	Low	2.31	13
	Middle	2.22	13
	High	2.30	13

Mode	Channel	PAR (dB)	Limit (dB)
GPRS	Low	2.30	13
	Middle	2.27	13
	High	2.41	13

WCDMA Band II

Mode	Channel	PAR (dB)	Limit (dB)
WCDMA (Rel99)	Low	2.61	13
	Middle	2.54	13
	High	2.63	13
WCDMA (HSDPA)	Low	2.24	13
	Middle	2.30	13
	High	2.31	13
WCDMA (HSUPA)	Low	2.33	13
	Middle	2.42	13
	High	2.44	13
WCDMA (HSPA+)	Low	2.35	13
	Middle	2.42	13
	High	2.39	13

WCDMA Band IV

Mode	Channel	PAR (dB)	Limit (dB)
WCDMA (Rel99)	Low	2.58	13
	Middle	2.59	13
	High	2.55	13
WCDMA (HSDPA)	Low	2.34	13
	Middle	2.28	13
	High	2.26	13
WCDMA (HSUPA)	Low	2.30	13
	Middle	2.41	13
	High	2.43	13
WCDMA (HSPA+)	Low	2.33	13
	Middle	2.45	13
	High	2.37	13

Radiated Power:**GSM Mode**

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (cm)	Polar (H/V)	Submitted Level (dBm)	Cable loss (dB)	Antenna Gain (dBd/dBi)			
GSM 850 Band, Middle Channel (ERP)										
836.60	96.87	185	160	H	33.18	0.63	-1.14	31.41	38.45	7.04
836.60	97.95	209	107	V	30.80	0.63	-1.14	29.03	38.45	9.42
PCS 1900 Band, Middle Channel (EIRP)										
1880.00	93.24	237	220	H	19.71	0.85	8.81	27.67	33	5.33
1880.00	94.59	154	179	V	20.63	0.85	8.81	28.59	33	4.41

WCDMA Mode

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (cm)	Polar (H/V)	Submitted Level (dBm)	Cable loss (dB)	Antenna Gain (dBd/dBi)			
WCDMA Band V, Middle Channel(ERP)										
836.60	86.25	149	112	H	22.56	0.63	-1.14	20.79	38.45	17.66
836.60	90.17	164	228	V	23.02	0.63	-1.14	21.25	38.45	17.20
WCDMA Band II, Middle Channel(EIRP)										
1880.00	84.27	156	200	H	10.74	0.85	8.81	18.70	33	14.30
1880.00	86.53	111	237	V	12.57	0.85	8.81	20.53	33	12.47
WCDMA Band IV, Middle Channel(EIRP)										
1732.60	85.56	157	168	H	11.13	0.84	8.57	18.86	30	11.14
1732.60	87.74	67	199	V	12.83	0.84	8.57	20.56	30	9.44

Note:

All above data were tested without amplifier.

Absolute Level (dBm) = Submitted Level (dBm) - Cable loss (dB) + Antenna Gain (dBd/dBi)

Margin (dB) = Limit (dBm) - Absolute Level (dBm)


FCC §2.1049, §22.917, §22.905 & §24.238; §27.53- OCCUPIED BANDWIDTH**Applicable Standards**

FCC 47 §2.1049, §22.917, §22.905 & §24.238 and §27.53.

Test Procedure

The RF output of the transmitter was connected to the simulator and the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set at 5 kHz (Cellular /PCS) & 100 kHz (WCDMA), and the 26 dB & 99% bandwidth was recorded.

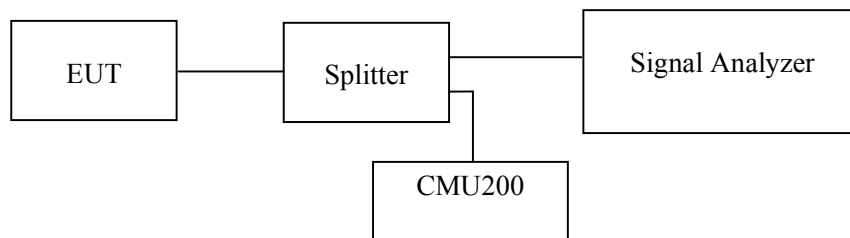**Test Data****Environmental Conditions**

Temperature:	23.2℃
Relative Humidity:	51 %
ATM Pressure:	101.3kPa

The testing was performed by Mark Yu from 2018-06-26 to 2018-08-16.

EUT operation mode: Transmitting

Test Result: Compliance.

GSM 850 Band

Mode	Frequency (MHz)	26 dB Emission Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
GSM (GMSK)	836.6	0.317	0.246
GPRS (GMSK)	836.6	0.323	0.244

WCDMA Band V

Mode	Frequency (MHz)	26 dB Emission Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
WCDMA (Rel 99)	836.6	4.709	4.148
WCDMA (HSDPA)	836.6	4.729	4.148
WCDMA (HSUPA)	836.6	4.709	4.148
WCDMA (HSPA+)	836.6	4.709	4.148

PCS 1900 Band



Mode	Frequency (MHz)	26 dB Emission Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
GSM (GMSK)	1880.0	0.317	0.244
GPRS (GMSK)	1880.0	0.317	0.242



WCDMA Band II

Mode	Frequency (MHz)	26 dB Emission Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
WCDMA (Rel 99)	1880.0	4.729	4.168
WCDMA (HSDPA)	1880.0	4.749	4.168
WCDMA (HSUPA)	1880.0	4.709	4.188
WCDMA (HSPA+)	1880.0	4.749	4.188


WCDMA Band IV

Mode	Frequency (MHz)	26 dB Emission Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
WCDMA (Rel 99)	1732.6	4.729	4.168
WCDMA (HSDPA)	1732.6	4.749	4.168
WCDMA (HSUPA)	1732.6	4.749	4.168
WCDMA (HSPA+)	1732.6	4.749	4.188

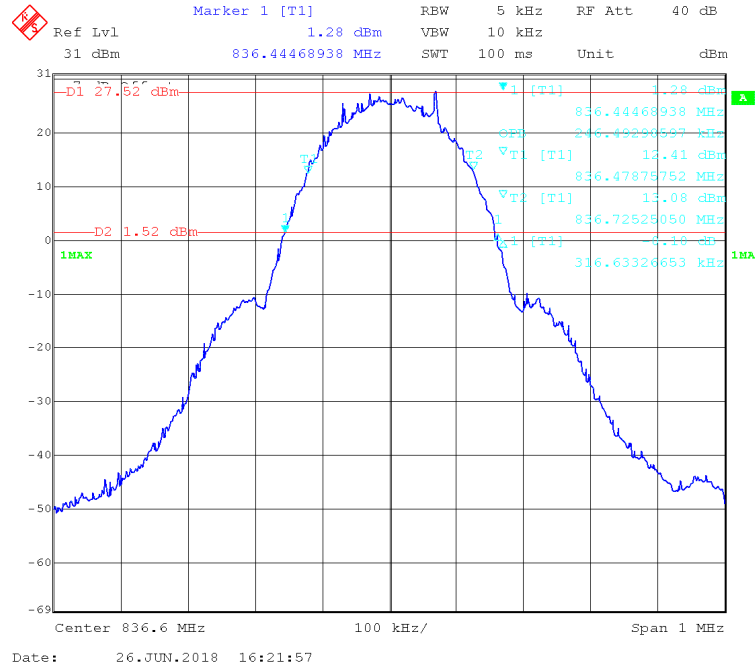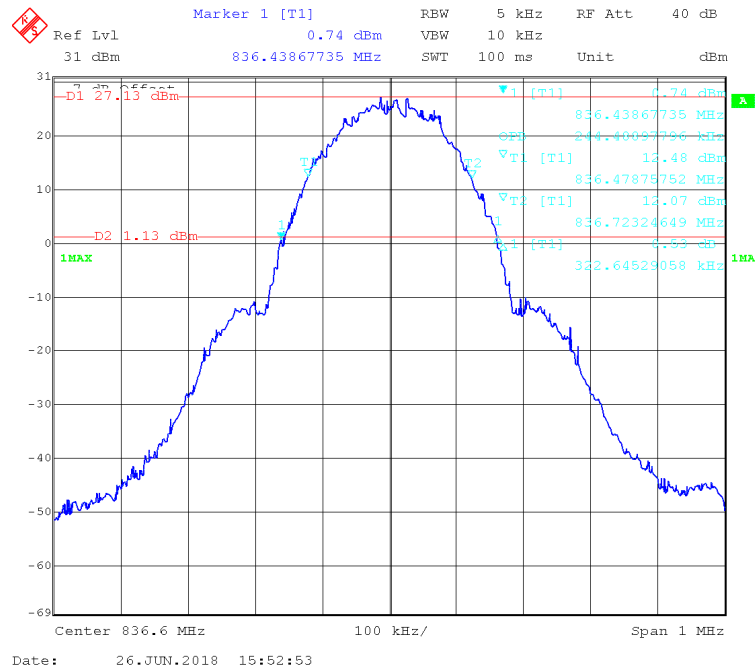
GSM 850 Band**99% Occupied & 26 dB Emissions Bandwidth for GSM (GMSK) Mode****99% Occupied & 26 dB Emissions Bandwidth for GPRS (GMSK) Mode**

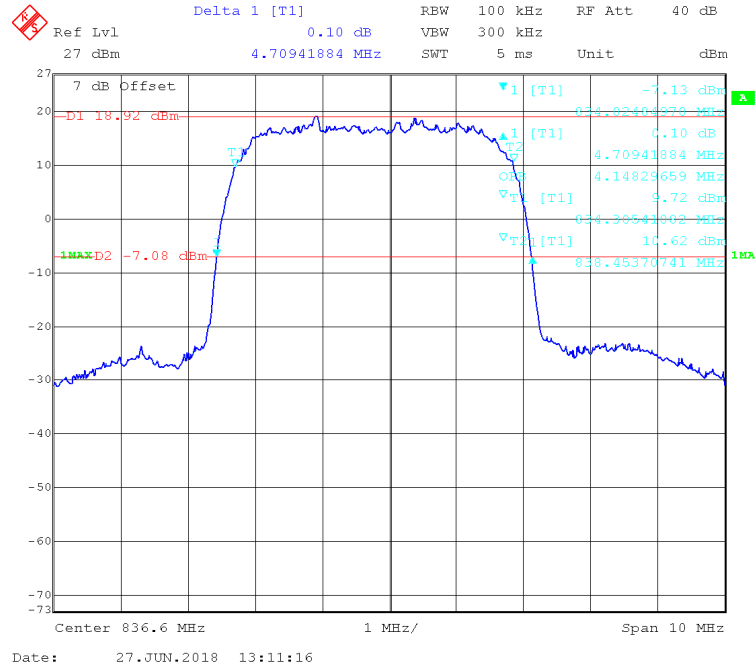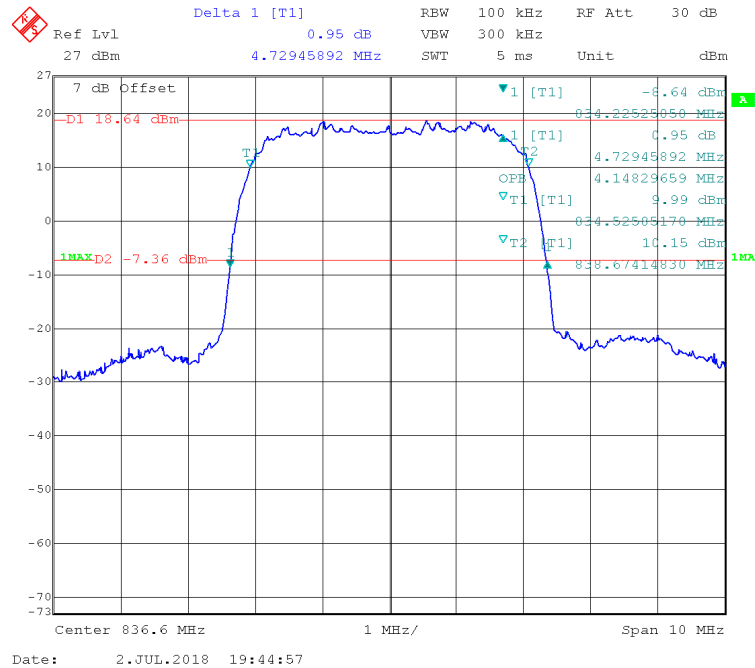WCDMA Band V**99% Occupied & 26 dB Emissions Bandwidth for WCDMA (Rel 99) Mode****99% Occupied & 26 dB Emissions Bandwidth for WCDMA (HSDPA) Mode**

99% Occupied & 26 dB Emissions Bandwidth for WCDMA (HSUPA) Mode

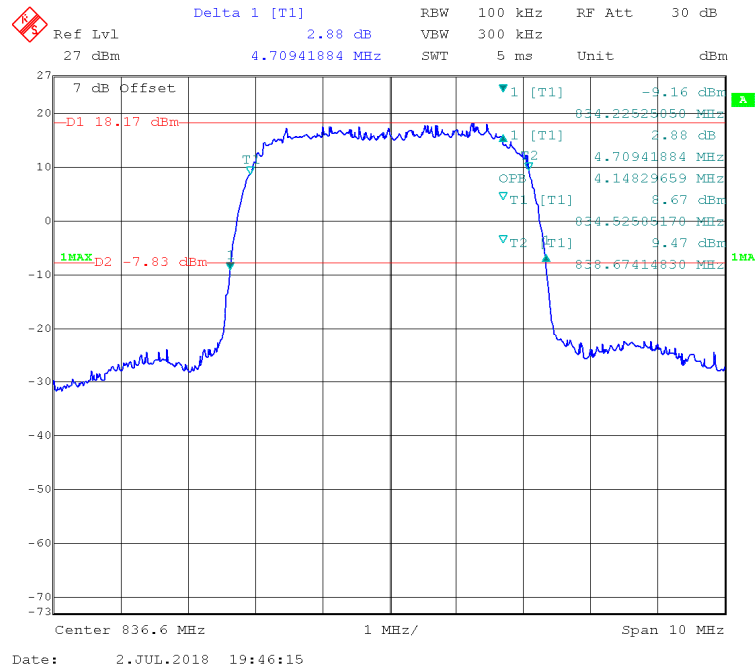


99% Occupied & 26 dB Emissions Bandwidth for WCDMA (HSPA+) Mode

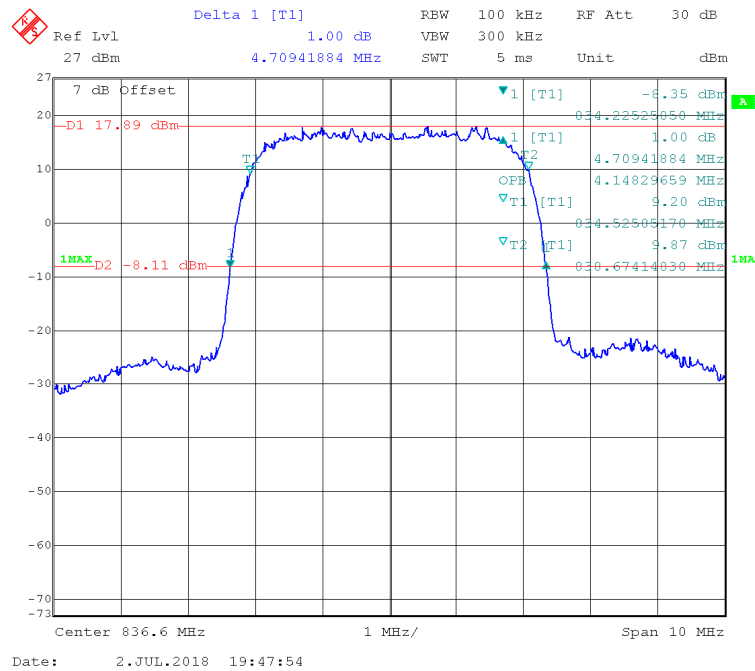


PCS 1900 Band

99% Occupied & 26 dB Emissions Bandwidth for GSM (GMSK) Mode

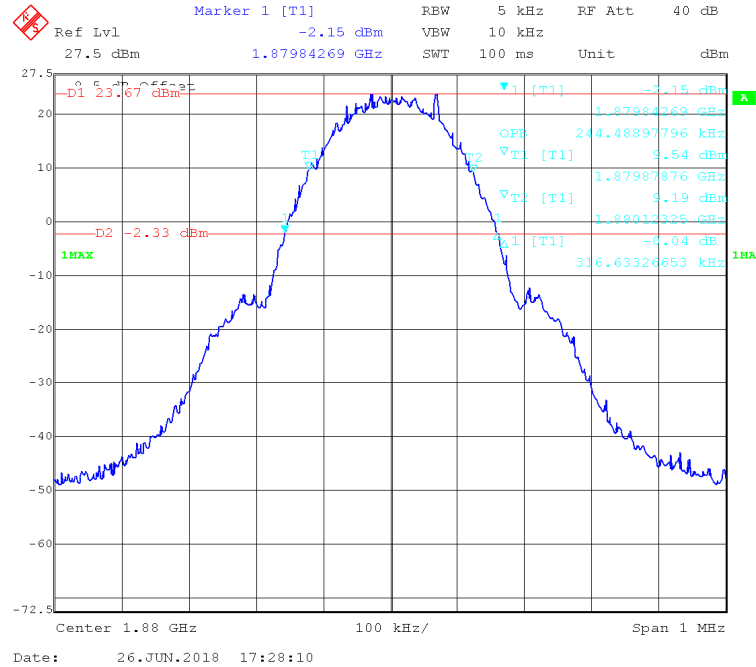


99% Occupied & 26 dB Emissions Bandwidth for GPRS (GMSK) Mode

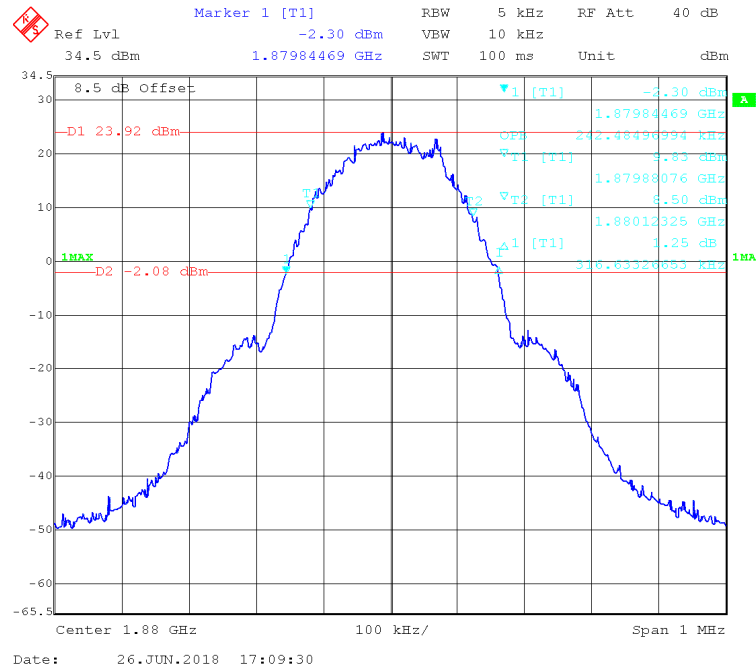


WCDMA Band II


99% Occupied & 26 dB Emissions Bandwidth for WCDMA (Rel 99) Mode

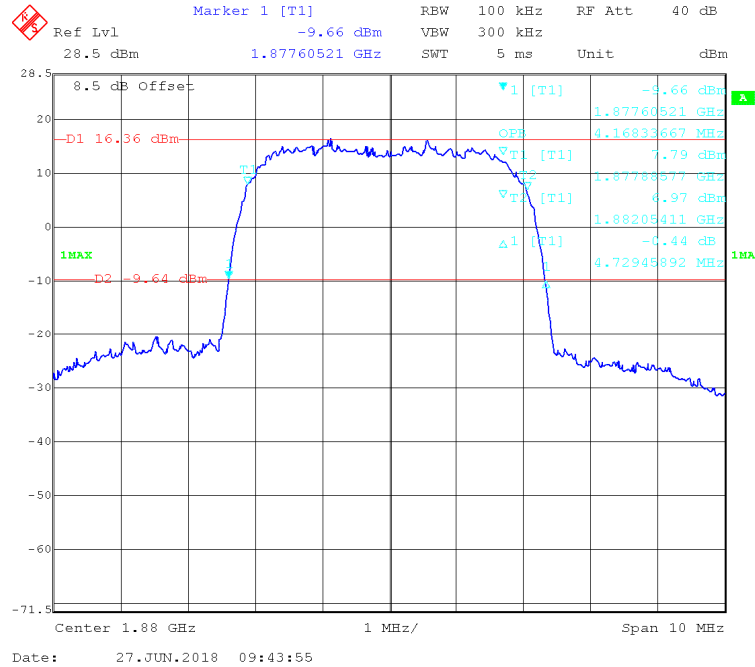


99% Occupied & 26 dB Emissions Bandwidth for WCDMA (HSDPA) Mode

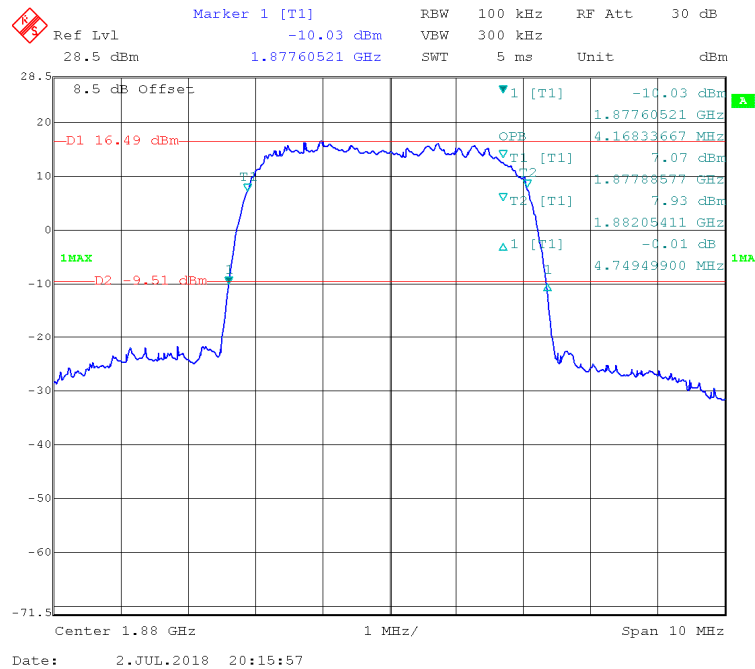

99% Occupied & 26 dB Emissions Bandwidth for WCDMA (HSUPA) Mode

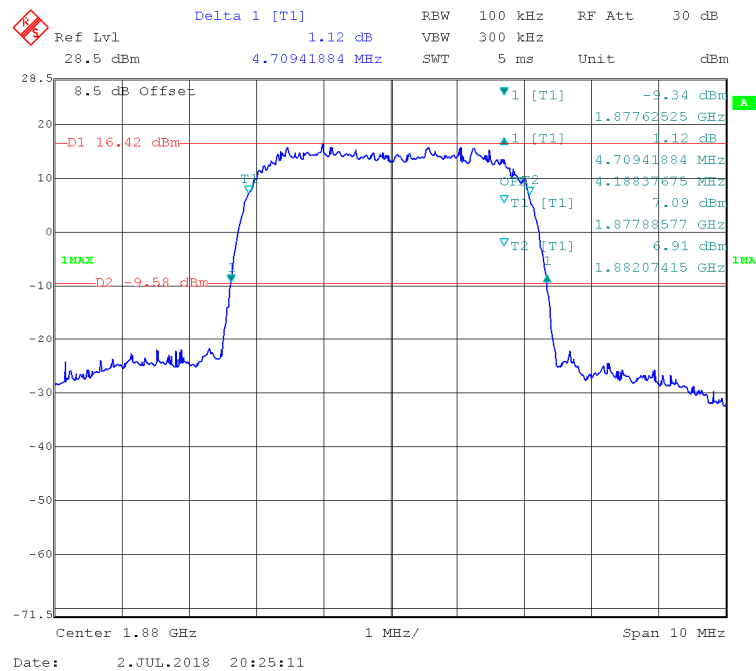


99% Occupied & 26 dB Emissions Bandwidth for WCDMA (HSPA+) Mode

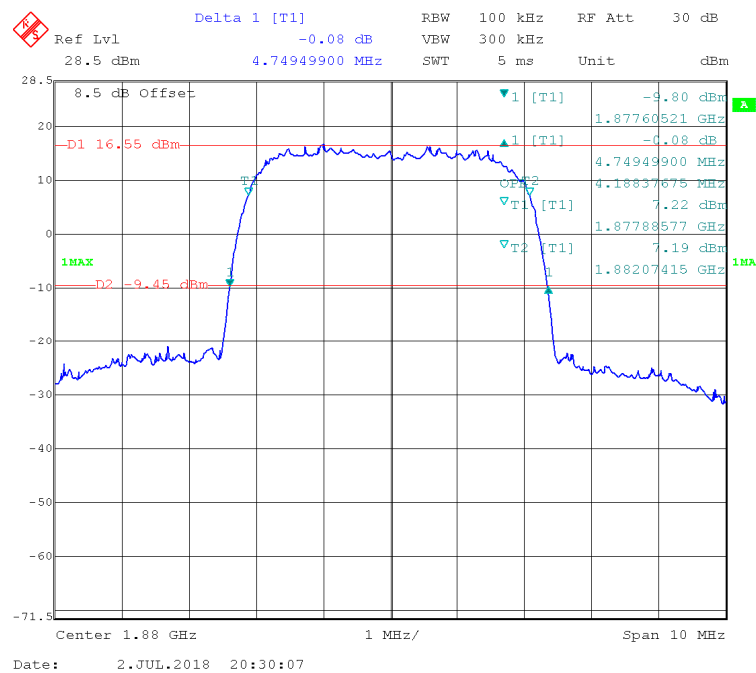


WCDMA Band IV

99% Occupied & 26 dB Emissions Bandwidth for WCDMA (Rel 99) Mode

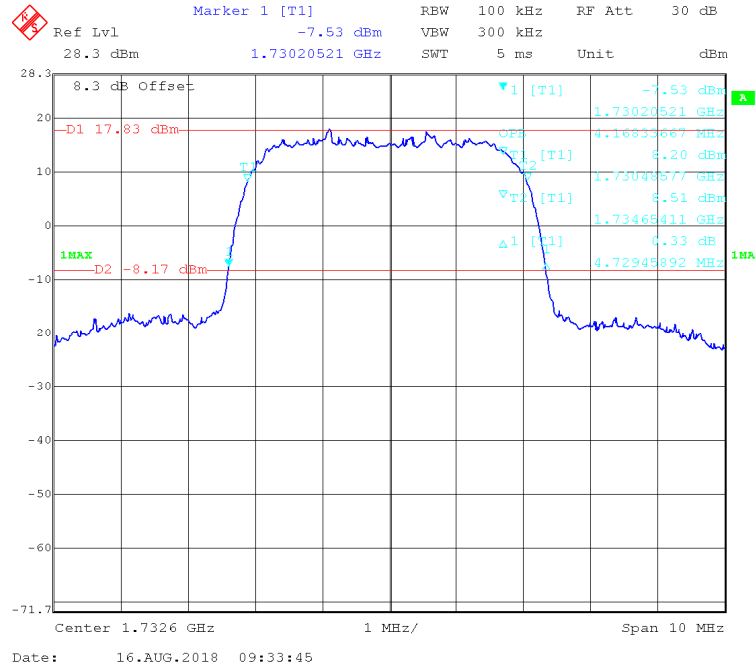

99% Occupied & 26 dB Emissions Bandwidth for WCDMA (HSDPA) Mode

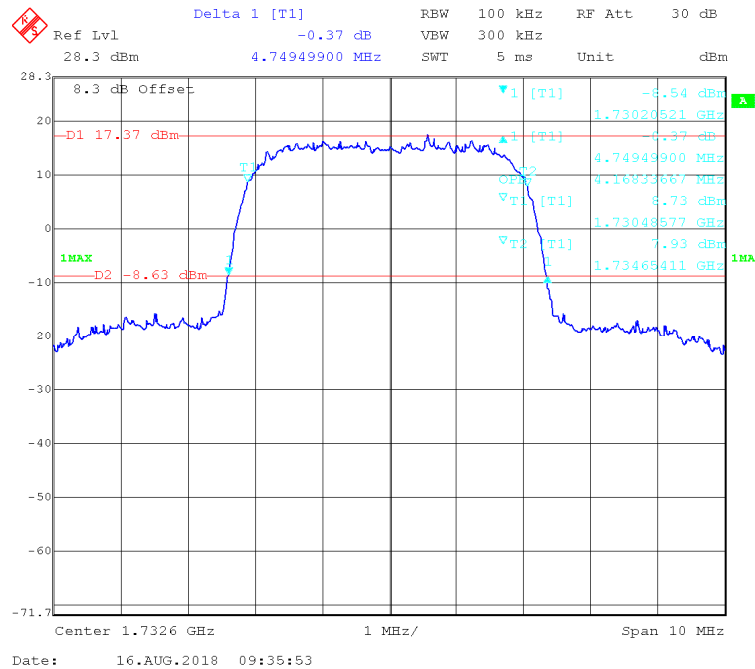

[illegible]

Delta 1 [T1] 0.33 dB
 Ref Lvl 28.3 dBm
 RBW 100 kHz
 RF Att 30 dB
 VBW 300 kHz
 SWT 5 ms
 Unit dBm

8.3 dB Offset
 -D1 17.33 dBm
 1MAX
 D2 -8.67 dBm
 T1
 T2
 T3
 T4
 T5
 T6
 T7
 T8
 T9
 T10
 T11
 T12
 T13
 T14
 T15
 T16
 T17
 T18
 T19
 T20
 T21
 T22
 T23
 T24
 T25
 T26
 T27
 T28
 T29
 T30
 T31
 T32
 T33
 T34
 T35
 T36
 T37
 T38
 T39
 T40
 T41
 T42
 T43
 T44
 T45
 T46
 T47
 T48
 T49
 T50
 T51
 T52
 T53
 T54
 T55
 T56
 T57
 T58
 T59
 T60
 T61
 T62
 T63
 T64
 T65
 T66
 T67
 T68
 T69
 T70
 T71
 T72
 T73
 T74
 T75
 T76
 T77
 T78
 T79
 T80
 T81
 T82
 T83
 T84
 T85
 T86
 T87
 T88
 T89
 T90
 T91
 T92
 T93
 T94
 T95
 T96
 T97
 T98
 T99
 T100
 T101
 T102
 T103
 T104
 T105
 T106
 T107
 T108
 T109
 T110
 T111
 T112
 T113
 T114
 T115
 T116
 T117
 T118
 T119
 T120
 T121
 T122
 T123
 T124
 T125
 T126
 T127
 T128
 T129
 T130
 T131
 T132
 T133
 T134
 T135
 T136
 T137
 T138
 T139
 T140
 T141
 T142
 T143
 T144
 T145
 T146
 T147
 T148
 T149
 T150
 T151
 T152
 T153
 T154
 T155
 T156
 T157
 T158
 T159
 T160
 T161
 T162
 T163
 T164
 T165
 T166
 T167
 T168
 T169
 T170
 T171
 T172
 T173
 T174
 T175
 T176
 T177
 T178
 T179
 T180
 T181
 T182
 T183
 T184
 T185
 T186
 T187
 T188
 T189
 T190
 T191
 T192
 T193
 T194
 T195
 T196
 T197
 T198
 T199
 T200
 T201
 T202
 T203
 T204
 T205
 T206
 T207
 T208
 T209
 T210
 T211
 T212
 T213
 T214
 T215
 T216
 T217
 T218
 T219
 T220
 T221
 T222
 T223
 T224
 T225
 T226
 T227
 T228
 T229
 T230
 T231
 T232
 T233
 T234
 T235
 T236
 T237
 T238
 T239
 T240
 T241
 T242
 T243
 T244
 T245
 T246
 T247
 T248
 T249
 T250
 T251
 T252
 T253
 T254
 T255
 T256
 T257
 T258
 T259
 T260
 T261
 T262
 T263
 T264
 T265
 T266
 T267
 T268
 T269
 T270
 T271
 T272
 T273
 T274
 T275
 T276
 T277
 T278
 T279
 T280
 T281
 T282
 T283
 T284
 T285
 T286
 T287
 T288
 T289
 T290
 T291
 T292
 T293
 T294
 T295
 T296
 T297
 T298
 T299
 T300
 T301
 T302
 T303
 T304
 T305
 T306
 T307
 T308
 T309
 T310
 T311
 T312
 T313
 T314
 T315
 T316
 T317
 T318
 T319
 T320
 T321
 T322
 T323
 T324
 T325
 T326
 T327
 T328
 T329
 T330
 T331
 T332
 T333
 T334
 T335
 T336
 T337
 T338
 T339
 T340
 T341
 T342
 T343
 T344
 T345
 T346
 T347
 T348
 T349
 T350
 T351
 T352
 T353
 T354
 T355
 T356
 T357
 T358
 T359
 T360
 T361
 T362
 T363
 T364
 T365
 T366
 T367
 T368
 T369
 T370
 T371
 T372
 T373
 T374
 T375
 T376
 T377
 T378
 T379
 T380
 T381
 T382
 T383
 T384
 T385
 T386
 T387
 T388
 T389
 T390
 T391
 T392
 T393
 T394
 T395
 T396
 T397
 T398
 T399
 T400
 T401
 T402
 T403
 T404
 T405
 T406
 T407
 T408
 T409
 T410
 T411
 T412
 T413
 T414
 T415
 T416
 T417
 T418
 T419
 T420
 T421
 T422
 T423
 T424
 T425
 T426
 T427
 T428
 T429
 T430
 T431
 T432
 T433
 T434
 T435
 T436
 T437
 T438
 T439
 T440
 T441
 T442
 T443
 T444
 T445
 T446
 T447
 T448
 T449
 T450
 T451
 T452
 T453
 T454
 T455
 T456
 T457
 T458
 T459
 T460
 T461
 T462
 T463
 T464
 T465
 T466
 T467
 T468
 T469
 T470
 T471
 T472
 T473
 T474
 T475
 T476
 T477
 T478
 T479
 T480
 T481
 T482
 T483
 T484
 T485
 T486
 T487
 T488
 T489

FCC § 2.1051; § 22.917 (a); § 24.238 (a); §27.53 (h) (m) - SPURIOUS EMISSIONS AT ANTENNA TERMINALS


Applicable Standards

FCC §2.1051, §22.917(a) and §24.238(a) and §27.53(h) (m).

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in § 2.1051.

Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100 kHz for below 1GHz & 1MHz for above 1GHz. sufficient scans were taken to show any out of band emissions up to 10th harmonic.

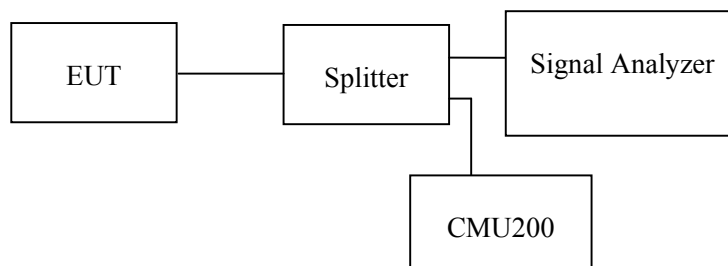

Test Data

Environmental Conditions

Temperature:	23.2°C
Relative Humidity:	51 %
ATM Pressure:	101.3kPa


The testing was performed by Mark Yu from 2018-06-26 to 2018-07-21.

EUT operation mode: Transmitting


Test Result: Compliance.

GSM 850 Band:


30 MHz – 1GHz(GSM Mode)

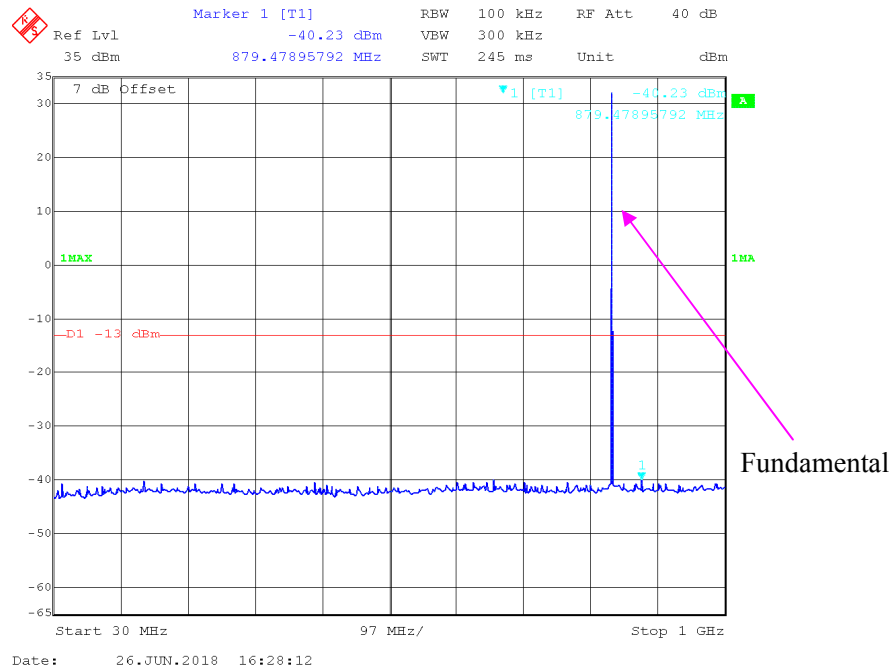


1 GHz – 10 GHz (GSM Mode)

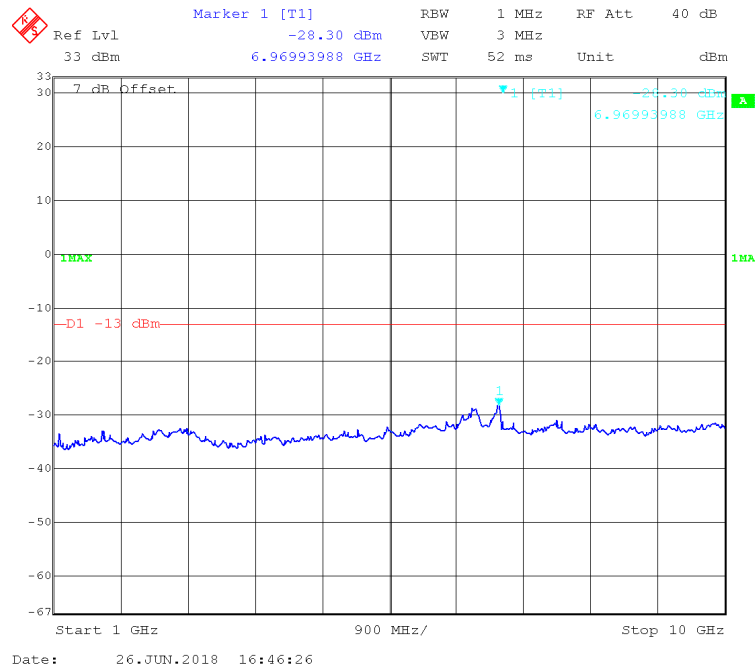

30 MHz – 1GHz(GPRS Mode)

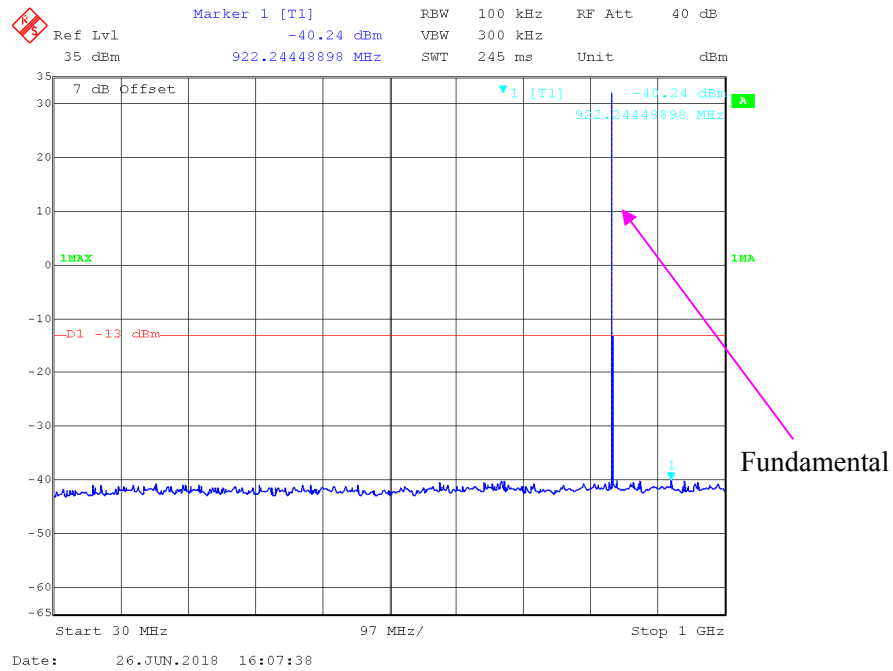


1 GHz – 10 GHz (GPRS Mode)

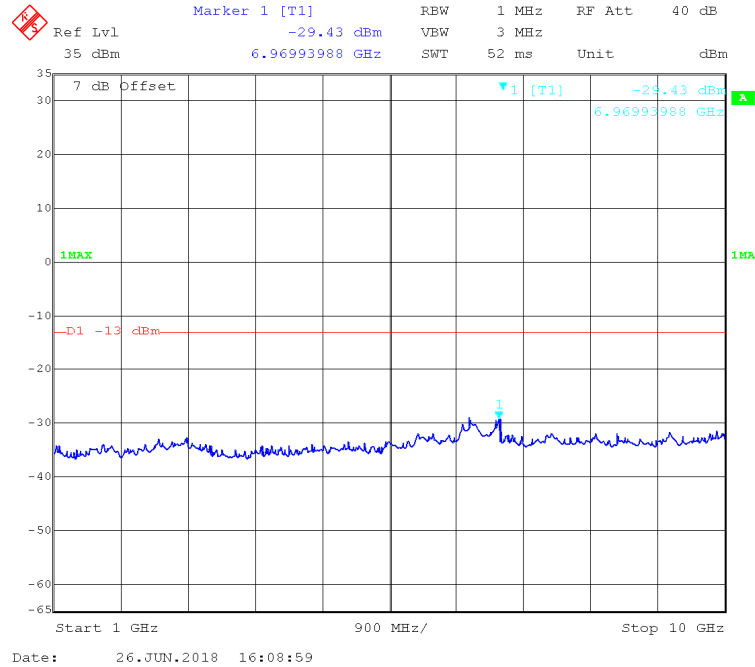


WCDMA Band V:

30 MHz – 1GHz(WCDMA Mode)

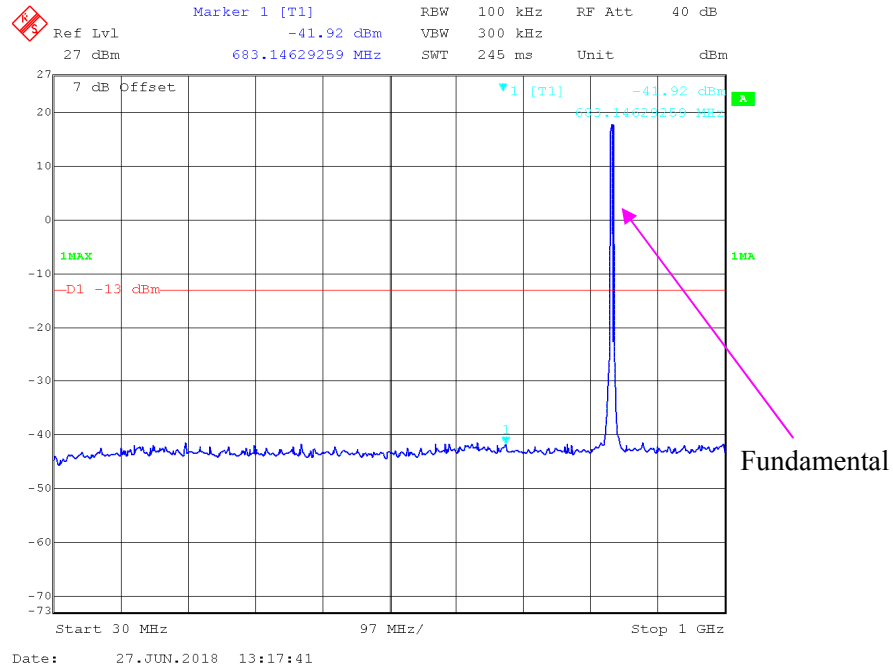


1 GHz – 10 GHz (WCDMA Mode)

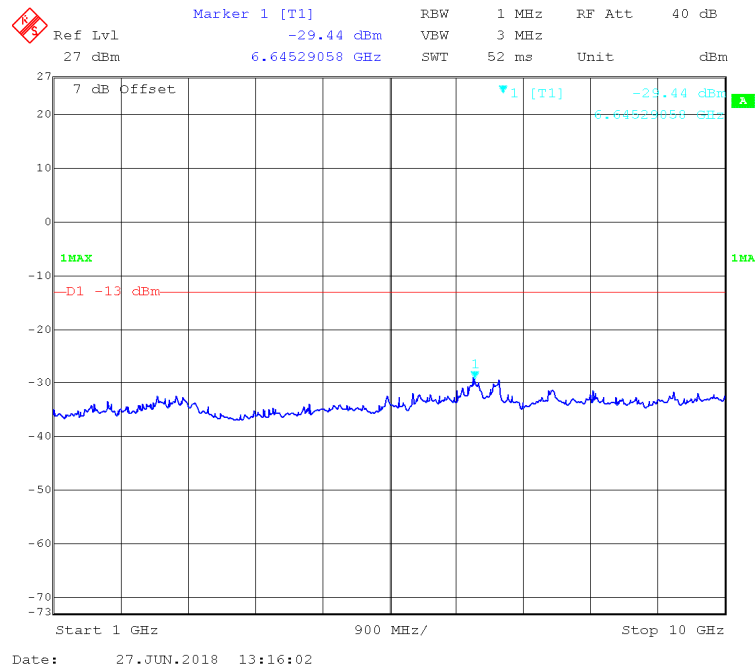


PCS 1900 Band:


30 MHz – 1GHz(GSM Mode)

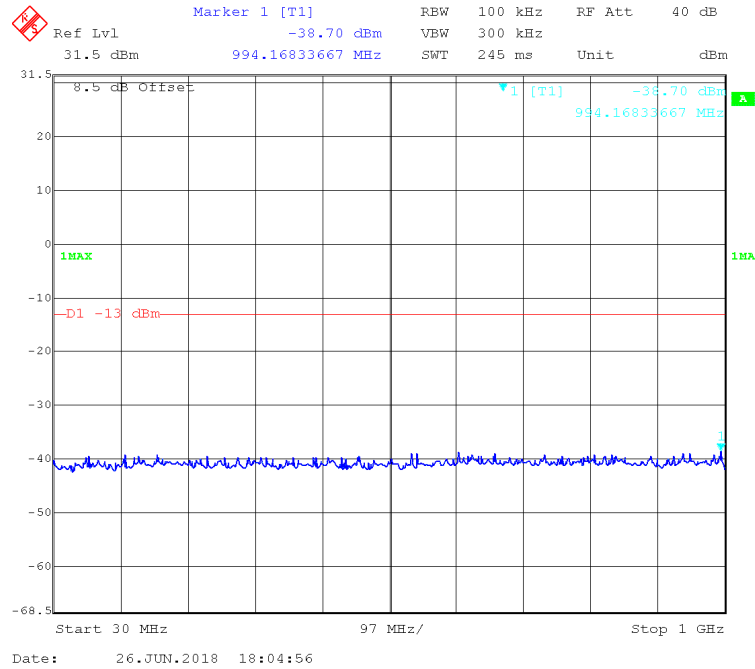


1 GHz – 20 GHz (GSM Mode)

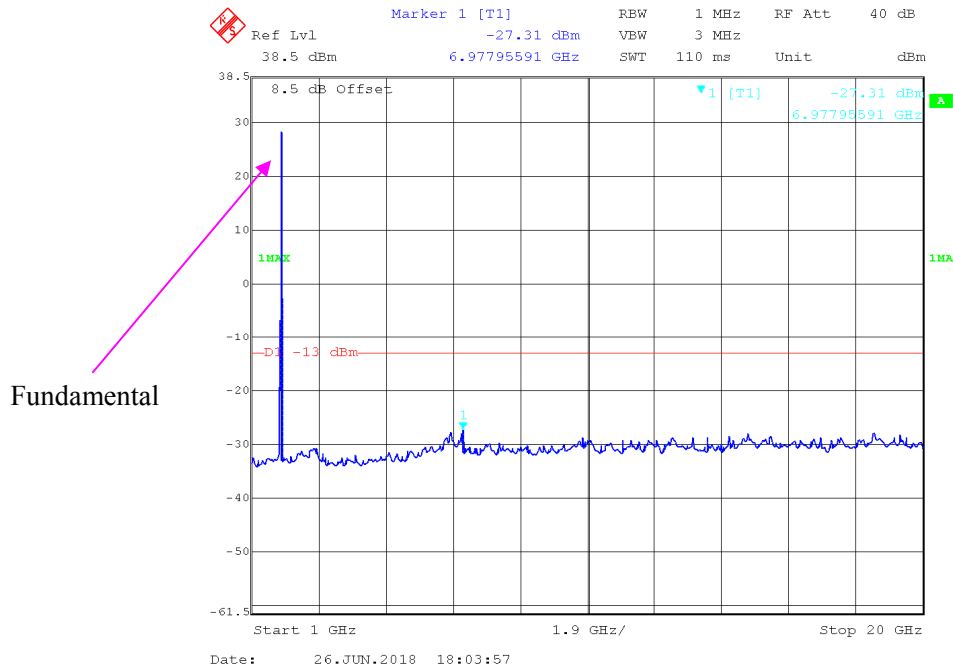

30 MHz – 1GHz(GPRS Mode)

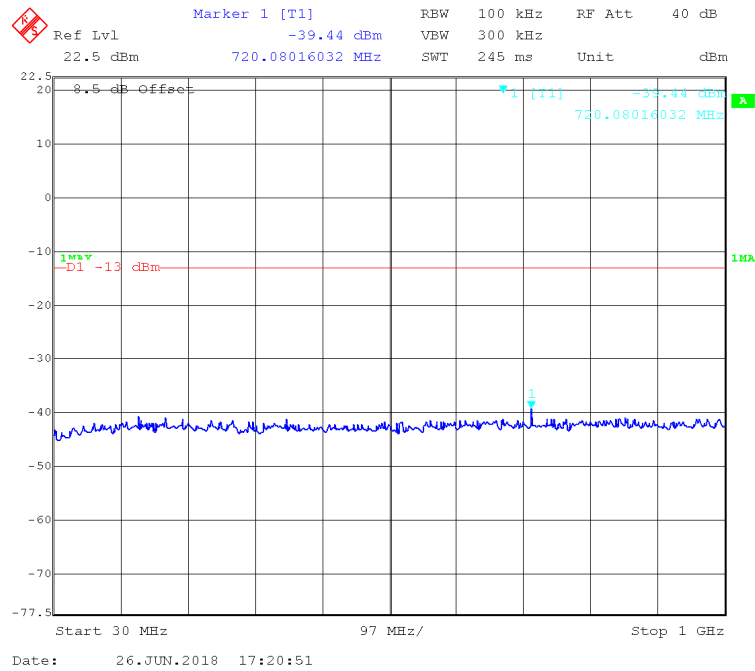


1 GHz – 20 GHz (GPRS Mode)

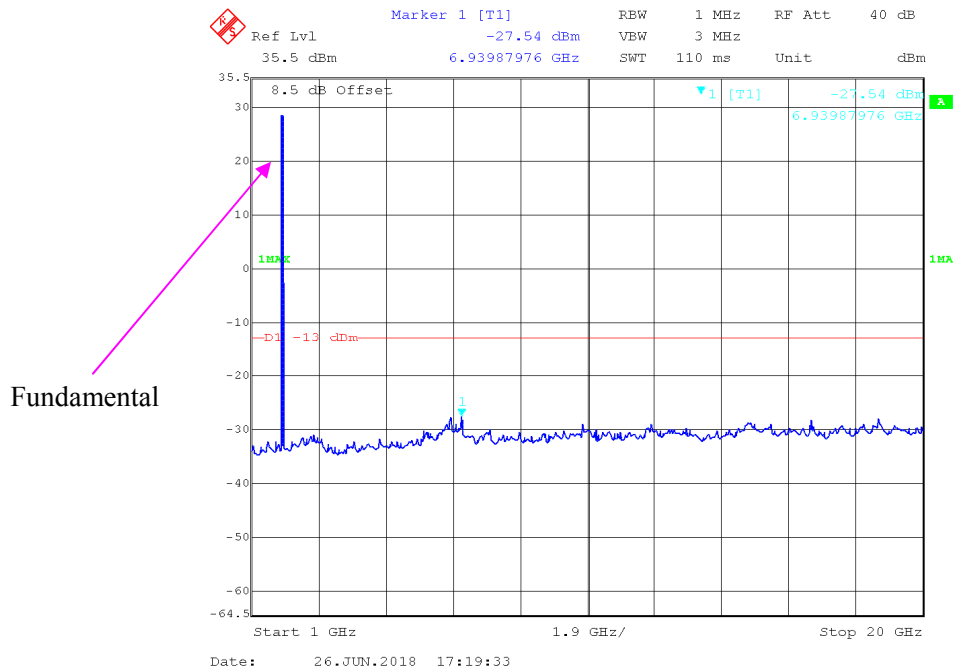


WCDMA Band II:

30 MHz – 1GHz(WCDMA Mode)

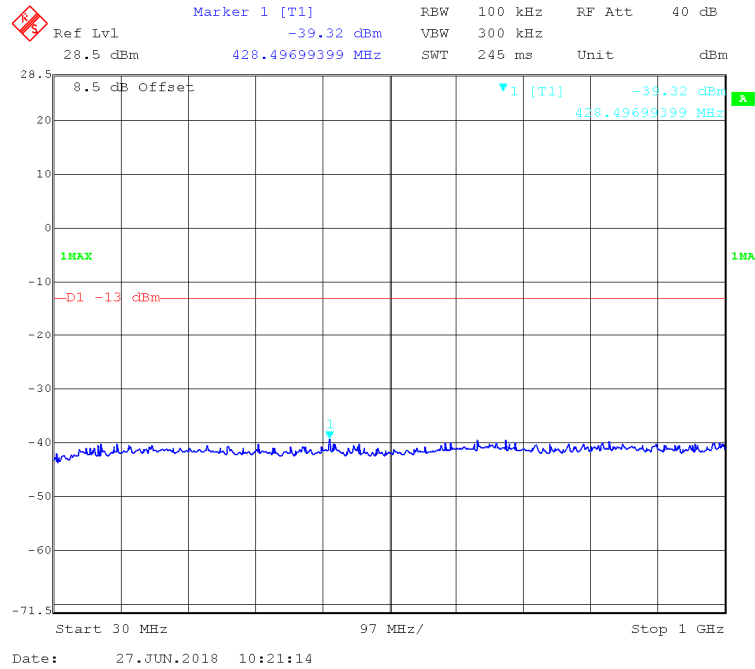


1 GHz – 20 GHz (WCDMA Mode)

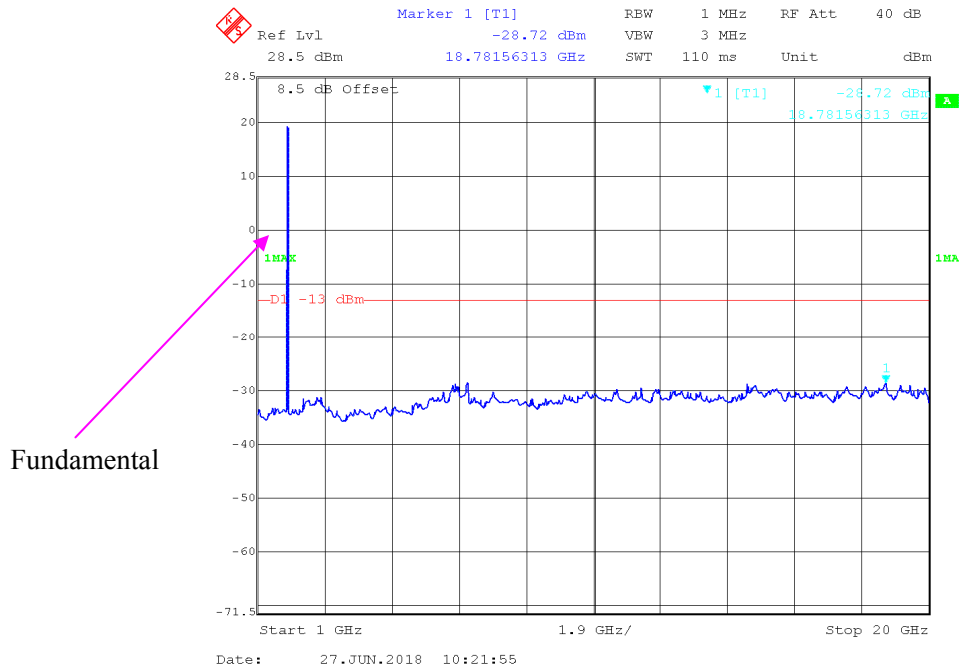


WCDMA Band IV:

30 MHz – 1GHz(WCDMA Mode)

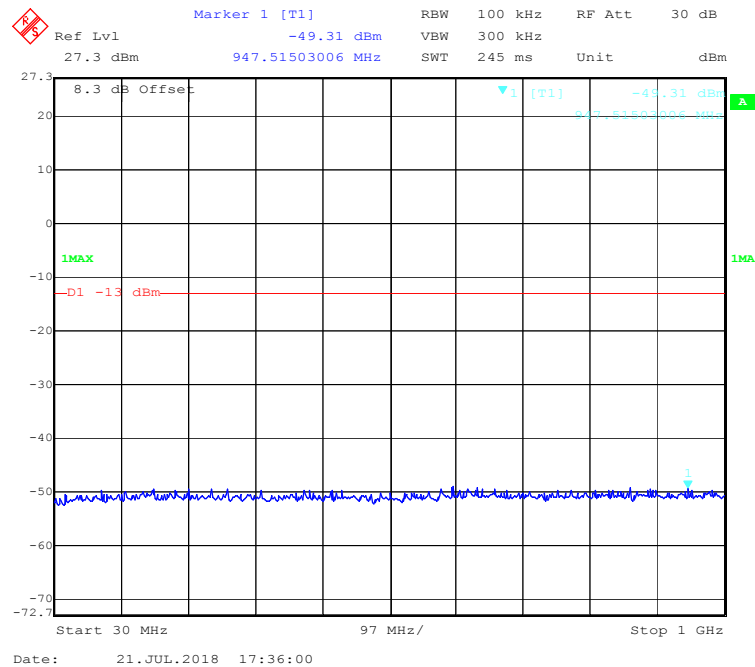

1 GHz – 20 GHz (WCDMA Mode)

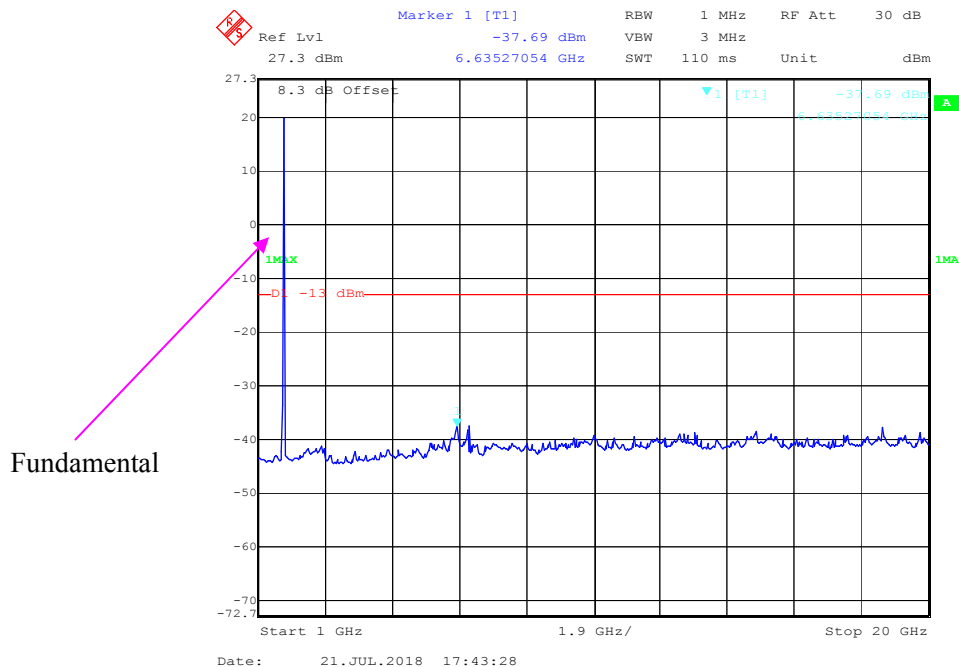

FCC § 2.1053; § 22.917 (a); § 24.238 (a); §27.53 (h) (m) - SPURIOUS RADIATED EMISSIONS

Applicable Standards

FCC § 2.1053, §22.917(a) and § 24.238(a) and § 27.53(h) (m)

22.917 (a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

24.238 (a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

27.53(h) (m), for mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = $10 \lg (\text{TX pwr in Watts}/0.001)$ – the absolute level

Spurious attenuation limit in dB = $43 + 10 \text{Log}_{10} (\text{power out in Watts})$

Test Data**Environmental Conditions**

Temperature:	23.2°C
Relative Humidity:	51 %
ATM Pressure:	101.3kPa

The testing was performed by Mark Yu on 2018-06-26 & 2018-07-24.

Test mode: Transmitting (Pre-scan with low, middle and high channels, and the worse case data as below)

30 MHz ~ 10 GHz:**GSM 850 Band**

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (cm)	Polar (H/V)	Submitted Level (dBm)	Cable Loss (dB)	Antenna Gain (dBd/dBi)			
GSM Mode, Middle channel										
479.21	49.25	337	243	H	-51.93	0.56	-1.83	-54.32	-13	41.32
479.21	51.25	255	225	V	-51.67	0.56	-1.83	-54.06	-13	41.06
1673.20	53.28	3	232	H	-50.11	0.84	8.48	-42.47	-13	29.47
1673.20	56.49	72	247	V	-46.07	0.84	8.48	-38.43	-13	25.43
2509.80	58.26	19	244	H	-42.68	0.89	10.09	-33.48	-13	20.48
2509.80	61.28	21	219	V	-39.66	0.89	10.09	-30.46	-13	17.46

WCDMA Band V

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (cm)	Polar (H/V)	Submitted Level (dBm)	Cable Loss (dB)	Antenna Gain (dBd/dBi)			
WCDMA Mode, Middle channel										
478.19	50.11	180	229	H	-50.98	0.56	-1.82	-53.36	-13	40.36
478.19	53.45	81	222	V	-49.51	0.56	-1.82	-51.89	-13	38.89
1673.20	54.83	63	156	H	-48.56	0.84	8.48	-40.92	-13	27.92
1673.20	56.19	1	204	V	-46.37	0.84	8.48	-38.73	-13	25.73
2509.80	62.46	317	166	H	-38.48	0.89	10.09	-29.28	-13	16.28
2509.80	64.79	97	199	V	-36.15	0.89	10.09	-26.95	-13	13.95

30 MHz ~ 20 GHz:**PCS 1900 Band**

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (cm)	Polar (H/V)	Submitted Level (dBm)	Cable Loss (dB)	Antenna Gain (dBd/dBi)			
GSM Mode, Middle channel										
480.57	46.24	11	198	H	-55.07	0.56	-1.83	-57.46	-13	44.46
480.57	49.77	227	224	V	-53.09	0.56	-1.83	-55.48	-13	42.48
3760.00	51.19	308	170	H	-52.50	0.95	9.74	-43.71	-13	30.71
3760.00	53.83	138	204	V	-50.18	0.95	9.74	-41.39	-13	28.39
5640.00	56.41	112	178	H	-44.10	1.15	10.47	-34.78	-13	21.78
5640.00	59.28	211	238	V	-41.53	1.15	10.47	-32.21	-13	19.21

WCDMA Band II

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (cm)	Polar (H/V)	Submitted Level (dBm)	Cable Loss (dB)	Antenna Gain (dBd/dBi)			
WCDMA Mode, Middle channel										
479.87	47.56	18	165	H	-53.68	0.56	-1.83	-56.07	-13	43.07
479.87	48.13	205	160	V	-54.76	0.56	-1.83	-57.15	-13	44.15
3760.00	50.36	242	137	H	-53.33	0.95	9.74	-44.54	-13	31.54
3760.00	54.57	12	182	V	-49.44	0.95	9.74	-40.65	-13	27.65
5640.00	55.76	239	227	H	-44.75	1.15	10.47	-35.43	-13	22.43
5640.00	56.49	352	110	V	-44.32	1.15	10.47	-35.00	-13	22.00

WCDMA Band IV

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (cm)	Polar (H/V)	Submitted Level (dBm)	Cable Loss (dB)	Antenna Gain (dBd/dBi)			
WCDMA Mode, Middle channel										
479.75	47.69	174	215	H	-53.55	0.56	-1.83	-55.94	-13	42.94
479.75	48.42	194	185	V	-54.47	0.56	-1.83	-56.86	-13	43.86
3465.20	50.55	64	243	H	-54.24	0.93	9.87	-45.30	-13	32.30
3465.20	54.37	259	228	V	-50.85	0.93	9.87	-41.91	-13	28.91
5197.80	55.58	221	196	H	-46.50	1.10	10.30	-37.30	-13	24.30
5197.80	56.63	152	102	V	-45.65	1.10	10.30	-36.45	-13	23.45

Note:

- 1) Absolute Level (dBm) = Submitted Level (dBm) - Cable loss (dB) + Antenna Gain (dBd/dBi)
- 2) Margin (dB) = Limit (dBm) - Absolute Level (dBm)

FCC § 22.917 (a); § 24.238 (a); §27.53 (h) (m) - BAND EDGES**Applicable Standards**

According to § 22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.


According to FCC §27.53 (h) (m), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log(P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log(P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log(P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log(P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log(P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency.

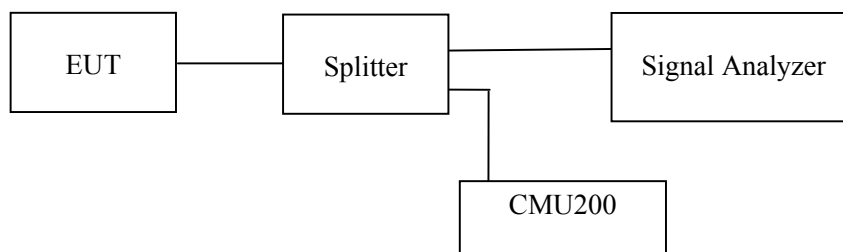

Test Data**Environmental Conditions**

Temperature:	23.2℃
Relative Humidity:	51 %
ATM Pressure:	101.3kPa


The testing was performed by Mark Yu from 2018-06-26 to 2018-07-21.

EUT operation mode: Transmitting


Test Result: Compliance.

GSM 850 Band:


GSM Mode, Left Band Edge

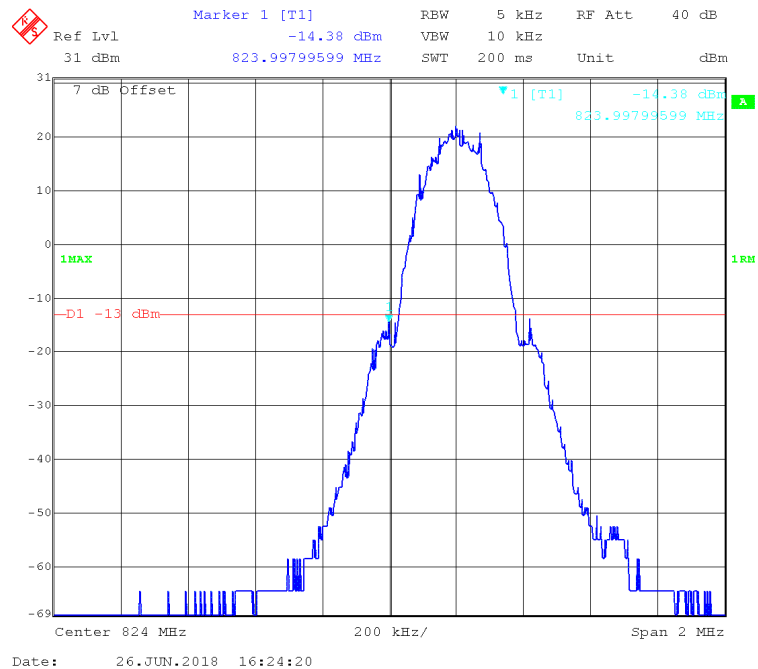


GSM Mode, Right Band Edge


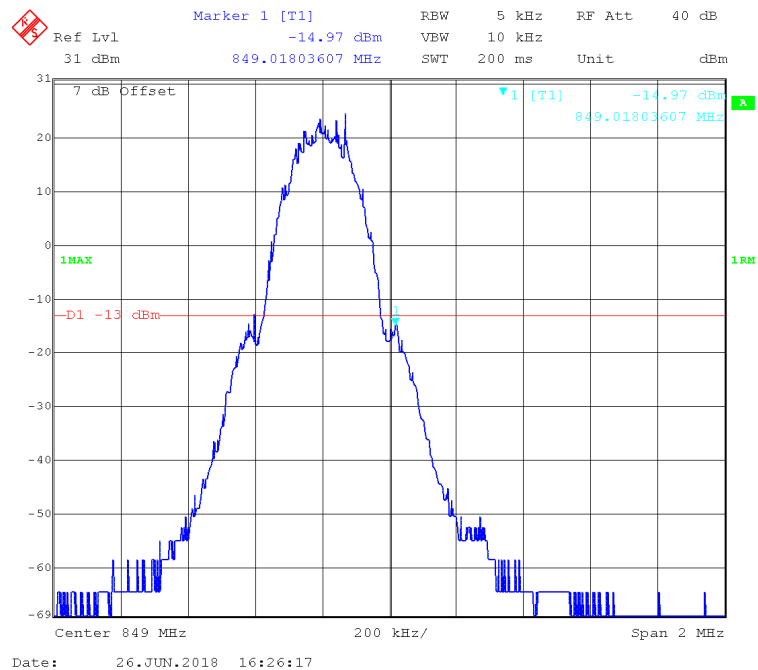


GPRS Mode, Left Band Edge

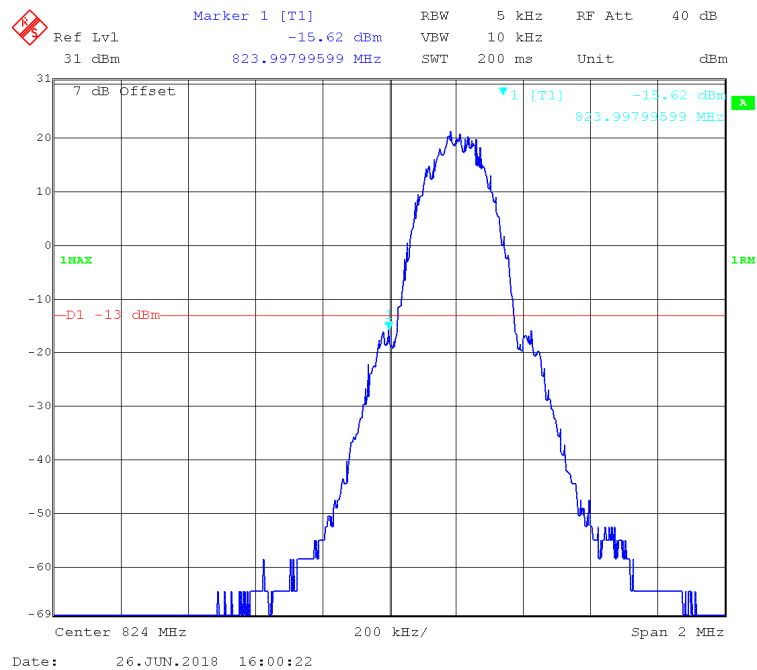


GPRS Mode, Right Band Edge

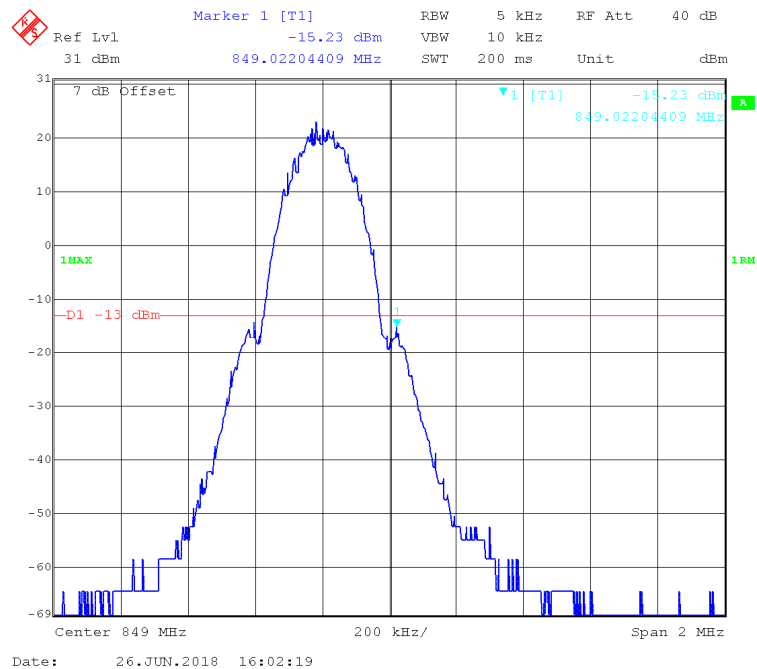


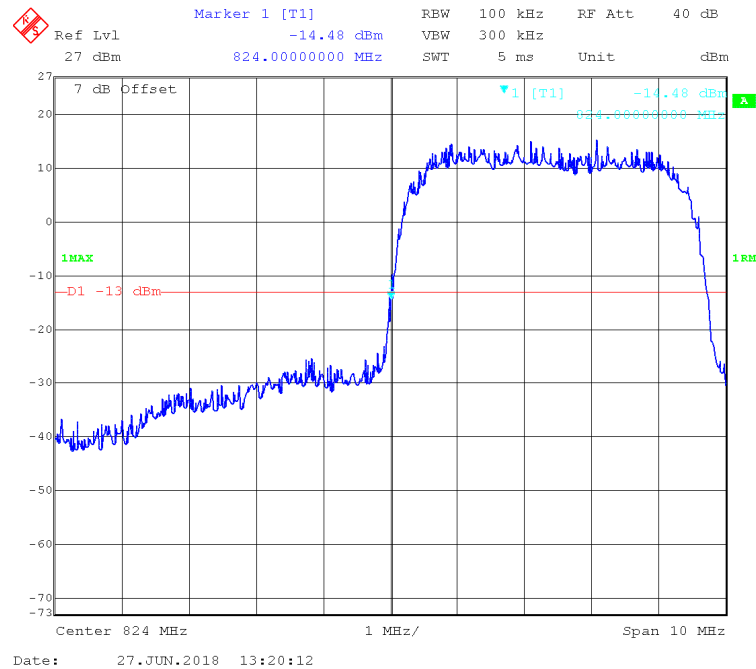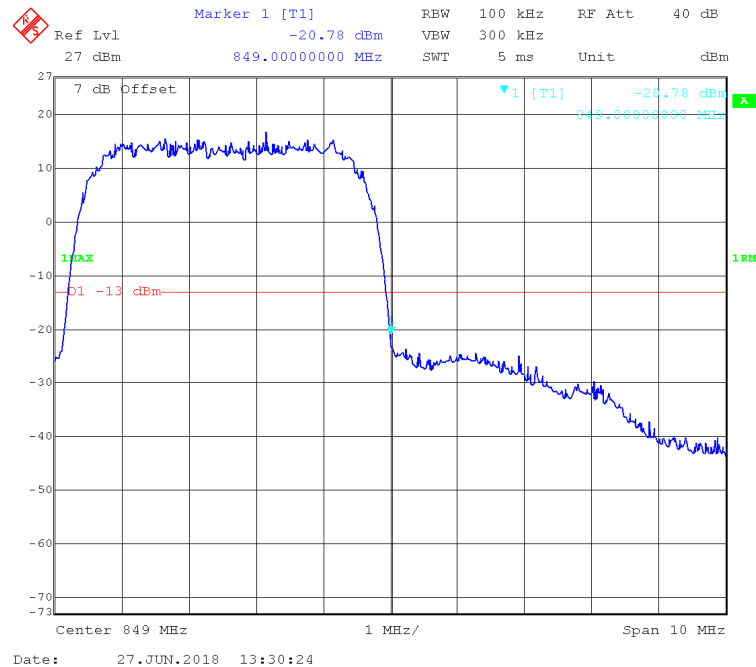WCDMA Band V**WCDMA (Rel 99) Mode, Left Band Edge****WCDMA (Rel 99) Mode, Right Band Edge**


WCDMA (HSDPA) Mode, Left Band Edge

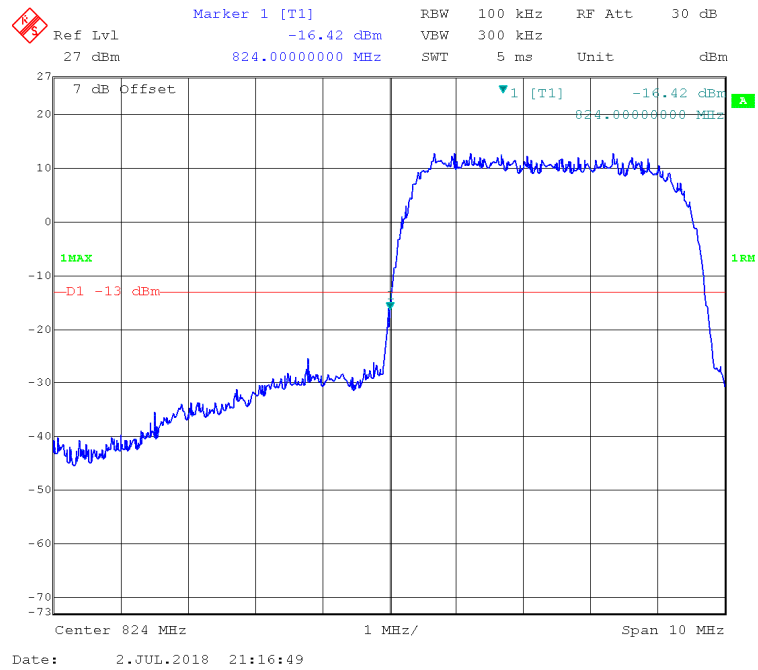


WCDMA (HSDPA) Mode, Right Band Edge

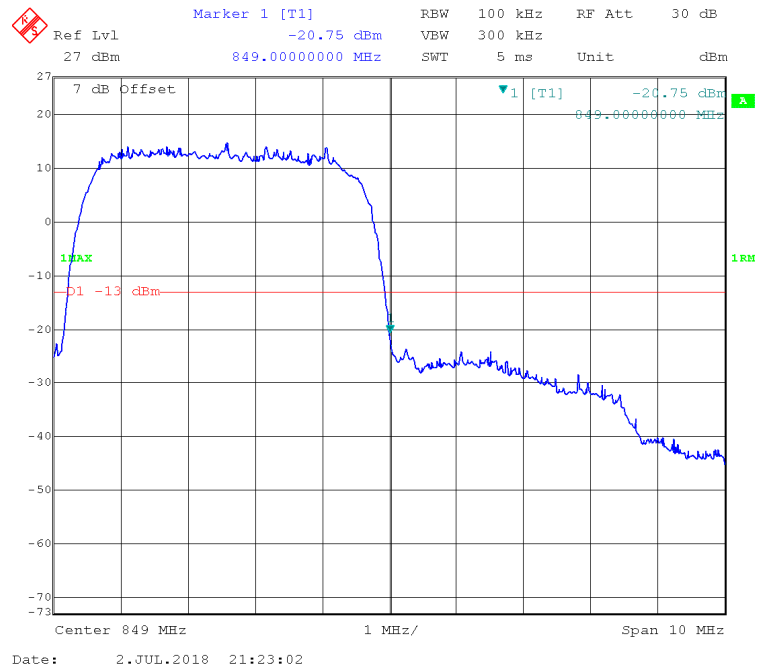


WCDMA (HSUPA) Mode, Left Band Edge

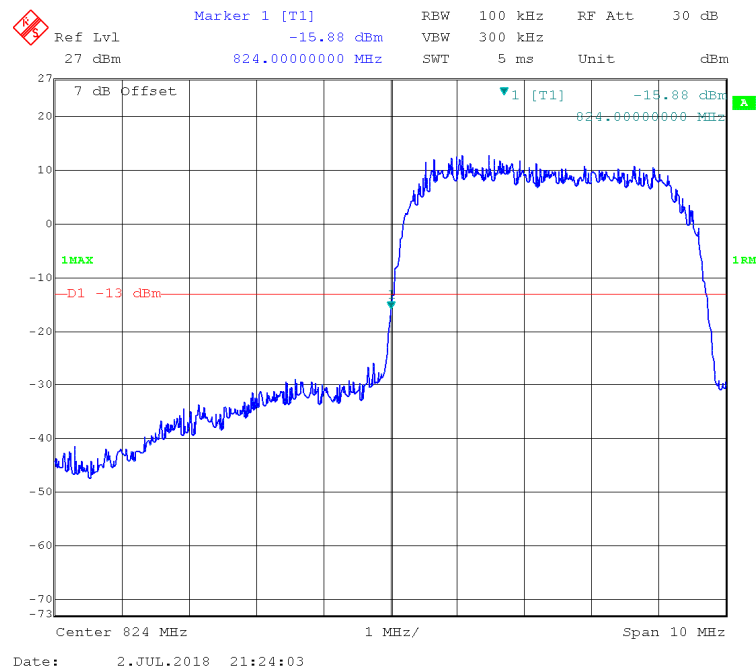


WCDMA (HSUPA) Mode, Right Band Edge

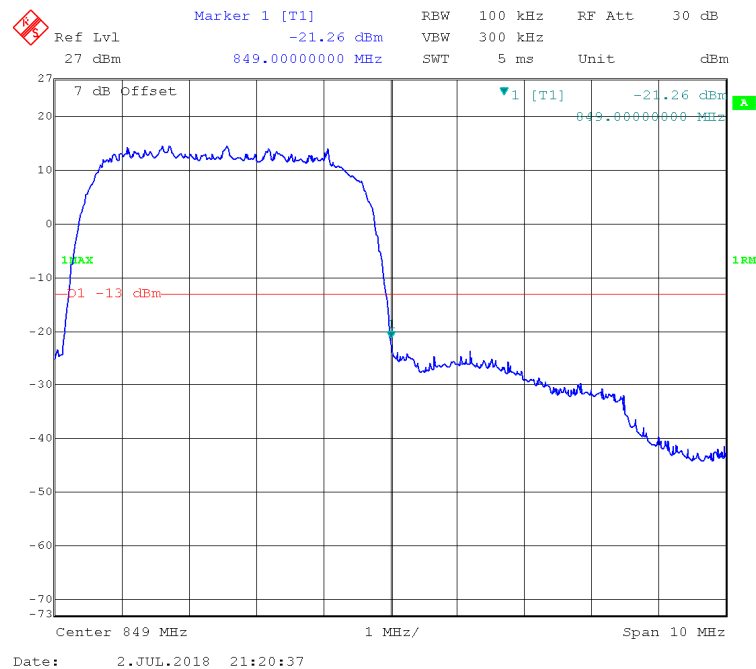

WCDMA (HSPA+) Mode, Left Band Edge

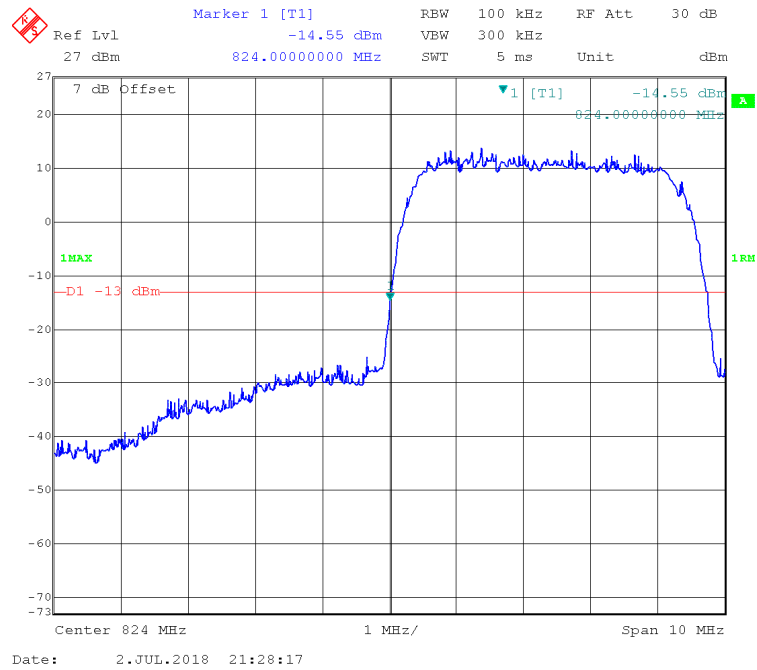


WCDMA (HSPA+) Mode, Right Band Edge

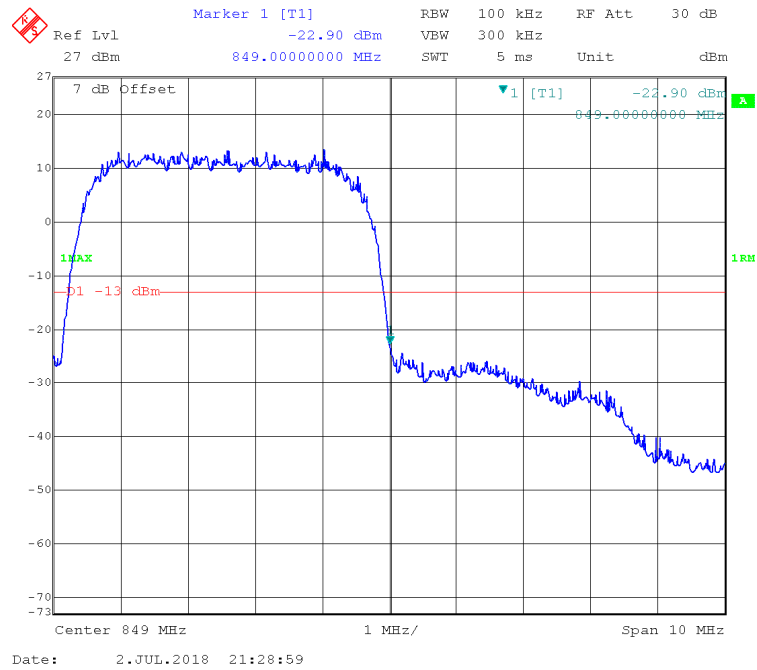


PCS 1900 Band:


GSM Mode, Left Band Edge

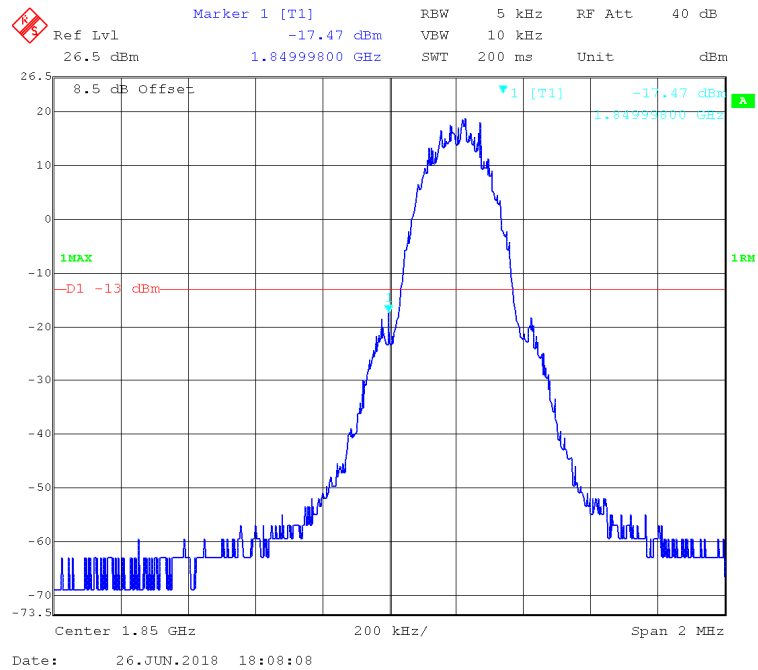


GSM Mode, Right Band Edge

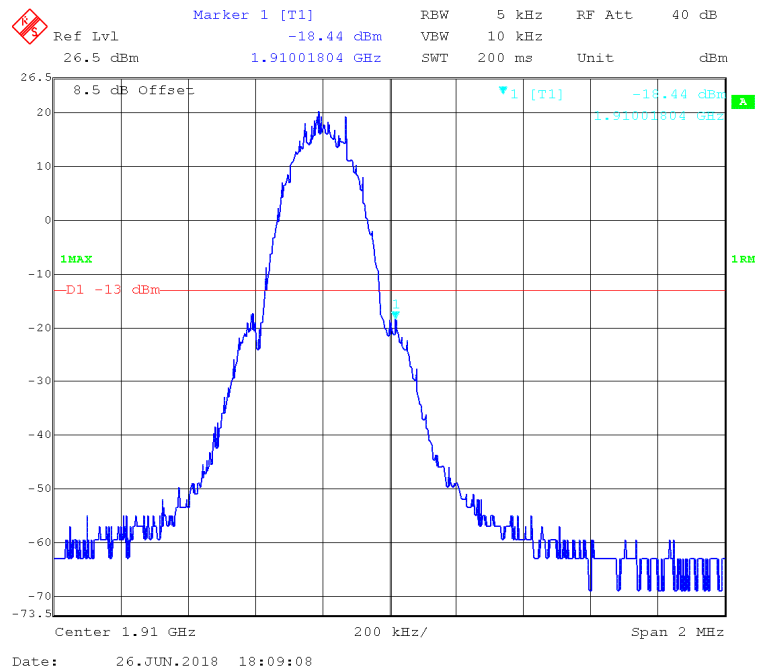

GPRS Mode, Left Band Edge

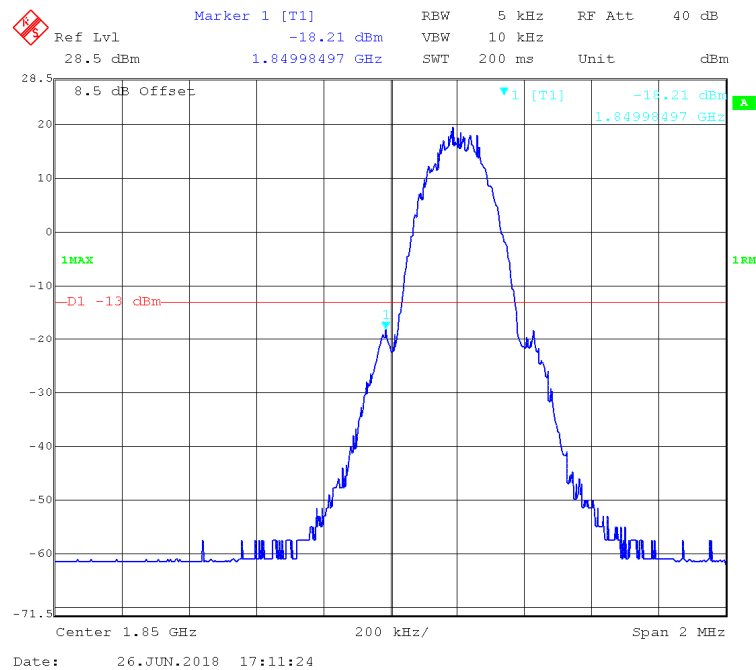


GPRS Mode, Right Band Edge

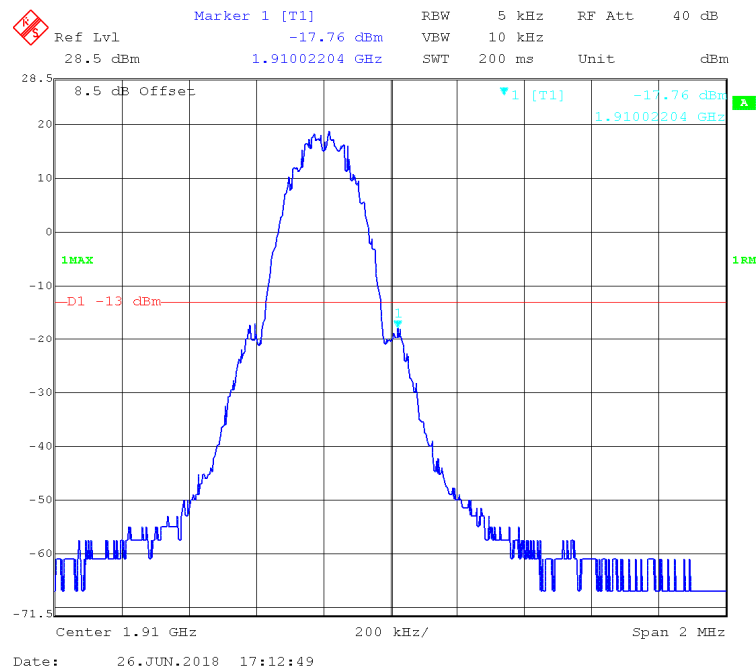




WCDMA Band II

WCDMA (Rel99) Mode, Left Band Edge

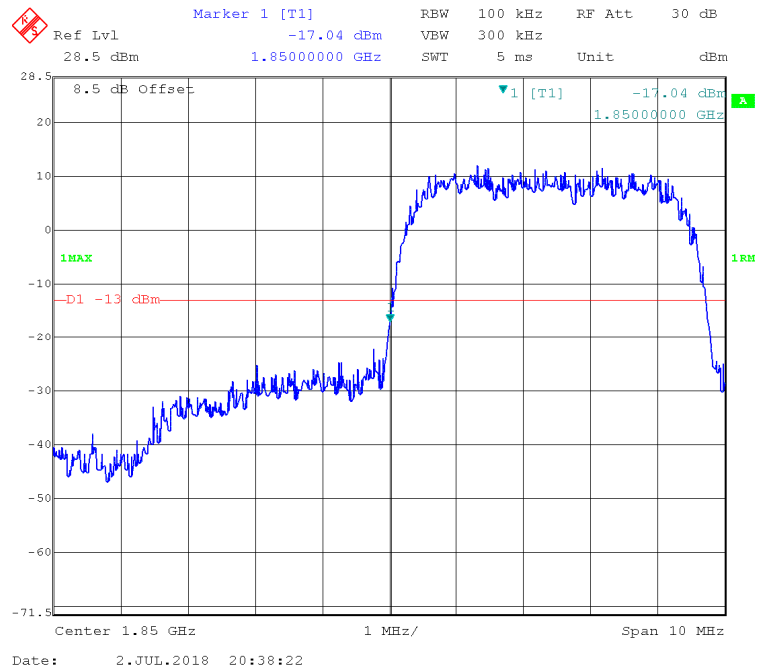


WCDMA (Rel99) Mode, Right Band Edge

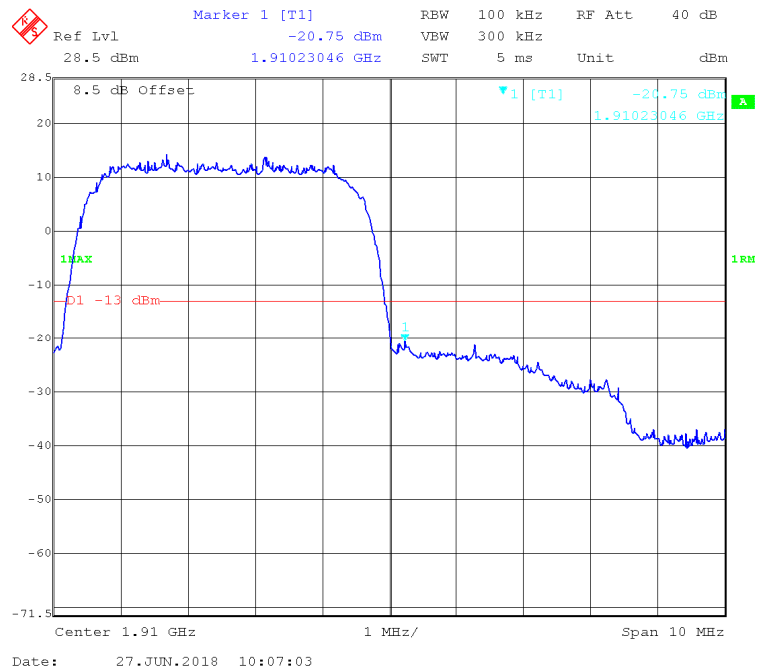


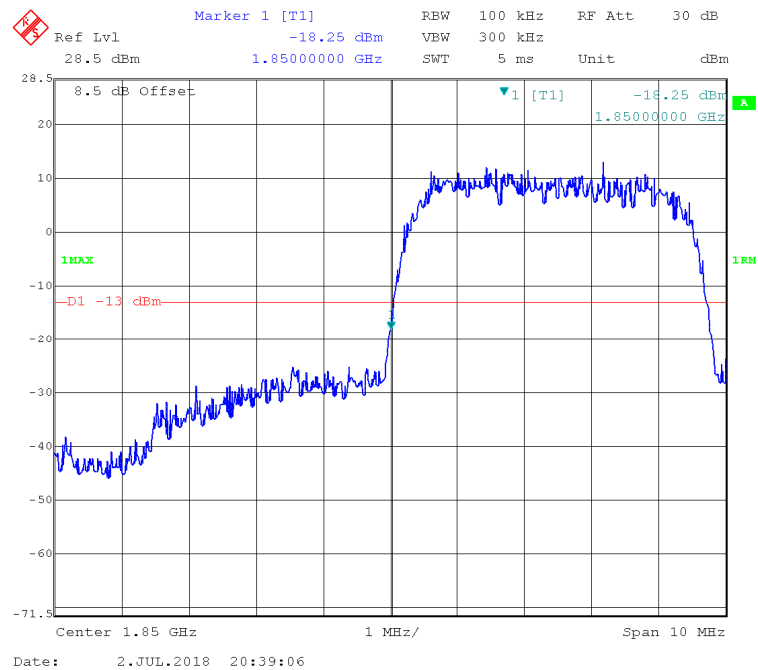
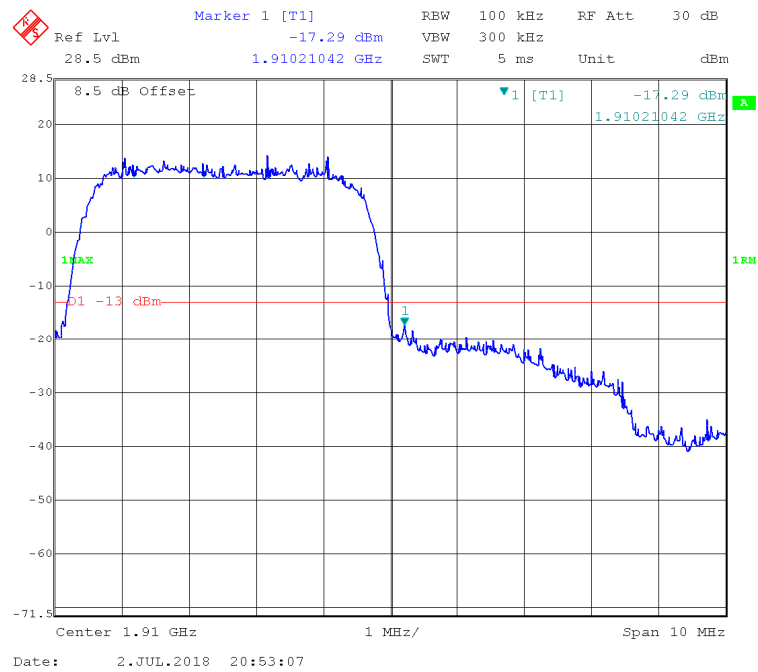
WCDMA (HSDPA) Mode, Left Band Edge**WCDMA (HSDPA) Mode, Right Band Edge**

WCDMA (HSUPA) Mode, Left Band Edge

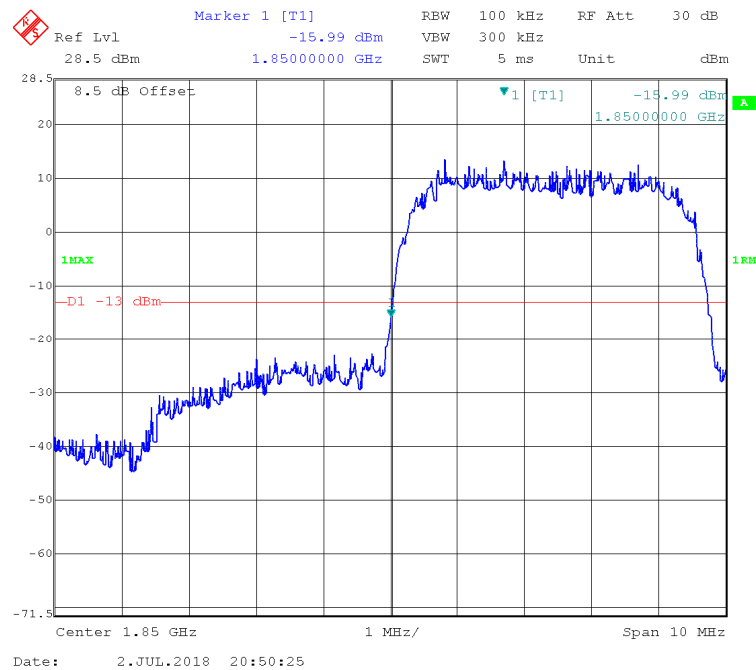

WCDMA (HSUPA) Mode, Right Band Edge

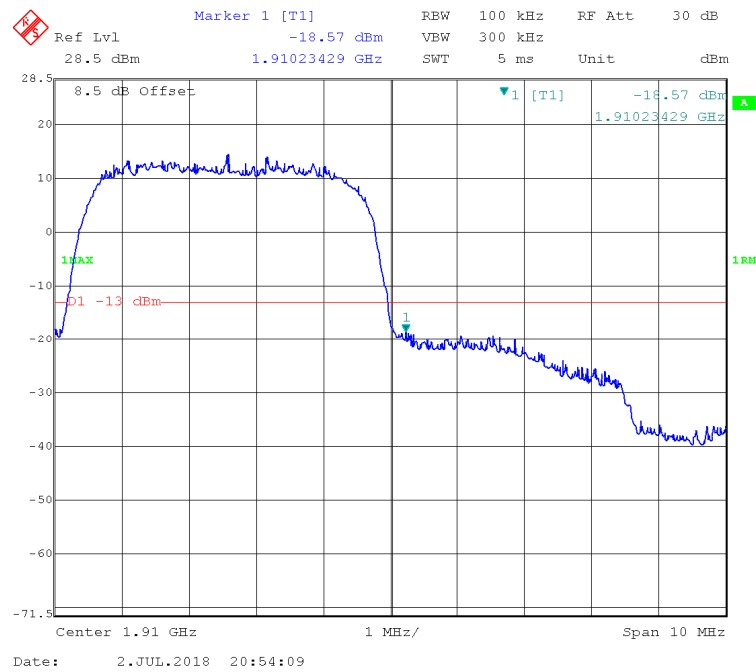


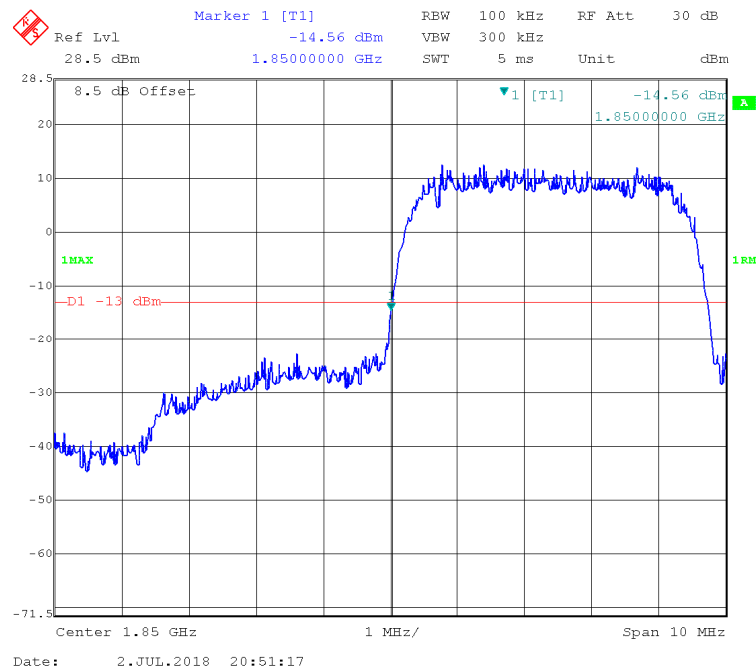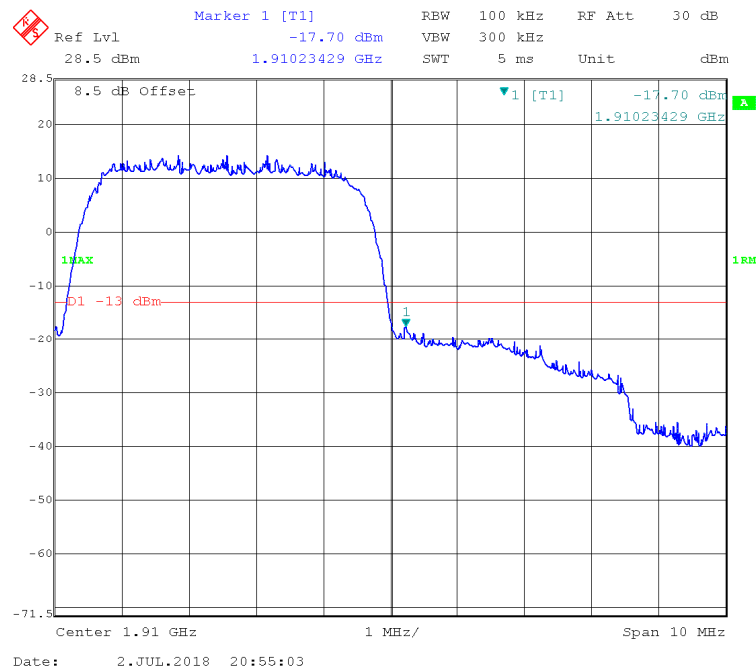WCDMA (HSPA+) Mode, Left Band Edge**WCDMA (HSPA+) Mode, Right Band Edge**


WCDMA (Rel99) Mode, Left Band Edge




WCDMA (HSDPA) Mode, Left Band Edge

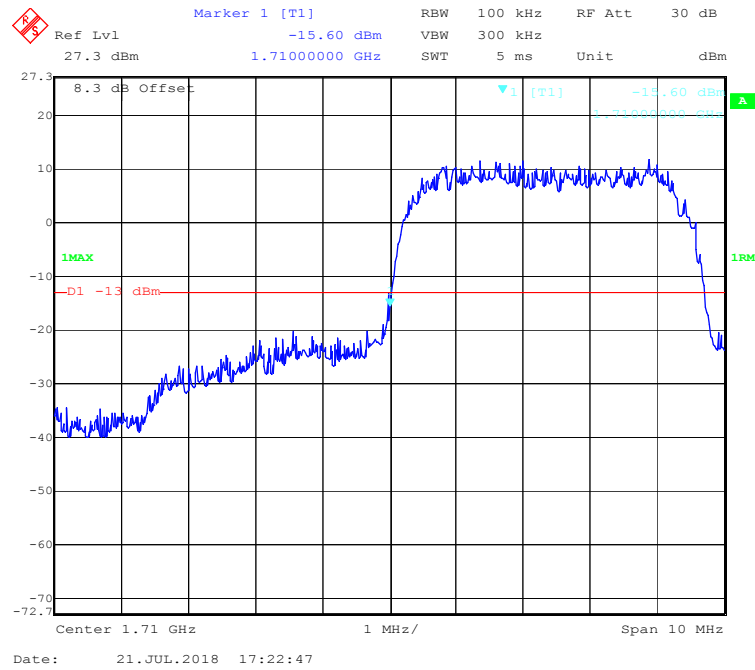


WCDMA (HSDPA) Mode, Right Band Edge

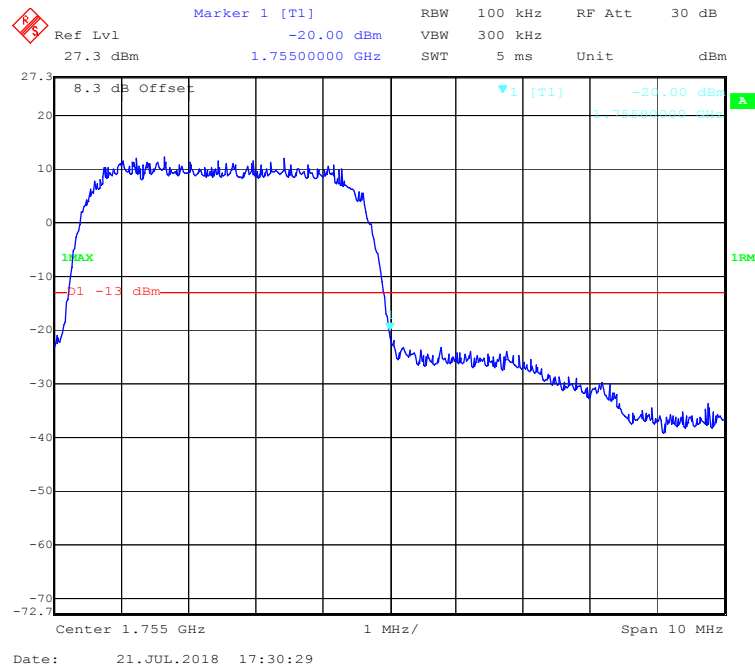


WCDMA (HSUPA) Mode, Left Band Edge

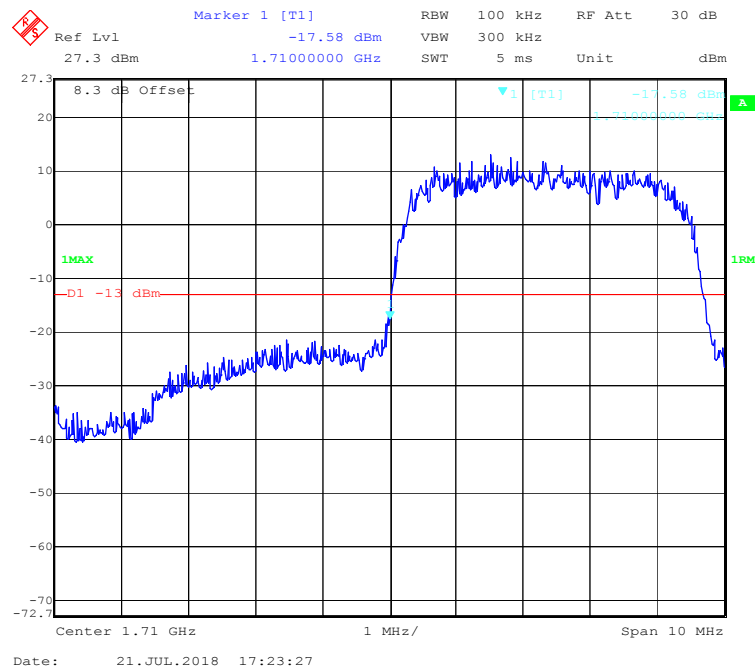


WCDMA (HSUPA) Mode, Right Band Edge

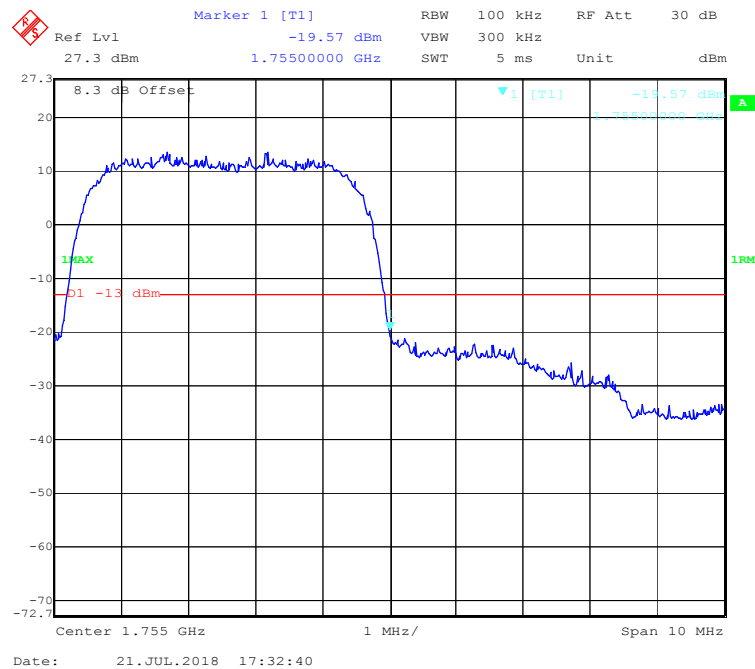

WCDMA (HSPA+) Mode, Left Band Edge

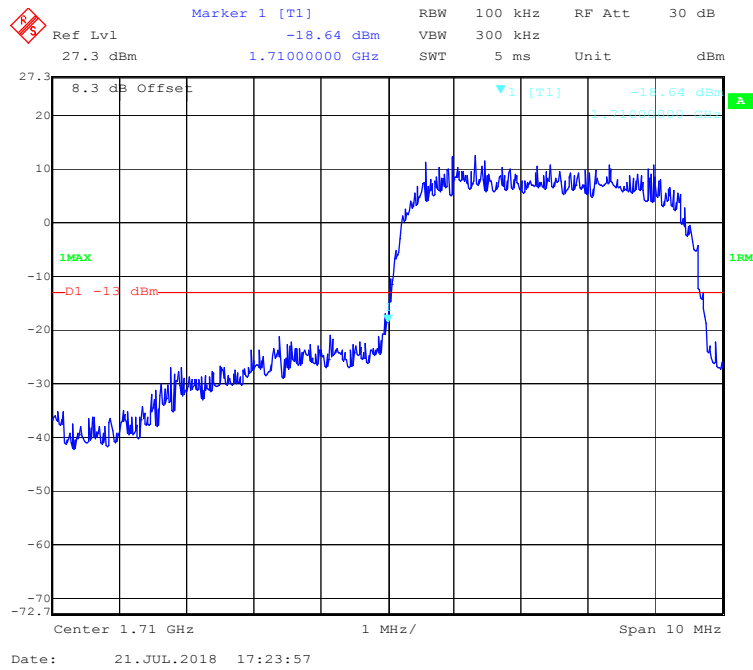

WCDMA (HSPA+) Mode, Right Band Edge

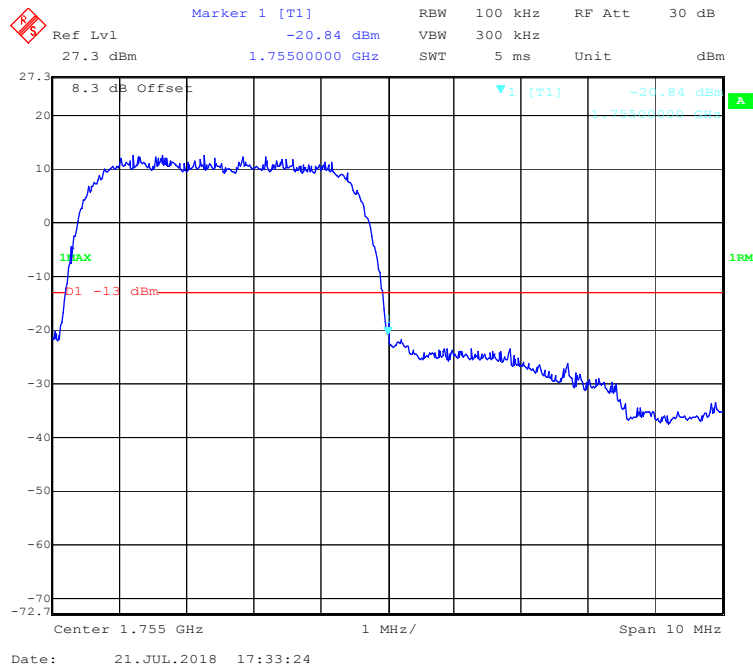

FCC § 2.1055; § 22.355; § 24.235; §27.54- FREQUENCY STABILITY

Applicable Standards

FCC § 2.1055, §22.355, §24.235 and §27.54.

According to FCC §2.1055, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Frequency Tolerance for Transmitters in the Public Mobile Services

Frequency Range (MHz)	Base, fixed (ppm)	Mobile > 3 watts (ppm)	Mobile ≤ 3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929.	5.0	N/A	N/A
929 to 960.	1.5	N/A	N/A
2110 to 2220	10.0	N/A	N/A


According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stays within the authorized frequency block.

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the communication test set.

Frequency Stability vs. Voltage: For hand carried, battery powered equipment; reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.

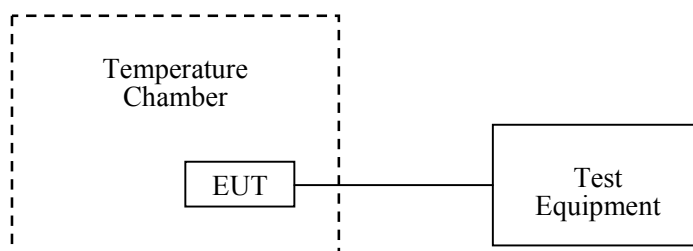

Test Data**Environmental Conditions**

Temperature:	23.2°C
Relative Humidity:	51 %
ATM Pressure:	101.3kPa

The testing was performed by Mark Yu from 2018-06-26 to 2018-07-21.

EUT operation mode: Transmitting

Test Result: Compliance.

GSM 850 Band:

GSM Mode, Middle Channel, $f_o = 836.6$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30	3.8	11	0.01315	2.5
-20		9	0.01076	2.5
-10		14	0.01673	2.5
0		9	0.01076	2.5
10		10	0.01195	2.5
20		14	0.01673	2.5
30		12	0.01434	2.5
40		10	0.01195	2.5
50		13	0.01554	2.5
25	V min.= 3.4	9	0.01076	2.5
25	V max.= 4.2	12	0.01434	2.5

GPRS Mode, Middle Channel, $f_0=836.6$ MHz				
Temperature (°C)	Power Supplied (V_{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30	3.8	10	0.01195	2.5
-20		11	0.01315	2.5
-10		13	0.01554	2.5
0		9	0.01076	2.5
10		14	0.01673	2.5
20		8	0.00956	2.5
30		10	0.01195	2.5
40		11	0.01315	2.5
50		13	0.01554	2.5
25	V min.= 3.4	14	0.01673	2.5
25	V max.= 4.2	12	0.01434	2.5

WCDMA Band V:

Middle Channel, $f_0=836.6$ MHz				
Temperature (°C)	Power Supplied (V_{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30	3.8	-4	-0.00478	2.5
-20		-2	-0.00239	2.5
-10		0	0.00000	2.5
0		-3	-0.00359	2.5
10		-6	-0.00717	2.5
20		-5	-0.00598	2.5
30		-1	-0.00120	2.5
40		-5	-0.00598	2.5
50		-3	-0.00359	2.5
25	V min.= 3.4	-5	-0.00598	2.5
25	V max.= 4.2	-6	-0.00717	2.5

PCS 1900 Band:

GSM Mode, Middle Channel, $f_0=1880.0$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30	3.8	-5	-0.00266	pass
-20		-7	-0.00372	pass
-10		-8	-0.00426	pass
0		1	0.00053	pass
10		2	0.00106	pass
20		-2	-0.00106	pass
30		-3	-0.00160	pass
40		-4	-0.00213	pass
50		-10	-0.00532	pass
25	V min.= 3.4	-6	-0.00319	pass
25	V max.= 4.2	-7	-0.00372	pass

GPRS Mode, Middle Channel, $f_0=1880.0$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30	3.8	-3	-0.00160	pass
-20		1	0.00053	pass
-10		-4	-0.00213	pass
0		-2	-0.00106	pass
10		2	0.00106	pass
20		1	0.00053	pass
30		-3	-0.00160	pass
40		5	0.00266	pass
50		3	0.00160	pass
25	V min.= 3.4	4	0.00213	pass
25	V max.= 4.2	2	0.00106	pass

WCDMA Band II:

WCDMA Mode, Middle Channel, $f_0=1880.0$ MHz				
Temperature (°C)	Power Supplied (V_{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30	3.8	-5	-0.00266	pass
-20		-2	-0.00106	pass
-10		-4	-0.00213	pass
0		-1	-0.00053	pass
10		-7	-0.00372	pass
20		-2	-0.00106	pass
30		-4	-0.00213	pass
40		-6	-0.00319	pass
50		-5	-0.00266	pass
25	V min.= 3.4	-1	-0.00053	pass
25	V max.= 4.2	-3	-0.00160	pass

WCDMA Band IV:

WCDMA Mode, Middle Channel, $f_0=1732.6$ MHz				
Temperature (°C)	Power Supplied (V_{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30	3.8	-9	-0.00519	pass
-20		-7	-0.00404	pass
-10		-6	-0.00346	pass
0		-2	-0.00115	pass
10		0	0.00000	pass
20		-4	-0.00231	pass
30		1	0.00058	pass
40		-7	-0.00404	pass
50		-8	-0.00462	pass
25	V min.= 3.4	-3	-0.00173	pass
25	V max.= 4.2	-5	-0.00289	pass

***** END OF REPORT *****