

TEST REPORT

Product : MOBILE PHONE
Trade mark : ROKiT
Model/Type reference : IO PRO 3D
Serial Number : N/A
Report Number : EED32M00238601
FCC ID : 2AQNZ-IOPRO3D
Date of Issue : Aug.13, 2020
Test Standards : 47 CFR Part 15Subpart C
Test result : PASS

Prepared for:

ROKIT Corp Limited
ROK House, Kingswood Business Park,
Holyhead Road, Albrighton, Wolverhampton,
United Kingdom, WV73AU

Prepared by:

Centre Testing International Group Co., Ltd.
Hongwei Industrial Zone, Bao'an 70 District,
Shenzhen, Guangdong, China
TEL: +86-755-3368 3668
FAX: +86-755-3368 3385

Compiled by:

Sunlight Sun

Reviewed by:

Jok Yang

Approved by:

Sunlight Sun

Date:

Aug.13, 2020

Sam Chuang

Check No.:3096381507




Report No. : EED32M00238601

Page 2 of 52

2 Version

Version No.	Date	Description
00	Aug.13, 2020	Original

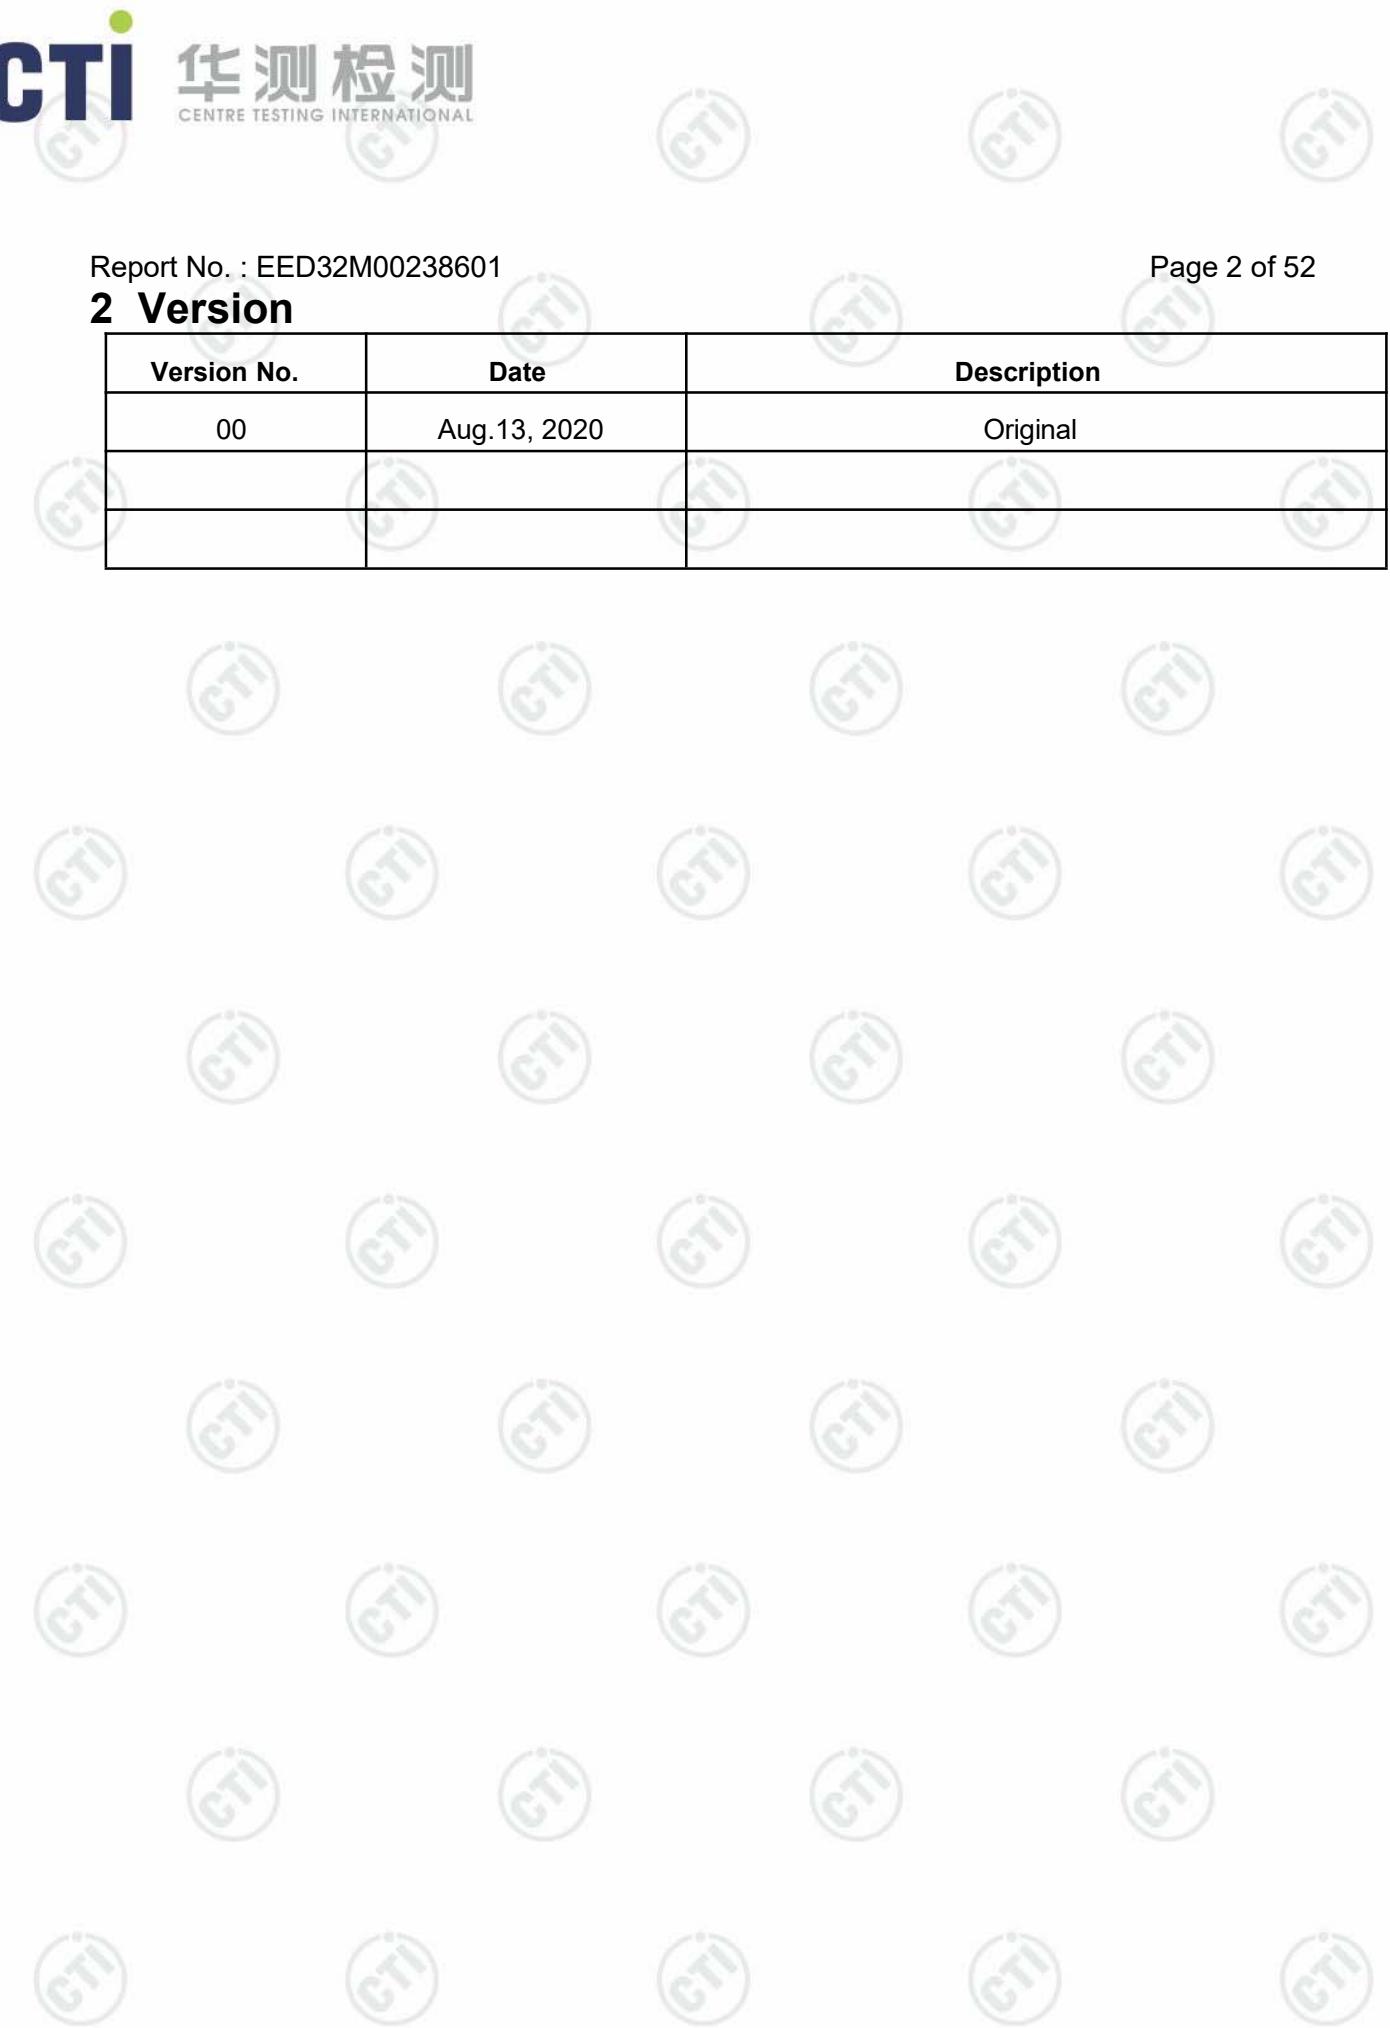

3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15Subpart C Section 15.203/15.247 (c)	ANSI C63.10-2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15Subpart C Section 15.207	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013	PASS
Power Spectral Density	47 CFR Part 15Subpart C Section 15.247 (e)	ANSI C63.10-2013	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15Subpart C Section 15.247(d)	ANSI C63.10-2013	PASS
RF Conducted Spurious Emissions	47 CFR Part 15Subpart C Section 15.247(d)	ANSI C63.10-2013	PASS
Radiated Spurious Emissions	47 CFR Part 15Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Remark: Test according to ANSI C63.4-2014 & ANSI C63.10-2013. The tested sample(s) and the sample information are provided by the client. All test data come from the report of No. EED32K00215401, only the product model and FCC ID has been modified.			

Report No. : EED32M00238601

Page 4 of 52


4 Content

1 COVER PAGE	1
2 VERSION	2
3 TEST SUMMARY	3
4 CONTENT	4
5 TEST REQUIREMENT	5
5.1 TEST SETUP.....	5
5.1.1 For Conducted test setup.....	5
5.1.2 For Radiated Emissions test setup.....	5
5.1.3 For Conducted Emissions test setup.....	6
5.2 TEST ENVIRONMENT.....	6
5.3 TEST CONDITION.....	6
6 GENERAL INFORMATION	7
6.1 CLIENT INFORMATION.....	7
6.2 GENERAL DESCRIPTION OF EUT.....	7
6.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD.....	8
6.4 DESCRIPTION OF SUPPORT UNITS.....	9
6.5 TEST LOCATION.....	9
6.6 DEVIATION FROM STANDARDS.....	9
6.7 ABNORMALITIES FROM STANDARD CONDITIONS.....	9
6.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	9
6.9 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2).....	10
7 EQUIPMENT LIST	11
8 RADIO TECHNICAL REQUIREMENTS SPECIFICATION	14
Appendix A) 6dB Occupied Bandwidth.....	15
Appendix B) Conducted Peak Output Power.....	17
Appendix C) Band-edge for RF Conducted Emissions.....	19
Appendix D) RF Conducted Spurious Emissions.....	21
Appendix E) Power Spectral Density.....	24
Appendix F) Antenna Requirement.....	26
Appendix G) AC Power Line Conducted Emission.....	27
Appendix H) Restricted bands around fundamental frequency (Radiated).....	30
Appendix I) Radiated Spurious Emissions.....	34
PHOTOGRAPHS OF TEST SETUP	40
PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	42

5 Test Requirement

5.1 Test setup

5.1.1 For Conducted test setup

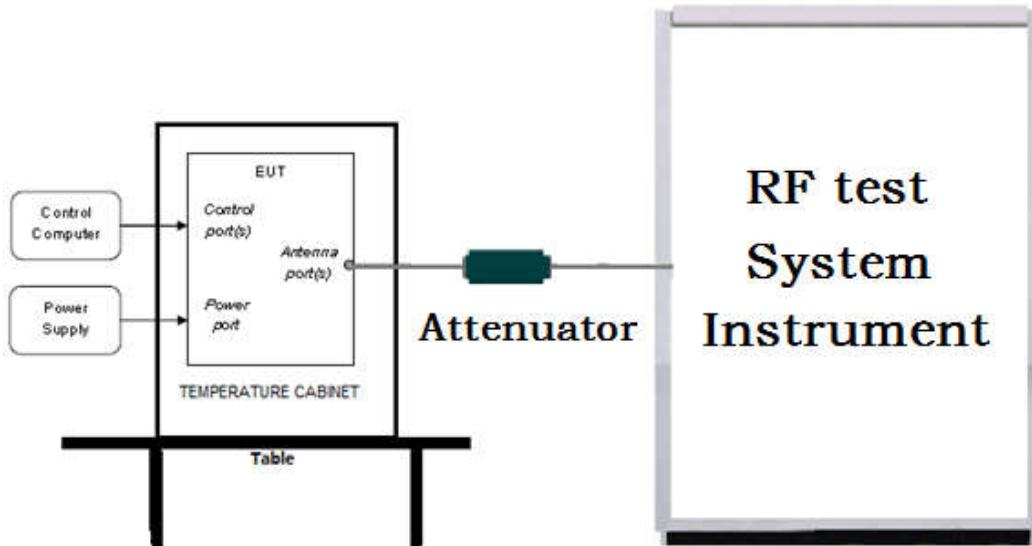

5.1.2 For Radiated Emissions test setup

Radiated Emissions setup:

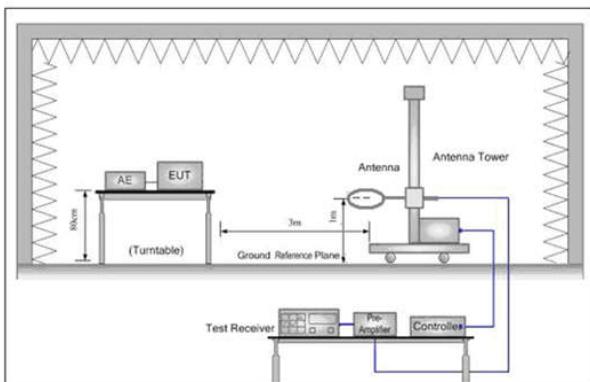


Figure 1. Below 30MHz

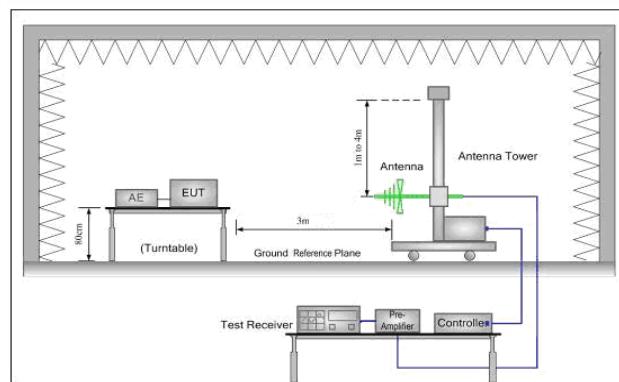


Figure 2. 30MHz to 1GHz


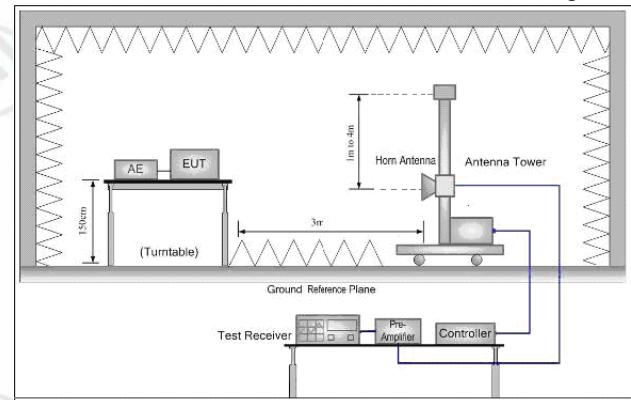


Figure 3. Above 1GHz

5.1.3 For Conducted Emissions test setup

Conducted Emissions setup

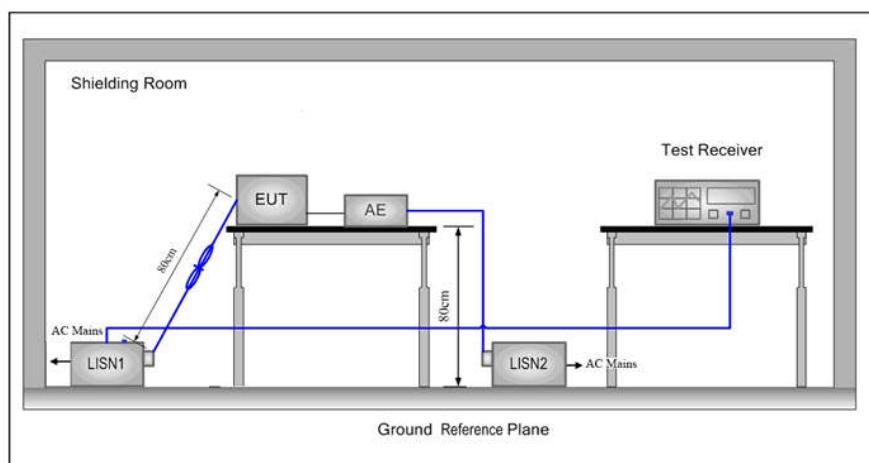

5.2 Test Environment

Operating Environment:

Temperature:	24.0 °C
Humidity:	57 % RH
Atmospheric Pressure:	1010mbar

5.3 Test Condition

Test channel:

Test Mode	Tx/Rx	RF Channel		
		Low(L)	Middle(M)	High(H)
GFSK	2402MHz ~2480 MHz	Channel 1	Channel 20	Channel 40
		2402MHz	2440MHz	2480MHz
TX mode:	The EUT transmitted the continuous signal at the specific channel(s).			

Report No. : EED32M00238601

Page 7 of 52

6 General Information

6.1 Client Information

Applicant:	ROKIT Corp Limited
Address of Applicant:	ROK House, Kingswood Business Park, Holyhead Road, Albrighton, Wolverhampton, United Kingdom, WV73AU
Manufacturer:	ROKIT Corp Limited
Address of Manufacturer:	ROK House, Kingswood Business Park, Holyhead Road, Albrighton, Wolverhampton, United Kingdom, WV73AU
Factory:	Shenzhen Newsun Technology Co., Ltd
Address of Factory:	5th Floor, A1 Building, Zhongtai Information Technology Industrial Park, No. 2 Dezheng Road, Shilong Community, Shiyan Street, Baoan District, Shenzhen, China

6.2 General Description of EUT

Product Name:	MOBILE PHONE
Model No.(EUT):	IO PRO 3D
Trade mark:	ROKiT
EUT Supports Radios application:	<p>BT4.0, 2.1+EDR: 2402MHz to 2480MHz</p> <p>WiFi: IEEE 802.11b/g/n(HT20): 2412MHz to 2462MHz</p> <p>IEEE 802.11n(HT40): 2422MHz to 2452MHz</p> <p>GPS: 1559MHz to 1610MHz</p> <p>GSM/GPRS/EDGE 850: Tx:824.20 -848.80MHz; Rx: 869.20 – 893.80MHz</p> <p>GSM/GPRS/EDGE 1900: Tx:1850.20 – 1909.80MHz; Rx:1930.20 – 1989.80MHz</p> <p>CDMA BC0: Tx:824-849MHz; Rx:869-894MHz</p> <p>CDMA BC1: Tx:1850-1910MHz; Rx:1930-1990MHz</p> <p>CDMA BC10: TX:817.25-823.975MHz, RX:862.25-868.975MHz</p> <p>1xEVDO BC0: Tx:824-849MHz; Rx:869-894MHz</p> <p>1xEVDO BC0: Tx:1850-1910MHz; Rx:1930-1990MHz</p> <p>1xEVDO BC0: TX:817.25-823.975MHz, RX:862.25-868.975MHz</p> <p>WCDMA/HSDPA/HSUPA/HSPA+(Down Link) Band V: Tx:826.40 -846.60MHz; Rx: 871.40 – 891.60MHz</p> <p>WCDMA/HSDPA/HSUPA/HSPA+(Down Link) Band IV: Tx:1710-1755MHz; Rx: 2110-2155MHz</p> <p>WCDMA/HSDPA/HSUPA/HSPA+(Down Link) Band II: Tx:1852.40 – 1907.60MHz; Rx:1932.40 – 1987.60MHz</p> <p>LTE Band 2: TX:1850MHz to 1910MHz RX:1930MHz to 1990MHz.</p> <p>LTE Band 4:</p>

Report No. : EED32M00238601

Page 8 of 52

	TX:1710MHz to 1755MHz RX:2110MHz to 2155MHz. LTE Band 5: TX:824MHz to 849MHz RX:869MHz to 894MHz. LTE Band 12: TX:698MHz to 716MHz RX:729MHz to 746MHz. LTE Band 17: TX:704MHz to 716MHz RX:734MHz to 746MHz.
Power Supply:	DC 5V by USB port Li-ion Battery 3.85V, 3850mAh, 14.822Wh
Firmware version:	MOLY.LR12A.R2.MP.V36.9(manufacturer declare)
Hardware version:	V0(manufacturer declare)
USB cable:	100cm(shielded)
Sample Received Date:	Aug. 08, 2018
Sample tested Date:	Aug. 08, 2018 to Aug. 29, 2018

6.3 Product Specification subjective to this standard

Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	4.0
Modulation Technique:	DSSS
Modulation Type:	GFSK
Number of Channel:	40
Sample Type:	mobile production
Antenna Type and Gain:	Type: MONOPOLE Gain: -3dBi
Test Voltage:	DC 3.85V

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	11	2422MHz	21	2442MHz	31	2462MHz
2	2404MHz	12	2424MHz	22	2444MHz	32	2464MHz
3	2406MHz	13	2426MHz	23	2446MHz	33	2466MHz
4	2408MHz	14	2428MHz	24	2448MHz	34	2468MHz
5	2410MHz	15	2430MHz	25	2450MHz	35	2470MHz
6	2412MHz	16	2432MHz	26	2452MHz	36	2472MHz
7	2414MHz	17	2434MHz	27	2454MHz	37	2474MHz
8	2416MHz	18	2436MHz	28	2456MHz	38	2476MHz
9	2418MHz	19	2438MHz	29	2458MHz	39	2478MHz
10	2420MHz	20	2440MHz	30	2460MHz	40	2480MHz

6.4 Description of Support Units

The EUT has been tested with associated equipment below.

Associated equipment name	Manufacture	model	serial number	Supplied by	Certification
AE1 AC Adapter	Dongguan Aohai Power Techhnology Co.,Ltd.	MDY-09-EB	_____	CTI	FCC

6.5 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd

Building C, Hongwei Industrial Park Block 70, Bao'an District, Shenzhen, China

Telephone: +86 (0) 755 33683668 Fax:+86 (0) 755 33683385

No tests were sub-contracted.

FCC Designation No.: CN1164

6.6 Deviation from Standards

None.

6.7 Abnormalities from Standard Conditions

None.

6.8 Other Information Requested by the Customer

None.

Report No. : EED32M00238601

Page 10 of 52

6.9 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.9×10^{-8}
2	RF power, conducted	0.31dB (30MHz-1GHz)
		0.57dB (1GHz-18GHz)
3	Radiated Spurious emission test	4.5dB (30MHz-1GHz)
		4.8dB (1GHz-12.75GHz)
4	Conduction emission	3.6dB (9kHz to 150kHz)
		3.2dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	2.8%
7	DC power voltages	0.025%

Report No. : EED32M00238601

Page 11 of 52

7 Equipment List

RF test system					
Equipment	Manufacturer	Model No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Signal Generator	Keysight	E8257D	MY53401106	03-13-2018	03-12-2019
Spectrum Analyzer	Keysight	N9010A	MY54510339	03-13-2018	03-12-2019
Attenuator	HuaXiang	SHX370	15040701	03-13-2018	03-12-2019
Signal Generator	Keysight	N5181A	MY46240094	03-13-2018	03-12-2019
Signal Generator	Keysight	N5182B	MY53051549	03-13-2018	03-12-2019
Temperature/Humidity Indicator	TAYLOR	1451	---	05-02-2018	05-01-2019
High-pass filter	Sinoscite	FL3CX03WG18 NM12-0398-002	---	01-10-2018	01-09-2019
High-pass filter	MICRO-TRONICS	SPA-F-63029-4	---	01-10-2018	01-09-2019
band rejection filter	Sinoscite	FL5CX01CA09 CL12-0395-001	---	01-10-2018	01-09-2019
band rejection filter	Sinoscite	FL5CX01CA08 CL12-0393-001	---	01-10-2018	01-09-2019
band rejection filter	Sinoscite	FL5CX02CA04 CL12-0396-002	---	01-10-2018	01-09-2019
band rejection filter	Sinoscite	FL5CX02CA03 CL12-0394-001	---	01-10-2018	01-09-2019
Communication test set	R&S	CMW500	107929	06-27-2018	06-26-2019
DC Power	Keysight	E3642A	MY54426035	03-13-2018	03-12-2019
PC-1	Lenovo	R4960d	---	03-29-2018	03-28-2019
BT&WI-FI Automatic control	R&S	OSP120	101374	04-11-2018	04-10-2019
RF control unit	JS Tonscend	JS0806-2	15860006	03-13-2018	03-12-2019
RF control unit	JS Tonscend	JS0806-1	15860004	03-13-2018	03-12-2019
RF control unit	JS Tonscend	JS0806-4	158060007	03-13-2018	03-12-2019
BT&WI-FI Automatic test software	JS Tonscend	JSTS1120-2	---	03-13-2018	03-12-2019
high-low temperature test chamber	DongGuangQinZhuo	LK-80GA	QZ20150611879	03-16-2018	03-15-2019

3M Semi/full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
3M Chamber & Accessory Equipment	TDK	SAC-3	---	06-04-2016	06-03-2019
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	9163-401	04-26-2018	04-25-2019
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	9163-618	07-30-2018	07-29-2019
Microwave Preamplifier	Agilent	8449B	3008A02425	08-21-2018	08-20-2019
Microwave Preamplifier	Tonscend	EMC051845SE	980380	01-19-2018	01-18-2019
Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-1869	04-25-2018	04-23-2021
Double ridge horn antenna	A.H.SYSTEMS	SAS-574	6042	06-05-2018	06-04-2021
Pre-amplifier	A.H.SYSTEMS	PAP-1840-60	6041	06-05-2018	06-04-2021
Loop Antenna	ETS	6502	00071730	06-22-2017	06-21-2019
Spectrum Analyzer	R&S	FSP40	100416	05-11-2018	05-10-2019
Receiver	R&S	ESCI	100435	05-25-2018	05-24-2019
Multi device Controller	maturo	NCD/070/10711 112	---	01-10-2018	01-09-2019
LISN	schwarzbeck	NNBM8125	81251547	05-11-2018	05-10-2019
LISN	schwarzbeck	NNBM8125	81251548	05-11-2018	05-10-2019
Signal Generator	Agilent	E4438C	MY45095744	03-13-2018	03-12-2019
Signal Generator	Keysight	E8257D	MY53401106	03-13-2018	03-12-2019
Temperature/ Humidity Indicator	TAYLOR	1451	1905	05-02-2018	05-01-2019
Communication test set	Agilent	E5515C	GB47050534	03-16-2018	03-15-2019
Cable line	Fulai(7M)	SF106	5219/6A	01-10-2018	01-09-2019
Cable line	Fulai(6M)	SF106	5220/6A	01-10-2018	01-09-2019
Cable line	Fulai(3M)	SF106	5216/6A	01-10-2018	01-09-2019
Cable line	Fulai(3M)	SF106	5217/6A	01-10-2018	01-09-2019
Communication test set	R&S	CMW500	104466	02-05-2018	02-04-2019
High-pass filter	Sinoscite	FL3CX03WG18 NM12-0398-002	---	01-10-2018	01-09-2019
High-pass filter	MICRO-TRONICS	SPA-F-63029-4	---	01-10-2018	01-09-2019
band rejection filter	Sinoscite	FL5CX01CA09 CL12-0395-001	---	01-10-2018	01-09-2019
band rejection filter	Sinoscite	FL5CX01CA08 CL12-0393-001	---	01-10-2018	01-09-2019
band rejection filter	Sinoscite	FL5CX02CA04 CL12-0396-002	---	01-10-2018	01-09-2019
band rejection filter	Sinoscite	FL5CX02CA03 CL12-0394-001	---	01-10-2018	01-09-2019

Report No. : EED32M00238601

Page 13 of 52

Conducted disturbance Test					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Receiver	R&S	ESCI	100435	05-25-2018	05-24-2019
Temperature/ Humidity Indicator	Defu	TH128	/	07-02-2018	07-01-2019
Communication test set	Agilent	E5515C	GB47050534	03-16-2018	03-15-2019
Communication test set	R&S	CMW500	152394	03-16-2018	03-15-2019
LISN	R&S	ENV216	100098	05-10-2018	05-10-2019
LISN	schwarzbeck	NNLK8121	8121-529	05-10-2018	05-10-2019
Voltage Probe	R&S	ESH2-Z3 0299.7810.56	100042	06-13-2017	06-11-2020
Current Probe	R&S	EZ-17 816.2063.03	100106	05-30-2018	05-29-2019
ISN	TESEQ	ISN T800	30297	02-06-2018	02-05-2019

Report No. : EED32M00238601

Page 14 of 52

8 Radio Technical Requirements Specification

Reference documents for testing:

No.	Identity	Document Title
1	FCC Part15C	Subpart C-Intentional Radiators
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

Test Results List:

Test Requirement	Test method	Test item	Verdict	Note
Part15C Section 15.247 (a)(2)	ANSI C63.10	6dB Occupied Bandwidth	PASS	Appendix A)
Part15C Section 15.247 (b)(3)	ANSI C63.10	Conducted Peak Output Power	PASS	Appendix B)
Part15C Section 15.247(d)	ANSI C63.10	Band-edge for RF Conducted Emissions	PASS	Appendix C)
Part15C Section 15.247(d)	ANSI C63.10	RF Conducted Spurious Emissions	PASS	Appendix D)
Part15C Section 15.247 (e)	ANSI C63.10	Power Spectral Density	PASS	Appendix E)
Part15C Section 15.203/15.247 (c)	ANSI C63.10	Antenna Requirement	PASS	Appendix F)
Part15C Section 15.207	ANSI C63.10	AC Power Line Conducted Emission	PASS	Appendix G)
Part15C Section 15.205/15.209	ANSI C63.10	Restricted bands around fundamental frequency (Radiated Emission)	PASS	Appendix H)
Part15C Section 15.205/15.209	ANSI C63.10	Radiated Spurious Emissions	PASS	Appendix I)

Report No. : EED32M00238601

Page 15 of 52

Appendix A) 6dB Occupied Bandwidth

Test Result

Mode	Channel	6dB Bandwidth [MHz]	99% OBW[MHz]	Verdict	Remark
BLE	LCH	0.6764	1.0319	PASS	Peak detector
BLE	MCH	0.6772	1.0324	PASS	
BLE	HCH	0.6738	1.0295	PASS	

Test Graphs



Report No. : EED32M00238601

Page 17 of 52

Appendix B) Conducted Peak Output Power

Test Result

Mode	Channel	Conduct Peak Power[dBm]	Verdict
BLE	LCH	4.734	PASS
BLE	MCH	5.45	PASS
BLE	HCH	3.795	PASS

Test Graphs



Report No. : EED32M00238601


Page 19 of 52

Appendix C) Band-edge for RF Conducted Emissions

Result Table

Mode	Channel	Carrier Power[dBm]	Max.Spurious Level [dBm]	Limit [dBm]	Verdict
BLE	LCH	3.955	-61.865	-16.05	PASS
BLE	HCH	3.092	-60.267	-16.91	PASS

Test Graphs

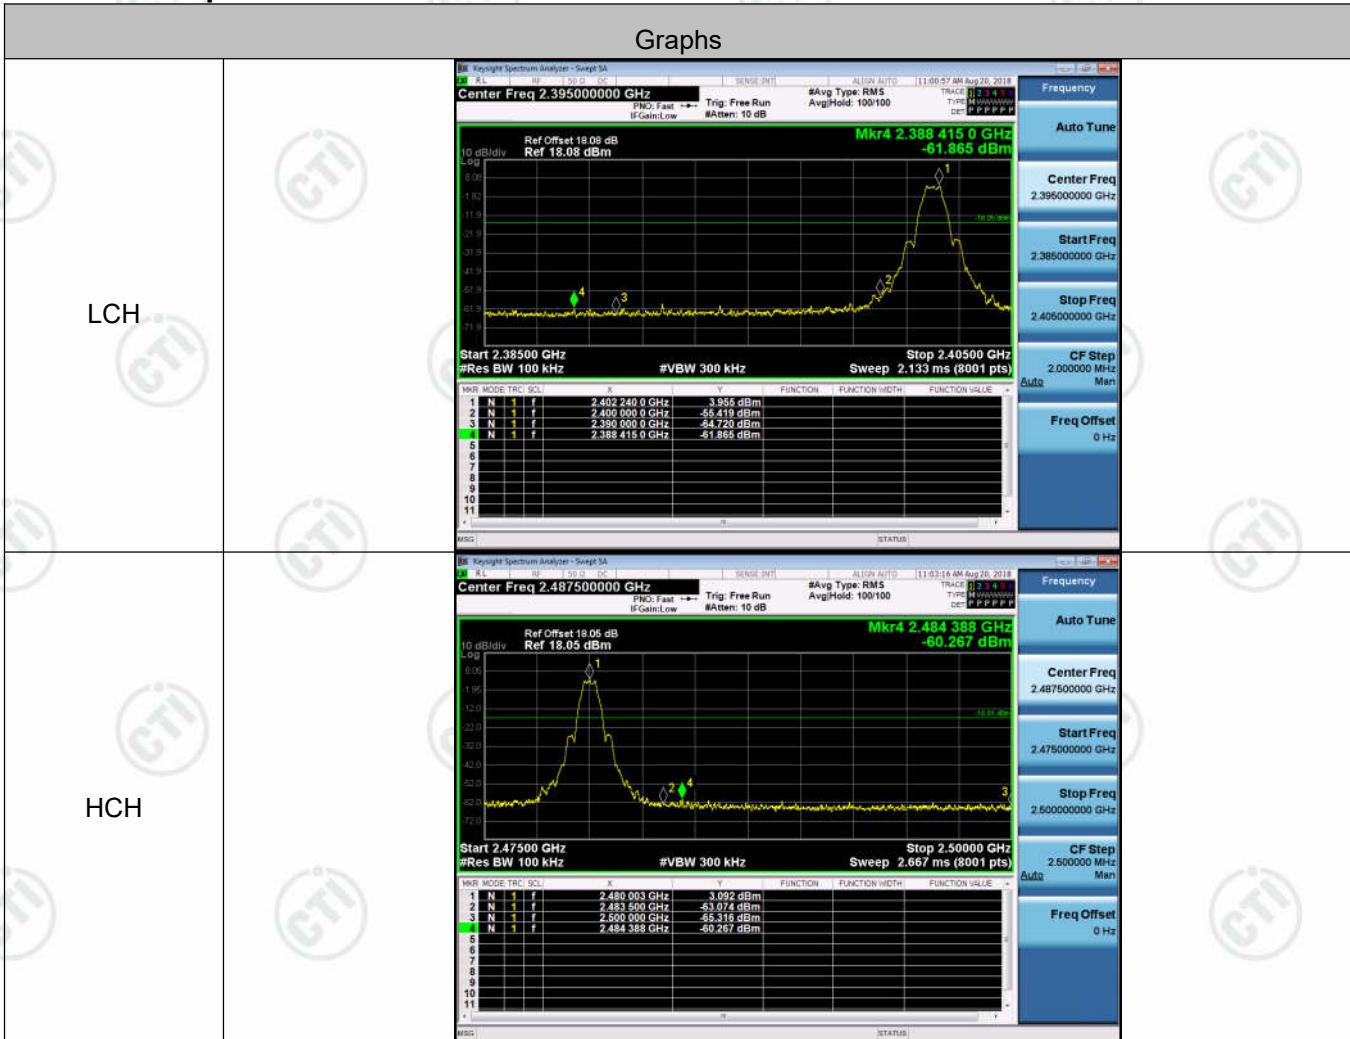

Report No. : EED32M00238601


Page 21 of 52



Appendix D) RF Conducted Spurious Emissions

Result Table

Mode	Channel	Pref [dBm]	Puw[dBm]	Verdict
BLE	LCH	3.807	<Limit	PASS
BLE	MCH	4.54	<Limit	PASS
BLE	HCH	2.831	<Limit	PASS

Test Graphs

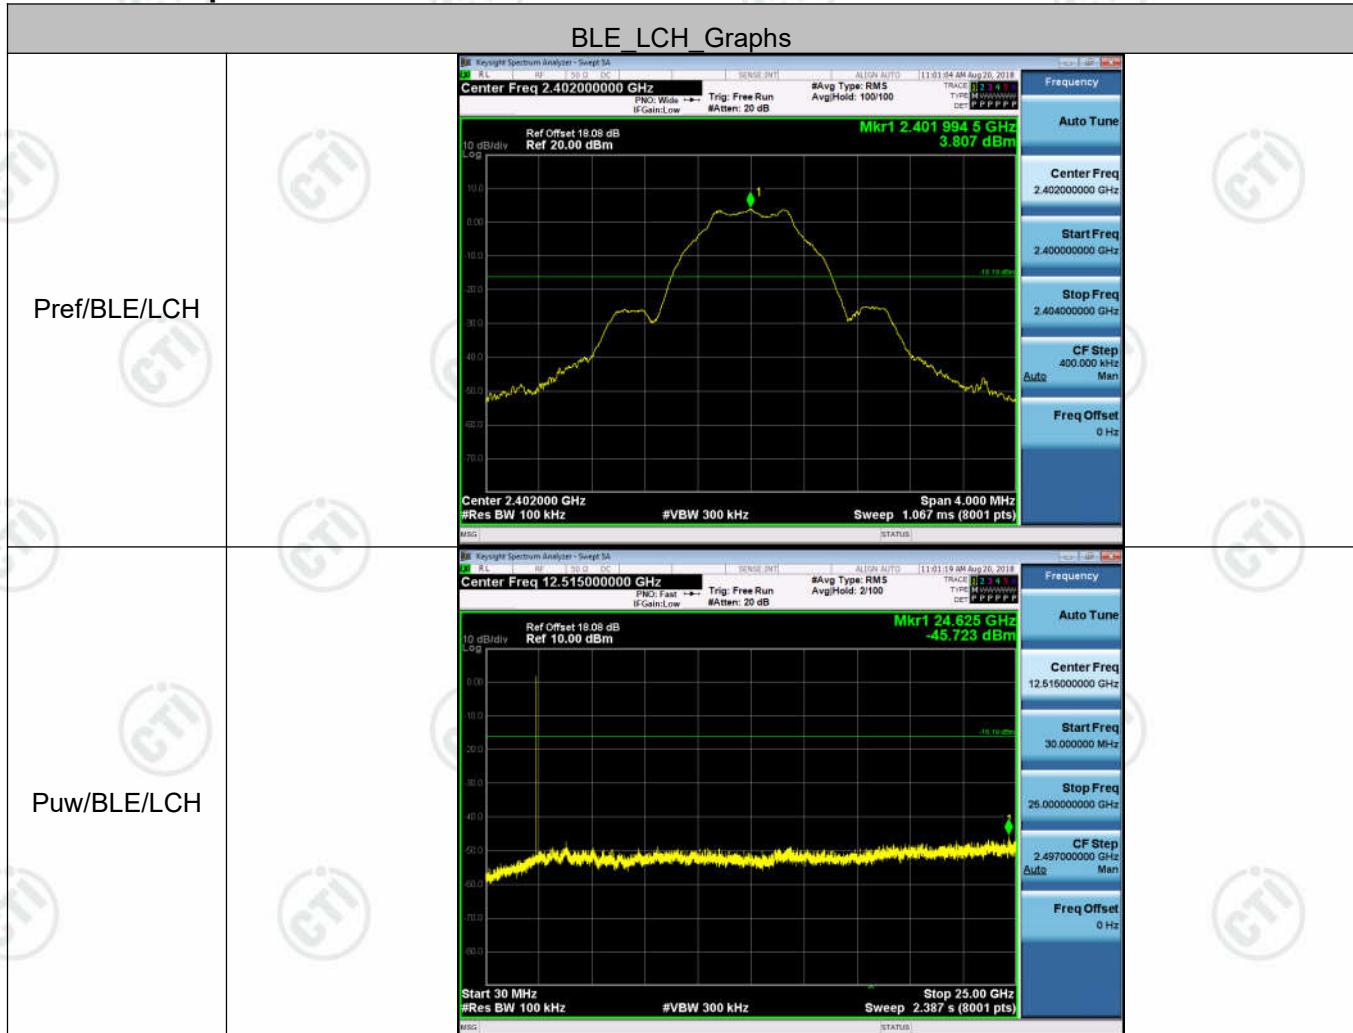

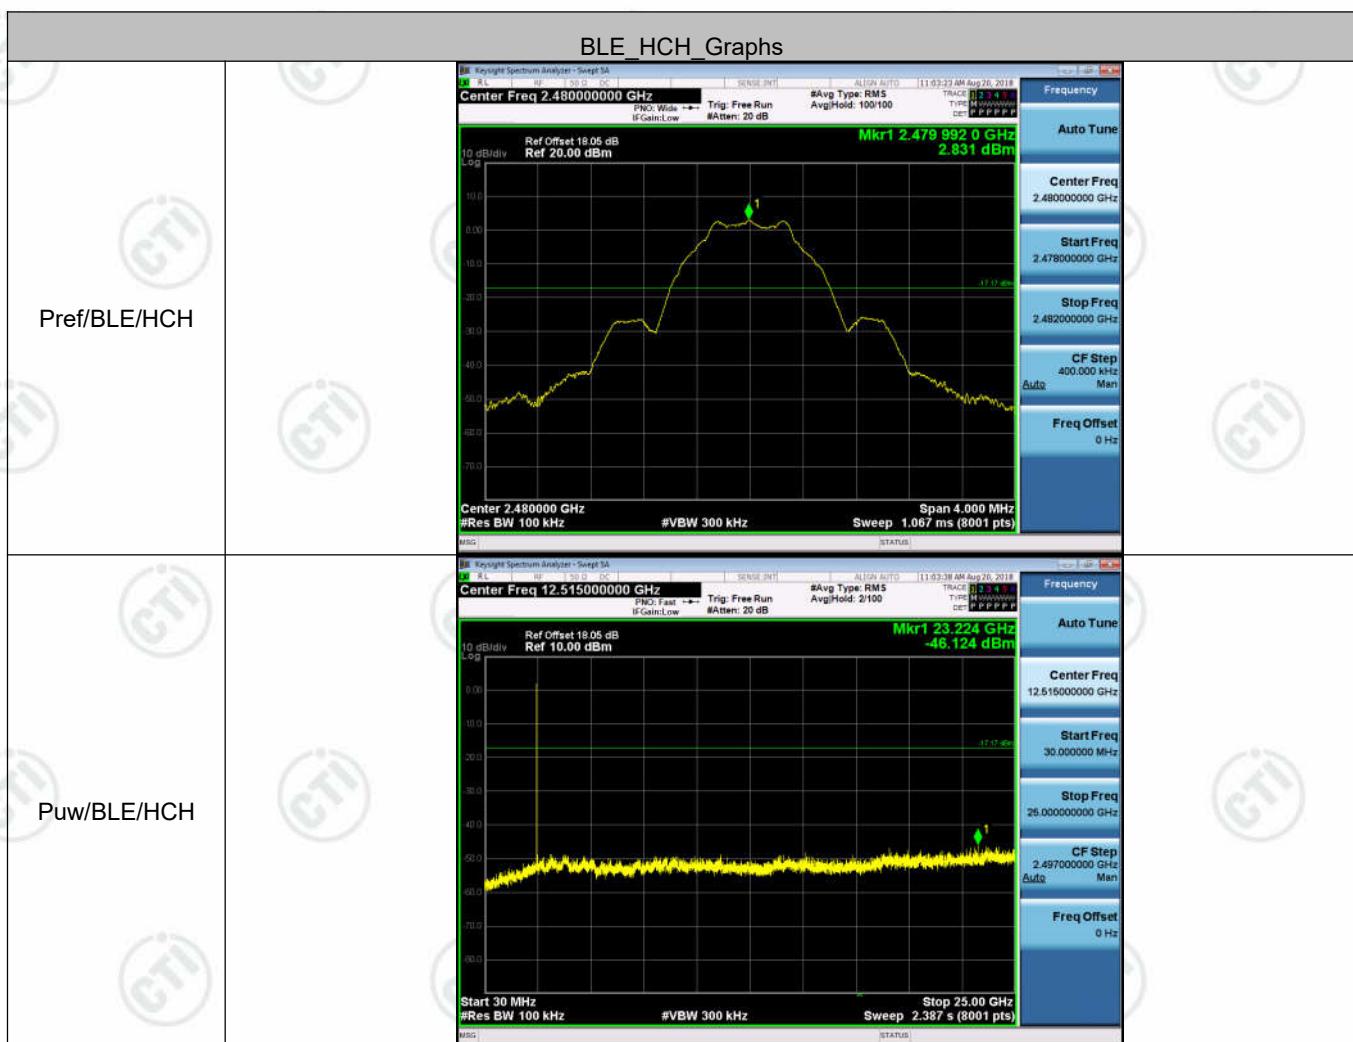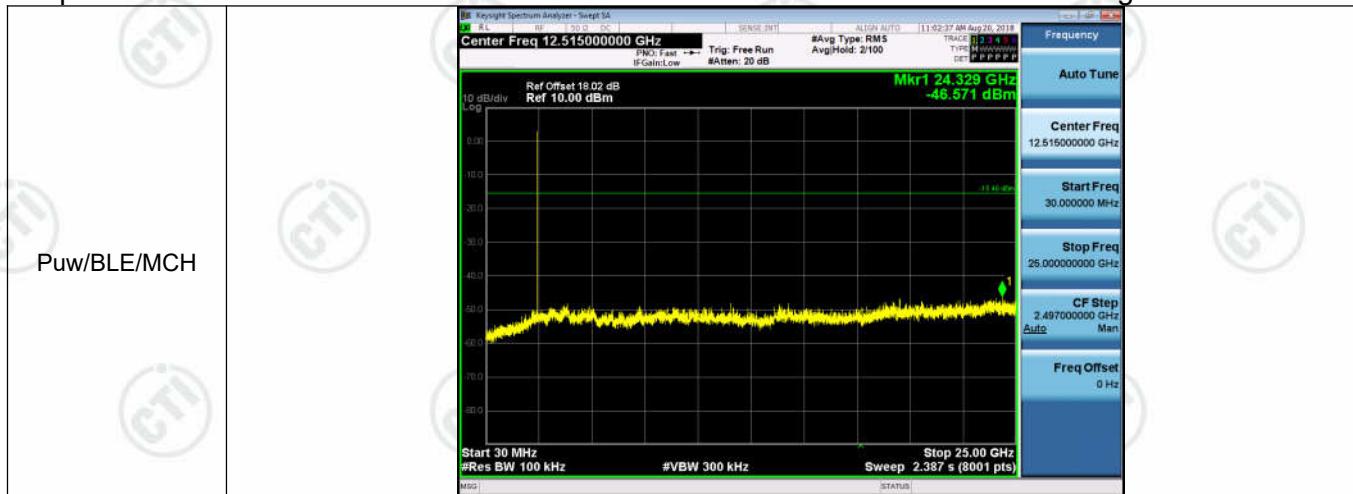


Report No. : EED32M00238601

Page 24 of 52

Appendix E) Power Spectral Density**Result Table**

Mode	Channel	PSD [dBm/3kHz]	Limit [dBm/3kHz]	Verdict
BLE	LCH	-10.306	8	PASS
BLE	MCH	-9.534	8	PASS
BLE	HCH	-11.245	8	PASS

Test Graphs

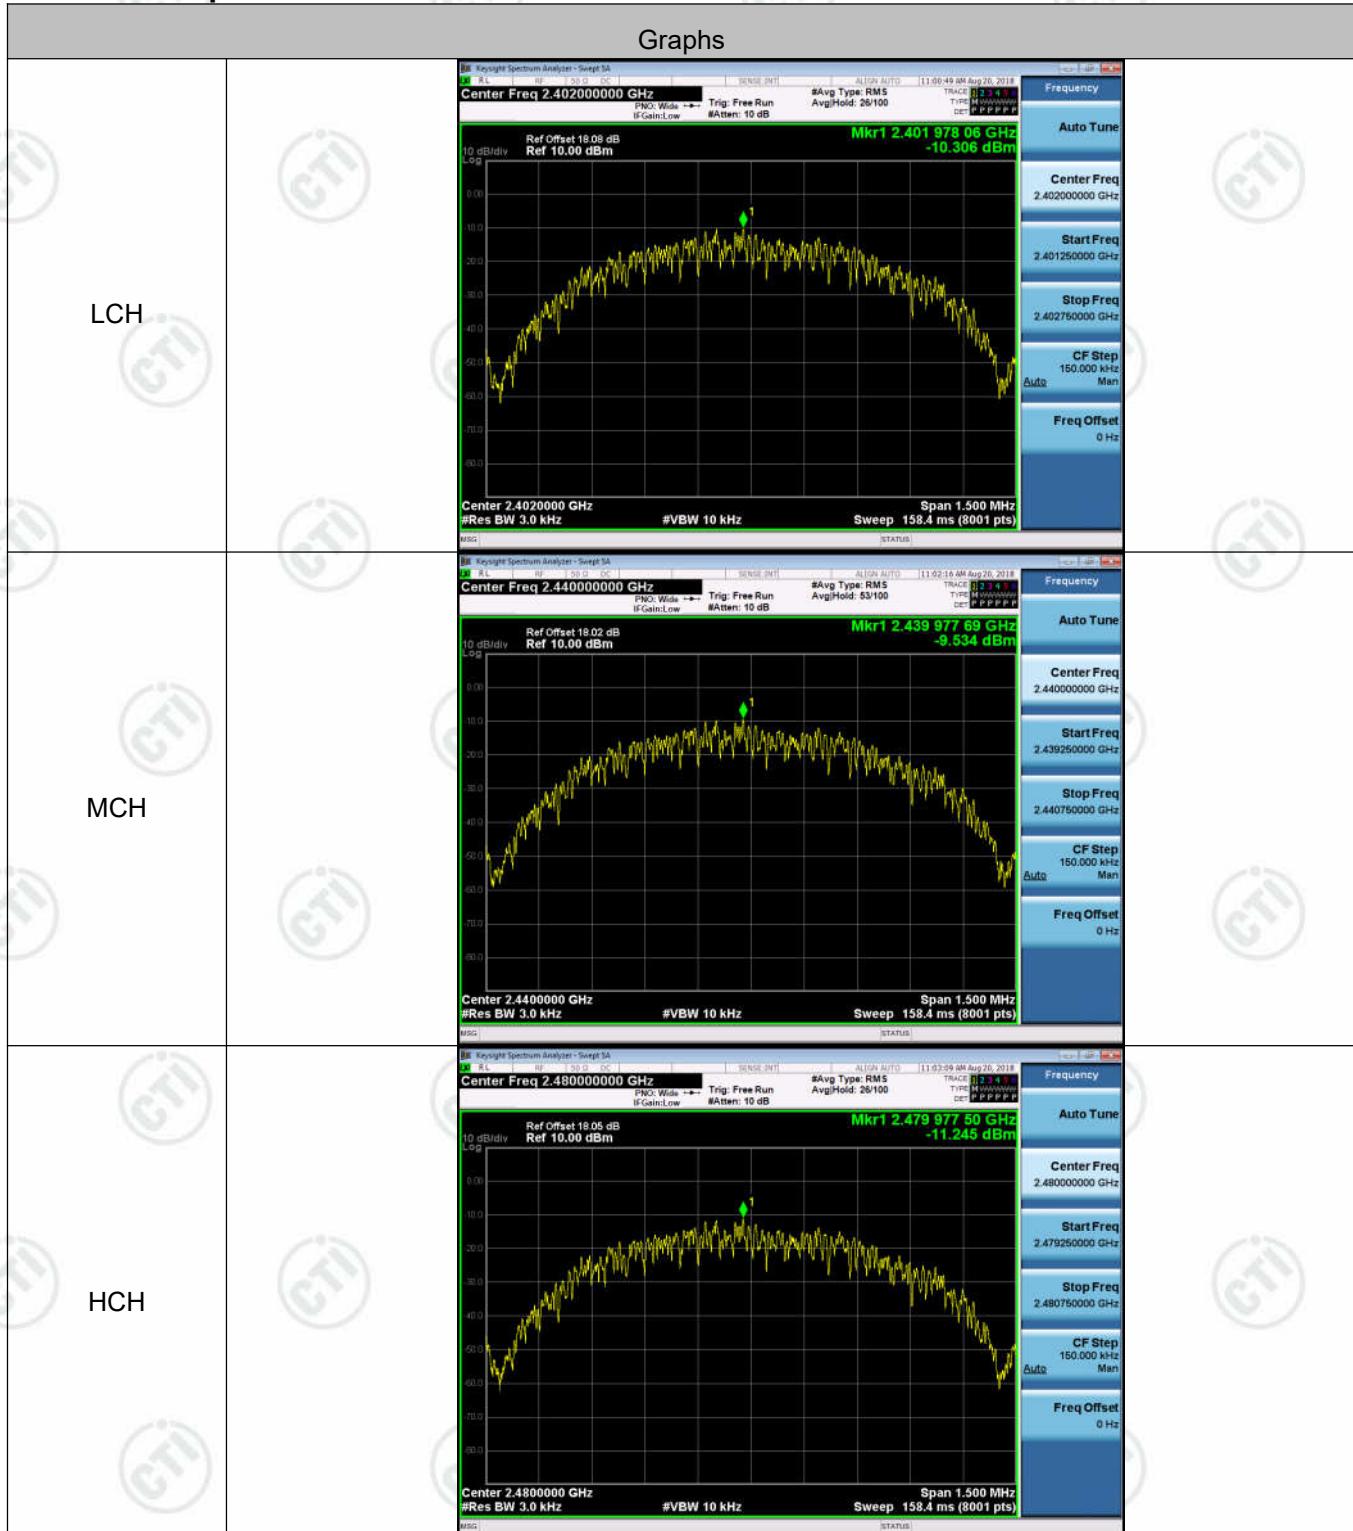

Appendix F) Antenna Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:



The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is -3dBi.

Appendix G) AC Power Line Conducted Emission

Test Procedure:	<p>Test frequency range :150KHz-30MHz</p> <ol style="list-style-type: none"> 1)The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3)The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement. 														
Limit:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBμV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table> <p>* The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.</p> <p>NOTE : The lower limit is applicable at the transition frequency</p>	Frequency range (MHz)	Limit (dB μ V)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dB μ V)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.


Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Report No. : EED32M00238601

Page 28 of 52

Live line:

80.0 dBuV

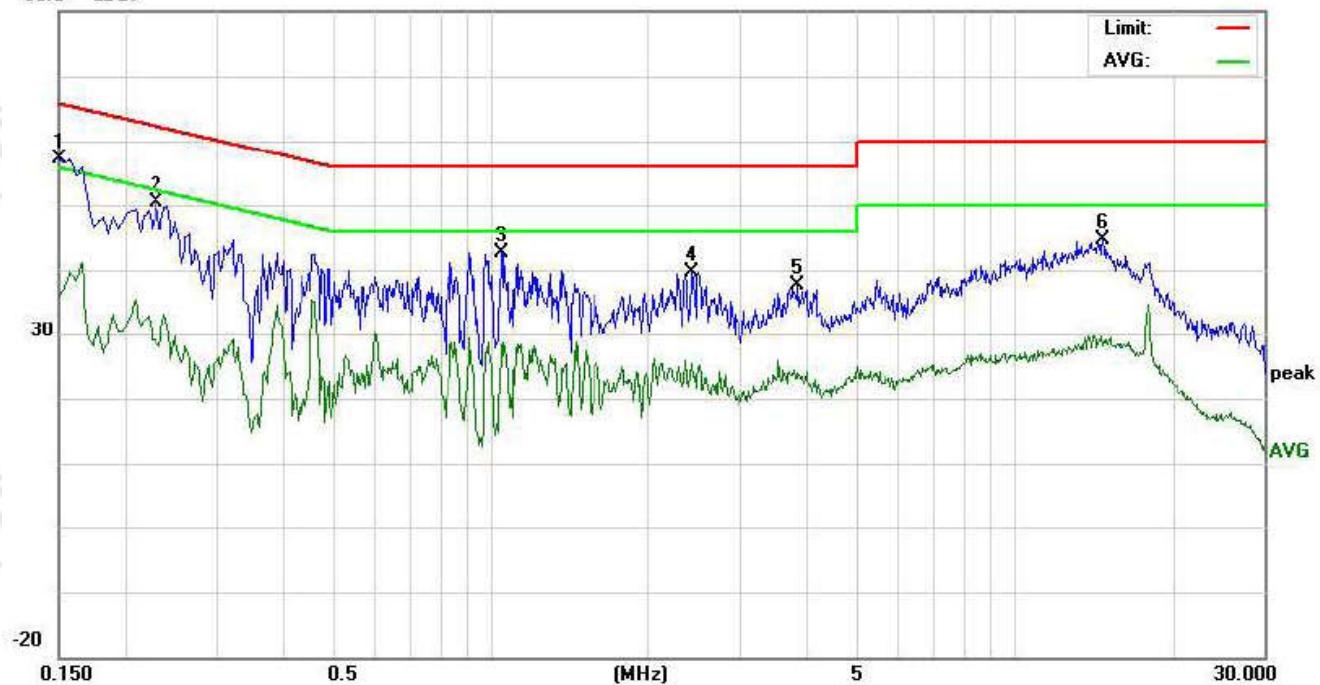


No.	Freq.	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		MHz	Peak	QP	Avg	dB	peak	QP	Avg	QP	Avg	QP	Avg	
1	0.1500	47.30	43.35	26.09	9.77	57.07	53.12	35.86	65.99	55.99	-12.87	-20.13	P	
2	0.2300	40.52	37.83	19.39	9.73	50.25	47.56	29.12	62.45	52.45	-14.89	-23.33	P	
3	1.0540	32.95	29.65	18.53	9.72	42.67	39.37	28.25	56.00	46.00	-16.63	-17.75	P	
4	2.4340	29.88	26.74	15.66	9.71	39.59	36.45	25.37	56.00	46.00	-19.55	-20.63	P	
5	3.8620	27.88	23.16	13.50	9.66	37.54	32.82	23.16	56.00	46.00	-23.18	-22.84	P	
6	14.7700	34.73	31.22	18.20	10.00	44.73	41.22	28.20	60.00	50.00	-18.78	-21.80	P	

Report No. : EED32M00238601

Page 29 of 52

Neutral line:

80.0 dBuV

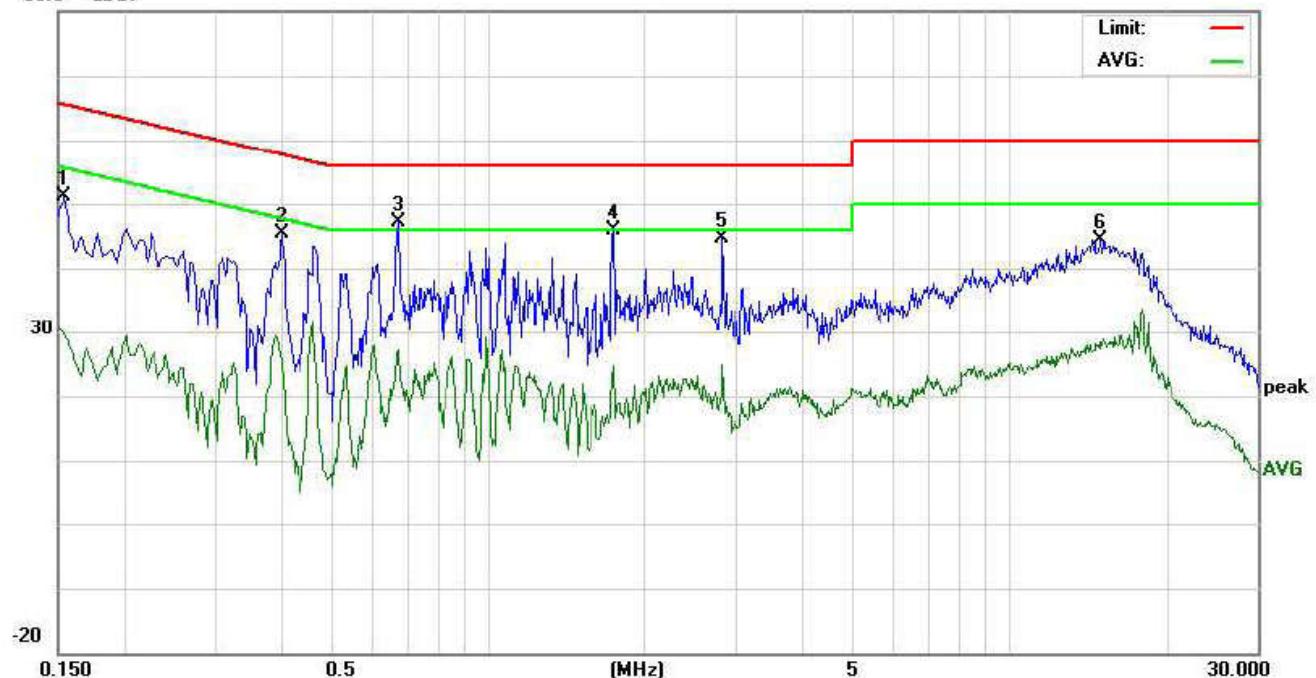

No.	Freq.	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)			Margin (dB)		
		MHz	Peak	QP	Avg	peak	QP	Avg	QP	Avg	QP	Avg	P/F	Comment
1	0.1539	41.32	38.74	19.98	9.76	51.08	48.50	29.74	65.78	55.78	-17.28	-26.04	P	
2	0.4020	35.61	32.16	16.04	9.75	45.36	41.91	25.79	57.81	47.81	-15.90	-22.02	P	
3	0.6740	37.41	34.33	17.36	9.75	47.16	44.08	27.11	56.00	46.00	-11.92	-18.89	P	
4	1.7460	36.22	32.16	15.02	9.72	45.94	41.88	24.74	56.00	46.00	-14.12	-21.26	P	
5	2.8220	34.95	31.25	15.11	9.69	44.64	40.94	24.80	56.00	46.00	-15.06	-21.20	P	
6	15.0460	34.35	31.11	17.47	10.01	44.36	41.12	27.48	60.00	50.00	-18.88	-22.52	P	

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.

Appendix H) Restricted bands around fundamental frequency (Radiated)


Receiver Setup:	Frequency	Detector	RBW	VBW	Remark																					
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak																					
	Above 1GHz	Peak	1MHz	3MHz	Peak																					
		Peak	1MHz	10Hz	Average																					
Test Procedure:		Below 1GHz test procedure as below: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel																								
		Above 1GHz test procedure as below: Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter). . Test the EUT in the lowest channel , the Highest channel The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which is worse case. Repeat above procedures until all frequencies measured was complete.																								
Limit:		<table border="1"> <thead> <tr> <th>Frequency</th> <th>Limit (dBμV/m @3m)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>30MHz-88MHz</td> <td>40.0</td> <td>Quasi-peak Value</td> </tr> <tr> <td>88MHz-216MHz</td> <td>43.5</td> <td>Quasi-peak Value</td> </tr> <tr> <td>216MHz-960MHz</td> <td>46.0</td> <td>Quasi-peak Value</td> </tr> <tr> <td>960MHz-1GHz</td> <td>54.0</td> <td>Quasi-peak Value</td> </tr> <tr> <td rowspan="2">Above 1GHz</td><td>54.0</td><td>Average Value</td> </tr> <tr> <td>74.0</td><td>Peak Value</td> </tr> </tbody> </table>					Frequency	Limit (dB μ V/m @3m)	Remark	30MHz-88MHz	40.0	Quasi-peak Value	88MHz-216MHz	43.5	Quasi-peak Value	216MHz-960MHz	46.0	Quasi-peak Value	960MHz-1GHz	54.0	Quasi-peak Value	Above 1GHz	54.0	Average Value	74.0	Peak Value
Frequency	Limit (dB μ V/m @3m)	Remark																								
30MHz-88MHz	40.0	Quasi-peak Value																								
88MHz-216MHz	43.5	Quasi-peak Value																								
216MHz-960MHz	46.0	Quasi-peak Value																								
960MHz-1GHz	54.0	Quasi-peak Value																								
Above 1GHz	54.0	Average Value																								
	74.0	Peak Value																								

Report No. : EED32M00238601

Page 31 of 52


Test plot as follows:

Worse case mode:	GFSK		
	Test channel: Lowest	Polarization: Horizontal	Remark: Peak

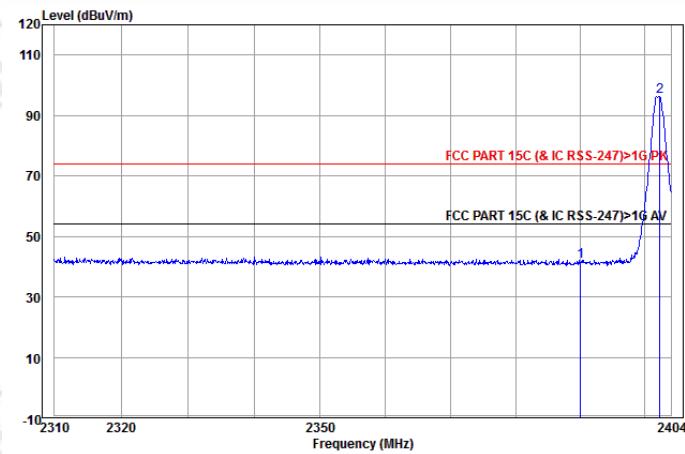


Freq	Ant Factor	Cable Loss	Read Level	Limit		Over Limit	Pol/Phase	Remark	
				MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m
1	2390.000	27.64	3.07	11.07	41.78	74.00	-32.22	Horizontal	Peak
2 pp	2402.275	27.62	3.08	65.56	96.26	74.00	22.26	Horizontal	Peak

Worse case mode:	GFSK		
	Test channel: Lowest	Polarization: Vertical	Remark: Peak

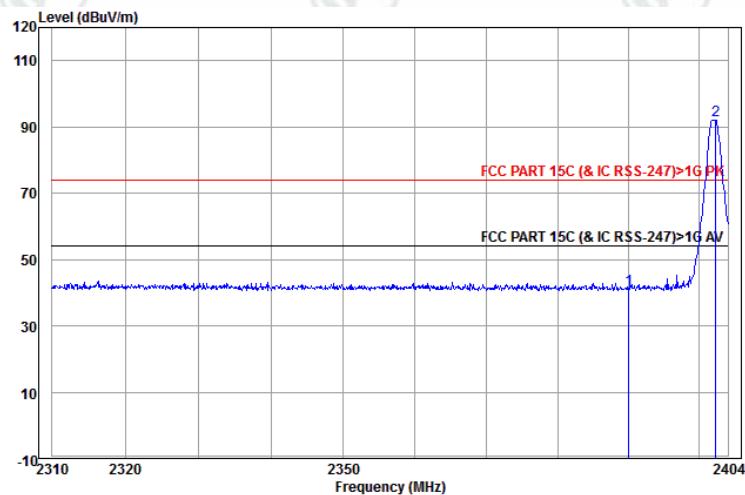


Freq	Ant Factor	Cable Loss	Read Level	Limit		Over Limit	Pol/Phase	Remark	
				MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m
1	2390.000	27.64	3.07	10.38	41.09	74.00	-32.91	Vertical	Peak
2 pp	2402.275	27.62	3.08	61.43	92.13	74.00	18.13	Vertical	Peak

Worse case mode:	GFSK					
	Test channel: Highest	Polarization: Horizontal	Remark: Peak			

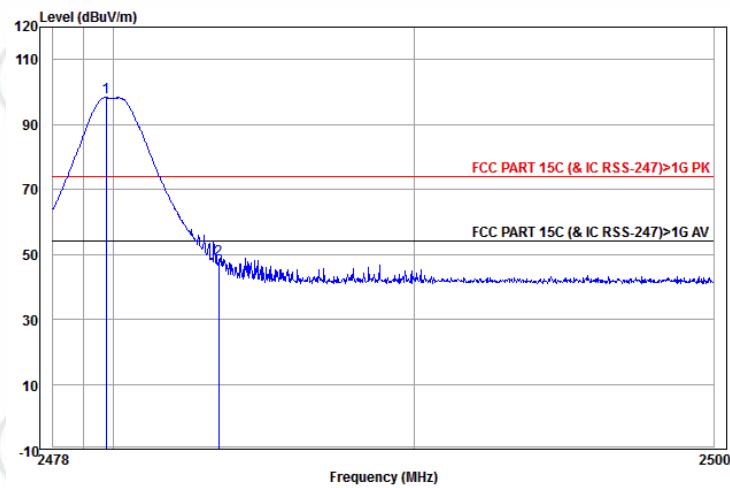

	Ant Freq	Cable Factor	Read Loss	Limit Level	Over Line	Over Limit	Over Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2479.753	27.59	3.12	67.60	98.31	74.00	24.31	Horizontal Peak
2	2483.500	27.59	3.12	17.70	48.41	74.00	-25.59	Horizontal Peak

Worse case mode:	GFSK					
	Test channel: Highest	Polarization: Vertical	Remark: Peak			

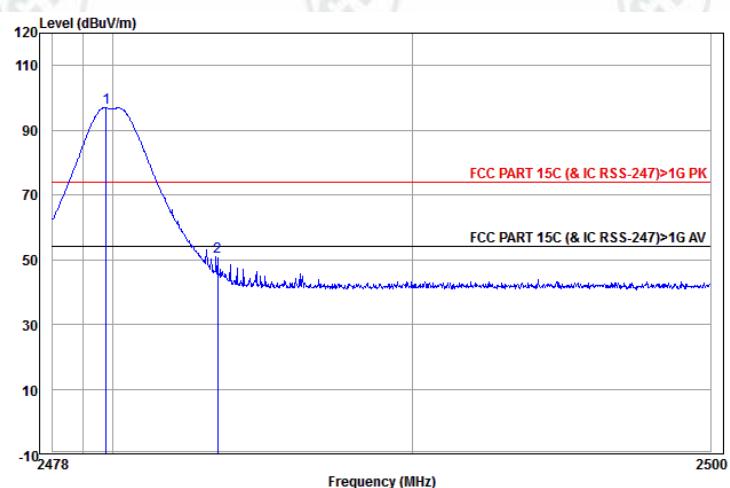

	Ant Freq	Cable Factor	Read Loss	Limit Level	Over Line	Over Limit	Over Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2479.775	27.59	3.12	66.24	96.95	74.00	22.95	Vertical Peak
2	2483.500	27.59	3.12	20.07	50.78	74.00	-23.22	Vertical Peak

Report No. : EED32M00238601

Page 33 of 52

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

Appendix I) Radiated Spurious Emissions

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
Above 1GHz		Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average

Test Procedure:

Below 1GHz test procedure as below:

The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.

The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading.

The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).

Test the EUT in the lowest channel ,the middle channel ,the Highest channel

The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.

Repeat above procedures until all frequencies measured was complete.

Limit:	Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

Report No. : EED32M00238601


Page 35 of 52

Radiated Spurious Emissions test Data:

Radiated Emission below 1GHz

Mode:	BLE GFSK Transmitting	Channel:	2440
Remark:	QP		

Test Graph

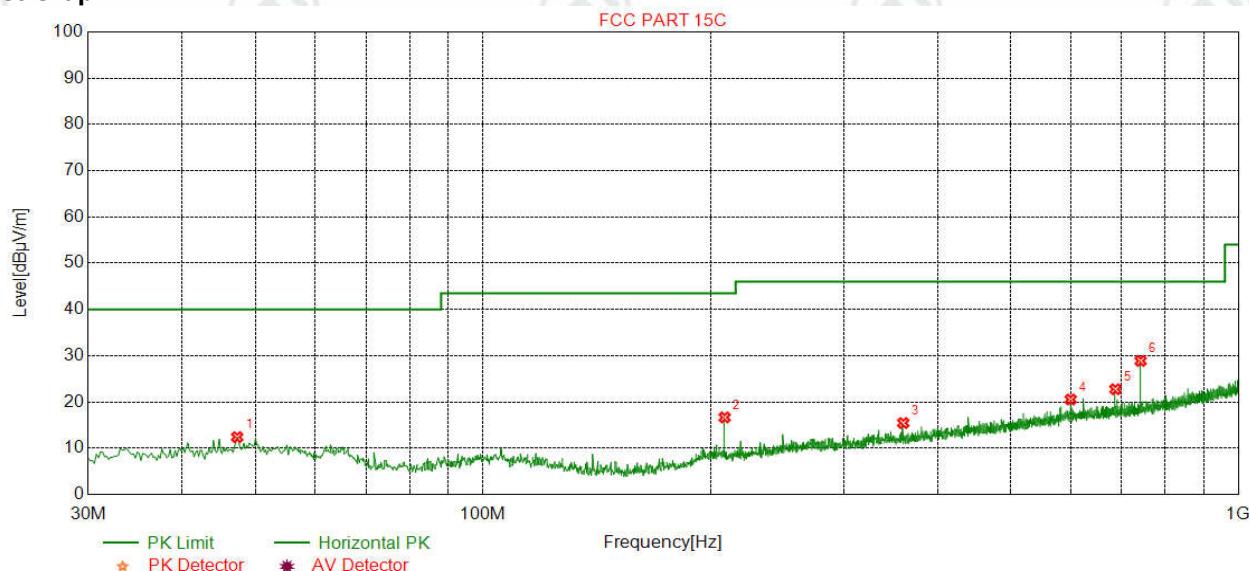

Suspected List


NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Magin [dB]	Result	Polarity
1	47.2695	13.20	0.77	-32.11	30.55	12.41	40.00	27.59	Pass	Horizontal
2	208.9038	11.13	1.71	-31.94	35.76	16.66	43.50	26.84	Pass	Horizontal
3	360.0600	14.52	2.27	-31.84	30.50	15.45	46.00	30.55	Pass	Horizontal
4	599.8920	19.00	2.96	-31.99	30.57	20.54	46.00	25.46	Pass	Horizontal
5	687.5975	19.70	3.14	-32.06	31.98	22.76	46.00	23.24	Pass	Horizontal
6	742.5105	20.27	3.26	-32.11	37.45	28.87	46.00	17.13	Pass	Horizontal

Report No. : EED32M00238601

Page 36 of 52

Mode:	BLE GFSK Transmitting	Channel:	2440
Remark:	QP		

Test Graph

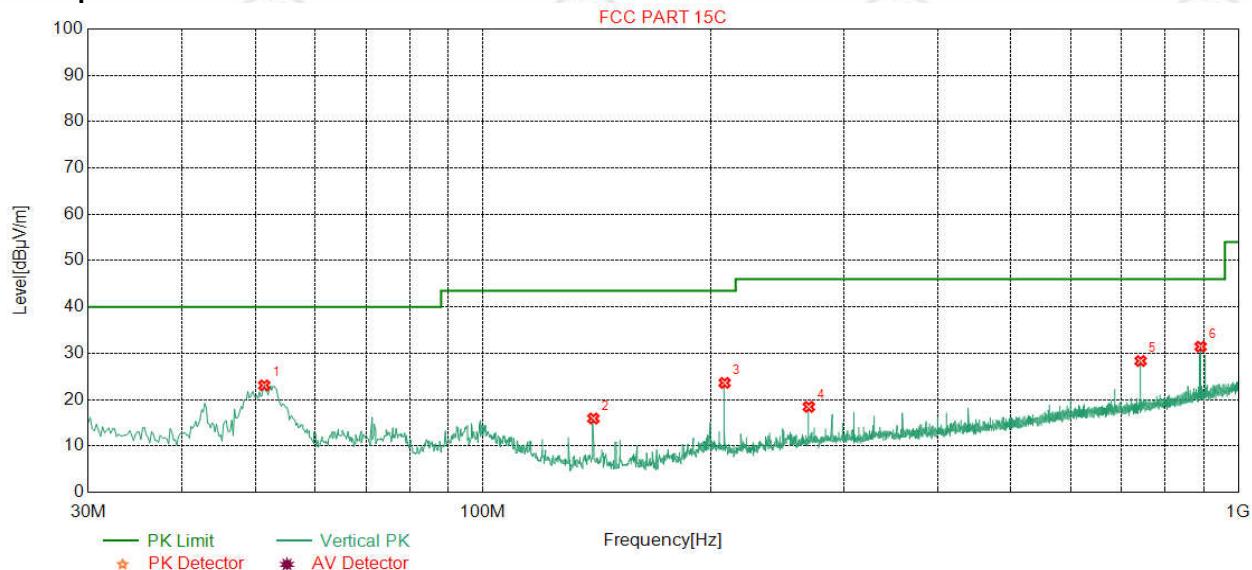

Suspected List

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Magin [dB]	Result	Polarity
1	51.3443	12.98	0.81	-32.10	41.39	23.08	40.00	16.92	Pass	Vertical
2	140.0200	7.20	1.39	-31.99	39.33	15.93	43.50	27.57	Pass	Vertical
3	208.9038	11.13	1.71	-31.94	42.72	23.62	43.50	19.88	Pass	Vertical
4	270.0260	12.60	1.96	-31.88	35.77	18.45	46.00	27.55	Pass	Vertical
5	742.5105	20.27	3.26	-32.11	36.92	28.34	46.00	17.66	Pass	Vertical
6	891.5323	22.00	3.58	-31.61	37.46	31.43	46.00	14.57	Pass	Vertical

Report No. : EED32M00238601

Page 37 of 52

Transmitter Emission above 1GHz

Mode:	BLE GFSK Transmitting	Channel:	2402
Remark:	/		

Suspected List

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Magin [dB]	Result	Polarity
1	2899.9800	33.04	4.38	-36.62	48.52	49.32	74.00	24.68	Pass	Horizontal
2	4804.0000	34.50	4.55	-36.15	41.60	44.50	74.00	29.50	Pass	Horizontal
3	6155.4155	35.83	5.25	-36.20	42.87	47.75	74.00	26.25	Pass	Horizontal
4	7206.0000	36.31	5.81	-36.43	42.50	48.19	74.00	25.81	Pass	Horizontal
5	8417.6418	36.57	6.35	-36.31	44.31	50.92	74.00	23.08	Pass	Horizontal
6	9608.0000	37.64	6.63	-36.79	43.05	50.53	74.00	23.47	Pass	Horizontal

Mode:	BLE GFSK Transmitting	Channel:	2402
Remark:	/		

Suspected List

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Magin [dB]	Result	Polarity
1	2642.3285	32.63	4.09	-36.66	48.17	48.23	74.00	25.77	Pass	Vertical
2	3860.0360	33.69	4.36	-36.20	44.37	46.22	74.00	27.78	Pass	Vertical
3	4804.0000	34.50	4.55	-36.15	40.06	42.96	74.00	31.04	Pass	Vertical
4	6815.5566	36.03	5.60	-36.19	43.18	48.62	74.00	25.38	Pass	Vertical
5	7206.0000	36.31	5.81	-36.43	41.53	47.22	74.00	26.78	Pass	Vertical
6	9608.0000	37.64	6.63	-36.79	42.64	50.12	74.00	23.88	Pass	Vertical

Report No. : EED32M00238601

Page 38 of 52

Mode:	BLE GFSK Transmitting	Channel:	2440
Remark:	/		

Suspected List

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity
1	3025.3525	33.21	4.88	-36.80	46.17	47.46	74.00	26.54	Pass	Horizontal
2	4880.0000	34.50	4.80	-36.09	41.15	44.36	74.00	29.64	Pass	Horizontal
3	5581.0831	35.13	5.12	-36.10	44.29	48.44	74.00	25.56	Pass	Horizontal
4	7320.0000	36.42	5.85	-36.38	40.76	46.65	74.00	27.35	Pass	Horizontal
5	8940.2940	37.57	6.37	-36.53	43.50	50.91	74.00	23.09	Pass	Horizontal
6	9760.0000	37.70	6.73	-36.81	43.60	51.22	74.00	22.78	Pass	Horizontal

Final Data List

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity
1	9760.0000	37.70	6.73	-36.82	29.70	37.31	54.00	16.69	Pass	Horizontal

Mode:	BLE GFSK Transmitting	Channel:	2440
Remark:	/		

Suspected List

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity
1	3006.8257	33.20	4.92	-36.73	46.35	47.74	74.00	26.26	Pass	Vertical
2	4880.0000	34.50	4.80	-36.09	41.08	44.29	74.00	29.71	Pass	Vertical
3	5532.3282	35.05	5.16	-36.08	43.04	47.17	74.00	26.83	Pass	Vertical
4	7320.0000	36.42	5.85	-36.38	40.24	46.13	74.00	27.87	Pass	Vertical
5	8540.5041	36.69	6.35	-36.34	43.64	50.34	74.00	23.66	Pass	Vertical
6	9760.0000	37.70	6.73	-36.81	41.99	49.61	74.00	24.39	Pass	Vertical

Mode:	BLE GFSK Transmitting	Channel:	2480
Remark:	/		

Suspected List

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Magin [dB]	Result	Polarity
1	3013.6514	33.21	4.90	-36.76	46.30	47.65	74.00	26.35	Pass	Horizontal
2	4960.0000	34.50	4.82	-36.20	40.67	43.79	74.00	30.21	Pass	Horizontal
3	5511.8512	35.02	5.16	-36.12	43.32	47.38	74.00	26.62	Pass	Horizontal
4	6368.9619	35.87	5.40	-36.20	42.84	47.91	74.00	26.09	Pass	Horizontal
5	7440.0000	36.54	5.85	-36.34	40.68	46.73	74.00	27.27	Pass	Horizontal
6	9920.0000	37.77	6.79	-36.82	40.70	48.44	74.00	25.56	Pass	Horizontal

Mode:	BLE GFSK Transmitting	Channel:	2480
Remark:	/		

Suspected List

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Magin [dB]	Result	Polarity
1	3506.0756	33.40	4.48	-36.56	46.37	47.69	74.00	26.31	Pass	Vertical
2	4537.7288	34.50	4.72	-36.27	44.69	47.64	74.00	26.36	Pass	Vertical
3	4960.0000	34.50	4.82	-36.20	41.62	44.74	74.00	29.26	Pass	Vertical
4	5879.4629	35.61	5.07	-36.15	43.22	47.75	74.00	26.25	Pass	Vertical
5	7440.0000	36.54	5.85	-36.34	39.16	45.21	74.00	28.79	Pass	Vertical
6	9920.0000	37.77	6.79	-36.82	39.78	47.52	74.00	26.48	Pass	Vertical

Note:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

2) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.