



## FCC RF EXPOSURE REPORT

*For*

**Xtorm Power Bank Wireless 8000 - Alpha**

**DS200**

**FCC ID: 2AQOFDS200**

**REPORT NUMBER: 4789251031.2-1**

**ISSUE DATE: January 6, 2020**

*Prepared for*

**Telco Accessories B.V.  
Hoofdveste 19, 3992DH, Houten, The Netherlands**

*Prepared by*

**UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch  
Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-  
Tech Development Zone Dongguan, 523808, People's Republic of China**  
**Tel: +86 769 22038881**  
**Fax: +86 769 33244054**  
**Website: [www.ul.com](http://www.ul.com)**

Revision History

Rev.	Issue Date	Revisions	Revised By
V0	01/06/2020	Initial Issue	

This test report is only published to and used by the applicant, and it is not for evidence purpose in China.

## TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS .....	4
2. TEST METHODOLOGY .....	5
3. FACILITIES AND ACCREDITATION .....	5
4. REQUIREMENT .....	7

## 1. ATTESTATION OF TEST RESULTS

### Applicant Information

Company Name: Telco Accessories B.V.  
Address: Hoofdveste 19, 3992DH, Houten, The Netherlands

### Manufacturer Information


Company Name: Shenzhen Trusda Industrial Co. , Ltd.  
Address: 3/F, Building 4, Lianchuang Technology Park, Bulan  
Road,Nanwan Street,Longgang District, Shenzhen, China

### EUT Description

EUT Name: Xtorm Power Bank Wireless 8000 - Alpha  
Model: DS200  
Brand Name: XTORM  
Sample Status: Normal  
Sample ID: 2756339  
Sample Received Date: December 13, 2019  
Date of Tested: December 18, 2019 ~ January 3, 2020

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC 47CFR§1.1307	PASS
FCC 47CFR§1.1310	PASS
FCC 47CFR§2.1093	PASS
FCC 47CFR§2.1091	PASS

Prepared By:



Denny Huang  
Project Engineer

Checked By:



Shawn Wen  
Laboratory Leader

Approved By:



Stephen Guo  
Laboratory Manager

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC 47CFR§1.1307(b)(1), FCC 47CFR§1.1310, FCC 47CFR§2.1093, 680106 D01 RF Exposure wireless charging apps v03.

## 3. FACILITIES AND ACCREDITATION

Accreditation Certificate	<p><b>A2LA (Certificate No.: 4102.01)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA.</p> <p><b>FCC (FCC Designation No.: CN1187)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules</p> <p><b>IC (Company No.: 21320)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with Industry Canada. The Company Number is 21320.</p> <p><b>VCCI (Registration No.: G-20019, R-20004, C-20012 and T-20011)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793.</p> <p>Facility Name: Chamber D, the VCCI registration No. is G-20019 and R-20004 Shielding Room B , the VCCI registration No. is C-20012 and T-20011</p>
---------------------------	--

Note: All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, Song Shan Lake Hi tech Development Zone, Dongguan, 523808, China

#### 4. DESCRIPTION OF EUT

EUT Name	Xtorm Power Bank Wireless 8000 - Alpha	
EUT Description	The EUT is a power bank with wireless charger.	
Model	DS200	
Product Description	Operation Frequency	110 ~ 205kHz
Modulation Type	MSK	
Rated wireless output power	Maximum 15W	
Rated total output	Maximum 18W	
Antenna type	Coil	
Ratings	Type-C Input: DC 5V, 3A / DC 9V, 2A Type-C Output: DC 5V, 3A / DC 9V, 2A / DC 12V, 1.5A USB-A A1 Output: DC 5V, 3A / DC 9V, 2A / DC 12V, 1.5A USB-A A2 Output: DC 5V, 2.1A	

Note: The wireless charger function can't use in standup configuration due to the shape of enclosure.


## 5. REQUIREMENT

### RF EXPOSURE LIMIT

Frequency Range (MHz)	E-field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm <sup>2</sup> )	Averaging Time  E  <sup>2</sup> ,  H  <sup>2</sup> or S (Minutes)
0.3 -- 1.34	614	1.63	(100)*	30
1.34 -- 30	824/f	2.19/f	(180/f <sup>2</sup> )*	30
30 -- 300	27.5	0.073	0.2	30
300 -- 1500	--	--	f/1500	30
1500 -- 100,000	--	--	1.0	30

### METHOD OF MEASUREMENT

- a) The RF exposure test was performed in shielded chamber.
- b) The measurement probe was placed at test distance (15 cm) which is between the edge of the charger and the geometric centre of probe. The measurement probe was placed at test distance (20cm) which is between the top of the charger and the geometric centre of probe.
- c) The measurement probe used to search of highest strength.
- d) The highest emission level was recorded and compared with limit as soon as measurement of each points (A, B, C, D, E) were completed.
- e) The EUT were measured according to the dictates of KDB 680106D01v03.

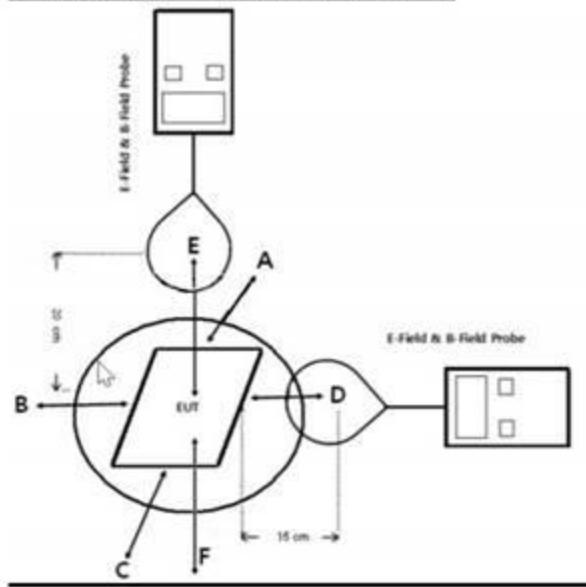**BLOCK DIAGRAM OF TEST SETUP**

Note 1: The block diagram only showed the measurement probe was placed at test distance (15 cm) which is between the edge of the charger and the geometric centre of probe, for the top of the charger, the test distance shall be 20cm.

Note 2: As bottom point is not required to test for desktop devices, so we scanning all the surfaces and recorded the worst level in F.

**EQUIPMENT APPROVAL CONSIDERATIONS**

The EUT does comply with KDB 680106D01v03.

1) Power transfer frequency is less than 1MHz.

Yes; the device operated in the frequency range from 110kHz to 205kHz.

2) Output power from each primary coil is less than or equal to 15 watts.

Yes; the maximum output power of each primary coil is 15 watts.

3) The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils.

Yes; The transfer system includes only single coil.

4) Client device is placed directly in contact with the transmitter.

Yes; Client device is placed directly in contact with the transmitter.

5) Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).

The EUT is a portable device.

6) The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 30% of the MPE limit.

The EUT field strength levels are less than 30% of the MPE limit.

**MEASURING INSTRUMENT USED**

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Electric and Magnetic Field Analyzer	Narda	EHP-200A	170WX90204	April 21, 2019	April 21, 2020

Test mode for wireless charger:

Test Mode	Description
Mode 1	DS200 being Charged + 10W Wireless Charging With Load
Mode 2 (*)	DS200 being Charged + 5W Wireless Charging With Load + USB-A1 Charging With Mobile Phone + USB-A2: 5V/1.0A Output Discharging
Mode 3(*)	USB-A1: 5V/1A Output Discharging + USB-A A2: Charging With Mobile Phone + USB-Type C: 5V/1A Output Discharging
Mode 4	15W Wireless Charging With Load
Mode 5	USB-C: 5V/3A Output Discharging
Mode 6(*)	USB-C: 9V/2A Output Discharging
Mode 7(*)	USB-C: 12V/1.5A Output Discharging
Mode 8	USB-A A1: 5V/3A Output Discharging
Mode 9(*)	USB-A A1: 9V/2A Output Discharging
Mode 10(*)	USB-A A1: 12V/1.5A Output Discharging
Mode 11	USB-A A2: 5V/2.1A Output Discharging
Mode 12	DS200 being Charged + Wireless Charger Standby
Mode 13	DS200 being Charged + Wireless Charging With iPhone
Mode 14 (*)	Wireless Charging With iPhone + USB-A1 Charging With Mobilephone + USB-A2 Charging With Mobilephone + USB-Type C Charging With Mobilephone

(\*) Note: The output power for the adapter is 18W. The total power for Mode 2, 3, 6, 7, 9, 10, 14 is 18W. If the user use the 15W wireless charging load, because of the big lose of energy, the others USB port will shut down.

Note: All the modes had been tested, but only the worst data recorded in the report.

H-Field Strength at 15 cm from the edges surrounding the EUT and 20cm above the top surface of the EUT (A/m)

Test Position	H-Field Strength Measure Result		Limits (A/m)	
	Mode 12			
	A/m			
A	0.0524		1.63	
B	0.0573		1.63	
C	0.0544		1.63	
D	0.0574		1.63	
E	0.0518		1.63	
F	0.0594		1.63	

Test Position	H-Field Strength Measure Result		Limits (A/m)	
	Mode 3			
	A/m			
A	0.0703		1.63	
B	0.0711		1.63	
C	0.1311		1.63	
D	0.0543		1.63	
E	0.0533		1.63	
F	0.1342		1.63	

Test Position	H-Field Strength Measure Result		Limits (A/m)	
	Mode 4			
	A/m			
A	0.1792		1.63	
B	0.2046		1.63	
C	0.1656		1.63	
D	0.1599		1.63	
E	0.1148		1.63	
F	0.2075		1.63	

E-Field Strength at 15 cm from the edges surrounding the EUT and 20cm above the top surface of the EUT (A/m)

Test Position	E-Field Strength Measure Result		Limits (V/m)	
	Mode 12			
	V/m			
A	0.4021		614	
B	0.4016		614	
C	0.4033		614	
D	0.4001		614	
E	0.4016		614	
F	0.4122		614	

Test Position	E-Field Strength Measure Result		Limits (V/m)	
	Mode 3			
	V/m			
A	0.4691		614	
B	0.4724		614	
C	0.4725		614	
D	0.4101		614	
E	0.5741		614	
F	0.5121		614	

Test Position	E-Field Strength Measure Result		Limits (V/m)	
	Mode 4			
	V/m			
A	1.3878		614	
B	0.9828		614	
C	1.2042		614	
D	0.9312		614	
E	2.3596		614	
F	1.4024		614	

Note: All the modes had been tested, but only the worst data recorded in the report.

---

## END OF REPORT