



## FCC TEST REPORT

**FCC ID: 2AQQR-HF100**

On Behalf of

**Huifang International Trade Co., Ltd.**

**Remote Control**

**Model No.: HF100, HF039, HF055, HF066, HF099, HF101,  
HF188, HF202, HF288, HF303**

Prepared for : Huifang International Trade Co., Ltd.  
Address : No.22 Chengli West Road, Fuqiao Street, Licheng District, Quanzhou  
City, China, 362000

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.  
Address : Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,  
Shenzhen, Guangdong, China

Report Number : T1881131 01  
Date of Receipt : July 19, 2018  
Date of Test : July 19, 2018-July 31, 2018  
Date of Report : July 31, 2018  
Version Number : REV0

## Contents

<b>1. General Information.....</b>	<b>5</b>
1.1. Description of Device (EUT) .....	5
1.2. Accessories of Device (EUT).....	6
1.3. Tested Supporting System Details.....	6
1.4. Test Facility .....	6
<b>2. Summary of test.....</b>	<b>7</b>
2.1. Summary of test result .....	7
2.2. Block Diagram .....	8
2.3. Test mode .....	8
2.4. Test Conditions.....	8
2.5. Measurement Uncertainty (95% confidence levels, k=2) .....	8
2.6. Test Equipment.....	9
<b>3. Radiation Emission.....</b>	<b>10</b>
3.1. Radiation Emission Limits(15.209&231) .....	10
3.2. Test Setup .....	10
3.3. Test Procedure .....	12
3.4. Test Equipment Setting For emission test .....	12
3.5. Test Condition .....	12
3.6. Test Result .....	12
<b>4. POWER LINE CONDUCTED EMISSION.....</b>	<b>15</b>
4.1. Conducted Emission Limits (15.209) .....	15
4.2. Test Setup .....	15
4.3. Test Procedure .....	16
4.4. Test Results .....	16
<b>5. Occupied bandwidth.....</b>	<b>17</b>
5.1. Test limit.....	17
5.2. Method of measurement.....	17
5.3. Test Setup .....	17
5.4. Test Results .....	17
<b>6. Transmission time.....</b>	<b>19</b>
6.1. Test limit.....	19
6.2. Method of measurement.....	19
6.3. Test Setup .....	19
6.4. Test Results .....	20
<b>7. Antenna Requirement .....</b>	<b>21</b>
7.1. Standard Requirement.....	21
7.2. Antenna Connected Construction .....	21
7.3. Result.....	21
<b>8. Test setup photo .....</b>	<b>22</b>
<b>9. Photos of EUT .....</b>	<b>23</b>

## TEST REPORT DECLARATION

Applicant : Huifang International Trade Co., Ltd.  
Address : No.22 Chengli West Road, Fuqiao Street, Licheng District, Quanzhou City, China,  
Manufacturer : Huifang International Trade Co., Ltd.  
Address : No.22 Chengli West Road, Fuqiao Street, Licheng District, Quanzhou City, China,  
362000  
EUT Description : Remote Control  
(A) Model No. : HF100, HF039, HF055, HF066, HF099, HF101,  
HF188, HF202, HF288, HF303  
(B) Trademark : N/A

Measurement Standard Used:

**FCC Rules and Regulations Part 15 Subpart C Section 15.231: 2017**

**ANSI C63.10-2013**


The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits both conducted and radiated emissions. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After the test, our opinion is that EUT compliance with the requirement of the above standards.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....:

Reak Yang  
Project Engineer



Approved by (name + signature).....:

Simple Guan  
Project Manager



Date of issue.....:

July 31, 2018

**Revision History**

Revision	Issue Date	Revisions	Revised By
00	July 31, 2018	Initial released Issue	Simple Guan

## 1. General Information

### 1.1. Description of Device (EUT)

EUT : Remote Control

Model No. : HF100, HF039, HF055, HF066, HF099, HF101, HF188, HF202, HF288, HF303

DIFF. : There is no difference between all the models, except the appearance : and model number, this report performs the model HF100.

Trade mark : N/A

Power supply : DC 3V from battery

Operation frequency : 433.92MHz

Modulation : ASK

Data rate : 600 kbps

Antenna Type : PCB antenna, max gain 0dBi.

Software version : V1.0

Hardware version : HF100

## 1.2. Accessories of Device (EUT)

Accessories1 : /  
Manufacturer : /  
Model : /  
Power supply : /

## 1.3. Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number	Certification or DOC
/	/	/	/	/	/

## 1.4. Test Facility

Shenzhen Alpha Product Testing Co., Ltd  
Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,  
Shenzhen, Guangdong, China

June 21, 2018 File on Federal Communication Commission

Registration Number: 293961

July 25, 2017 Certificated by IC

Registration Number: 12135A

## 2. Summary of test

### 2.1. Summary of test result

Description of Test Item	Standard	Results
Spurious Emission	Section 15.231&15.209	PASS
Conduction Emission	Section 15.207	N/A
Occupied bandwidth	Section 15.231	PASS
Transmission time	Section 15.231	PASS
Band Edge	Section 15.231	N/A
Antenna Requirement	Section 15.203	PASS
Note : Test according to ANSI C63.10-2013		

## 2.2. Block Diagram

1. For radiated emissions test: EUT was placed on a turn table, which is 0.8 meters high above ground for below 1 GHz test and 1.5 meters high above ground for below 1 GHz test . EUT was set into test mode before test. New battery is used during all test



## 2.3. Test mode

EUT work in Continuous TX mode, and select test channel, wireless mode

Tested mode, channel, and data rate information		
Mode (Button1,2,3,4)	Channel	Frequency (MHz)
ASK	CH1	433.92
Note: Button1 is worst case test mode		
		

## 2.4. Test Conditions

Temperature range	21-25°C
Humidity range	40-75%
Pressure range	86-106kPa

## 2.5. Measurement Uncertainty (95% confidence levels, k=2)

Item	MU	Remark
Uncertainty for Power point Conducted Emissions Test	2.71dB	
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.90 dB	Polarize: V
	3.92dB	Polarize: H
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	4.26 dB	Polarize: H
	4.28 dB	Polarize: V
Uncertainty for conducted RF Power	0.16dB	

## 2.6. Test Equipment

Equipment	Manufacture	Model No.	Serial No.	Last Cal.	Cal Interval
3m Semi-Anechoic	ETS-LINDGREN	N/A	SEL0017	2017.09.29	1Year
Spectrum analyzer	Agilent	E4407B	MY49510055	2017.09.29	1Year
Receiver	R&S	ESCI	101165	2017.09.29	1Year
Bilog Antenna	SCHWARZBECK	VULB 9168	9168-438	2017.09.30	2Year
Horn Antenna	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D(1201)	2017.09.30	2Year
Active Loop Antenna	Beijing Daze	ZN30900A	SEL0097	2017.09.29	1Year
Cable	Resenberger	SUCOFLEX 104	MY6562/4	2017.09.29	1Year
Cable	Resenberger	SUCOFLEX 104	309972/4	2017.09.29	1Year
Cable	Resenberger	SUCOFLEX 104	329112/4	2017.09.29	1Year
Pre-amplifier	SCHWARZBECK	BBV9743	9743-019	2017.09.29	1Year
Pre-amplifier	Quietek	AP-180C	CHM-0602012	2017.09.29	1Year

### 3. Radiation Emission

#### 3.1. Radiation Emission Limits(15.209&231)




Frequency (MHz)	Field Strength Limits at 3 metres (watts, e.i.r.p.)		
	uV/m	dB uV/m	Measurement distance(m)
0.009-0.490	2400/F(kHz)	XX	300
0.490-1.705	24000/F(kHz)	XX	30
1.705-30	30	29.5	30
30~88	100(3nW)	40	3
88~216	150(6.8nW)	43.5	3
216~960	200(12nW)	46	3
Above960	500(75nW)	54	3
Carrier frequency		75.6(AV)	3
Carrier frequency		95.6(PK)	3

**NOTE:**

- a) The tighter limit applies at the band edges.
- b) Emission Level(dB uV/m)=20log Emission Level(Uv/m)

#### 3.2. Test Setup

See the next page.

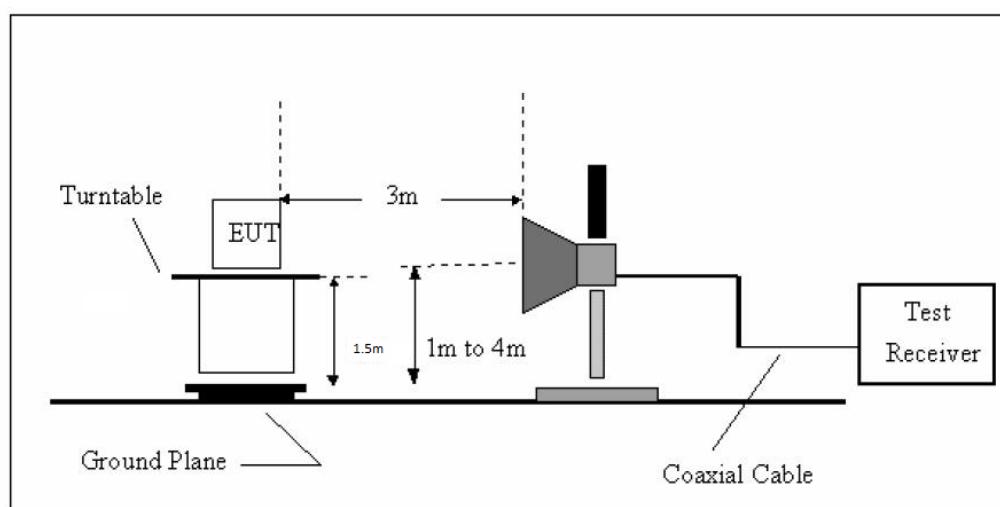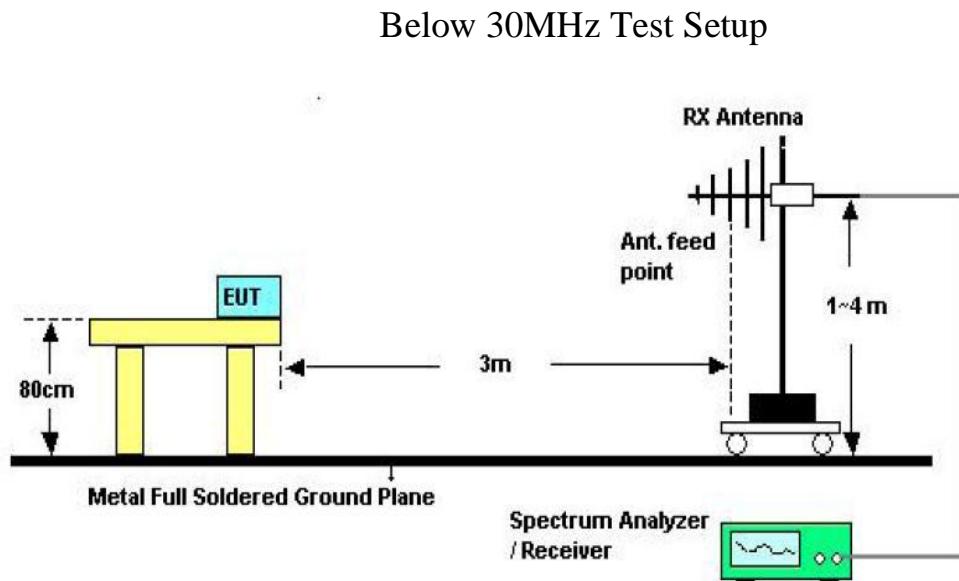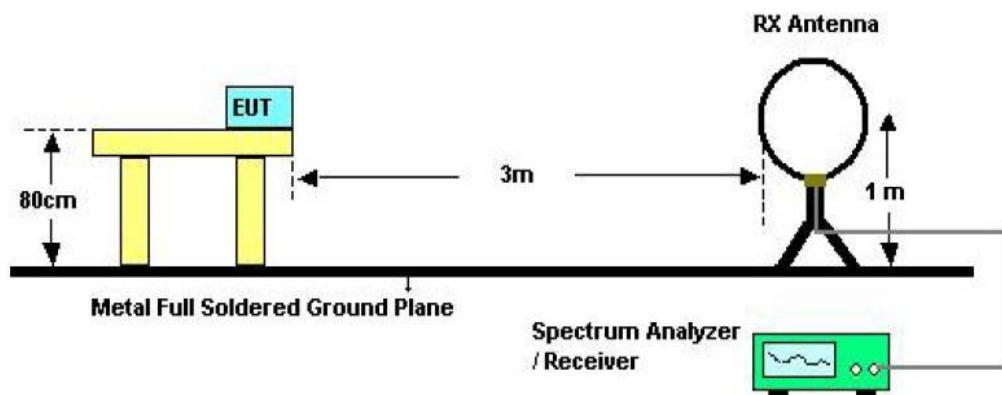

### 3.3. Test Procedure

- a) The EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber for below 1GHz and 150 cm above the ground plane inside a semi-anechoic chamber for above 1GHz. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.
- c) The initial step in collecting conducted emission data is a spectrum analyzer Peak detector mode pre-scanning the measurement frequency range. Significant Peaks are then marked. and then Qusia Peak Detector mode remeasured
- d) If Peak value comply with QP limit Below 1GHz. The EUT deemed to comply with QP limit. But the Peak value and average value both need to comply with applicable limit above 1GHz.
- e) For the actual test configuration, please see the test setup photo.

### 3.4. Test Equipment Setting For emission test.

9KHz~150KHz	RBW 200Hz	VBW1KHz
150KHz~30MHz	RBW 9KHz	VBW 30KHz
30MHz~1GHz	RBW 120KHz	VBW 300KHz
Above 1GHz	RBW 1MHz	VBW 3MHz

### 3.5. Test Condition

Continual Transmitting in maximum power(The new battery be used during Test)

### 3.6. Test Result

We have scanned the 10th harmonic from 9KHz to the EUT.  
Detailed information please see the following page.

From 9KHz to 30MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

**Notes:** 1 --Means other frequency and mode comply with standard requirements and at least have 20dB margin.

Correct Factor=Cable Loss+Antenna Factor-Amplifier Gain

Measurement Result=Reading + Correct Factor

Margin=Measurement Result-Limit

2 --Spectrum setting:

a. Peak setting 30MHz-1GHz, RBW=100KHz, VBW=300KHz.

3- PK measure result values is less than the AVG limit values, so AV measure result values test not applicable.

## Radiated Emissions Result of Inside band

<b>EUT</b>	Remote Control	<b>Model Name</b>	HF100
<b>Temperature</b>	25°C	<b>Relative Humidity</b>	56%
<b>Pressure</b>	960hPa	<b>Test voltage</b>	DC 3V from battery
<b>Test Mode</b>	TX CH1	<b>Test by</b>	Reak

Channel (433.92MHz Below 1GHz)										
Fre. MHz	Plority H/V	Reading dBuV	Antenna Factor dB	Cable Loss dB	Amplifier Gain dB	Correct Factor dB	Measure Result dBuV/m	Limit dBuV/m	Margin dB	
433.92	H	83.68	15.58	0.67	27.22	-10.97	72.71	100.8	PK	-28.09
433.92	H	--	--	--	--	--	--	80.8	AV	--
867.84	H	48.26	21.26	0.67	27.22	-5.29	42.97	80.8	PK	-37.83
867.84	H	--	--	--	--	--	--	60.8	AV	--
157.01	H	22.53	22.1	0.67	27.22	-4.45	18.08	43.5	PK	-25.42
672.84	H	29.27	20.64	0.67	27.22	-5.91	23.36	46.0	AV	-22.64
<hr/>										
433.92	V	85.97	15.58	0.67	27.22	-10.97	75.00	100.8	PK	-25.80
--	V	--	--	--	--	--	--	80.8	AV	--
867.84	V	47.95	21.26	0.67	27.22	-5.29	42.66	80.8	PK	-38.14
--	V	--	--	--	--	--	--	60.8	AV	--
301.43	V	30.36	22.1	0.67	27.22	-4.45	25.91	46.0	PK	-17.59
501.18	V	30.37	20.64	0.67	27.22	-5.91	24.46	46.0	AV	-21.54

Channel (433.92MHz Above 1GHz)								
Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs	Peak Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)			
1301.76	V	57.72	---	-10.41	47.31	74	-26.69	Peak
--	V	--	---	--	--	54	--	--
1301.76	H	58.99	---	-10.41	48.58	74	-25.42	Peak
--	H	--	---	--	--	54.00	--	--


## 4. POWER LINE CONDUCTED EMISSION

### 4.1. Conducted Emission Limits (15.209)

Frequency MHz	Limits dB( $\mu$ V)	
	Quasi-peak Level	Average Level
0.15 -0.50	66 -56*	56 - 46*
0.50 -5.00	56	46
5.00 -30.00	60	50

Notes: 1. \*Decreasing linearly with logarithm of frequency.  
 2. The lower limit shall apply at the transition frequencies.  
 3. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

### 4.2. Test Setup

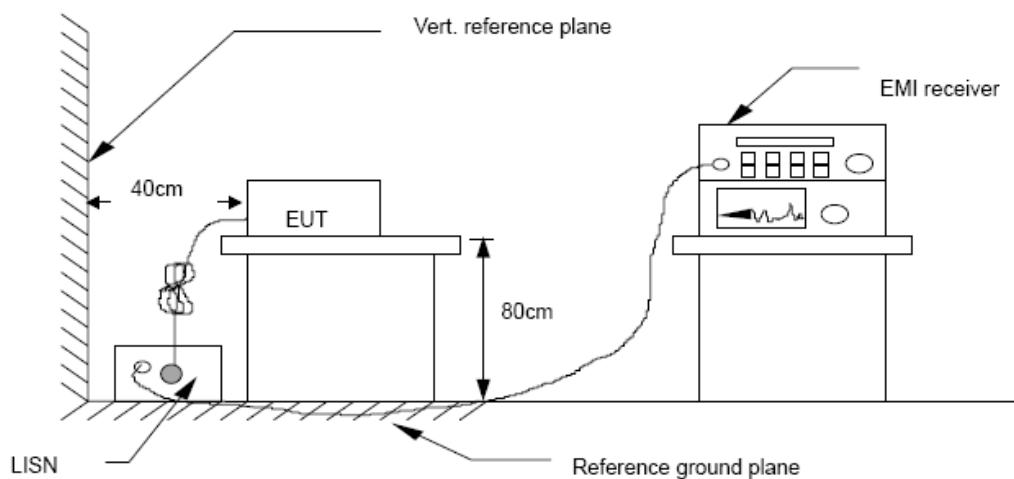

#### 4.3. Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10-2013 on Conducted Emission Measurement.

The bandwidth of test receiver (R & S ESCI) is set at 9 kHz.

#### 4.4. Test Results

EUT power supply by battery, so the test not applicable.

## 5. Occupied bandwidth

### 5.1. Test limit


Please refer section RSS-210 & 15.231

According to §15.231(C), The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70MHz and below 900MHz.

### 5.2. Method of measurement

- a)The bandwidth is measured at an amplitude level reduced 20dB from the reference level. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.
- b)The test receiver RBW set 30KHz,VBW set 30KHz,Sweep time set auto.


### 5.3. Test Setup



### 5.4. Test Results

Mode	Freq (MHz)	20dB Bandwidth (KHz)	99% Bandwidth	Limit (kHz)	Conclusion
ASK	433.92	132.0	/	1084.8	PASS

*Note: Limit = 433.92MHz \*0.25% = 1084.8 kHz*

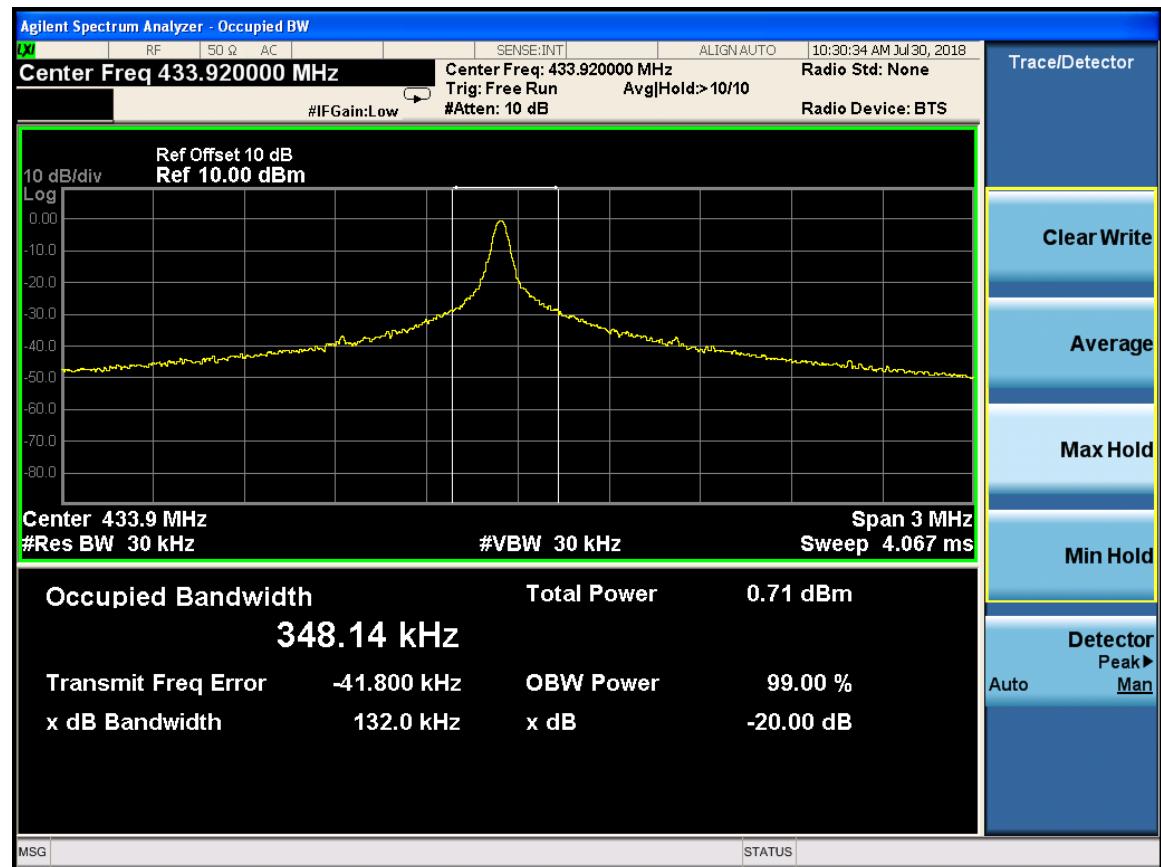

## 6. Transmission time

### 6.1. Test limit

Please refer section RSS-210 & 15.231

According to §15.231(a)(1), A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

### 6.2. Method of measurement

6.2.1. Place the EUT on the table and set it in transmitting mode.

6.2.2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

6.2.3. Set spectrum analyzer Center = 433.92MHz, Span = 0MHz, Sweep = 10s.

6.2.4. Set the spectrum analyzer as RBW, VBW = 100kHz,

6.2.5. Max hold, view and count how many channel in the band.


### 6.3. Test Setup



## 6.4. Test Results

Freq (MHz)	Test Result(s)	Limit (s)	Conclusion
433.92	0.880	< 5s	PASS

EUT After Release the button, EUT emission Continue 0.880 seconds, Compliance with 15.231 a(1) section.

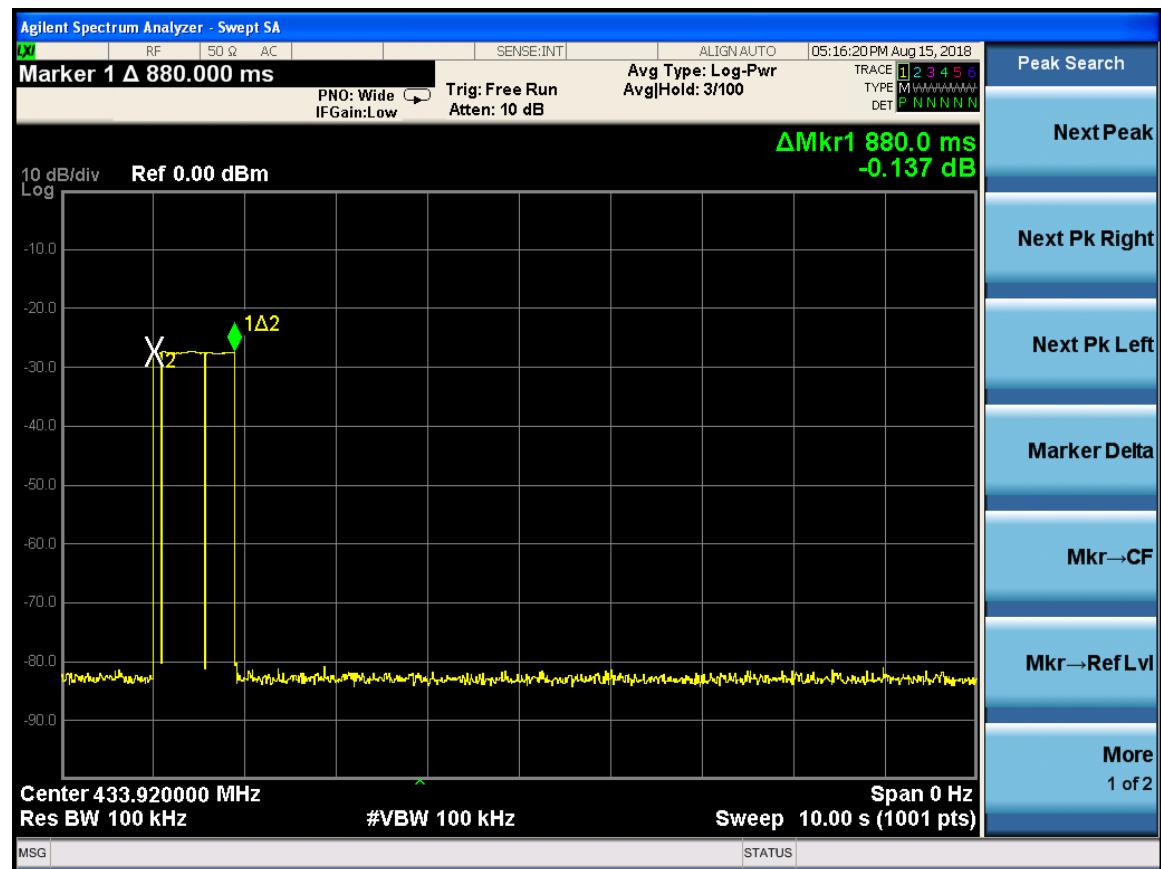

## 7. Antenna Requirement

### 7.1. Standard Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### 7.2. Antenna Connected Construction


The directional gains of antenna used for transmitting is 0 dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Please see EUT photo for details.

### 7.3. Result


The EUT antenna is PCB antenna. It complies with the standard requirement.


## 8. Test setup photo

Photos of Radiated emission

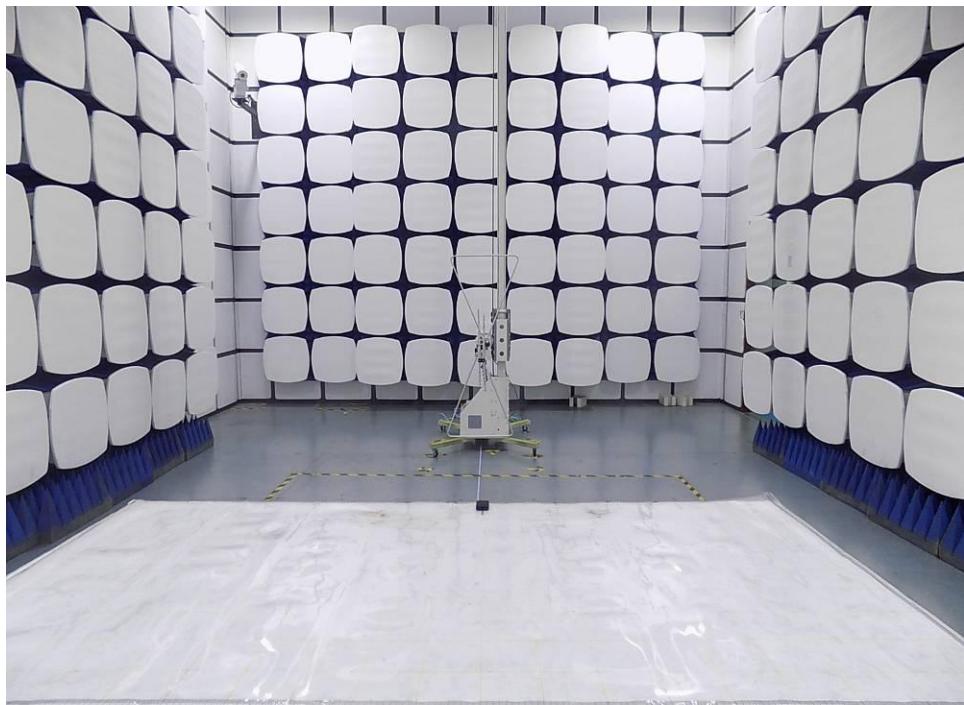




## 9. Photos of EUT

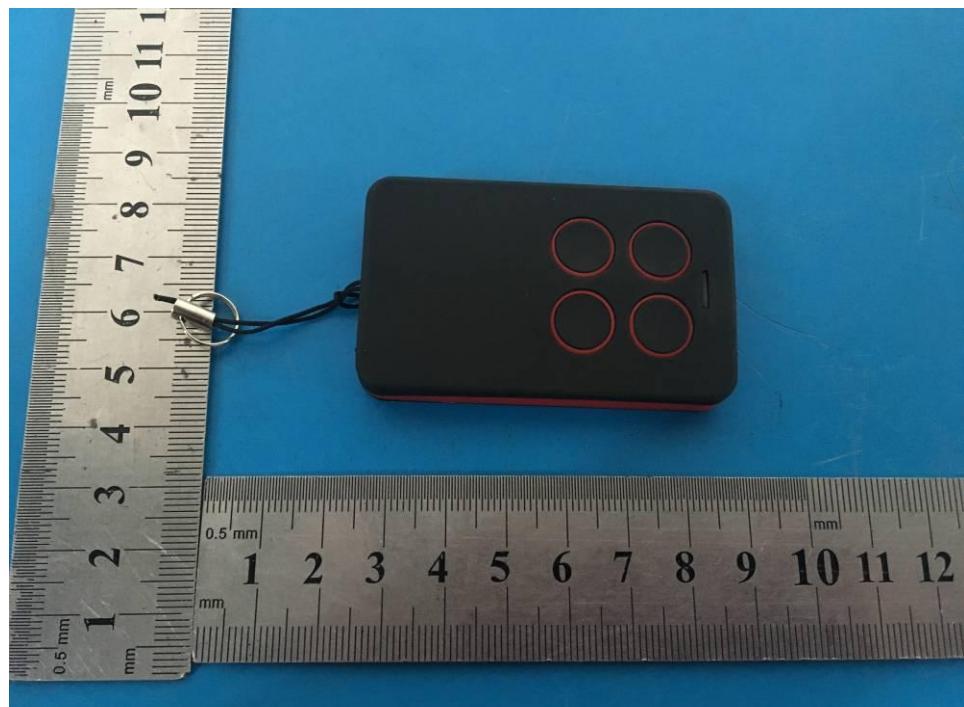


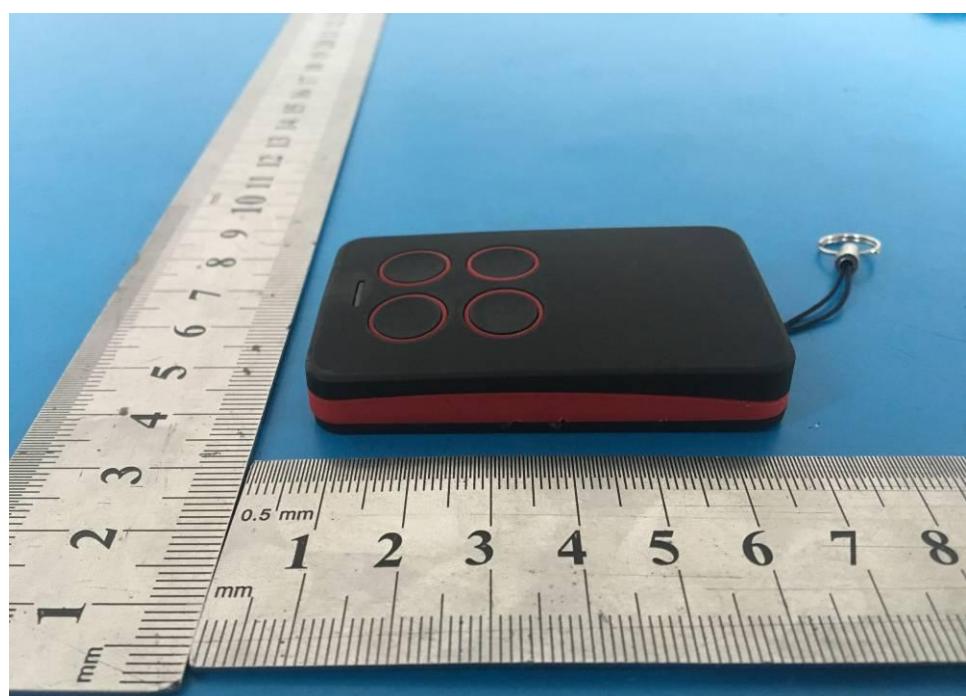



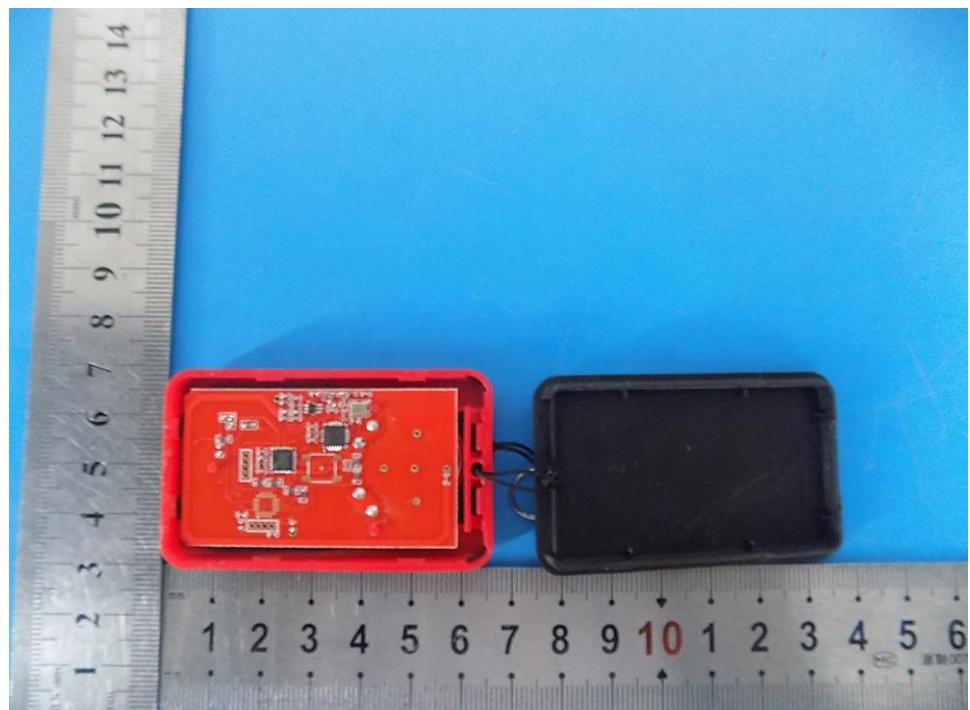

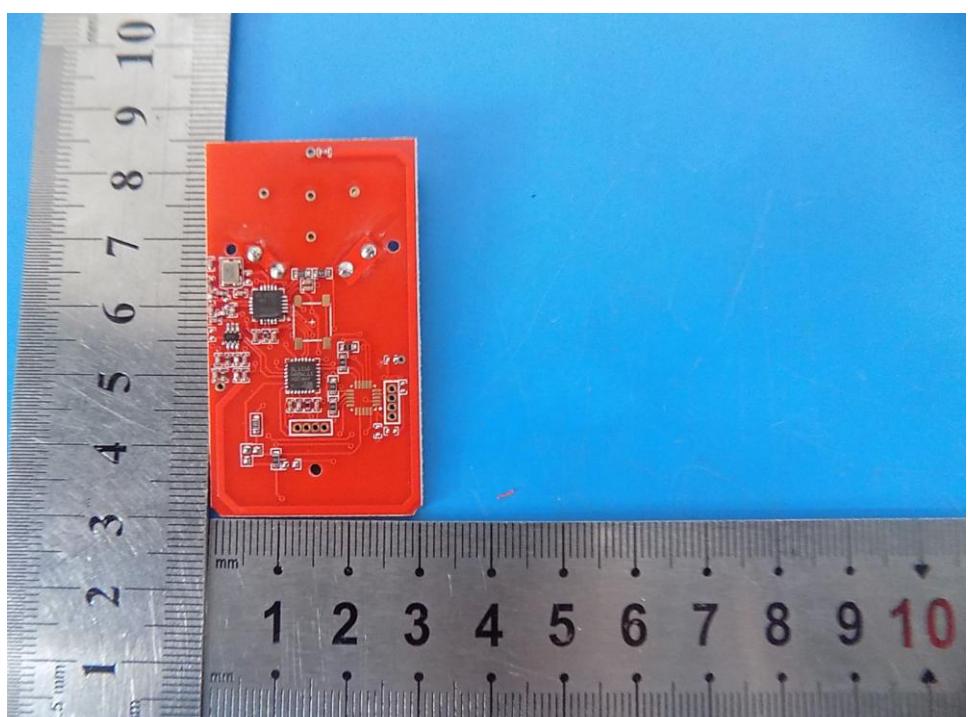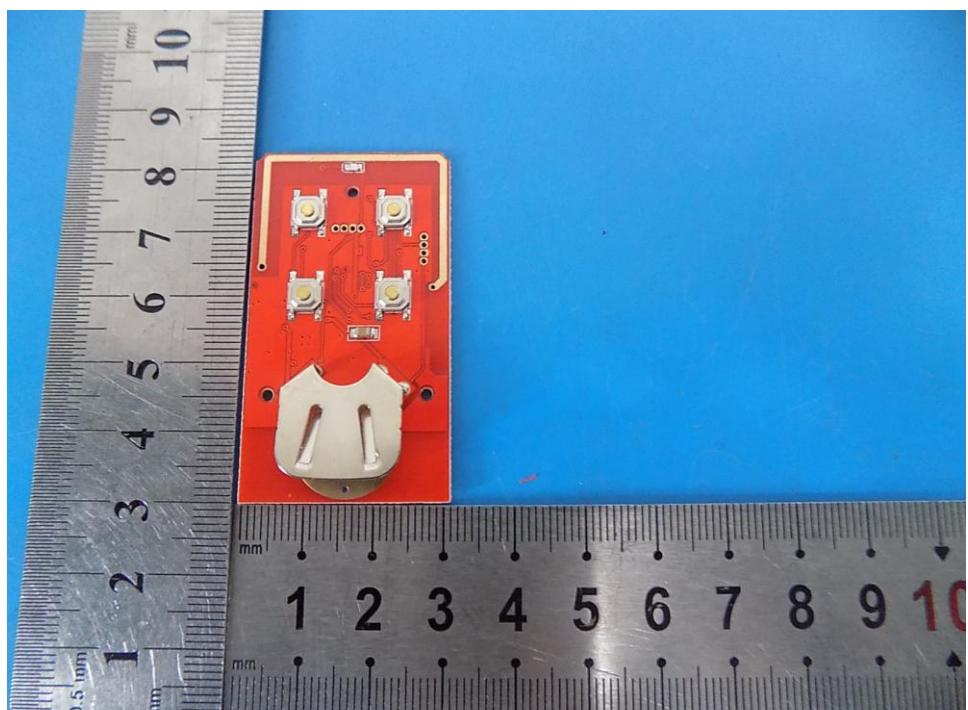

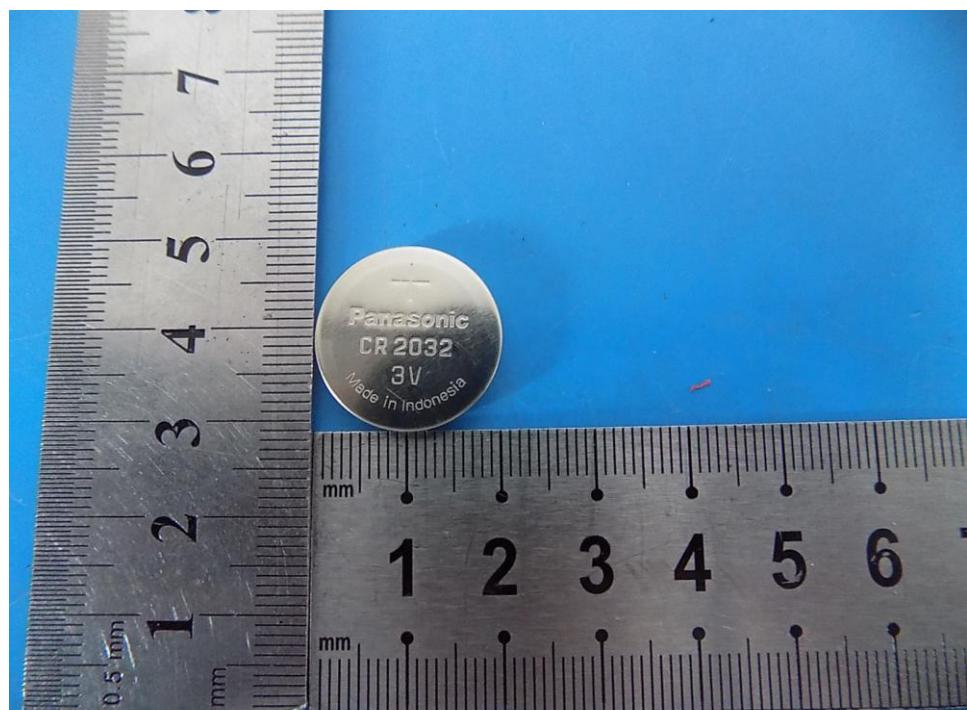

-----END OF THE REPORT-----