



SAR Test Report


For

Applicant Name: FOXX Development Inc.
Address: 3480 Preston Ridge Road, Suite500, Alpharetta, GA 30005, USA
EUT Name: Kids Smartwatch
Model Number: W4
Brand Name: MIRO, FOXXD, FOXX

Issued By


Company Name: BTF Testing Lab (Shenzhen) Co., Ltd.
Address: 101/201/301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Subdistrict, Bao'an District, Shenzhen, China

Report Number: BTF250514R00401
Test Standards: 47 CFR Part 2.1093 IEEE C95.1-2019
IEEE Std. 1528-2013 KDB447498 D04
KDB865664 D01 KDB865664 D02 KDB941225 D05
KDB248227 D01 KDB648474 D04 KDB690783 D01
FCC ID: 2AQRW-W4
Test Conclusion: Pass
Test Date: 2025-05-29 to 2025-06-05
Date of Issue: 2025-06-06

Tested By: 
Jim Yin / Tester
Date of Issue: 2025-06-06

Reviewed By: 
Amenda Zhong / Project Engineer
Date: 2025-06-06

Approved By: 
Ryan.CJ / EMC Manager
Date: 2025-06-06



Note: All the test results in this report only related to the testing samples. Which can be duplicated completely for the legal use with approval of applicant; it shall not be reproduced except in full without the written approval of BTF Testing Lab (Shenzhen) Co., Ltd., All the objections should be raised within thirty days from the date of issue. To validate the report, you can contact us.

Revision History		
Version	Issue Date	Revisions Content
R_V0	2025-06-06	Original
Note:		Once the revision has been made, then previous versions reports are invalid.

Table of Contents

1. Introduction	4
1.1 Identification of Testing Laboratory	4
1.2 Identification of the Responsible Testing Location	4
1.3 Laboratory Condition	4
1.4 Announcement	4
2. Product Information	5
2.1 Application Information	5
2.2 Manufacturer Information	5
2.3 Factory Information	5
2.4 General Description of Equipment under Test (EUT)	5
2.5 Equipment under Test Ancillary Equipment	5
2.6 Technical Information	5
3. Summary of Test Results	7
3.1 Test Standards	7
3.2 Device Category and SAR Limit	7
3.3 Test Result Summary	8
3.4 Test Uncertainty	9
4. Measurement System	11
4.1 Specific Absorption Rate (SAR) Definition	11
4.2 MVG SAR System	11
5. System Verification	16
5.1 Purpose of System Check	16
5.2 System Check Setup	16
6. TEST POSITION CONFIGURATIONS	17
6.1 Head Exposure Conditions	17
6.2 Body-worn Position Conditions	19
6.3 Hotspot Mode Exposure Position Conditions	20
6.4 Product Specific 10g Exposure Consideration	20
7. Measurement Procedure	21
7.1 Measurement Process Diagram	21
7.2 SAR Scan General Requirement	22
7.3 Measurement Procedure	23
7.4 Area & Zoom Scan Procedure	23
8. Conducted RF Output Power	24
8.1 WCDMA	24
8.2 LTE	25
8.3 WIFI	33
8.4 Bluetooth	34
9. Test Exclusion Consideration	35
9.1 SAR Test Exclusion Consideration Table	35
10. Test Result	36
11. SAR Measurement Variability	38
12. Simultaneous Transmission	39
12.1 Simultaneous Transmission Mode Considerations	39
12.2 Sum SAR of Simultaneous Transmission	39
13. Test Equipment List	40
ANNEX A Simulating Liquid Verification Result	41
ANNEX B System Check Result	41
ANNEX C Test Data	54
ANNEX D SAR Test Setup Photos	94
ANNEX E EUT External and Internal Photos	95
ANNEX F Calibration Information	95

1. Introduction

1.1 Identification of Testing Laboratory

Company Name:	BTF Testing Lab (Shenzhen) Co., Ltd.
Address:	101/201/301, Building 1, Block 2, Tantou Industrial Park,Tantou Community, Songgang Subdistrict, Bao'an District, Shenzhen, China
Phone Number:	+86-0755-23146130
Fax Number:	+86-0755-23146130

1.2 Identification of the Responsible Testing Location

Test Location:	BTF Testing Lab (Shenzhen) Co., Ltd.
Address:	101/201/301, Building 1, Block 2, Tantou Industrial Park,Tantou Community, Songgang Subdistrict, Bao'an District, Shenzhen, China
Description:	All measurement facilities used to collect the measurement data are located at 101/201/301, Building 1, Block 2, Tantou Industrial Park,Tantou Community, Songgang Subdistrict, Bao'an District, Shenzhen, China
FCC Registration Number	518915
Designation Number	CN1409

1.3 Laboratory Condition

Ambient Temperature:	21°C to 25°C
Ambient Relative Humidity:	48% to 59%
Ambient Pressure:	100 kPa to 102 kPa

1.4 Announcement

- (1) The test report reference to the report template version v0.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing, reviewing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) This document may not be altered or revised in any way unless done so by BTF and all revisions are duly noted in the revisions section.
- (5) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
- (6) The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.

2. Product Information

2.1 Application Information

Company Name:	FOXX Development Inc.
Address:	3480 Preston Ridge Road, Suite500, Alpharetta, GA 30005, USA

2.2 Manufacturer Information

Company Name:	FOXX Development Inc.
Address:	3480 Preston Ridge Road, Suite500, Alpharetta, GA 30005, USA

2.3 Factory Information

Company Name:	FOXX Development Inc.
Address:	3480 Preston Ridge Road, Suite500, Alpharetta, GA 30005, USA

2.4 General Description of Equipment under Test (EUT)

EUT Name	Kids Smartwatch
Under Test Model Name	W4
Sample No.	BTFSN250514012

2.5 Equipment under Test Ancillary Equipment

Ancillary Equipment 1	Rechargeable Li-ion Battery	
	Capacity	700mAh
	Rated Voltage	3.87V

2.6 Technical Information

Network and Wireless connectivity	3G Network WCDMA/HSDPA/HSUPA Band 2/5 4G Network TDD LTE Band 2/4/5/7/12/17 2.4G WIFI 802.11b, 802.11g, 802.11n(HT20) BT (EDR+BLE)
-----------------------------------	---

The requirement for the following technical information of the EUT was tested in this report:

Operating Mode	LTE, WLAN, Bluetooth		
Frequency Range	WCDMA Band 2	TX: 1850 ~ 1910 MHz	RX: 1930 ~ 1990 MHz
	WCDMA Band 5	TX: 824 ~ 849 MHz	RX: 869 ~ 894 MHz
	LTE Band 2	TX: 1850 ~ 1910 MHz	RX: 1930 ~ 1990 MHz
	LTE Band 4	TX: 1710 ~ 1755 MHz	RX: 2110 ~ 2155 MHz
	LTE Band 5	TX: 824 ~ 849 MHz	RX: 869 ~ 894 MHz
	LTE Band 7	TX: 2500 ~ 2570 MHz	RX: 2620 ~ 2690 MHz
	LTE Band 12	TX: 698 ~ 716 MHz	RX: 728 ~ 746 MHz
	LTE Band 17	TX: 704 ~ 716 MHz	RX: 734 ~ 746 MHz
	802.11b/g/n(HT20)	2412 ~ 2462 MHz	
	Bluetooth	2402 ~ 2480 MHz	
Antenna Type	WWAN: Internal antenna WIFI: Internal antenna BT: Internal antenna		
Hotspot Function	Not Support		
Power Reduction	Not Support		
Exposure Category	General Population/Uncontrolled exposure		
EUT Stage	Portable Device		
Product	Type		
	☐ Production unit		☒ Identical prototype

3. Summary of Test Results

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 2.1093	Radiofrequency radiation exposure evaluation: portable devices
2	IEEE Std. 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
3	IEEE C95.1-2019	IEEE Standard for Safety Levels with Respect to Human Exposure to Electric, Magnetic, and Electromagnetic Fields, 0 Hz to 300 GHz
4	KDB447498 D04	Interim General RF Exposure Guidance v01
5	KDB865664 D01	SAR measurement 100MHz to 6GHz v01r04
6	KDB865664 D02	RF Exposure Reporting v01r02
7	KDB941225 D05	SAR for LTE Devices v02r05
8	KDB248227 D01	802.11 Wi-Fi SAR v02r02
9	KDB648474 D04	Handset SAR v01r03
10	KDB690783 D01	SAR Listings on Grant v01r03

3.2 Device Category and SAR Limit

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user. Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.

Body Position	SAR Value (W/Kg)	
	General Population/ Uncontrolled Exposure	Occupational/ Controlled Exposure
Whole-Body SAR (averaged over the entire body)	0.08	0.4
Partial-Body SAR (averaged over any 1 gram of tissue)	1.60	8.0
SAR for hands, wrists, feet and ankles (averaged over any 10 grams of tissue)	4.0	20.0

NOTE:

General Population/Uncontrolled Exposure: Locations where there is the exposure of individuals who have no knowledge or control of their exposure. General population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

Occupational/Controlled Exposure: Locations where there is exposure that may be incurred by persons who are aware of the potential for exposure. In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

3.3 Test Result Summary

The maximum results of Specific Absorption Rate (SAR) found during test as bellows:

<Highest Reported standalone SAR Summary>

Frequency Band		Maximum Reported SAR (W/kg) 1g	Maximum Reported SAR (W/kg) 10g
		Next-to-mouth SAR (Separation 10 mm)	Wrist-worn SAR (Separation 0 mm)
WWAN	WCDMA Band 2	0.289	0.993
	WCDMA Band 5	0.252	0.753
	LTE FDD Band 2	0.257	0.840
	LTE FDD Band 4	0.146	0.490
	LTE FDD Band 5	0.244	0.659
	LTE FDD Band 7	0.434	0.823
	LTE FDD Band 12	0.091	0.217
	LTE FDD Band 17	0.086	0.307
WLAN	2.4G WIFI	0.079	0.206
BT	BT	0.002	0.012
Limits (W/kg)		1.6	4.0
Test Verdict		Pass	

This device is in compliance with Specific Absorption Rate(SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC47 CFR part 2(2.1093) and ANSI/IEEE C95.1-2019, and had been tested in accordance with the measurement methods and procedures specified in IEEE Std. 1528-2013.

<Highest Reported Simultaneous SAR>

Exposure Position	Simultaneous Configuration	Highest Reported Simultaneous Transmission SAR (W/kg)	Limit (W/kg)	Verdict
Next-to-mouth SAR (Separation 10 mm)	LTE Band 7 + 2.4G WIFI	0.513	1.6	Pass
Wrist-worn SAR (Separation 0 mm)	WCDMA Band 2 + 2.4G WIFI	1.199	4.0	Pass

3.4 Test Uncertainty

3.4.1 Measurement uncertainty evaluation for SAR test (300MHz to 6GHz)

Uncertainty Budget of 1g/10gpsSAR for DUT with COMOSAR											
Ambiente temperature: 18-25 °C & ΔT≤2 °C											
Humidity: 30-70%											
Frequency range: 150MHz-7500MHz											
Symbol	Input quantity Xi (source of uncertainty)	PDF _i	Unc. a(x) [±%]	Div. q	u(x)= a(x)/q _i	c _i 1g	c _i 10g	u(y)= c _i *u(x) 1g [± %]	u(y)= c _i *u(x) 10g [± %]	v _i	Frequency range [MHz]
Measurement System errors											
CF	Probe calibration	N (k=2)	11.00	2.00	5.50	1.00	1.00	5.50	5.50	∞	150-450
			14.00	2.00	7.00	1.00	1.00	7.00	7.00	∞	600-7500
CF _{drift}	Probe calibration drift	R	2.30	1.73	1.33	1.00	1.00	1.33	1.33	∞	150-450
LIN	Probe linearity	R	4.00	1.73	2.31	1.00	1.00	2.31	2.31	∞	600-7500
			4.70	1.73	2.71	1.00	1.00	2.71	2.71	∞	
BBS	Detection limit	R	1.00	1.73	0.58	1.00	1.00	0.58	0.58	∞	
BBS	Broadband signal	R	0.00	1.73	0.00	1.00	1.00	0.00	0.00	∞	
			3.50	1.73	2.02	0.71	0.71	1.43	1.43	∞	
ISO	Axial Isotropy	R	5.90	1.73	3.41	0.71	0.71	2.41	2.41	∞	
ISO	Hemispherical Isotropy	R	1.00	1.73	0.58	1.00	1.00	0.58	0.58	∞	
			1.40	1.73	0.81	1.00	1.00	0.81	0.81	∞	
DAE	Boundary effect	R	0.00	1.73	0.00	1.00	1.00	0.00	0.00	∞	
			0.00	1.73	0.00	1.00	1.00	0.00	0.00	∞	
DAE	Integration time	R	0.50	1.00	0.50	1.00	1.00	0.50	0.50	∞	
			3.00	1.73	1.73	1.00	1.00	1.73	1.73	∞	
DAE	Response time	R	0.50	1.00	0.50	1.00	1.00	0.50	0.50	∞	
			3.00	1.73	1.73	1.00	1.00	1.73	1.73	∞	
DAE	Readout electronics	N	0.50	1.00	0.50	1.00	1.00	0.50	0.50	∞	
			3.00	1.73	1.73	1.00	1.00	1.73	1.73	∞	
AMB	Noise	R	3.00	1.73	1.73	1.00	1.00	1.73	1.73	∞	
			3.00	1.73	1.73	1.00	1.00	1.73	1.73	∞	
AMB	Reflections	R	1.40	1.73	0.81	0.14	0.14	0.12	0.12	∞	
			3.28	1.73	1.89	0.33	0.33	0.62	0.62	∞	
Δ _{xyz}	Positioner Mechanical Tolerance	R	3.28	1.73	1.89	0.33	0.33	0.62	0.62	∞	
			1.40	1.73	0.81	0.14	0.14	0.12	0.12	∞	
Δ _{xyz}	Positioning with respect to Phantom Shell	R	3.28	1.73	1.89	0.33	0.33	0.62	0.62	∞	
			3.28	1.73	1.89	0.33	0.33	0.62	0.62	∞	
DAT	Data processing errors	R	2.30	1.73	1.33	1.00	1.00	1.33	1.33	∞	150-7500
Phantom and DUT errors											
LIQ(σ,ε)	Conductivity measurement	N	4.07	1.00	4.07	0.79	0.77	3.22	3.13	9	
			5.06	1.00	5.06	0.23	0.26	1.16	1.32	9	
LIQ(T _c)	Liquid Conductivity - Temperature Uncertainty	R	2.50	1.73	1.44	0.79	0.77	1.14	1.11	∞	
			2.50	1.73	1.44	0.23	0.26	0.33	0.38	∞	
EPS	Liquid Permittivity - Temperature Uncertainty	R	2.90	1.73	1.67	0.00	0.00	0.00	0.00	∞	
			2.90	1.73	1.67	0.25	0.25	0.42	0.42	∞	
EPS	Shell permittivity	R	2.90	1.73	1.67	0.50	0.50	0.84	0.84	∞	
			2.70	1.00	2.70	2.00	2.00	5.40	5.40	∞	
DIS	Distance between the radiating element of the DUT and the phantom medium	N	2.70	1.00	2.70	2.00	2.00	5.40	5.40	∞	
			3.20	1.00	3.20	2.00	2.00	6.40	6.40	∞	
D _{xyz}	Repeatability of positioning the DUT or source against the phantom	N	2.60	1.00	2.60	1.00	1.00	2.60	2.60	13	
H	Device holder effects	N	3.00	1.00	3.00	1.00	1.00	3.00	3.00	23	
MOD	Effect of operating mode on probe sensitivity	R	8.20	1.73	4.73	1.00	1.00	4.73	4.73	∞	
RF _{drift}	Variation in SAR due to drift in output of DUT	R	5.00	1.73	2.89	1.00	1.00	2.89	2.89		
Corrections to the SAR result											
C(ε',σ)	Phantom deviation from target (ε',σ)	N	1.90	1.00	1.90	1.00	1.00	1.90	1.90		
C(R)	SAR scaling	R	5.00	1.73	2.89	1.00	1.00	2.89	2.89		
u(ΔSAR)	Combined uncertainty							12.54	12.53		150-450
								13.40	13.40		≥600 & ≤3000
								13.44	13.43		>3000 & ≤6000
								13.89	13.88		>6000 & ≤7500
U	Expanded uncertainty (95% confidence interval)							25.08	25.07		150-450
								26.80	26.79		≥600 & ≤3000
								26.87	26.86		>3000 & ≤6000
								27.77	27.76		>6000 & ≤7500

3.4.2 Measurement uncertainty evaluation for system check

Uncertainty Budget of 1g/10g psSAR for System Validation/Check COMOSAR											
Ambiente temperature: 18-25 °C & $\Delta T \leq 2^\circ\text{C}$											
Humidity: 30-70%											
Frequency range: 150MHz-7500MHz											
Symbol	Input quantity X_i (source of uncertainty)	PDF _i	Unc. $a(x_i)$ [± %]	Div. q_i	$u(x_i) =$ $a(x_i)/q_i$	c_i 1g	c_i 10 g	$u(y) =$ $c_i \cdot u(x_i)$ 1g [± %]	$u(y) =$ $c_i \cdot u(x_i)$ 10g [± %]	v_i	Frequency range [MHz]
Measurement System errors											
CF	Probe calibration	N (k=2)	11.00	2.00	5.50	1.00	1.00	5.50	5.50	∞	150-450
			14.00	2.00	7.00	1.00	1.00	7.00	7.00	∞	600-7500
CF _{drift}	Probe calibration drift	R	2.30	1.73	1.33	1.00	1.00	1.33	1.33	∞	150-450
			4.00	1.73	2.31	1.00	1.00	2.31	2.31	∞	600-7500
LIN	Probe linearity	R	4.70	1.73	2.71	1.00	1.00	2.71	2.71	∞	150-7500
	Detection limit	R	1.00	1.73	0.58	1.00	1.00	0.58	0.58	∞	
ISO	Axial Isotropy	R	3.50	1.73	2.02	0.71	0.71	1.43	1.43	∞	
	Hemispherical Isotropy	R	5.90	1.73	3.41	0.71	0.71	2.41	2.41	∞	
DAE	Boundary effect	R	1.00	1.73	0.58	1.00	1.00	0.58	0.58	∞	
	Integration time	R	1.40	1.73	0.81	1.00	1.00	0.81	0.81	∞	
	Response time	R	0.00	1.73	0.00	1.00	1.00	0.00	0.00	∞	
	Readout electronics	N	0.50	1.00	0.50	1.00	1.00	0.50	0.50	∞	
AMB	Noise	R	3.00	1.73	1.73	1.00	1.00	1.73	1.73	∞	
	Reflections	R	3.00	1.73	1.73	1.00	1.00	1.73	1.73	∞	
Δ_{xyz}	Positioner Mechanical Tolerance	R	1.40	1.73	0.81	0.14	0.14	0.12	0.12	∞	≥150 & ≤3000
			3.28	1.73	1.89	0.33	0.33	0.62	0.62	∞	>3000 & ≤6000
			3.28	1.73	1.89	0.33	0.33	0.62	0.62	∞	>6000 & ≤10000
	Positioning with respect to Phantom Shell	R	1.40	1.73	0.81	0.14	0.14	0.12	0.12	∞	≥150 & ≤3000
			3.28	1.73	1.89	0.33	0.33	0.62	0.62	∞	>3000 & ≤6000
			3.28	1.73	1.89	0.33	0.33	0.62	0.62	∞	>6000 & ≤10000
DAT	Data processing errors	R	2.30	1.73	1.33	1.00	1.00	1.33	1.33	∞	150-7500
Phantom and Dipoles errors											
LIQ(σ,ε)	Conductivity measurement	N	4.07	1.00	4.07	0.79	0.77	3.22	3.13	9	150-7500
	Permittivity measurement	N	5.06	1.00	5.06	0.23	0.26	1.16	1.32	9	
LIQ(T _c)	Liquid Conductivity - Temperature Uncertainty	R	2.50	1.73	1.44	0.79	0.77	1.14	1.11	∞	
	Liquid Permittivity - Temperature Uncertainty	R	2.50	1.73	1.44	0.23	0.26	0.33	0.38	∞	
EPS	Shell permittivity	R	2.90	1.73	1.67	0.00	0.00	0.00	0.00	∞	≥150 & ≤3000
			2.90	1.73	1.67	0.25	0.25	0.42	0.42	∞	>3000 & ≤6000
			2.90	1.73	1.67	0.50	0.50	0.84	0.84	∞	>6000 & ≤10000
DIS	Distance between the radiating element of the DUT and the phantom medium	N	2.70	1.00	2.70	2.00	2.00	5.40	5.40	∞	≥150 & ≤3000
			2.70	1.00	2.70	2.00	2.00	5.40	5.40	∞	>3000 & ≤6000
			3.20	1.00	3.20	2.00	2.00	6.40	6.40	∞	>6000 & ≤10000
VAL	Deviation of experimental antennas	N	4.50	1.73	2.60	1.00	1.00	2.60	2.60		150-7500
	Other uncertainty contributions	R	2.00	1.00	2.00	1.00	1.00	2.00	2.00		
P _{in}	Uncertainty in accepted power	R	3.00	1.73	1.73	1.00	1.00	1.73	1.73		
Corrections to the SAR result											
C(ε',σ)	Phantom deviation from target (ε',σ)	N	1.90	1.00	1.90	1.00		1.90	1.90		150-7500
u(ΔSAR)	Combined uncertainty							10.78	10.77		150-450
								11.77	11.76		≥600 & ≤3000
								11.81	11.80		>3000 & ≤6000
								12.32	12.31		>6000 & ≤7500
U	Expanded uncertainty (95% confidence interval)							21.56	21.54		150-450
								23.54	23.52		≥600 & ≤3000
								23.62	23.60		>3000 & ≤6000
								24.64	24.62		>6000 & ≤7500

4. Measurement System

4.1 Specific Absorption Rate (SAR) Definition

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg) SAR measurement can be related to the electrical field in the tissue by

$$SAR = \frac{\sigma E^2}{\rho}$$

Where: σ is the conductivity of the tissue,
 ρ is the mass density of the tissue and E is the RMS electrical field strength.

4.2 MVG SAR System

4.2.1 SAR system diagram

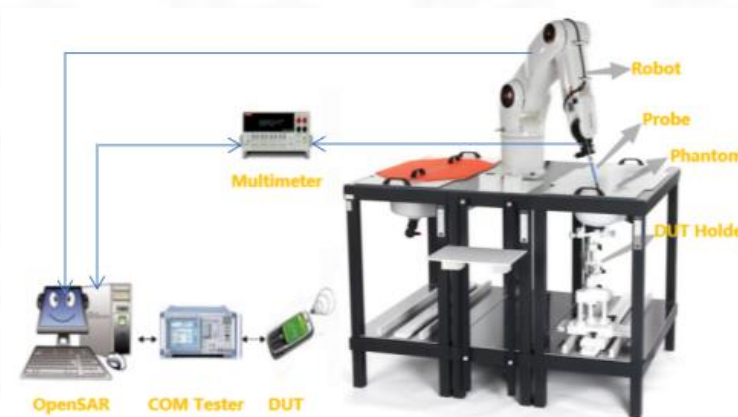

4.2.2 Robot



A standard high precision 6-axis robot (Denso) with teaches pendant with Scanning System

- It must be able to scan all the volume of the phantom to evaluate the tridimensional distribution of SAR.
- Must be able to set the probe orthogonal of the surface of the phantom ($\pm 30^\circ$).
- Detects stresses on the probe and stop itself if necessary to keep the integrity of the probe.

4.2.3 E-Field Probe

For the measurements, the Specific Dosimetric SSE2 E-Field Probe with following specifications is used:

- Dynamic range: 0.01-100 W/kg
- Tip diameter: 2mm for SSE2
- Distance between probe tip and sensor centre: 1mm for SSE2
- Distance between sensor centre and the inner phantom surface: 2mm for $f \geq 4\text{GHz}$.
- Probe linearity: $<0.25\text{dB}$.
- Axial Isotropy: $<0.25\text{dB}$.
- Spherical Isotropy: $<0.50\text{dB}$.
- Calibration range: 150 to 6000 MHz for head & body simulating liquid
- Angle between probe axis (evaluation axis) and surface normal line: less than 20° .



4.2.4 Phantoms

SAM Phantom

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The probe scanning of the E-Field is done in the 2 halves of the normalized head. The normalized shape of the phantom corresponds to the dimensions of 90% of an adult head size. It enables the dosimetric evaluation of left and right-hand phone usage and includes an additional flat phantom part for the simplified body performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.



SAM Phantom

The thickness of the phantom amounts to $2\text{ mm} \pm 0.2\text{ mm}$. The materials for the phantom do not affect the radiation of the device under test (DUT) : $\epsilon_r' < 5$
The head is filled with tissue simulating liquid. The hand do not have to be modeled.

TWIN SAM phantom

	Mechanical	Electrical	
Overall thickness	$2 \pm 0.2\text{ mm}$ (except ear area)	Relative permittivity	3.4
Dimensions	1000 mm(L) x 500 mm(W) x 200 mm(H)	Loss tangent	0.02
Maximum volume	27 L		
Material	Fiberglass based		

ELLIPTICAL Phantom

The phantom is for Body performance check filled with tissue-equivalent liquid to a depth of at least 150 mm, whose shell material is resistant to damage or reaction with tissue-equivalent liquid chemicals.




ELLI Phantom

The shape of the phantom is an ellipse with length $600\text{ mm} \pm 5\text{ mm}$ and width $400\text{ mm} \pm 5\text{ mm}$.
The phantom shell is made of low-loss and low-permittivity material, having loss tangent $\tan \delta \leq 0.05$ and relative permittivity:
 $\epsilon_r' \leq 5$ for $f \leq 3\text{ GHz}$
 $3 \leq \epsilon_r' \leq 5$ for $f > 3\text{ GHz}$
The thickness of the bottom-wall of the flat phantom is 2.0 mm with a tolerance of $\pm 0.2\text{ mm}$.

Technical & mechanical characteristics

Shell thickness	$2\text{ mm} \pm 0.2\text{ mm}$
Filling volume	25 L
Dimensions	600 mm x 400 mm x 200mm
Permittivity	4.4
Loss tangent	0.017

4.2.5 Device Holder

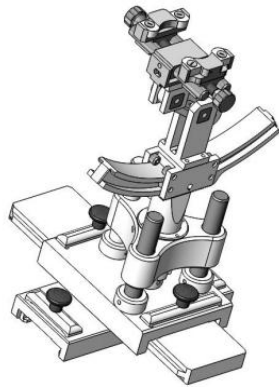

System Material	Permittivity	Loss tangent
Delrin	3.7	0.005


(The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is lower than 1°.)

System Material	Permittivity	Loss tangent
PMMA	2.9	0.028


4.2.6 Simulating Liquid

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 5%.

Head Liquid Depth

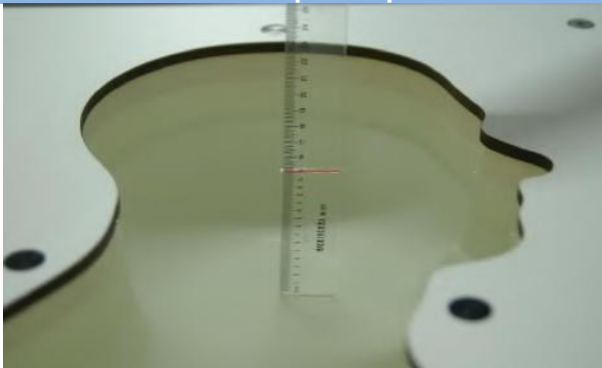

Body Liquid Depth

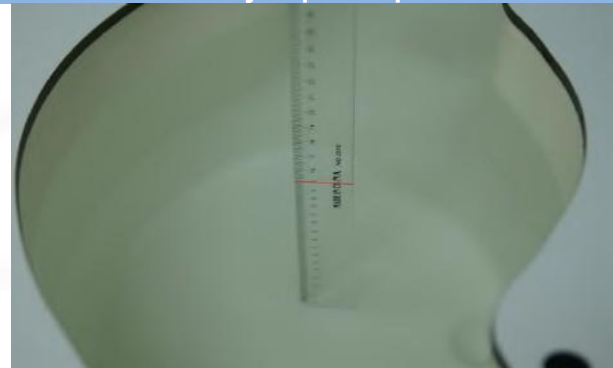

The following table gives the recipes for tissue simulating liquid and the theoretical Conductivity/Permittivity.


Head (Reference IEEE1528)								
Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity σ (S/m)	Permittivity ϵ
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.4	40.0
2450	55.0	0	0	0.1	0	44.9	1.80	39.2
2600	54.9	0	0	0.1	0	45.0	1.96	39.0
Frequency (MHz)	Water (%)	Hexyl Carbitol (%)			Triton X-100 (%)		Conductivity σ (S/m)	Permittivity ϵ
5200	62.52	17.24			17.24		4.66	36.0
5800	62.52	17.24			17.24		5.27	35.3
Body (From instrument manufacturer)								
Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity σ (S/m)	Permittivity ϵ
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
900	50.8	48.2	0	0.9	0.1	0	1.05	55.0
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0.1	0	31.3	1.95	52.7
2600	68.2	0	0	0.1	0	31.7	2.16	52.5
Frequency(MHz)	Water	DGBE (%)			Salt (%)		Conductivity σ (S/m)	Permittivity ϵ
5200	78.60	21.40			/		5.30	49.00
5800	78.50	21.40			0.1		6.00	48.20

5. System Verification

5.1 Purpose of System Check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. The setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

5.2 System Check Setup

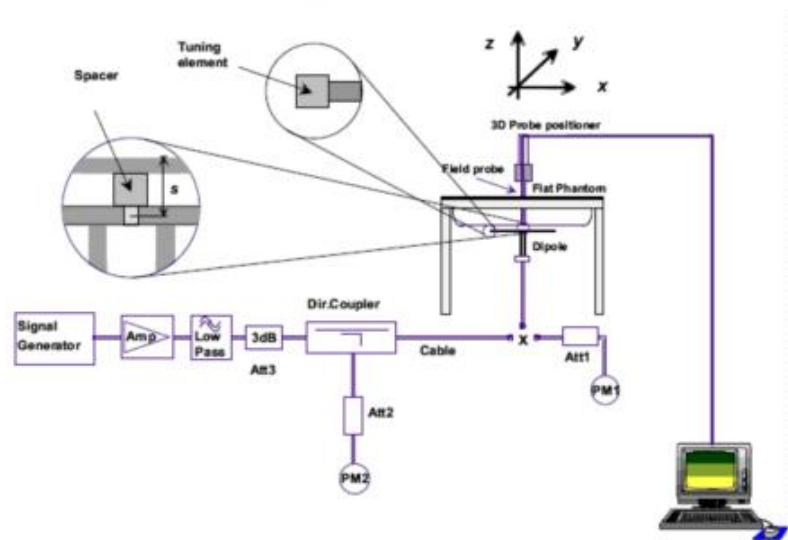

6. TEST POSITION CONFIGURATIONS


According to KDB 648474 D04 Handset, handsets are tested for SAR compliance in head, body-worn accessory and other use configurations described in the following subsections.

6.1 Head Exposure Conditions

Head exposure is limited to next to the ear voice mode operations. Head SAR compliance is tested according to the test positions defined in IEEE Std 1528-2013 using the SAM phantom illustrated as below.


6.1.1 Two Imaginary Lines on the Handset

- The vertical center line passes through two points on the front side of the handset - the midpoint of the width w_t of the handset at the level of the acoustic output, and the midpoint of the width w_b of the bottom of the handset.
- The horizontal line is perpendicular to the vertical center line and passes through the center of the acoustic output. The horizontal line is also tangential to the face of the handset at point A.
- The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical center line is not necessarily parallel to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.

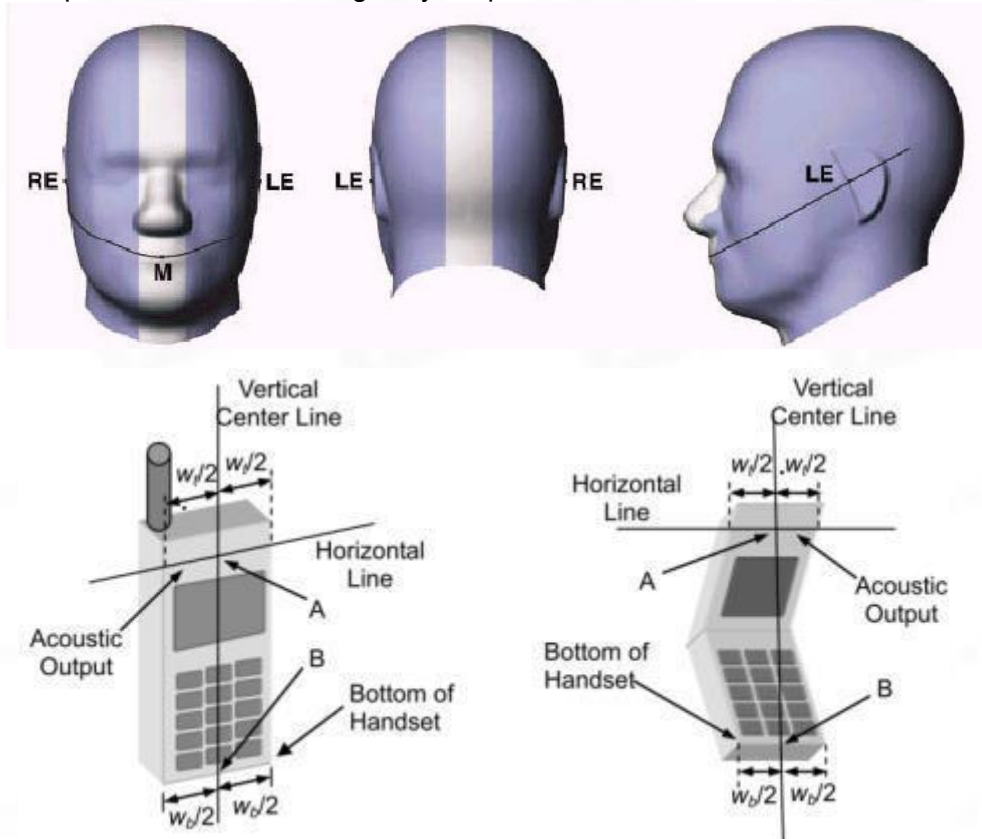

6.1.2 Two Imaginary Lines on the Handset

- To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the three ear and mouth reference point (M: Mouth, RE: Right Ear, and LE: Left Ear) and align the center of the ear piece with the line RE-LE.
- To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost.

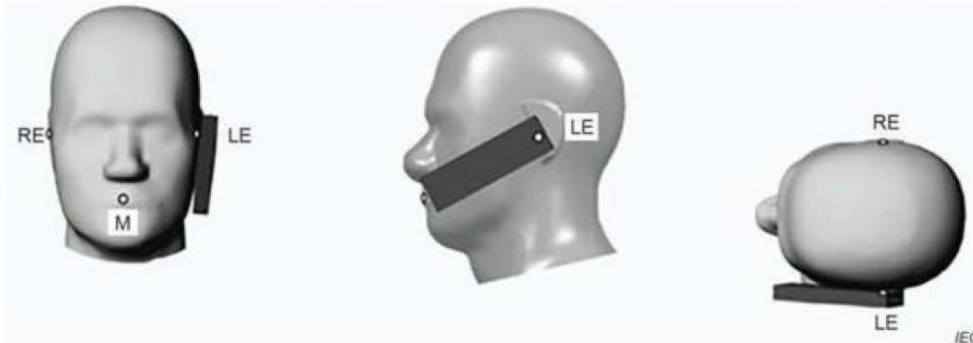

6.1.3 Titled Position

- To position the device in the “cheek” position described above.
- While maintaining the device the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost.




6.2 Body-worn Position Conditions

Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in KDB 447498 are used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode. When the reported SAR for a body-worn accessory.


Body-worn accessories that do not contain metallic or conductive components may be tested according to worst-case exposure configurations, typically according to the smallest test separation distance required for the group of body-worn accessories with similar operating and exposure characteristics. All body-worn accessories containing metallic components are tested in conjunction with the host device.

Body-worn accessory SAR compliance is based on a single minimum test separation distance for all wireless and operating modes applicable to each body-worn accessory used by the host, and according to the relevant voice and/or data mode transmissions and operations. If a body-worn accessory supports voice only operations in its normal and expected use conditions, testing of data mode for body-worn compliance is not required. A conservative minimum test separation distance for supporting off-the-shelf body-worn accessories that may be acquired by users of consumer handsets is used to test for body-worn accessory SAR compliance. This distance is determined by the handset manufacturer, according to the requirements of Supplement C 01-01. Devices that are designed to operate on the body of users using lanyards and straps, or without requiring additional body-worn accessories, will be tested using a conservative minimum test separation distance ≤ 5 mm to support compliance.

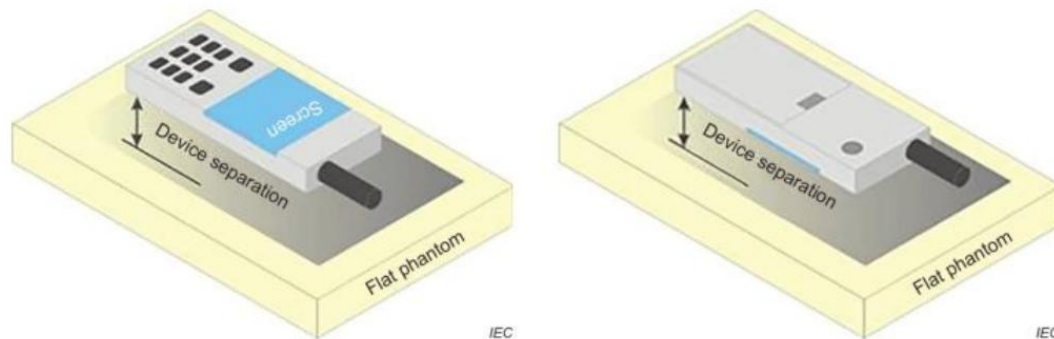

6.3 Hotspot Mode Exposure Position Conditions

For handsets that support hotspot mode operations, with wireless router capabilities and various web browsing functions, the relevant hand and body exposure conditions are tested according to the hotspot SAR procedures in KDB 941225. A test separation distance of 10 mm is required between the phantom and all surfaces and edges with a transmitting antenna located within 25 mm from that surface or edge. When the form factor of a handset is smaller than 9 cm x 5 cm, a test separation distance of 5 mm (instead of 10 mm) is required for testing hotspot mode. When the separation distance required for body-worn accessory testing is larger than or equal to that tested for hotspot mode, in the same wireless mode and for the same surface of the phone, the hotspot mode SAR data may be used to support body-worn accessory SAR compliance for that particular configuration (surface).

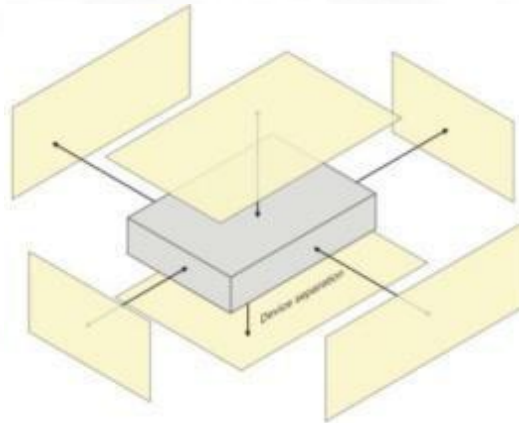

6.4 Product Specific 10g Exposure Consideration


According with FCC KDB 648474 D04, for smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, unless it is confirmed otherwise through KDB inquiries, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance;

The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions. The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

7. Measurement Procedure

7.1 Measurement Process Diagram

Body SAR

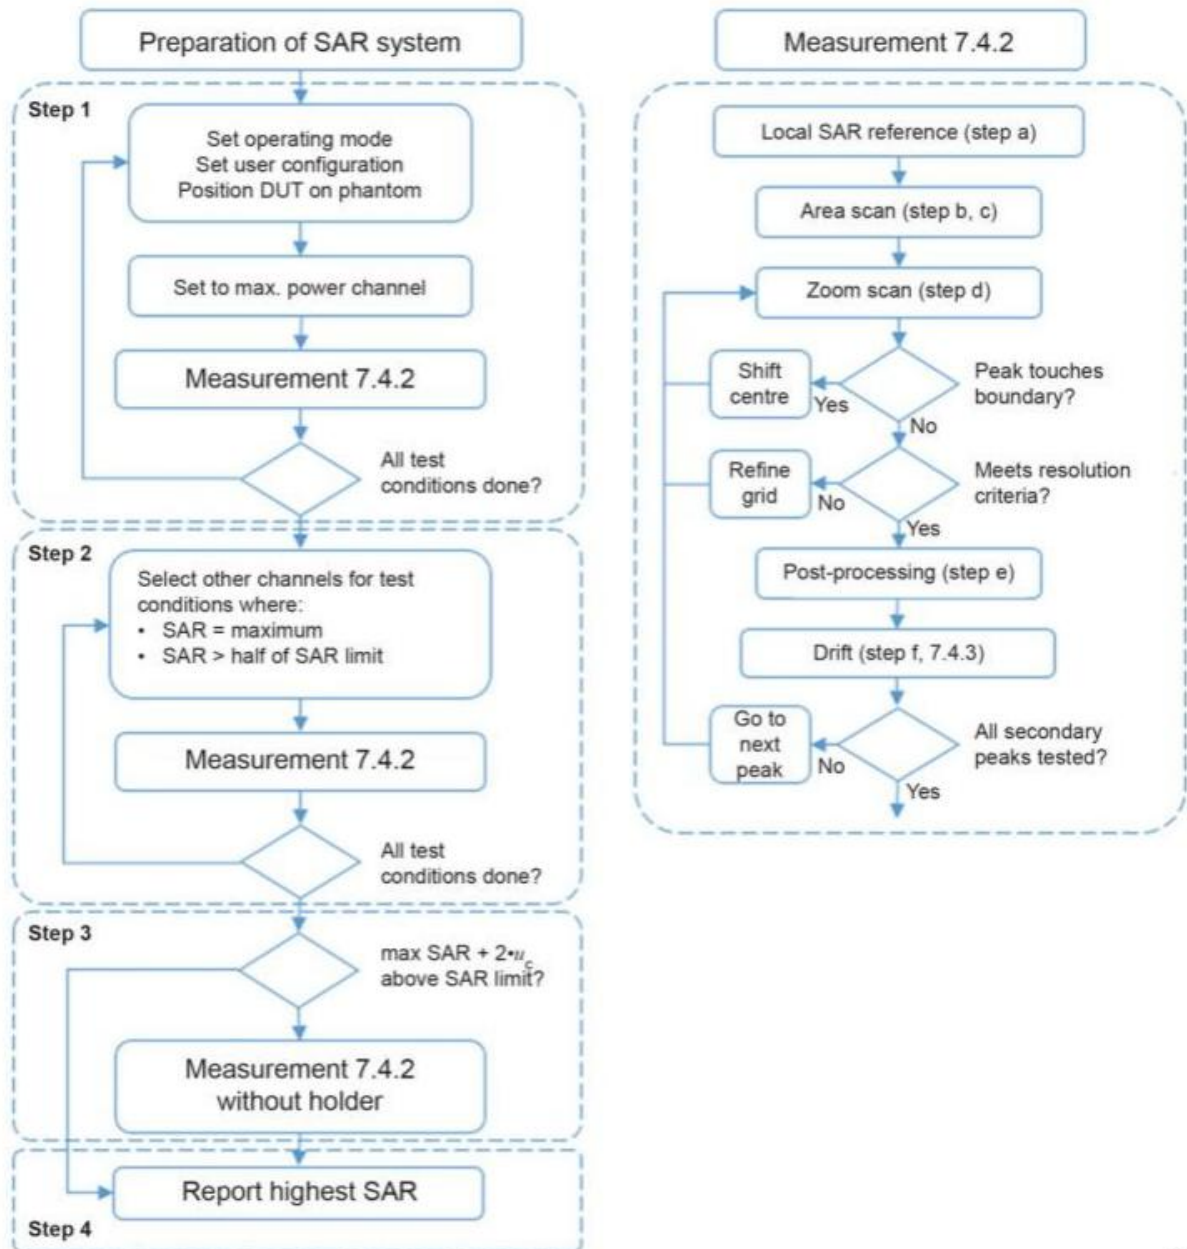

IEC

7.2 SAR Scan General Requirement

Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1 g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std 1528-2013.

			≤3GHz	>3GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5±1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			30°±1°	20°±1°
Maximum area scan spatial resolution: Δx Area , Δy Area			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3–4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx Zoom , Δy Zoom			≤ 2 GHz: ≤ 8 mm 2 –3 GHz: ≤ 5 mm*	3–4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: Δz Zoom (n)		≤ 5 mm	3–4 GHz: ≤ 4 mm
				4–5 GHz: ≤ 3 mm
				5–6 GHz: ≤ 2 mm
	graded grid	Δz Zoom (1): between 1st two points closest to phantom surface	≤ 4 mm	3–4 GHz: ≤ 3 mm
				4–5 GHz: ≤ 2.5 mm
				5–6 GHz: ≤ 2 mm
		Δz Zoom (n>1): between subsequent points		≤ 1.5·Δz Zoom (n-1)
Minimum zoom scan volume	x, y, z		≥30 mm	3–4 GHz: ≥ 28 mm
				4–5 GHz: ≥ 25 mm
				5–6 GHz: ≥ 22 mm
Note:				
1. δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528- 2011 for details.				
2. * When zoom scan is required and the reported SAR from the area scan based 1 g SAR estimation procedures of KDB				
447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

7.3 Measurement Procedure

The following steps are used for each test position

- a. Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface
- b. Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
- c. Measurement of the SAR distribution with a grid of 8 to 16mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
- d. Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8*4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

7.4 Area & Zoom Scan Procedure

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g.

When the 1 g SAR of the highest peak is within 2 dB of the SAR limit, additional zoom scans are required for other peaks within 2 dB of the highest peak that have not been included in any zoom scan to ensure there is no increase in SAR.

8. Conducted RF Output Power

8.1 WCDMA

Mode		Maximum Tune-up(dBm)	WCDMA Band II		
			Conducted Power (dBm)		
			CH9262	CH9400	CH9538
			1852.4	1880.0	1907.6
RMC 12.2K		22.00	21.93	21.76	21.73
HSDPA	Subtest-1	22.50	22.07	21.73	21.25
	Subtest-2	22.50	22.11	21.69	21.24
	Subtest-3	22.50	22.07	21.72	21.27
	Subtest-4	22.50	22.05	21.69	21.22
HSUPA	Subtest-1	20.00	19.54	19.69	18.58
	Subtest-2	20.50	20.11	19.17	19.05
	Subtest-3	20.00	19.84	19.51	18.75
	Subtest-4	20.50	20.07	19.46	18.57
	Subtest-5	20.50	20.09	19.16	19.03
Mode		Maximum Tune-up(dBm)	WCDMA Band V		
			Conducted Power (dBm)		
			CH4132	CH4183	CH4233
			826.4	836.6	846.6
RMC 12.2K		22.50	22.12	22.05	21.97
HSDPA	Subtest-1	22.50	22.22	22.28	22.19
	Subtest-2	22.50	22.26	22.29	22.22
	Subtest-3	22.50	22.29	22.30	22.15
	Subtest-4	22.50	22.26	22.26	22.19
HSUPA	Subtest-1	20.50	19.68	19.82	20.18
	Subtest-2	20.50	20.14	20.10	20.38
	Subtest-3	20.50	19.70	20.18	20.38
	Subtest-4	20.00	19.84	19.87	19.84
	Subtest-5	20.50	20.07	20.20	20.19
Per KDB 941225 D01, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq 1/2$ dB higher than the primary mode (RMC12.2kbps) or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.					

8.2 LTE

Band 2

LTE-FDD Band 2				Maximum Tune-up(dBm)	Conducted Power(dBm)		
Bandwidth	Modulation	RB allocation	RB offset		18607	18900	19193
					1850.7MHz	1880.0MHz	1909.3MHz
1.4MHz	QPSK	1	0	23.00	23.00	20.87	20.92
			2	23.00	22.86	20.86	20.96
			5	23.00	22.88	20.87	20.41
		3	0	23.00	22.87	20.85	20.82
			2	23.00	22.77	20.77	20.52
			3	23.00	22.78	20.80	20.17
		6	0	22.00	21.83	19.92	19.77
	16QAM	1	0	21.50	21.38	19.91	19.95
			2	21.50	21.36	19.88	19.93
			5	21.50	21.37	19.85	19.29
		3	0	22.00	21.65	20.08	19.65
			2	22.00	21.63	20.15	19.71
			3	20.50	19.63	20.09	19.62
		6	0	18.00	17.86	17.32	15.82
Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	18615	18900	19185
					1851.5MHz	1880.0MHz	1908.5MHz
3MHz	QPSK	1	0	21.00	20.84	20.88	20.84
			7	21.00	20.90	20.89	20.85
			14	21.00	20.95	20.79	19.67
		8	0	20.00	19.96	19.88	19.80
			4	20.00	19.87	19.77	19.82
			7	20.00	19.98	19.86	19.81
		15	0	20.00	19.94	19.84	19.86
	16QAM	1	0	20.50	19.60	20.36	19.86
			7	20.50	19.66	20.30	19.86
			14	20.50	19.69	20.32	19.00
		8	0	18.00	17.53	17.09	16.31
			4	18.00	17.63	17.17	16.20
			7	18.00	17.63	17.15	15.95
		15	0	18.00	17.60	17.09	16.24
Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	18625	18900	19175
					1852.5MHz	1880.0MHz	1907.5MHz
5MHz	QPSK	1	0	21.50	20.84	21.01	20.65
			13	21.50	20.87	21.04	20.69
			24	21.50	20.84	21.00	19.44
		12	0	20.50	20.01	19.94	19.91
			6	20.00	19.95	19.95	19.80
			13	20.50	20.05	19.89	19.83
		25	0	20.50	20.02	20.01	19.82
	16QAM	1	0	20.50	20.01	19.67	19.60
			13	20.50	20.07	19.68	19.55
			24	20.50	20.06	19.64	18.81
		12	0	17.50	17.36	16.87	16.34
			6	18.00	17.57	17.06	16.40
			13	17.50	17.49	16.92	15.86
		25	0	17.50	17.46	16.97	16.28

LTE-FDD Band 2				Maximum Tune-up(dBm)	Conducted Power(dBm)		
Bandwidth	Modulation	RB allocation	RB offset		18650 1855.0MHz	18900 1880.0MHz	19150 1905.0MHz
10MHz	QPSK	1	0	21.00	20.94	20.89	20.84
			25	21.50	21.03	20.99	20.82
			49	21.50	21.05	21.03	19.69
		25	0	20.00	19.94	19.96	19.84
			13	20.50	20.09	20.03	20.07
			25	20.50	20.04	19.93	19.81
	16QAM	50	0	20.50	20.09	19.91	19.86
			0	20.00	19.40	19.96	19.70
			25	20.50	19.53	20.07	19.68
		1	49	20.50	19.47	20.01	19.10
			0	17.50	17.24	16.97	16.64
			13	17.50	17.42	17.09	16.66
		25	25	18.00	17.64	17.27	16.54
			0	18.00	17.50	17.15	16.64
Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	18675 1857.5MHz	18900 1880.0MHz	19125 1902.5MHz
15MHz	QPSK	1	0	21.00	20.89	20.88	20.87
			38	21.00	20.85	20.90	20.81
			74	21.00	20.96	20.79	19.71
		36	0	20.00	20.00	19.89	19.89
			18	20.00	19.96	19.99	19.84
			39	20.50	20.00	19.96	19.87
	16QAM	75	0	20.00	19.91	19.96	19.88
			0	20.50	20.04	20.29	19.69
			38	20.50	20.06	20.24	19.61
		1	74	20.50	20.06	20.36	19.11
			0	17.50	17.26	16.94	16.69
			18	17.50	17.34	16.93	16.45
		36	39	17.50	17.45	16.99	16.26
			0	17.50	17.41	17.00	16.59
Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	18700 1860.0MHz	18900 1880.0MHz	19100 1900.0MHz
20MHz	QPSK	1	0	21.50	21.02	21.04	20.87
			50	21.50	20.97	21.03	20.89
			99	21.00	20.98	20.92	20.09
		50	0	20.00	19.99	19.88	19.87
			25	20.00	19.94	19.90	19.76
			50	20.00	19.96	19.77	19.91
	16QAM	100	0	20.00	19.96	19.98	19.95
			0	20.00	19.84	19.55	19.92
			50	20.00	19.84	19.60	19.94
		1	99	20.00	19.90	19.51	19.56
			0	17.50	17.08	16.94	16.74
			25	17.50	17.24	16.96	16.64
		50	50	18.00	17.60	17.34	16.56
			0	17.50	17.35	17.20	16.71

Band 4

LTE-FDD Band 4				Maximum Tune-up(dBm)	Conducted Power(dBm)		
Bandwidth	Modulation	RB allocation	RB offset		19957	20175	20393
					1710.7MHz	1732.5MHz	1754.3MHz
1.4MHz	QPSK	1	0	21.00	20.99	20.85	20.83
			2	21.00	20.96	20.97	20.95
			5	21.50	20.98	20.98	21.01
		3	0	21.50	20.87	21.01	20.93
			2	21.50	20.89	21.04	20.97
			3	21.00	20.87	20.96	20.88
		6	0	20.00	19.85	19.88	19.93
	16QAM	1	0	20.50	19.95	19.38	20.16
			2	20.50	19.91	19.37	20.22
			5	20.50	19.97	19.37	20.26
		3	0	20.00	19.74	19.74	19.83
			2	20.00	19.82	19.65	19.90
			3	20.00	19.77	19.73	19.83
		6	0	19.00	18.88	18.91	18.57
Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	19965	20175	20385
					1711.5MHz	1732.5MHz	1753.5MHz
3MHz	QPSK	1	0	21.00	20.80	20.85	20.84
			7	21.00	20.88	20.88	20.84
			14	21.00	20.85	20.88	20.89
		8	0	20.00	19.92	19.98	19.97
			4	20.50	19.88	19.87	20.00
			7	20.00	19.85	19.84	19.93
		15	0	20.00	19.88	19.94	19.94
	16QAM	1	0	21.00	19.55	20.71	19.93
			7	21.00	19.63	20.59	19.81
			14	21.00	19.50	20.72	19.87
		8	0	19.00	18.66	18.80	18.64
			4	19.00	18.74	18.88	18.73
			7	19.00	18.74	18.87	18.71
		15	0	19.00	18.73	18.82	18.71
Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	19976	20175	20375
					1712.5MHz	1732.5MHz	1752.5MHz
5MHz	QPSK	1	0	21.00	20.76	20.83	20.96
			13	21.00	20.64	20.85	20.94
			24	21.00	20.68	20.93	20.95
		12	0	20.00	19.91	19.92	19.96
			6	20.00	19.87	19.96	19.89
			13	20.50	19.92	19.86	20.05
		25	0	20.50	19.89	19.84	20.07
	16QAM	1	0	20.50	19.97	20.12	19.60
			13	20.50	20.08	20.07	19.59
			24	20.50	20.06	20.06	19.56
		12	0	19.00	18.52	18.62	18.46
			6	19.00	18.72	18.80	18.62
			13	19.00	18.64	18.69	18.50
		25	0	19.00	18.63	18.73	18.57

LTE-FDD Band 4				Maximum Tune-up(dBm)	Conducted Power(dBm)			
Bandwidth	Modulation	RB allocation	RB offset		20000	20175	20350	
					1715.0MHz	1732.5MHz	1750.0MHz	
10MHz	QPSK	1	0	21.00	20.85	20.83	21.00	
			25	21.50	20.86	20.90	21.06	
			49	21.50	20.92	20.93	21.04	
		25	0	20.50	19.86	20.01	19.94	
			13	20.50	19.81	19.99	20.12	
			25	20.00	19.81	19.89	19.96	
		50	0	20.50	19.96	19.96	20.11	
		16QAM	1	0	21.00	19.28	20.61	19.79
				25	21.00	19.30	20.62	19.98
	49			21.00	19.35	20.70	19.87	
	25		0	19.00	18.46	18.68	18.58	
			13	19.00	18.67	18.87	18.71	
			25	19.50	18.83	19.05	18.85	
	50		0	19.00	18.70	18.89	18.72	
	Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	20025	20175	20325
						1717.5MHz	1732.5MHz	1747.5MHz
15MHz	QPSK	1	0	21.50	20.78	20.82	21.06	
			38	21.50	20.86	20.88	21.10	
			74	21.50	20.89	20.92	21.11	
		36	0	20.00	19.82	19.93	19.96	
			18	20.50	19.80	19.92	20.07	
			39	20.50	19.98	20.04	19.93	
		75	0	20.00	19.92	19.96	19.91	
		16QAM	1	0	21.00	20.06	20.67	19.90
				38	21.00	19.98	20.69	19.89
	74			21.00	20.04	20.67	19.95	
	36		0	19.00	18.55	18.71	18.61	
			18	19.00	18.61	18.75	18.60	
			39	19.00	18.72	18.89	18.68	
	75		0	19.00	18.68	18.82	18.67	
	Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	20050	20175	20300
						1720.0MHz	1732.5MHz	1745.0MHz
20MHz	QPSK	1	0	21.00	20.92	20.89	20.96	
			50	21.00	20.90	20.96	20.99	
			99	21.00	20.98	20.98	20.96	
		50	0	20.00	19.76	19.81	19.88	
			25	20.00	19.94	19.86	19.76	
			50	20.00	19.85	19.95	19.82	
		100	0	20.00	19.83	19.91	19.80	
		16QAM	1	0	20.00	19.90	19.92	18.94
				50	20.00	19.91	19.95	19.05
	99			20.00	19.92	19.99	19.09	
	50		0	19.00	18.49	18.73	18.84	
			25	19.50	18.74	19.01	19.03	
			50	19.50	19.02	19.29	19.28	
	100		0	19.50	18.82	19.11	18.99	

Band 5

LTE-FDD Band 5				Maximum Tune-up(dBm)	Conducted Power(dBm)			
Bandwidth	Modulation	RB allocation	RB offset		20407	20525	20643	
					824.7MHz	836.5MHz	848.3MHz	
1.4MHz	QPSK	1	0	24.00	23.61	23.41	23.07	
			2	24.00	23.62	23.58	23.14	
			5	24.00	23.58	23.49	23.16	
		3	0	24.00	23.53	23.33	23.18	
			2	24.00	23.52	23.36	23.16	
			3	24.00	23.53	23.32	23.09	
		6	0	22.50	22.45	22.30	22.14	
		16QAM	1	0	23.00	22.57	21.79	22.68
				2	23.00	22.62	21.80	20.94
	5			23.00	22.61	21.81	20.94	
	3		0	22.50	22.41	22.10	20.40	
			2	22.50	20.41	22.05	20.43	
			3	22.50	20.42	22.08	20.33	
	6	0	22.00	19.01	21.76	18.48		
	Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	20415	20525	20635
825.5MHz						836.5MHz	847.5MHz	
3MHz	QPSK	1	0	22.00	21.66	21.28	21.53	
			7	22.00	21.66	21.46	21.43	
			14	22.00	21.69	21.50	21.51	
		8	0	20.50	20.47	20.31	20.39	
			4	21.00	20.46	20.63	20.38	
			7	21.00	20.57	20.62	20.40	
		15	0	21.00	20.52	20.57	20.47	
	16QAM	1	0	21.00	19.98	20.97	20.34	
			7	21.50	19.98	21.37	20.34	
			14	21.50	19.99	21.26	20.29	
		8	0	19.50	19.12	18.80	18.78	
			4	19.50	19.22	18.89	18.83	
			7	19.50	19.18	18.90	18.75	
		15	0	19.50	19.15	18.83	18.79	
		LTE-FDD Band 5				Maximum Tune-up(dBm)	Conducted Power(dBm)	
Bandwidth	Modulation	RB allocation	RB offset	20425	20525		20625	
				826.5MHz	836.5MHz		846.5MHz	
5MHz	QPSK	1	0	23.50	21.19	23.31	21.42	
			13	23.50	21.25	23.32	21.42	
			24	23.50	21.14	23.28	21.30	
		12	0	22.50	20.42	22.33	20.45	
			6	22.50	20.47	22.36	20.46	
			13	22.50	20.44	22.31	20.53	
		25	0	21.00	20.50	20.65	20.42	
	16QAM	1	0	20.50	20.49	20.45	20.02	
			13	21.00	20.57	20.77	20.03	
			24	23.00	22.58	20.75	19.90	
		12	0	22.00	21.60	18.63	18.68	
			6	22.00	21.66	18.85	18.87	
			13	22.00	21.61	18.76	18.66	
		25	0	22.00	21.59	18.78	18.77	

Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	20450	20525	20600
					829.0MHz	836.5MHz	844.0MHz
10MHz	QPSK	1	0	24.00	21.47	23.51	21.51
			25	23.50	21.34	23.43	21.21
			49	22.00	21.40	21.67	21.39
		25	0	20.50	20.44	20.31	20.39
			13	21.00	20.34	20.71	20.16
			25	21.00	20.69	20.58	20.41
		50	0	22.50	22.34	20.72	20.16
	16QAM	1	0	22.00	21.90	20.92	20.33
			25	22.00	21.76	20.73	20.02
			49	22.00	21.79	20.67	20.22
		25	0	22.00	21.58	18.76	18.77
			13	22.00	21.50	18.97	19.02
			25	22.00	21.82	19.16	19.14
		50	0	21.50	21.47	18.98	18.94

Band 7

LTE-FDD Band 7				Maximum Tune-up(dBm)	Conducted Power(dBm)		
Bandwidth	Modulation	RB allocation	RB offset		20775	21100	21425
					2502.5MHz	2535.0MHz	2567.5MHz
5MHz	QPSK	1	0	23.00	22.55	22.69	21.52
			13	23.00	22.59	22.74	21.49
			24	23.00	22.61	22.65	21.45
		12	0	22.50	21.95	22.02	20.49
			6	22.50	22.00	22.05	20.51
			13	22.50	22.02	21.99	20.43
		25	0	22.50	21.91	22.06	20.47
	16QAM	1	0	22.50	22.13	22.23	20.08
			13	22.50	22.16	22.32	20.05
			24	22.50	22.17	22.36	20.06
		12	0	21.50	21.06	21.22	19.98
			6	21.50	21.01	21.26	20.12
			13	21.50	21.11	21.26	19.97
		25	0	21.50	21.08	21.34	20.06
		Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	20800
2505.0MHz	2535.0MHz						2565.0MHz
10MHz	QPSK	1	0	23.00	20.72	20.80	22.82
			25	23.00	20.88	20.86	22.90
			49	23.00	20.83	20.88	22.89
		25	0	22.00	19.66	19.94	21.91
			13	22.50	19.73	19.93	22.01
			25	22.00	19.78	19.89	21.96
		50	0	22.50	19.78	20.02	22.03
	16QAM	1	0	22.50	19.27	20.60	22.25
			25	22.50	19.29	20.63	22.29
			49	22.50	19.41	20.75	22.27
		25	0	21.50	20.20	19.76	21.08
			13	21.50	20.32	20.06	21.28
			25	21.00	20.38	20.38	20.57
		50	0	21.00	20.46	20.67	20.74

LTE-FDD Band 7				Maximum Tune-up(dBm)	Conducted Power(dBm)		
Bandwidth	Modulation	RB allocation	RB offset		20825	21100	21375
					2507.5MHz	2535.0MHz	2562.5MHz
15MHz	QPSK	1	0	21.50	20.64	20.70	21.01
			38	21.50	20.73	20.81	21.06
			74	21.50	20.81	20.93	21.09
		38	0	20.50	19.64	19.97	20.07
			18	20.50	19.57	19.91	20.09
			39	20.50	19.55	19.97	20.19
		75	0	20.50	19.54	19.81	20.05
	16QAM	1	0	21.00	19.93	20.60	20.43
			38	21.00	19.93	20.65	20.46
			74	21.00	20.05	20.76	20.46
		38	0	21.00	20.59	19.71	20.57
			18	20.50	20.49	19.93	20.29
			39	20.50	20.29	20.34	20.04
		75	0	20.50	20.44	20.07	20.36
Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	20850	21100	21350
					2510.0MHz	2535.0MHz	2560.0MHz
20MHz	QPSK	1	0	21.50	20.79	21.13	21.05
			50	21.50	20.81	21.38	21.11
			99	21.50	20.91	21.19	21.16
		50	0	20.50	19.59	19.99	20.06
			25	20.50	19.79	20.12	20.07
			50	20.50	19.76	20.01	20.27
		100	0	20.50	19.76	20.04	20.07
	16QAM	1	0	20.50	20.25	20.20	19.69
			50	20.50	20.33	20.27	19.85
			99	20.50	20.30	20.47	19.82
		50	0	20.50	19.78	19.07	20.25
			25	20.00	19.73	19.48	19.99
			50	20.50	19.66	20.15	19.83
		100	0	20.50	19.73	19.64	20.11

Band 12

LTE-FDD Band 12				Maximum Tune-up(dBm)	Conducted Power(dBm)		
Bandwidth	Modulation	RB allocation	RB offset		23017	23095	23173
					699.7MHz	707.5MHz	715.3MHz
1.4MHz	QPSK	1	0	22.00	21.54	21.45	21.54
			2	22.00	21.50	21.51	21.32
			5	22.00	21.52	21.54	21.35
		3	0	22.00	21.34	21.59	21.65
			2	22.00	21.45	21.61	21.37
			3	22.00	21.40	21.52	21.38
		6	0	21.00	20.44	20.58	20.28
	16QAM	1	0	21.00	20.04	20.71	20.73
			2	21.00	20.07	20.80	20.48
			5	21.00	20.04	20.81	20.50
		3	0	21.00	20.19	20.62	20.47
			2	21.00	20.18	20.63	20.30
			3	21.00	20.16	20.58	20.29
		6	0	19.50	19.18	18.92	18.75

Band 17

LTE-FDD Band 17				Maximum Tune-up(dBm)	Conducted Power(dBm)				
Bandwidth	Modulation	RB allocation	RB offset		23755	23790	23825		
					706.5MHz	710MHz	713.5MHz		
5MHz	QPSK	1	0	21.50	21.49	21.46	21.19		
			13	22.00	21.55	21.38	21.48		
			24	21.50	21.49	21.35	21.26		
		12	0	21.00	20.52	20.44	20.39		
			6	21.00	20.52	20.39	20.61		
			13	21.00	20.51	20.36	20.61		
		25	0	21.00	20.63	20.43	20.55		
	16QAM	1	0	20.50	20.24	19.78	20.32		
			13	20.50	20.21	19.66	20.49		
			24	20.50	20.27	19.59	20.34		
		12	0	20.00	19.53	19.06	19.47		
			6	20.00	19.34	19.17	19.66		
			13	19.50	18.90	19.29	19.41		
		25	0	20.00	19.24	19.23	19.52		
		Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	23780	23790	23800
							709MHz	710MHz	711MHz
10MHz	QPSK	1	0	22.00	21.65	21.51	21.46		
			25	22.00	21.74	21.22	21.27		
			49	22.00	21.63	21.45	21.33		
		25	0	21.00	20.55	20.58	20.53		
			13	21.00	20.53	20.17	20.33		
			25	21.00	20.43	20.32	20.52		
		50	0	21.00	20.53	20.44	20.56		
	16QAM	1	0	21.50	20.08	21.30	20.81		
			25	21.50	20.18	21.10	20.71		
			49	21.50	20.17	21.31	20.73		
		25	0	20.00	19.66	19.29	19.16		
			13	19.50	19.40	19.32	19.40		
			25	20.00	19.59	19.61	19.65		
		50	0	20.00	19.62	19.50	19.45		

8.3 WIFI

Band (GHz)	Mode	Channel	Freq. (MHz)	Average power(dBm)	Maximum Tune-up(dBm)	SAR Test Require.
2.4g (2.4~2.4835)	802.11b	1	2412	15.17	15.50	No
		6	2437	16.60	17.00	No
		11	2462	16.79	17.00	Yes
	802.11g	1	2412	14.18	14.50	No
		6	2437	15.59	16.00	No
		12	2462	14.77	15.00	No
	802.11n(HT20)	1	2412	11.54	12.00	No
		6	2437	12.90	13.00	No
		11	2462	13.02	13.50	No

Note: SAR is not required for the following 2.4 GHz OFDM conditions as the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2W/kg.

8.4 Bluetooth

EDR	Mode	Maximum Tune-up(dBm)	Average power(dBm)		
			0	39	78
			2402MHz	2441MHz	2480MHz
			1.79	3.82	2.43
BLE	GFSK	4.00	1.79	3.82	2.43
	π/4QPSK	6.00	3.83	5.89	4.43
	8DPSK	6.50	4.25	6.26	4.78
	Average power(dBm)				
BLE	Mode	Maximum Tune-up(dBm)	0	19	39
			2402MHz	2440MHz	2480MHz
			1.01	1.07	0.18
			1.01	1.07	0.18

Note

- Per KDB 447498 D04 Interim General RF Exposure Guidance v01, the 1-g SAR test exclusion thresholds for 300 MHz to 6 GHz at *test separation distances* ≤ 40 cm are determined by:

$$P_{th} \text{ (mW)} = \begin{cases} ERP_{20 \text{ cm}} (d/20 \text{ cm})^x & d \leq 20 \text{ cm} \\ ERP_{20 \text{ cm}} & 20 \text{ cm} < d \leq 40 \text{ cm} \end{cases} \quad (\text{B.2})$$

where

$$P_{th} \text{ (mW)} = ERP_{20 \text{ cm}} \text{ (mW)} = \begin{cases} 2040f & 0.3 \text{ GHz} \leq f < 1.5 \text{ GHz} \\ 3060 & 1.5 \text{ GHz} \leq f \leq 6 \text{ GHz} \end{cases} \quad (\text{B.1})$$


$$x = -\log_{10} \left(\frac{60}{ERP_{20 \text{ cm}} \sqrt{f}} \right)$$

and f is in GHz, d is the separation distance (cm), and $ERP_{20 \text{ cm}}$ is per Formula (B.1).

- *When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine estimated SAR.
- Per KDB 248227 D01 v02r02, choose the highest output power channel to test SAR and determine further SAR exclusion.
 - The output power of all data rate were prescan, just the worst case (the lowest data rate) of all mode were shown in report.

9. Test Exclusion Consideration

Antenna information:

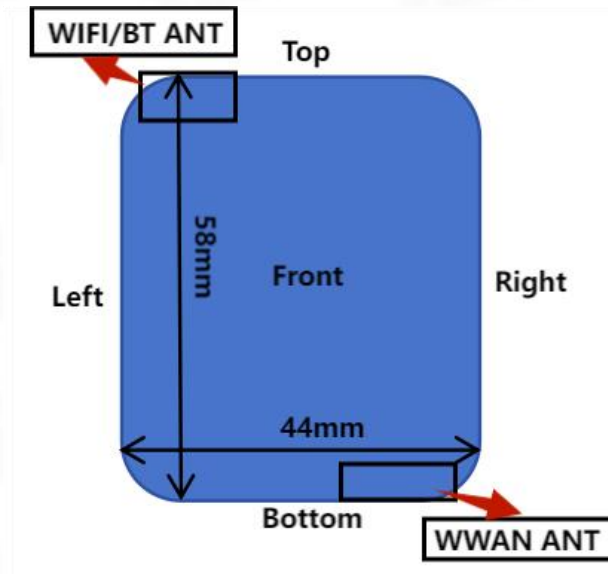

WCDMA/LTE Antenna	WCDMA/LTE TX/RX
WLAN/BT Antenna	WLAN/BT TX/RX
Note: 1. KDB 447498 D04v01, Transmitters that are built-in within a wrist watch or similar wrist-worn devices typically operate in speaker mode for voice communication, with the device worn on the wrist and positioned next to the mouth. Next to the mouth exposure requires 1-g SAR and the wrist-worn condition requires 10-g extremity SAR.	

9.1 SAR Test Exclusion Consideration Table

Per KDB 447498 requires when the standalone SAR test exclusion of section 4.3.1 is applied to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to the following format to determine simultaneous transmission SAR test exclusion:

$$(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})} / x]$$

W/kg for test separation distances ≤ 50 mm;

where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.

0.4 W/Kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm

10. Test Result

Next-to-mouth(10mm gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Reported SAR (W/kg)	Meas. No.
WCDMA Band 2 (RMC*)	Front	9262	1852.4	1.460	0.284	100.00	1.000	21.93	22.00	1.016	0.289	1#
Wrist-worn(0mm Gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	10g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	10g Reported SAR (W/kg)	Meas. No.
WCDMA Band 2 (RMC*)	Back	9262	1852.4	0.720	0.977	100.00	1.000	21.93	22.00	1.016	0.993	2#

Next-to-mouth(10mm gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Reported SAR (W/kg)	Meas. No.
WCDMA Band 5 (RMC*)	Front	4132	826.4	-0.350	0.231	100.00	1.000	22.12	22.50	1.091	0.252	3#
Wrist-worn(0mm Gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	10g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	10g Reported SAR (W/kg)	Meas. No.
WCDMA Band 5 (RMC*)	Back	4132	826.4	-3.770	0.690	100.00	1.000	22.12	22.50	1.091	0.753	4#

Next-to-mouth(10mm gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Reported SAR (W/kg)	Meas. No.
Band 2 (BW:20MHz)	1RB	Front	18900	1880.0	4.530	0.231	100.00	1.000	21.04	21.50	1.112	0.257	5#
	50%RB	Front	18900	1880.0	2.350	0.211	100.00	1.000	19.90	20.00	1.023	0.216	/
Wrist-worn(0mm Gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	10g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	10g Reported SAR (W/kg)	Meas. No.
Band 2 (BW:20MHz)	1RB	Back	18900	1880.0	-1.110	0.755	100.00	1.000	21.04	21.50	1.112	0.840	6#
	50%RB	Back	18900	1880.0	2.590	0.682	100.00	1.000	19.90	20.00	1.023	0.698	/

Next-to-mouth(10mm gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Reported SAR (W/kg)	Meas. No.
Band 4 (BW:20MHz)	1RB	Front	20300	1745.0	1.850	0.146	100.00	1.000	20.99	21.00	1.002	0.146	7#
	50%RB	Front	20300	1745.0	3.690	0.103	100.00	1.000	19.88	20.00	1.028	0.106	/
Wrist-worn(0mm Gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	10g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	10g Reported SAR (W/kg)	Meas. No.
Band 4 (BW:20MHz)	1RB	Back	20300	1745.0	-0.960	0.489	100.00	1.000	20.99	21.00	1.002	0.490	8#
	50%RB	Back	20300	1745.0	4.350	0.403	100.00	1.000	19.88	20.00	1.028	0.414	/

Next-to-mouth(10mm gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Reported SAR (W/kg)	Meas. No.
Band 5 (BW:10MHz)	1RB	Front	20525	836.5	-4.790	0.218	100.00	1.000	23.51	24.00	1.119	0.244	9#
	50%RB	Front	20525	836.5	-2.650	0.186	100.00	1.000	20.71	21.00	1.069	0.199	/
Wrist-worn(0mm Gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	10g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	10g Reported SAR (W/kg)	Meas. No.
Band 5 (BW:10MHz)	1RB	Back	20525	836.5	-2.310	0.589	100.00	1.000	23.51	24.00	1.119	0.659	10#
	50%RB	Back	20525	836.5	1.350	0.566	100.00	1.000	20.71	21.00	1.069	0.605	/

Next-to-mouth(10mm gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Reported SAR (W/kg)	Meas. No.
Band 7 (BW: 20MHz)	1RB	Front	21100	2535.0	2.380	0.422	100.00	1.000	21.38	21.50	1.028	0.434	11#
	50%RB	Front	21100	2535.0	-3.200	0.383	100.00	1.000	20.12	20.50	1.091	0.418	/

Wrist-worn(0mm Gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	10g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	10g Reported SAR (W/kg)	Meas. No.
Band 7 (BW: 20MHz)	1RB	Back	21100	2535.0	-3.030	0.801	100.00	1.000	21.38	21.50	1.028	0.823	12#
	50%RB	Back	21100	2535.0	-2.230	0.721	100.00	1.000	20.12	20.50	1.091	0.787	/

Next-to-mouth(10mm gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Reported SAR (W/kg)	Meas. No.
Band 12 (BW: 10MHz)	1RB	Front	23060	704.0	1.990	0.085	100.00	1.000	21.68	22.00	1.076	0.091	13#
	50%RB	Front	23060	704.0	-2.090	0.051	100.00	1.000	20.61	21.00	1.094	0.056	/

Wrist-worn(0mm Gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	10g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	10g Reported SAR (W/kg)	Meas. No.
Band 12 (BW: 10MHz)	1RB	Back	23060	704.0	-1.640	0.202	100.00	1.000	21.68	22.00	1.076	0.217	14#
	50%RB	Back	23060	704.0	2.300	0.177	100.00	1.000	20.61	21.00	1.094	0.194	/

Next-to-mouth(10mm gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Reported SAR (W/kg)	Meas. No.
Band 17 (BW: 10MHz)	1RB	Front	23780	709.0	-0.420	0.081	100.00	1.000	21.74	22.00	1.062	0.086	15#
	50%RB	Front	23780	709.0	-2.330	0.050	100.00	1.000	20.55	21.00	1.109	0.055	/

Wrist-worn(0mm Gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	10g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	10g Reported SAR (W/kg)	Meas. No.
Band 17 (BW: 10MHz)	1RB	Back	23780	709.0	-1.450	0.289	100.00	1.000	21.74	22.00	1.062	0.307	16#
	50%RB	Back	23780	709.0	-2.540	0.253	100.00	1.000	20.55	21.00	1.109	0.281	/

Next-to-mouth(10mm gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Reported SAR (W/kg)	Meas. No.
2.4 (2.4~2.4835) 802.11b	Front	11	2462	-2.760	0.075	100.00	1.000	16.79	17.00	1.050	0.079	17#

Wrist-worn(0mm Gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	10g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	10g Reported SAR (W/kg)	Meas. No.
2.4 (2.4~2.4835) 802.11b	Back	11	2462	-2.290	0.196	100.00	1.000	16.79	17.00	1.050	0.206	18#

Next-to-mouth(10mm gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	10g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Reported SAR (W/kg)	Meas. No.
EDR	Back	39	2441	-3.000	0.002	100.00	1.000	6.26	6.50	1.057	0.002	19#

Wrist-worn(0mm Gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	10g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	10g Reported SAR (W/kg)	Meas. No.
EDR	Back	39	2441	0.390	0.011	100.00	1.000	6.26	6.50	1.057	0.012	20#

Note:

- The maximum SAR Value of each test band is marked bold.
- SAR plot is provided only for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination.
- Per KDB 447498 D04 v01, for each exposure position, if the highest output power channel Reported SAR $\leq 0.8W/kg$, other channels SAR testing is not necessary.
- Per KDB 447498 D04 v01, next-to-mouth/wrist-worn use is evaluated with the device positioned at 10/0mm from a flat phantom respectively filled with head tissue-equivalent medium.
- Per KDB 447498 D04 v01, the report SAR is measured SAR value adjusted for maximum tune-up tolerance. Scaling Factor= $10^{(tune-up\ limit\ power(dBm) - Ave.power\ power(dBm))/10}$, where tune-up limit is the maximum rated power among all production units.
Reported SAR(W/kg)=Measured SAR (W/kg)*Scaling Factor.

11. SAR Measurement Variability

According to KDB 865664 D01, SAR measurement variability was assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. Alternatively, if the highest measured SAR for both head and body tissue-equivalent media are ≤ 1.45 W/kg and the ratio of these highest SAR values, i.e., largest divided by smallest value, is ≤ 1.10 , the highest SAR configuration for either head or body tissue-equivalent medium may be used to perform the repeated measurement. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results. 10g factor

SAR repeated measurement procedure:

1. When the highest measured SAR is < 0.80 W/kg, repeated measurement is not required.
2. When the highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
3. If the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 , or when the original or repeated measurement is ≥ 1.45 W/kg, perform a second repeated measurement.
4. If the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 , and the original, first or second repeated measurement is ≥ 1.5 W/kg, perform a third repeated measurement.

For 10g SAR, the 10-g Extremity SAR are 2.5 times higher than the 1-g SAR assessment indicated above.

As the above result shows, the highest measured 1g SAR is $0.422 < 0.8$ W/kg and 10g SAR is $0.977 < 2.0$ W/kg, so repeated measurement is not required.

12. Simultaneous Transmission

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna. When the sum of SAR 1g of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit (SAR 1g 1.6 W/kg/SAR 10g 4.0 W/kg), the simultaneous transmission SAR is not required. When the sum of SAR 1g is greater than the SAR limit (SAR 1g 1.6 W/kg/SAR 10g 4.0 W/kg), SAR test exclusion is determined by the SAR to Peak Location Ratio (SPLSR)

12.1 Simultaneous Transmission Mode Considerations

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna. The device has 2 Tx antennas, WWAN main antenna and Wi-Fi/BT Ant. supporting 2.4G Wi-Fi & BT. Among that, 2x antennas can always transmit simultaneously. The work mode combination is showed as below table.

Simultaneous Transmission information:

NO.	Configuration	Next-to-mouth	Wrist-worn
1	WWAN+WLAN	Yes	Yes
2	WWAN+BT	Yes	Yes

12.2 Sum SAR of Simultaneous Transmission

Next-to-mouth

Band	Test Position	RB allocation	Reported SAR(W/kg)			Σ SAR (W/kg) WWAN + 2.4G WIFI	Σ SAR (W/kg) WWAN + BT	SPLSR	Remark
			WWAN	2.4G WIFI	BT				
LTE Band 7 (20MHz)	Front	1RB	0.434	0.079	0.002	0.513	0.436	N/A	N/A
	Front	50%RB	0.418	0.079	0.002	0.497	0.420	N/A	N/A

Wrist-worn

Band	Test Position	RB allocation	Reported SAR(W/kg)			Σ SAR (W/kg) WWAN + 2.4G WIFI	Σ SAR (W/kg) WWAN + BT	SPLSR	Remark
			WWAN	2.4G WIFI	BT				
WCDMA Band 2	Back	1RB	0.993	0.206	0.012	1.199	1.005	N/A	N/A

13. Test Equipment List

Description	Manufacturer	Model	Serial No./Version	Cal. Date	Cal. Due
E-Field Probe	MVG	SSE2	0125-EPGO-445	2025/02/01	2026/01/31
6 1/2 Digital Multimeter	Keithley	DMM6500	4527164	2024/10/25	2025/10/24
Wideband Radio Communication Tester	ROHDE & SCHWARZ	CMW500	161997	2024/10/25	2025/10/24
MXG Vector Signal Generator	Agilent	N5182A	MY46240163	2024/10/25	2025/10/24
E-Series Avg. Power Sensor	KEYSIGHT	E9300A	MY55050017	2025/04/02	2026/04/01
EPM Series Power Meter	KEYSIGHT	E4418B	MY41293435	2025/04/02	2026/04/01
MXA Signal Analyzer	KEYSIGHT	N9020A	MY54410409	2024/10/25	2025/10/24
Broadband Preamplifier	Schwarzbeck	BBV9718D	00008	2024/09/24	2025/09/23
Coupler	MERRIMAC	CWM-10R-10.8G	LOT-83391	N/A	N/A
750MHz Validation Dipole	MVG	SID750	07/22 DIP 0G750-655	2025/05/26	2028/05/25
835MHz Validation Dipole	MVG	SID835	07/22 DIP 0G835-656	2025/05/26	2028/05/25
1800MHz Validation Dipole	MVG	SID1800	07/22 DIP 1G800-657	2025/05/26	2028/05/25
1900MHz Validation Dipole	MVG	SID1900	07/22 DIP 1G900-658	2025/05/26	2028/05/25
2450MHz Validation Dipole	MVG	SID2450	07/22 DIP 2G450-662	2025/05/26	2028/05/25
2600MHz Validation Dipole	MVG	SID2600	07/22 DIP 2G600-663	2025/05/26	2028/05/25
LIMESAR Dielectric Probe	MVG	SCLMP	06/22 OCPG88	2025/02/05	2026/02/04
ENA Series Network Analyzer	Agilent	E5071B	MY42301221	2024/10/25	2025/10/24
Thermometer	Riters	DT-232	21A11	2025/04/02	2026/04/01
Antenna network emulator	MVG	ANTA 74	07/22 ANTA 74	N/A	N/A
SAM Phantom	MVG	SAM	07/22 SAM149	N/A	N/A
Mobile Phone Positioning System	MVG	MSH 118	07/22 MSH 118	N/A	N/A
Mechanical Calibration Kit	PNA	N/A	N/A	2024/10/25	2025/10/24
Open SAR test software	MVG	N/A	V5.3.5	N/A	N/A

Note: For dipole antennas, BTF has adopted 3 years as calibration intervals, and on annual basis, every measurement dipole has been evaluated and is in compliance with the following criteria:

1. There is no physical damage on the dipole;
2. System validation with specific dipole is within 10% of calibrated value;
3. Return-loss is within 20% of calibrated measurement.
4. Impedance (real or imaginary parts) is within 5 Ohms of calibrated measurement.

ANNEX A Simulating Liquid Verification Result

The dielectric parameters of the liquids were verified prior to the SAR evaluation using an SCLMP Dielectric Probe Kit.

Dielectric performance of tissue simulating liquid									
Frequency (MHz)	ϵ_r		σ (s/m)		Delta (ϵ_r)	Delta (σ)	Limit	Temp (°C)	Date
	Target	Measured	Target	Measured					
750	41.90	41.96	0.89	0.91	0.14%	2.25%	±5%	21.3	29/5/2025
835	41.50	41.61	0.90	0.93	0.27%	3.33%	±5%	21.3	29/5/2025
1800	40.00	39.53	1.40	1.39	-1.18%	-0.71%	±5%	21.5	30/5/2025
1900	40.00	39.77	1.40	1.44	-0.57%	2.86%	±5%	21.5	30/5/2025
2450	39.20	38.26	1.80	1.83	-2.40%	1.67%	±5%	21.1	3/6/2025
2600	39.00	37.85	1.96	1.95	-2.95%	-0.51%	±5%	21.1	3/6/2025

NOTE: The dielectric parameters of the tissue-equivalent liquid should be measured under similar ambient conditions and within 2 °C of the conditions expected during the SAR evaluation to satisfy protocol requirements.

ANNEX B System Check Result

Comparing to the original SAR value provided by MVG, the validation data should be within its specification of 10 %(for 10 g).

Frequency (MHz)	Input Power (mW)	10g SAR (W/Kg)	1g SAR (W/Kg)	10g SAR 1W input power normalized (W/Kg)	1g SAR 1W input power normalized (W/Kg)	10g SAR Standard target (1W) (W/Kg)	1g SAR Standard target (1W) (W/Kg)	10g SAR Deviation	1g SAR Deviation
750	100	0.503	0.79	5.03	7.90	5.55	8.41	-9.37%	-6.06%
835	100	0.581	1.036	5.81	10.36	6.12	9.46	-5.07%	9.51%
1800	100	1.977	3.782	19.77	37.82	19.83	37.93	-0.30%	-0.29%
1900	100	1.974	3.690	19.74	36.90	20.82	40.29	-5.19%	-8.41%
2450	100	2.480	5.412	24.80	54.12	24.55	52.72	1.02%	2.66%
2600	100	2.569	5.586	25.69	55.86	24.43	53.76	5.16%	3.91%

System Performance Check Data (750 MHz)

System check at 750 MHz

Date of measurement: 29/5/2025


A. Experimental conditions.

Probe	0125-EPGO-445
ConvF	1.24
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5.0mm, Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW750
Channels/Frequency	Middle
Signal	CW

B. Permittivity

Middle TX Frequency (MHz)	750.000
Relative permittivity (real part)	41.962
Relative permittivity (imaginary part)	21.456
Conductivity (S/m)	0.913

C. SAR Surface and Volume

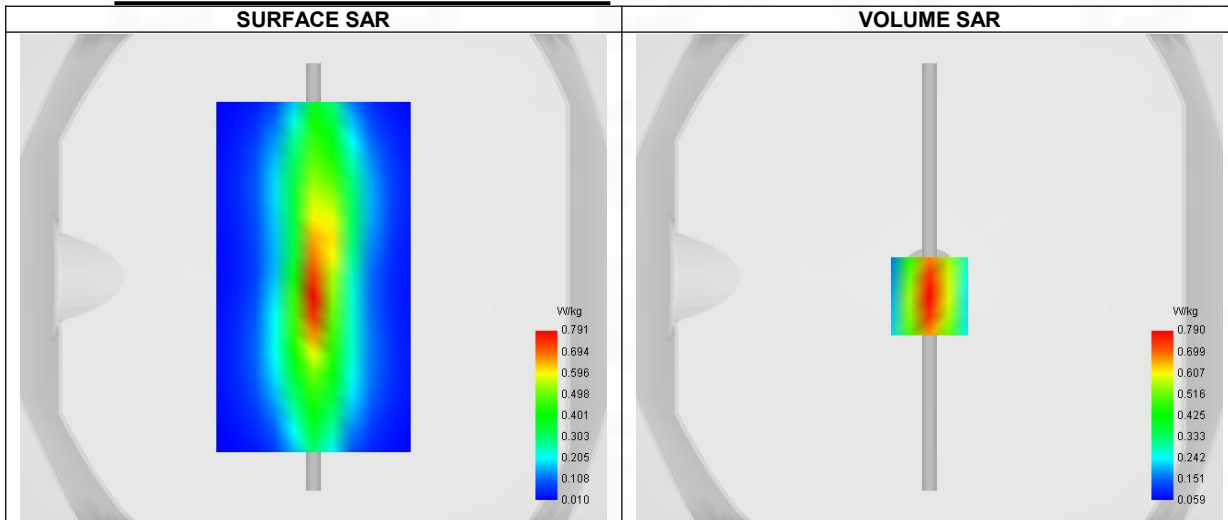


Maximum location: X=0.00, Y=-8.00 ; SAR Peak: 1.37 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.503
SAR 1g (W/Kg)	0.790
Variation (%)	-3.840
Horizontal validation criteria: minimum distance (mm)	16.000
Vertical validation criteria: SAR ratio M2/M1 (%)	48.734

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.366	0.790	0.385	0.199	0.123

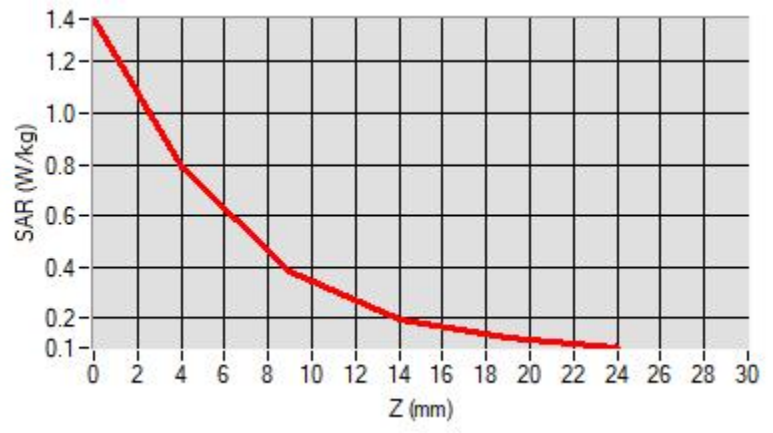

F. 3D Image

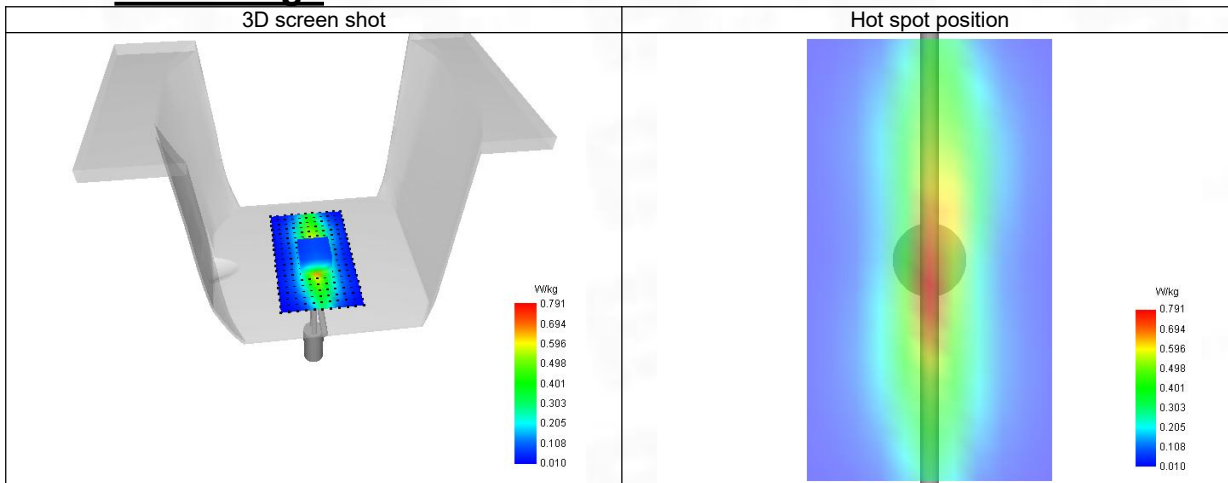

System Performance Check Data (835 MHz)

System check at 835 MHz

Date of measurement: 29/5/2025


A. Experimental conditions.

Probe	0125-EPGO-445
ConvF	1.15
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5.0mm, Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW835
Channels	Middle
Signal	CW

B. Permittivity

Frequency (MHz)	835.000
Relative permittivity (real part)	41.612
Relative permittivity (imaginary part)	19.455
Conductivity (S/m)	0.932

C. SAR Surface and Volume

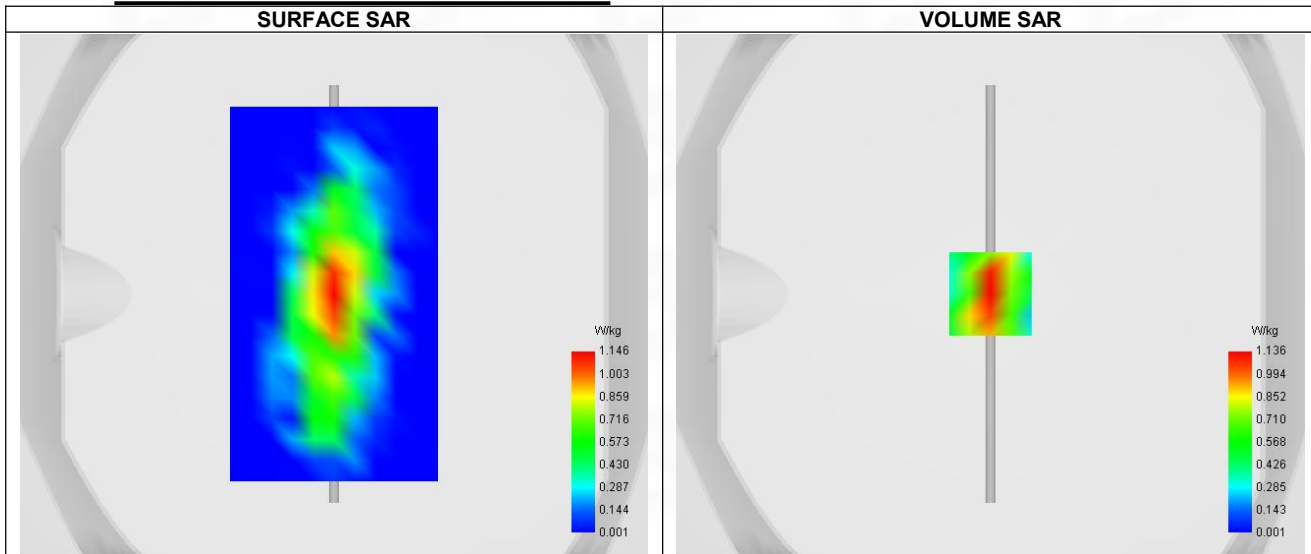


Maximum location: X=1.00, Y=0.00 ; SAR Peak: 2.90 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.581
SAR 1g (W/Kg)	1.036
Variation (%)	1.870
Horizontal validation criteria: minimum distance (mm)	11.313
Vertical validation criteria: SAR ratio M2/M1 (%)	37.412

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	2.403	1.136	0.425	0.292	0.246

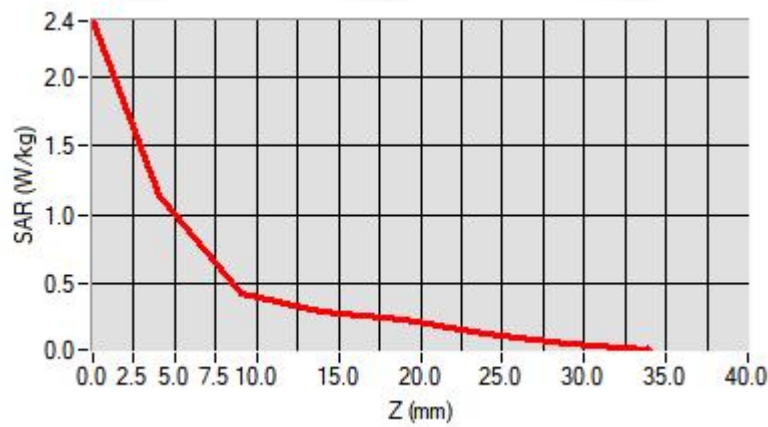

F. 3D Image

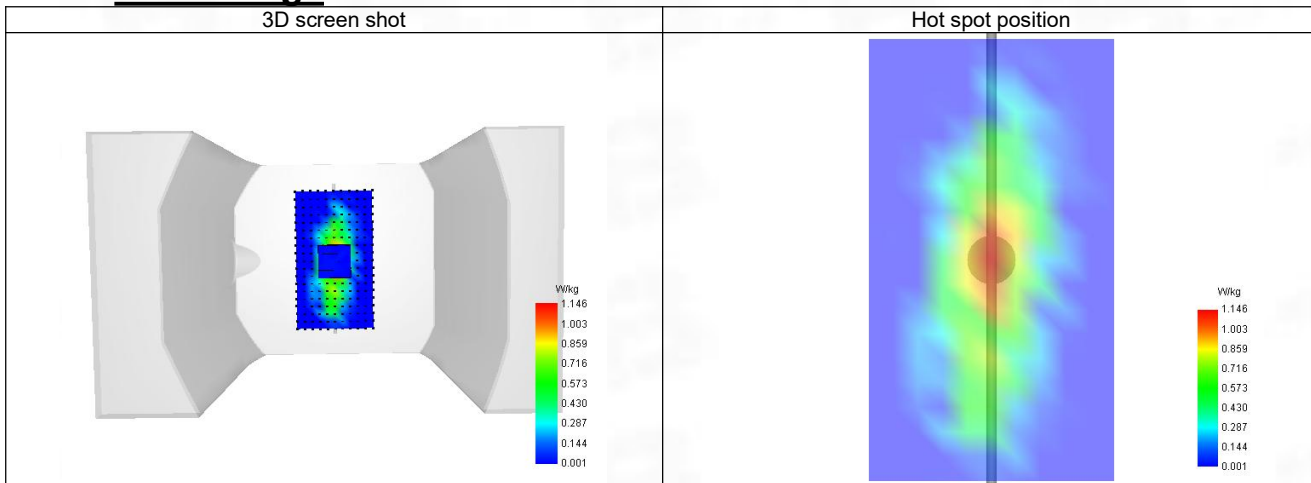

System Performance Check Data (1800 MHz)

System check at 1800 MHz

Date of measurement: 30/5/2025


A. Experimental conditions.

Probe	0125-EPGO-445
ConvF	1.20
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5.0mm, Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW1800
Channels/Frequency	Middle
Signal	CW

B. Permittivity

Middle TX Frequency (MHz)	1800.000
Relative permittivity (real part)	39.533
Relative permittivity (imaginary part)	14.072
Conductivity (S/m)	1.394

C. SAR Surface and Volume

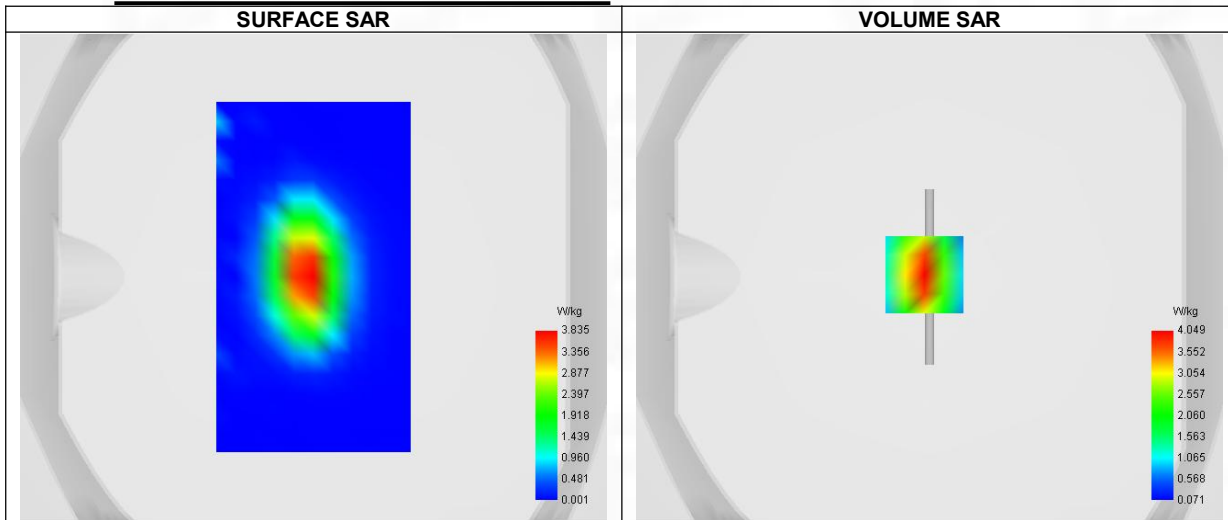


Maximum location: X=-2.00, Y=1.00 ; SAR Peak: 6.31 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	1.977
SAR 1g (W/Kg)	3.782
Variation (%)	2.000
Horizontal validation criteria: minimum distance (mm)	16.000
Vertical validation criteria: SAR ratio M2/M1 (%)	56.532

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	6.316	4.049	2.289	1.360	0.821

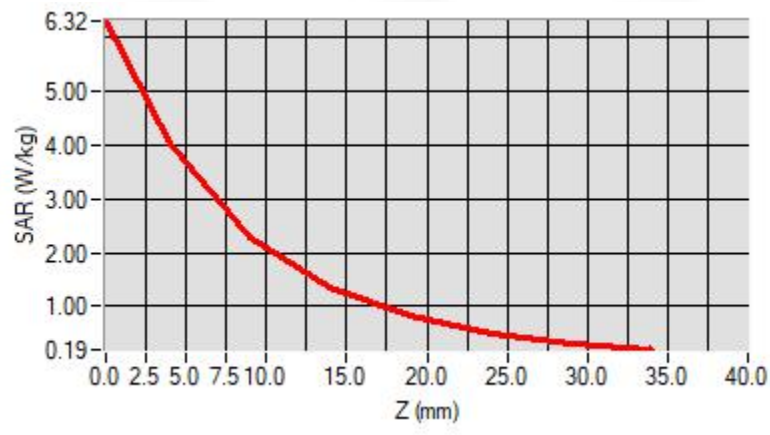

F. 3D Image

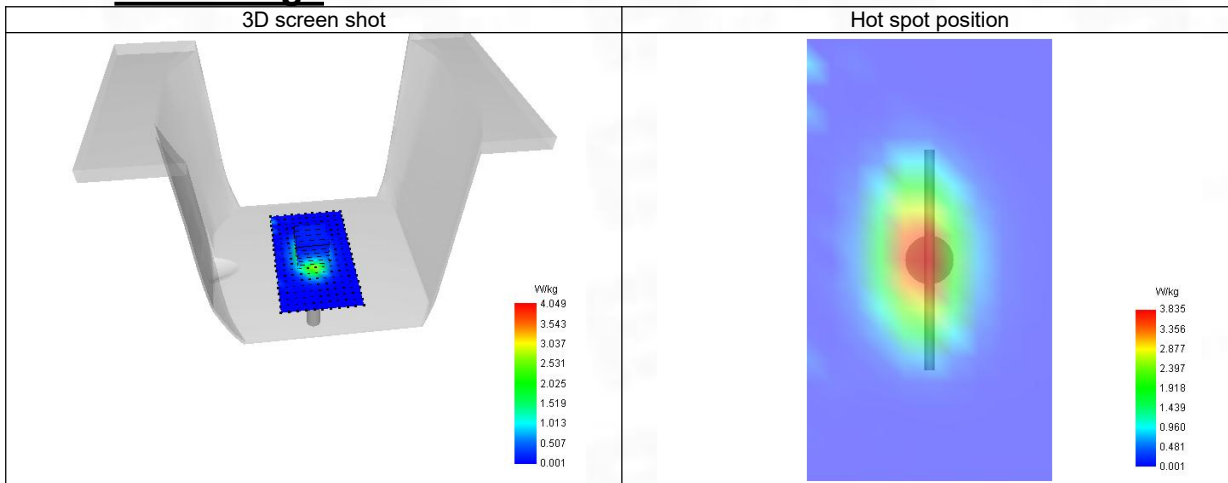

System Performance Check Data (1900MHz)

System check at 1900 MHz

Date of measurement: 30/5/2025


A. Experimental conditions.

Probe	0125-EPGO-445
ConvF	1.31
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5.0mm, Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW1900
Channels	Middle
Signal	CW

B. Permittivity

Frequency (MHz)	1900.000
Relative permittivity (real part)	39.776
Relative permittivity (imaginary part)	13.253
Conductivity (S/m)	1.447

C. SAR Surface and Volume

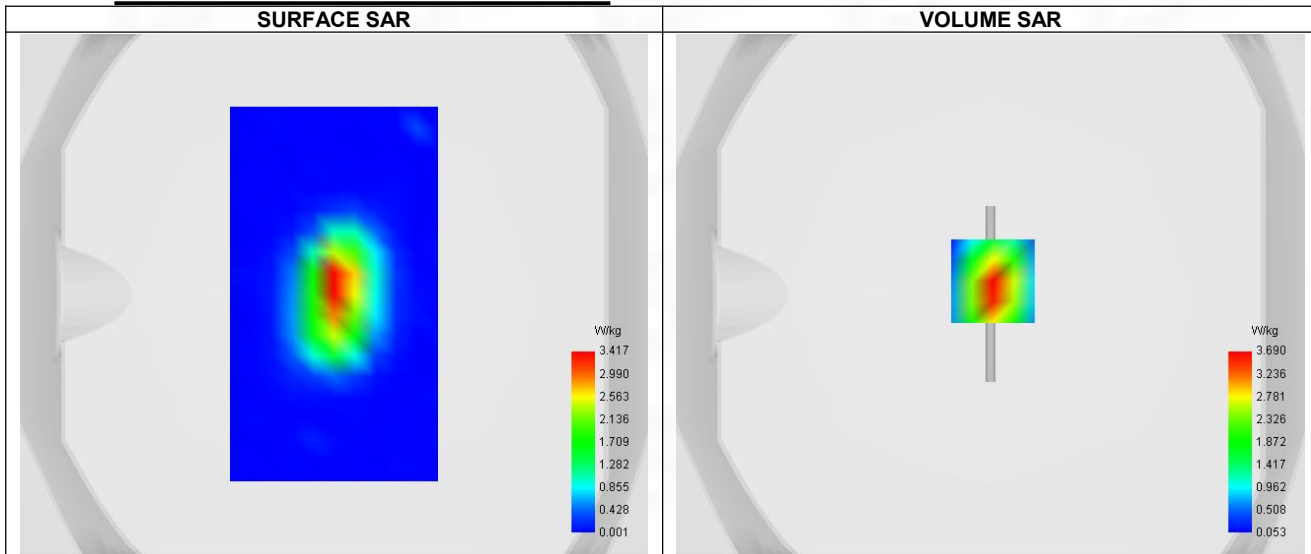


Maximum location: X=1.00, Y=5.00 ; SAR Peak: 6.51 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	1.974
SAR 1g (W/Kg)	3.690
Variation (%)	2.300
Horizontal validation criteria: minimum distance (mm)	16.000
Vertical validation criteria: SAR ratio M2/M1 (%)	48.509

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	6.384	3.690	1.790	0.904	0.536

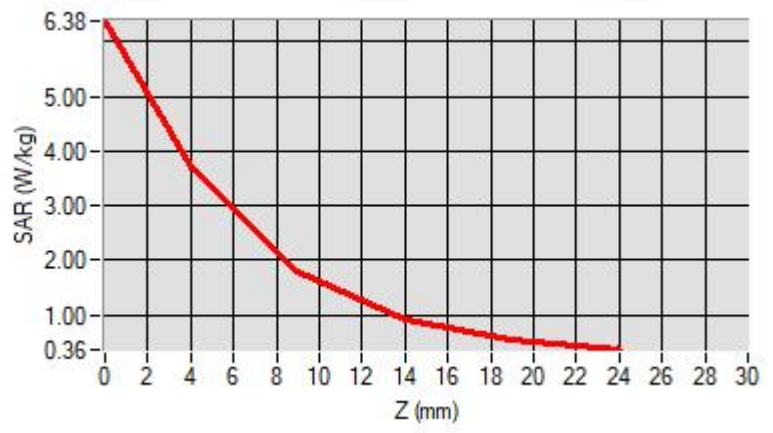

F. 3D Image

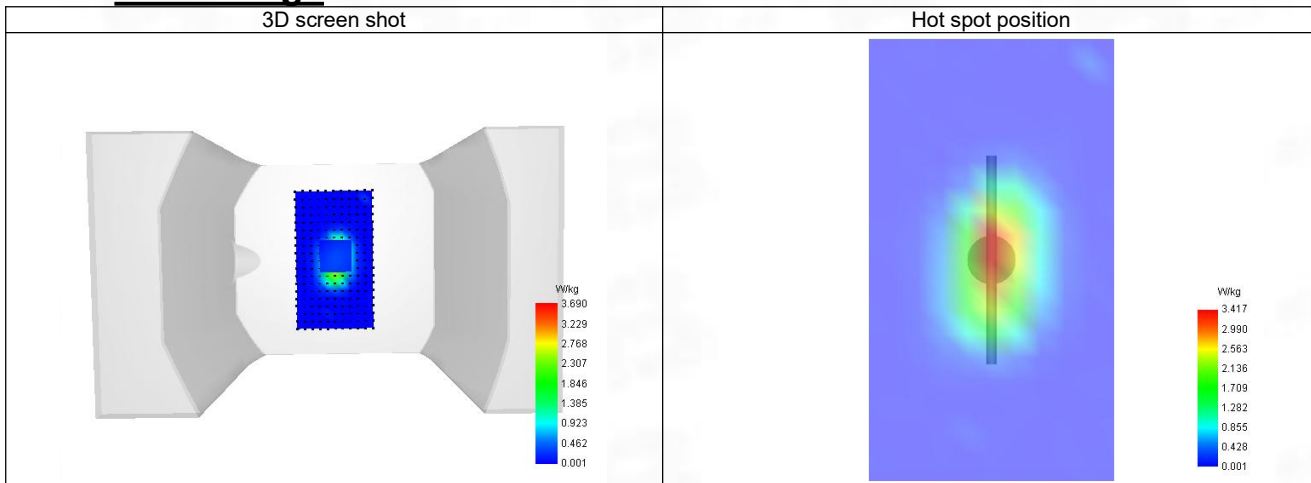

System Performance Check Data (2450 MHz)

System check at 2450 MHz

Date of measurement: 3/6/2025


A. Experimental conditions.

Probe	0125-EPGO-445
ConvF	1.40
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5.0mm, Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW2450
Channels/Frequency	Middle
Signal	CW

B. Permittivity

Middle TX Frequency (MHz)	2450.000
Relative permittivity (real part)	38.269
Relative permittivity (imaginary part)	13.356
Conductivity (S/m)	1.837

C. SAR Surface and Volume

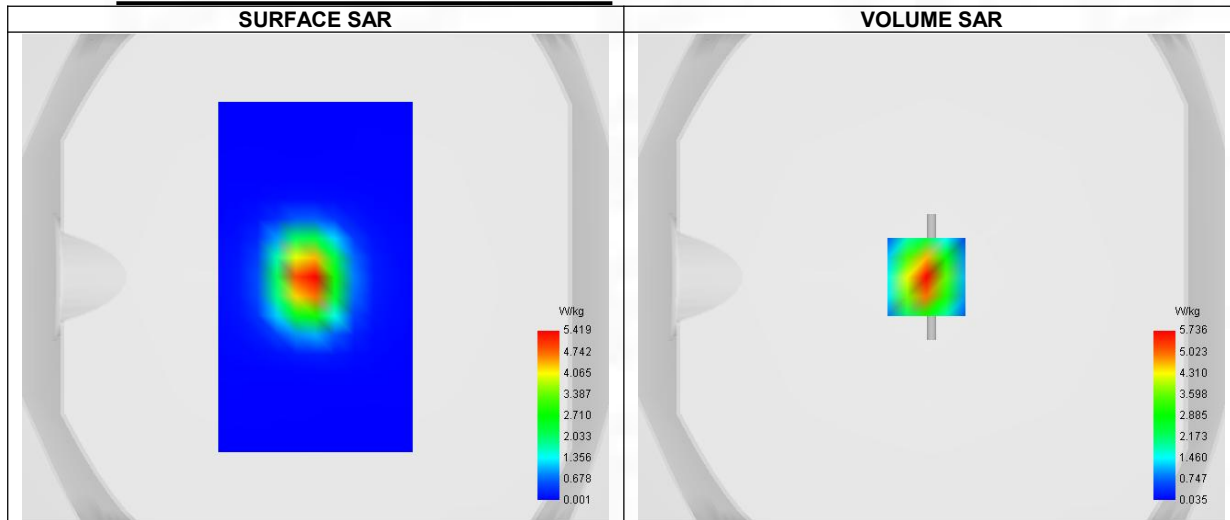


Maximum location: X=-2.00, Y=0.00 ; SAR Peak: 9.42 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	2.480
SAR 1g (W/Kg)	5.412
Variation (%)	-2.910
Horizontal validation criteria: minimum distance (mm)	11.313
Vertical validation criteria: SAR ratio M2/M1 (%)	51.342

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	9.448	5.736	2.945	1.562	0.829

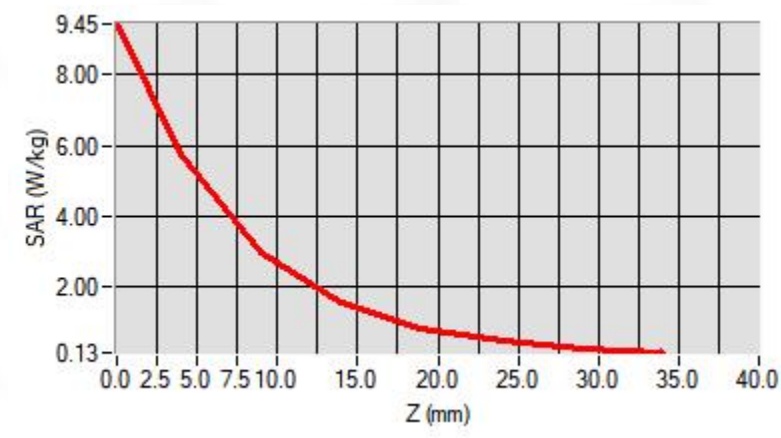

F. 3D Image

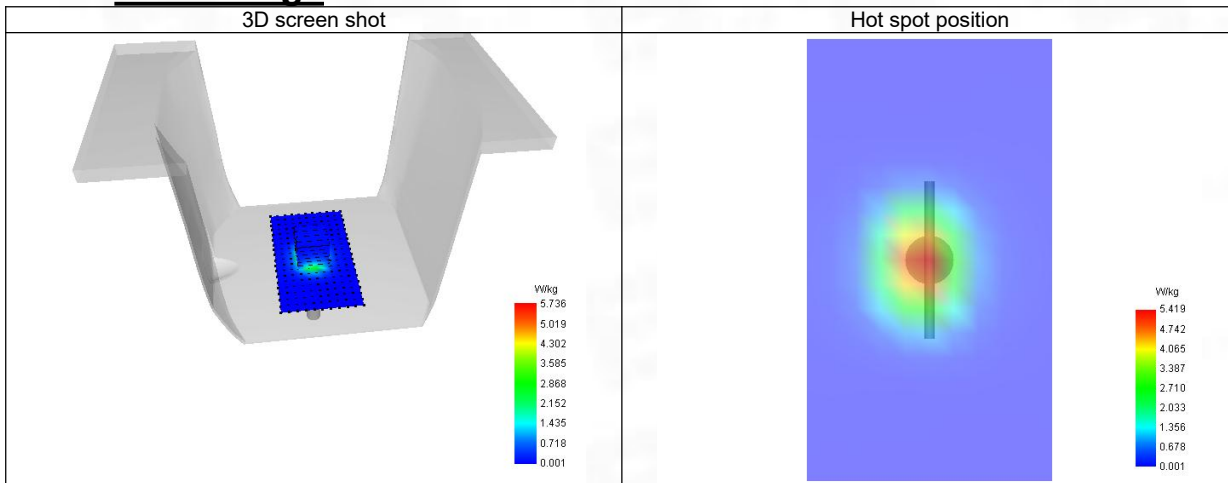

System Performance Check Data (2600 MHz)

System check at 2600 MHz

Date of measurement: 3/6/2025


A. Experimental conditions.

Probe	0125-EPGO-445
ConvF	1.27
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5.0mm,Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW2600
Channels/Frequency	Middle
Signal	CW

B. Permittivity

Middle TX Frequency (MHz)	2600.000
Relative permittivity (real part)	37.853
Relative permittivity (imaginary part)	12.612
Conductivity (S/m)	1.951

C. SAR Surface and Volume

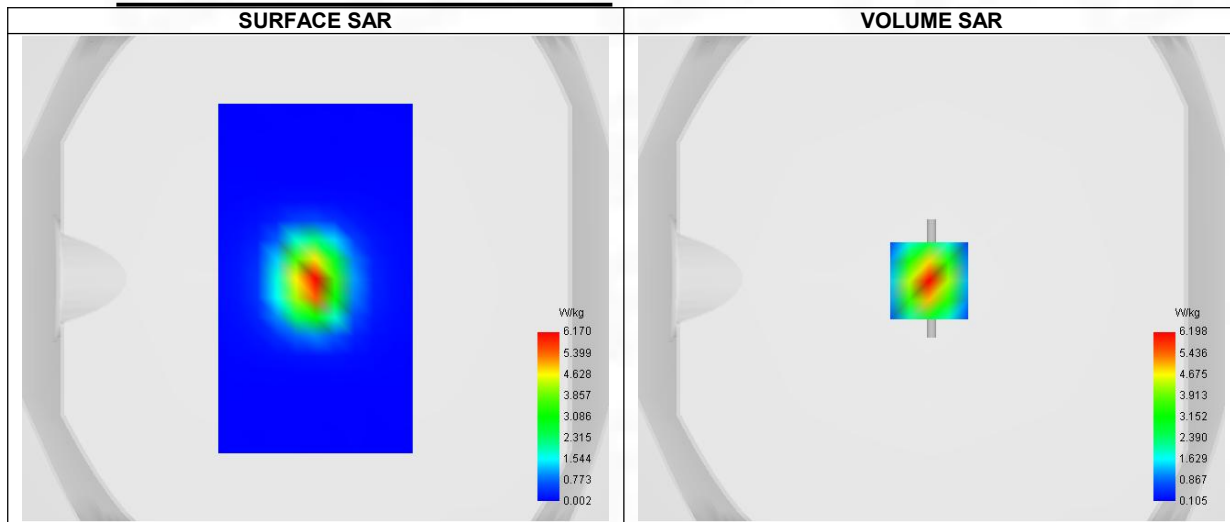


Maximum location: X=-1.00, Y=-1.00 ; SAR Peak: 10.39 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	2.569
SAR 1g (W/Kg)	5.586
Variation (%)	4.030
Horizontal validation criteria: minimum distance (mm)	16.000
Vertical validation criteria: SAR ratio M2/M1 (%)	49.984

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	10.404	6.198	3.098	1.538	0.811

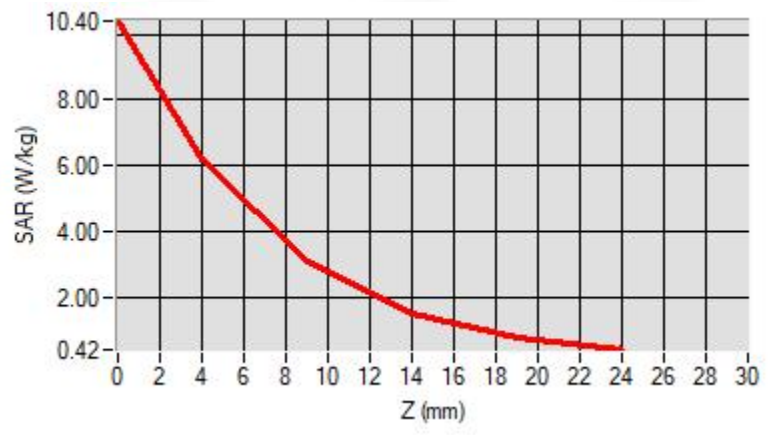

F. 3D Image

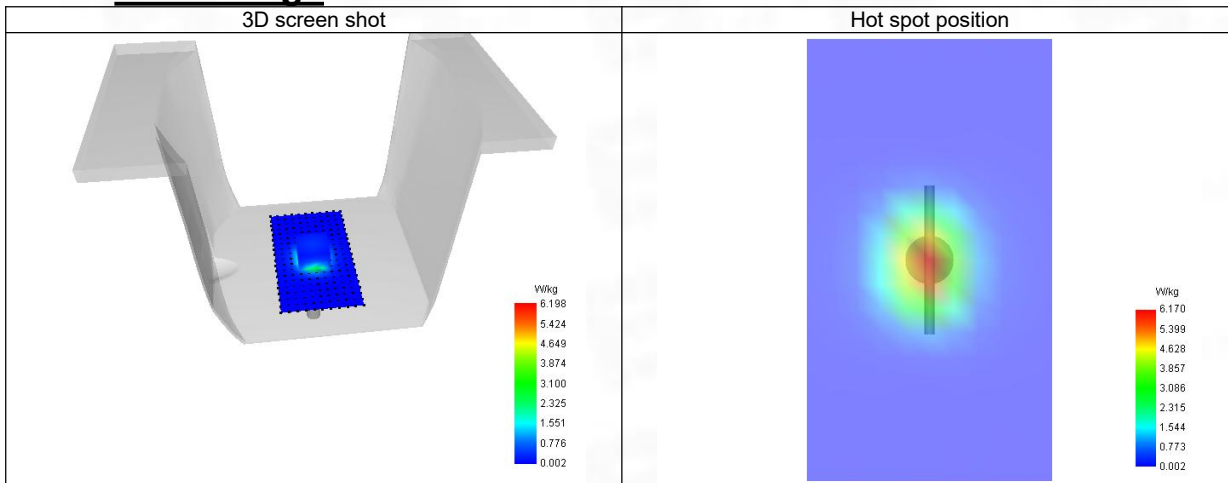

ANNEX C Test Data

1-Next-to-mouth: front position in dist. 10mm Channel 9262 in WCDMA Band 2

SAR Measurement at Band 2 (1900) (Body, Validation Plane)

Date of measurement: 30/5/2025


A. Experimental conditions.

Probe	0125-EPGO-445
ConvF	1.31
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5.0mm, Complete
Phantom	Validation plane
Device Position	Body
Band	Band 2 (1900)
Channels/Frequency	Lower (9262)/ frequency 1852.400 Mhz
Signal	WCDMA
Mode	Release 99
Connection Type	RMC, 12.2 kbps

B. Permittivity

Middle TX Frequency (MHz)	1852.400
Relative permittivity (real part)	39.660
Relative permittivity (imaginary part)	13.643
Conductivity (S/m)	1.422

C. SAR Surface and Volume

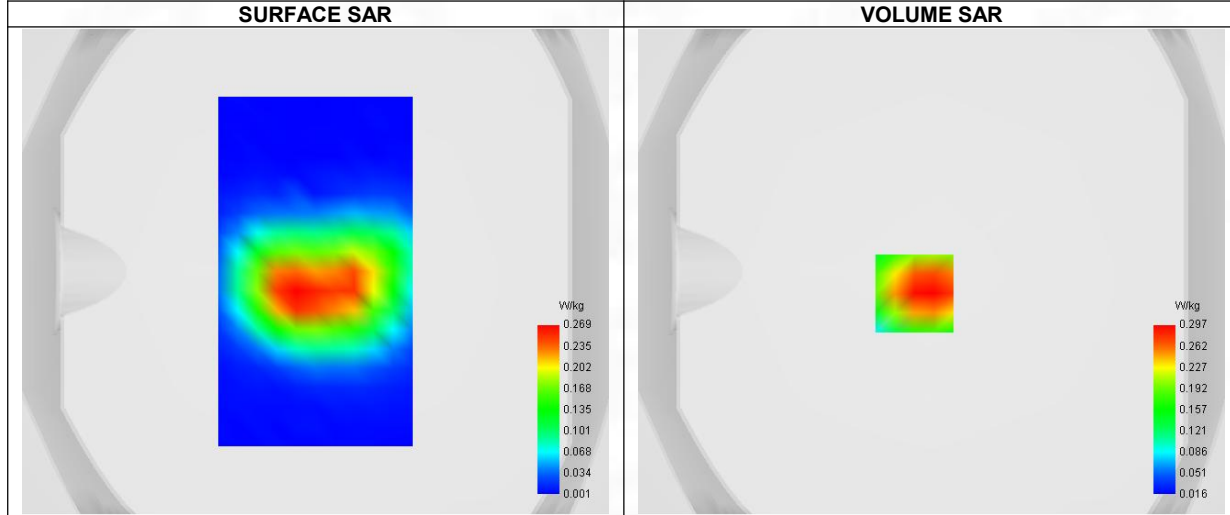


D. SAR 1g & 10g


SAR 10g (W/Kg)	0.158
SAR 1g (W/Kg)	0.284
Variation (%)	1.460
Horizontal validation criteria: minimum distance (mm)	17.888
Vertical validation criteria: SAR ratio M2/M1 (%)	50.842

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.693	0.297	0.151	0.114	0.060

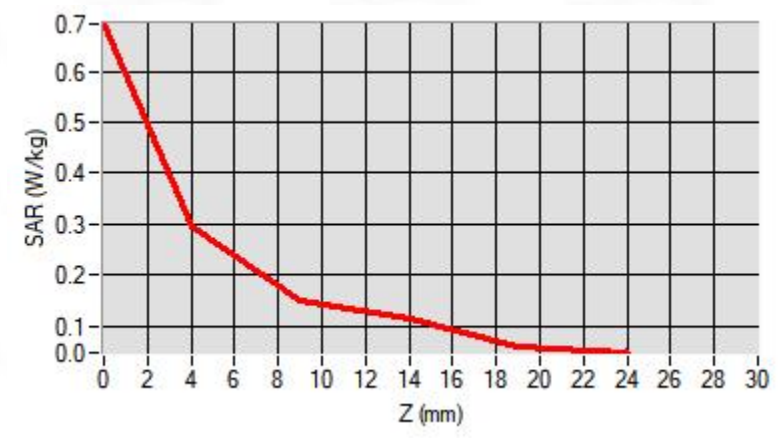

F. 3D Image

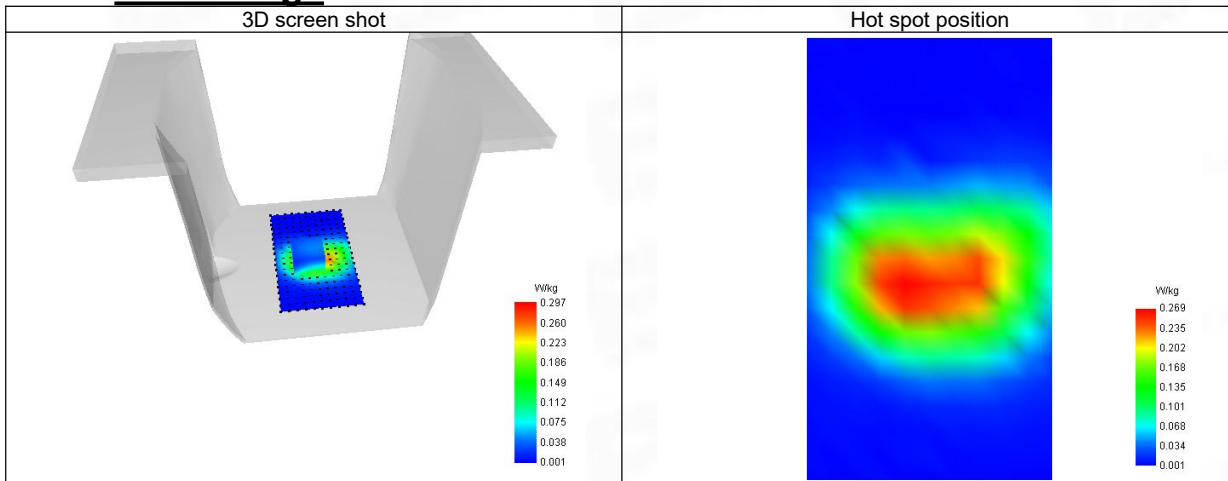

2-wrist-worn: back position in dist. 0mm Channel 9262 in WCDMA Band 2

SAR Measurement at Band 2 (1900) (Body, Validation Plane)

Date of measurement: 30/5/2025


A. Experimental conditions.

Probe	0125-EPGO-445
ConvF	1.31
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5.0mm, Complete
Phantom	Validation plane
Device Position	Body
Band	Band 2 (1900)
Channels/Frequency	Lower (9262)/ frequency 1852.400 Mhz
Signal	WCDMA
Mode	Release 99
Connection Type	RMC, 12.2 kbps

B. Permittivity

Middle TX Frequency (MHz)	1852.400
Relative permittivity (real part)	39.660
Relative permittivity (imaginary part)	13.643
Conductivity (S/m)	1.422

C. SAR Surface and Volume

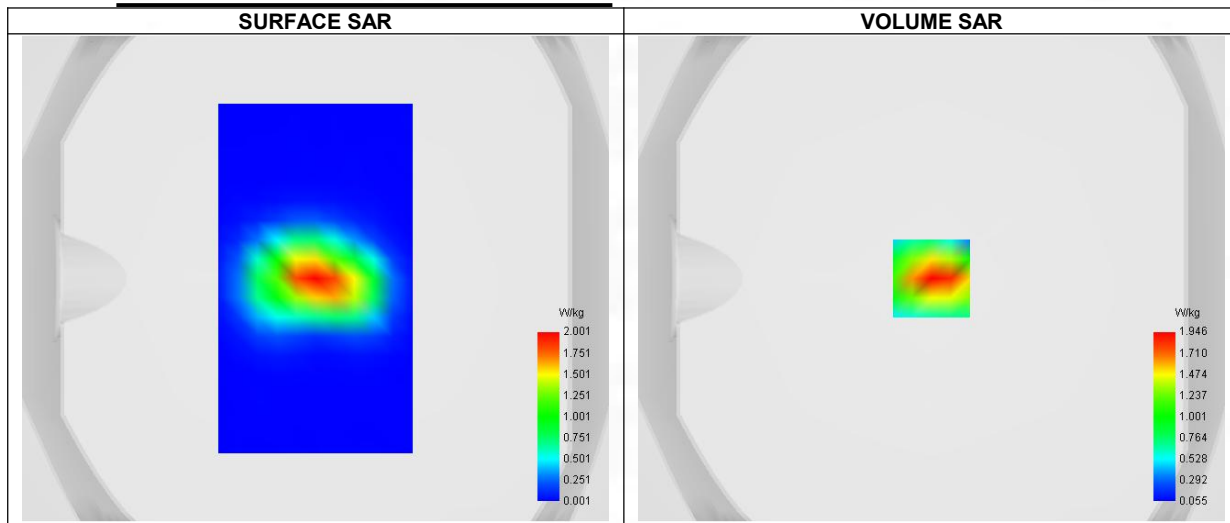


D. SAR 1g & 10g


SAR 10g (W/Kg)	0.977
SAR 1g (W/Kg)	1.808
Variation (%)	0.720
Horizontal validation criteria: minimum distance (mm)	16.000
Vertical validation criteria: SAR ratio M2/M1 (%)	60.171

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	2.867	1.946	1.171	0.695	0.411

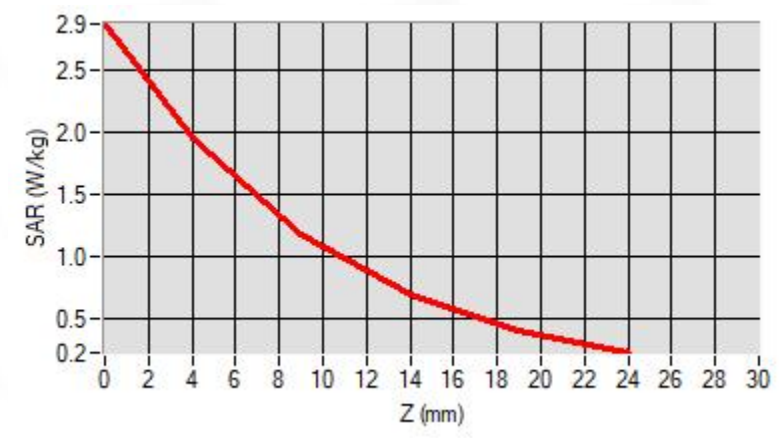

F. 3D Image

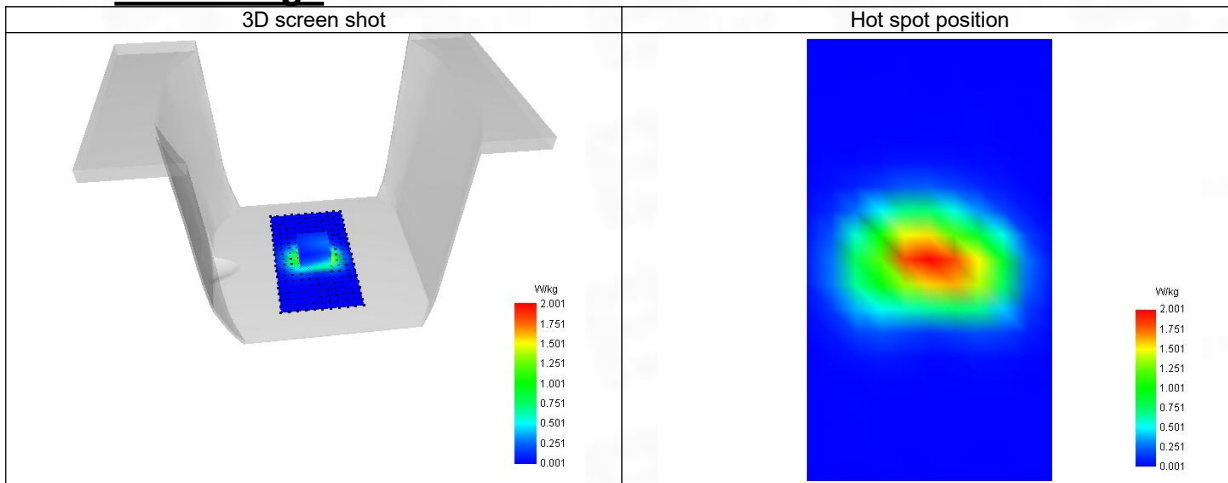

3-Next-to-mouth: front position in dist. 10mm Channel 4132 in WCDMA Band 5

SAR Measurement at Band 5 (850) (Body, Validation Plane)

Date of measurement: 29/5/2025


A. Experimental conditions.

Probe	0125-EPGO-445
ConvF	1.15
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5.0mm, Complete
Phantom	Validation plane
Device Position	Body
Band	Band 5 (850)
Channels/Frequency	Lower (4132)/ frequency 826.400 Mhz
Signal	WCDMA
Mode	Release 99
Connection Type	RMC, 12.2 kbps

B. Permittivity

Middle TX Frequency (MHz)	826.400
Relative permittivity (real part)	41.647
Relative permittivity (imaginary part)	19.657
Conductivity (S/m)	0.930

C. SAR Surface and Volume

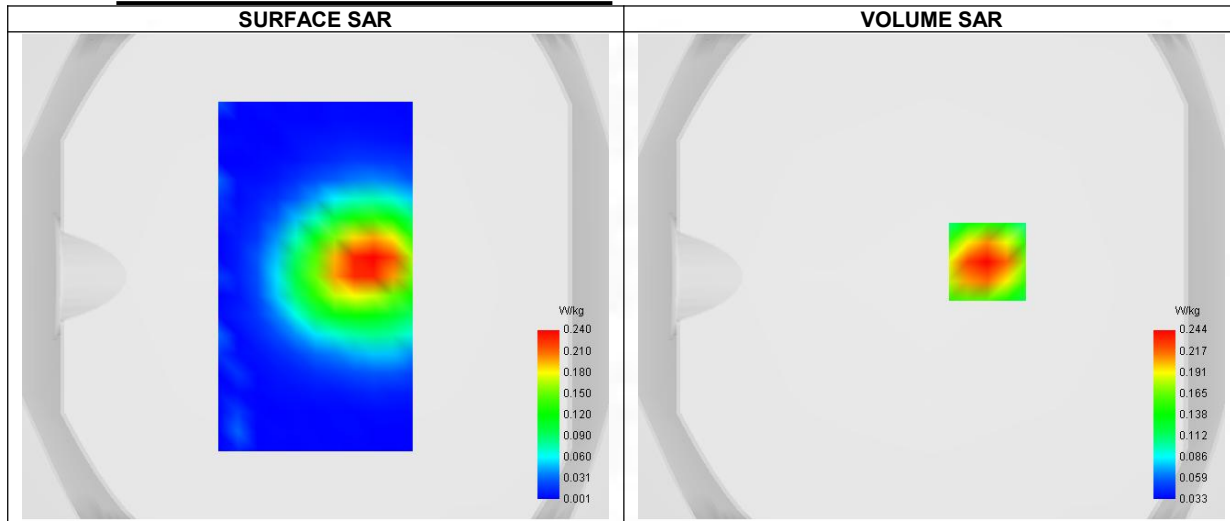


D. SAR 1g & 10g


SAR 10g (W/Kg)	0.146
SAR 1g (W/Kg)	0.231
Variation (%)	-0.350
Horizontal validation criteria: minimum distance (mm)	22.627
Vertical validation criteria: SAR ratio M2/M1 (%)	66.804

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.337	0.244	0.163	0.111	0.078

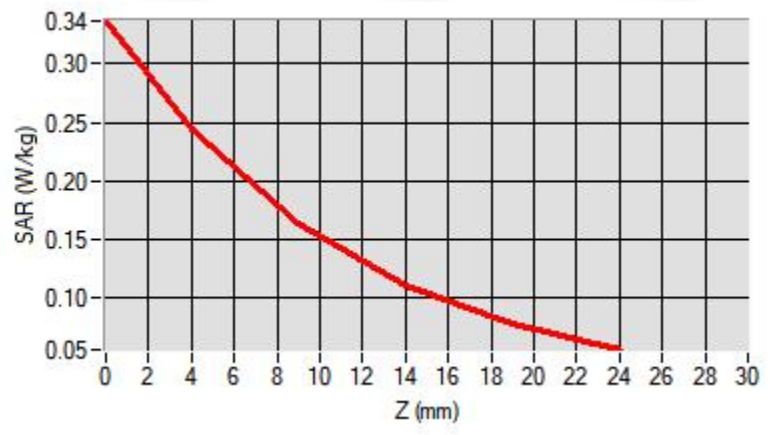

F. 3D Image

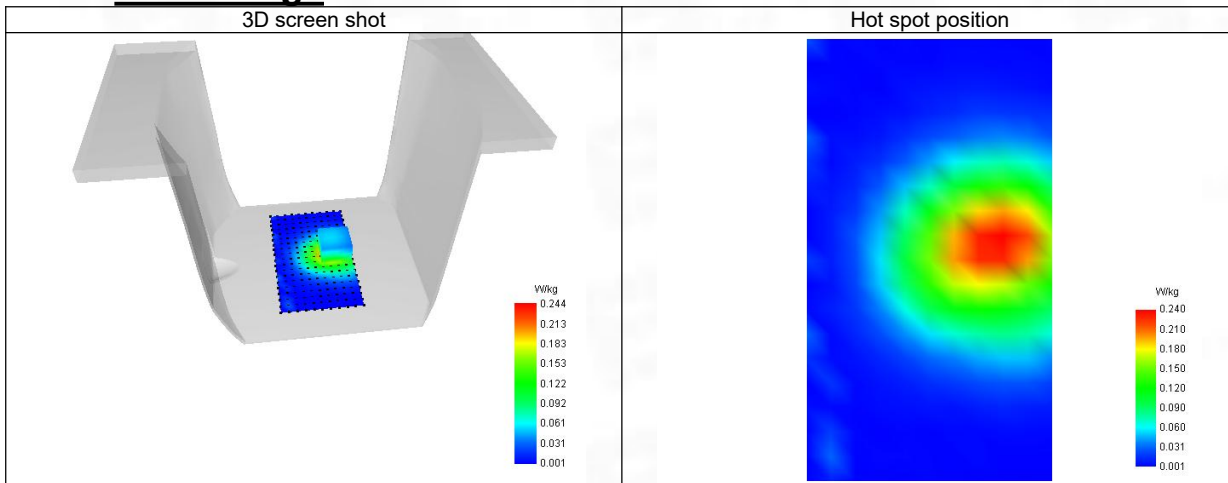

4-wrist-worn: back position in dist. 0mm Channel 4132 in WCDMA Band 5

SAR Measurement at Band 5 (850) (Body, Validation Plane)

Date of measurement: 29/5/2025


A. Experimental conditions.

Probe	0125-EPGO-445
ConvF	1.15
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5.0mm, Complete
Phantom	Validation plane
Device Position	Body
Band	Band 5 (850)
Channels/Frequency	Lower (4132)/ frequency 826.400 Mhz
Signal	WCDMA
Mode	Release 99
Connection Type	RMC, 12.2 kbps

B. Permittivity

Middle TX Frequency (MHz)	826.400
Relative permittivity (real part)	41.647
Relative permittivity (imaginary part)	19.657
Conductivity (S/m)	0.930

C. SAR Surface and Volume

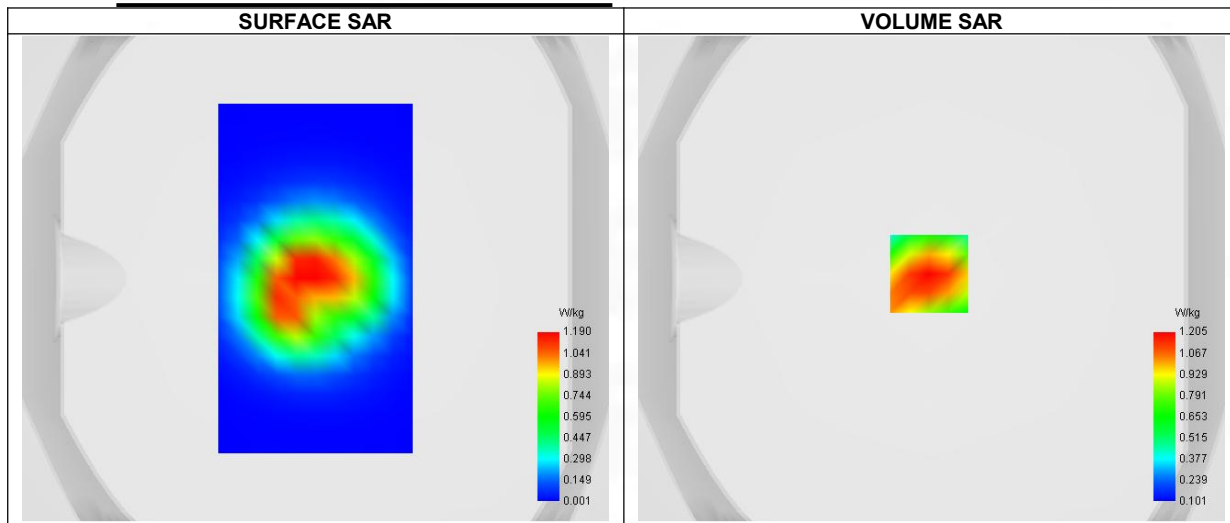


Maximum location: X=-1.00, Y=2.00 ; SAR Peak: 1.79 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.690
SAR 1g (W/Kg)	1.144
Variation (%)	-3.770
Horizontal validation criteria: minimum distance (mm)	17.888
Vertical validation criteria: SAR ratio M2/M1 (%)	60.835

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.781	1.205	0.733	0.456	0.299

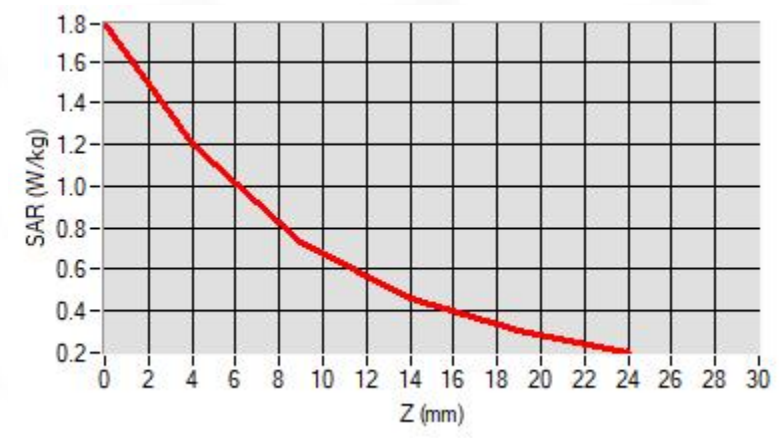

F. 3D Image

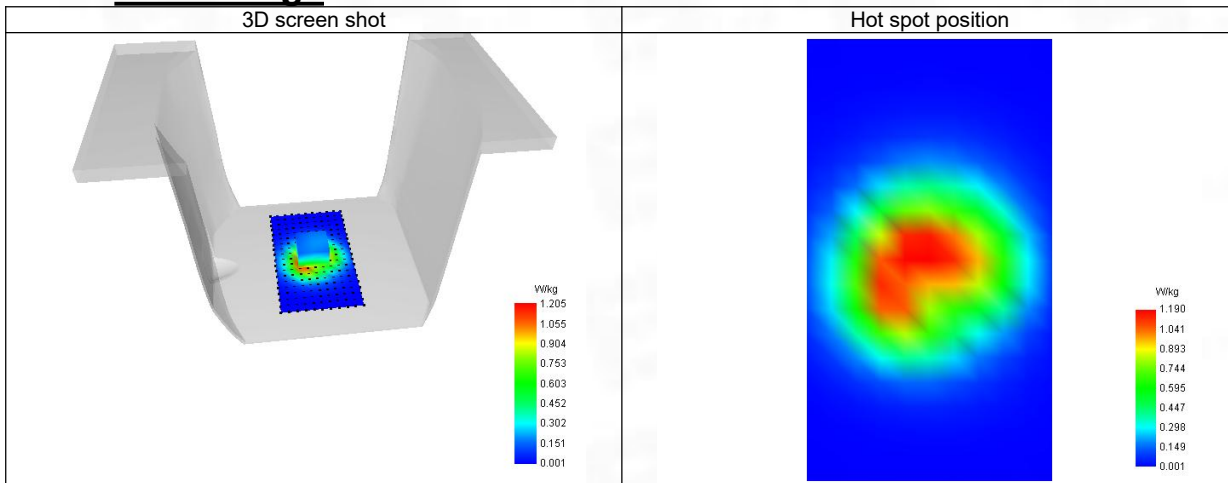

5-Next-to-mouth: front position in dist. 10mm Channel 18900 in LTE Band 2

SAR Measurement at LTE band 2 (Body, Validation Plane)

Date of measurement: 30/5/2025


A. Experimental conditions.

Probe	0125-EPGO-445
ConvF	1.31
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5.0mm, Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 2
Channels/Frequency	Middle (18900)/ frequency 1880.000 Mhz
Signal	LTE FDD
Cell Bandwidth	20 Mhz
Modulation	SC-OFDM - QPSK
RB offset	0
RB size	1

B. Permittivity

Middle TX Frequency (MHz)	1871.090
Relative permittivity (real part)	39.706
Relative permittivity (imaginary part)	13.490
Conductivity (S/m)	1.432

C. SAR Surface and Volume

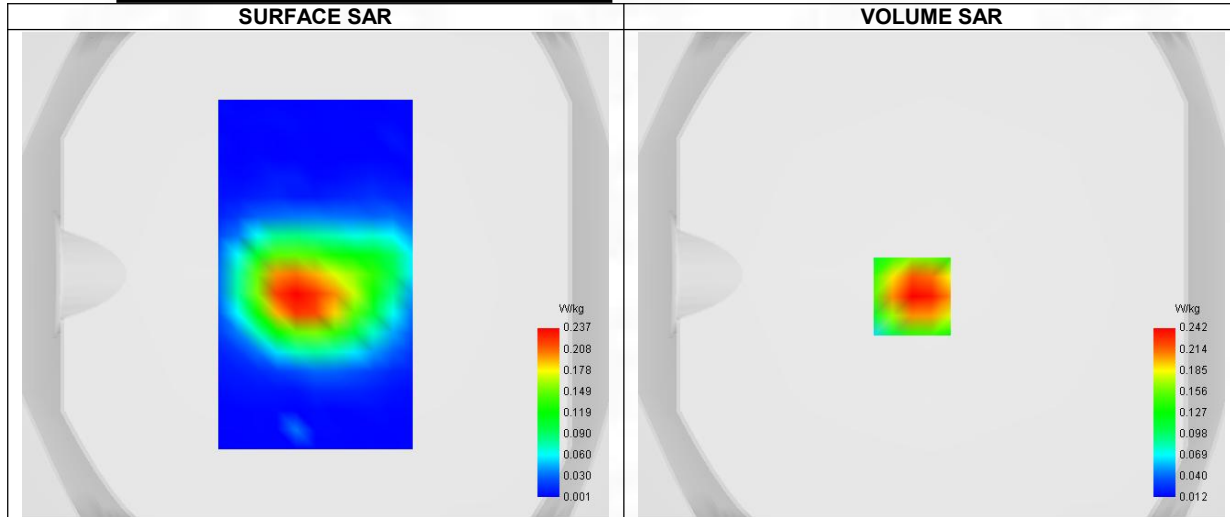


D. SAR 1g & 10g


SAR 10g (W/Kg)	0.136
SAR 1g (W/Kg)	0.231
Variation (%)	4.530
Horizontal validation criteria: minimum distance (mm)	17.888
Vertical validation criteria: SAR ratio M2/M1 (%)	60.741

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.361	0.242	0.147	0.092	0.062

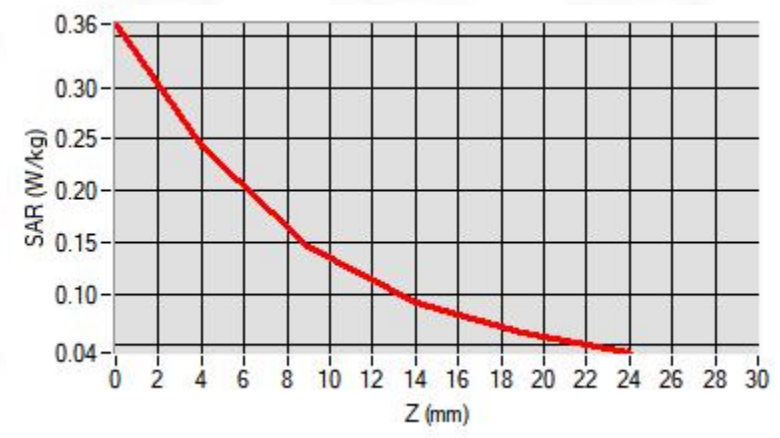

F. 3D Image

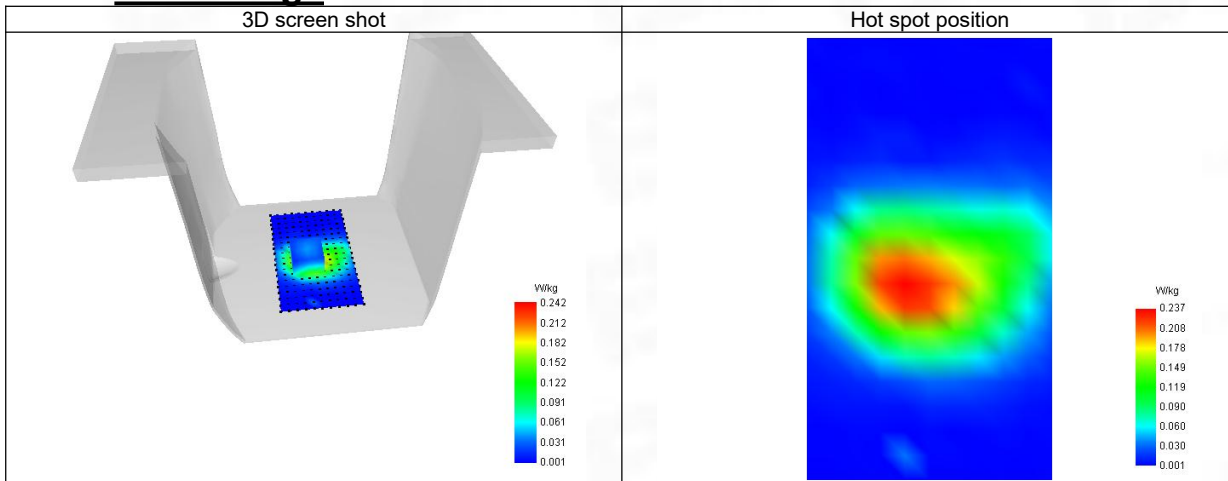

6-wrist-worn: back position in dist. 0mm Channel 18900 in LTE Band 2

SAR Measurement at LTE band 2 (Body, Validation Plane)

Date of measurement: 30/5/2025


A. Experimental conditions.

Probe	0125-EPGO-445
ConvF	1.31
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5.0mm, Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 2
Channels/Frequency	Middle (18900)/ frequency 1880.000 Mhz
Signal	LTE FDD
Cell Bandwidth	20 Mhz
Modulation	SC-OFDM - QPSK
RB offset	0
RB size	1

B. Permittivity

Middle TX Frequency (MHz)	1871.090
Relative permittivity (real part)	39.706
Relative permittivity (imaginary part)	13.490
Conductivity (S/m)	1.432

C. SAR Surface and Volume

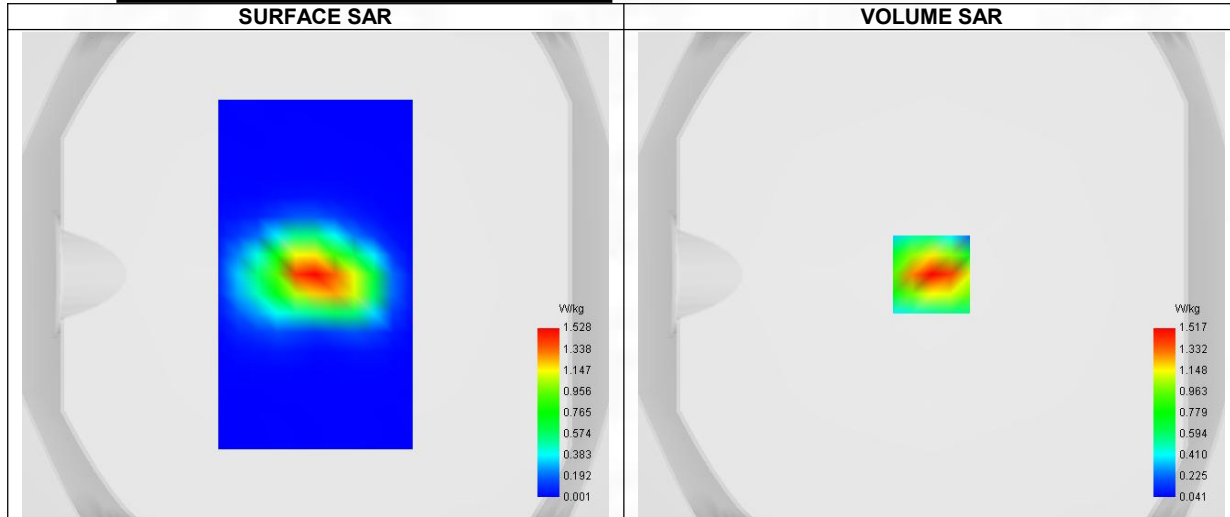


Maximum location: X=0.00, Y=0.00 ; SAR Peak: 2.26 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.755
SAR 1g (W/Kg)	1.403
Variation (%)	-1.110
Horizontal validation criteria: minimum distance (mm)	16.000
Vertical validation criteria: SAR ratio M2/M1 (%)	59.263

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	2.261	1.517	0.899	0.528	0.312

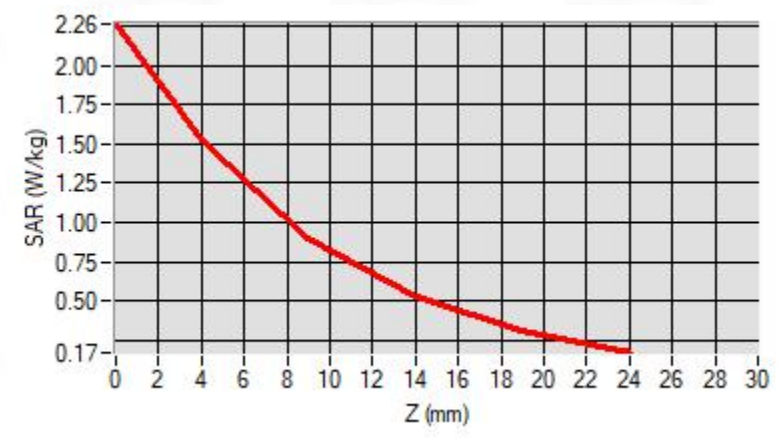

F. 3D Image

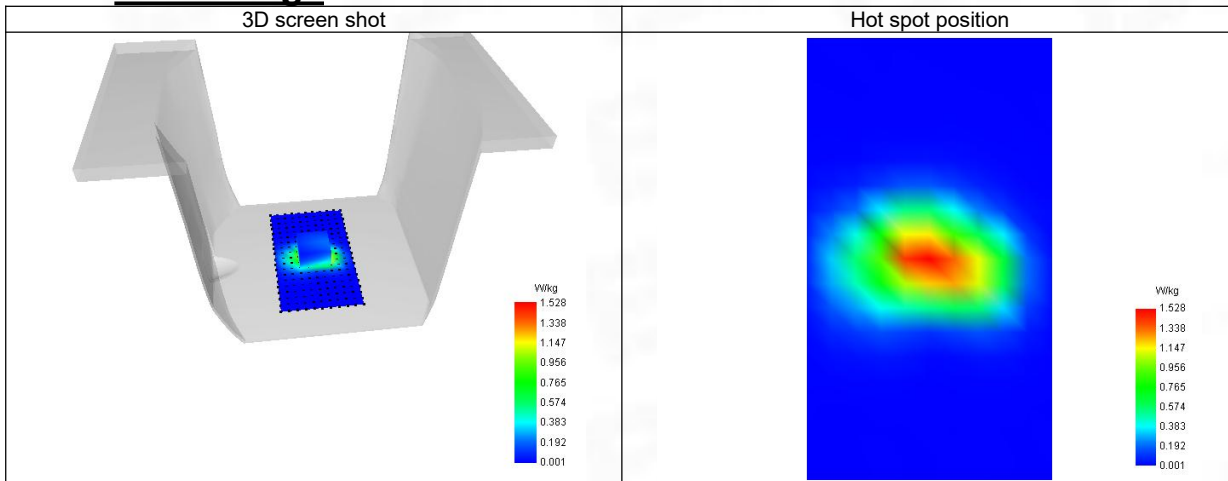

7-Next-to-mouth: front position in dist. 10mm Channel 20300 in LTE Band 4

SAR Measurement at LTE band 4 (Body, Validation Plane)

Date of measurement: 30/5/2025


A. Experimental conditions.

Probe	0125-EPGO-445
ConvF	1.20
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5.0mm, Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 4
Channels/Frequency	Higher (20300)/ frequency 1745.000 Mhz
Signal	LTE FDD
Cell Bandwidth	20 Mhz
Modulation	SC-OFDM - QPSK
RB offset	50
RB size	1

B. Permittivity

Middle TX Frequency (MHz)	1745.090
Relative permittivity (real part)	39.651
Relative permittivity (imaginary part)	14.378
Conductivity (S/m)	1.368

C. SAR Surface and Volume

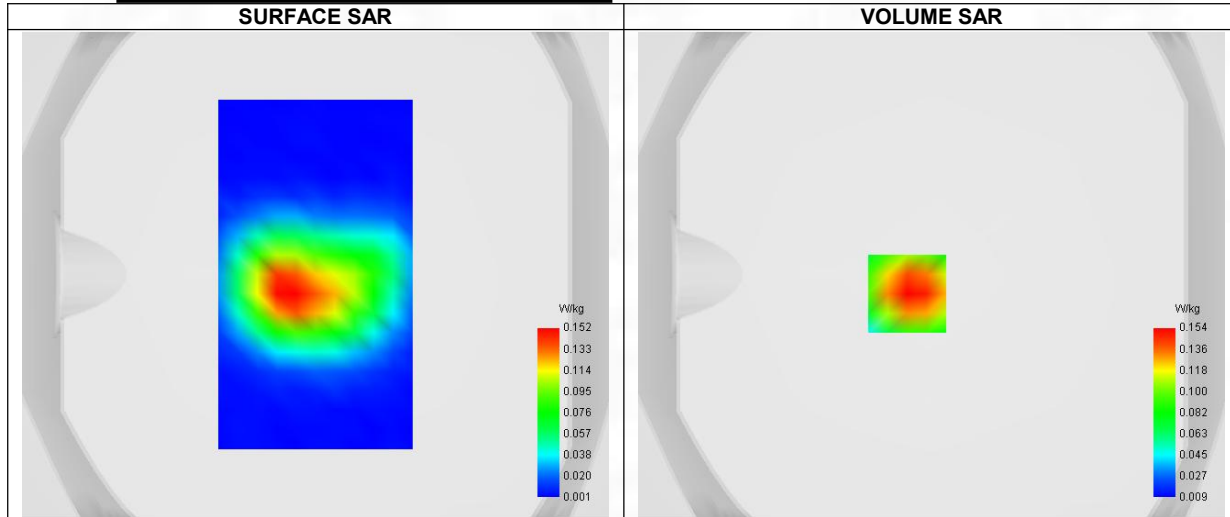


Maximum location: X=-10.00, Y=-8.00 ; SAR Peak: 0.23 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.085
SAR 1g (W/Kg)	0.146
Variation (%)	1.850
Horizontal validation criteria: minimum distance (mm)	17.888
Vertical validation criteria: SAR ratio M2/M1 (%)	60.390

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.228	0.154	0.093	0.057	0.036

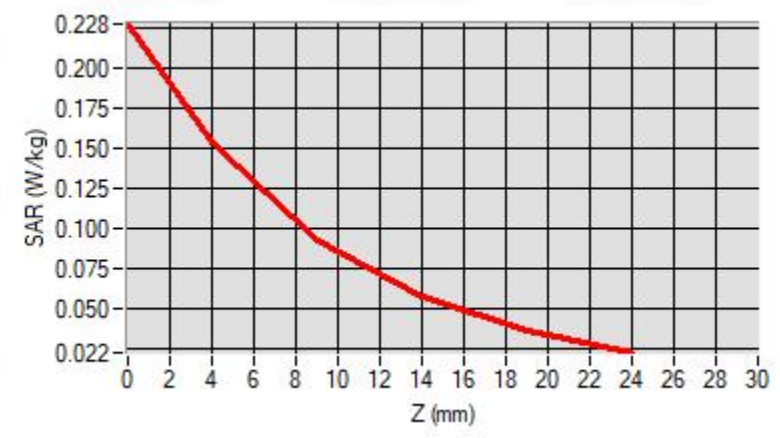

F. 3D Image

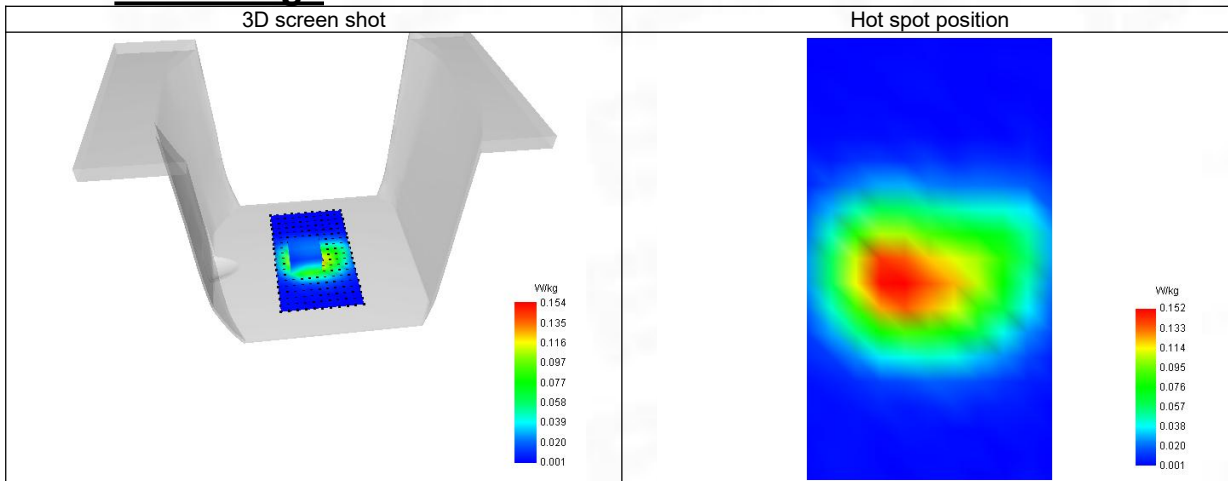

8-wrist-worn: back position in dist. 0mm Channel 20300 in LTE Band 4

SAR Measurement at LTE band 4 (Body, Validation Plane)

Date of measurement: 30/5/2025


A. Experimental conditions.

Probe	0125-EPGO-445
ConvF	1.20
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5.0mm, Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 4
Channels/Frequency	Higher (20300)/ frequency 1745.000 Mhz
Signal	LTE FDD
Cell Bandwidth	20 Mhz
Modulation	SC-OFDM - QPSK
RB offset	50
RB size	1

B. Permittivity

Middle TX Frequency (MHz)	1745.090
Relative permittivity (real part)	39.651
Relative permittivity (imaginary part)	14.378
Conductivity (S/m)	1.368

C. SAR Surface and Volume

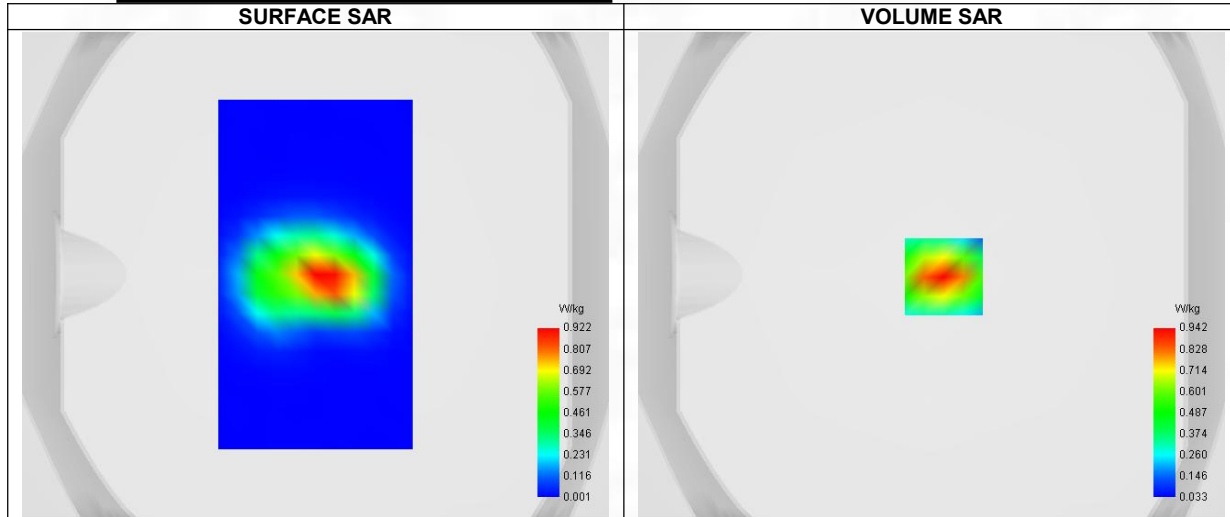


D. SAR 1g & 10g


SAR 10g (W/Kg)	0.489
SAR 1g (W/Kg)	0.866
Variation (%)	-0.960
Horizontal validation criteria: minimum distance (mm)	16.000
Vertical validation criteria: SAR ratio M2/M1 (%)	66.775

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.278	0.942	0.629	0.410	0.258

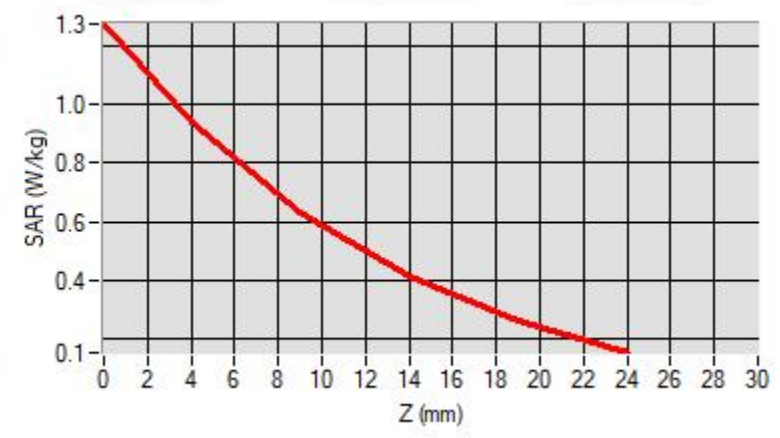

F. 3D Image

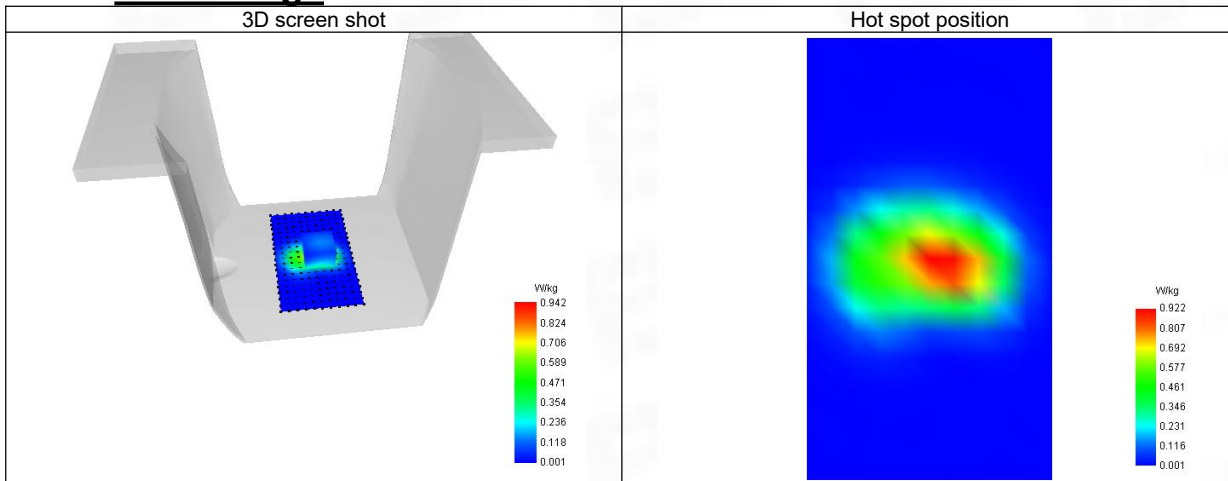

9-Next-to-mouth: front position in dist. 10mm Channel 20525 in LTE Band 5

SAR Measurement at LTE band 5 (Body, Validation Plane)

Date of measurement: 29/5/2025


A. Experimental conditions.

Probe	0125-EPGO-445
ConvF	1.15
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5.0mm, Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 5
Channels/Frequency	Middle (20525)/ frequency 836.500 Mhz
Signal	LTE FDD
Cell Bandwidth	10 Mhz
Modulation	SC-OFDM - QPSK
RB offset	0
RB size	1

B. Permittivity

Middle TX Frequency (MHz)	832.090
Relative permittivity (real part)	41.624
Relative permittivity (imaginary part)	19.524
Conductivity (S/m)	0.931

C. SAR Surface and Volume

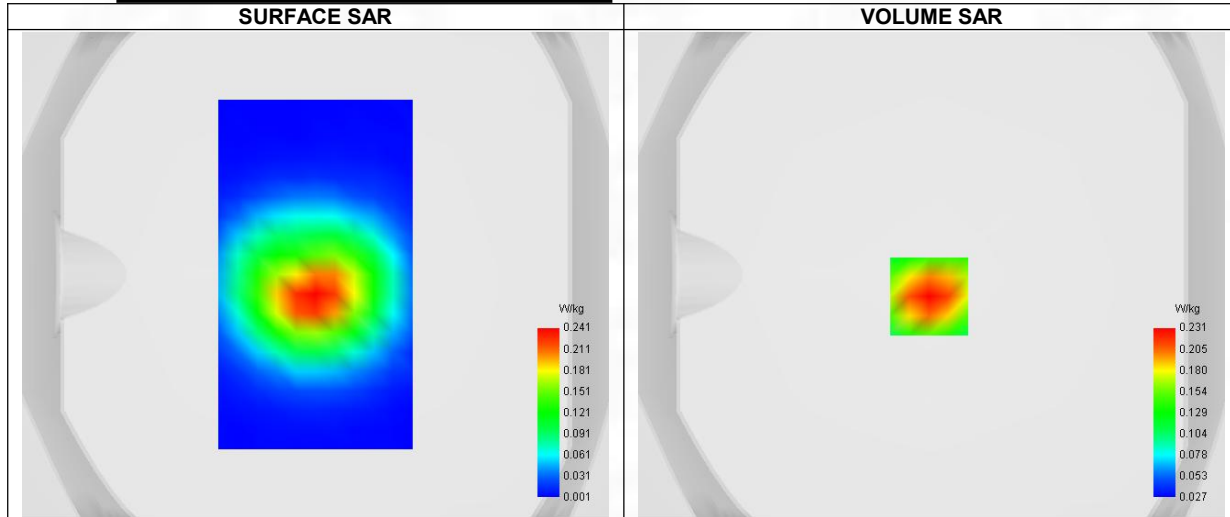


D. SAR 1g & 10g


SAR 10g (W/Kg)	0.139
SAR 1g (W/Kg)	0.218
Variation (%)	-4.790
Horizontal validation criteria: minimum distance (mm)	22.627
Vertical validation criteria: SAR ratio M2/M1 (%)	67.531

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.314	0.231	0.156	0.107	0.075

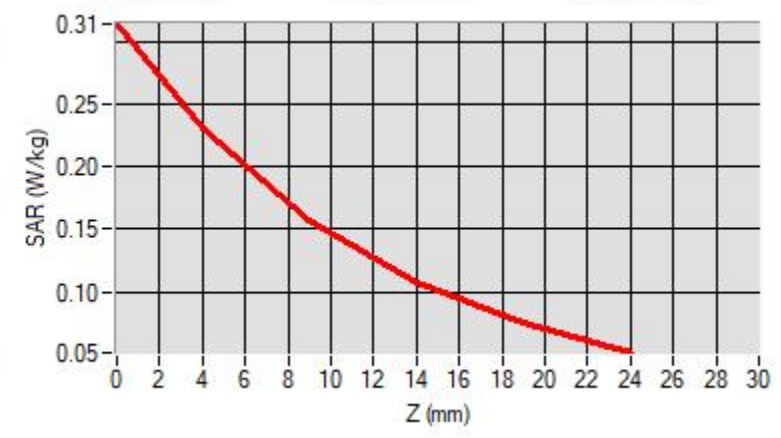

F. 3D Image

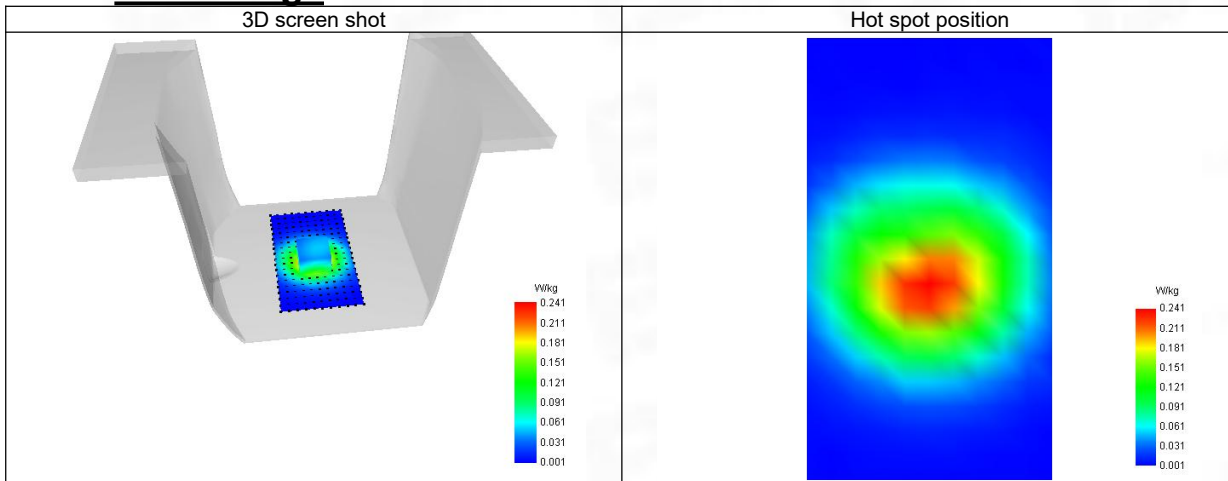

10-wrist-worn: back position in dist. 0mm Channel 20525 in LTE Band 5

SAR Measurement at LTE band 5 (Body, Validation Plane)

Date of measurement: 29/5/2025


A. Experimental conditions.

Probe	0125-EPGO-445
ConvF	1.15
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5.0mm, Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 5
Channels/Frequency	Middle (20525)/ frequency 836.500 Mhz
Signal	LTE FDD
Cell Bandwidth	10 Mhz
Modulation	SC-OFDM - QPSK
RB offset	0
RB size	1

B. Permittivity

Middle TX Frequency (MHz)	832.090
Relative permittivity (real part)	41.624
Relative permittivity (imaginary part)	19.524
Conductivity (S/m)	0.931

C. SAR Surface and Volume

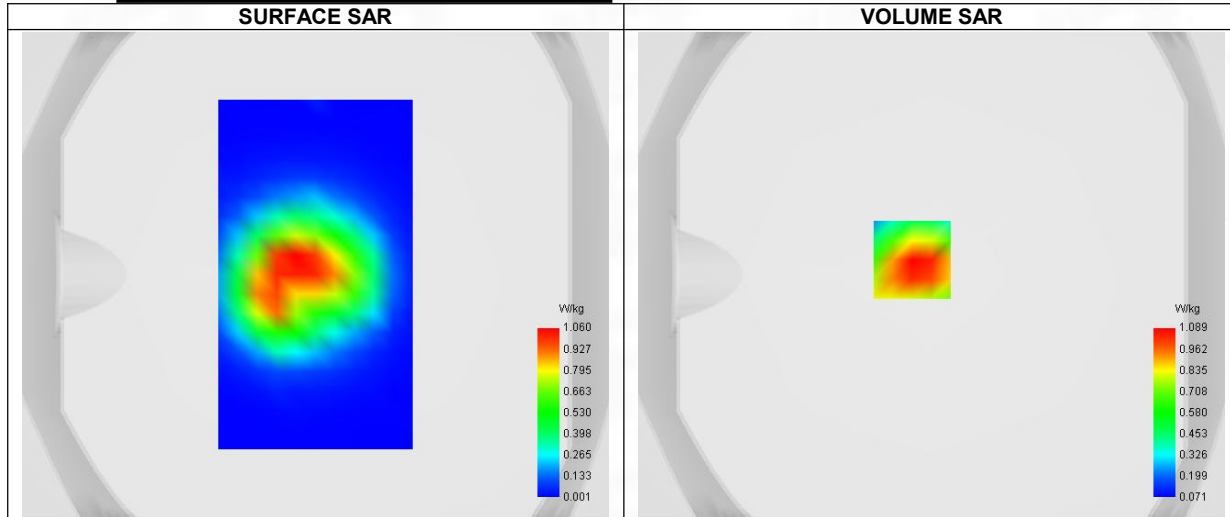


Maximum location: X=-8.00, Y=6.00 ; SAR Peak: 1.70 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.589
SAR 1g (W/Kg)	1.048
Variation (%)	-2.310
Horizontal validation criteria: minimum distance (mm)	16.000
Vertical validation criteria: SAR ratio M2/M1 (%)	58.032

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.669	1.089	0.632	0.379	0.244

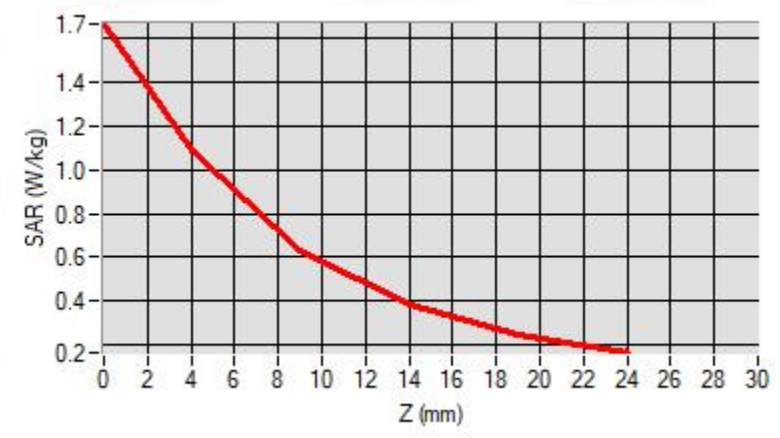

F. 3D Image

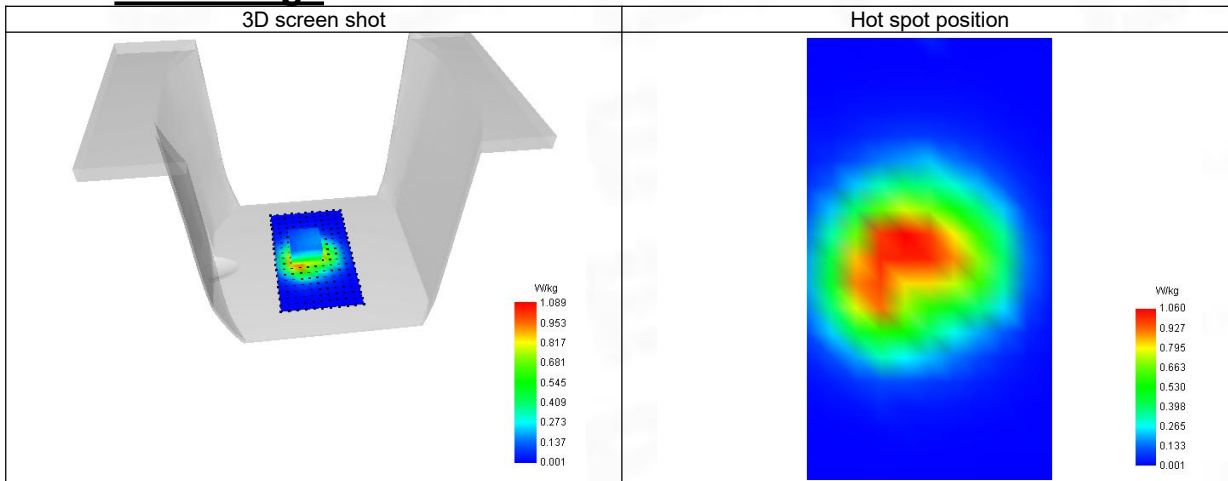

11-Next-to-mouth: front position in dist. 10mm Channel 21100 in LTE Band 7

SAR Measurement at LTE band 7 (Body, Validation Plane)

Date of measurement: 3/6/2025


A. Experimental conditions.

Probe	0125-EPGO-445
ConvF	1.40
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5.0mm, Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 7
Channels/Frequency	Middle (21100)/ frequency 2535.000 Mhz
Signal	LTE FDD
Cell Bandwidth	20 Mhz
Modulation	SC-OFDM - QPSK
RB offset	50
RB size	1

B. Permittivity

Middle TX Frequency (MHz)	2510.090
Relative permittivity (real part)	38.102
Relative permittivity (imaginary part)	13.058
Conductivity (S/m)	1.883

C. SAR Surface and Volume

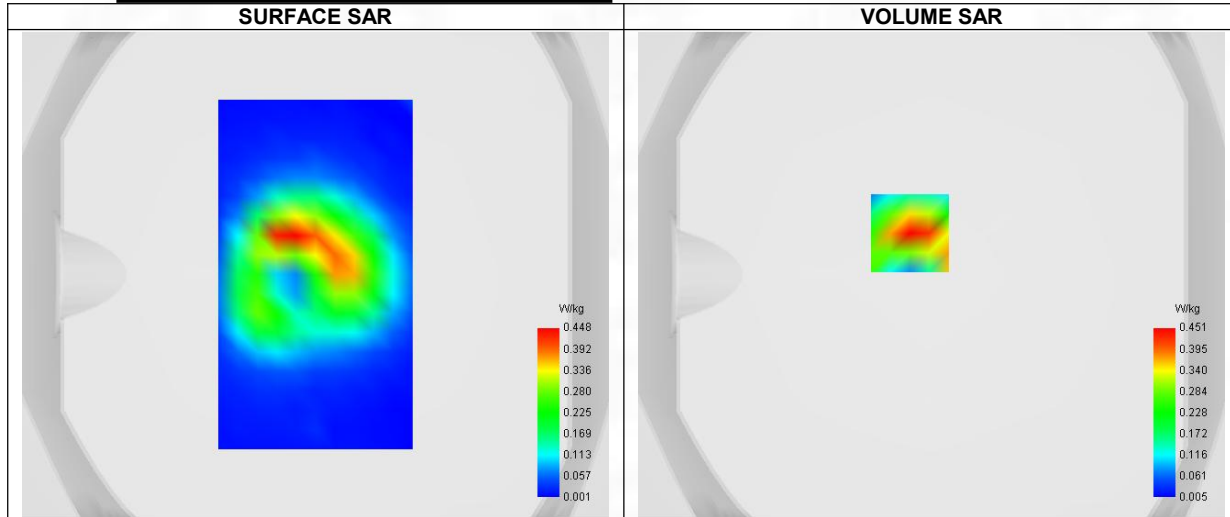


D. SAR 1g & 10g


SAR 10g (W/Kg)	0.215
SAR 1g (W/Kg)	0.422
Variation (%)	2.380
Horizontal validation criteria: minimum distance (mm)	16.000
Vertical validation criteria: SAR ratio M2/M1 (%)	55.651

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.702	0.451	0.251	0.138	0.077

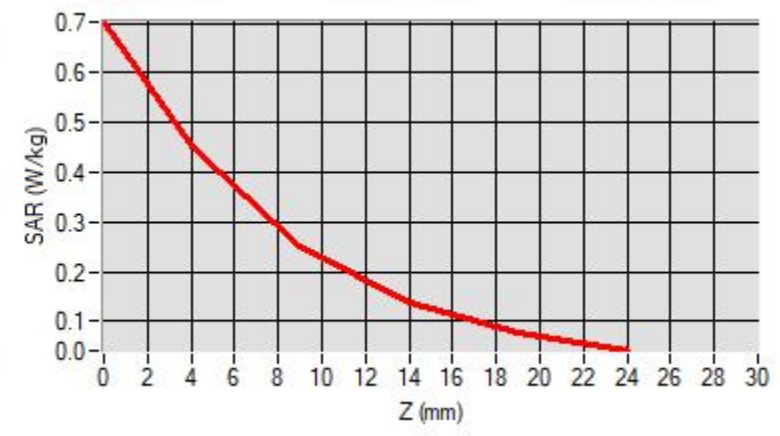

F. 3D Image

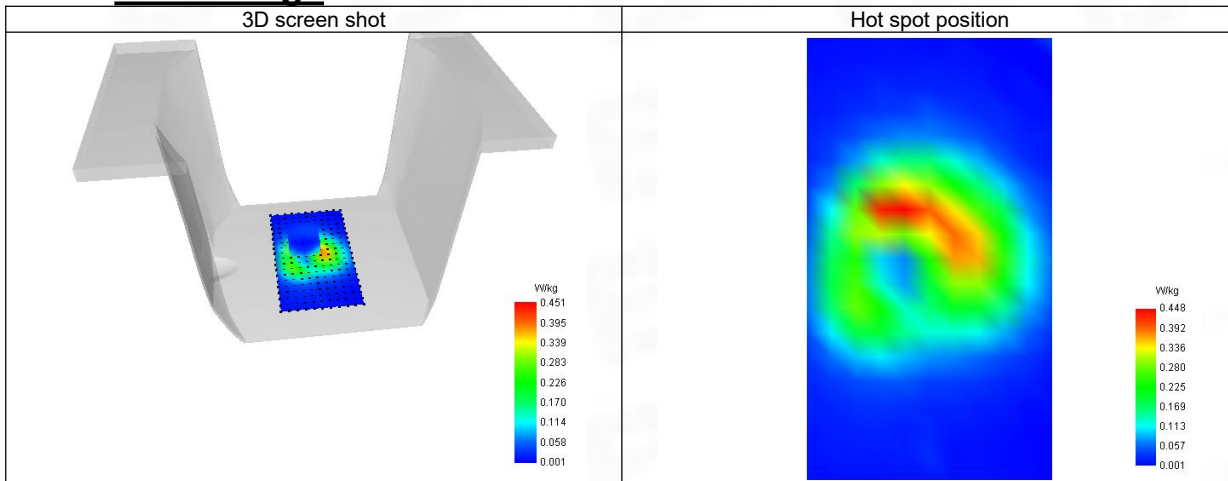

12-wrist-worn: back position in dist. 0mm Channel 21100 in LTE Band 7

SAR Measurement at LTE band 7 (Body, Validation Plane)

Date of measurement: 3/6/2025


A. Experimental conditions.

Probe	0125-EPGO-445
ConvF	1.27
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5.0mm, Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 7
Channels/Frequency	Middle (21100)/ frequency 2535.000 Mhz
Signal	LTE FDD
Cell Bandwidth	20 Mhz
Modulation	SC-OFDM - QPSK
RB offset	50
RB size	1

B. Permittivity

Middle TX Frequency (MHz)	2535.090
Relative permittivity (real part)	38.102
Relative permittivity (imaginary part)	13.058
Conductivity (S/m)	1.883

C. SAR Surface and Volume

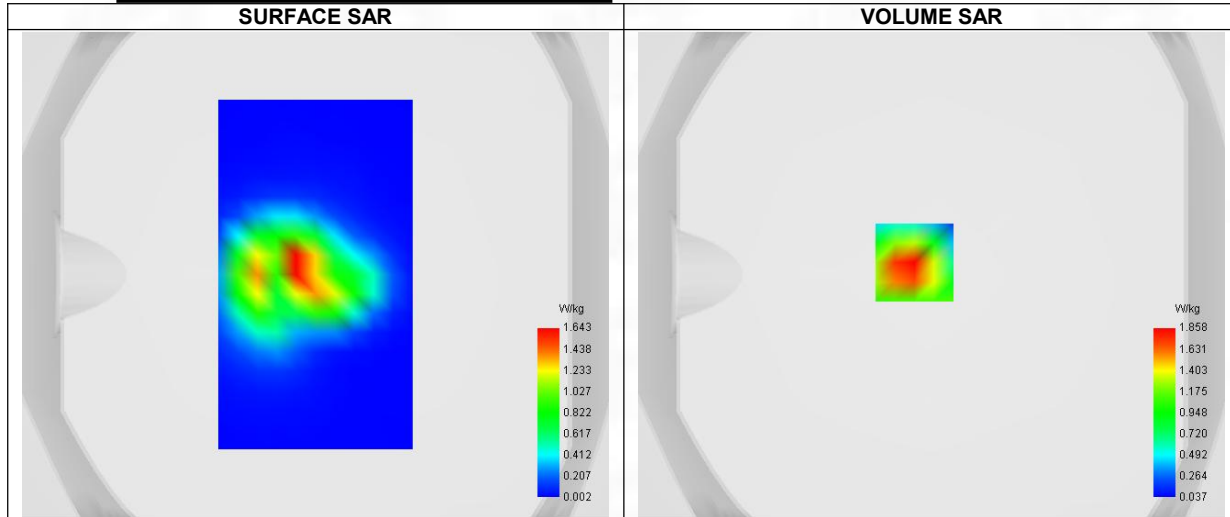


D. SAR 1g & 10g


SAR 10g (W/Kg)	0.801
SAR 1g (W/Kg)	1.782
Variation (%)	-3.030
Horizontal validation criteria: minimum distance (mm)	11.313
Vertical validation criteria: SAR ratio M2/M1 (%)	44.355

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	3.359	1.858	0.824	0.358	0.172

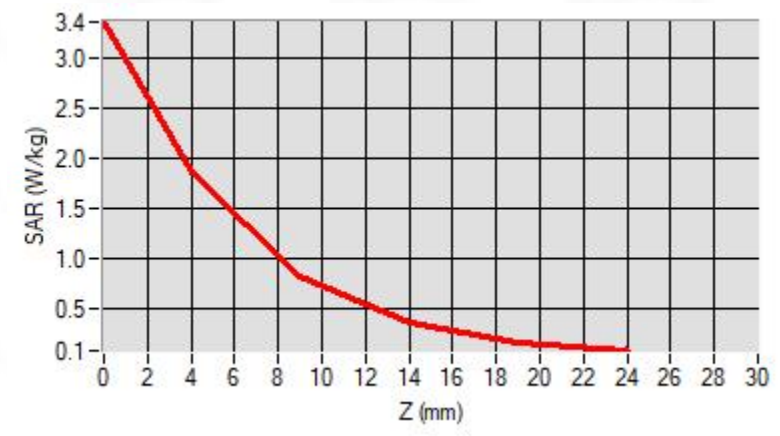

F. 3D Image

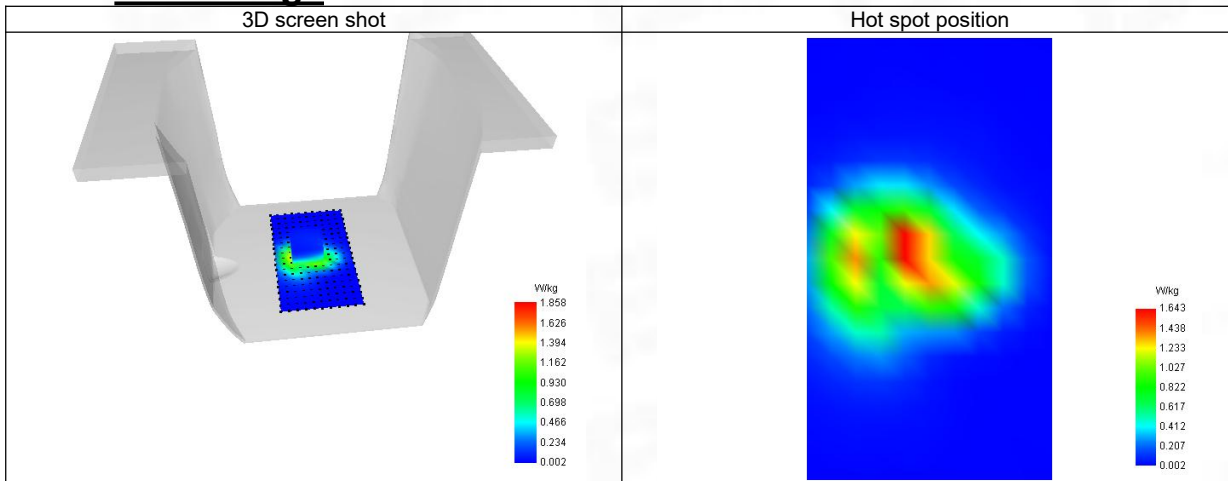

13-Next-to-mouth: front position in dist. 10mm Channel 23060 in LTE Band 12

SAR Measurement at LTE band 12 (Body, Validation Plane)

Date of measurement: 29/5/2025


A. Experimental conditions.

Probe	0125-EPGO-445
ConvF	1.24
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5.0mm, Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 12
Channels/Frequency	Lower (23060)/ frequency 704.000 Mhz
Signal	LTE FDD
Cell Bandwidth	10 Mhz
Modulation	SC-OFDM - QPSK
RB offset	25
RB size	1

B. Permittivity

Middle TX Frequency (MHz)	704.090
Relative permittivity (real part)	42.151
Relative permittivity (imaginary part)	22.537
Conductivity (S/m)	0.903

C. SAR Surface and Volume

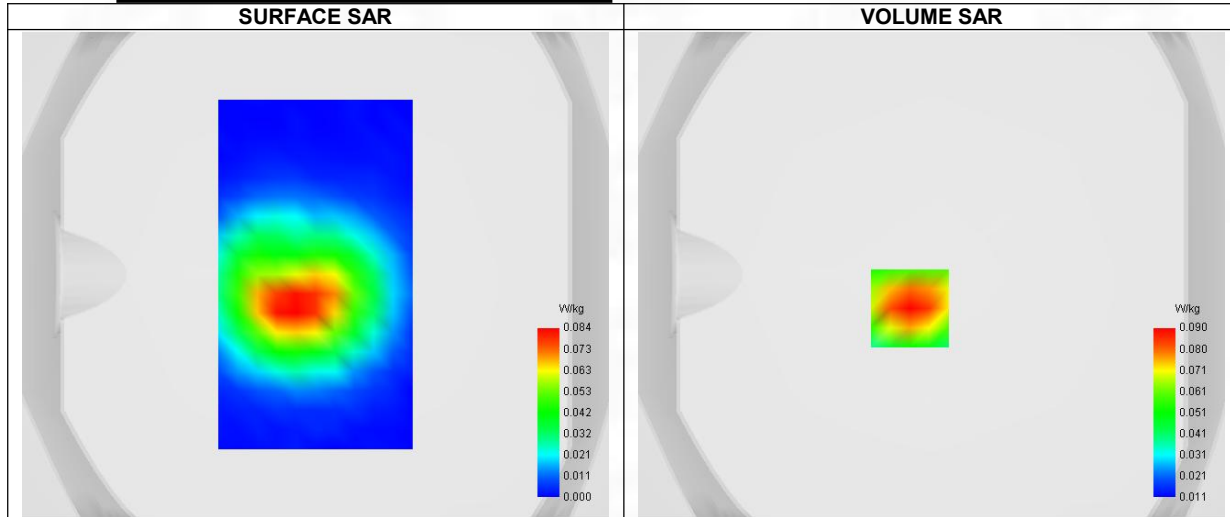


D. SAR 1g & 10g


SAR 10g (W/Kg)	0.054
SAR 1g (W/Kg)	0.085
Variation (%)	1.990
Horizontal validation criteria: minimum distance (mm)	22.627
Vertical validation criteria: SAR ratio M2/M1 (%)	66.670

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.125	0.090	0.060	0.041	0.029

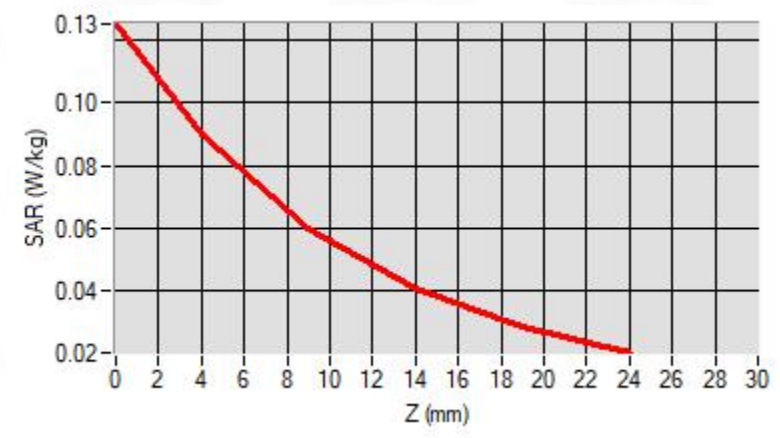

F. 3D Image

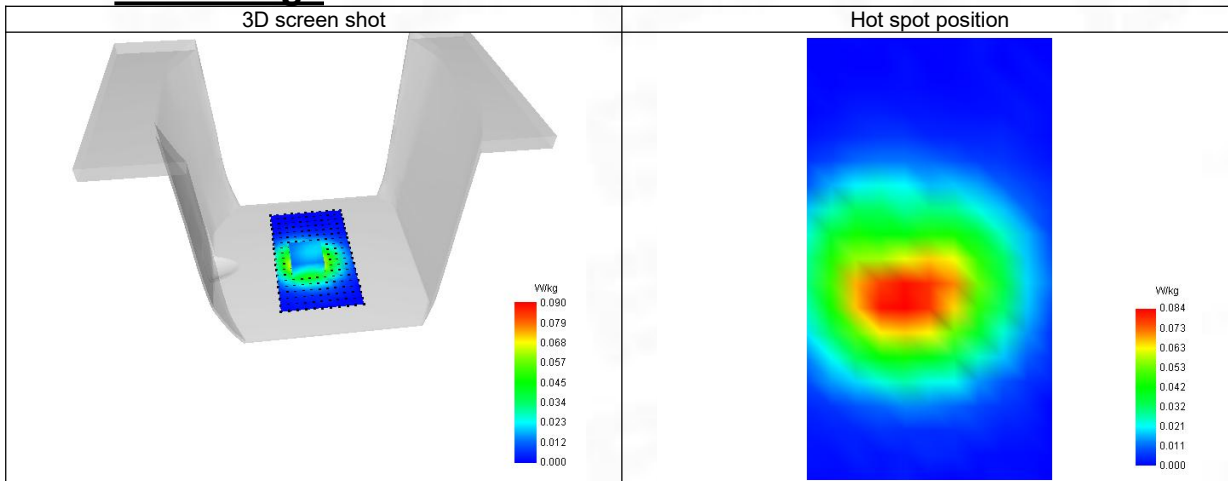

14-wrist-worn: back position in dist. 0mm Channel 23060 in LTE Band 12

SAR Measurement at LTE band 12 (Body, Validation Plane)

Date of measurement: 29/5/2025


A. Experimental conditions.

Probe	0125-EPGO-445
ConvF	1.24
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5.0mm, Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 12
Channels/Frequency	Lower (23060)/ frequency 704.000 Mhz
Signal	LTE FDD
Cell Bandwidth	10 Mhz
Modulation	SC-OFDM - QPSK
RB offset	25
RB size	1

B. Permittivity

Middle TX Frequency (MHz)	704.090
Relative permittivity (real part)	42.151
Relative permittivity (imaginary part)	22.537
Conductivity (S/m)	0.903

C. SAR Surface and Volume

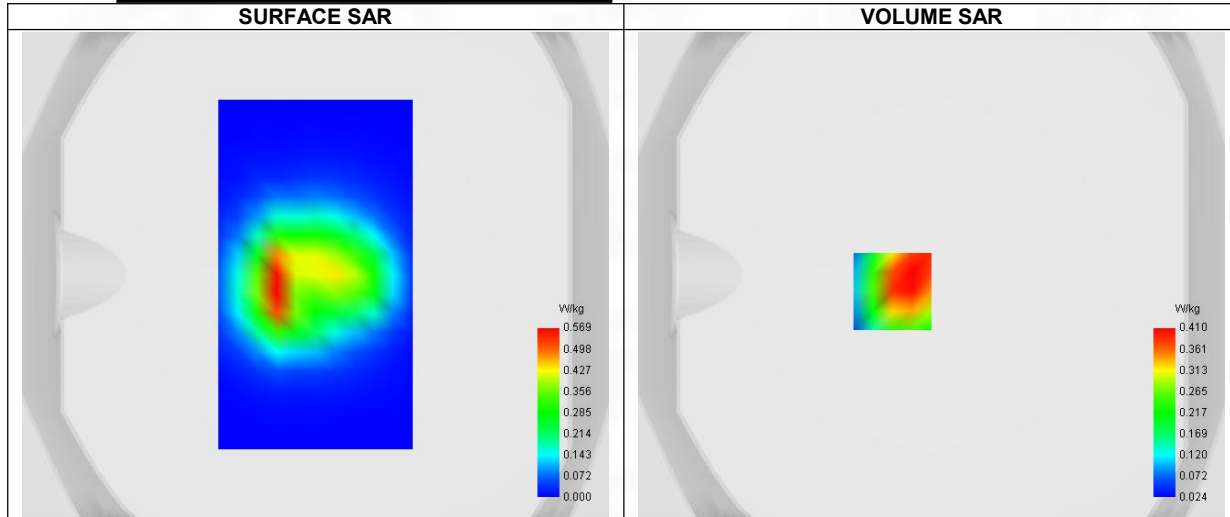


D. SAR 1g & 10g


SAR 10g (W/Kg)	0.202
SAR 1g (W/Kg)	0.395
Variation (%)	-1.640
Horizontal validation criteria: minimum distance (mm)	17.888
Vertical validation criteria: SAR ratio M2/M1 (%)	32.201

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.461	0.410	0.132	0.143	0.059

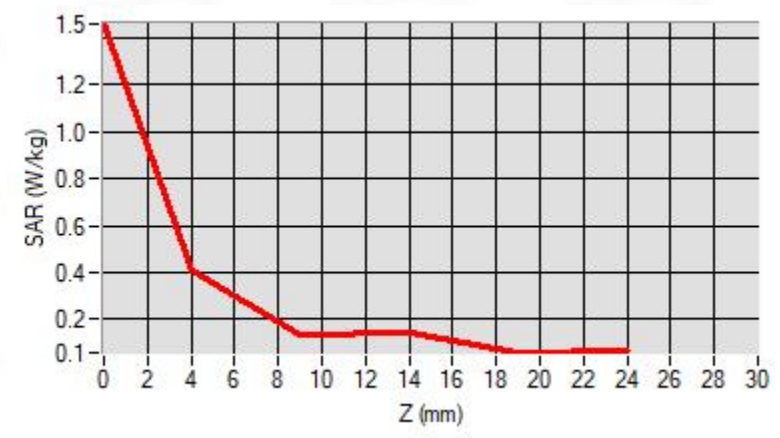

F. 3D Image

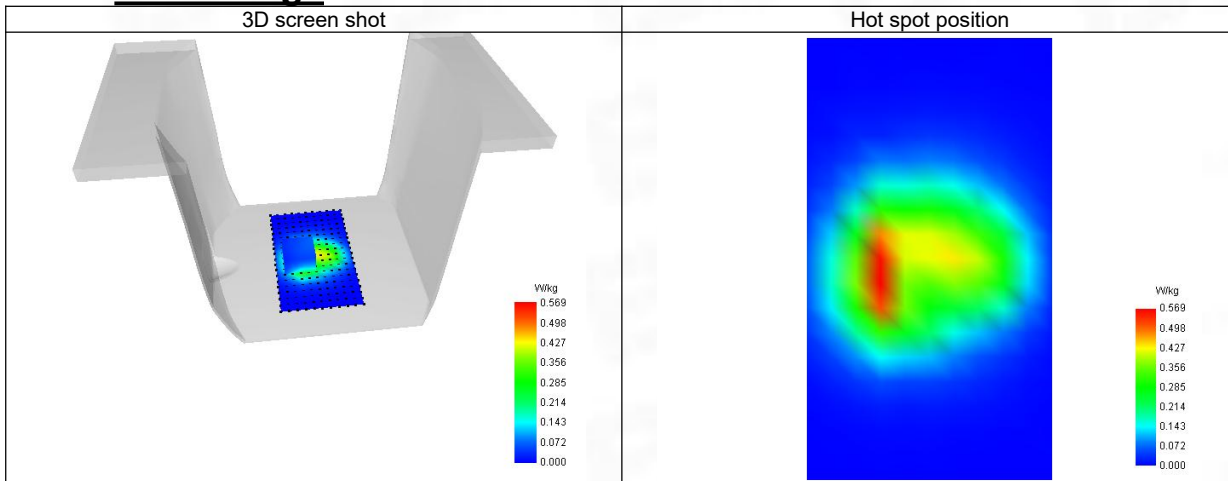

15-Next-to-mouth: front position in dist. 10mm Channel 23780 in LTE Band 17

SAR Measurement at LTE band 17 (Body, Validation Plane)

Date of measurement: 29/5/2025


A. Experimental conditions.

Probe	0125-EPGO-445
ConvF	1.24
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5.0mm, Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 17
Channels/Frequency	Lower (23780)/ frequency 709.000 Mhz
Signal	LTE FDD
Cell Bandwidth	10 Mhz
Modulation	SC-OFDM - QPSK
RB offset	25
RB size	1

B. Permittivity

Middle TX Frequency (MHz)	709.090
Relative permittivity (real part)	42.130
Relative permittivity (imaginary part)	22.419
Conductivity (S/m)	0.904

C. SAR Surface and Volume

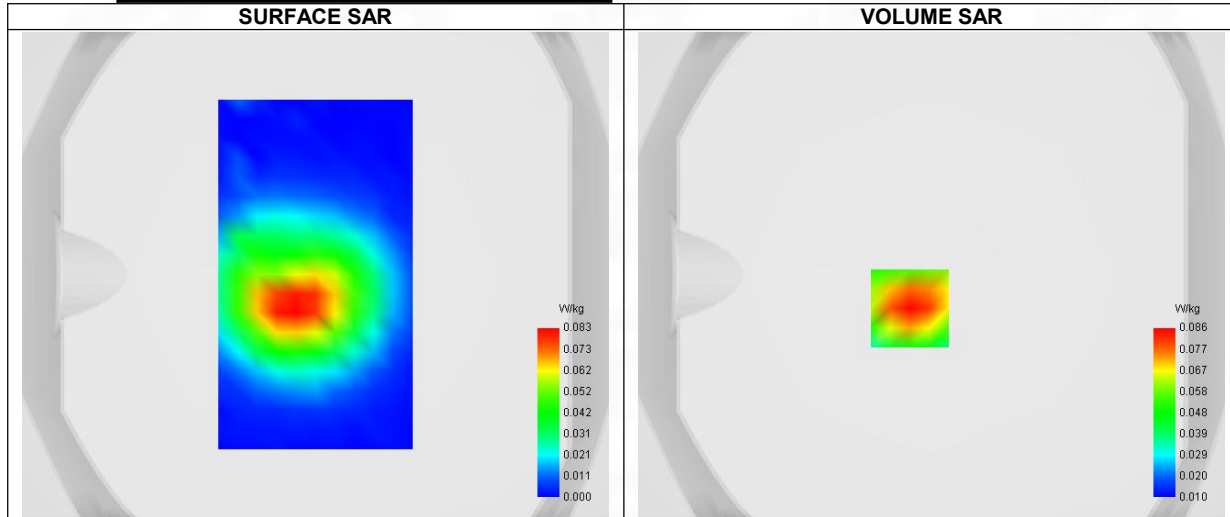


D. SAR 1g & 10g


SAR 10g (W/Kg)	0.051
SAR 1g (W/Kg)	0.081
Variation (%)	-0.420
Horizontal validation criteria: minimum distance (mm)	22.627
Vertical validation criteria: SAR ratio M2/M1 (%)	65.120

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.121	0.086	0.056	0.037	0.026

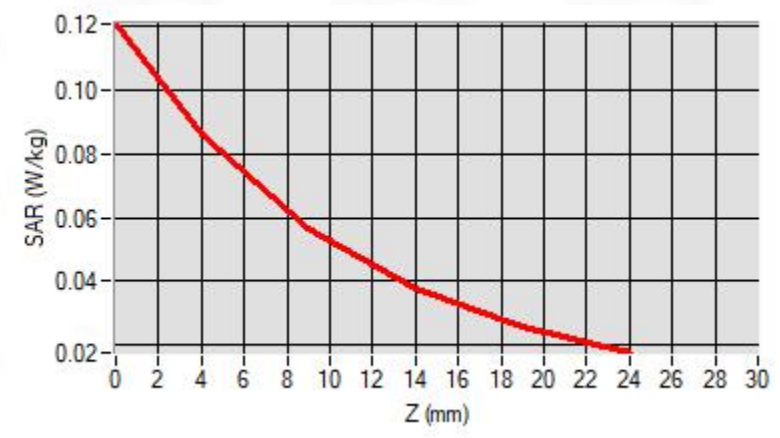

F. 3D Image

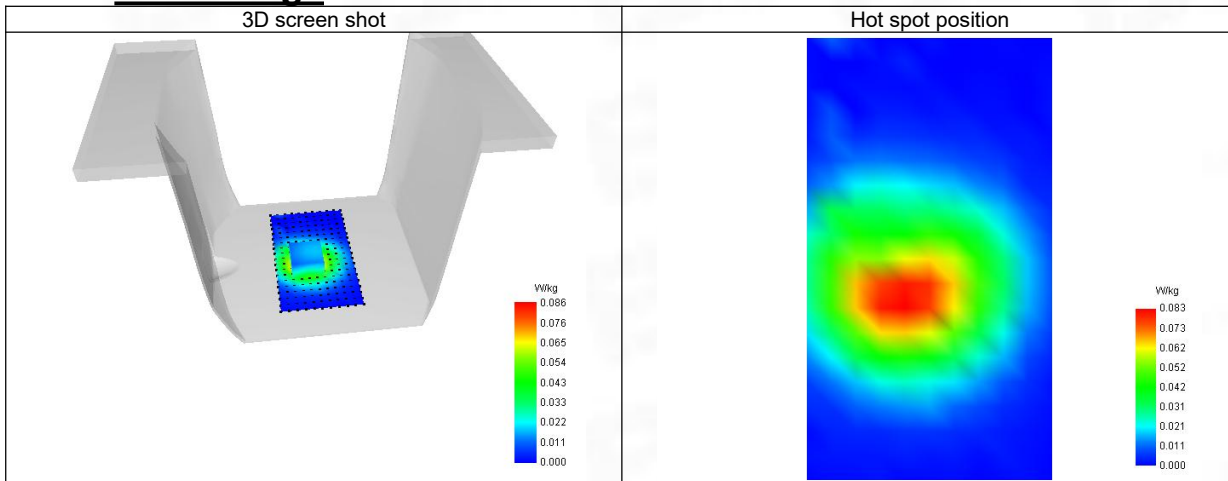

16-wrist-worn: back position in dist. 0mm Channel 23780 in LTE Band 17

SAR Measurement at LTE band 17 (Body, Validation Plane)

Date of measurement: 29/5/2025


A. Experimental conditions.

Probe	0125-EPGO-445
ConvF	1.24
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5.0mm, Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 17
Channels/Frequency	Lower (23780)/ frequency 709.000 Mhz
Signal	LTE FDD
Cell Bandwidth	10 Mhz
Modulation	SC-OFDM - QPSK
RB offset	25
RB size	1

B. Permittivity

Middle TX Frequency (MHz)	709.090
Relative permittivity (real part)	42.130
Relative permittivity (imaginary part)	22.419
Conductivity (S/m)	0.904

C. SAR Surface and Volume

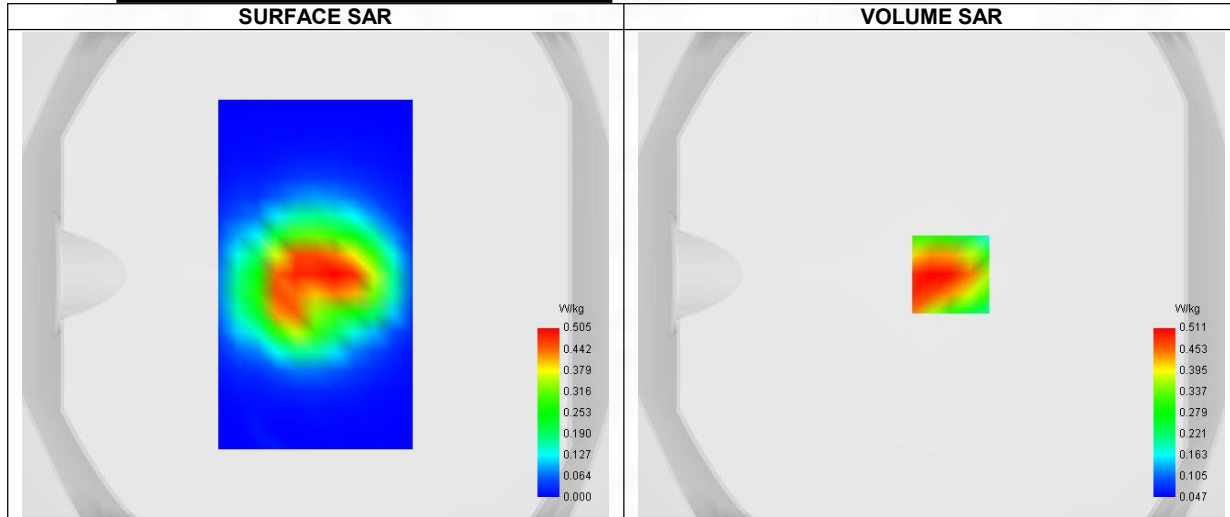


D. SAR 1g & 10g


SAR 10g (W/Kg)	0.289
SAR 1g (W/Kg)	0.488
Variation (%)	-1.450
Horizontal validation criteria: minimum distance (mm)	22.627
Vertical validation criteria: SAR ratio M2/M1 (%)	55.973

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.959	0.511	0.286	0.196	0.123

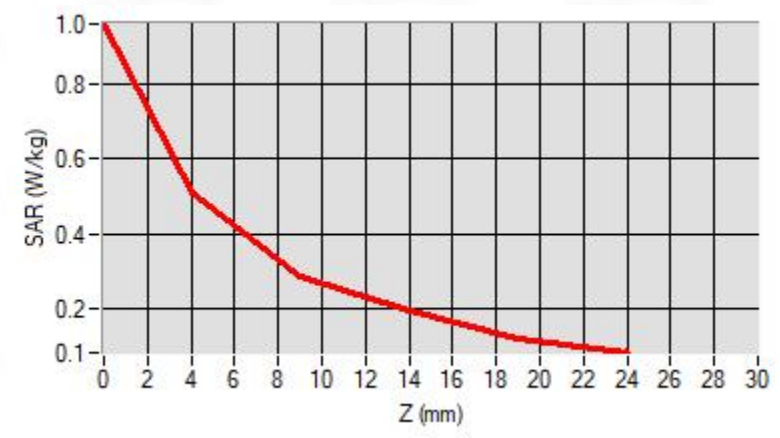

F. 3D Image

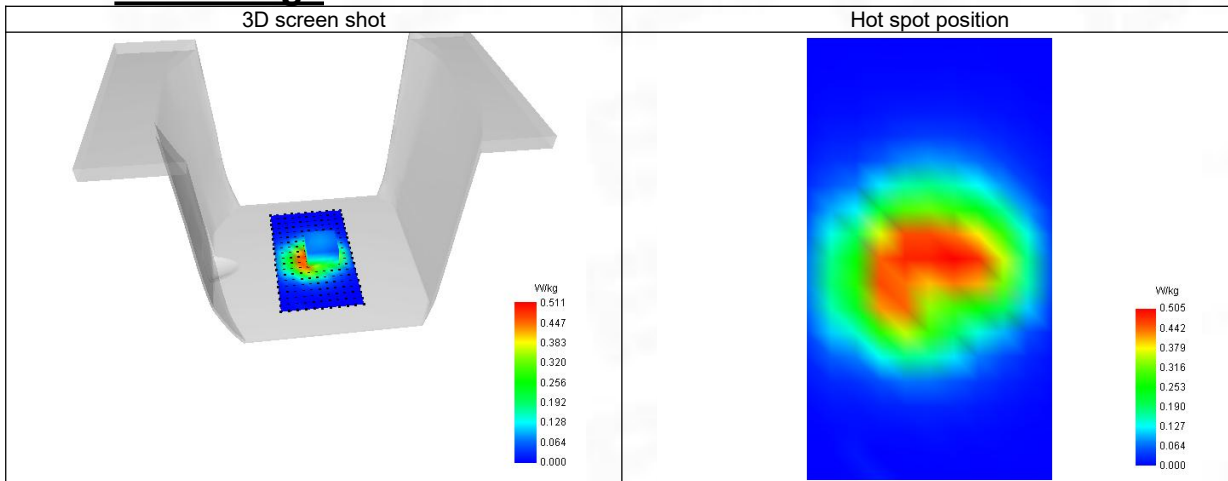

17-Next-to-mouth: front position in dist. 10mm Channel 11 in 802.11b

SAR Measurement at ISM (Body, Validation Plane)

Date of measurement: 3/6/2025


A. Experimental conditions.

Probe	0125-EPGO-445
ConvF	1.40
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5.0mm, Complete
Phantom	Validation plane
Device Position	Body
Band	ISM
Channels/Frequency	Higher (11)/ frequency 2462.000 Mhz
Signal	IEEE 802.11 b

B. Permittivity

Middle TX Frequency (MHz)	2462.000
Relative permittivity (real part)	39.064
Relative permittivity (imaginary part)	13.288
Conductivity (S/m)	1.823

C. SAR Surface and Volume

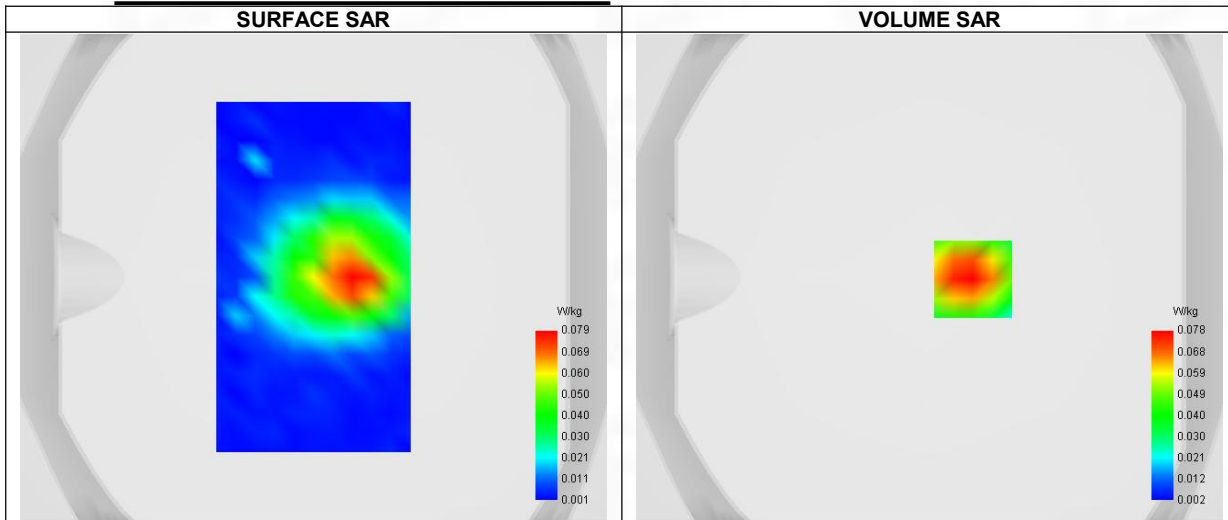


Maximum location: X=18.00, Y=-1.00 ; SAR Peak: 0.14 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.038
SAR 1g (W/Kg)	0.075
Variation (%)	-2.760
Horizontal validation criteria: minimum distance (mm)	17.888
Vertical validation criteria: SAR ratio M2/M1 (%)	50.002

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.133	0.078	0.039	0.021	0.013

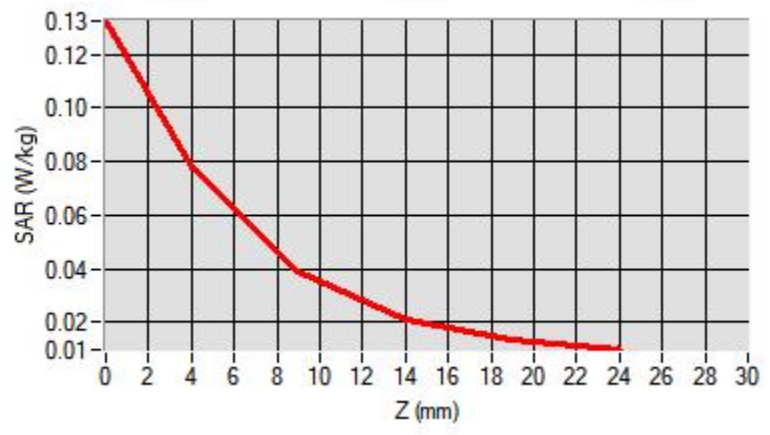

F. 3D Image

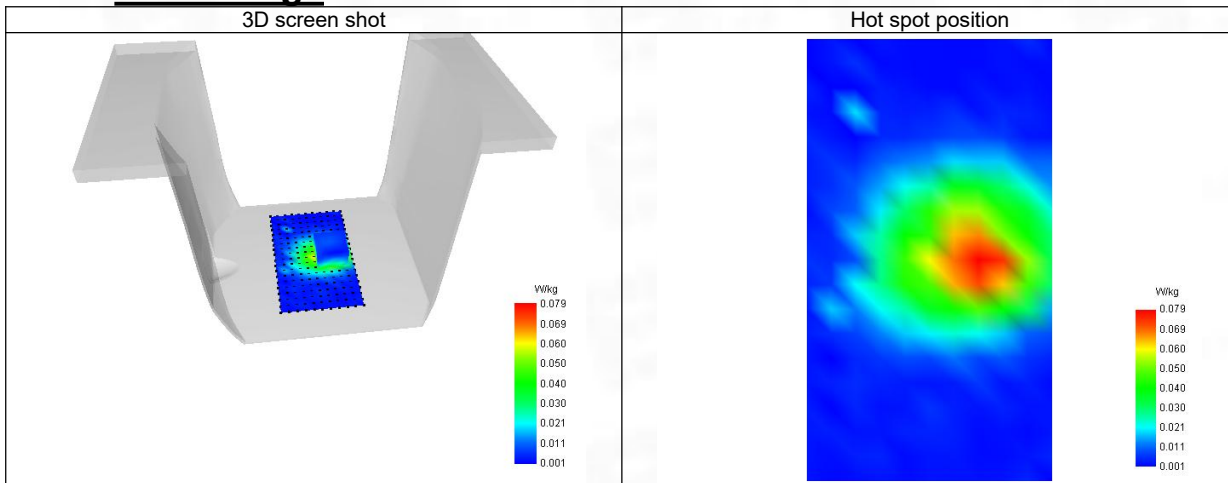

18-wrist-worn: back position in dist. 0mm Channel 11 in 802.11b

SAR Measurement at ISM (Body, Validation Plane)

Date of measurement: 3/6/2025


A. Experimental conditions.

Probe	0125-EPGO-445
ConvF	1.40
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5.0mm, Complete
Phantom	Validation plane
Device Position	Body
Band	ISM
Channels/Frequency	Higher (11)/ frequency 2462.000 Mhz
Signal	IEEE 802.11 b

B. Permittivity

Middle TX Frequency (MHz)	2462.000
Relative permittivity (real part)	39.064
Relative permittivity (imaginary part)	13.288
Conductivity (S/m)	1.823

C. SAR Surface and Volume

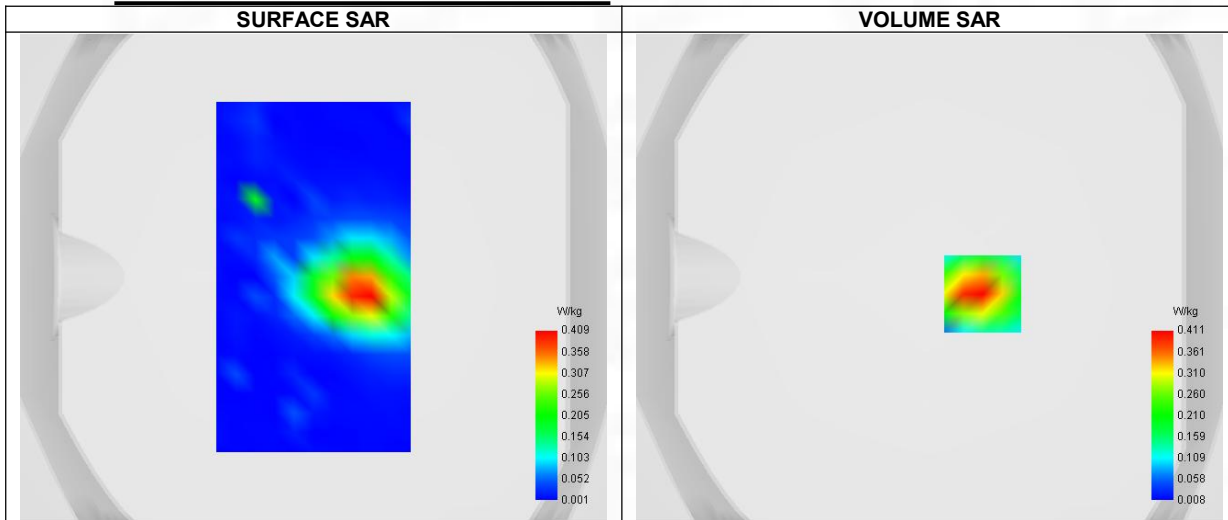


D. SAR 1g & 10g


SAR 10g (W/Kg)	0.196
SAR 1g (W/Kg)	0.385
Variation (%)	-2.290
Horizontal validation criteria: minimum distance (mm)	16.000
Vertical validation criteria: SAR ratio M2/M1 (%)	54.010

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.656	0.411	0.222	0.119	0.066

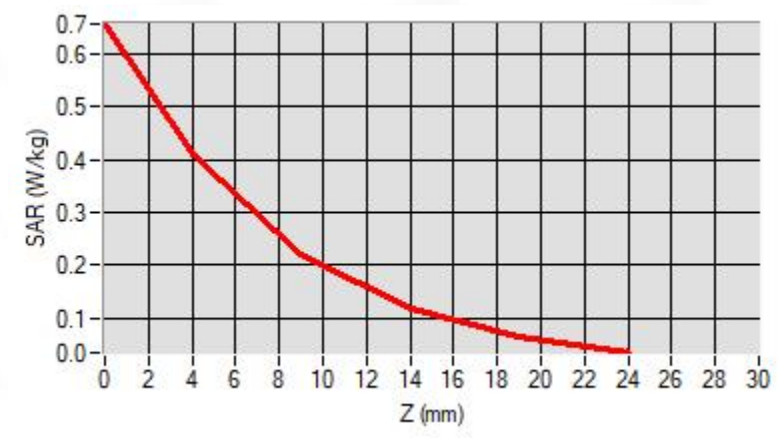

F. 3D Image

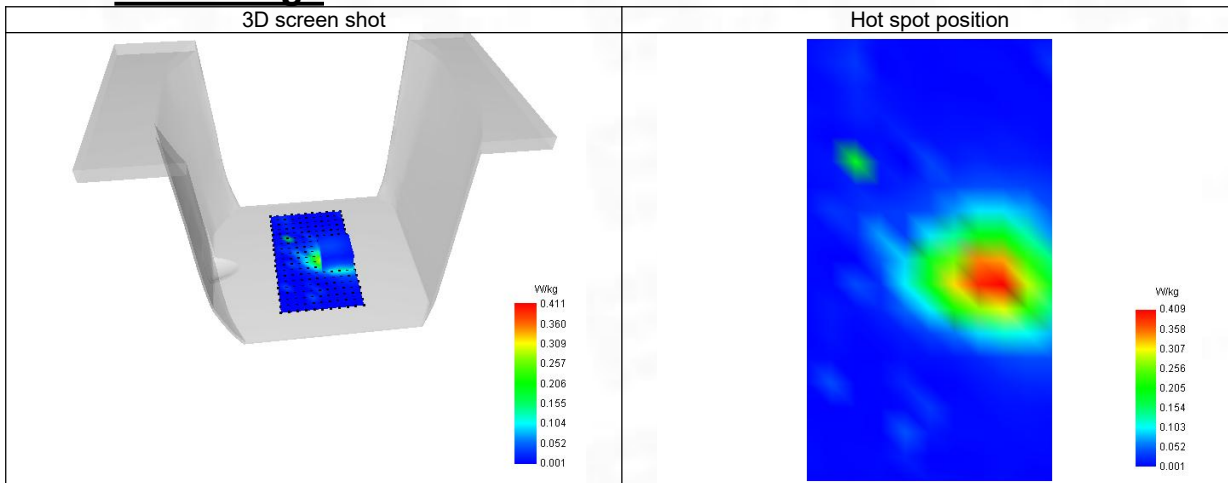

19-Next-to-mouth: front position in dist. 10mm Channel 39 in Bluetooth

SAR Measurement at Bluetooth (Body, Validation Plane)

Date of measurement: 3/6/2025


A. Experimental conditions.

Probe	0125-EPGO-445
ConvF	1.40
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5.0mm, Complete
Phantom	Validation plane
Device Position	Body
Band	Bluetooth
Channels/Frequency	Middle (39)/ frequency 2441.000 Mhz
Signal	Bluetooth

B. Permittivity

Middle TX Frequency (MHz)	2441.000
Relative permittivity (real part)	39.093
Relative permittivity (imaginary part)	13.341
Conductivity (S/m)	1.803

C. SAR Surface and Volume

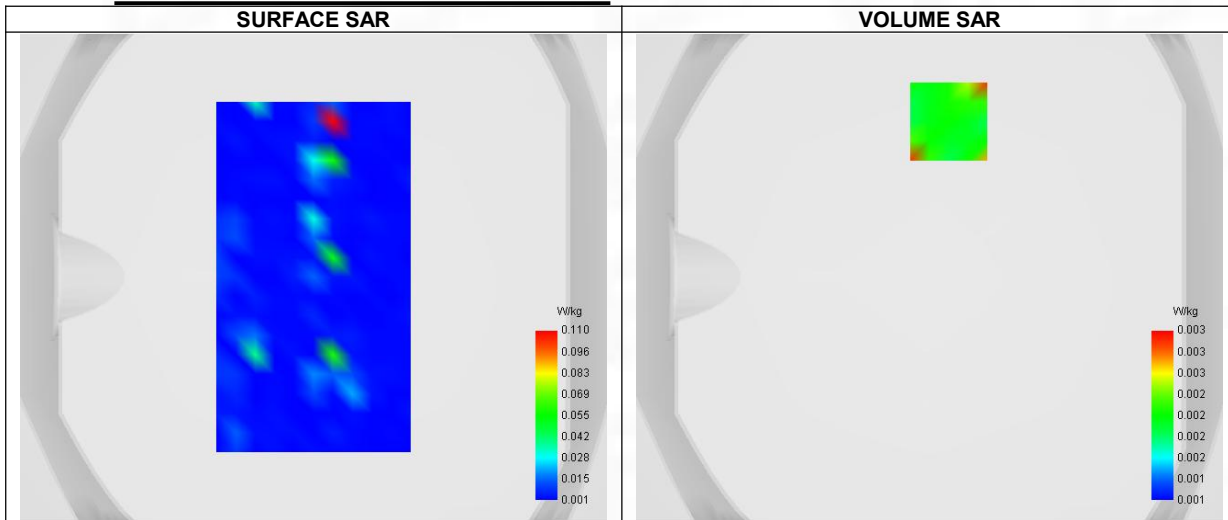


Maximum location: X=8.00, Y=64.00 ; SAR Peak: 0.00 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.001
SAR 1g (W/Kg)	0.002
Variation (%)	-3.000
Horizontal validation criteria: minimum distance (mm)	16.000
Vertical validation criteria: SAR ratio M2/M1 (%)	66.670

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.005	0.003	0.002	0.002	0.001

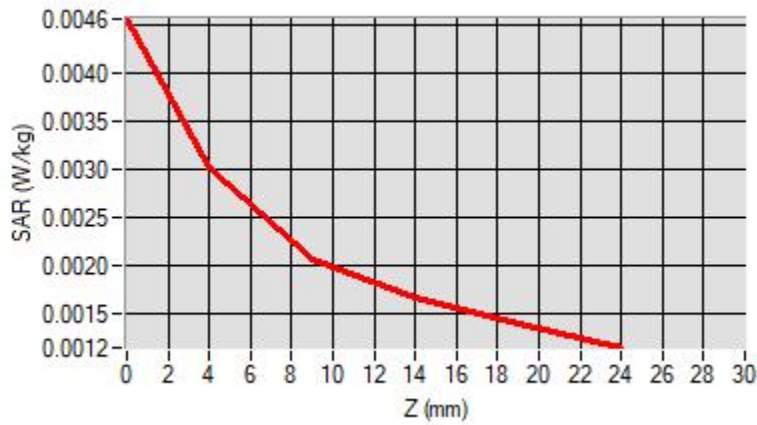

F. 3D Image

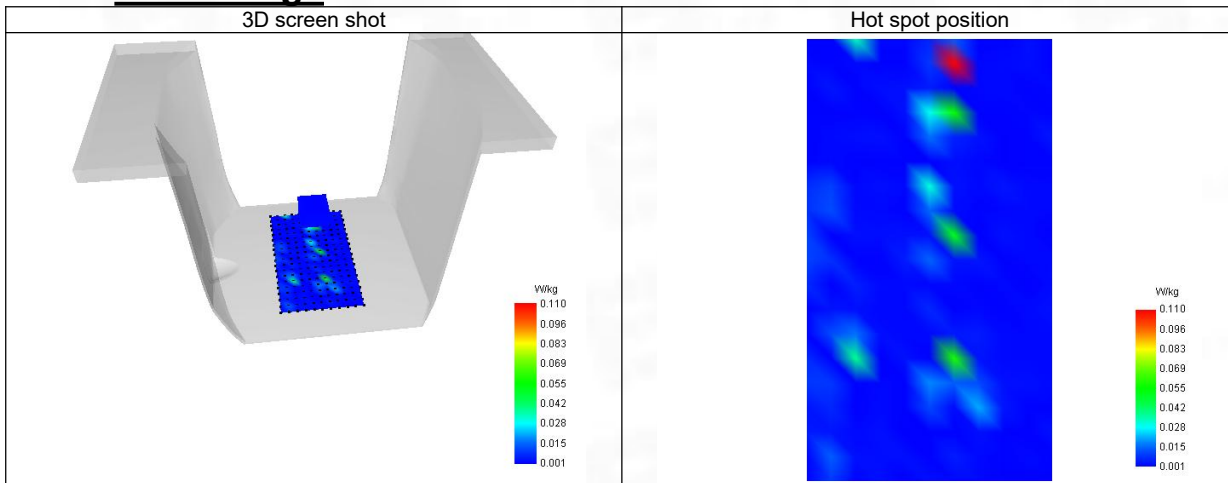

20-wrist-worn: back position in dist. 0mm Channel 39 in Bluetooth

SAR Measurement at Bluetooth (Body, Validation Plane)

Date of measurement: 29/5/2025


A. Experimental conditions.

Probe	0125-EPGO-445
ConvF	1.40
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5.0mm, Complete
Phantom	Validation plane
Device Position	Body
Band	Bluetooth
Channels/Frequency	Middle (39)/ frequency 2441.000 Mhz
Signal	Bluetooth

B. Permittivity

Middle TX Frequency (MHz)	2441.000
Relative permittivity (real part)	39.093
Relative permittivity (imaginary part)	13.341
Conductivity (S/m)	1.803

C. SAR Surface and Volume

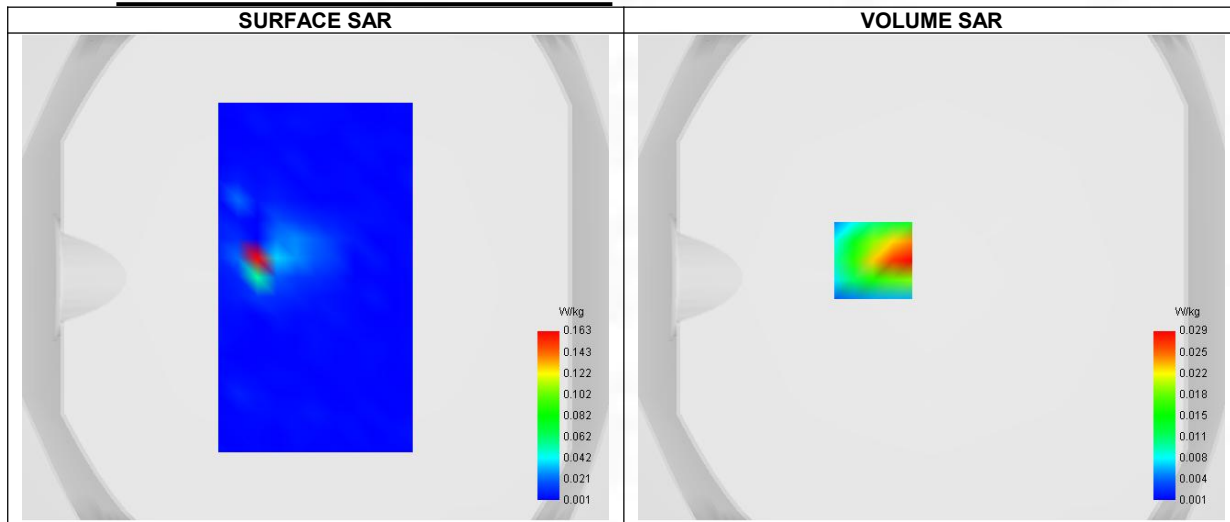


Maximum location: X=-24.00, Y=7.00 ; SAR Peak: 0.04 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.011
SAR 1g (W/Kg)	0.027
Variation (%)	0.390
Horizontal validation criteria: minimum distance (mm)	16.000
Vertical validation criteria: SAR ratio M2/M1 (%)	31.031

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.163	0.029	0.009	0.012	0.003

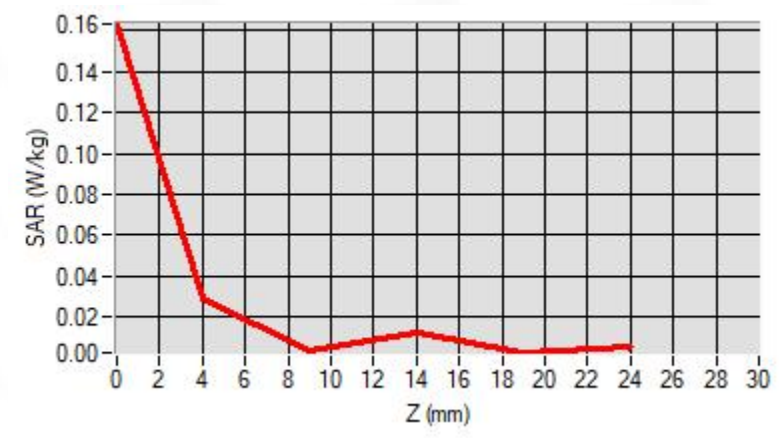


F. 3D Image

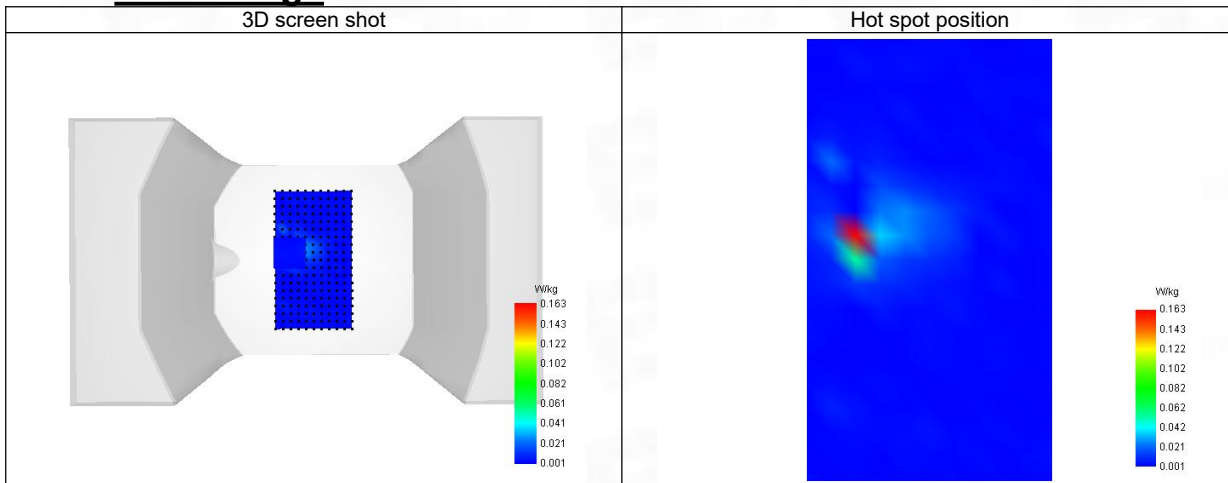

ANNEX D SAR Test Setup Photos

Reference Photo: simulation liquid depth 15cm

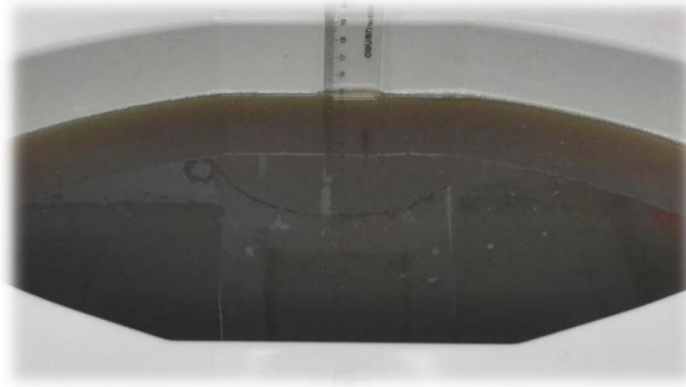

Reference Photos



Next-to-mouth (10mm)



wrist-worn (0mm)

ANNEX E EUT External and Internal Photos

Please refer to RF Report.

ANNEX F Calibration Information

Please refer to the document "Calibration.pdf".



BTF Testing Lab (Shenzhen) Co., Ltd.

F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street,
Bao'an District, Shenzhen, China

www.btf-lab.com

--END OF REPORT--