



HAC Receive Volume Control Test Report

For

Applicant Name: FOXX Development Inc.
Address: 3480 Preston Ridge Road, Suite500, Alpharetta, GA 30005, USA
EUT Name: Smart Phone
Brand Name: FOXX, FOXXD, MIRO
Model Number: A56

Issued By

Company Name: BTF Testing Lab (Shenzhen) Co., Ltd.
Address: 101/201/301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Subdistrict, Bao'an District, Shenzhen, China

Report Number: BTF250514R00203
Test Standards: ANSI C63.19:2019 FCC 47 CFR §20.19 TIA-5050:2018
FCC ID: 2AQRMA56

Test Conclusion: Pass
Test Date: 2025-05-18 to 2025-05-20
Date of Issue: 2025-05-23

Tested By: Jim. Yin
Date: 2025-05-23

Reviewed By: Amenda Zhong
Date: 2025-05-23

Approved By: Ryan.CJ
Date: 2025-05-23

Approved By: Ryan.CJ / EMC Manager
Date: 2025-05-23



Note: All the test results in this report only related to the testing samples. Which can be duplicated completely for the legal use with approval of applicant; it shall not be reproduced except in full without the written approval of BTF Testing Lab (Shenzhen) Co., Ltd., All the objections should be raised within thirty days from the date of issue. To validate the report, you can contact us.

Revision History		
Version	Issue Date	Revisions Content
Rev_V0	2025-05-23	Original
Note:	<i>Once the revision has been made, then previous versions reports are replaced by the latest version.</i>	

Table of Contents

1. Introduction	4
1.1 Identification of Testing Laboratory	4
1.2 Identification of the Responsible Testing Location	4
1.3 Laboratory Condition	4
1.4 Announcement	4
2. Product Information	5
2.1 Application Information	5
2.2 Manufacturer Information	5
2.3 Factory Information	5
2.4 General Description of Equipment under Test (EUT)	5
2.5 Equipment under Test Ancillary Equipment	6
2.6 Technical Information	6
3. Summary of Test Results	7
3.1 Test Standards	7
3.2 Air Interfaces / Bands Indicating Operating Modes	7
4. Test Uncertainty	8
5. Measurement System	9
5.1 MEASUREMENT SET-UP	9
6. Evaluation of Test	10
6.1 RECEIVE VOLUME CONTROL PERFORMANCE	10
6.2 RECEIVE DISTORTION AND NOISE PERFORMANCE	11
6.3 RECEIVE ACOUSTIC FREQUENCY RESPONSE PERFORMANCE	12
7. Test Equipment List	14
8. Air Interfaces / Bands used for testing	14
9. Test Result	15
9.1 Receive volume control, distortion and noise performance	15
9.2 Receive acoustic frequency response performance	17
ANNEX A Test Data	19
1.1 Receive Distortion and Noise 8N NB	20
1.2 Receive Distortion and Noise 2N NB	22
1.3 Receive Frequency Response	25
2.1 Receive Distortion and Noise 8N WB	26
2.2 Receive Distortion and Noise 2N WB	30
2.3 Receive Frequency Response	34
3.1 Receive Distortion and Noise 8N WB	35
3.2 Receive Distortion and Noise 2N WB	39
3.3 Receive Frequency Response	43
4.1 Receive Distortion and Noise 8N NB	44
4.2 Receive Distortion and Noise 2N NB	46
4.3 Receive Frequency Response	49
ANNEX B Test Setup Photo	50
ANNEX C CALIBRATION REPORT	50
ANNEX D EUT photograph	50

1. Introduction

1.1 Identification of Testing Laboratory

Company Name:	BTF Testing Lab (Shenzhen) Co., Ltd.
Address:	101/201/301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Subdistrict, Bao'an District, Shenzhen, China
Phone Number:	+86-0755-23146130
Fax Number:	+86-0755-23146130

1.2 Identification of the Responsible Testing Location

Test Location:	BTF Testing Lab (Shenzhen) Co., Ltd.
Address:	101/201/301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Subdistrict, Bao'an District, Shenzhen, China
Description:	All measurement facilities used to collect the measurement data are located at 101/201/301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Subdistrict, Bao'an District, Shenzhen, China
FCC Registration Number	518915
Designation Number	CN1409

1.3 Laboratory Condition

Ambient Temperature:	18°C to 25°C
Ambient Relative Humidity:	32% to 49%
Ambient Pressure:	100 kPa to 102 kPa

1.4 Announcement

- (1) The test report reference to the report template version v0.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing, reviewing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) This document may not be altered or revised in any way unless done so by BTF and all revisions are duly noted in the revisions section.
- (5) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
- (6) The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.

2. Product Information

2.1 Application Information

Company Name:	FOXX Development Inc.
Address:	3480 Preston Ridge Road, Suite500, Alpharetta, GA 30005, USA

2.2 Manufacturer Information

Company Name:	FOXX Development Inc.
Address:	3480 Preston Ridge Road, Suite500, Alpharetta, GA 30005, USA

2.3 Factory Information

Company Name:	FOXX Development Inc.
Address:	3480 Preston Ridge Road, Suite500, Alpharetta, GA 30005, USA

2.4 General Description of Equipment under Test (EUT)

EUT Name	Smart Phone
Under Test Model Name	A56
Series Model Name	N/A
Description of Model name differentiation	N/A
Hardware Version	N/A
Software and Firmware Version	N/A
Dimensions (Approx.)	148*72*8mm
Weight (Approx.)	158g

2.5 Equipment under Test Ancillary Equipment

Ancillary Equipment 1	Battery	
	Model No.	A56
	Serial No.	N/A
	Capacity	Typical capacity: 2000mAh
	Rated Voltage	3.8 V

2.6 Technical Information

Network and Wireless connectivity	2G Network GSM/GPRS/EGPRS 850/1900 3G Network WCDMA/HSDPA/HSUPA Band 2/4/5 4G Network FDD LTE Band 2/4/5/12/17/25/26/66/71 TDD LTE Band 41 2.4G WIFI 802.11b, 802.11g, 802.11n(HT20) Bluetooth (EDR+BLE)
-----------------------------------	--

3. Summary of Test Results

3.1 Test Standards

No.	Identity	Document Title
1	ANSI C63.19-2019	American National Standard for Methods of Measurement of Compatibility between Wireless Communication Devices and Hearing Aids
2	FCC 47 CFR §20.19	Hearing Aid Compatible Mobile Headsets
3	TIA-5050:2018	Telecommunications Communications Products Receive Volume Control Requirements for Wireless (Mobile) Devices
4	KDB285076 D05v01	HACWaiverDA23-914
5	KDB285076 D04v02	Volume Control
6	KDB285076 D01v06r04	HAC Guidance

3.2 Air Interfaces / Bands Indicating Operating Modes

Air Interface	Band	Type	Simultaneous Transmitter	Name of Service
GSM	850	VO	WLAN & BT	CMRS Voice
	1900	VO	WLAN & BT	CMRS Voice
	GPRS/EGPRS	DT	N/A	N/A
WCDMA	Band II	VO	WLAN & BT	CMRS Voice
	Band IV	VO	WLAN & BT	CMRS Voice
	Band V	VO	WLAN & BT	CMRS Voice
	HSPA	DT	N/A	N/A
LTE	Band 2	VD	WLAN & BT	VoLTE
	Band 4	VD	WLAN & BT	VoLTE
	Band 5	VD	WLAN & BT	VoLTE
	Band 12	VD	WLAN & BT	VoLTE
	Band 17	VD	WLAN & BT	VoLTE
	Band 25	VD	WLAN & BT	VoLTE
	Band 26 part 90	VD	WLAN & BT	VoLTE
	Band 26 part 22	VD	WLAN & BT	VoLTE
	Band 41	VD	WLAN & BT	VoLTE
	Band 66	VD	WLAN & BT	VoLTE
WLAN	Band 71	VD	WLAN & BT	VoLTE
	2.4g	VD	WWAN	VoWIFI
BT	2450	DT	WWAN	N/A

NA: Not Applicable
 VO: Voice Only
 VD: CMRS and IP Voice Service over Digital Transport
 DT: Digital Transport Only

Note: The hearing aid compatibility mode of the prototype was turned on during testing, and all tests were performed in HAC mode.

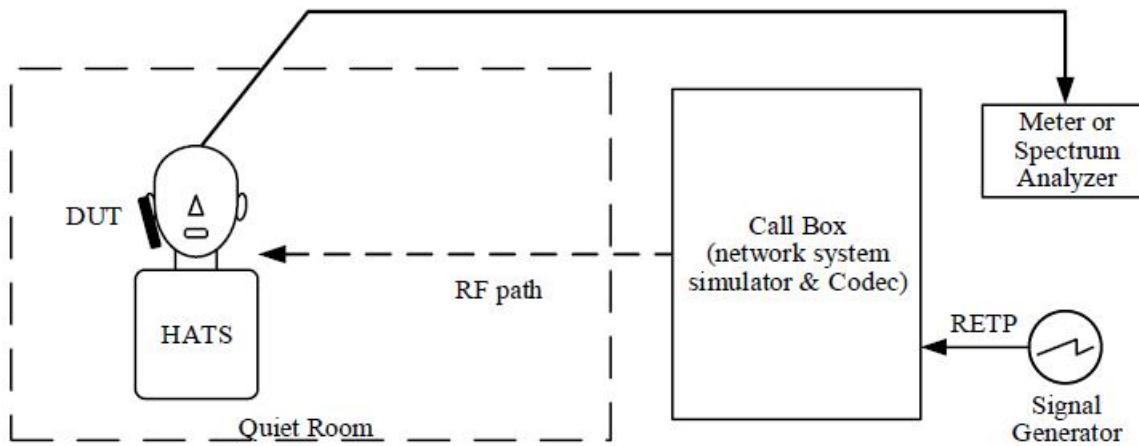
4. Test Uncertainty

UNCERTAINTY EVALUATION FOR AUDIO HAC MEASUREMENT					
Uncertainty Component	Tol (+- %)	Prob. Dist.	Div.	Uncertainty (dB)	Uncertainty (%)
Measurement System					
RF reflections	0.1	R	$\sqrt{3}$	0.06	
Acoustic noise	0.1	R	$\sqrt{3}$	0.06	
Probe coil sensitivity	0.49	R	$\sqrt{3}$	0.28	
Reference signal level	0.25	R	$\sqrt{3}$	0.14	
Positioning accuracy	0.4	R	$\sqrt{3}$	0.23	
Cable loss	0.1	N	2	0.05	
Frequency analyzer	0.15	R	$\sqrt{3}$	0.09	
System repeatability	0.2	N	1	0.20	
Repeatability of the WD	0.4	N	1	0.40	
Combined Standard Uncertainty		N	1	0.61	
Expanded uncertainty (confidence level of 95%, k = 2)		N	K=2	1.22	15.05
REPORTED Expanded uncertainty (confidence level of 95%, k = 2)		N	K=2	1.20	15.00

5. Measurement System

5.1 MEASUREMENT SET-UP

The general test arrangement is shown in Figure 1. The Call Box passes the voice channel stream to the DUT without modification. There is no gain or loss in the voice channel stream due to the Call Box interface.



NOTES:

1. Additional information related to the air interface for the various RF technologies is specified in several 3GPP documents. A list of these can be found in 3GPP TS 26.132 V14.0.0 clause 4
2. Additional information related to the test setup can be found in 3GPP TS 26.132, V14.0.0 clause 5.1.
3. The RETP (receive electrical test point) is the point in the device test arrangement where signals are applied to the DUT in the receive direction.

6. Evaluation of Test

6.1 RECEIVE VOLUME CONTROL PERFORMANCE

6.1.1 Requirement

1. With a mounting force of 8N, the DUT shall have at least one volume control setting that will produce a conversational gain of ≥ 18 dB with the output distortion and the frequency response meeting the requirements in clause 5.2.1 & 5.3.1 respectively.
2. With a mounting force of 2N, the DUT shall have at least one volume control setting that will produce a conversational gain of ≥ 6 dB with the output distortion and the frequency response meeting the requirements in clause 5.2.1 & 5.3.1 respectively.

NOTE: Other acoustic receive features may be available such as additional amplification, tone control, automatic gain control, etc. ANSI/TIA-4953-B contains performance requirements for output levels and tone control operation for amplified devices.

6.1.2 Method of Measurement

1. Configure the DUT with a mounting force of 8N and test equipment as shown in Figure 1 in an active call state with the applicable codec for the transmission mode under test.
2. Set the DUT volume control to the maximum setting.
3. If the DUT has an adjustable tone control feature, a tone control setting that meets the frequency response requirements in section 5.3.1 shall be used.
4. Apply the real speech test signal at a level of -20 dBm0 at the RETP and measure the acoustic output at the Drum Reference Point (DRP) over one complete sequence of the test signal.
5. Translate the measurement made at the DRP to the Free Field (FF) using the translation data in Annex B.
6. Over the applicable frequency band, determine the ASL in dB SPL for the resulting sound pressure level in accordance with Method B of ITU-T Recommendation P.56:
 - a. Narrowband 100 Hz through 4000 Hz.
 - b. Wideband 100 Hz through 7720 Hz.
7. Calculate the Conversational Gain by subtracting 70 dB from the measured dB SPL.
[Conversational Gain = (Measured dB SPL Level - 70 dB SPL) dB]
8. Measure the output distortion per clause 5.2. If a distortion failure occurs at the maximum volume control setting, reduce the volume control setting and repeat the measurement to determine if a setting can be found for which the conversational gain requirement is met without a distortion failure.
9. Repeat steps 2-8 with a mounting force of 2N.

6.1.3 Test Result

Refer to Part Nine test result.

Remark: The report only reflects the test data plots of worst mode (for GSM 850, WCDMA Band 5, LTE Band 2, 2.4G WIFI)

6.1.4 Test Conclusion

PASS.

6.2 RECEIVE DISTORTION AND NOISE PERFORMANCE

6.2.1 Requirement

With a mounting force of 8N and 2N, the ratio of the stimulus signal power to the 100 Hz to 8000 Hz total A-weighted distortion and noise power shall be ≥ 20 dB when tested over the range of 1/3 octave band center frequencies:

1. Narrowband transmission mode: Each 1/3 octave band center frequency from 400 Hz to 3150 Hz.
2. Wideband transmission mode: Each 1/3 octave band center frequency from 250 Hz to 5000 Hz.

6.2.2 Method of Measurement

1. Configure the DUT with a mounting force of 8N and test equipment as shown in Figure 1 in an active call state with the applicable codec for the transmission mode under test with the volume control at the setting determined in 5.1.1.
2. Receive distortion and noise is measured using the PN-SDNR procedure as described in Annex A.
3. To ensure DUT activation, apply the real speech test signal at a level of -20 dBm0 followed immediately by the initial 1/3 octave center frequency PN test signal in Table A.1 based on the narrowband or wideband operating mode. Measure the acoustic output at the DRP over the complete sequence of the PN test signal.
4. Translate the measurement made at the DRP to the FF using the translation data in Annex B.
5. Calculate the acoustic output unweighted total signal power of the stimulus measurement band as described in A.2.
6. Calculate the notched A-weighting distortion and noise components as described in A.3.
7. Calculate the ratio of the signal power to the total A-weighted distortion and noise power using Eq A-1.
8. Repeat for each of the remaining 1/3 octave center frequencies in Table A.1 based on the narrowband or wideband operating mode.
9. Repeat steps 2-8 with a mounting force of 2N.

6.2.3 Test Result

Refer to test Annex A.

Remark: The report only reflects the test data plots of worst mode (for GSM 850, WCDMA Band 5, LTE Band 2, 2.4G WIFI)

6.2.4 Test Conclusion

PASS.


6.3 RECEIVE ACOUSTIC FREQUENCY RESPONSE PERFORMANCE

6.3.1 Requirement

1. Narrowband: The 1/12 octave band frequency response after translation to the FF or DF shall fall between the upper and lower limits given in Table 1 and shown in Figure below.

Table 1 – Narrowband Receive Frequency Response Limits


Lower Limit Frequency (Hz)	Lower Limit (dB)	Upper Limit Frequency (Hz)	Upper Limit (dB)
300	-6	100	+6
3400	-6	4000	+6

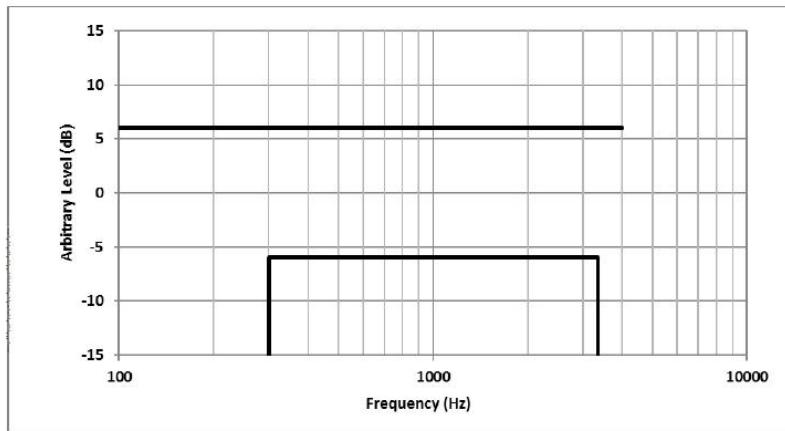

2. Wideband: The 1/12 octave band frequency response after translation to the FF or DF shall fall between the upper and lower limits given in Table 2 and shown in Figure below.

Table 2 – Wideband Receive Frequency Response Limits

Lower Limit Frequency (Hz)	Lower Limit (dB)	Upper Limit Frequency (Hz)	Upper Limit (dB)
200	-10	100	+6
300	-6	1000	+6
5000	-6	2000	+8
6300	-12	8000	+8

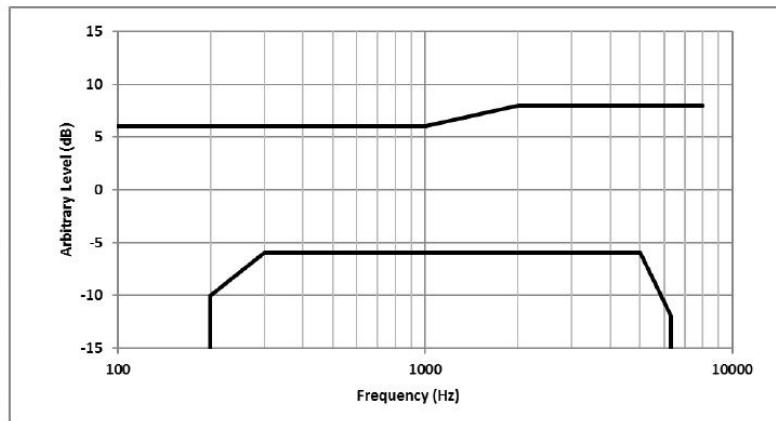

6.3.2 Method of Measurement

1. Configure the DUT with a mounting force of 8N and test equipment as shown in Figure 1 in an active call state with the applicable codec for the transmission mode under test with the volume control at the setting determined in 5.1.1.
2. If the DUT has an adjustable tone control feature the initial measurement is to be performed with the default tone control setting.
3. Apply the real speech test signal with a level of -20 dBm0 at the RETP.
4. Capture the frequency spectrum at the DRP of the HATS using real-time analysis with 1/12 octave bands over the frequency range from 100 Hz to 4000 Hz for narrowband measurements, or over the frequency range from 100 Hz to 8000 Hz for wideband measurements, averaged over the entire duration of the test signal.
5. Transform the DRP frequency spectrum measurement to the FF or DF (see Annex B).
6. Divide the 1/12 octave measurement data by the 1/12 octave frequency spectrum of the test signal at the RETP and present the measurement in terms of dB(Pa/V).
7. Apply the applicable frequency response limits to determine compliance.
8. If the default tone control setting does not meet the requirement, repeat the above steps for other tone control settings to determine a tone control setting that meets the requirements.
9. Repeat with a mounting force of 2N.

6.3.3 Test Result

Refer to test Annex A.

Remark: The report only reflects the test data plots of worst mode (for GSM 850, WCDMA Band 5, LTE Band 2, 2.4G WIFI)

6.3.4 Test Conclusion

PASS.

7. Test Equipment List

Description	Manufacturer	Model	Internal number	Cal. Date	Cal. Due
WIDEBAND RADIO COMMUNICATION TESTER	ROHDE&SCHWABER	CMW500	BTF-EM-023	2024/10/25	2025/10/24
Conditioning Amplifier	Brüel&Kjaer	Type 2690--030	BTF-EM- 146	2025/2/11	2026/2/10
Head and Torso Simulator	Brüel&Kjaer	Type 4128C	BTF-EM- 148	2025/2/11	2026/2/10
Sound Calibration	Brüel&Kjaer	Type 4231	BTF-EM- 149	2025/2/08	2026/2/07
Anechoic Test Chamber	MEC	Type 115	BTF-EM- 150	N/A	N/A

8. Air Interfaces / Bands used for testing

Air-interface	Band	Tested Codec	Tested Rate(kbps)
GSM	850/1900	EFR	/
WCDMA(UMTS)	Band 2/4/5	AMR-NB	4.75/12.2
		AMR-WB	6.6/23.85
VoLTE	Band 2/4/5/12/17/25/26/41/66/71	AMR-NB	4.75/12.2
		AMR-WB	6.6/23.85
VoWIFI	2.4G	AMR-NB	4.75/12.2
		AMR-WB	6.6/23.85

9. Test Result

9.1 Receive volume control, distortion and noise performance

Plot No.	Mode	Channel/Freq.	BW	Codec B itrate	Volume Level	Codec T type	Codec B andwidt h	Mountin g Force (N)	Freque ncy(H Z)	Min PN- SDNR(d B)	PN-SDN R Limb (dB)	Signal Q uality (d B)	Convers ational Gain	FCC CG Limit (d B)	CG Marg in (dB)	Verdi ct
1	GSM850	251/848.8MHz	/	/	Max	EFR	NB	8N	3150	21.08	20.00	88.65	18.65	6.00	12.65	Pass
			/	/	Max	EFR	NB	2N	3150	20.71	20.00	85.36	15.36	6.00	9.36	
2	PCS1900	661/1880.0MHz	/	/	Max	EFR	NB	8N	3150	22.46	20.00	89.70	19.70	6.00	13.70	Pass
			/	/	Max	EFR	NB	2N	3150	21.76	20.00	86.78	16.78	6.00	10.78	
3	WCDMA Band II	9538/1907.6MHz	/	12.20	Max	AMR	NB	8N	5000	23.55	20.00	90.49	20.49	6.00	14.49	Pass
			/	12.20	Max	AMR	NB	2N	5000	22.88	20.00	85.79	15.79	6.00	9.79	
			/	23.85	Max	AMR	WB	8N	5000	21.35	20.00	91.47	21.47	6.00	15.47	
			/	23.85	Max	AMR	WB	2N	5000	21.66	20.00	87.81	17.81	6.00	11.81	
4	WCDMA Band IV	1413/1732.6MHz	/	12.20	Max	AMR	NB	8N	5000	21.08	20.00	91.15	21.15	6.00	15.15	Pass
			/	12.20	Max	AMR	NB	2N	5000	21.42	20.00	91.28	15.28	6.00	9.28	
			/	23.85	Max	AMR	WB	8N	5000	22.48	20.00	85.85	20.85	6.00	14.85	
			/	23.85	Max	AMR	WB	2N	4000	22.65	20.00	86.13	16.13	6.00	10.13	
5	WCDMA Band V	4233/846.6MHz	/	12.20	Max	AMR	NB	8N	5000	21.36	20.00	90.62	20.62	6.00	14.62	Pass
			/	12.20	Max	AMR	NB	2N	5000	21.53	20.00	85.64	15.64	6.00	9.64	
			/	23.85	Max	AMR	WB	8N	5000	20.79	20.00	89.57	19.57	6.00	13.57	
			/	23.85	Max	AMR	WB	2N	5000	20.41	20.00	83.49	13.49	6.00	7.49	
6	LTE FDD Band 2	18900/1880.0MHz	20MHz_QPSK_1_49	12.20	Max	AMR	NB	8N	5000	21.38	20.00	91.06	21.06	6.00	15.06	Pass
				12.20	Max	AMR	NB	2N	5000	21.49	20.00	87.59	17.59	6.00	11.59	
				23.85	Max	AMR	WB	8N	5000	20.53	20.00	90.08	20.08	6.00	14.08	
				23.85	Max	AMR	WB	2N	5000	21.17	20.00	86.79	16.79	6.00	10.79	
7	LTE FDD Band 4	20300/1745.0MHz	20MHz_QPSK_1_0	12.20	Max	AMR	NB	8N	5000	21.64	20.00	91.46	21.46	6.00	15.46	Pass
				12.20	Max	AMR	NB	2N	5000	21.39	20.00	87.16	17.16	6.00	11.16	
				23.85	Max	AMR	WB	8N	5000	22.95	20.00	89.74	19.74	6.00	13.74	
				23.85	Max	AMR	WB	2N	5000	23.11	20.00	85.67	15.67	6.00	9.67	
8	LTE FDD Band 5	20600/844.0MHz	10MHz_QPSK_1_49	12.20	Max	AMR	NB	8N	5000	23.28	20.00	90.14	20.14	6.00	14.14	Pass
				12.20	Max	AMR	NB	2N	5000	23.34	20.00	84.79	14.79	6.00	8.79	
				23.85	Max	AMR	WB	8N	5000	22.67	20.00	90.48	20.48	6.00	14.48	
				23.85	Max	AMR	WB	2N	5000	22.53	20.00	85.10	15.10	6.00	9.10	
9	LTE FDD Band 12	23130/711.0MHz	10MHz_QPSK_1_49	12.20	Max	AMR	NB	8N	5000	21.99	20.00	89.31	19.31	6.00	13.31	Pass
				12.20	Max	AMR	NB	2N	5000	21.92	20.00	84.08	14.08	6.00	8.08	
				23.85	Max	AMR	WB	8N	5000	22.26	20.00	89.46	19.46	6.00	13.46	
				23.85	Max	AMR	WB	2N	5000	22.37	20.00	85.20	15.20	6.00	9.20	
10	LTE FDD Band 17	23800/711.0MHz	10MHz_QPSK_1_49	12.20	Max	AMR	NB	8N	5000	24.51	20.00	90.21	20.21	6.00	14.21	Pass
				12.20	Max	AMR	NB	2N	5000	23.87	20.00	84.92	14.92	6.00	8.92	
				23.85	Max	AMR	WB	8N	5000	24.13	20.00	90.62	20.62	6.00	14.62	
				23.85	Max	AMR	WB	2N	5000	24.56	20.00	85.11	15.11	6.00	9.11	

Plot No.	Mode	Channel/Freq.	BW	Codec B itrate	Volume Level	Codec T ype	Codec B andwidt h	Mountin g Force (N)	Freque ncy(H Z)	Min PN- SDNR(d B)	PN-SDN R Limb (dB)	Signal Q uality (d B)	Convers ational Gain	FCC CG Limit (d B)	CG Marg in (dB)	Verdi ct
11	LTE FDD Band 25	26365/1882.5MHz	20MHz_QPSK_1_49	12.20	Max	AMR	NB	8N	5000	22.85	20.00	92.07	22.07	6.00	16.07	Pass
				12.20	Max	AMR	NB	2N	5000	23.14	20.00	85.61	15.61	6.00	9.61	
				23.85	Max	AMR	WB	8N	5000	21.62	20.00	91.54	21.54	6.00	15.54	
				23.85	Max	AMR	WB	2N	5000	21.54	20.00	85.16	15.16	6.00	9.16	
12	LTE FDD Band 26 Part 90	26740/819.0MHz	10MHz_QPSK_1_0	12.20	Max	AMR	NB	8N	5000	22.34	20.00	90.43	20.43	6.00	14.43	Pass
				12.20	Max	AMR	NB	2N	5000	21.89	20.00	84.52	14.52	6.00	8.52	
				23.85	Max	AMR	WB	8N	5000	21.21	20.00	89.34	19.34	6.00	13.34	
				23.85	Max	AMR	WB	2N	5000	21.49	20.00	84.29	14.29	6.00	8.29	
13	LTE FDD Band 26 part 22	26915/836.5MHz	15MHz_QPSK_1_74	12.20	Max	AMR	NB	8N	5000	22.33	20.00	91.67	21.67	6.00	15.67	Pass
				12.20	Max	AMR	NB	2N	5000	22.79	20.00	85.22	15.22	6.00	9.22	
				23.85	Max	AMR	WB	8N	5000	23.01	20.00	91.10	21.10	6.00	15.10	
				23.85	Max	AMR	WB	2N	5000	22.78	20.00	85.03	15.03	6.00	9.03	
14	LTE TDD Band 41	41490/2680.0MHz	20MHz_QPSK_1_99	12.20	Max	AMR	NB	8N	5000	21.38	20.00	92.48	22.48	6.00	16.48	Pass
				12.20	Max	AMR	NB	2N	5000	21.54	20.00	85.71	15.71	6.00	9.71	
				23.85	Max	AMR	WB	8N	5000	22.42	20.00	92.15	22.15	6.00	16.15	
				23.85	Max	AMR	WB	2N	5000	22.09	20.00	85.21	15.21	6.00	9.21	
15	LTE FDD Band 66	132322/1745.0MHz	20MHz_QPSK_1_99	12.20	Max	AMR	NB	8N	5000	21.60	20.00	91.05	21.05	6.00	15.05	Pass
				12.20	Max	AMR	NB	2N	5000	21.88	20.00	85.11	15.11	6.00	9.11	
				23.85	Max	AMR	WB	8N	5000	22.21	20.00	90.71	20.71	6.00	14.71	
				23.85	Max	AMR	WB	2N	5000	22.04	20.00	84.62	14.62	6.00	8.62	
16	LTE FDD Band 71	133322/683.0MHz	20MHz_QPSK_1_49	12.20	Max	AMR	NB	8N	5000	21.70	20.00	90.60	20.60	6.00	14.60	Pass
				12.20	Max	AMR	NB	2N	5000	21.94	20.00	85.11	15.11	6.00	9.11	
				23.85	Max	AMR	WB	8N	5000	22.16	20.00	90.36	20.36	6.00	14.36	
				23.85	Max	AMR	WB	2N	5000	22.27	20.00	84.72	14.72	6.00	8.72	
17	2.4G WIFI 802.11b	1/2412.0MHz	/	12.20	Max	AMR	NB	8N	3150	20.33	20.00	89.13	19.13	6.00	13.13	Pass
				12.20	Max	AMR	NB	2N	3150	20.63	20.00	85.49	15.49	6.00	9.49	
				23.85	Max	AMR	WB	8N	3150	20.81	20.00	89.64	19.64	6.00	13.64	
				23.85	Max	AMR	WB	2N	3150	21.10	20.00	85.55	15.55	6.00	9.55	

Note:

1. With a mounting force of 8N, the DUT shall have at least one volume control setting that will produce a conversational gain of ≥ 18 dB with the output distortion and the frequency response.
2. With a mounting force of 2N, the DUT shall have at least one volume control setting that will produce a conversational gain of ≥ 6 dB with the output distortion and the frequency response.
3. With a mounting force of 8N and 2N, the ratio of the stimulus signal power to the 100 Hz to 8000 Hz total A-weighted distortion and noise power shall be ≥ 20 dB.

9.2 Receive acoustic frequency response performance

Plot No.1 0	Model	LTE FDD Band 17	Channel/Freq.23800 /711.0MHz	BW	Volume Level	Codec Type	Codec Bandwidth	Mounting Force (N)	RFR
									Test Result
1	GSM850	251/848.8MHz	/	/	Max	EFR	NB	2N	Pass
					Max	EFR	NB	8N	
2	PCS1900	661/1880.0MHz	/	/	Max	EFR	NB	2N	Pass
					Max	EFR	NB	8N	
3	WCDMA Band II	9538/1907.6MHz	/	/	Max	AMR	NB	2N	Pass
					Max	AMR	NB	8N	
					Max	AMR	WB	2N	
					Max	AMR	WB	8N	
4	WCDMA Band IV	1413/1732.6MHz	/	/	Max	AMR	NB	2N	Pass
					Max	AMR	NB	8N	
					Max	AMR	WB	2N	
					Max	AMR	WB	8N	
5	WCDMA Band V	4233/846.6MHz	/	/	Max	AMR	NB	2N	Pass
					Max	AMR	NB	8N	
					Max	AMR	WB	2N	
					Max	AMR	WB	8N	
6	LTE FDD Band 2	18900/1880.0MHz	20MHz_QPSK_1_49	/	Max	AMR	NB	2N	Pass
					Max	AMR	NB	8N	
					Max	AMR	WB	2N	
					Max	AMR	WB	8N	
7	LTE FDD Band 4	20300/1745.0MHz	20MHz_QPSK_1_0	/	Max	AMR	NB	2N	Pass
					Max	AMR	NB	8N	
					Max	AMR	WB	2N	
					Max	AMR	WB	8N	
8	LTE FDD Band 5	20600/844.0MHz	10MHz_QPSK_1_49	/	Max	AMR	NB	2N	Pass
					Max	AMR	NB	8N	
					Max	AMR	WB	2N	
					Max	AMR	WB	8N	
9	LTE FDD Band 12	23130/711.0MHz	10MHz_QPSK_1_49	/	Max	AMR	NB	2N	Pass
					Max	AMR	NB	8N	
					Max	AMR	WB	2N	
					Max	AMR	WB	8N	
10	LTE FDD Band 17	23800/711.0MHz	10MHz_QPSK_1_49	/	Max	AMR	NB	2N	Pass
					Max	AMR	NB	8N	
					Max	AMR	WB	2N	
					Max	AMR	WB	8N	

Plot No.	Mode	Channel/Freq.	BW	Volume Level	Codec Type	Codec Bandwidth	Mounting Force (N)	RFR
								Test Result
11	LTE FDD Band 25	26365/1882.5MHz	20MHz_QPSK_1_49	Max	AMR	NB	2N	Pass
				Max	AMR	NB	8N	
				Max	AMR	WB	2N	
				Max	AMR	WB	8N	
12	LTE FDD Band 26 Part 90	26740/819.0MHz	10MHz_QPSK_1_0	Max	AMR	NB	2N	Pass
				Max	AMR	NB	8N	
				Max	AMR	WB	2N	
				Max	AMR	WB	8N	
13	LTE FDD Band 26 part 22	26915/836.5MHz	15MHz_QPSK_1_74	Max	AMR	NB	2N	Pass
				Max	AMR	NB	8N	
				Max	AMR	WB	2N	
				Max	AMR	WB	8N	
14	LTE TDD Band 41	41490/2680.0MHz	20MHz_QPSK_1_99	Max	AMR	NB	2N	Pass
				Max	AMR	NB	8N	
				Max	AMR	WB	2N	
				Max	AMR	WB	8N	
15	LTE FDD Band 66	132322/1745.0MHz	20MHz_QPSK_1_99	Max	AMR	NB	2N	Pass
				Max	AMR	NB	8N	
				Max	AMR	WB	2N	
				Max	AMR	WB	8N	
16	LTE FDD Band 71	133322/683.0MHz	20MHz_QPSK_1_49	Max	AMR	NB	2N	Pass
				Max	AMR	NB	8N	
				Max	AMR	WB	2N	
				Max	AMR	WB	8N	
17	2.4G WIFI 802.11b	1/2412.0MHz	/	Max	AMR	NB	2N	Pass
				Max	AMR	NB	8N	
				Max	AMR	WB	2N	
				Max	AMR	WB	8N	


Volume Control Verification Test Results





Date of Testing	Test Location	Air Interface Equipment	Acoustical Calibrator	HATS Sens.(dB)	Ambient Noise(dBA)
18/5/2025	JB HATS R	CMW 500	B&K 4231 & UA1546	97.16	32.59
19/5/2025	JB HATS R	CMW 500	B&K 4231 & UA1546	97.11	32.35
20/5/2025	JB HATS R	CMW 500	B&K 4231 & UA1546	97.14	33.67


ANNEX A Test Data

1. GSM 850 in channel 512

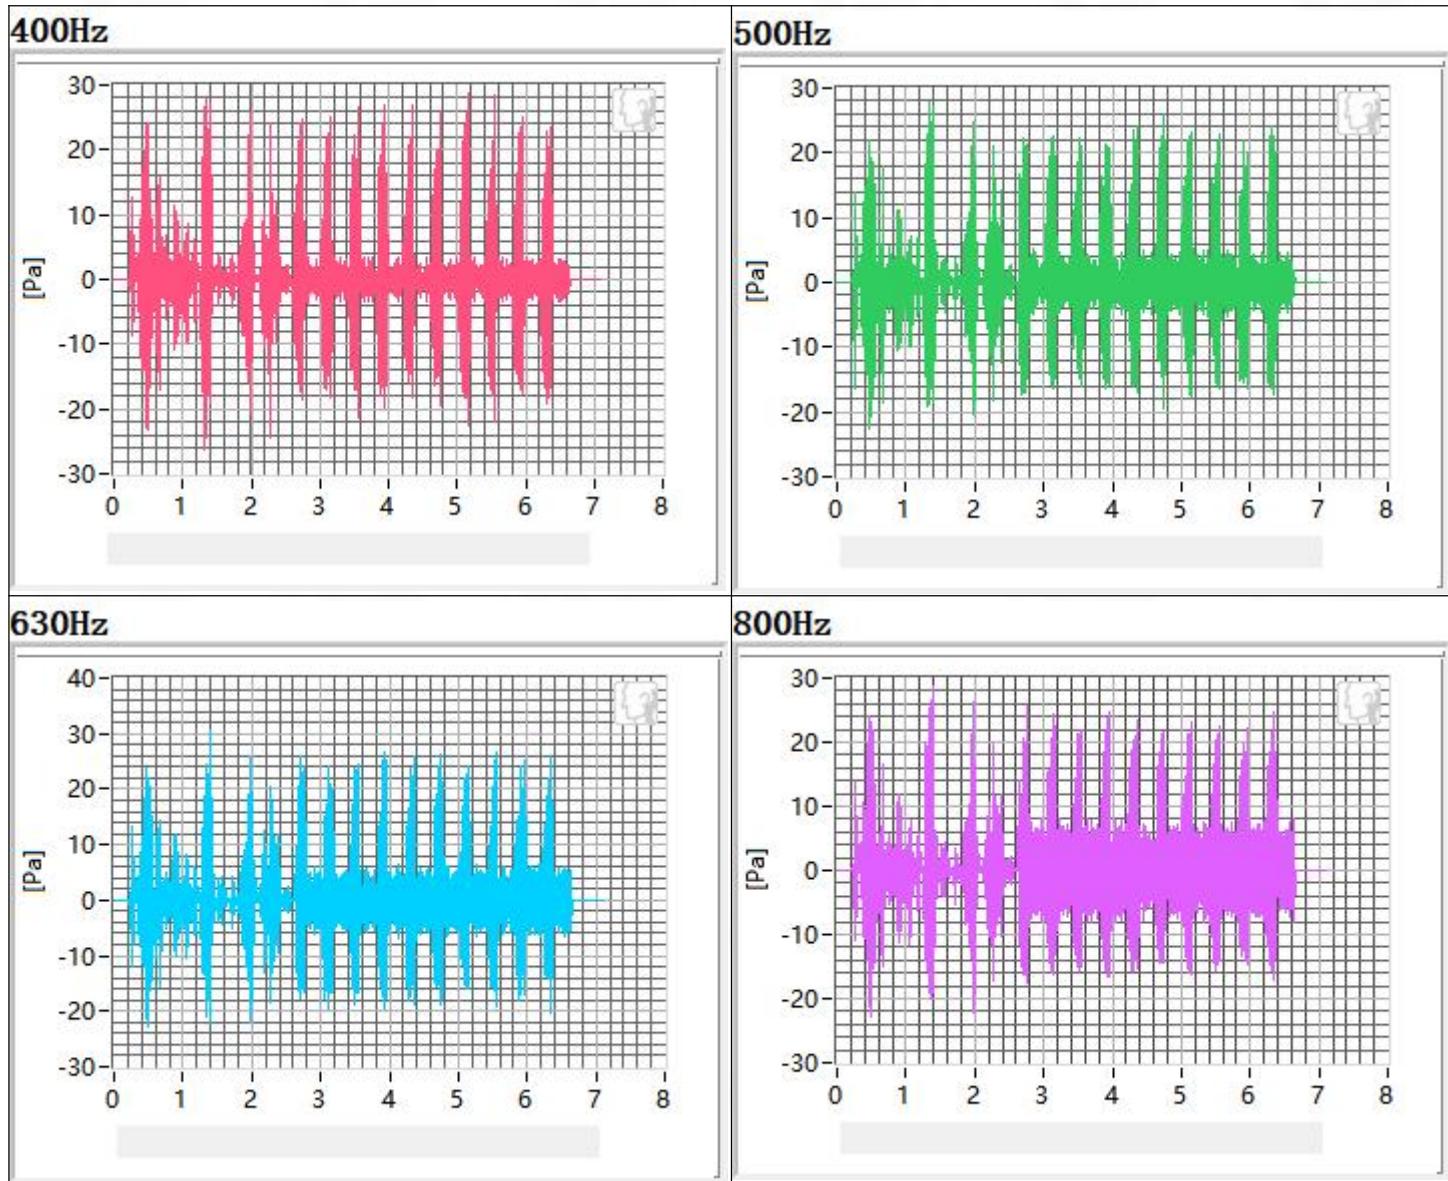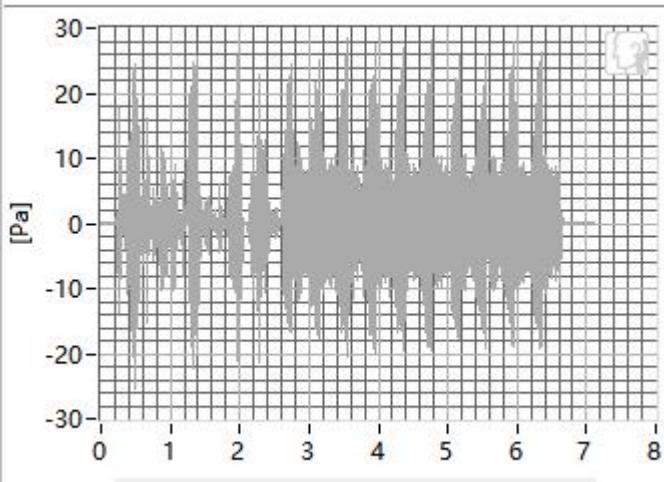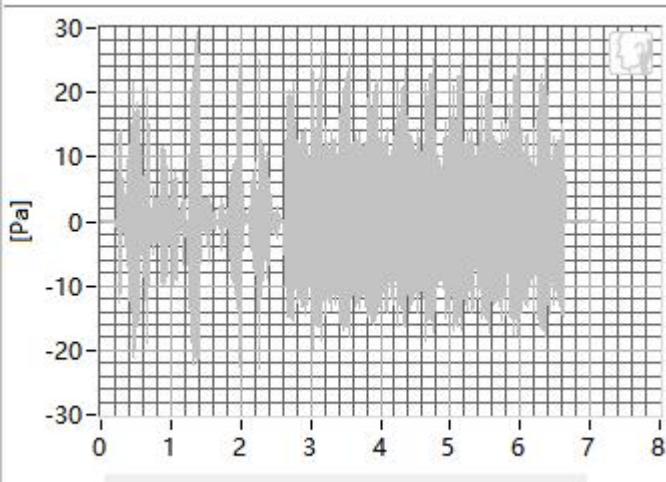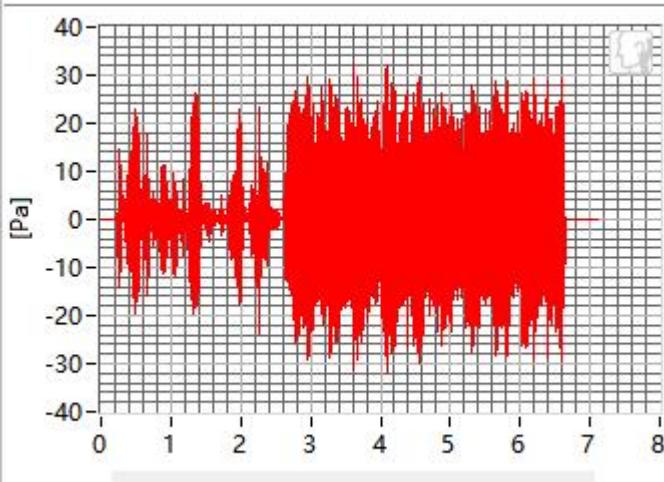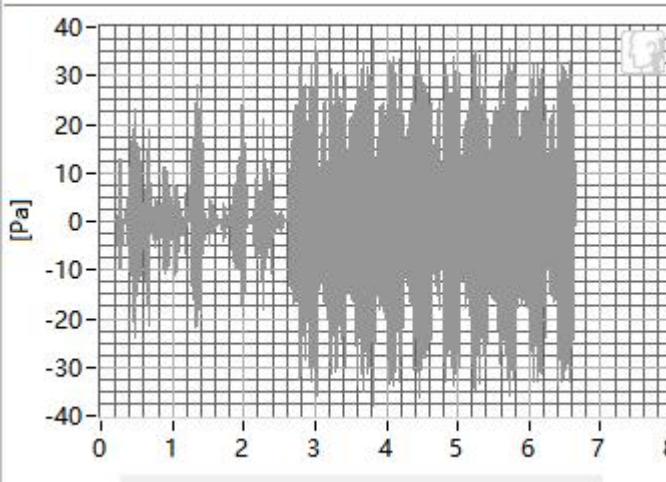
1.1 Receive Distortion and Noise 8N NB











1000Hz**1250Hz****1600Hz****2000Hz**

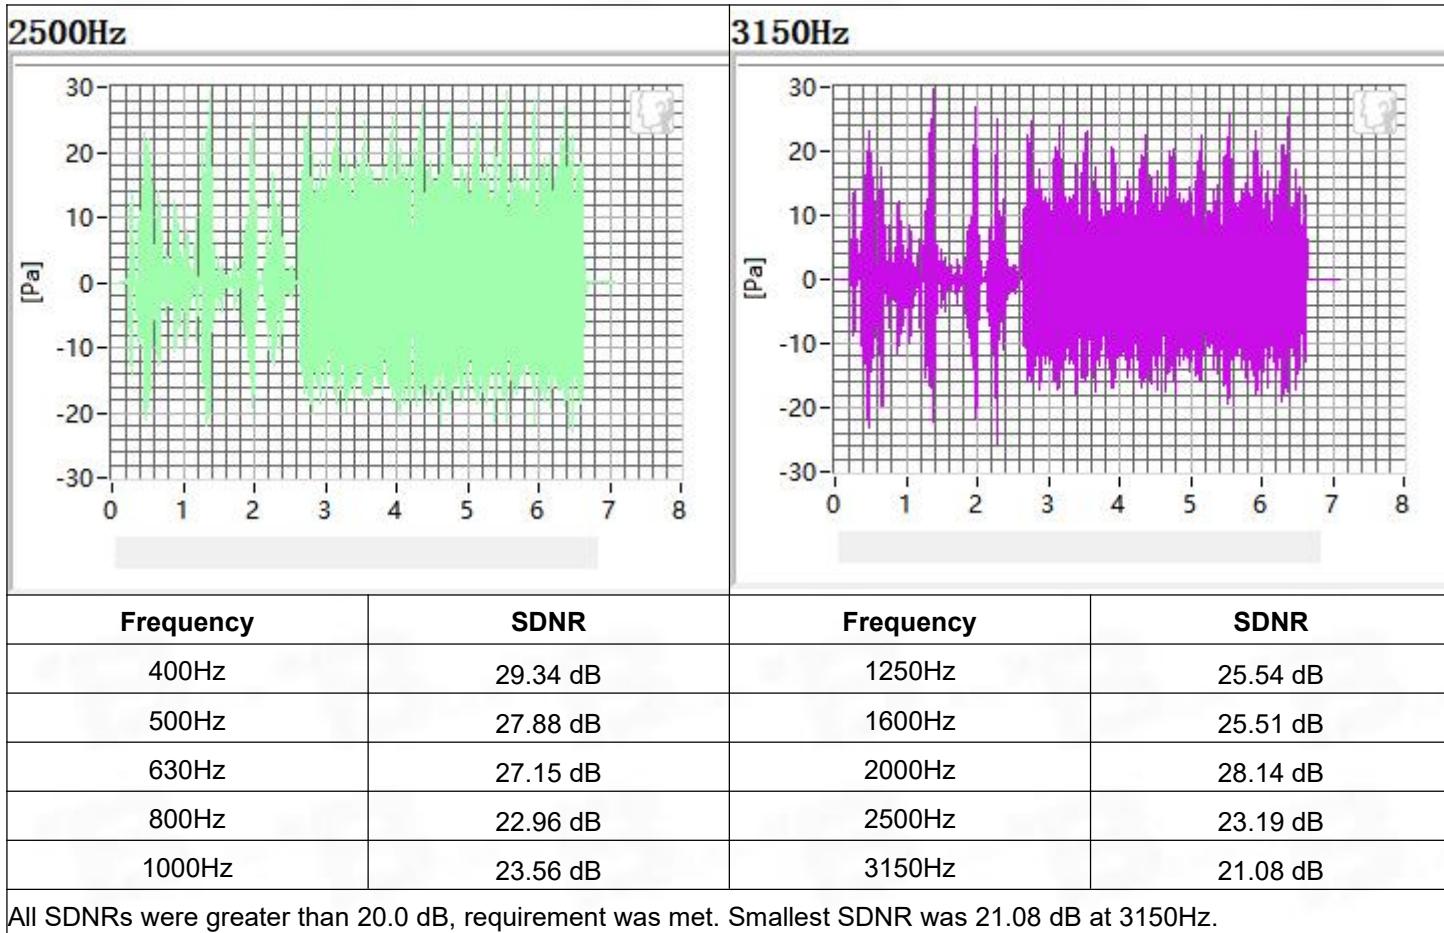

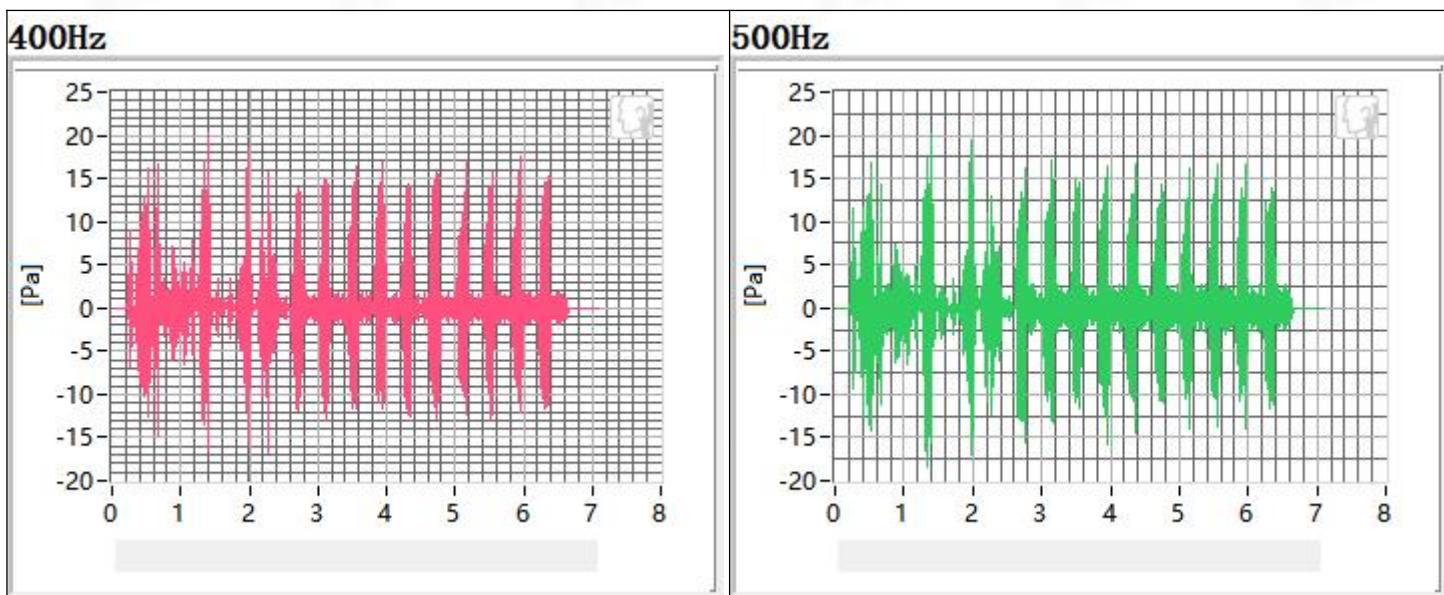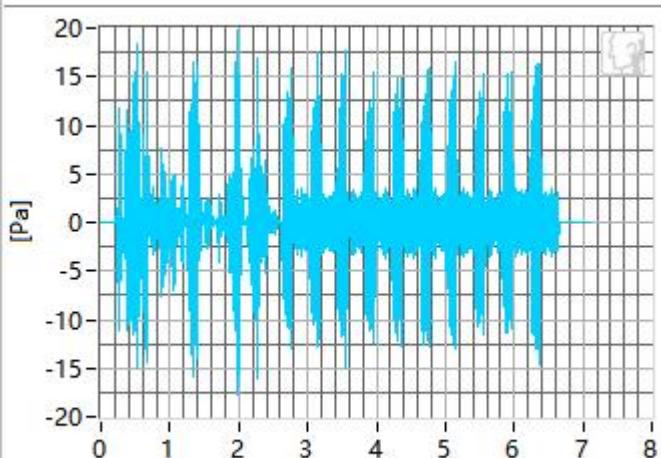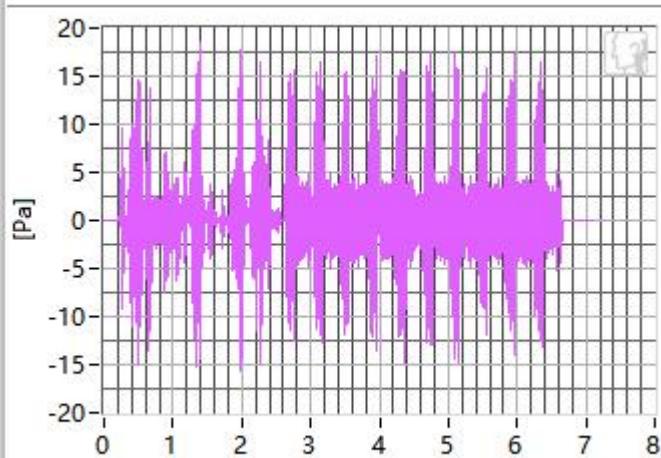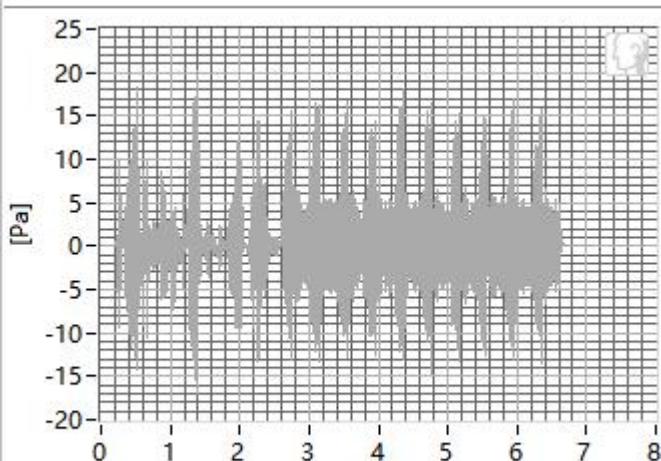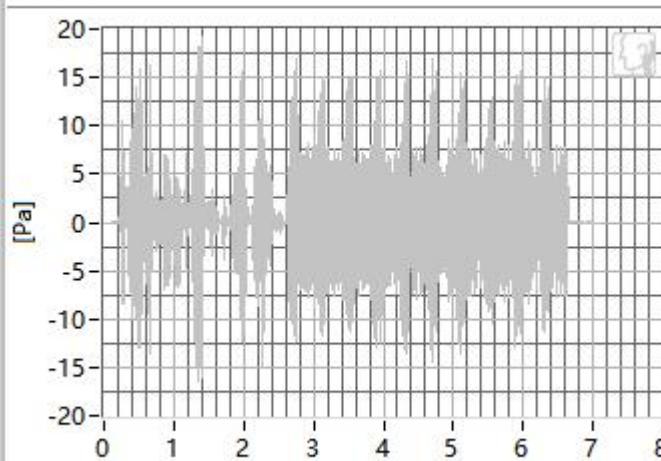1.2 Receive Distortion and Noise 2N NB




630Hz**800Hz****1000Hz****1250Hz**

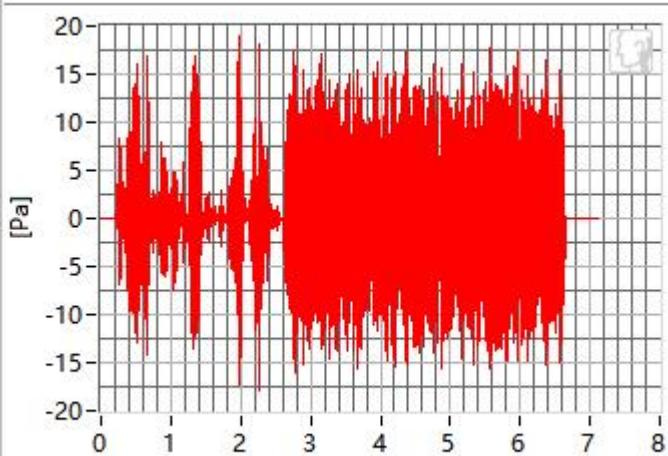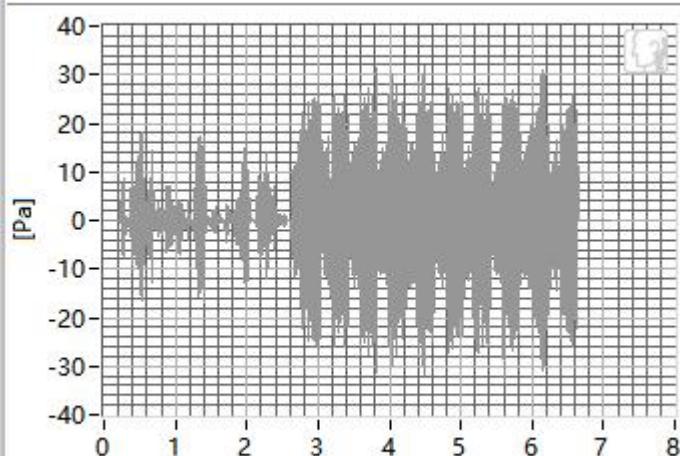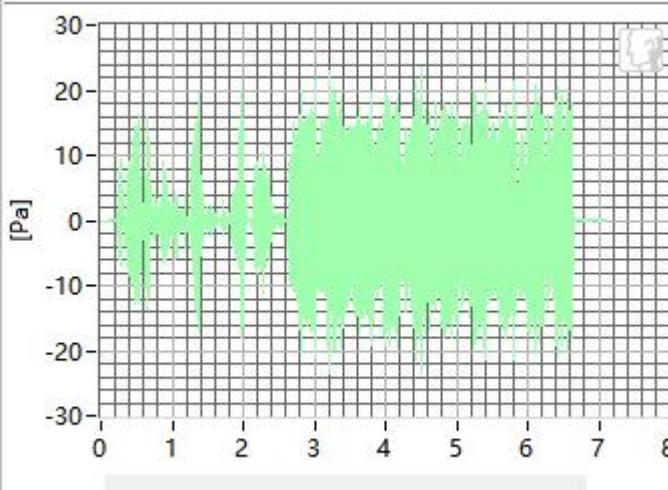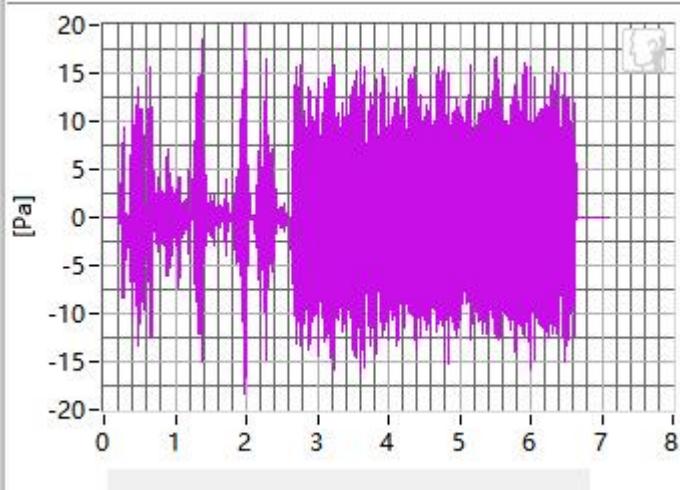1600Hz

2000Hz

2500Hz

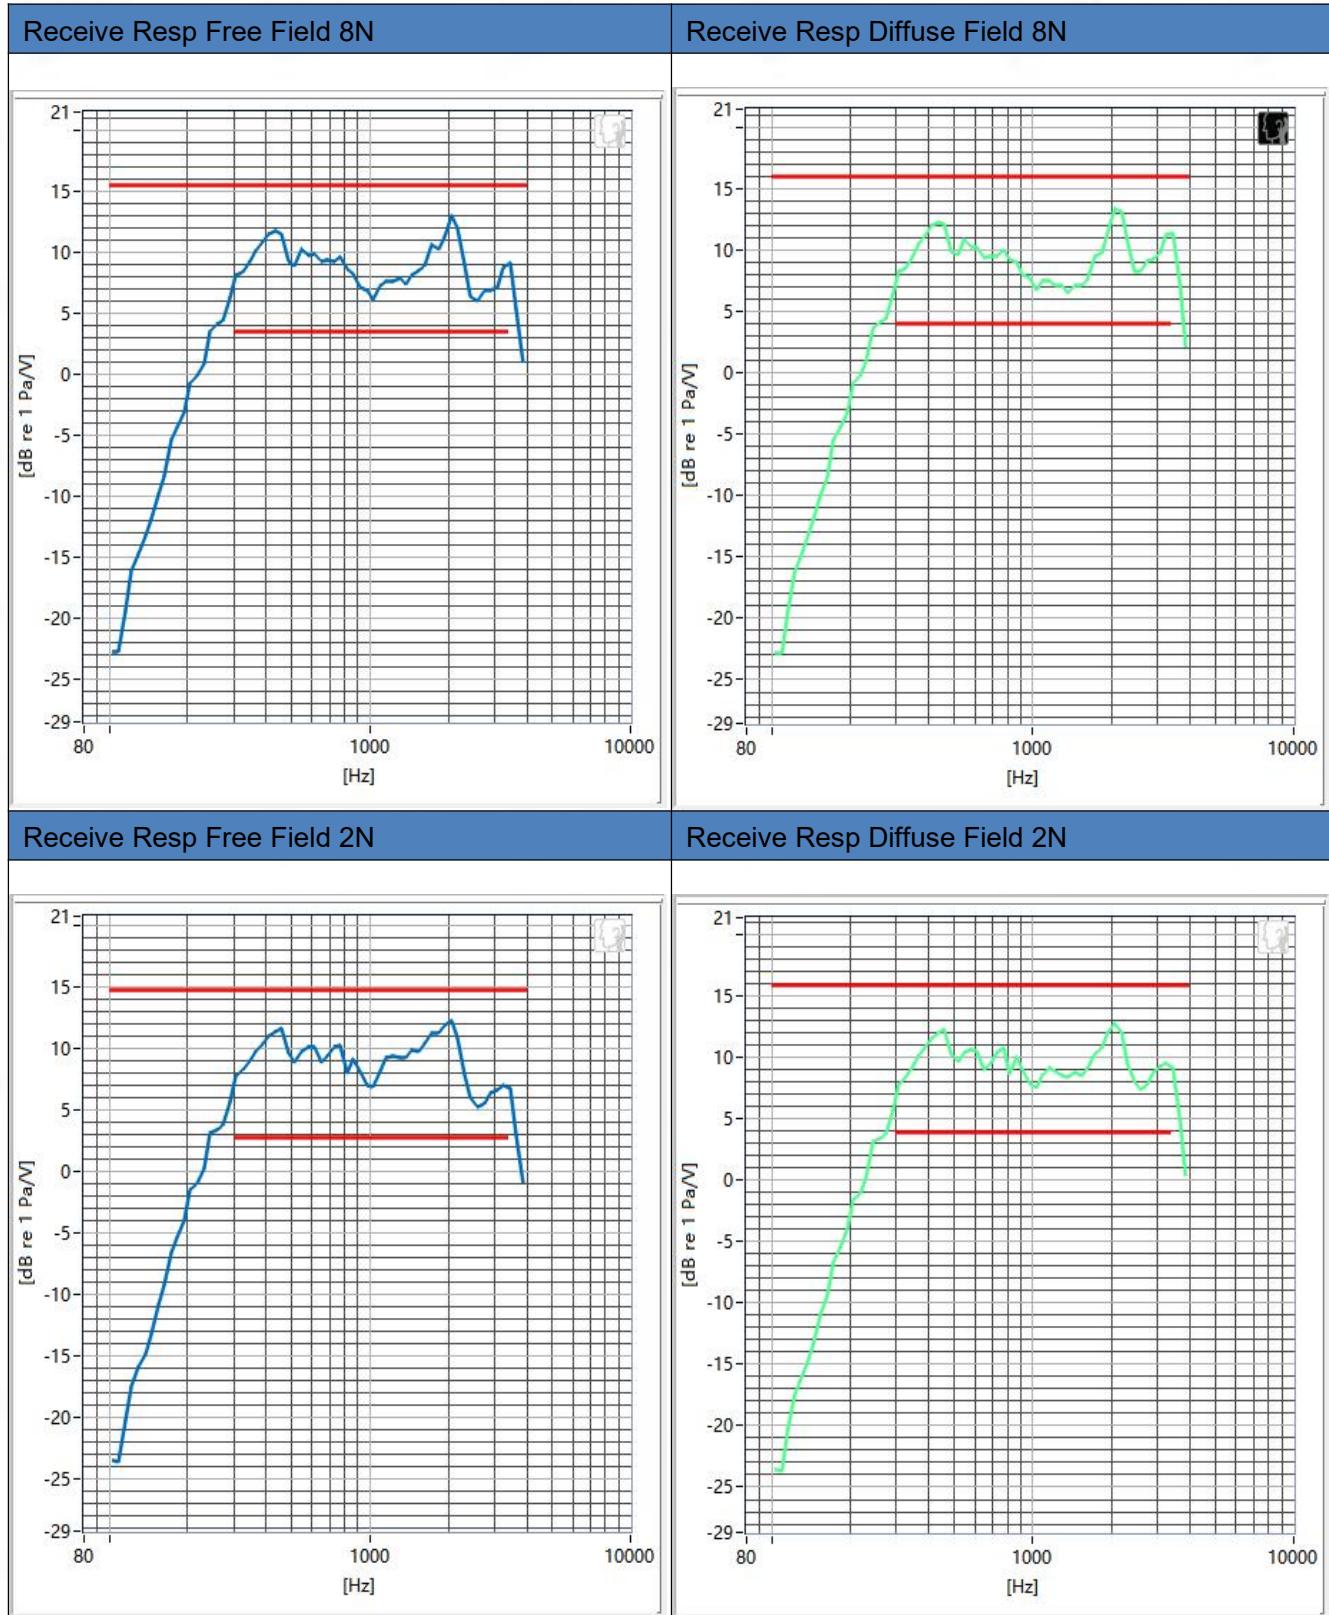3150Hz


Frequency	SDNR	Frequency	SDNR
400Hz	29.56 dB	1250Hz	25.43 dB
500Hz	28.36 dB	1600Hz	24.32 dB
630Hz	26.61 dB	2000Hz	25.92 dB
800Hz	23.73 dB	2500Hz	23.42 dB
1000Hz	24.06 dB	3150Hz	20.71 dB

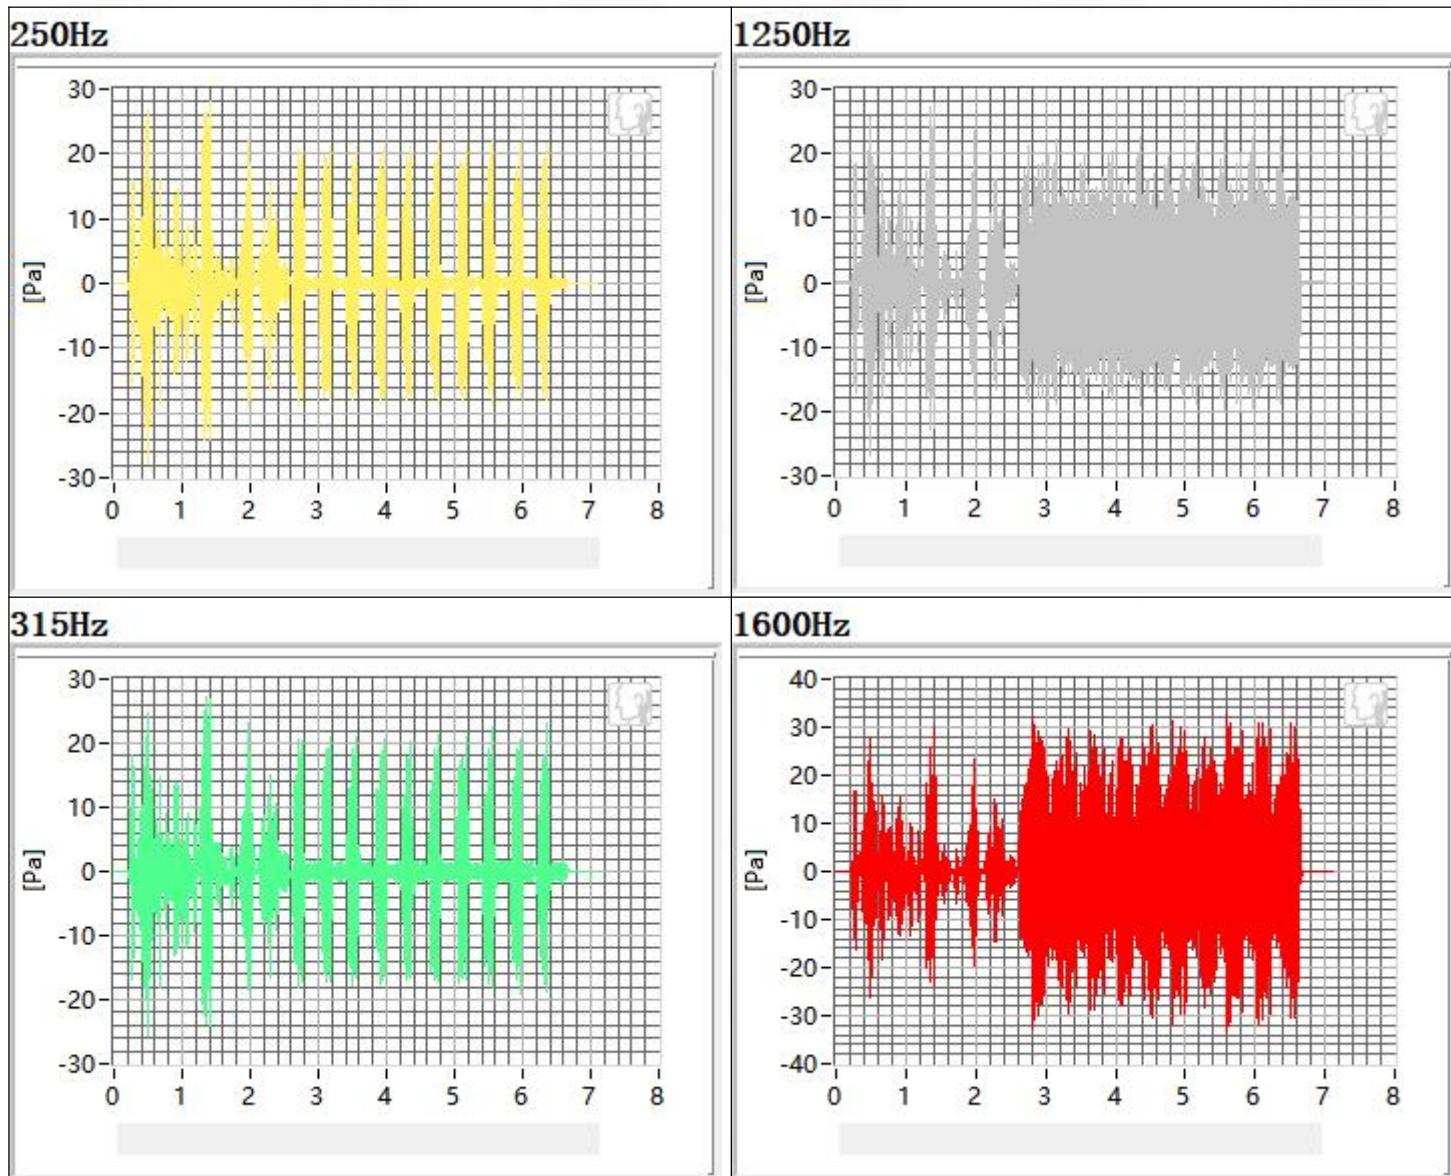
All SDNRs were greater than 20.0 dB, requirement was met. Smallest SDNR was 20.71 dB at 3150Hz.

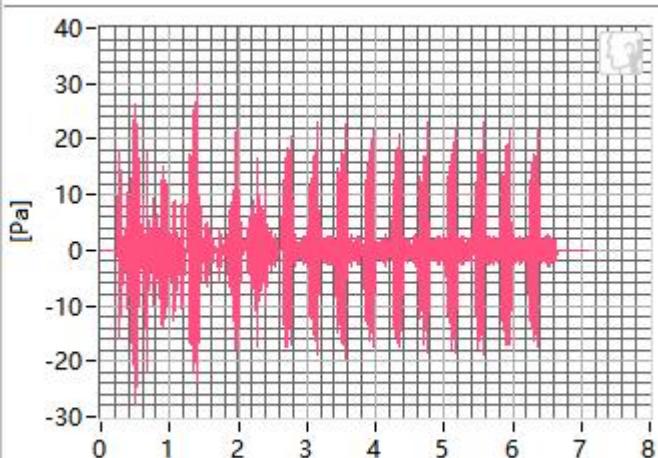
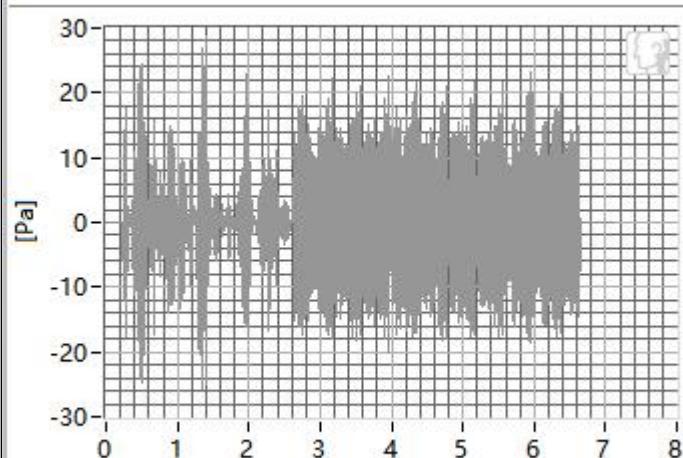
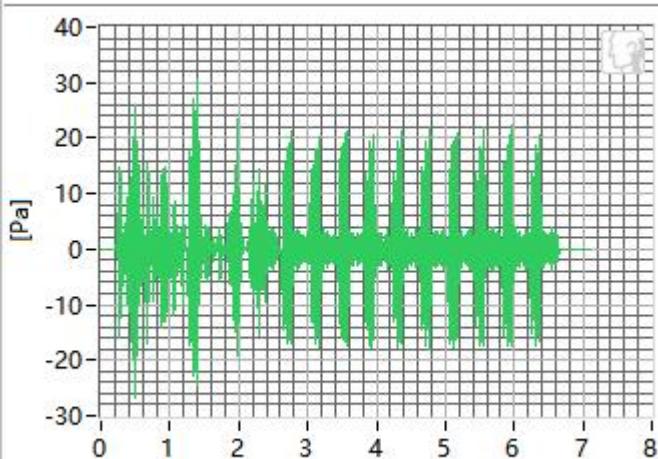
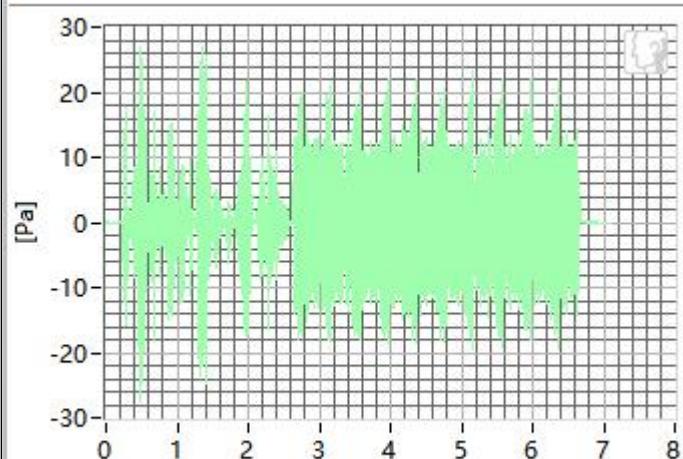
1.3 Receive Frequency Response









2. WCDMA band 5 in channel 4233

2.1 Receive Distortion and Noise 8N WB



400Hz**2000Hz****500Hz****2500Hz**

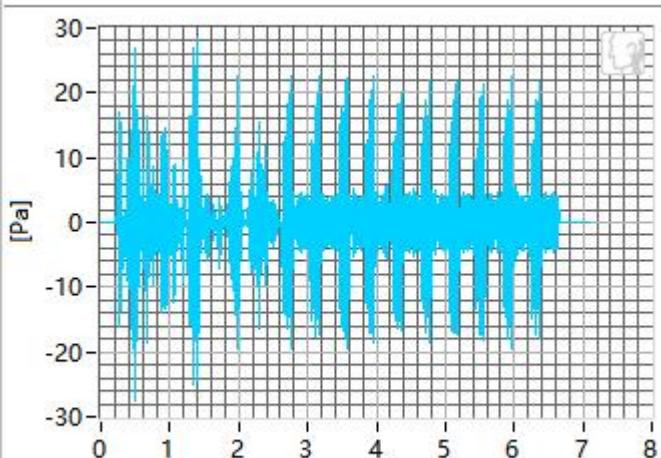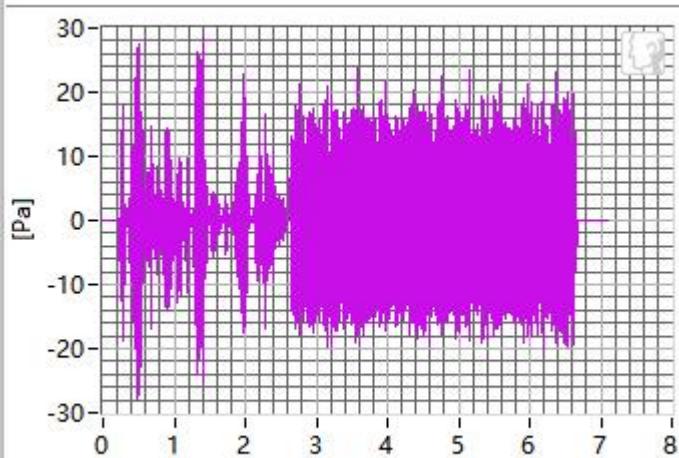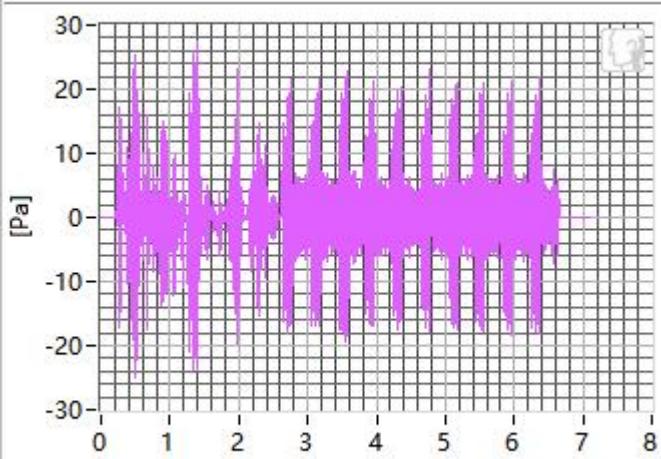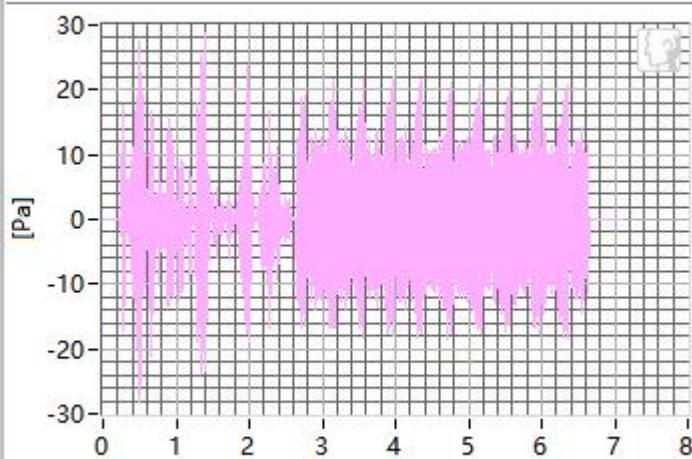
630Hz**3150Hz****800Hz****4000Hz**



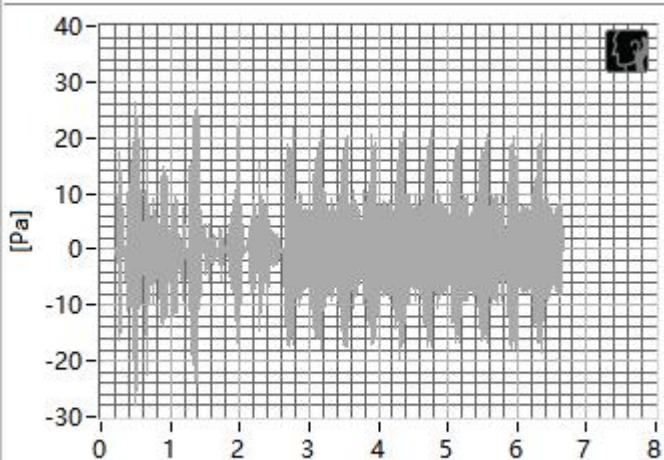
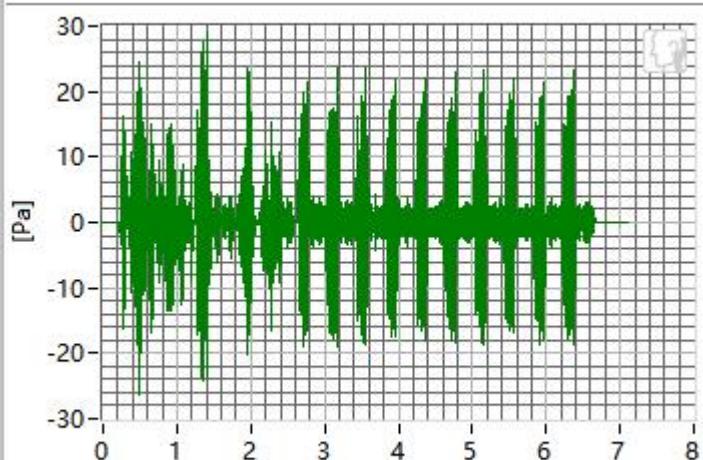
1000Hz**5000Hz**





Frequency	SDNR	Frequency	SDNR
250Hz	29.46 dB	1250Hz	26.55 dB
315Hz	28.09 dB	1600Hz	25.19 dB
400Hz	31.05 dB	2000Hz	26.78 dB
500Hz	27.89 dB	2500Hz	24.78 dB
630Hz	28.66 dB	3150Hz	23.19 dB
800Hz	29.46 dB	4000Hz	22.52 dB
1000Hz	27.38 dB	5000Hz	20.79 dB



All SDNRs were greater than 20.0 dB, requirement was met. Smallest SDNR was 20.79 dB at 5000Hz.

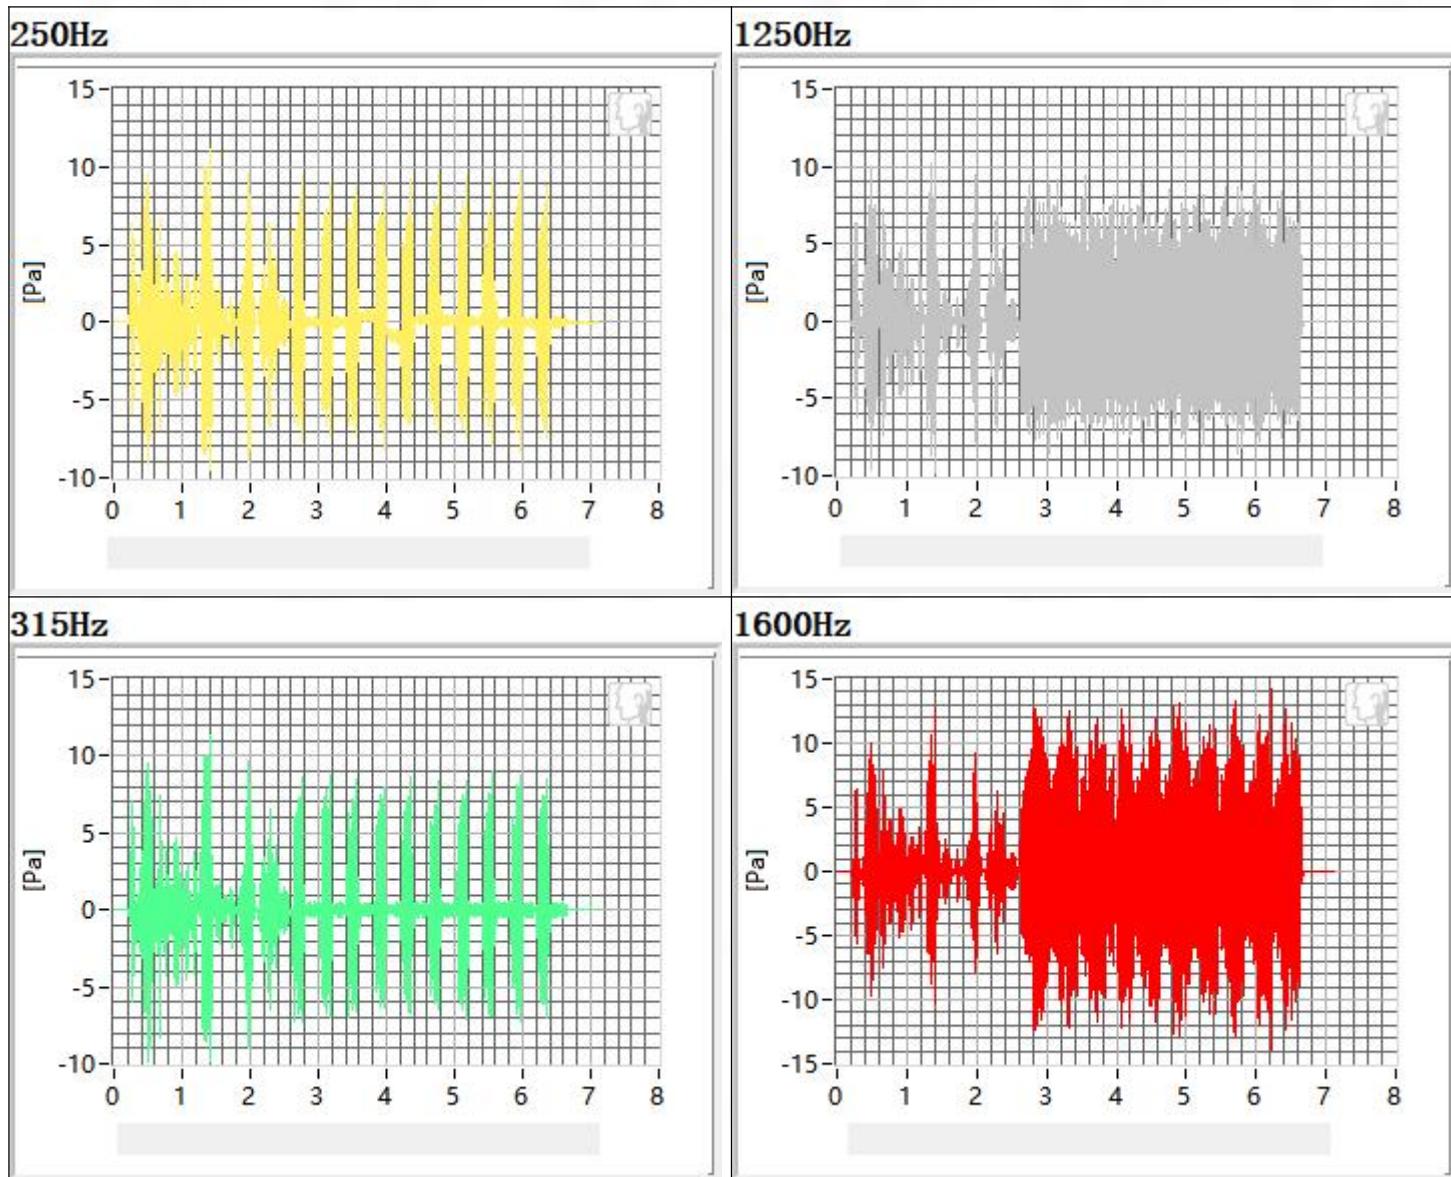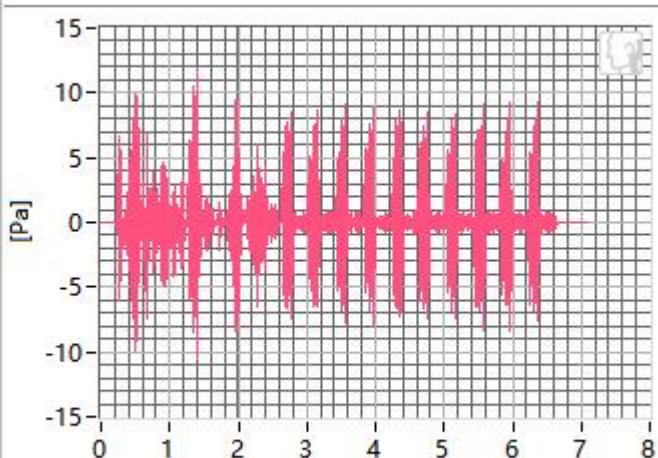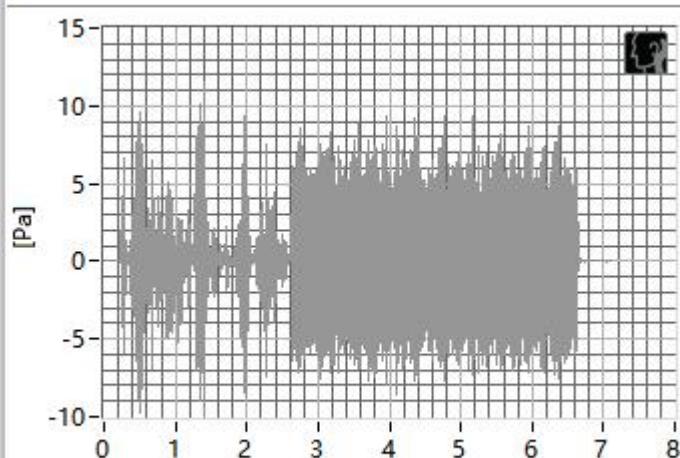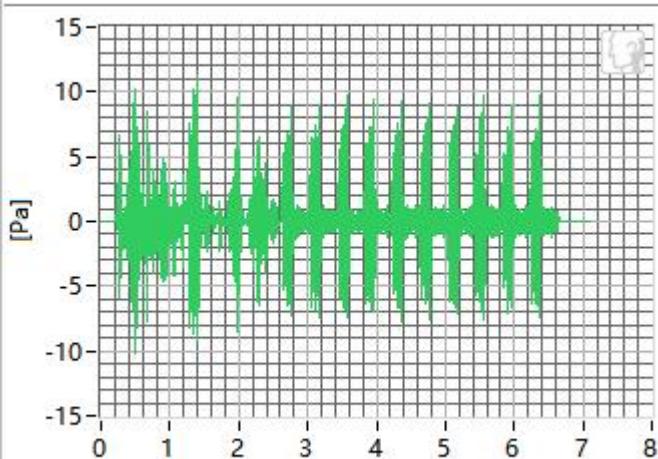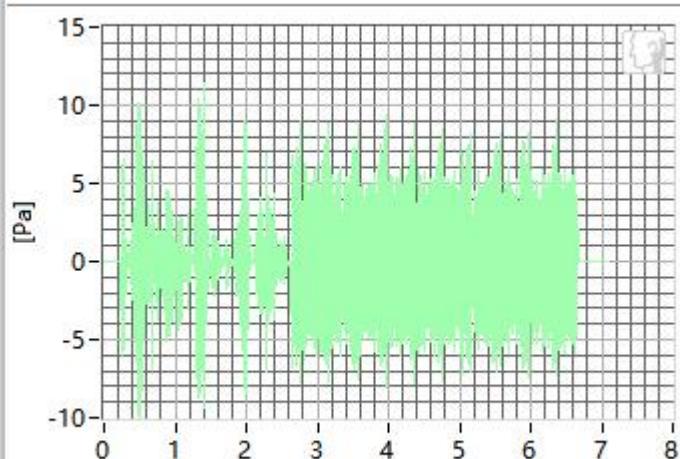2.2 Receive Distortion and Noise 2N WB



400Hz**2000Hz****500Hz****2500Hz**

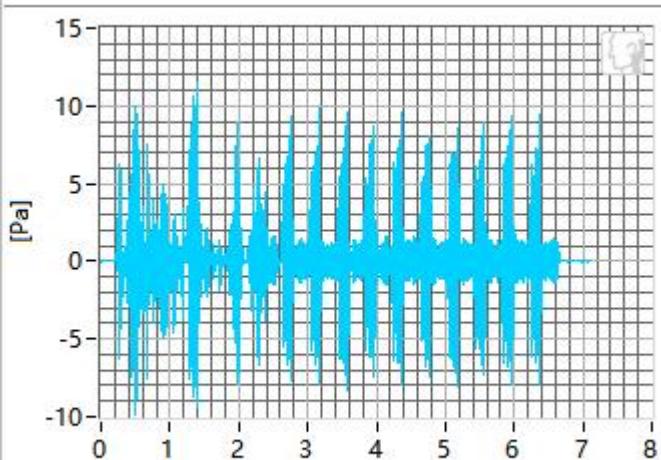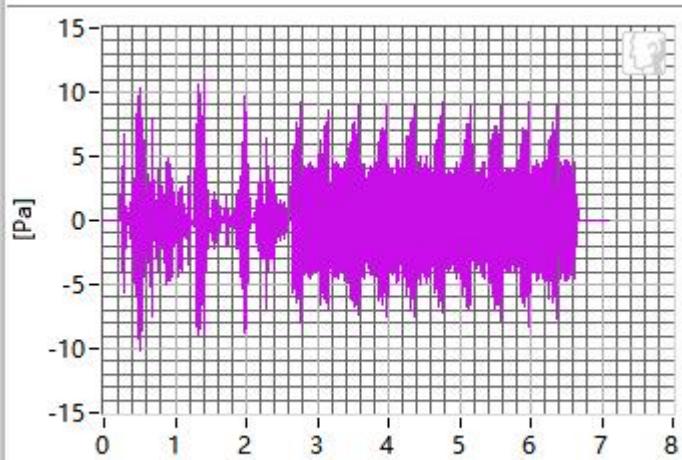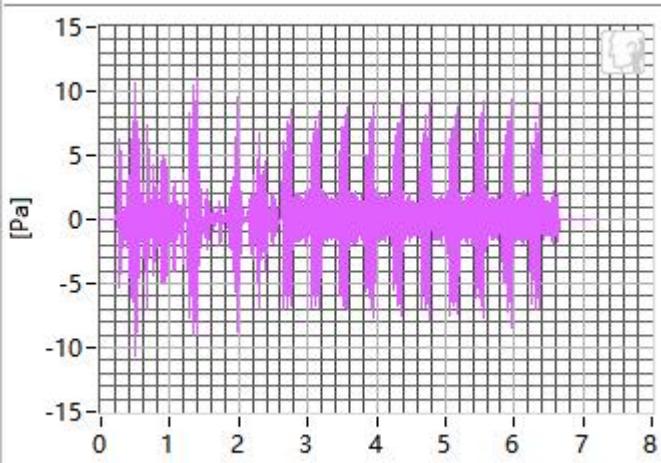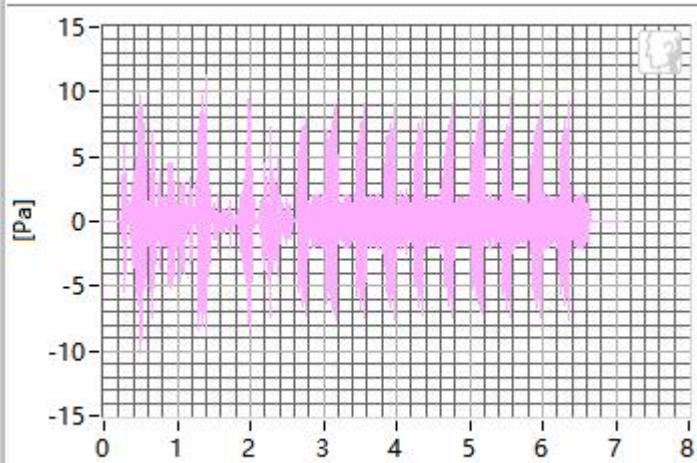
630Hz**3150Hz****800Hz****4000Hz**

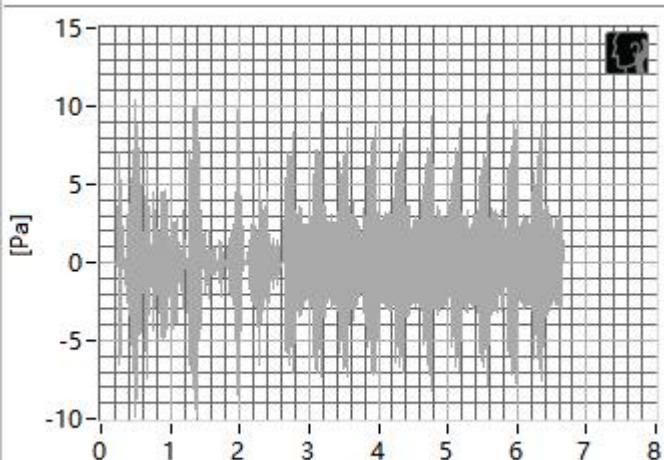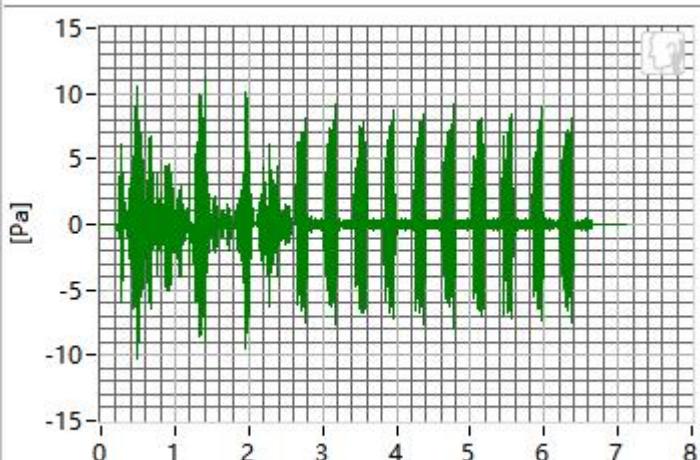1000Hz**5000Hz**

Frequency	SDNR	Frequency	SDNR
250Hz	26.55 dB	1250Hz	23.50 dB
315Hz	25.43 dB	1600Hz	22.99 dB
400Hz	26.10 dB	2000Hz	26.50 dB
500Hz	27.38 dB	2500Hz	22.11 dB
630Hz	25.37 dB	3150Hz	23.65 dB
800Hz	24.26 dB	4000Hz	24.16 dB
1000Hz	26.55 dB	5000Hz	20.41 dB


All SDNRs were greater than 20.0 dB, requirement was met. Smallest SDNR was 20.41 dB at 5000Hz.




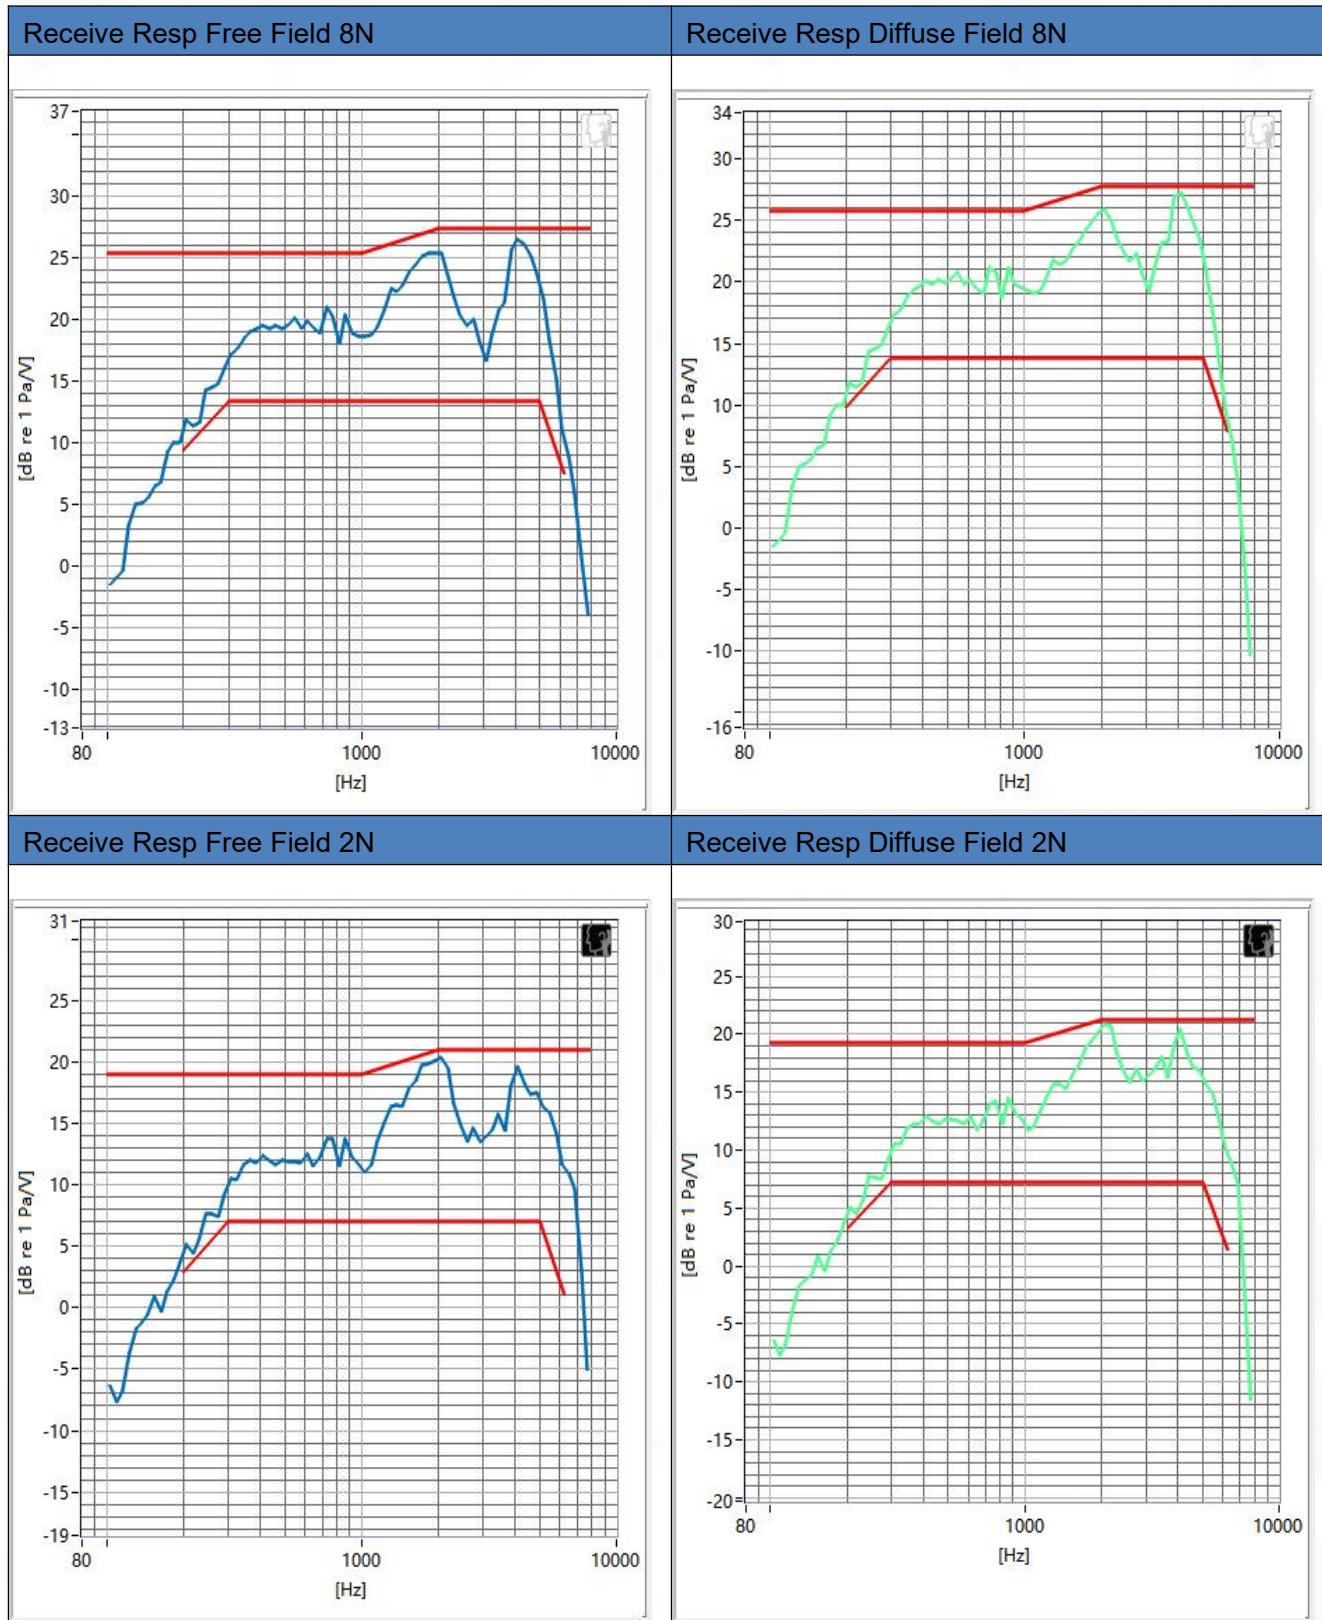
2.3 Receive Frequency Response









3. LTE band 2 in channel 18900

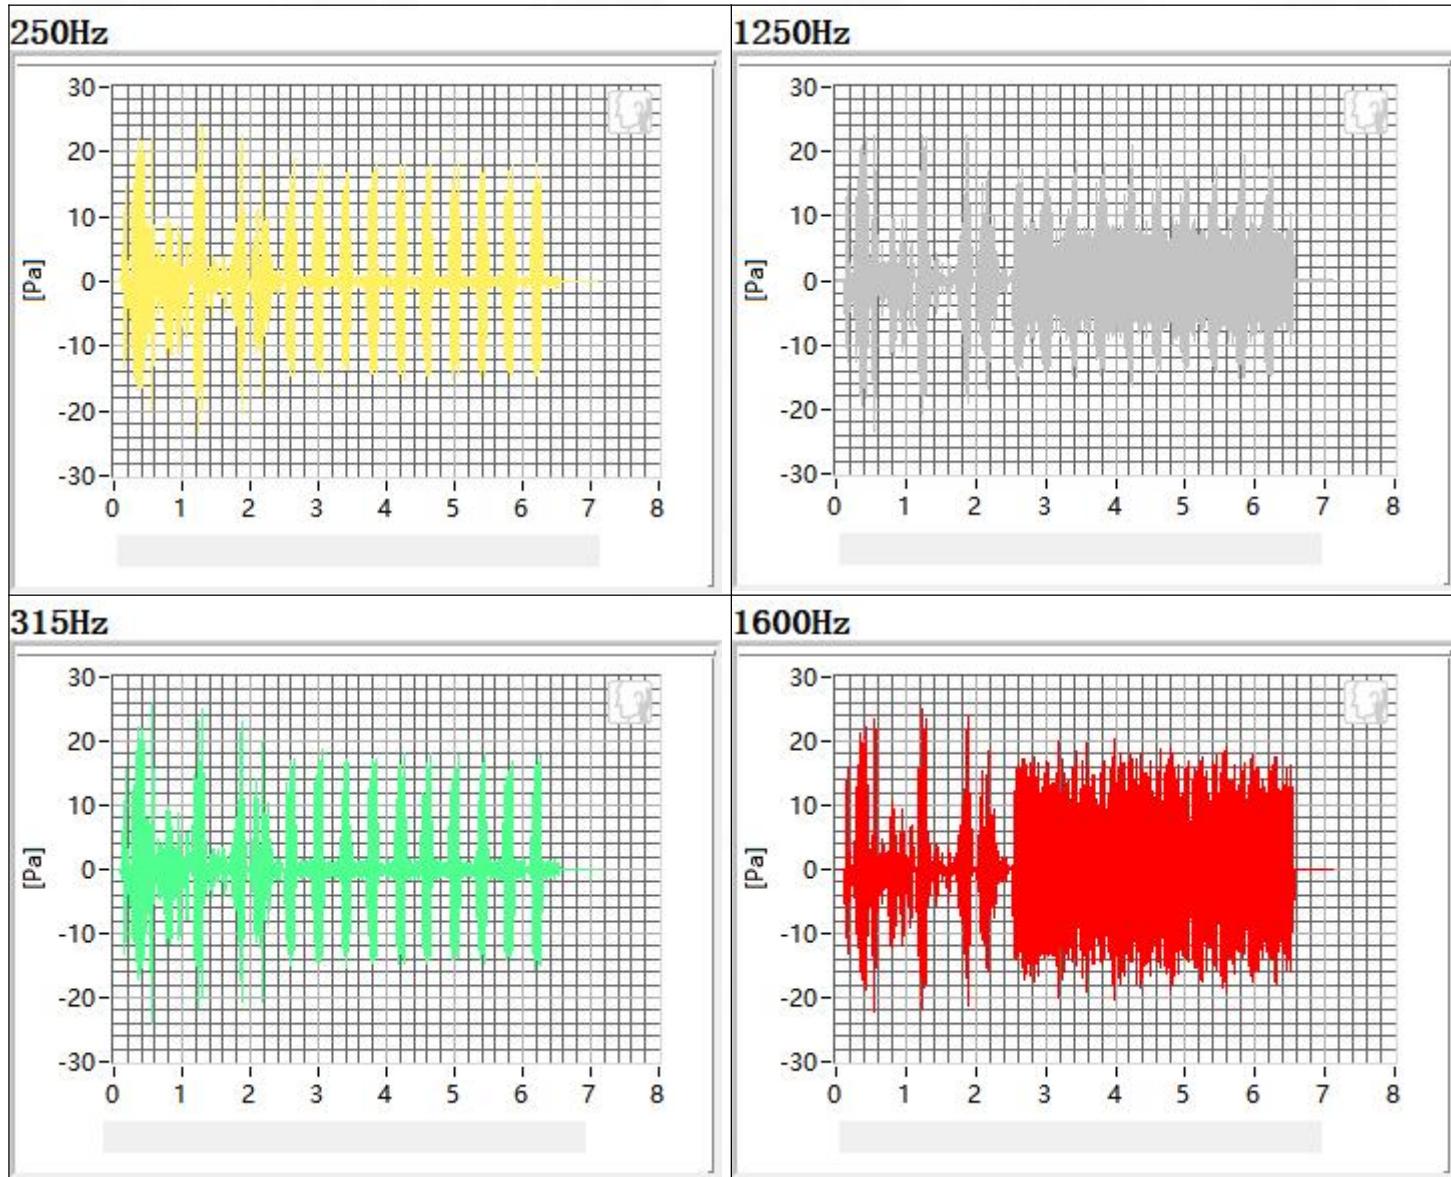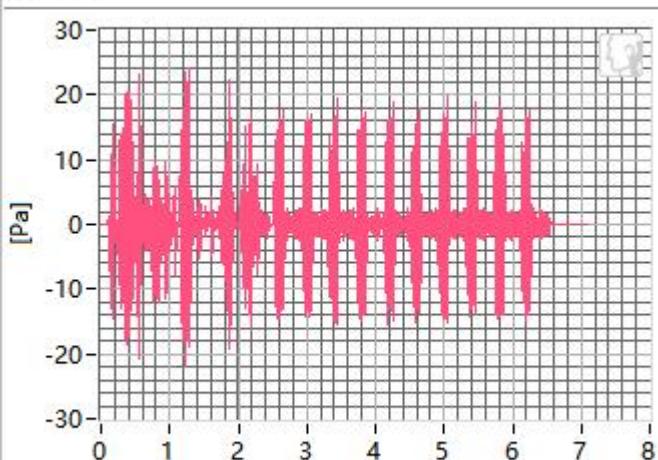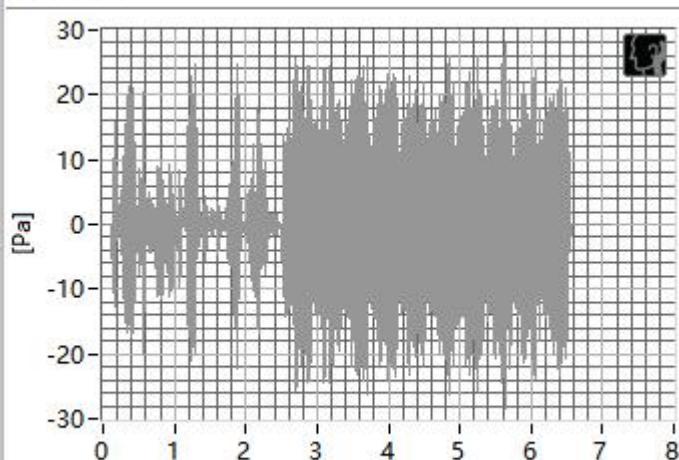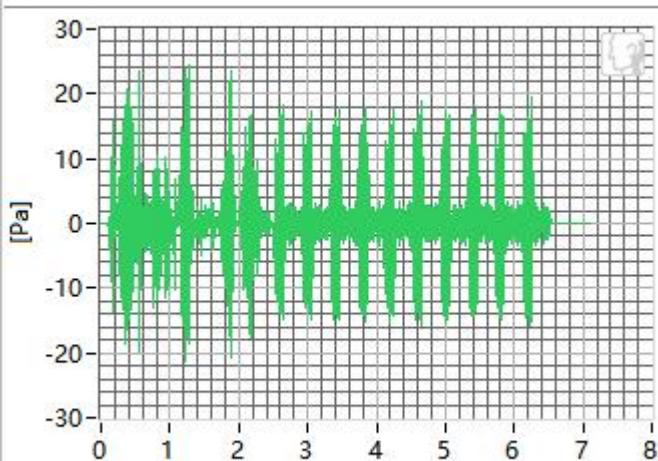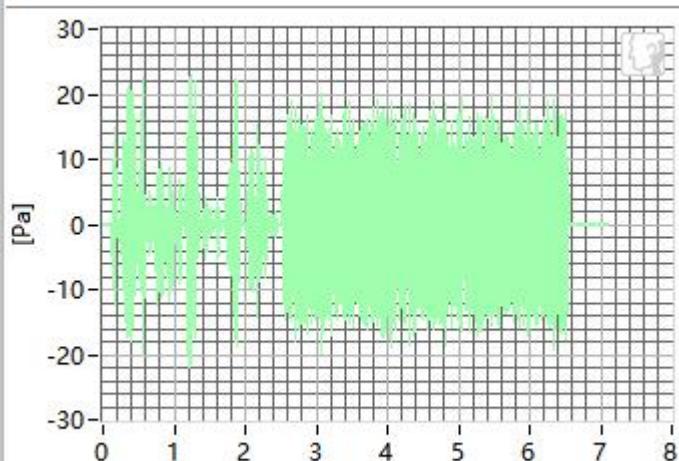3.1 Receive Distortion and Noise 8N WB



400Hz**2000Hz****500Hz****2500Hz**

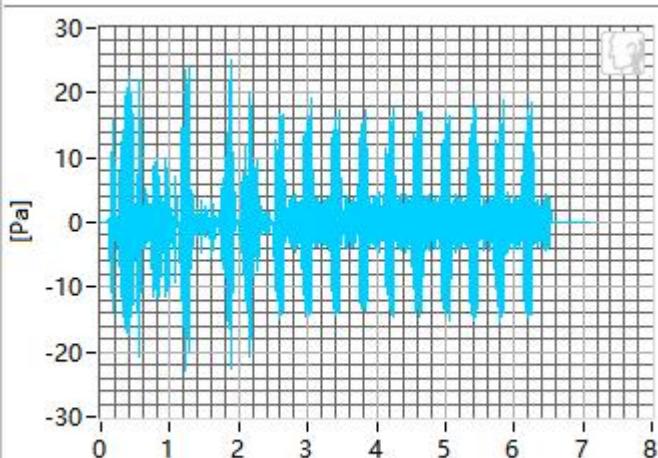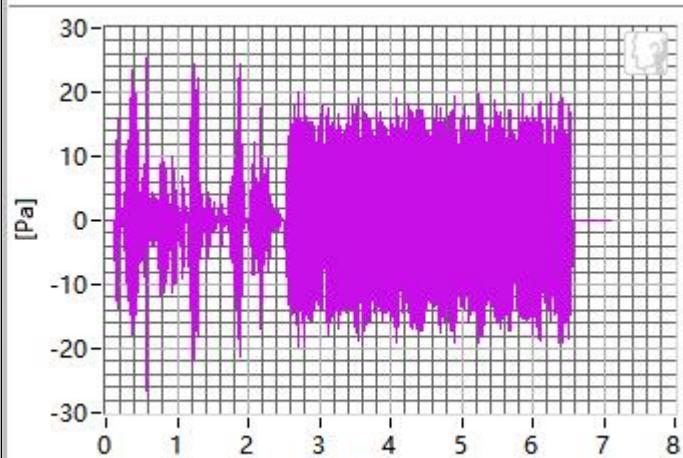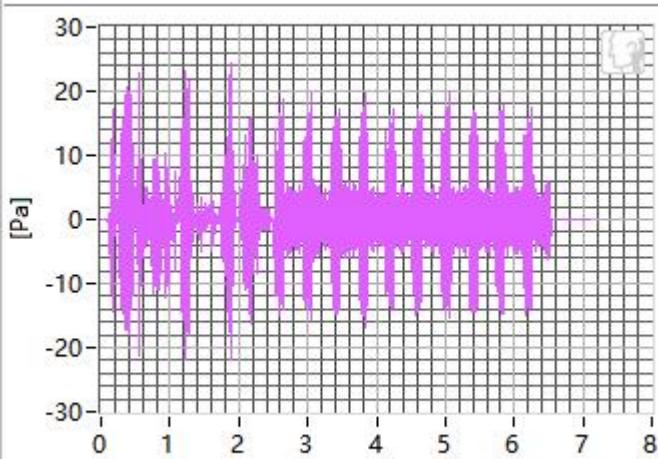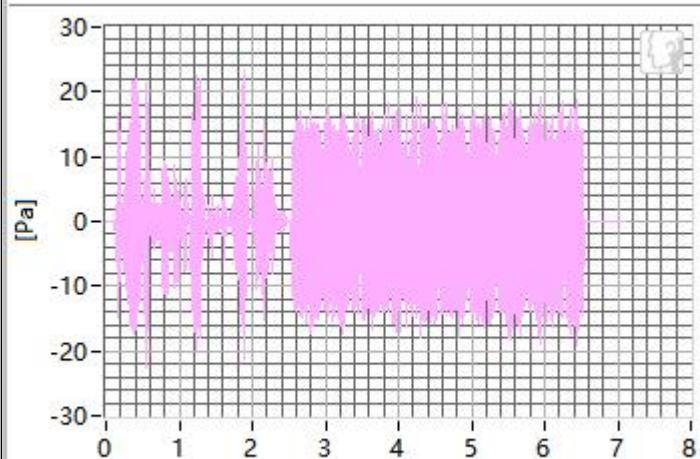
630Hz**3150Hz****800Hz****4000Hz**



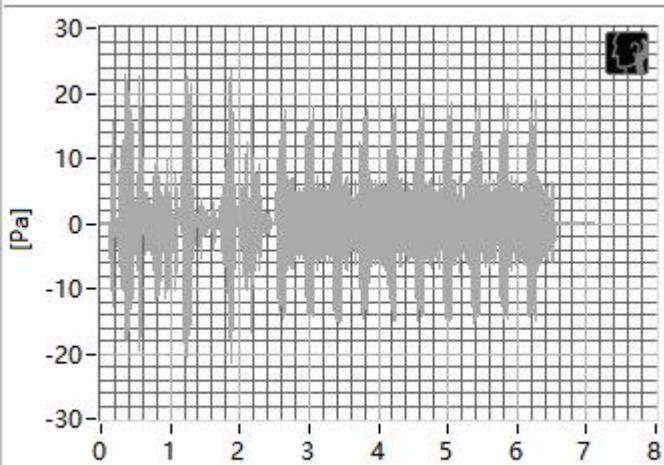
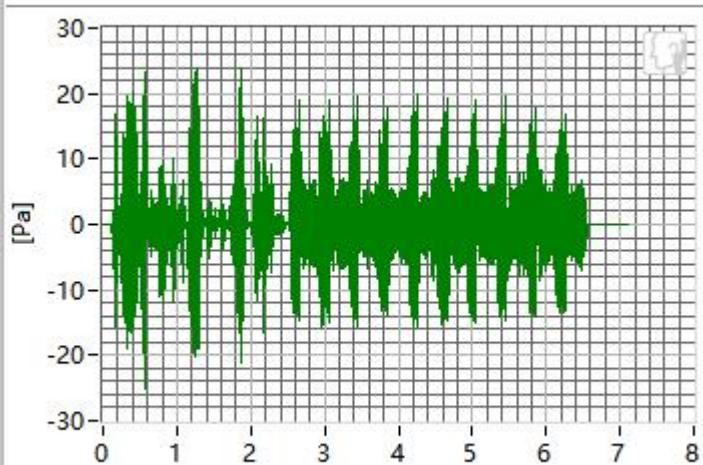
1000Hz**5000Hz**

Frequency	SDNR	Frequency	SDNR
250Hz	28.01 dB	1250Hz	21.70 dB
315Hz	27.04 dB	1600Hz	22.61 dB
400Hz	26.85 dB	2000Hz	22.98 dB
500Hz	30.24 dB	2500Hz	21.83 dB
630Hz	27.91 dB	3150Hz	23.38 dB
800Hz	26.04 dB	4000Hz	28.06 dB
1000Hz	25.87 dB	5000Hz	20.53 dB


All SDNRs were greater than 20.0 dB, requirement was met. Smallest SDNR was 20.53 dB at 5000 Hz.

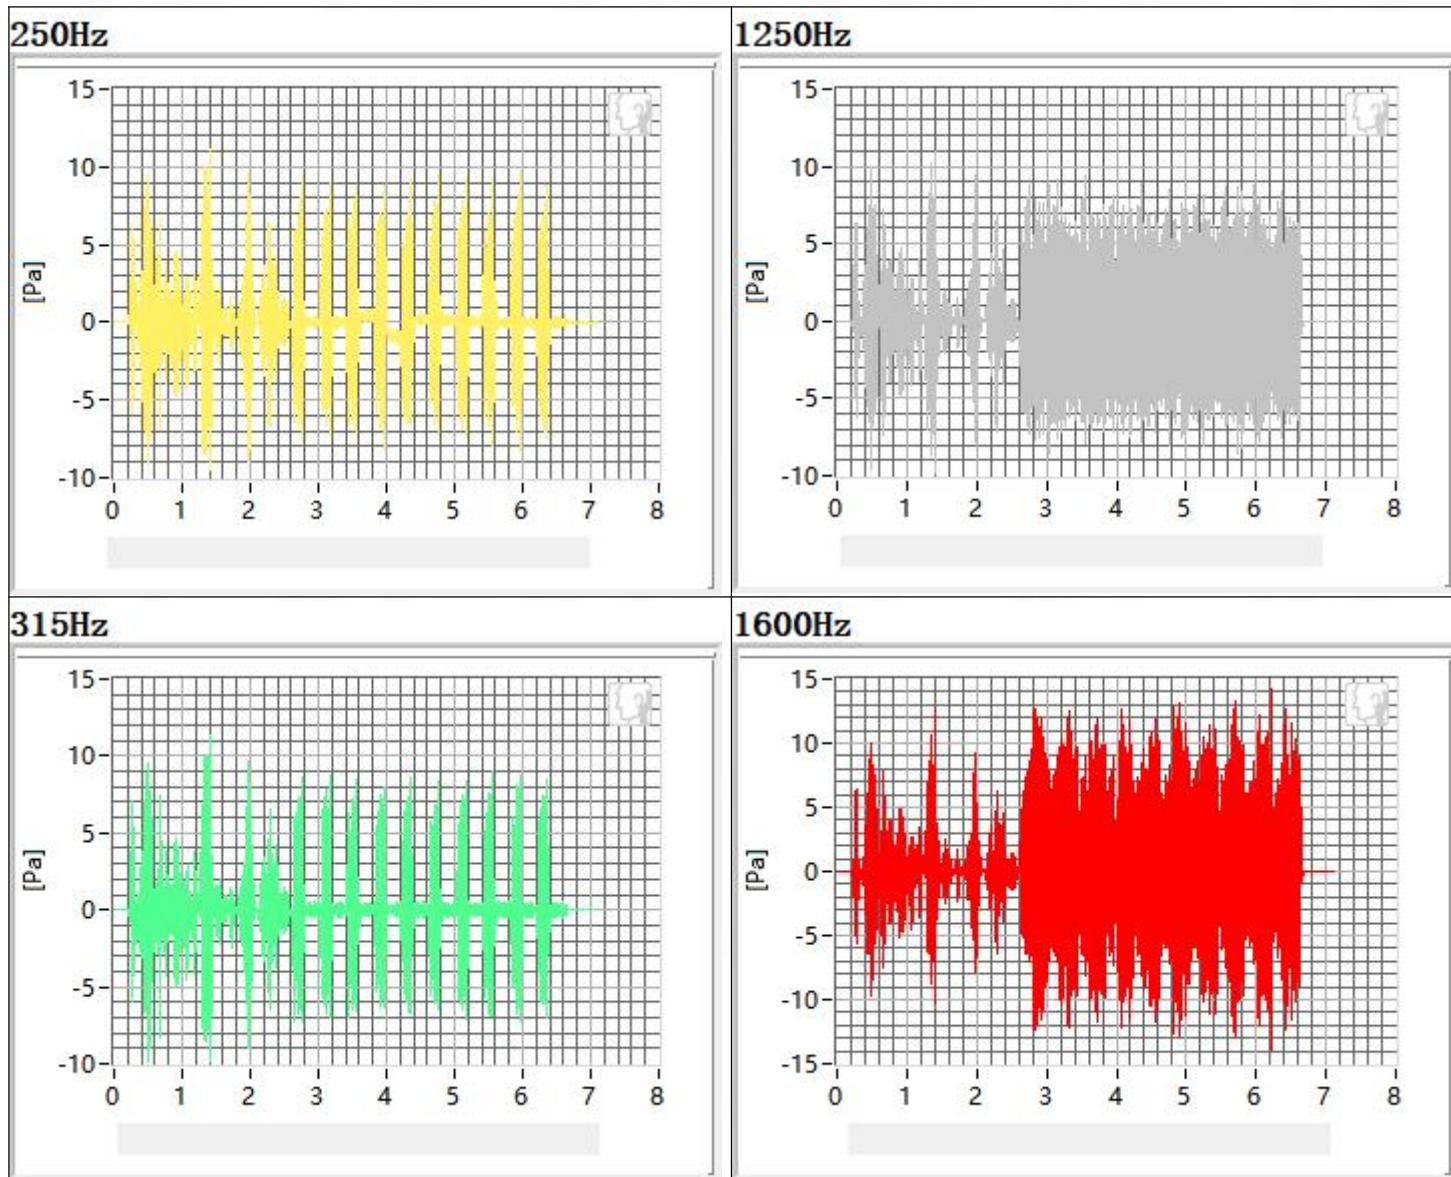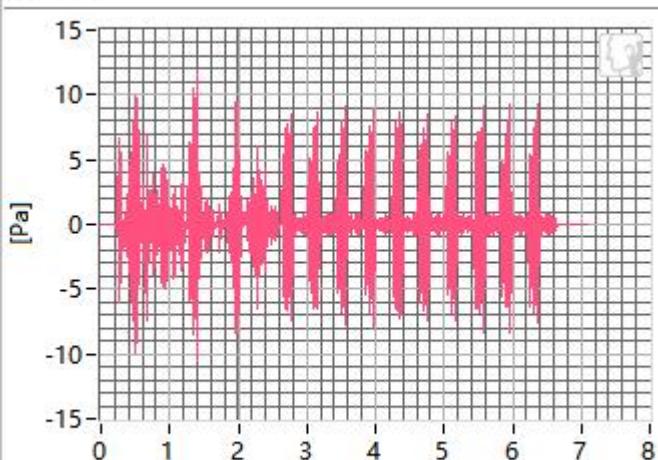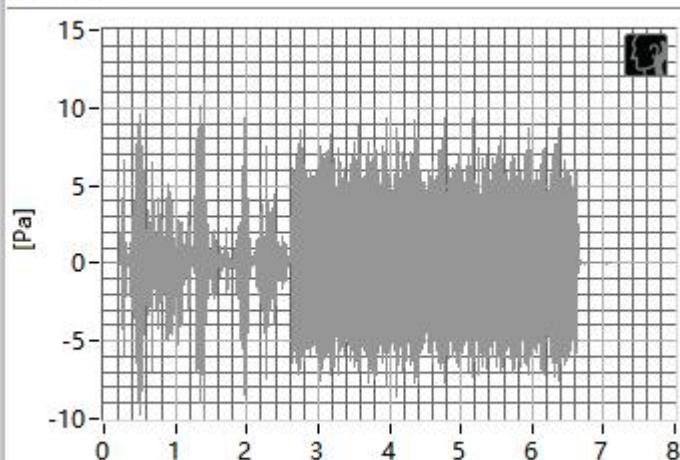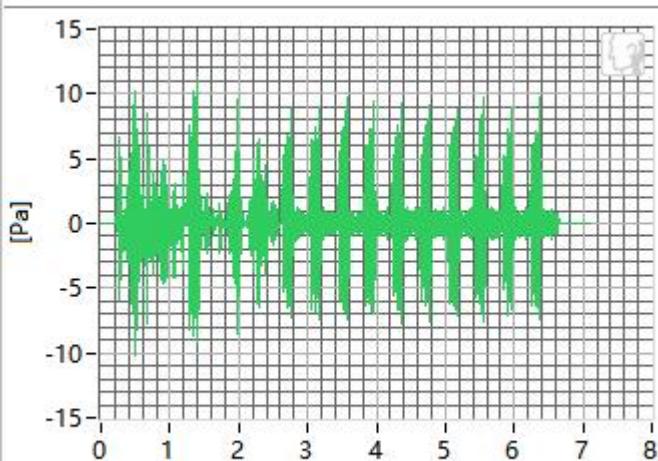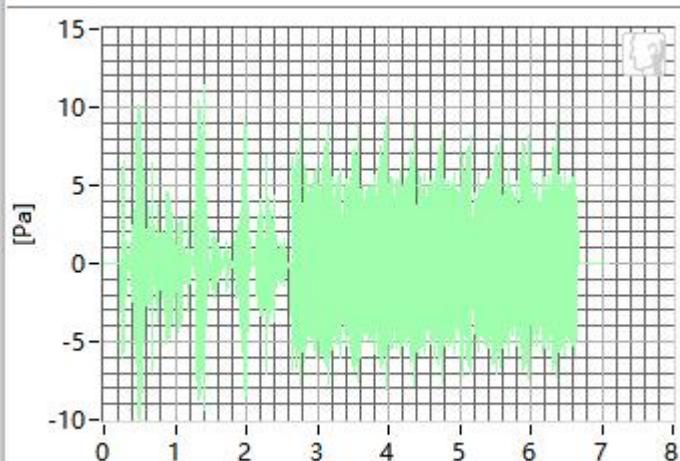3.2 Receive Distortion and Noise 2N WB




400Hz**2000Hz****500Hz****2500Hz**

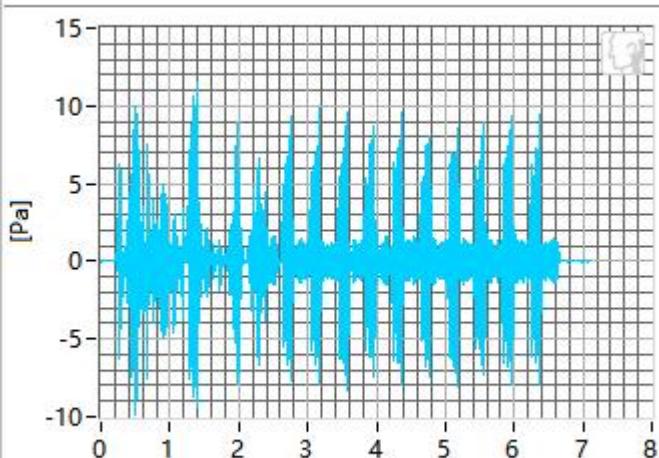
630Hz




3150Hz


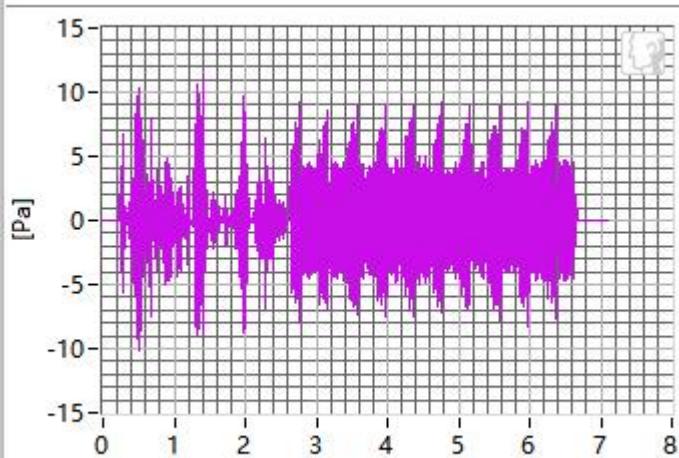


800Hz

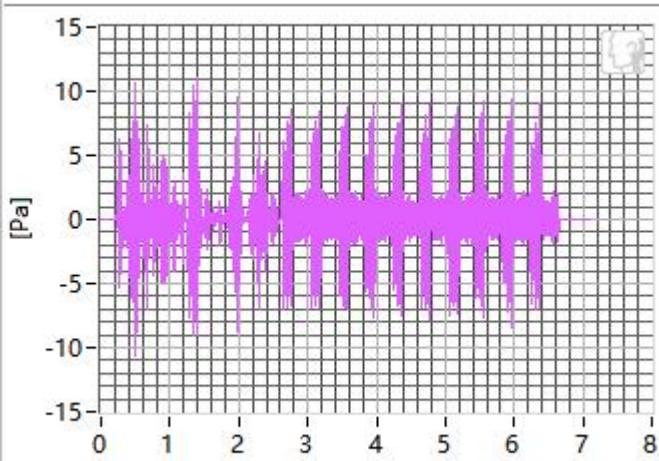

4000Hz

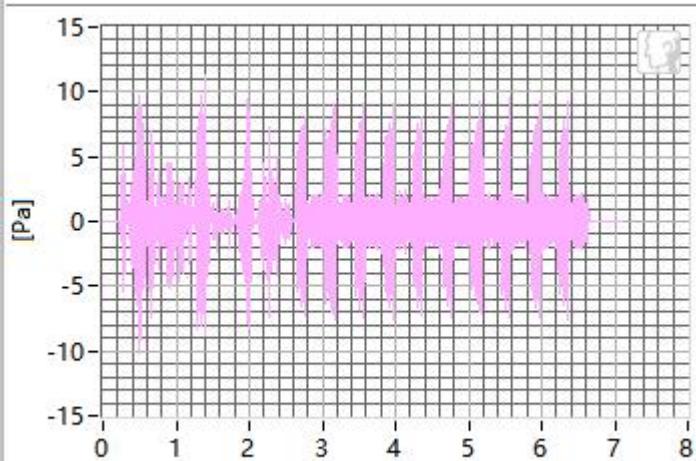


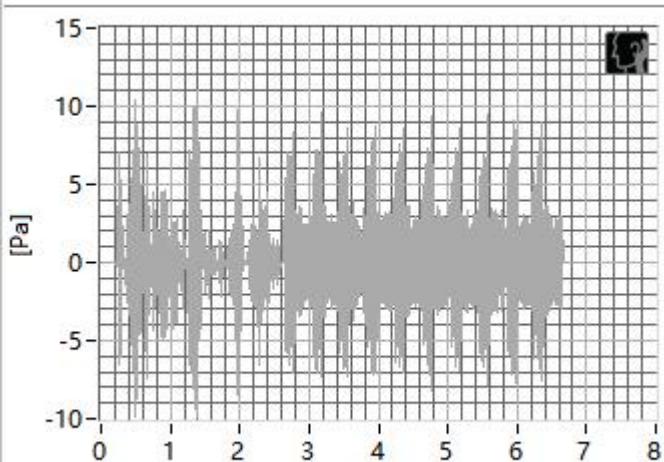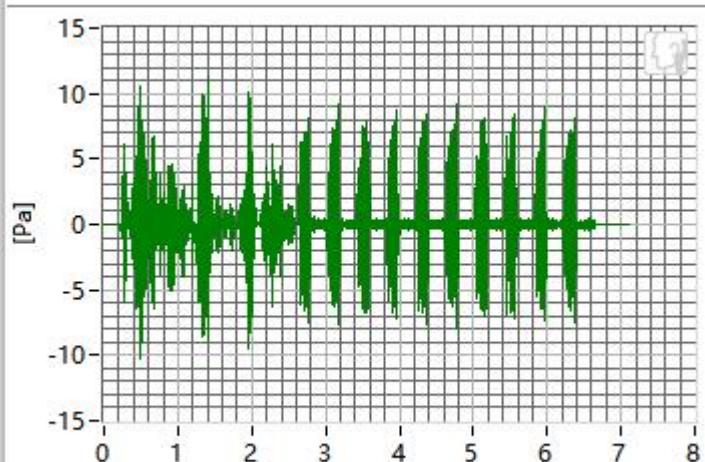1000Hz**5000Hz**

Frequency	SDNR	Frequency	SDNR
250Hz	28.51 dB	1250Hz	23.36 dB
315Hz	26.75 dB	1600Hz	22.48 dB
400Hz	26.27 dB	2000Hz	21.73 dB
500Hz	29.07 dB	2500Hz	21.28 dB
630Hz	28.08 dB	3150Hz	22.96 dB
800Hz	27.02 dB	4000Hz	27.33 dB
1000Hz	24.29 dB	5000Hz	21.17 dB


All SDNRs were greater than 20.0 dB, requirement was met. Smallest SDNR was 21.17 dB at 5000Hz.

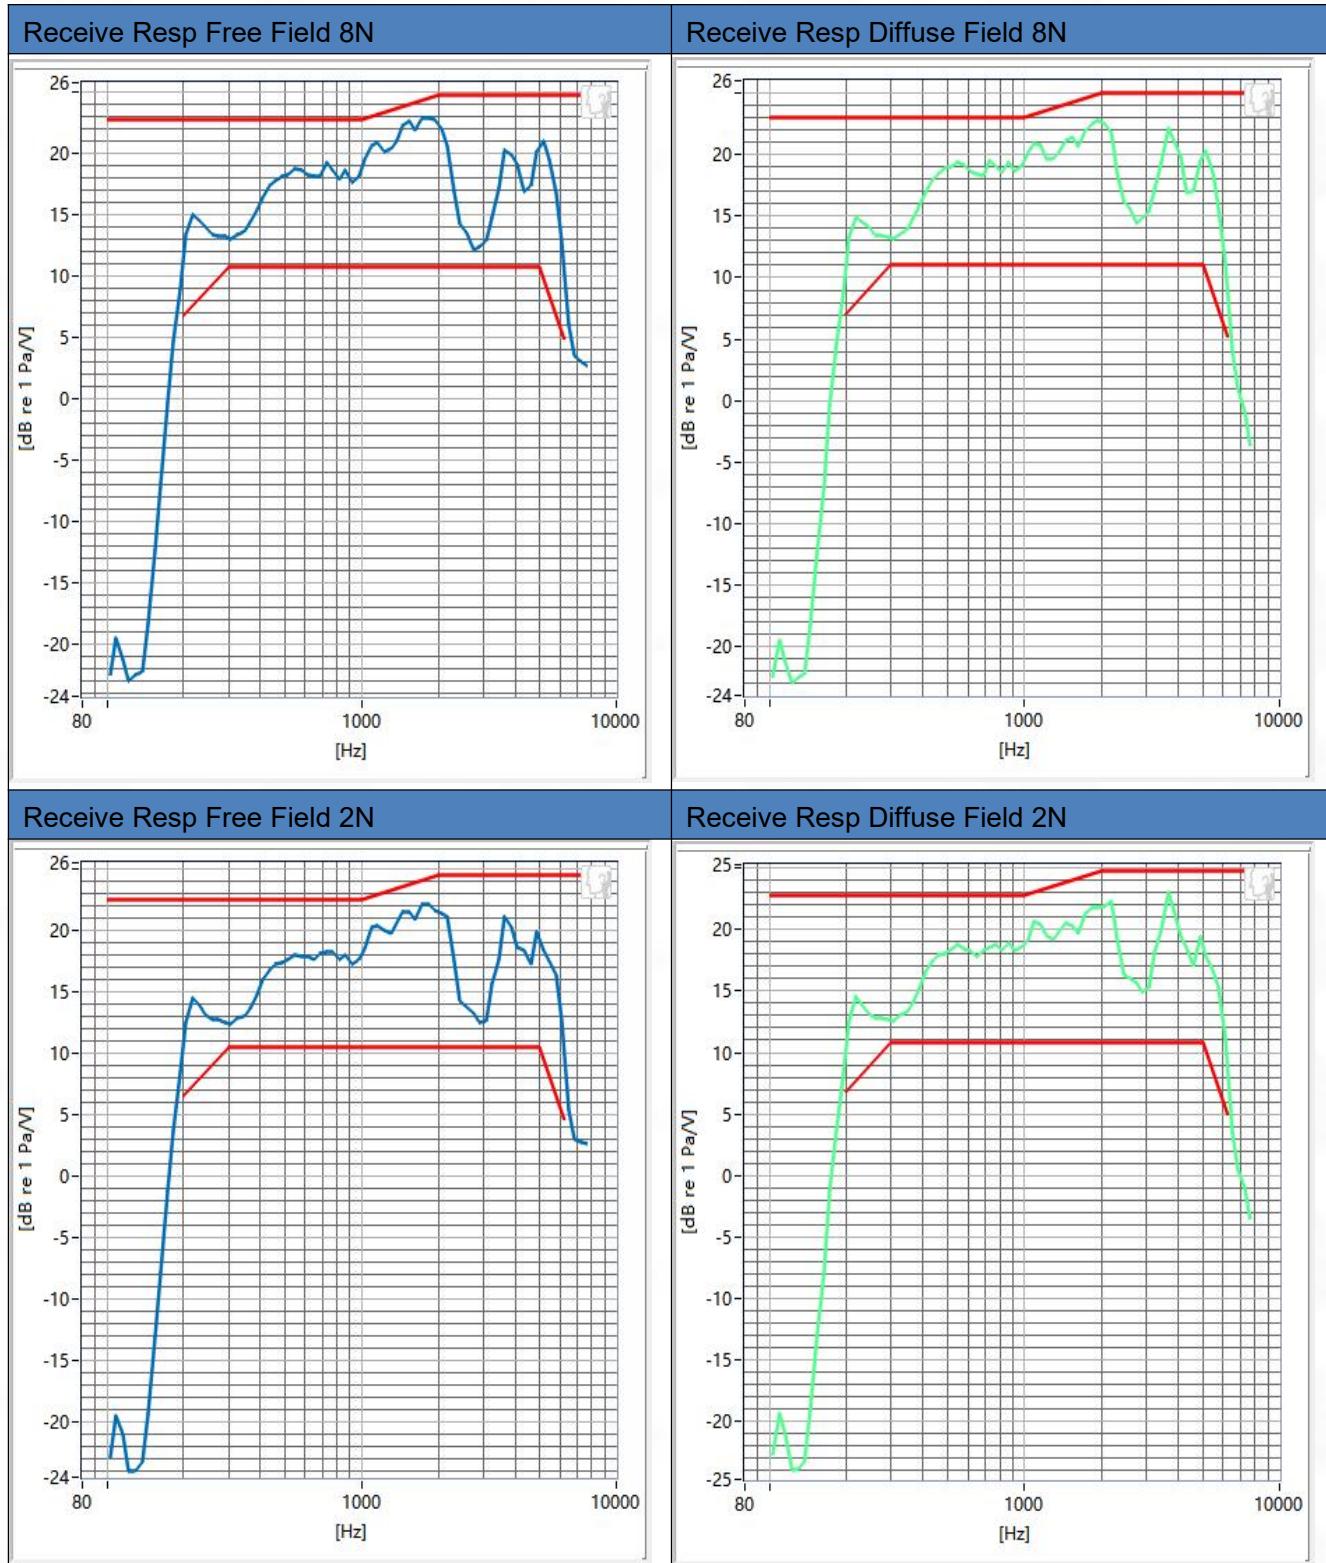3.3 Receive Frequency Response




4. 2.4G WIFI in channel 1

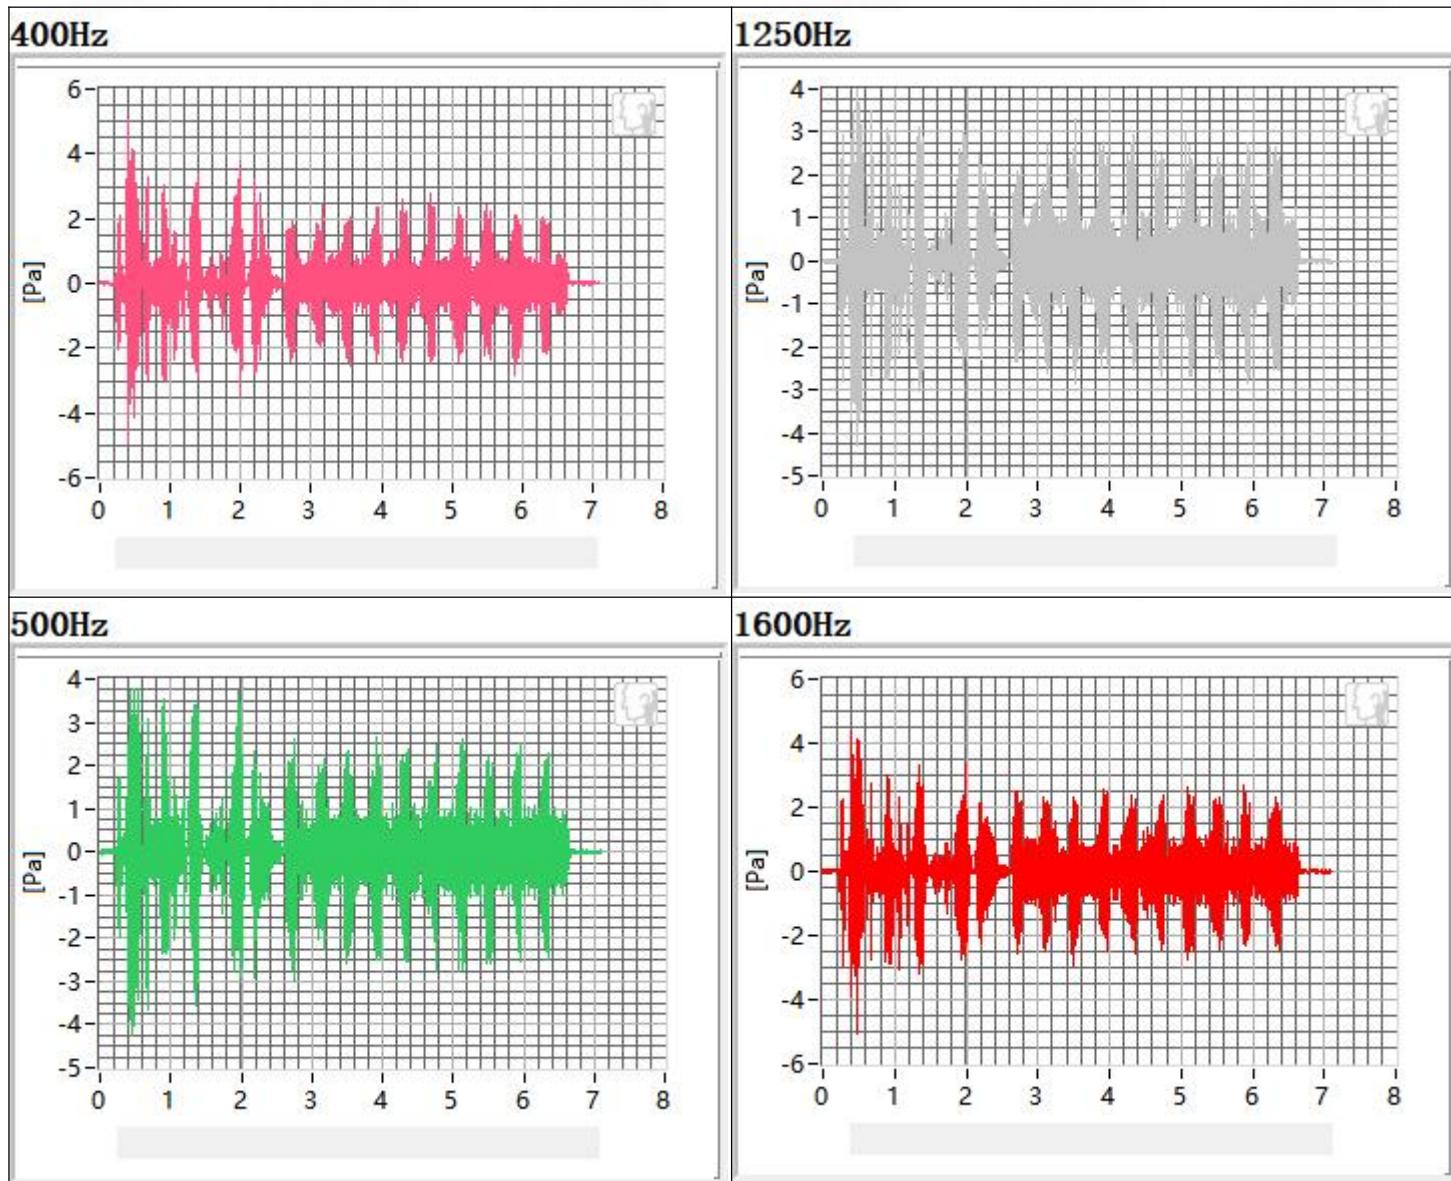
4.1 Receive Distortion and Noise 8N NB




630Hz

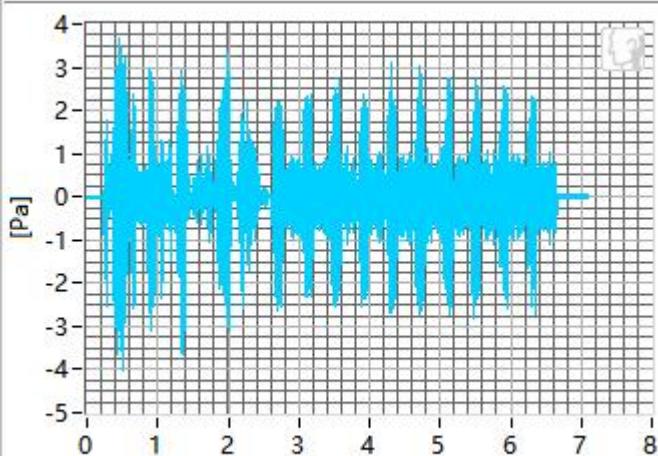


2000Hz

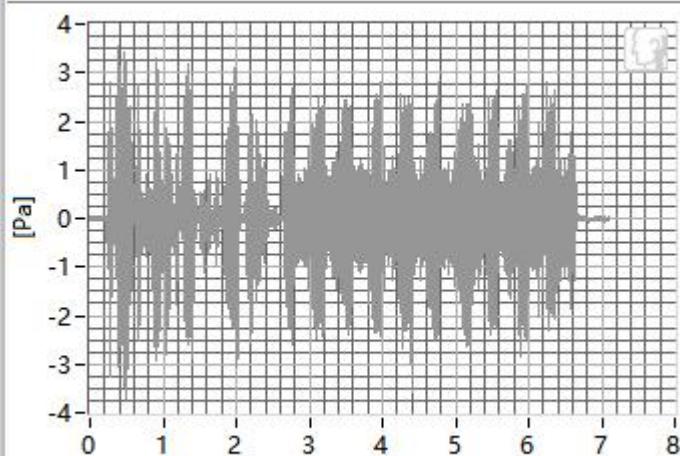


800Hz

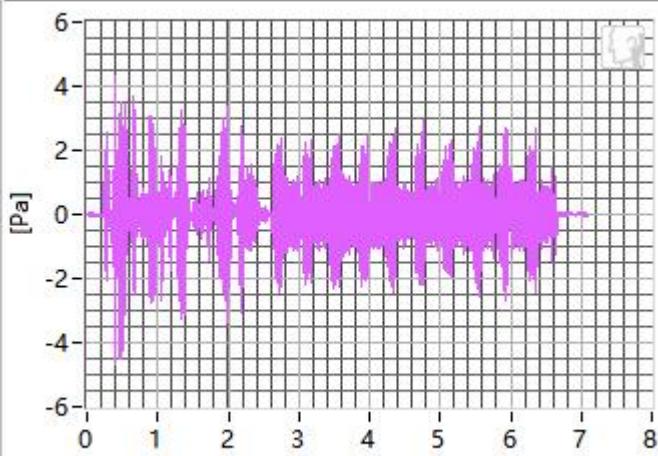


2500Hz

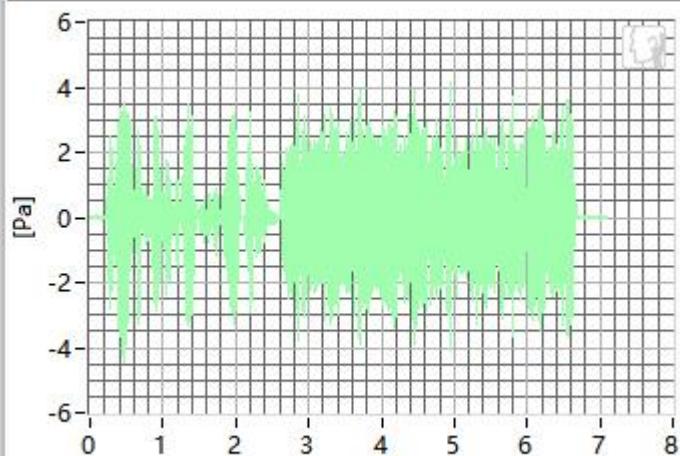


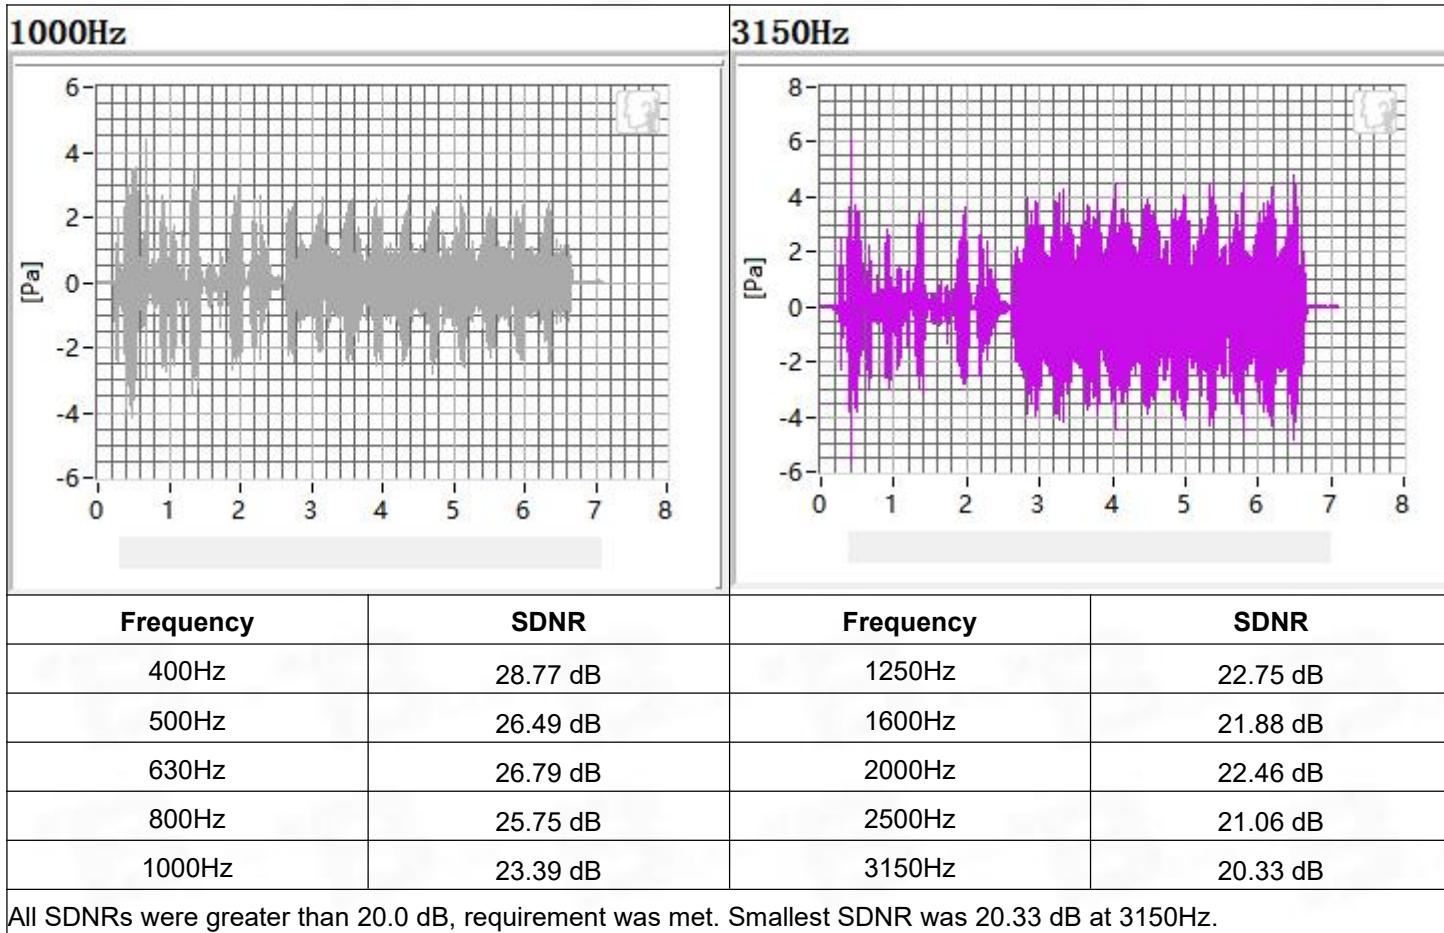

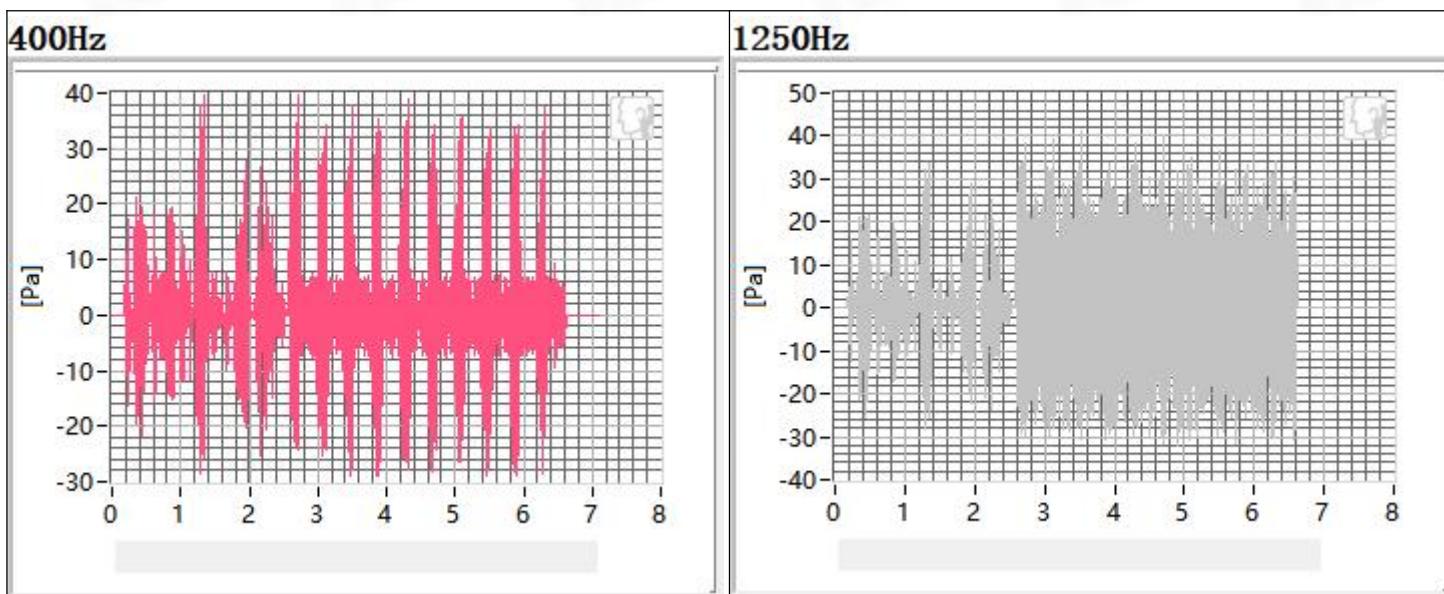
4.2 Receive Distortion and Noise 2N NB




500Hz

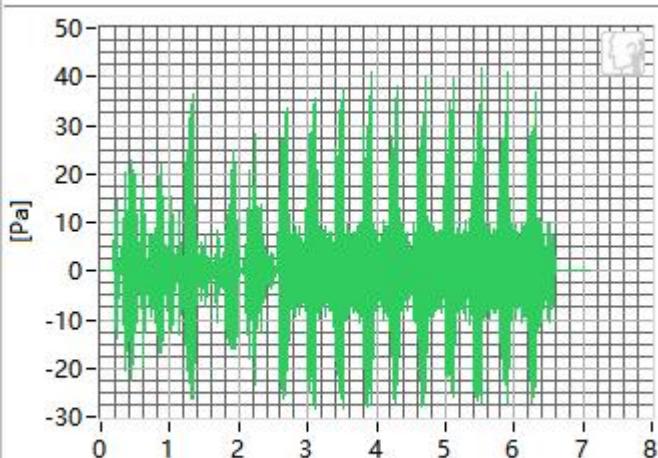


1600Hz




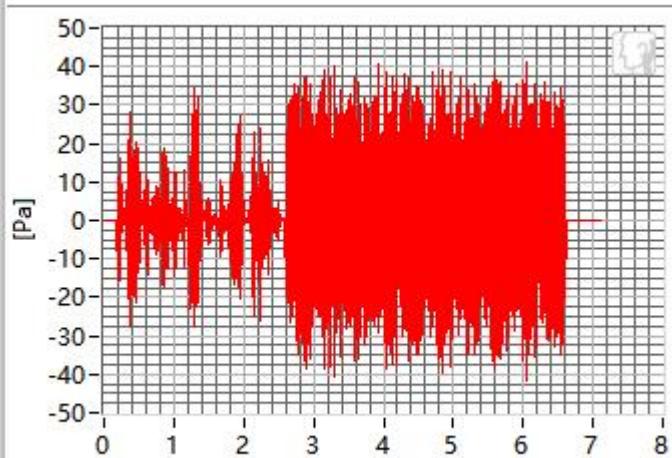


630Hz

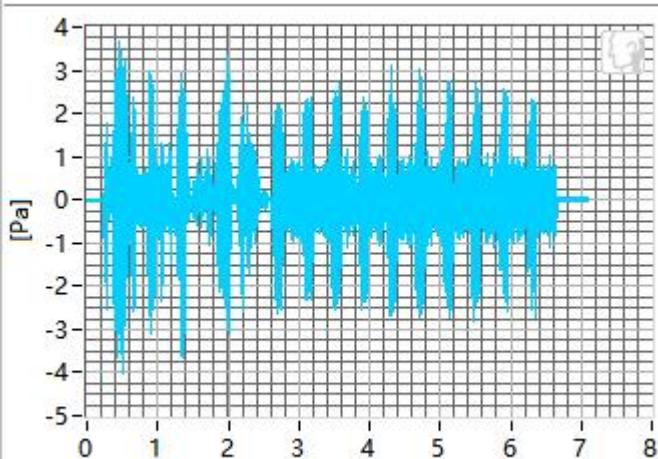

2000Hz

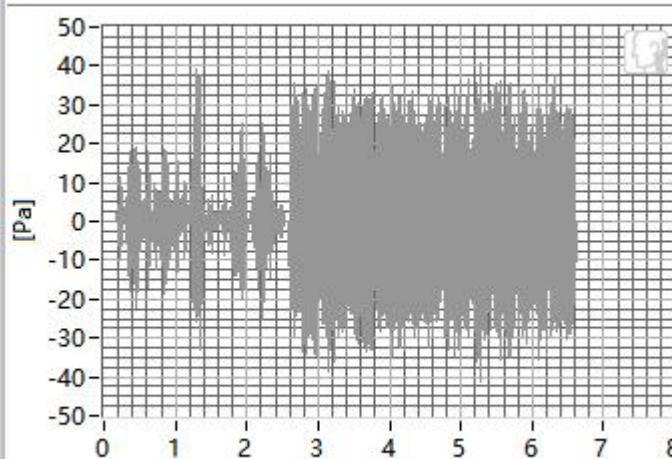

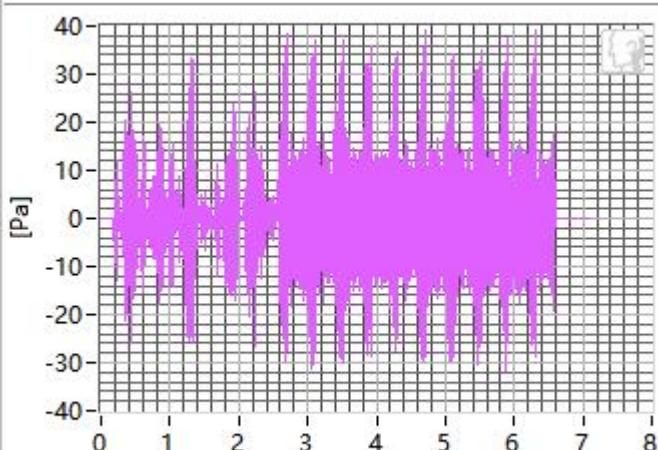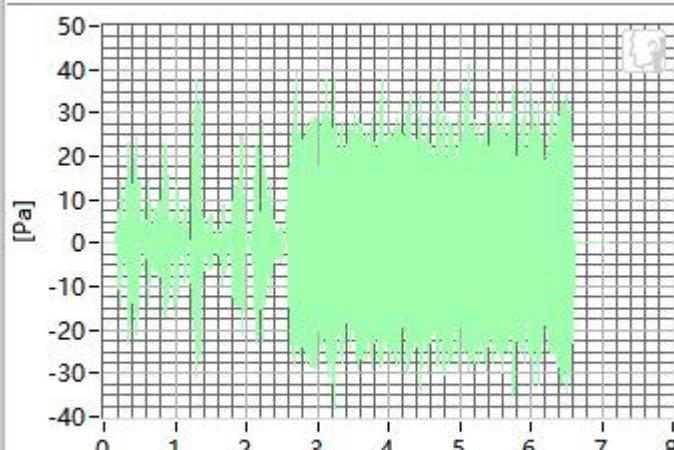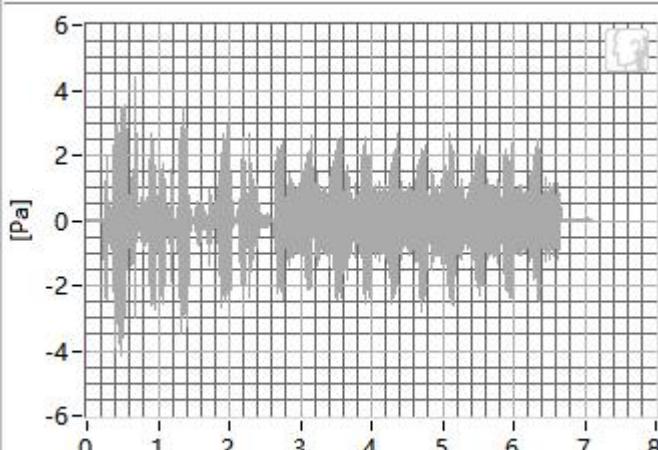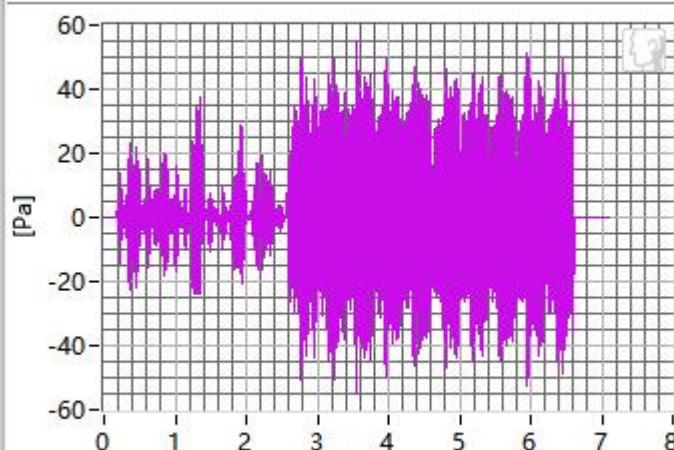800Hz

2500Hz

1000Hz

3150Hz

Frequency
SDNR
Frequency
SDNR

400Hz 29.46 dB

1250Hz 22.79 dB

500Hz 28.79 dB

1600Hz 23.59 dB

630Hz 28.45 dB

2000Hz 21.48 dB

800Hz 27.68 dB

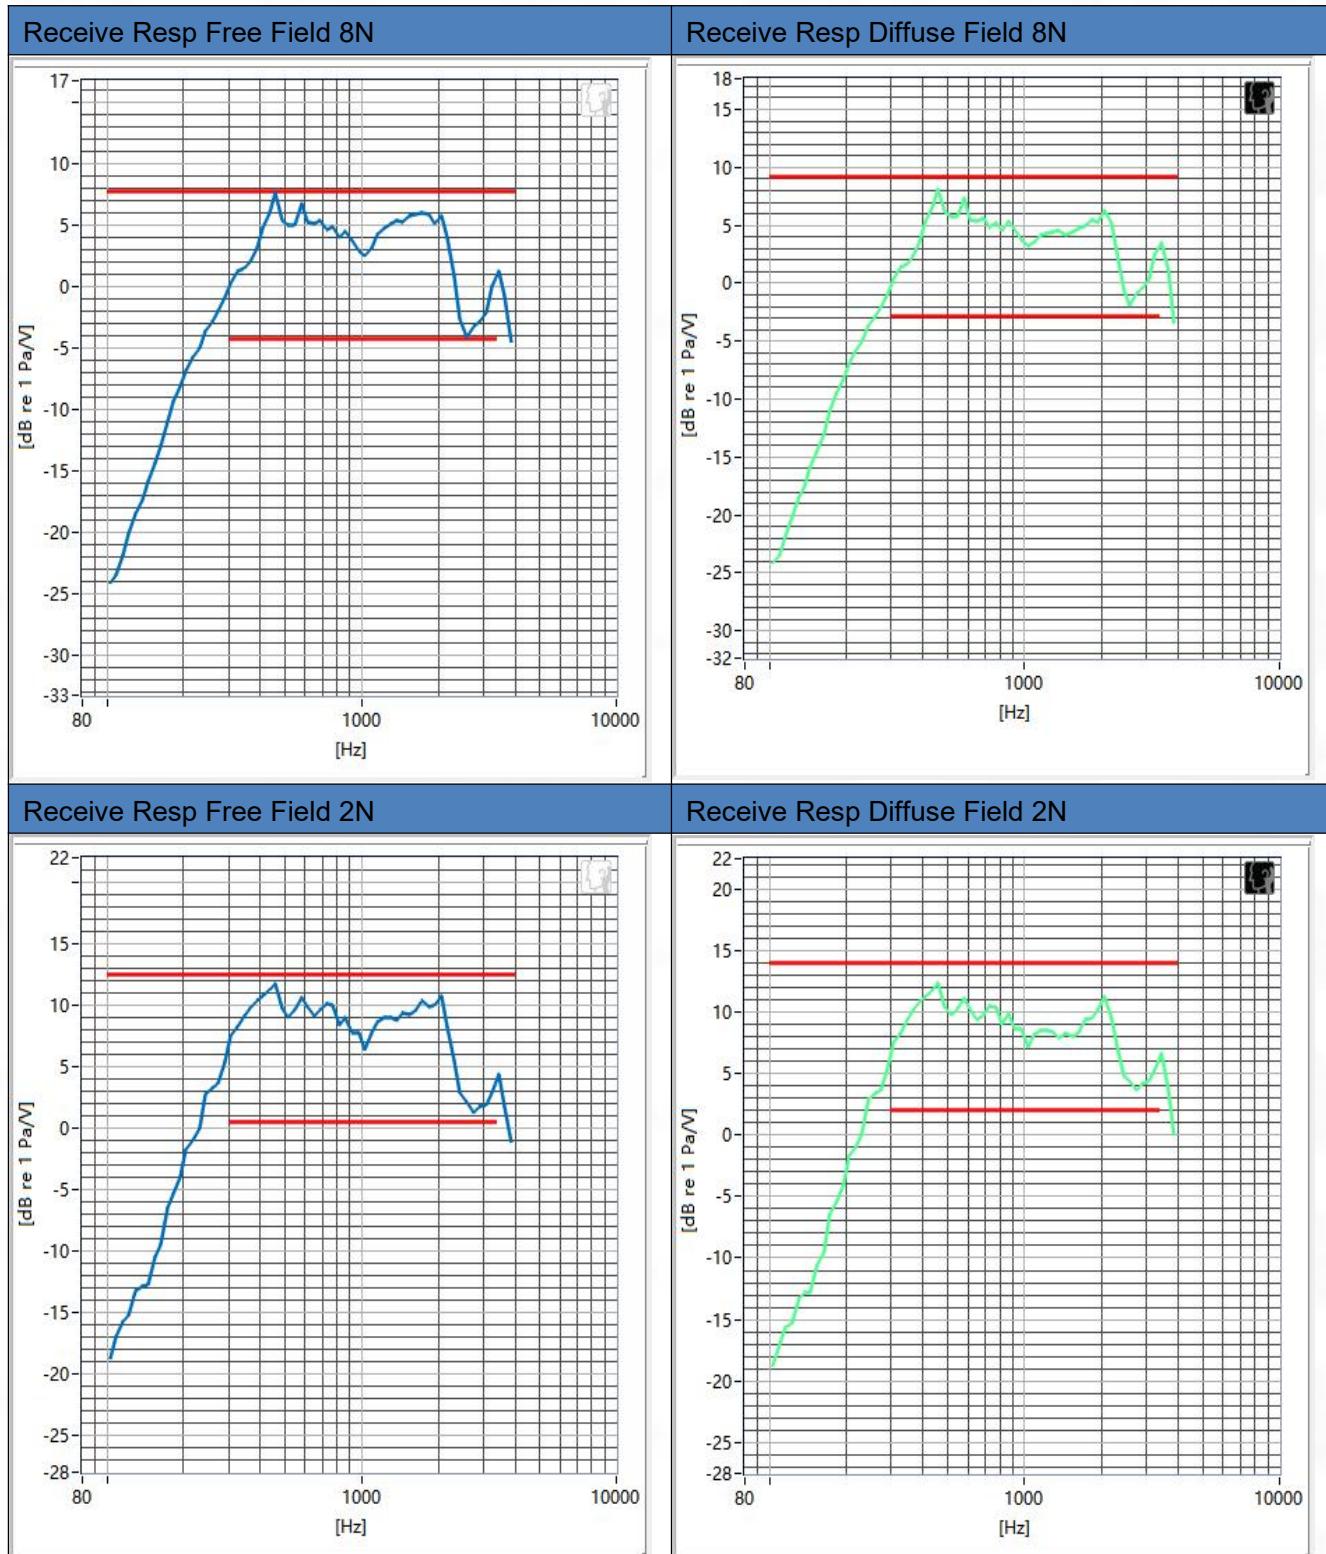
2500Hz 21.66 dB

1000Hz 25.89 dB


3150Hz 20.63 dB

All SDNRs were greater than 20.0 dB, requirement was met. Smallest SDNR was 20.63 dB at 3150Hz.

4.3 Receive Frequency Response



ANNEX B Test Setup Photo

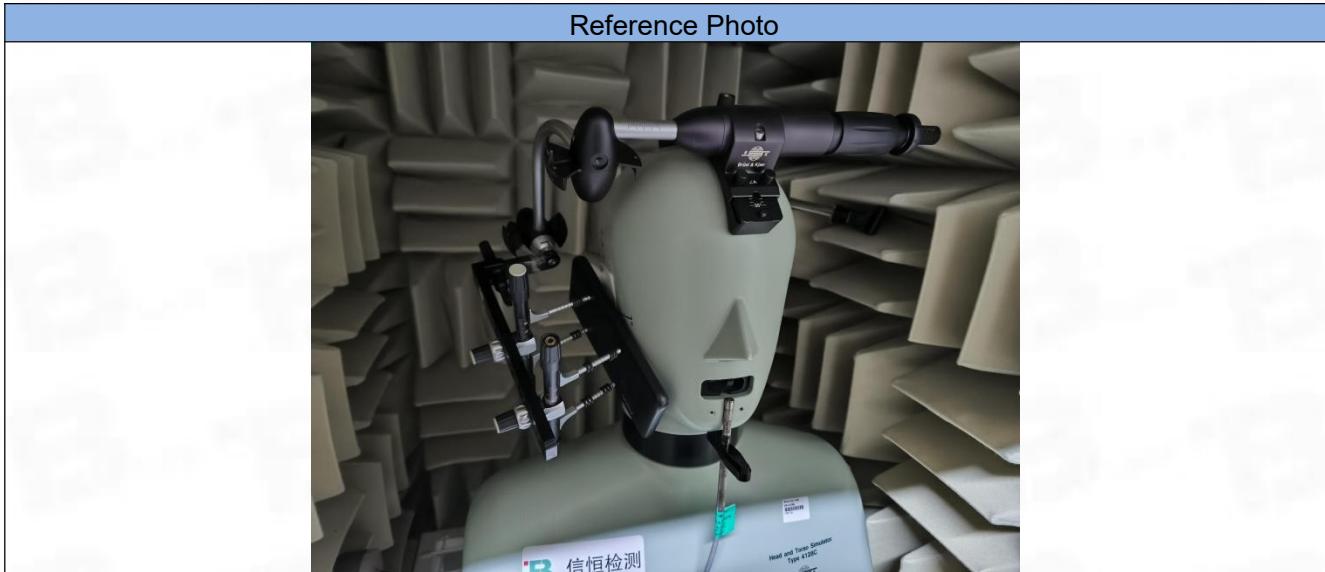

ANNEX C CALIBRATION REPORT

Please refer the document "CALIBRATION REPORT.pdf".

ANNEX D EUT photograph

Please refer to "EUT photograph.pdf".



BTF Testing Lab (Shenzhen) Co., Ltd.

F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street,
Bao'an District, Shenzhen, China

www.btf-lab.com

--END OF REPORT--