

FCC Test Report

Product Name : Electrand
Trade Name : genteq
Model No. : 8794700LAG01
FCC ID. : 2AQRT-LAG01

Applicant : Regal Beloit

Address : 1946 West Cook Road, Fort Wayne, Indiana 46818, United States

Date of Receipt : Oct. 31, 2018
Issued Date : Dec. 13, 2018
Report No. : 18B0105R-RFUSP01V00
Report Version : V2.0



The test results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of DEKRA Testing and Certification Co., Ltd.

Test Report Certification

Issued Date : Dec. 13, 2018

Report No. : 18B0105R-RFUSP01V00




Product Name : Electrand
Applicant : Regal Beloit
Address : 1946 West Cook Road, Fort Wayne, Indiana 46818, United States
Manufacturer : PCI Limited
Address : 35 Pioneer Road North, Singapore 628475
Trade Name : genteq
Model No. : 8794700LAG01
FCC ID. : 2AQRT-LAG01
EUT Voltage : AC 120V / 60Hz (Power by PC)
DC 3.7V (Power by Battery)
Testing Voltage : AC 120V / 60Hz (Power by PC)
DC 3.7V (Power by Battery)
Applicable Standard : FCC CFR Title 47 Part 15 Subpart C Section 15.247: 2017
ANSI C63.10: 2013
Laboratory Name : Hsin Chu Laboratory
Address : No.372-2, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County 310, Taiwan, R.O.C.
TEL: +886-3-582-8001 / FAX: +886-3-582-8958
Test Result : Complied

Documented By :




(Demi Chang / Senior Engineering Adm. Specialist)

Tested By :



(Elwin Lin / Engineer)

Approved By :



(Roy Wang / Director)

Revision History

Report No.	Version	Description	Issued Date
18B0105R-RFUSP01V00	V2.0	Initial issue of report	Dec. 13, 2018

TABLE OF CONTENTS

Description	Page
1. General Information	6
1.1. EUT Description	6
1.2. Test Mode	7
1.3. Tested System Details	8
1.4. Configuration of tested System	9
1.5. EUT Exercise Software	10
1.6. Test Facility	11
1.7. List of Test Equipment	12
1.8. Duty cycle	15
1.9. Uncertainty	16
2. Conducted Emission	17
2.1. Test Setup	17
2.2. Limits	17
2.3. Test Procedure	18
2.4. Test Specification	18
2.5. Test Result	19
3. Maximum peak conducted output power	21
3.1. Test Setup	21
3.2. Test procedures	21
3.3. Limits	21
3.4. Test Specification	21
3.5. Test Result	22
4. Radiated Emission	23
4.1. Test Setup	23
4.2. Limits	24
4.3. Test Procedure	25
4.4. Test Specification	25
4.5. Test Result	26
5. RF antenna conducted test	36
5.1. Test Setup	36
5.2. Limits	36
5.3. Test Procedure	36
5.4. Test Specification	36
5.5. Test Result	37
6. Radiated Emission Band Edge	41
6.1. Test Setup	41
6.2. Limits	41
6.3. Test Procedure	41
6.4. Test Specification	41
6.5. Test Result	42
7. Occupied Bandwidth & DTS Bandwidth	54
7.1. Test Setup	54

7.2.	Limits	54
7.3.	Test Procedures.....	54
7.4.	Test Specification.....	54
7.5.	Test Result.....	55
8.	Power Density	59
8.1.	Test Setup.....	59
8.2.	Limits	59
8.3.	Test Procedures.....	59
8.4.	Test Specification.....	59
8.5.	Test Result.....	60
Attachment 1		62
	Test Setup Photograph.....	62
Attachment 2		66
	EUT External Photograph.....	66
Attachment 3		71
	EUT Internal Photograph.....	71

1. General Information

1.1. EUT Description

Product Name	Electrand
Trade Name	genteq
Model No.	8794700LAG01
Frequency Range/Channel Number	2402~2480MHz / 40 Channels
Type of Modulation	GFSK

Antenna Information	
MFR. / Model No.	Green Antenna / GA123416BL02
Antenna Type	Omni-Directional Antenna
Antenna Gain	2.28 dBi

Accessories Information	
USB Cable	Non-Shielded, 0.96m

Working Frequency of Each Channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 00	2402 MHz	Channel 10	2422 MHz	Channel 20	2442 MHz	Channel 30	2462 MHz
Channel 01	2404 MHz	Channel 11	2424 MHz	Channel 21	2444 MHz	Channel 31	2464 MHz
Channel 02	2406 MHz	Channel 12	2426 MHz	Channel 22	2446 MHz	Channel 32	2466 MHz
Channel 03	2408 MHz	Channel 13	2428 MHz	Channel 23	2448 MHz	Channel 33	2468 MHz
Channel 04	2410 MHz	Channel 14	2430 MHz	Channel 24	2450 MHz	Channel 34	2470 MHz
Channel 05	2412 MHz	Channel 15	2432 MHz	Channel 25	2452 MHz	Channel 35	2472 MHz
Channel 06	2414 MHz	Channel 16	2434 MHz	Channel 26	2454 MHz	Channel 36	2474 MHz
Channel 07	2416MHz	Channel 17	2436 MHz	Channel 27	2456 MHz	Channel 37	2476 MHz
Channel 08	2418 MHz	Channel 18	2438 MHz	Channel 28	2458 MHz	Channel 38	2478 MHz
Channel 09	2420 MHz	Channel 19	2440 MHz	Channel 29	2460 MHz	Channel 39	2480 MHz

Note: Regards to the frequency band operation; the lowest 、 middle and highest frequency of channel were selected to perform the test, and then shown on this report.

1.2. Test Mode

DEKRA has verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

Test Mode	Mode 1: Transmit_Power by PC Mode 2: Transmit_Power by Battery
-----------	---

Test Items	Modulation	Channel	Result
Conducted Emission	GFSK	19	Complies
Maximum peak conducted output power	GFSK	00/19/39	Complies
Radiated Emission	GFSK	00/19/39	Complies
RF antenna conducted test	GFSK	00/19/39	Complies
Radiated Emission Radiated Emission Band Edge	GFSK	00/19/39	Complies
Occupied Bandwidth & DTS Bandwidth	GFSK	00/19/39	Complies
Power Density	GFSK	00/19/39	Complies

1.3. Tested System Details


The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Test Mode		Mode 1: Transmit_Power by PC				
Product		Manufacturer	Model No.	Serial No.	FCC ID	Power Cord
1	Notebook PC	ACER	PAV70	LUSEW0D03711 05FE221601	DoC	Non-Shielded, 2.5m one ferrite core bonded
2	Printer	HP	C2642A	MY75J1D1D2	DoC	Non-Shielded, 0.7m
3	Mouse	Logitech	M-SBF83	HCA52200174	DoC	--

Test Mode		Mode 2: Transmit_Power by Battery				
Product		Manufacturer	Model No.	Serial No.	FCC ID	Power Cord
N/A						

1.4. Configuration of tested System

Test Mode		Mode 1: Transmit_Power by PC	
Connection Diagram			
			
Signal Cable Type		Signal cable Description	
A	USB Cable	Shielded, 2m	
B	Print Cable	Non-Shielded, 3m	
C	USB Cable	Non-Shielded, 1.5m	

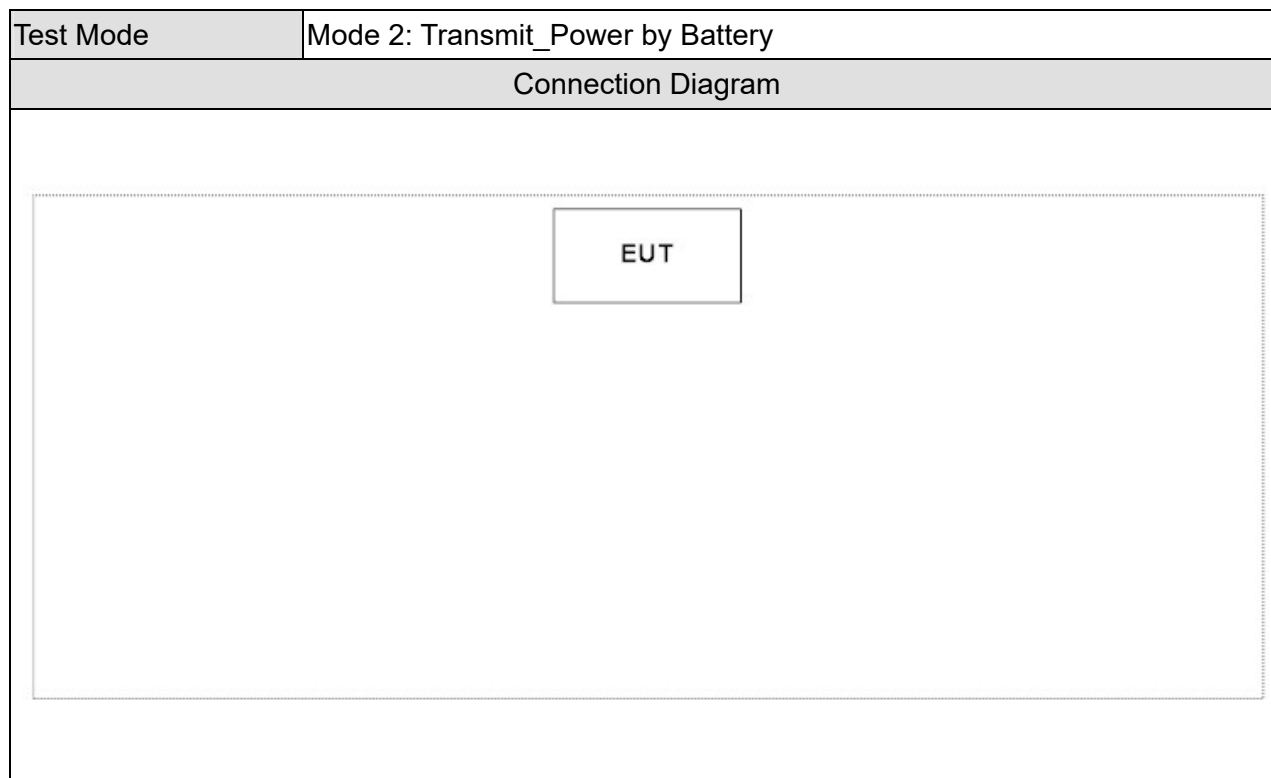

1.5. EUT Exercise Software

1	Setup the EUT as shown in Section 1.4.
2	Execute the TestAppwin on the EUT.
3	Configure the test mode, the test channel
4	Verify that the EUT works properly.

1.6. Test Facility

Ambient conditions in the laboratory:

Items	Test Item	Required (IEC 68-1)	Actual	Test Site
Temperature (°C)	FCC PART 15 C 15.207 Conducted Emission	15 - 35	20	3
Humidity (%RH)		25 - 75	50	
Barometric pressure (mbar)		860 - 1060	950-1000	
Temperature (°C)	FCC PART 15 C 15.247 Maximum peak conducted output power	15 - 35	24	3
Humidity (%RH)		25 - 75	45	
Barometric pressure (mbar)		860 - 1060	950-1000	
Temperature (°C)	FCC PART 15 C 15.247 Radiated Emission	15 - 35	25	2
Humidity (%RH)		25 - 75	54	
Barometric pressure (mbar)		860 - 1060	950-1000	
Temperature (°C)	FCC PART 15 C 15.247 RF antenna conducted test	15 - 35	24	3
Humidity (%RH)		25 - 75	45	
Barometric pressure (mbar)		860 - 1060	950-1000	
Temperature (°C)	FCC PART 15 C 15.247 Radiated Emission Band Edge	15 - 35	25	2
Humidity (%RH)		25 - 75	50	
Barometric pressure (mbar)		860 - 1060	950-1000	
Temperature (°C)	FCC PART 15 C 15.247 Occupied Bandwidth & DTS Bandwidth	15 - 35	24	3
Humidity (%RH)		25 - 75	45	
Barometric pressure (mbar)		860 - 1060	950-1000	
Temperature (°C)	FCC PART 15 C 15.247 Power Density	15 - 35	24	3
Humidity (%RH)		25 - 75	45	
Barometric pressure (mbar)		860 - 1060	950-1000	

Note: Test site information refers to Laboratory Information.

USA : FCC, Registration Number: TW3024

The related certificate for our laboratories about the test site and management system can be downloaded from DEKRA Testing and Certification Co., Ltd. Web Site:

<http://www.dekra.com.tw/english/about/certificates.aspx?bval=5>

The address and introduction of DEKRA Testing and Certification Co., Ltd. laboratories can be founded in our Web site: http://www.dekra.com.tw/index_en.aspx

If you have any comments, Please don't hesitate to contact us. Our test sites as below:

- No. 75-2, 3rd Lin, WangYe Keng, Yonghxing Tsuen, Qionglin Shiang, Hsinchu County 307, Taiwan (R.O.C.)
TEL: +886-3-592-8858 / FAX: +886-3-592-8859 E-Mail : info.tw@dekra.com
- No.372, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County 31061, Taiwan, R.O.C.
TEL: +886-3-582-8001 / FAX: +886-3-582-8958 E-Mail : info.tw@dekra.com
- No.372-2, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County 31061, Taiwan, R.O.C.
TEL: +886-3-582-8001 / FAX: +886-3-582-8958 E-Mail : info.tw@dekra.com

1.7. List of Test Equipment

Conducted Emission / SR2-H

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
Artificial Mains Network	R&S	ENV4200	848411/010	2018/01/22	2019/01/21
Test Receiver	R&S	ESCS 30	836858/022	2018/03/30	2019/03/29
LISN	R&S	ENV216	100092	2018/07/23	2019/07/22

Maximum peak conducted output power / SR10-H

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
High Speed Peak Power Meter Dual Input	Anritsu	ML2496A	1602004	2018/01/02	2019/01/01
Temperature & Humidity Test Chamber	WIT	TH-1S-B	1082101	2018/01/23	2019/01/22
Power Supply	Agilent	E3649A	MY50040066	NA	NA
Pulse Power Sensor	Anritsu	MA2411B	1531043	2018/01/02	2019/01/01
Pulse Power Sensor	Anritsu	MA2411B	1531044	2018/01/02	2019/01/01
Power Meter	Keysight	8990B	MY51000248	2018/06/07	2019/06/06
Power Sensor	Keysight	N1923A	MY57240005	2018/06/07	2019/06/06

Radiated Emission / CB2-H, CB4-H

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
Signal Analyzer	R&S	FSVA40	101455	2018/11/05	2019/11/04
Signal & Spectrum Analyzer	R&S	FSV40	101049	2018/01/10	2019/01/09
EXA Signal Analyzer	Keysight	N9010A	MY51440132	2018/03/05	2019/03/04
Bilog Antenna	Teseq	CBL6112D	23191	2018/06/26	2019/06/25
Horn Antenna	Schwarzbeck	BBHA 9120D	639	2018/06/01	2019/05/31
Horn Antenna	Schwarzbeck	BBHA 9170	202	2018/01/31	2019/01/30
Pre-Amplifier	Dekra	AP-025C	201801236	2018/02/26	2019/02/25
Pre-Amplifier	EMCI	EMC11830I	980366	2018/01/08	2019/01/07
Pre-Amplifier	Dekra	AP-400C	201801231	2018/12/05	2019/12/04
Horn Antenna	Schwarzbeck	BBHA 9120D	01656	2018/10/17	2019/10/16
Signal Analyzer	R&S	FSV40	101435	2018/07/19	2019/07/18
Band Reject Filter	Micro-Tronics	BRM50702	G192	2018/04/11	2019/04/10
Band Reject Filter	Micro-Tronics	BRM50716	G089	2018/04/11	2019/04/10
Band Reject Filter	Micro-Tronics	BRM50716	G068	2018/04/11	2019/04/10
Coaxial Cable	Huber+Suhner	SF104_SF104_SF104_SF104 (16.0m)	CB2-H	2018/08/21	2019/08/20
Coaxial Cable	Suhner	SF104_SF106_SF104_SF102 (23.5m)	CB4_1	2018/08/21	2019/08/20

RF antenna conducted test / SR10-H

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
Temperature & Humidity Test Chamber	WIT	TH-1S-B	1082101	2018/01/23	2019/01/22
Power Supply	Agilent	E3649A	MY50040066	NA	NA
Spectrum Analyzer	Keysight	N9030B	MY57140404	2018/06/26	2019/06/25
Spectrum Analyzer	Keysight	N9010B	MY57110159	2018/05/25	2019/05/24
Spectrum Analyzer	Agilent	N9010A	US47140172	2018/07/18	2019/07/17
Signal & Spectrum Analyzer	R&S	FSV40	101049	2018/01/10	2019/01/09

Radiated Emission Band Edge / CB4-H

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
Signal Analyzer	R&S	FSVA40	101455	2018/11/05	2019/11/04
Signal & Spectrum Analyzer	R&S	FSV40	101049	2018/01/10	2019/01/09
EXA Signal Analyzer	Keysight	N9010A	MY51440132	2018/03/05	2019/03/04
Bilog Antenna	Teseq	CBL6112D	23191	2018/06/26	2019/06/25
Horn Antenna	Schwarzbeck	BBHA 9120D	639	2018/06/01	2019/05/31
Horn Antenna	Schwarzbeck	BBHA 9170	202	2018/01/31	2019/01/30
Pre-Amplifier	Dekra	AP-025C	201801236	2018/02/26	2019/02/25
Pre-Amplifier	EMCI	EMC11830I	980366	2018/01/08	2019/01/07
Pre-Amplifier	Dekra	AP-400C	201801231	2018/12/05	2019/12/04
Horn Antenna	Schwarzbeck	BBHA 9120D	01656	2018/10/17	2019/10/16
Signal Analyzer	R&S	FSV40	101435	2018/07/19	2019/07/18
Band Reject Filter	Micro-Tronics	BRM50702	G192	2018/04/11	2019/04/10
Band Reject Filter	Micro-Tronics	BRM50716	G089	2018/04/11	2019/04/10
Band Reject Filter	Micro-Tronics	BRM50716	G068	2018/04/11	2019/04/10
Coaxial Cable	Suhner	SF104_SF106_ SF104_SF102 (23.5m)	CB4_1	2018/08/21	2019/08/20

Occupied Bandwidth & DTS Bandwidth / SR10-H

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
Temperature & Humidity Test Chamber	WIT	TH-1S-B	1082101	2018/01/23	2019/01/22
Power Supply	Agilent	E3649A	MY50040066	NA	NA
Spectrum Analyzer	Keysight	N9030B	MY57140404	2018/06/26	2019/06/25
Spectrum Analyzer	Keysight	N9010B	MY57110159	2018/05/25	2019/05/24
Spectrum Analyzer	Agilent	N9010A	US47140172	2018/07/18	2019/07/17
Signal & Spectrum Analyzer	R&S	FSV40	101049	2018/01/10	2019/01/09


Power Density / SR10-H

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
Temperature & Humidity Test Chamber	WIT	TH-1S-B	1082101	2018/01/23	2019/01/22
Power Supply	Agilent	E3649A	MY50040066	NA	NA
Spectrum Analyzer	Keysight	N9030B	MY57140404	2018/06/26	2019/06/25
Spectrum Analyzer	Keysight	N9010B	MY57110159	2018/05/25	2019/05/24
Spectrum Analyzer	Agilent	N9010A	US47140172	2018/07/18	2019/07/17
Signal & Spectrum Analyzer	R&S	FSV40	101049	2018/01/10	2019/01/09

Note: All equipment upon which need to calibrated are with calibration period of 1 year.

1.8. Duty cycle

Frequency	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
2440	0.389	0.624	62.30%	2.06	2.57

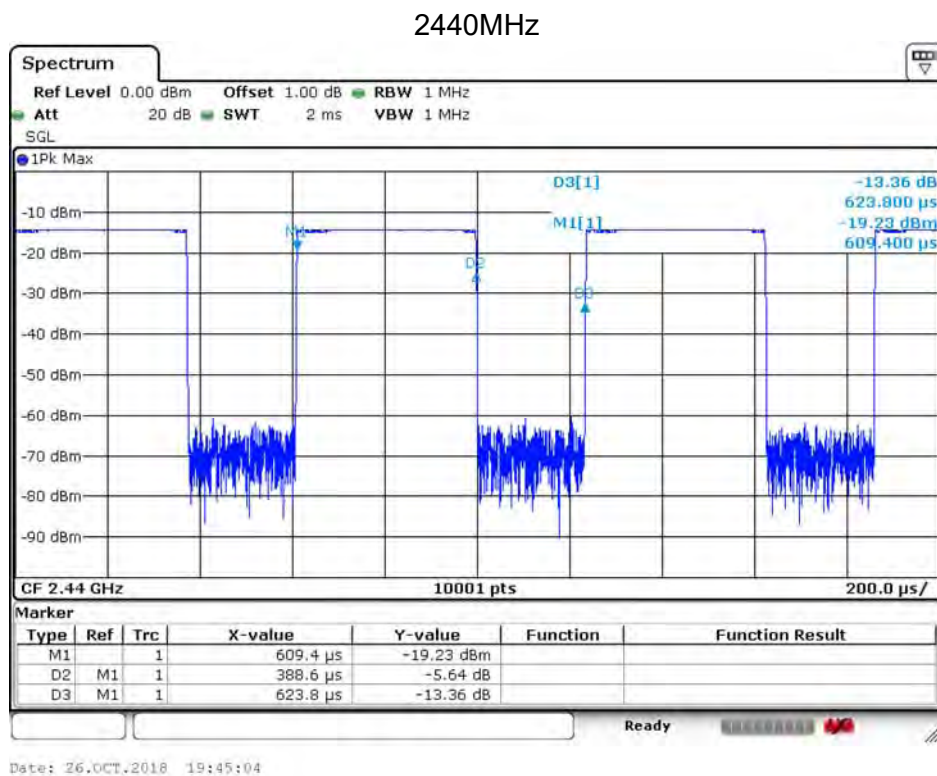


1.9. Uncertainty

Test item	Uncertainty
Conducted Emission	± 2.26 dB
Maximum peak conducted output power	± 1.27 dB
Radiated Emission	30MHz~1GHz as ± 3.43 dB 1GHz~26.5GHz as ± 3.65 dB
RF antenna conducted test	± 1.27 dB
Radiated Emission Radiated Emission Band Edge	± 3.9 dB
Occupied Bandwidth & DTS Bandwidth	± 50 Hz
Power Density	± 1.27 dB

2. Conducted Emission

2.1. Test Setup

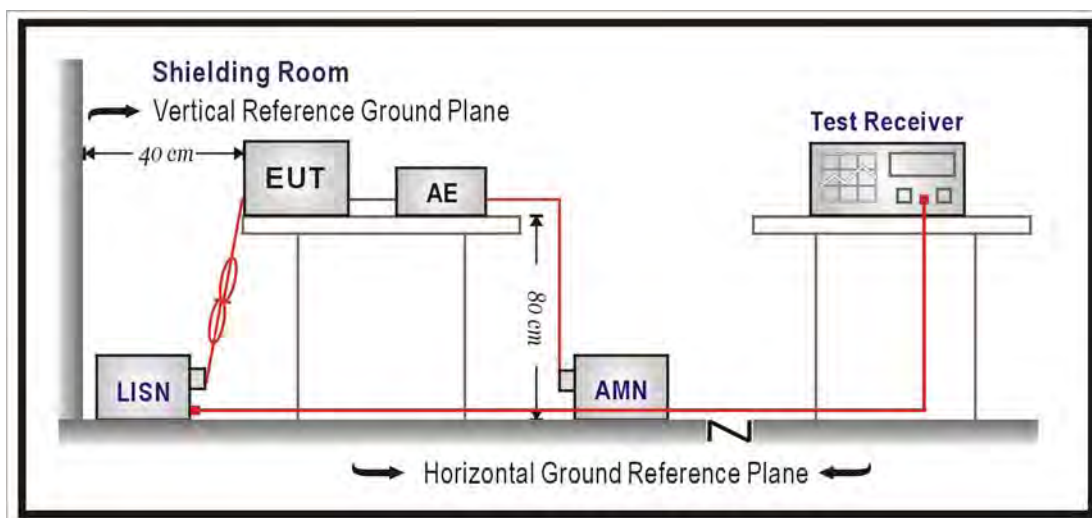

2.2. Limits

FCC Part 15 Subpart C Paragraph 15.207 Limits (dBuV)		
Frequency MHz	QP	AV
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Remarks: In the above table, the tighter limit applies at the band edges.

2.3. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2014 on conducted measurement.


Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9KHz.

2.4. Test Specification

According to FCC Part 15 Subpart C Paragraph 15.207: 2017

2.5. Test Result

Site : SR2-H	Time : 2018/11/14
Limit : CISPR_B_00M_QP	Margin : 10
Probe : SR2-B127_LISN(16A)-8 - Line1	Power : AC 120V/60Hz
EUT : Electrand	Note : Mode 1: Transmit_Power by PC 802.15.1_BLE_2440MHz

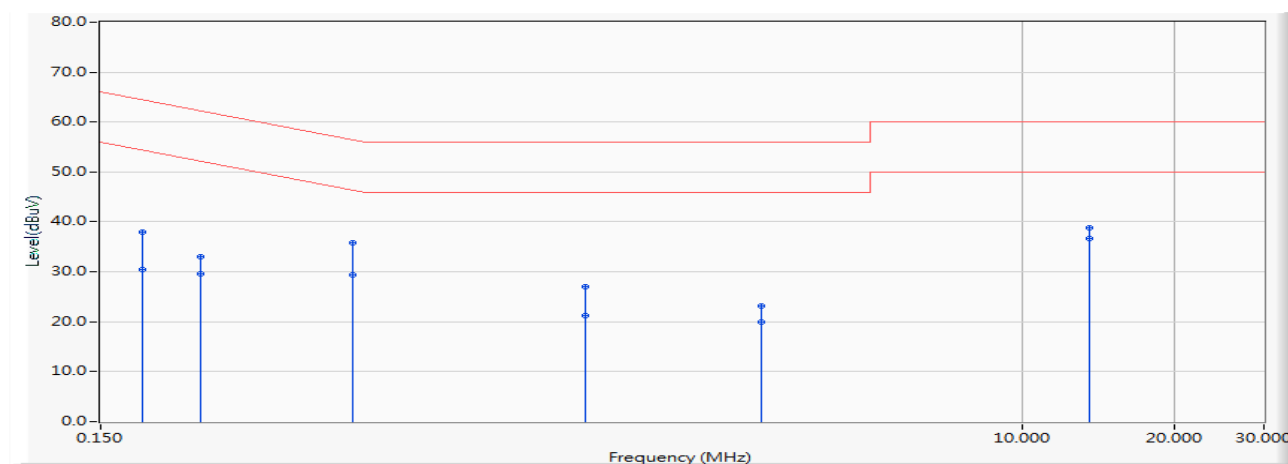


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1	0.181	9.680	28.330	38.010	-26.418	64.428	QUASIPeAK
2	0.181	9.680	20.730	30.410	-24.018	54.428	AVERAGE
3	0.236	9.680	23.300	32.980	-29.258	62.238	QUASIPeAK
4	0.236	9.680	19.860	29.540	-22.698	52.238	AVERAGE
5	0.474	9.681	26.040	35.721	-20.718	56.440	QUASIPeAK
6	0.474	9.681	19.770	29.451	-16.988	46.440	AVERAGE
7	1.361	9.794	17.280	27.074	-28.926	56.000	QUASIPeAK
8	1.361	9.794	11.530	21.324	-24.676	46.000	AVERAGE
9	3.033	9.805	13.400	23.205	-32.795	56.000	QUASIPeAK
10	3.033	9.805	10.150	19.955	-26.045	46.000	AVERAGE
11	13.560	10.275	28.570	38.845	-21.155	60.000	QUASIPeAK
12	*	10.275	26.360	36.635	-13.365	50.000	AVERAGE

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

Site : SR2-H	Time : 2018/11/14
Limit : CISPR_B_00M_QP	Margin : 10
Probe : SR2-B127_LISN(16A)-8 - Line2	Power : AC 120V/60Hz
EUT : Electrand	Note : Mode 1: Transmit_Power by PC 802.15.1_BLE_2440MHz

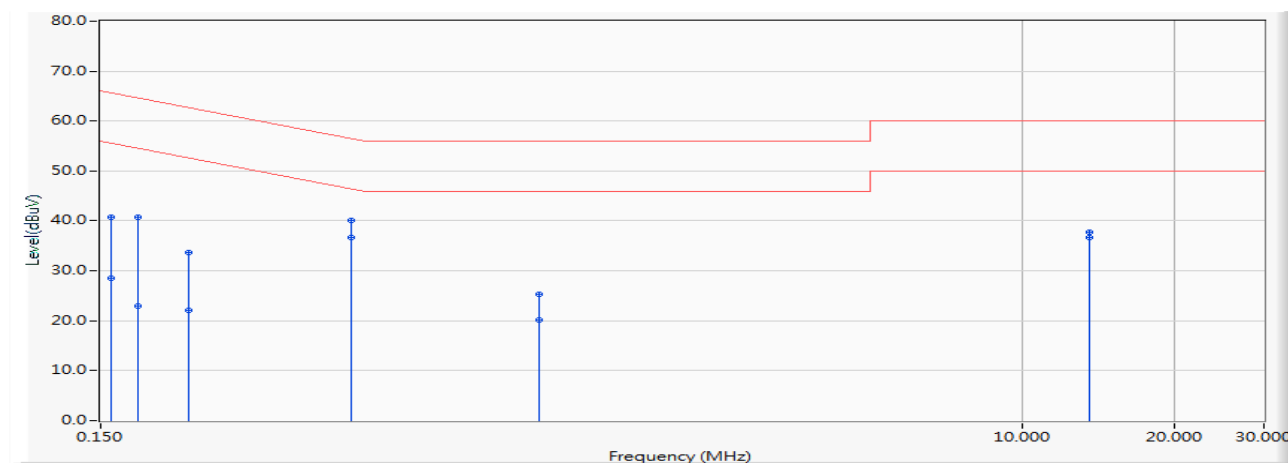


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1		0.158	9.680	30.970	40.650	-24.928	65.578	QUASIPeAK
2		0.158	9.680	18.790	28.470	-27.108	55.578	AVERAGE
3		0.177	9.680	31.040	40.720	-23.889	64.609	QUASIPeAK
4		0.177	9.680	13.290	22.970	-31.639	54.609	AVERAGE
5		0.224	9.680	24.050	33.730	-28.931	62.661	QUASIPeAK
6		0.224	9.680	12.390	22.070	-30.591	52.661	AVERAGE
7		0.470	9.681	30.470	40.151	-16.357	56.508	QUASIPeAK
8	*	0.470	9.681	27.050	36.731	-9.777	46.508	AVERAGE
9		1.103	9.791	15.600	25.391	-30.609	56.000	QUASIPeAK
10		1.103	9.791	10.320	20.111	-25.889	46.000	AVERAGE
11		13.560	10.250	27.570	37.821	-22.179	60.000	QUASIPeAK
12		13.560	10.250	26.410	36.661	-13.339	50.000	AVERAGE

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

3. Maximum peak conducted output power

3.1. Test Setup

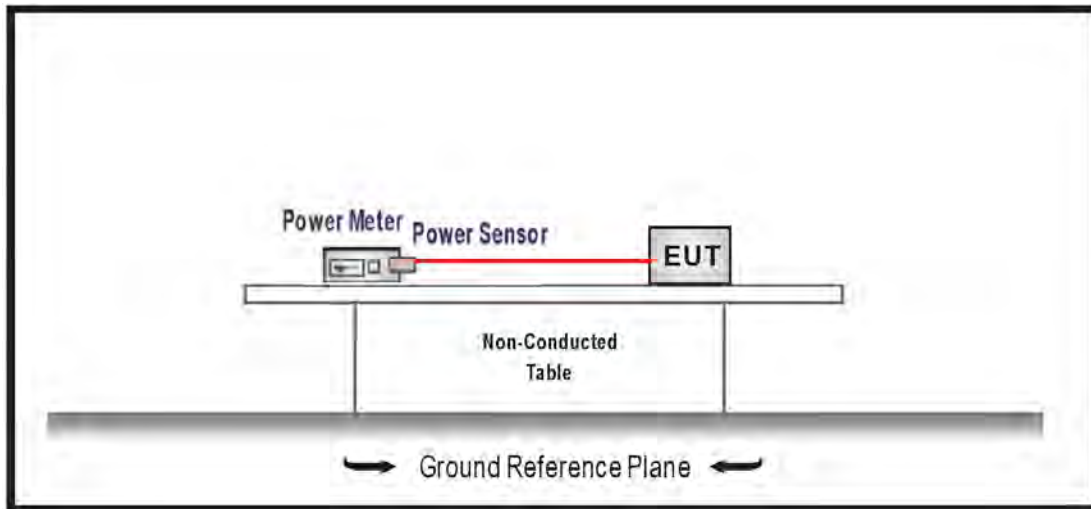

3.2. Test procedures

The EUT was setup according to ANSI C63.10: 2013; tested according to DTS test procedure of KDB 558074 V05 for compliance to FCC 47CFR 15.247 requirements.

3.3. Limits

The maximum peak power shall be less 1 Watt.

3.4. Test Specification

According to FCC Part 15 Subpart C Paragraph 15.247: 2017

3.5. Test Result


Product	Electrand		
Test Item	Maximum peak conducted output power		
Test Mode	Mode 1: Transmit_Power by PC		
Date of Test	2018/12/12	Test Site	SR10-H

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)
00	2402	3.650	≤ 30
19	2440	3.660	≤ 30
39	2480	3.640	≤ 30


4. Radiated Emission

4.1. Test Setup


Under 30MHz Test Setup:

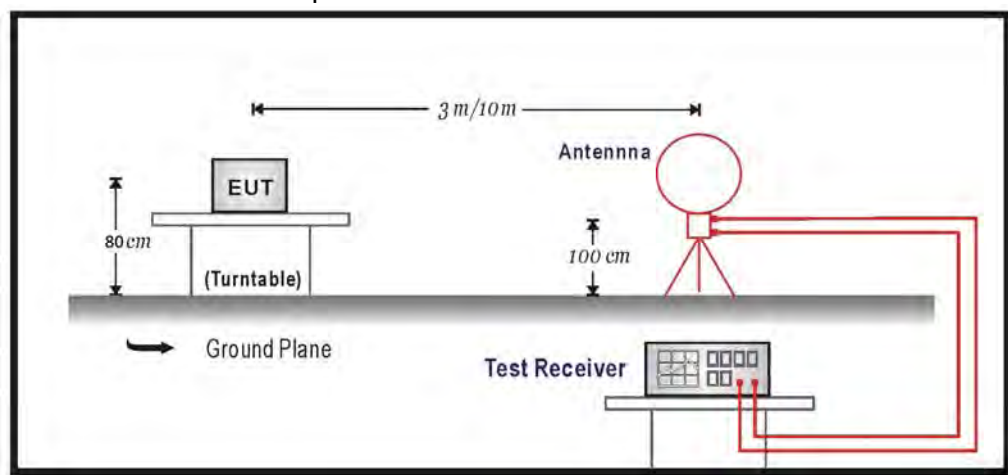

Under 1GHz Test Setup:

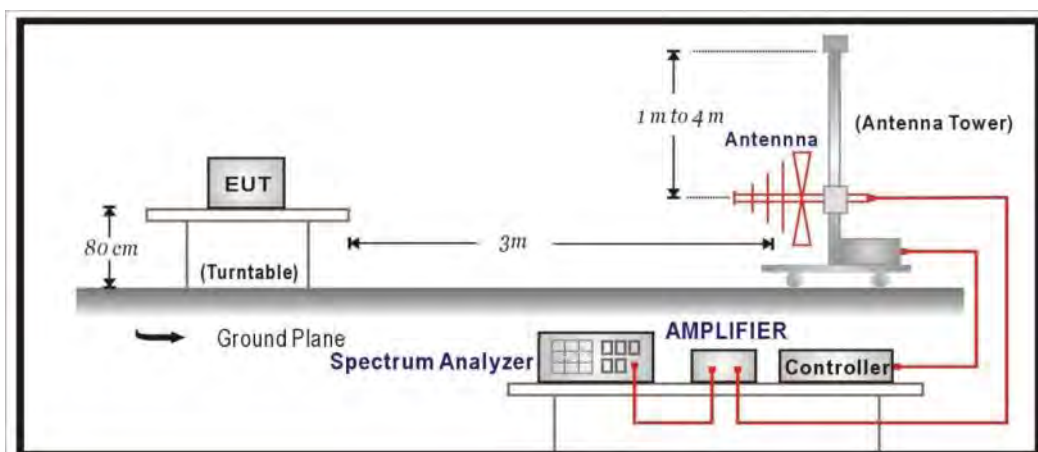

Above 1GHz Test Setup:

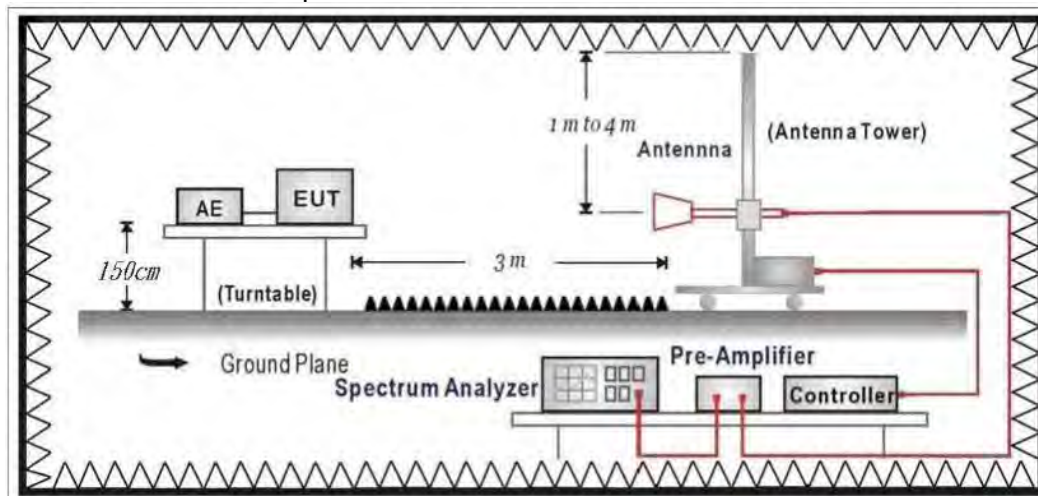

4.2. Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	uV/m	dBuV/m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

Remarks: 1. RF Voltage (dBuV) = 20 log RF Voltage (uV)

2. In the Above Table, the tighter limit applies at the Radiated Emission Band Edges.

3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

4.3. Test Procedure

The EUT was setup according to ANSI C63.10: 2013 and tested according to DTS test procedure of KDB 558074 V05 for compliance to FCC 47CFR 15.247 requirements.

The EUT and its simulators are placed on a turn table which is 0.8 or 1.5 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10: 2013 on radiated measurement.

On any frequency or frequencies from 9KHz (include The the lowest oscillator frequency generated within the device up to the 10th harmonic) to 1000 MHz, the limits shown are based on measuring equipment employing a quasi-peak detector function and on any frequency or frequencies above 1000 MHz the radiated limits shown are based upon the use of measurement instrumentation employing an average detector function. When average radiated emission measurement are included emission measurement below 1000 MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit. The bandwidth below 1GHz setting on the field strength meter is 120 kHz and above 1GHz is 1MHz.


4.4. Test Specification

According to FCC Part 15 Subpart C Paragraph 15.247:2017

4.5. Test Result

30MHz-1GHz Spurious

Site :	CB2-H	Engineer :	Mark
Model No :	8794700LAG01	Test Date :	2018/10/25
Test Voltage :	AC 120V/60Hz	Polarity :	Horizontal
Test Mode :	Mode 1: Transmit Power by PC		
Note :	802.15.1_BLE_2440MHz		

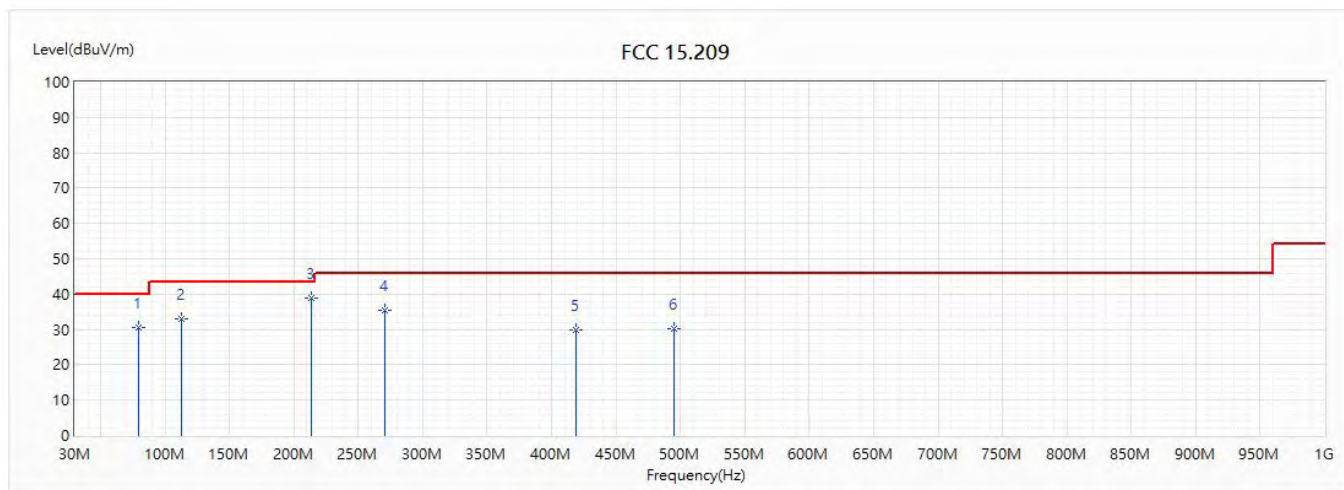


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	79.47	30.61	40.00	-9.39	57.82	-27.21	QP
2	112.45	32.90	43.50	-10.60	55.20	-22.30	QP
* 3	213.33	38.84	43.50	-4.66	61.49	-22.65	QP
4	270.56	35.40	46.00	-10.60	55.28	-19.88	QP
5	418.97	29.75	46.00	-16.25	45.38	-15.63	QP
6	494.63	30.24	46.00	-15.76	44.78	-14.54	QP

Note:

1. All Reading Levels is Quasi-Peak value.
2. " * ", means this data is the worst emission level.
3. Emission Level = Reading Level + Correct Factor
4. The Emission under 30MHz were not included is because their levels are too low.

Site :	CB2-H	Engineer :	Mark
Model No :	8794700LAG01	Test Date :	2018/10/25
Test Voltage :	AC 120V/60Hz	Polarity :	Vertical
Test Mode :	Mode 1: Transmit Power by PC		
Note :	802.15.1_BLE_2440MHz		

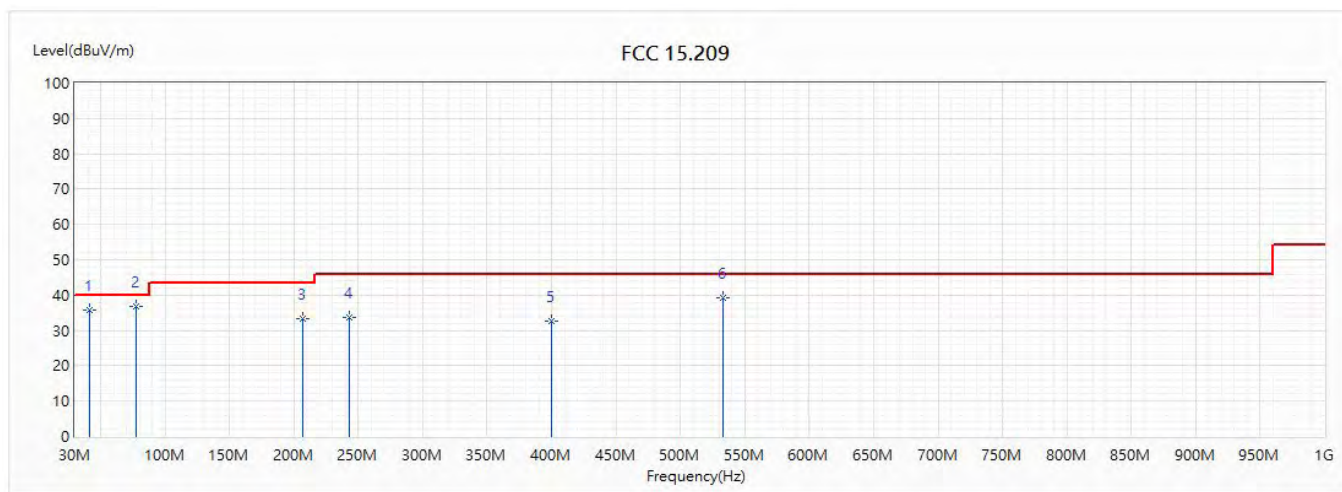


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	41.64	35.93	40.00	-4.07	54.74	-18.81	QP
* 2	77.53	36.97	40.00	-3.03	64.41	-27.44	QP
3	206.54	33.16	43.50	-10.34	56.22	-23.06	QP
4	243.4	33.59	46.00	-12.41	54.37	-20.78	QP
5	399.57	32.73	46.00	-13.27	48.69	-15.96	QP
6	533.43	39.22	46.00	-6.78	53.31	-14.09	QP

Note:

1. All Reading Levels is Quasi-Peak value.
2. " * ", means this data is the worst emission level.
3. Emission Level = Reading Level + Correct Factor
4. The Emission under 30MHz were not included is because their levels are too low.

Site :	CB2-H	Engineer :	Mark
Model No :	8794700LAG01	Test Date :	2018/10/25
Test Voltage :	DC 3.7V	Polarity :	Horizontal
Test Mode :	Mode 2: Transmit_Power by Battery		
Note :	802.15.1_BLE_2440MHz		

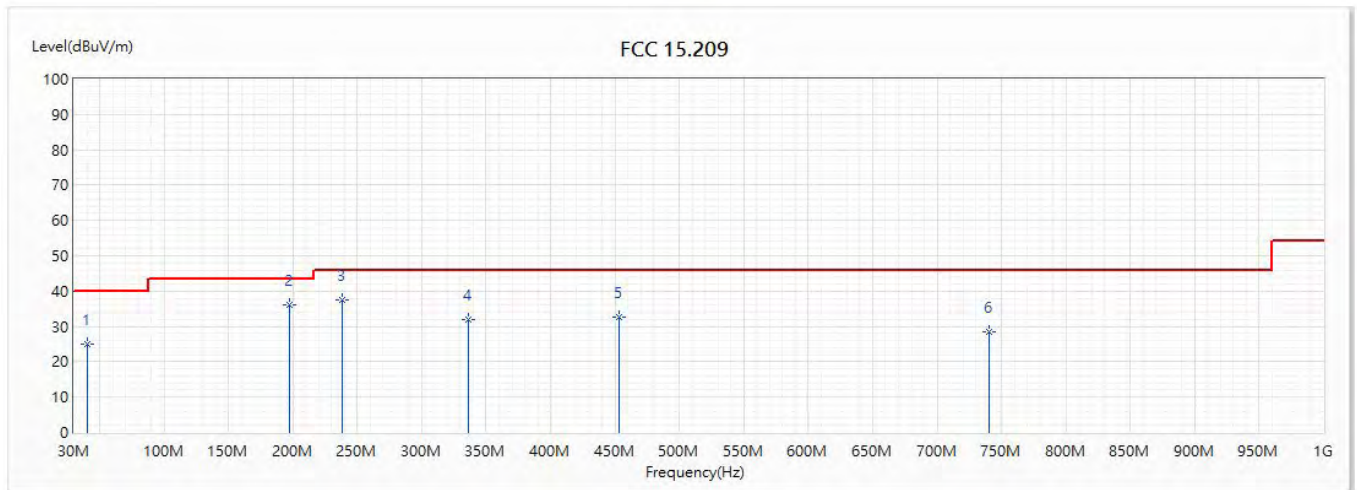


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	40.67	25.05	40.00	-14.95	42.72	-17.67	QP
* 2	197.81	36.03	43.50	-7.47	59.58	-23.55	QP
3	238.55	37.46	46.00	-8.54	58.55	-21.09	QP
4	336.52	32.01	46.00	-13.99	49.95	-17.94	QP
5	452.92	32.67	46.00	-13.33	47.80	-15.13	QP
6	740.04	28.40	46.00	-17.60	40.24	-11.84	QP

Note:

1. All Reading Levels is Quasi-Peak value.
2. " * ", means this data is the worst emission level.
3. Emission Level = Reading Level + Correct Factor
4. The Emission under 30MHz were not included is because their levels are too low.

Site :	CB2-H	Engineer :	Mark
Model No :	8794700LAG01	Test Date :	2018/10/25
Test Voltage :	DC 3.7V	Polarity :	Vertical
Test Mode :	Mode 2: Transmit_Power by Battery		
Note :	802.15.1_BLE_2440MHz		

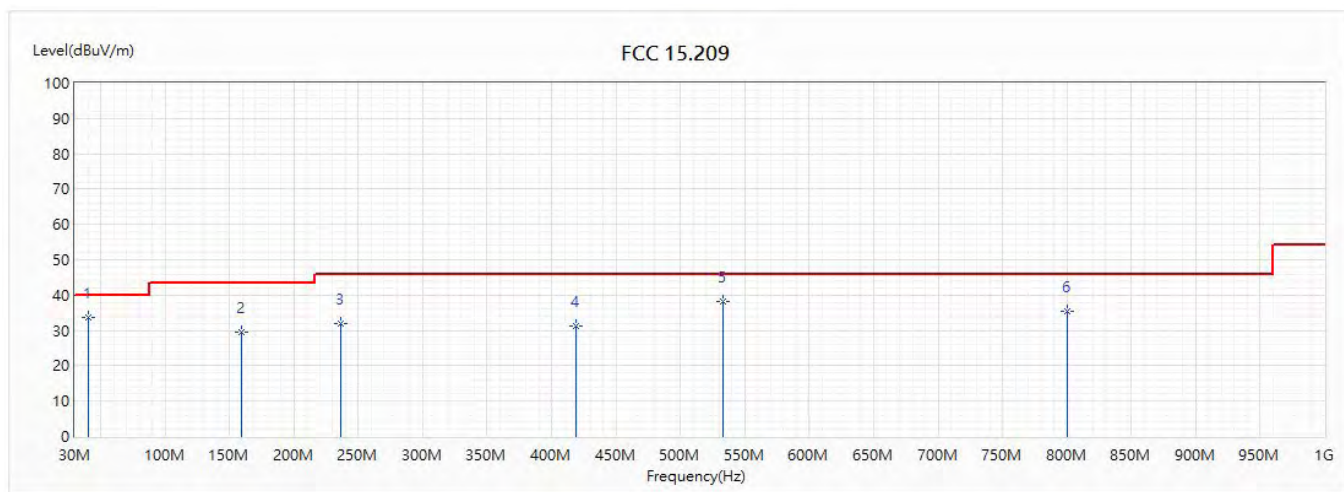


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	40.67	33.80	40.00	-6.20	51.47	-17.67	QP
2	159.01	29.39	43.50	-14.11	52.37	-22.98	QP
3	236.61	32.08	46.00	-13.92	53.29	-21.21	QP
4	418.97	31.14	46.00	-14.86	46.77	-15.63	QP
5	533.43	38.05	46.00	-7.95	52.14	-14.09	QP
6	800.18	35.48	46.00	-10.52	46.59	-11.11	QP

Note:

1. All Reading Levels is Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + Correct Factor
4. The Emission under 30MHz were not included is because their levels are too low.

Harmonic & Spurious:

Site :	CB4-H	Engineer :	Lion
Model No :	8794700LAG01	Test Date :	2018/10/30
Test Voltage :	AC 120V/60Hz	Polarity :	Horizontal
Test Mode :	Mode 1: Transmit Power by PC		
Note :	802.15.1_BLE_2402MHz		

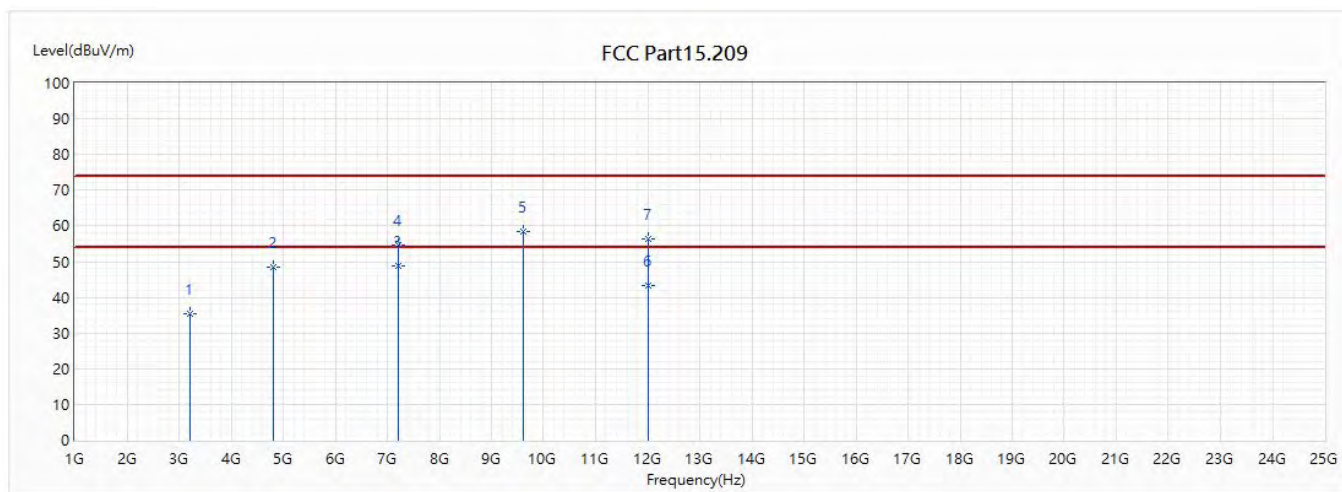


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	3206.667	35.27	74.00	-38.73	39.65	-4.38	PK
2	4804	48.30	74.00	-25.70	47.12	1.18	PK
* 3	7206	48.79	54.00	-5.21	39.25	9.54	AV
4	7206	54.50	74.00	-19.50	44.96	9.54	PK
5	9608	58.39	74.00	-15.61	43.97	14.42	PK
6	12010	43.37	54.00	-10.63	24.60	18.77	AV
7	12010	56.41	74.00	-17.59	37.64	18.77	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 13GHz were not included is because their levels are too low.

Site :	CB4-H	Engineer :	Lion
Model No :	8794700LAG01	Test Date :	2018/10/30
Test Voltage :	AC 120V/60Hz	Polarity :	Vertical
Test Mode :	Mode 1: Transmit Power by PC		
Note :	802.15.1_BLE_2402MHz		

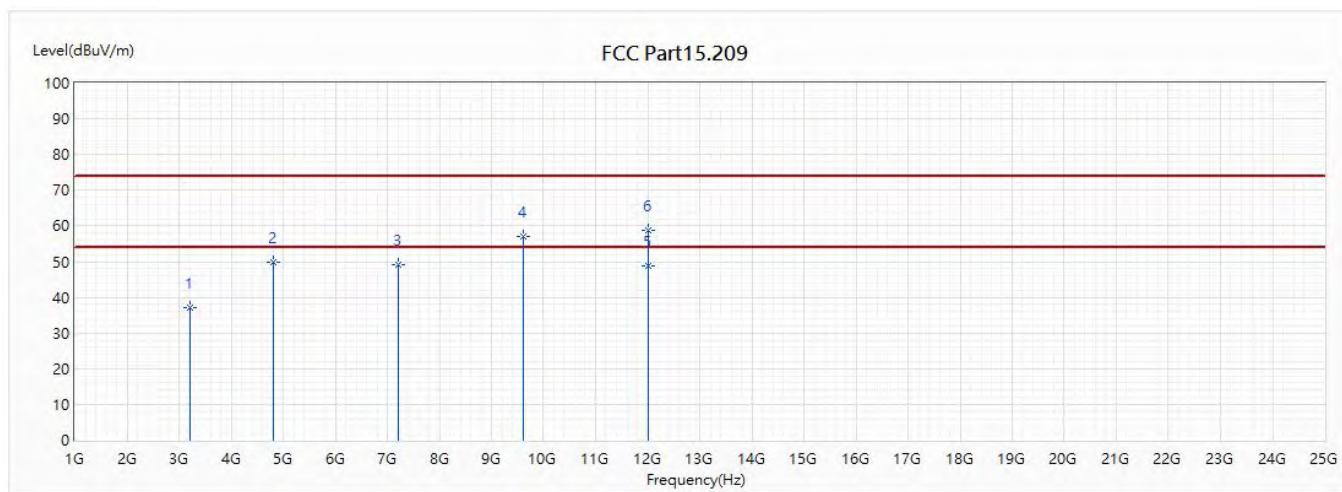


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	3206.667	37.06	74.00	-36.94	41.44	-4.38	PK
2	4804	49.69	74.00	-24.31	48.51	1.18	PK
3	7206	49.07	74.00	-24.93	39.53	9.54	PK
4	9608	56.99	74.00	-17.01	42.57	14.42	PK
* 5	12010	48.63	54.00	-5.37	29.86	18.77	AV
6	12010	58.88	74.00	-15.12	40.11	18.77	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 13GHz were not included is because their levels are too low.

Site :	CB4-H	Engineer :	Lion
Model No :	8794700LAG01	Test Date :	2018/10/30
Test Voltage :	AC 120V/60Hz	Polarity :	Horizontal
Test Mode :	Mode 1: Transmit Power by PC		
Note :	802.15.1_BLE_2440MHz		

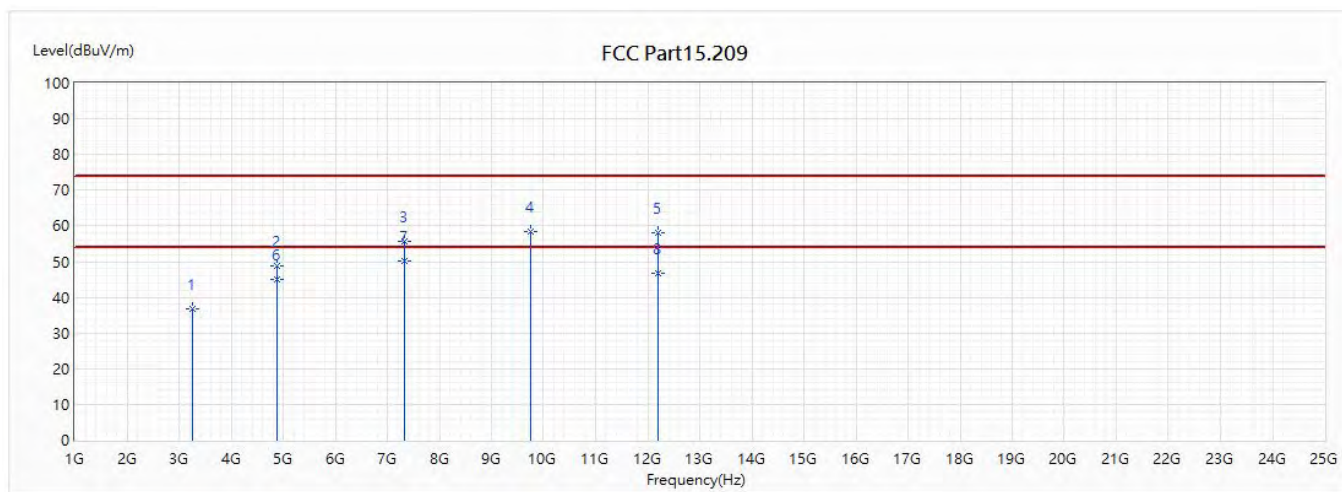


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	3253.333	36.65	74.00	-37.35	41.00	-4.35	PK
2	4880	48.77	74.00	-25.23	47.17	1.60	PK
3	7320	55.51	74.00	-18.49	45.61	9.90	PK
4	9760	58.33	74.00	-15.67	43.69	14.64	PK
5	12200	58.12	74.00	-15.88	39.72	18.40	PK
6	4880	44.92	54.00	-9.08	43.32	1.60	AV
* 7	7320	50.06	54.00	-3.94	40.16	9.90	AV
8	12200	46.60	54.00	-7.40	28.20	18.40	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 13GHz were not included is because their levels are too low.

Site :	CB4-H	Engineer :	Lion
Model No :	8794700LAG01	Test Date :	2018/10/30
Test Voltage :	AC 120V/60Hz	Polarity :	Vertical
Test Mode :	Mode 1: Transmit Power by PC		
Note :	802.15.1_BLE_2440MHz		

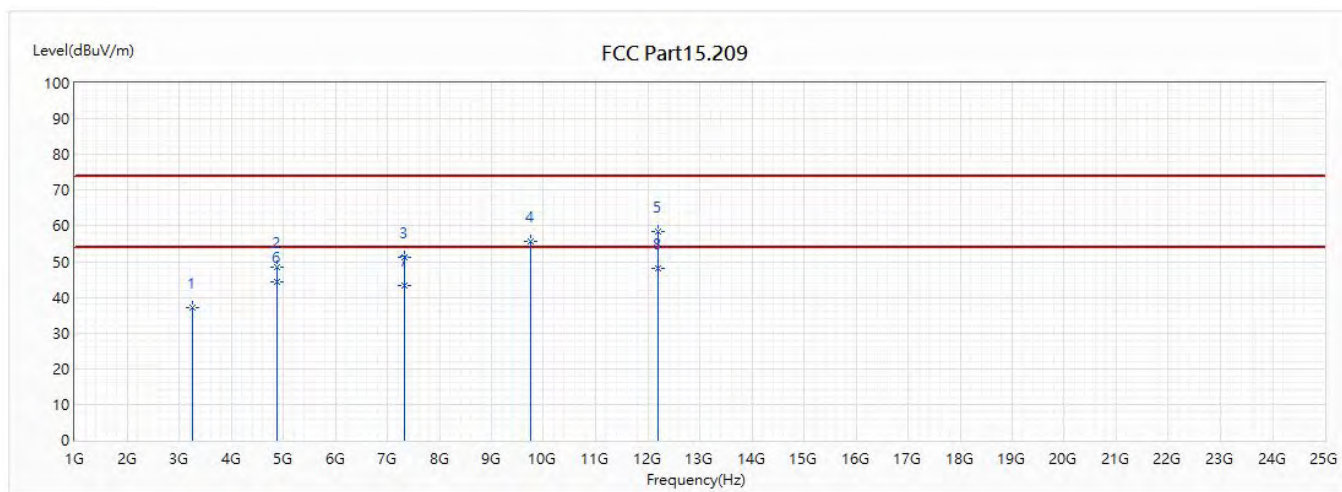


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	3253.333	37.07	74.00	-36.93	41.42	-4.35	PK
2	4880	48.54	74.00	-25.46	46.94	1.60	PK
3	7320	51.27	74.00	-22.73	41.37	9.90	PK
4	9760	55.62	74.00	-18.38	40.98	14.64	PK
5	12200	58.42	74.00	-15.58	40.02	18.40	PK
6	4880	44.22	54.00	-9.78	42.62	1.60	AV
7	7320	43.33	54.00	-10.67	33.43	9.90	AV
* 8	12200	47.96	54.00	-6.04	29.56	18.40	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 13GHz were not included is because their levels are too low.

Site :	CB4-H	Engineer :	Lion
Model No :	8794700LAG01	Test Date :	2018/10/30
Test Voltage :	AC 120V/60Hz	Polarity :	Horizontal
Test Mode :	Mode 1: Transmit Power by PC		
Note :	802.15.1_BLE_2480MHz		

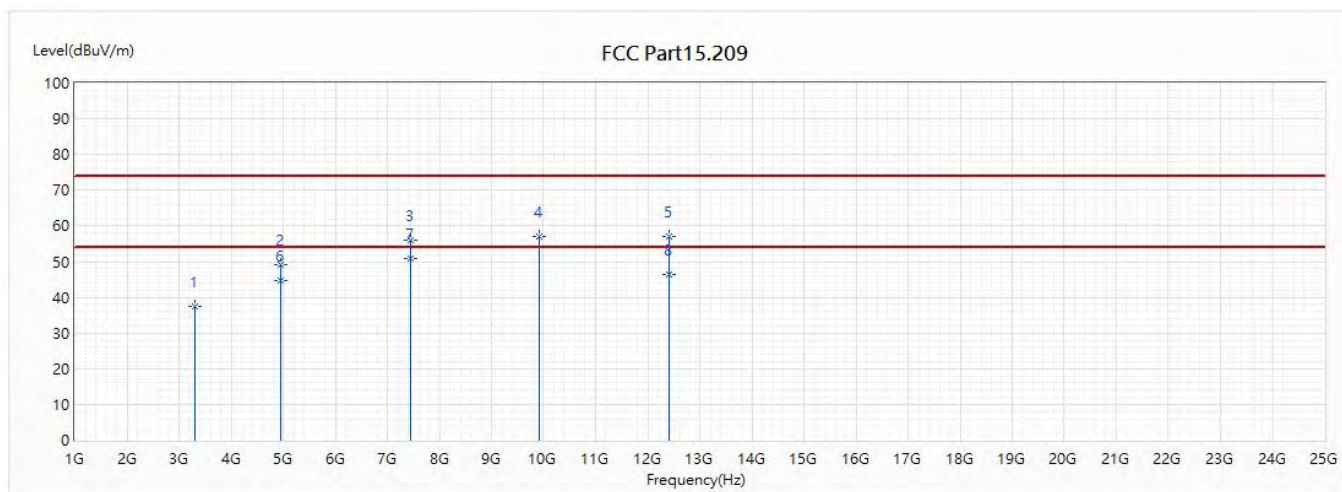


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	3306.667	37.59	74.00	-36.41	41.91	-4.32	PK
2	4960	48.99	74.00	-25.01	46.89	2.10	PK
3	7440	56.13	74.00	-17.87	45.62	10.51	PK
4	9920	56.90	74.00	-17.10	41.84	15.06	PK
5	12400	57.12	74.00	-16.88	39.13	17.99	PK
6	4960	44.74	54.00	-9.26	42.64	2.10	AV
* 7	7440	50.70	54.00	-3.30	40.19	10.51	AV
8	12400	46.30	54.00	-7.70	28.31	17.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 13GHz were not included is because their levels are too low.

Site :	CB4-H	Engineer :	Lion
Model No :	8794700LAG01	Test Date :	2018/10/30
Test Voltage :	AC 120V/60Hz	Polarity :	Vertical
Test Mode :	Mode 1: Transmit Power by PC		
Note :	802.15.1_BLE_2480MHz		

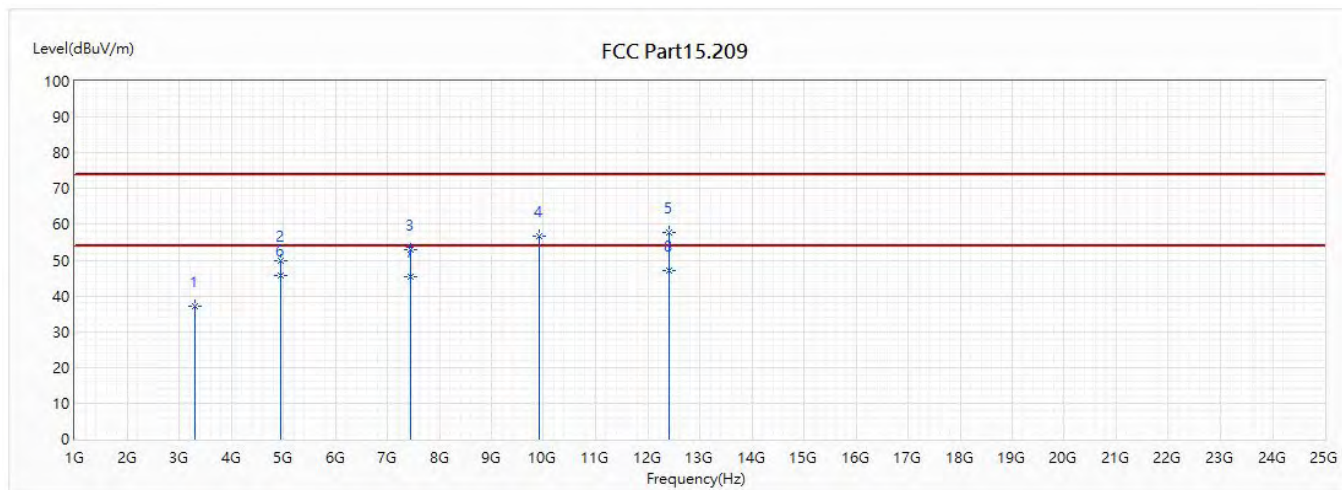

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	3306.667	37.05	74.00	-36.95	41.37	-4.32	PK
2	4960	49.81	74.00	-24.19	47.70	2.11	PK
3	7440	52.89	74.00	-21.11	42.38	10.51	PK
4	9920	56.55	74.00	-17.45	41.49	15.06	PK
5	12400	57.78	74.00	-16.22	39.79	17.99	PK
6	4960	45.79	54.00	-8.21	43.68	2.11	AV
7	7440	45.30	54.00	-8.70	34.79	10.51	AV
* 8	12400	46.95	54.00	-7.05	28.96	17.99	AV


Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 13GHz were not included is because their levels are too low.

5. RF antenna conducted test

5.1. Test Setup

RF Conducted Measurement:

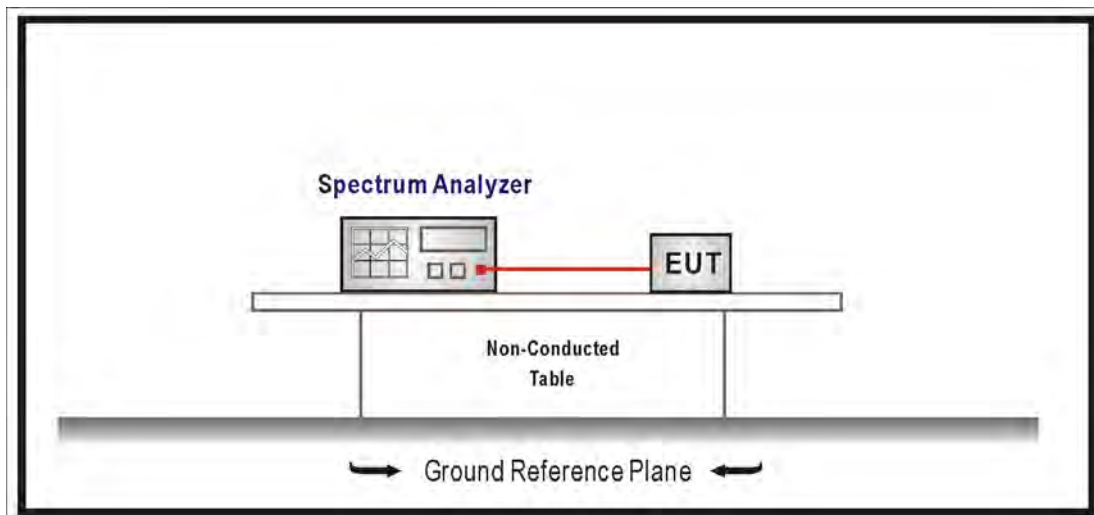

5.2. Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

5.3. Test Procedure

The EUT was setup according to ANSI C63.10: 2013 and tested according to DTS test procedure of KDB 558074 V05 for compliance to FCC 47CFR 15.247 requirements. Set RBW = 100 kHz, Set VBW > RBW, scan up through 10th harmonic.

5.4. Test Specification


According to FCC Part 15 Subpart C Paragraph 15.247: 2017

5.5. Test Result


Product	Electrand		
Test Item	RF antenna conducted test		
Test Mode	Mode 1: Transmit_Power by PC		
Date of Test	2018/10/31	Test Site	SR10-H

Channel	Frequency (MHz)	Measure Level (dBc)	Limit (dBc)
00	2402	42.196	≥ 30
19	2440	43.150	≥ 30
39	2480	41.616	≥ 30


Channel 00

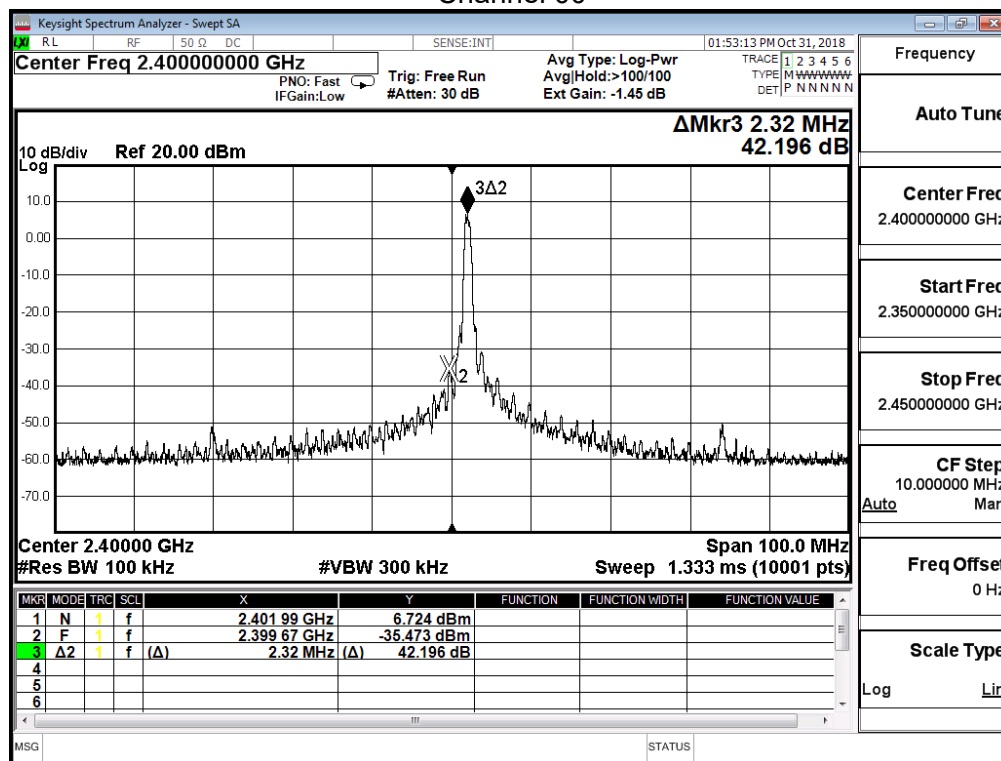

Channel 19

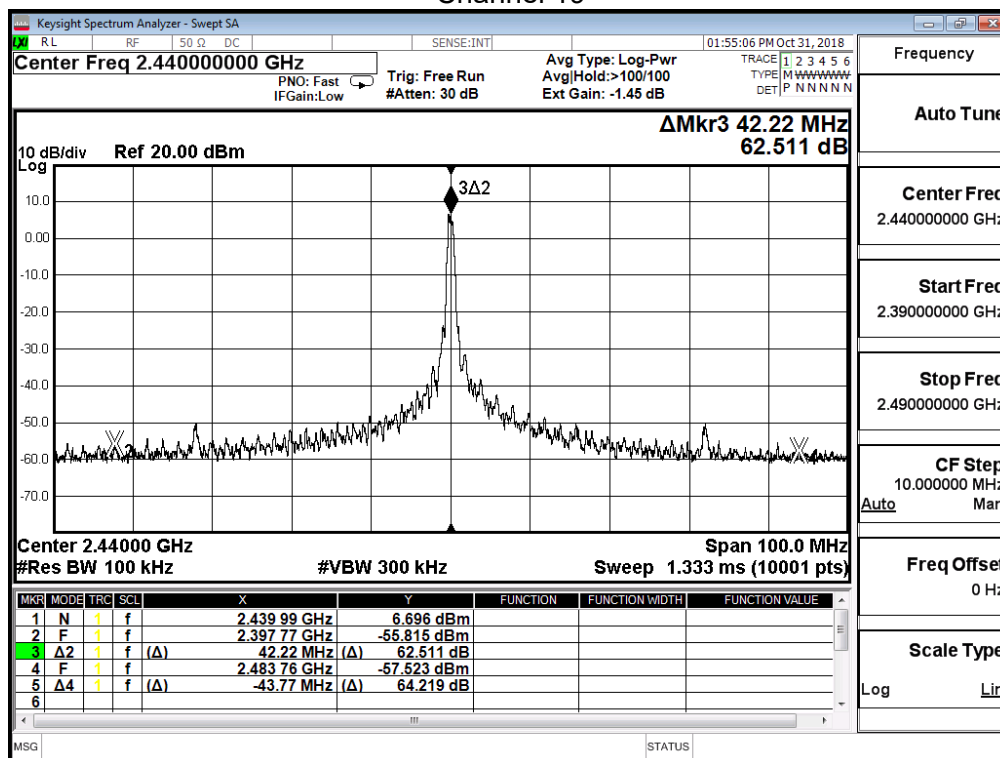


Channel 39

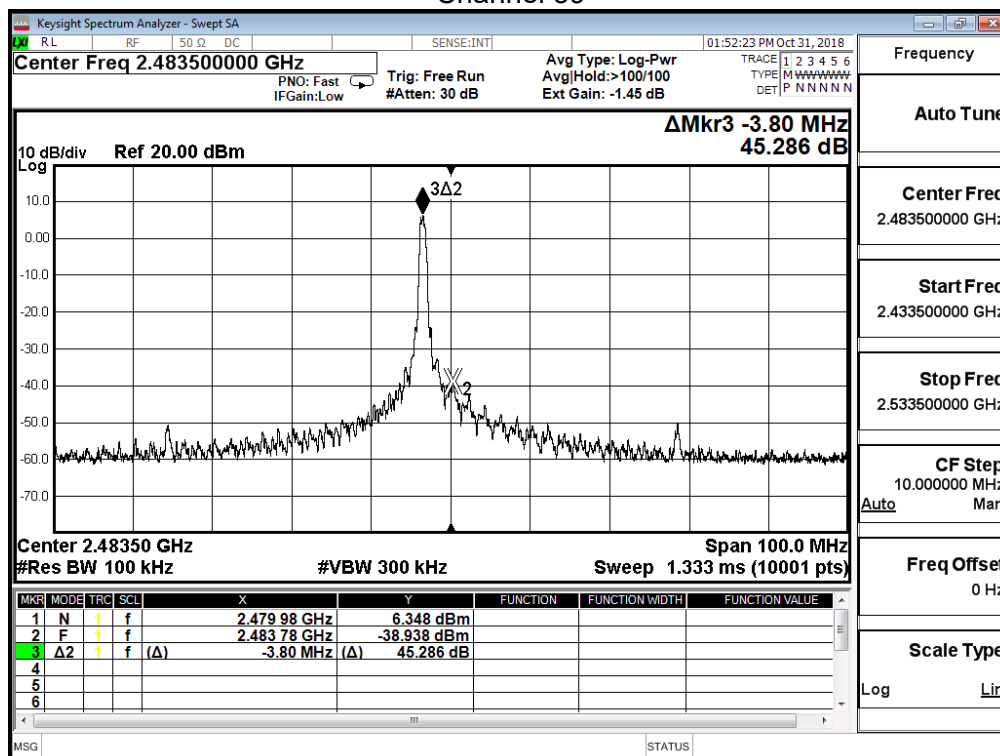


Product	Electrand		
Test Item	RF antenna conducted test		
Test Mode	Mode 1: Transmit_Power by PC		
Date of Test	2018/10/31	Test Site	SR10-H


Channel 00 (30MHz-25GHz)

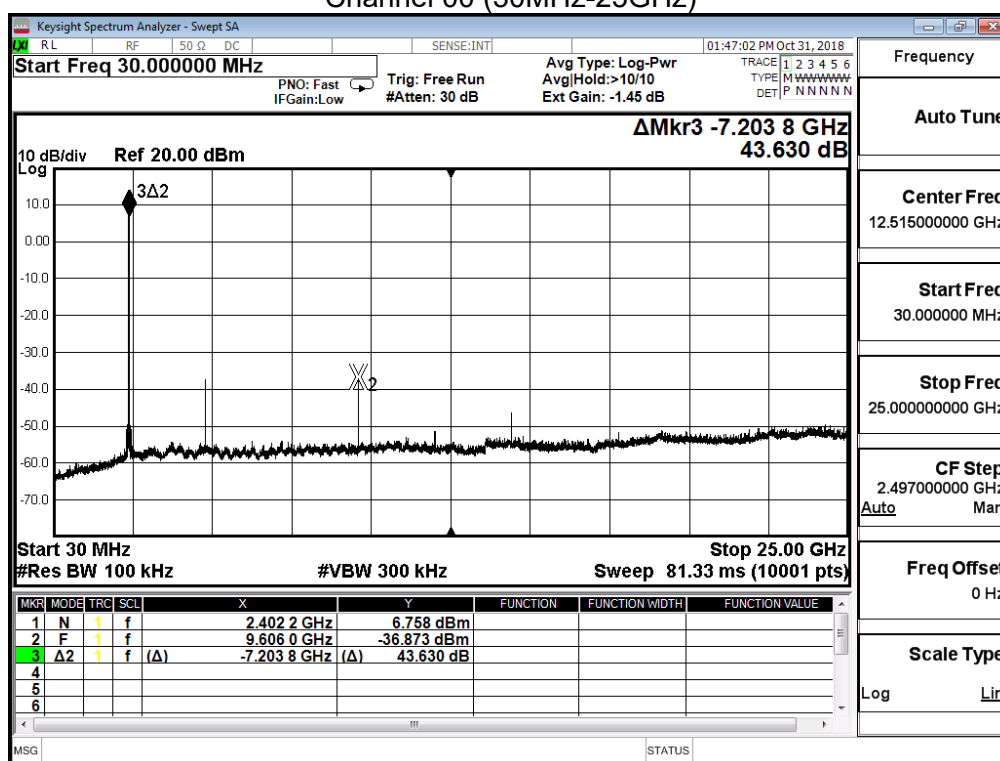

Channel 19 (30MHz-25GHz)

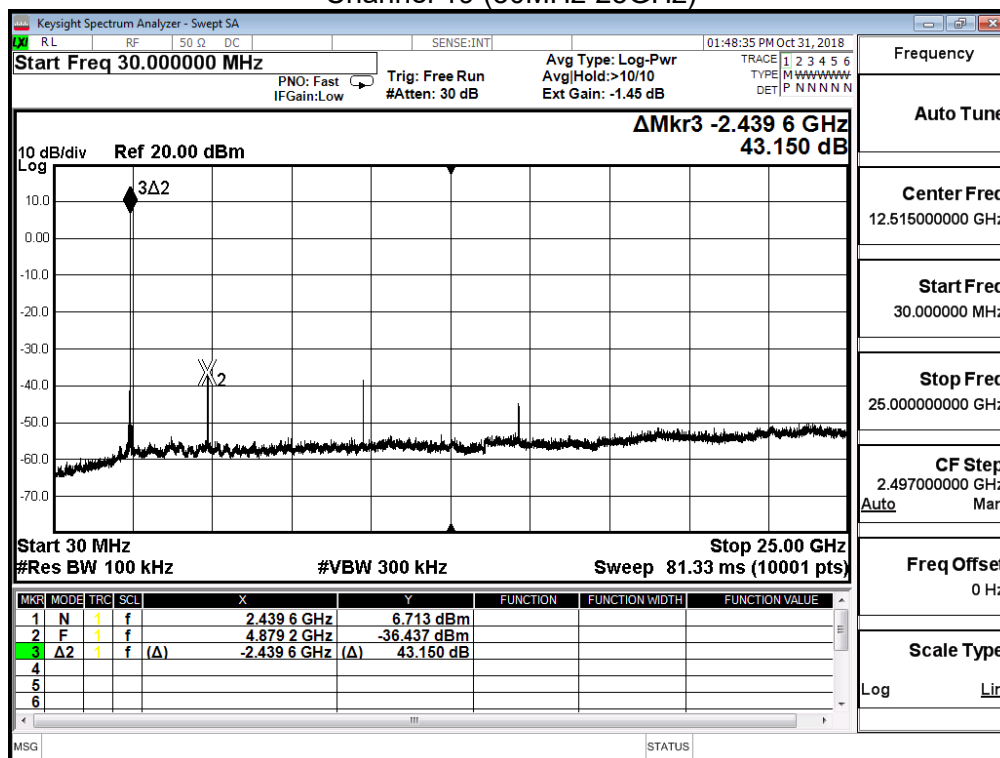


Channel 39 (30MHz-25GHz)

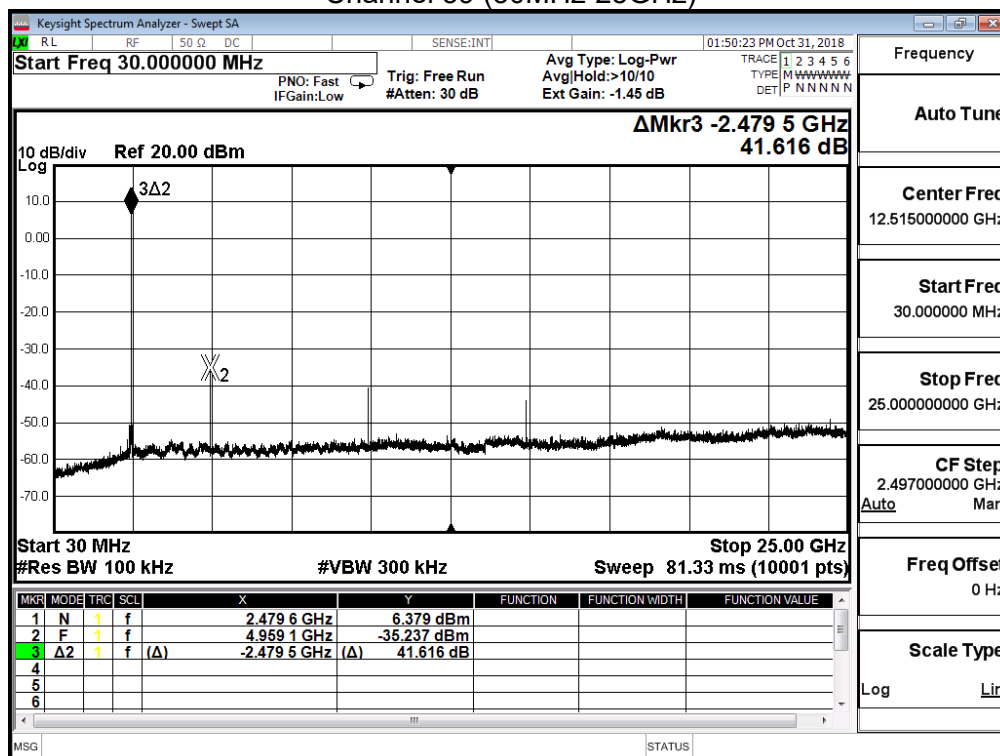

6. Radiated Emission Band Edge

6.1. Test Setup

RF Radiated Measurement:

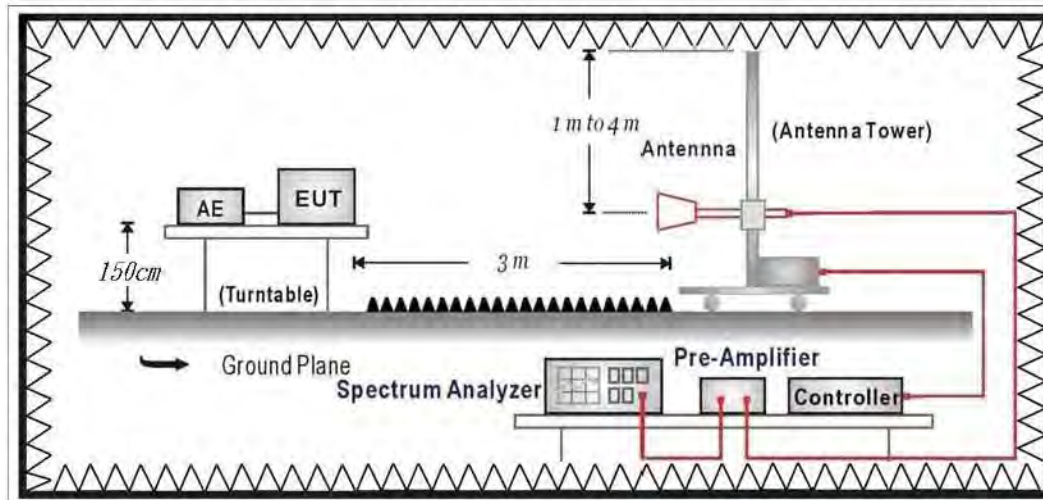

6.2. Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

6.3. Test Procedure

The EUT was setup according to ANSI C63.10: 2013 and tested according to DTS test procedure of KDB 558074 V05 for compliance to FCC 47CFR 15.247 requirements.

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.


Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10: 2013 on radiated measurement.

6.4. Test Specification

According to FCC Part 15 Subpart C Paragraph 15.247:2017

6.5. Test Result

Site :	CB4-H	Engineer :	Lion
Model No :	8794700LAG01	Test Date :	2018/10/30
Test Voltage :	AC 120V/60Hz	Polarity :	Horizontal
Test Mode :	Mode 1: Transmit Power by PC		
Note :	802.15.1_BLE_2402MHz		

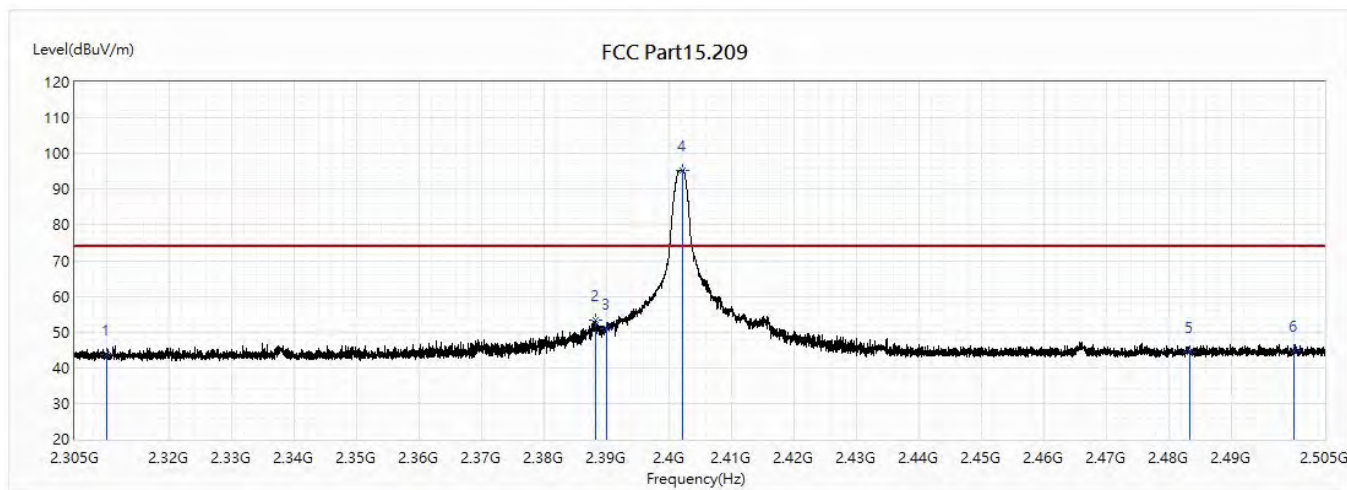


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310	43.60	74.00	-30.40	29.63	13.97	PK
2	2388.26	53.34	74.00	-20.66	38.93	14.41	PK
3	2390	50.97	74.00	-23.03	36.55	14.42	PK
! 4	2402.28	95.34	74.00	21.34	80.84	14.50	PK
5	2483.5	44.53	74.00	-29.47	29.55	14.98	PK
6	2500	44.91	74.00	-29.09	29.83	15.08	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it's not restricted by unwanted emission limit.

Site :	CB4-H	Engineer :	Lion
Model No :	8794700LAG01	Test Date :	2018/10/30
Test Voltage :	AC 120V/60Hz	Polarity :	Horizontal
Test Mode :	Mode 1: Transmit Power by PC		
Note :	802.15.1_BLE_2402MHz		

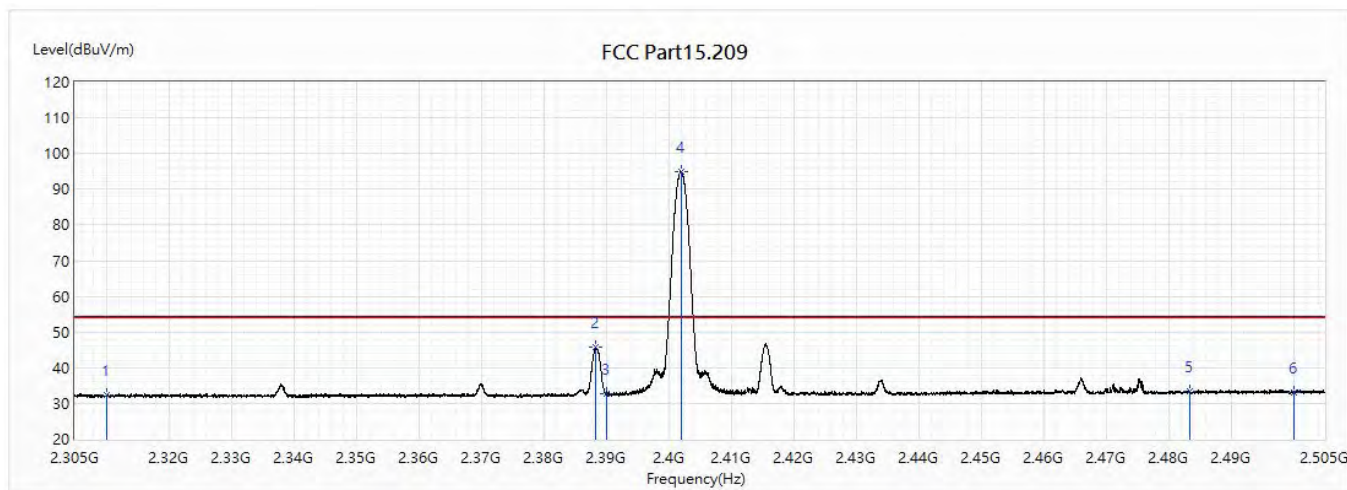


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310	32.22	54.00	-21.78	18.25	13.97	AV
2	2388.4	45.68	54.00	-8.32	31.27	14.41	AV
3	2390	32.62	54.00	-21.38	18.20	14.42	AV
! 4	2401.98	94.95	54.00	40.95	80.45	14.50	AV
5	2483.5	33.35	54.00	-20.65	18.37	14.98	AV
6	2500	33.05	54.00	-20.95	17.97	15.08	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it's not restricted by unwanted emission limit.

Site :	CB4-H	Engineer :	Lion
Model No :	8794700LAG01	Test Date :	2018/10/30
Test Voltage :	AC 120V/60Hz	Polarity :	Vertical
Test Mode :	Mode 1: Transmit Power by PC		
Note :	802.15.1_BLE_2402MHz		

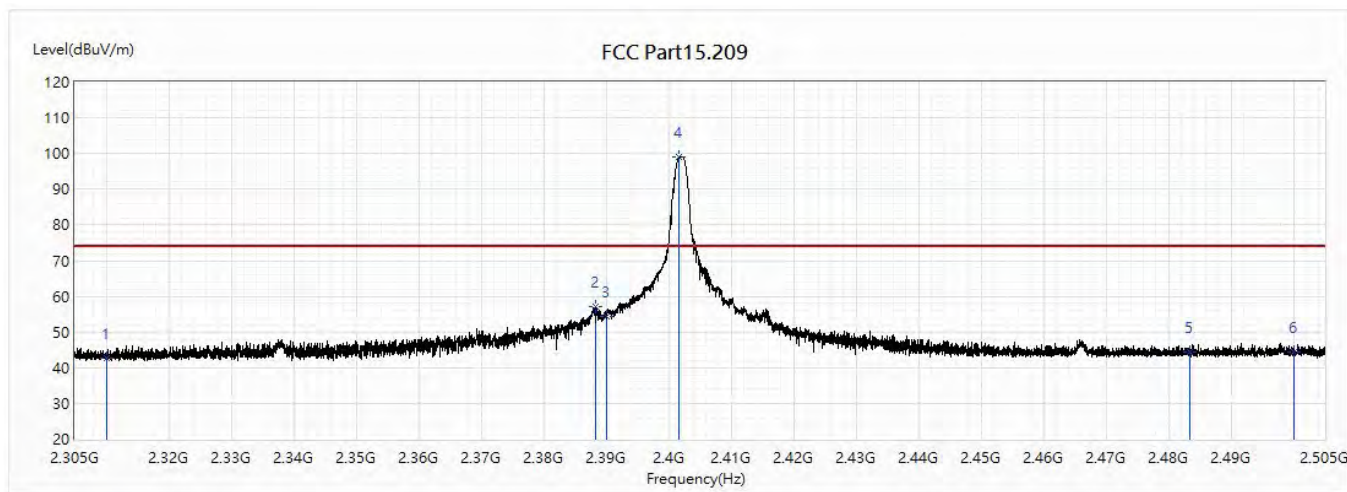


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310	42.51	74.00	-31.49	28.54	13.97	PK
2	2388.38	56.97	74.00	-17.03	42.56	14.41	PK
3	2390	54.43	74.00	-19.57	40.01	14.42	PK
! 4	2401.74	99.10	74.00	25.10	84.60	14.50	PK
5	2483.5	44.30	74.00	-29.70	29.32	14.98	PK
6	2500	44.40	74.00	-29.60	29.32	15.08	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it's not restricted by unwanted emission limit.

Site :	CB4-H	Engineer :	Lion
Model No :	8794700LAG01	Test Date :	2018/10/30
Test Voltage :	AC 120V/60Hz	Polarity :	Vertical
Test Mode :	Mode 1: Transmit Power by PC		
Note :	802.15.1_BLE_2402MHz		

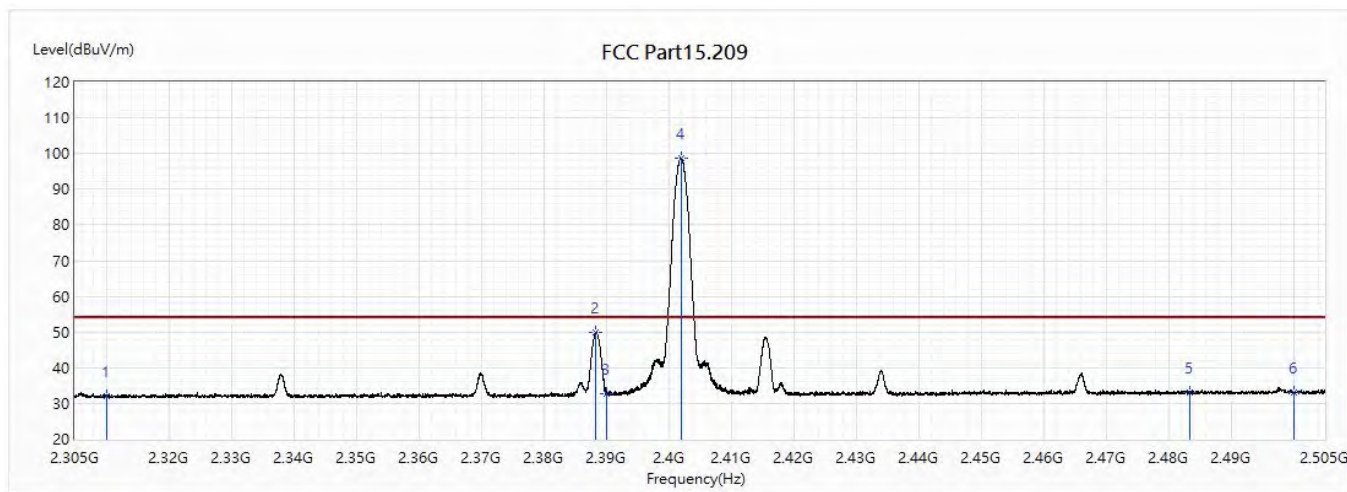


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310	32.05	54.00	-21.95	18.08	13.97	AV
2	2388.32	49.77	54.00	-4.23	35.36	14.41	AV
3	2390	32.83	54.00	-21.17	18.41	14.42	AV
! 4	2402	98.73	54.00	44.73	84.23	14.50	AV
5	2483.5	33.15	54.00	-20.85	18.17	14.98	AV
6	2500	32.94	54.00	-21.06	17.86	15.08	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it's not restricted by unwanted emission limit.

Site :	CB4-H	Engineer :	Lion
Model No :	8794700LAG01	Test Date :	2018/10/30
Test Voltage :	AC 120V/60Hz	Polarity :	Horizontal
Test Mode :	Mode 1: Transmit Power by PC		
Note :	802.15.1_BLE_2440MHz		

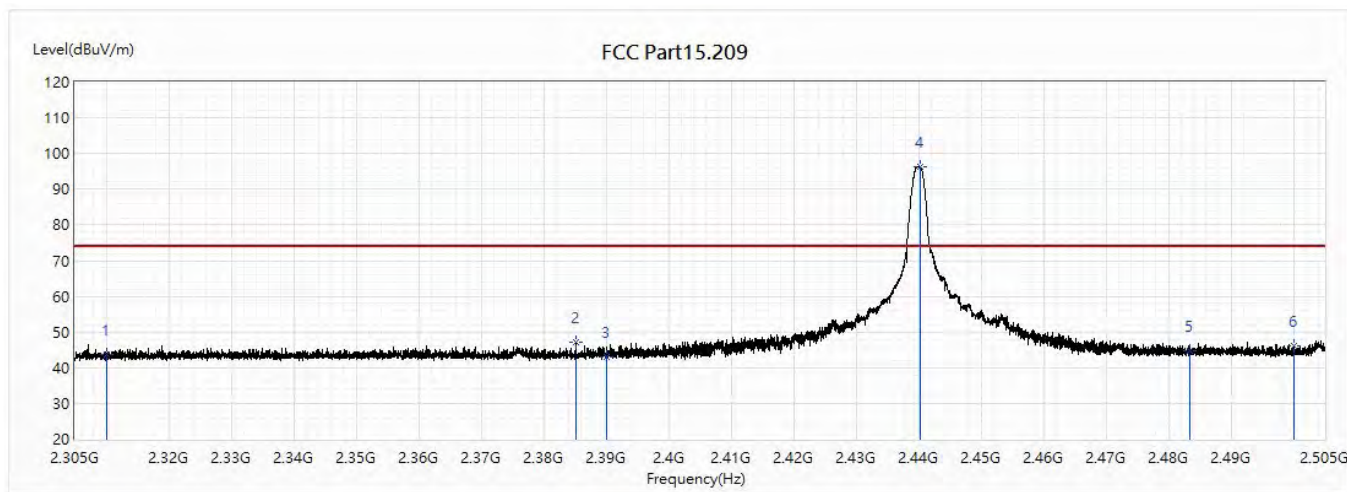


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310	43.88	74.00	-30.12	29.91	13.97	PK
2	2385.22	47.20	74.00	-26.80	32.80	14.40	PK
3	2390	42.91	74.00	-31.09	28.49	14.42	PK
! 4	2440.26	96.31	74.00	22.31	81.59	14.72	PK
5	2483.5	44.62	74.00	-29.38	29.64	14.98	PK
6	2500	45.96	74.00	-28.04	30.88	15.08	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it's not restricted by unwanted emission limit.

Site :	CB4-H	Engineer :	Lion
Model No :	8794700LAG01	Test Date :	2018/10/30
Test Voltage :	AC 120V/60Hz	Polarity :	Horizontal
Test Mode :	Mode 1: Transmit Power by PC		
Note :	802.15.1_BLE_2440MHz		

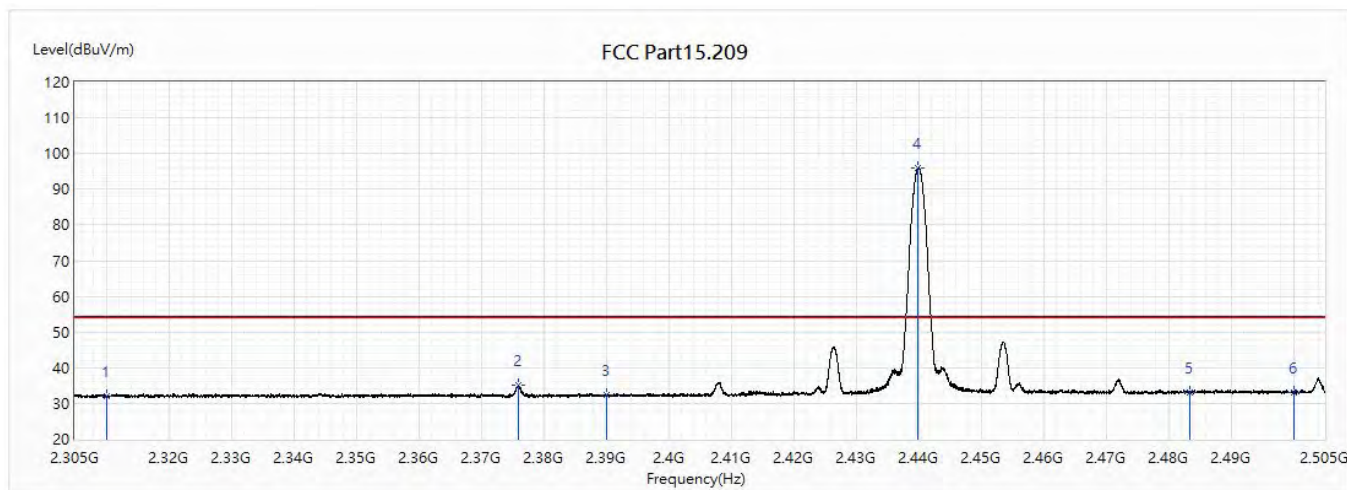


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310	32.05	54.00	-21.95	18.08	13.97	AV
2	2375.94	35.16	54.00	-18.84	20.82	14.34	AV
3	2390	32.28	54.00	-21.72	17.86	14.42	AV
4	2439.98	95.94	54.00	41.94	81.22	14.72	AV
5	2483.5	32.95	54.00	-21.05	17.97	14.98	AV
6	2500	33.18	54.00	-20.82	18.10	15.08	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it's not restricted by unwanted emission limit.

Site :	CB4-H	Engineer :	Lion
Model No :	8794700LAG01	Test Date :	2018/10/30
Test Voltage :	AC 120V/60Hz	Polarity :	Vertical
Test Mode :	Mode 1: Transmit Power by PC		
Note :	802.15.1_BLE_2440MHz		

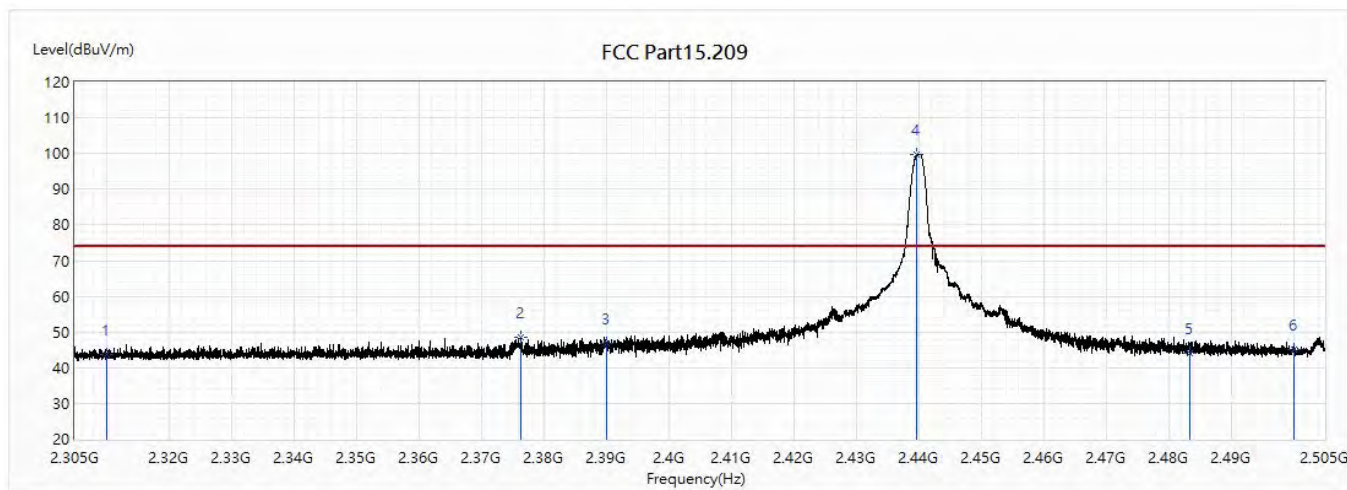


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310	43.70	74.00	-30.30	29.73	13.97	PK
2	2376.34	48.50	74.00	-25.50	34.16	14.34	PK
3	2390	46.79	74.00	-27.21	32.37	14.42	PK
! 4	2439.76	99.71	74.00	25.71	84.99	14.72	PK
5	2483.5	44.22	74.00	-29.78	29.24	14.98	PK
6	2500	45.09	74.00	-28.91	30.01	15.08	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it's not restricted by unwanted emission limit.

Site :	CB4-H	Engineer :	Lion
Model No :	8794700LAG01	Test Date :	2018/10/30
Test Voltage :	AC 120V/60Hz	Polarity :	Vertical
Test Mode :	Mode 1: Transmit Power by PC		
Note :	802.15.1_BLE_2440MHz		

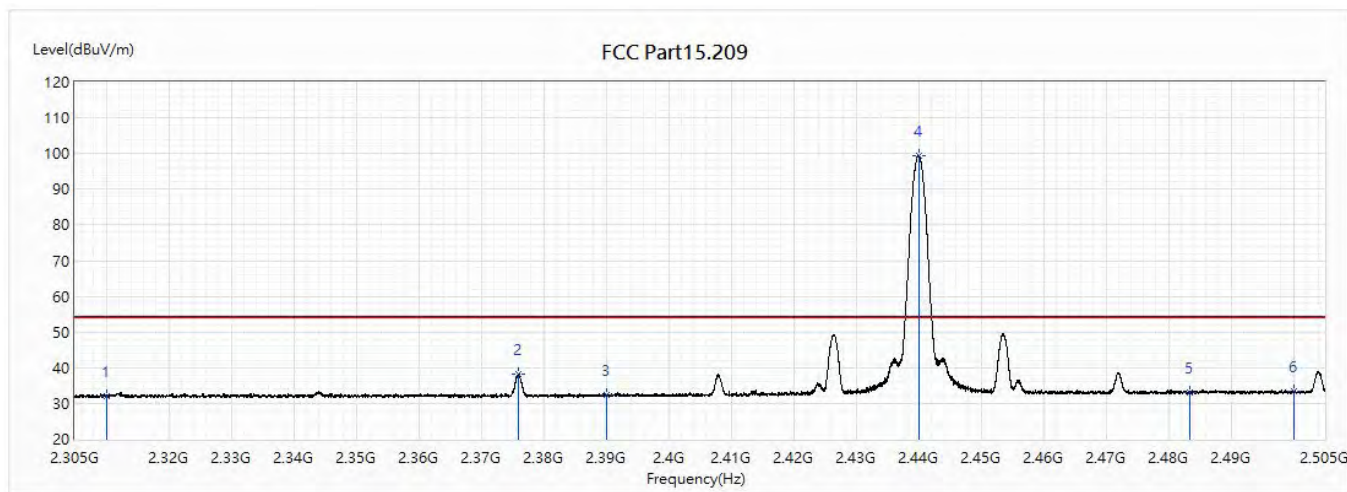


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310	31.98	54.00	-22.02	18.01	13.97	AV
2	2375.94	38.26	54.00	-15.74	23.92	14.34	AV
3	2390	32.54	54.00	-21.46	18.12	14.42	AV
! 4	2440	99.35	54.00	45.35	84.63	14.72	AV
5	2483.5	33.18	54.00	-20.82	18.20	14.98	AV
6	2500	33.35	54.00	-20.65	18.27	15.08	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it's not restricted by unwanted emission limit.

Site :	CB4-H	Engineer :	Lion
Model No :	8794700LAG01	Test Date :	2018/10/30
Test Voltage :	AC 120V/60Hz	Polarity :	Horizontal
Test Mode :	Mode 1: Transmit Power by PC		
Note :	802.15.1_BLE_2480MHz		

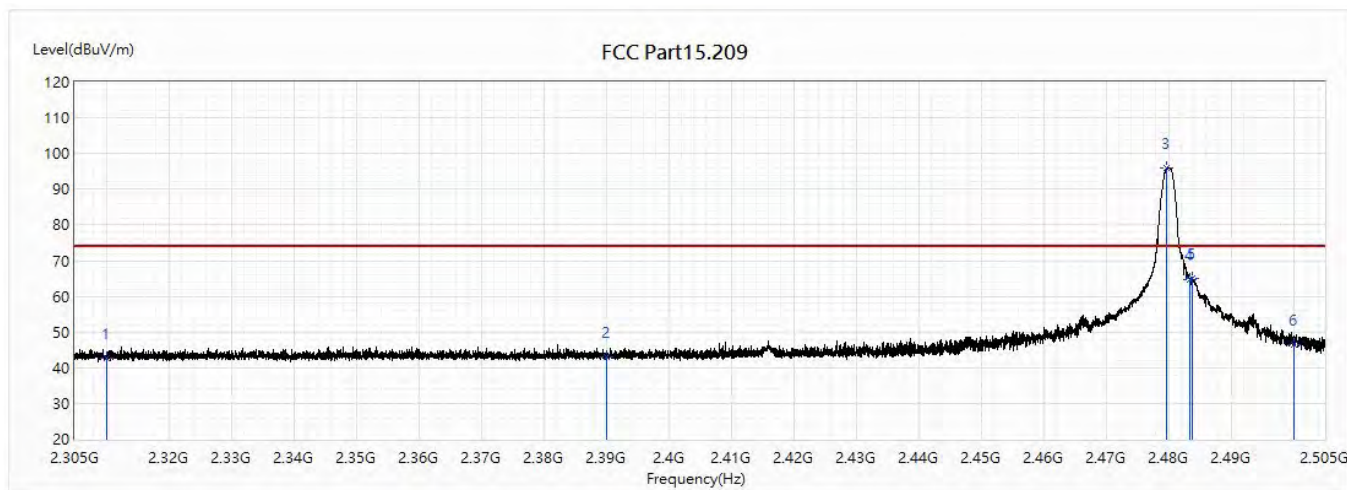


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310	42.51	74.00	-31.49	28.54	13.97	PK
2	2390	43.16	74.00	-30.84	28.74	14.42	PK
! 3	2479.78	95.97	74.00	21.97	81.01	14.96	PK
4	2483.5	64.75	74.00	-9.25	49.77	14.98	PK
5	2483.84	65.06	74.00	-8.94	50.08	14.98	PK
6	2500	46.41	74.00	-27.59	31.33	15.08	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it's not restricted by unwanted emission limit.

Site :	CB4-H	Engineer :	Lion
Model No :	8794700LAG01	Test Date :	2018/10/30
Test Voltage :	AC 120V/60Hz	Polarity :	Horizontal
Test Mode :	Mode 1: Transmit Power by PC		
Note :	802.15.1_BLE_2480MHz		

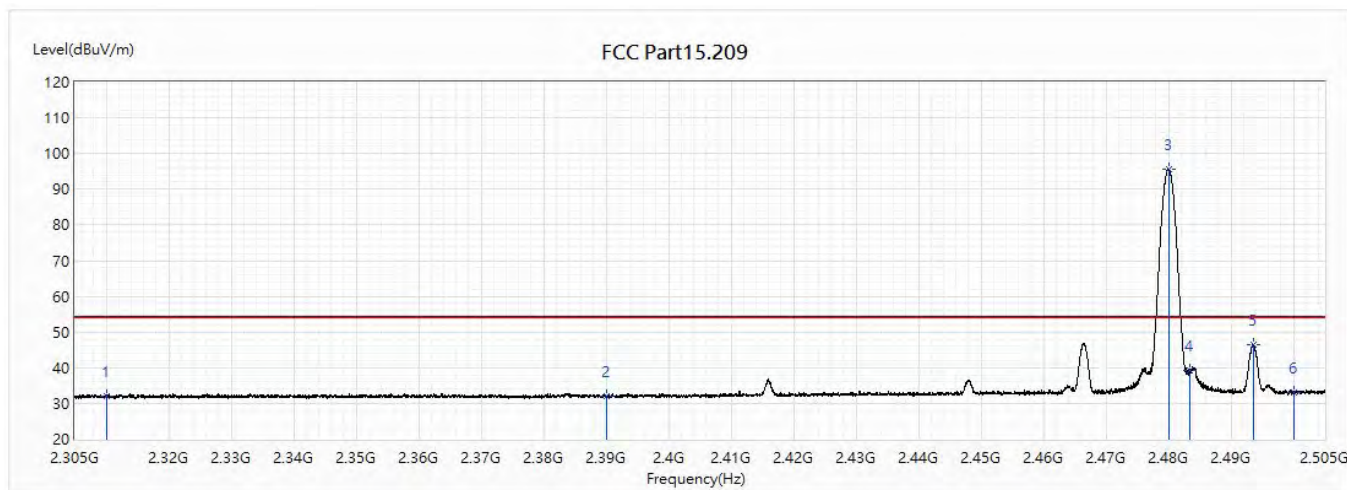


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310	31.87	54.00	-22.13	17.90	13.97	AV
2	2390	32.05	54.00	-21.95	17.63	14.42	AV
! 3	2480.04	95.53	54.00	41.53	80.56	14.97	AV
4	2483.5	39.37	54.00	-14.63	24.39	14.98	AV
5	2493.56	46.30	54.00	-7.70	31.26	15.04	AV
6	2500	32.89	54.00	-21.11	17.81	15.08	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it's not restricted by unwanted emission limit.

Site :	CB4-H	Engineer :	Lion
Model No :	8794700LAG01	Test Date :	2018/10/30
Test Voltage :	AC 120V/60Hz	Polarity :	Vertical
Test Mode :	Mode 1: Transmit Power by PC		
Note :	802.15.1_BLE_2480MHz		

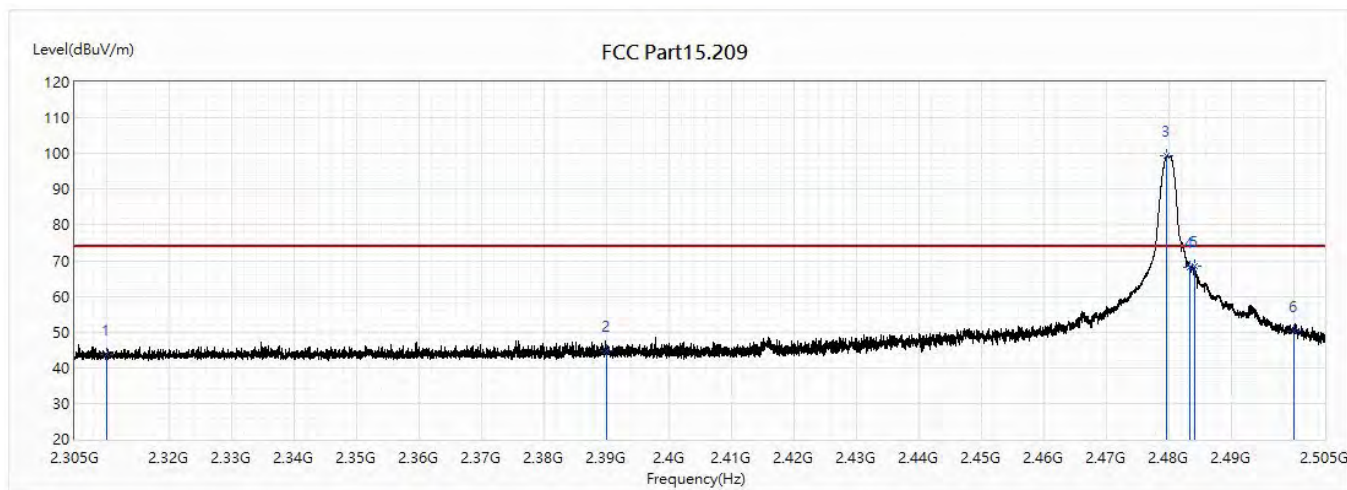


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310	43.61	74.00	-30.39	29.64	13.97	PK
2	2390	44.58	74.00	-29.42	30.16	14.42	PK
! 3	2479.78	99.22	74.00	25.22	84.26	14.96	PK
4	2483.5	68.11	74.00	-5.89	53.13	14.98	PK
5	2484.14	68.41	74.00	-5.59	53.43	14.98	PK
6	2500	50.40	74.00	-23.60	35.32	15.08	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it's not restricted by unwanted emission limit.

Site :	CB4-H	Engineer :	Lion
Model No :	8794700LAG01	Test Date :	2018/10/30
Test Voltage :	AC 120V/60Hz	Polarity :	Vertical
Test Mode :	Mode 1: Transmit Power by PC		
Note :	802.15.1_BLE_2480MHz		

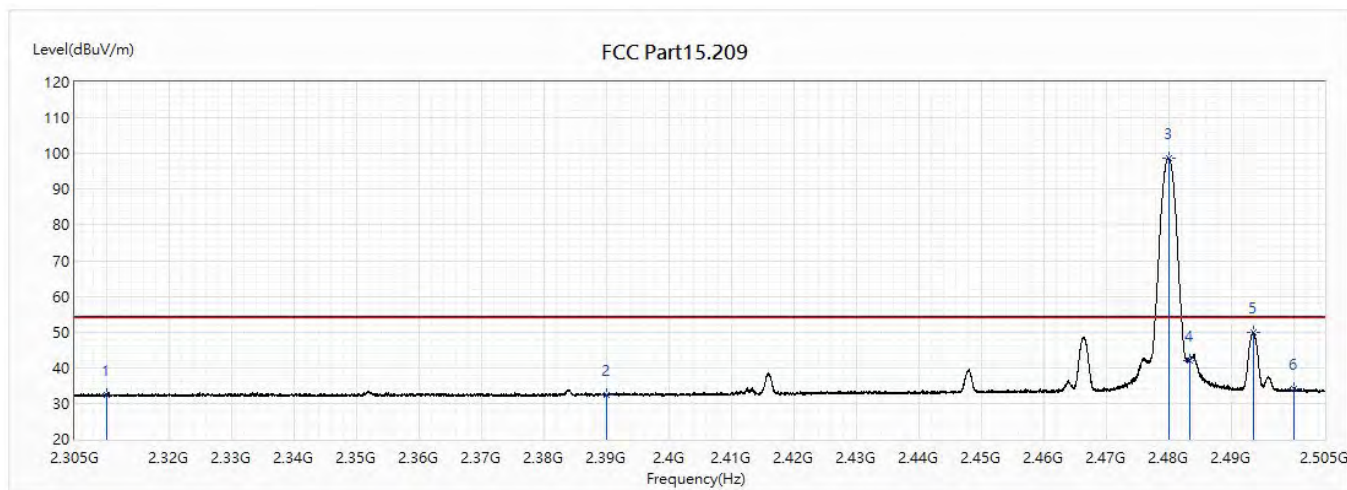


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310	32.38	54.00	-21.62	18.41	13.97	AV
2	2390	32.33	54.00	-21.67	17.91	14.42	AV
! 3	2480	98.84	54.00	44.84	83.87	14.97	AV
4	2483.5	42.00	54.00	-12.00	27.02	14.98	AV
5	2493.56	49.73	54.00	-4.27	34.69	15.04	AV
6	2500	34.14	54.00	-19.86	19.06	15.08	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it's not restricted by unwanted emission limit.

7. Occupied Bandwidth & DTS Bandwidth

7.1. Test Setup

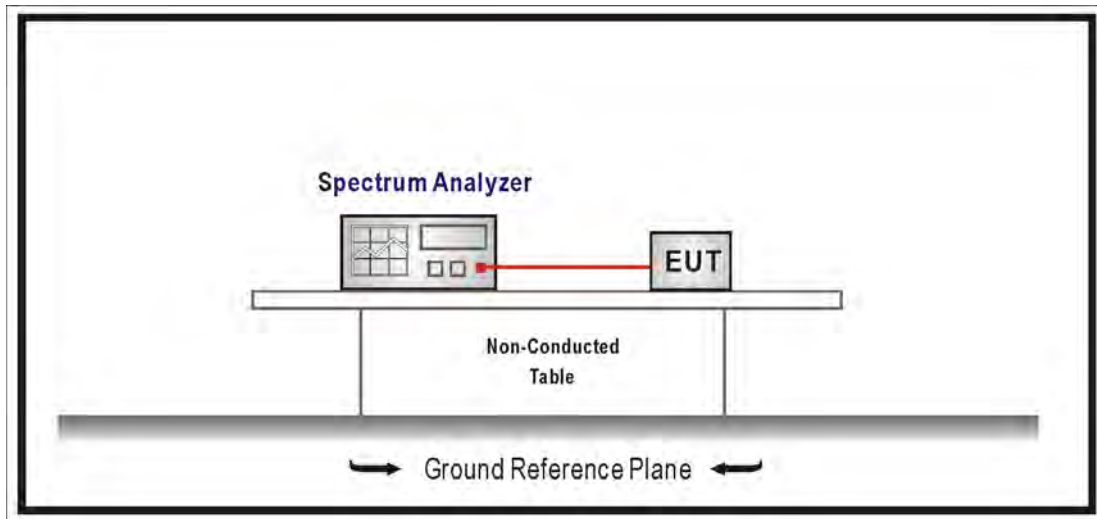

7.2. Limits

The 6 dB bandwidth: ≥ 500 kHz.

Occupied Bandwidth: NA

7.3. Test Procedures

The EUT was setup according to ANSI C63.10: 2013; tested according to DTS test procedure of KDB 558074 V05 for compliance to FCC 47CFR 15.247 requirements.

7.4. Test Specification


According to FCC Part 15 Subpart C Paragraph 15.247:2017

7.5. Test Result


Product	Electrand		
Test Item	Occupied Bandwidth		
Test Mode	Mode 1: Transmit_Power by PC		
Date of Test	2018/10/31	Test Site	SR10-H

Channel No.	Frequency (MHz)	Measure Level (MHz)	Limit (MHz)
00	2402	1.040	--
19	2440	1.041	--
39	2480	1.041	--


Channel 00

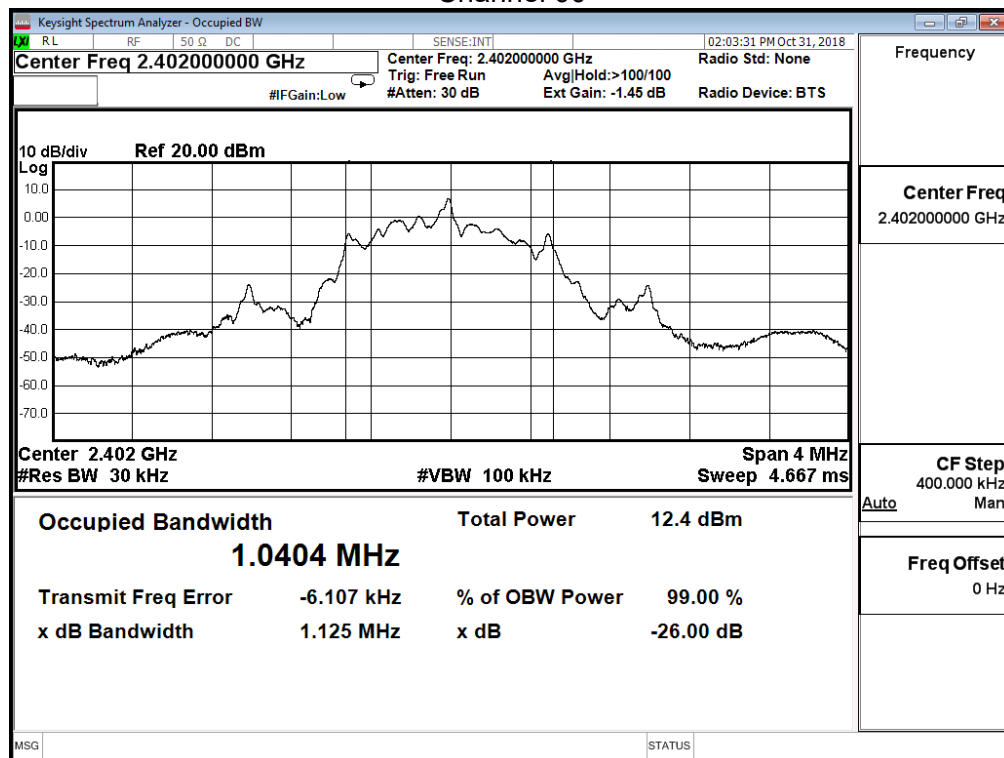

Channel 19

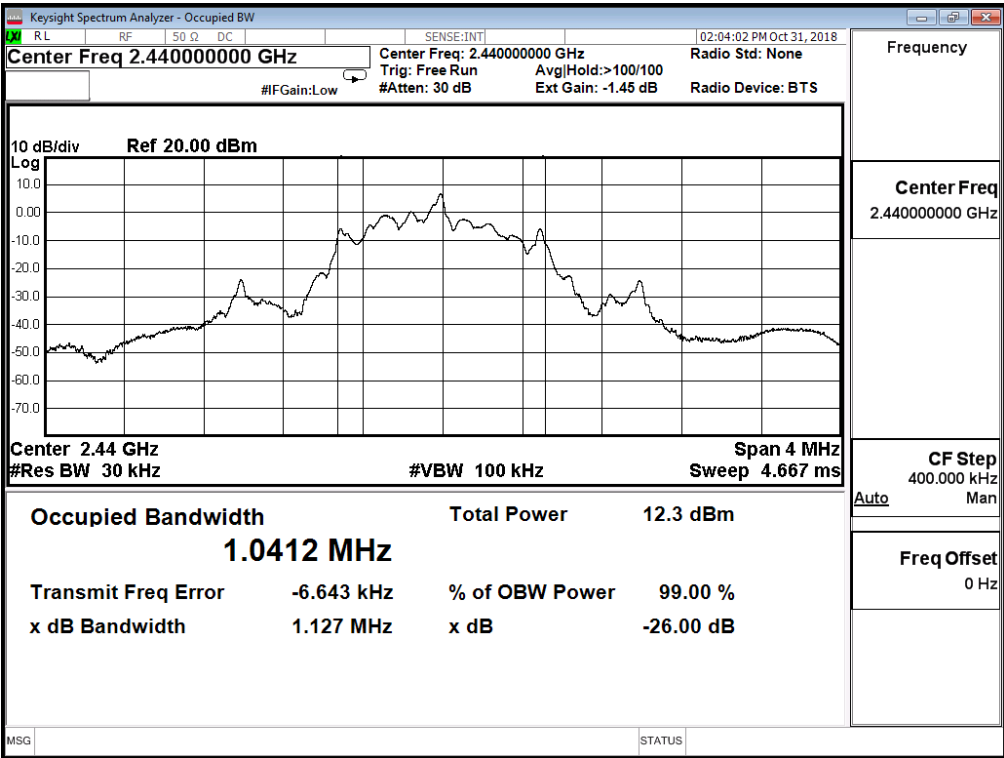


Channel 39

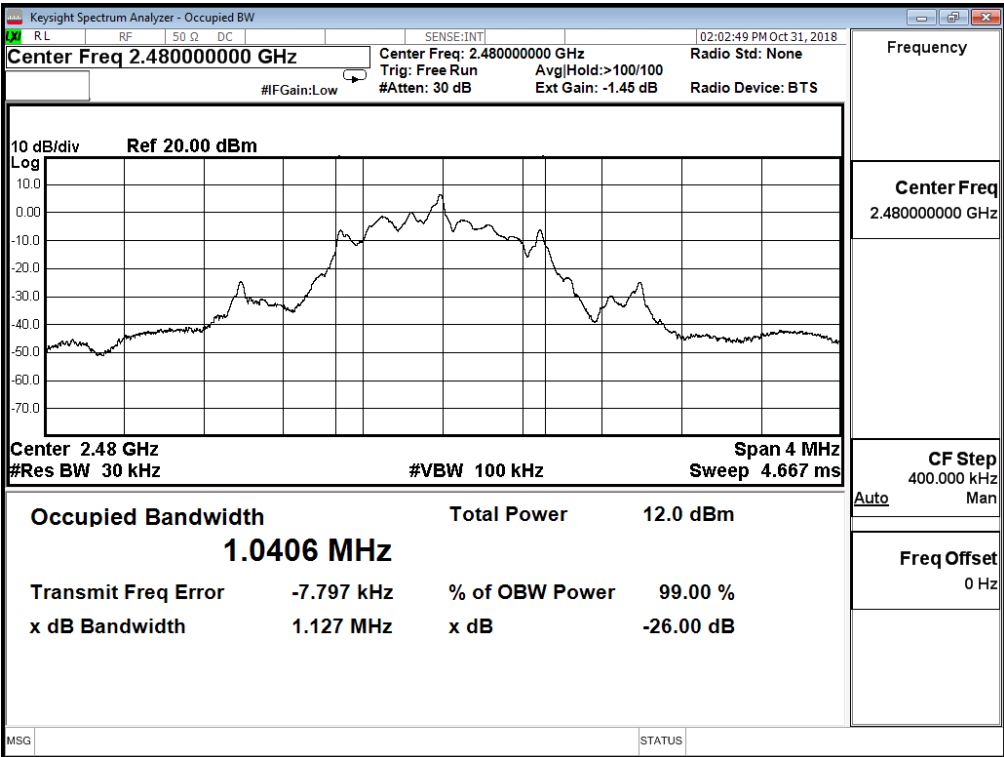


Product	Electrand		
Test Item	DTS Bandwidth		
Test Mode	Mode 1: Transmit_Power by PC		
Date of Test	2018/10/31	Test Site	SR10-H

Channel No.	Frequency (MHz)	Measure Value (MHz)	Limit (MHz)
00	2402	0.677	≥ 0.500
19	2440	0.686	≥ 0.500
39	2480	0.710	≥ 0.500


Channel 00

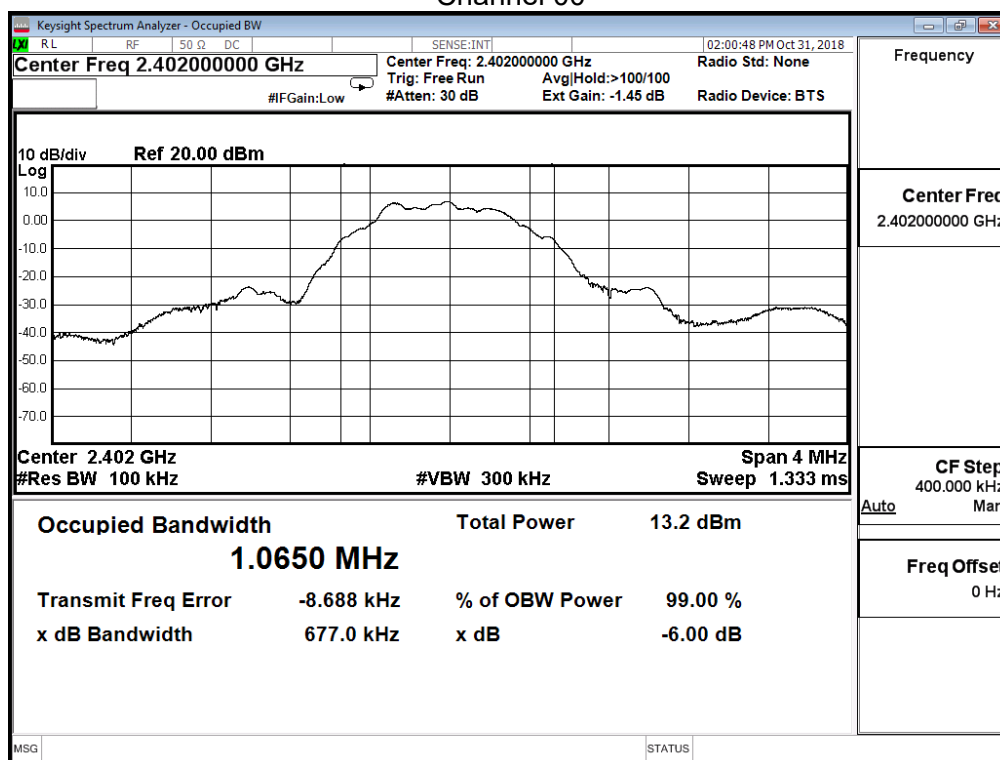

Channel 19

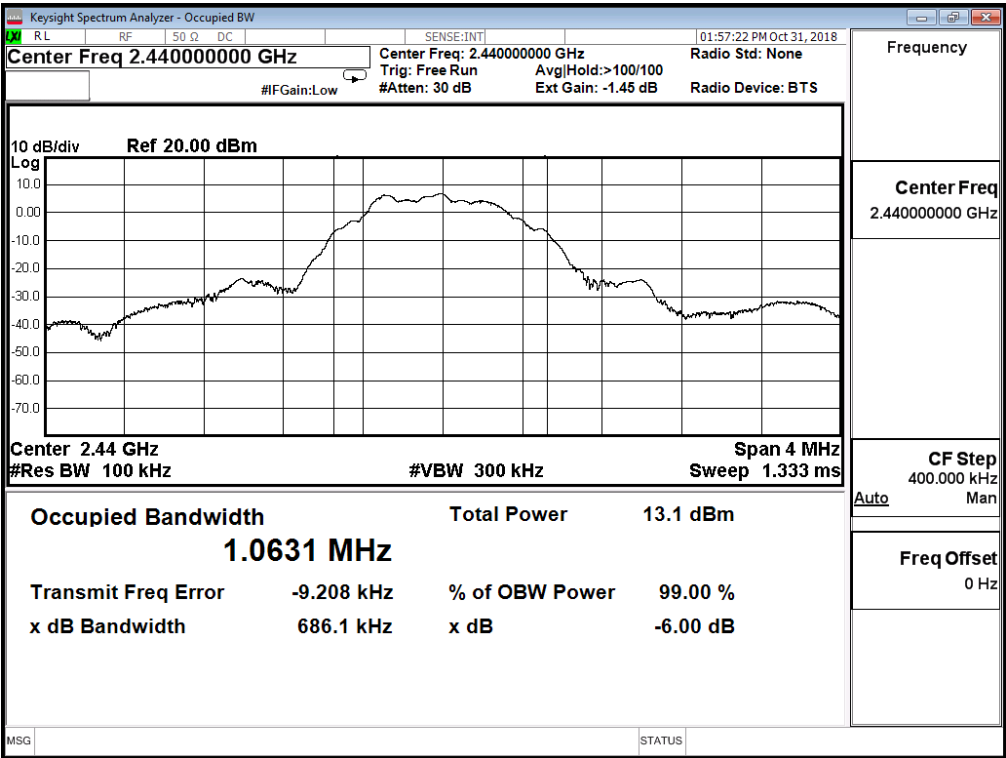


Channel 39

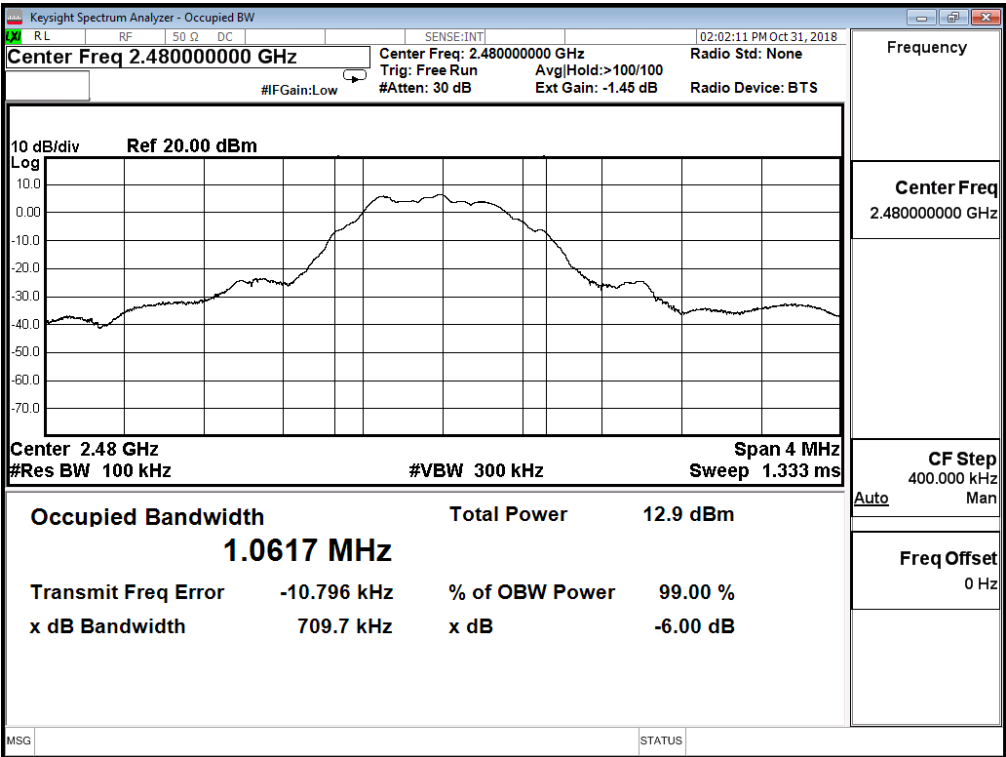

8. Power Density

8.1. Test Setup

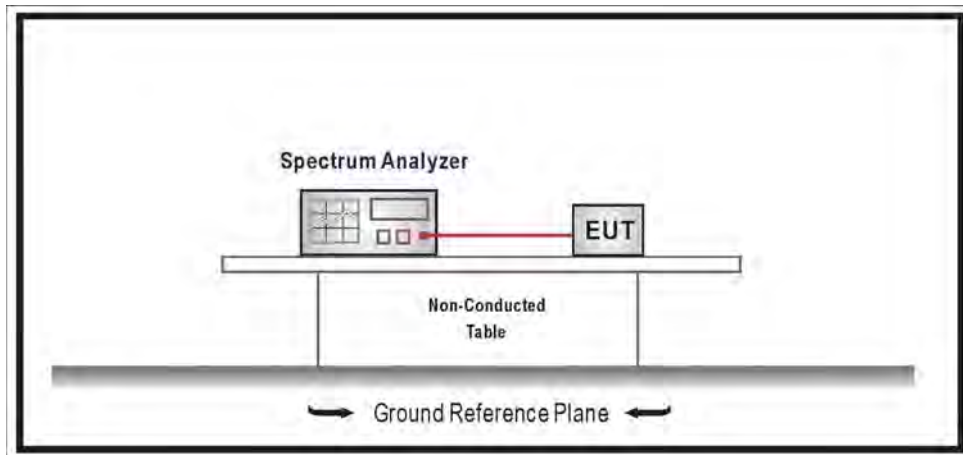

8.2. Limits

The peak power spectral density conducted from the intentional radiated to the antenna shall not be greater than +8dBm in any 3kHz band during any time interval of continuous transmission.

8.3. Test Procedures


The EUT was setup according to ANSI C63.10: 2013; tested according to DTS test procedure of KDB 558074 V05 for compliance to FCC 47CFR 15.247 requirements.

8.4. Test Specification


According to FCC Part 15 Subpart C Paragraph 15.247

Product	Electrand		
Test Item	Power Density		
Test Mode	Mode 1: Transmit_Power by PC		
Date of Test	2018/10/31	Test Site	SR10-H

Channel No.	Frequency (MHz)	Measure Vaule (dBm/10kHz)	Limit (dBm/3kHz)
00	2402	6.710	≤ 8
19	2440	6.666	≤ 8
39	2480	6.319	≤ 8

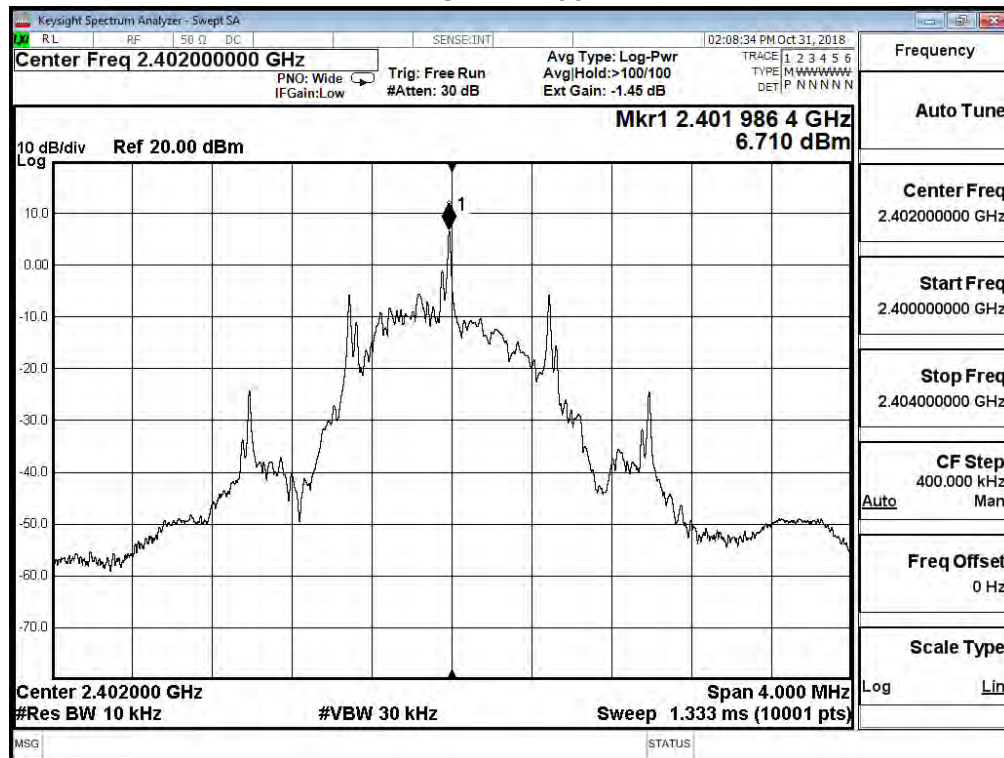

Channel 19

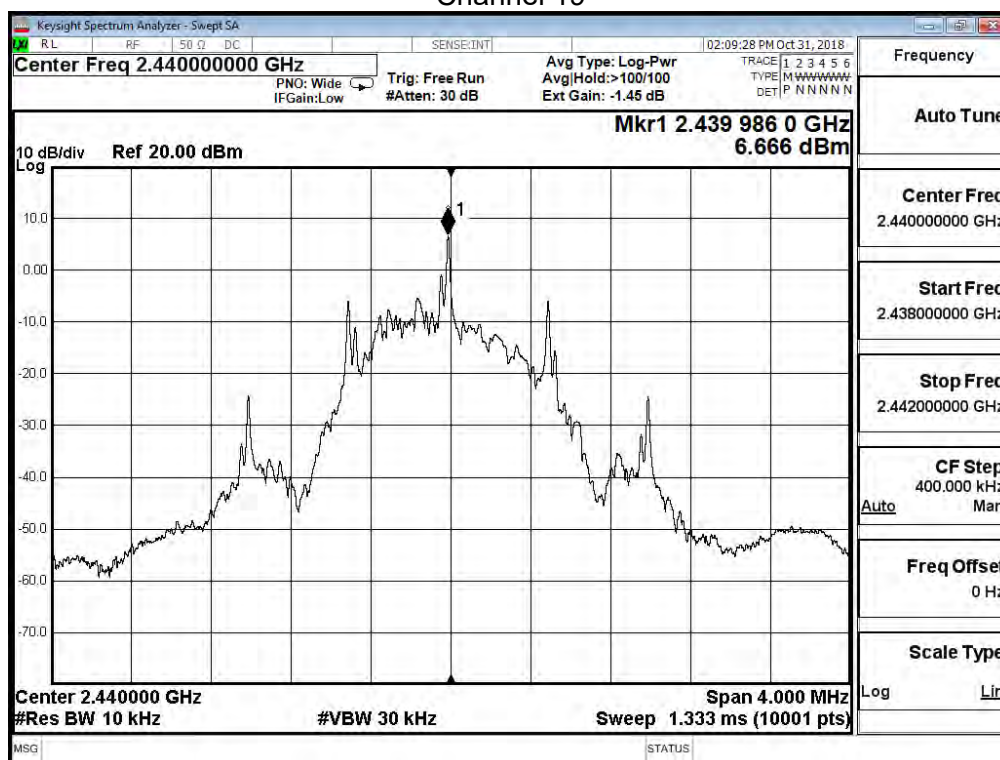

Channel 39

