



FCC RF EXPOSURE REPORT

For

Wireless Charging Power Bank

F101-BSCG8

FCC ID: 2AQSFBSCG8

REPORT NUMBER: 4789106740.1-2

ISSUE DATE: September 24, 2019

Prepared for

**Function 101 Group LLC
7365 Commercial Way, Suite 115, Henderson NV 89011**

Prepared by

**UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch
Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China**
Tel: +86 769 22038881
Fax: +86 769 33244054
Website: www.ul.com

Revision History

Rev.	Issue Date	Revisions	Revised By
V0	09/24/2018	Initial Issue	

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. TEST METHODOLOGY	4
3. FACILITIES AND ACCREDITATION	5
4. REQUIREMENT	6

1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: Function 101 Group LLC
Address: 7365 Commercial Way, Suite 115, Henderson NV 89011

Manufacturer Information

Company Name: Shenzhen Trusda Industrial Co., Ltd.
Address: 3/F, Building 4, Lianchuang Technology Park, Bulan
Road, Nanwan Street, Longgang District, Shenzhen, China

EUT Description

EUT Name: Wireless Charging Power Bank
Model: F101-BSCG8
Sample Status: Normal
Sample ID: 2295469
Sample Received Date: August 27, 2019
Date of Tested: August 27~ September 24, 2019

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC 47CFR§1.1307	PASS
FCC 47CFR§1.1310	PASS
FCC 47CFR§2.1093	PASS
FCC 47CFR§2.1091	PASS

Prepared By:



Kebo Zhang
Project Engineer

Checked By:



Shawn Wen
Laboratory Leader

Approved By:



Stephen Guo
Laboratory Manager

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC 47CFR§1.1307(b)(1), FCC 47CFR§1.1310, FCC 47CFR§2.1093, 680106 D01 RF Exposure wireless charging apps v03.

3. FACILITIES AND ACCREDITATION

Accreditation Certificate	<p>A2LA (Certificate No.: 4102.01) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA.</p> <p>FCC (FCC Designation No.: CN1187) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules</p> <p>IC (Company No.: 21320) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report Field with Industry Canada. The Company Number is 21320.</p> <p>VCCI (Registration No.: G-20019, R-20004, C-20012 and T-20011) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793.</p> <p>Facility Name: Chamber D, the VCCI registration No. is G-20019 and R-20004 Shielding Room B , the VCCI registration No. is C-20012 and T-20011</p>
---------------------------	--

Note: All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, Song Shan Lake Hi tech Development Zone, Dongguan, 523808, China

4. REQUIREMENT


RF EXPOSURE LIMIT

Frequency Range (MHz)	E-field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm ²)	Averaging Time E ² , H ² or S (Minutes)
0.3 -- 1.34	614	1.63	(100)*	30
1.34 -- 30	824/f	2.19/f	(180/f ²)*	30
30 -- 300	27.5	0.073	0.2	30
300 -- 1500	--	--	f/1500	30
1500 -- 100,000	--	--	1.0	30

METHOD OF MEASUREMENT

- The RF exposure test was performed in shielded chamber.
- The measurement probe was placed at test distance (15cm) which is between the edge of the charger and the geometric centre of probe.
- The measurement probe used to search of highest strength.
- The highest emission level was recorded and compared with limit as soon as measurement of each points (A, B, C, D, E) were completed.
- The EUT were measured according to the dictates of KDB 680106D01v03.

BLOCK DIAGRAM OF TEST SETUP

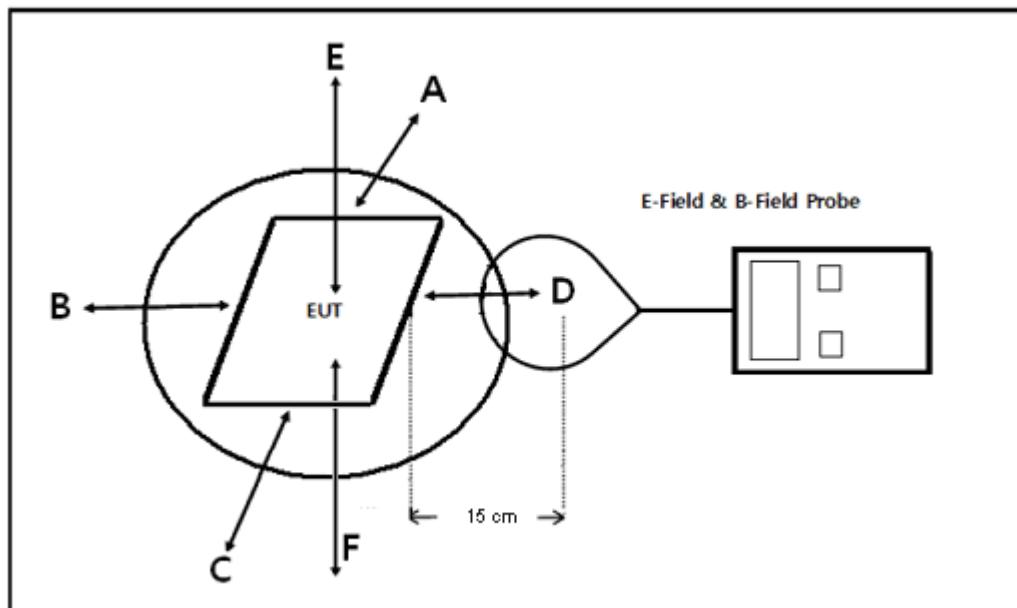

Note: As bottom point is not required to test for desktop devices, so we scanning all the surfaces and recorded the worst level in F.

EQUIPMENT APPROVAL CONSIDERATIONS

The EUT does comply with KDB 680106D01v03.

- 1) Power transfer frequency is less than 1 MHz.
Yes; the device operated in the frequency range from 110kHz to 205kHz.
- 2) Output power from each primary coil is less than or equal to 15 watts.
Yes; the maximum output power of each primary coil is 10 watts.
- 3) The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils.
The transmitter includes one coils.
- 4) Client device is placed directly in contact with the transmitter.
Yes; Client device is placed directly in contact with the transmitter.
- e) Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).
Yes; The EUT is a mobile devices.
- f) The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.
The EUT field strength levels are less than 50% of the MPE limit.

MEASURING INSTRUMENT USED

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Electric and Magnetic Field Analyzer	Narda	EHP-200A	170WX90204	April 21, 2019	April 21, 2020

H FIELD STRENGTH

Test mode for wireless charger:

Config	Test Mode	Description
Mode 1	Standby	EUT alone powered by AC/DC adapter
Mode 2	Operating	EUT and iPhone powered by AC/DC adapter
Mode 3	Operating	EUT and 10W load powered by AC/DC adapter
Mode 4	Operating	EUT and 5W load powered by AC/DC adapter
Mode 5	Operating	EUT and 7.5W load powered by AC/DC adapter

The USB-A and USB-C loads will add to all test modes during test.

Test Result for Coil 1:

H-Field Strength at 15 cm from the edges surrounding the EUT and 20cm above the top surface of the EUT (A/m)

Test Position	H-Field Strength Measure Result		Limits (A/m)	
	Mode 1			
	A/m			
A	0.2166		1.63	
B	0.1721		1.63	
C	0.5422		1.63	
D	0.2988		1.63	
E	0.3123		1.63	
F	0.5531		1.63	

Test Position	H-Field Strength Measure Result		Limits (A/m)	
	Mode 2			
	A/m			
A	0.2198		1.63	
B	0.1931		1.63	
C	0.4.676		1.63	
D	0.2596		1.63	
E	0.2941		1.63	
F	0.5312		1.63	

Test Position	H-Field Strength Measure Result		Limits (A/m)	
	Mode 3			
	A/m			
A	0.3668		1.63	
B	0.2931		1.63	
C	0.5891		1.63	
D	0.1224		1.63	
E	0.3241		1.63	
F	0.6742		1.63	

Test Position	H-Field Strength Measure Result		Limits (A/m)	
	Mode 4			
	A/m			
A	0.3122		1.63	
B	0.2866		1.63	
C	0.7643		1.63	
D	0.4211		1.63	
E	0.2355		1.63	
F	0.6123		1.63	

Test Position	H-Field Strength Measure Result		Limits (A/m)	
	Mode 5			
	A/m			
A	0.3512		1.63	
B	0.2812		1.63	
C	0.6724		1.63	
D	0.5121		1.63	
E	0.3151		1.63	
F	0.6623		1.63	

E-Field Strength at 15 cm from the edges surrounding the EUT (V/m)

Test Position	E-Field Strength Measure Result		Limits (V/m)	
	Mode 1			
	V/m			
A	2.2212		614	
B	1.3102		614	
C	2.2543		614	
D	1.2312		614	
E	0.3124		614	
F	2.3214		614	

Test Position	E-Field Strength Measure Result		Limits (V/m)	
	Mode 2			
	V/m			
A	5.1912		614	
B	5.2144		614	
C	4.2464		614	
D	5.2185		614	
E	1.2955		614	
F	3.3125		614	

Test Position	E-Field Strength Measure Result		Limits (V/m)	
	Mode 3			
	V/m			
A	5.2702		614	
B	4.3221		614	
C	5.3494		614	
D	6.2919		614	
E	1.3212		614	
F	3.3512		614	

Test Position	E-Field Strength Measure Result		Limits (V/m)	
	Mode 4			
	V/m			
A	4.2432		614	
B	5.3421		614	
C	6.2542		614	
D	3.2512		614	
E	1.3452		614	
F	3.3641		614	



Test Position	E-Field Strength Measure Result		Limits (V/m)	
	Mode 5			
	V/m			
A	4.3132		614	
B	5.3241		614	
C	5.2461		614	
D	3.2735		614	
E	1.3612		614	
F	3.3713		614	

END OF REPORT