

FCC PART 15.247

TEST REPORT

For

Suzhou Pairlink Network Technology Ltd.

Room 117, No.55, Su hong xi Road, Suzhou Industrial Park, Suzhou City, Jiangsu Province, China

FCC ID: 2AQV6TIGERKIN

Report Type: Original Report	Product Type: Tigerkin Bluetooth 5 BLE module
Test Engineer: Max Min	<i>Max Min</i>
Report Number: RSHD190117001-00A	
Report Date: 2019-05-23	
Reviewed By: Oscar Ye RF Leader	<i>Oscar Ye</i>
Prepared By: Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road, Kunshan, Jiangsu province, China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY.....	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	6
EUT EXERCISE SOFTWARE	6
SUPPORT EQUIPMENT LIST AND DETAILS	8
EXTERNAL I/O CABLE.....	8
BLOCK DIAGRAM OF TEST SETUP	8
SUMMARY OF TEST RESULTS	10
TEST EQUIPMENT LIST	11
FCC §1.1310& §2.1091 –MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	12
FCC §15.203 - ANTENNA REQUIREMENT.....	13
APPLICABLE STANDARD	13
ANTENNA CONNECTOR CONSTRUCTION	13
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	14
APPLICABLE STANDARD	14
EUT SETUP	14
EMI TEST RECEIVER SETUP.....	14
TEST PROCEDURE	14
CORRECTED FACTOR & MARGIN CALCULATION	15
TEST RESULTS SUMMARY	15
TEST DATA	15
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	20
APPLICABLE STANDARD	20
EUT SETUP	20
EMI TEST RECEIVER SETUP.....	21
TEST PROCEDURE	21
CORRECTED AMPLITUDE & MARGIN CALCULATION	21
TEST RESULTS SUMMARY	21
TEST DATA	22
FCC §15.247(a) (2) - 6 dB EMISSION BANDWIDTH	47
APPLICABLE STANDARD	47
TEST PROCEDURE	47
TEST DATA	47
FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....	52
APPLICABLE STANDARD	52
TEST PROCEDURE	52
TEST DATA	52
FCC §15.247(d) - BAND EDGE	57
APPLICABLE STANDARD	57
TEST PROCEDURE	57
TEST DATA	57

FCC §15.247(e) - POWER SPECTRAL DENSITY	60
APPLICABLE STANDARD	60
TEST PROCEDURE	60
TEST DATA	60

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant:	Suzhou Pairlink Network Technology Ltd.
Tested Model:	Tigerkin
Series Model:	Tigerkin-B,Tigerkin-C
Model different:	Model name and Antenna type
Product Type:	Tigerkin Bluetooth 5 BLE module
Dimension:	14.0mm(L) × 23.0 mm(W) × 2.6 mm(H)
Power Supply:	DC 3.3V

**All measurement and test data in this report was gathered from production sample serial number: 20190117001/20190117001-1. (Assigned by the BACL. The EUT supplied by the applicant was received on 2019-01-17)*

Objective

This report is prepared on behalf of Suzhou Pairlink Network Technology Ltd. in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

No Related Submittal(s)/Grant(s).

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and FCC KDB 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Item		Uncertainty
AC Power Lines Conducted Emissions		3.19 dB
RF conducted test with spectrum		0.9dB
RF Output Power with Power meter		0.5dB
Radiated emission	30MHz~1GHz	6.11dB
	1GHz~6GHz	4.45dB
	6GHz~18GHz	5.23dB
	18GHz~40GHz	5.65dB
Occupied Bandwidth		0.5kHz
Temperature		1.0°C
Humidity		6%

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) Lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4323.01) and the FCC designation No. CN1185 under the FCC KDB 974614 D01 and CAB identifier CN0004 under the ISED requirement. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

Description of Test Configuration

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	...	...
...	...	...	...
...	...	...	...
18	2438	38	2478
19	2440	39	2480

Equipment Modifications


EUT Exercise Software

Power Level: Default power

Middle Channel(1M)



Middle Channel(2M)

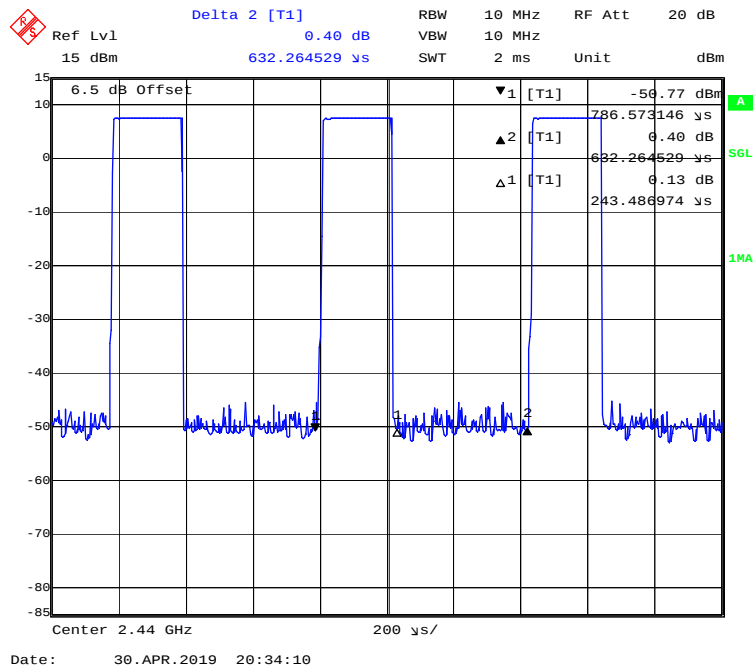

Mode	Duty Cycle (%)	T(ms)	1/T(kHz)	10log(1/x)
BLE-1M	67	0.415	2.410	1.739
BLE-2M	39	0.243	2.597	4.089

Note: “x” means the Duty Cycle.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
DELL	Notebook	GX620	D65874152
DELL	Adapter	LA65NS0-00	DF263
Suzhou Pairlink	Debug Board	/	/

External I/O Cable


Cable Description	Length (m)	From Port	To
Data Cable	0.15	EUT	Debug Board

Block Diagram of Test Setup


For Conducted Emissions:

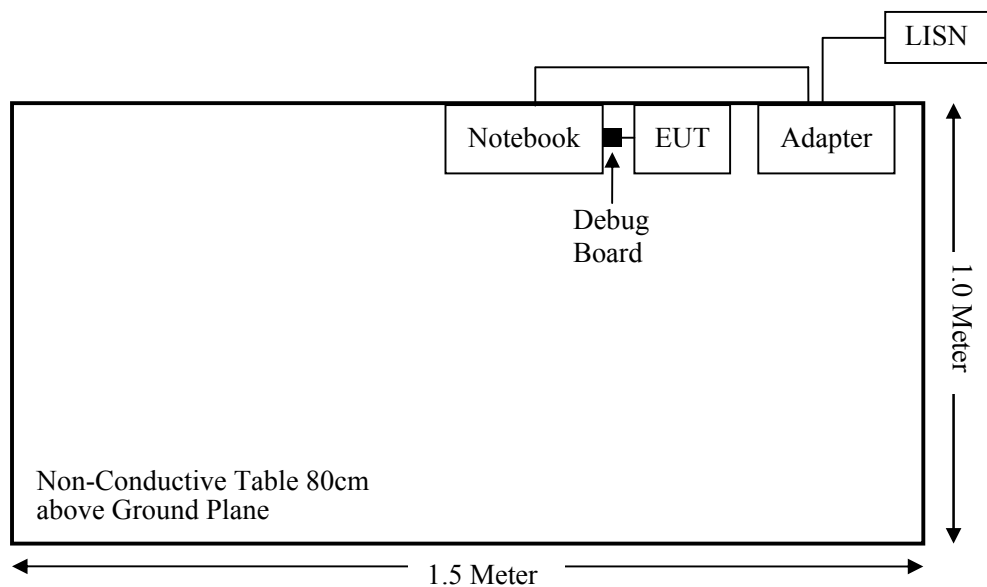

For Radiated Emissions(Below 1GHz):

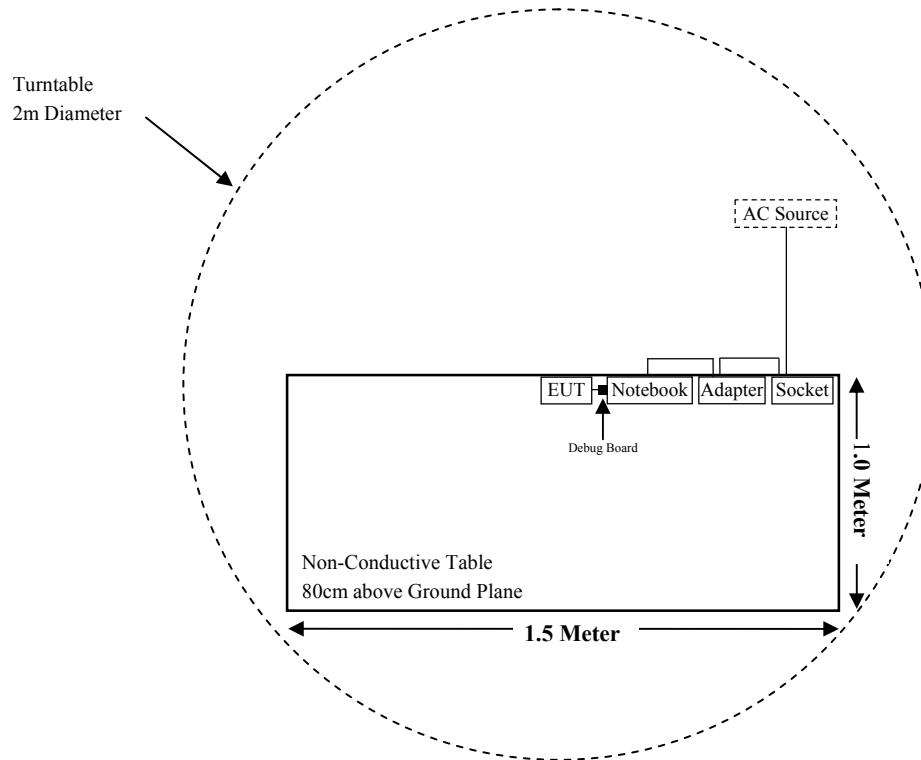

For Radiated Emissions(Above 1GHz):

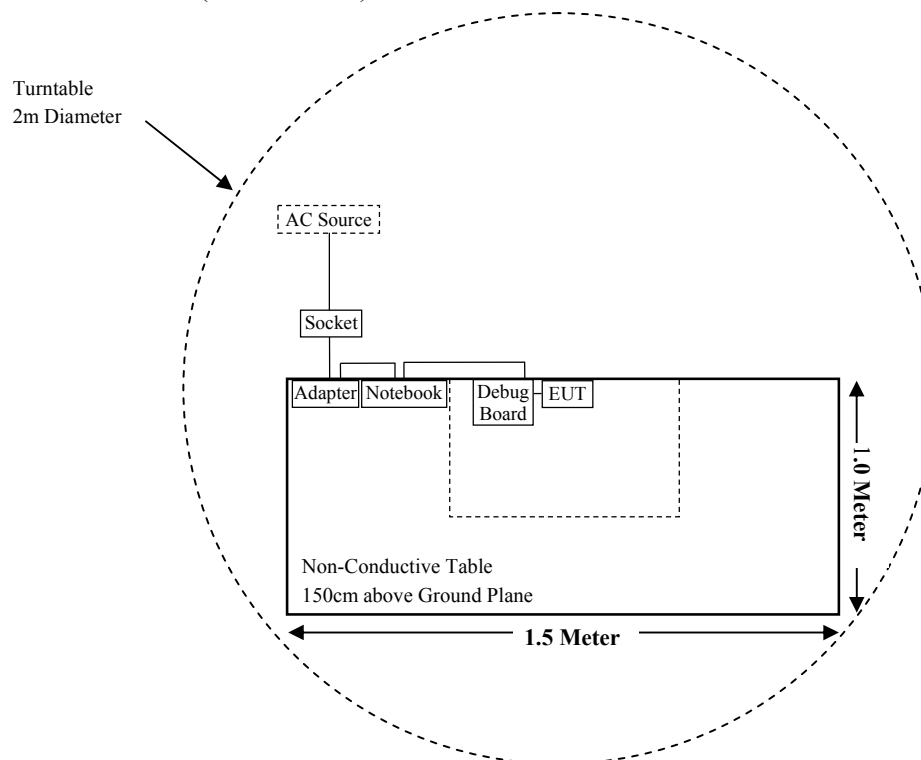

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1310 & §2.1091	Maximum Permissible Exposure (MPE)	Compliant
§15.203	Antenna Requirement	Compliant
§15.207 (a)	AC Line Conducted Emissions	Compliant
§15.247(d)	Spurious Emissions at Antenna Port	Compliant
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliant
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(d)	Band Edge	Compliant
§15.247(e)	Power Spectral Density	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test (Chamber 1#)					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2018-11-25	2019-11-24
Sunol Sciences	Broadband Antenna	JB3	A040914-2	2019-01-09	2020-01-08
Sonoma Instrument	Pre-amplifier	310N	171205	2018-08-15	2019-08-14
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-8	008	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-9	009	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-10	010	2018-08-15	2019-08-14
Radiated Emission Test (Chamber 2#)					
Rohde & Schwarz	EMI Test Receiver	ESU40	100207	2018-08-27	2019-08-26
ETS-LINDGREN	Horn Antenna	3115	6229	2019-01-11	2020-01-10
ETS-LINDGREN	Horn Antenna	3116	00084159	2016-10-18	2019-10-17
Mini-Circuits	Amplifier	ZVA-183W-S+	220701818	2018-05-20	2019-05-19
SELECTOR	Amplifier	EM18G40G	060726	2018-03-22	2019-03-21
SELECTOR	Amplifier	EM18G40G	060726	2019-03-22	2020-03-21
MICRO-TRONICS	Notch filter	BRM50702	/	2018-08-05	2019-08-04
Narda	Attenuator/10dB	10dB	/	2018-08-15	2019-08-14
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-6	006	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-11	011	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-12	012	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-13	013	2018-08-15	2019-08-14
RF Conducted Test					
Rohde & Schwarz	Signal Analyzer	FSIQ26	836131/009	2018-09-21	2019-09-20
Narda	Attenuator/10dB	10dB	/	2018-08-15	2019-08-14
Narda	Attenuator/6dB	6dB	/	2018-08-15	2019-08-14
Suzhou Pairlink	RF Cable	/	/	Each Time	/
Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESCS30	834115/007	2018-11-12	2019-11-11
Rohde & Schwarz	LISN	ENV216	3560655016	2018-11-15	2019-11-14
BACL	Auto test Software	BACL-EMC	CE001	/	/
Narda	Attenuator/6dB	10690812-2	26850-6	2019-01-10	2020-01-09
MICRO-COAX	Coaxial Cable	Cable-15	015	2018-08-15	2019-08-14

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1310& §2.1091 –MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart §2.1091 and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm²)	Averaging Time (minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculated Formulary:

Predication of MPE limit at a given distance

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

Mode	Antenna Type	Frequency Range (MHz)	Antenna Gain		Max Tune-up Conducted Power		Evaluation Distance (cm)	Power Density (mW/cm²)	MPE Limit (mW/cm²)
			(dBi)	(numeric)	(dBm)	(mW)			
BLE-1M	Dipole	2402~2480	0	1.00	8.00	6.31	20	0.0013	1.0
BLE-1M	Ceramics	2402~2480	2	1.58	8.00	6.31	20	0.0020	1.0
BLE -2M	Dipole	2402~2480	0	1.00	7.50	5.62	20	0.0011	1.0
BLE -2M	Ceramics	2402~2480	2	1.58	7.50	5.62	20	0.0018	1.0

Note: The tune-up power was declared by the manufacturer.

Conclusion: The EUT meets exemption requirement - RF exposure evaluation greater than 20cm distance specified in § 2.1091. If the device built into a host as a portable usage, the additional RF exposure evaluation may be required as specified by§ 2.1093.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

Model	Antenna Type	Max. Antenna Gain	Description	Result
Tigerkin	Ceramics	2 dBi	Permanently attached	Compliant
Tigerkin-B	Ceramics	2 dBi	Permanently attached	Compliant
Tigerkin-C	Dipole	0 dBi	Use a unique type of connector to attach to the EUT	Compliant


Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

EUT Setup

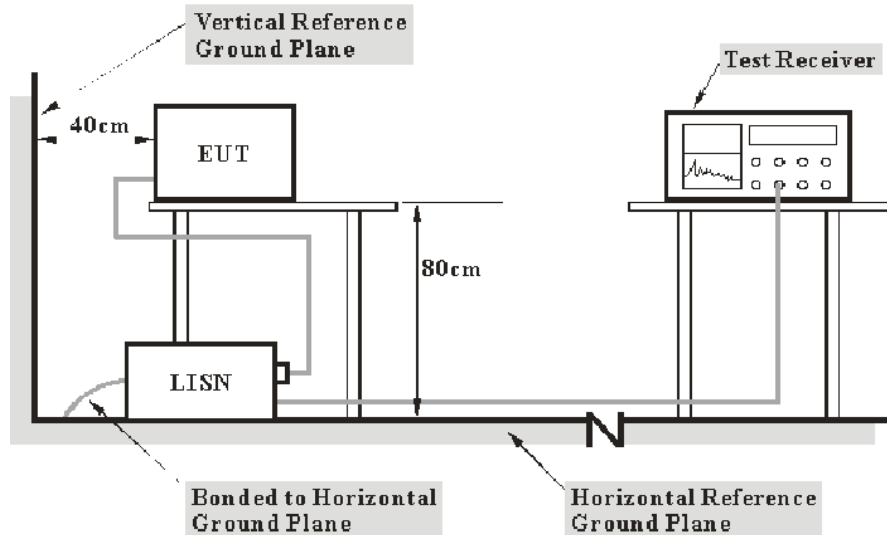

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz - 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Corrected Factor (dB)} = \text{LISN VDF (dB)} + \text{Cable Loss (dB)} + \text{Transient Limiter Attenuation (dB)}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V)} - \text{Corrected Amplitude (dB}\mu\text{V)}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

Test Data

Environmental Conditions


Temperature:	24.1 °C
Relative Humidity:	50 %
ATM Pressure:	101.2kPa

The testing was performed by Max Min on 2019-01-28.

EUT operation mode: Transmitting in BLE-1M low channel. (Worst case)


Tigerkin-C

AC 120V/60 Hz, Line

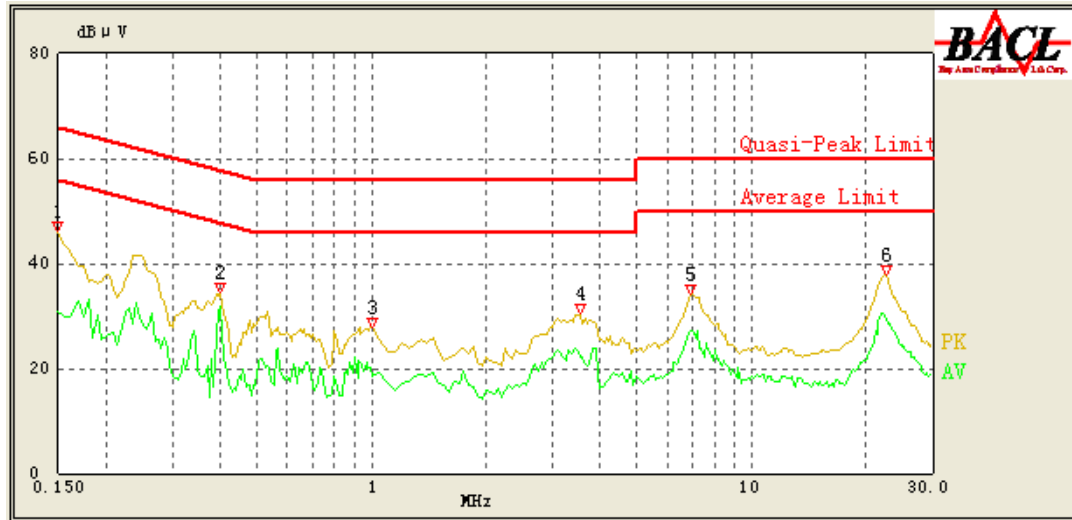

Frequency (MHz)	Corrected Amplitude (dBμV)	Detector (PK/AV/QP)	Bandwidth (kHz)	Line	Corrected Factor (dB)	Limit (dBμV)	Margin (dB)	Comment
0.150	46.18	QP	9.000	L1	16.06	66.00	19.82	Compliance
0.150	30.80	AV	9.000	L1	16.06	56.00	25.20	Compliance
0.400	34.46	QP	9.000	L1	16.06	57.85	23.39	Compliance
0.400	31.76	AV	9.000	L1	16.06	47.85	16.09	Compliance
1.000	27.81	QP	9.000	L1	15.88	56.00	28.19	Compliance
1.000	18.61	AV	9.000	L1	15.88	46.00	27.39	Compliance
3.550	30.34	QP	9.000	L1	15.85	56.00	25.66	Compliance
3.550	22.30	AV	9.000	L1	15.85	46.00	23.70	Compliance
6.950	34.25	QP	9.000	L1	15.98	60.00	25.75	Compliance
6.950	27.30	AV	9.000	L1	15.97	50.00	22.70	Compliance
22.600	37.72	QP	9.000	L1	16.45	60.00	22.28	Compliance
22.600	29.51	AV	9.000	L1	16.45	50.00	20.49	Compliance

AC 120V/60 Hz, Neutral

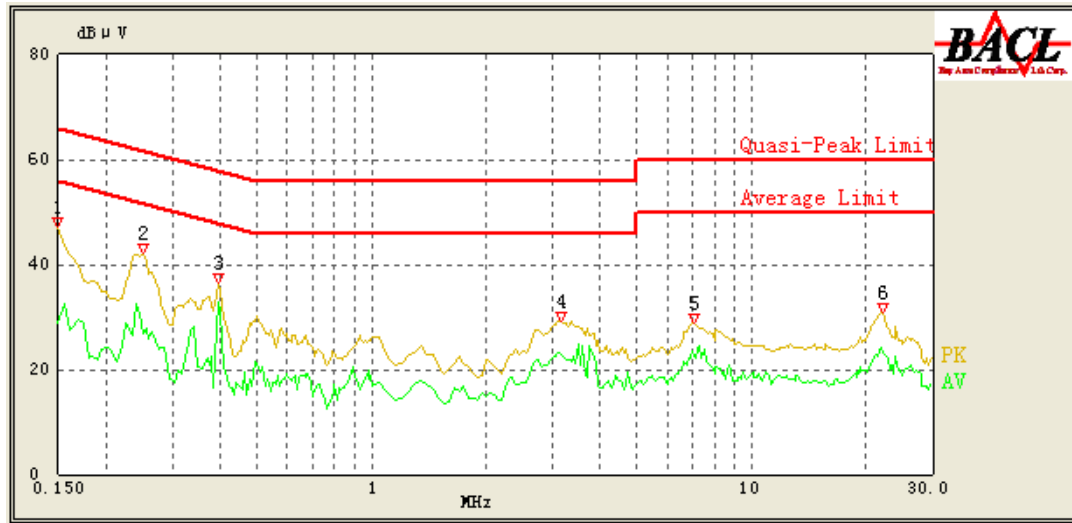

Frequency (MHz)	Corrected Amplitude (dBμV)	Detector (PK/AV/QP)	Bandwidth (kHz)	Line	Corrected Factor (dB)	Limit (dBμV)	Margin (dB)	Comment
0.150	47.09	QP	9.000	N	16.06	66.00	18.91	Compliance
0.150	28.79	AV	9.000	N	16.06	56.00	27.21	Compliance
0.250	42.15	QP	9.000	N	16.06	61.76	19.61	Compliance
0.250	26.78	AV	9.000	N	16.06	51.76	24.98	Compliance
0.395	36.53	QP	9.000	N	16.09	57.96	21.43	Compliance
0.395	32.68	AV	9.000	N	16.09	47.96	15.28	Compliance
3.150	29.22	QP	9.000	N	15.89	56.00	26.78	Compliance
3.150	22.93	AV	9.000	N	15.89	46.00	23.07	Compliance
7.050	28.76	QP	9.000	N	15.92	60.00	31.24	Compliance
7.050	23.35	AV	9.000	N	15.92	50.00	26.65	Compliance
22.100	30.76	QP	9.000	N	16.19	60.00	29.24	Compliance
22.100	24.13	AV	9.000	N	16.19	50.00	25.87	Compliance


Note:

1) Corrected Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)

2) Margin (dB) = Limit (dBμV) - Corrected Amplitude (dBμV)


Tigerkin

AC 120V/60 Hz, Line

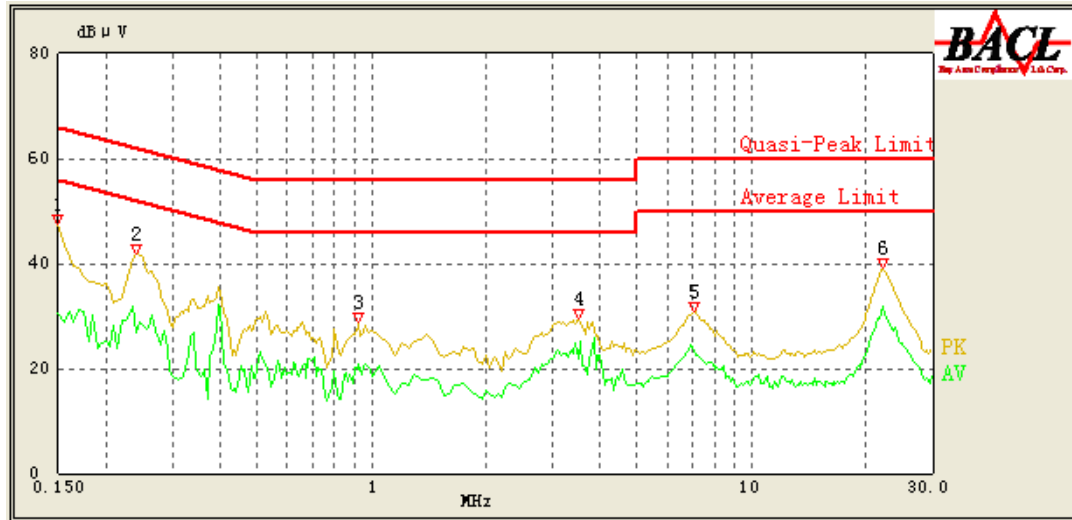

Frequency (MHz)	Corrected Amplitude (dBμV)	Detector (PK/AV/QP)	Bandwidth (kHz)	Line	Corrected Factor (dB)	Limit (dBμV)	Margin (dB)	Comment
0.150	47.38	QP	9.000	L1	16.06	66.00	18.62	Compliance
0.150	30.59	AV	9.000	L1	16.06	56.00	25.41	Compliance
0.240	41.67	QP	9.000	L1	16.02	62.1	20.43	Compliance
0.240	26.97	AV	9.000	L1	16.02	52.1	25.13	Compliance
0.925	28.67	QP	9.000	L1	15.90	56.00	27.33	Compliance
0.925	20.95	AV	9.000	L1	15.90	46.00	25.05	Compliance
3.500	29.54	QP	9.000	L1	15.85	56.00	26.46	Compliance
3.500	21.78	AV	9.000	L1	15.85	46.00	24.22	Compliance
7.050	30.80	QP	9.000	L1	15.98	60.00	29.20	Compliance
7.050	23.64	AV	9.000	L1	15.98	50.00	26.36	Compliance
22.250	39.03	QP	9.000	L1	16.45	60.00	20.97	Compliance
22.250	31.74	AV	9.000	L1	16.45	50.00	18.26	Compliance

AC 120V/60 Hz, Neutral

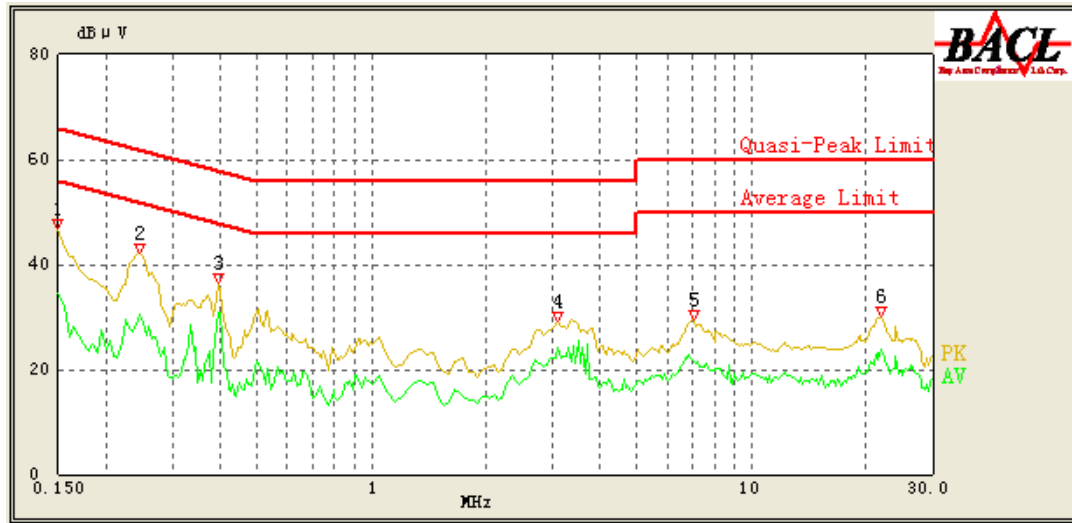

Frequency (MHz)	Corrected Amplitude (dBμV)	Detector (PK/AV/QP)	Bandwidth (kHz)	Line	Corrected Factor (dB)	Limit (dBμV)	Margin (dB)	Comment
0.150	46.69	QP	9.000	N	16.06	66.00	19.31	Compliance
0.150	34.62	AV	9.000	N	16.06	56.00	21.38	Compliance
0.245	42.05	QP	9.000	N	16.06	61.92	19.87	Compliance
0.245	30.57	AV	9.000	N	16.06	51.92	21.35	Compliance
0.395	36.57	QP	9.000	N	16.09	57.96	21.39	Compliance
0.395	30.81	AV	9.000	N	16.09	47.96	17.15	Compliance
3.100	29.10	QP	9.000	N	15.90	56.00	26.90	Compliance
3.100	24.18	AV	9.000	N	15.90	46.00	21.82	Compliance
7.050	29.44	QP	9.000	N	15.92	60.00	30.56	Compliance
7.050	21.74	AV	9.000	N	15.92	50.00	28.26	Compliance
21.850	30.02	QP	9.000	N	16.19	60.00	29.98	Compliance
21.850	23.76	AV	9.000	N	16.19	50.00	26.24	Compliance

Note:

1) Corrected Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)


2) Margin (dB) = Limit (dBμV) - Corrected Amplitude (dBμV)

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS**Applicable Standard**


FCC §15.247 (d); §15.209; §15.205;

EUT Setup

Below 1 GHz:

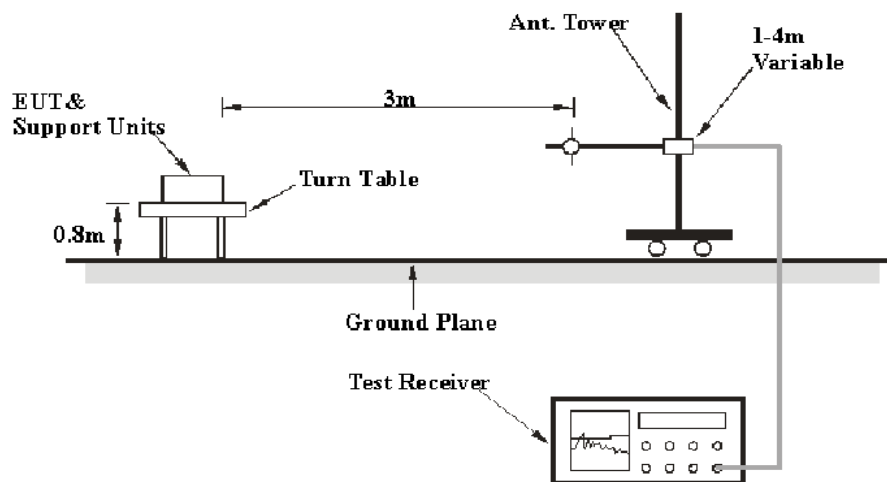

Above 1GHz:

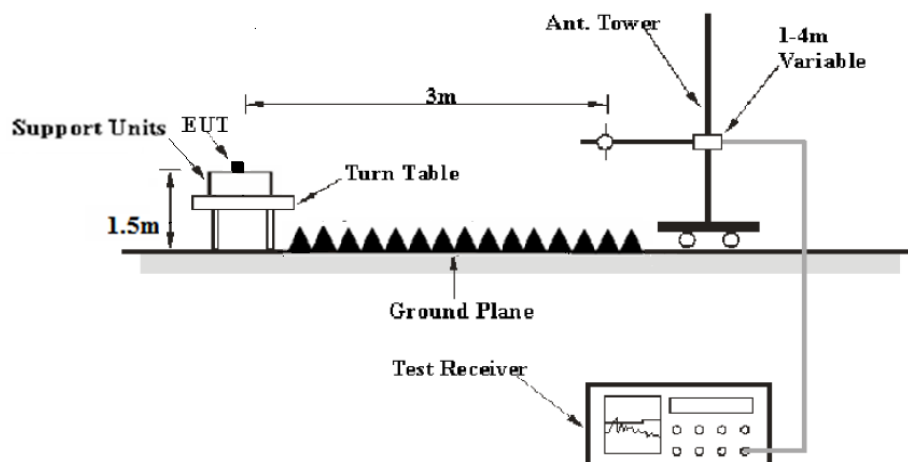

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

EMI Test Receiver Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver Setup was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz - 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1GHz	1MHz	3 MHz	/	PK
	1MHz	3 MHz	/	Ave

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz - 1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude (dB}\mu\text{V /m)} = \text{Meter Reading (dB}\mu\text{V)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \text{Amplifier Gain (dB)}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V/m)} - \text{Corrected Amplitude (dB}\mu\text{V /m)}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

Test Data**Environmental Conditions**


Temperature:	24.1-24.2°C
Relative Humidity:	50-51 %
ATM Pressure:	101.1-101.2 kPa

The testing was performed by Max Min from 2019-02-16 to 2019-05-10.

EUT operation mode: Transmitting

Spurious Emission Test:**30MHz-1GHz**

(Pre-scan low, middle and high channels of operation in the X,Y and Z axes of orientation, the worst case Tigerkin-C BLE-1M low channel of operation in X-axis of orientation was recorded)

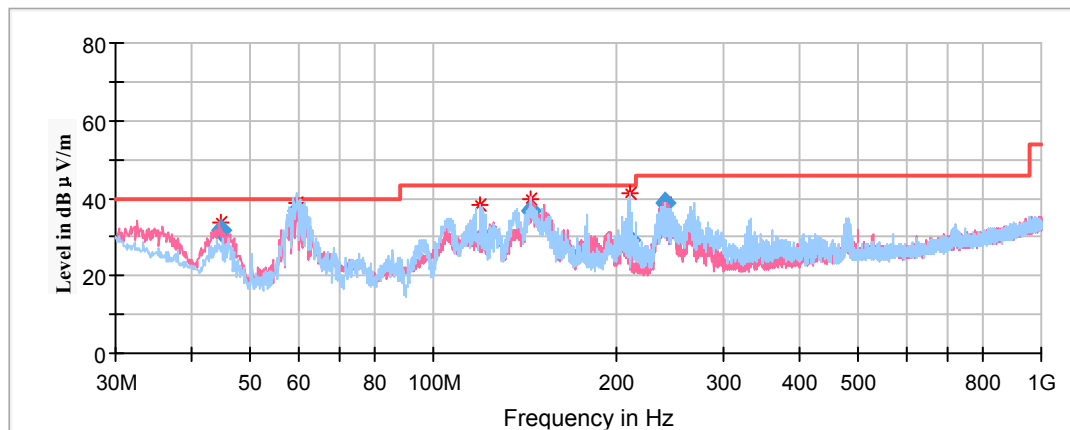

Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	QuasiPeak (dBμV/m)	Height (cm)	Polar (H/V)				
44.820550	31.76	101.0	V	295.0	-14.0	40.00	8.24
59.688800	36.52	199.0	H	315.0	-17.9	40.00	3.48
119.110050	28.96	199.0	H	180.0	-11.3	43.50	14.54
144.065950	36.56	199.0	H	8.0	-12.1	43.50	6.94
210.080450	29.06	101.0	H	0.0	-12.3	43.50	14.44
241.116650	38.70	199.0	V	199.0	-12.1	46.00	7.30

Tigerkin-C**1GHz-18GHz(BLE 1M)**


(Pre-scan in the X, Y and Z axes of orientation, the worst case **X-axis of orientation** was recorded.)

Note:

1. This test was performed with the 2.4 - 2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) - Amplifier Factor (dB)
 Corrected Amplitude (dB μ V/m) = Corrected Factor (dB/m) + Reading (dB μ V)
 Margin (dB) = Limit (dB μ V/m) - Corrected Amplitude (dB μ V /m)

Low Channel: 2402MHz


Full Spectrum

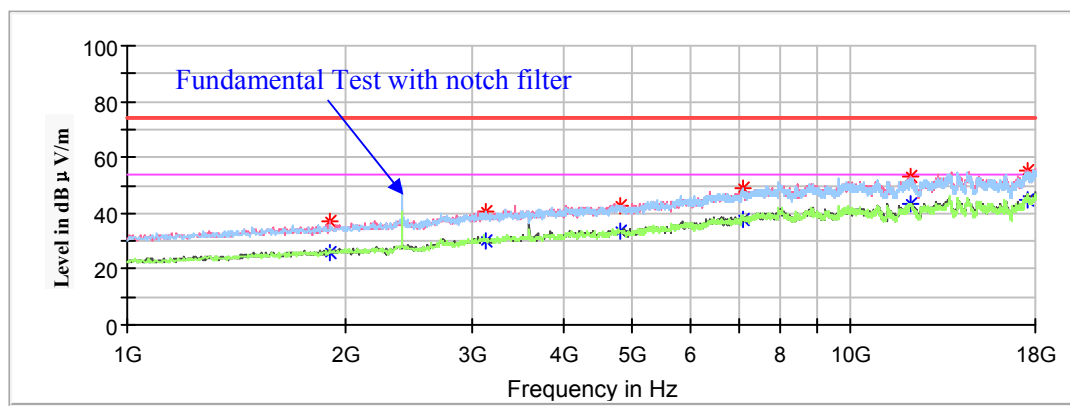

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1537.200000	44.36	---	200.0	H	77.0	-9.8	74.00	29.64
1537.200000	---	25.57	200.0	H	77.0	-9.8	54.00	28.43
3325.600000	---	30.35	250.0	V	340.0	-3.8	54.00	23.65
3325.600000	40.29	---	250.0	V	340.0	-3.8	74.00	33.71
4804.000000	---	33.94	200.0	V	281.0	-0.6	54.00	20.06
4804.000000	43.73	---	200.0	V	281.0	-0.6	74.00	30.27
7206.000000	---	38.44	150.0	V	188.0	5.7	54.00	15.56
7206.000000	46.57	---	150.0	V	188.0	5.7	74.00	27.43
9608.800000	---	46.46	200.0	H	164.0	7.8	54.00	7.54
9608.800000	56.16	---	200.0	H	164.0	7.8	74.00	17.84
17928.600000	---	45.62	150.0	V	340.0	13.6	54.00	8.38
17928.600000	55.82	---	150.0	V	340.0	13.6	74.00	18.18

Middle Channel: 2440MHz


Full Spectrum

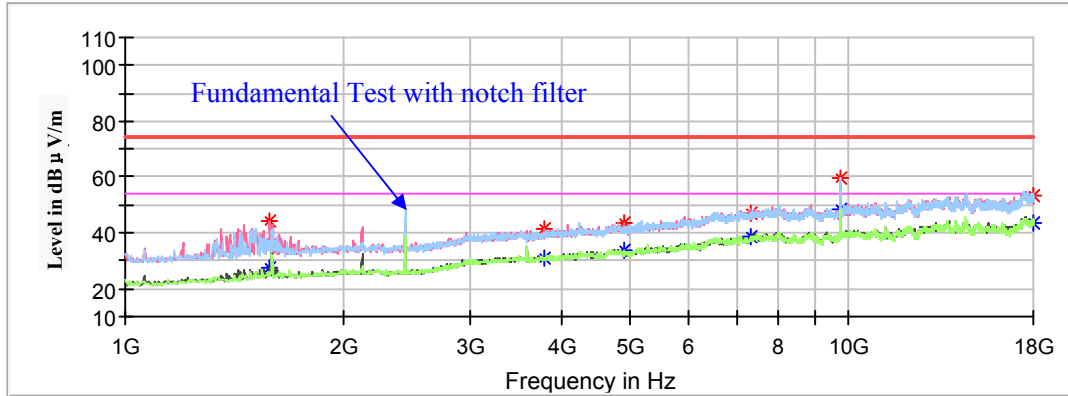

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1584.800000	---	27.67	200.0	V	62.0	-9.6	54.00	26.33
1584.800000	44.29	---	200.0	V	62.0	-9.6	74.00	29.71
3791.400000	---	30.66	250.0	V	225.0	-2.6	54.00	23.34
3791.400000	41.49	---	250.0	V	225.0	-2.6	74.00	32.51
4880.000000	---	34.00	150.0	V	13.0	-0.4	54.00	20.00
4880.000000	43.58	---	150.0	V	13.0	-0.4	74.00	30.42
7320.000000	---	38.63	200.0	H	141.0	5.8	54.00	15.37
7320.000000	47.23	---	200.0	H	141.0	5.8	74.00	26.77
9758.400000	---	48.61	250.0	H	269.0	7.9	54.00	5.39
9758.400000	59.88	---	250.0	H	260.0	7.9	74.00	14.12
17983.000000	---	43.77	100.0	V	28.0	13.5	54.00	10.23
17983.000000	53.19	---	100.0	V	28.0	13.5	74.00	20.81

High Channel: 2480MHz

Full Spectrum

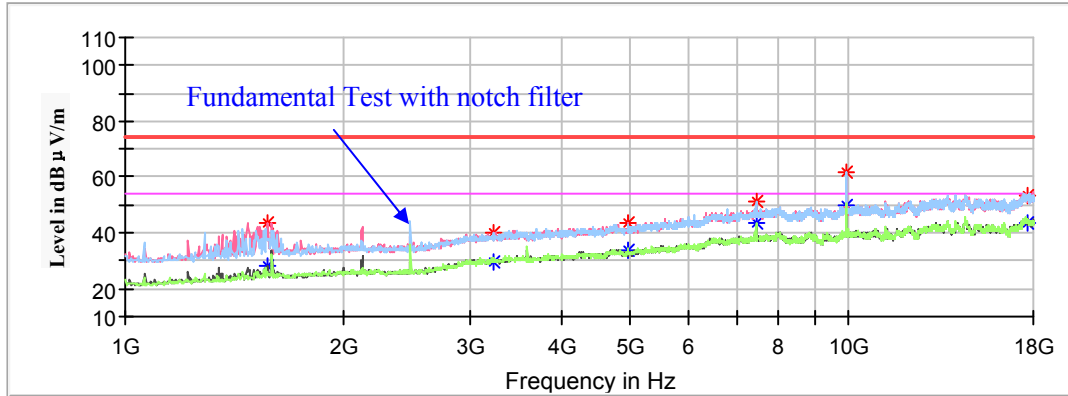

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
1574.600000	---	28.11	150.0	V	52.0	-9.7	54.00	25.89
1574.600000	43.83	---	150.0	V	52.0	-9.7	74.00	30.17
3237.200000	---	29.32	100.0	H	131.0	-4.0	54.00	24.68
3237.200000	40.05	---	100.0	H	131.0	-4.0	74.00	33.95
4960.000000	---	33.95	200.0	V	88.0	-0.3	54.00	20.05
4960.000000	43.79	---	200.0	V	88.0	-0.3	74.00	30.21
7440.000000	---	43.74	150.0	H	160.0	6.0	54.00	10.26
7440.000000	51.20	---	150.0	H	160.0	6.0	74.00	22.80
9921.600000	---	49.88	250.0	H	283.0	8.1	54.00	4.12
9921.600000	61.57	---	250.0	H	283.0	8.1	74.00	12.43
17663.400000	---	43.3	250.0	V	7.0	14.0	54.00	10.70
17663.400000	53.26	---	250.0	V	7.0	14.0	74.00	20.74

Tigerkin**1GHz-18GHz(BLE 1M)**


(Pre-scan in the X, Y and Z axes of orientation, the worst case **X-axis of orientation** was recorded.)

Note:

1. This test was performed with the 2.4 - 2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) - Amplifier Factor (dB)
 Corrected Amplitude (dBμV/m) = Corrected Factor (dB/m) + Reading (dBμV)
 Margin (dB) = Limit (dBμV/m) - Corrected Amplitude (dBμV /m)

Low Channel: 2402MHz


Full Spectrum

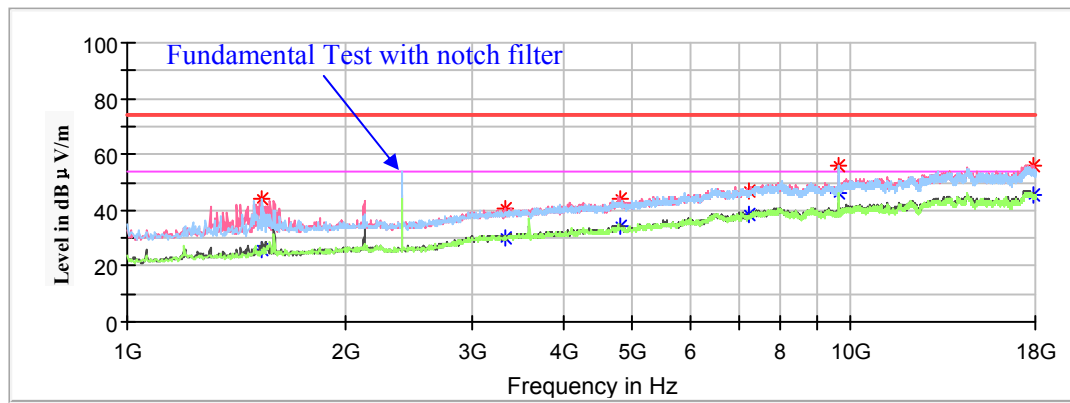

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1523.600000	45.44	---	200.0	V	142.0	-9.9	74.00	28.56
1523.600000	---	25.99	200.0	V	142.0	-9.9	54.00	28.01
3465.000000	---	29.62	250.0	H	37.0	-3.6	54.00	24.38
3465.000000	40.70	---	250.0	H	37.0	-3.6	74.00	33.30
4804.000000	43.34	---	150.0	V	270.0	-0.5	74.00	30.66
4804.000000	---	32.71	150.0	V	270.0	-0.5	54.00	21.29
7206.000000	---	37.24	200.0	H	119.0	5.7	54.00	16.76
7206.000000	45.12	---	200.0	H	119.0	5.7	74.00	28.88
9608.800000	---	39.47	250.0	V	213.0	7.8	54.00	14.53
9608.800000	48.63	---	250.0	V	213.0	7.8	74.00	25.37
17558.000000	---	45.64	150.0	V	200.0	14.2	54.00	8.36
17558.000000	56.03	---	150.0	V	200.0	14.2	74.00	17.97

Middle Channel: 2440MHz


Full Spectrum

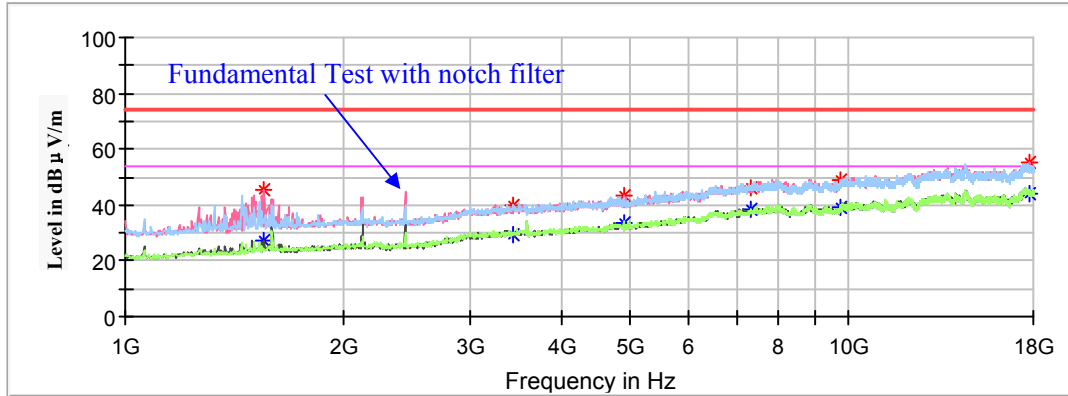

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1557.600000	---	27.08	250.0	V	223.0	-9.7	54.00	26.92
1557.600000	45.57	---	250.0	V	223.0	-9.7	74.00	28.43
3444.600000	---	29.60	250.0	H	304.0	-3.6	54.00	24.40
3444.600000	40.18	---	250.0	H	304.0	-3.6	74.00	33.82
4880.000000	---	33.65	100.0	V	216.0	-0.4	54.00	20.35
4880.000000	43.10	---	100.0	V	216.0	-0.4	74.00	30.90
7320.000000	---	38.36	200.0	H	345.0	5.8	54.00	15.64
7320.000000	46.40	---	200.0	H	345.0	5.8	74.00	27.60
9761.800000	---	39.12	200.0	H	322.0	7.9	54.00	14.88
9761.800000	48.98	---	200.0	H	322.0	7.9	74.00	25.02
17813.000000	---	44.00	250.0	V	76.0	13.8	54.00	10.00
17813.000000	54.95	---	250.0	V	76.0	13.8	74.00	19.05

High Channel: 2480MHz

Full Spectrum

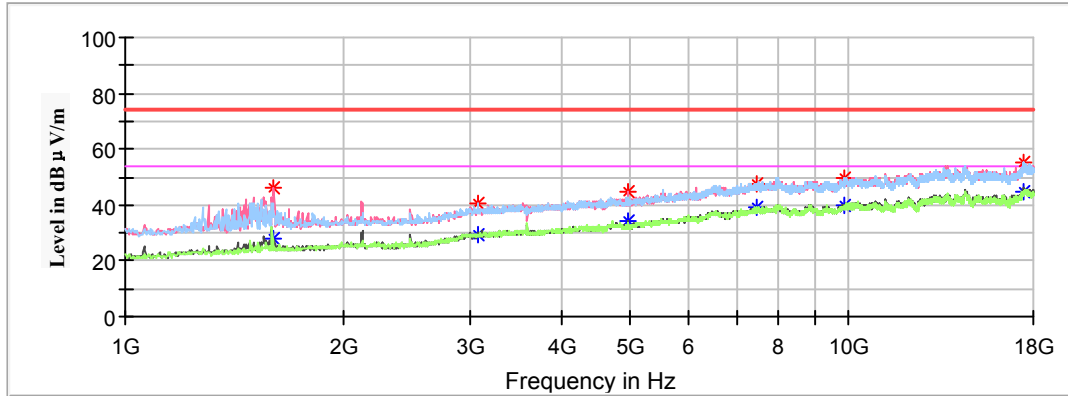

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
1605.200000	---	27.98	250.0	V	189.0	-9.6	54.00	26.02
1605.200000	46.04	---	250.0	V	189.0	-9.6	74.00	27.96
3070.600000	---	29.57	200.0	H	223.0	-4.3	54.00	24.43
3070.600000	40.30	---	200.0	H	223.0	-4.3	74.00	33.70
4960.000000	---	34.46	100.0	V	2.0	-0.3	54.00	19.54
4960.000000	44.85	---	100.0	V	2.0	-0.3	74.00	29.15
7440.000000	---	38.95	200.0	H	326.0	6.1	54.00	15.05
7440.000000	47.75	---	200.0	H	326.0	6.1	74.00	26.25
9884.200000	49.69	---	150.0	H	188.0	8.1	74.00	24.31
9884.200000	---	39.59	150.0	H	188.0	8.1	54.00	14.41
17452.600000	---	45.02	250.0	V	347.0	14.0	54.00	8.98
17452.600000	55.48	---	250.0	V	347.0	14.0	74.00	18.52

Tigerkin-C**1GHz-18GHz(BLE 2M)**


(Pre-scan in the X, Y and Z axes of orientation, the worst case **X-axis of orientation** was recorded.)

Note:

1. This test was performed with the 2.4 - 2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) - Amplifier Factor (dB)
 Corrected Amplitude (dBμV/m) = Corrected Factor (dB/m) + Reading (dBμV)
 Margin (dB) = Limit (dBμV/m) - Corrected Amplitude (dBμV /m)

Low Channel: 2402MHz


Full Spectrum

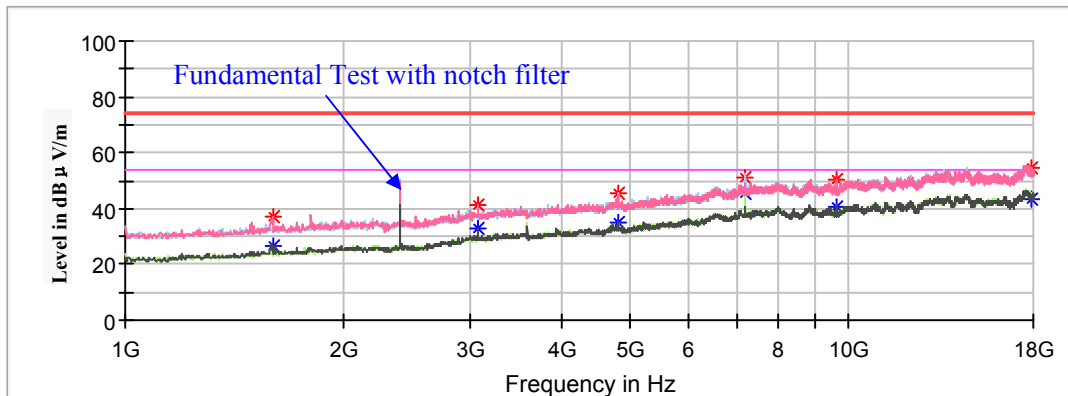

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1598.400000	---	26.83	200.0	V	305.0	-9.6	54.00	27.17
1598.400000	37.05	---	200.0	V	305.0	-9.6	74.00	36.95
3070.600000	---	32.68	200.0	V	205.0	-4.3	54.00	21.32
3070.600000	41.56	---	200.0	V	205.0	-4.3	74.00	32.44
4804.000000	---	34.73	150.0	H	23.0	-0.6	54.00	19.27
4804.000000	45.69	---	150.0	H	23.0	-0.6	74.00	28.31
7206.000000	---	45.28	150.0	H	219.0	5.7	54.00	8.72
7206.000000	50.93	---	150.0	H	219.0	5.7	74.00	23.07
9608.800000	---	40.82	200.0	V	13.0	7.8	54.00	13.18
9608.800000	50.28	---	200.0	V	13.0	7.8	74.00	23.72
17847.000000	---	43.54	100.0	H	140.0	13.7	54.00	10.46
17847.000000	54.60	---	100.0	H	140.0	13.7	74.00	19.40

Middle Channel: 2440MHz


Full Spectrum

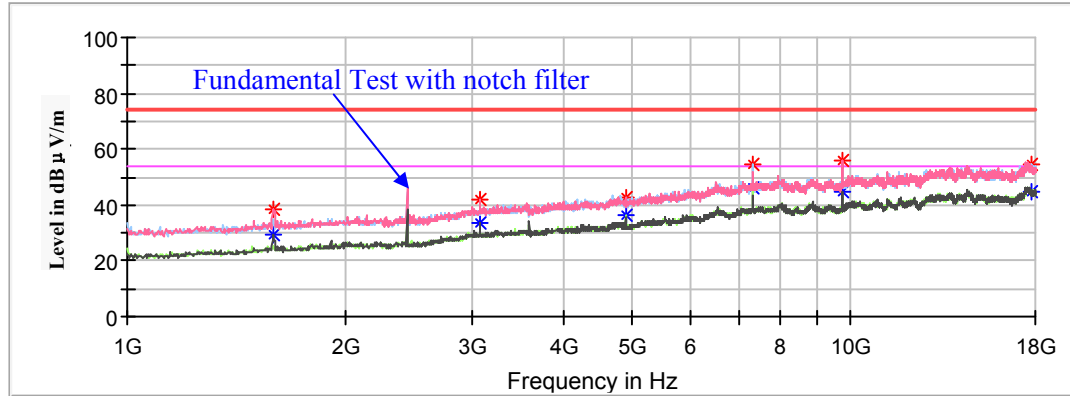

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)				
1591.600000	---	29.43	150.0	V	245.0	-9.6	54.00	24.57
1591.600000	38.12	---	150.0	V	245.0	-9.6	74.00	35.88
3070.600000	---	33.29	200.0	V	191.0	-4.3	54.00	20.71
3070.600000	42.09	---	200.0	V	191.0	-4.3	74.00	31.91
4880.000000	---	36.42	100.0	H	355.0	-0.4	54.00	17.58
4880.000000	42.91	---	100.0	H	355.0	-0.4	74.00	31.09
7320.000000	---	46.17	200.0	H	189.0	5.8	54.00	7.83
7320.000000	54.55	---	200.0	H	189.0	5.8	74.00	19.45
9761.800000	---	45.00	200.0	V	13.0	7.9	54.00	9.00
9761.800000	55.76	---	200.0	V	13.0	7.9	74.00	18.24
17789.200000	---	44.60	150.0	H	319.0	13.8	54.00	9.40
17789.200000	54.72	---	150.0	H	319.0	13.8	74.00	19.28

High Channel: 2480MHz

Full Spectrum

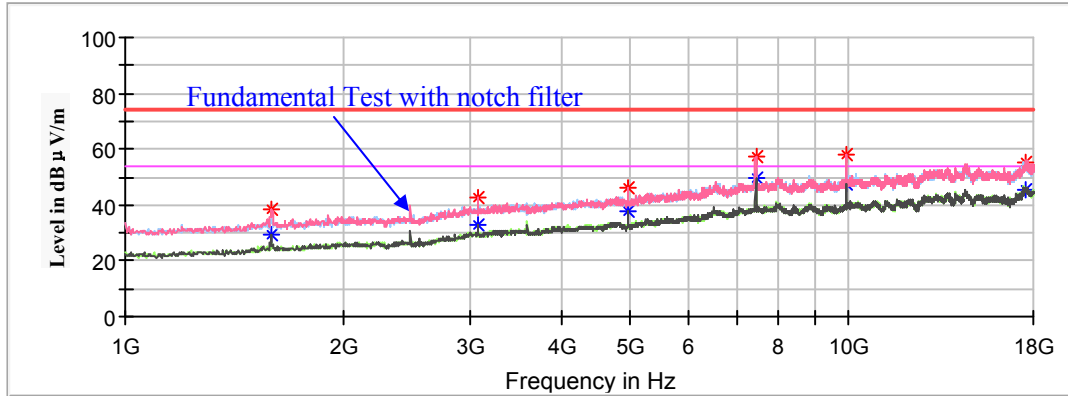

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
1591.600000	---	29.26	200.0	V	236.0	-9.6	54.00	24.74
1591.600000	38.38	---	200.0	V	236.0	-9.6	74.00	35.62
3070.600000	---	32.86	200.0	V	189.0	-4.3	54.00	21.14
3070.600000	42.54	---	200.0	V	189.0	-4.3	74.00	31.46
4960.000000	---	37.59	200.0	V	189.0	-0.3	54.00	16.41
4960.000000	45.91	---	200.0	V	189.0	-0.3	74.00	28.09
7440.000000	---	49.31	150.0	V	199.0	6.0	54.00	4.69
7440.000000	57.68	---	150.0	V	199.0	6.0	74.00	16.32
9918.200000	---	47.28	100.0	V	318.0	8.1	54.00	6.72
9918.200000	57.79	---	100.0	V	318.0	8.1	74.00	16.21
17547.800000	---	45.35	200.0	H	119.0	14.2	54.00	8.65
17547.800000	55.33	---	200.0	H	119.0	14.2	74.00	18.67

Tigerkin**1GHz-18GHz(BLE 2M)**


(Pre-scan in the X, Y and Z axes of orientation, the worst case **X-axis of orientation** was recorded.)

Note:

1. This test was performed with the 2.4 - 2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) - Amplifier Factor (dB)
 Corrected Amplitude (dBμV/m) = Corrected Factor (dB/m) + Reading (dBμV)
 Margin (dB) = Limit (dBμV/m) - Corrected Amplitude (dBμV /m)

Low Channel: 2402MHz


Full Spectrum

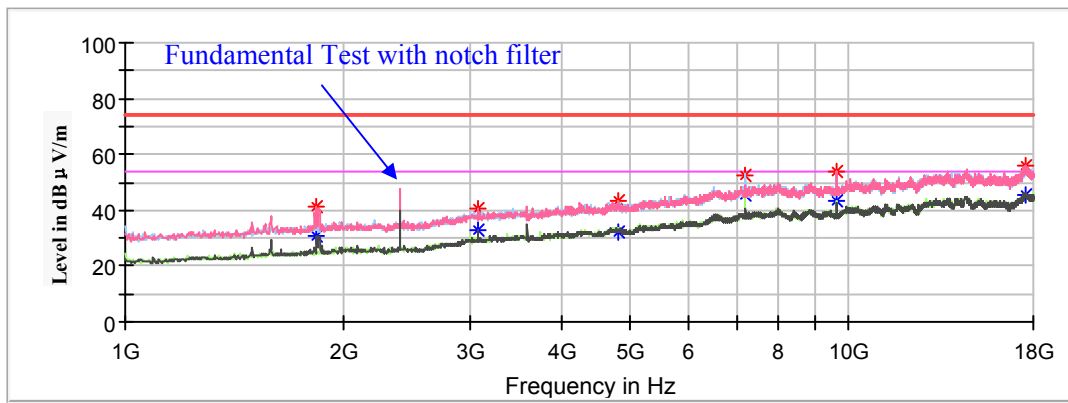

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1839.800000	---	30.44	100.0	V	0.0	-8.8	54.00	23.56
1839.800000	41.02	---	100.0	V	0.0	-8.8	74.00	32.98
3070.600000	---	33.11	200.0	V	191.0	-4.3	54.00	20.89
3070.600000	40.88	---	200.0	V	191.0	-4.3	74.00	33.12
4804.000000	---	32.07	200.0	V	93.0	-0.6	54.00	21.93
4804.000000	43.68	---	200.0	V	93.0	-0.6	74.00	30.32
7206.000000	---	45.58	150.0	H	163.0	5.7	54.00	8.42
7206.000000	52.79	---	150.0	H	163.0	5.7	74.00	21.21
9605.400000	---	43.17	100.0	H	7.0	7.8	54.00	10.83
9605.400000	53.96	---	100.0	H	7.0	7.8	74.00	20.04
17524.000000	---	45.44	150.0	H	0.0	14.2	54.00	8.56
17524.000000	56.03	---	150.0	H	0.0	14.2	74.00	17.97

Middle Channel: 2440MHz


Full Spectrum

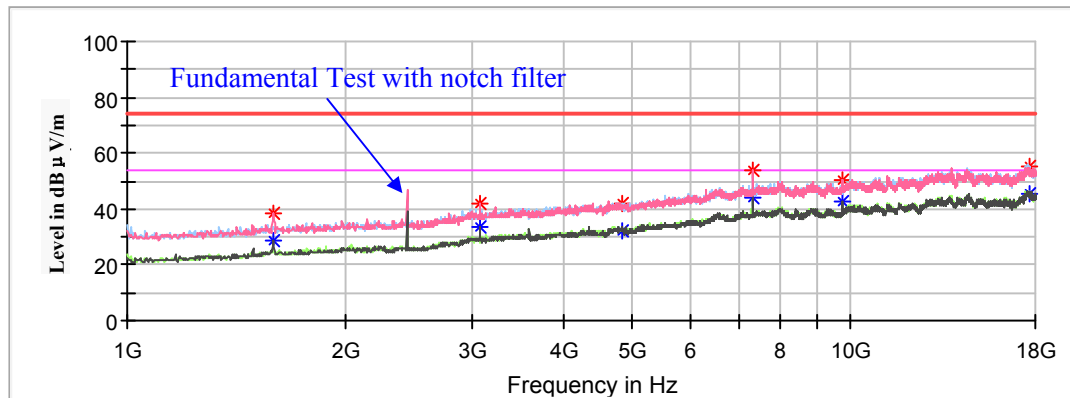

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1591.600000	---	28.80	200.0	V	249.0	-9.6	54.00	25.20
1591.600000	38.77	---	200.0	V	249.0	-9.6	74.00	35.23
3070.600000	---	33.23	200.0	V	293.0	-4.3	54.00	20.77
3070.600000	42.23	---	150.0	V	293.0	-4.3	74.00	31.77
4880.000000	---	32.39	150.0	H	256.0	-0.5	54.00	21.61
4880.000000	41.85	---	100.0	H	256.0	-0.5	74.00	32.15
7320.000000	---	43.80	100.0	V	0.0	5.8	54.00	10.20
7320.000000	53.96	---	100.0	V	0.0	5.8	74.00	20.04
9761.800000	---	42.40	150.0	V	83.0	7.9	54.00	11.60
9761.800000	50.25	---	150.0	V	83.0	7.9	74.00	23.75
17677.000000	---	45.27	100.0	H	358.0	14.0	54.00	8.73
17677.000000	55.55	---	100.0	H	358.0	14.0	74.00	18.45

High Channel: 2480MHz


Full Spectrum

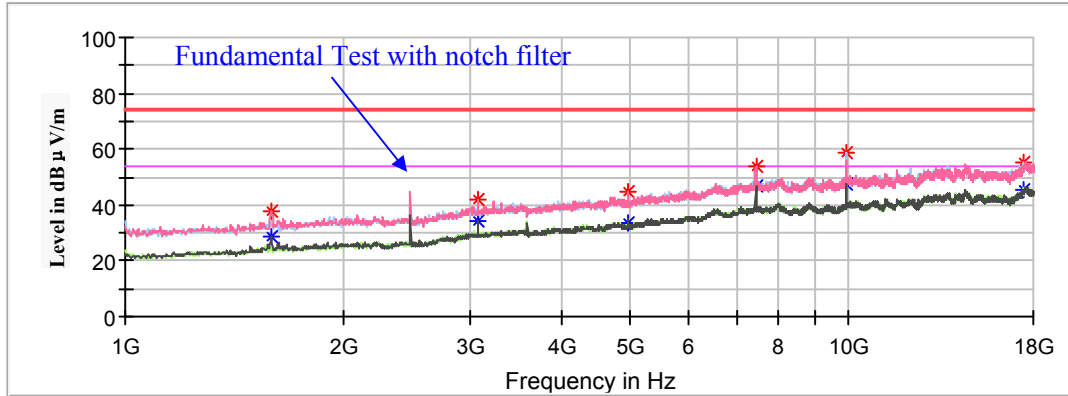


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
1591.600000	---	28.84	200.0	V	241.0	-9.6	54.00	25.16
1591.600000	37.96	---	100.0	V	241.0	-9.6	74.00	36.04
3070.600000	---	34.01	200.0	V	291.0	-4.3	54.00	19.99
3070.600000	41.82	---	200.0	V	291.0	-4.3	74.00	32.18
4960.000000	---	33.44	100.0	V	42.0	-0.3	54.00	20.56
4960.000000	44.43	---	150.0	V	42.0	-0.3	74.00	29.57
7440.000000	---	46.59	100.0	V	262.0	6.0	54.00	7.41
7440.000000	53.71	---	100.0	V	262.0	6.0	74.00	20.29
9921.600000	---	47.24	150.0	H	154.0	8.1	54.00	6.76
9921.600000	58.88	---	150.0	H	154.0	8.1	74.00	15.12
17496.800000	---	45.15	150.0	H	324.0	14.3	54.00	8.85
17496.800000	55.47	---	200.0	H	324.0	14.3	74.00	18.53

Tigerkin-C**18GHz - 25GHz(BLE 1M)**

(Pre-scan with low, middle and high channels of operation in the X,Y and Z axes of orientation, the worst case **low** channel of operation in X-axis of orientation was recorded)

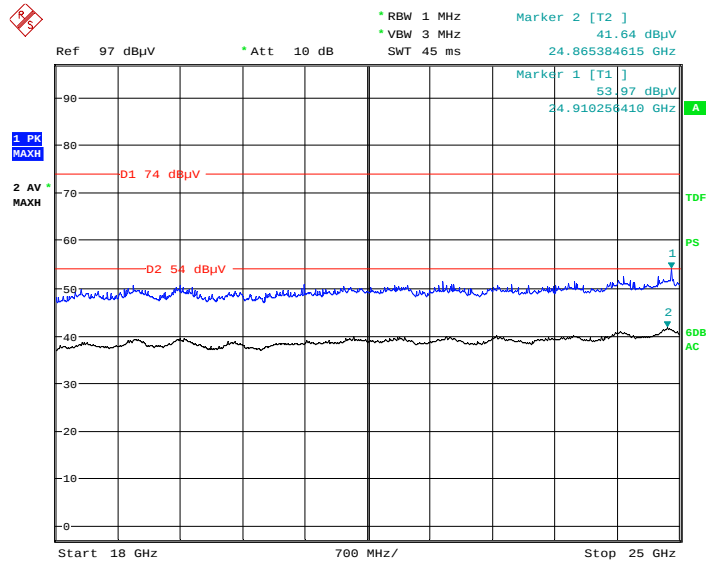Horizontal


Date: 10.MAR.2019 11:01:15

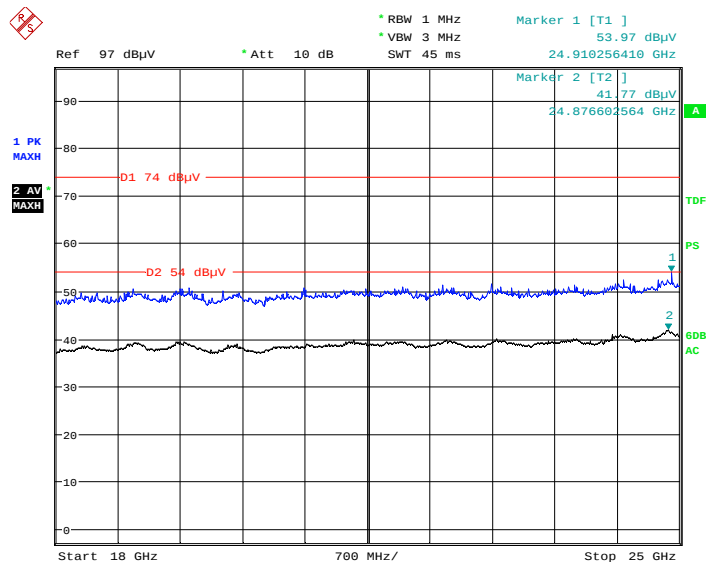Vertical


Date: 10.MAR.2019 11:31:16

Tigerkin**18GHz - 25GHz(BLE 1M)**

(Pre-scan with low, middle and high channels of operation in the X,Y and Z axes of orientation, the worst case **low** channel of operation in X-axis of orientation was recorded)

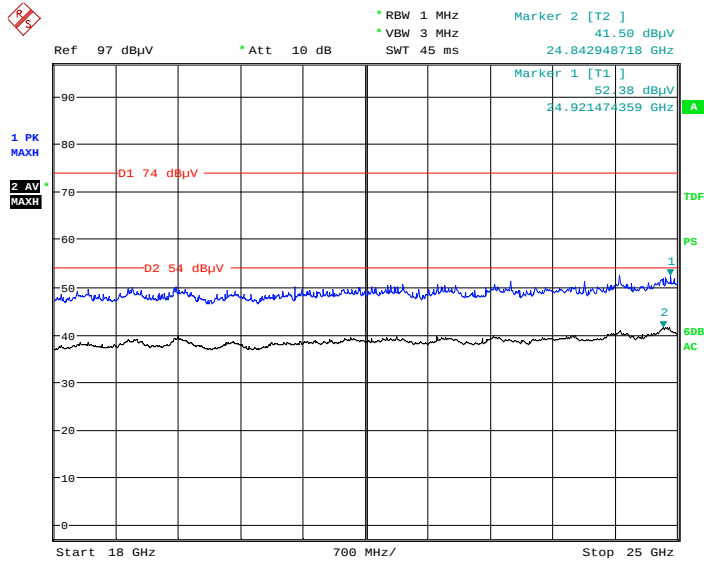Horizontal


Date: 10.MAR.2019 12:02:23

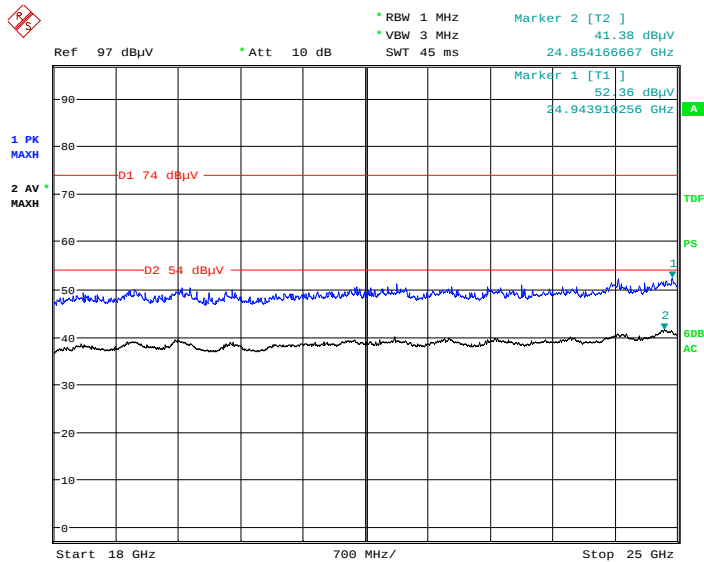Vertical


Date: 10.MAR.2019 12:34:44

Tigerkin-C**18GHz - 25GHz(BLE 2M)**

(Pre-scan with low, middle and high channels of operation in the X,Y and Z axes of orientation, the worst case **low** channel of operation in X-axis of orientation was recorded)

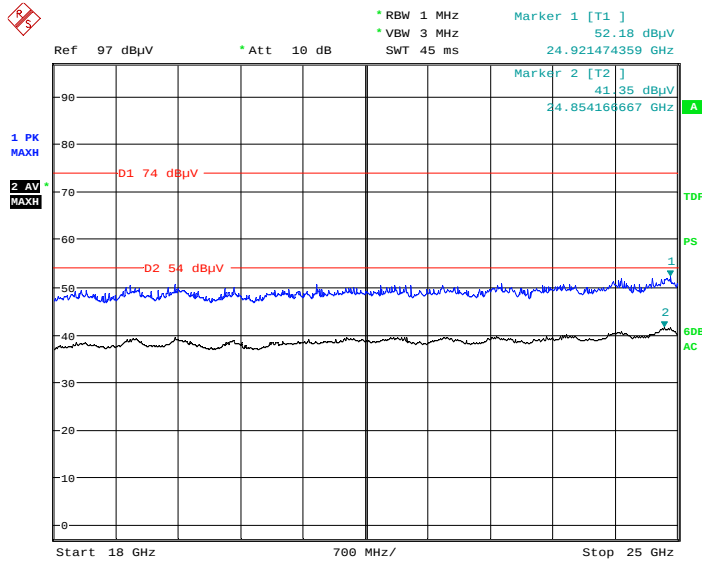Horizontal

Date: 6.MAY.2019 13:50:25

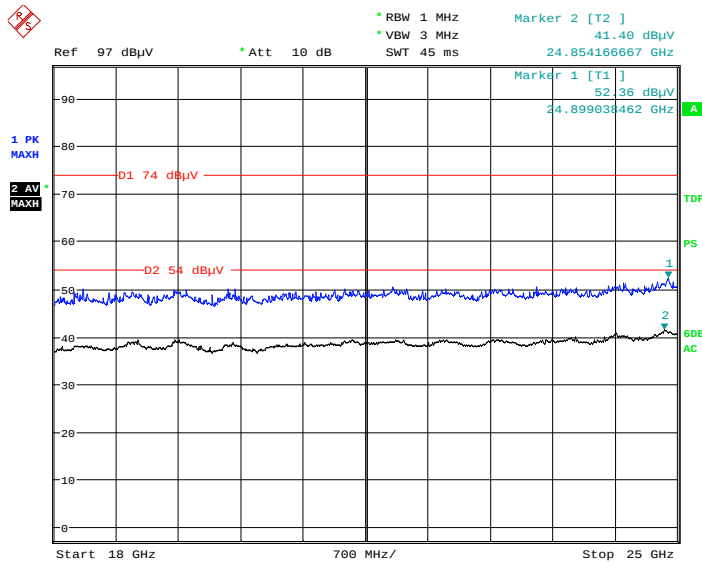Vertical


Date: 6.MAY.2019 13:07:14

Tigerkin

18GHz - 25GHz(BLE 2M)


(Pre-scan with low, middle and high channels of operation in the X,Y and Z axes of orientation, the worst case **low** channel of operation in X-axis of orientation was recorded)

Horizontal

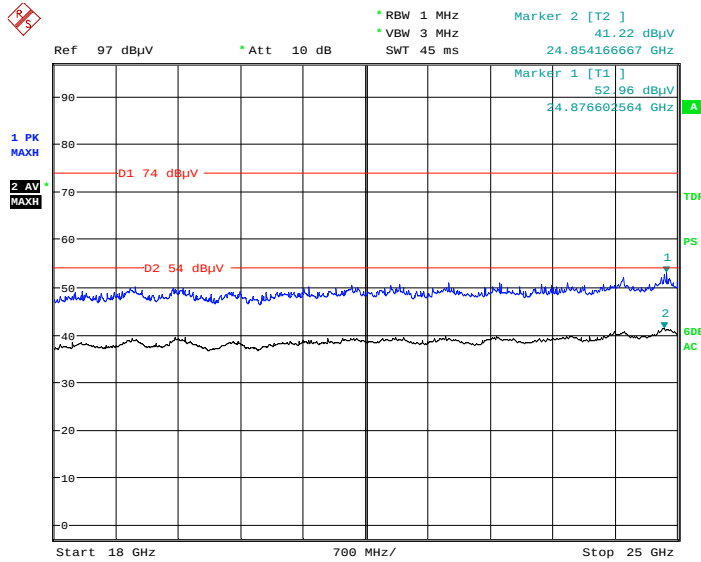

Date: 6.MAY.2019 12:56:13

Vertical

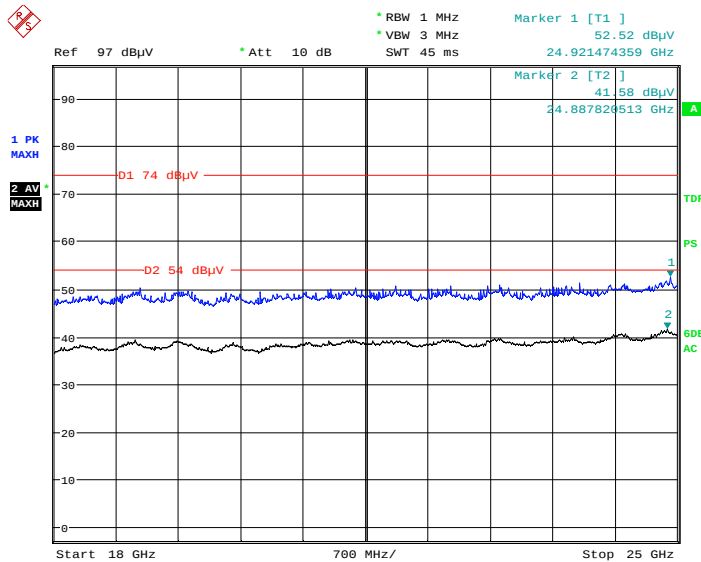

Date: 6.MAY.2019 13:28:18

Fundamental Test & Restricted Bands Emissions Test:

(Pre-scan in the X, Y and Z axes of orientation, the worst case X-axis of orientation was recorded.)

Note:

1. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) - Amplifier Factor (dB)

Corrected Amplitude (dBμV/m) = Corrected Factor (dB/m) + Reading (dBμV)

Margin (dB) = Limit (dBμV/m) - Corrected Amplitude (dBμV /m)

Tigerkin-C (BLE 1M)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
Low Channel: 2402MHz								
2402.000000	---	106.26	150	V	289	2.8	/	/
2402.000000	108.56	---	150	V	289	2.8	/	/
2402.000000	---	107.82	200	H	205	2.8	/	/
2402.000000	109.48	---	200	H	205	2.8	/	/
2390.000000	---	37.32	100	V	359	2.8	54	16.68
2390.000000	45.92	---	100	V	359	2.8	74	28.08
Middle Channel: 2440MHz								
2440.000000	---	107.62	250	V	130	2.9	/	/
2440.000000	109.51	---	250	V	130	2.9	/	/
2440.000000	---	105.48	200	H	258	2.9	/	/
2440.000000	107.83	---	200	H	258	2.9	/	/
High Channel: 2480MHz								
2480.000000	---	106.52	150	V	353	3	/	/
2480.000000	108.45	---	150	V	353	3	/	/
2480.000000	---	105.62	200	H	262	3	/	/
2480.000000	107.26	---	200	H	262	3	/	/
2483.500000	---	38.62	200	V	276	3	54	15.38
2483.500000	48.76	---	200	V	176	3	74	25.24

Tigerkin (BLE 1M):

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
Low Channel: 2402MHz								
2402.000000	---	106.38	150	V	289	2.8	/	/
2402.000000	108.58	---	150	V	289	2.8	/	/
2402.000000	---	107.34	200	H	205	2.8	/	/
2402.000000	109.51	---	200	H	205	2.8	/	/
2390.000000	---	36.85	100	V	359	2.8	54	17.15
2390.000000	44.84	---	100	V	359	2.8	74	29.16
Middle Channel: 2440MHz								
2440.000000	---	107.16	250	V	130	2.9	/	/
2440.000000	109.37	---	250	V	130	2.9	/	/
2440.000000	---	106.53	200	H	258	2.9	/	/
2440.000000	108.46	---	200	H	258	2.9	/	/
High Channel: 2480MHz								
2480.000000	---	106.84	150	V	353	3	/	/
2480.000000	108.31	---	150	V	353	3	/	/
2480.000000	---	105.29	200	H	262	3	/	/
2480.000000	107.63	---	200	H	262	3	/	/
2483.500000	---	38.4	200	V	276	3	54	15.6
2483.500000	48.43	---	200	V	176	3	74	25.57

Fundamental Test & Restricted Bands Emissions Test:

(Pre-scan in the X, Y and Z axes of orientation, the worst case X-axis of orientation was recorded.)

Note:

1. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) - Amplifier Factor (dB)

Corrected Amplitude (dBμV/m) = Corrected Factor (dB/m) + Reading (dBμV)

Margin (dB) = Limit (dBμV/m) - Corrected Amplitude (dBμV /m)

Tigerkin-C(BLE 2M):


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
Low Channel: 2402MHz								
2402.000000	---	105.37	150	V	116	2.8	/	/
2402.000000	107.83	---	150	V	116	2.8	/	/
2402.000000	---	104.32	200	H	205	2.8	/	/
2402.000000	106.29	---	200	H	205	2.8	/	/
2390.000000	---	36.58	100	V	225	2.8	54	17.42
2390.000000	46.93	---	100	V	225	2.8	74	27.07
Middle Channel: 2440MHz								
2440.000000	---	104.65	250	V	130	2.9	/	/
2440.000000	106.85	---	250	V	130	2.9	/	/
2440.000000	---	103.82	200	H	168	2.9	/	/
2440.000000	105.37	---	200	H	168	2.9	/	/
High Channel: 2480MHz								
2480.000000	---	102.83	150	V	317	3	/	/
2480.000000	104.65	---	150	V	317	3	/	/
2480.000000	---	101.46	200	H	119	3	/	/
2480.000000	103.19	---	200	H	119	3	/	/
2483.500000	---	38.34	200	V	276	3	54	15.66
2483.500000	49.44	---	200	V	276	3	74	24.56

Tigerkin (BLE 2M):


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
Low Channel: 2402MHz								
2402.000000	---	107.18	150	V	198	2.8	/	/
2402.000000	109.05	---	150	V	198	2.8	/	/
2402.000000	---	106.44	200	H	255	2.8	/	/
2402.000000	108.67	---	200	H	255	2.8	/	/
2390.000000	---	36.93	100	V	359	2.8	54	17.07
2390.000000	46.65	---	100	V	359	2.8	74	27.35
Middle Channel: 2440MHz								
2440.000000	---	107.56	150	V	130	2.9	/	/
2440.000000	109.42	---	150	V	130	2.9	/	/
2440.000000	---	106.37	200	H	222	2.9	/	/
2440.000000	108.24	---	200	H	222	2.9	/	/
High Channel: 2480MHz								
2480.000000	---	105.29	150	V	198	3	/	/
2480.000000	107.47	---	150	V	198	3	/	/
2480.000000	---	104.21	200	H	262	3	/	/
2480.000000	106.83	---	200	H	262	3	/	/
2483.500000	---	40.07	200	V	176	3	54	13.93
2483.500000	51.4	---	200	V	176	3	74	22.6

Conducted Spurious Emissions at Antenna Port(BLE 1M):

Low Channel

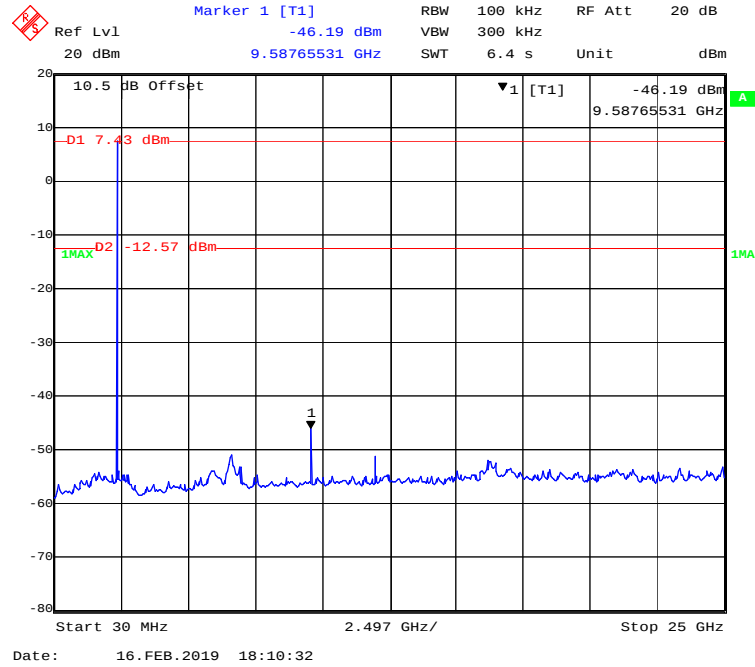


Middle Channel

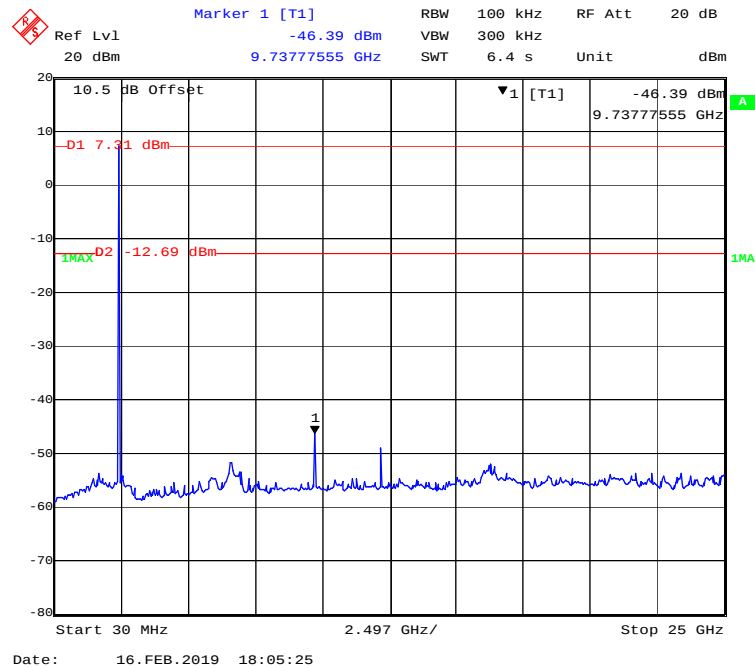


RBW 100 kHz VBW 300 kHz SWT 6.4 s Ref Lvl 20 dBm RF Att 20 dB
 Marker 1 [T1] -45.76 dBm 9.93793587 GHz Unit dBm
 10.5 dB Offset
 ▼1 [T1] -45.76 dBm 9.93793587 GHz
 -D1 7.25 dBm
 -D2 -12.75 dBm
 1MAX
 Start 30 MHz 2.497 GHz/ Stop 25 GHz
 Date: 16.FEB.2019 18:02:55

Conducted Spurious Emissions at Antenna Port(BLE 2M):


Low Channel

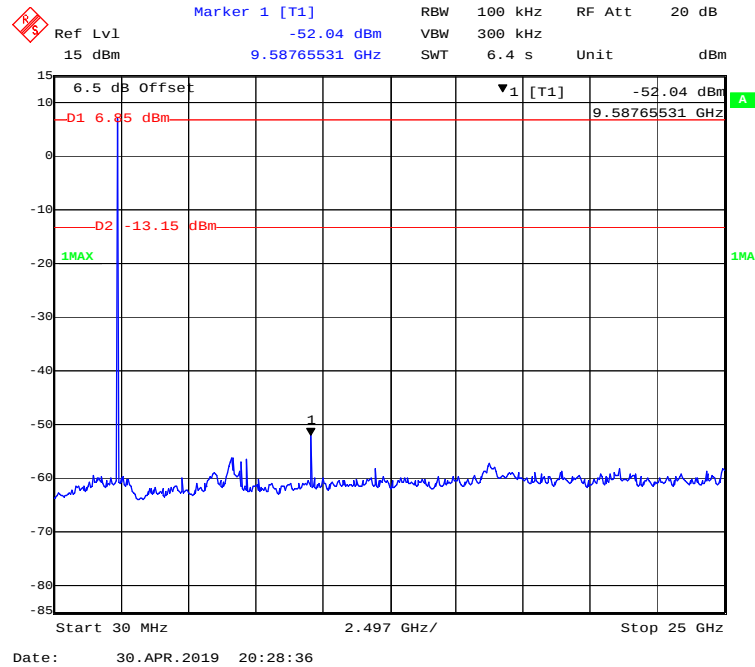

Middle Channel

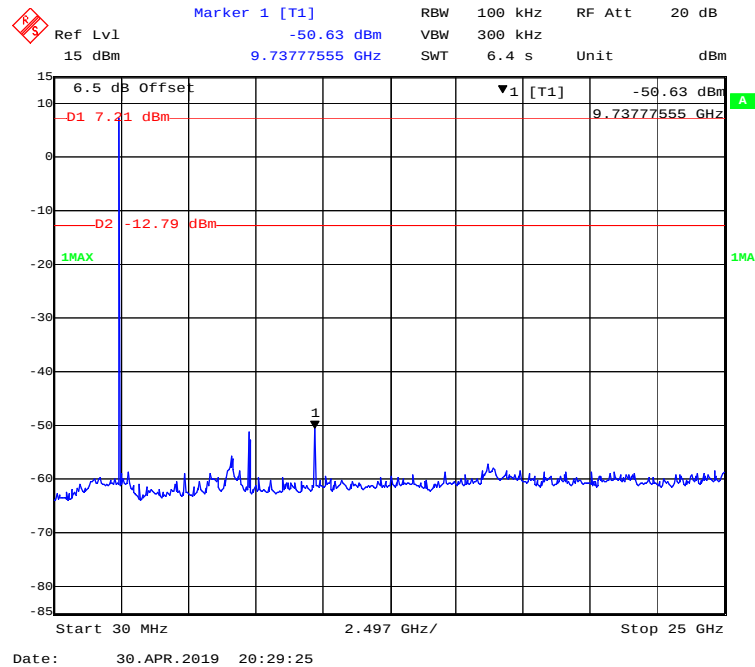

High Channel

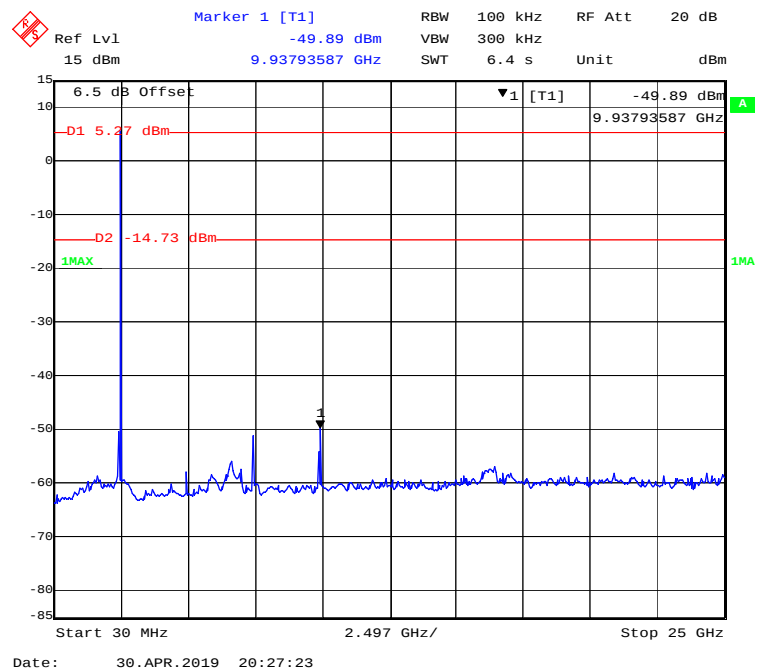

FCC §15.247(a) (2) - 6 dB EMISSION BANDWIDTH


Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

According to ANSI C63.10-2013 sub-clause 11.8.1

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



Test Data

Environmental Conditions

Temperature:	24.1-24.5°C
Relative Humidity:	50-51 %
ATM Pressure:	101.1-101.2 kPa


The testing was performed by Max Min from 2019-01-23 to 2019-04-30.

Test Result: Pass.


EUT operation mode: Transmitting

Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	Limit (MHz)
BLE 1M			
Low	2402	0.824	≥ 0.5
Middle	2440	0.818	≥ 0.5
High	2480	0.818	≥ 0.5


Low Channel

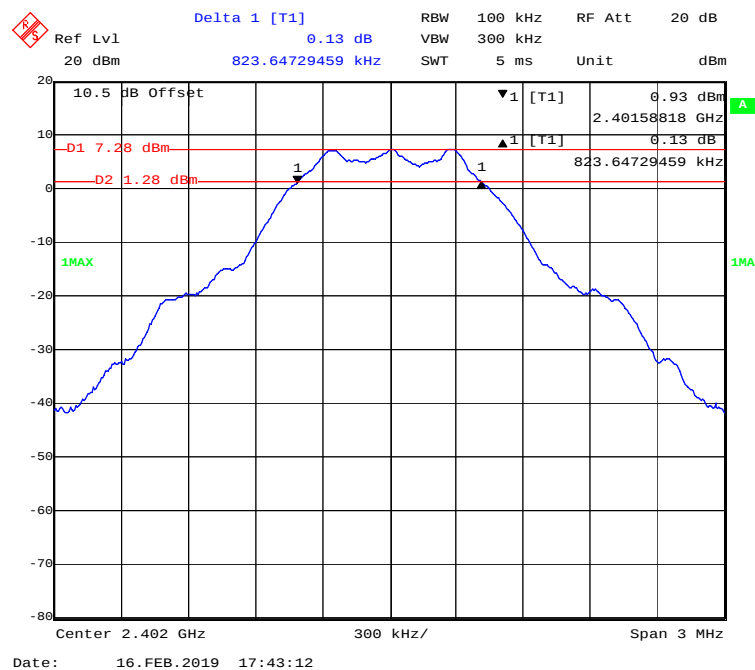

Middle Channel

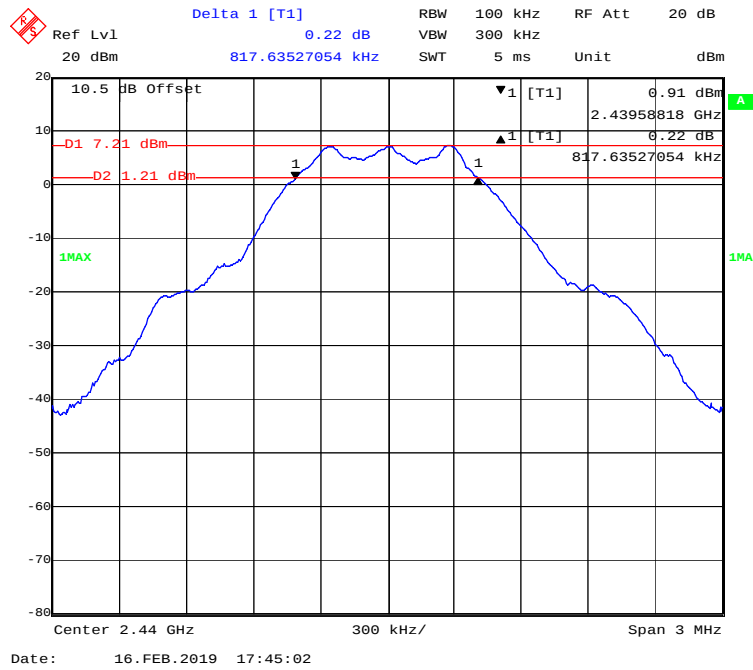


High Channel

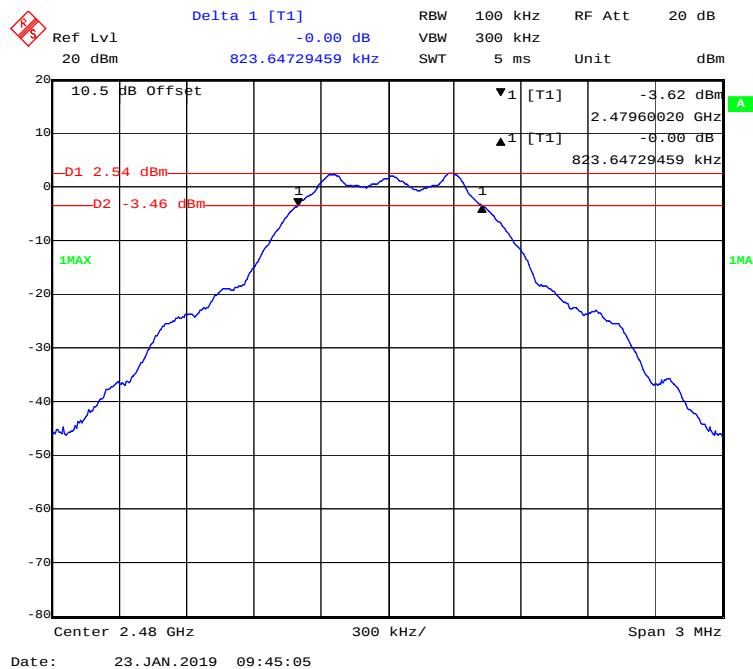


Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	Limit (MHz)
BLE 2M			
Low	2402	1.092	≥ 0.5
Middle	2440	1.092	≥ 0.5
High	2480	1.092	≥ 0.5


Low Channel

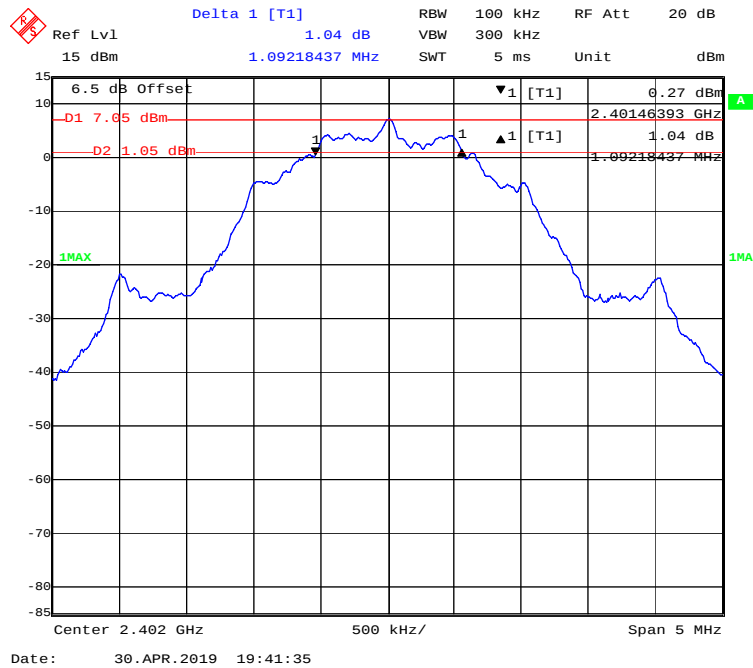

Middle Channel

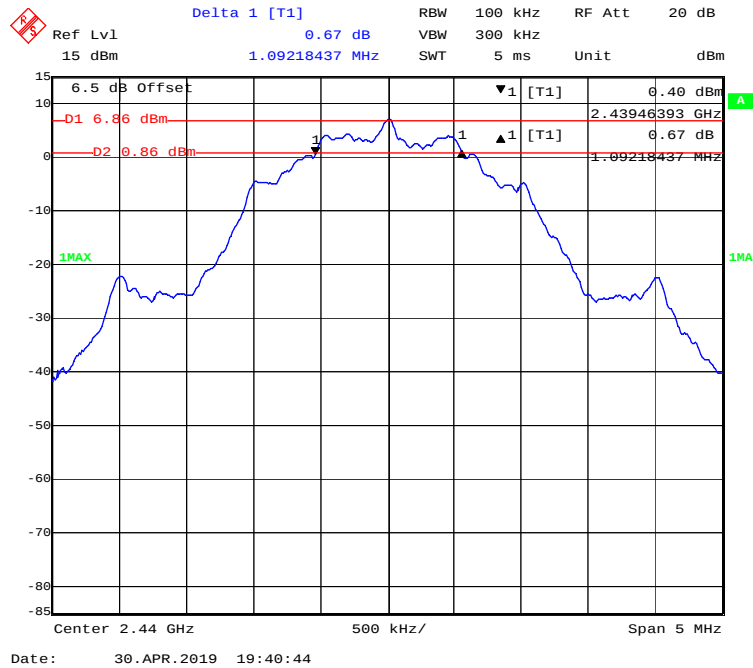

High Channel

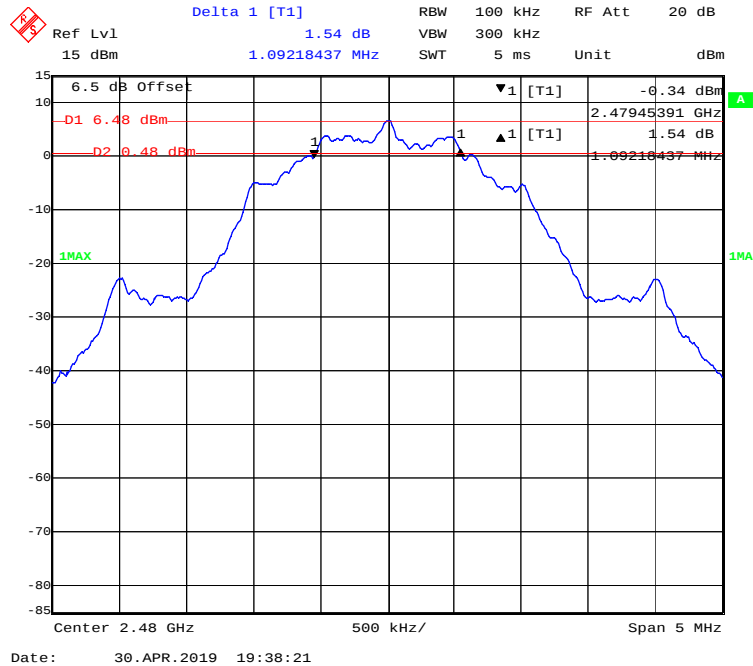

FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER


Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

According to ANSI C63.10-2013 sub-clause 11.9.1.1

1. Set the RBW $\geq$ DTS bandwidth.
2. Set VBW $\geq 3 \times$ RBW.
3. Set span $\geq 3 \times$ RBW
4. Sweep time = auto couple.
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use peak marker function to determine the peak amplitude level.



Test Data

Environmental Conditions


Temperature:	24.1-24.5°C
Relative Humidity:	50-51 %
ATM Pressure:	101.1-101.2 kPa

The testing was performed by Max Min from 2019-02-16 to 2019-04-30.


EUT operation mode: Transmitting

Channel	Frequency (MHz)	Max Conducted Peak Output Power (dBm)	Limit (dBm)	Result
BLE 1M				
Low	2402	7.79	≤ 30	Pass
Middle	2440	7.48	≤ 30	Pass
High	2480	7.24	≤ 30	Pass


Low Channel

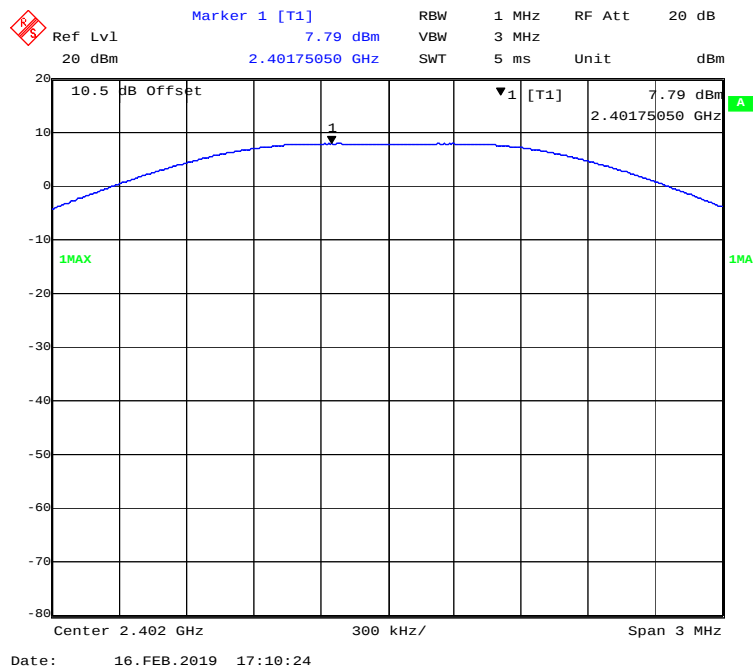

Middle Channel

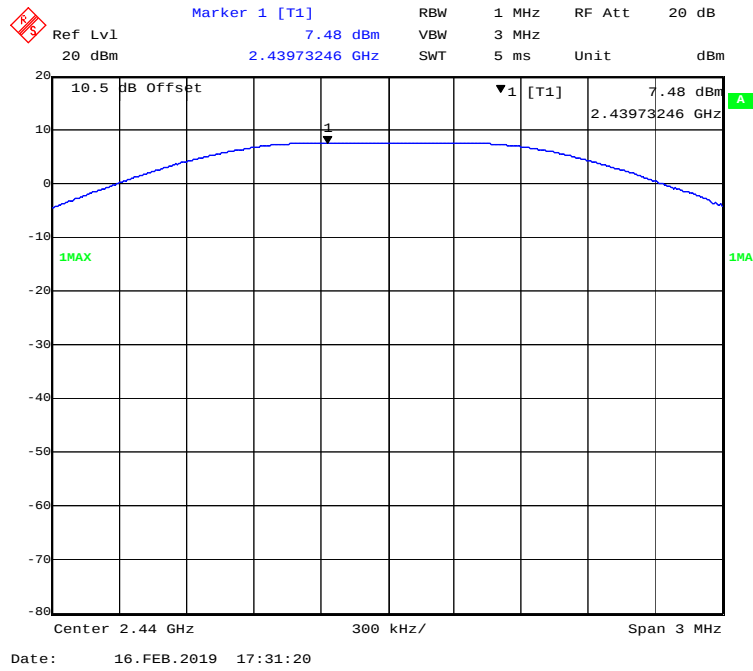


High Channel

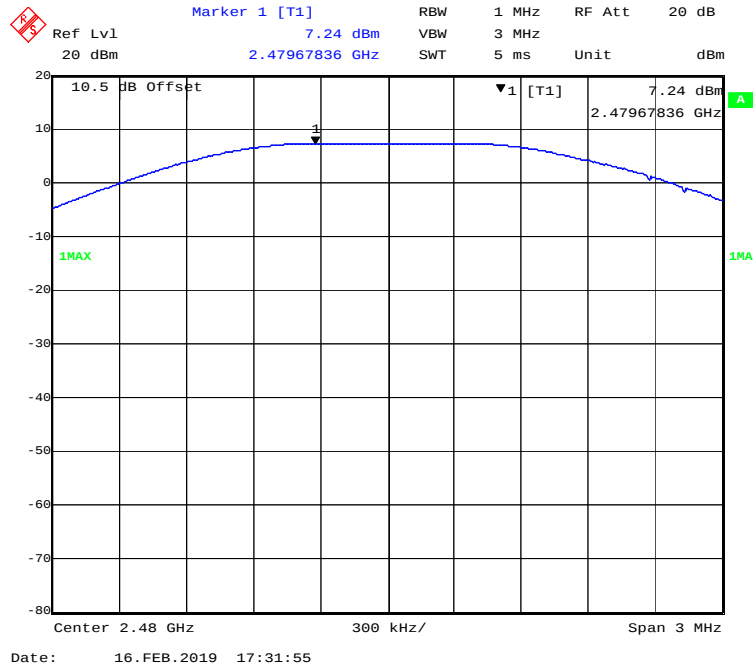


Channel	Frequency (MHz)	Max Conducted Peak Output Power (dBm)	Limit (dBm)	Result
BLE 2M				
Low	2402	7.33	≤ 30	Pass
Middle	2440	7.19	≤ 30	Pass
High	2480	6.82	≤ 30	Pass


Low Channel

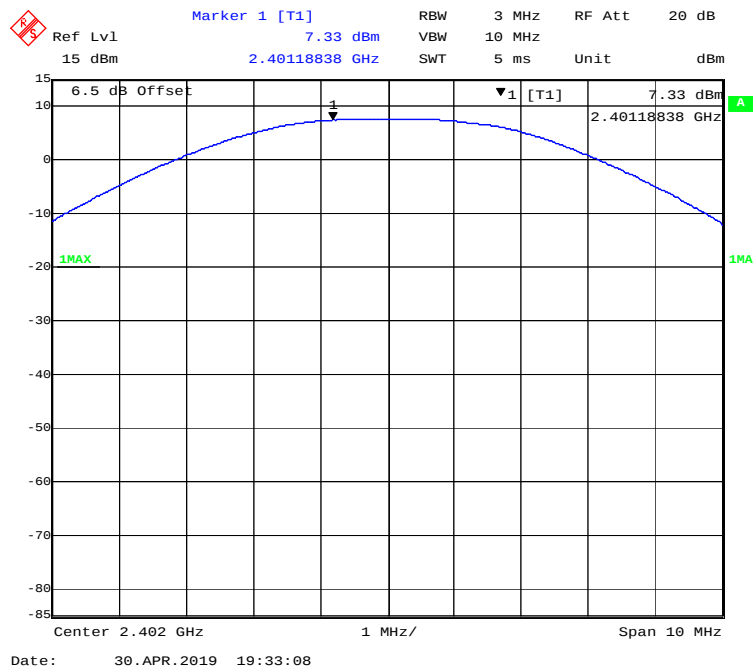

Middle Channel

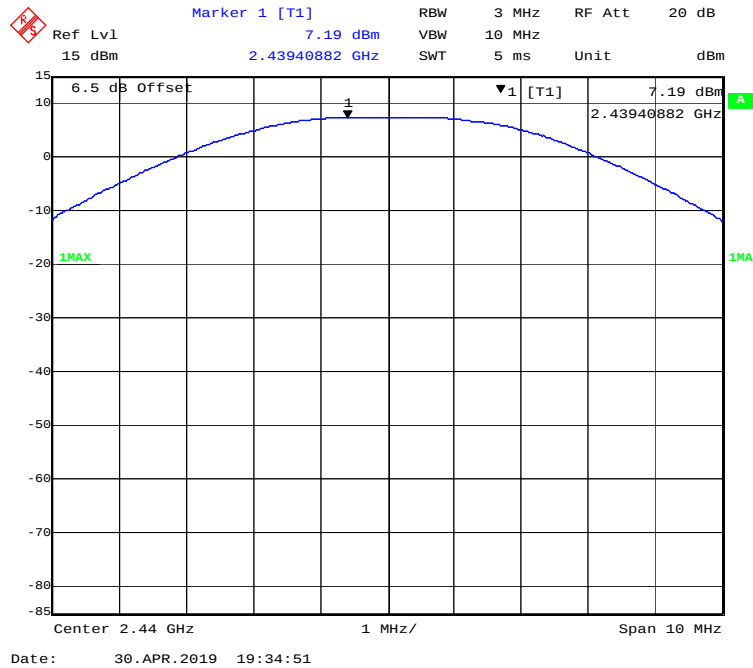

High Channel

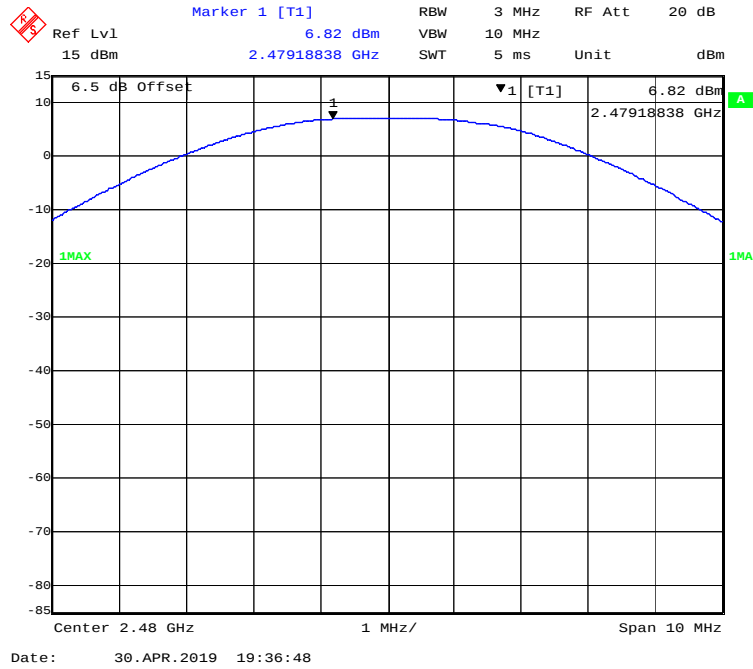

FCC §15.247(d) - BAND EDGE

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

According to ANSI C63.10-2013 sub-clause 6.10.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data

Environmental Conditions


Temperature:	24.1-24.5°C
Relative Humidity:	50-51 %
ATM Pressure:	101.1-101.2 kPa

The testing was performed by Max Min from 2019-02-16 to 2019-04-30.


EUT operation mode: Transmitting

Test Result: *Compliance*


Left Side-1M

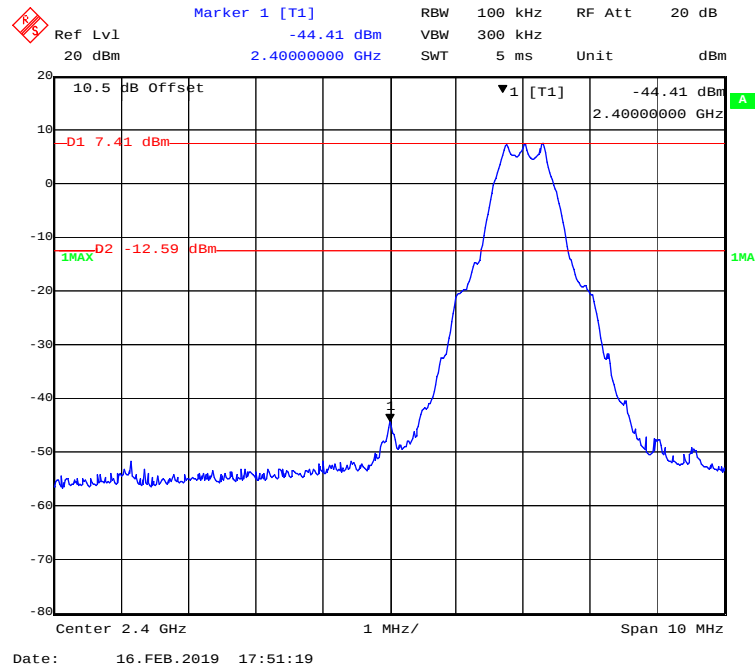


Right Side-1M

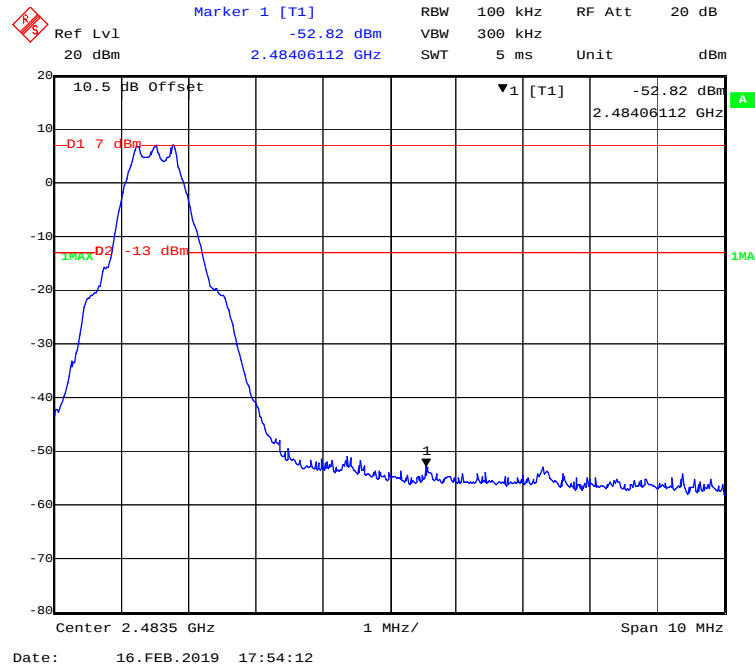

Left Side-2M

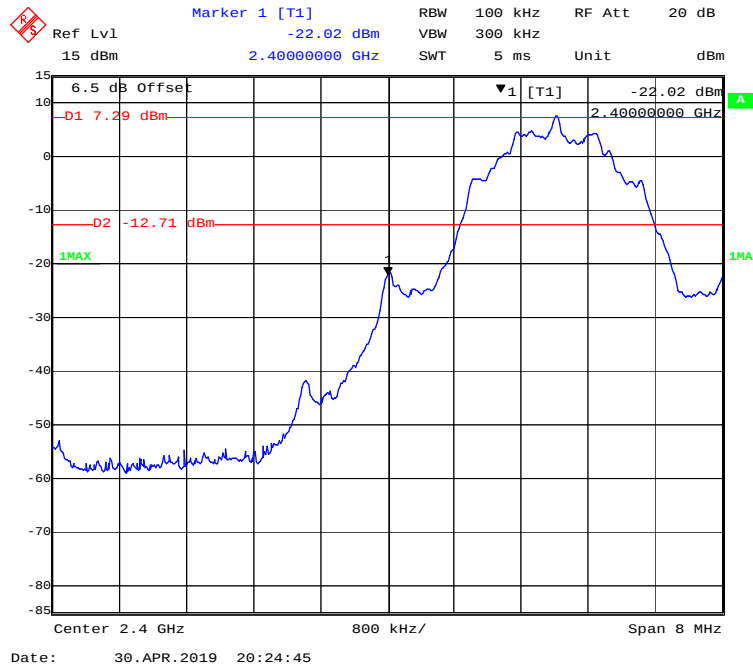

Right Side-2M

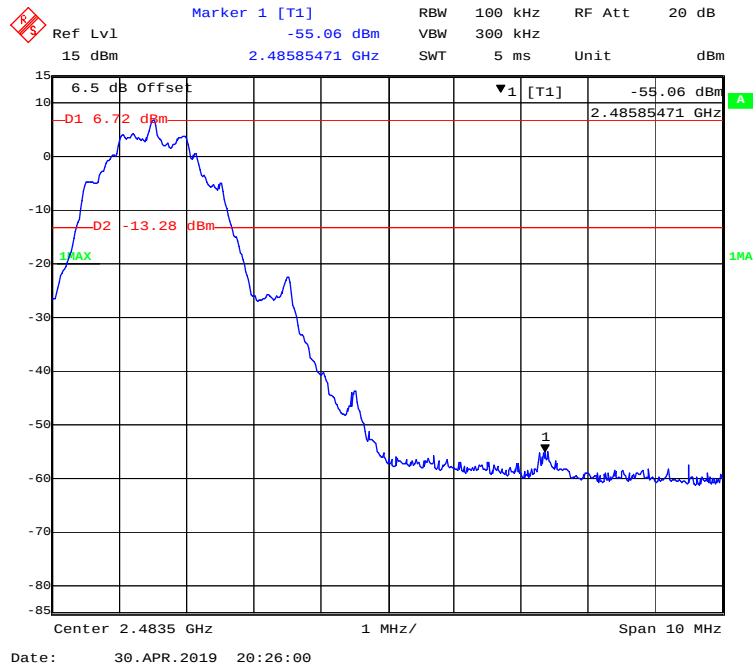

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

According to ANSI C63.10-2013 sub-clause 11.10.2

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
3. Set the VBW $\geq 3 \times \text{RBW}$.
4. Set the span to 1.5 times the DTS bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Test Data

Environmental Conditions

Temperature:	24.1-24.5°C
Relative Humidity:	50-51 %
ATM Pressure:	101.1-101.2 kPa


The testing was performed by Max Min from 2019-02-16 to 2019-04-30.

EUT operation mode: Transmitting


Test Result: Pass

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)
BLE 1M			
Low	2402	-6.80	≤ 8
Middle	2440	-6.92	≤ 8
High	2480	-7.06	≤ 8


Low Channel

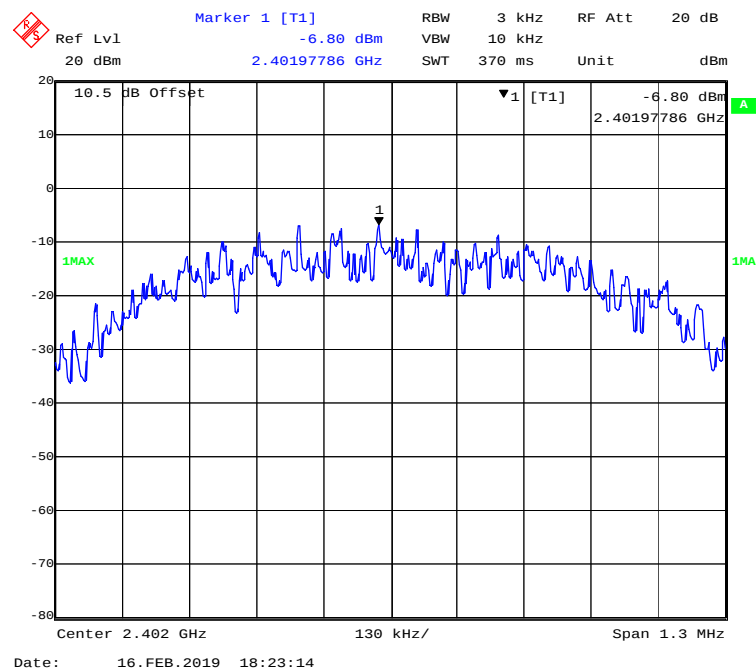

Middle Channel

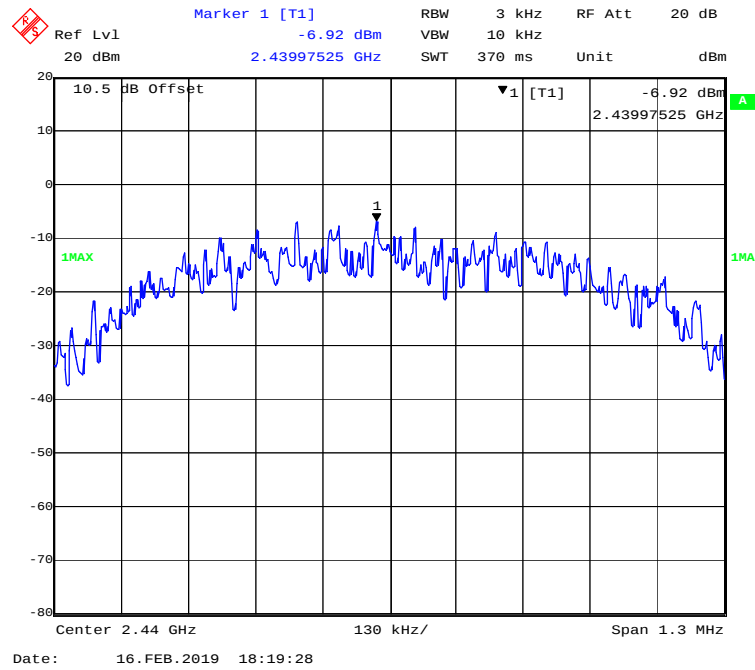


High Channel

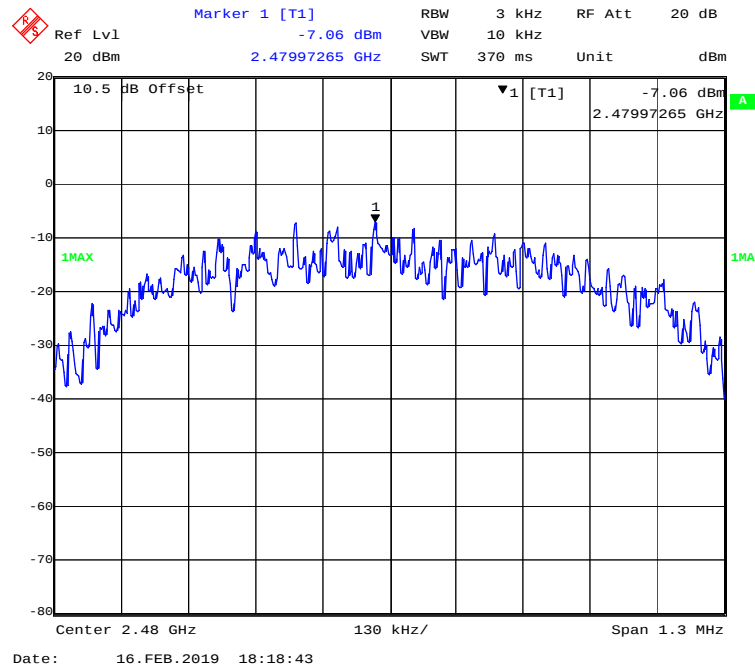


Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)
BLE 2M			
Low	2402	-9.28	≤ 8
Middle	2440	-9.28	≤ 8
High	2480	-9.72	≤ 8


Low Channel

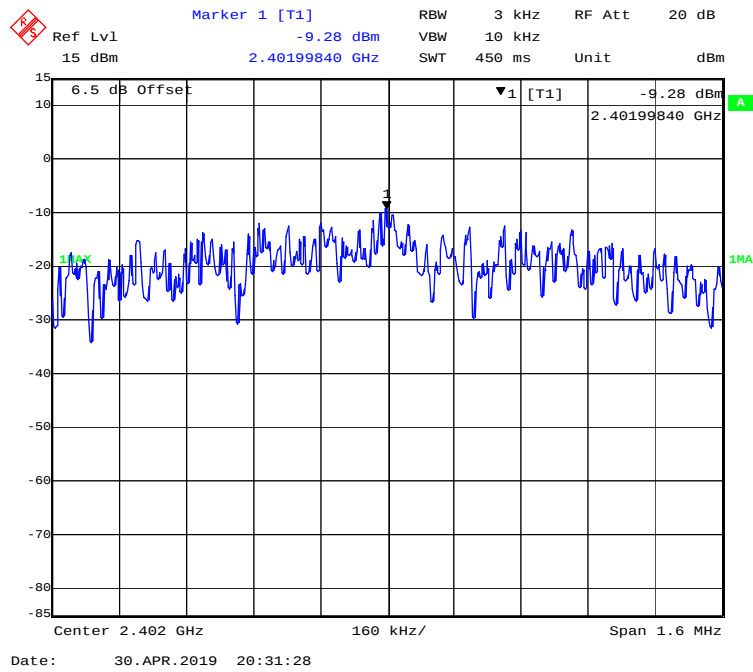

Middle Channel

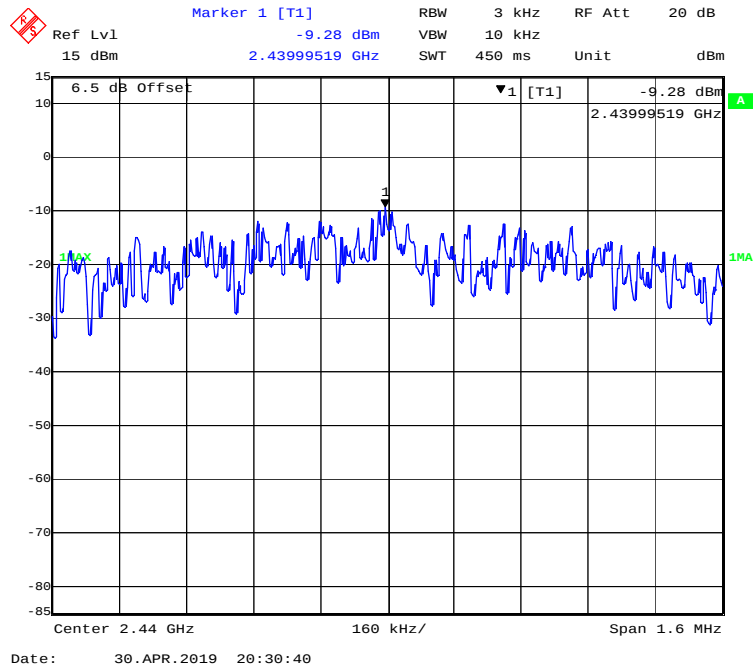

High Channel

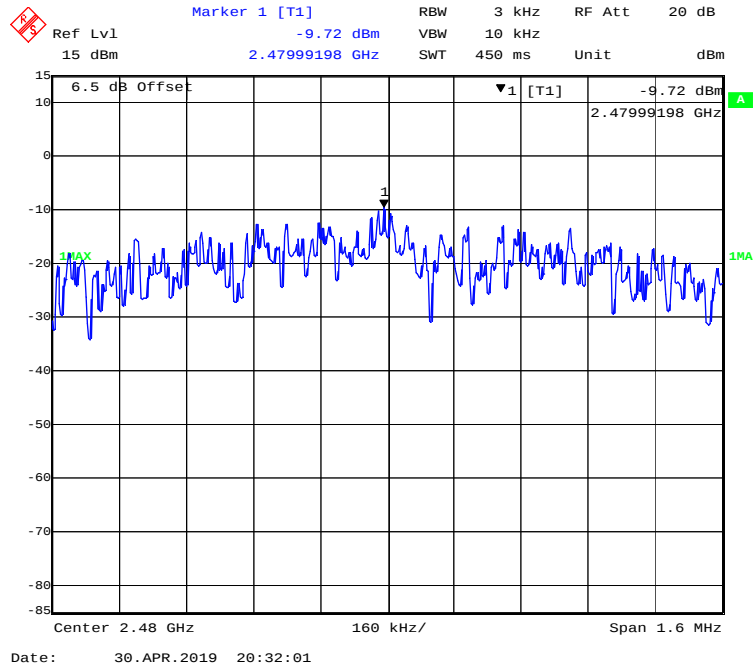

***** END OF REPORT *****