


Appendix A. Test Result of AC Power Line Conducted Emission

Antenna 1


Site :HY-SR01
Condition :Line
Mode :TX_wireless 5g_5768MHz
test by :Neko

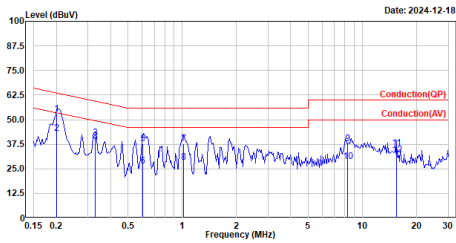

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV	Line	Limit	Level	dB	
1	0.202	52.92	63.54	-10.62	43.28	9.64	QP
2	0.202	43.17	53.54	-10.37	33.53	9.64	Average
3	0.328	40.92	59.50	-18.58	31.28	9.64	QP
4	0.328	38.33	49.50	-11.17	28.69	9.64	Average
5	0.604	37.72	56.00	-18.28	28.08	9.64	QP
6	0.604	26.28	46.00	-19.72	16.64	9.64	Average
7	1.018	37.63	56.00	-18.37	27.98	9.65	QP
8	1.018	28.36	46.00	-17.64	18.71	9.65	Average
9	8.289	37.80	60.00	-22.20	27.93	9.87	QP
10	8.289	28.69	50.00	-21.31	18.82	9.87	Average
11	15.476	35.56	60.00	-24.44	25.52	10.04	QP
12	15.476	32.06	50.00	-17.94	22.02	10.04	Average

Note:
1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line

Site :HY-SR01
Condition :Neutral
Mode :TX_wireless 5g_5768MHz
test by :Neko

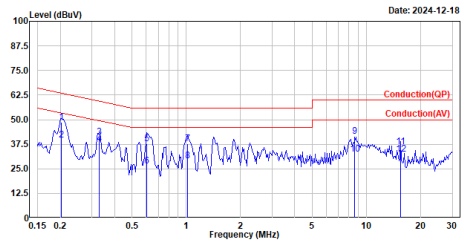


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV	Line	Limit	Level	dB	
1	0.203	48.50	63.47	-14.97	38.88	9.62	QP
2	0.203	39.46	53.47	-14.01	29.84	9.62	Average
3	0.329	41.11	59.47	-18.36	31.49	9.62	QP
4	0.329	37.80	49.47	-11.67	28.18	9.63	Average
5	0.603	37.81	56.00	-18.19	28.19	9.62	QP
6	0.603	26.35	46.00	-19.65	16.73	9.62	Average
7	1.015	37.62	56.00	-18.38	27.99	9.63	QP
8	1.015	28.88	46.00	-17.12	19.25	9.63	Average
9	8.568	41.68	60.00	-18.32	31.80	9.88	QP
10	8.568	32.57	50.00	-17.43	22.69	9.88	Average
11	15.478	36.35	60.00	-23.65	26.26	10.09	QP
12	15.478	32.34	50.00	-17.66	22.25	10.09	Average

Note:
1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line

Antenna 2


Site :HY-SR01
Condition :Line
Mode :TX_wireless 5g_5768MHz
test by :Neko

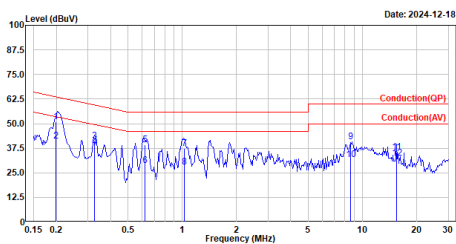

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV	Line	Limit	Level	dB	
1	0.200	51.13	63.63	-12.50	41.49	9.64	QP
2	0.200	41.30	53.63	-12.33	31.66	9.64	Average
3	0.326	41.08	59.55	-18.47	31.44	9.64	QP
4	0.326	38.19	49.55	-11.36	28.55	9.64	Average
5	0.619	39.11	56.00	-16.89	29.47	9.64	QP
6	0.619	28.71	46.00	-17.29	19.07	9.64	Average
7	1.023	37.46	56.00	-18.54	27.81	9.65	QP
8	1.023	28.07	46.00	-17.93	18.42	9.65	Average
9	8.564	40.89	60.00	-19.11	31.00	9.89	QP
10	8.564	31.74	50.00	-18.26	21.85	9.89	Average
11	15.484	35.43	60.00	-24.57	25.39	10.04	QP
12	15.484	32.47	50.00	-17.53	22.43	10.04	Average

Note:
1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line

Site :HY-SR01
Condition :Neutral
Mode :TX_wireless 5g_5768MHz
test by :Neko

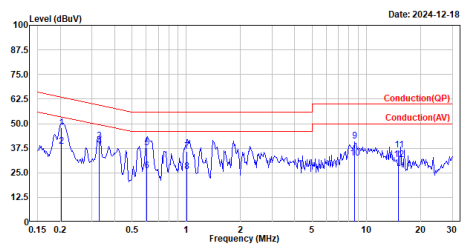

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV	Line	Limit	Level	dB	
1	0.202	47.99	63.51	-15.52	38.37	9.62	QP
2	0.202	38.55	53.51	-14.96	28.93	9.62	Average
3	0.328	40.97	59.51	-18.54	31.35	9.62	QP
4	0.328	38.41	49.51	-11.10	28.79	9.62	Average
5	0.603	37.67	56.00	-18.33	28.05	9.62	QP
6	0.603	26.19	46.00	-19.81	16.57	9.62	Average
7	1.007	35.96	56.00	-20.04	26.33	9.63	QP
8	1.007	25.84	46.00	-20.16	16.21	9.63	Average
9	8.573	41.07	60.00	-18.93	31.19	9.88	QP
10	8.573	32.36	50.00	-17.64	22.48	9.88	Average
11	15.080	36.51	60.00	-23.49	26.41	10.10	QP
12	15.080	31.76	50.00	-18.24	21.66	10.10	Average

Note:
1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line


Appendix B. Test Result of Emission Bandwidth

Antenna 1

Modulation	Frequency (MHz)	6dB Bandwidth (kHz)	Limit (kHz)	Result
OFDM	5745	9071	>500	Pass
	5768	9071	>500	Pass
	5791	9071	>500	Pass

Antenna 2

Modulation	Frequency (MHz)	6dB Bandwidth (kHz)	Limit (kHz)	Result
OFDM	5745	9111	>500	Pass
	5768	9111	>500	Pass
	5791	9071	>500	Pass

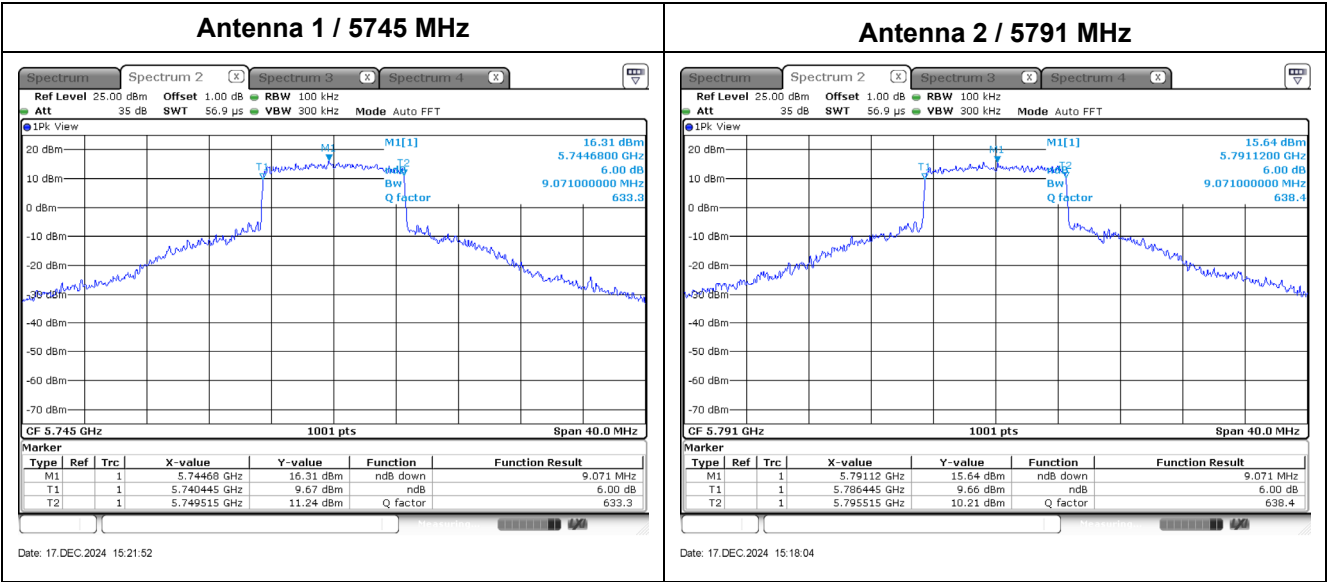

Appendix C. Test Result of Maximum Conducted Output Power**Antenna 1**

Modulation	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Result
OFDM	5745	23.95	30	Pass
	5768	23.76	30	Pass
	5791	23.88	30	Pass

Antenna 2

Modulation	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Result
OFDM	5745	23.98	30	Pass
	5768	23.86	30	Pass
	5791	23.95	30	Pass


Appendix D. Test Result of Maximum Power Spectral Density

Antenna 1

Modulation	Frequency (MHz)	PSD (dBm)	Duty factor (dB)	Total PSD (dBm)	Required Limit (dBm)	Result
OFDM	5745	13.12	0.47	13.59	30	Pass
	5768	12.72	0.47	13.19	30	Pass
	5791	13.33	0.47	13.80	30	Pass

Antenna 2


Modulation	Frequency (MHz)	PSD (dBm)	Duty factor (dB)	Total PSD (dBm)	Required Limit (dBm)	Result
OFDM	5745	13.32	0.47	13.79	30	Pass
	5768	13.44	0.47	13.91	30	Pass
	5791	13.26	0.47	13.73	30	Pass

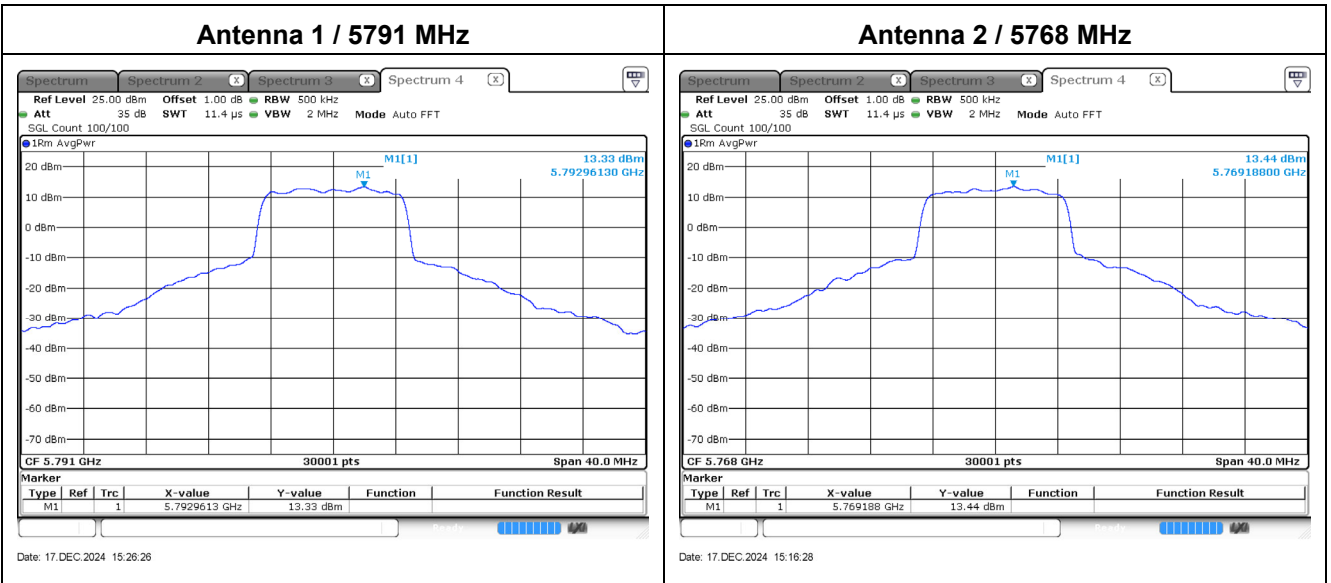

Appendix E. Test Result of Transmitter Radiated Spurious Emission

Antenna 1


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_Wireless 5g_5745MHz
Test by :Caster

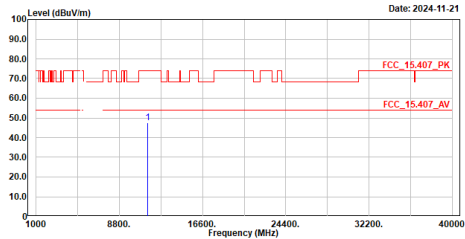

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11490.000	47.41	74.00	-26.59	43.22	4.19	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_Wireless 5g_5745MHz
Test by :Caster

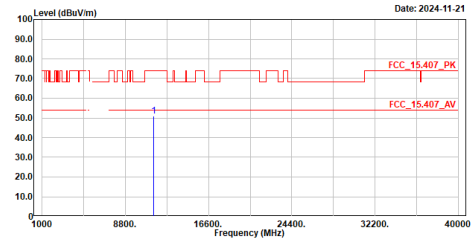

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11490.000	58.95	74.00	-23.05	46.76	4.19	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_Wireless 5g_5768MHz
Test by :Caster

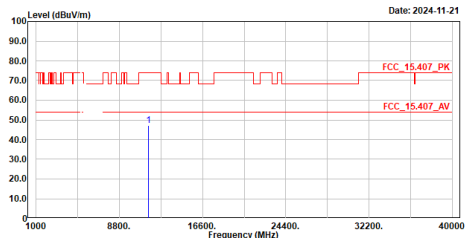

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11536.000	47.28	74.00	-26.72	43.04	4.24	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_Wireless 5g_5768MHz
Test by :Caster

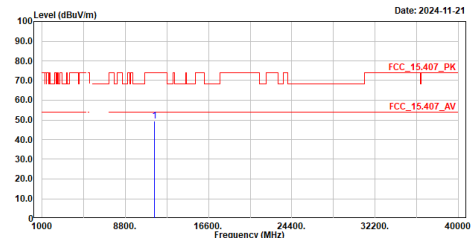

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11536.000	49.62	74.00	-24.38	45.38	4.24	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_Wireless 5g_5791MHz
Test by :Caster

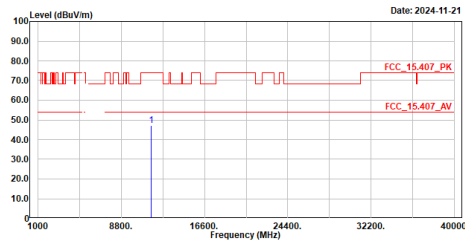

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11582.000	47.19	74.00	-26.81	42.97	4.22	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_Wireless 5g_5791MHz
Test by :Caster

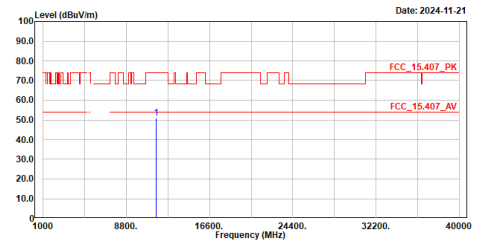

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11582.000	51.05	74.00	-22.95	46.83	4.22	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_wireless 5g_5768MHz
Test by :Caster

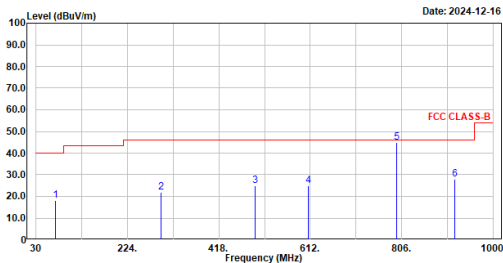

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	70.740	18.26	40.00	-21.74	44.43	-26.17	QP
2	294.810	21.77	46.00	-24.23	44.54	-22.77	QP
3	495.600	25.02	46.00	-20.98	42.71	-17.69	QP
4	607.150	24.83	46.00	-21.17	39.83	-15.00	QP
5	795.330	44.95	46.00	-1.05	56.98	-12.03	QP
6	919.490	27.75	46.00	-18.25	38.38	-10.63	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_wireless 5g_5768MHz
Test by :Caster

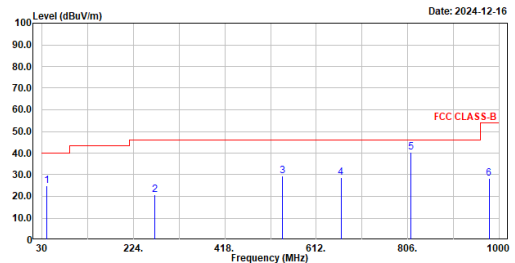

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	39.700	24.74	40.00	-15.26	48.57	-23.83	QP
2	269.590	20.69	46.00	-25.31	44.30	-23.61	QP
3	540.220	29.53	46.00	-16.47	46.36	-16.83	QP
4	664.380	28.54	46.00	-17.46	42.77	-14.23	QP
5	812.790	40.19	46.00	-5.81	52.18	-11.99	QP
6	978.660	28.38	54.00	-25.62	38.60	-10.22	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.


Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_Wireless 5g_5745MHz
Test by :Caster

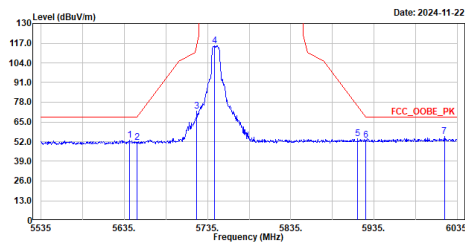

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5641.500	52.84	68.20	-15.36	37.26	15.58	Peak
2	5650.000	51.42	68.21	-16.79	35.78	15.64	Peak
3	5722.000	72.05	115.36	-43.31	55.86	16.19	Peak
4	5743.500	115.47	-----	-----	99.19	16.28	Peak
5	5915.500	53.95	75.24	-21.29	37.54	16.41	Peak
6	5925.000	52.80	68.21	-15.41	36.37	16.43	Peak
7	6019.500	55.22	68.20	-12.98	38.67	16.55	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_Wireless 5g_5745MHz
Test by :Caster

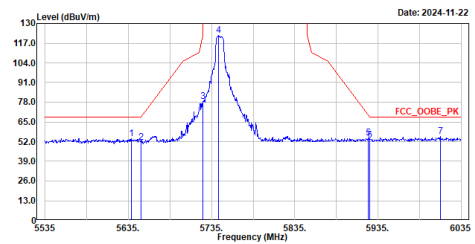

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5639.000	54.03	68.20	-14.17	38.48	15.55	Peak
2	5650.000	51.40	68.21	-16.81	35.76	15.64	Peak
3	5725.000	78.27	122.20	-43.93	62.07	16.20	Peak
4	5743.500	122.14	-----	-----	105.86	16.28	Peak
5	5923.500	54.53	69.32	-14.79	38.11	16.42	Peak
6	5925.000	52.84	68.21	-15.37	36.41	16.43	Peak
7	6010.500	55.67	68.20	-12.53	39.14	16.53	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_Wireless 5g_5768MHz
Test by :Caster

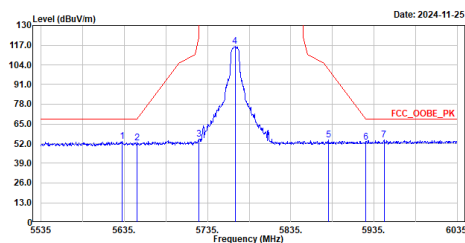

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5632.000	53.69	68.20	-14.51	38.19	15.50	Peak
2	5650.000	52.31	68.21	-15.90	36.67	15.64	Peak
3	5725.000	54.96	122.20	-67.24	38.76	16.20	Peak
4	5768.000	116.43	-----	-----	100.09	16.34	Peak
5	5880.000	54.21	101.50	-47.29	37.85	16.36	Peak
6	5925.000	53.05	68.21	-15.16	36.62	16.43	Peak
7	5947.000	54.32	68.20	-13.88	37.87	16.45	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Vertical
mode :TX_Wireless 5g_5768MHz
Test by :Caster

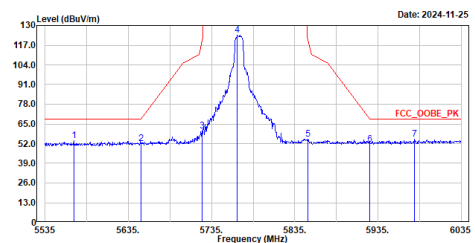

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5669.500	54.05	68.20	-14.15	38.86	15.19	Peak
2	5650.000	51.83	68.21	-16.38	36.19	15.64	Peak
3	5723.500	60.33	118.78	-58.45	44.14	16.19	Peak
4	5766.000	123.52	-----	-----	107.19	16.33	Peak
5	5850.500	55.09	121.06	-65.97	38.76	16.33	Peak
6	5925.000	51.61	68.21	-16.60	35.18	16.43	Peak
7	5979.000	54.70	68.20	-13.50	38.22	16.48	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_Wireless 5g_5791MHz
Test by :Caster

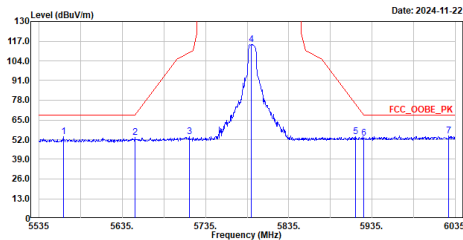

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5564.000	54.02	68.20	-14.18	38.84	15.18	Peak
2	5650.000	53.27	68.21	-14.94	37.63	15.64	Peak
3	5716.000	53.74	109.68	-55.94	37.59	16.15	Peak
4	5790.000	115.01	-----	-----	98.65	16.36	Peak
5	5915.000	54.09	75.61	-21.52	37.68	16.41	Peak
6	5925.000	52.75	68.21	-15.46	36.32	16.43	Peak
7	6027.500	54.68	68.20	-13.52	38.11	16.57	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_Wireless 5g_5791MHz
Test by :Caster

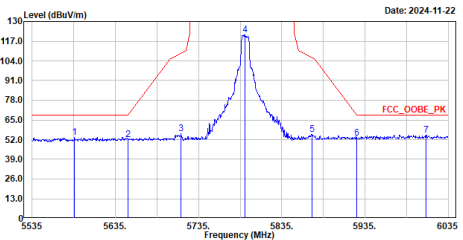


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5586.000	53.59	68.20	-14.61	38.35	15.24	Peak
2	5650.000	52.03	68.21	-16.18	36.39	15.64	Peak
3	5714.000	55.81	109.12	-53.31	39.66	16.15	Peak
4	5790.500	121.10	-----	-----	104.74	16.36	Peak
5	5871.500	55.42	106.18	-50.76	39.06	16.36	Peak
6	5925.000	53.06	68.21	-15.15	36.63	16.43	Peak
7	6008.500	55.06	68.20	-13.14	38.53	16.53	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Antenna 2

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_Wireless 5g_5745MHz
Test by :Caster

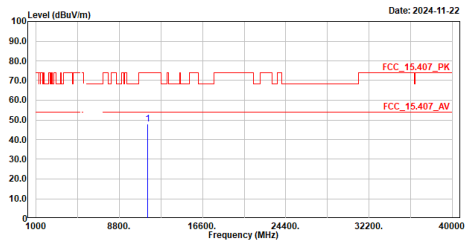


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11490.000	48.09	74.00	-25.91	43.90	4.19	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_Wireless 5g_5745MHz
Test by :Caster

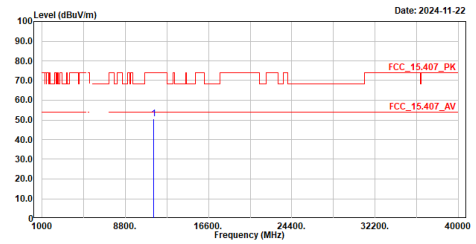


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11490.000	50.67	74.00	-23.33	46.48	4.19	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_Wireless 5g_5768MHz
Test by :Caster

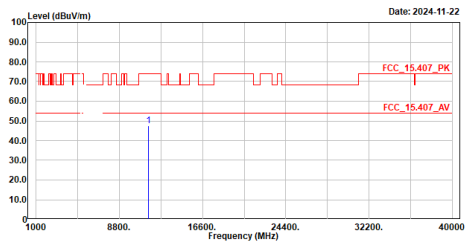


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11536.000	47.59	74.00	-26.41	43.35	4.24	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_Wireless 5g_5768MHz
Test by :Caster

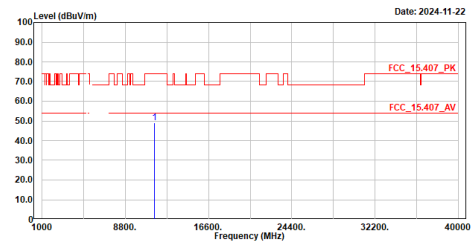


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11536.000	49.04	74.00	-24.96	44.80	4.24	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_Wireless 5g_5791MHz
Test by :Caster

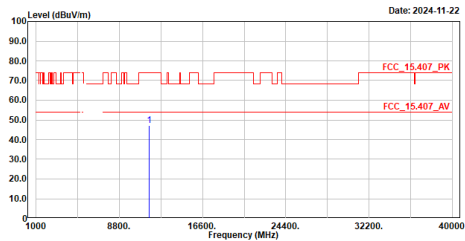


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	11582.000	47.25	74.00	-26.75	43.03	4.22	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_Wireless 5g_5791MHz
Test by :Caster

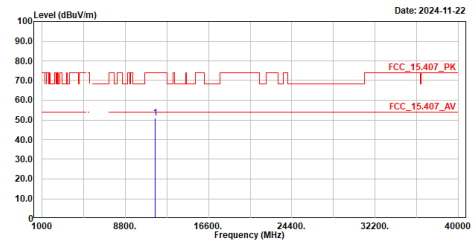


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	11582.000	50.80	74.00	-23.20	46.58	4.22	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_wireless 5g_5768MHz
Test by :Caster

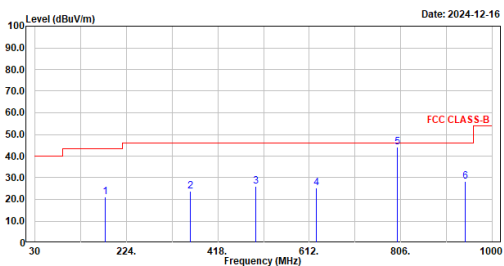


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	179.380	21.03	43.50	-22.47	45.95	-24.92	QP
2	359.800	23.67	46.00	-22.33	45.02	-21.35	QP
3	498.510	26.12	46.00	-19.88	43.75	-17.63	QP
4	626.550	25.19	46.00	-20.81	39.98	-14.79	QP
5	798.240	44.11	46.00	-1.89	56.12	-12.01	QP
6	943.740	28.48	46.00	-17.52	38.69	-10.21	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_wireless 5g_5768MHz
Test by :Caster

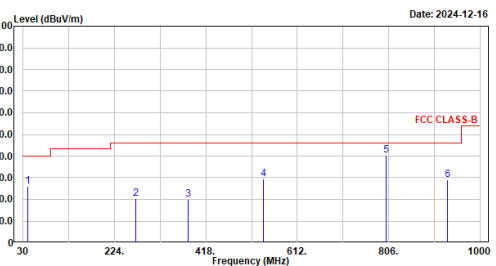


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	40.670	25.91	40.00	-14.09	49.70	-23.79	QP
2	269.590	20.47	46.00	-25.53	44.08	-23.61	QP
3	380.170	20.18	46.00	-25.82	40.45	-20.27	QP
4	540.220	29.44	46.00	-16.56	46.27	-16.83	QP
5	801.150	40.30	46.00	-5.70	52.31	-12.01	QP
6	930.160	29.02	46.00	-16.98	39.42	-10.40	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_Wireless 5g_5745MHz
Test by :Caster

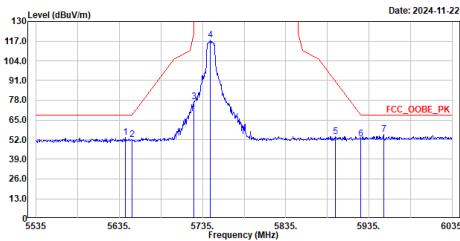


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5642.000	53.42	68.20	-14.78	37.84	15.58	Peak
2	5650.000	51.96	68.21	-16.25	36.32	15.64	Peak
3	5725.000	76.80	122.20	-45.40	60.60	16.20	Peak
4	5744.500	117.54	-----	-----	101.25	16.29	Peak
5	5894.500	54.00	90.77	-36.77	37.62	16.38	Peak
6	5925.000	52.39	68.21	-15.82	35.96	16.43	Peak
7	5952.500	55.44	68.20	-12.76	38.99	16.45	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_Wireless 5g_5745MHz
Test by :Caster

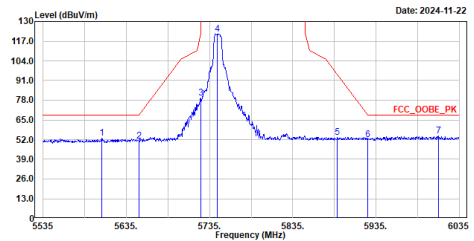


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5605.500	52.77	68.20	-15.43	37.45	15.32	Peak
2	5650.000	51.02	68.21	-17.19	35.38	15.64	Peak
3	5725.000	79.56	122.20	-42.64	63.36	16.20	Peak
4	5744.500	121.80	-----	-----	105.51	16.29	Peak
5	5888.500	53.72	95.21	-41.49	37.34	16.38	Peak
6	5925.000	51.95	68.21	-16.26	35.52	16.43	Peak
7	6010.000	54.33	68.20	-13.87	37.80	16.53	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_Wireless 5g_5768MHz
Test by :Caster

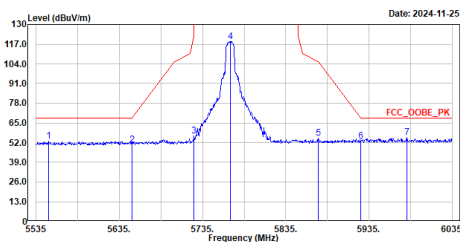


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5550.500	53.20	68.20	-15.00	38.06	15.14	Peak
2	5650.000	50.65	68.21	-17.56	35.01	15.64	Peak
3	5725.000	56.28	122.20	-65.92	40.08	16.20	Peak
4	5768.500	118.94	-----	-----	102.60	16.34	Peak
5	5874.500	55.14	105.34	-50.20	38.78	16.36	Peak
6	5925.000	52.89	68.21	-15.32	36.46	16.43	Peak
7	5981.000	55.25	68.20	-12.95	38.77	16.48	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_Wireless 5g_5768MHz
Test by :Caster

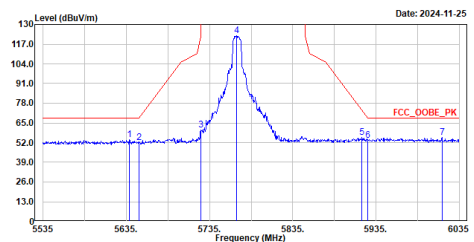


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5638.500	53.74	68.20	-14.46	38.19	15.55	Peak
2	5650.000	52.21	68.21	-16.00	36.57	15.64	Peak
3	5725.000	60.36	122.20	-61.84	44.16	16.20	Peak
4	5767.500	122.75	-----	-----	106.41	16.34	Peak
5	5918.000	55.33	73.39	-18.06	38.92	16.41	Peak
6	5925.000	53.49	68.21	-14.72	37.06	16.43	Peak
7	6014.500	55.67	68.20	-12.53	39.13	16.54	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_Wireless 5g_5791MHz
Test by :Caster

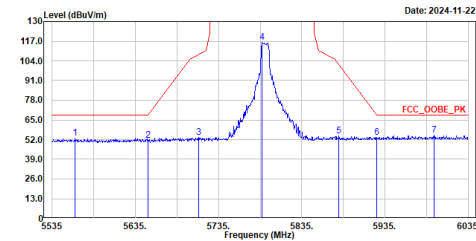

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5563.000	53.07	68.20	-15.13	37.89	15.18	Peak
2	5650.000	51.50	68.21	-16.71	35.86	15.64	Peak
3	5711.000	53.42	108.28	-54.86	37.29	16.13	Peak
4	5787.500	116.08	-----	-----	99.72	16.36	Peak
5	5879.500	94.51	101.87	-47.36	38.15	16.36	Peak
6	5925.000	53.28	68.21	-14.93	36.85	16.43	Peak
7	5994.000	54.99	68.20	-13.21	38.49	16.50	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_Wireless 5g_5791MHz
Test by :Caster

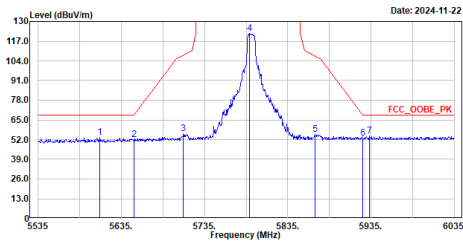

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5609.500	53.52	68.20	-14.68	38.17	15.35	Peak
2	5650.000	52.17	68.21	-16.04	36.53	15.64	Peak
3	5709.500	55.80	107.86	-52.06	39.67	16.13	Peak
4	5789.000	122.16	-----	-----	105.80	16.36	Peak
5	5868.000	55.25	107.16	-51.91	38.89	16.36	Peak
6	5925.000	53.14	68.21	-15.07	36.71	16.43	Peak
7	5933.000	54.50	68.20	-13.70	38.07	16.43	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.