



FCC TEST REPORT

FCC ID:2AQVL-NVBM50RX

Report Number.....: **ZKT-240508L4900E**

Date of Test..... Apr.05,2024 to Apr.11,2024

Date of issue.....: Apr.12,2024

Total number of pages..... 49

Test Result: PASS

Testing Laboratory.....: Shenzhen ZKT Technology Co., Ltd.

Address: 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

Applicant's name: BABYSENSE DONGGUAN LTD.

Address: Floor 9th, Building 6th, Dongsheng New Industrial Park, No. 100, Taxin Road, Dongkeng Town, Dongguan City, Guangdong Province, China.

Manufacturer's name: BABYSENSE DONGGUAN LTD.

Address: Floor 9th, Building 6th, Dongsheng New Industrial Park, No. 100, Taxin Road, Dongkeng Town, Dongguan City, Guangdong Province, China.

Test specification:

Standard.....: FCC CFR Title 47 Part 15 Subpart C Section 15.247
ANSI C63.10:2013

Test procedure.....: /

Non-standard test method: N/A

Test Report Form No.....: TRF-EL-112_V0**Test Report Form(s) Originator.....: ZKT Testing****Master TRF: Dated: 2021-04-22**

This device described above has been tested by ZKT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of ZKT, this document may be altered or revised by ZKT, personal only, and shall be noted in the revision of the document.

Product name.....: Baby Monitor

Trademark: Babysense

Model/Type reference.....: NVBM50RX

Ratings.....: Adapter:
Model:GQ07-050120-AJ
Input:100-240V~50/60Hz 0.3A Max
Output:5.0A $\overline{\text{---}}$ 1.2A 6.0W
Battery:DC3.7V,4000mAh 14.8Wh



Testing procedure and testing location:

Testing Laboratory.....: Shenzhen ZKT Technology Co., Ltd.
Address.....: 1/F, No. 101, Building B, No. 6, Tangwei Community
Industrial Avenue, Fuhai Street, Bao'an District,
Shenzhen, China

Tested by (name + signature).....: Tom Zou

Tom Zou

Reviewer (name + signature).....: Jackson Fang

Jackson Fang

Approved (name + signature).....: Lake Xie





Table of Contents

	Page
1. VERSION	5
2. TEST SUMMARY	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3. GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 Test Setup Configuration	9
3.3 Support Equipment	9
3.4 Test Mode	10
3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	11
4. EMC EMISSION TEST	13
4.1 Conducted emissions	13
4.1.1 POWER LINE CONDUCTED EMISSION Limits	13
4.1.2 TEST PROCEDURE	13
4.1.3 DEVIATION FROM TEST STANDARD	13
4.1.4 TEST SETUP	13
4.1.5 EUT OPERATING CONDITIONS	14
4.1.6 Test Result	15
4.2 Radiated emissions	17
4.2.1 Radiated Emission Limits	17
4.2.2 TEST PROCEDURE	17
4.2.3 DEVIATION FROM TEST STANDARD	18
4.2.4 TEST SETUP	18
4.2.5 EUT OPERATING CONDITIONS	19
4.2.6 TEST RESULTS	20
5. RADIATED BAND EMISSION MEASUREMENT	25
5.1 Test Requirement:	25
5.2 TEST PROCEDURE	25
5.3 DEVIATION FROM TEST STANDARD	26
5.4 TEST SETUP	26
5.5 EUT OPERATING CONDITIONS	26
5.6 TEST RESULT	27
6. CONDUCTED BAND EDGE AND SPURIOUS EMISSION	28
6.1 Limit	28
6.2 Test Setup	28
6.3 Test procedure	28
6.4 DEVIATION FROM STANDARD	28
6.5 Test Result	29
7. 20DB&99% BANDWIDTH	34
7.1 Test Setup	34
7.2 Limit	34
7.3 Test procedure	34
7.4 DEVIATION FROM STANDARD	34



7.5 Test Result	34
8. MAXIMUM PEAK OUTPUT POWER	37
8.1 Block Diagram Of Test Setup	37
8.2 Limit	37
8.3 Test procedure	37
8.4 DEVIATION FROM STANDARD	37
8.5 Test Result	37
9. HOPPING CHANNEL SEPARATION	40
9.1 Test Setup	40
9.2 Test procedure	40
9.3 DEVIATION FROM STANDARD	40
9.4 Test Result	41
10.NUMBER OF HOPPING FREQUENCY	42
10.1 Test Setup	43
10.2 Test procedure	43
10.3 DEVIATION FROM STANDARD	43
10.4 Test Result	43
11. DWELL TIME	45
11.1 Test Setup	45
11.2 Test procedure	45
11.3 DEVIATION FROM STANDARD	45
11.4 Test Result	46
12. ANTENNA REQUIREMENT	47
13. TEST SETUP PHOTO	49
14. EUT CONSTRUCTIONAL DETAILS	49



1. VERSION

Report No.	Version	Description	Approved
ZKT-240508L4900E	Rev.01	Initial issue of report	Apr.12,2024



2. TEST SUMMARY

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Result	Remark
15.203/15.247 (c)	Antenna Requirement	PASS	
15.207	AC Power Line Conducted Emission	PASS	
15.247 (b)(1)	Conducted Peak Output Power	PASS	
15.247 (a)(1)	20dB Occupied Bandwidth 99% OCB	PASS	
15.247 (a)(1)	Carrier Frequencies Separation	PASS	
15.247 (a)(1)(iii)	Hopping Channel Number	PASS	
15.247 (a)(1)(iii)	Dwell Time	PASS	
15.205/15.209	Radiated Emission and Restricted Band	PASS	
15.247(d)	Conducted Unwanted emissions and Band Edge	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report



2.1 TEST FACILITY

Shenzhen ZKT Technology Co., Ltd.
Add. : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street,
Bao'an District, Shenzhen, China

FCC Test Firm Registration Number: 692225
Designation Number: CN1299
IC Registered No.: 27033
Designation Number: CN0110

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(9KHz-30MHz)	U=4.5dB
2	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.8dB
3	3m chamber Radiated spurious emission(1GHz-6GHz)	U=4.9dB
4	3m chamber Radiated spurious emission(6GHz-40GHz)	U=5.0dB
5	Conducted disturbance	U=3.2dB
6	RF Band Edge	U=1.68dB
7	RF power conducted	U=1.86dB
8	RF conducted Spurious Emission	U=2.2dB
9	RF Occupied Bandwidth	U=1.8dB
10	RF Power Spectral Density	U=1.75dB
11	humidity uncertainty	U=5.3%
12	Temperature uncertainty	U=0.59℃



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Product Name:	Baby Monitor
Model No.:	NVBM50RX
Model Different.:	N/A
Sample ID	ZKT-240508L4900-1
Sample(s) Status:	Engineer sample
Channel numbers:	19
Operation Frequency:	2410.001MHz~2473.001MHz
Modulation technology:	FHSS
Antenna Type:	External antenna
Antenna gain:	3.00 dBi
Power supply:	Adapter: Model:GQ07-050120-AU Input:100-240V~50/60Hz 0.3A Max Output:5.0A 1.2A 6.0W Battery:DC3.7V,4000mAh 14.8Wh

Operation Frequency each of channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2410.001	6	2427.501	11	2444.501	16	2462.501
2	2413.501	7	2431.001	12	2448.001	17	2466.001
3	2417.001	8	2434.501	13	2451.501	18	2469.501
4	2420.501	9	2438.001	14	2455.501	19	2473.001
5	2424.001	10	2441.501	15	2459.001		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency
The lowest channel	2410.001MHz
The middle channel	2441.501MHz
The Highest channel	2473.001MHz



3.2 Test Setup Configuration

Conducted Emission

AC Line

Radiated Emission

AC Line

Conducted Spurious

3.3 Support Equipment

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Baby Monitor	Babysense	VBM55RX	N/A	EUT
A-1	ADAPTER	N/A	GQ07-050120-AJ	N/A	EUT

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



3.4 Test Mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	

Test Software	BT Test Tool
Power level setup	<Default



3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	KEYSIGHT	9020A	MY55370835	A.17.05	Nov. 02, 2023	Nov. 01, 2024
2	Spectrum Analyzer (10kHz-39.9GHz)	R&S	FSV40-N	100363	1.71 SP2	Nov. 02, 2023	Nov. 01, 2024
3	EMI Test Receiver (9kHz-7GHz)	R&S	ESCI7	100969	4.32	Nov. 02, 2023	Nov. 01, 2024
4	Bilog Antenna (30MHz-1500MHz)	Schwarzbeck	VULB9168	N/A	N/A	Nov. 13, 2023	Nov. 12, 2024
5	Horn Antenna (1GHz-18GHz)	Agilent	AH-118	071145	N/A	Nov. 13, 2023	Nov. 12, 2024
6	Horn Antenna (15GHz-40GHz)	A.H.System	SAS-574	588	N/A	Nov. 13, 2023	Nov. 12, 2024
7	Loop Antenna	TESEQ	HLA6121	58357	N/A	Nov. 16, 2023	Nov. 15, 2024
8	Amplifier (30-1000MHz)	EM Electronics	EM330 Amplifier	60747	N/A	Nov. 02, 2023	Nov. 01, 2024
9	Amplifier (1GHz-26.5GHz)	HuiPu	8449B	3008A00315	N/A	Nov. 02, 2023	Nov. 01, 2024
10	Amplifier (500MHz-40GHz)	QuanJuDa	DLE-161	097	N/A	Nov. 02, 2023	Nov. 01, 2024
11	Test Cable	N/A	R-01	N/A	N/A	Nov. 02, 2023	Nov. 01, 2024
12	Test Cable	N/A	R-02	N/A	N/A	Nov. 02, 2023	Nov. 01, 2024
13	Test Cable	N/A	R-03	N/A	N/A	Nov. 02, 2023	Nov. 01, 2024
14	Test Cable	N/A	RF-01	N/A	N/A	Nov. 02, 2023	Nov. 01, 2024
15	Test Cable	N/A	RF-02	N/A	N/A	Nov. 02, 2023	Nov. 01, 2024
16	Test Cable	N/A	RF-03	N/A	N/A	Nov. 02, 2023	Nov. 01, 2024
17	ESG Signal Generator	Agilent	E4421B	N/A	B.03.84	Nov. 02, 2023	Nov. 01, 2024
18	Signal Generator	Agilent	N5182A	N/A	A.01.87	Nov. 02, 2023	Nov. 01, 2024
19	Magnetic Field Probe Tester	Narda	ELT-400	0-0344	N/A	Nov. 16, 2023	Nov. 15, 2024
20	Wideband Radio Communication Test	R&S	CMW500	106504	V 3.7.22	Nov. 02, 2023	Nov. 01, 2024
21	MWRF Power Meter Test system	MW	MW100-RF CB	N/A	N/A	Nov. 02, 2023	Nov. 01, 2024
22	D.C. Power Supply	LongWei	TPR-6405D	N/A	N/A	\	\
23	EMC Software	Frad	EZ-EMC	Ver.EMC-C ON 3A1.1	N/A	\	\
24	RF Software	MW	MTS8310	V2.0.0.0	N/A	\	\
25	Turntable	MF	MF-7802BS	N/A	N/A	\	\
26	Antenna tower	MF	MF-7802BS	N/A	N/A	\	\



Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Last calibration	Calibrated until
1	LISN	R&S	ENV216	101471	N/A	Nov. 14, 2023	Nov. 13, 2024
2	LISN	CYBERTEK	EM5040A	E1850400149	N/A	Nov. 02, 2023	Nov. 01, 2024
3	Test Cable	N/A	C-01	N/A	N/A	Nov. 02, 2023	Nov. 01, 2024
4	Test Cable	N/A	C-02	N/A	N/A	Nov. 02, 2023	Nov. 01, 2024
5	Test Cable	N/A	C-03	N/A	N/A	Nov. 02, 2023	Nov. 01, 2024
6	EMI Test Receiver	R&S	ESCI3	101393	4.42 SP3	Nov. 02, 2023	Nov. 01, 2024
7	Triple-Loop Antenna	N/A	RF300	N/A	N/A	Nov. 02, 2023	Nov. 01, 2024
8	Absorbing Clamp	DZ	ZN23201	15034	N/A	Nov. 07, 2023	Nov. 06, 2024
9	EMC Software	Frad	EZ-EMC	Ver.EMC-CON 3A1.1	N/A	\	\



4. EMC EMISSION TEST

4.1 Conducted emissions

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10:2013
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

4.1.1 POWER LINE CONDUCTED EMISSION Limits

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) *Decreases with the logarithm of the frequency.


4.1.2 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

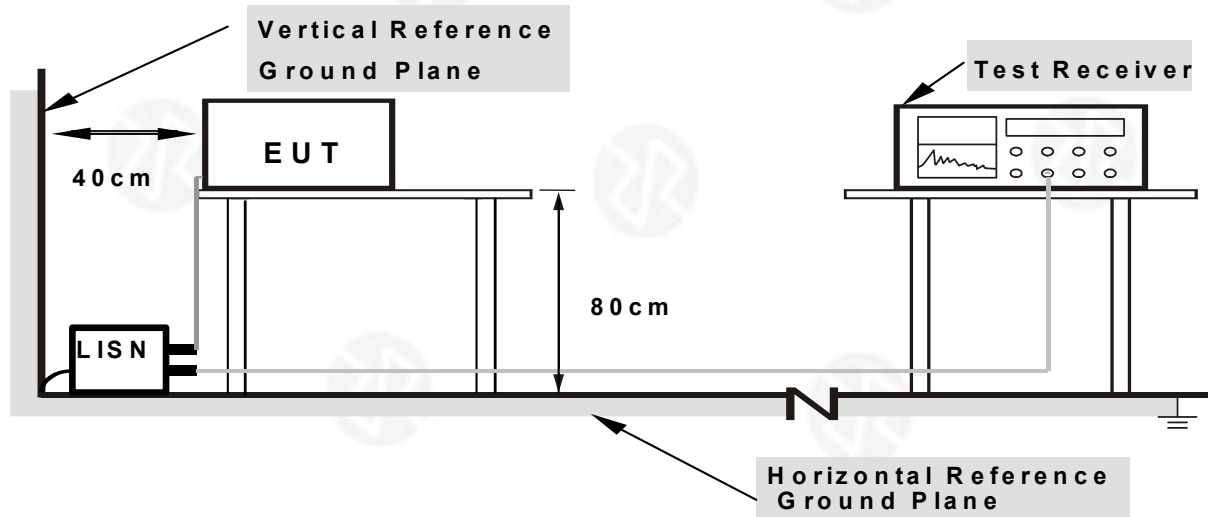

Note: 1.Support units were connected to second LISN.
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes


4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



4.1.6 Test Result

Temperature:	26℃	Relative Humidity:	54%
Pressure:	101kPa	Phase :	L
Test Voltage :	AC 120V/60Hz		

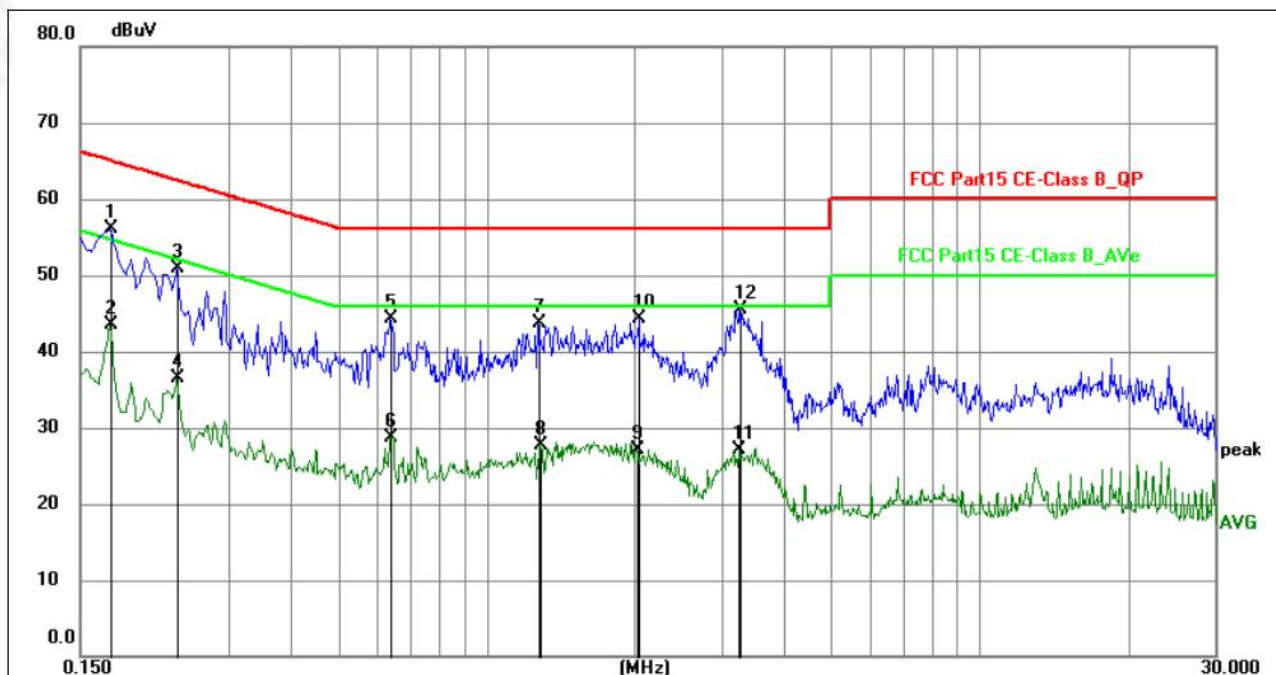


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1725	35.59	20.59	56.18	64.84	-8.66	QP	P	
2	0.1725	22.86	20.59	43.45	54.84	-11.39	AVG	P	
3	0.2355	30.22	20.62	50.84	62.25	-11.41	QP	P	
4	0.2355	15.80	20.62	36.42	52.25	-15.83	AVG	P	
5	0.6404	23.60	20.64	44.24	56.00	-11.76	QP	P	
6	0.6404	8.04	20.64	28.68	46.00	-17.32	AVG	P	
7	1.2703	23.12	20.65	43.77	56.00	-12.23	QP	P	
8	1.2839	7.07	20.65	27.72	46.00	-18.28	AVG	P	
9	2.0219	6.36	20.69	27.05	46.00	-18.95	AVG	P	
10	2.0400	23.66	20.69	44.35	56.00	-11.65	QP	P	
11	3.2505	6.34	20.71	27.05	46.00	-18.95	AVG	P	
12	3.2640	24.84	20.71	45.55	56.00	-10.45	QP	P	

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101kPa	Phase :	N
Test Voltage :	AC 120V/60Hz		

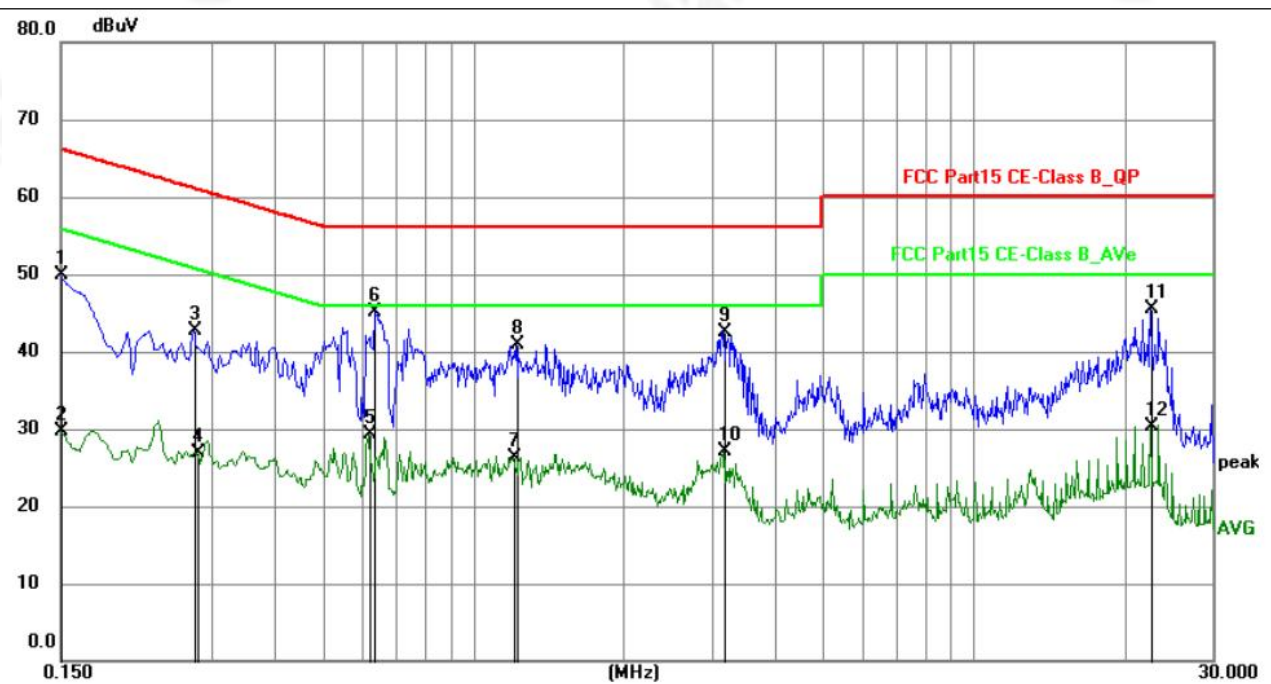

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1500	29.22	20.60	49.82	66.00	-16.18	QP	P	
2	0.1500	9.06	20.60	29.66	56.00	-26.34	AVG	P	
3	0.2760	22.24	20.56	42.80	60.94	-18.14	QP	P	
4	0.2805	6.33	20.56	26.89	50.80	-23.91	AVG	P	
5	0.6179	8.62	20.62	29.24	46.00	-16.76	AVG	P	
6	0.6359	24.59	20.61	45.20	56.00	-10.80	QP	P	
7	1.2074	5.82	20.56	26.38	46.00	-19.62	AVG	P	
8	1.2164	20.42	20.56	40.98	56.00	-15.02	QP	P	
9	3.1650	21.79	20.73	42.52	56.00	-13.48	QP	P	
10	3.1650	6.33	20.73	27.06	46.00	-18.94	AVG	P	
11	22.5960	24.89	20.59	45.48	60.00	-14.52	QP	P	
12	22.5960	9.78	20.59	30.37	50.00	-19.63	AVG	P	

Notes:
1.An initial pre-scan was performed on the line and neutral lines with peak detector.
2.Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3.Mesurement Level = Reading level + Correct Factor



4.2 Radiated emissions

Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	MX5Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average

4.2.1 Radiated Emission Limits

Frequencies (MHz)	Field Strength (micровolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

4.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.1 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.



- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested
and performed pretest to three orthogonal axis. The worst case emissions were reported

4.2.3 DEVIATION FROM TEST STANDARD

No deviation


4.2.4 TEST SETUP

(A) Radiated Emission Test-Up Frequency Below 30MHz

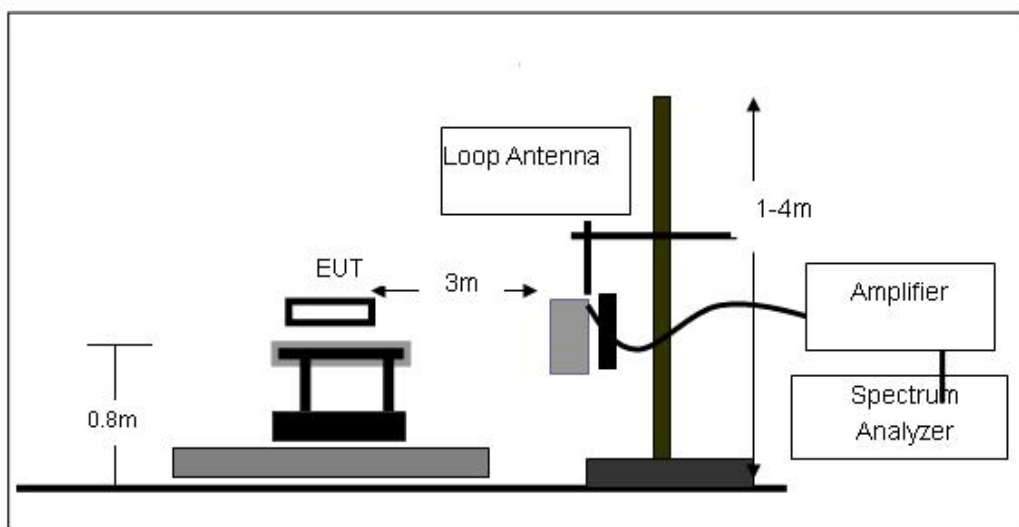




(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

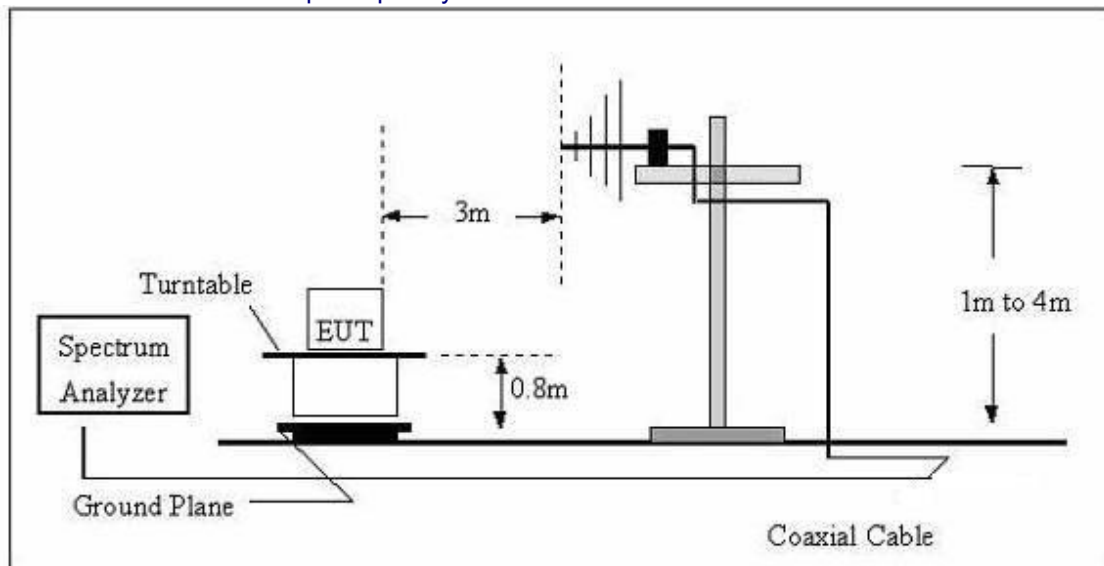

(C) Radiated Emission Test-Up Frequency Above 1GHz

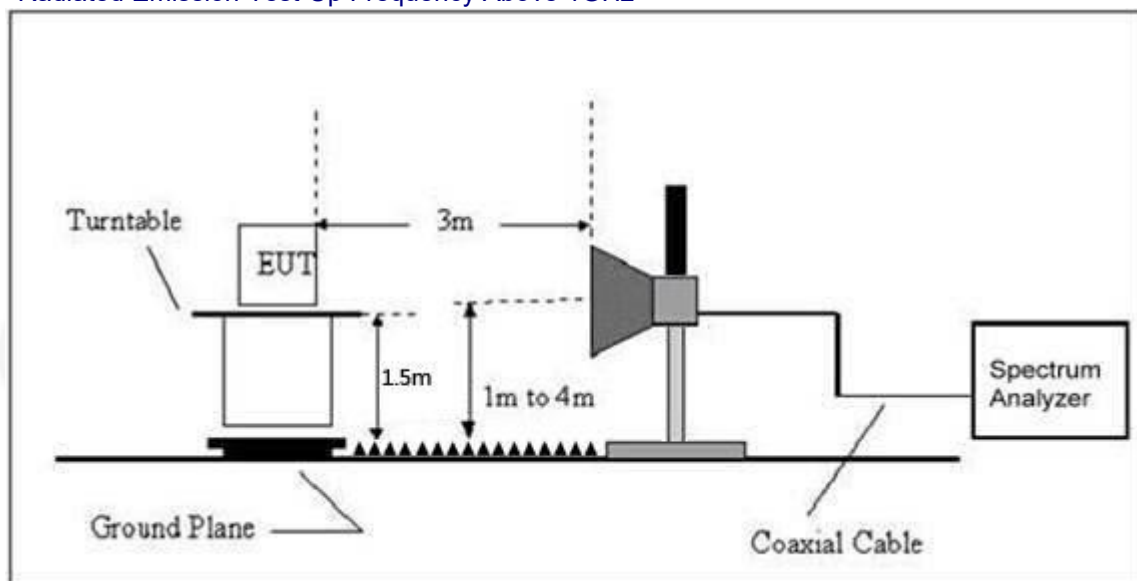

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



4.2.6 TEST RESULTS


Between 9KHz – 30MHz

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.




Between 30MHz – 1GHz

Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz		

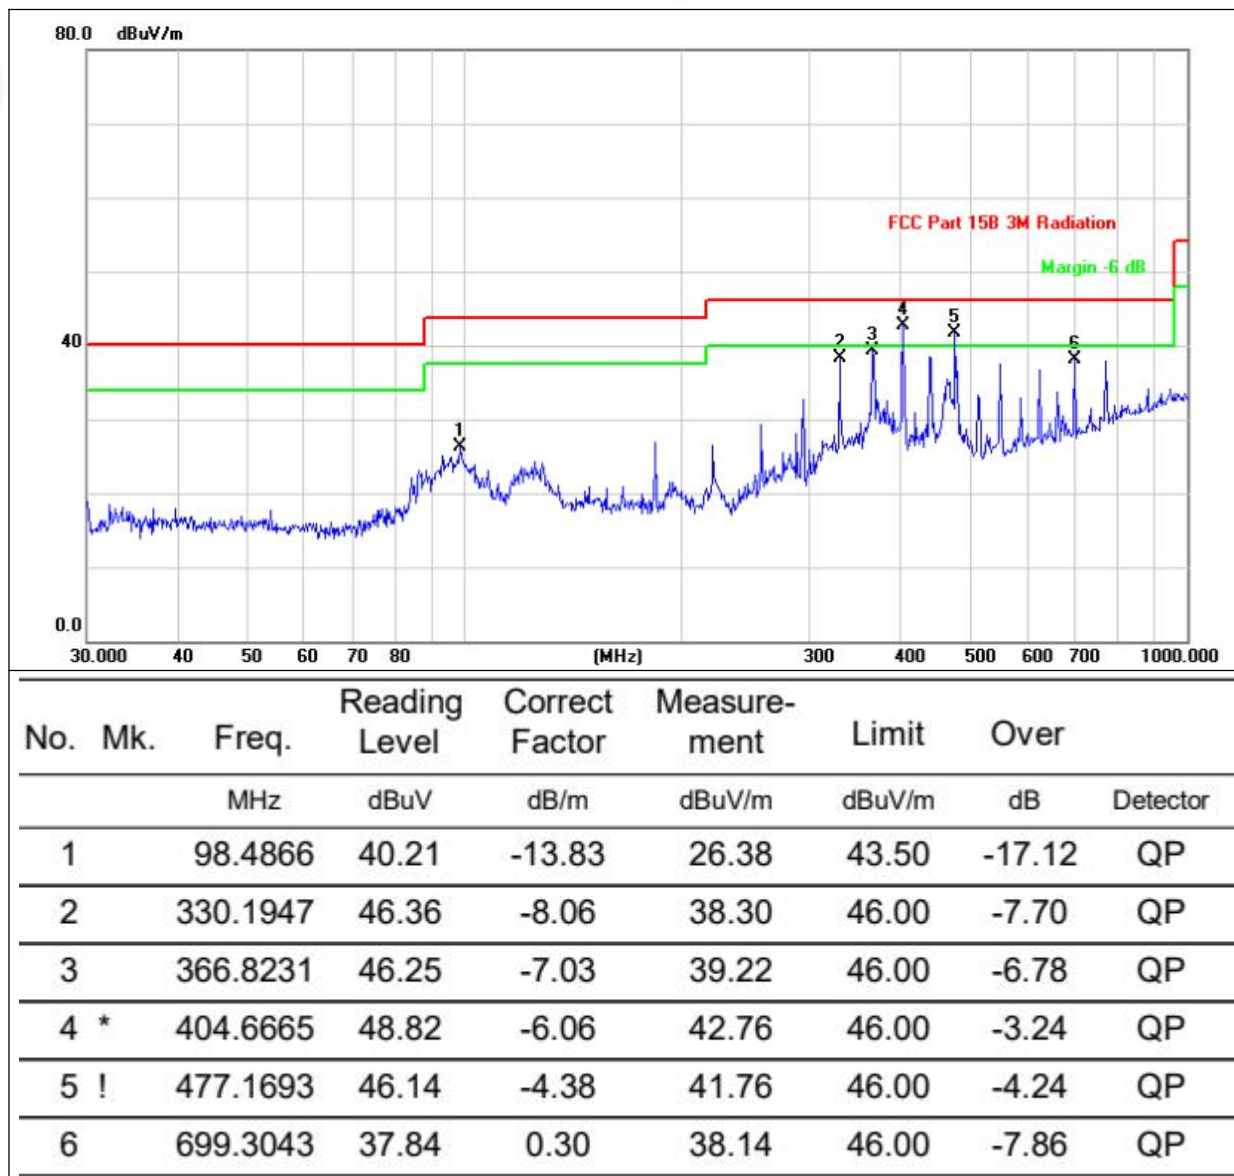



Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz		

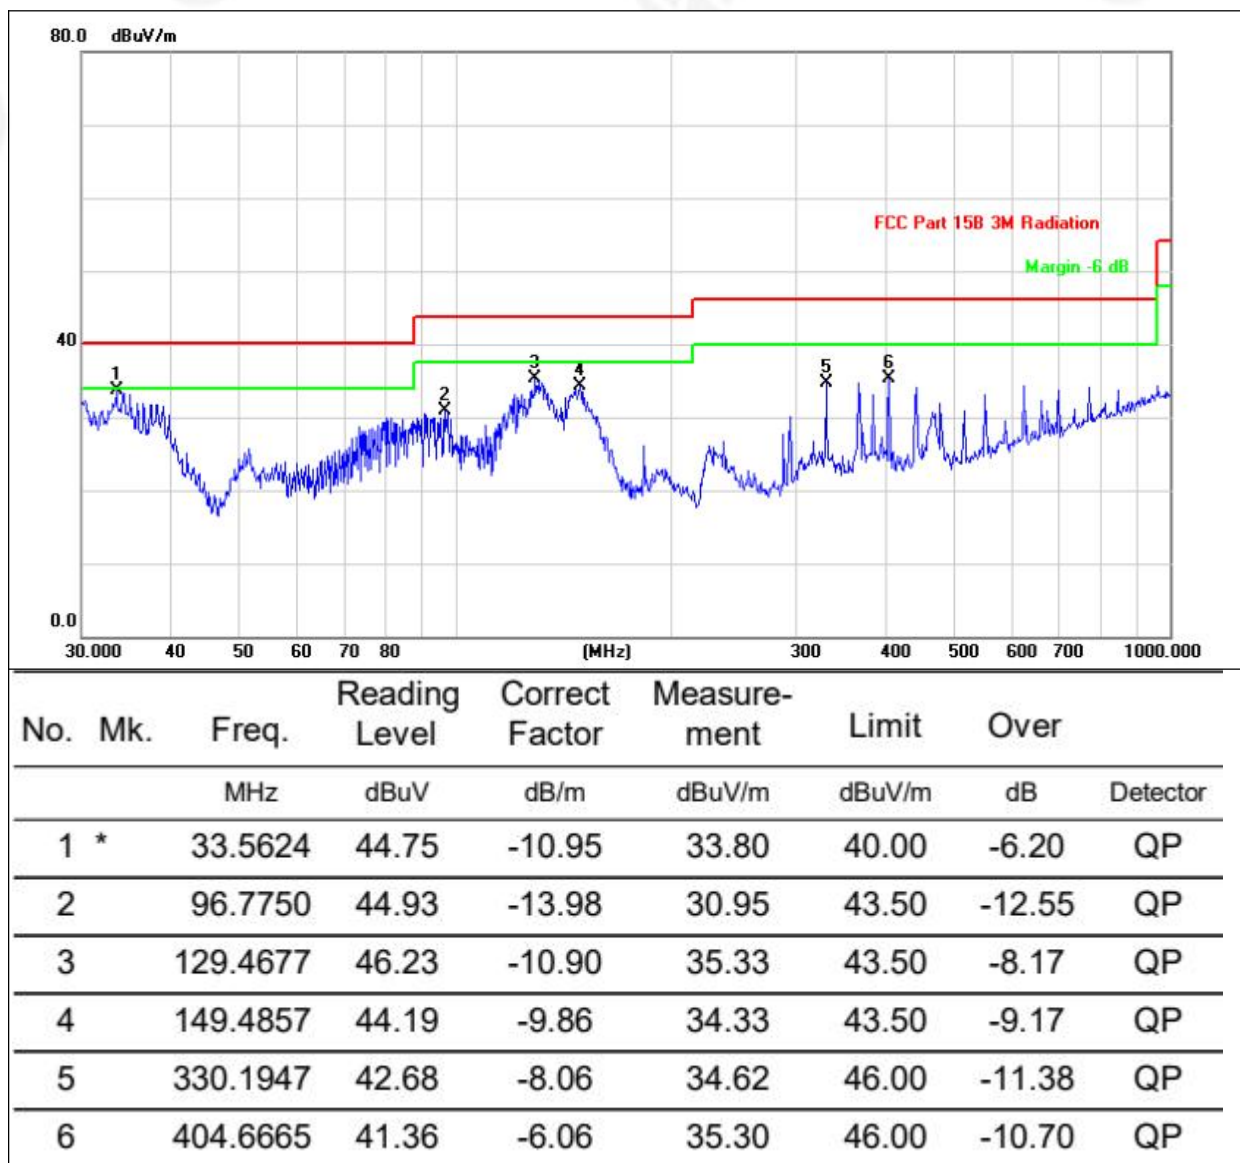

Remarks:

- 1.Final Level =Receiver Read level + Antenna Factor + Cable Loss
- 2.The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3.The test data shows only the worst case FHSS mode



1GHz~25GHz

FHSS

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2410.001MHz									
V	4820.002	51.7	30.55	5.77	24.66	51.58	74.00	-22.42	Pk
V	4820.002	42.51	30.55	5.77	24.66	42.39	54.00	-11.61	AV
V	7230.003	51.03	30.33	6.32	24.55	51.57	74.00	-22.43	Pk
V	7230.003	41.9	30.33	6.32	24.55	42.44	54.00	-11.56	AV
V	9640.004	53.11	30.85	7.45	24.69	54.40	74.00	-19.60	Pk
V	9640.004	41.81	30.85	7.45	24.69	43.10	54.00	-10.90	AV
V	12050.005	50.68	31.02	8.99	25.57	54.22	74.00	-19.78	Pk
V	12050.005	41.77	31.02	8.99	25.57	45.31	54.00	-8.69	AV
H	4820.002	53.62	30.55	5.77	24.66	53.50	74.00	-20.50	Pk
H	4820.002	41.86	30.55	5.77	24.66	41.74	54.00	-12.26	AV
H	7230.003	51.75	30.33	6.32	24.55	52.29	74.00	-21.71	Pk
H	7230.003	42.06	30.33	6.32	24.55	42.60	54.00	-11.40	AV
H	9640.004	50.04	30.85	7.45	24.69	51.33	74.00	-22.67	Pk
H	9640.004	42.04	30.85	7.45	24.69	43.33	54.00	-10.67	AV
H	12050.005	52.42	31.02	8.99	25.57	55.96	74.00	-18.04	Pk
H	12050.005	42	31.02	8.99	25.57	45.54	54.00	-8.46	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2441.501MHz									
V	4883.002	51.50	30.55	5.77	24.66	51.38	74.00	-22.62	Pk
V	4883.002	42.27	30.55	5.77	24.66	42.15	54.00	-11.85	AV
V	7324.503	52.52	30.33	6.32	24.55	53.06	74.00	-20.94	Pk
V	7324.503	42.36	30.33	6.32	24.55	42.9	54.00	-11.10	AV
V	9766.004	51.09	30.85	7.45	24.69	52.38	74.00	-21.62	Pk
V	9766.004	42.33	30.85	7.45	24.69	43.62	54.00	-10.38	AV
V	12207.505	49.80	31.02	8.99	25.57	53.34	74.00	-20.66	Pk
V	12207.505	42.56	31.02	8.99	25.57	46.1	54.00	-7.90	AV
H	4820.002	49.26	30.55	5.77	24.66	49.14	74.00	-24.86	Pk
H	4820.002	42.66	30.55	5.77	24.66	42.54	54.00	-11.46	AV
H	7230.003	49.42	30.33	6.32	24.55	49.96	74.00	-24.04	Pk
H	7230.003	42.45	30.33	6.32	24.55	42.99	54.00	-11.01	AV
H	9640.004	52.72	30.85	7.45	24.69	54.01	74.00	-19.99	Pk
H	9640.004	42.65	30.85	7.45	24.69	43.94	54.00	-10.06	AV
H	12050.005	48.98	31.02	8.99	25.57	52.52	74.00	-21.48	Pk
H	12050.005	42.64	31.02	8.99	25.57	46.18	54.00	-7.82	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:2473.001MHz									
V	4946.002	50.72	30.55	5.77	24.66	50.6	74.00	-23.40	Pk
V	4946.002	42.07	30.55	5.77	24.66	41.95	54.00	-12.05	AV
V	7419.003	52.23	30.33	6.32	24.55	52.77	74.00	-21.23	Pk
V	7419.003	42.48	30.33	6.32	24.55	43.02	54.00	-10.98	AV
V	9892.004	51.44	30.85	7.45	24.69	52.73	74.00	-21.27	Pk
V	9892.004	42.46	30.85	7.45	24.69	43.75	54.00	-10.25	AV
V	12365.005	51.45	31.02	8.99	25.57	54.99	74.00	-19.01	Pk
V	12365.005	41.94	31.02	8.99	25.57	45.48	54.00	-8.52	AV
H	4820.002	53.1	30.55	5.77	24.66	52.98	74.00	-21.02	Pk
H	4820.002	42.52	30.55	5.77	24.66	42.40	54.00	-11.60	AV
H	7230.003	49.2	30.33	6.32	24.55	49.74	74.00	-24.26	Pk
H	7230.003	42.33	30.33	6.32	24.55	42.87	54.00	-11.13	AV
H	9640.004	52.26	30.85	7.45	24.69	53.55	74.00	-20.45	Pk
H	9640.004	42.57	30.85	7.45	24.69	43.86	54.00	-10.14	AV
H	12050.005	48.84	31.02	8.99	25.57	52.38	74.00	-21.62	Pk
H	12050.005	41.97	31.02	8.99	25.57	45.51	54.00	-8.49	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



5. RADIATED BAND EMISSION MEASUREMENT

5.1 Test Requirement:

Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10: 2013				
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Average	1MHz	3MHz	Average

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	2300MHz
Stop Frequency	2520MHz
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

5.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- a. 1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel,the Highest channel

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported




5.3 DEVIATION FROM TEST STANDARD

No deviation

5.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

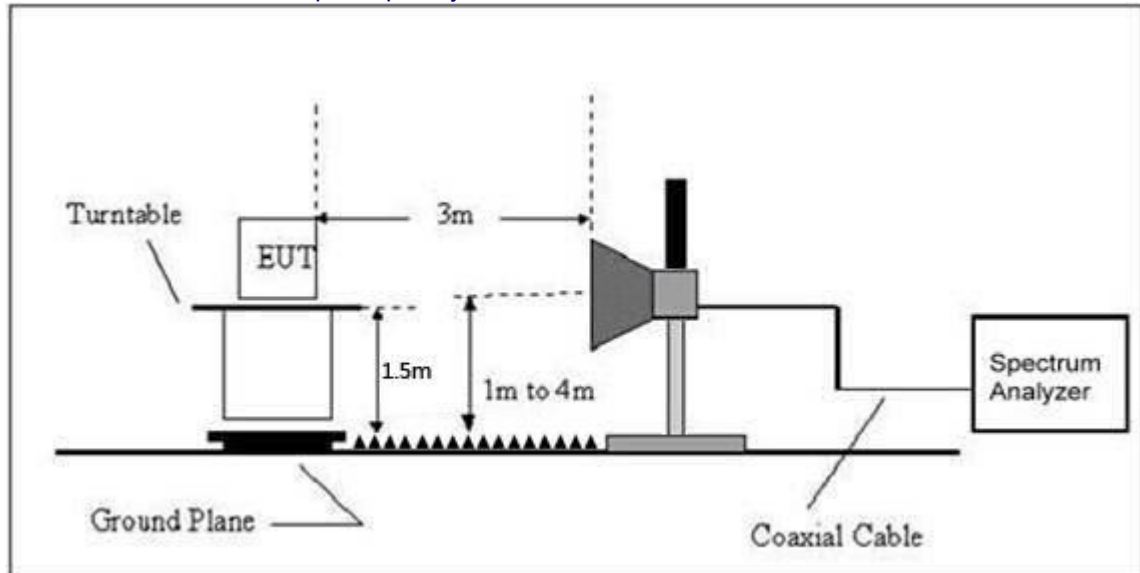

5.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



5.6 TEST RESULT

	Polar (H/V)	Frequenc y (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV /m)	Detec tor Type	Result
FHSS	Low Channel: 2410.001MHz									
	H	2390.00	53.05	30.22	4.85	23.98	51.66	74.00	PK	PASS
	H	2390.00	43.01	30.22	4.85	23.98	41.62	54.00	AV	PASS
	H	2400.00	51.91	30.22	4.85	23.98	50.52	74.00	PK	PASS
	H	2400.00	43.01	30.22	4.85	23.98	41.62	54.00	AV	PASS
	V	2390.00	52.35	30.22	4.85	23.98	50.96	74.00	PK	PASS
	V	2390.00	43.57	30.22	4.85	23.98	42.18	54.00	AV	PASS
	V	2400.00	52.32	30.22	4.85	23.98	50.93	74.00	PK	PASS
	V	2400.00	42.8	30.22	4.85	23.98	41.41	54.00	AV	PASS
	High Channel: 2473.001MHz									
	H	2483.50	52.79	30.22	4.85	23.98	51.4	74.00	Pk	PASS
	H	2483.50	42.76	30.22	4.85	23.98	41.37	54.00	AV	PASS
	H	2500.00	52.49	30.22	4.85	23.98	51.10	74.00	Pk	PASS
	H	2500.00	43.03	30.22	4.85	23.98	41.64	54.00	AV	PASS
	V	2483.50	53.36	30.22	4.85	23.98	51.97	74.00	Pk	PASS
	V	2483.50	43.46	30.22	4.85	23.98	42.07	54.00	AV	PASS
	V	2500.00	53.31	30.22	4.85	23.98	51.92	74.00	Pk	PASS
	V	2500.00	43.40	30.22	4.85	23.98	42.01	54.00	AV	PASS

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit




6. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

6.1 Limit

Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

6.2 Test Setup

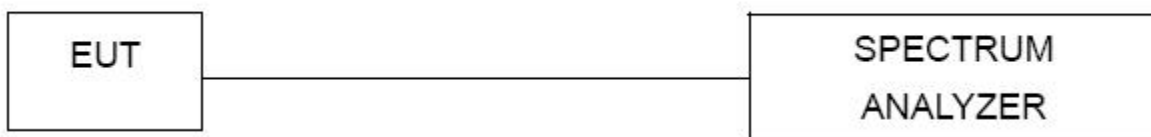

6.3 Test procedure

Using the following spectrum analyzer setting:

- A) Set the RBW = 100KHz.
- B) Set the VBW = 300KHz.
- C) Sweep time = auto couple.
- D) Detector function = peak.
- E) Trace mode = max hold.
- F) Allow trace to fully stabilize.

6.4 DEVIATION FROM STANDARD



No deviation.



6.5 Test Result

FHSS mode:



Test channel:	Lowest channel
---------------	----------------

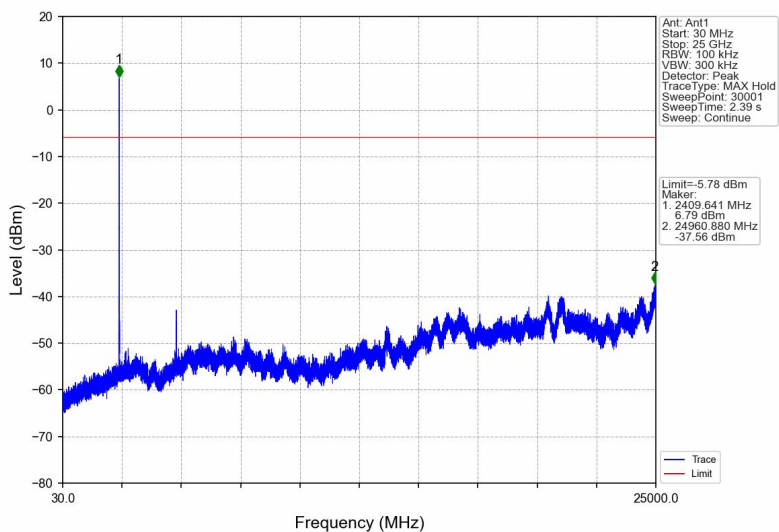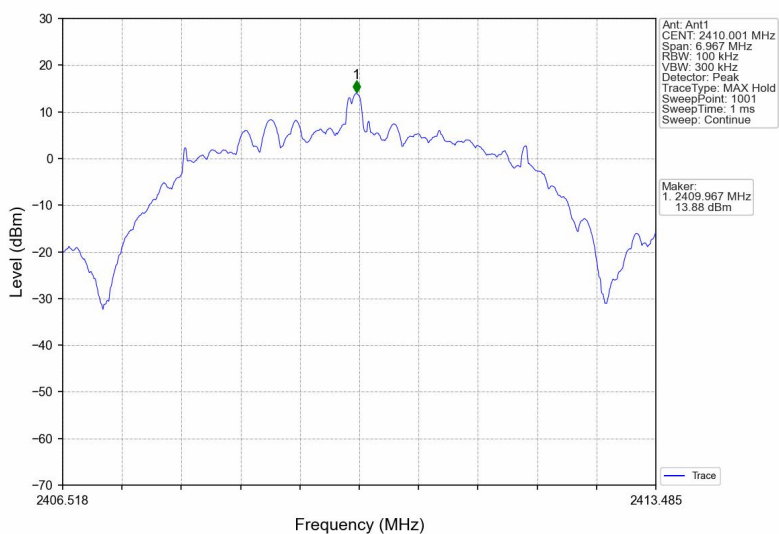

30MHz~25GHz





Test channel:	Middle channel
---------------	----------------

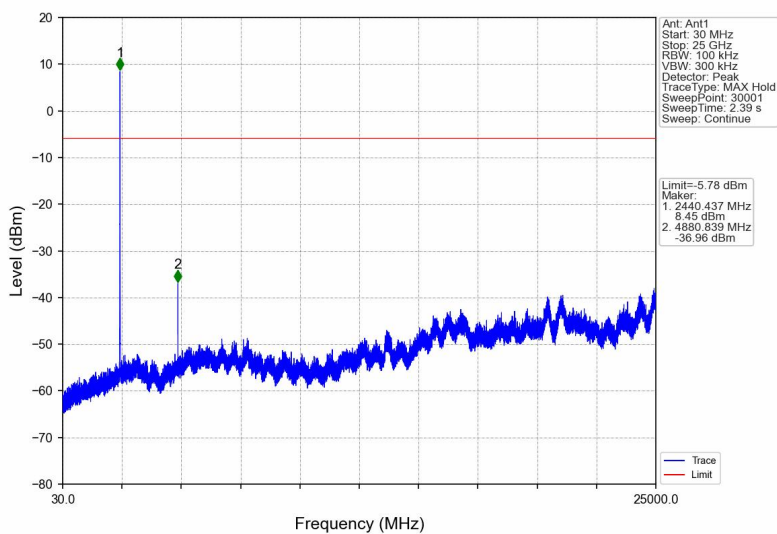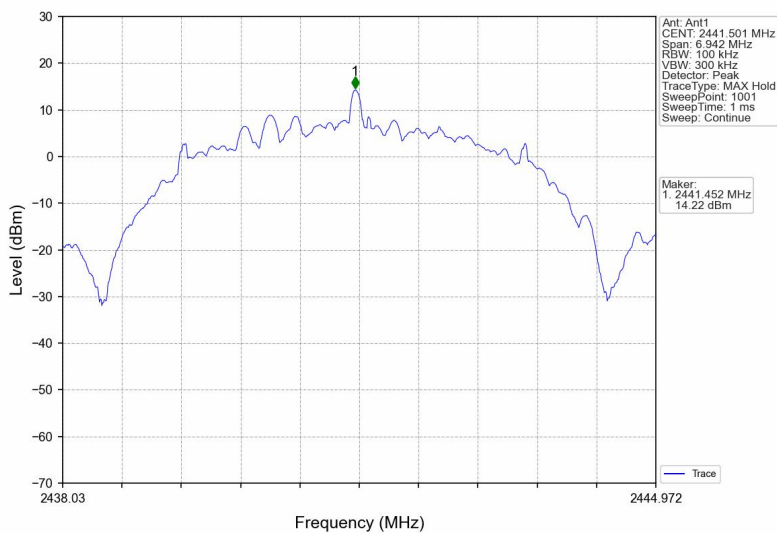

30MHz~25GHz




Test channel:	Highest channel
---------------	-----------------

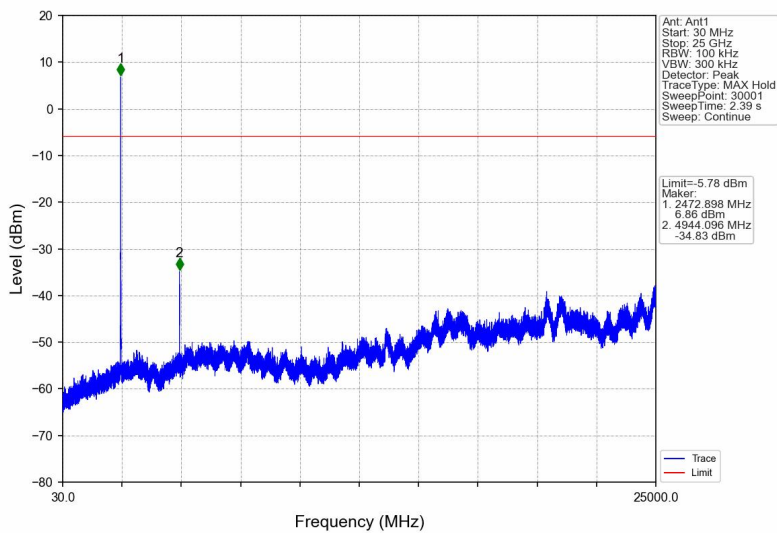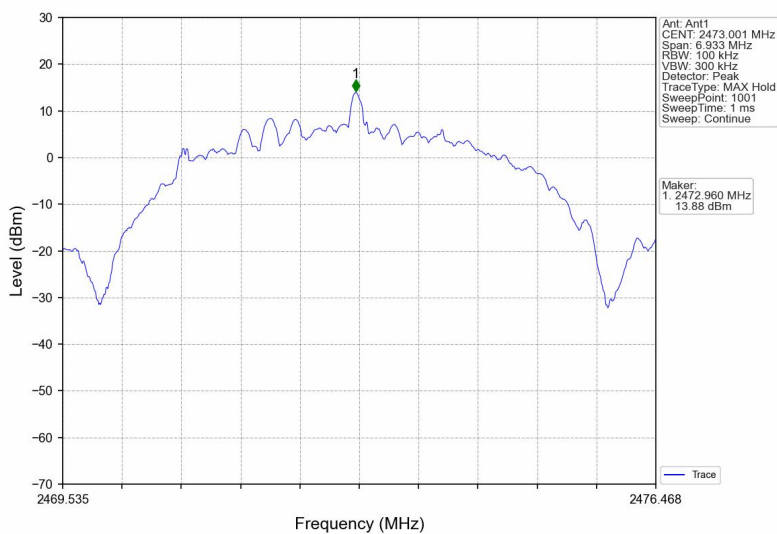


30MHz~25GHz



FHSS No-hopping Band edge-left side

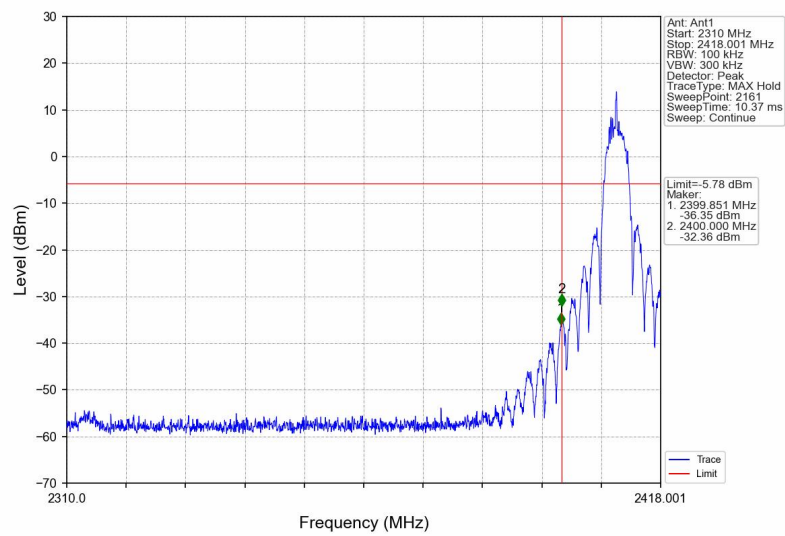


FHSS Hopping Band edge-left side

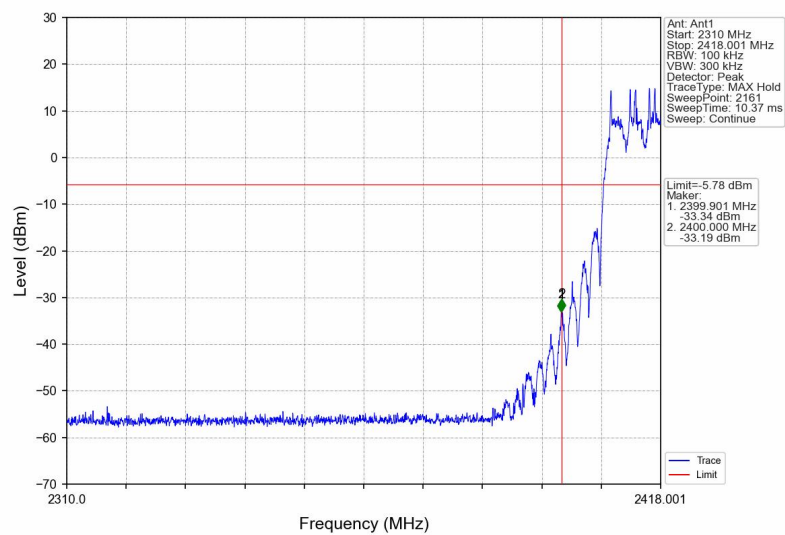




FHSS No-hopping Band edge-right side

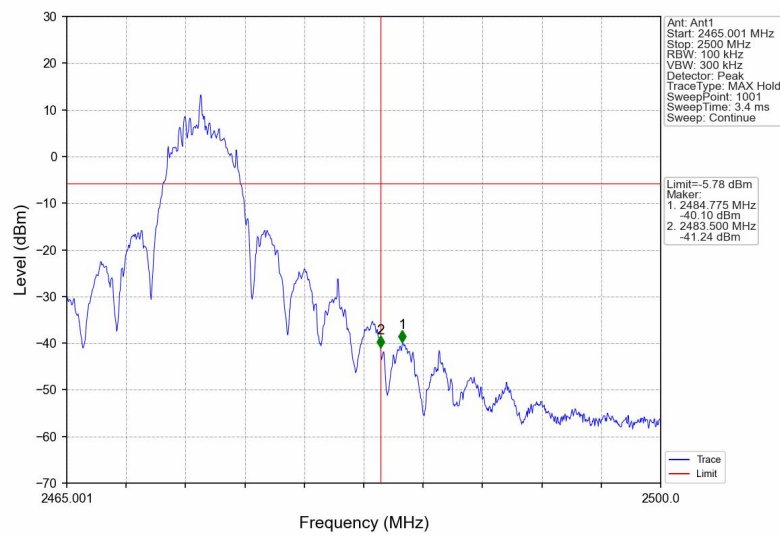

FHSS Hopping Band edge-right side

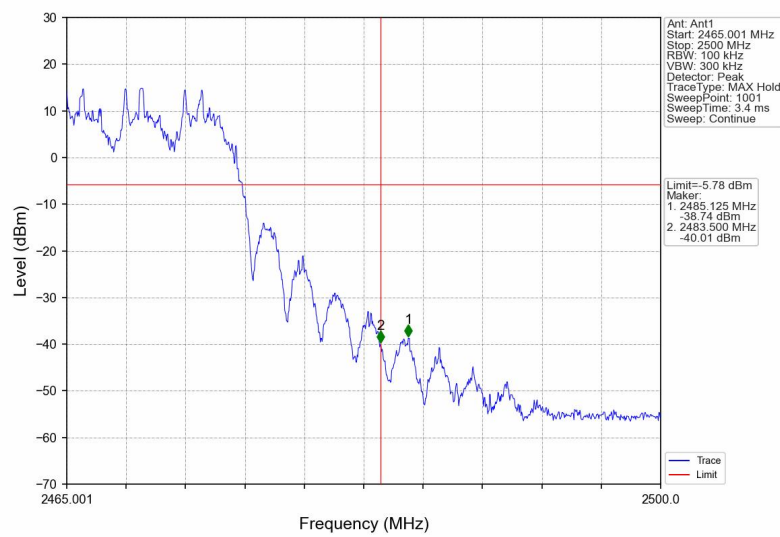



7. 20DB&99% BANDWIDTH

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013

7.1 Test Setup



7.2 Limit

N/A

7.3 Test procedure

1. Set RBW = 150 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.4 DEVIATION FROM STANDARD

No deviation.


7.5 Test Result

Mode	Test channel	20dB Emission Bandwidth (MHz)	Result
FHSS	Lowest	4.645	Pass
	Middle	4.628	
	Highest	4.622	




Test plots

FHSS Low Channel

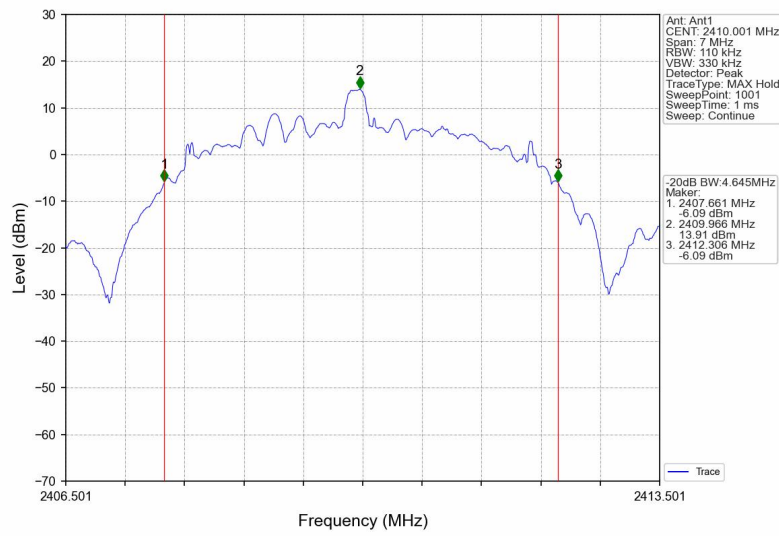




FHSS Middle Channel

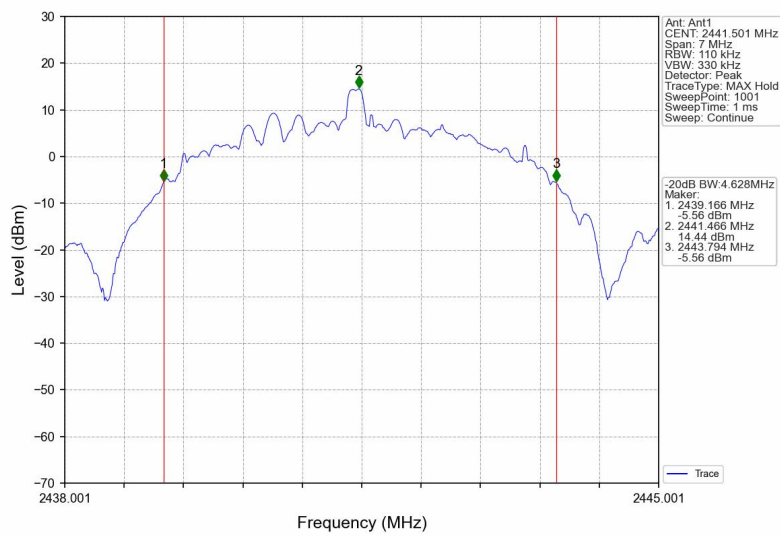

FHSS High Channel

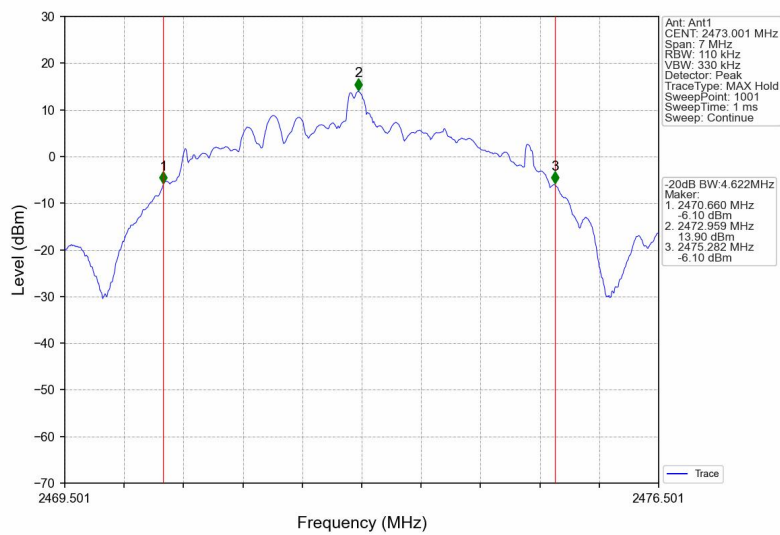



8. Maximum Peak Output Power

Test Requirement:	FCC Part15 C Section 15.247 (b)(1)
Test Method:	ANSI C63.10:2013
Limit:	FHSS:30 dBm

8.1 Block Diagram Of Test Setup



8.2 Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt.
For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

For FHSs operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W if the hopset uses less than 75 hopping channels. The e.i.r.p. shall not exceed 4 W.

8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 5MHz. VBW =5MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.

8.4 DEVIATION FROM STANDARD

No deviation.


8.5 Test Result

Mode	Test channel	Peak Output Power (dBm)	FCC Limit (dBm)	Result
FHSS	Lowest	14.76	20.97	Pass
	Middle	15.35		
	Highest	14.84		




Test plots

FHSS Low Channel

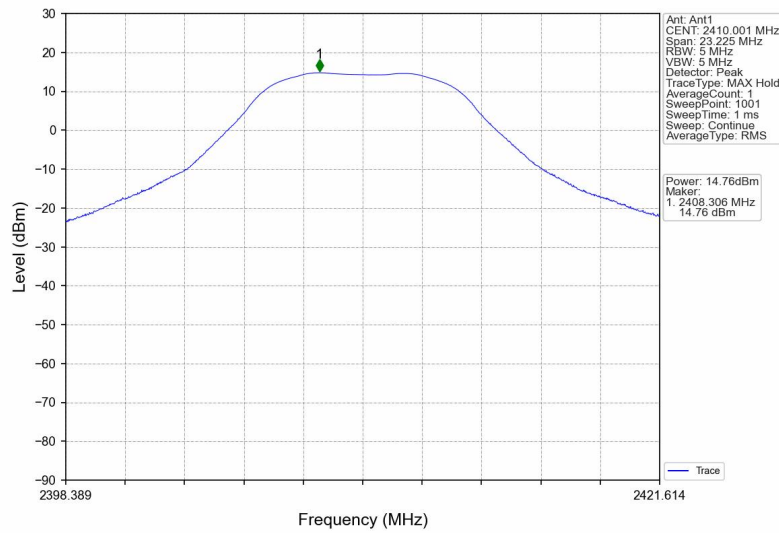


FHSS Middle Channel

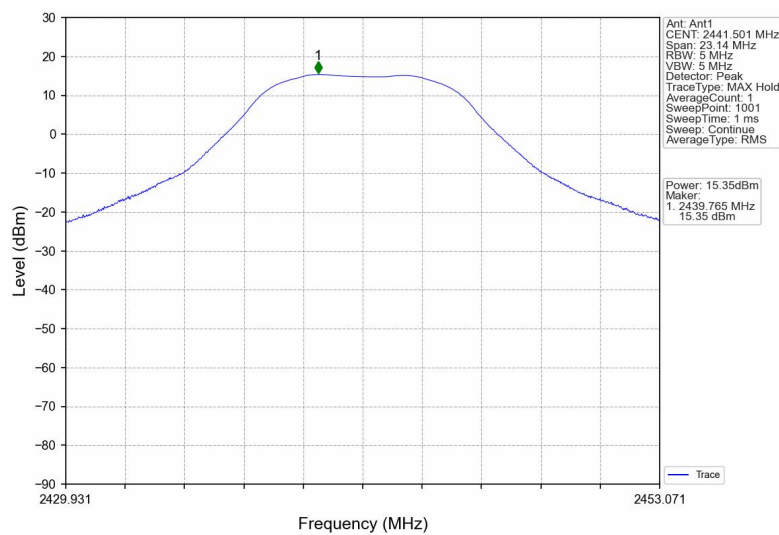



FHSS High Channel

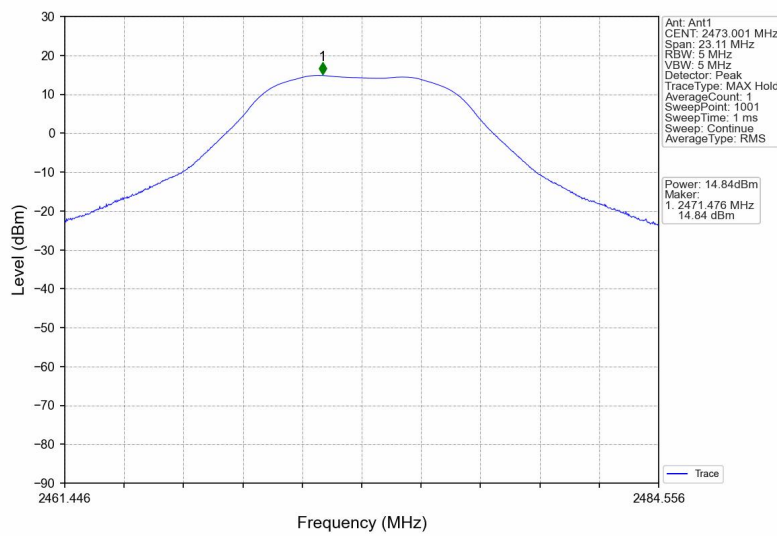



9. HOPPING CHANNEL SEPARATION

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=1.1MHz, VBW=1.1MHz, detector=Peak
Limit:	FHSS: 20dB bandwidth

9.1 Test Setup



9.2 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1.1MHz. VBW = 1.1MHz , Span = 9.0MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

9.3 DEVIATION FROM STANDARD

No deviation.




9.4 Test Result

Modulation	Test Channel	Separation (MHz)	Limit(MHz)	Result
FHSS	Middle	3.500	$\geq 2/3$ (20 dB bandwidth)	PASS



FHSS Middle Channel

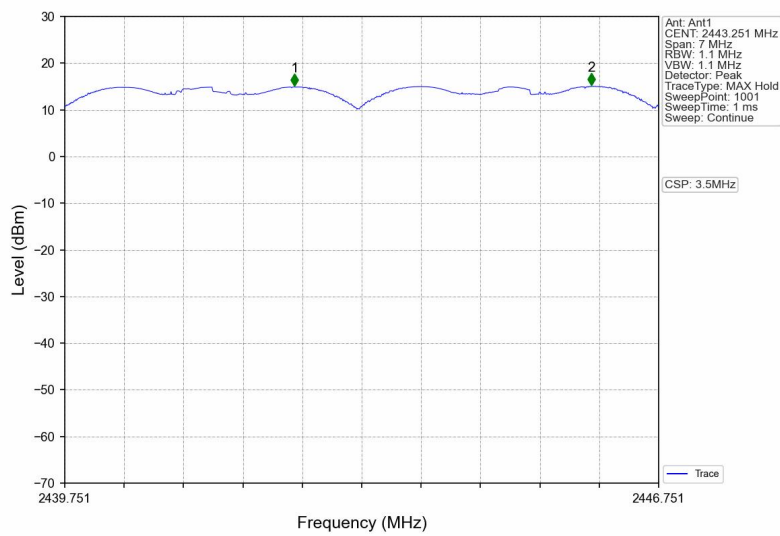

10.NUMBER OF HOPPING FREQUENCY

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)(iii)
Test Method:	ANSI C63.10:2013



Receiver setup:	RBW=1.1MHz, VBW=1.1MHz, Frequency range=2400MHz-2483.5MHz, Detector=Peak
Limit:	15 channels

10.1 Test Setup



10.2 Test procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1.1MHz. VBW = 1.1MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;

10.3 DEVIATION FROM STANDARD

No deviation.

10.4 Test Result

Test Plots:
19 Channels in total
FHSS

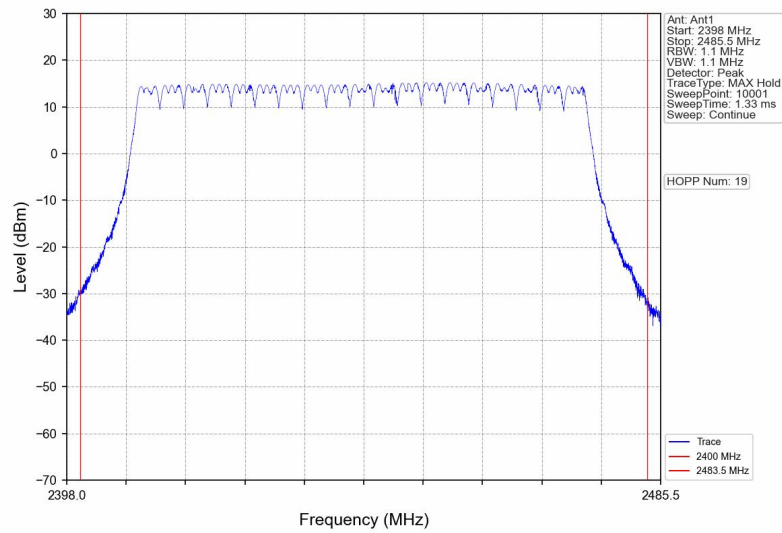



11. DWELL TIME

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)(iii)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=1MHz, VBW=3MHz, Span=0Hz, Detector=Peak
Limit:	0.4 Second

11.1 Test Setup



11.2 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0Hz;
3. Set RBW = 3MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

11.3 DEVIATION FROM STANDARD

No deviation.



11.4 Test Result

FHSS mode:

Frequency	Packet	Dwell time(ms)	Limit(ms)	Result
2441.5MHz	DH1	166.260	400	Pass

Remarks:

The test period: $T = 0.4 \text{ Second/Channel} \times 19 \text{ Channel} = 7.6 \text{ s}$



Test channel: as blow

CH:2441MHz time slot= $3.26(\text{ms}) \times 51 = 166.26\text{ms}$



Test Plots

FHSS DH1 2441.5MHz

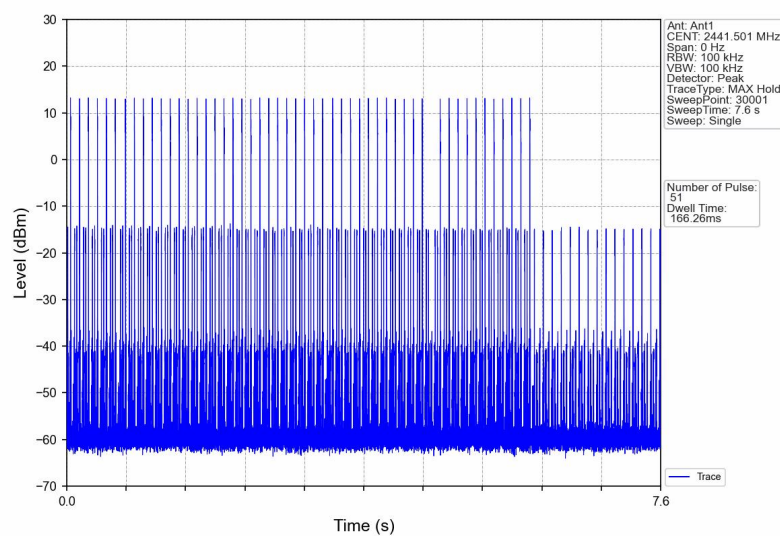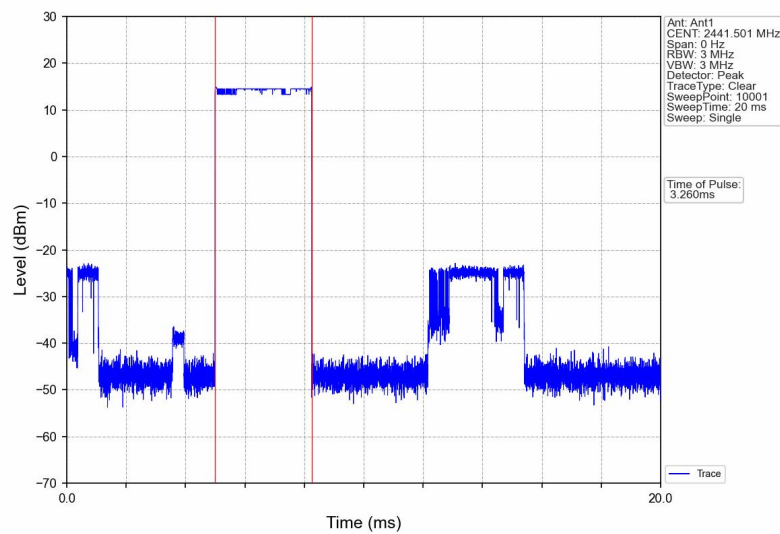

12. Antenna Requirement

Standard requirement:	FCC Part15 C Section 15.203 /247(c)
15.203 requirement:	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall

Shenzhen ZKT Technology Co., Ltd.

1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

+86-400-000-9970

+86-755-2233 6688

zkt@zkt-lab.com

www.zkt-lab.com



be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(c) (1)(i) requirement:

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

EUT Antenna:

The antenna is External antenna, the best case gain of the antennas is 3.00 dBi, reference to the appendix II for details



13. Test Setup Photo

Reference to the appendix I for details.

14. EUT Constructional Details

Reference to the External Photos & Internal photos for details.

***** END OF REPORT *****