



RF MEASUREMENT REPORT

FCC ID: 2AQVU0062

Applicant: JOYTECH HEALTHCARE CO., LTD.

Product: Arm-type Fully Automatic Digital Blood Pressure Monitor

Model No.: DBP-63D2L

Serial Model No.: DBP-63D2L-P

FCC Classification: Digital Transmission System (DTS)

FCC Rule Part(s): Part 15 Subpart C (Section 15.247)

Result: Complies

Received Date: 2025-02-28

Test Date: 2025-03-17 ~ 2025-07-09

Reviewed By:

Denise Zhou

Approved By:

Robin Wu



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
R25S1070028-U202	V01	Initial Report	2025-07-23	Valid

CONTENTS

Description	Page
1. General Information	5
1.1. Applicant	5
1.2. Manufacturer	5
1.3. Testing Facility	5
1.4. Product Information	6
1.5. Radio Specification under Test	6
1.6. Working Frequencies	6
2. Test Configuration	7
2.1. Test Mode	7
2.2. Test System Connection Diagram	7
2.3. Test Software	9
2.4. Applied Standards	9
2.5. Test Environment Condition	9
3. Antenna Requirements	10
4. Measuring Instrument	11
5. Decision Rules and Measurement Uncertainty	12
5.1. Decision Rules	12
5.2. Measurement Uncertainty	12
6. Test Result	13
6.1. Summary	13
6.2. 6dB Bandwidth Measurement	14
6.2.1. Test Limit	14
6.2.2. Test Procedure	14
6.2.3. Test Setting	14
6.2.4. Test Setup	14
6.2.5. Test Result	14
6.3. Output Power Measurement	15
6.3.1. Test Limit	15
6.3.2. Test Procedure	15
6.3.3. Test Setting	15
6.3.4. Test Setup	15
6.3.5. Test Result	15
6.4. Power Spectral Density Measurement	16
6.4.1. Test Limit	16
6.4.2. Test Procedure	16

6.4.3.	Test Setting	16
6.4.4.	Test Setup	16
6.4.5.	Test Result	16
6.5.	Conducted Band Edge and Out-of-Band Emissions Measurement	17
6.5.1.	Test Limit	17
6.5.2.	Test Procedure	17
6.5.3.	Test Setting	17
6.5.4.	Test Setup	17
6.5.5.	Test Result	18
6.6.	Radiated Spurious Emission Measurement.....	19
6.6.1.	Test Limit	19
6.6.2.	Test Procedure	19
6.6.3.	Test Setting	19
6.6.4.	Test Setup	21
6.6.5.	Test Result	22
6.7.	Radiated Restricted Band Edge Measurement	23
6.7.1.	Test Limit	23
6.7.2.	Test Procedure	24
6.7.3.	Test Setting	24
6.7.4.	Test Setup	25
6.7.5.	Test Result	25
6.8.	AC Conducted Emissions Measurement	26
6.8.1.	Test Limit	26
6.8.2.	Test Setup	26
6.8.3.	Test Result	26
Appendix A – Test Result.....		27
A.1	Duty Cycle Test Result	27
A.2	6dB Bandwidth Test Result	28
A.3	Output Power Test Result	31
A.4	Power Spectral Density Test Result	32
A.5	Conducted Band Edge and Out-of-Band Emissions Test Result.....	35
A.6	Radiated Spurious Emission Test Result	42
A.7	Radiated Restricted Band Edge Test Result.....	48
A.8	AC Conducted Emissions Test Result	72
Appendix B – Test Setup Photograph		76
Appendix C – EUT Photograph		77

1. General Information

1.1. Applicant

JOYTECH HEALTHCARE CO., LTD.

No.365, Wuzhou Road, Hangzhou City, Zhejiang, China 311100

1.2. Manufacturer

JOYTECH HEALTHCARE CO., LTD.

No.365, Wuzhou Road, Hangzhou City, Zhejiang, China 311100

1.3. Testing Facility

☒	Test Site – MRT Suzhou Laboratory			
	Laboratory Location (Suzhou - Wuzhong)			
	D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China			
	Laboratory Location (Suzhou - SIP)			
	4b Building, Liando U Valley, No.200 Xingpu Rd., Shengpu Town, Suzhou Industrial Park, China			
	Laboratory Location (Suzhou - Wujiang)			
	Building 1, No.1 Xingdong Road, Wujiang, Suzhou, Jiangsu, People's Republic of China			
☒	Laboratory Accreditations			
	A2LA: 3628.01		CNAS: L10551	
	FCC: CN1166		ISED: CN0001	
	VCCI:	☐ R-20025	☐ G-20034	☐ C-20020
		☐ R-20141	☐ G-20134	☐ C-20103
☐	Test Site – MRT Shenzhen Laboratory			
	Laboratory Location (Shenzhen)			
	1G, Building A, Junxiangda Building, Zhongshanyuan Road West, Nanshan District, Shenzhen, China			
	Laboratory Accreditations			
	A2LA: 3628.02		CNAS: L10551	
☐	Test Site – MRT Taiwan Laboratory			
	Laboratory Location (Taiwan)			
	No. 38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)			
	Laboratory Accreditations			
	TAF: 3261		ISED: TW3261	

1.4. Product Information

Product Name	Arm-type Fully Automatic Digital Blood Pressure Monitor
Model No.	DBP-63D2L
Serial/Family Model	DBP-63D2L-P
EUT Identification No.	20250228Sample#03
Bluetooth Specification	V5.2 (BLE only)
Wi-Fi Specification	802.11b/g/n
Power Supply	Lithium battery 3.7V or DC 5.0V
Accessory	
Adapter	Model: MPSUL0501000 Input: 100-240V ~ 50/60Hz 0.25A Output: 5V 1000mA
Notes:	
1. The information of the EUT (Equipment Under Test) was provided by the manufacturer. The accuracy, completeness, and validity of the information are solely the responsibility of the manufacturer.	
2. DBP-63D2L and DBP-63D2L-P are identical, but for different kinds of consumers.	

1.5. Radio Specification under Test

Frequency Range	802.11b/g/n-HT20: 2412 ~ 2462MHz
Channel Number	802.11b/g/n-HT20: 11
Type of Modulation	802.11b: DSSS 802.11g/n: OFDM
Data Rate	802.11b: 1/2/5.5/11Mbps 802.11g: 6/9/12/18/24/36/48/54Mbps 802.11n: up to 72.2Mbps
Antenna Type	PCB Antenna
Antenna Gain	1.03 dBi

1.6. Working Frequencies

802.11b/g/n-HT20

Channel	Frequency	Channel	Frequency	Channel	Frequency
01	2412 MHz	02	2417 MHz	03	2422 MHz
04	2427 MHz	05	2432 MHz	06	2437 MHz
07	2442 MHz	08	2447 MHz	09	2452 MHz
10	2457 MHz	11	2462 MHz	--	--


2. Test Configuration

2.1. Test Mode


Test Mode
Mode 1: Transmit by 802.11b (1Mbps)
Mode 2: Transmit by 802.11g (6Mbps)
Mode 3: Transmit by 802.11n-HT20 (MCS0)
Notes:
1. For Radiated emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power.
2. After evaluation, the lowest data rate was the worst condition, so all the tests were done with lowest data rate.

2.2. Test System Connection Diagram

The device was tested per the guidance ANSI C63.10: 2013 was used to reference the appropriate EUT setup for radiated emissions testing and AC line conducted testing.

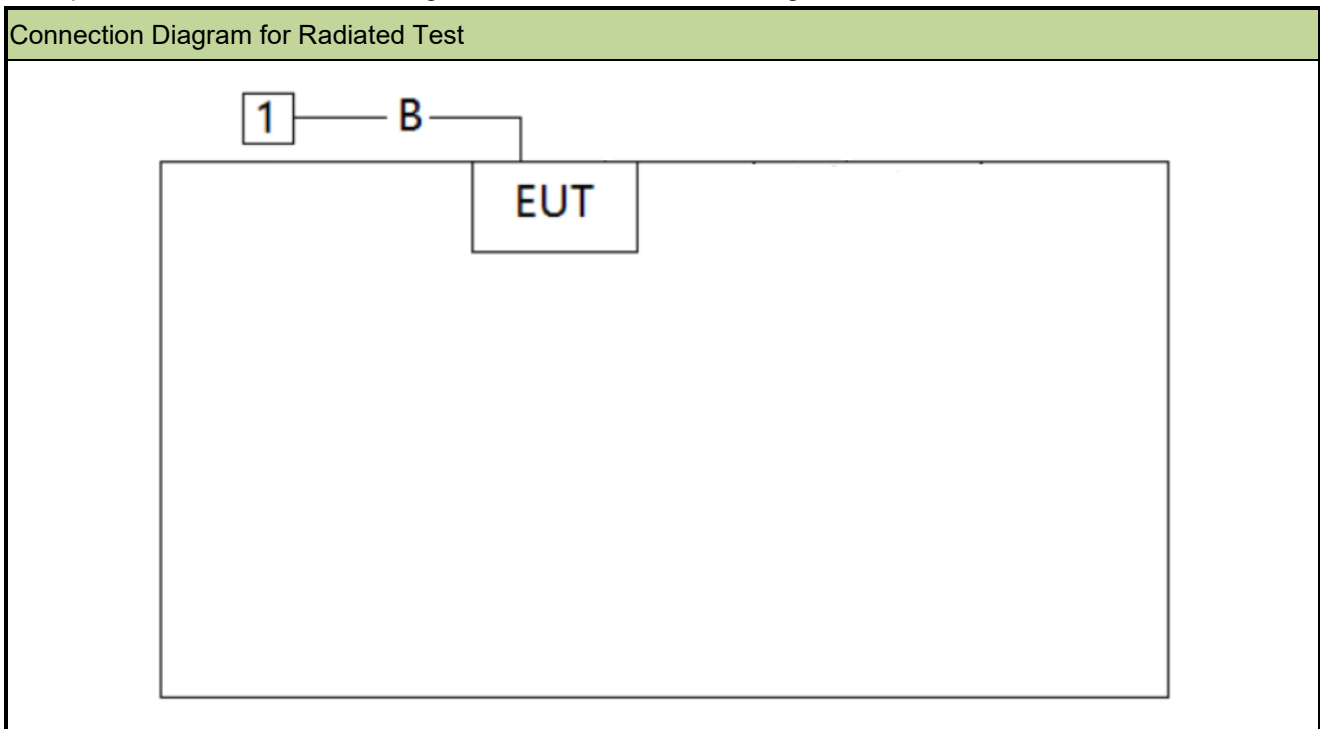

Connection Diagram for Conducted Test

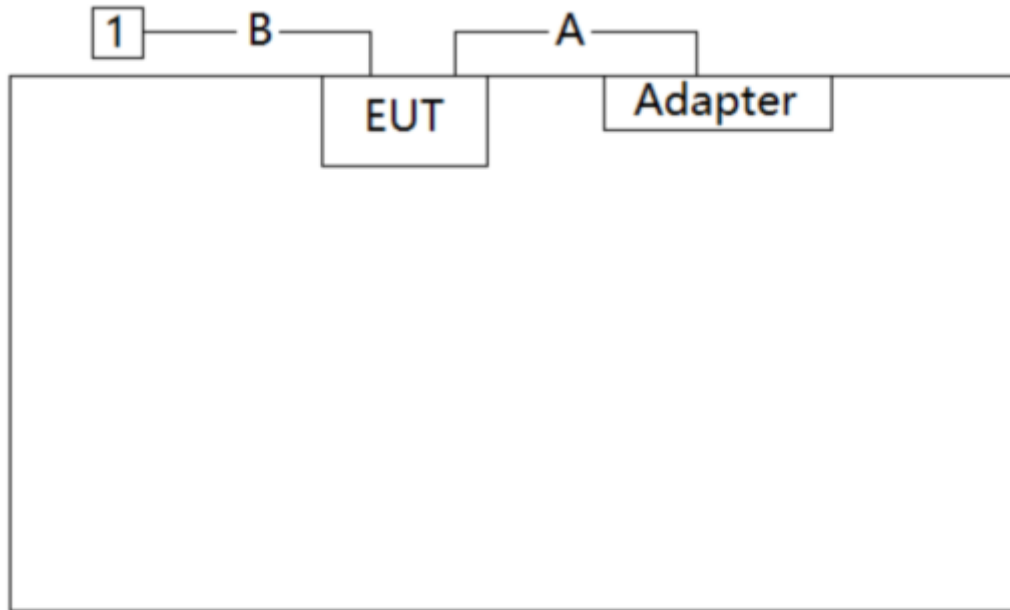

Cable Type		Cable Description	Length
A	Power Cable	Non shielded	1.0m
B	Serial Cable	Non shielded	0.5m
Product		Manufacturer	Model No.
1	Notebook	ThinkPad	Gen5 E14

2.3. Test Software

The test utility software used during testing was "NCAuth.exe".

2.4. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15.247
- KDB 558074 D01v05r02
- KDB 662911 D01v02r01
- ANSI C63.10-2013

2.5. Test Environment Condition

Ambient Temperature	15 ~ 35°C
Relative Humidity	20 ~ 75%RH

3. Antenna Requirements

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the device is **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The unit complies with the requirement of §15.203.

4. Measuring Instrument

Instrument	Manufacturer	Model No.	Asset No.	Cali. Interval	Cali. Due Date	Test Site
Thermohygrometer	testo	608-H1	MRTSUE11333	1 year	2025-06-24	WJ-AC1
					2026-06-16	
Thermohygrometer	testo	608-H1	MRTSUE11402	1 year	2025-12-01	WJ-AC1
Microwave Broadband Preamplifier	Schwarzbeck	BBV 9718 D	MRTSUE07084	1 year	2025-12-22	WJ-AC1
Horn Antenna	ETS	3117	MRTSUE06257	1 year	2025-09-08	WJ-AC1
Anechoic Chamber	TDK	WJ-AC1	MRTSUE07115	1 year	2025-05-17	WJ-AC1
					2026-05-16	
EXA Signal Analyzer	Keysight	N9010B	MRTSUE07147	1 year	2025-11-06	WJ-AC1/WJ-AC2
EMI Test Receiver	R&S	ESR3	MRTSUE07110	1 year	2025-04-24	WJ-AC2
					2026-04-19	
Active Loop Antenna	Schwarzbeck	FMZB 1519-60 D	MRTSUE07076	1 year	2025-11-19	WJ-AC2
TRILOG Broad Band Antenna	Schwarzbeck	VULB 9163	MRTSUE07097	1 year	2025-04-21	WJ-AC2
					2026-04-20	
Preamplifier	EMCI	EMC184045SE	MRTSUE07103	1 year	2025-04-14	WJ-AC2
					2026-04-09	
Broadband Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE07100	1 year	2025-04-24	WJ-AC2
					2026-04-10	
Anechoic Chamber	TDK	WJ-AC2	MRTSUE07117	1 year	2025-05-14	WJ-AC2
					2026-05-12	
Two-Line V-Network	R&S	ENV216	MRTSUE06003	1 year	2025-05-08	SIP-SR2
					2026-04-29	
EMI Test Receiver	R&S	ESR3	MRTSUE06612	1 year	2025-05-08	SIP-SR2
					2026-04-29	
Thermohygrometer	testo	608-H1	MRTSUE06621	1 year	2025-10-29	SIP-SR2
Shielding Room	MIX-BEP	SIP-SR2	MRTSUE06949	5 years	2029-10-13	SIP-SR2
USB Power Sensor	Keysight	U2021XA	MRTSUE06596	1 year	2025-07-23	SIP-TR1
Signal Analyzer	Keysight	N9010B	MRTSUE07036	1 year	2026-01-21	SIP-TR1
Thermohygrometer	testo	608-H1	MRTSUE11022	1 year	2025-10-16	SIP-TR1

Software	Version	Function
e3	230711	RE & CE
CONTROLLER CO3000	v 1.03.02	RE Antenna & Turntable
Agilent Power Analyzer/Agilent Power Panel	V R03.09.00	Power

5. Decision Rules and Measurement Uncertainty

5.1. Decision Rules

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4: 2012 Clause 8.2.
(Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

5.2. Measurement Uncertainty

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement	
The maximum measurement uncertainty is evaluated as:	
9kHz~150kHz: 3.58dB	
150kHz~30MHz: 3.20dB	
Radiated Emission Measurement	
The maximum measurement uncertainty is evaluated as:	
Coaxial:	9kHz~30MHz: 2.35dB
Coplanar:	9kHz~30MHz: 2.37dB
Horizontal:	30MHz~200MHz: 3.47dB
	200MHz~1GHz: 4.17dB
	1GHz~40GHz: 4.97dB
Vertical:	30MHz~200MHz: 4.07dB
	200MHz~1GHz: 5.28dB
	1GHz~40GHz: 4.84dB
Spurious Emissions, Conducted	
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$):	
2.5dB	
Output Power	
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$):	
1.5dB	
Power Spectrum Density	
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$):	
2.5dB	
Occupied Bandwidth	
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$):	
3.2%	

6. Test Result

6.1. Summary

FCC Section(s)	Test Description	Test Condition	Verdict
15.247(a)(2)	6dB Bandwidth	Conducted	Pass
15.247(b)(3)	Output Power		Pass
15.247(e)	Power Spectral Density		Pass
15.247(d)	Band Edge / Out-of-Band Emissions		Pass
15.205 15.209	General Field Strength (Restricted Bands and Radiated Emission)	Radiated	Pass
15.207	AC Conducted Emissions 150kHz - 30MHz	Line Conducted	Pass

Notes:

1. The analyzer plots shown in this section were captured using a correction table to account for cable and attenuator losses in the system connecting the EUT to the analyzer across relevant frequencies.
2. For radiated emission tests, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst-case emissions.

6.2. 6dB Bandwidth Measurement

6.2.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


6.2.2. Test Procedure

ANSI C63.10 - 2013 - Section 11.8

6.2.3. Test Setting

1. The Spectrum's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. Set RBW = 100 kHz
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = Max hold
6. Sweep = Auto couple
7. Allow the trace to stabilize.

6.2.4. Test Setup

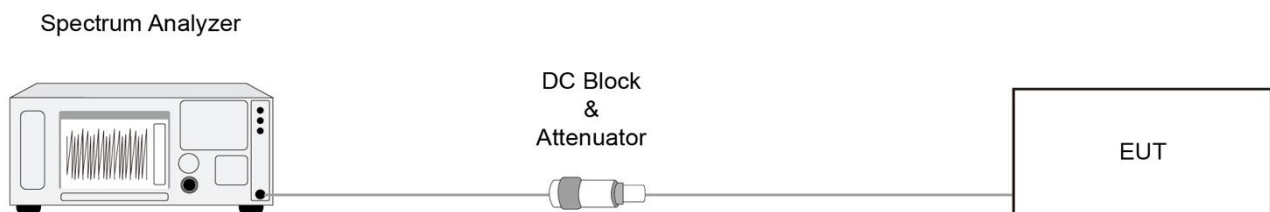

6.2.5. Test Result

Refer to Appendix A.2.

6.3. Output Power Measurement

6.3.1. Test Limit

The maximum output power shall be less 1 Watt (30dBm).

The conducted output power limit specified in paragraph FCC Part 15.247(b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs FCC Part 15.247(b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

6.3.2. Test Procedure


ANSI C63.10 - 2013 - Section 11.9.2.3.2

6.3.3. Test Setting

Average Power Measurement

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

6.3.4. Test Setup

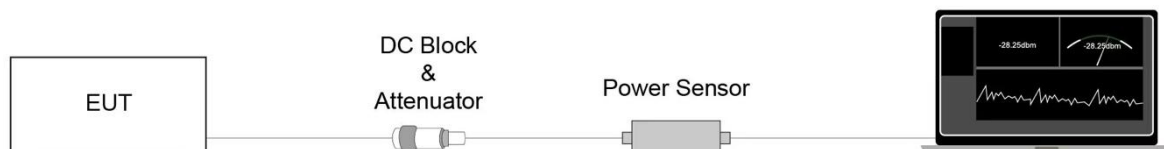

6.3.5. Test Result

Refer to Appendix A.3.

6.4. Power Spectral Density Measurement

6.4.1. Test Limit

The maximum permissible power spectral density is 8dBm in any 3 kHz band.

The same method of determining the conducted output power shall be used to determine the power spectral density.


6.4.2. Test Procedure

ANSI C63.10-2013 Section 11.10.2

6.4.3. Test Setting

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 3kHz
4. VBW = 10kHz
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize

6.4.4. Test Setup

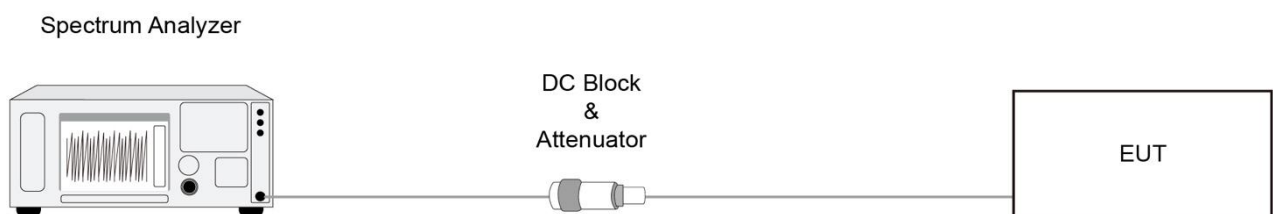

6.4.5. Test Result

Refer to Appendix A.4.

6.5. Conducted Band Edge and Out-of-Band Emissions Measurement

6.5.1. Test Limit

The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth per the PSD procedure.

6.5.2. Test Procedure

ANSI C63.10-2013 - Section 11.11

6.5.3. Test Setting


Reference level measurement

1. Set instrument center frequency to DTS channel center frequency
2. Set the span to ≥ 1.5 times the DTS bandwidth
3. Set the RBW = 100 kHz
4. Set the VBW $\geq 3 \times$ RBW
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Allow trace to fully stabilize

Emission level measurement

1. Set the center frequency and span to encompass frequency range to be measured
2. RBW = 100kHz
3. VBW = 300kHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

6.5.4. Test Setup

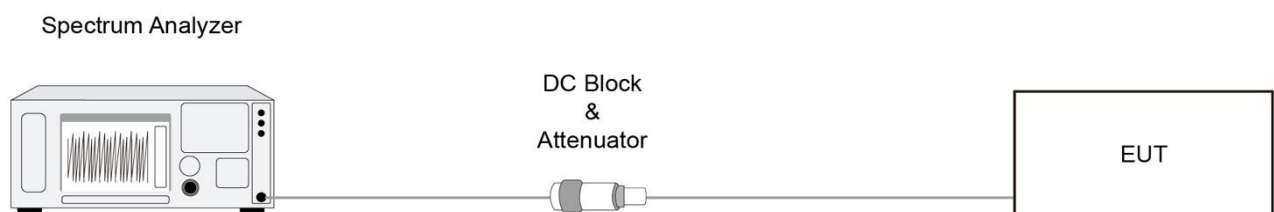

6.5.5. Test Result

Refer to Appendix A.5.

6.6. Radiated Spurious Emission Measurement

6.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.6.2. Test Procedure

ANSI C63.10 - 2013 - Section 11.11 & 11.12

ANSI C63.10 - 2013 - Section 6.3 (General Requirements)

ANSI C63.10 - 2013 - Section 6.4 (Standard test method below 30MHz)

ANSI C63.10 - 2013 - Section 6.5 (Standard test method above 30MHz to 1GHz)

ANSI C63.10 - 2013 - Section 6.6 (Standard test method above 1GHz)

6.6.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000MHz	1MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Sweep time = Auto couple
6. Trace mode = Max hold
7. Trace was allowed to stabilize


Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; if the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10Hz


If the EUT duty cycle is $< 98\%$, set $VBW \geq 1/T$. T is the minimum transmission duration.
4. As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = Auto
7. Trace mode = Max hold
8. Trace was allowed to stabilize

6.6.4. Test Setup


Below 30MHz Test Setup:

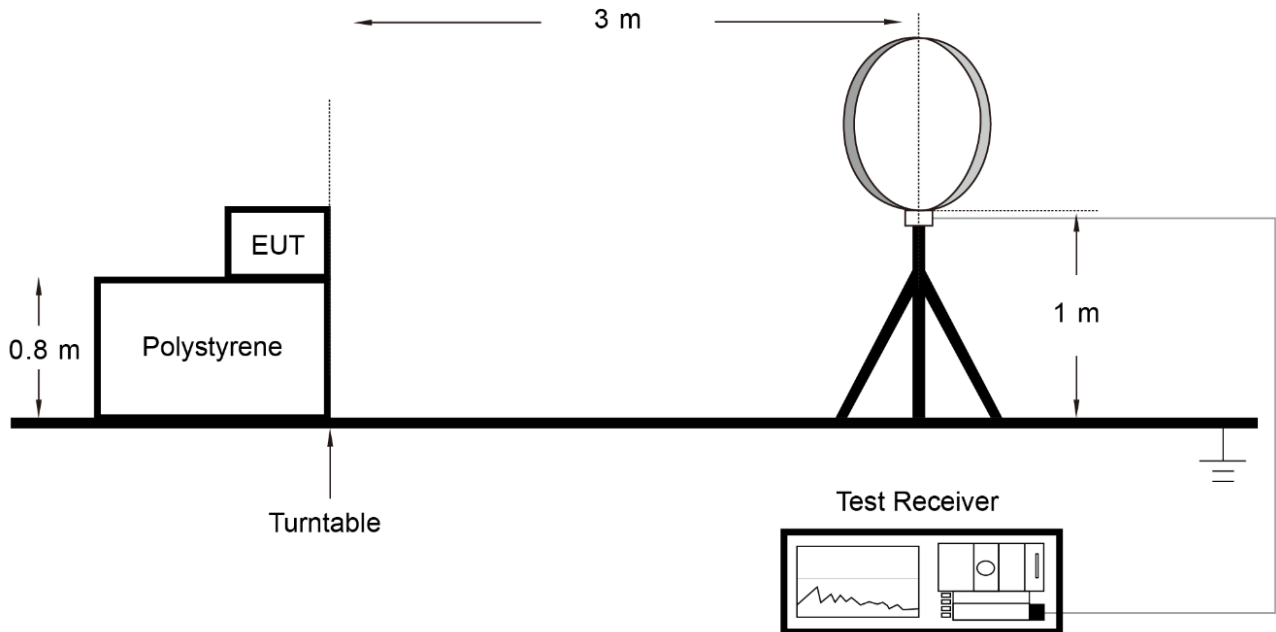

Below 1GHz Test Setup:

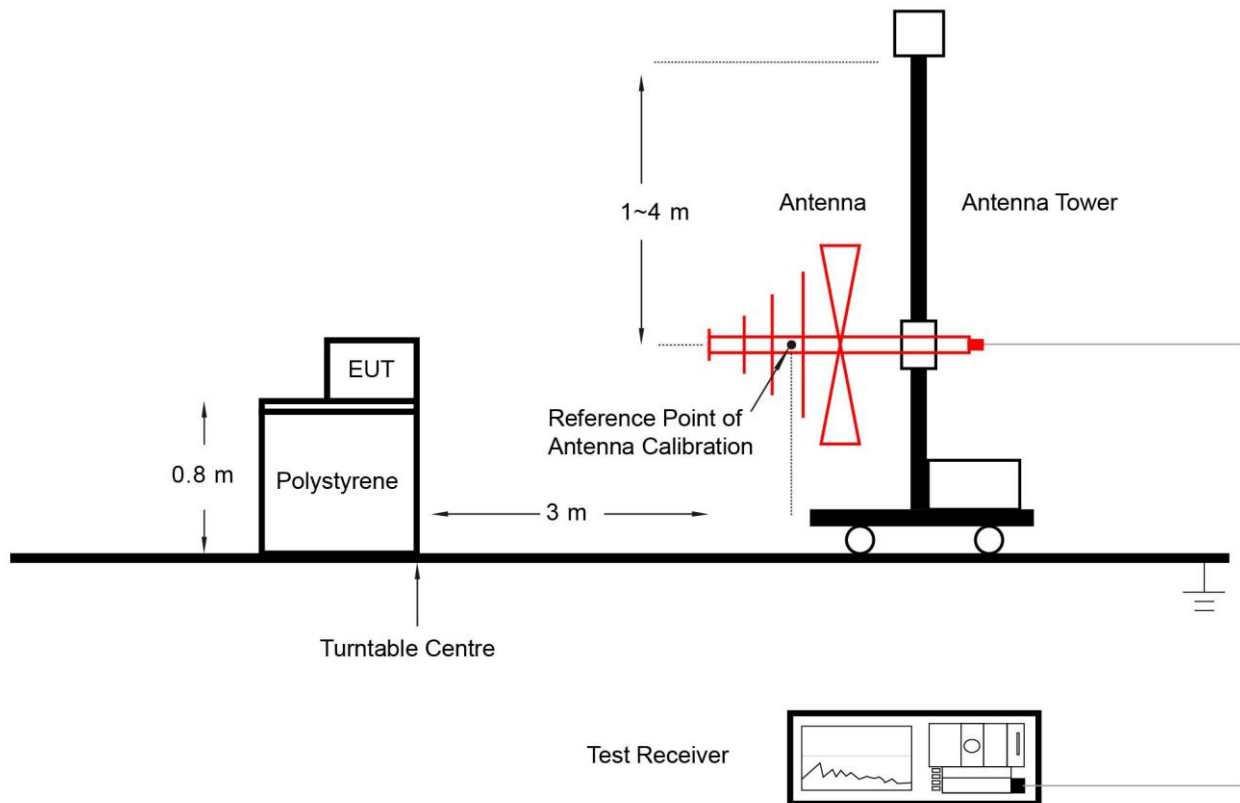

Above 1GHz Test Setup:

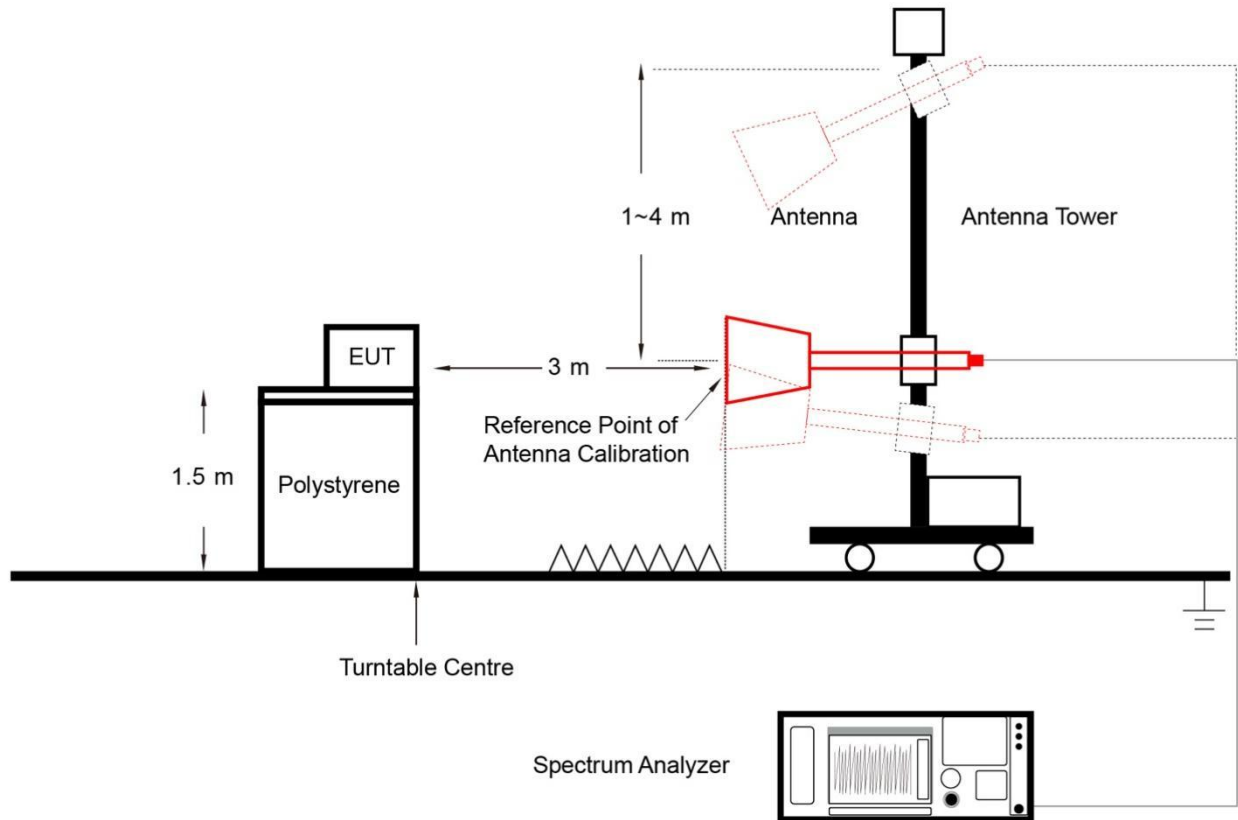

6.6.5. Test Result

Refer to Appendix A.6.

6.7. Radiated Restricted Band Edge Measurement

6.7.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.7.2. Test Procedure

ANSI C63.10-2013 Section 6.3 & 6.6 & 11.13

6.7.3. Test Setting

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize


Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.

If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.

4. As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = auto
7. Trace mode = max hold
8. Allow max hold to run for at least 50 times (1/duty cycle) traces

6.7.4. Test Setup

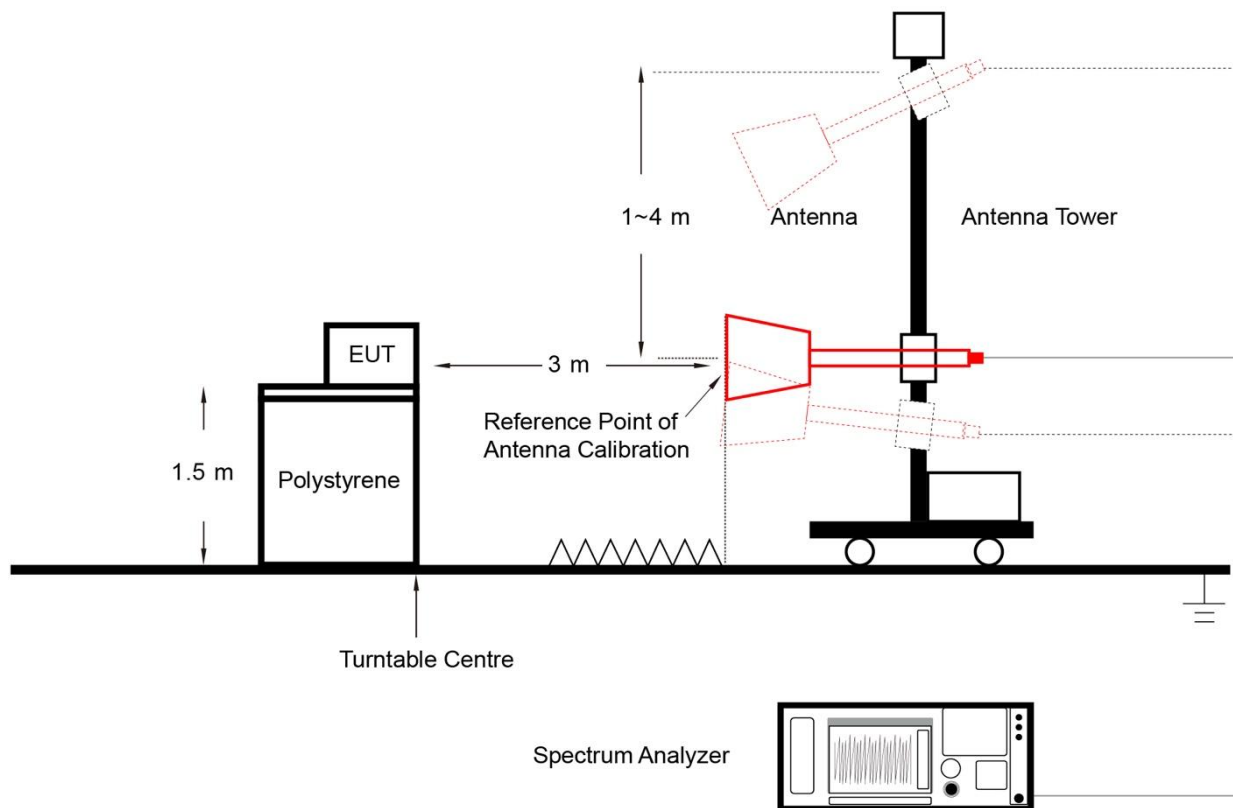

6.7.5. Test Result

Refer to Appendix A.7.

6.8. AC Conducted Emissions Measurement


6.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dB μ V)	AV (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

6.8.2. Test Setup

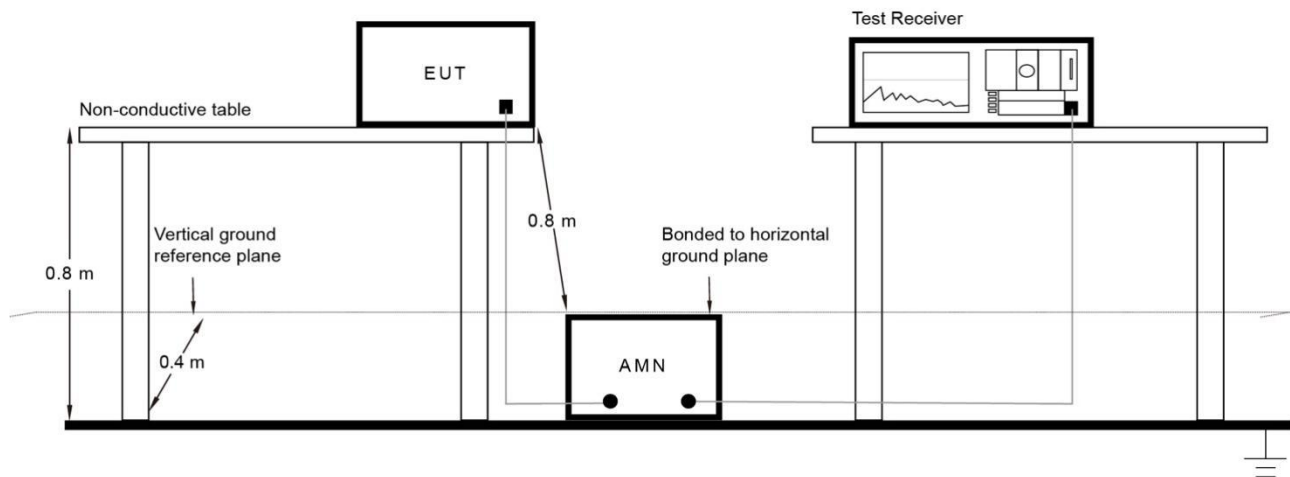

6.8.3. Test Result

Refer to Appendix A.8.

Appendix A – Test Result

A.1 Duty Cycle Test Result

Test Site	SIP-TR1	Test Engineer	Ryan Wang
Test Date	2025-03-17		

Test Mode	Duty Cycle
802.11b	93.58%
802.11g	48.57%
802.11n-HT20	70.63%

Duty Cycle (T = Transmission Duration)

802.11b ($T = 4.505\text{ms}$)

Mode	Trace	Scale	X	Y	Function	Function Width	Function Value
1	A2	t	(A)	4.505 ms	0.2150 dB		
2	F	t	(A)	4.452 ms	15.96 dbm		
3	A4	t	(A)	4.814 ms (A)	1.054 dB		
4	F	t	(A)	4.452 ms	15.96 dbm		
5	B						
6	B						

802.11g ($T = 739.7\mu\text{s}$)

Mode	Trace	Scale	X	Y	Function	Function Width	Function Value
1	A2	t	(A)	739.7 μs (A)	0.09705 dB		
2	F	t	(A)	2.359 ms	11.76 dbm		
3	A4	t	(A)	1.523 ms (A)	0.4514 dB		
4	F	t	(A)	2.359 ms	11.76 dbm		
5	B						
6	B						

802.11n-HT20 ($T = 700.7\mu\text{s}$)

Mode	Trace	Scale	X	Y	Function	Function Width	Function Value
1	A2	t	(A)	700.7 μs (A)	-0.5274 dB		
2	F	t	(A)	956.8 μs	12.50 dbm		
3	A4	t	(A)	996.1 μs (A)	-1.549 dB		
4	F	t	(A)	956.8 μs	12.50 dbm		
5	B						
6	B						


A.2 6dB Bandwidth Test Result

Test Site	SIP-TR1	Test Engineer	Ryan Wang
Test Date	2025-03-17		


Test Mode	Data Rate / MCS	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
11b	1Mbps	01	2412	9.552	≥ 0.5
11b	1Mbps	06	2437	9.030	≥ 0.5
11b	1Mbps	11	2462	9.057	≥ 0.5
11g	6Mbps	01	2412	16.340	≥ 0.5
11g	6Mbps	06	2437	16.350	≥ 0.5
11g	6Mbps	11	2462	16.350	≥ 0.5
11n-HT20	MCS0	01	2412	17.590	≥ 0.5
11n-HT20	MCS0	06	2437	17.580	≥ 0.5
11n-HT20	MCS0	11	2462	17.590	≥ 0.5

802.11b 6dB Bandwidth


Channel 01 (2412MHz)

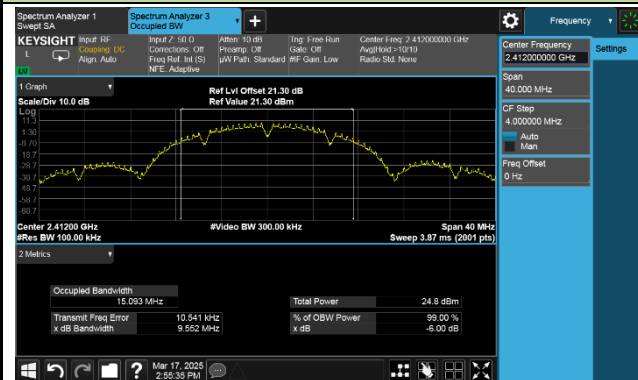

Channel 06 (2437MHz)

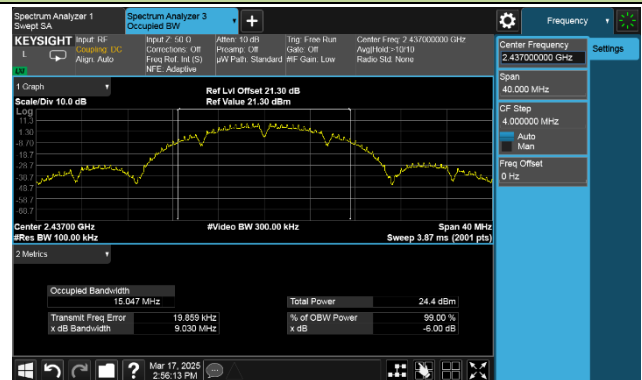


Channel 11 (2462MHz)

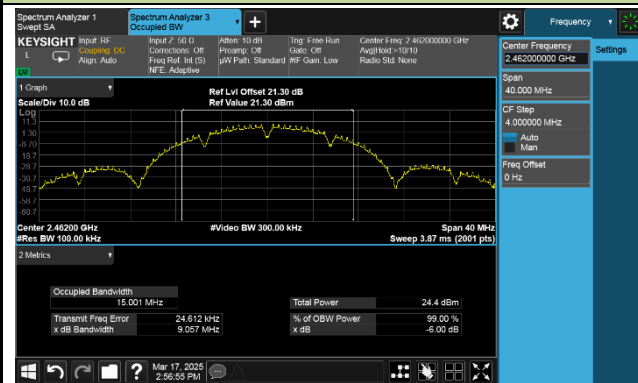


802.11g 6dB Bandwidth


Channel 01 (2412MHz)

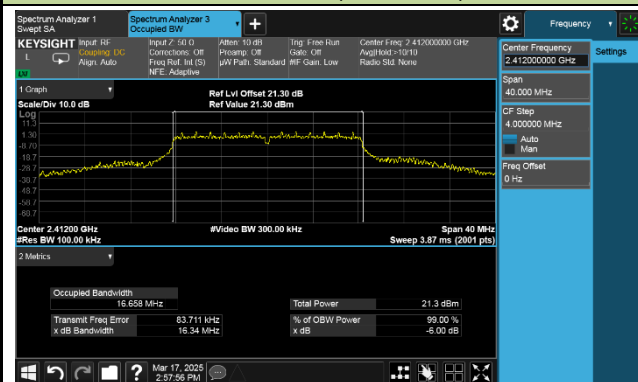


Channel 06 (2437MHz)

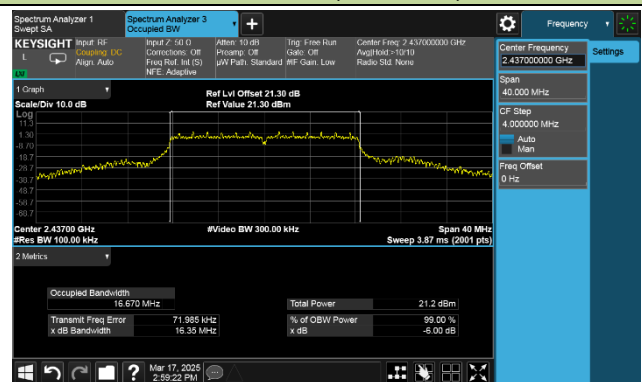

Channel 11 (2462MHz)

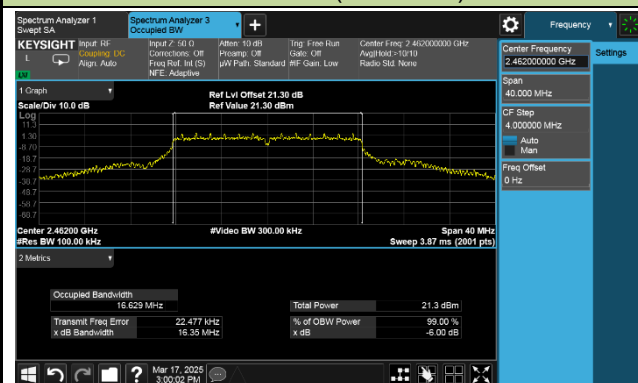

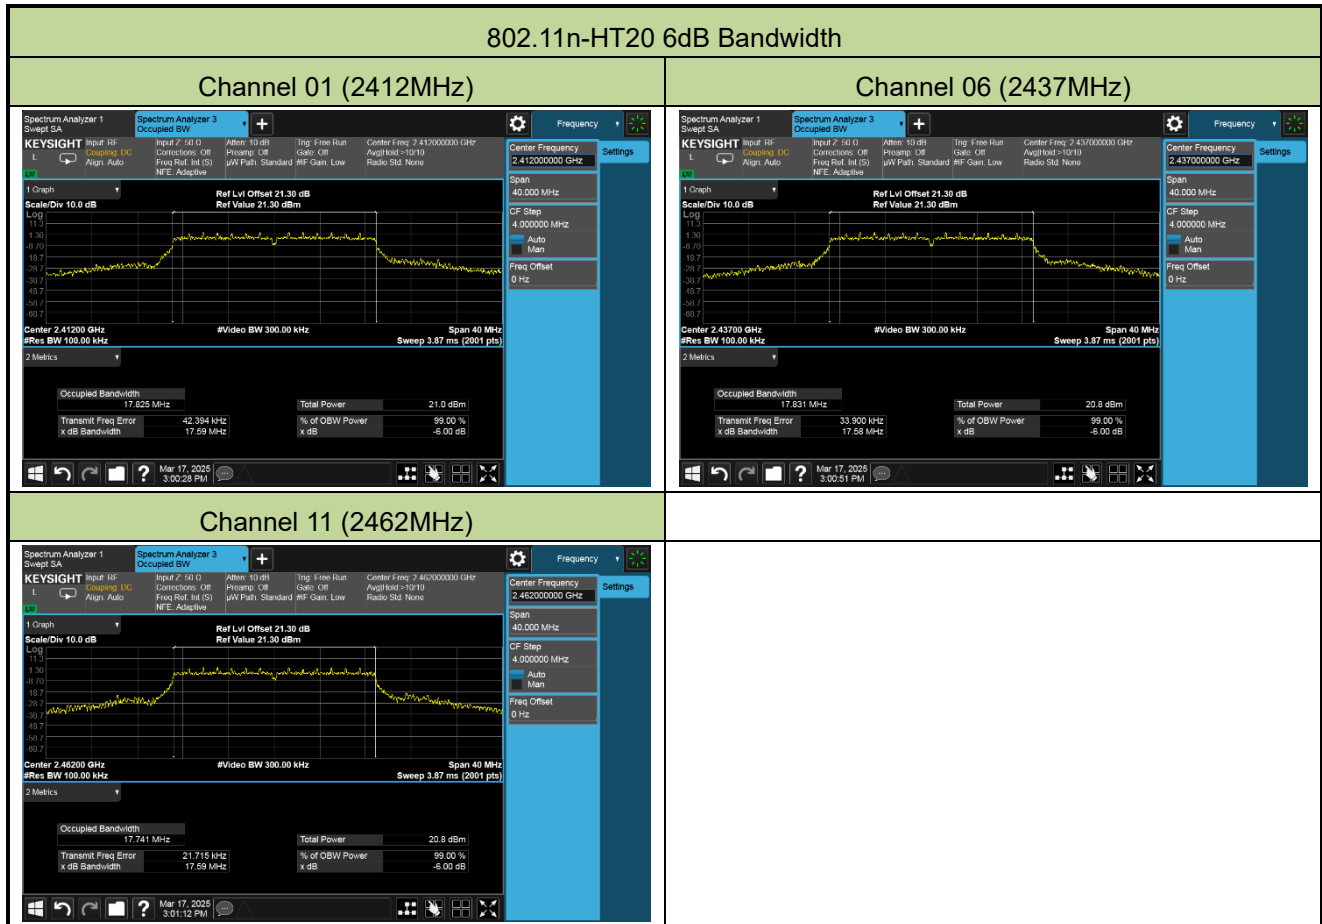

A.3 Output Power Test Result

Test Site	SIP-TR1	Test Engineer	Ryan Wang
Test Date	2025-03-17		

Test Result of Peak Output Power

Test Mode	Data Rate / MCS	Channel No.	Freq. (MHz)	Peak Power (dBm)	Limit (dBm)
11b	1Mbps	01	2412	16.22	≤ 30.00
11b	1Mbps	06	2437	16.14	≤ 30.00
11b	1Mbps	11	2462	15.96	≤ 30.00
11g	6Mbps	01	2412	19.13	≤ 30.00
11g	6Mbps	06	2437	19.23	≤ 30.00
11g	6Mbps	11	2462	18.92	≤ 30.00
11n-HT20	MCS0	01	2412	18.67	≤ 30.00
11n-HT20	MCS0	06	2437	18.54	≤ 30.00
11n-HT20	MCS0	11	2462	18.62	≤ 30.00

Test Result of Average Output Power (Reporting Only)

Test Mode	Data Rate / MCS	Channel No.	Freq. (MHz)	Average Power (dBm)	Limit (dBm)
11b	1Mbps	01	2412	14.11	≤ 30.00
11b	1Mbps	06	2437	13.94	≤ 30.00
11b	1Mbps	11	2462	13.81	≤ 30.00
11g	6Mbps	01	2412	10.71	≤ 30.00
11g	6Mbps	06	2437	10.63	≤ 30.00
11g	6Mbps	11	2462	10.45	≤ 30.00
11n-HT20	MCS0	01	2412	10.72	≤ 30.00
11n-HT20	MCS0	06	2437	10.69	≤ 30.00
11n-HT20	MCS0	11	2462	10.44	≤ 30.00


A.4 Power Spectral Density Test Result

Test Site	SIP-TR1	Test Engineer	Ryan Wang
Test Date	2025-06-06		

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Final PSD (dBm/3kHz)	Limit (dBm/3kHz)
11b	1Mbps	01	2412	-6.14	≤ 8.00
11b	1Mbps	06	2437	-8.27	≤ 8.00
11b	1Mbps	11	2462	-8.70	≤ 8.00
11g	6Mbps	01	2412	-13.14	≤ 8.00
11g	6Mbps	06	2437	-14.36	≤ 8.00
11g	6Mbps	11	2462	-13.08	≤ 8.00
11n-HT20	MCS0	01	2412	-13.09	≤ 8.00
11n-HT20	MCS0	06	2437	-12.76	≤ 8.00
11n-HT20	MCS0	11	2462	-13.65	≤ 8.00

802.11b - PSD

Channel 01 (2412MHz)

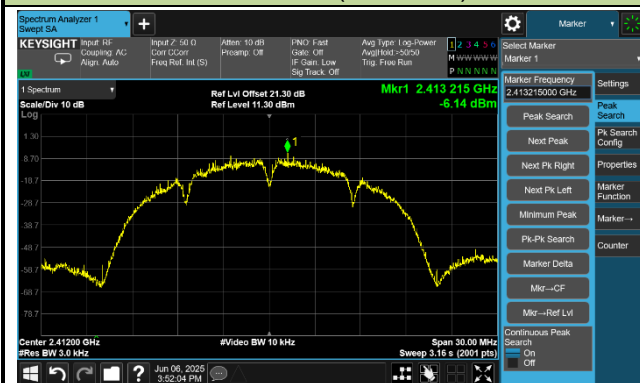

Channel 06 (2437MHz)




Channel 11 (2462MHz)



802.11g - PSD


Channel 01 (2412MHz)

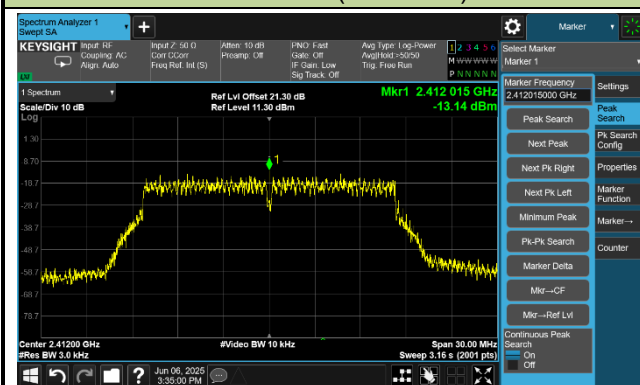

Channel 06 (2437MHz)




Channel 11 (2462MHz)

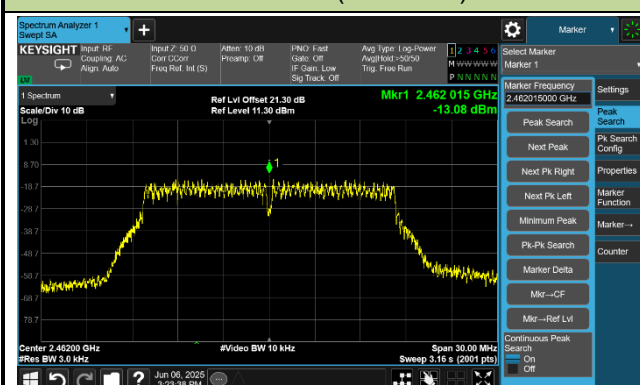


802.11n-HT20 - PSD

Channel 01 (2412MHz)

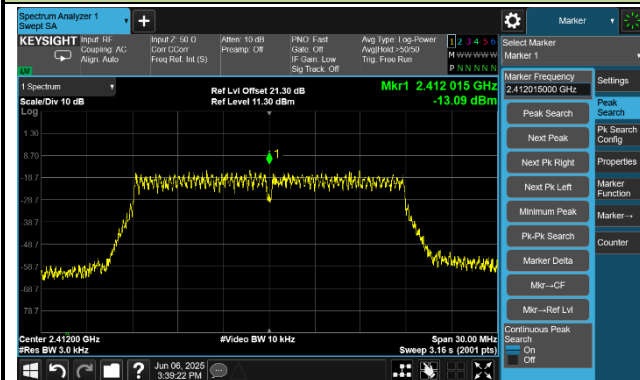

Channel 06 (2437MHz)

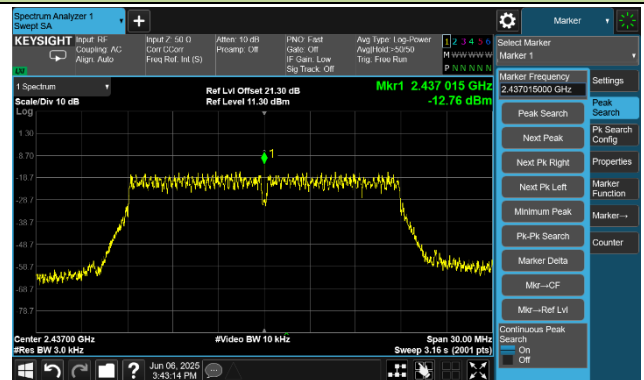

Channel 11 (2462MHz)



A.5 Conducted Band Edge and Out-of-Band Emissions Test Result


Test Site	SIP-TR1	Test Engineer	Ryan Wang
Test Date	2025-03-17		

Test Mode	Data Rate / MCS	Channel No.	Frequency (MHz)	Limit
11b	1Mbps	01	2412	20dBc
11b	1Mbps	06	2437	20dBc
11b	1Mbps	11	2462	20dBc
11g	6Mbps	01	2412	20dBc
11g	6Mbps	06	2437	20dBc
11g	6Mbps	11	2462	20dBc
11n-HT20	MCS0	01	2412	20dBc
11n-HT20	MCS0	06	2437	20dBc
11n-HT20	MCS0	11	2462	20dBc

802.11b Out-of-Band Emissions

Channel 01 (2412MHz)


Reference Level

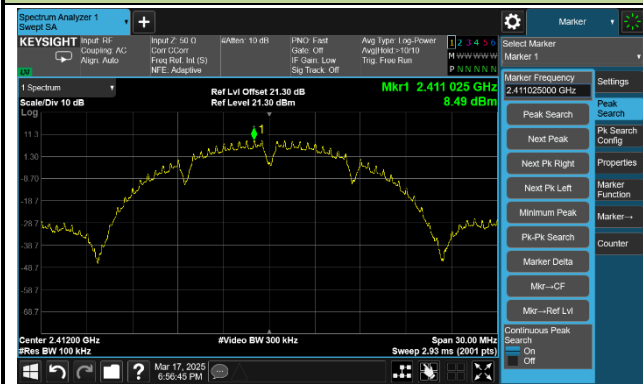

Low Band Edge




Spurious Emission

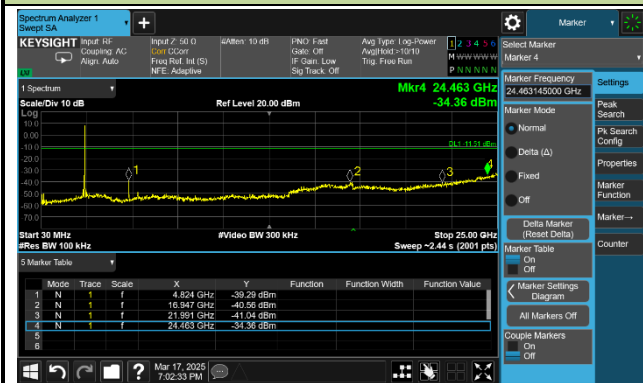


Channel 06 (2437MHz)

Reference Level

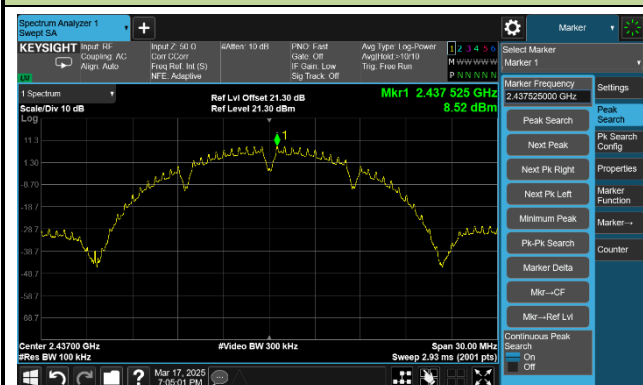


Spurious Emission

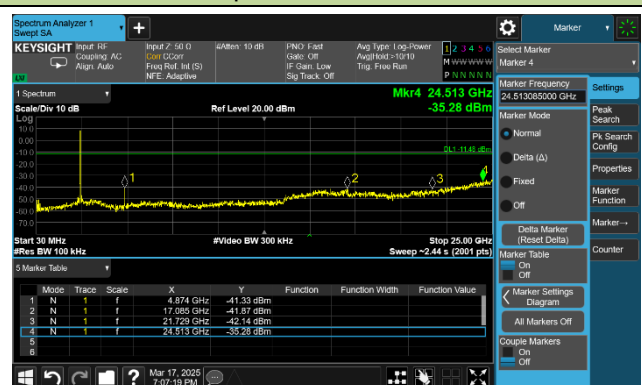


802.11b Out-of-Band Emissions

Channel 11 (2462MHz)


Reference Level

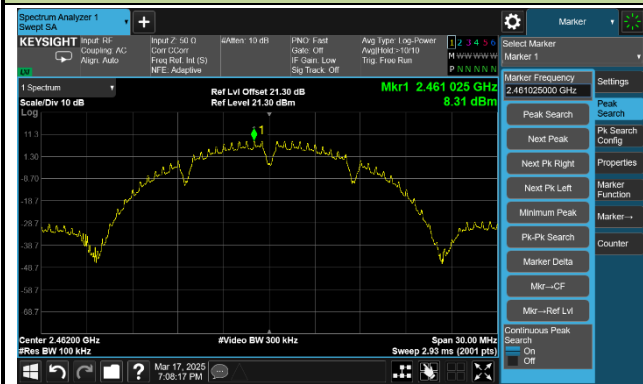

High Band Edge

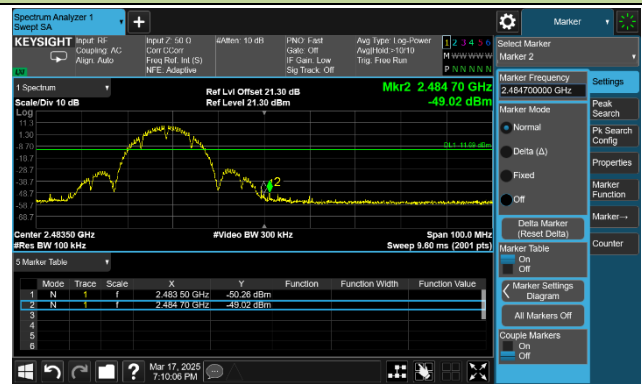


Spurious Emission

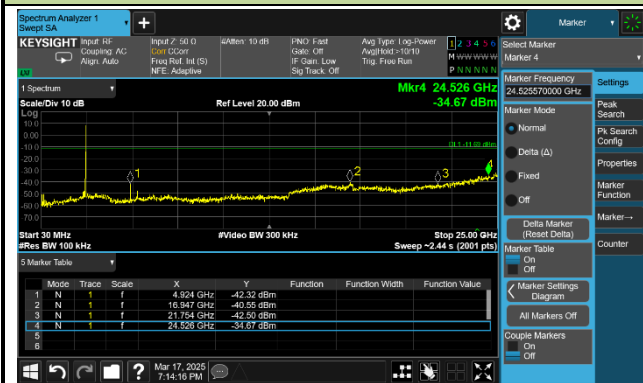

802.11g Out-of-Band Emissions

Channel 01 (2412MHz)


Reference Level

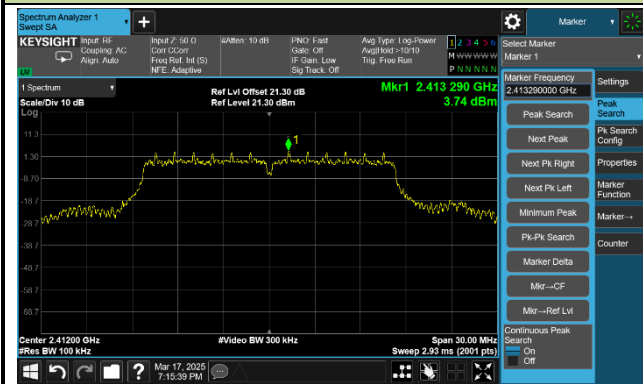

Low Band Edge




Spurious Emission

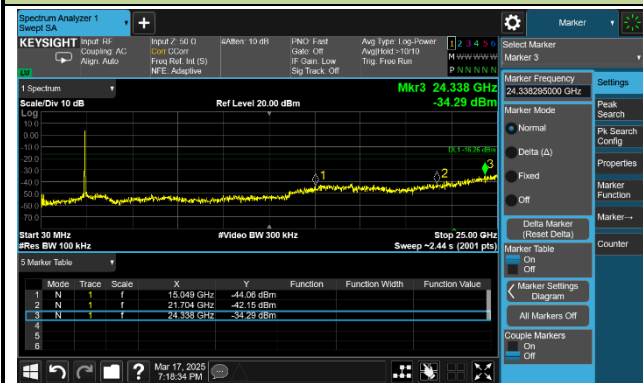


Channel 06 (2437MHz)

Reference Level

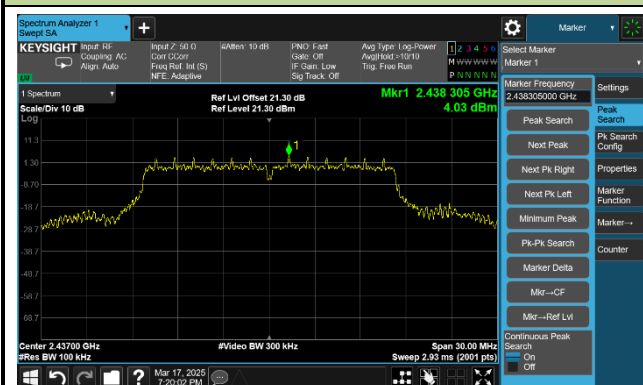


Spurious Emission

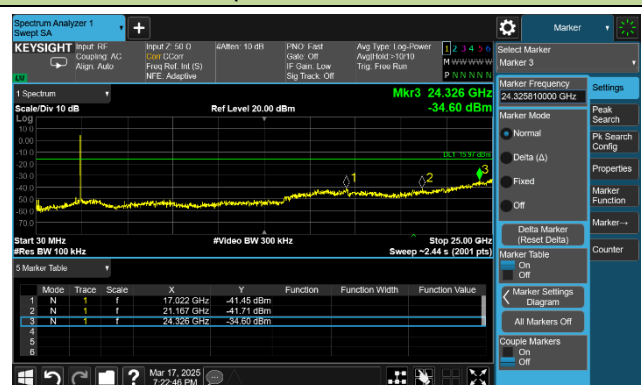


802.11g Out-of-Band Emissions

Channel 11 (2462MHz)


Reference Level

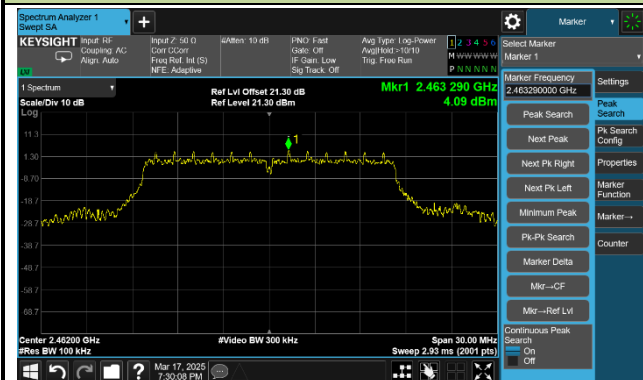

High Band Edge

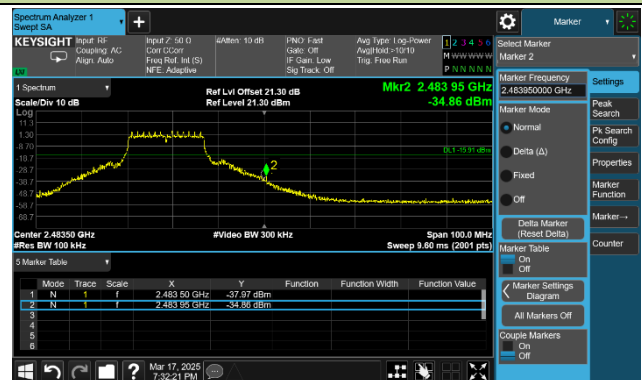

Spurious Emission

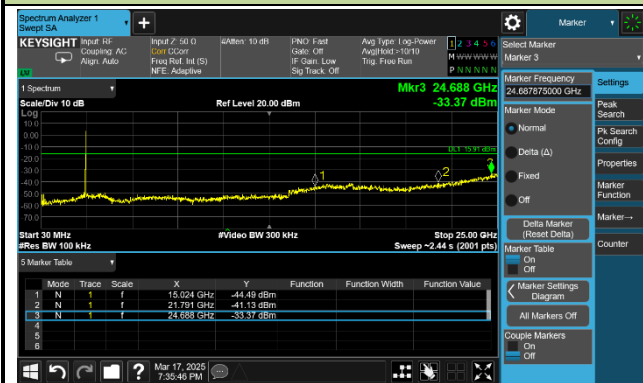


802.11n-HT20 Out-of-Band Emissions

Channel 01 (2412MHz)

Reference Level



Low Band Edge

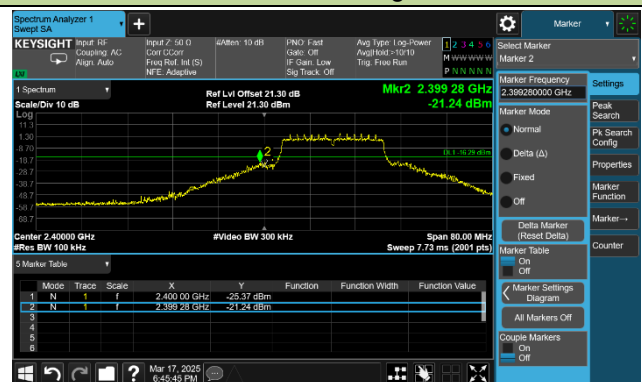

Spurious Emission



Channel 06 (2437MHz)

Reference Level




Spurious Emission




802.11n-HT20 Out-of-Band Emissions

Channel 11 (2462MHz)


Reference Level

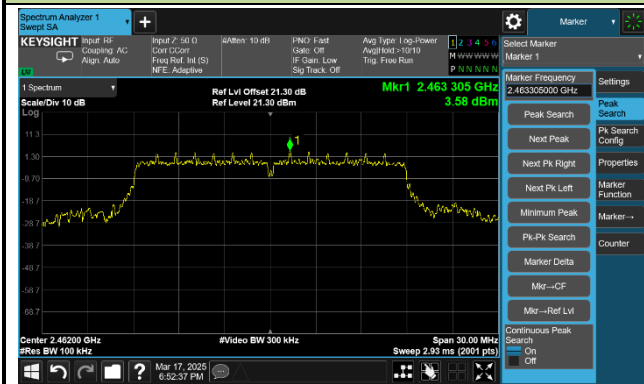

High Band Edge

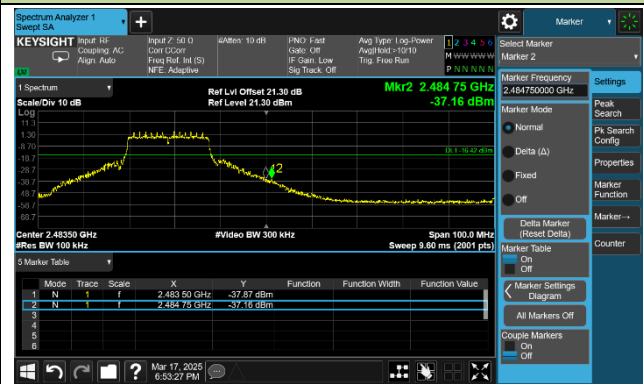

Spurious Emission

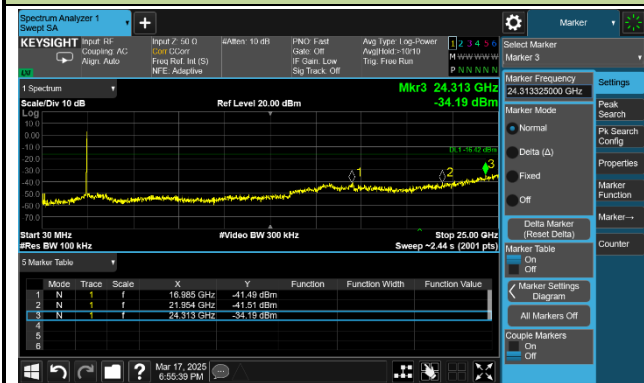

A.6 Radiated Spurious Emission Test Result

Test Site	WJ-AC1	Test Engineer	Carl Jiang
Test Date	2025-06-28 ~ 2025-06-30	Test Mode	802.11b
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	4825.00	38.24	8.41	46.65	54.00	-7.35	Average	Horizontal
	4825.00	39.14	8.41	47.55	74.00	-26.45	Peak	Horizontal
	7562.00	29.44	13.92	43.36	74.00	-30.64	Peak	Horizontal
	17828.30	17.26	29.37	46.63	54.00	-7.37	Average	Horizontal
	17828.30	28.03	29.37	57.40	74.00	-16.60	Peak	Horizontal
	4825.00	36.99	8.41	45.40	54.00	-8.60	Average	Vertical
	4825.00	38.87	8.41	47.28	74.00	-26.72	Peak	Vertical
	8255.60	29.97	14.40	44.37	74.00	-29.63	Peak	Vertical
	17979.60	17.15	29.73	46.88	54.00	-7.12	Average	Vertical
	17979.60	28.73	29.73	58.46	74.00	-15.54	Peak	Vertical
06	4874.30	37.44	8.45	45.89	74.00	-28.11	Peak	Horizontal
	7310.40	31.19	13.57	44.76	54.00	-9.24	Average	Horizontal
	7310.40	33.83	13.57	47.40	74.00	-26.60	Peak	Horizontal
	17974.50	17.08	29.46	46.54	54.00	-7.46	Average	Horizontal
	17974.50	28.94	29.46	58.40	74.00	-15.60	Peak	Horizontal
	4874.30	34.89	8.45	43.34	74.00	-30.66	Peak	Vertical
	7310.40	33.81	13.57	47.38	54.00	-6.62	Average	Vertical
	7310.40	36.69	13.57	50.26	74.00	-23.74	Peak	Vertical
	17875.90	17.03	29.66	46.69	54.00	-7.31	Average	Vertical
	17875.90	28.16	29.66	57.82	74.00	-16.18	Peak	Vertical
11	4923.60	35.73	8.46	44.19	74.00	-29.81	Peak	Horizontal
	7522.90	29.65	13.91	43.56	74.00	-30.44	Peak	Horizontal
	17864.00	17.11	29.27	46.38	54.00	-7.62	Average	Horizontal
	17864.00	28.69	29.27	57.96	74.00	-16.04	Peak	Horizontal
	4923.60	34.92	8.46	43.38	74.00	-30.62	Peak	Vertical
	7385.20	29.16	13.44	42.60	54.00	-11.40	Average	Vertical
	7385.20	34.47	13.44	47.91	74.00	-26.09	Peak	Vertical
	17780.70	17.03	28.73	45.76	54.00	-8.24	Average	Vertical

	17780.70	28.86	28.73	57.59	74.00	-16.41	Peak	Vertical
Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	WJ-AC1	Test Engineer	Carl Jiang
Test Date	2025-06-30	Test Mode	802.11g
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	4816.50	33.31	8.41	41.72	74.00	-32.28	Peak	Horizontal
	7415.80	26.80	13.76	40.56	74.00	-33.44	Peak	Horizontal
	17724.60	17.03	28.97	46.00	54.00	-8.00	Average	Horizontal
	17724.60	28.89	28.97	57.86	74.00	-16.14	Peak	Horizontal
	4818.20	34.27	8.42	42.69	74.00	-31.31	Peak	Vertical
	7434.50	27.42	13.47	40.89	74.00	-33.11	Peak	Vertical
	17972.80	17.11	29.36	46.47	54.00	-7.53	Average	Vertical
	17972.80	28.43	29.36	57.79	74.00	-16.21	Peak	Vertical
06	4840.30	32.47	8.16	40.63	74.00	-33.37	Peak	Horizontal
	7312.10	22.58	13.54	36.12	54.00	-17.88	Average	Horizontal
	7312.10	34.10	13.54	47.64	74.00	-26.36	Peak	Horizontal
	17972.80	17.02	29.36	46.38	54.00	-7.62	Average	Horizontal
	17972.80	29.14	29.36	58.50	74.00	-15.50	Peak	Horizontal
	4819.90	33.73	8.43	42.16	74.00	-31.84	Peak	Vertical
	7318.90	22.58	13.42	36.00	54.00	-18.00	Average	Vertical
	7318.90	38.47	13.42	51.89	74.00	-22.11	Peak	Vertical
	17974.50	17.06	29.46	46.52	54.00	-7.48	Average	Vertical
	17974.50	28.79	29.46	58.25	74.00	-15.75	Peak	Vertical
11	4804.60	32.92	8.31	41.23	74.00	-32.77	Peak	Horizontal
	7386.90	31.85	13.47	45.32	74.00	-28.68	Peak	Horizontal
	17824.90	17.14	29.63	46.77	54.00	-7.23	Average	Horizontal
	17824.90	28.64	29.63	58.27	74.00	-15.73	Peak	Horizontal
	4746.80	32.99	8.28	41.27	74.00	-32.73	Peak	Vertical
	7375.00	22.06	13.33	35.39	54.00	-18.61	Average	Vertical
	7375.00	33.74	13.33	47.07	74.00	-26.93	Peak	Vertical
	17969.40	17.13	29.18	46.31	54.00	-7.69	Average	Vertical
	17969.40	29.24	29.18	58.42	74.00	-15.58	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Carl Jiang
Test Date	2025-06-30	Test Mode	802.11n-HT20
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		


Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	4835.20	33.24	8.24	41.48	74.00	-32.52	Peak	Horizontal
	7568.80	30.00	13.99	43.99	74.00	-30.01	Peak	Horizontal
	17969.40	17.11	29.18	46.29	54.00	-7.71	Average	Horizontal
	17969.40	28.71	29.18	57.89	74.00	-16.11	Peak	Horizontal
	4818.20	34.04	8.42	42.46	74.00	-31.54	Peak	Vertical
	7434.50	27.86	13.47	41.33	74.00	-32.67	Peak	Vertical
	17932.00	17.16	29.33	46.49	54.00	-7.51	Average	Vertical
	17932.00	28.93	29.33	58.26	74.00	-15.74	Peak	Vertical
06	4661.80	33.24	8.37	41.61	74.00	-32.39	Peak	Horizontal
	7310.40	21.87	13.57	35.44	54.00	-18.56	Average	Horizontal
	7310.40	33.79	13.57	47.36	74.00	-26.64	Peak	Horizontal
	17923.50	17.11	29.20	46.31	54.00	-7.69	Average	Horizontal
	17923.50	28.67	29.20	57.87	74.00	-16.13	Peak	Horizontal
	4672.00	33.62	8.23	41.85	74.00	-32.15	Peak	Vertical
	7313.80	22.85	13.51	36.36	54.00	-17.64	Average	Vertical
	7313.80	35.81	13.51	49.32	74.00	-24.68	Peak	Vertical
	17911.60	17.03	28.75	45.78	54.00	-8.22	Average	Vertical
	17911.60	29.67	28.75	58.42	74.00	-15.58	Peak	Vertical
11	4932.10	33.03	8.41	41.44	74.00	-32.56	Peak	Horizontal
	7454.90	29.36	13.69	43.05	74.00	-30.95	Peak	Horizontal
	17830.00	17.13	29.24	46.37	54.00	-7.63	Average	Horizontal
	17830.00	29.42	29.24	58.66	74.00	-15.34	Peak	Horizontal
	4843.70	33.77	8.19	41.96	74.00	-32.04	Peak	Vertical
	7385.20	32.29	13.44	45.73	74.00	-28.27	Peak	Vertical
	17989.80	17.02	29.28	46.30	54.00	-7.70	Average	Vertical
	17989.80	28.86	29.28	58.14	74.00	-15.86	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Result of Radiated Emission below 1GHz:

Site	WJ-AC2	Test Date	2025-07-09
Temperature	23.6°C	Humidity	51.4%
Limit	FCC_Part 15.209_RSE (3m)	Test Engineer	Bob Zhang
Factor	VULB 9163_07097	Polarity	Horizontal
EUT	Arm-type Fully Automatic Digital Blood Pressure Monitor	Test Voltage	By battery
Test Mode	Transmit by 802.11g at 2437MHz		

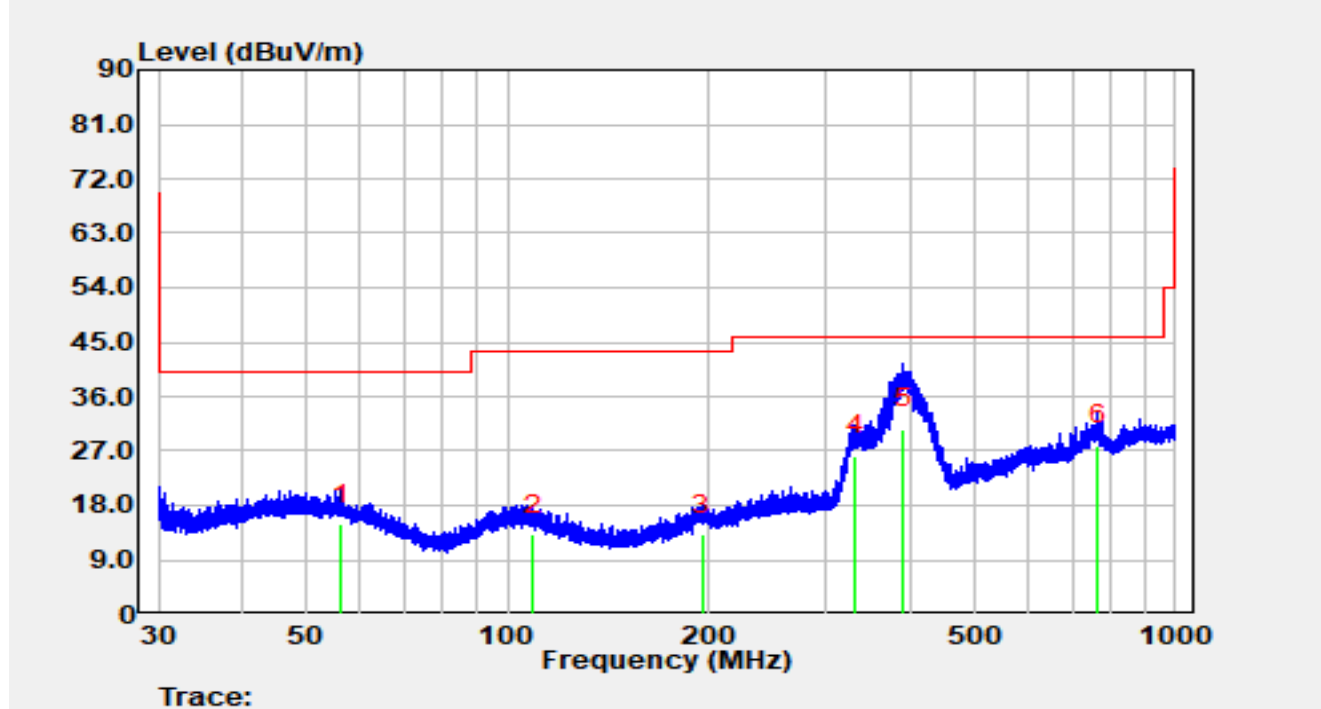


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		56.395	-4.36	19.29	14.93	-25.07	40.00	QP
2		109.412	-4.76	17.86	13.10	-30.40	43.50	QP
3		195.479	-4.83	18.02	13.19	-30.31	43.50	QP
4		331.936	5.19	21.06	26.25	-19.75	46.00	QP
5	*	391.546	8.37	22.36	30.73	-15.27	46.00	QP
6		763.911	-0.63	28.65	28.01	-17.99	46.00	QP

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Site	WJ-AC2	Test Date	2025-07-09
Temperature	23.6°C	Humidity	51.4%
Limit	FCC_Part 15.209_RSE (3m)	Test Engineer	Bob Zhang
Factor	VULB 9163_07097	Polarity	Vertical
EUT	Arm-type Fully Automatic Digital Blood Pressure Monitor	Test Voltage	By battery
Test Mode	Transmit by 802.11g at 2437MHz		

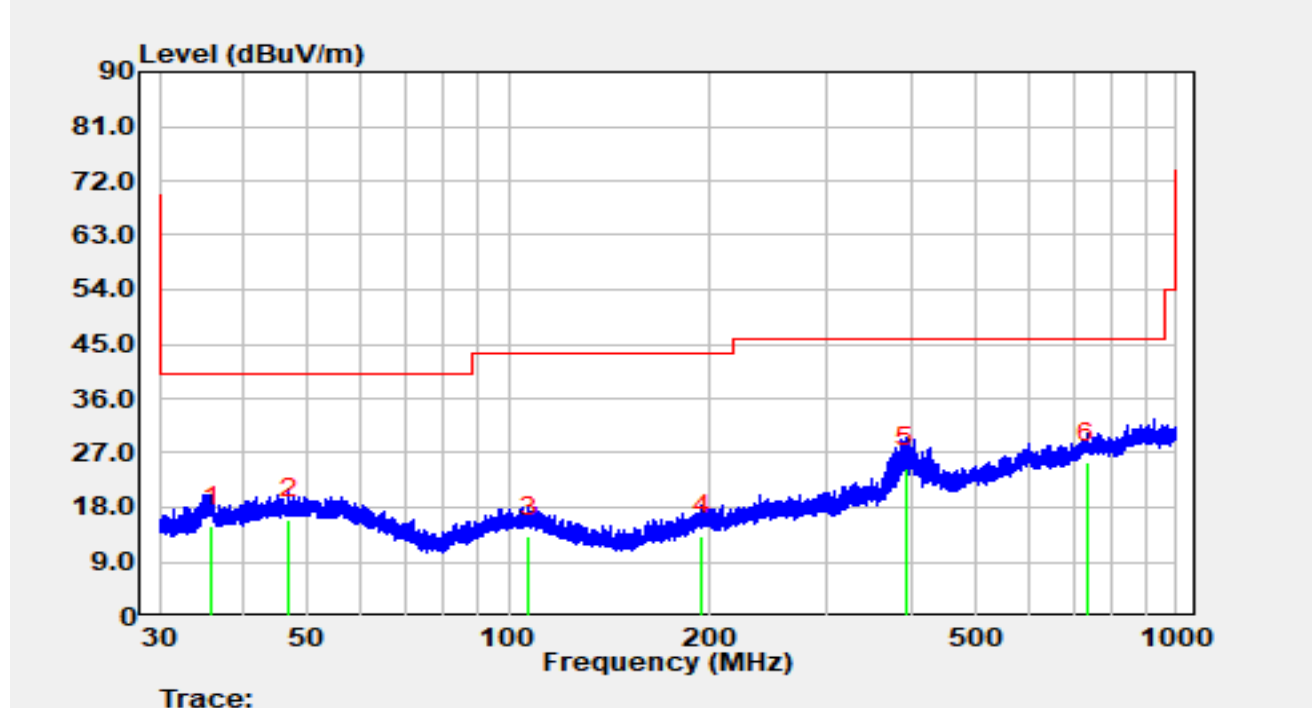


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		36.001	-2.46	17.32	14.87	-25.13	40.00	QP
2		46.929	-3.89	19.92	16.03	-23.97	40.00	QP
3		107.247	-4.86	18.04	13.18	-30.32	43.50	QP
4		195.000	-4.70	18.01	13.31	-30.19	43.50	QP
5		393.748	2.03	22.44	24.47	-21.53	46.00	QP
6	*	735.780	-2.98	28.35	25.37	-20.63	46.00	QP

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

A.7 Radiated Restricted Band Edge Test Result

Site	WJ-AC1	Test Date	2025-06-28
Temperature	20.4 °C	Humidity	40.6 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Arm-type Fully Automatic Digital Blood Pressure Monitor	Test Voltage	By battery
Test Mode	Transmit by 802.11b at 2412MHz		

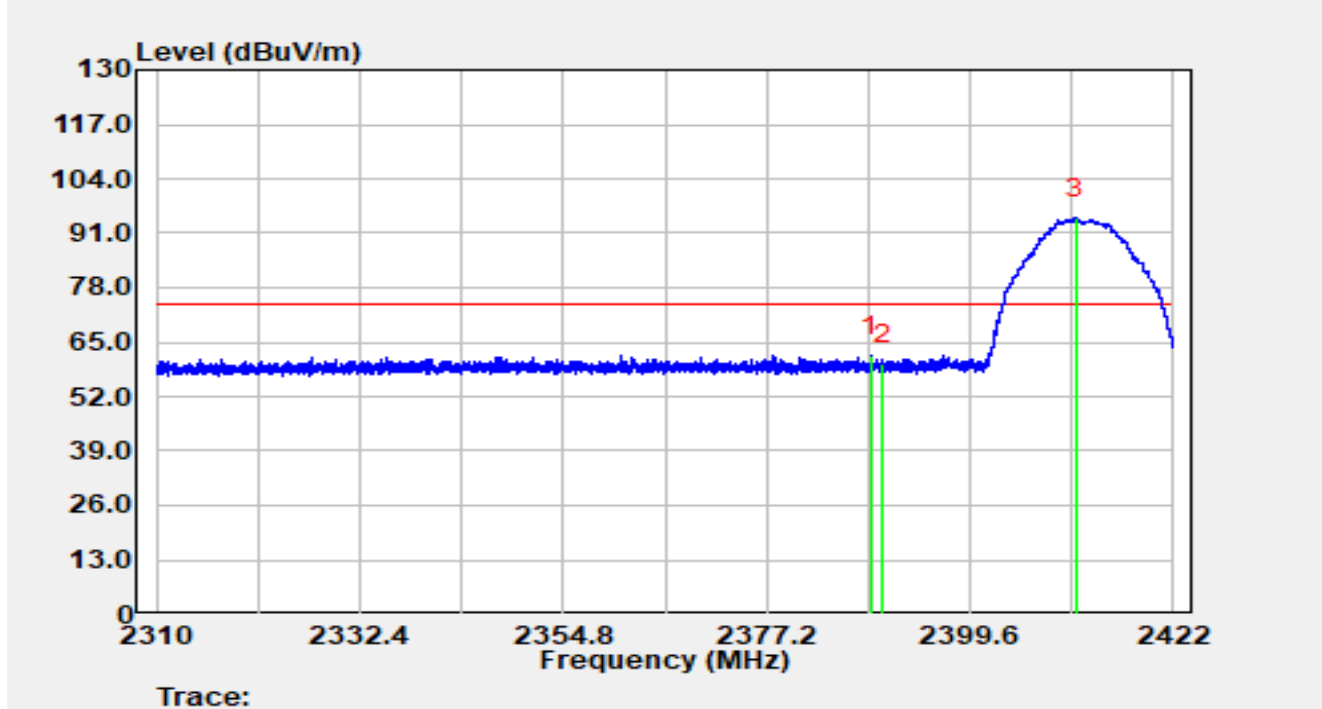


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2388.646	24.89	36.82	61.71	-12.29	74.00	Peak
2		2390.000	22.90	36.83	59.73	-14.27	74.00	Peak
3		2411.237	57.60	36.97	94.57	N/A	N/A	Peak

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-06-28
Temperature	20.4 °C	Humidity	40.6 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Arm-type Fully Automatic Digital Blood Pressure Monitor	Test Voltage	By battery
Test Mode	Transmit by 802.11b at 2412MHz		

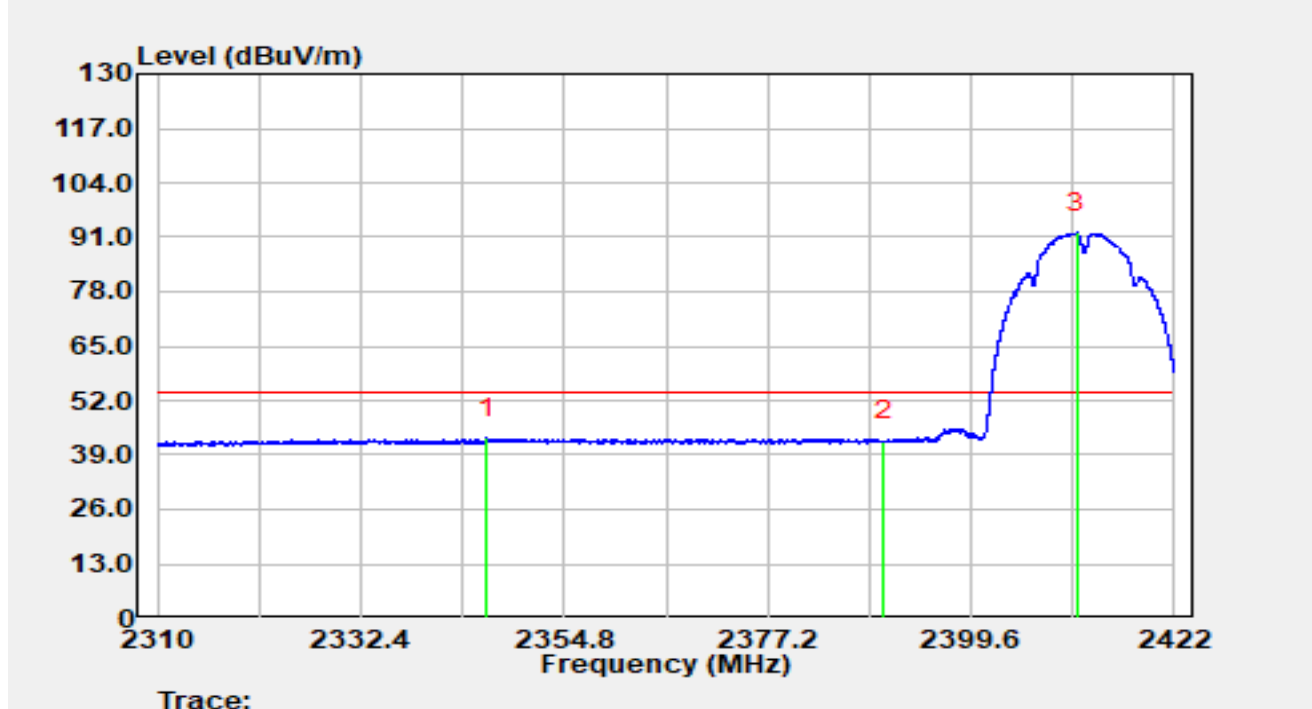


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2346.322	6.40	36.70	43.10	-10.90	54.00	Average
2		2390.000	5.42	36.83	42.25	-11.75	54.00	Average
3		2411.293	55.11	36.97	92.08	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-06-28
Temperature	20.4 °C	Humidity	40.6 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Arm-type Fully Automatic Digital Blood Pressure Monitor	Test Voltage	By battery
Test Mode	Transmit by 802.11b at 2412MHz		

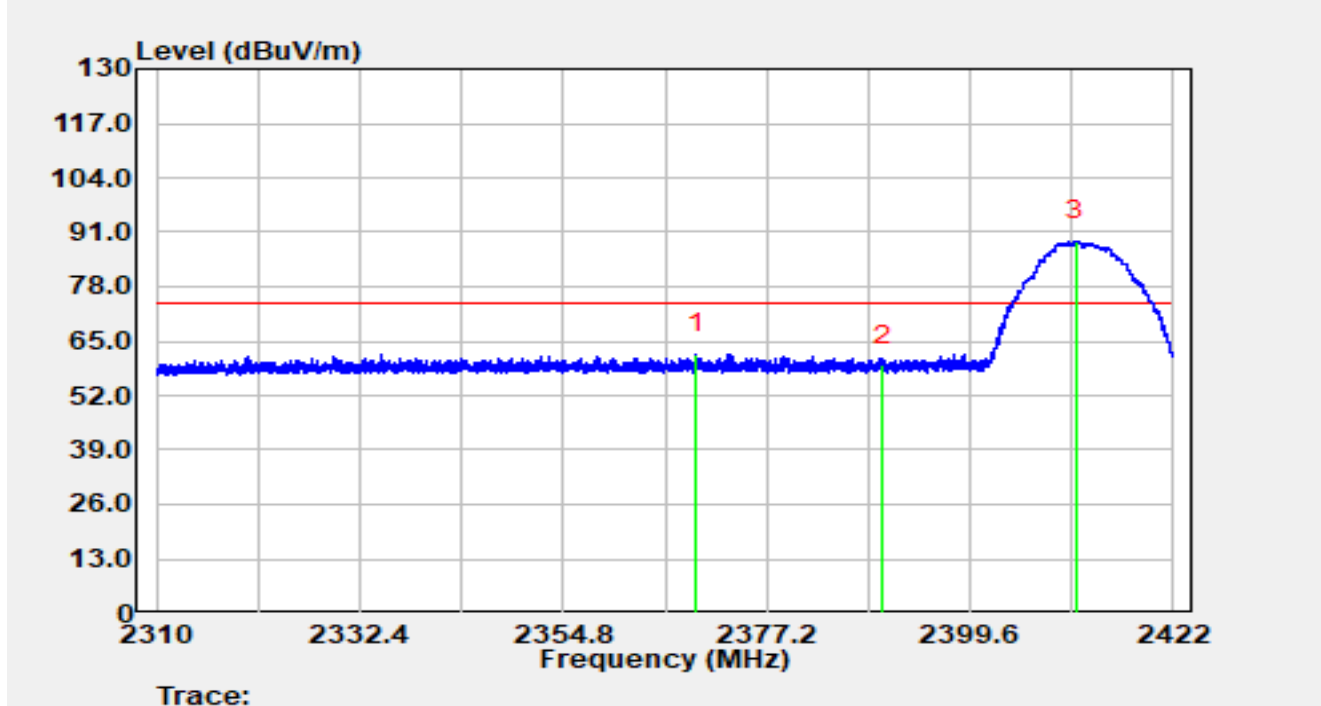


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2369.506	25.23	36.73	61.96	-12.04	74.00	Peak
2		2390.000	22.39	36.83	59.22	-14.78	74.00	Peak
3		2411.192	51.93	36.97	88.90	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-06-28
Temperature	20.4 °C	Humidity	40.6 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Arm-type Fully Automatic Digital Blood Pressure Monitor	Test Voltage	By battery
Test Mode	Transmit by 802.11b at 2412MHz		

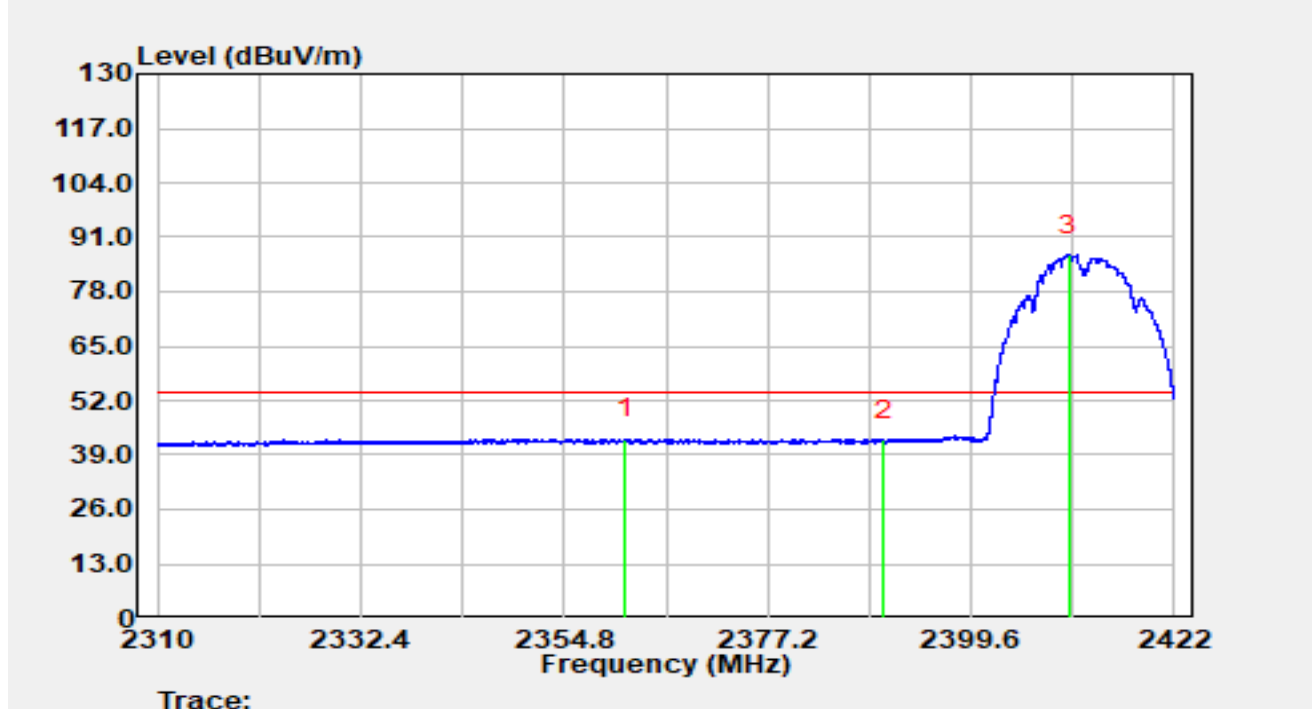


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2361.542	6.08	36.72	42.79	-11.21	54.00	Average
2		2390.000	5.77	36.83	42.60	-11.40	54.00	Average
3		2410.385	49.65	36.97	86.62	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-06-28
Temperature	20.4 °C	Humidity	40.6 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Arm-type Fully Automatic Digital Blood Pressure Monitor	Test Voltage	By battery
Test Mode	Transmit by 802.11b at 2462MHz		

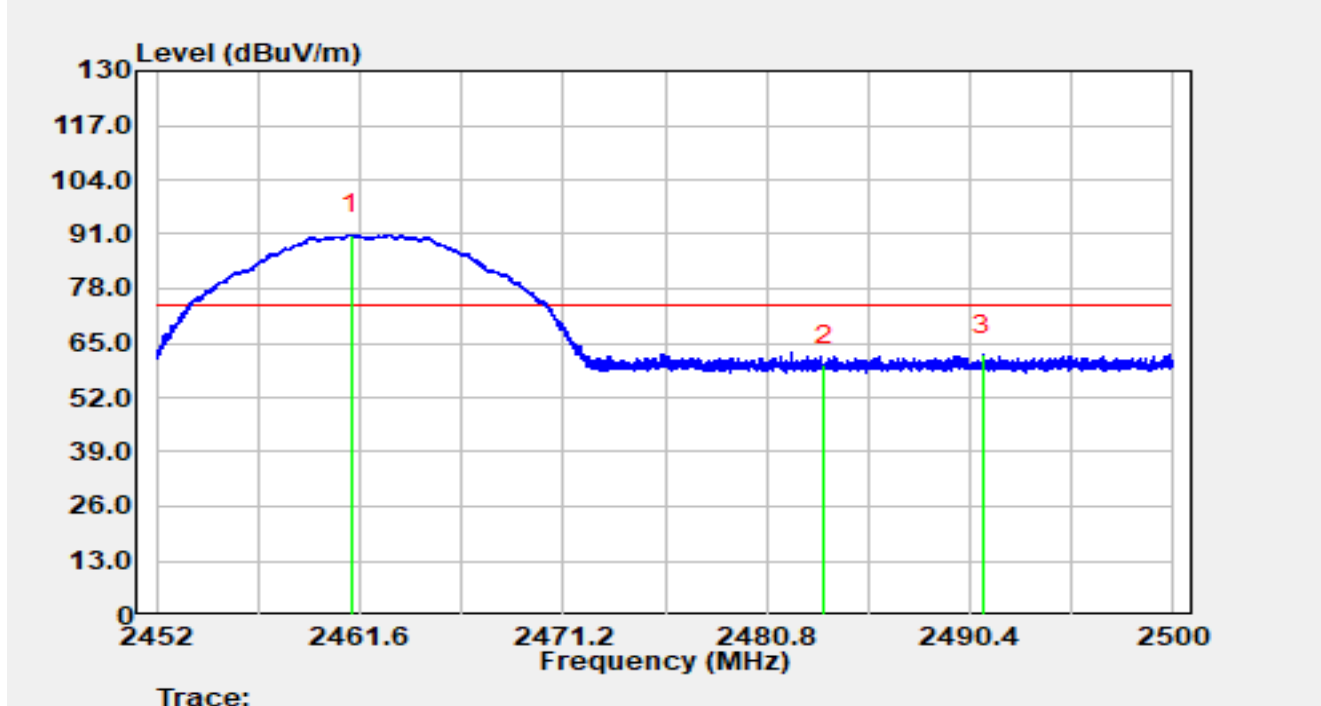


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2461.202	53.97	37.00	90.97	N/A	N/A	Peak
2		2483.500	22.59	37.05	59.64	-14.36	74.00	Peak
3	*	2491.010	25.08	37.07	62.15	-11.85	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-06-28
Temperature	20.4 °C	Humidity	40.6 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Arm-type Fully Automatic Digital Blood Pressure Monitor	Test Voltage	By battery
Test Mode	Transmit by 802.11b at 2462MHz		

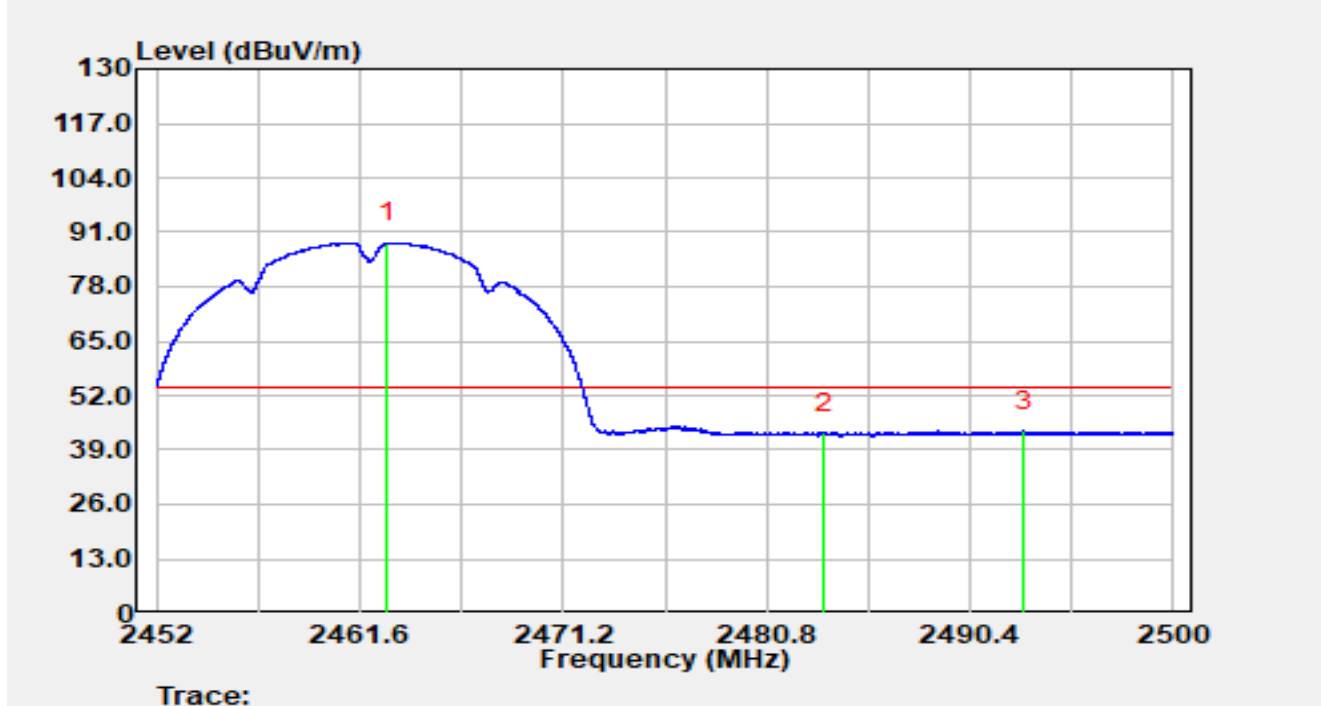


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2462.877	51.49	37.00	88.49	N/A	N/A	Average
2		2483.500	5.95	37.05	43.00	-11.00	54.00	Average
3	*	2492.973	6.35	37.07	43.42	-10.58	54.00	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-06-28
Temperature	20.4 °C	Humidity	40.6 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Arm-type Fully Automatic Digital Blood Pressure Monitor	Test Voltage	By battery
Test Mode	Transmit by 802.11b at 2462MHz		

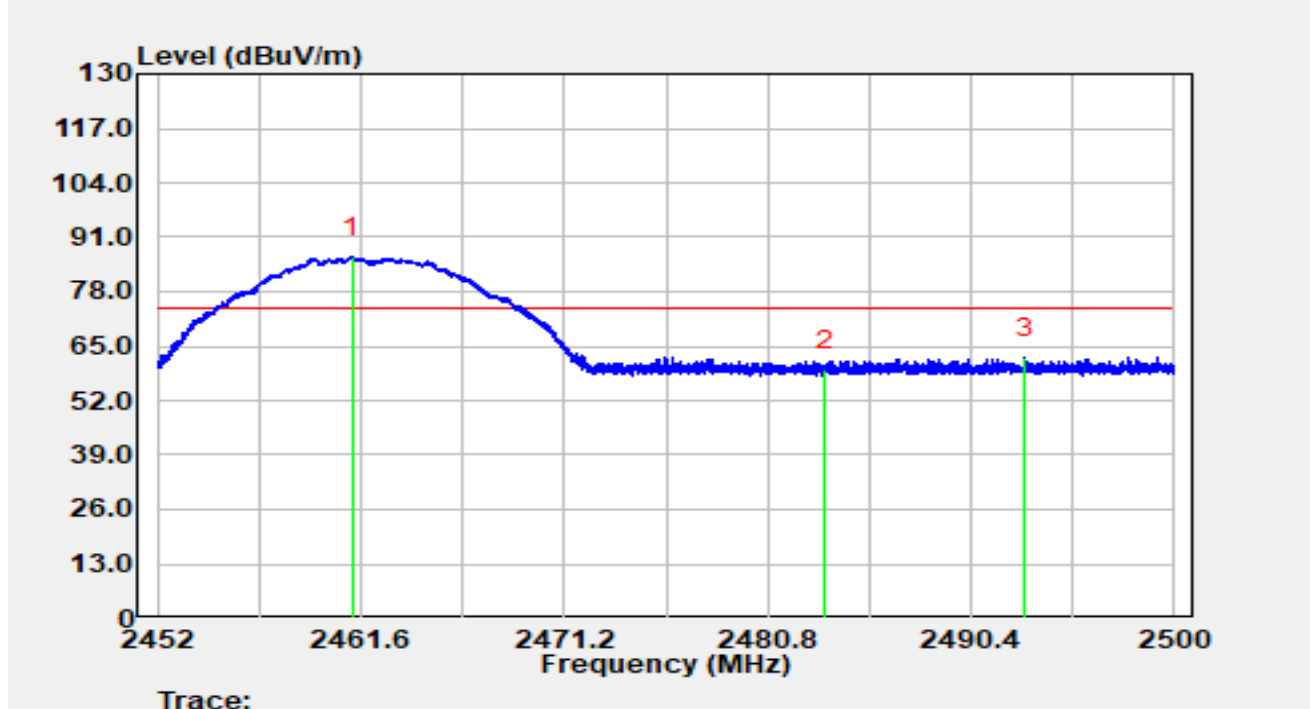


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2461.206	49.20	37.00	86.20	N/A	N/A	Peak
2		2483.500	22.23	37.05	59.28	-14.72	74.00	Peak
3	*	2492.925	25.19	37.07	62.26	-11.74	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-06-28
Temperature	20.4 °C	Humidity	40.6 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Arm-type Fully Automatic Digital Blood Pressure Monitor	Test Voltage	By battery
Test Mode	Transmit by 802.11b at 2462MHz		

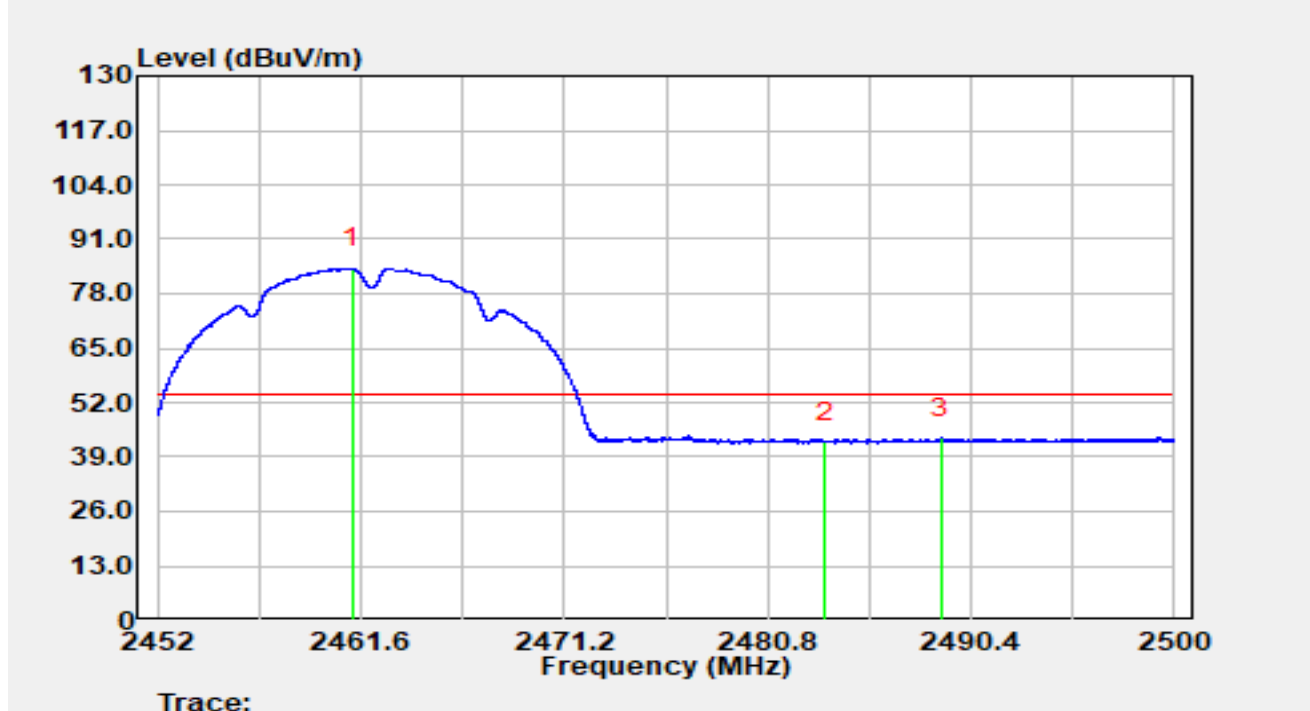


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2461.163	46.97	37.00	83.97	N/A	N/A	Average
2		2483.500	5.46	37.05	42.52	-11.48	54.00	Average
3	*	2488.984	6.44	37.07	43.51	-10.49	54.00	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-06-28
Temperature	20.4 °C	Humidity	40.6 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Arm-type Fully Automatic Digital Blood Pressure Monitor	Test Voltage	By battery
Test Mode	Transmit by 802.11g at 2412MHz		

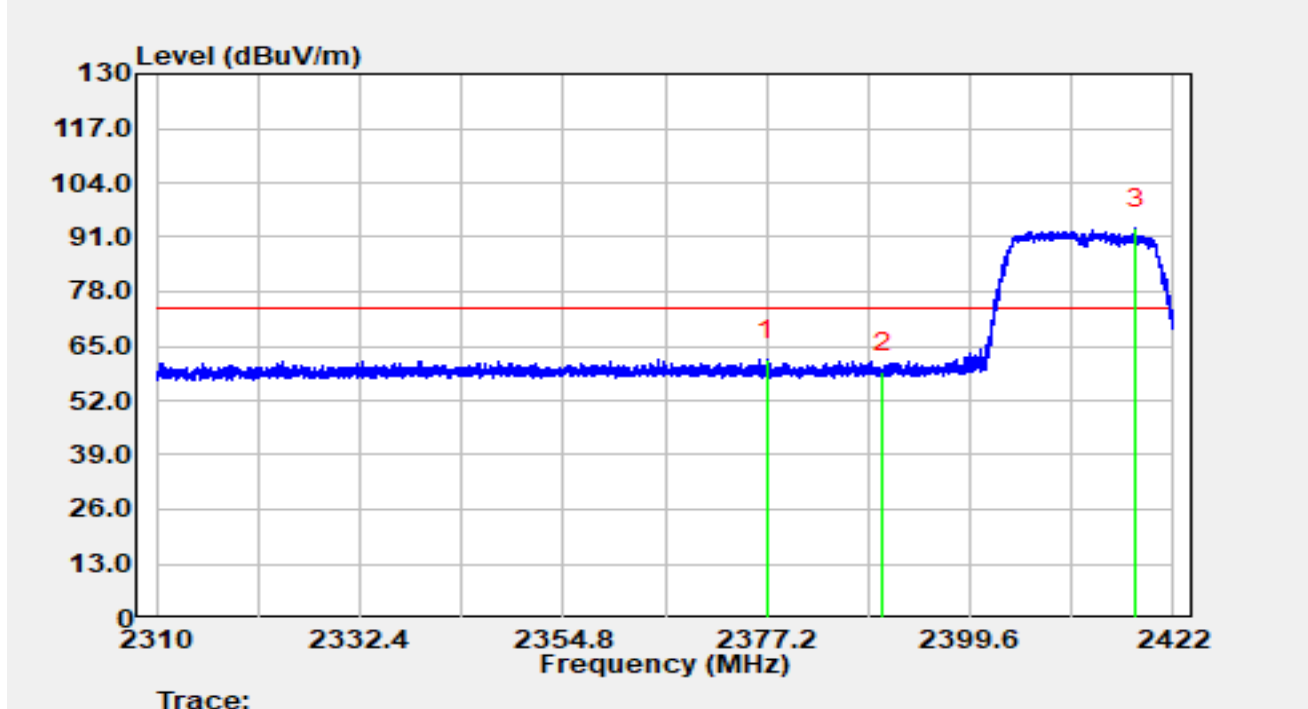


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2377.222	24.93	36.77	61.69	-12.31	74.00	Peak
2		2390.000	21.86	36.83	58.69	-15.31	74.00	Peak
3		2417.811	55.97	37.00	92.97	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-06-28
Temperature	20.4 °C	Humidity	40.6 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Arm-type Fully Automatic Digital Blood Pressure Monitor	Test Voltage	By battery
Test Mode	Transmit by 802.11g at 2412MHz		

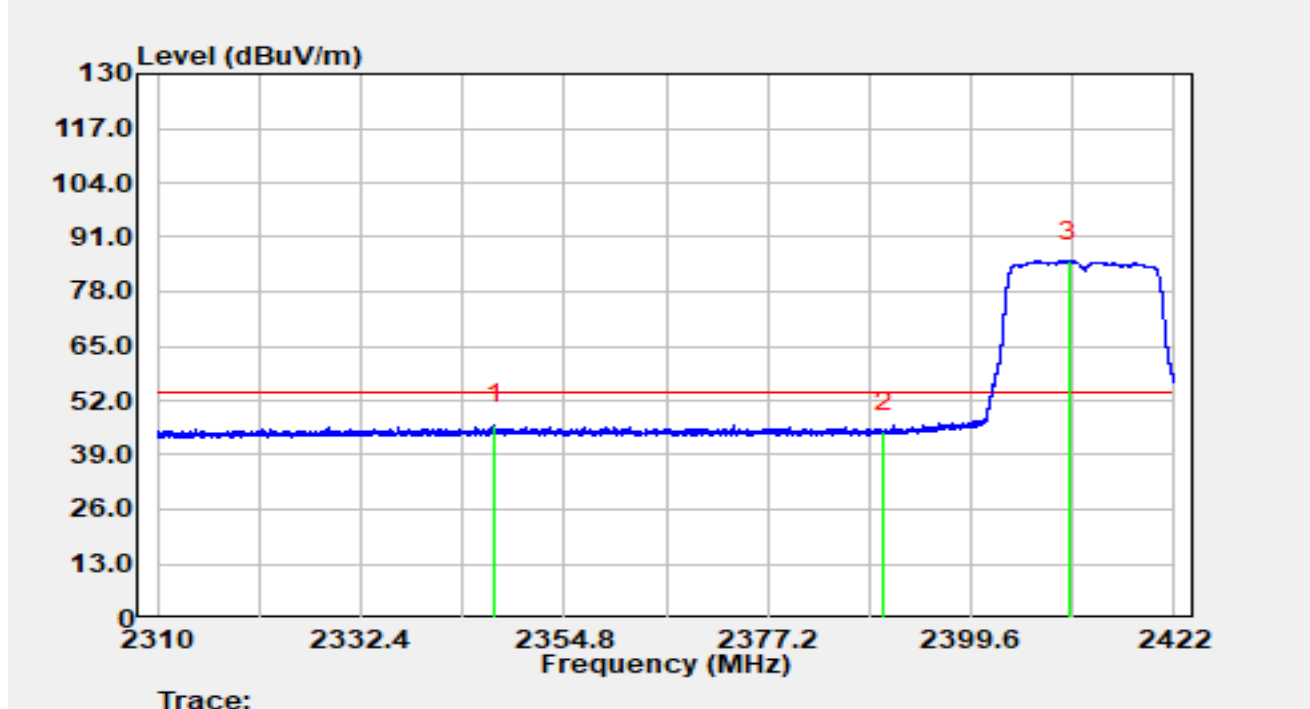


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2347.195	9.59	36.71	46.30	-7.70	54.00	Average
2		2390.000	7.60	36.83	44.43	-9.57	54.00	Average
3		2410.430	48.34	36.97	85.30	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-06-28
Temperature	20.4 °C	Humidity	40.6 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Arm-type Fully Automatic Digital Blood Pressure Monitor	Test Voltage	By battery
Test Mode	Transmit by 802.11g at 2412MHz		

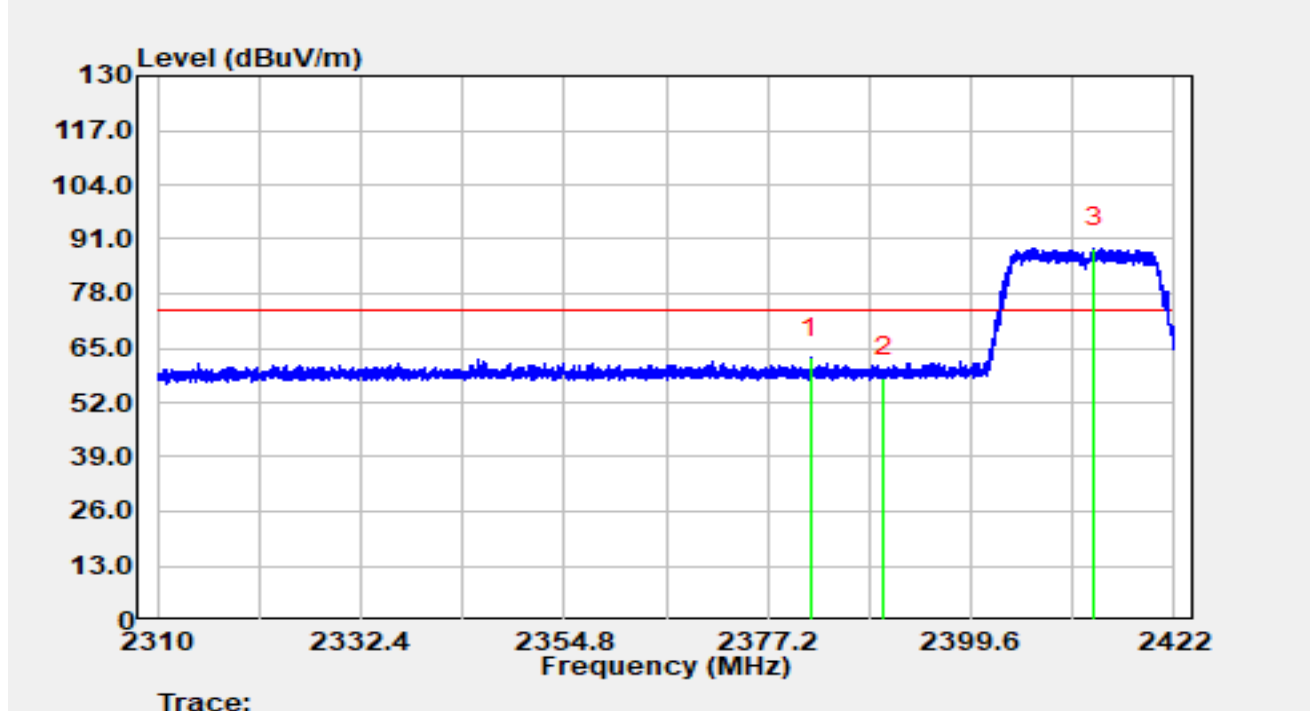


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2381.904	25.79	36.79	62.58	-11.42	74.00	Peak
2		2390.000	21.24	36.83	58.07	-15.93	74.00	Peak
3		2413.197	51.92	36.98	88.90	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-06-28
Temperature	20.4 °C	Humidity	40.6 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Arm-type Fully Automatic Digital Blood Pressure Monitor	Test Voltage	By battery
Test Mode	Transmit by 802.11g at 2412MHz		

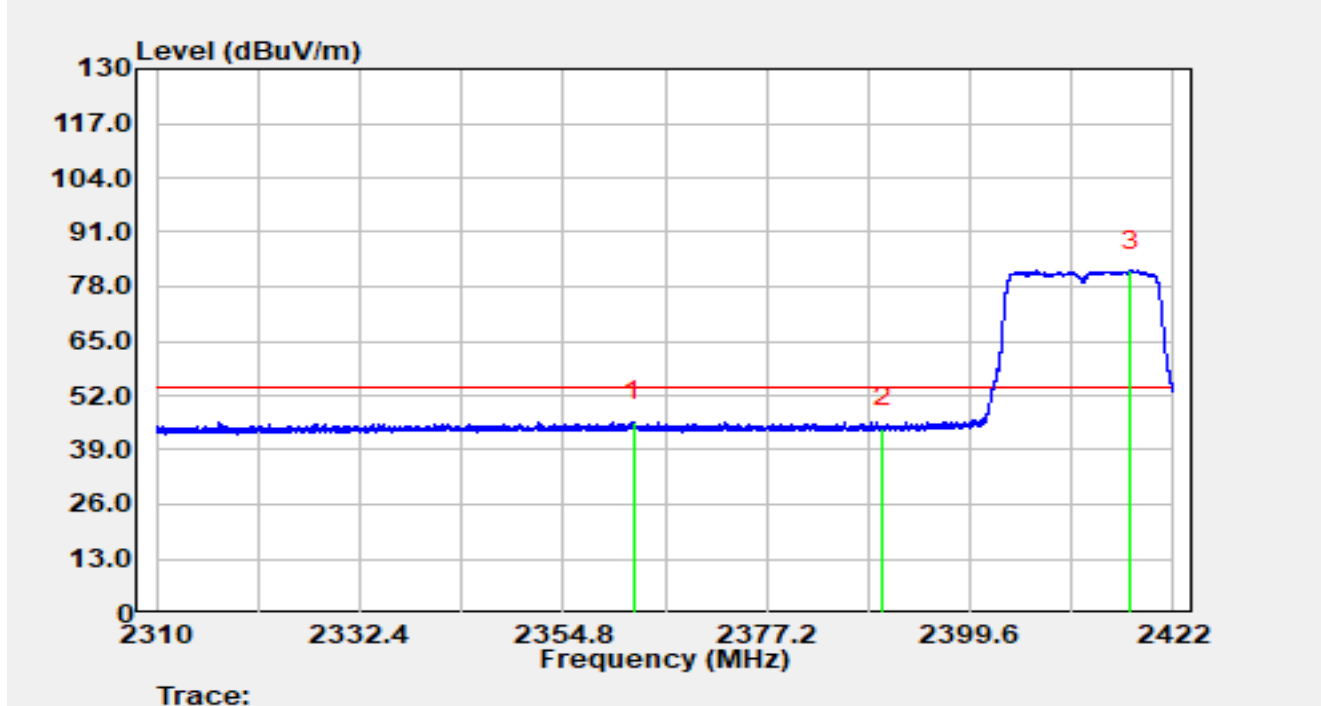


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2362.483	9.10	36.72	45.82	-8.18	54.00	Average
2		2390.000	7.50	36.83	44.33	-9.67	54.00	Average
3		2417.274	44.76	36.99	81.76	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-06-28
Temperature	20.4 °C	Humidity	40.6 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Arm-type Fully Automatic Digital Blood Pressure Monitor	Test Voltage	By battery
Test Mode	Transmit by 802.11g at 2462MHz		

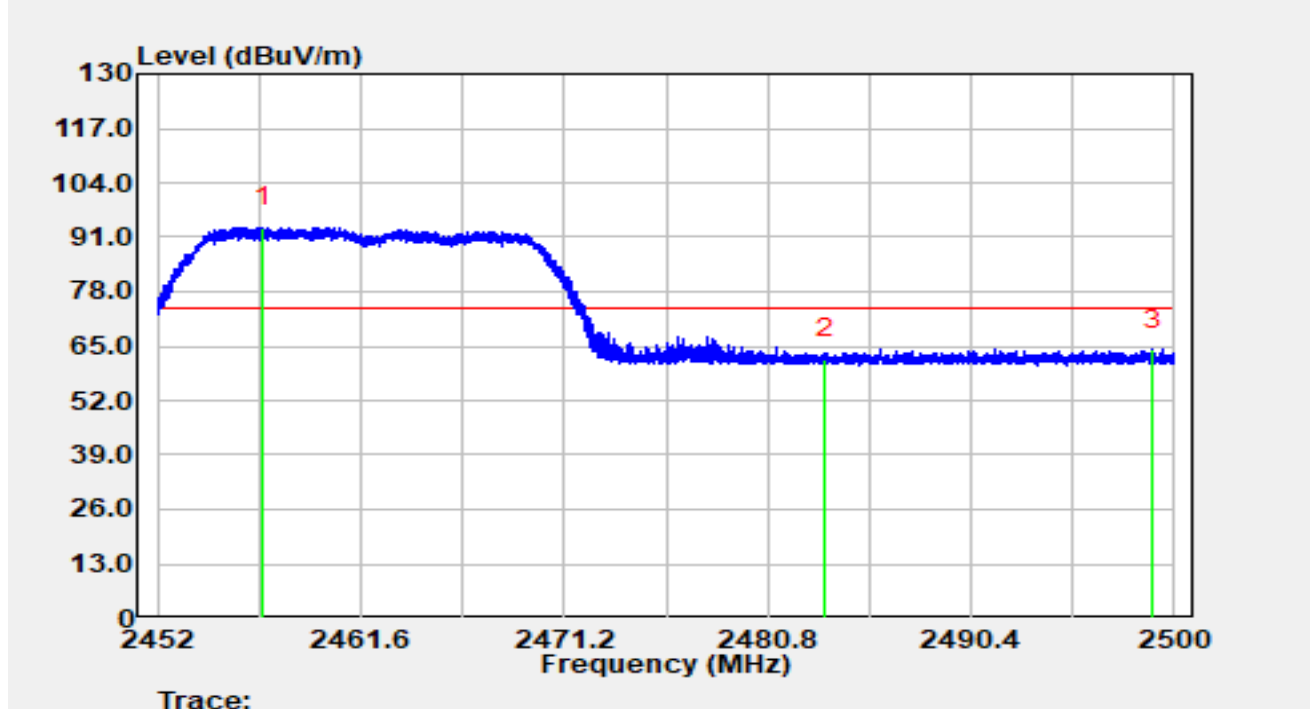


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2457.002	56.34	36.99	93.34	N/A	N/A	Peak
2		2483.500	24.87	37.05	61.92	-12.08	74.00	Peak
3	*	2498.997	27.11	37.08	64.19	-9.81	74.00	Peak

Notes:

- " * " indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-06-28
Temperature	20.4 °C	Humidity	40.6 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Arm-type Fully Automatic Digital Blood Pressure Monitor	Test Voltage	By battery
Test Mode	Transmit by 802.11g at 2462MHz		

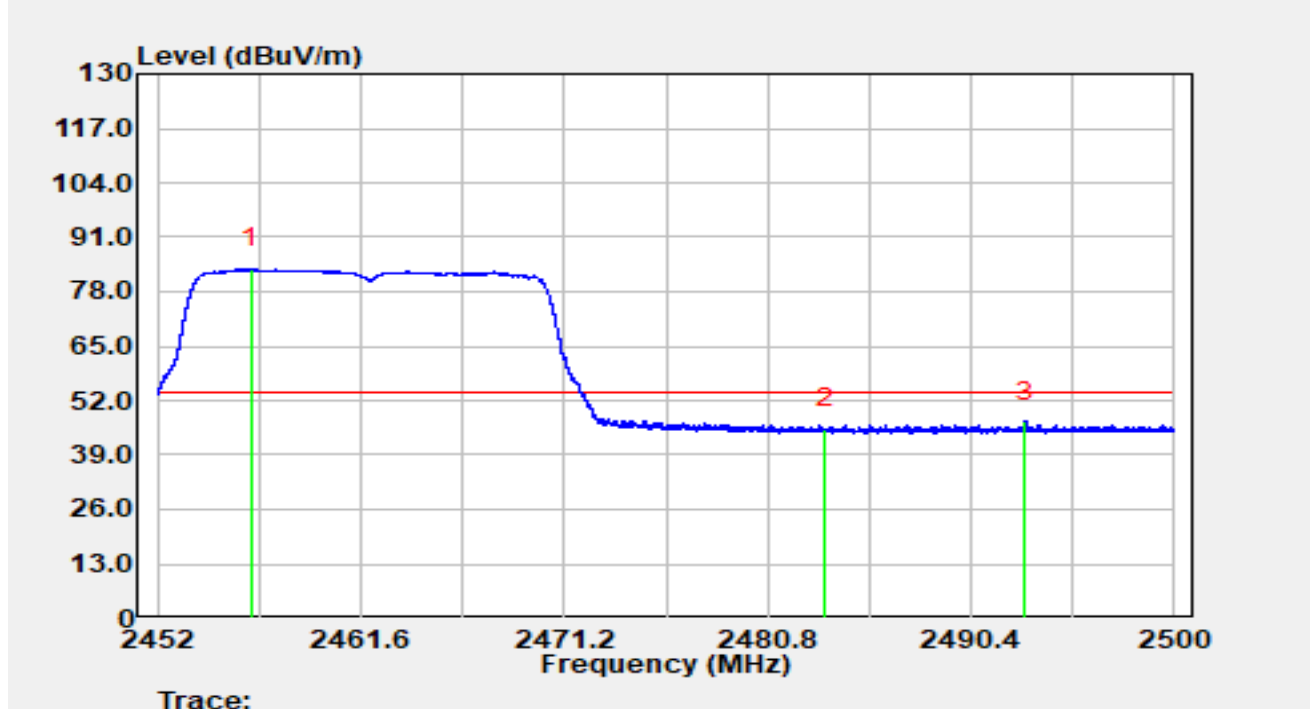


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2456.421	46.49	36.99	83.48	N/A	N/A	Average
2		2483.500	8.12	37.05	45.17	-8.83	54.00	Average
3	*	2492.973	9.94	37.07	47.01	-6.99	54.00	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-06-28
Temperature	20.4 °C	Humidity	40.6 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Arm-type Fully Automatic Digital Blood Pressure Monitor	Test Voltage	By battery
Test Mode	Transmit by 802.11g at 2462MHz		

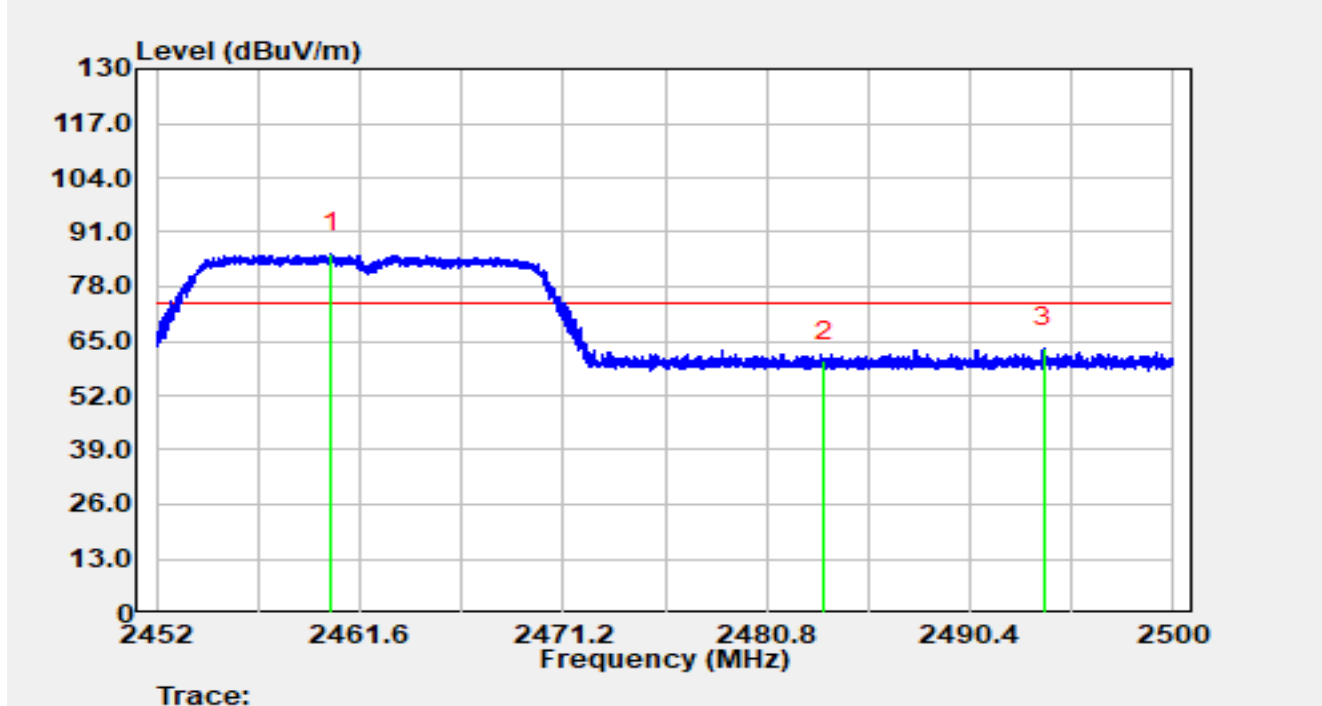


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2460.266	48.89	37.00	85.89	N/A	N/A	Peak
2		2483.500	23.20	37.05	60.25	-13.75	74.00	Peak
3	*	2493.890	26.37	37.08	63.44	-10.56	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-06-28
Temperature	20.4 °C	Humidity	40.6 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Arm-type Fully Automatic Digital Blood Pressure Monitor	Test Voltage	By battery
Test Mode	Transmit by 802.11g at 2462MHz		

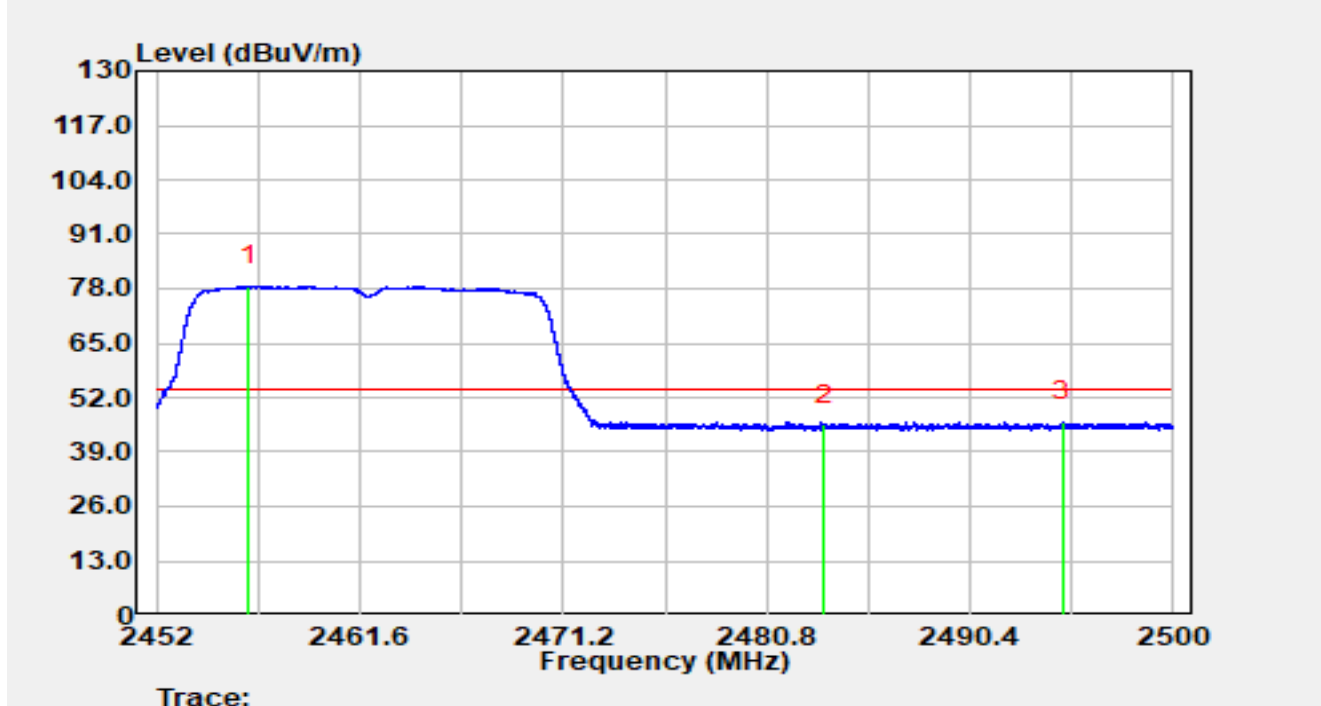


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2456.330	41.72	36.99	78.72	N/A	N/A	Average
2		2483.500	8.47	37.05	45.52	-8.48	54.00	Average
3	*	2494.782	9.06	37.08	46.14	-7.86	54.00	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-06-28
Temperature	20.4 °C	Humidity	40.6 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Arm-type Fully Automatic Digital Blood Pressure Monitor	Test Voltage	By battery
Test Mode	Transmit by 802.11n-HT20 at 2412MHz		

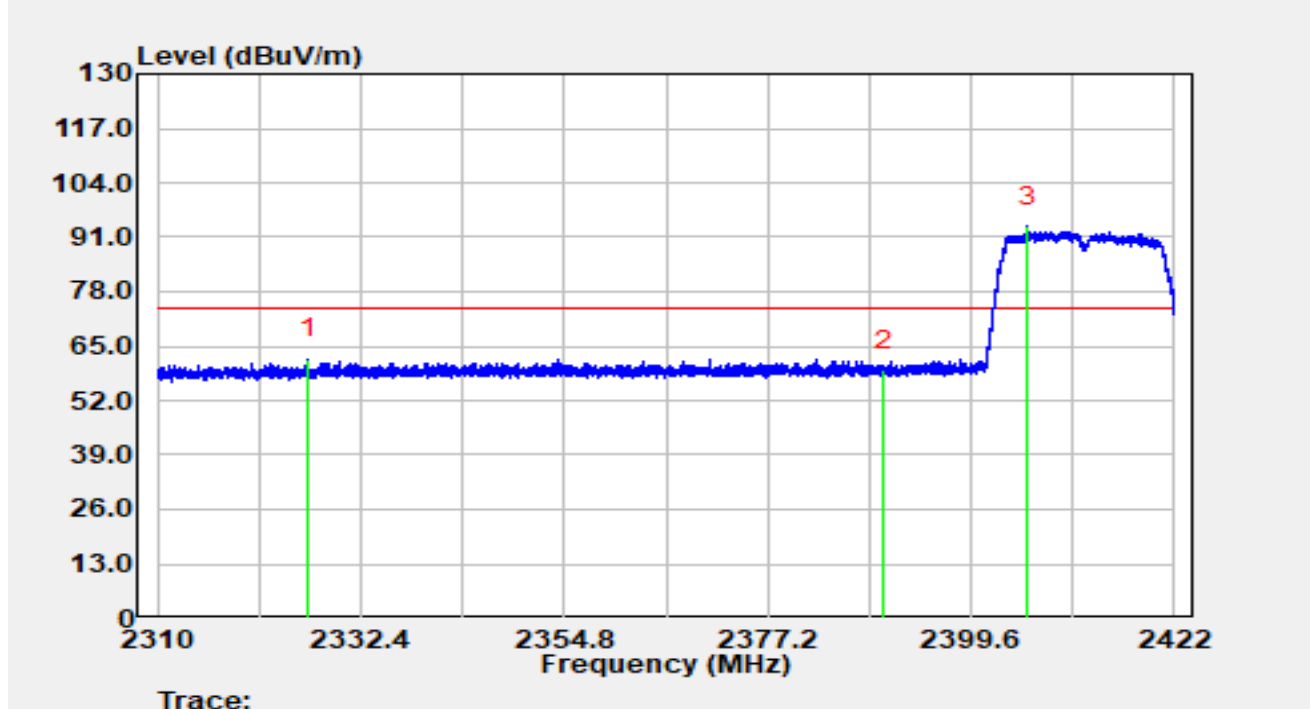


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2326.621	25.25	36.62	61.87	-12.13	74.00	Peak
2		2390.000	22.44	36.83	59.27	-14.73	74.00	Peak
3		2405.838	56.73	36.94	93.67	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-06-28
Temperature	20.4 °C	Humidity	40.6 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Arm-type Fully Automatic Digital Blood Pressure Monitor	Test Voltage	By battery
Test Mode	Transmit by 802.11n-HT20 at 2412MHz		

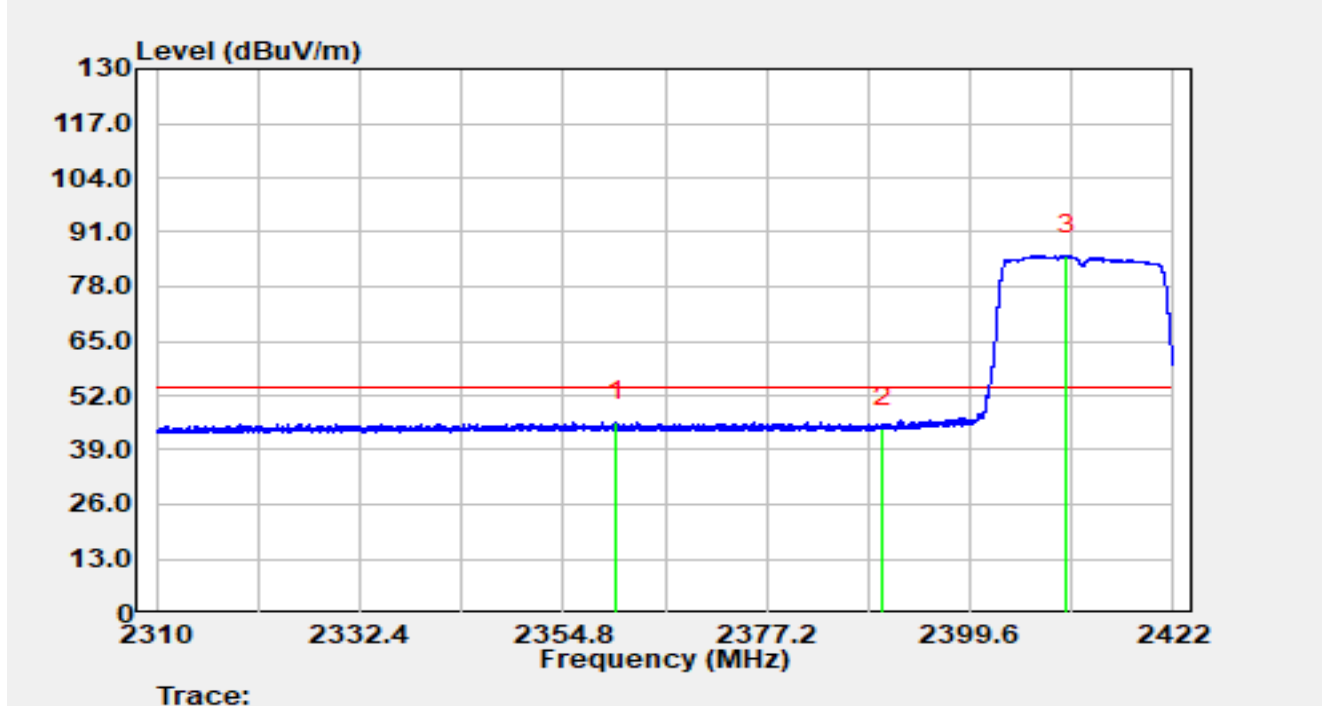


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2360.702	8.95	36.71	45.67	-8.33	54.00	Average
2		2390.000	7.32	36.83	44.15	-9.85	54.00	Average
3		2410.206	48.42	36.97	85.39	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-06-28
Temperature	20.4 °C	Humidity	40.6 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Arm-type Fully Automatic Digital Blood Pressure Monitor	Test Voltage	By battery
Test Mode	Transmit by 802.11n-HT20 at 2412MHz		

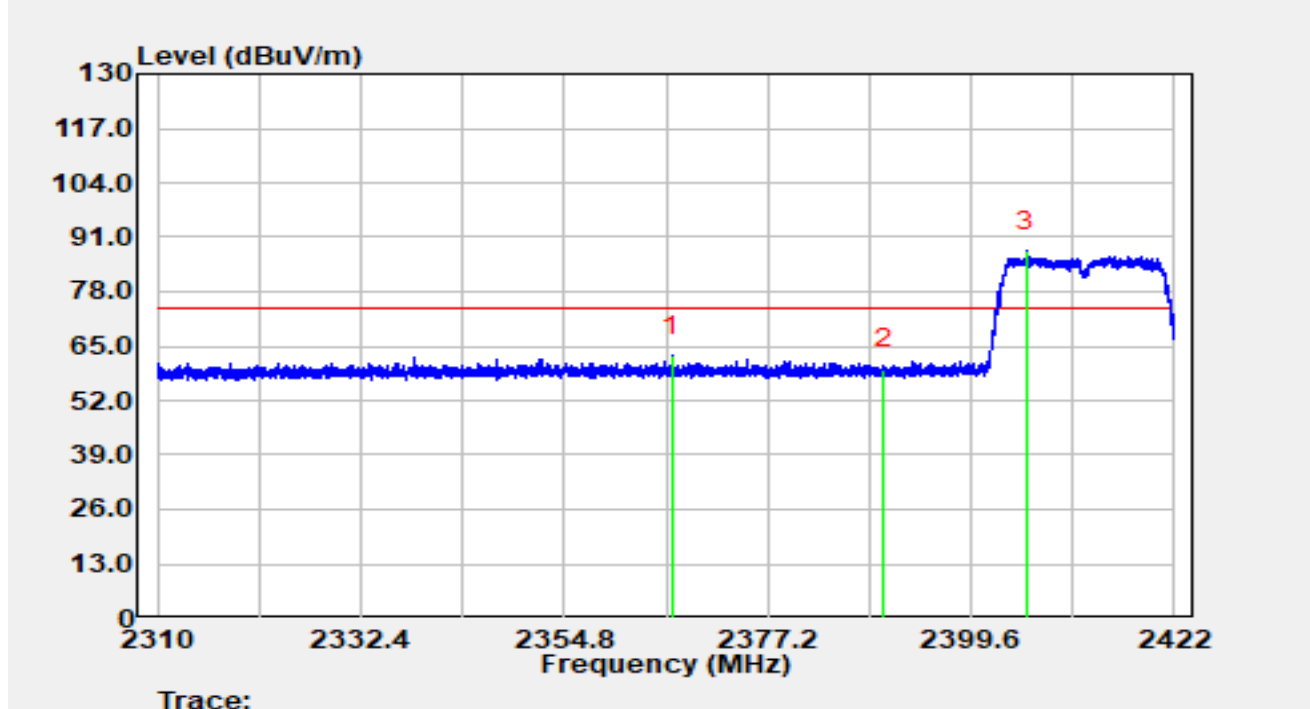


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2366.683	25.92	36.73	62.64	-11.36	74.00	Peak
2		2390.000	22.66	36.83	59.49	-14.51	74.00	Peak
3		2405.726	50.85	36.94	87.79	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-06-28
Temperature	20.4 °C	Humidity	40.6 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Arm-type Fully Automatic Digital Blood Pressure Monitor	Test Voltage	By battery
Test Mode	Transmit by 802.11n-HT20 at 2412MHz		

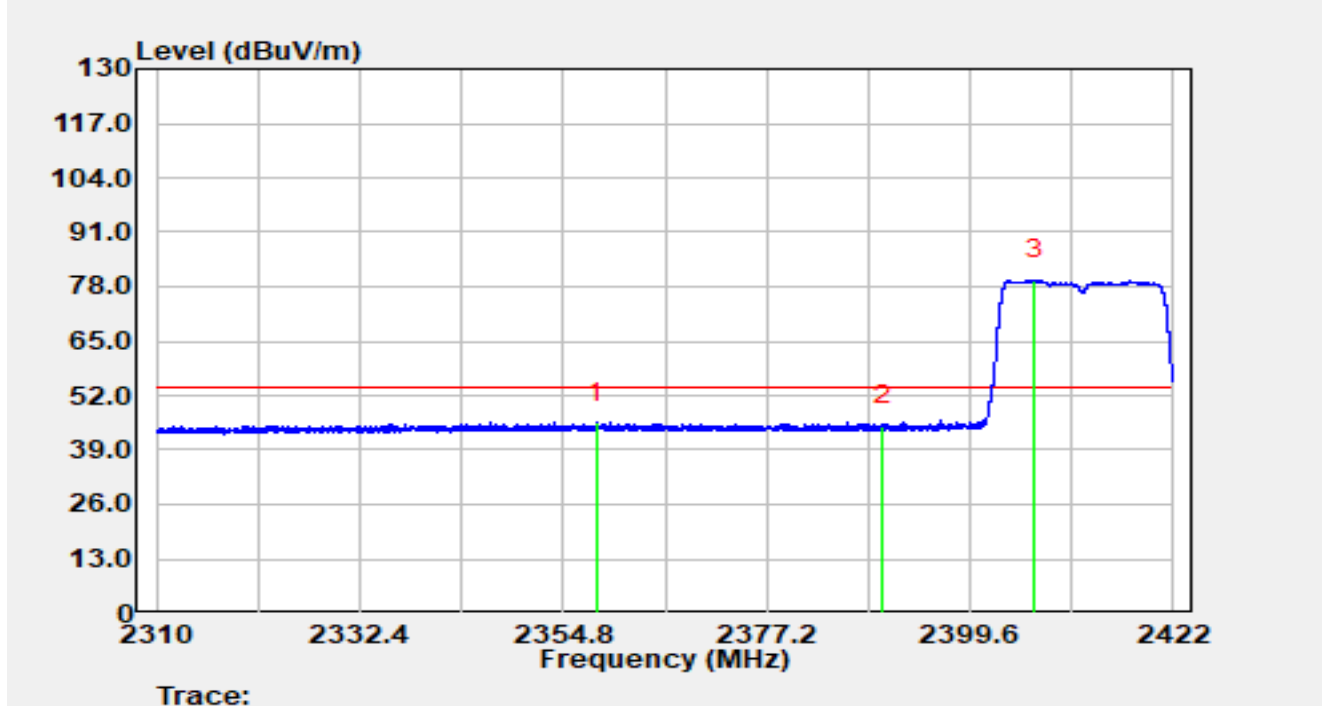


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2358.440	8.82	36.71	45.53	-8.47	54.00	Average
2		2390.000	7.84	36.83	44.68	-9.33	54.00	Average
3		2406.690	42.54	36.95	79.49	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-06-28
Temperature	20.4 °C	Humidity	40.6 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Arm-type Fully Automatic Digital Blood Pressure Monitor	Test Voltage	By battery
Test Mode	Transmit by 802.11n-HT20 at 2462MHz		

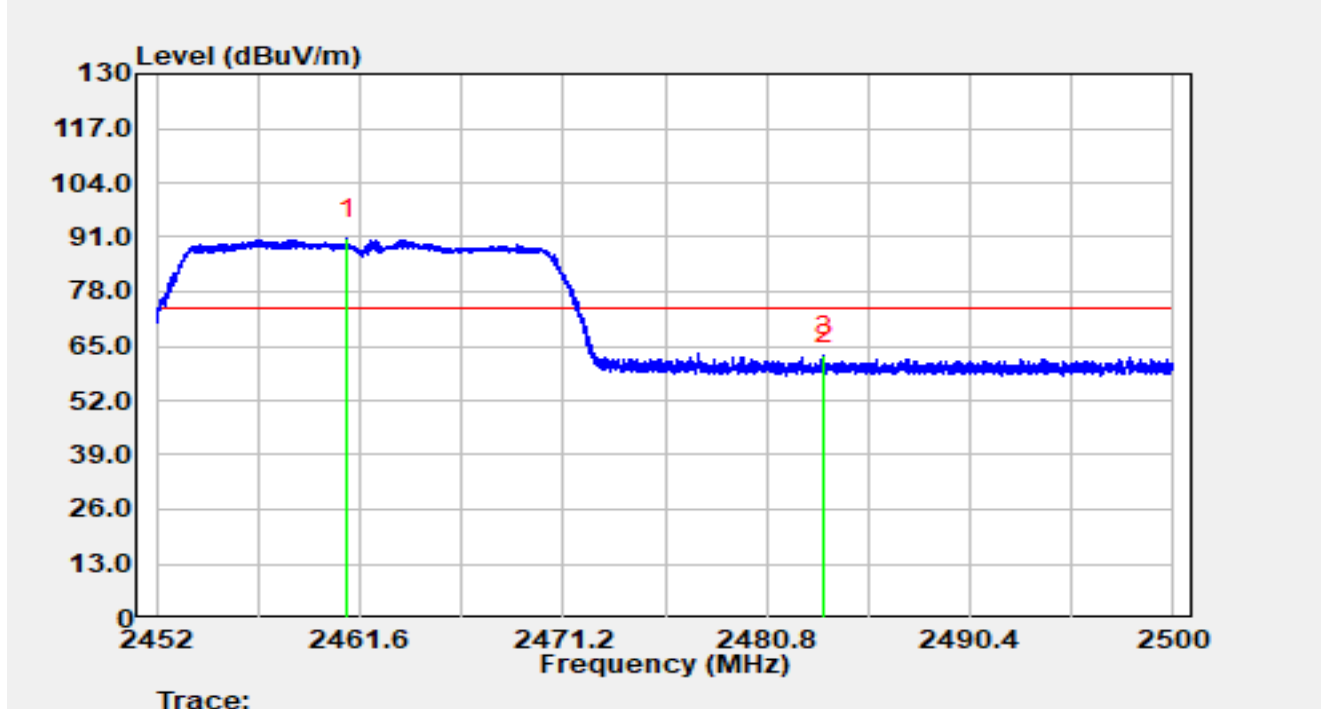


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2461.000	53.67	37.00	90.67	N/A	N/A	Peak
2		2483.500	23.74	37.05	60.79	-13.21	74.00	Peak
3	*	2483.531	25.70	37.05	62.76	-11.24	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-06-28
Temperature	20.4 °C	Humidity	40.6 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Arm-type Fully Automatic Digital Blood Pressure Monitor	Test Voltage	By battery
Test Mode	Transmit by 802.11n-HT20 at 2462MHz		

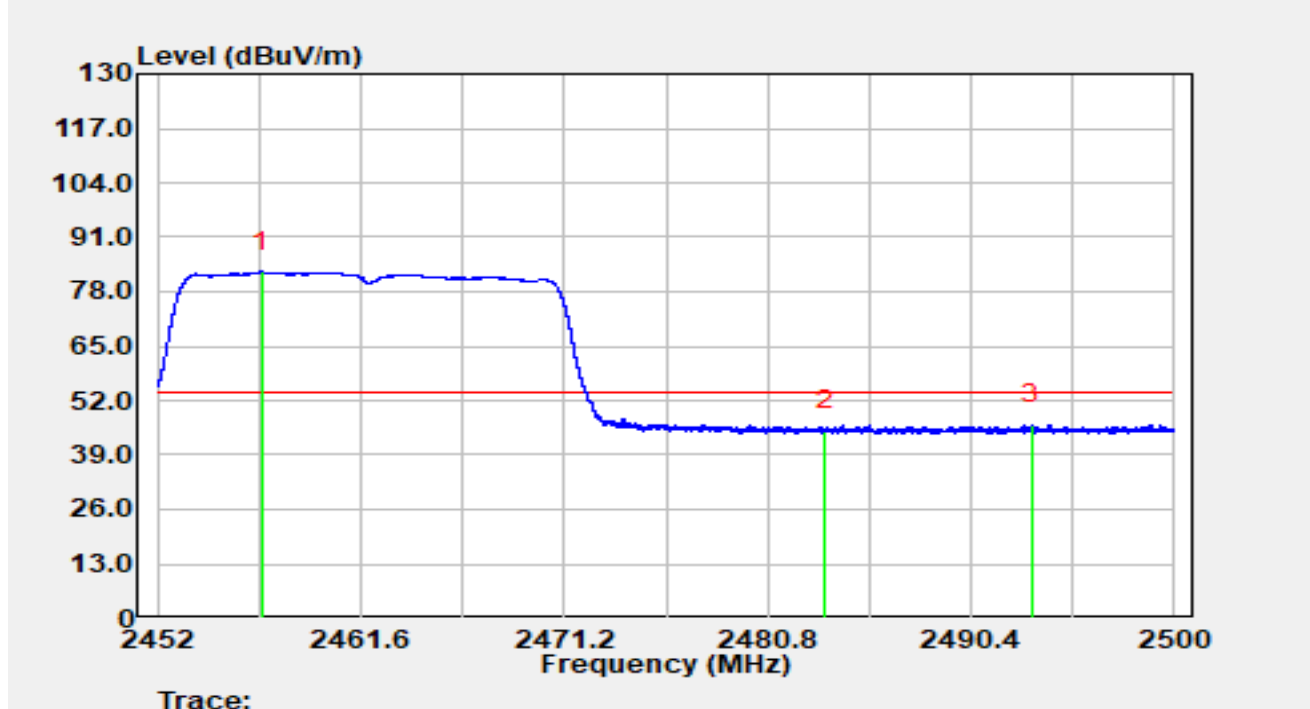


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2456.949	45.84	36.99	82.83	N/A	N/A	Average
2		2483.500	7.60	37.05	44.66	-9.34	54.00	Average
3	*	2493.242	9.18	37.08	46.25	-7.75	54.00	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-06-28
Temperature	20.4 °C	Humidity	40.6 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Arm-type Fully Automatic Digital Blood Pressure Monitor	Test Voltage	By battery
Test Mode	Transmit by 802.11n-HT20 at 2462MHz		

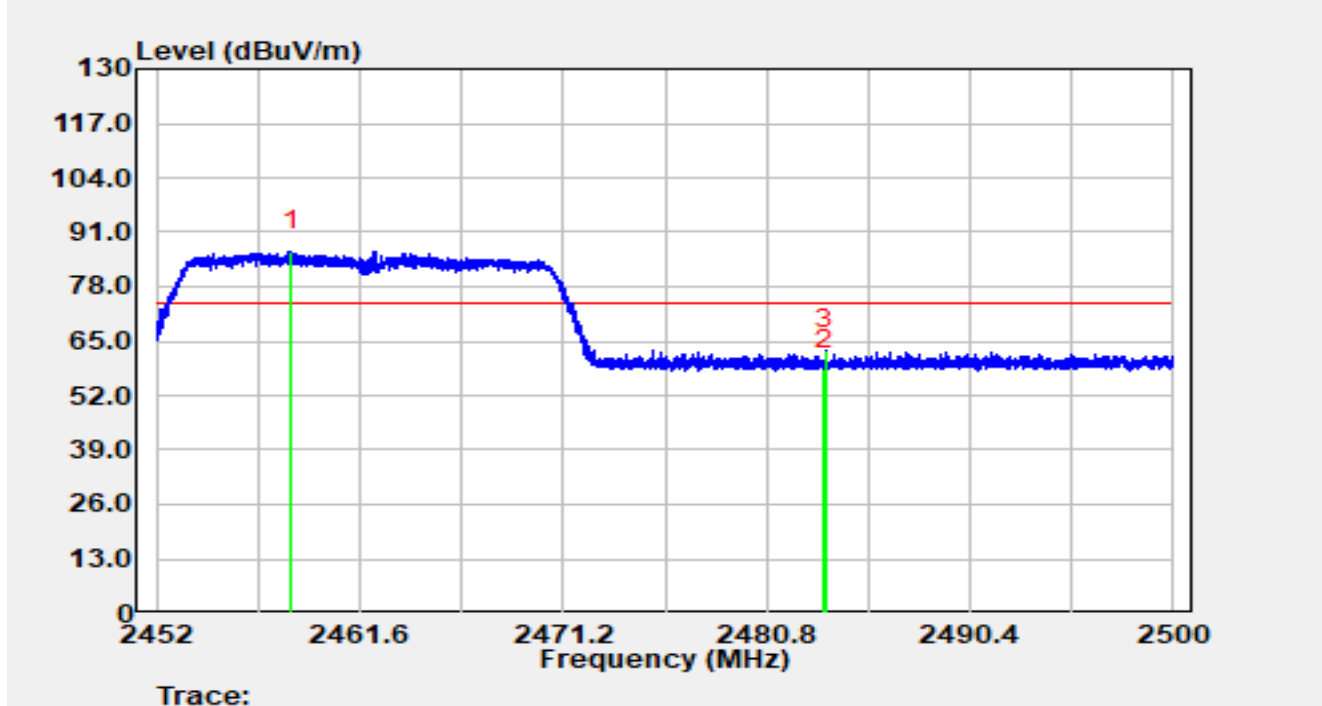


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2458.365	49.53	36.99	86.52	N/A	N/A	Peak
2		2483.500	21.25	37.05	58.30	-15.70	74.00	Peak
3	*	2483.560	25.76	37.05	62.82	-11.18	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-06-28
Temperature	20.4 °C	Humidity	40.6 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Arm-type Fully Automatic Digital Blood Pressure Monitor	Test Voltage	By battery
Test Mode	Transmit by 802.11n-HT20 at 2462MHz		

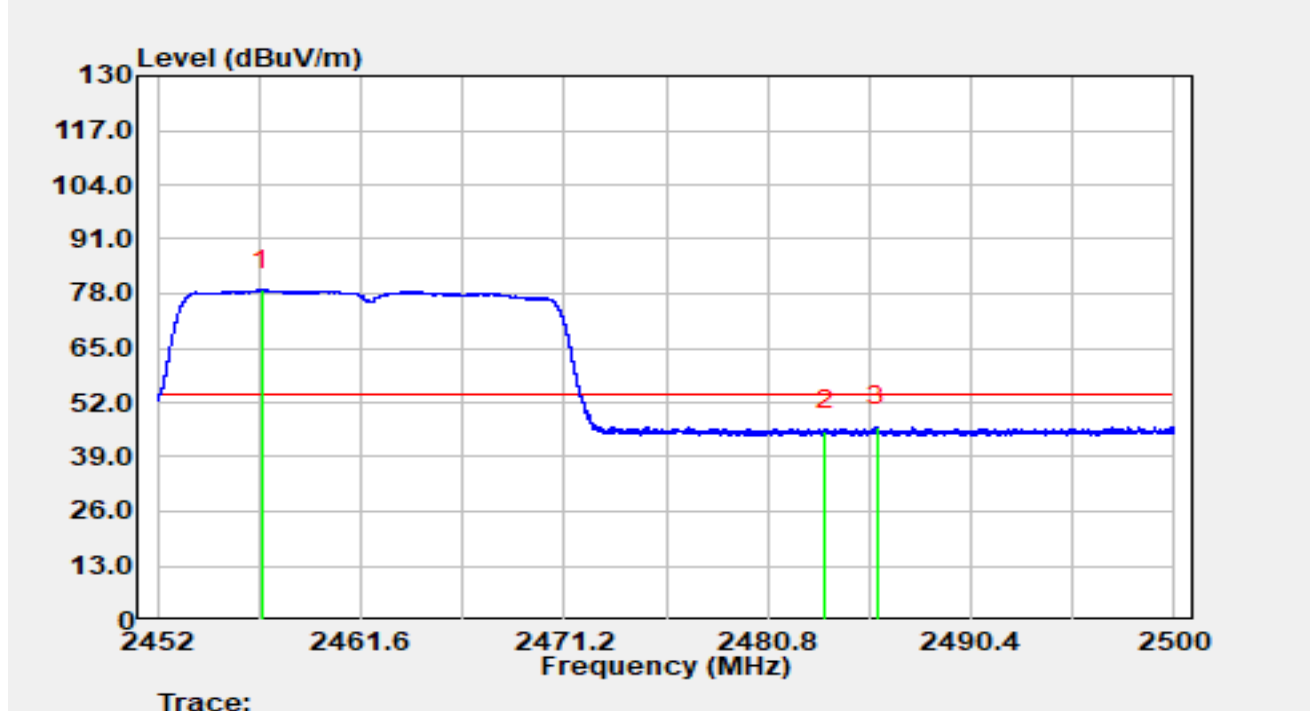


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2456.901	41.89	36.99	78.88	N/A	N/A	Average
2		2483.500	8.22	37.05	45.27	-8.73	54.00	Average
3	*	2485.936	9.08	37.06	46.14	-7.86	54.00	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

A.8 AC Conducted Emissions Test Result

Site	SIP-SR2	Test Date	2025-06-11
Temperature	25.3 °C	Humidity	55.4 %
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Henry Wang
Factor	ENV216_101684_E	Polarity	Line
EUT	Arm-type Fully Automatic Digital Blood Pressure Monitor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11g at 2437MHz		

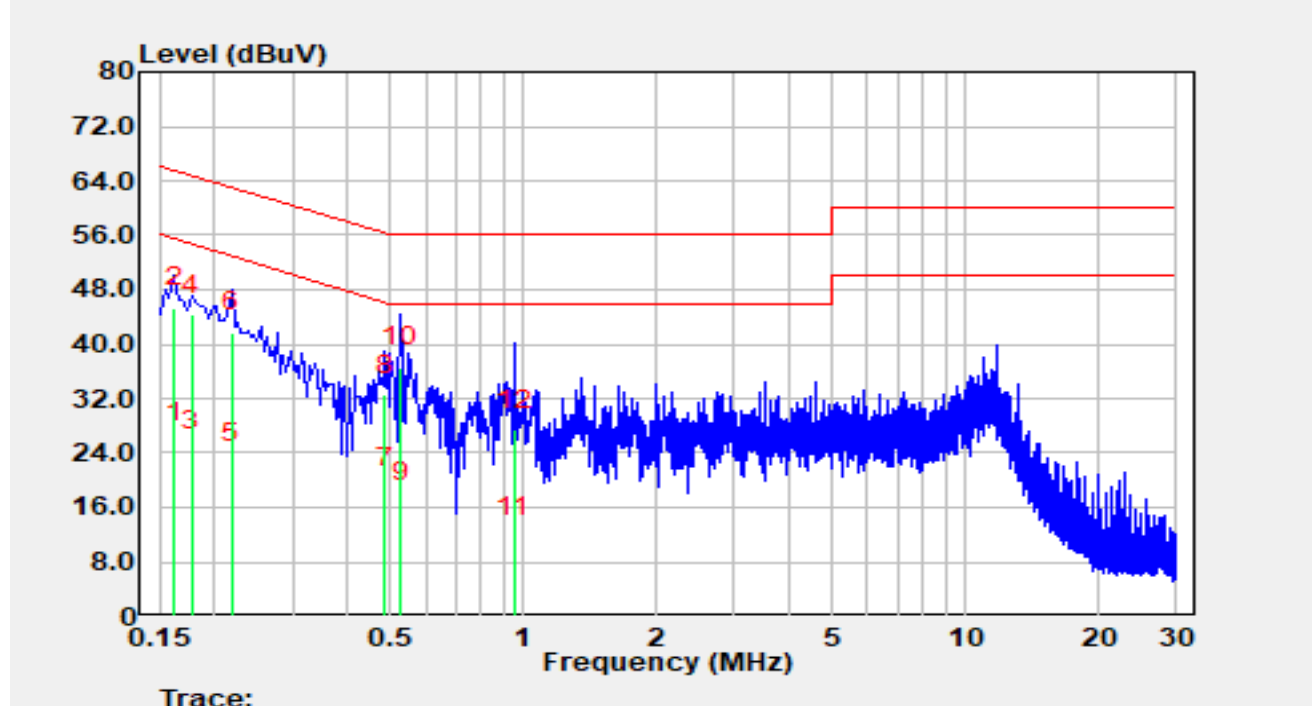


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.162	15.56	9.81	25.37	-29.99	55.36	Average
2		0.162	35.57	9.81	45.38	-19.98	65.36	QP
3		0.178	14.45	9.81	24.26	-30.32	54.58	Average
4		0.178	34.48	9.81	44.30	-20.28	64.58	QP
5		0.218	12.58	9.87	22.45	-30.45	52.89	Average
6		0.218	31.89	9.87	41.76	-21.14	62.89	QP
7		0.486	9.01	9.93	18.94	-27.30	46.24	Average
8		0.486	22.65	9.93	32.58	-23.66	56.24	QP
9		0.526	6.76	9.93	16.70	-29.30	46.00	Average
10	*	0.526	26.69	9.93	36.62	-19.38	56.00	QP
11		0.950	1.60	9.95	11.55	-34.45	46.00	Average
12		0.950	17.51	9.95	27.46	-28.54	56.00	QP

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
3. Measurement (dB μ V) = Reading (dB μ V) + C.F (dB).

Site	SIP-SR2	Test Date	2025-06-11
Temperature	25.3 °C	Humidity	55.4 %
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Henry Wang
Factor	ENV216_101684_E	Polarity	Neutral
EUT	Arm-type Fully Automatic Digital Blood Pressure Monitor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11g at 2437MHz		

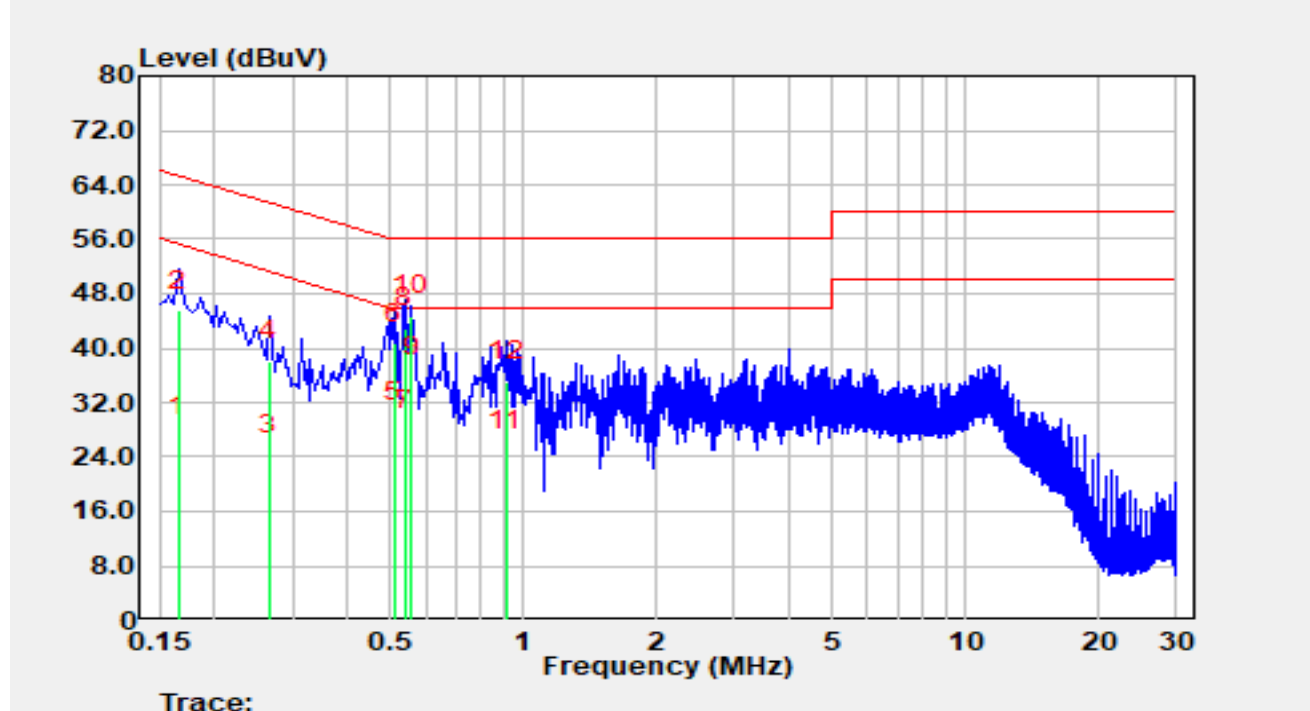

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.166	17.29	9.81	27.10	-28.06	55.16	Average
2		0.166	35.76	9.81	45.57	-19.59	65.16	QP
3		0.266	14.33	9.86	24.19	-27.05	51.24	Average
4		0.266	28.27	9.86	38.13	-23.11	61.24	QP
5		0.510	19.16	9.90	29.06	-16.94	46.00	Average
6		0.510	30.80	9.90	40.70	-15.30	56.00	QP
7		0.538	18.02	9.90	27.92	-18.08	46.00	Average
8		0.538	33.11	9.90	43.02	-12.98	56.00	QP
9	*	0.558	25.82	9.91	35.72	-10.28	46.00	Average
10		0.558	34.79	9.91	44.70	-11.30	56.00	QP
11		0.914	15.09	9.95	25.04	-20.96	46.00	Average
12		0.914	25.18	9.95	35.13	-20.87	56.00	QP

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
3. Measurement (dB μ V) = Reading (dB μ V) + C.F (dB).

Appendix B – Test Setup Photograph

Refer to “R25S1070028-UT” file.

Appendix C – EUT Photograph

Refer to “R25S1070028-UE” file.

_____ The End _____