



Test Site	WZ-SR6	Test Engineer	Edith Yu
Test Date	2025-04-12	Test Band	Band 38/41

Channel Bandwidth (MHz)	Frequency (MHz)	Frequency Range (MHz)	Max Spurious Emissions (dBm)	Limit (dBm)	Result
5	2498.5	30 ~ 27000	-30.23	≤ -25.00	Pass
5	2593.0	30 ~ 27000	-30.09	≤ -25.00	Pass
5	2687.5	30 ~ 27000	-29.96	≤ -25.00	Pass
10	2501.0	30 ~ 27000	-29.88	≤ -25.00	Pass
10	2593.0	30 ~ 27000	-29.75	≤ -25.00	Pass
10	2685.0	30 ~ 27000	-29.81	≤ -25.00	Pass
15	2503.5	30 ~ 27000	-30.04	≤ -25.00	Pass
15	2593.0	30 ~ 27000	-29.92	≤ -25.00	Pass
15	2682.5	30 ~ 27000	-30.23	≤ -25.00	Pass
20	2506.0	30 ~ 27000	-29.97	≤ -25.00	Pass
20	2593.0	30 ~ 27000	-29.97	≤ -25.00	Pass
20	2680.0	30 ~ 27000	-29.80	≤ -25.00	Pass

Note: The amplitude of Conducted Spurious emissions (frequency range from 9 kHz to 30 MHz) is that proximity to ambient noise, which is also attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

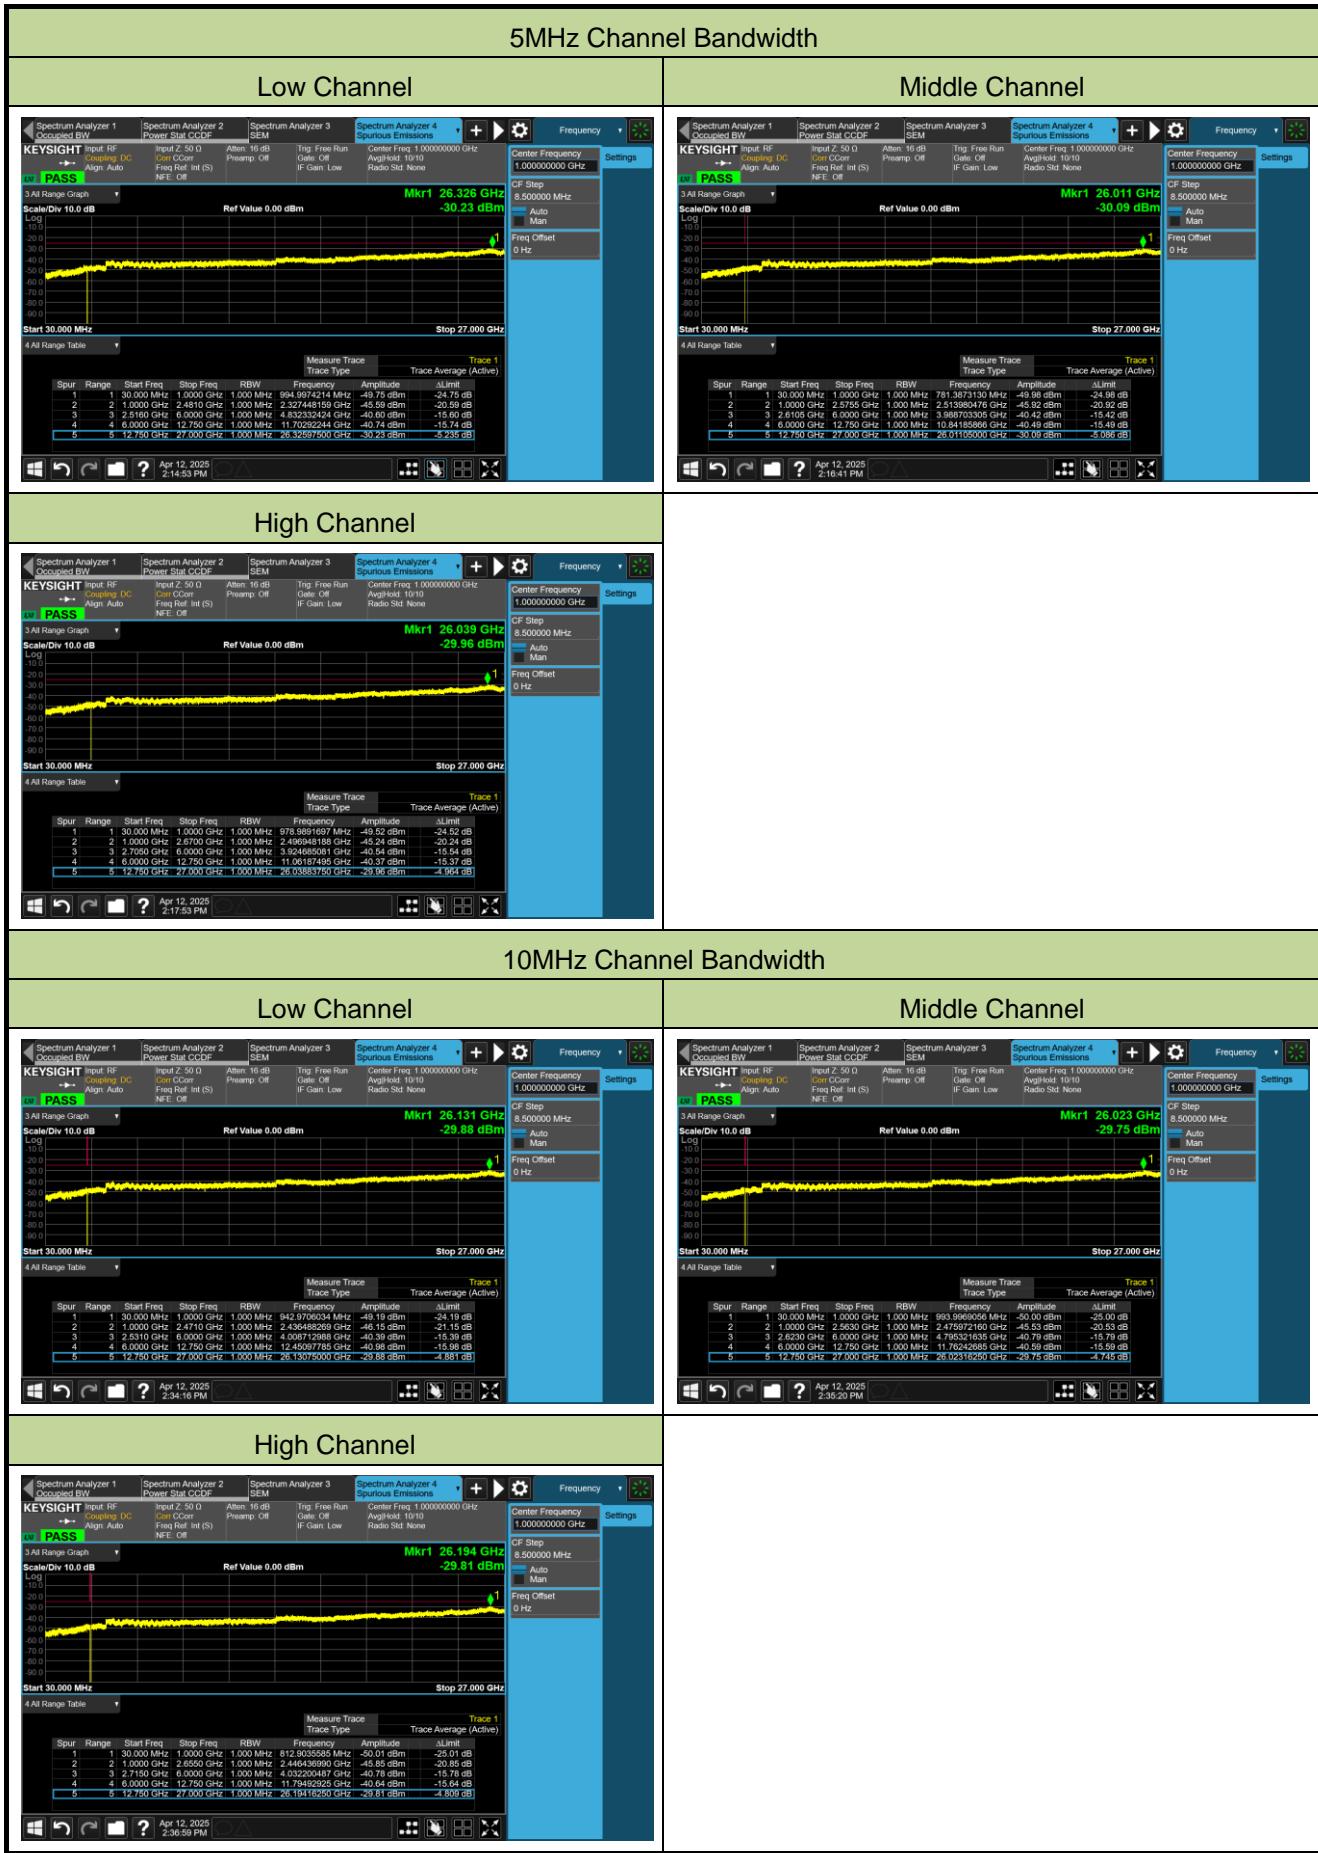

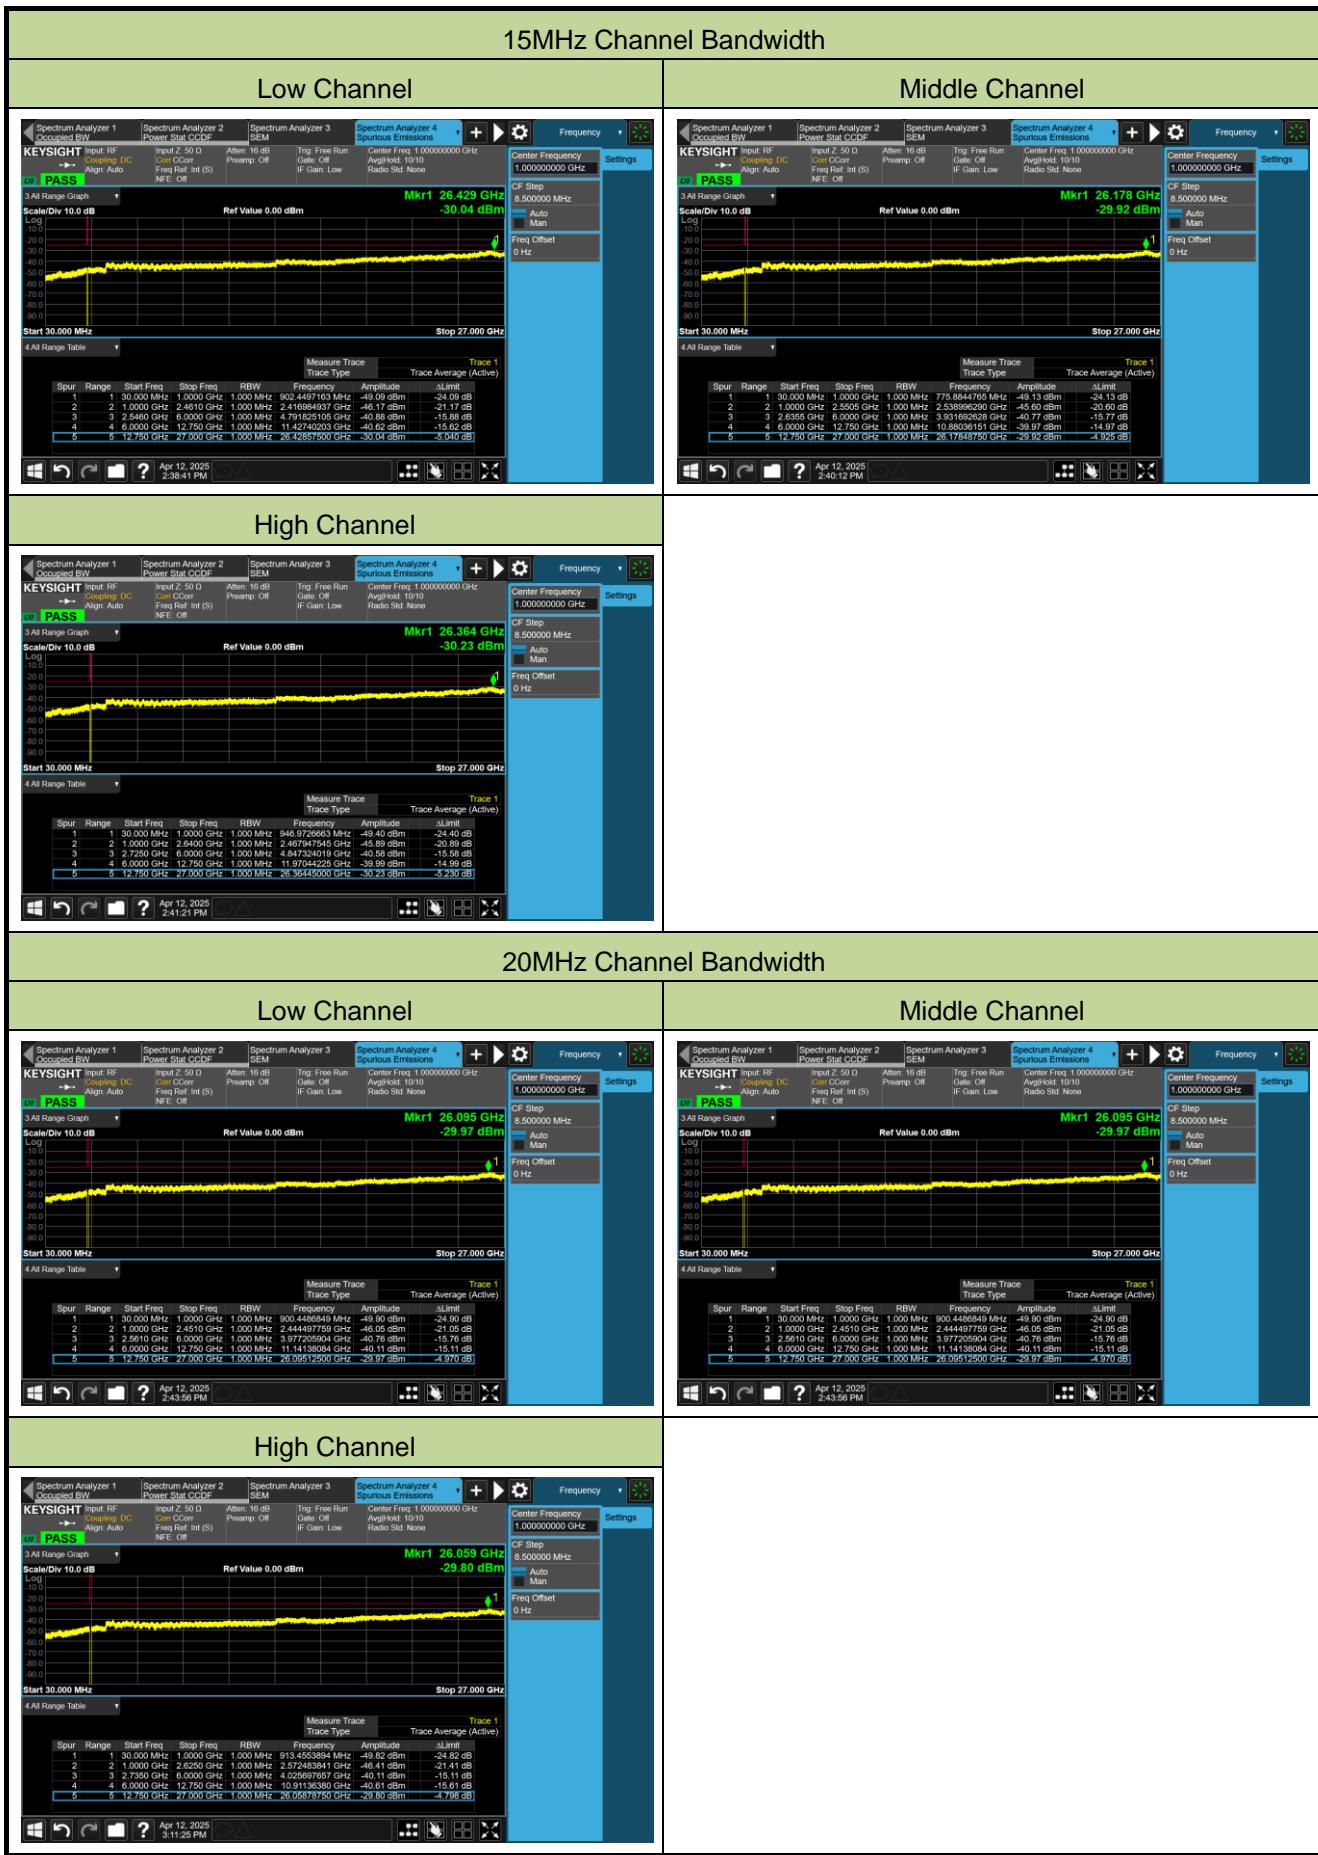

**A.7 Radiated Spurious Emissions Test Result**

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2025-04-15 ~ 2025-04-16	Test Band	Band 5

Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
<b>Low Channel</b>							
104.980	-3.7	18.7	15.0	82.3	-67.3	Quasi-peak	Horizontal
869.920	-4.5	30.9	26.4	82.3	-55.9	Quasi-peak	Horizontal
91.980	7.8	17.2	25.0	82.3	-57.3	Quasi-peak	Vertical
168.710	7.2	16.2	23.4	82.3	-58.9	Quasi-peak	Vertical
1647.700	63.5	-5.8	57.7	82.3	-24.6	Peak	Horizontal
17945.600	31.1	28.6	59.7	82.3	-22.6	Peak	Horizontal
1647.700	61.0	-5.8	55.2	82.3	-27.1	Peak	Vertical
2472.200	44.0	-3.1	40.9	82.3	-41.4	Peak	Vertical
<b>Middle Channel</b>							
46.100	-3.4	20.5	17.1	82.3	-65.2	Quasi-peak	Horizontal
927.540	-4.7	31.3	26.6	82.3	-55.7	Quasi-peak	Horizontal
93.440	7.7	17.5	25.2	82.3	-57.1	Quasi-peak	Vertical
168.610	8.7	16.2	24.9	82.3	-57.4	Quasi-peak	Vertical
1671.500	60.1	-6.0	54.1	82.3	-28.2	Peak	Horizontal
17949.000	30.8	28.6	59.4	82.3	-22.9	Peak	Horizontal
1671.500	54.2	-6.0	48.2	82.3	-34.1	Peak	Vertical
17972.800	30.7	28.1	58.8	82.3	-23.5	Peak	Vertical
<b>High Channel</b>							
49.300	-3.9	20.6	16.7	82.3	-65.6	Quasi-peak	Horizontal
892.910	-5.5	31.1	25.6	82.3	-56.7	Quasi-peak	Horizontal
91.500	8.6	17.1	25.7	82.3	-56.6	Quasi-peak	Vertical
168.230	9.5	16.1	25.6	82.3	-56.7	Quasi-peak	Vertical
1695.300	56.6	-6.0	50.6	82.3	-31.7	Peak	Horizontal
17954.100	31.1	28.5	59.6	82.3	-22.7	Peak	Horizontal
1695.300	54.2	-6.0	48.2	82.3	-34.1	Peak	Vertical
2543.600	46.4	-3.3	43.1	82.3	-39.2	Peak	Vertical

Note 1: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 2: The peak-detection value will always be equal to or greater than the average-detection value. As a result, the peak-detection value measured by spectrum analyzer shall represent the worst-case result.

Note 3: The amplitude of Radiated transmitter spurious emissions (Frequency range from 9 kHz to 30 MHz and above 18GHz) is that proximity to ambient noise, which is also attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2025-04-15 ~ 2025-04-16	Test Band	Band 38/41

Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB/m)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
<b>Low Channel</b>							
90.630	8.9	16.8	25.7	70.3	-44.6	Quasi-peak	Horizontal
822.200	-4.2	30.7	26.5	70.3	-43.8	Quasi-peak	Horizontal
90.240	18.3	16.6	34.9	70.3	-35.4	Quasi-peak	Vertical
151.150	14.5	15.2	29.7	70.3	-40.6	Quasi-peak	Vertical
4993.300	44.8	3.1	47.9	70.3	-22.4	Peak	Horizontal
7488.900	42.7	10.7	53.4	70.3	-16.9	Peak	Horizontal
4993.300	46.7	3.1	49.8	70.3	-20.5	Peak	Vertical
17942.200	31.4	28.6	60.0	70.3	-10.3	Peak	Vertical
<b>Middle Channel</b>							
90.530	5.2	16.8	22.0	70.3	-48.3	Quasi-peak	Horizontal
902.220	-4.1	31.3	27.2	70.3	-43.1	Quasi-peak	Horizontal
90.430	16.9	16.7	33.6	70.3	-36.7	Quasi-peak	Vertical
152.610	15.1	15.3	30.4	70.3	-39.9	Quasi-peak	Vertical
7772.800	42.4	10.3	52.7	70.3	-17.6	Peak	Horizontal
17932.000	31.5	28.5	60.0	70.3	-10.3	Peak	Horizontal
5182.000	49.0	2.8	51.8	70.3	-18.5	Peak	Vertical
7772.800	43.9	10.3	54.2	70.3	-16.1	Peak	Vertical
<b>High Channel</b>							
90.530	3.8	16.8	20.6	70.3	-49.7	Quasi-peak	Horizontal
913.480	-4.7	31.3	26.6	70.3	-43.7	Quasi-peak	Horizontal
90.430	15.6	16.7	32.3	70.3	-38.0	Quasi-peak	Vertical
168.900	11.9	16.2	28.1	70.3	-42.2	Quasi-peak	Vertical
8056.700	41.9	10.8	52.7	70.3	-17.6	Peak	Horizontal
17930.300	30.7	28.4	59.1	70.3	-11.2	Peak	Horizontal
5370.700	43.0	3.0	46.0	70.3	-24.3	Peak	Vertical
17860.600	31.5	28.6	60.1	70.3	-10.2	Peak	Vertical

Note 1: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 2: The peak-detection value will always be equal to or greater than the average-detection value. As a result, the peak-detection value measured by spectrum analyzer shall represent the worst-case result.

Note 3: The amplitude of Radiated transmitter spurious emissions (Frequency range from 9 kHz to 30 MHz and

above 18GHz) is that proximity to ambient noise, which is also attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

## Appendix B - Test Setup Photograph

Refer to "R25S1001045-UT" file.

## Appendix C - EUT Photograph

Refer to "R25S1001045-UE" file.

---

The End

---