



TESTING LABORATORY
CERTIFICATE #4820.01



FCC PART 15.247

RSS-GEN, ISSUE 5, APRIL 2018

RSS-247, ISSUE 2, FEBRUARY 2017

TEST REPORT

For

Beijing Penslink Co.,Ltd

502 Room,2 Building,6th Yard, Fuandonglu Street, Chaoyang District Beijing, China

FCC ID: 2AQXJ-P0102A
IC: 24286-P0102A

Report Type: Original Report	Product Name: Petfon
Report Number: RDG180628007-00B	
Report Date: 2018-10-24	
Jerry Zhang	
Reviewed By:	EMC Manager <i>Jerry Zhang</i>
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA* or any agency of the Federal Government. * This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “*”.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	6
EUT EXERCISE SOFTWARE	7
EQUIPMENT MODIFICATIONS	10
SUPPORT EQUIPMENT LIST AND DETAILS	10
SUPPORT CABLE LIST AND DETAILS	10
BLOCK DIAGRAM OF TEST SETUP	11
SUMMARY OF TEST RESULTS	12
FCC §15.247 (i) & §1.1310 & §2.1093- RF EXPOSURE.....	13
APPLICABLE STANDARD	13
RSS-102 § 2.5.1 EXEMPTION LIMITS FOR ROUTINE EVALUATION – SAR EVALUATION	14
APPLICABLE STANDARD	14
FCC §15.203& RSS-GEN CLAUSE 6.8 - ANTENNA REQUIREMENT	15
APPLICABLE STANDARD	15
ANTENNA INFORMATION AND CONNECTOR CONSTRUCTION.....	16
FCC §15.207 (a) & RSS-GEN CLAUSE 8.8– AC LINE CONDUCTED EMISSIONS.....	17
APPLICABLE STANDARD	17
EUT SETUP	17
EMI TEST RECEIVER SETUP.....	17
TEST PROCEDURE	18
CORRECTED AMPLITUDE & MARGIN CALCULATION	18
TEST EQUIPMENT LIST AND DETAILS.....	18
TEST DATA	19
FCC §15.209, §15.205, §15.247(d) & RSS-247 CLAUSE 5.5, RSS-GEN CLAUSE 8.10- SPURIOUS EMISSIONS.....	21
APPLICABLE STANDARD	21
EUT SETUP	21
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	22
TEST PROCEDURE	22
CORRECTED AMPLITUDE & MARGIN CALCULATION	22
TEST EQUIPMENT LIST AND DETAILS.....	23
TEST DATA	23
FCC §15.247(a) (2) & RSS-247 CLAUSE 5.2 a) &RSS-GEN CLAUSE 6.7–6 dB EMISSION BANDWIDTH AND 99% OCCUPIED BANDWIDTH.....	33
APPLICABLE STANDARD	33
TEST PROCEDURE	34
TEST EQUIPMENT LIST AND DETAILS.....	34
TEST DATA	34

FCC §15.247(b) (3)& RSS-247 CLAUSE 5.4 d) - MAXIMUM PEAK CONDUCTED OUTPUT POWER	51
APPLICABLE STANDARD	51
TEST PROCEDURE	51
TEST EQUIPMENT LIST AND DETAILS.....	51
TEST DATA	52
FCC §15.247(d)& RSS-247 CLAUSE 5.5 – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	53
APPLICABLE STANDARD	53
TEST PROCEDURE	53
TEST EQUIPMENT LIST AND DETAILS.....	54
TEST DATA	54
FCC §15.247(e) & RSS-247 CLAUSE 5.2 b - POWER SPECTRAL DENSITY	60
APPLICABLE STANDARD	60
TEST PROCEDURE	60
TEST EQUIPMENT LIST AND DETAILS.....	60
TEST DATA	60

FINAL

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

EUT Name:	Petfon
EUT Model:	P0102A, P0102B
FCC ID:	2AQXJ-P0102A
IC:	24286-P0102A
Rated Input Voltage:	DC 3.7V from battery or DC 5V charged by Charger box(Controller) DC 3.7V from battery or DC 5V charged by Charger box(Tracker)
External Dimension:	42mm(L)* 42mm(W)* 18mm(H) (Controller) 42mm(L)* 42mm(W)* 18mm(H) (Tracker)
Serial Number:	180628007-1 (Controller) 180628007-2(Tracker)
EUT Received Date:	2018.06.28

Note: the Controller and Tracker have identical schematics and PCB layout, only antenna, keys and appearance different, test performed at both unit for AC Line Conducted Emissions and Radiation Spurious emissions, other test items only performed at Controller.

Objective

This report is prepared on behalf of **Beijing Penslink Co.,Ltd** in accordance with Part 2, Subpart J, Part 15, Subparts A, and C of the Federal Communications Commission's rules and RSS-247, Issue 2, February 2017, RSS-Gen Issue 5, April 2018 of the Innovation, Science and Economic Development Canada.

The tests were performed in order to determine the compliance of the EUT with FCC Rules Part 15-Subpart C, section 15.203, 15.205, 15.207, 15.209, 15.247 rules and RSS-247, Issue 2, February 2017, RSS-Gen Issue 5, April 2018 of the Innovation, Science and Economic Development Canada.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and KDB 558074 D01 15.247 Meas Guidance v05, and RSS-247, Issue 2, February 2017, RSS-Gen Issue 5, April 2018 of the Innovation, Science and Economic Development Canada.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.55 dB, 200M~1GHz: 5.92 dB, 1G~6GHz: 4.98 dB, 6G~18GHz: 5.89 dB, 18G~26.5G: 5.47 dB, 26.5G~40G: 5.63 dB
Unwanted Emissions, conducted	±1.5 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062D.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in Engineering Mode, which was provided by the manufacturer.

For 2.4GHz band, total 11 channels are provided:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

For 802.11b, 802.11g, and 802.11n ht20 modes were test with channel 1,6,11. For 802.11n ht40 mode was tested with channel 3, 6, 9.

The worst-case data rates are determined to be as follows for each mode based upon investigations by measuring the average power and PSD across all data rates bandwidths, and modulations.

For Bluetooth LE mode, 40 channels are provided for testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	...	...
...	...	...	...
...	...	...	...
..	...	38	2478
19	2440	39	2480

EUT was tested with channel 0, 19 and 39.

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

The software “wifi_Tool” was used for testing, which was provided by manufacturer. The maximum power was configured as below table, that provided by the manufacturer:


Mode	Channel	Frequency (MHz)	Data Rate	Power level
802.11b	Low	2412	1Mbps	46
	Middle	2437	1Mbps	42
	High	2462	1Mbps	37
802.11g	Low	2412	6Mbps	46
	Middle	2437	6Mbps	42
	High	2462	6Mbps	46
802.11n ht20	Low	2412	MCS0	46
	Middle	2437	MCS0	46
	High	2462	MCS0	46
802.11n ht40	Low	2422	MCS0	46
	Middle	2437	MCS0	48
	High	2452	MCS0	49

Bluetooth LE mode was configured by the system default setting

The maximum duty cycle as following table:


Test mode	T _{on} (ms)	T _{on+off} (ms)	Duty Cycle (%)
802.11b	100	100	100
802.11g	100	100	100
802.11n ht20	100	100	100
802.11n ht40	100	100	100
BLE	0.415	0.630	65.87

802.11b

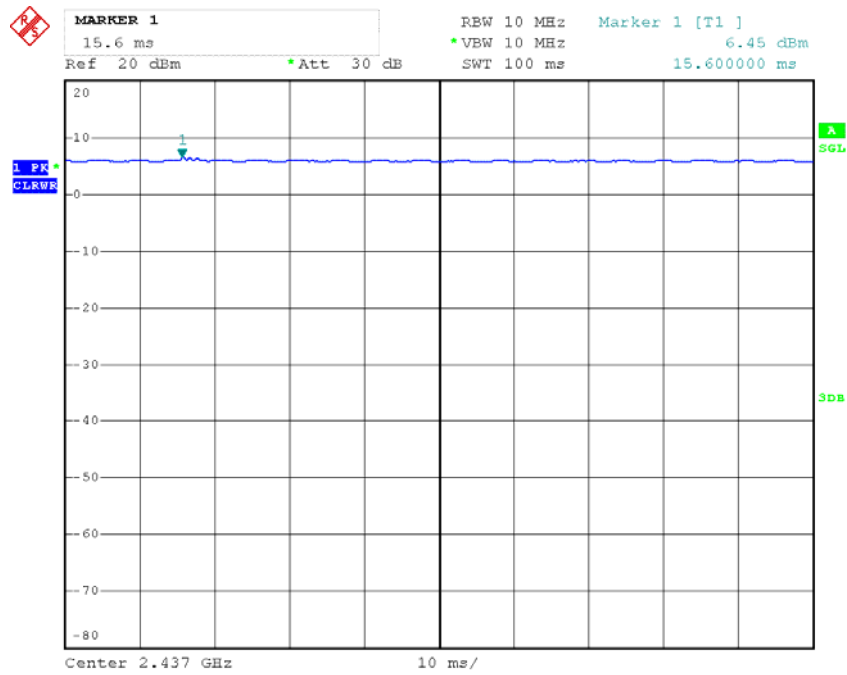


Date: 13.JUL.2018 08:58:45

802.11g

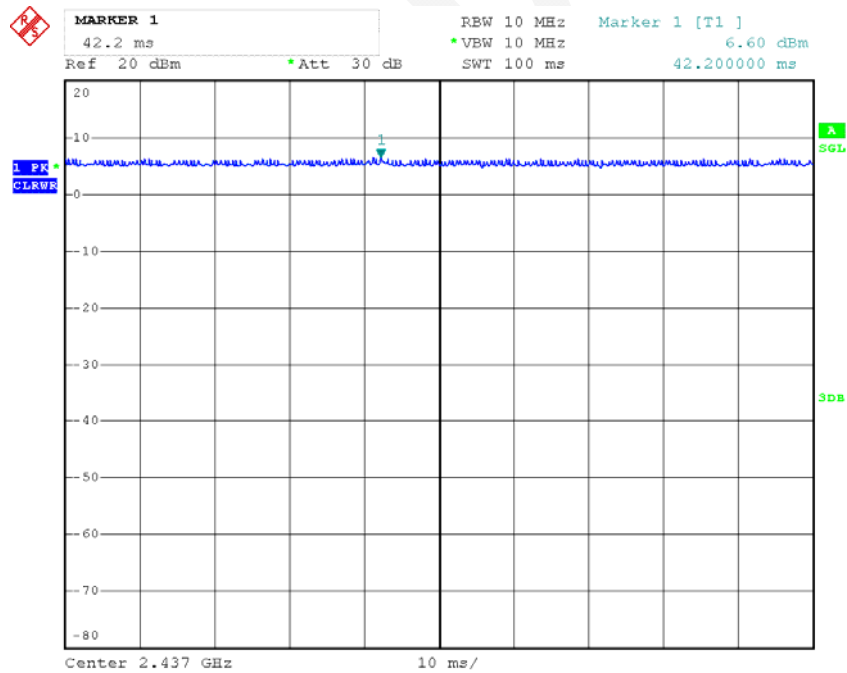


Date: 13.JUL.2018 08:58:24

802.11n ht20

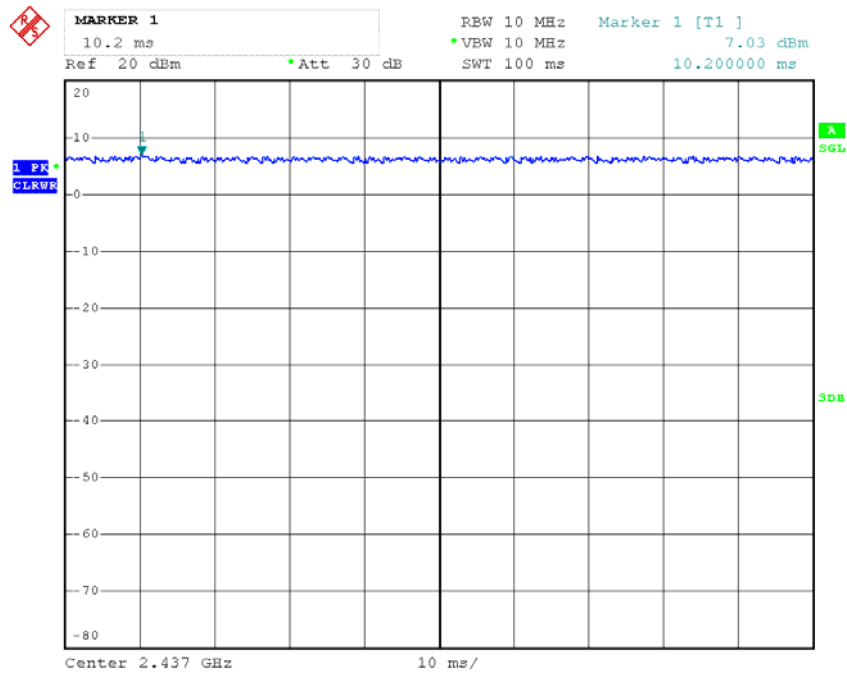


Date: 13.JUL.2018 08:59:19

802.11n ht40

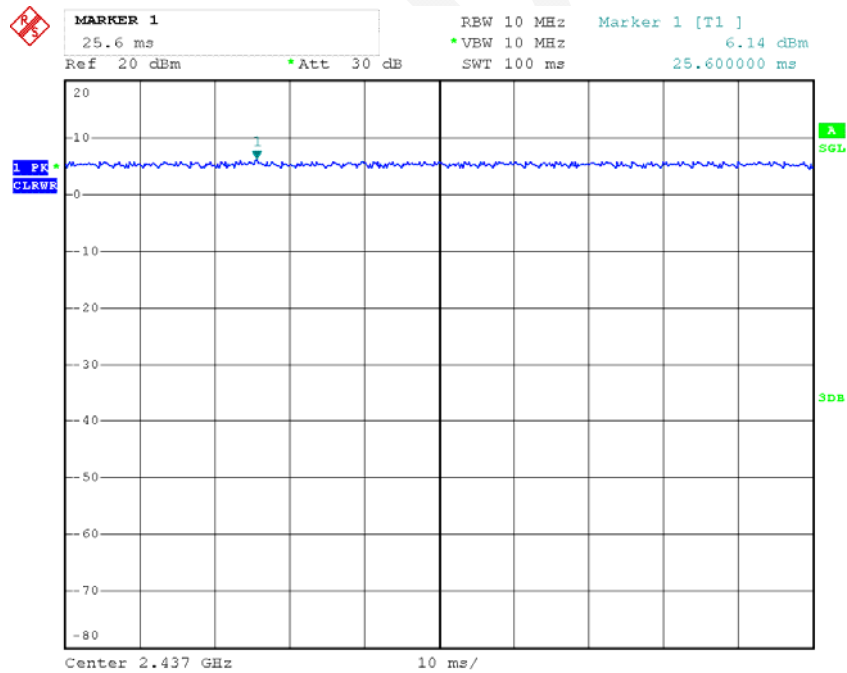

Date: 13.JUL.2018 08:59:56

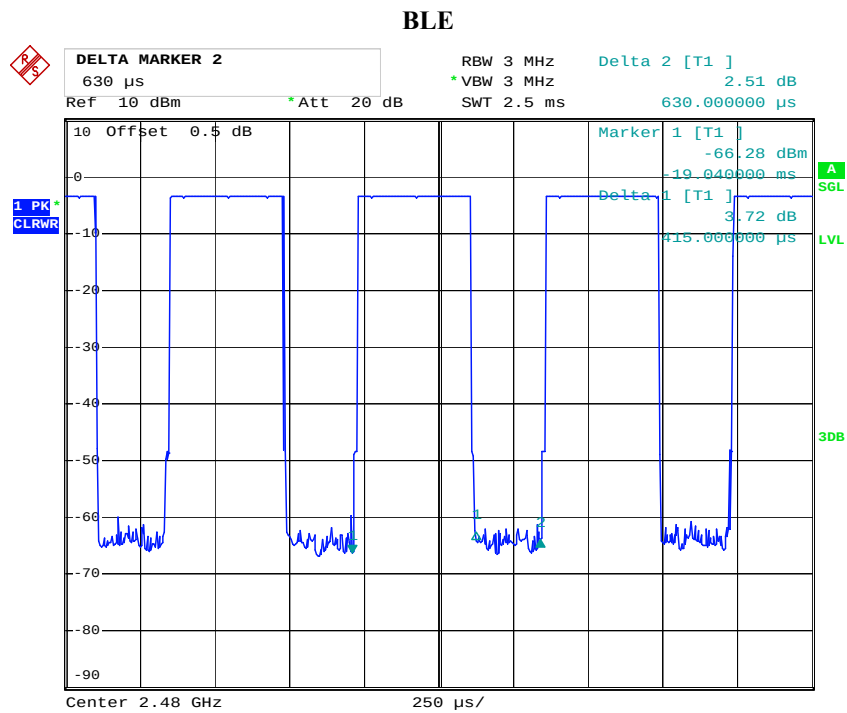

Date: 12.JUL.2018 22:22:42

Equipment Modifications

No modification was made to the EUT.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Huawei	adapter	HW-050200C3W	H333L5FM06947

Support Cable List and Details


Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
USB cable	no	no	0.8	adapter	charger box

Block Diagram of Test Setup

AC Line Conducted Emissions:

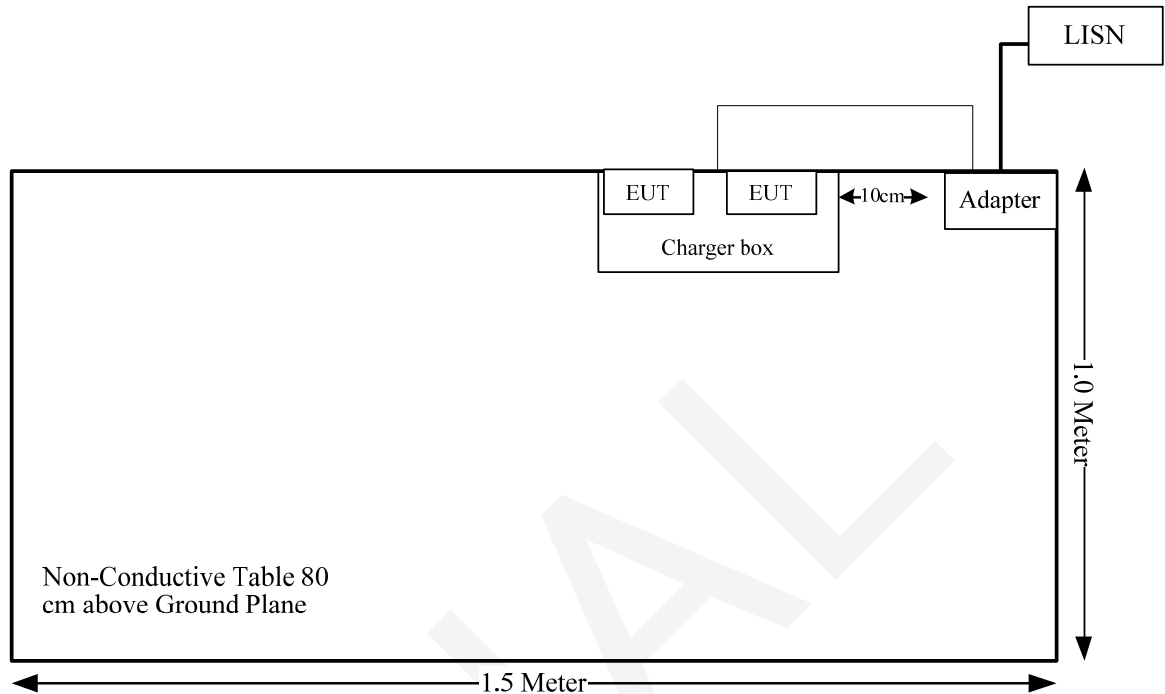

Radiated Emissions:

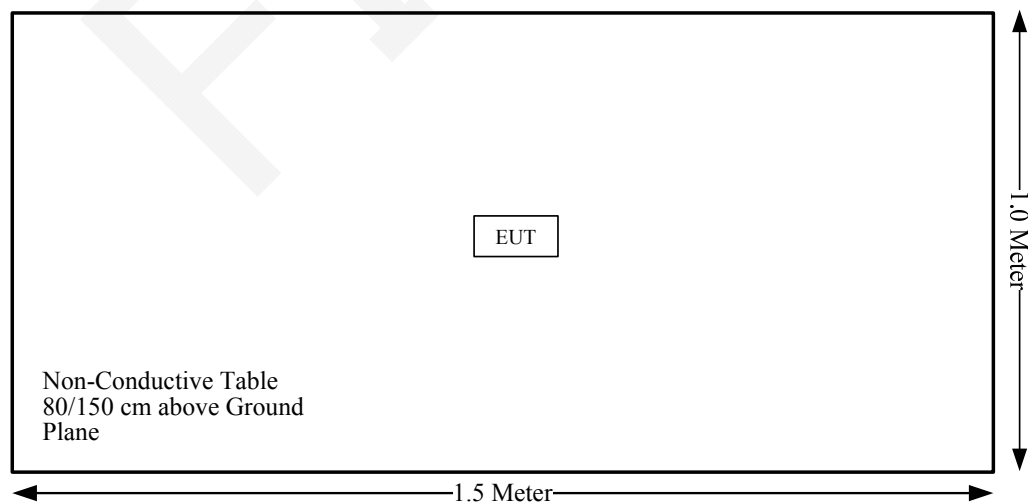

SUMMARY OF TEST RESULTS

Rules	Description of Test	Result
FCC §15.247 (i) & §1.1310 & §2.1093	RF Exposure	Compliance
RSS-102 §2.5.1	Exemption Limits for Routine Evaluation -SAR Evaluation	Compliance
FCC§15.203, RSS-Gen Clause 6.8	Antenna Requirement	Compliance
FCC§15.207 (a), RSS-Gen Clause 8.8	AC Line Conducted Emissions	Compliance
FCC§15.205, §15.209, FCC §15.247(d), RSS-247 Clause 5.5 RSS-Gen Clause 8.10	Spurious Emissions	Compliance
FCC§15.247 (a)(2), RSS-247 Clause 5.2 a) RSS-Gen Clause 6.7	6 dB Bandwidth	Compliance
FCC§15.247(b)(3), RSS-247 Clause 5.4 d)	Maximum Conducted Output Power	Compliance
FCC§15.247(d), RSS-247 Clause5.5	100 kHz Bandwidth of Frequency Band Edge	Compliance
FCC§15.247(e), RSS-247 Clause5.2 b)	Power Spectral Density	Compliance

FCC §15.247 (i) & §1.1310 & §2.1093- RF EXPOSURE

Applicable Standard

According to §15.247(i) and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB447498 D01 General RF Exposure Guidance v06:

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- 3.0 and 7.5 are referred to as the numeric thresholds in the step 2 below

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm according to 5) in section 4.1 is applied to determine SAR test exclusion.

Measurement Result

For Bluetooth LE mode:

The max conducted power including tune-up tolerance is -3.0 dBm (0.5 mW).
 $[(\text{max. power of channel, mW})/(\text{min. test separation distance, mm})][\sqrt{f(\text{GHz})}]$
 $= 0.5/5 \cdot (\sqrt{2.480}) = 0.2 < 3.0$

So the stand-alone SAR evaluation is not necessary.

For WIFI:

Please refer to the SAR report: RDG180628007-20

RSS-102 § 2.5.1 EXEMPTION LIMITS FOR ROUTINE EVALUATION – SAR EVALUATION

Applicable Standard

SAR evaluation is required if the separation distance between the user and/or bystander and the antenna and/or radiating element of the device is less than or equal to 20 cm, except when the device operates at or below the applicable output power level (adjusted for tune-up tolerance) for the specified separation distance defined in Table 1. For limb-worn devices where the 10 gram value applies, the exemption limits for routine evaluation in Table 1 are multiplied by a factor of 2.5.

Table 1: SAR evaluation – Exemption limits for routine evaluation based on frequency and separation distance⁴⁵

Frequency (MHz)	Exemption Limits (mW)				
	At separation distance of ≤5 mm	At separation distance of 10 mm	At separation distance of 15 mm	At separation distance of 20 mm	At separation distance of 25 mm
≤300	71 mW	101 mW	132 mW	162 mW	193 mW
450	52 mW	70 mW	88 mW	106 mW	123 mW
835	17 mW	30 mW	42 mW	55 mW	67 mW
1900	7 mW	10 mW	18 mW	34 mW	60 mW
2450	4 mW	7 mW	15 mW	30 mW	52 mW
3500	2 mW	6 mW	16 mW	32 mW	55 mW
5800	1 mW	6 mW	15 mW	27 mW	41 mW

Frequency (MHz)	Exemption Limits (mW)				
	At separation distance of 30 mm	At separation distance of 35 mm	At separation distance of 40 mm	At separation distance of 45 mm	At separation distance of ≥50 mm
≤300	223 mW	254 mW	284 mW	315 mW	345 mW
450	141 mW	159 mW	177 mW	195 mW	213 mW
835	80 mW	92 mW	105 mW	117 mW	130 mW
1900	99 mW	153 mW	225 mW	316 mW	431 mW
2450	83 mW	123 mW	173 mW	235 mW	309 mW
3500	86 mW	124 mW	170 mW	225 mW	290 mW
5800	56 mW	71 mW	85 mW	97 mW	106 mW

Measurement Result:

For Bluetooth LE mode:

The maximum output power including tune up tolerance is -3.0 dBm, which was declared by manufacturer. The antenna gain is 1.0 dBi, so the EIRP=-3.0+1.0= -2.0dBm(0.63 mW)

The exemption power(P) limits for routine evaluation in 2402-2480MHz is:

$$(2480-2450)/(3500-2450)=(4-P)/(4-2)$$

$$\Rightarrow P=3.96 \text{ mW}@2480\text{MHz}$$

$$> 0.63 \text{ mW}$$

So the SAR evaluation can be exempted.

For WIFI:

Please refer to the SAR report: RDG180628007-20

FCC §15.203& RSS-GEN CLAUSE 6.8 - ANTENNA REQUIREMENT

Applicable Standard

According to FCC§ 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

According to RSS-Gen §6.8, The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

For licence-exempt equipment with detachable antennas, the user manual shall also contain the following notice in a conspicuous location:

This radio transmitter [enter the device's ISED certification number] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

Antenna Information And Connector Construction

Both Controller and Tracker have 3 internal antenna, fulfill the requirement of this section. Please refer to the EUT photos and below information.

Unit	Antenna	Antenna Type	Connector Type	input impedance (Ohm)	Antenna Gain /Frequency
Controller	Lora	FPC	ejector pin	50	3.0 dBi/ 902-928MHz
	WIFI	Ceramic	Welded	50	1.0 dBi/ 2.4-2.5GHz
	BT	Ceramic	Welded	50	1.0 dBi/ 2.4-2.5GHz
Tracker	Lora	FPC	ejector pin	50	3.0 dBi/ 902-928MHz
	WIFI	Ceramic	Welded	50	1.0 dBi/ 2.4-2.5GHz
	BT	Ceramic	Welded	50	1.0 dBi/ 2.4-2.5GHz


Result: Compliance.

FCC §15.207 (a) & RSS-GEN CLAUSE 8.8– AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207(a), RSS-Gen§8.8.

EUT Setup

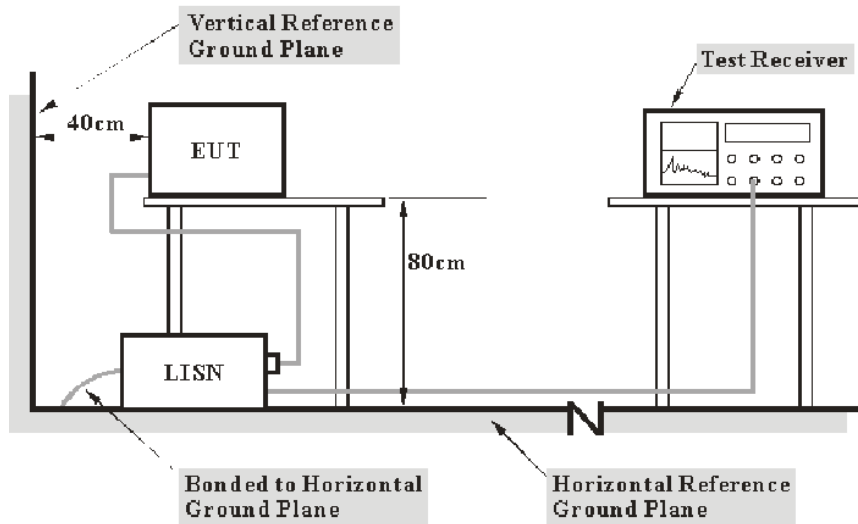

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 and the RSS-Gen limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to the main lisn with a 120 V/60 Hz AC power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

$$C_f = A_C + VDF$$

Herein,

V_C (cord. Reading): corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF: voltage division factor of AMN

C_f : Correction Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2017-12-11	2018-12-11
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-01	2018-09-05	2019-09-05
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A
R&S	Two-line V-network	ENV 216	101614	2017-12-08	2018-12-08

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


Test Data**Environmental Conditions**

Temperature:	27.6°C
Relative Humidity:	50 %
ATM Pressure:	100.6 kPa

The testing was performed by Alex You on 2018-09-08.


Test Mode: Transmitting (Wi-Fi mode 802.11b middle channel was the worst)

AC120 V, 60 Hz, Line:

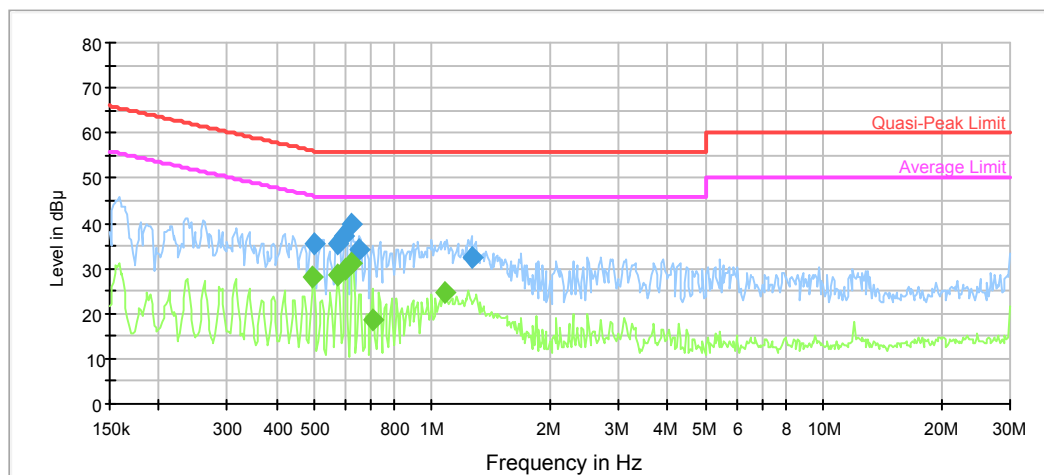

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.499611	35.3	9.000	L1	9.9	20.7	56.0	Compliance
0.572086	35.3	9.000	L1	9.8	20.7	56.0	Compliance
0.595338	37.0	9.000	L1	9.8	19.0	56.0	Compliance
0.624492	39.7	9.000	L1	9.8	16.3	56.0	Compliance
0.649874	34.1	9.000	L1	9.8	21.9	56.0	Compliance
1.259081	32.3	9.000	L1	9.8	23.7	56.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.495646	28.1	9.000	L1	9.9	18.0	46.1	Compliance
0.576662	28.4	9.000	L1	9.8	17.6	46.0	Compliance
0.600101	29.6	9.000	L1	9.8	16.4	46.0	Compliance
0.624492	31.2	9.000	L1	9.8	14.8	46.0	Compliance
0.703777	18.8	9.000	L1	9.8	27.2	46.0	Compliance
1.082190	24.7	9.000	L1	9.8	21.3	46.0	Compliance

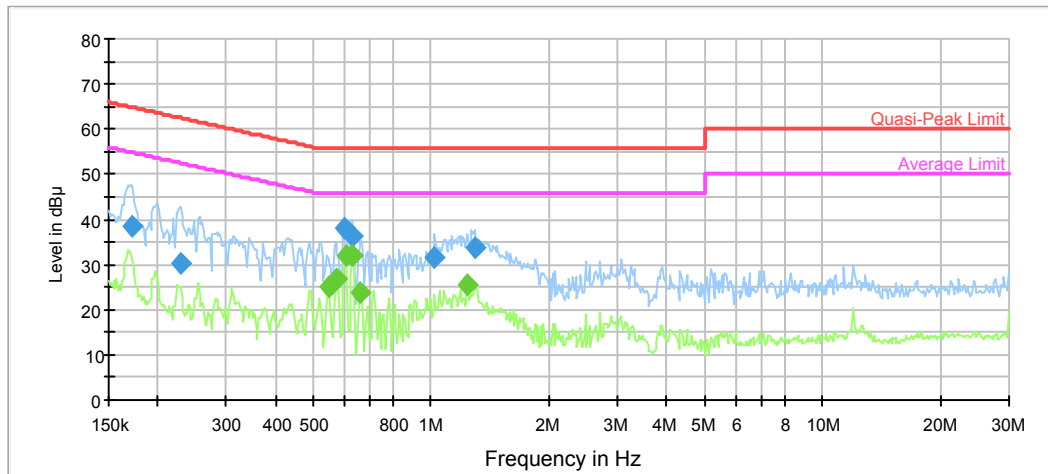AC120 V, 60 Hz, Neutral:

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.171759	38.5	9.000	N	10.9	26.4	64.9	Compliance
0.228823	30.5	9.000	N	10.4	32.0	62.5	Compliance
0.600101	38.3	9.000	N	9.8	17.7	56.0	Compliance
0.629488	36.4	9.000	N	9.8	19.6	56.0	Compliance
1.023481	31.6	9.000	N	9.8	24.4	56.0	Compliance
1.289541	33.7	9.000	N	9.8	22.3	56.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.545378	25.2	9.000	N	9.8	20.8	46.0	Compliance
0.576662	27.0	9.000	N	9.8	19.0	46.0	Compliance
0.604902	32.0	9.000	N	9.8	14.0	46.0	Compliance
0.629488	32.1	9.000	N	9.8	13.9	46.0	Compliance
0.660314	23.8	9.000	N	9.8	22.2	46.0	Compliance
1.239175	25.5	9.000	N	9.8	20.5	46.0	Compliance


FCC §15.209, §15.205, §15.247(d) & RSS-247 CLAUSE 5.5, RSS-GEN CLAUSE 8.10- SPURIOUS EMISSIONS

Applicable Standard


FCC §15.247 (d); §15.209; §15.205, RSS-247 §5.5, RSS-GEN §8.10.

EUT Setup

Below 1GHz:

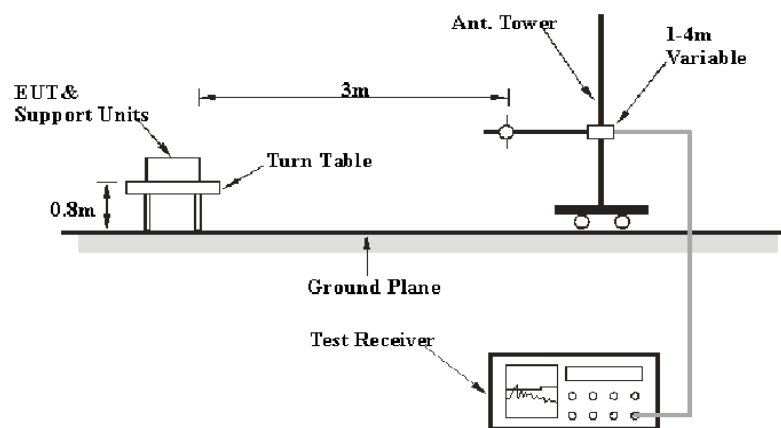

Above 1GHz:

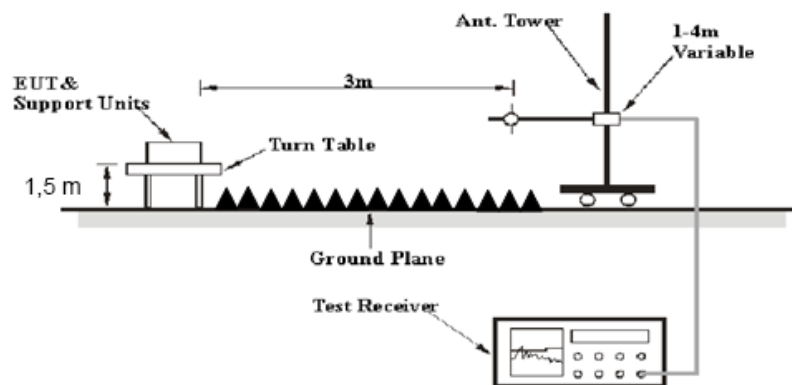

The radiated emission tests were performed in the 3 meters chamber test site A for the range 30MHz to 1GHz and the 3 meters chamber A test site for above 1GHz, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247, the RSS-247 §5.5, RSS-Gen §8.10 limits..

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 26.5 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

30MHz-1000MHz:

Measurement	RBW	Video B/W	IF B/W
QP	120 kHz	300 kHz	120kHz

1GHz- 26.5GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
Ave.	>98%	1MHz	10 Hz
	<98%	1MHz	1/T

Note: T is minimum transmission duration

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2017-12-11	2018-12-11
Sunol Sciences	Antenna	JB3	A060611-1	2017-11-10	2020-11-10
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2018-09-05	2019-09-05
HP	Amplifier	8447D	2727A05902	2018-09-05	2019-09-05
Rohde & Schwarz	Signal Analyzer	FSIQ26	831929/005	2018-08-31	2019-08-31
TDK RF	Horn Antenna	HRN-0118	130 084	2016-01-05	2019-01-04
MICRO-COAX	Coaxial Cable	UFA147-1-2362-100100	64639 231029-001	2018-02-24	2019-02-28
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2018-09-05	2019-09-05
E-Microwave	Band-stop Filters	OBSF-2400-2483.5-S	OE01601525	2018-06-16	2019-06-16
Micro-tronics	High Pass Filter	HPM50111	S/N-G217	2018-06-16	2019-06-16
MITEQ	Amplifier	AFS42-00101800-25-S-42	2001271	2018-09-05	2019-09-05
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2018-06-27	2019-06-27

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**


Temperature:	26.4~27.7 °C
Relative Humidity:	40~44 %
ATM Pressure:	100~100.7kPa

* The testing was performed by Sunny Cen & Vern Shen on 2018-07-13~2018-09-18.


Test Mode: Transmitting

1) 30MHz-1GHz (802.11g Low channel was the worst):

Horizontal:

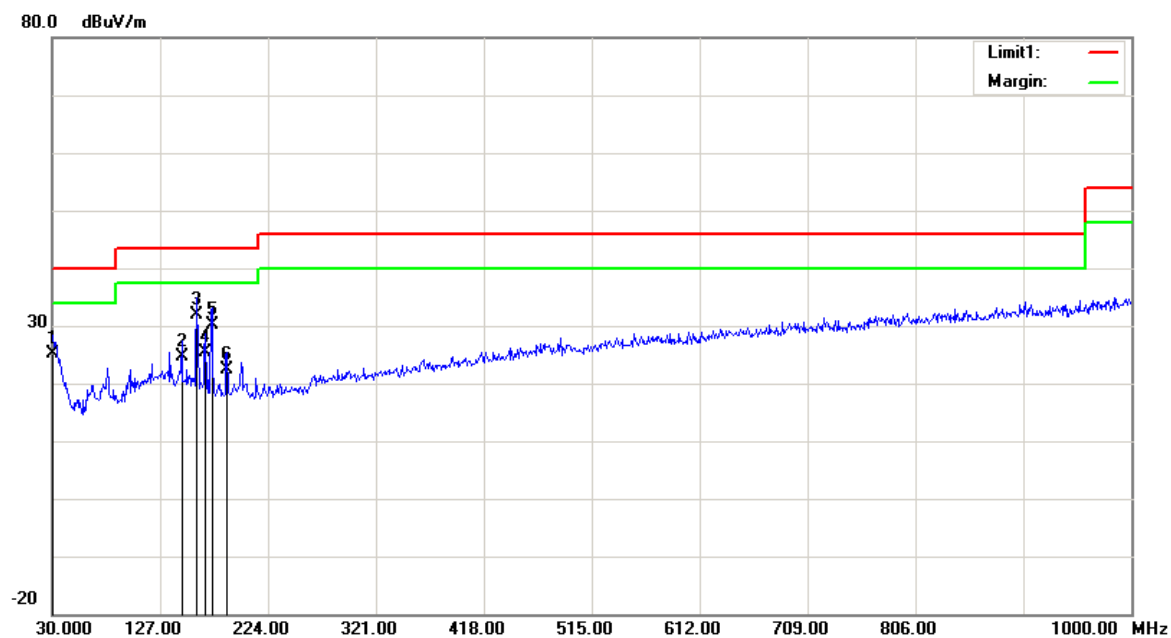

Frequency (MHz)	Receiver Reading (dBuV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
30.9700	24.35	QP	0.85	25.20	40.00	14.80
146.4000	30.70	QP	-6.00	24.70	43.50	18.80
159.9800	37.73	QP	-5.83	31.90	43.50	11.60
167.7400	31.67	QP	-6.37	25.30	43.50	18.20
173.5600	36.95	QP	-6.85	30.10	43.50	13.40
187.1400	29.50	QP	-7.20	22.30	43.50	21.20

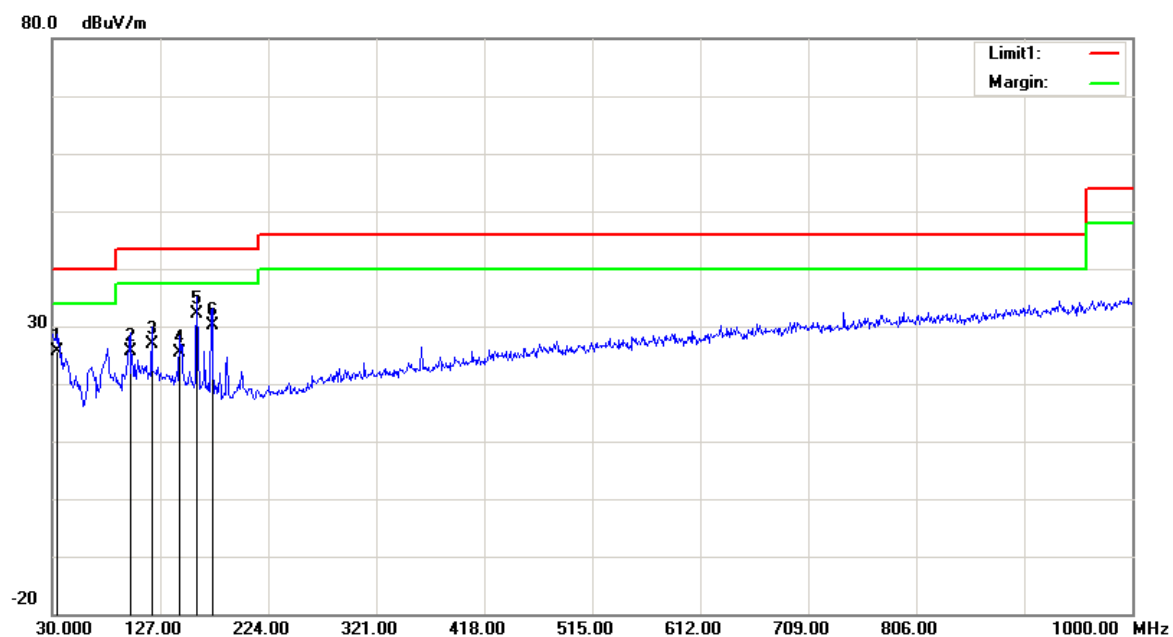Vertical:

Frequency (MHz)	Receiver Reading (dBuV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
34.8500	27.64	QP	-2.04	25.60	40.00	14.40
99.8400	34.59	QP	-8.89	25.70	43.50	17.80
119.2400	31.69	QP	-4.89	26.80	43.50	16.70
144.4600	31.33	QP	-5.93	25.40	43.50	18.10
159.9800	37.93	QP	-5.83	32.10	43.50	11.40
173.5600	36.95	QP	-6.85	30.10	43.50	13.40

2) 1-26.5GHz:**802.11b Mode:**

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2412 MHz									
2412.00	70.31	PK	H	24.84	3.35	0.00	98.50	N/A	N/A
2412.00	65.12	AV	H	24.84	3.35	0.00	93.31	N/A	N/A
2412.00	62.48	PK	V	24.84	3.35	0.00	90.67	N/A	N/A
2412.00	57.34	AV	V	24.84	3.35	0.00	85.53	N/A	N/A
2390.00	29.65	PK	H	24.80	3.33	0.00	57.78	74.00	16.22
2390.00	15.68	AV	H	24.80	3.33	0.00	43.81	54.00	10.19
4824.00	46.72	PK	H	29.75	4.58	27.41	53.64	74.00	20.36
4824.00	39.85	AV	H	29.75	4.58	27.41	46.77	54.00	7.23
7236.00	42.72	PK	H	33.98	5.62	27.22	55.10	74.00	18.90
7236.00	35.27	AV	H	33.98	5.62	27.22	47.65	54.00	6.35
Middle Channel: 2437 MHz									
2437.00	68.64	PK	H	24.89	3.36	0.00	96.89	N/A	N/A
2437.00	64.57	AV	H	24.89	3.36	0.00	92.82	N/A	N/A
2437.00	60.38	PK	V	24.89	3.36	0.00	88.63	N/A	N/A
2437.00	54.85	AV	V	24.89	3.36	0.00	83.10	N/A	N/A
4874.00	45.00	PK	H	29.85	4.57	27.54	51.88	74.00	22.12
4874.00	38.63	AV	H	29.85	4.57	27.54	45.51	54.00	8.49
7311.00	42.91	PK	H	34.10	5.68	27.28	55.41	74.00	18.59
7311.00	34.83	AV	H	34.10	5.68	27.28	47.33	54.00	6.67
High Channel: 2462 MHz									
2462.00	66.77	PK	H	24.93	3.37	0.00	95.07	N/A	N/A
2462.00	61.89	AV	H	24.93	3.37	0.00	90.19	N/A	N/A
2462.00	54.84	PK	V	24.93	3.37	0.00	83.14	N/A	N/A
2462.00	49.37	AV	V	24.93	3.37	0.00	77.67	N/A	N/A
2483.50	29.34	PK	H	24.97	3.38	0.00	57.69	74.00	16.31
2483.50	16.52	AV	H	24.97	3.38	0.00	44.87	54.00	9.13
4924.00	45.72	PK	H	29.95	4.57	27.51	52.73	74.00	21.27
4924.00	38.55	AV	H	29.95	4.57	27.51	45.56	54.00	8.44
7386.00	41.74	PK	H	34.22	5.74	27.18	54.52	74.00	19.48
7386.00	33.97	AV	H	34.22	5.74	27.18	46.75	54.00	7.25

802.11g Mode:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2412 MHz									
2412.00	70.62	PK	H	24.84	3.35	0.00	98.81	N/A	N/A
2412.00	60.24	AV	H	24.84	3.35	0.00	88.43	N/A	N/A
2412.00	66.34	PK	V	24.84	3.35	0.00	94.53	N/A	N/A
2412.00	56.45	AV	V	24.84	3.35	0.00	84.64	N/A	N/A
2390.00	30.57	PK	H	24.80	3.33	0.00	58.70	74.00	15.30
2390.00	17.85	AV	H	24.80	3.33	0.00	45.98	54.00	8.02
4824.00	46.82	PK	H	29.75	4.58	27.41	53.74	74.00	20.26
4824.00	36.91	AV	H	29.75	4.58	27.41	43.83	54.00	10.17
7236.00	43.75	PK	H	33.98	5.62	27.22	56.13	74.00	17.87
7236.00	33.68	AV	H	33.98	5.62	27.22	46.06	54.00	7.94
Middle Channel: 2437 MHz									
2437.00	69.04	PK	H	24.89	3.36	0.00	97.29	N/A	N/A
2437.00	59.85	AV	H	24.89	3.36	0.00	88.10	N/A	N/A
2437.00	65.32	PK	V	24.89	3.36	0.00	93.57	N/A	N/A
2437.00	55.76	AV	V	24.89	3.36	0.00	84.01	N/A	N/A
4874.00	48.26	PK	H	29.85	4.57	27.54	55.14	74.00	18.86
4874.00	37.96	AV	H	29.85	4.57	27.54	44.84	54.00	9.16
7311.00	43.58	PK	H	34.10	5.68	27.28	56.08	74.00	17.92
7311.00	35.44	AV	H	34.10	5.68	27.28	47.94	54.00	6.06
High Channel: 2462 MHz									
2462.00	69.52	PK	H	24.93	3.37	0.00	97.82	N/A	N/A
2462.00	59.97	AV	H	24.93	3.37	0.00	88.27	N/A	N/A
2462.00	65.56	PK	V	24.93	3.37	0.00	93.86	N/A	N/A
2462.00	56.13	AV	V	24.93	3.37	0.00	84.43	N/A	N/A
2483.50	33.85	PK	H	24.97	3.38	0.00	62.20	74.00	11.80
2483.50	19.78	AV	H	24.97	3.38	0.00	48.13	54.00	5.87
4924.00	47.68	PK	H	29.95	4.57	27.51	54.69	74.00	19.31
4924.00	38.21	AV	H	29.95	4.57	27.51	45.22	54.00	8.78
7386.00	44.61	PK	H	34.22	5.74	27.18	57.39	74.00	16.61
7386.00	33.63	AV	H	34.22	5.74	27.18	46.41	54.00	7.59

802.11n ht20 Mode:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2412 MHz									
2412.00	70.24	PK	H	24.84	3.35	0.00	98.43	N/A	N/A
2412.00	60.21	AV	H	24.84	3.35	0.00	88.40	N/A	N/A
2412.00	65.34	PK	V	24.84	3.35	0.00	93.53	N/A	N/A
2412.00	55.67	AV	V	24.84	3.35	0.00	83.86	N/A	N/A
2390.00	31.24	PK	H	24.80	3.33	0.00	59.37	74.00	14.63
2390.00	15.41	AV	H	24.80	3.33	0.00	43.54	54.00	10.46
4824.00	47.40	PK	H	29.75	4.58	27.41	54.32	74.00	19.68
4824.00	37.01	AV	H	29.75	4.58	27.41	43.93	54.00	10.07
7236.00	43.94	PK	H	33.98	5.62	27.22	56.32	74.00	17.68
7236.00	35.04	AV	H	33.98	5.62	27.22	47.42	54.00	6.58
Middle Channel: 2437 MHz									
2437.00	68.68	PK	H	24.89	3.36	0.00	96.93	N/A	N/A
2437.00	58.79	AV	H	24.89	3.36	0.00	87.04	N/A	N/A
2437.00	65.22	PK	V	24.89	3.36	0.00	93.47	N/A	N/A
2437.00	55.48	AV	V	24.89	3.36	0.00	83.73	N/A	N/A
4874.00	47.24	PK	H	29.85	4.57	27.54	54.12	74.00	19.88
4874.00	37.01	AV	H	29.85	4.57	27.54	43.89	54.00	10.11
7311.00	45.42	PK	H	34.10	5.68	27.28	57.92	74.00	16.08
7311.00	34.34	AV	H	34.10	5.68	27.28	46.84	54.00	7.16
High Channel: 2462 MHz									
2462.00	68.64	PK	H	24.93	3.37	0.00	96.94	N/A	N/A
2462.00	58.90	AV	H	24.93	3.37	0.00	87.20	N/A	N/A
2462.00	63.47	PK	V	24.93	3.37	0.00	91.77	N/A	N/A
2462.00	53.54	AV	V	24.93	3.37	0.00	81.84	N/A	N/A
2483.50	40.25	PK	H	24.97	3.38	0.00	68.60	74.00	5.40
2483.50	21.43	AV	H	24.97	3.38	0.00	49.78	54.00	4.22
4924.00	48.25	PK	H	29.95	4.57	27.51	55.26	74.00	18.74
4924.00	38.27	AV	H	29.95	4.57	27.51	45.28	54.00	8.72
7386.00	45.09	PK	H	34.22	5.74	27.18	57.87	74.00	16.13
7386.00	33.94	AV	H	34.22	5.74	27.18	46.72	54.00	7.28

802.11n ht40 Mode:




Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2422 MHz									
2422.00	68.01	PK	H	24.86	3.35	0.00	96.22	N/A	N/A
2422.00	58.70	AV	H	24.86	3.35	0.00	86.91	N/A	N/A
2422.00	63.47	PK	V	24.86	3.35	0.00	91.68	N/A	N/A
2422.00	53.58	AV	V	24.86	3.35	0.00	81.79	N/A	N/A
2390.00	33.37	PK	H	24.80	3.33	0.00	61.50	74.00	12.50
2390.00	18.34	AV	H	24.80	3.33	0.00	46.47	54.00	7.53
4844.00	47.99	PK	H	29.79	4.57	27.46	54.89	74.00	19.11
4844.00	38.18	AV	H	29.79	4.57	27.46	45.08	54.00	8.92
7266.00	44.87	PK	H	34.03	5.64	27.25	57.29	74.00	16.71
7266.00	33.65	AV	H	34.03	5.64	27.25	46.07	54.00	7.93
Middle Channel: 2437 MHz									
2437.00	67.68	PK	H	24.89	3.36	0.00	95.93	N/A	N/A
2437.00	57.85	AV	H	24.89	3.36	0.00	86.10	N/A	N/A
2437.00	63.82	PK	V	24.89	3.36	0.00	92.07	N/A	N/A
2437.00	53.95	AV	V	24.89	3.36	0.00	82.20	N/A	N/A
4874.00	47.72	PK	H	29.85	4.57	27.54	54.60	74.00	19.40
4874.00	37.68	AV	H	29.85	4.57	27.54	44.56	54.00	9.44
7311.00	44.82	PK	H	34.10	5.68	27.28	57.32	74.00	16.68
7311.00	35.35	AV	H	34.10	5.68	27.28	47.85	54.00	6.15
High Channel: 2452 MHz									
2452.00	67.97	PK	H	24.91	3.37	0.00	96.25	N/A	N/A
2452.00	58.11	AV	H	24.91	3.37	0.00	86.39	N/A	N/A
2452.00	63.15	PK	V	24.91	3.37	0.00	91.43	N/A	N/A
2452.00	53.38	AV	V	24.91	3.37	0.00	81.66	N/A	N/A
2483.50	38.60	PK	H	24.97	3.38	0.00	66.95	74.00	7.05
2483.50	24.50	AV	H	24.97	3.38	0.00	52.85	54.00	1.15
4904.00	48.49	PK	H	29.91	4.56	27.58	55.38	74.00	18.62
4904.00	37.21	AV	H	29.91	4.56	27.58	44.10	54.00	9.90
7356.00	43.74	PK	H	34.17	5.72	27.22	56.41	74.00	17.59
7356.00	34.25	AV	H	34.17	5.72	27.22	46.92	54.00	7.08

BLE Mode:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2402 MHz									
2402.00	61.42	PK	H	24.82	3.34	0.00	89.58	N/A	N/A
2402.00	55.68	AV	H	24.82	3.34	0.00	83.84	N/A	N/A
2402.00	60.45	PK	V	24.82	3.34	0.00	88.61	N/A	N/A
2402.00	54.26	AV	V	24.82	3.34	0.00	82.42	N/A	N/A
2390.00	28.34	PK	H	24.80	3.33	0.00	56.47	74.00	17.53
2390.00	15.68	AV	H	24.80	3.33	0.00	43.81	54.00	10.19
4804.00	43.62	PK	H	29.71	4.58	27.36	50.55	74.00	23.45
4804.00	37.85	AV	H	29.71	4.58	27.36	44.78	54.00	9.22
7206.00	40.21	PK	H	33.93	5.59	27.19	52.54	74.00	21.46
7206.00	34.24	AV	H	33.93	5.59	27.19	46.57	54.00	7.43
Middle Channel: 2440 MHz									
2440.00	58.62	PK	H	24.89	3.36	0.00	86.87	N/A	N/A
2440.00	52.32	AV	H	24.89	3.36	0.00	80.57	N/A	N/A
2440.00	53.69	PK	V	24.89	3.36	0.00	81.94	N/A	N/A
2440.00	48.35	AV	V	24.89	3.36	0.00	76.60	N/A	N/A
4880.00	43.57	PK	H	29.86	4.56	27.55	50.44	74.00	23.56
4880.00	37.51	AV	H	29.86	4.56	27.55	44.38	54.00	9.62
7320.00	40.22	PK	H	34.11	5.69	27.26	52.76	74.00	21.24
7320.00	34.24	AV	H	34.11	5.69	27.26	46.78	54.00	7.22
High Channel: 2480 MHz									
2480.00	58.75	PK	H	24.96	3.38	0.00	87.09	N/A	N/A
2480.00	52.45	AV	H	24.96	3.38	0.00	80.79	N/A	N/A
2480.00	54.32	PK	V	24.96	3.38	0.00	82.66	N/A	N/A
2480.00	48.63	AV	V	24.96	3.38	0.00	76.97	N/A	N/A
2483.50	28.64	PK	H	24.97	3.38	0.00	56.99	74.00	17.01
2483.50	15.85	AV	H	24.97	3.38	0.00	44.20	54.00	9.80
4960.00	46.31	PK	H	30.02	4.58	27.37	53.54	74.00	20.46
4960.00	40.27	AV	H	30.02	4.58	27.37	47.50	54.00	6.50
7440.00	40.57	PK	H	34.30	5.79	27.22	53.44	74.00	20.56
7440.00	34.42	AV	H	34.30	5.79	27.22	47.29	54.00	6.71




Test plots(802.11 g mode middle channel was the worst)
Horizontal:

Fundamental
Test with Band
Rejection Filter

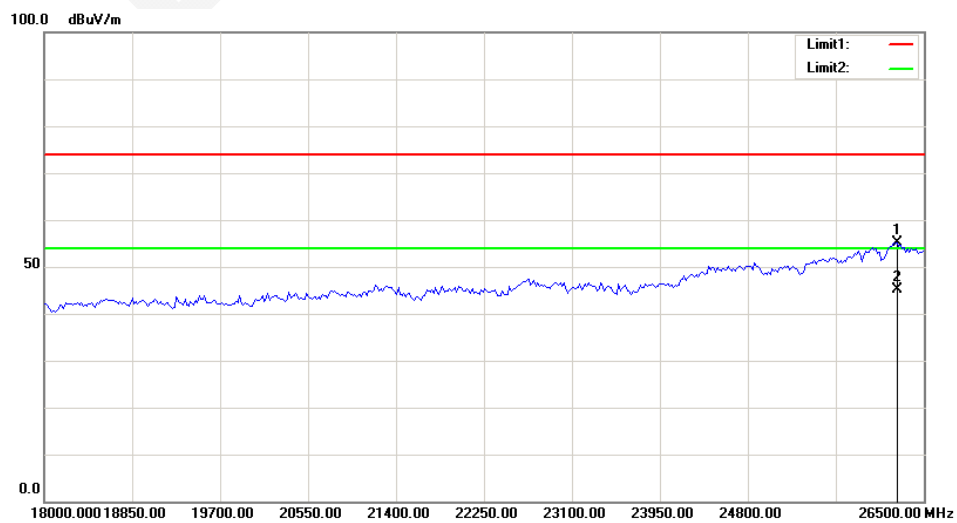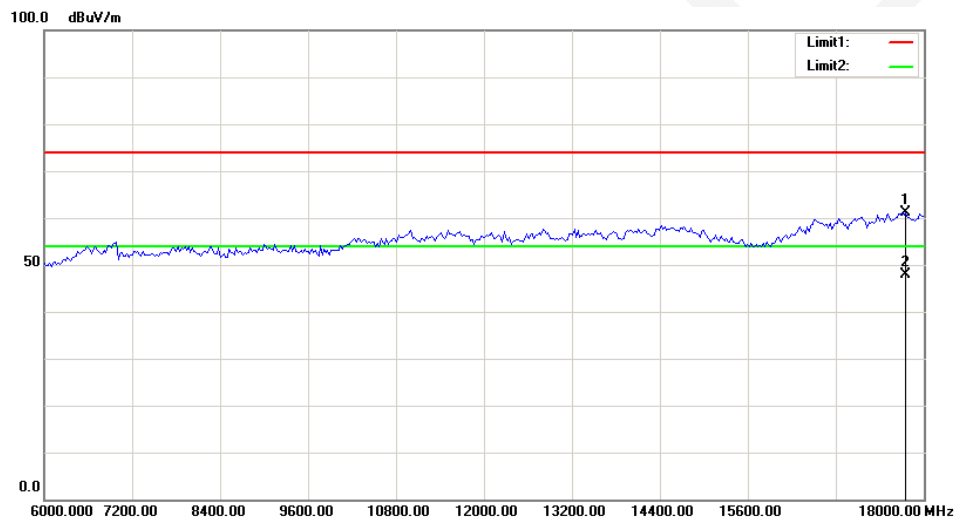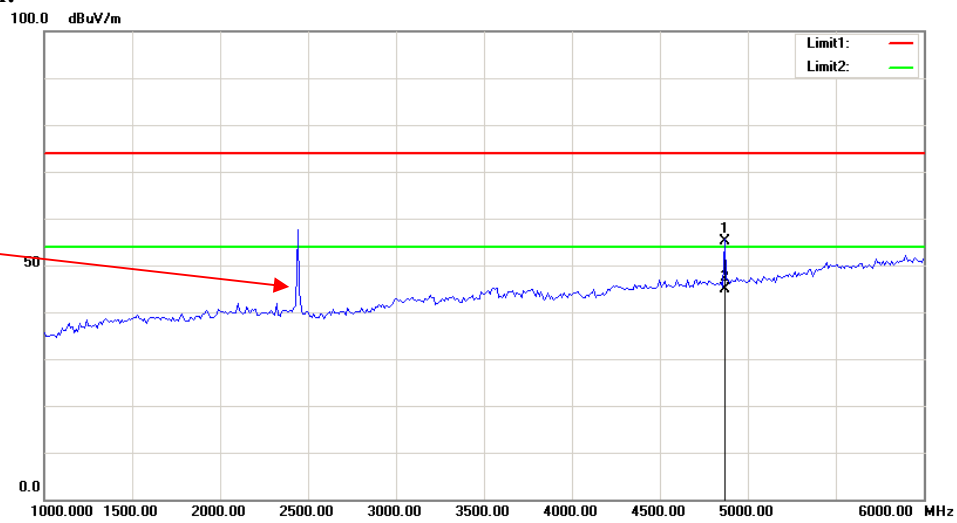

Vertical:

Fundamental
Test with Band
Rejection Filter

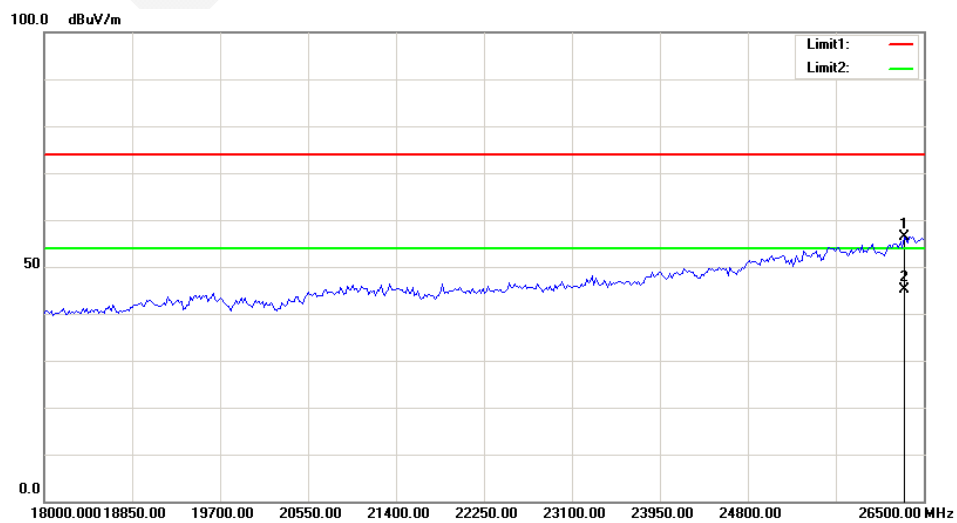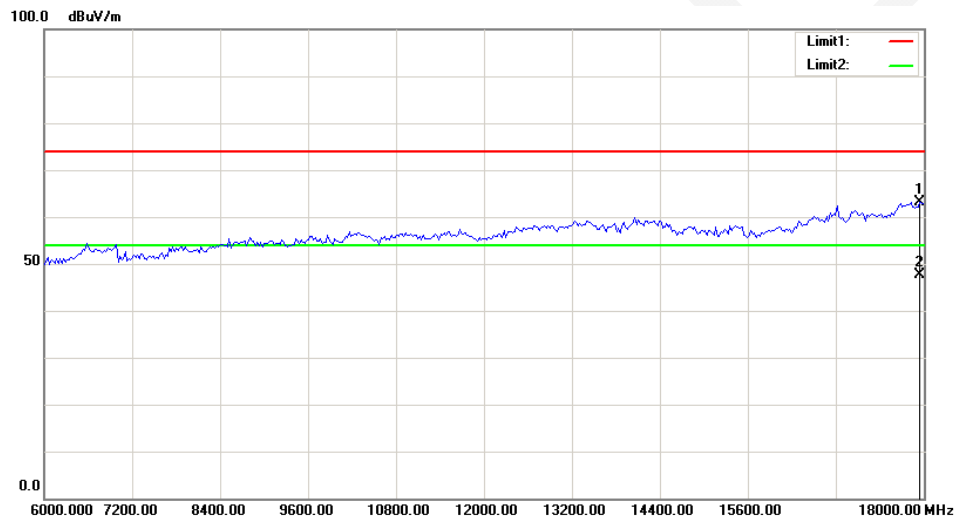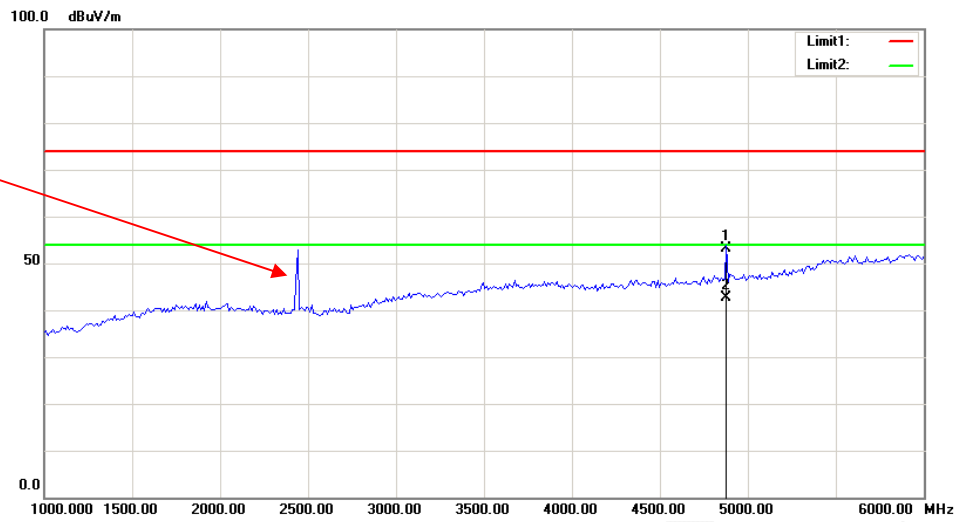

FCC §15.247(a) (2) & RSS-247 CLAUSE 5.2 a) & RSS-GEN CLAUSE 6.7–6 dB EMISSION BANDWIDTH AND 99% OCCUPIED BANDWIDTH

Applicable Standard

According to FCC §15.247(a) (2)

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

According to RSS-247 §5.2 a)

The minimum 6 dB bandwidth shall be 500 kHz.

According to RSS-Gen §6.7

The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs.

In some cases, the “x dB bandwidth” is required, which is defined as the frequency range between two points, one at the lowest frequency below and one at the highest frequency above the carrier frequency, at which the maximum power level of the transmitted emission is attenuated x dB below the maximum in-band power level of the modulated signal, where the two points are on the outskirts of the in-band emission.

The following conditions shall be observed for measuring the occupied bandwidth and x dB bandwidth:

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
- The detector of the spectrum analyzer shall be set to “Sample”. However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or “Max Hold”) may be necessary to determine the occupied / x dB bandwidth if the device is not transmitting continuously.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / x dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).

Test Procedure

6dB bandwidth test:

- Set RBW = 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

99% Occupied bandwidth test:

Use Occupied bandwidth test function, measure the 99% Occupied bandwidth.

Repeat above procedures until all frequencies measured were complete.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESPI	100120	2017-12-11	2018-12-11
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	28.9 °C
Relative Humidity:	65 %
ATM Pressure:	99.8 kPa

* The testing was performed by Tiago Huang & Swim Lv on 2018-07-12.


Test Mode: Transmitting

Test Result: Compliant. Please refer to the following table and plots.

Test mode	Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (MHz)
802.11b	Low	2412	9.12	11.92	≥ 0.5
	Middle	2437	9.36	12.40	≥ 0.5
	High	2462	9.28	12.56	≥ 0.5
802.11g	Low	2412	16.64	17.44	≥ 0.5
	Middle	2437	16.64	17.28	≥ 0.5
	High	2462	16.64	17.52	≥ 0.5
802.11n ht20	Low	2412	17.76	17.84	≥ 0.5
	Middle	2437	17.76	17.84	≥ 0.5
	High	2462	17.76	17.92	≥ 0.5
802.11n ht40	Low	2422	36.64	36.96	≥ 0.5
	Middle	2437	33.28	36.00	≥ 0.5
	High	2452	32.00	36.00	≥ 0.5
BLE	Low	2402	0.720	1.044	≥ 0.5
	Middle	2440	0.732	1.044	≥ 0.5
	High	2480	0.724	1.040	≥ 0.5


6dB bandwidth:

802.11b Low Channel

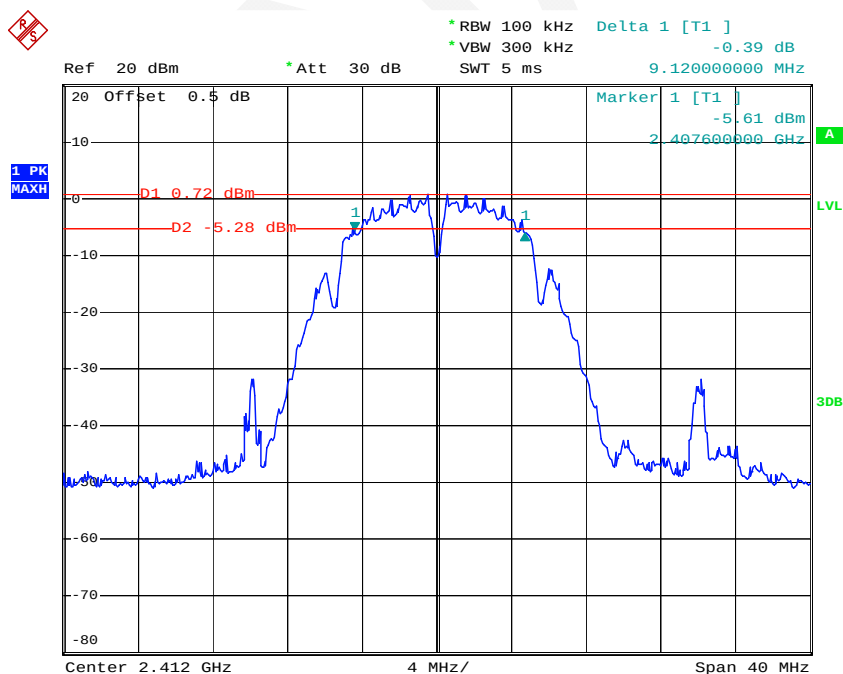


Date: 12.JUL.2018 15:17:39

802.11b Middle Channel

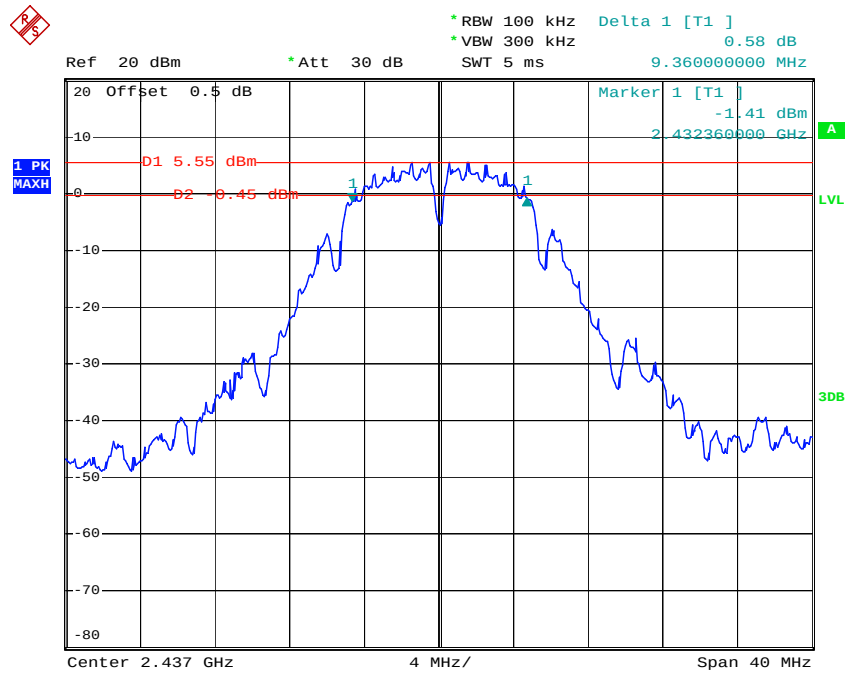


Date: 12.JUL.2018 15:25:07

802.11b High Channel

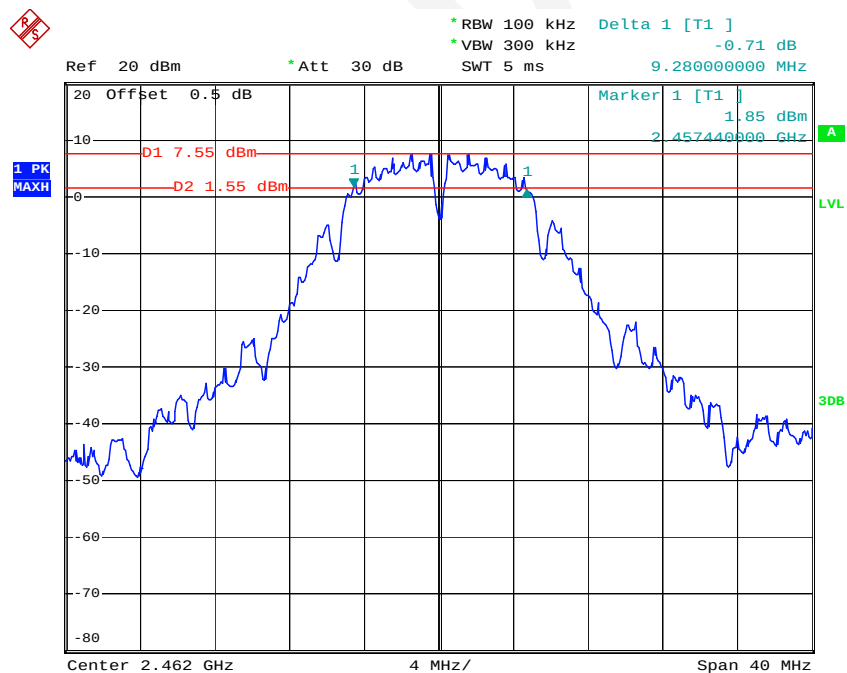


Date: 12.JUL.2018 15:27:10

802.11g Low Channel

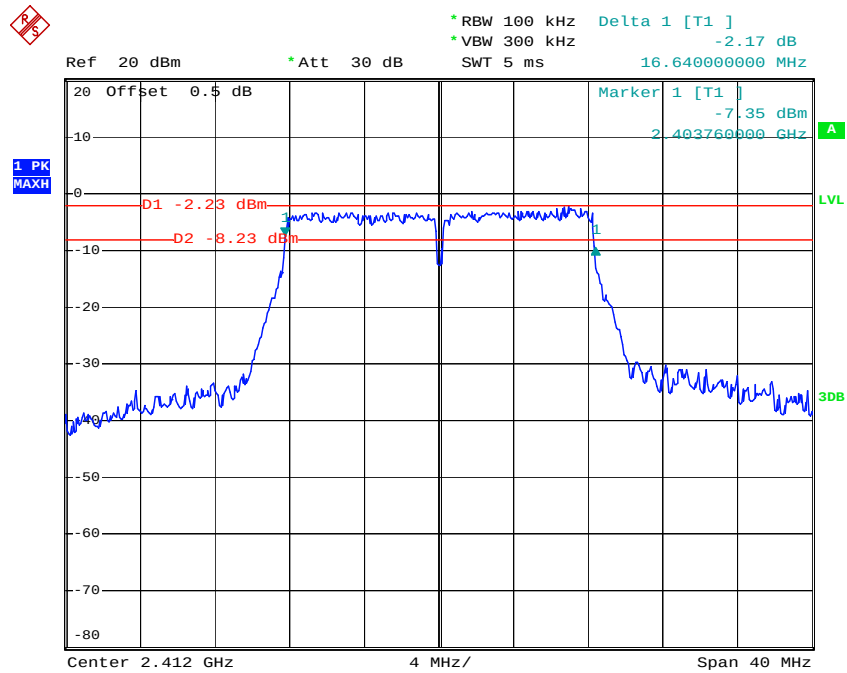


Date: 12.JUL.2018 15:33:08

802.11g Middle Channel

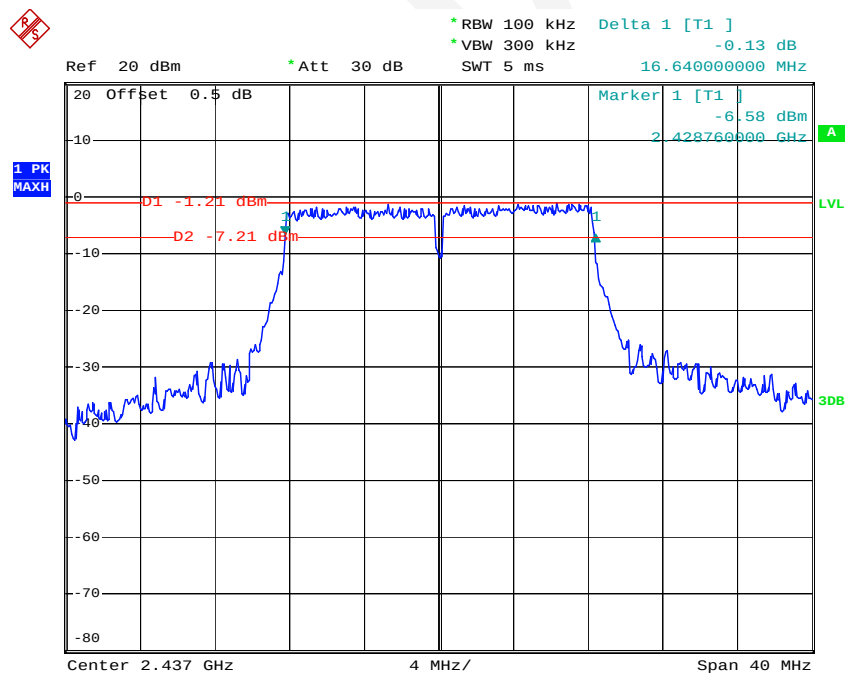


Date: 12.JUL.2018 15:35:19

802.11g High Channel

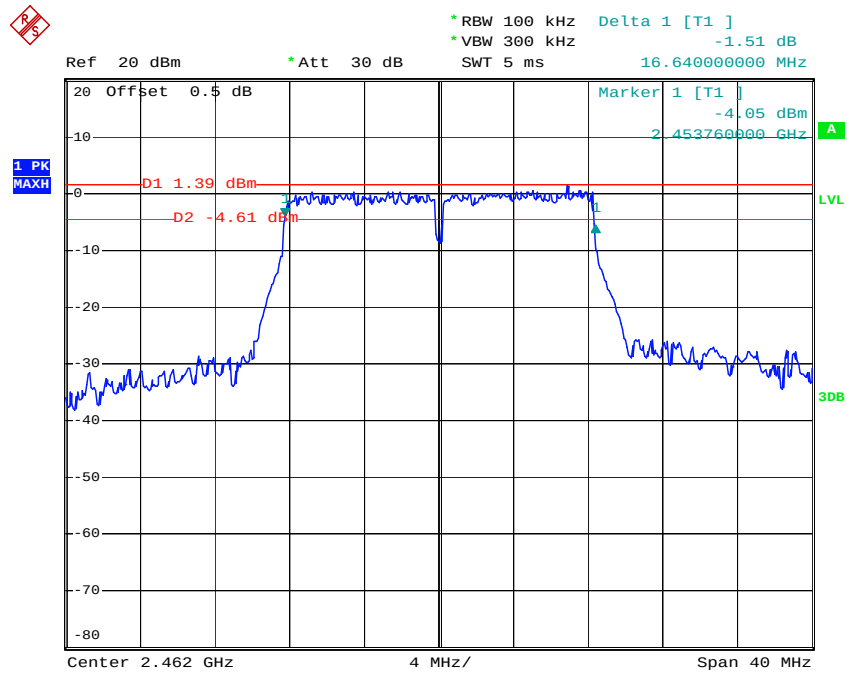


Date: 12.JUL.2018 15:37:26

802.11n ht20 Low Channel

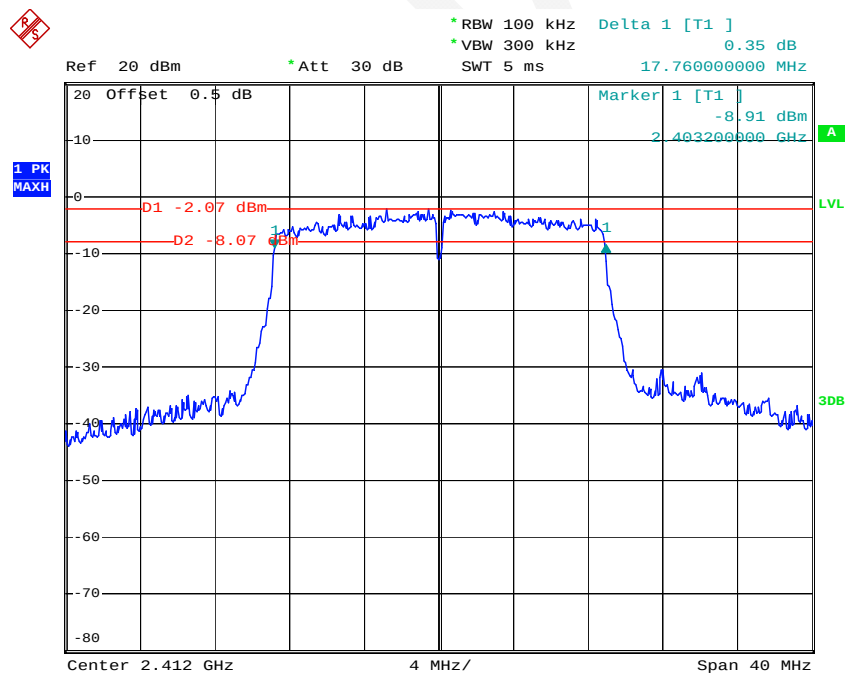


Date: 12.JUL.2018 15:39:56

802.11n ht20 Middle Channel

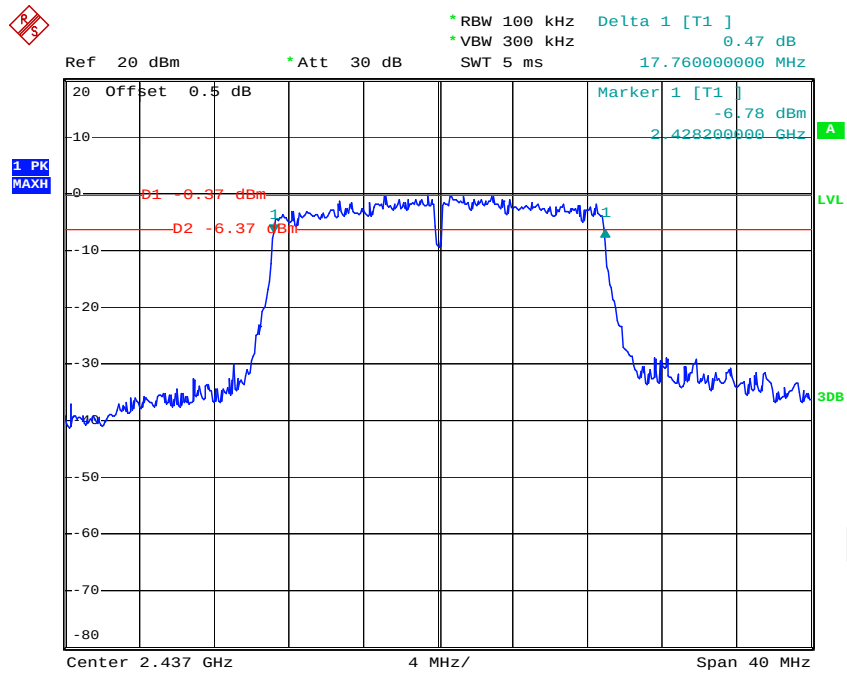


Date: 12.JUL.2018 15:43:50

802.11n ht20 High Channel

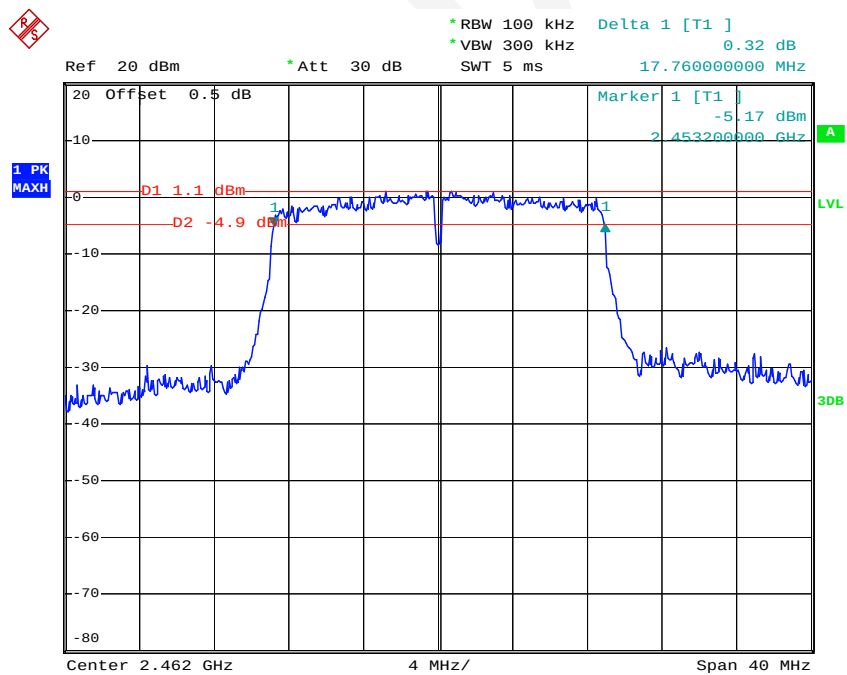


Date: 12.JUL.2018 15:47:00

802.11n ht40 Low Channel

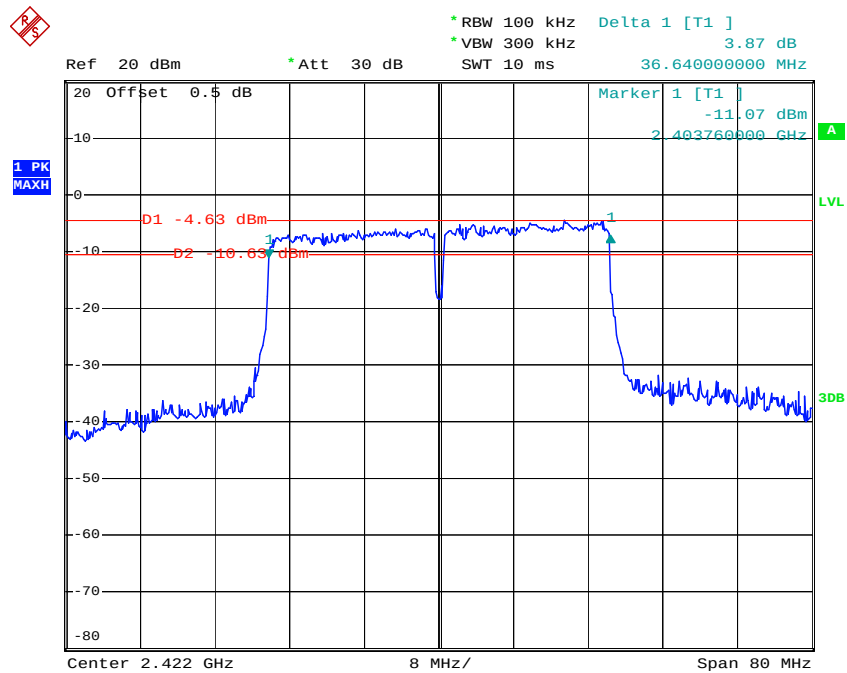


Date: 12.JUL.2018 15:49:51

802.11n ht40 Middle Channel

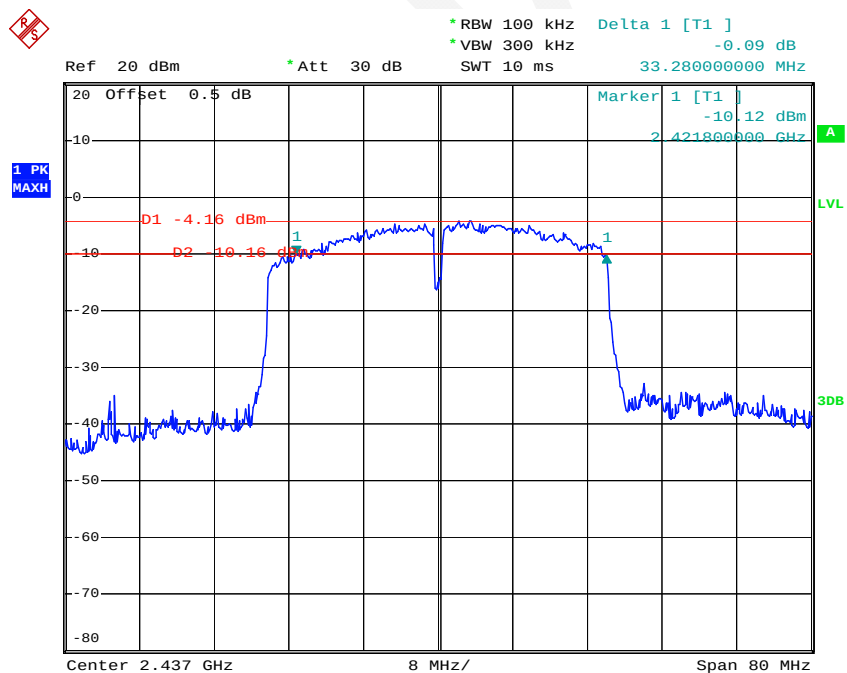


Date: 12.JUL.2018 15:55:31

802.11n ht40 High Channel

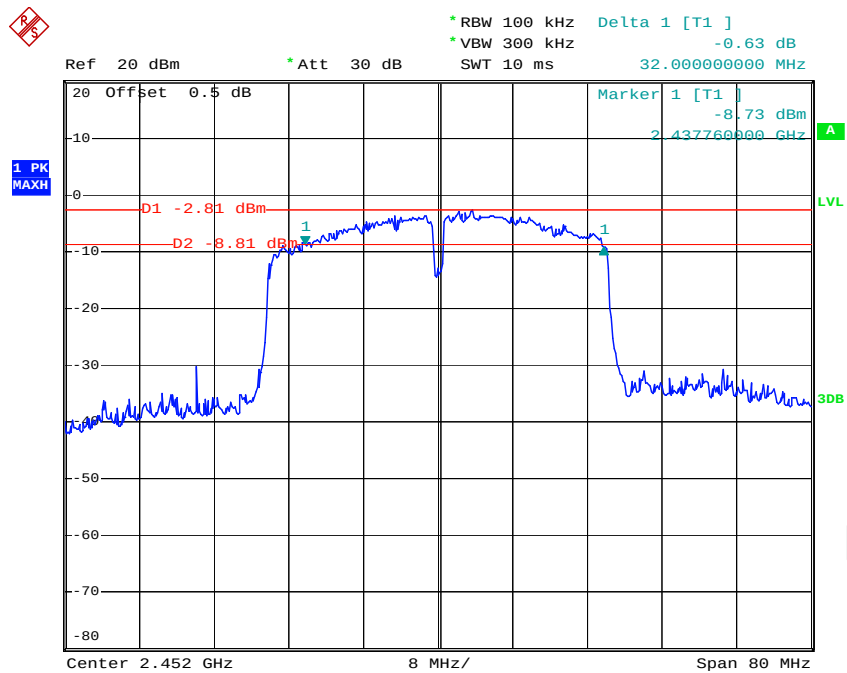


Date: 12.JUL.2018 15:59:49

BLE Low Channel

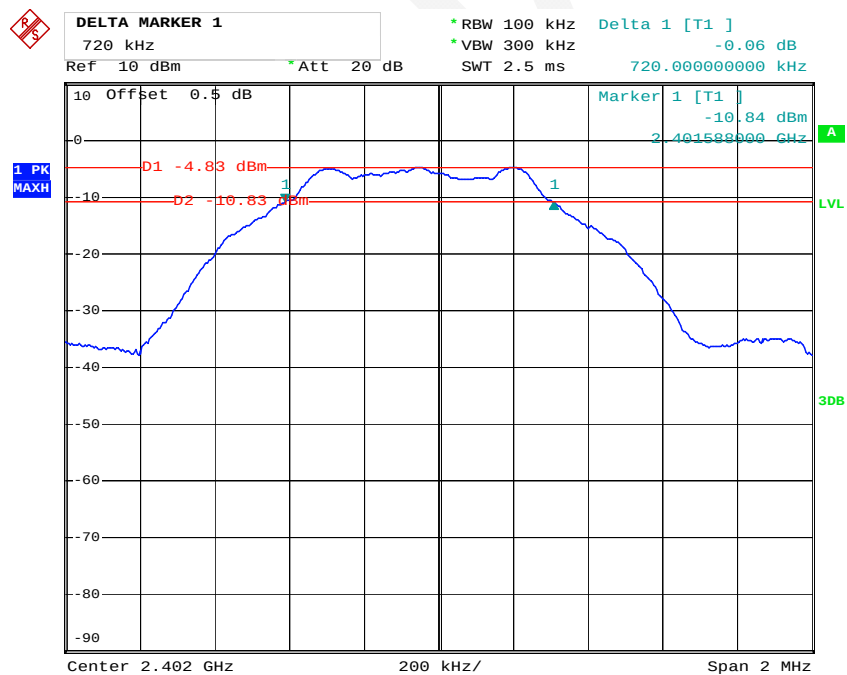


Date: 12.JUL.2018 22:18:59

BLE Middle Channel

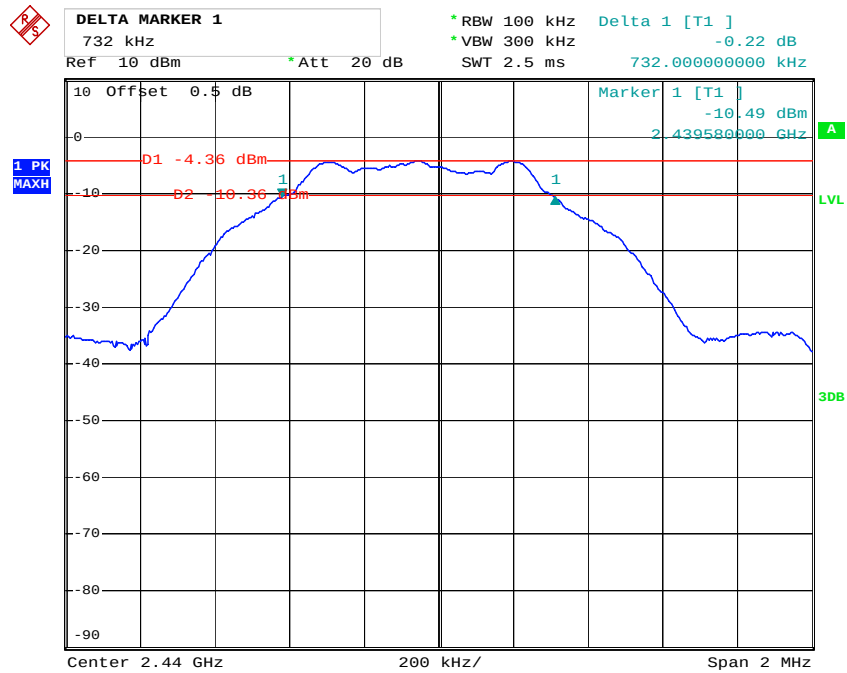


Date: 12.JUL.2018 22:17:48


BLE High Channel

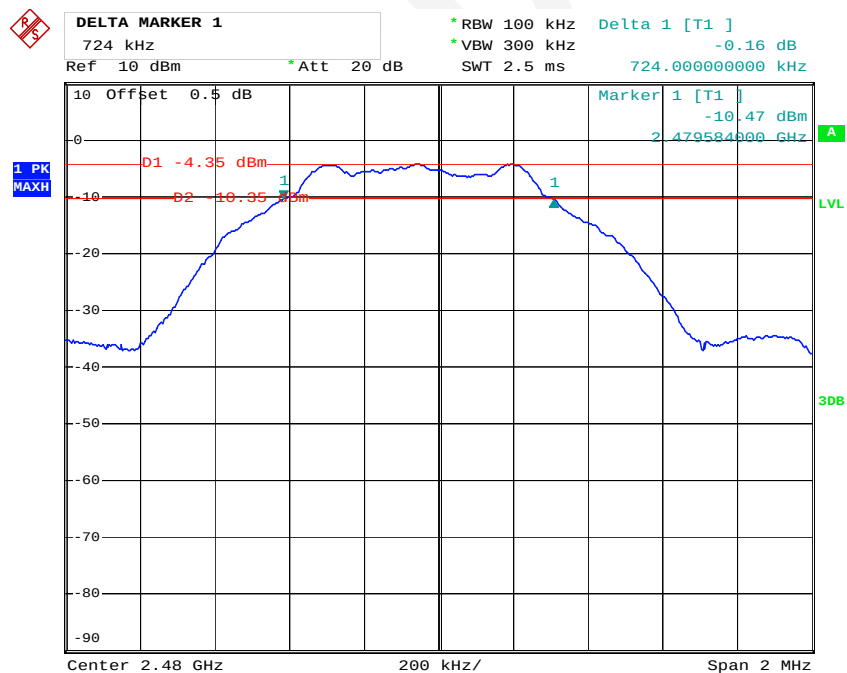

Date: 12.JUL.2018 22:16:35

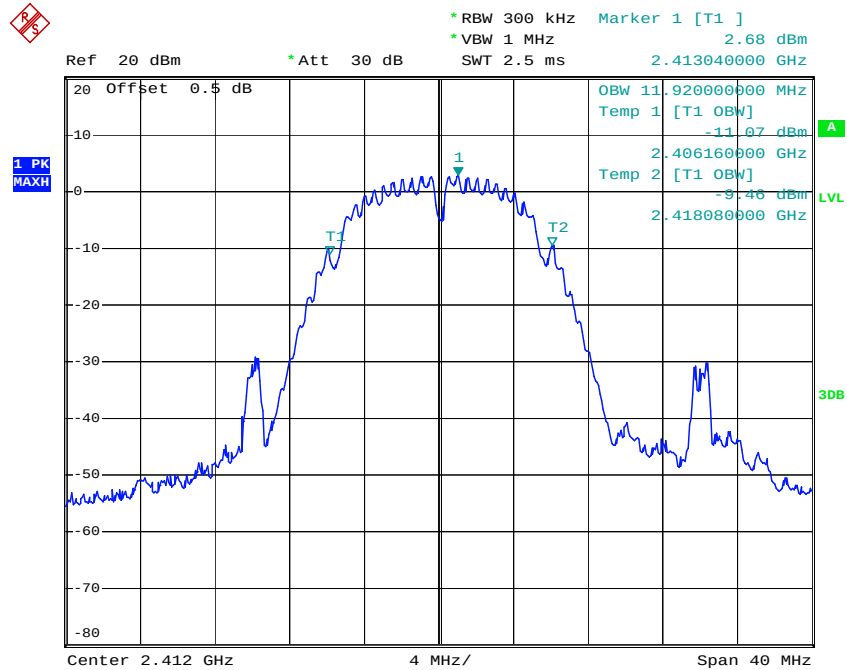
99% Occupied bandwidth:**802.11b Low Channel**

Date: 12.JUL.2018 15:17:58

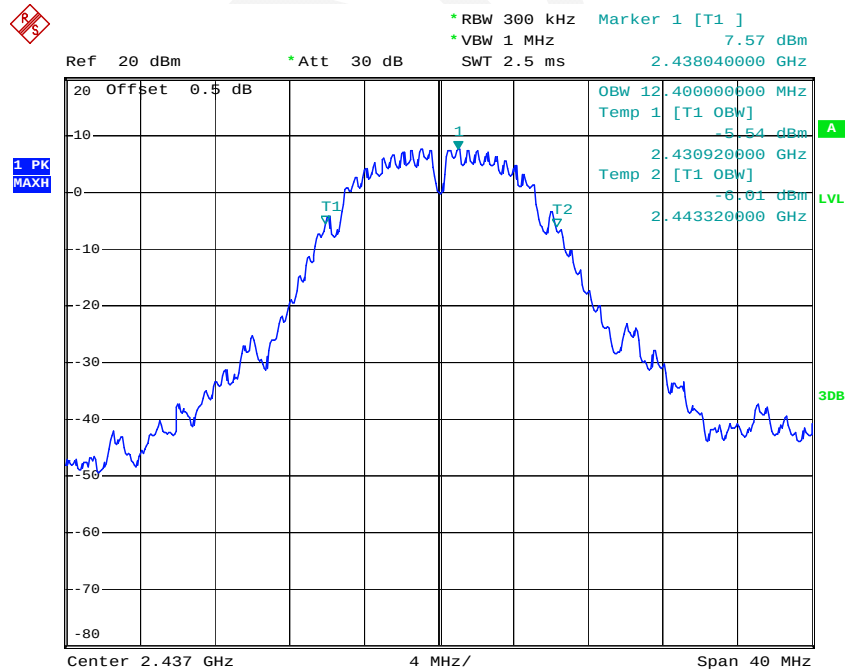802.11b Middle Channel


Date: 12.JUL.2018 15:25:26

802.11b High Channel

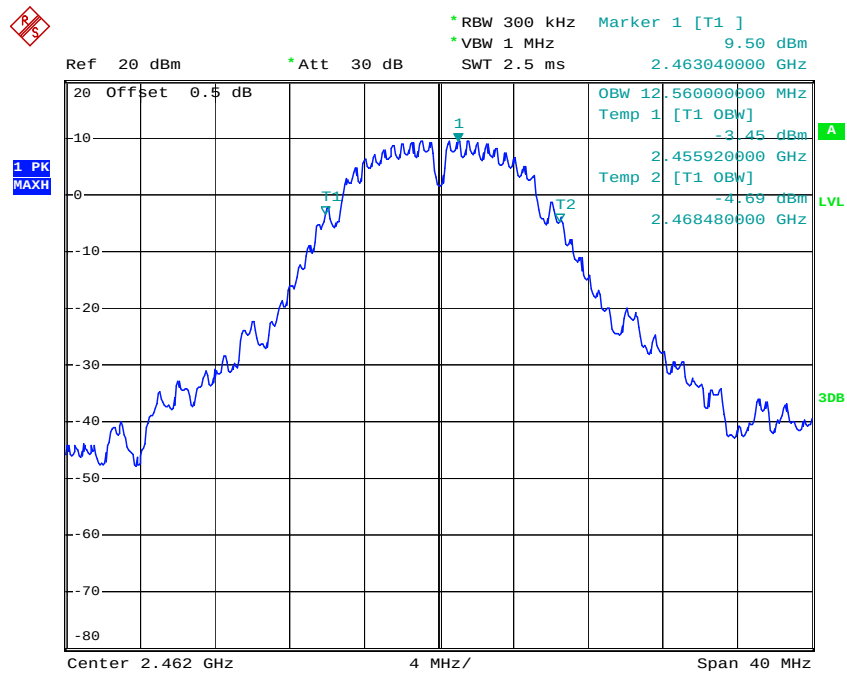


Date: 12.JUL.2018 15:27:24


802.11g Low Channel

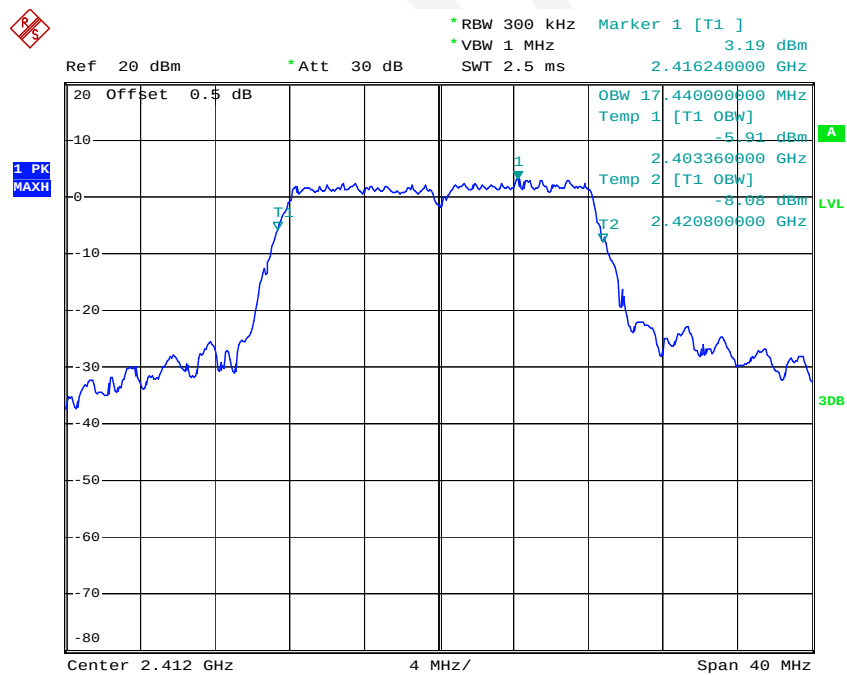

Date: 12.JUL.2018 15:33:25

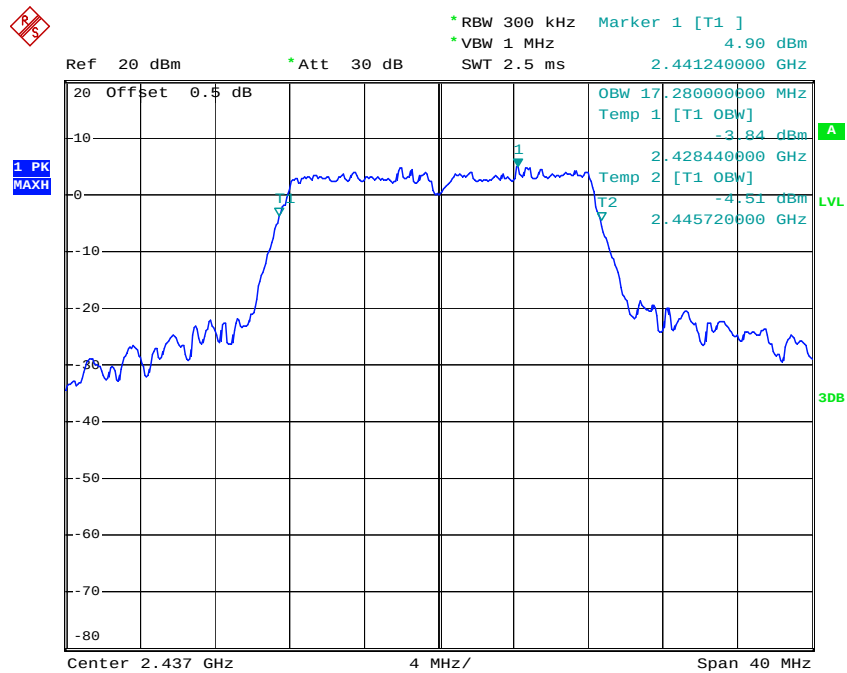
802.11g Middle Channel

Date: 12.JUL.2018 15:35:38

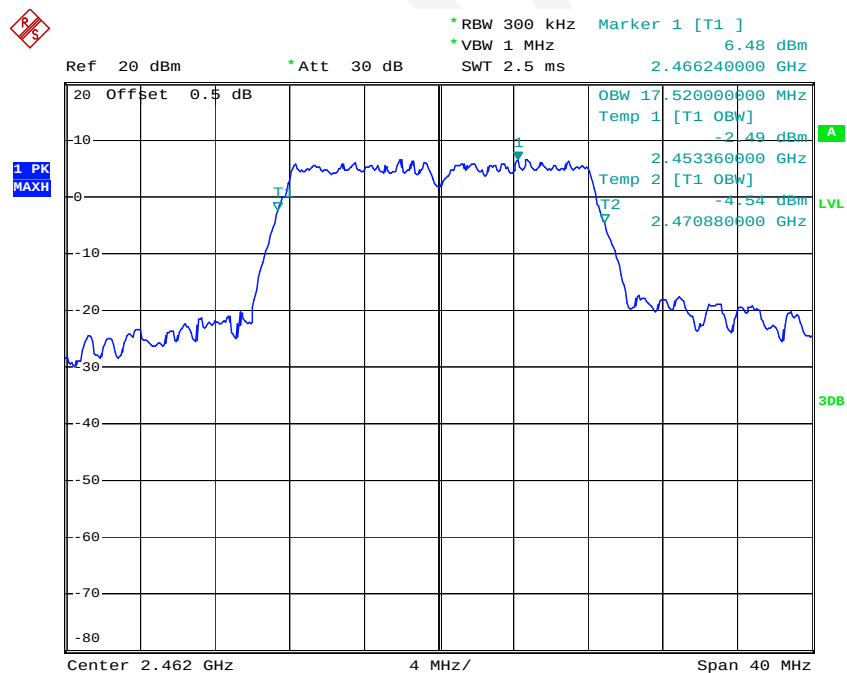802.11g High Channel


Date: 12.JUL.2018 15:37:43

802.11n ht20 Low Channel

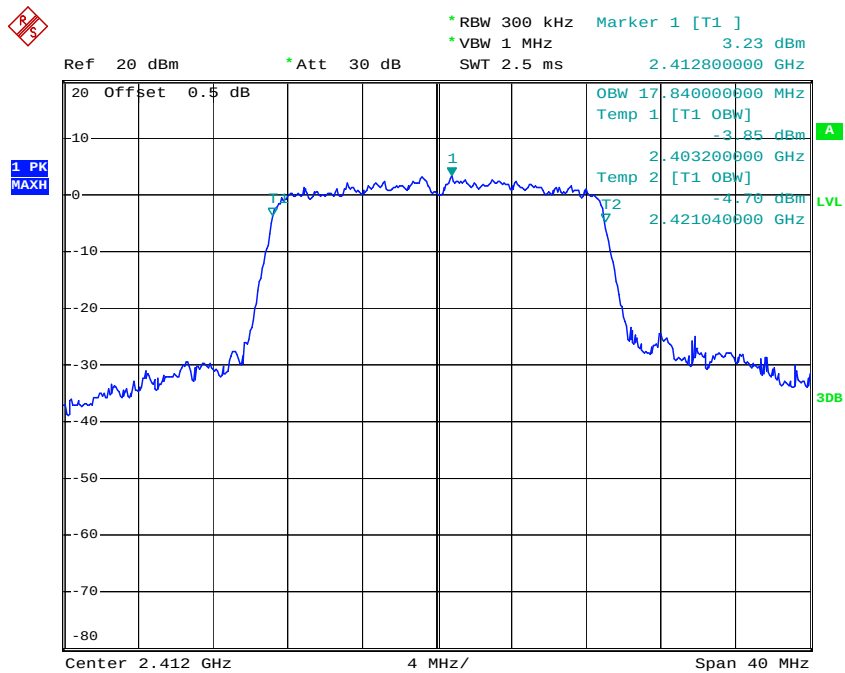


Date: 12.JUL.2018 15:40:13

802.11n ht20 Middle Channel

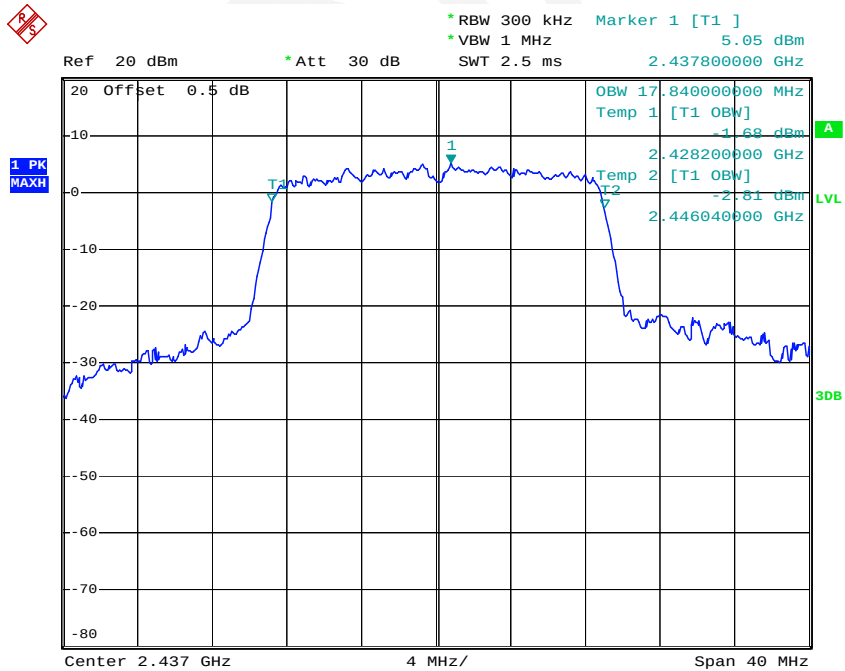


Date: 12.JUL.2018 15:44:13

802.11n ht20 High Channel

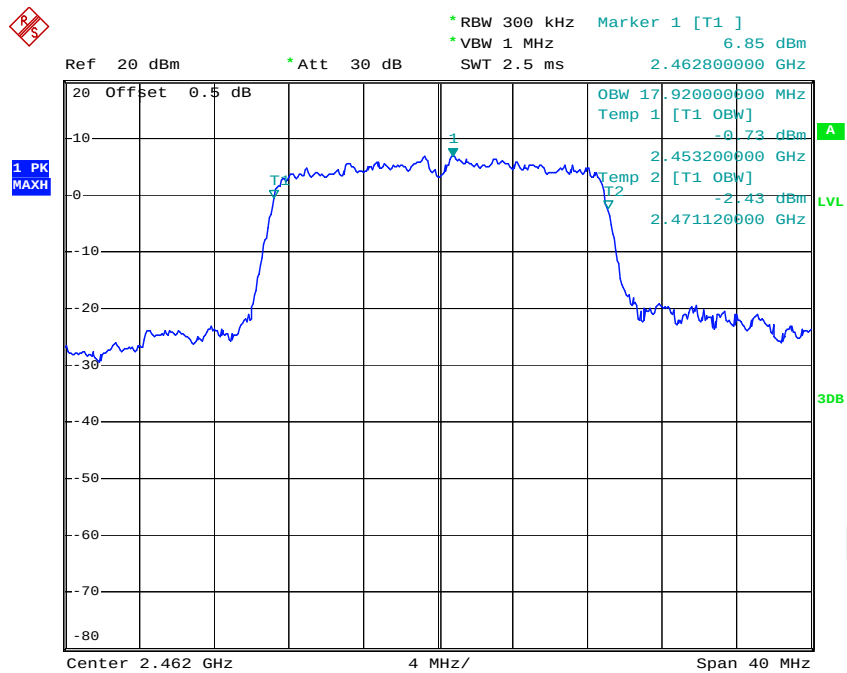


Date: 12.JUL.2018 15:47:23

802.11n ht40 Low Channel

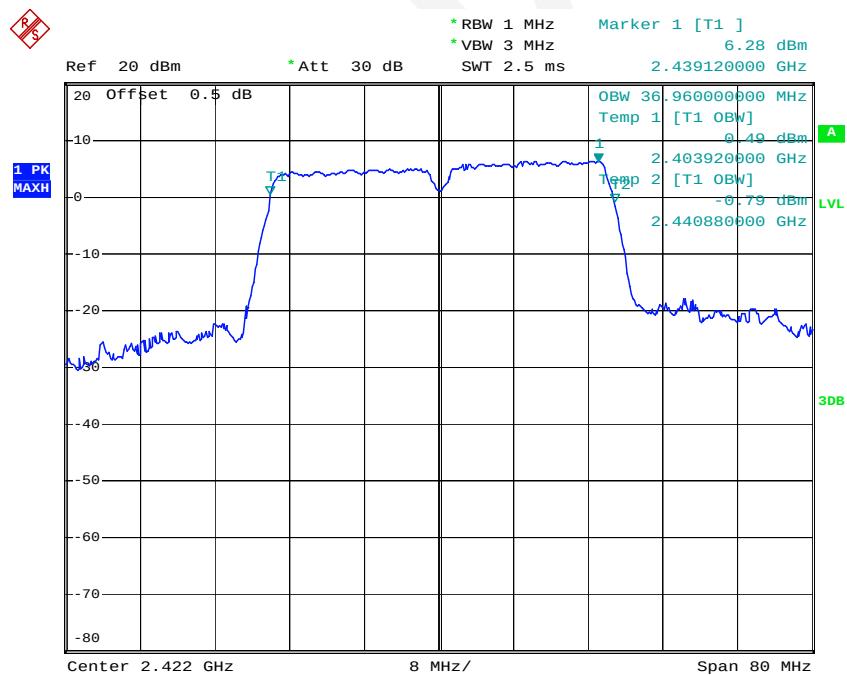


Date: 12.JUL.2018 15:50:14

802.11n ht40 Middle Channel

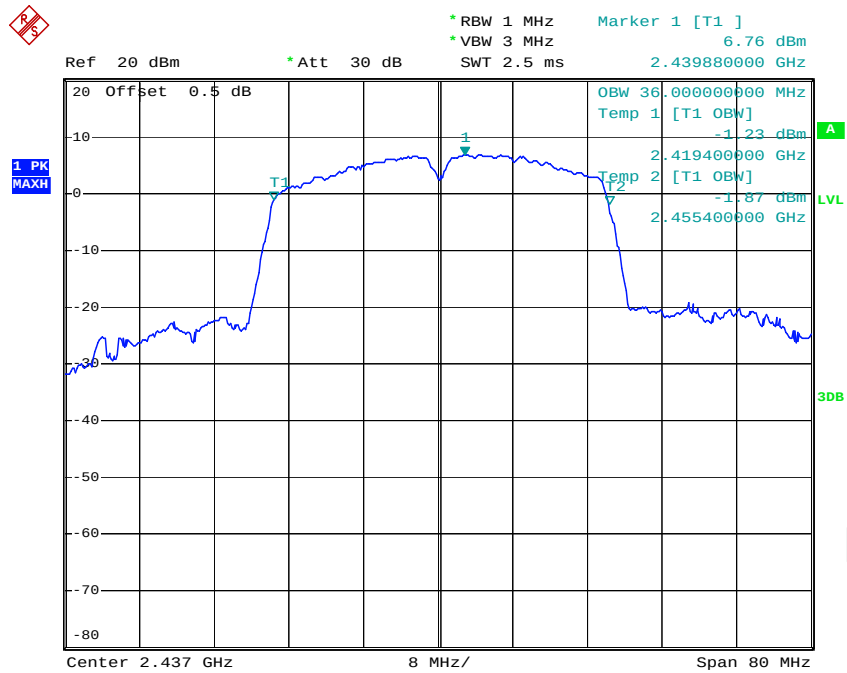


Date: 12.JUL.2018 15:56:00

802.11n ht40 High Channel

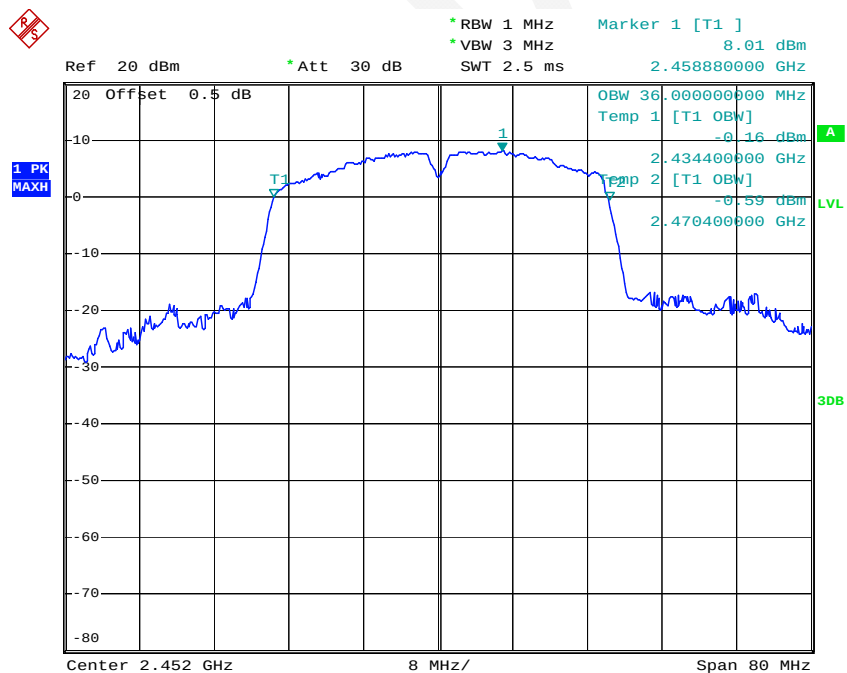


Date: 12.JUL.2018 16:00:12

BLE Low Channel

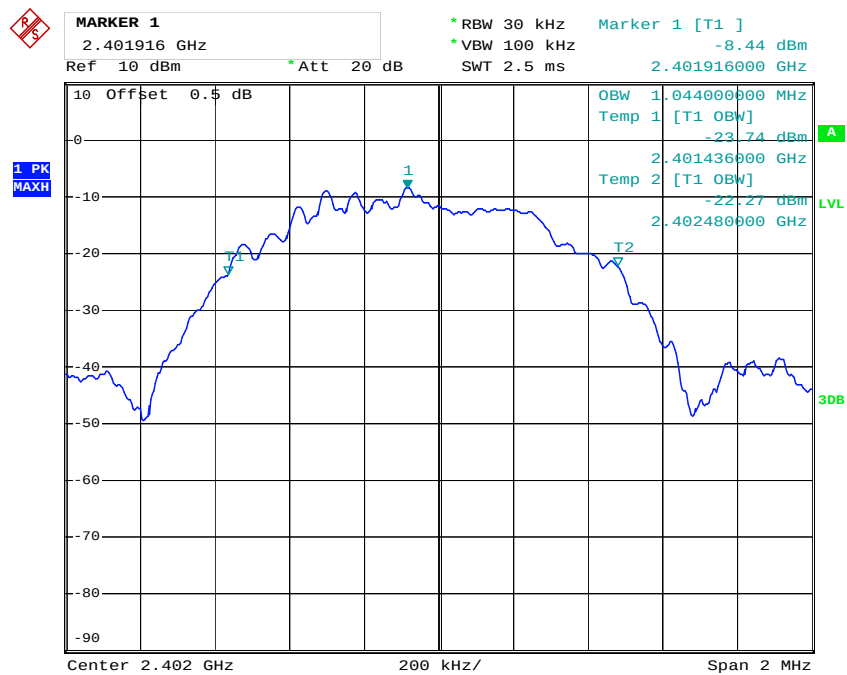


Date: 12.JUL.2018 22:14:10

BLE Middle Channel

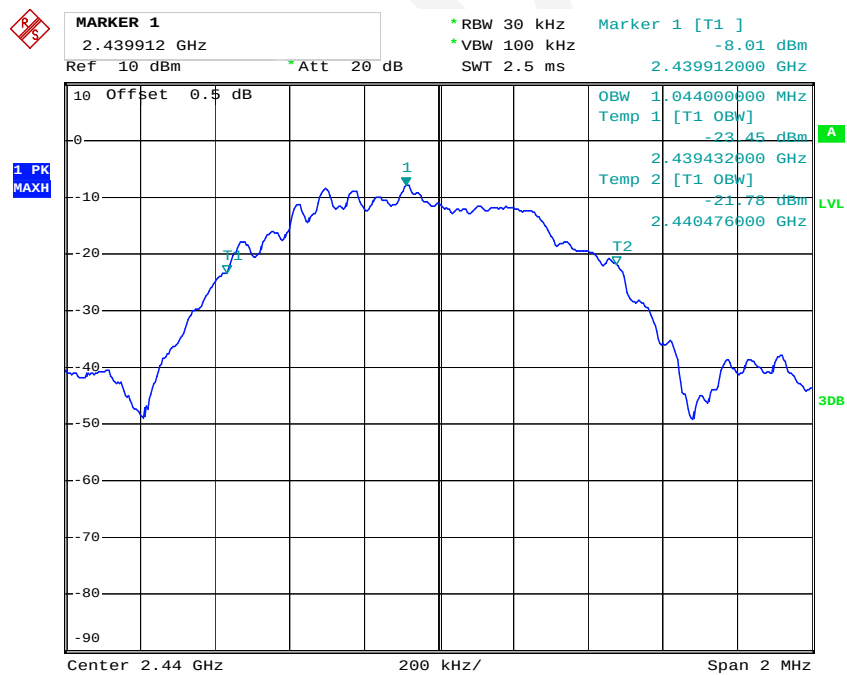

Date: 12.JUL.2018 22:14:40

BLE High Channel

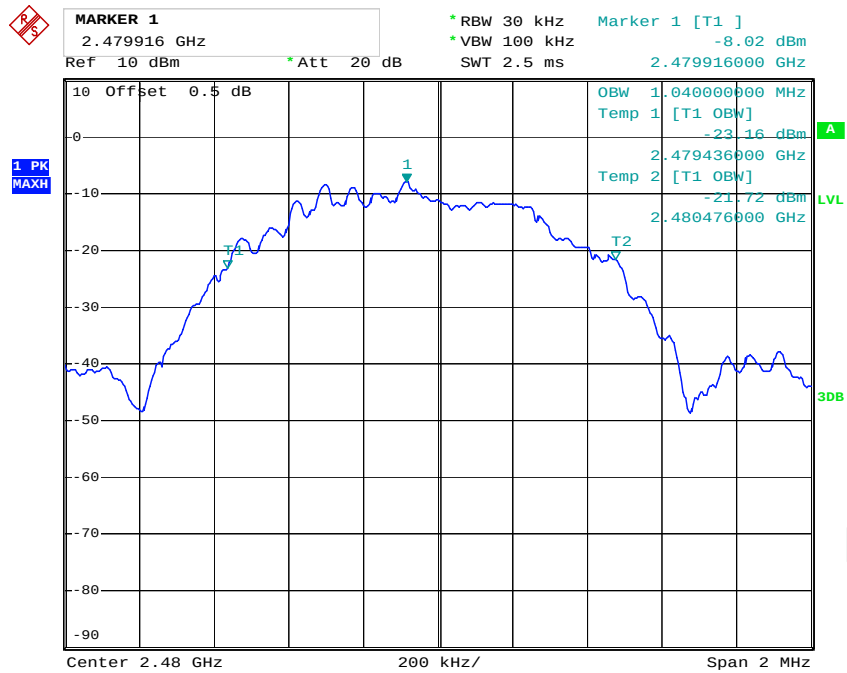

Date: 12.JUL.2018 22:15:18

FCC §15.247(b) (3)& RSS-247 CLAUSE 5.4 d) - MAXIMUM PEAK CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

According to RSS-247§5.4 d) For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1W. Except as provided in Section 5.4(e), the e.i.r.p. shall not exceed 4 W.

As an alternative to a peak power measurement, compliance can be based on a measurement of the maximum conducted output power. The maximum conducted output power is the total transmit power delivered to all antennas and antenna elements, averaged across all symbols in the signalling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or transmitting at a reduced power level. If multiple modes of operation are implemented, the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to test equipment.
3. Add a correction factor to the display.
4. Set the power Meter to test Peak output power, record the result as peak power.
5. Set the power meter to test average output power, record the result as average power.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	USB Wideband Power Sensor	U2022XA	MY5417006	2017-12-11	2018-12-11
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	28.9 °C
Relative Humidity:	65 %
ATM Pressure:	99.8 kPa

* The testing was performed by Tiago Huang & Swim Lv on 2018-07-12.

Test Mode: Transmitting

Test Result: Compliance. Please refer to the following table.

Test mode	Frequency (MHz)	Max Conducted Output Power (dBm)			Peak EIRP (dBm)	EIRP Limit for ISM (dBm)
		Peak	Average	Limit		
802.11b	2412	17.67	13.72	30	18.67	36
	2437	17.91	14.45	30	18.91	36
	2462	18.09	14.57	30	19.09	36
802.11g	2412	18.91	11.23	30	19.91	36
	2437	20.56	12.84	30	21.56	36
	2462	22.60	14.73	30	23.6	36
802.11n ht20	2412	19.20	11.09	30	20.2	36
	2437	20.98	12.89	30	21.98	36
	2462	22.83	14.60	30	23.83	36
802.11n ht40	2422	19.91	11.77	30	20.91	36
	2437	20.56	12.22	30	21.56	36
	2452	21.45	12.61	30	22.45	36
BLE	2402	-3.86	/	30	-2.86	36
	2440	-3.34	/	30	-2.34	36
	2480	-3.34	/	30	-2.34	36

FCC §15.247(d)& RSS-247 CLAUSE 5.5 – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE

Applicable Standard

According to FCC§15.247(d):In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to RSS-247 Clause 5.5:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESPI	100120	2017-12-11	2018-12-11
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A

Test Data

Temperature:	28.9 °C
Relative Humidity:	65 %
ATM Pressure:	99.8 kPa

Test Result: Compliant. Please refer to following plots.

Ref 20 dBm * Att 30 dB * RBW 100 kHz Marker 2 [T1] -47.44 dBm
 * VBW 300 kHz 2.396640000 GHz
 SWT 5 ms

20 Offset 0.5 dB

Marker 1 [T1] 0.73 dBm
 2 411616000 GHz


1 PK MAXH

-19.27 dBm

Center 2.4 GHz 4.8 MHz/ Span 48 MHz


Date: 12.JUL.2018 15:18:58

802.11b: Band Edge, Right Side

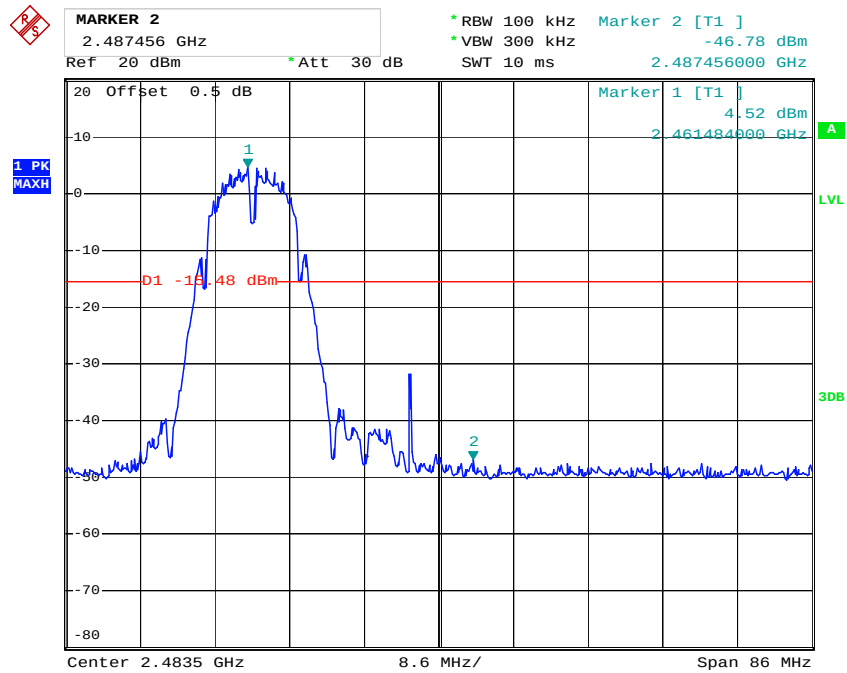


Date: 12.JUL.2018 17:07:29

802.11g: Band Edge, Left Side

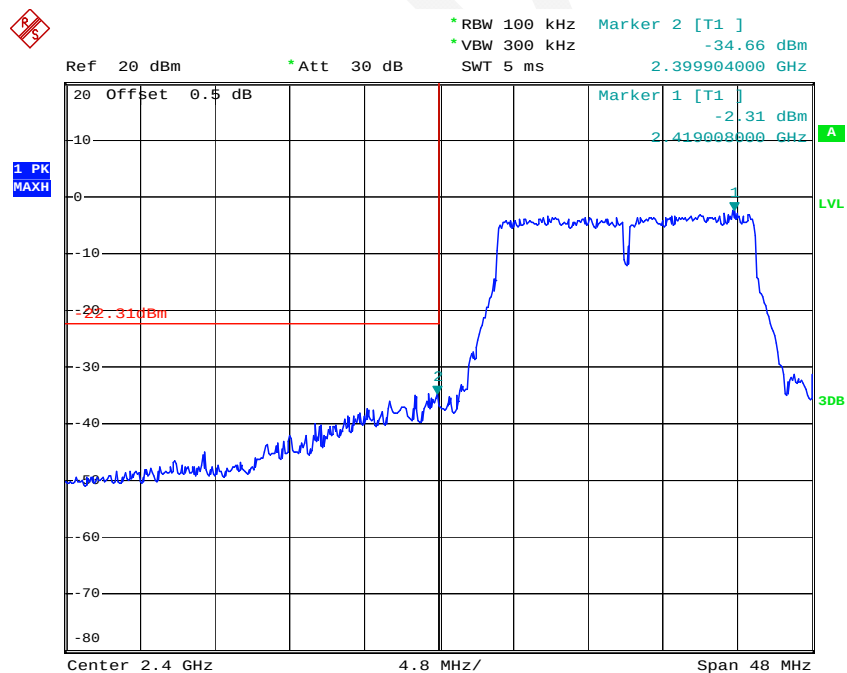


Date: 12.JUL.2018 15:34:38

802.11g: Band Edge, Right Side

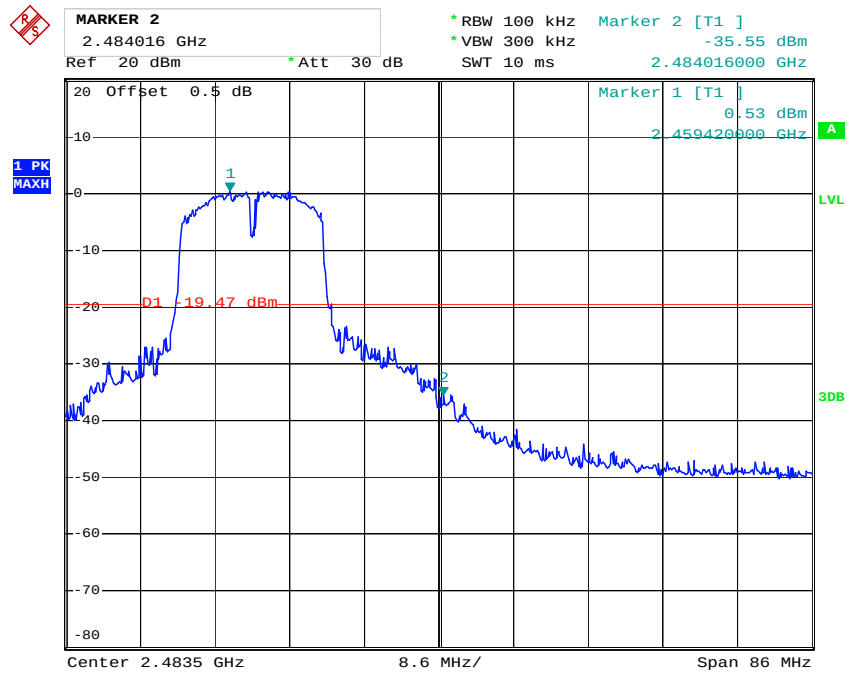


Date: 12.JUL.2018 17:06:07

802.11n ht20 Band Edge, Left Side

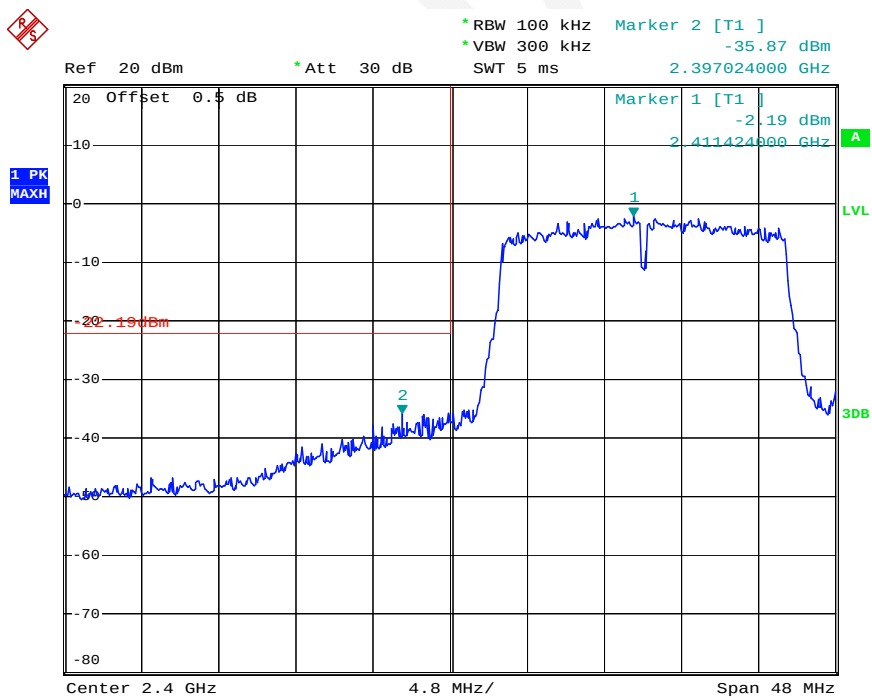


Date: 12.JUL.2018 15:41:56

802.11n ht20 Band Edge, Right Side

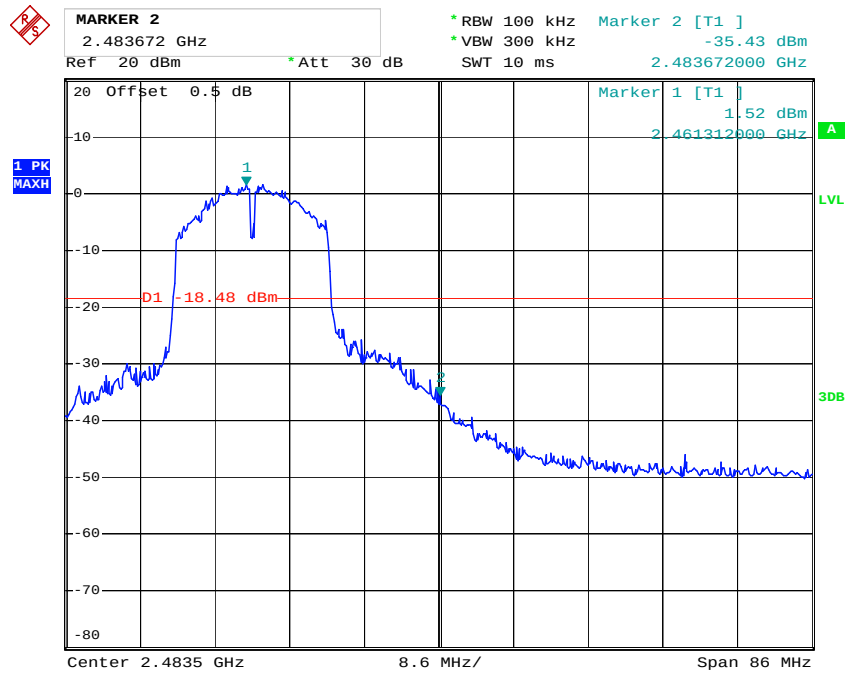


Date: 12.JUL.2018 17:04:49

802.11n ht40: Band Edge, Left Side

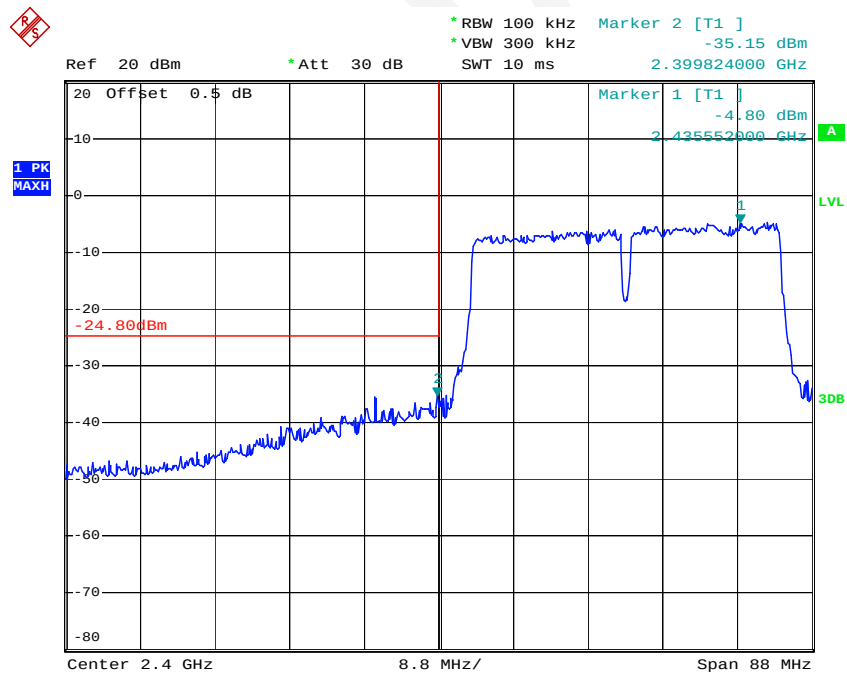


Date: 12.JUL.2018 15:52:09

802.11n ht40 Band Edge, Right Side

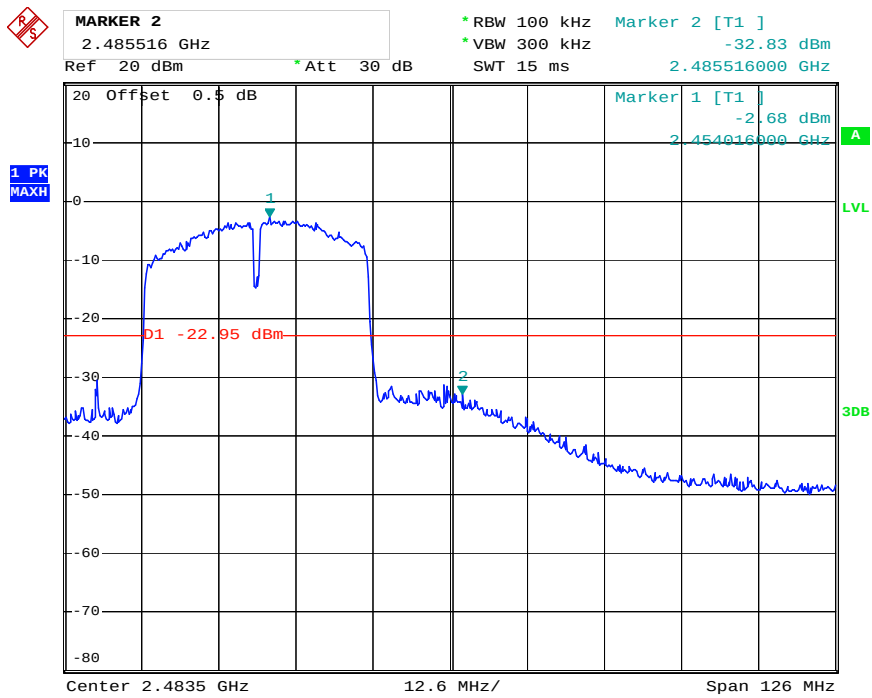


Date: 12.JUL.2018 17:03:32

BLE Band Edge, Left Side

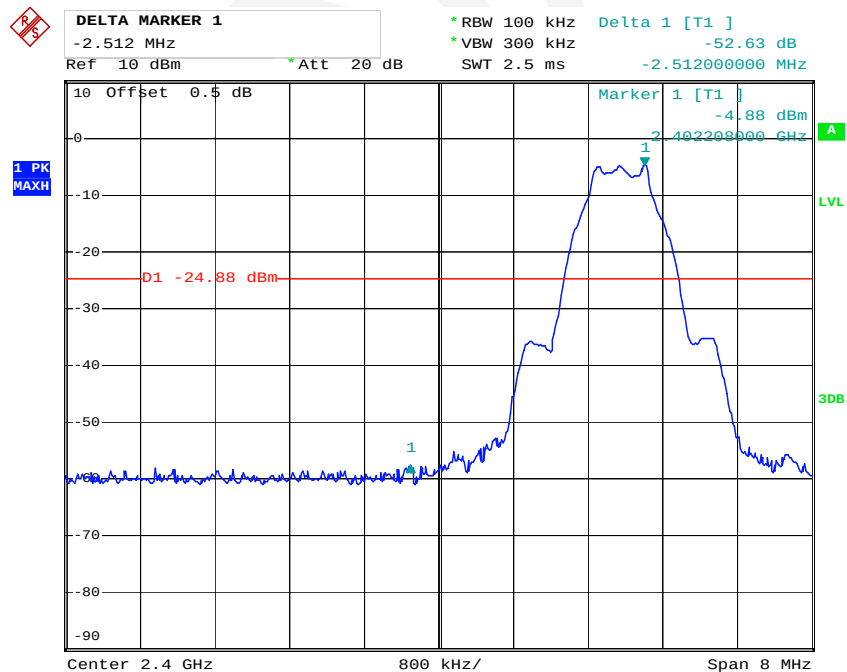

Date: 12.JUL.2018 22:20:15

BLE Band Edge, Right Side

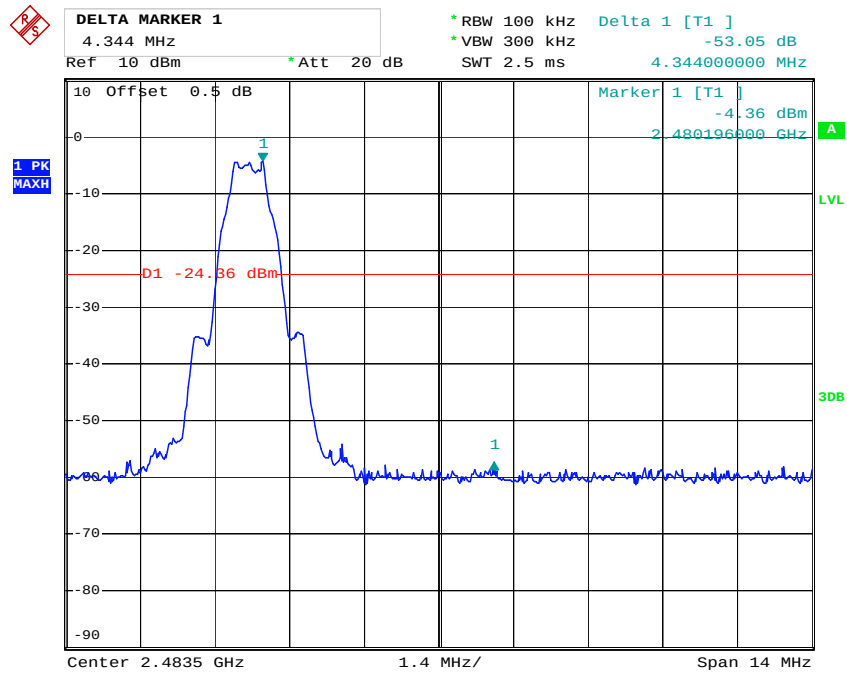

Date: 12.JUL.2018 22:21:07

FCC §15.247(e) & RSS-247 CLAUSE 5.2 b - POWER SPECTRAL DENSITY

Applicable Standard

According to FCC§15.247(e):For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

According to RSS-247 §5.2 b):

- b) The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of section 5.4(d), (i.e. the power spectral density shall be determined using the same method as is used to determine the conducted output power).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set the RBW = 3 kHz, VBW = 10 kHz, Set the span to 1.5 times the DTS bandwidth.
4. Use the peak marker function to determine the maximum amplitude level.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESPI	100120	2017-12-11	2018-12-11
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	28.9 °C
Relative Humidity:	65 %
ATM Pressure:	99.8 kPa


* The testing was performed by Tiago Huang & Swim Lv on 2018-07-12.

Test Mode: Transmitting

Test Result: Compliance. Please refer to the following table and plots


Test mode	Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)
802.11b	Low	2412	-14.11	≤8
	Middle	2437	-13.86	≤8
	High	2462	-13.26	≤8
802.11g	Low	2412	-17.11	≤8
	Middle	2437	-15.42	≤8
	High	2462	-13.41	≤8
802.11n ht20	Low	2412	-16.65	≤8
	Middle	2437	-14.75	≤8
	High	2462	-13.10	≤8
802.11n ht40	Low	2422	-16.83	≤8
	Middle	2437	-17.26	≤8
	High	2452	-15.89	≤8
BLE	Low	2402	-19.46	≤8
	Middle	2440	-19.06	≤8
	High	2480	-19.02	≤8

Power Spectral Density, 802.11b Low Channel

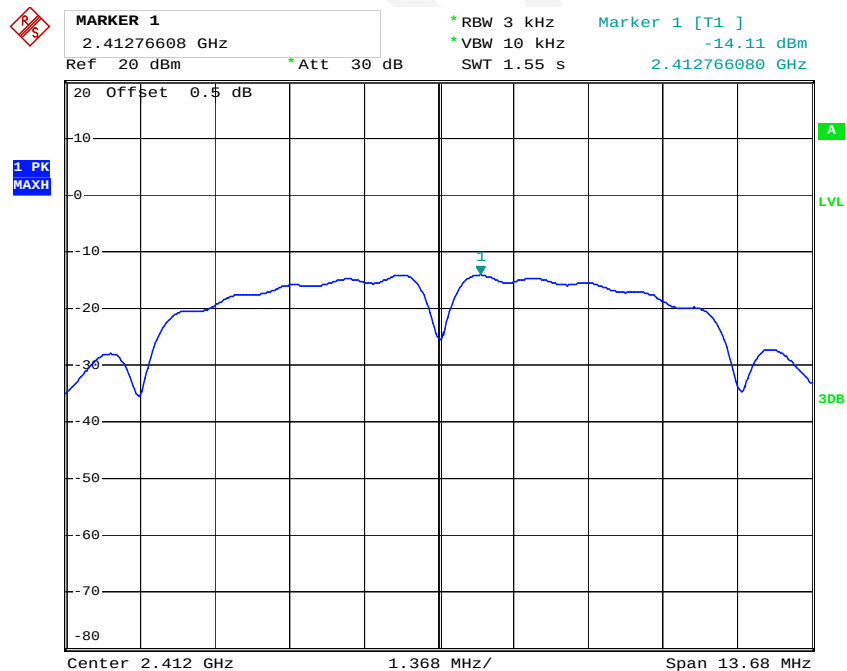


Date: 12.JUL.2018 16:41:27

Power Spectral Density, 802.11b Middle Channel

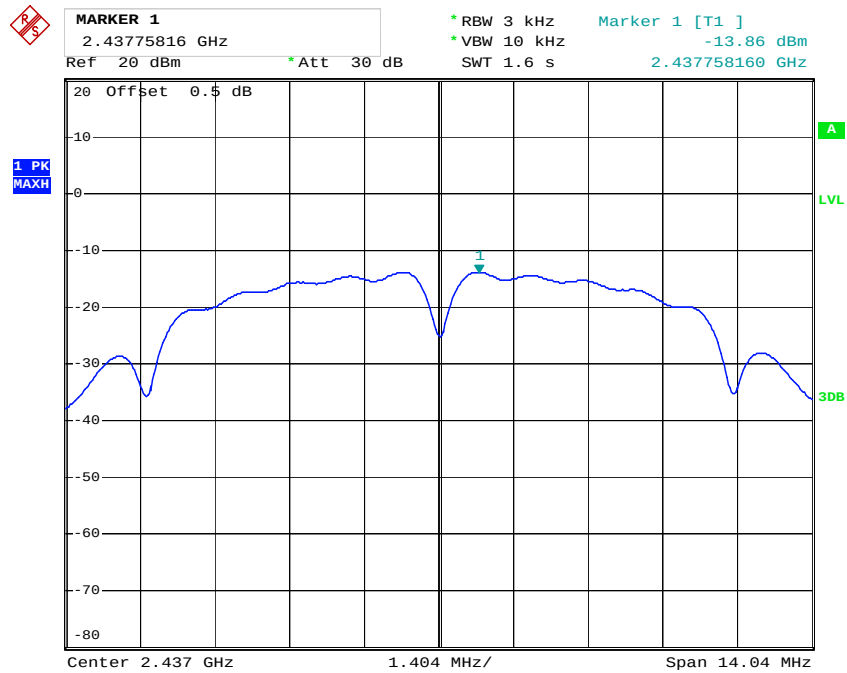


Date: 12.JUL.2018 16:43:03

Power Spectral Density, 802.11b High Channel

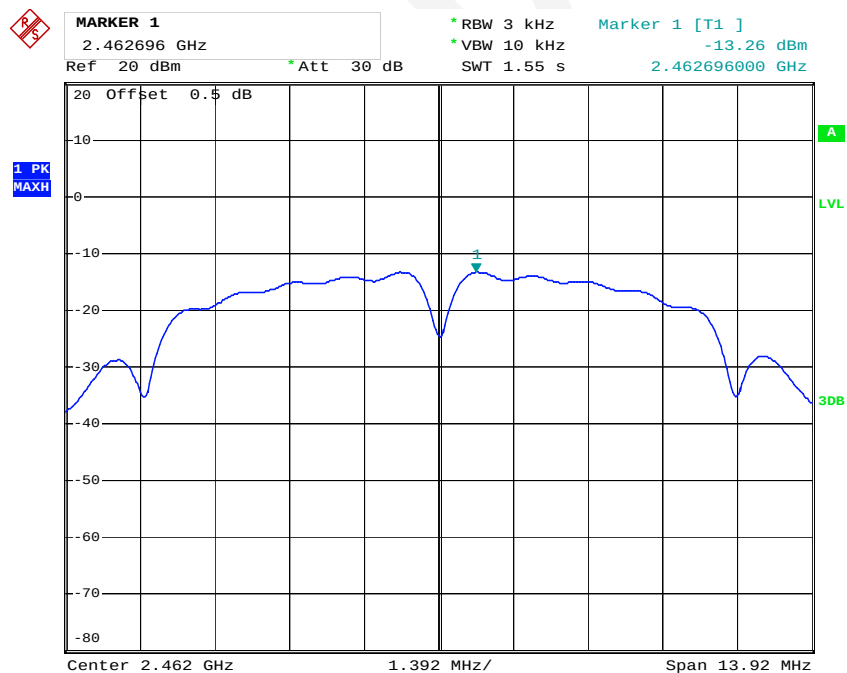


Date: 12.JUL.2018 16:45:17

Power Spectral Density, 802.11g Low Channel

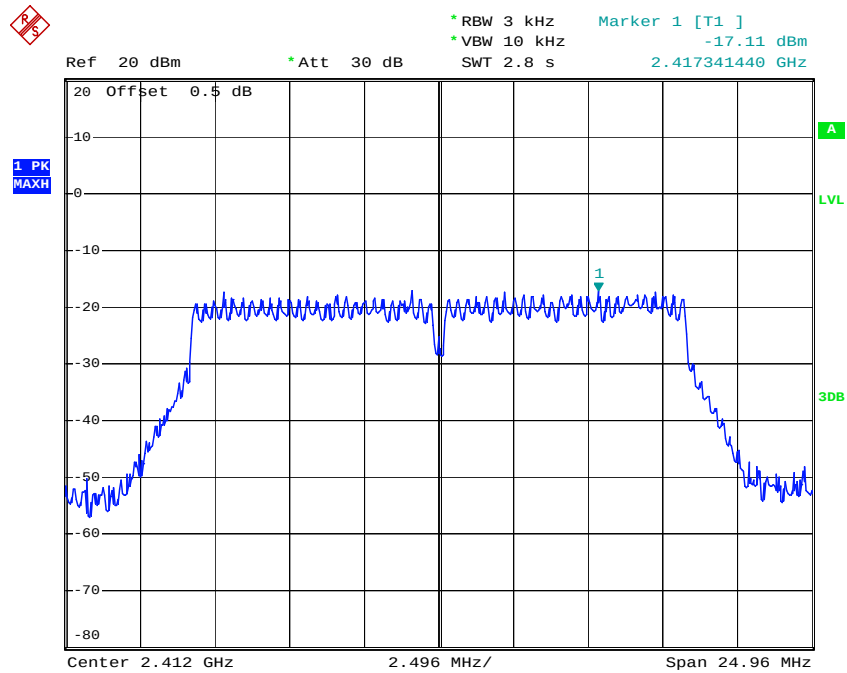


Date: 12.JUL.2018 15:34:21

Power Spectral Density, 802.11g Middle Channel

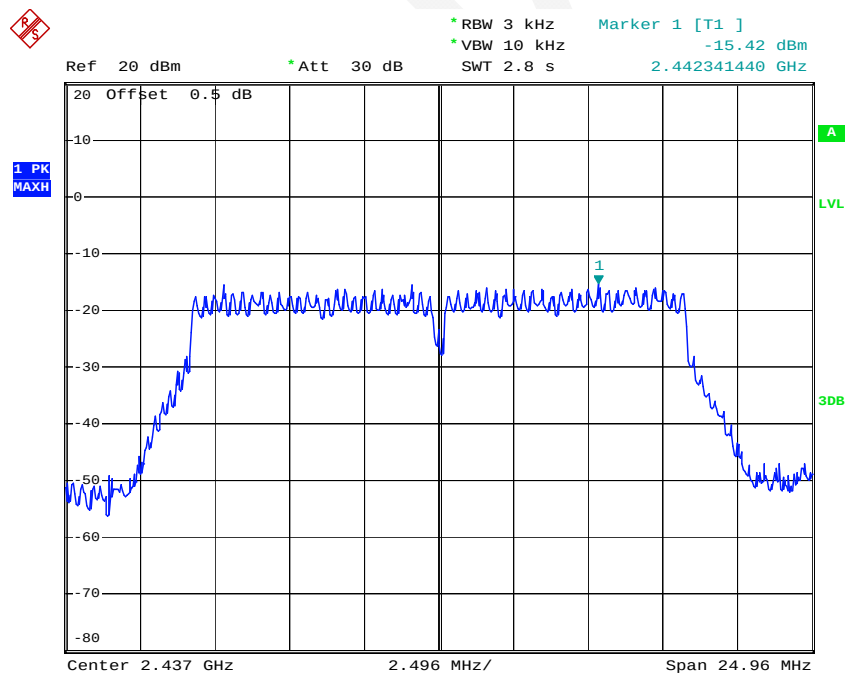


Date: 12.JUL.2018 15:36:24

Power Spectral Density, 802.11g High Channel

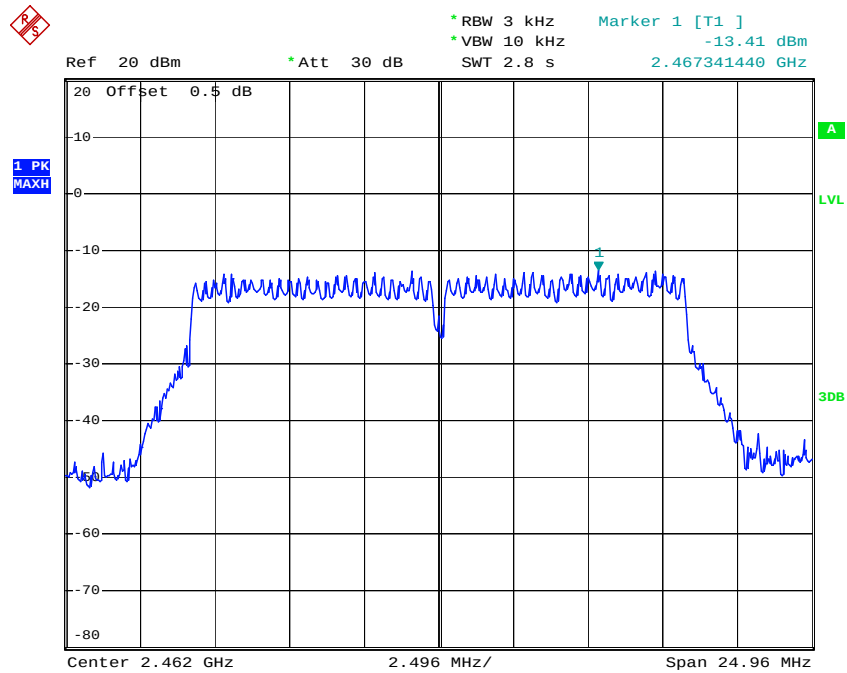


Date: 12.JUL.2018 15:38:48


Power Spectral Density, 802.11n ht20 Low Channel

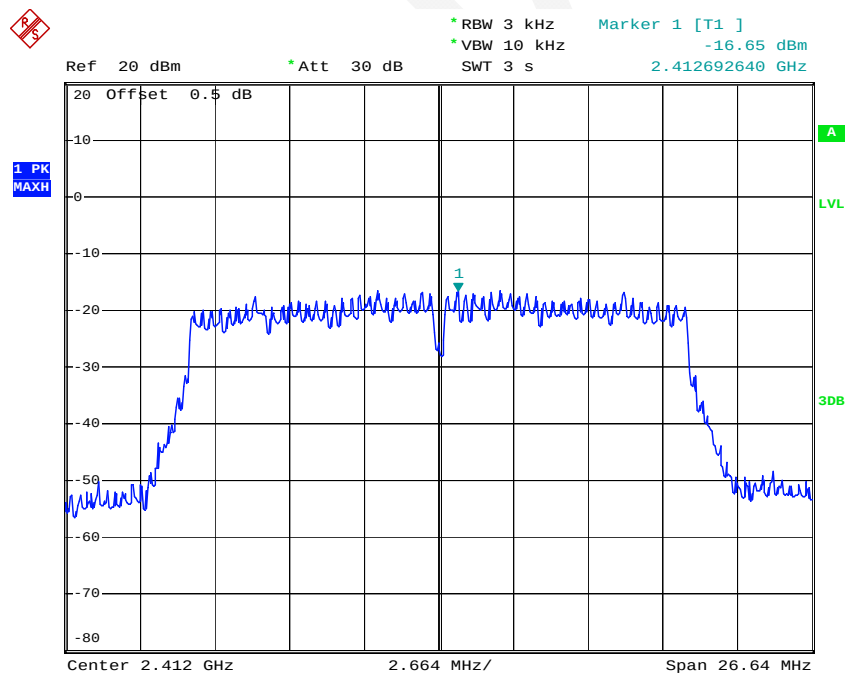

Date: 12.JUL.2018 15:41:30

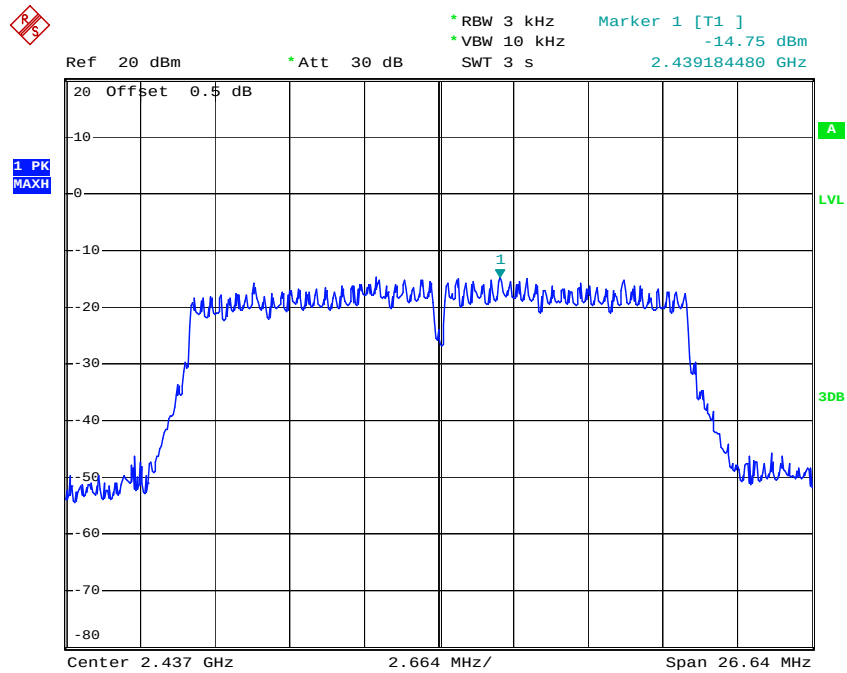
Power Spectral Density, 802.11n ht20 Middle Channel

Date: 12.JUL.2018 15:45:30

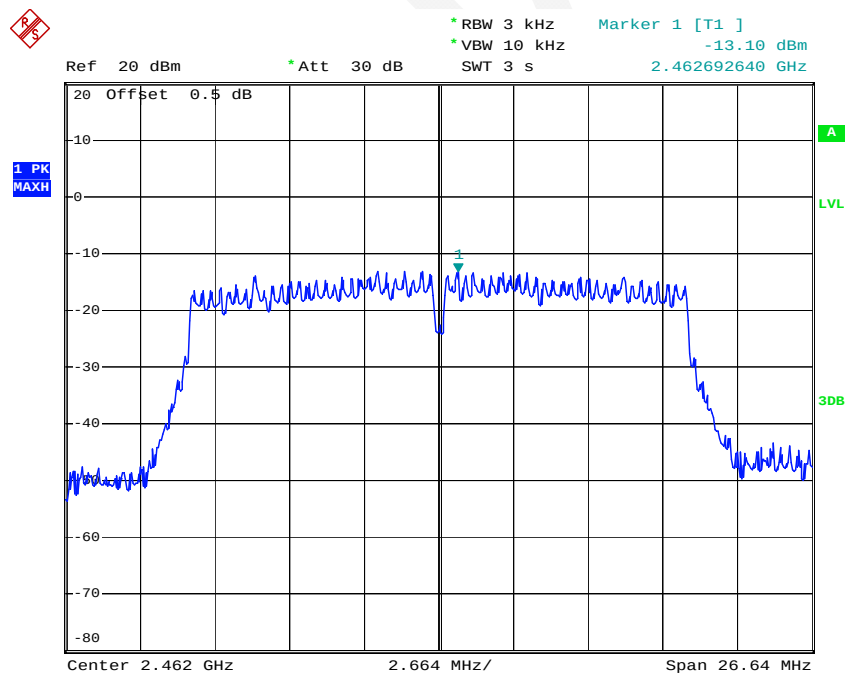Power Spectral Density, 802.11n ht20 High Channel


Date: 12.JUL.2018 15:48:41

Power Spectral Density, 802.11n ht40 Low Channel

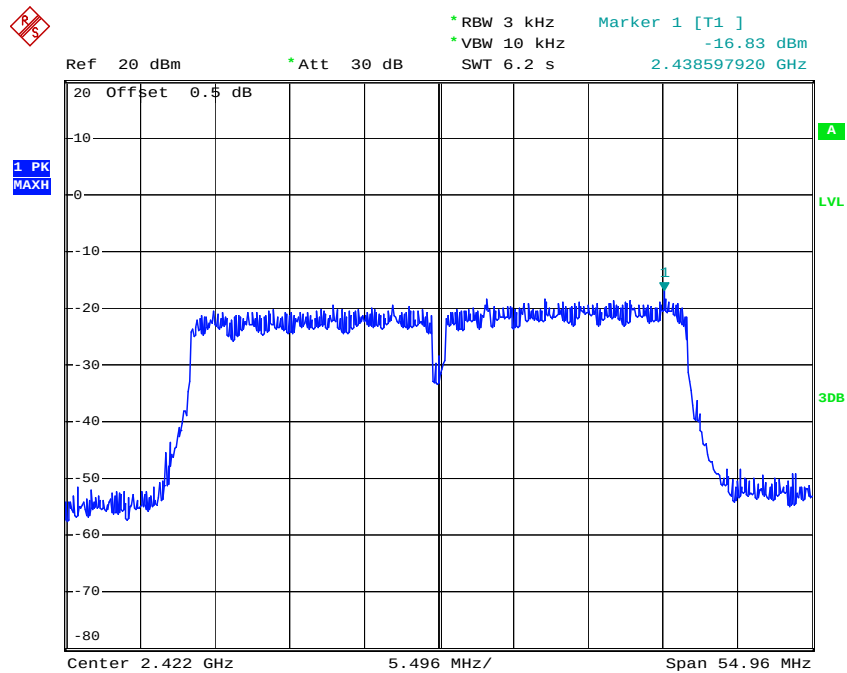


Date: 12.JUL.2018 15:51:43

Power Spectral Density, 802.11n ht40 Middle Channel

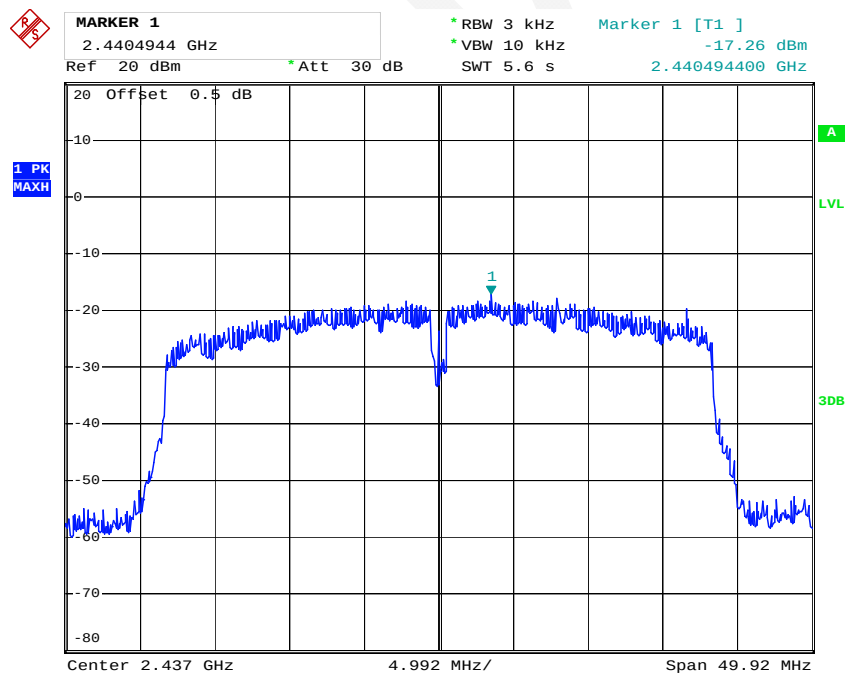


Date: 12.JUL.2018 16:51:37

Power Spectral Density, 802.11n ht40 High Channel

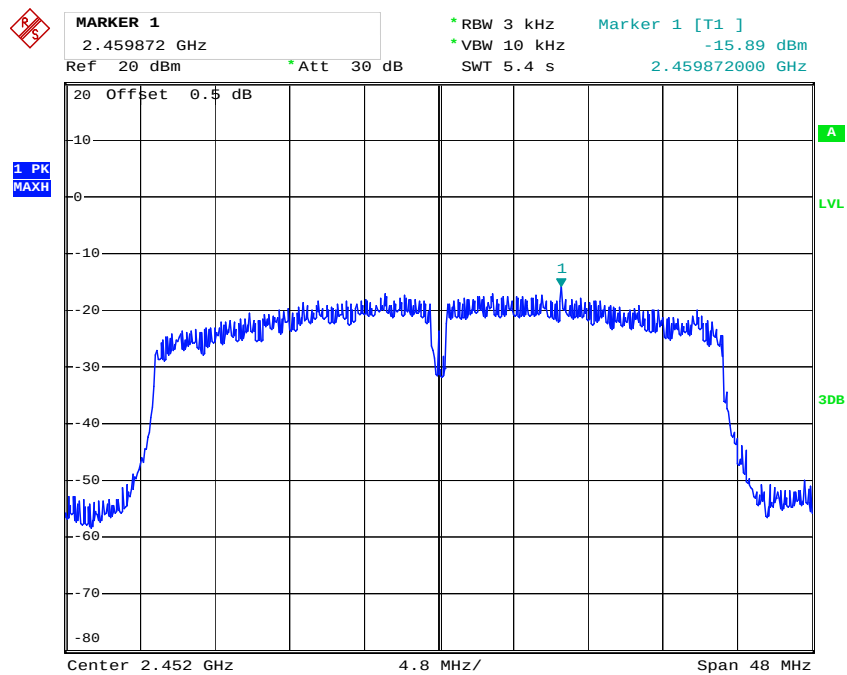


Date: 12.JUL.2018 16:38:58

Power Spectral Density, BLE Low Channel

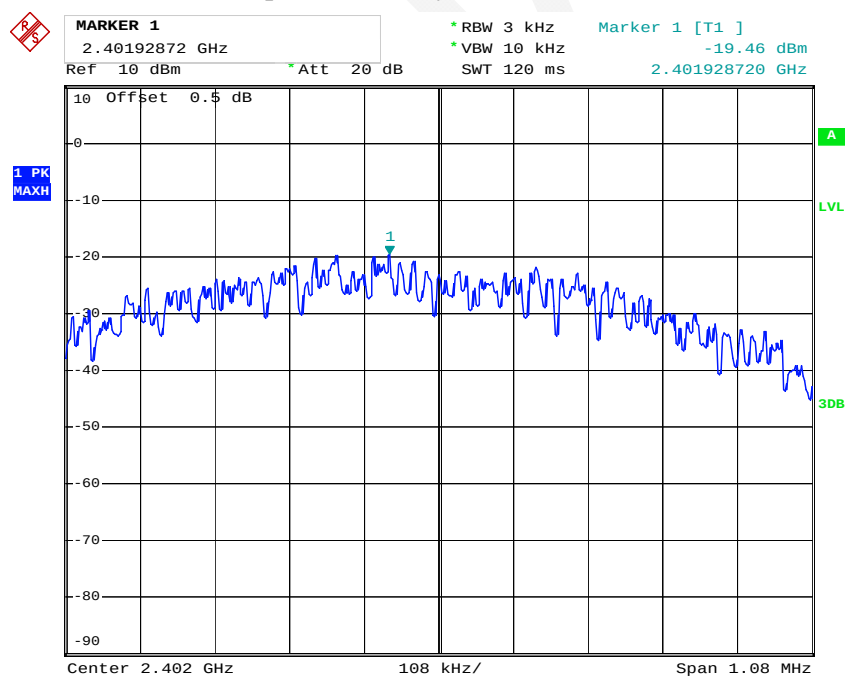


Date: 12.JUL.2018 22:28:20

Power Spectral Density, BLE Middle Channel

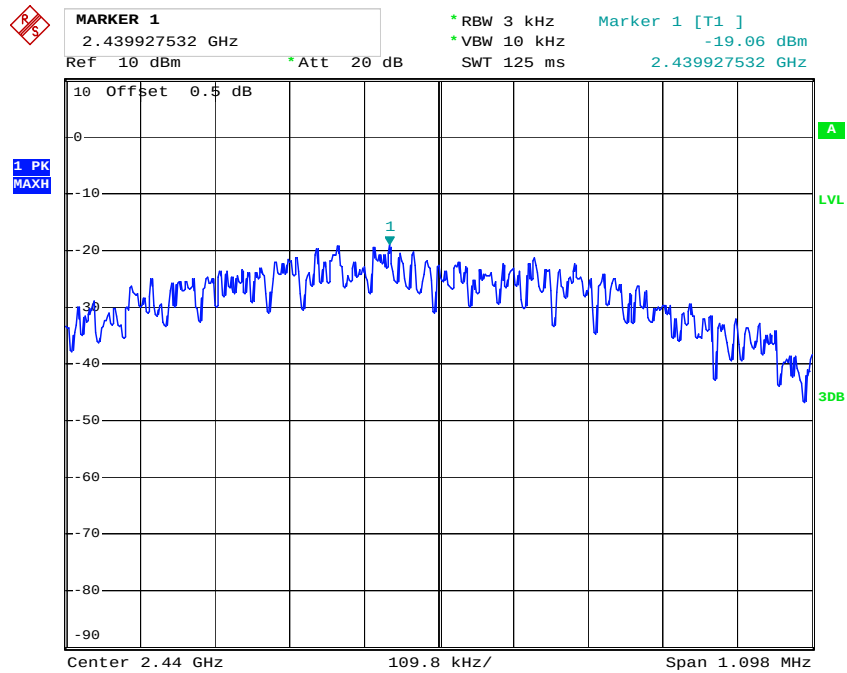

Date: 12.JUL.2018 22:29:24

Power Spectral Density, BLE High Channel

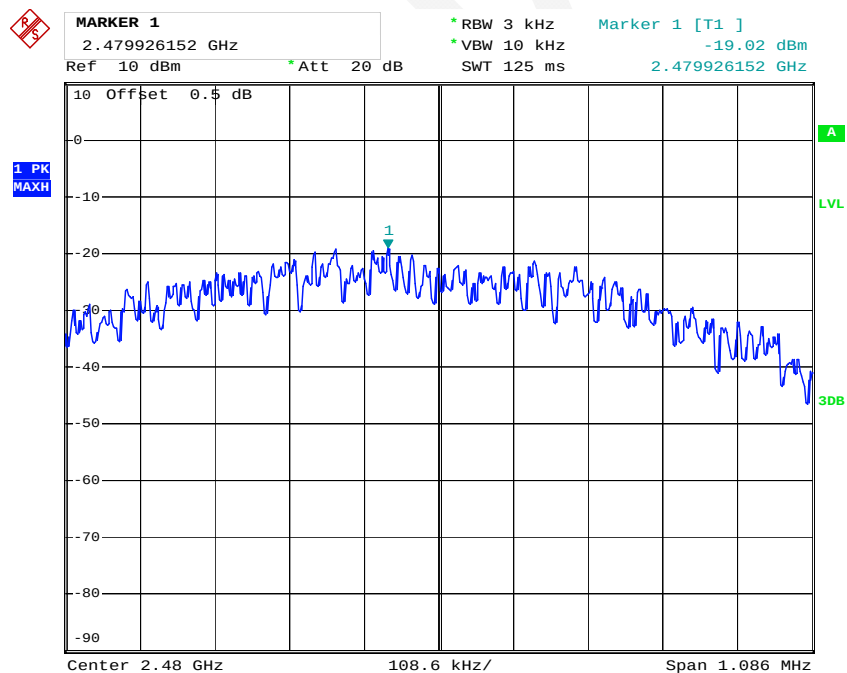

Date: 12.JUL.2018 22:30:25

***** END OF REPORT *****