



中国认可
国际互认
检测
TESTING
CNAS L5313



Test Report

FCC Part15 Subpart C

Product Name : Wireless SPI transceiver module
Model No. : LCR1-1276H
FCC ID : 2AQXP-LCR1-1276H

Applicant : Shanghai leeyz Electronic Technology Co., Ltd.
Address : Room 205, 2588 Jinhai Road, Pudong New Area,
Shanghai

Date of Receipt : Aug. 13, 2018
Test Date : Aug. 14, 2018~ Aug. 28, 2018
Issued Date : Sep. 17, 2018
Report No. : 1882082R-RF-US-P06V01
Report Version : V1.2

The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by CNAS, A2LA or any agency of the government.

The test report shall not be reproduced without the written approval of DEKRA Testing & Certification (Suzhou) Co., Ltd.

Test Report Certification

Issued Date : Sep. 17, 2018
Report No. : 1882082R-RF-US-P06V01



Product Name : Wireless SPI transceiver module
Applicant : Shanghai leeyz Electronic Technology Co., Ltd.
Address : Room 205, 2588 Jinhai Road, Pudong New Area, Shanghai
Manufacturer : Shanghai leeyz Electronic Technology Co., Ltd.
Address : Room 205, 2588 Jinhai Road, Pudong New Area, Shanghai
Model No. : LCR1-1276H
FCC ID : 2AQXP-LCR1-1276H
EUT Voltage : DC 3.3V
Brand Name : N/A
Applicable Standard : FCC CFR Title 47 Part 15 Subpart C
ANSI C63.4:2014; ANSI C63.10:2013;
Test Result : Complied
Performed Location : DEKRA Testing & Certification (Suzhou) Co., Ltd.
No.99 Hongye Rd., Suzhou Industrial Park, Suzhou, 215006,
Jiangsu, China
TEL: +86-512-6251-5088 / FAX: +86-512-6251-5098
FCC Registration Number: CN1199;

Documented By :



(Project Assistant: Kitty Li)

Reviewed By :



(Senior Project Manager: Frank He)

Approved By :



(Engineering Supervisor: Jack Zhang)

TABLE OF CONTENTS

Description	Page
1. General Information	6
1.1. EUT Description	6
1.2. Antenna information	7
1.3. Mode of Operation	8
1.4. Tested System Details	8
1.5. Configuration of Tested System	9
2. Technical Test	10
2.1. Summary of Test Result	10
2.2. Test Frequency configuration:	10
2.3. Duty Cycle	11
2.4. Test Environment	12
2.5. Measurement Uncertainty	12
3. AC Power Line Conducted Emission	13
3.1. Test Equipment	13
3.2. Test Setup	13
3.3. Limit	14
3.4. Test Procedure	14
3.5. Test Result	15
4. Emissions in restricted frequency bands	16
4.1. Test Equipment	16
4.2. Test Setup	17
4.3. Limit	18
4.4. Test Procedure	20
4.5. EUT test Axis definition	21
4.6. Test Result	22
5. Emissions in non-restricted frequency bands	30
5.1. Test Equipment	30
5.2. Test Setup	30
5.3. Limit	31
5.4. Test Procedure	32
5.5. EUT test Axis definition	33
5.6. Test Result	34
6. Occupied Bandwidth	35
6.1. Test Equipment	35
6.2. Test Setup	35
6.3. Limit	36
6.4. Test Procedure	36

6.5.	EUT test definition	37
6.6.	Test Result.....	38
7.	Fundamental emission output power	39
7.1.	Test Equipment.....	39
7.2.	Test Setup.....	39
7.3.	Limit.....	40
7.4.	Test Procedure	41
7.5.	EUT test definition	42
7.6.	Test Result.....	43
8.	Power Spectral Density	44
8.1.	Test Equipment.....	44
8.2.	Test Setup.....	44
8.3.	Limit.....	44
8.4.	Test Procedure	45
8.5.	EUT test definition	46
8.6.	Test Result.....	47
9.	Antenna Requirement.....	48
9.1.	Limit.....	48
9.2.	Antenna Connector Construction.....	48

History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
1882082R-RF-US-P06V01	V1.0	Initial Issued Report	Aug. 31, 2018
1882082R-RF-US-P06V01	V1.1	Updated Occupied Bandwidth	Sep. 11, 2018
1882082R-RF-US-P06V01	V1.2	Page 9, update the test setup	Sep. 17, 2018

1. General Information

1.1. EUT Description

Product Name	Wireless SPI transceiver module
Model No.	LCR1-1276H
EUT Voltage	DC 3.3V
Frequency Range	902~928MHz
Channel Number	25
Type of Modulation	LoRaTM
Channel Control	Auto

1.2. Antenna information

Model No.	N/A					
Antenna manufacturer	N/A					
Antenna Delivery	☒	1*TX+1*RX	☐	2*TX+2*RX	☐	3*TX+3*RX
Antenna technology	☒	SISO				
	☐	MIMO	☐	Basic		
			☐	CDD		
			☐	Sectorized		
			☐	Beam-forming		
Antenna Type	☒	External	☒	Dipole		
			☐	Sectorized		
	☐	Internal	☐	PIFA		
			☐	PCB		
			☐	helical antenna		
			☐	Ceramic Chip Antenna		
			☐	Metal plate type F antenna		
Antenna Technology	Ant Gain (dBi)					
☒ SISO	2.0					

1.3. Mode of Operation

Test Modes List
Mode 1: Transmit

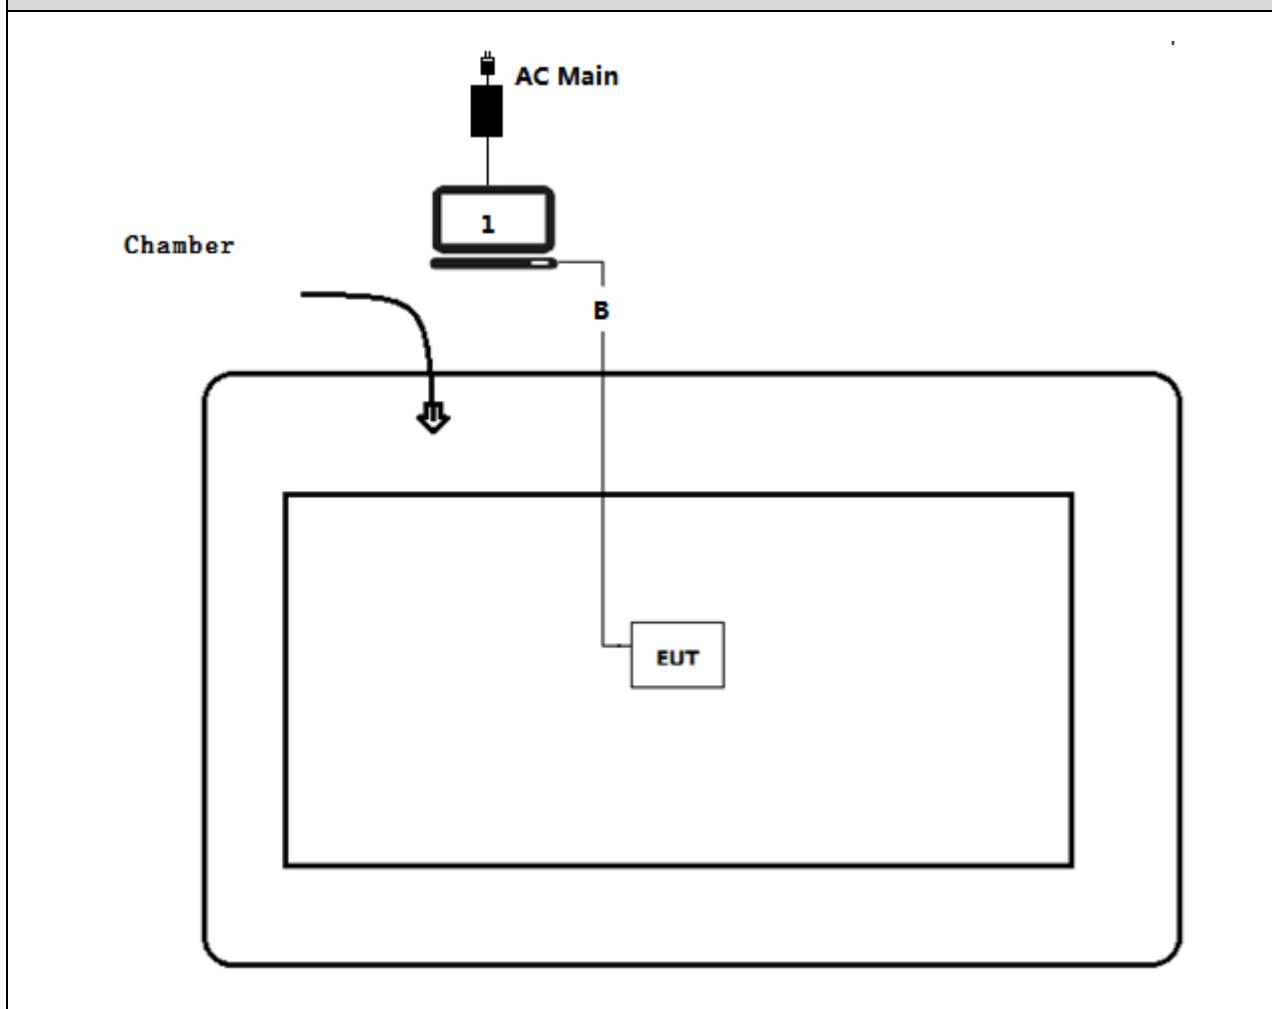
1.4. Tested System Details

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

No.	Product	Manufacturer	Model No.	Serial No.	Power Cord
1	Notebook	Lenovo	Think pad x220	SUA0600195	Non-shielded

1.5. Configuration of Tested System

Test setup Diagram- Radiated Emission



2. Technical Test

2.1. Summary of Test Result

Performed Test Item	Normative References	Limit	Result
AC Power Line Conducted Emission	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.207	FCC 15.207	N/A
Emissions in restricted frequency bands	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.209	FCC 15.209	PASS
Emissions in non-restricted frequency bands	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.247(d)	$\geq 20\text{dBc}$	PASS
Occupied Bandwidth	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.247(a)(2)	$\geq 500\text{kHz}$	PASS
Fundamental emission output power	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.247(b)(3)	$\leq 30\text{dBm}$	PASS
Power Spectral Density	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.247(e)	$\leq 8\text{dBm}/3\text{kHz}$	PASS
Antenna Requirement	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.203	FCC 15.203	PASS


2.2. Test Frequency configuration:

Channel	Frequency	Channel	Frequency	Channel	Frequency
Low	903 MHz	Mid	915 MHz	High	927MHz

2.3. Duty Cycle

Test Mode	Tx On (ms)	Tx Off (ms)	Tx On + Tx Off (ms)	Duty Cycle
1	470	2520	2990	15.72%

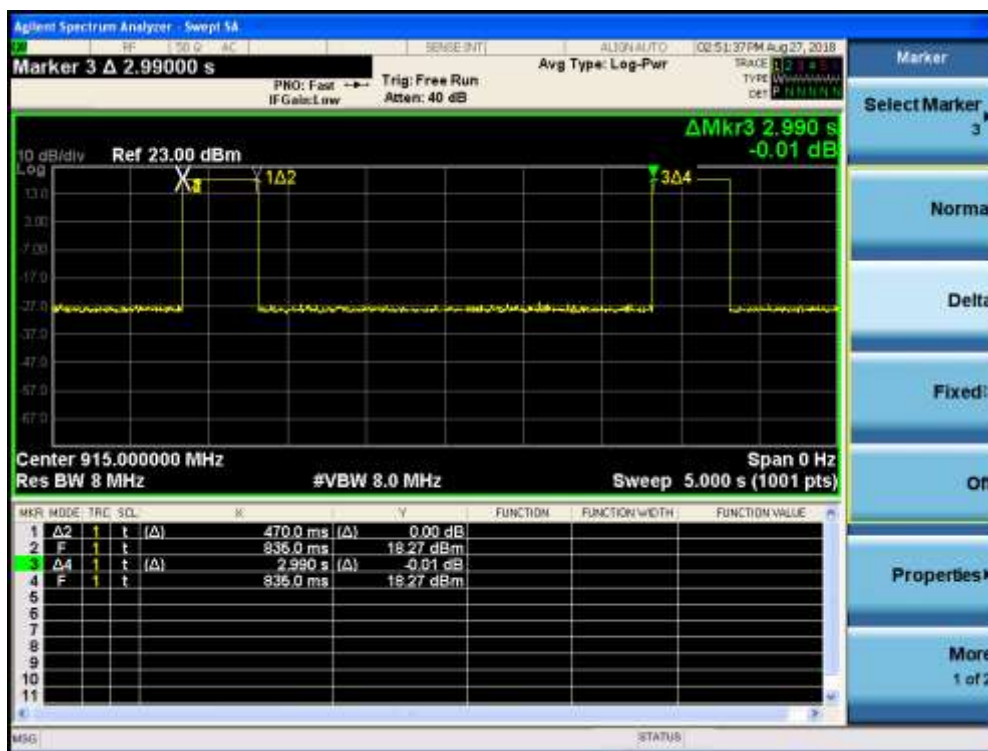Frequency 915MHz



2.4. Test Environment

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	21
Humidity (%RH)	25-75	50
Barometric pressure (mbar)	860-1060	950-1000

2.5. Measurement Uncertainty

Test Items	Uncertainty
AC Power Line Conducted Emission	$\pm 2.02\text{dB}$
Radiated Emission	Below 1GHz $\pm 3.8\text{ dB}$
	Above 1GHz $\pm 3.9\text{ dB}$
RF Antenna Port Conducted Emission	$\pm 1.27\text{dB}$
Radiated Emission Band Edge	$\pm 3.9\text{dB}$
Occupied Bandwidth	$\pm 1\text{kHz}$
Power Spectral Density	$\pm 1.27\text{dB}$


3. AC Power Line Conducted Emission

3.1. Test Equipment

AC Power Line Conducted Emission / TR-1					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
EMI Test Receiver	R&S	ESCI	100906	2018.03.05	2019.03.04
Two-Line V-Network	R&S	ENV 216	101189	2018.07.16	2019.07.15
Two-Line V-Network	R&S	ENV 216	101044	2017.09.04	2018.09.03
50ohm Coaxial Switch	Anritsu	MP59B	6200464462	N/A	N/A
50ohm Termination	SHX	TF2	07081402	2017.09.04	2018.09.03
Temperature/Humidity Meter	Zhichen	ZC1-2	TR1-TH	2018.01.05	2019.01.04

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

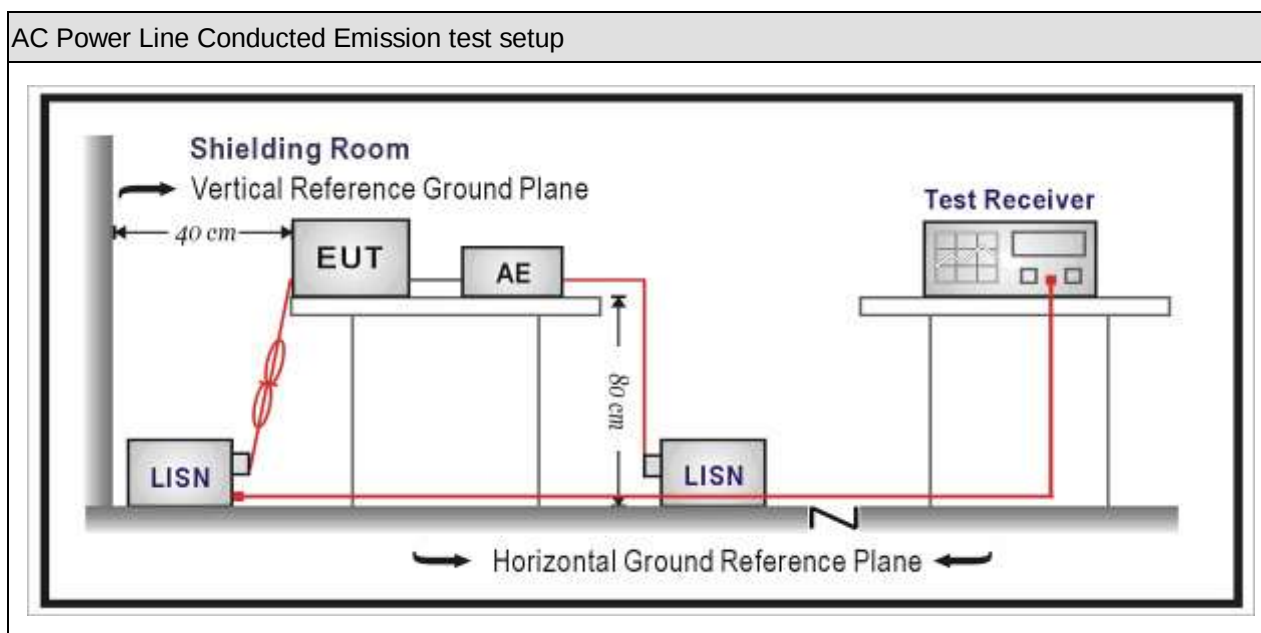3.2. Test Setup



3.3. Limit

Frequency of Emission (MHz)	Conducted Limit	
	Quasi-peak (dB μ V)	Average (dB μ V)
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50
Note 1: The lower limit shall apply at the transition frequencies.		
Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.		

3.4. Test Procedure

Test Method			
	References Rule	Chapter	Item
☒	ANSI C63.10-2013	6.2	Standard test method for ac power-line conducted emissions from unlicensed wireless devices
☒	ANSI C63.4-2014	7	AC power-line conducted emission measurements

3.5. Test Result

The EUT is powered by DC, so this item is not application.

4. Emissions in restricted frequency bands


4.1. Test Equipment

Radiated Emission(Below 1GHz) / AC-2					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
EMI Test Receiver	R&S	ESCI	100573	2018.03.05	2019.03.04
Loop Antenna	R&S	HFH2-Z2	833799/003	2017.11.07	2018.11.06
Bilog Antenna	Teseq GmbH	CBL6112D	27611	2018.08.10	2019.08.09
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC2-C	2018.02.28	2019.02.27
Temperature/Humidity Meter	Zhichen	ZC1-2	AC2-TH	2018.01.05	2019.01.04
Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.					


Radiated Emission(Above 1GHz) / AC-5					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	E4446A	MY45300103	2018.01.04	2019.01.03
Preamplifier	Miteq	NSP1800-25	1364185	2018.05.03	2019.05.02
Preamplifier	QuieTek	AP-040G	CHM-0906001	2018.05.06	2019.05.05
DRG Horn	ETS-Lindgren	3117	00123988	2018.01.22	2019.01.20
Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	294	2017.11.25	2018.11.23
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C1	2018.03.02	2019.03.01
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C2	2018.03.02	2019.03.01
Coaxial Cable	Huber+Suhner	SUCOFLEX 102	AC5-C3	2018.03.02	2019.03.01
EMI Receiver	Agilent	N9038A	MY51210196	2018.06.10	2019.06.09
Temperature/Humidity Meter	Zhichen	ZC1-2	AC5-TH	2018.01.04	2019.01.03
Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.					

4.2. Test Setup

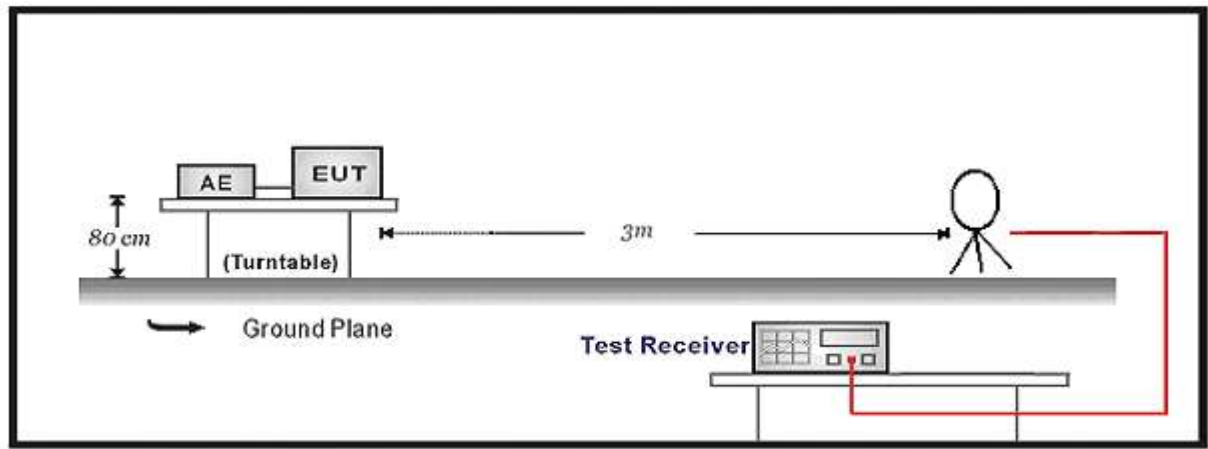
Below 30MHz Test Setup:



30MHz-1GHz Test Setup:

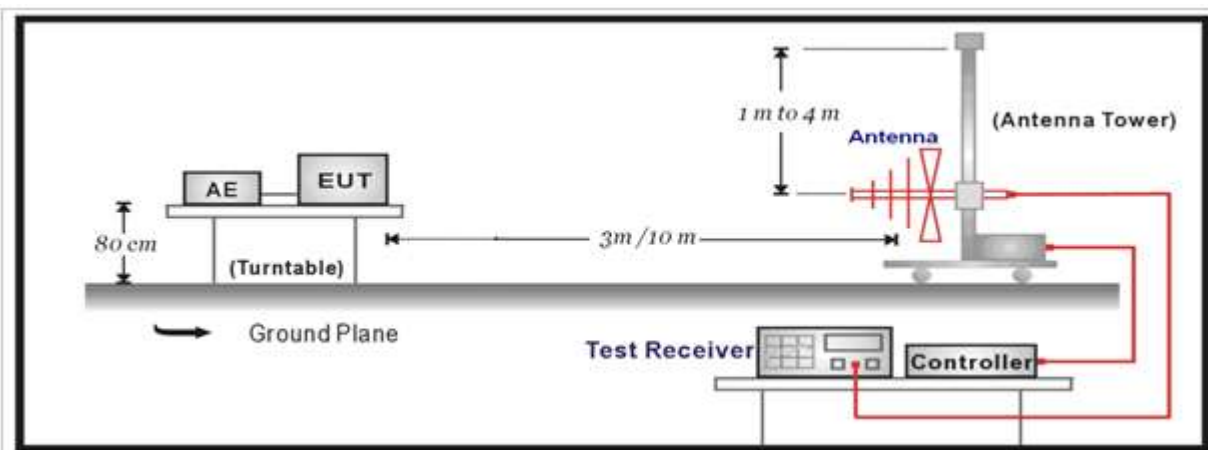

Above 1GHz Test Setup:

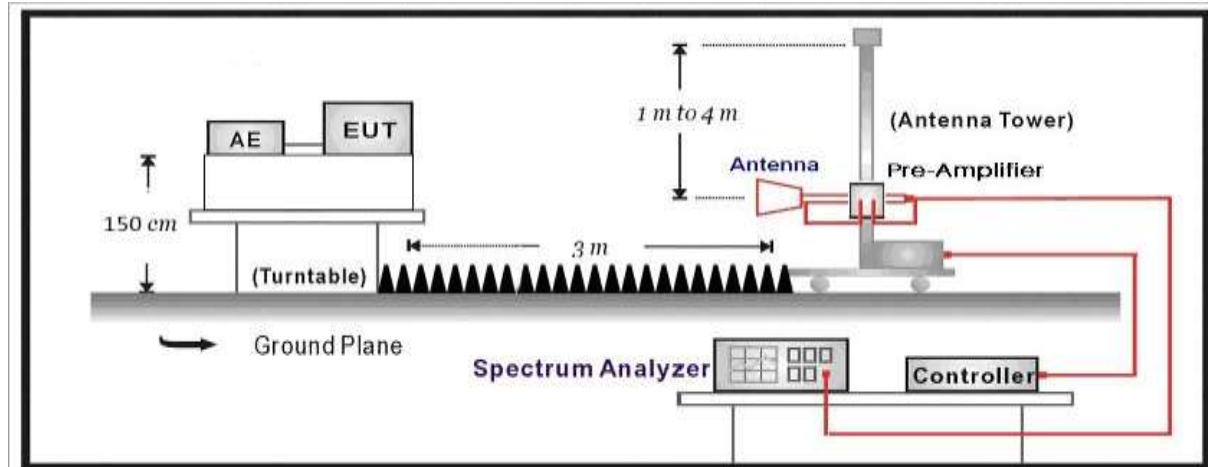

4.3. Limit

Restricted Bands of operation			
Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 – 0.110	16.42 – 16.423	399.9 – 410	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	608 – 614	5.35 – 5.46
2.1735 – 2.1905	16.80425 – 16.80475	960 – 1240	7.25 – 7.75
4.125 – 4.128	25.5 – 25.67	1300 – 1427	8.025 – 8.5
4.17725 – 4.17775	37.5 – 38.25	1435 – 1626.5	9.0 – 9.2
4.20725 – 4.20775	73 – 74.6	1645.5 – 1646.5	9.3 – 9.5
6.215 – 6.218	74.8 – 75.2	1660 – 1710	10.6 – 12.7
6.26775 – 6.26825	108 – 121.94	1718.8 – 1722.2	13.25 – 13.4
6.31175 – 6.31225	123 – 138	2200 – 2300	14.47 – 14.5
8.291 – 8.294	149.9 – 150.05	2310 – 2390	15.35 – 16.2
8.362 – 8.366	156.52475 – 156.52525	2483.5 – 2500	17.7 – 21.4
8.37625 – 8.38675	156.7 – 156.9	2690 – 2900	22.01 – 23.12
8.81425 – 8.81475	162.0125 – 167.17	3260 – 3267	23.6 – 24.0
12.29 – 12.293	167.72 – 173.2	3332 – 3339	31.2 – 31.8
12.51975 – 12.52025	240 – 285	3345.8 – 3358	36.43 – 36.5
12.57675 – 12.57725	322 – 335.4	3600 – 4400	
13.36 – 13.41			

Restricted Band Emissions Limit			
Frequency (MHz)	Field strength (μ V/m)	Field strength (dB μ V/m)	Measurement distance (m)
0.009 - 0.49	2400/F(kHz)	48.5 – 13.8	300 _(Note 1)
0.49 - 1.705	24000/F(kHz)	33.8 - 23	30 _(Note 1)
1.705 - 30	30	29.5	30 _(Note 1)
30 - 88	100	40	3 _(Note 2)
88 - 216	150	43.5	3 _(Note 2)
216 - 960	200	46	3 _(Note 2)
Above 960	500	54	3 _(Note 2)





Note 1: At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade).

Note 2: At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

4.4. Test Procedure


Test Method						
	References Rule		Chapter	Description		
☐	ANSI C63.10		11.11	Emissions in non-restricted frequency bands		
	☐	ANSI C63.10	11.11.2	Reference level measurement		
	☐	ANSI C63.10	11.11.3	Emission level measurement		
☒	ANSI C63.10		11.12	Emissions in restricted frequency bands		
	☒	ANSI C63.10	11.12.1	Radiated emission measurements		
	☒	ANSI C63.10	11.12.2.7	Radiated spurious emission test		
		☒	ANSI C63.10	6.4	Radiated emissions from unlicensed wireless devices below 30 MHz	
		☒	ANSI C63.10	6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz	
		☒	ANSI C63.10	6.6	Radiated emissions from unlicensed wireless devices above 1 GHz	
		☐	ANSI C63.10	11.12.2.3	Quasi-peak measurement procedure	
		☒	ANSI C63.10	11.12.2.4	Peak power measurement procedure	
		☒	ANSI C63.10	11.12.2.5	Average power measurement procedures	
			☐	ANSI C63.10	11.12.2.5.1	Trace averaging with continuous EUT transmission at full power
			☐	ANSI C63.10	11.12.2.5.2	Trace averaging across ON and OFF times of the EUT transmissions followed by duty cycle correction
			☒	ANSI C63.10	11.12.2.5.3	Reduced VBW averaging across ON and OFF times of the EUT transmissions with max hold

4.5. EUT test Axis definition

Item	Emissions in restricted frequency bands			
Device Category	☒	Fixed position use		
	☐	Mobile position use		
Test mode	Mode 1			
Test method	☒	Radiated		
		X Axis	Y Axis	Z Axis
				
		Worst Axis ☒	Worst Axis ☐	Worst Axis ☐
	☐	Conducted		
	☐	Chain 1		
				
	☐	Chain 1	Chain 2	
				
	☐	Chain 1	Chain 2	Chain 3
				


4.6. Test Result

Engineer: ALLEN	
Site: AC5	Time: 2018/08/27 - 19:28
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT:Wireless SPI transceiver module	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 903MHz	

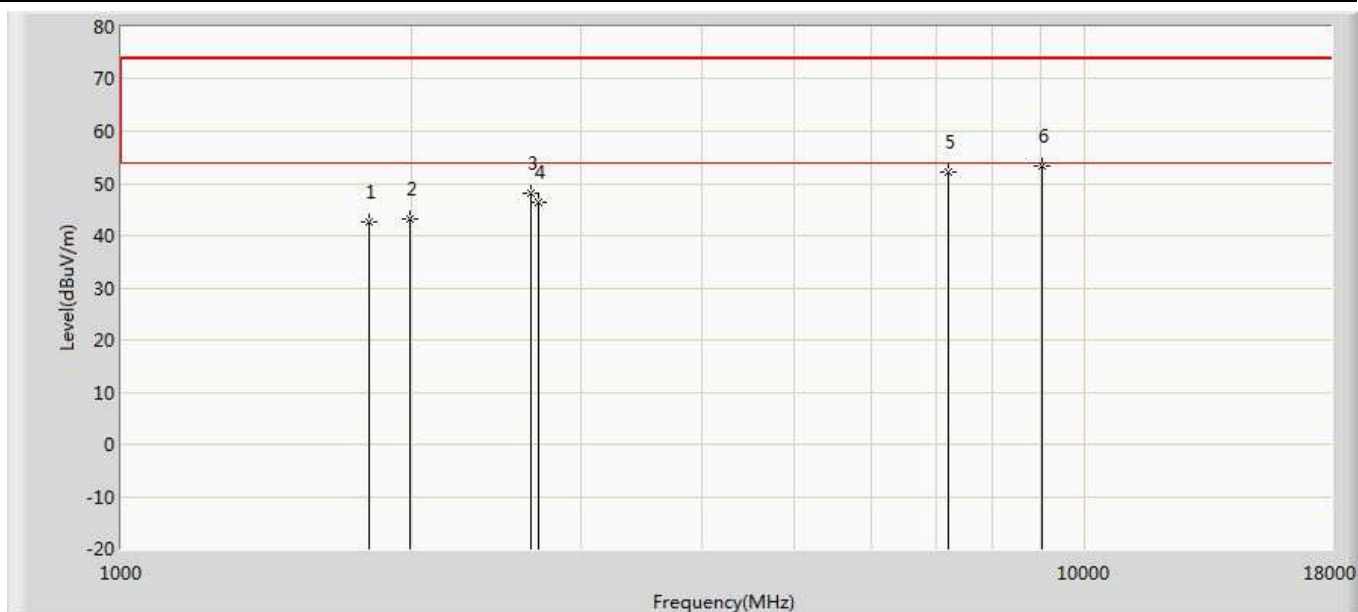


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		1807.500	42.667	50.812	-31.333	74.000	-8.144	PK
2		1994.500	43.158	49.900	-30.842	74.000	-6.742	PK
3		2657.500	48.081	53.425	-25.919	74.000	-5.345	PK
4		2708.500	46.315	51.393	-27.685	74.000	-5.078	PK
5		7222.000	52.264	48.757	-21.736	74.000	3.507	PK
6	*	9032.500	53.230	45.443	-20.770	74.000	7.788	PK

Engineer: ALLEN	
Site: AC5	Time: 2018/08/27 - 19:29
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT:Wireless SPI transceiver module	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 903MHz	

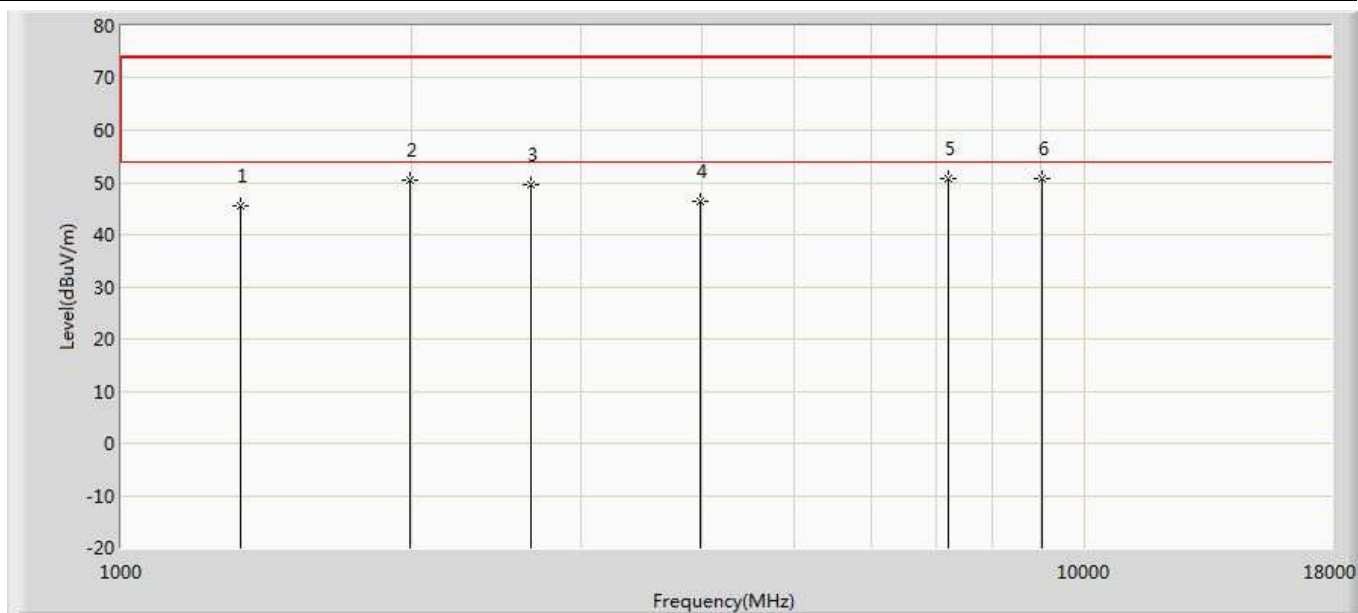


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		1331.500	45.396	55.655	-28.604	74.000	-10.259	PK
2		1994.500	50.437	57.179	-23.562	74.000	-6.742	PK
3		2657.500	49.629	54.973	-24.371	74.000	-5.345	PK
4		3992.000	46.507	47.987	-27.493	74.000	-1.480	PK
5		7222.000	50.727	47.220	-23.273	74.000	3.507	PK
6	*	9032.500	50.752	42.964	-23.248	74.000	7.788	PK

Engineer: ALLEN	
Site: AC5	Time: 2018/08/27 - 11:29
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT:Wireless SPI transceiver module	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 915MHz	

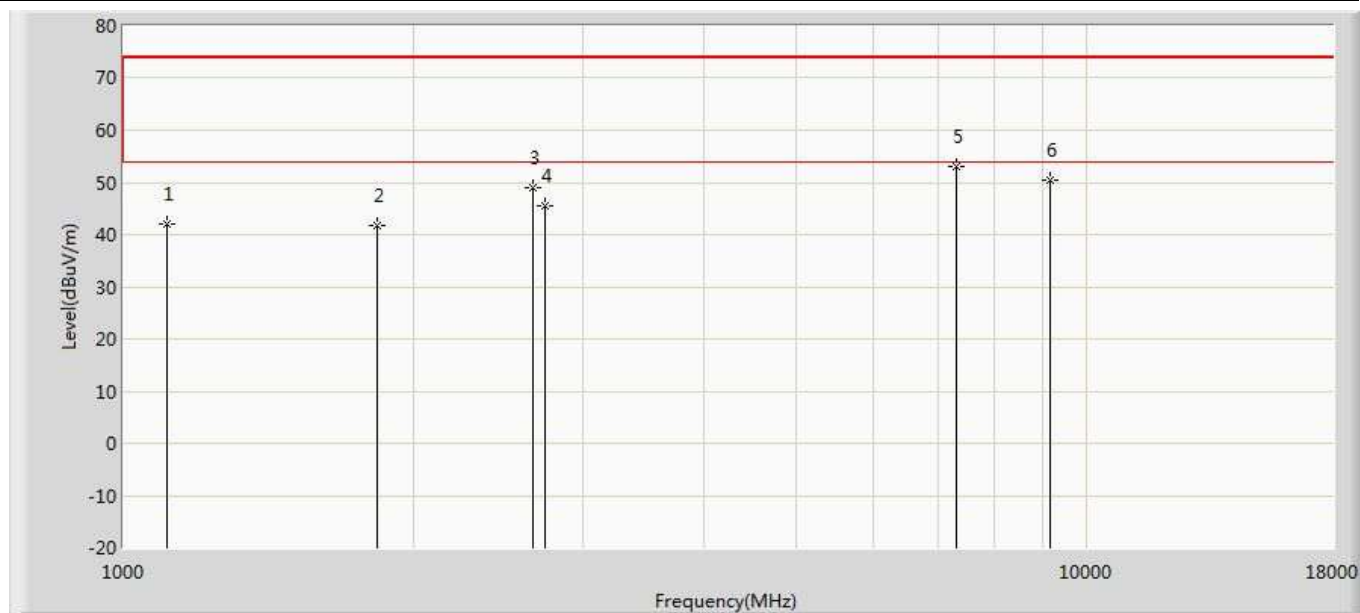


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		1110.500	42.084	52.148	-31.916	74.000	-10.064	PK
2		1833.000	41.782	49.839	-32.218	74.000	-8.057	PK
3		2657.500	48.996	54.340	-25.004	74.000	-5.345	PK
4		2742.500	45.444	50.713	-28.556	74.000	-5.269	PK
5	*	7324.000	52.920	49.318	-21.080	74.000	3.602	PK
6		9151.500	50.532	43.427	-23.468	74.000	7.105	PK

Engineer: ALLEN	
Site: AC5	Time: 2018/08/27 - 19:29
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT:Wireless SPI transceiver module	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 915MHz	

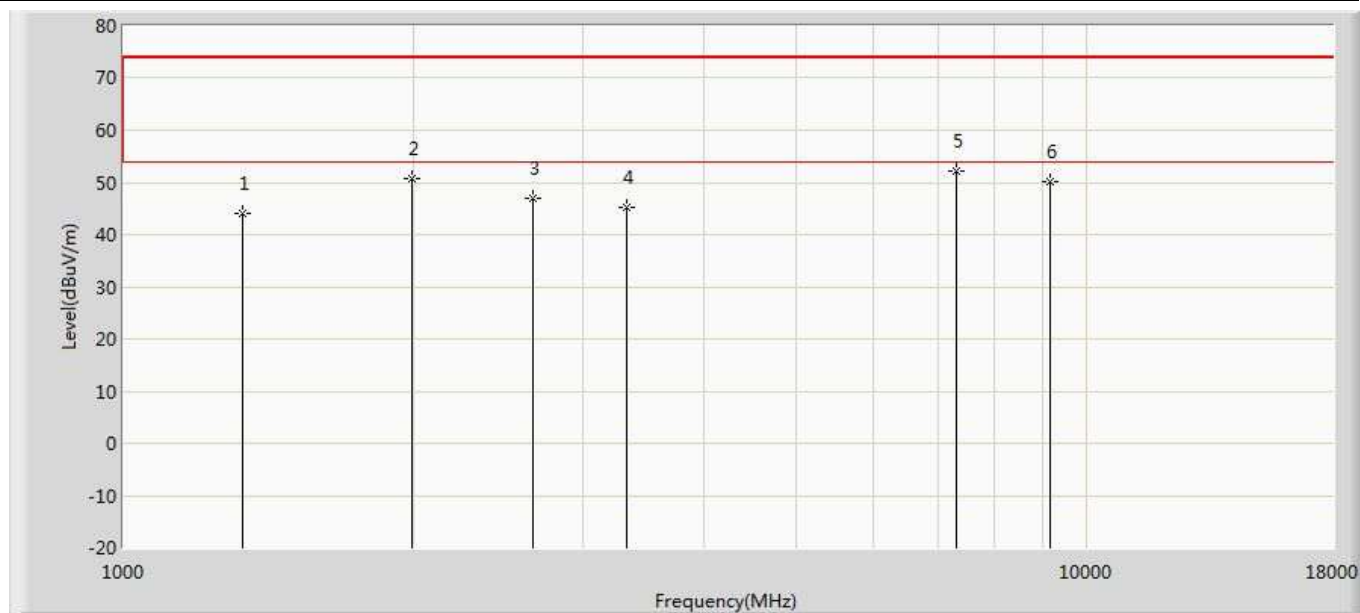


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		1331.500	44.200	54.459	-29.800	74.000	-10.259	PK
2		1994.500	50.779	57.521	-23.221	74.000	-6.742	PK
3		2657.500	46.928	52.272	-27.072	74.000	-5.345	PK
4		3329.000	45.258	49.626	-28.742	74.000	-4.368	PK
5	*	7324.000	52.182	48.580	-21.818	74.000	3.602	PK
6		9151.500	50.189	43.084	-23.811	74.000	7.105	PK

Engineer: ALLEN	
Site: AC5	Time: 2018/08/27 - 19:29
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT:Wireless SPI transceiver module	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 927MHz	

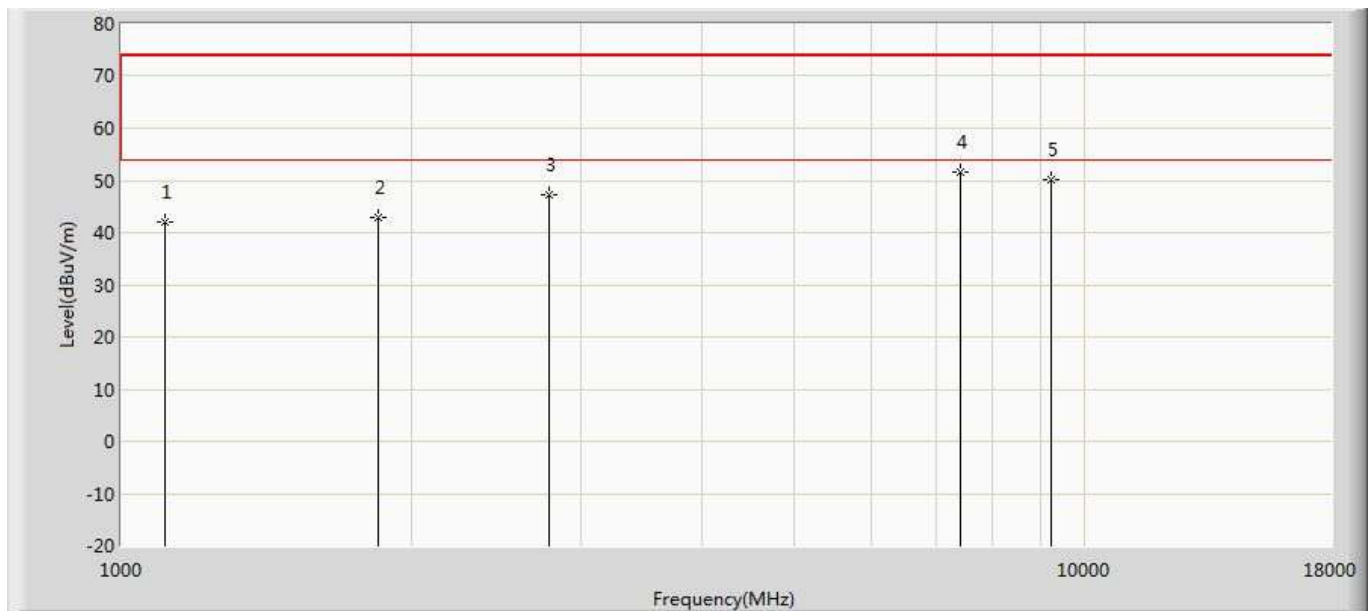

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		1110.500	42.053	52.117	-31.947	74.000	-10.064	PK
2		1850.000	43.028	51.089	-30.972	74.000	-8.061	PK
3		2776.500	47.375	52.088	-26.625	74.000	-4.714	PK
4	*	7417.500	51.649	47.814	-22.351	74.000	3.835	PK
5		9219.500	50.246	41.472	-23.754	74.000	8.774	PK


Engineer: ALLEN	
Site: AC5	Time: 2018/08/27 - 19:29
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT:Wireless SPI transceiver module	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 927MHz	

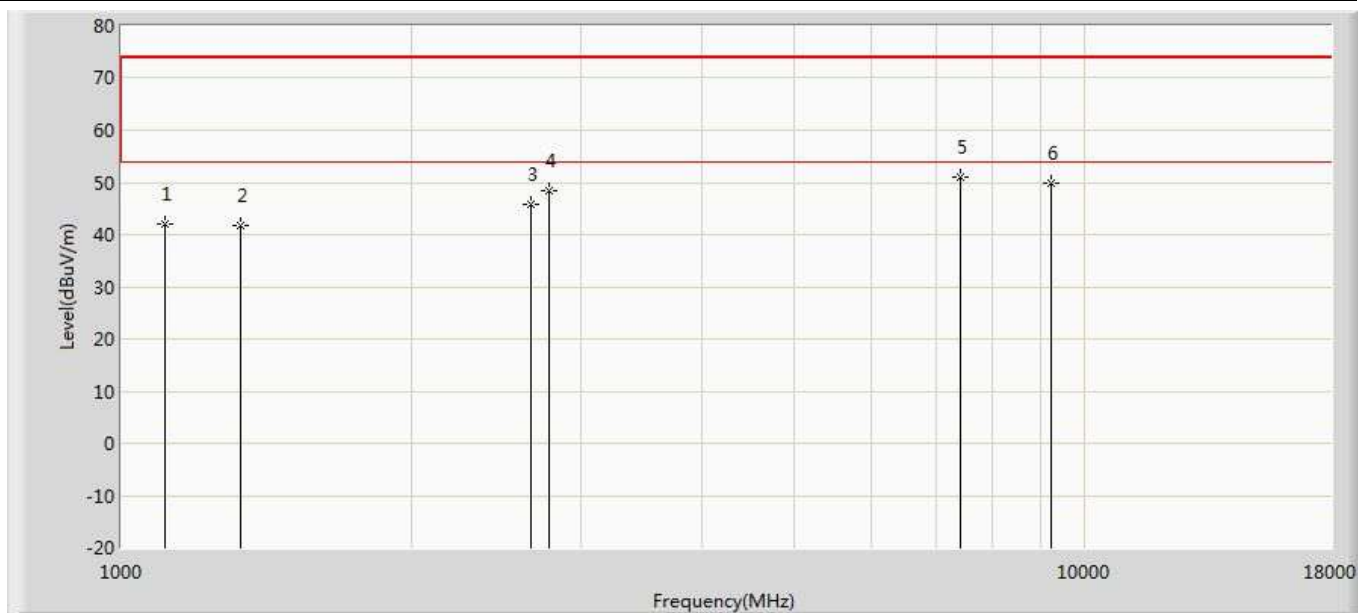

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		1110.500	42.133	52.197	-31.867	74.000	-10.064	PK
2		1331.500	41.842	52.102	-32.158	74.000	-10.259	PK
3		2657.500	45.932	51.276	-28.068	74.000	-5.345	PK
4		2785.000	48.422	53.000	-25.578	74.000	-4.578	PK
5	*	7417.500	50.983	47.148	-23.017	74.000	3.835	PK
6		9211.000	49.796	40.690	-24.204	74.000	9.106	PK


The worst case of Radiated Emission below 1GHz:

Site: AC3	Time: 2018/08/27 - 20:30
Limit: FCC_Part15.109_RE(3m)_ClassB	Margin: 0
Probe: AC3_3m (30-1000MHz)	Polarity: Horizontal
EUT: Wireless SPI transceiver module	Power: 120V/60Hz
Note: Mode 1	

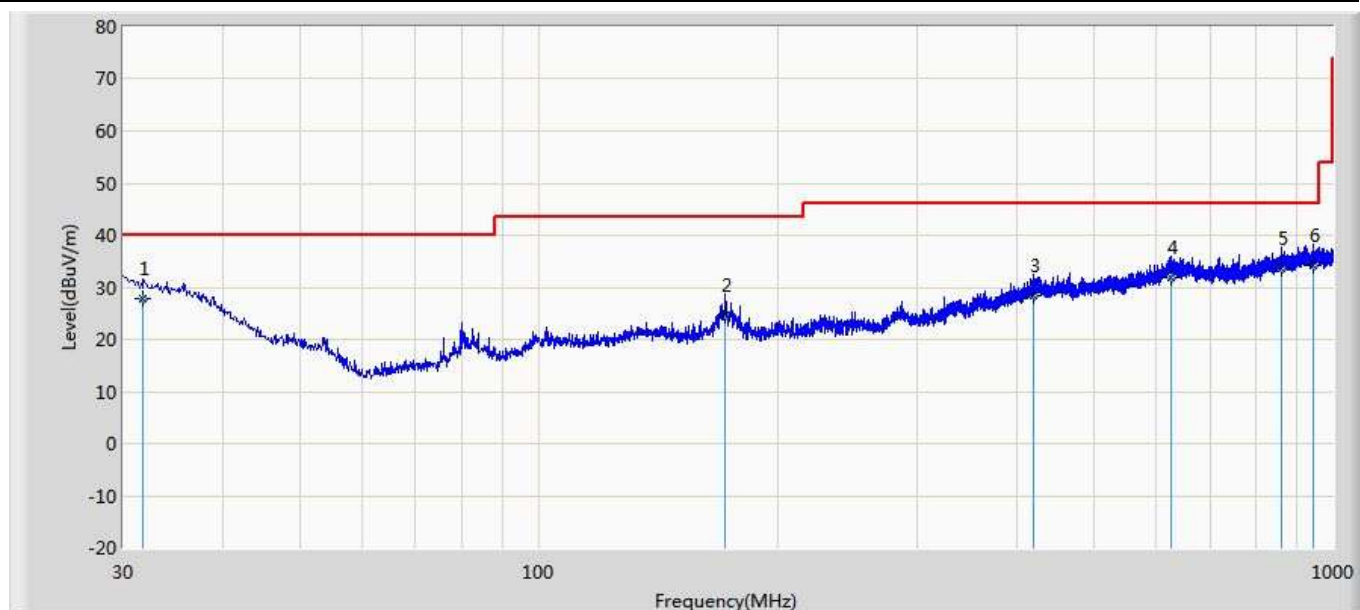

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		31.820	27.691	0.800	-12.309	40.000	26.893	QP
2		171.621	24.546	7.200	-18.954	43.500	17.347	QP
3		420.183	28.409	1.300	-17.591	46.000	27.11	QP
4		625.217	31.888	2.000	-14.112	46.000	29.889	QP
5		862.746	33.573	1.900	-12.427	46.000	31.674	QP
6	*	943.498	34.098	1.700	-11.902	46.000	32.399	QP

Site: AC3	Time: 2018/08/27 - 20:33
Limit: FCC_Part15.109_RE(3m)_ClassB	Margin: 0
Probe: AC3_3m (30-1000MHz)	Polarity: Vertical
EUT: Wireless SPI transceiver module	Power: 120V/60Hz
Note: Mode 1	

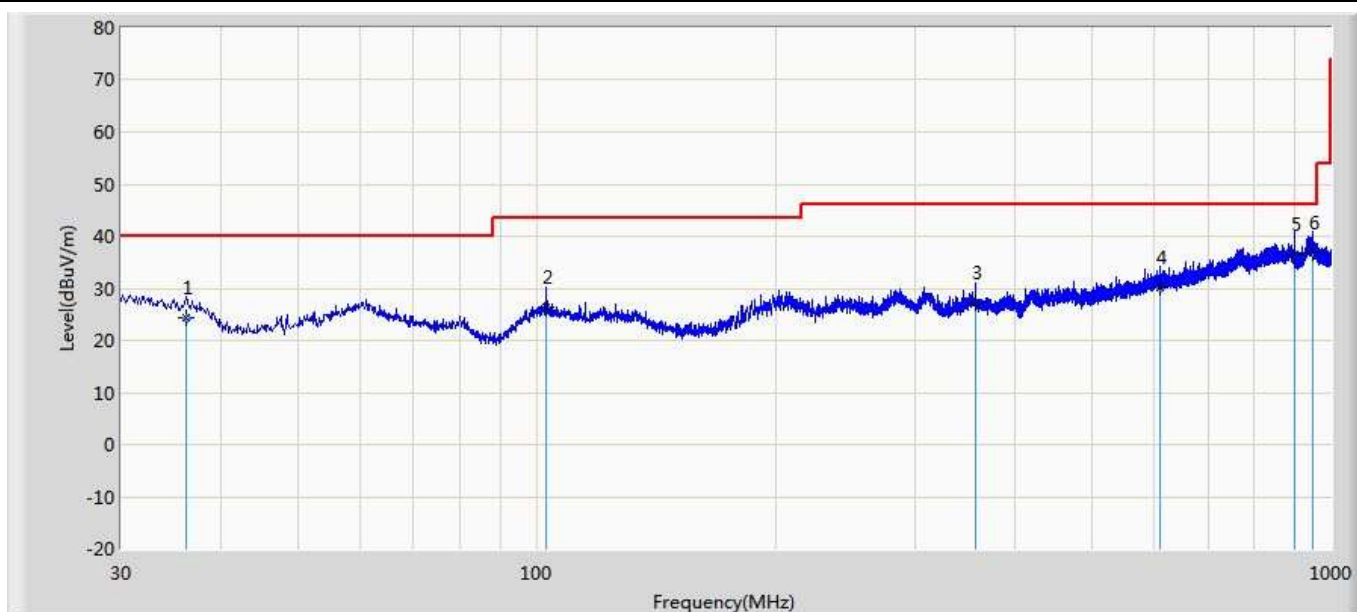


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		36.185	24.212	2.300	-15.788	40.000	21.913	QP
2		102.751	26.475	4.400	-17.025	43.500	22.076	QP
3		357.255	27.117	2.600	-18.883	46.000	24.518	QP
4		609.940	30.142	2.700	-15.858	46.000	27.443	QP
5		898.940	36.576	4.200	-9.424	46.000	32.376	QP
6	*	948.955	36.951	2.200	-9.049	46.000	34.753	QP

5. Emissions in non-restricted frequency bands

5.1. Test Equipment

Occupied Bandwidth / TR-8					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2018.02.04	2019.02.03
EXA Spectrum Analyzer	Keysight	N9010A	MY55370495	2018.04.09	2019.04.08
MXA Signal Analyzer	Keysight	N9020A	MY56060147	2018.04.09	2019.04.08
Temperature/Humidity Meter	zhichen	ZC1-2	TR8-TH	2018.04.10	2019.04.09
Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.					

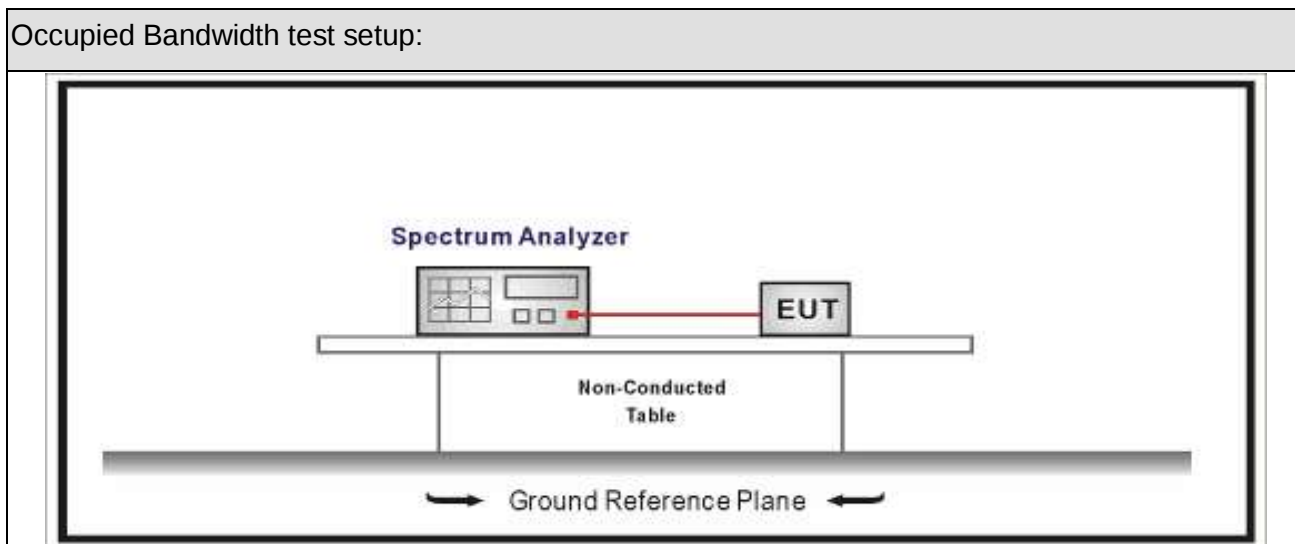5.2. Test Setup








5.3. Limit

Un-Restricted Band Emissions Limit	
RF Output power (Detection methods)	Limit(dB)
RF Output power(Average detector)	30c(Note1)
RF Output power(PK detector)	20c(Note2)
Note 1: If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc). Note 2: If the maximum peak conducted output power procedure was used, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).	

5.4. Test Procedure

Test Method				
	References Rule		Chapter	Description
☒	ANSI C63.10		11.11	Emissions in non-restricted frequency bands
	☒	ANSI C63.10	11.11.2	Reference level measurement
	☒	ANSI C63.10	11.11.3	Emission level measurement
☐	ANSI C63.10		11.12	Emissions in restricted frequency bands
	☐	ANSI C63.10	11.12.1	Radiated emission measurements
	☐	ANSI C63.10	11.12.2.7	Radiated spurious emission test
☐	ANSI C63.10		6.4	Radiated emissions from unlicensed wireless devices below 30 MHz
☐	ANSI C63.10		6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz
☒	ANSI C63.10		6.6	Radiated emissions from unlicensed wireless devices above 1 GHz
	☒	ANSI C63.10	11.12.2	Antenna-port conducted measurements
	☐	ANSI C63.10	11.12.2.3	Quasi-peak measurement procedure
		☒	ANSI C63.10	Peak power measurement procedure
		☐	ANSI C63.10	Average power measurement procedures
		☐	ANSI C63.10	11.12.2.5.1 Trace averaging with continuous EUT transmission at full power
		☐	ANSI C63.10	11.12.2.5.2 Trace averaging across ON and OFF times of the EUT transmissions followed by duty cycle correction
		☐	ANSI C63.10	11.12.2.5.3 Reduced VBW averaging across ON and OFF times of the EUT transmissions with max hold


5.5. EUT test Axis definition

Item	Emissions in non-restricted frequency bands			
Device Category	☒	Fixed position use		
	☐	Mobile position use		
Test mode	Mode 1 ~ Mode 4			
Test method	☐	Radiated		
		X Axis	Y Axis	Z Axis
				
		Worst Axis ☐	Worst Axis ☐	Worst Axis ☐
	☒	Conducted		
	☒	Chain 0		
				
	☐	Chain 0	Chain 1	
				
	☐	Chain 0	Chain 1	Chain 2
				


5.6. Test Result

Product Name	: Wireless SPI transceiver module	Power	: AC 120V/60Hz
Test Mode	: Mode1	Test Site	: TR8
Test Date	: 2018.08.15		

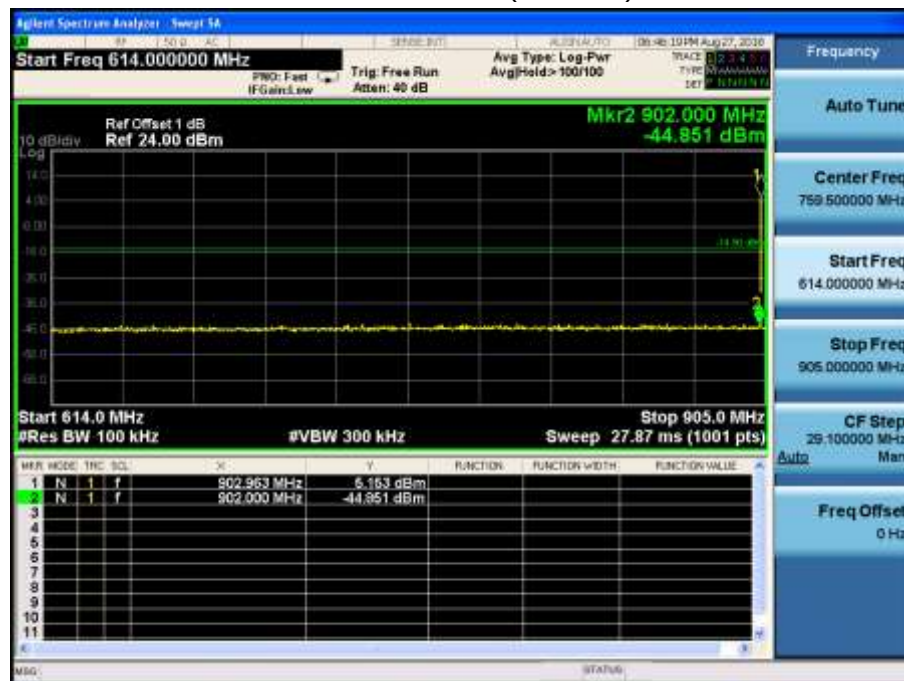Mode 1 Channel(902MHz)



Mode 1 Channel(928MHz)

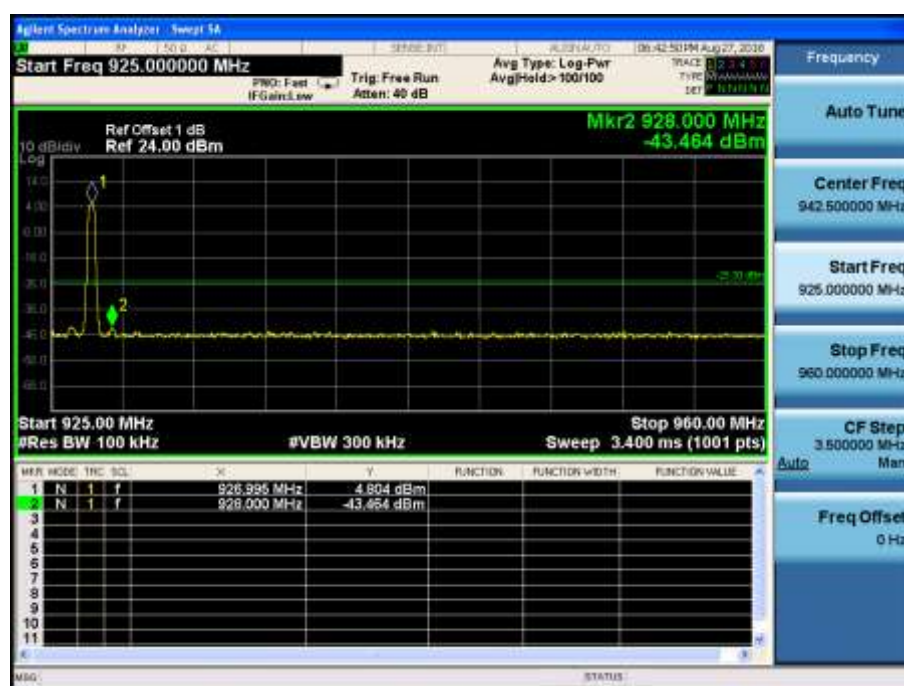


6. Occupied Bandwidth

6.1. Test Equipment

Occupied Bandwidth / TR-8					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2018.02.04	2019.02.03
EXA Spectrum Analyzer	Keysight	N9010A	MY55370495	2018.04.09	2019.04.08
MXA Signal Analyzer	Keysight	N9020A	MY56060147	2018.04.09	2019.04.08
Temperature/Humidity Meter	zhichen	ZC1-2	TR8-TH	2018.04.10	2019.04.09
Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.					

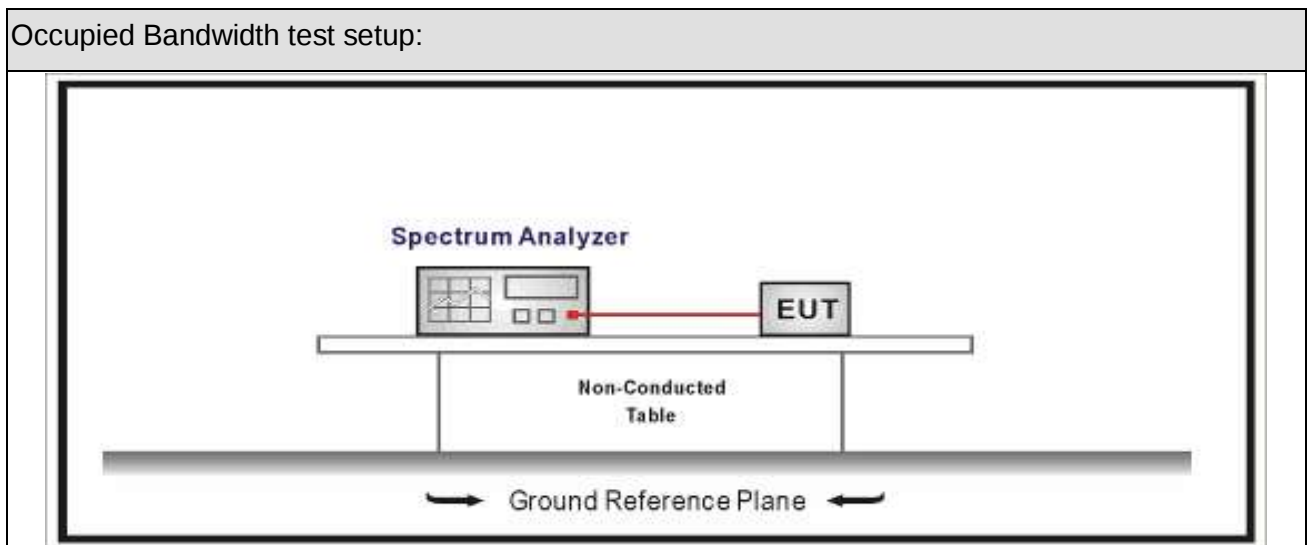6.2. Test Setup



6.3. Limit






Occupied Bandwidth

Systems using digital modulation techniques operate in the 2400-2483.5 MHz. The minimum 6 dB bandwidth shall be at least 500 kHz

6.4. Test Procedure

Test Method				
	Reference Rule		Chapter	Description
☒	ANSI C63.10		11.8	DTS bandwidth
	☐	ANSI C63.10	11.8.1	Option 1
	☒	ANSI C63.10	11.8.2	Option 2

6.5. EUT test definition

Item	Occupied Bandwidth			
Device Category	☒	Fixed position use		
	☐	Mobile position use		
Test mode	Mode 1			
Test method	☐	Radiated		
		X Axis	Y Axis	Z Axis
				
		Worst Axis ☐	Worst Axis ☐	Worst Axis ☐
	☒	Conducted		
	☒	Chain 0		
				
	☐	Chain 0	Chain 1	
				
	☐	Chain 0	Chain 1	Chain 2
				

6.6. Test Result

Product Name	: Wireless SPI transceiver module	Power	: AC 120V/60Hz
Test Mode	: Mode1	Test Site	: TR8
Test Date	: 2018.08.15		

Mode	CH.	Test Freq. (MHz)	99% Occupied Bandwidth (KHz)	6dB Occupied Bandwidth (KHz)	Limit (kHz)	Result
1	Low	903	742.38	716.7	>500	Pass
1	Mid	915	725.92	686.3	>500	Pass
1	High	927	731.89	677.1	>500	Pass

Note : The worst case of Occupied Bandwidth as below :

Mode 1 High Channel (927MHz)




7. Fundamental emission output power

7.1. Test Equipment

Fundamental emission output power/ TR-8					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	E4446A	MY45300103	2018.01.04	2019.01.03
Spectrum Analyzer	Agilent	N9010A	MY48030494	2018.02.04	2019.02.03
Wideband Peak Power Meter	Anritsu	ML2495A	0905006	2017.10.14	2018.10.13
Power Sensor	Anritsu	MA2411B	0846014	2017.10.14	2018.10.13
Temperature/Humidity Meter	zhicheng	ZC1-2	TR8-TH	2018.04.10	2019.04.09

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

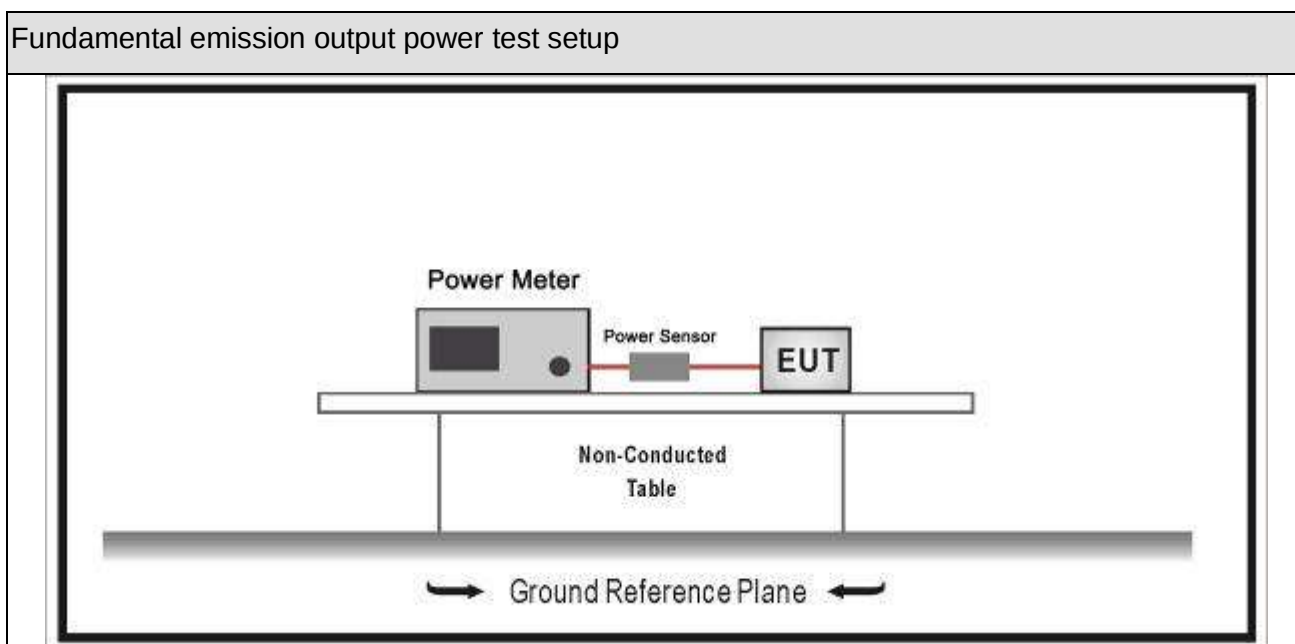7.2. Test Setup








7.3. Limit

Fundamental emission output power Limit		
☒	$G_{TX} < 6\text{dBi}$	$P_{out} \leq 30\text{dBm}$
☐	$G_{TX} > 6\text{dBi}$	
☐	Non-Fix point-point	$P_{out} \leq 30 - (G_{TX} - 6)$
☐	Fix point-point	$P_{out} \leq 30 - [(G_{TX} - 6)]/3$
☐	Point-to-multipoint	$P_{out} \leq 30 - (G_{TX} - 6)$
☐	Overlap Beams	$P_{out} \leq 30 - [(G_{TX} - 6)]/3$
☐	Aggregate power transmitted simultaneously on all beams	$P_{out} \leq 30 - [(G_{TX} - 6)]/3$
☐	single directional beam	$P_{out} \leq 30 - [(G_{TX} - 6)]/3 + 8\text{dB}$
Note 1 : G_{TX} directional gain of transmitting antennas. Note 2 : P_{out} is maximum peak conducted output power .		

7.4. Test Procedure

Fundamental emission output power Test Method						
	References Rule			Chapter	Description	
☒	ANSI C63.10			11.9	Fundamental emission output power	
	☒	ANSI C63.10		11.9.1	Maximum peak conducted output power	
		☐	ANSI C63.10	11.9.1.1	RBW ≥ DTS bandwidth	
		☐	ANSI C63.10	11.9.1.2	Integrated band power method	
		☒	ANSI C63.10	11.9.1.3	PKPM1 Peak power meter method	
	☐	ANSI C63.10		11.9.2	Maximum conducted (average) output power	
		☐	ANSI C63.10		11.9.2.2	Measurement using a spectrum analyzer (SA)
			☐	ANSI C63.10	11.9.2.2.2	Method AVGSA-1(Duty cycle≥98%)
			☐	ANSI C63.10	11.9.2.2.3	Method AVGSA-1A(Duty cycle≥98%)
			☐	ANSI C63.10	11.9.2.2.4	Method AVGSA-2(Duty cycle≤98%)
			☐	ANSI C63.10	11.9.2.2.5	Method AVGSA-2A(Duty cycle≤98%)
			☐	ANSI C63.10	11.9.2.2.4	Method AVGSA-3
			☐	ANSI C63.10	11.9.2.2.5	Method AVGSA-3A
		☐	ANSI C63.10		11.9.2.3	Measurement using a power meter (PM)
			☐	ANSI C63.10	11.9.2.3.1	Method AVGPM
			☐	ANSI C63.10	11.9.2.3.2	Method AVGPM-G

7.5. EUT test definition

Item	Fundamental emission output power			
Device Category	☒	Fixed position use		
	☐	Mobile position use		
Test mode	Mode 1~4			
Test method	☐	Radiated		
		X Axis	Y Axis	Z Axis
				
		Worst Axis ☐	Worst Axis ☐	Worst Axis ☐
	☒	Conducted		
	☒	Chain 0		
				
	☐	Chain 0	Chain 1	
				
	☐	Chain 0	Chain 1	Chain 2
				

7.6. Test Result

Product Name	:	Wireless SPI transceiver module	Power	:	AC 120V/60Hz
Test Mode	:	Mode1	Test Site	:	TR8
Test Date	:	2018.08.15			


Mode	Channel	Test Frequency (MHz)	Peak Power Output (dBm)	Antenna Gain (dBi)	Limit (dBm)	Result
1	Low	903	13.86	2.0	30	Pass
1	Mid	915	13.86	2.0	30	Pass
1	High	927	13.82	2.0	30	Pass

8. Power Spectral Density

8.1. Test Equipment

Power Spectral Density / TR-8					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2018.02.04	2019.02.03
EXA Spectrum Analyzer	Keysight	N9010A	MY55370495	2018.04.09	2019.04.08
MXA Signal Analyzer	Keysight	N9020A	MY56060147	2018.04.09	2019.04.08
Temperature/Humidity Meter	zhichen	ZC1-2	TR8-TH	2018.04.10	2019.04.09
Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.					

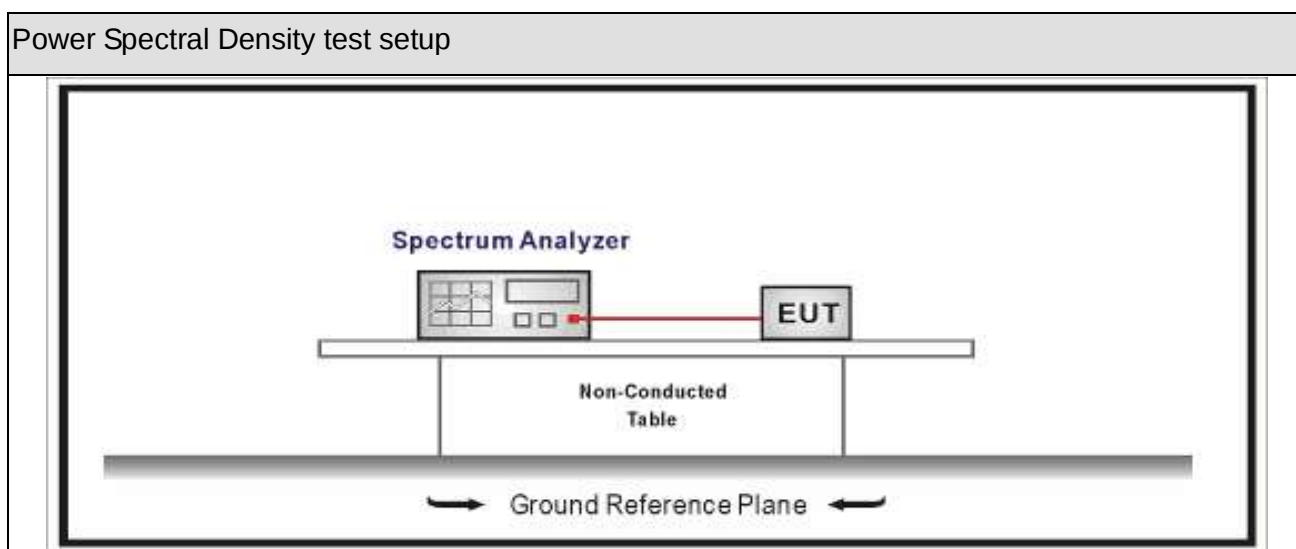8.2. Test Setup








8.3. Limit

Power Spectral Density Limit
Power Spectral Density $\leq 8\text{dBm}/3\text{kHz}$

8.4. Test Procedure

Power Spectral Density Test Method				
	References Rule		Chapter	Description
☒	ANSI C63.10		11.10	Maximum power spectral density level in the fundamental emission
	☒	ANSI C63.10	11.10.2	Method PKPSD (peak PSD)
	☐	ANSI C63.10	11.10.3	Method AVGPSD-1(Duty cycle $\geq$ 98%)
	☐	ANSI C63.10	11.10.4	Method AVGPSD-1A(Duty cycle $\geq$ 98%)
	☐	ANSI C63.10	11.10.5	Method AVGPSD-2(Duty cycle<98%)
	☐	ANSI C63.10	11.10.6	Method AVGPSD-2A(Duty cycle<98%)
	☐	ANSI C63.10	11.10.7	Method AVGPSD-3
	☐	ANSI C63.10	11.10.8	Method AVGPSD-3A

8.5. EUT test definition


Item	Power Spectral Density Test Method			
Device Category	☒	Fixed position use		
	☐	Mobile position use		
Test mode	Mode 1			
Test method	☐	Radiated		
		X Axis	Y Axis	Z Axis
				
		Worst Axis ☐	Worst Axis ☐	Worst Axis ☐
	☒	Conducted		
	☒	Chain 0		
				
	☐	Chain 0	Chain 1	
				
	☐	Chain 0	Chain 1	Chain 2
				

8.6. Test Result

Product Name	: Wireless SPI transceiver module	Power	: AC 120V/60Hz
Test Mode	: Mode1	Test Site	: TR8
Test Date	: 2018.08.19		

Mode	Channel	Test Frequency (MHz)	Measurement PSD (dBm/3kHz)	Directional Gain (dBi)	Limit (dBm/3kHz)	Result
1	Low	903	5.277	2.0	8.0	Pass
1	Mid	915	5.083	2.0	8.0	Pass
1	High	927	5.026	2.0	8.0	Pass

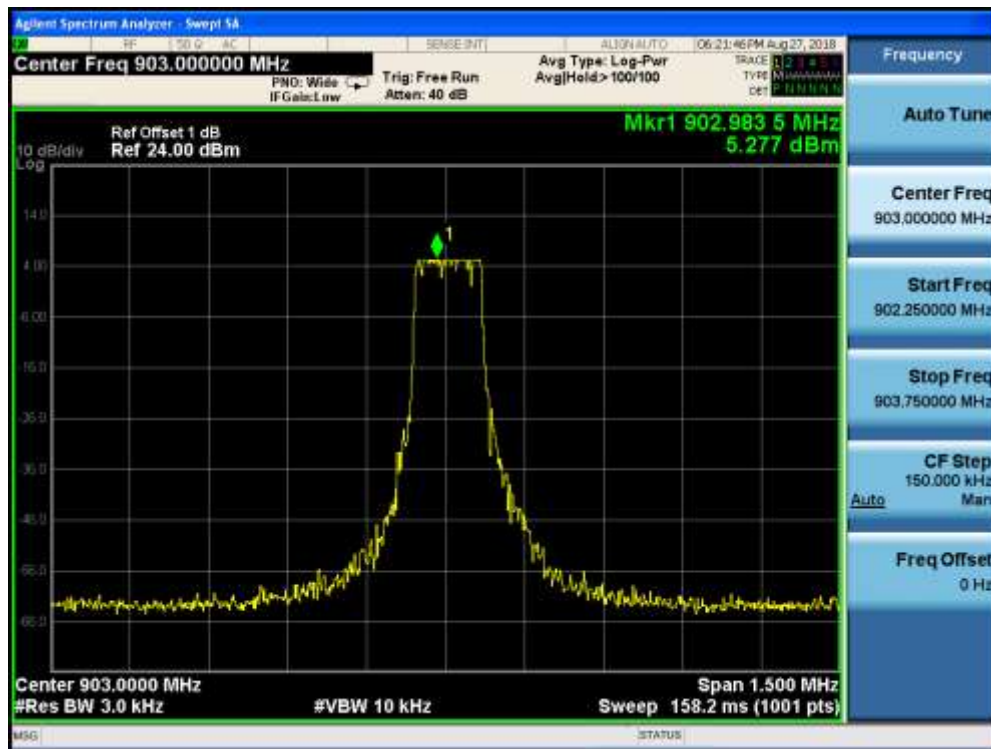Mode 1 Low Channel (903MHz)



9. Antenna Requirement

9.1. Limit

Antenna Requirement Limit	
An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.	

9.2. Antenna Connector Construction

Antenna Connector Construction	
☐	The use of a permanently attached antenna
☐	The antenna use of a unique coupling to the intentional radiator
☒	The use of a nonstandard antenna jack or electrical connector
Please refer to the attached document "Internal Photograph" to show the antenna connector.	

_____ The End _____