

## FCC TEST REPORT FOR CERTIFICATION

Report No. : N1808R-0543  
Model and/or type referene : GramByGram-TAQ / Smart Weight Device  
Test item description : Digital Transmission System (DTS)  
Trade Mark/Brand name :  / MaxCare Design Labs, Inc  
Additional model name : N/A  
Applicant : MaxCare Design Labs, Inc

Test Device Serial No.:	: N/A
Test Standards	: FCC 47 CFR Part 15C
Classification	Digital Transmission System (DTS)

Data of issue : August 22, 2018  
Test result : Complied

  
2018.08.22  
Tested by Yeonghwan Hong  
(+ signature) / Project Engineer

  
2018.08.22  
Reviewed by Changwoo Kim  
(+ signature) / Technical Manager

The device bearing the brand name and model specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. The client should not use it to claim product endorsement by TAF or any government agencies.

The test results in the report only apply to the tested sample.

I attest to the accuracy of data and all measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

It is not allowed to copy this report even partly without the allowance of the test laboratory.

## TABLE OF CONTENTS

TABLE OF CONTENTS .....	2
CERTIFICATE OF INFORMATION .....	3
GENERAL INFORMATION'S .....	5
SUMMARY OF TEST RESULTS .....	11
RECOMMENDATION/CONCLUSION .....	12
<i>8. TEST DATA</i> .....	19
<i>PLOTS OF EMISSIONS</i> .....	20
<i>PLOTS OF EMISSIONS</i> .....	21
<i>TEST DATA</i> .....	22
<i>PLOTS OF EMISSIONS</i> .....	24
<i>TEST DATA</i> .....	25
<i>PLOTS OF EMISSIONS</i> .....	26
<i>PLOTS OF EMISSIONS</i> .....	27
<i>TEST DATA</i> .....	28
<i>TEST DATA</i> .....	31
<i>TEST DATA</i> .....	34
<i>TEST DATA</i> .....	44
<i>PLOTS OF EMISSIONS</i> .....	44
<i>PLOTS OF EMISSIONS</i> .....	45
<i>PLOTS OF EMISSIONS</i> .....	46
<i>PLOTS OF EMISSIONS</i> .....	47
<i>PLOTS OF EMISSIONS</i> .....	48
<i>PLOTS OF EMISSIONS</i> .....	49
<i>TEST DATA</i> .....	50
<i>9. TEST EQUIPMENT</i> .....	52

## Certificate of Information

### Applicant / Manufacture

Company name : MaxCare Design Labs, Inc  
Address : Baekma Bldg Room# 305, 237, Yatap-ro, Bundang-gu, Seongnam-si, Gyeonggi-do  
Telephone : +82-70-4400-7841  
/Facsimile :

### Equipment Under Test (EUT)

FCC ID : 2AQYB-MAXCD  
Classification of installation : Digital Transmission System (DTS)  
Test item particulars : FCC 47 CFR Part 15 subpart C  
Trademark : N/A  
Model and/or type reference : GramByGram-TAQ / Smart Weight Device  
Additional model name : N/A  
Serial number : N/A  
Date (s) of performance of tests: : August 01, 2018 to August 21, 2018  
Date of receipt of test item : July 27, 2018  
EUT condition : Pre-production, not damaged  
Interface Ports : DC IN  
EUT Power Source : Operating Voltage : 3.33 Vdc ~ 4.07 Vdc  
Test Voltage : 3.70 Vdc  
Internal clock frequency : 2402 MHz ~ 2480 MHz  
Firmware version : N/A  
Note : N/A

### Model Description

- NONE

### Model Specification

- NONE

### Test Performed

Test started & completed : August 01, 2018 to August 21, 2018  
Location : NTREE Co., Ltd.

\*\*\* To be continued next page \*\*\*

## Certification –cont.-

### Test Specification

Purpose of the test	: Compliance test to the following standard
Applied standard	: FCC 47 CFR Part 15C
Classification	: Class B
Deviations from	
Standard	: FCC KDB 558074 D01 DTS Meas Guidance V03R05
Test Method	

### Summary of Test Results

FCC Part15(15.247), Subpart C			
Standard Section	Test Item	Verdict	Remark
15.207	Conducted Emission	N/A	1)
15.209	Radiated Emission	PASS	-
15.247(a)(2)	6dB Bandwidth	PASS	-
15.247(b)	Peak Output Power	PASS	-
15.247(c)	Radiated Spurious Emission	PASS	-
15.247(d)	Power Spectral Density	PASS	-
15.205	Band Edge Emission	PASS	-
15.203	Antenna Requirement	PASS	-

#### Remark

\* N/A: denote test is not applicable in this test report.

\* All test items were verified and recorded according to the standards and without any deviation during the test.

1) Used to only battery.

## General information's

### Purpose

This document is based on the Electromagnetic Interference (EMI) tests performed on the “Smart Weight Device”. The measurements were performed according to the measurement procedure described in ANSI C 63.4:2014. The tests were carried out in order to confirm whether the electromagnetic emissions from the EUT( Equipment Under Test), are within the class B limits defined in FCC Part 15, Subpart C- “Section 15.207- Conducted limits” and “Section 15.209-Radiated emission limits”.

### Test Performed

The Electromagnetic compatibility measurement facilities are located on at 30,Pajangcheon-ro 44beon-gil,Jangan-gu, Suwon-si, Gyeonggi-do Korea. Description details of test facilities were submitted to the RRA(National Radio Research Agency) according to the requirement of ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme) and FCC(Federal Communications Commission) and Vietnam MRA and TuV SUD CARAT and TuV NORD, UL WTDP.

RRA Designation No.: KR0175

KOLAS Accreditation No. : KT511

FCC(DoC) Test Firm Registration No. : KR0175

Vietnam MRA Designation No.: KR0175

(QCVN 18:2014/BTTTT, QCVN 54:2011/BTTTT,TCVN 7317:2003(CISPR 24:1997),TCVN 7189:2009(CISPR 22:2006)

TuV SUD CARAT : ROK1211C

TuV NORD : KL-3879/11

UL WTDP :: 1107-S-131


Laboratory : NTREE Co., Ltd.

Address : 30,Pajangcheon-ro 44beon-gil,Jangan-gu, Suwon-si, Gyeonggi-do Korea

Telephone : +82-31-893-1000

Facsimile : +82-31-893-0111

### SITE MAP

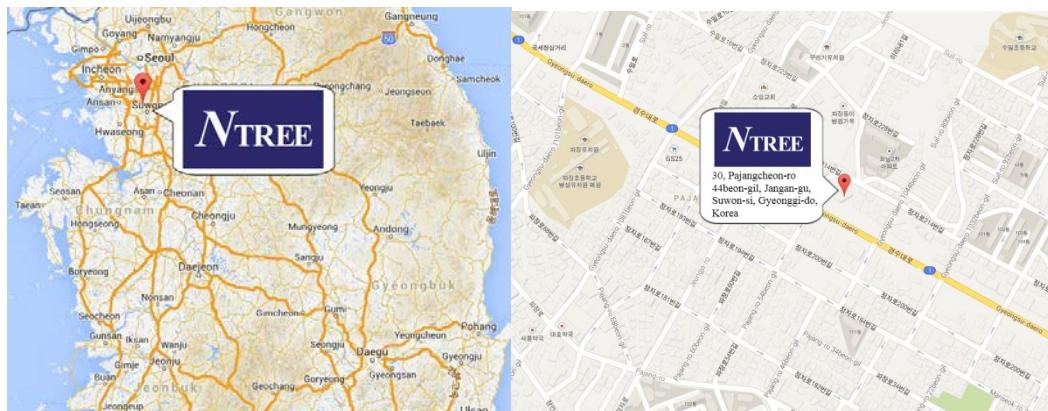

### **Measurement uncertainty**

Radiated disturbance	30 MHz to 1 GHz	3.6 dB
	1 GHz to 18 GHz	7.8 dB
Conducted disturbance	0.15 MHz to 30 MHz	1.8 dB

The coverage factor  $k=2$  yields approx. a 95% level of confidence for near-normal distribution typical of most measurement results.

N  
T  
R  
E  
E

## TEST CONDITIONS & EUT INFORMATION

### **Operation During Test**

The EUT is the transceiver which is the Bluetooth LE mode.

The Laptop was used to control the EUT to transmit the wanted TX channel by the testing program (EMI\_TEST\_v1.2) which manufacturer supported. The Laptop was removed after controlling the EUT to transmit the wanted signal. The EUT was tested at the lowest channel, middle channel and the highest channel with the maximum output power in accordance with the manufacturer's specifications. The worst data were recorded in the report.

#### **Table of test power setting**

Frequency band	Mode	Power setting Level
2402~2480 MHz	LE	Default

#### **3.1.2 Table of test channels**

Frequency band	Mode	Test Channel (CH)	Frequency (MHz)
2.4 GHz	LE	0	2402
		20	2442
		39	2480

**Table of test modes**

Test Items	Mode	Modulation	Test Channel (CH)
Radiated Emissions	LE	GFSK	0/20/39
Conducted Emissions	LE	GFSK	0/20/39
6 dB Bandwidth			0/20/39
Peak Output Power			0/20/39
Peak Power Spectral Density	LE	GFSK	0/20/39
Conducted Spurious Emission			0/20/39
Radiated Spurious Emission, Band edge Emission			0/20/39


**Antenna TX mode information:**

Frequency band	Mode	Antenna TX mode	Support MIMO
2.4 GHz	LE	■ 1TX, □ 2TX	□ Yes, ■ No

## Support Equipment

EUT	MaxCare Design Labs, Inc Model : GramByGram-TAQ	S/N: N/A
Laptop Computer	DELL Model : Latitude E5440	FCC DOC S/N : 5WHBYZ1
AC/DC Adapter	DELL Model : DA130PE1-00 1.5 m unshielded power cable	FCC DOC S/N : WRHKW

## Setup Drawing

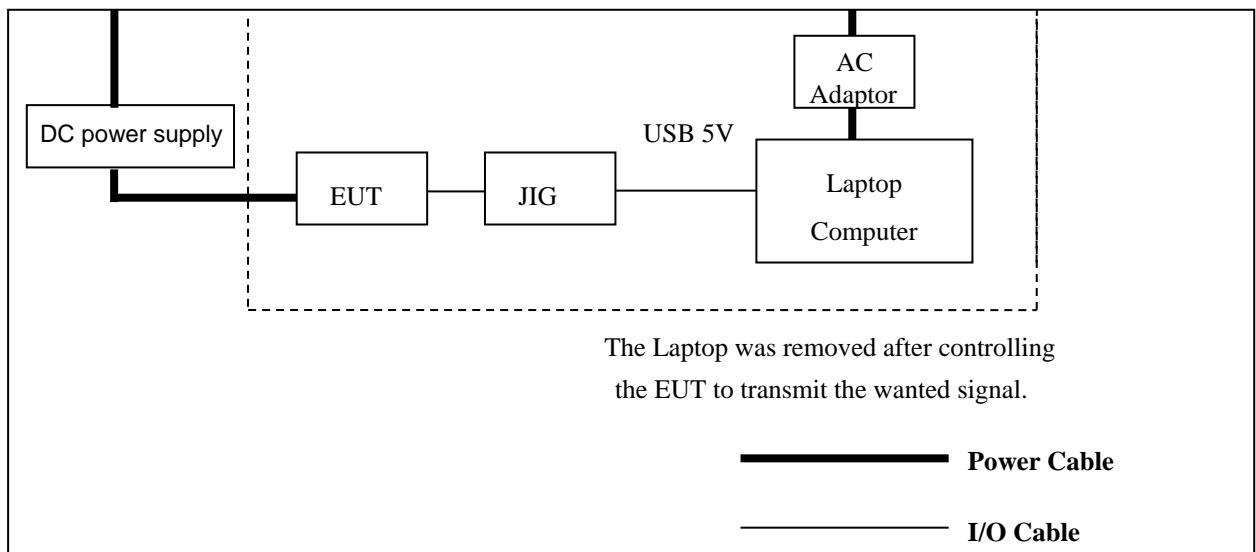

## EUT Information

The EUT is the **Bluetooth Transceiver FCC ID: 2AQYB-MAXCD**. This unit supports full qualified Bluetooth 4.0 with LE standard system.

Specifications:

Category	Smart Weight Device
Model Name	GramByGram-TAQ
Brand Name	MaxCare Design Labs, Inc
RF Frequency	2402 MHz ~ 2480 MHz
Maximum Conducted Output Power	-0.07 dBm
Channels	40ch
Antenna Gain (peak)	1.97 dBi
Antenna Setup	1TX / 1RX
Modulations	GFSK(BLE)
Temperature Range	10°C ~ 40 °C
Voltage	3.7 Vdc
Dimensions (H x W x D)	About 400 mm x 300 mm X 50 mm
Weight	About 3 Kg
H/W Status	-
S/W Status	-
Remarks	-

## SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specification:

Name of Test	FCC Paragraph No.	Result	Remark
Conducted Emission	15.207	N/A	Used to only battery device
Radiated Emission	15.209	C	-
6 dB Bandwidth	15.247(a)(2)	C	-
Peak Output Power and E.I.R.P	15.247(b)(3)	C	-
Power Spectral Density	15.247(e)	C	-
Conducted Spurious Emission	15.247(d)	C	-
Radiated Spurious Emission	15.247(d)	C	-
Maximum Permissible Exposure	1.1307(b)	N/A	-

Note 1: C=Complies NC=Not Complies NA=Not Applicable  
\* The data in this test report are traceable to the national or international standards.

## **RECOMMENDATION/CONCLUSION**

The data collected shows that the **MaxCare Design Labs, Inc. Smart Weight Device** FCC ID: **2AQYB-MAXCD** is in compliance with Part 15.247 of the FCC Rule specification.

### **ANTENNA REQUIREMENTS**

#### **§15.203 of the FCC Rules part 15 Subpart C**

: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

The antenna of the **MaxCare Design Labs, Inc. Smart Weight Device** FCC ID: **2AQYB-MAXCD** is **permanently attached** and there are no provisions for connection to an internal antenna. It complies with the requirement of §15.203.

The logo for NTREE, featuring the letters 'NTREE' in a large, stylized, serif font. The 'N' is the most prominent, with the 'T', 'R', 'E', and 'E' stacked vertically to its right.

## **DESCRIPTION OF TESTS**

### **7.1 Conducted Emissions**

The Line conducted emission test facility is located inside a 8.0 x 5.0 x 3.0 meter shielded enclosure.

It is manufactured by DAMSTec's. The shielding effectiveness of the shielded room is in accordance with IEEE 299, MIL-STD-285 or NSA CISPR 16-1-4 1 m x 1.5 m wooden table 0.8 m height is placed 0.4 m away from the vertical wall and 1.5 m away from the side of wall of the shielded room Rohde & Schwarz (ENV216) and (ENV216) of the 50 ohm/50  $\mu$ H Line Impedance Stabilization Network (LISN) are bonded to the shielded room. The EUT is powered from the Rohde & Schwarz LISN (ENV216) and the support equipment is powered from the Rohde & Schwarz LISN (ENV216). Power to the LISNs are filtered by high-current high insertion loss Power line filters. The purpose of filter is to attenuate ambient signal interference and this filter is also bonded to shielded enclosure. All electrical cables are shielded by tinned copper zipper tubing with inner diameter of 1 / 2 ".

If DC power device, power will be derived from the source power supply it normally will be powered

from and this supply lines will be connected to the LISNs, All interconnecting cables more than 1 meter were shortened by non inductive bundling (serpentinefashion) to a 1 meter length.

Sufficient time for EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer to determine the frequency producing the maximum EME from the EUT.

The spectrum was scanned from 150 kHz to 30 MHz with 200 msec sweep time.

The frequency producing the maximum level was re-examined using the EMI test receiver.

(Rohde & Schwarz ESR3 and ESCS30). The detector functions were set to CISPR quasi-peak mode & average mode. The bandwidth of receiver was set to 9 kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each EME emission.

Each emission was maximized by; switching power lines; varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and of support equipment, and powering the monitor from the floor mounted outlet box and computer aux AC outlet, if applicable; whichever determined the worst case emission.

Each EME reported was calibrated using the R&S signal generator.

## 7.2 Radiated Emissions

The measurement was performed at the test site that is specified in accordance with ANSI C63.10-2013.

The spurious emission was scanned from 9 kHz to 30 MHz using Loop Antenna(Schwarzbeck, FMZB1519) and 30 to 1000 MHz using Trilog broadband test antenna(Schwarzbeck, VULB 9168). Above 1 GHz, Horn antenna (Schwarzbeck BBHA 9120D: up to 18 GHz, Schwarzbeck BBHA9170 : 18 to 40 GHz) was used.

For emissions testing at below 1GHz, The test equipment was placed on turntable with 0.8 m above ground. For emission measurements above 1 GHz, The test equipment was placed on turntable with 1.5 m above ground. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The EUT, cable, wire arrangement and mode of operation that has the highest amplitude relative to the limit was selected. Then, the turn table was rotated from 0° to 360° and an antenna mast was moved from 1 m to 4 m height to maximize the suspected highest amplitude signal. The final maximized level was recorded.


At frequencies below 1000 MHz, measurements performed using the CISPR quasi-peak detection. At frequencies above 1000 MHz, measurements performed using the peak and average measurement procedures described in KDB "558074 D01 DTS Meas Guidance v03r03" in section 12.2.4 and 12.2.5.3. Peak emission levels were measured by setting the analyzer RBW = 1 MHz, VBW = 3 MHz, Detector = Peak, Trace mode = max hold. Average emission levels were measured by setting the analyzer RBW = 1 MHz, VBW = 3kHz, Detector = Peak, Trace mode = max hold. Allow max hold to run for at least 50 times (1/duty cycle) traces.

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009–0.490	2400/F(kHz)	300
0.490–1.705	24000/F(kHz)	30
1.705–30.0	30	30
30–88	100	3
88–216	150	3
216–960	200	3
Above 960	500	3

Radiated Emissions Limits per 47 CFR 15.209(a)

## **6 dB Bandwidth**

### **Test Setup**



### **Test Procedure**

EUTs 6 dB bandwidth is measured at low, middle, high channels with a spectrum analyzer connected to the antenna terminal while the EUTs operating at its maximum power control level.

The spectrum analyzer setting is as follows.

RBW = 100 kHz

VBW  $\geq$  3 x RBW

Detector = Peak

Trace mode = max hold


Sweep = auto couple

Allow the trace to stabilize.

The bandwidth measurement function on the spectrum analyzer is used to measure the 6 dB bandwidth.

## Peak Output Power

### Test Setup



### Test Procedure

EUTs Maximum Peak Conducted Output Power is measured at low, middle, high channels with a spectrum analyzer connected to the antenna terminal while the EUTs operating at its maximum power control level.

The spectrum analyzer setting is as follows.

RBW = 1 MHz

VBW = 3 MHz

Span = fully encompass the DTS bandwidth

Detector = peak

Sweep time = auto couple


Trace mode = max hold

Allow the trace to stabilize.

Use peak marker function to determine the peak amplitude level.

## Peak Power Spectral Density

### Test Setup



### Test Procedure

EUTs Peak Power Spectral Density is measured at low, middle, high channels with a spectrum analyzer connected to the antenna terminal while the EUTs operating at its maximum power control level.

The spectrum analyzer setting is as follows.

Center frequency = DTS channel center frequency

Span = 1.5 times the DTS channel bandwidth

RBW  $\geq$  3 kHz

VBW  $\geq$  3 x RBW

Detector = peak

Sweep time = auto couple


Trace mode = max hold

Allow the trace to stabilize.

The peak search function on the spectrum analyzer is used to determine the maximum amplitude level within the RBW.

## Conducted Spurious Emissions

### Test Setup



### Test Procedure

EUTs Conducted spurious emissions are measured at low, middle, high channels with a spectrum analyzer connected to the antenna terminal while the EUTs operating at its maximum power control level.

The spectrum analyzer setting is as follows.

#### 1) Reference Level

RBW = 100 kHz

VBW  $\geq$  300 kHz

Span = 1.5 times the DTS channel bandwidth

Detector = peak

Sweep time = auto couple

Trace mode = max hold

Allow the trace to stabilize.

Use the peak marker function to determine the maximum PSD level.

*Note that the channel found to contain the maximum PSD level can be used to establish the reference level.*

#### 2) Unwanted Emissions

RBW = 100 kHz

VBW  $\geq$  300 kHz

Span = encompass the spectrum to be examined

Detector = peak

Sweep time = auto couple

Trace mode = max hold

Allow the trace to stabilize.

The amplitude of all unwanted emissions outside of the authorized frequency band is confirmed that it is attenuated by at least the minimum requirements specified.

## 8. TEST DATA

### **8.1 Conducted Emissions**

#### **FCC §15.207**

##### **Result**

This device used to battery.

#### **Line Conducted Emissions Tabulated Data**

##### **Notes:**

1. Measurements using CISPR quasi-peak mode & average mode.
2. All modes of operation were investigated and the worst -case emission are reported. See attached Plots.
3. \*) Factor = LISN + Cable Loss
4. \*\*) LINE : L = Line , N = Neutral
5. The limit is on the FCC §15.207

NTREE

## *PLOTS OF EMISSIONS*

- ***Conducted Emission (Line)***

N/A

N  
T  
R  
E  
E

## *PLOTS OF EMISSIONS*

- ***Conducted Emission (Neutral)***

N/A

N  
T  
R  
E  
E

## TEST DATA

**8.2 Radiated Emissions****FCC §15.209****Result**

Frequency (MHz)	QuasiPeak (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
130.047000	34.43	43.52	9.10	2000.0	120.000	100.0	V	22.0	-29.9
174.045000	34.08	43.52	9.44	2000.0	120.000	100.0	V	331.0	-28.4
282.086000	31.38	46.02	14.64	2000.0	120.000	100.0	V	358.0	-26.2
330.101000	33.48	46.02	12.54	2000.0	120.000	100.0	V	342.0	-24.5
550.308000	37.13	46.02	8.89	2000.0	120.000	100.0	V	80.0	-18.4
740.428000	37.90	46.02	8.12	2000.0	120.000	100.0	H	59.0	-14.5

**Radiated Measurements at 3meters****2.31 GHz to 2.39 GHz Result****Lowest Channel**

Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB)
2384.166667	---	30.39	54.00	23.61	1000.0	1000.000	H	128.0	-7.7
2384.166667	43.39	---	74.00	30.61	1000.0	1000.000	H	128.0	-7.7

**Radiated Measurements at 3meters****2.4835 GHz to 2.50 GHz Result****Highest Channel**

Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB)
2491.944444	---	31.51	54.00	22.49	1000.0	1000.000	H	0.0	-7.1
2491.944444	44.29	---	74.00	29.71	1000.0	1000.000	H	0.0	-7.1

**Radiated Measurements at 3meters**

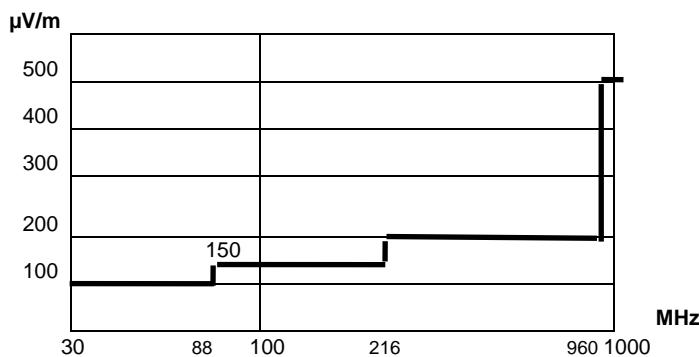
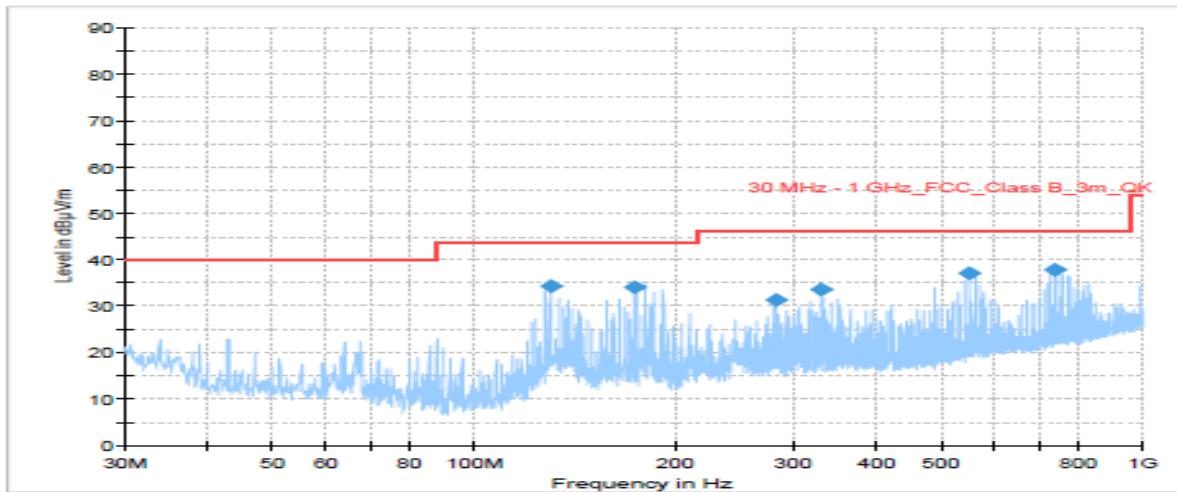
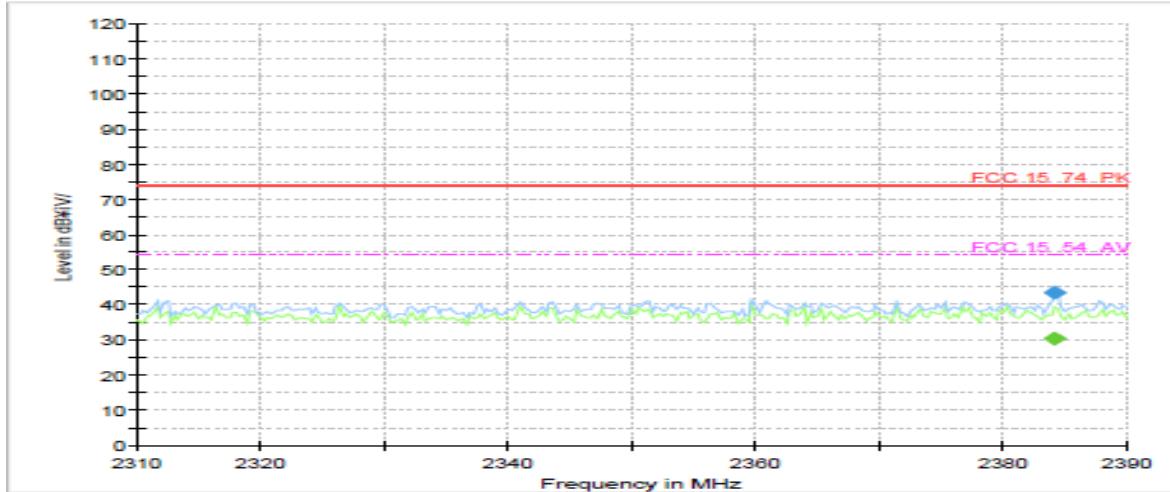
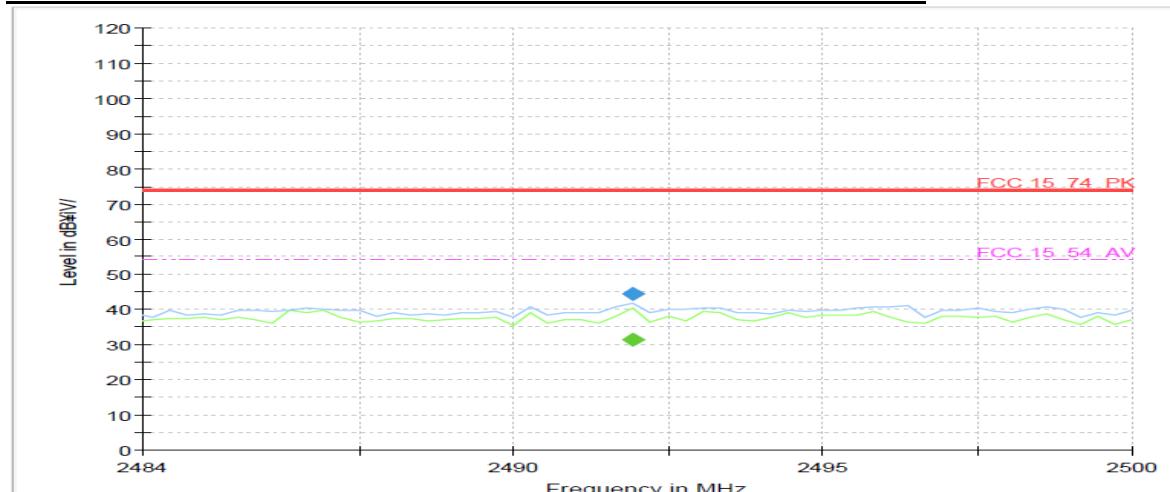


Fig. 3. Limits at 3 meters

**Notes:**

1. All modes were measured and the worst-case emission was reported.
- 2 The radiated limits are shown on Figure 3. Above 1GHz the limit is 500  $\mu$ V /m.
3. \*Pol. H = Horizontal, V = Vertical
4. \*\*AF + CL + Amp. = Antenna Factor + Cable Loss + Amplifier.
5. Measurements using CISPR quasi-peak mode below 1 GHz.
6. The radiated emissions testing were made by rotating the receive antenna with horizontal, Vertical polarization. The worst date was recorded.
7. GFSK on the middle channel (2442MHz) is the worst case channel. (Below 1GHz)
8. GFSK on the lowest channel (2402MHz) is the worst case channel. (2.31 GHz to 2.39 GHz)
9. GFSK on the highest channel (2480MHz) is the worst case channel. (2.4835 GHz to 2.50 GHz)
10. No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).
11. The limit is on the FCC §15.209

## PLOTS OF EMISSIONS

Worst Case : 2442 MHz(below 1GHz) GFSK modulationWorst Case : 2402MHz GFSK modulation : 2.31 GHz to 2.39 GHzWorst Case : 2480MHz GFSK modulation : 2.4835 GHz to 2.50 GHz

## TEST DATA


**8.3 6 dB Modulated Bandwidth****FCC §15.247(a)(2)****Test Mode : Set to Lowest channel, Middle channel and Highest channel****Result**

Channel	Frequency (MHz)	6 dB modulated bandwidth (MHz)	Limit (MHz)	Margin (MHz)
Lowest	2402	0.729	0.500	0.229
Middle	2442	0.729	0.500	0.229
Highest	2480	0.739	0.500	0.239


The logo consists of the letters 'NTREE' in a large, bold, black serif font. The 'N' is slightly taller than the other letters. The 'T' has a vertical stroke on its left side. The 'R' has a vertical stroke on its right side. The 'E' has a small horizontal bar on its top right corner.

## PLOTS OF EMISSIONS

## 6 dB Bandwidth, Lowest Channel (2402 MHz)

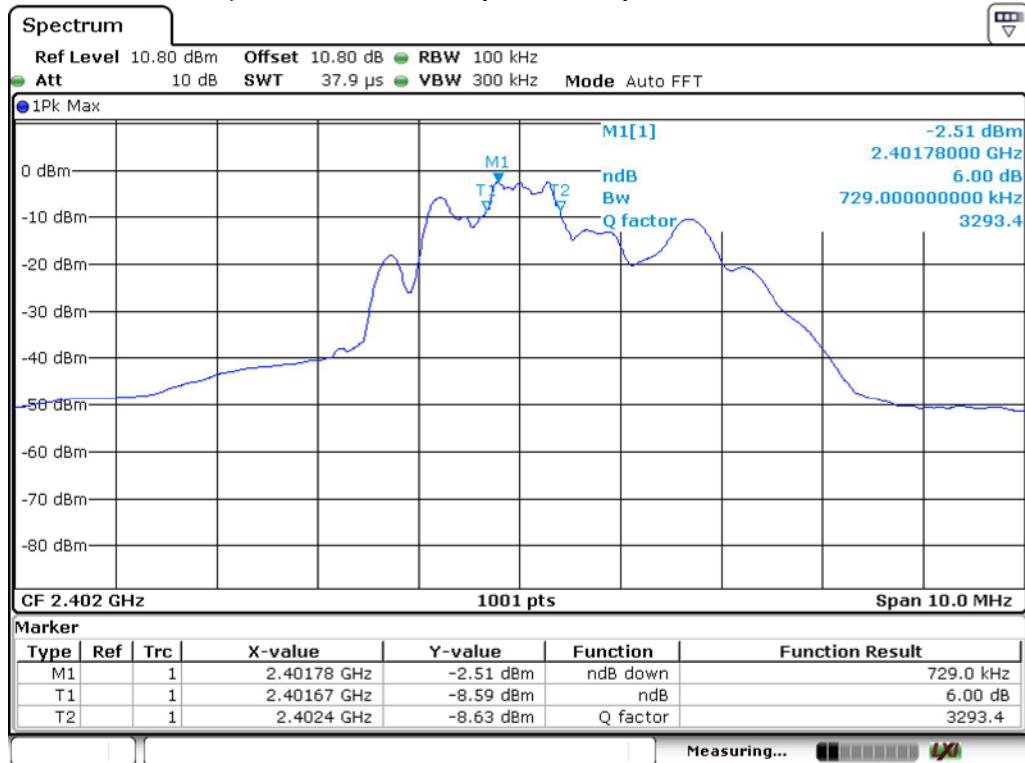


## 6 dB Bandwidth, Middle Channel (2442 MHz)

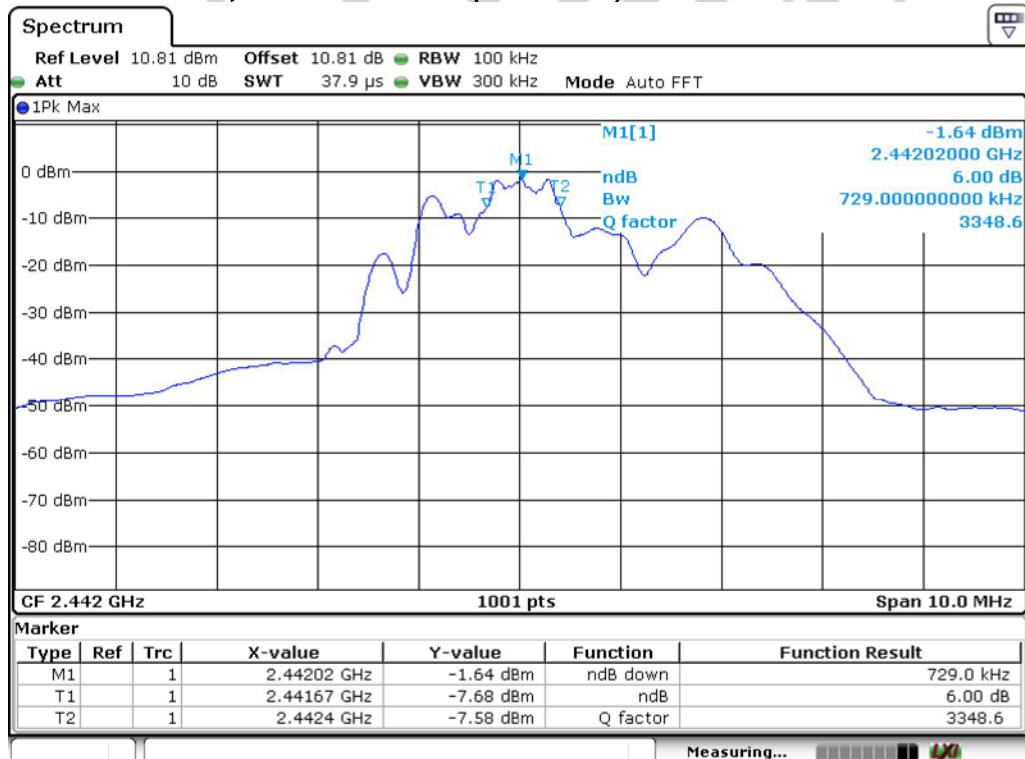

## PLOTS OF EMISSIONS

## 6 dB Bandwidth, Highest Channel (2480 MHz)

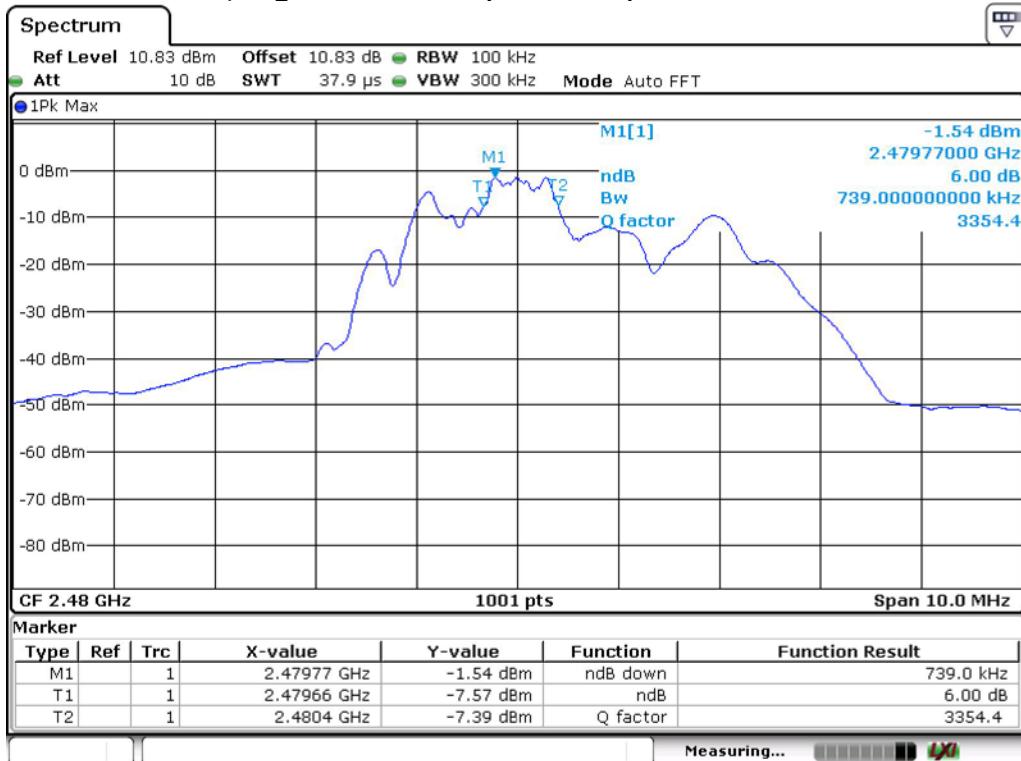

NTREE


## TEST DATA

**8.4 Peak Output Power.****FCC §15.247(b)(3)****Test Mode : Set to Lowest channel, Middle channel and Highest channel****Result**

Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Result
2402	-0.73	30.00	Complies
2442	-0.13	30.00	Complies
2480	-0.07	30.00	Complies

**Note:***The following formula was used for spectrum offset:**Spectrum offset (dB) = Attenuator (dB) + Cable Loss (dB) + SMA Type Connector Loss (dB)*

## PLOT OF TEST DATA

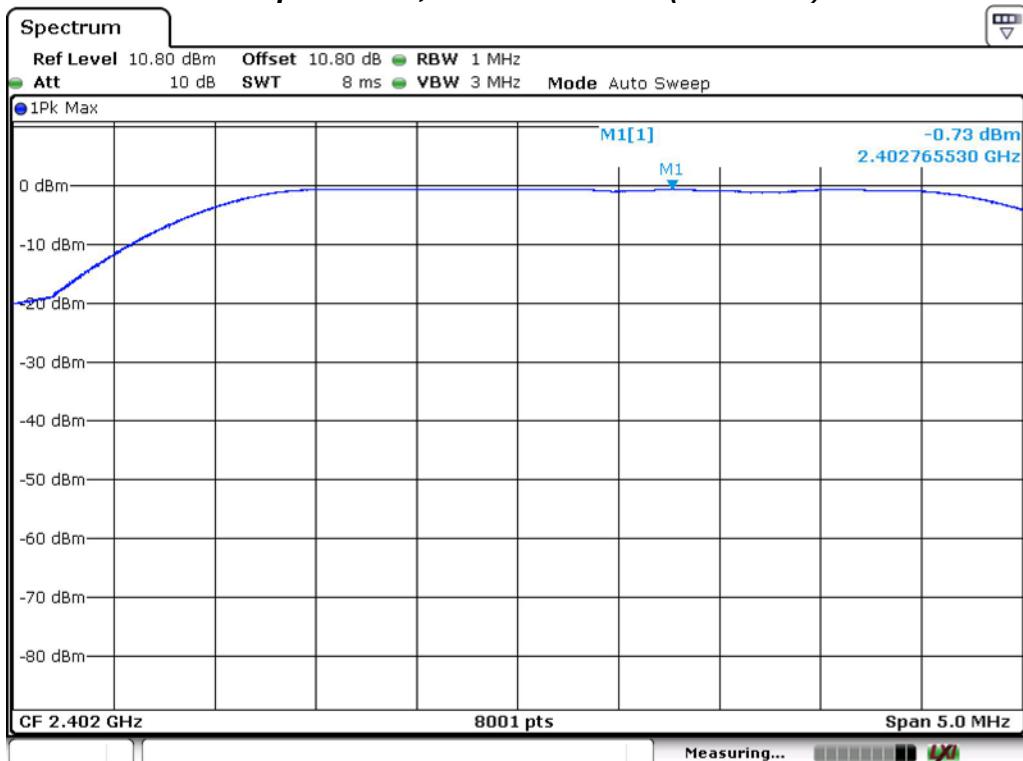**Maximum Peak Output Power, Lowest Channel (2402 MHz)****Maximum Peak Output Power, Middle Channel (2442 MHz)**

## PLOT OF TEST DATA

**Maximum Peak Output Power, Highest Channel (2480 MHz)**

NTREE

## TEST DATA


**8.5 Peak Power Spectral Density****FCC §15.247(e)****Test Mode : Set to Lowest channel, Middle channel and Highest channel****Result**

Channel	Frequency (MHz)	Result (dBm)	Limit (dBm)
Lowest	2402	-15.41	8.00
Middle	2442	-15.30	8.00
Highest	2480	-14.37	8.00


**Note:***The following equation was used for spectrum offset:**Spectrum offset (dB) = Attenuator (dB) + Cable Loss (dB) + SMA Type Connector Loss (dB)*

## PLOT OF TEST DATA

## Peak Power Spectral Density, Lowest Channel (2402 MHz)

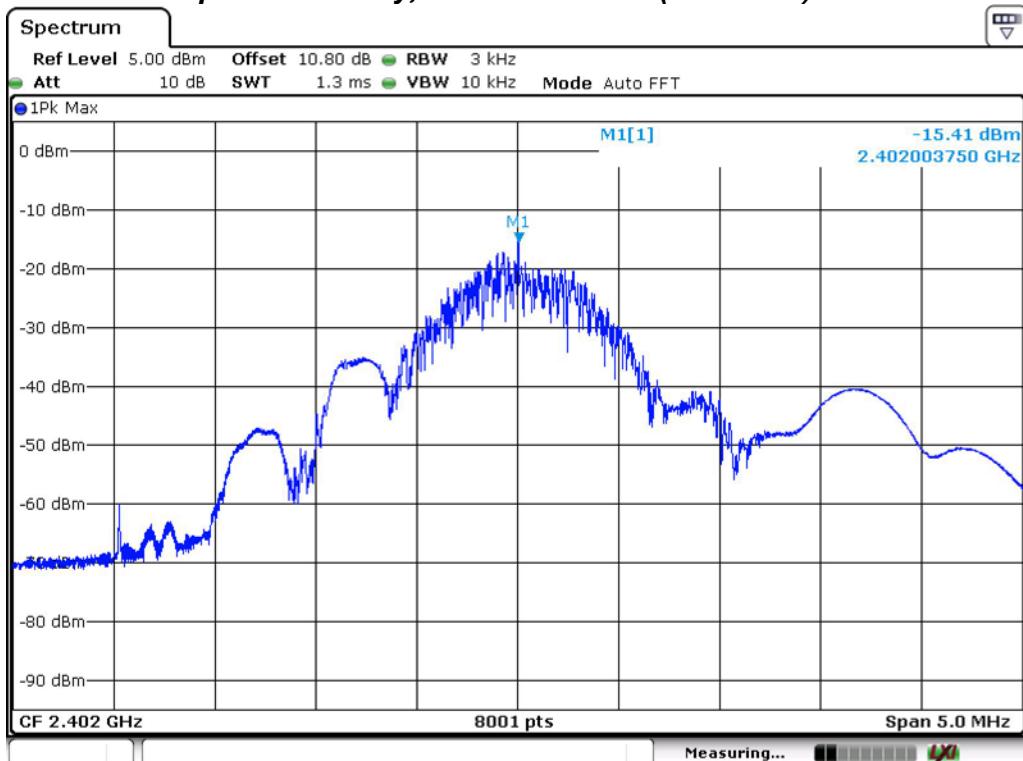


## Peak Power Spectral Density, Middle Channel (2442 MHz)

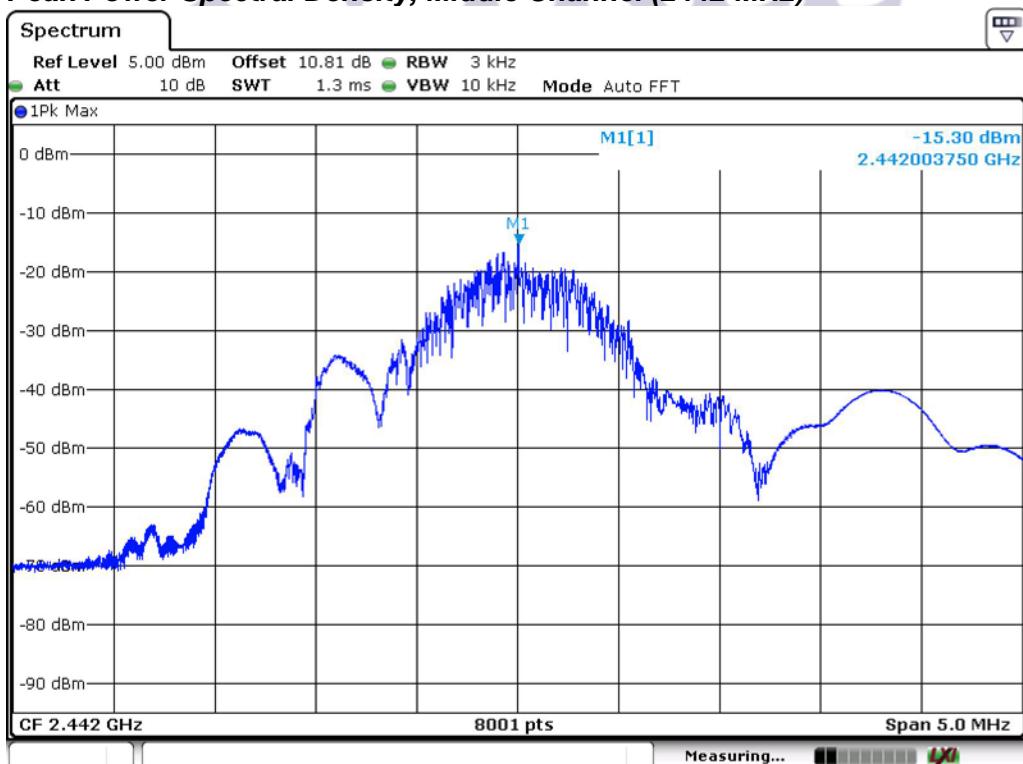

## PLOT OF TEST DATA

## Peak Power Spectral Density, Highest Channel (2480 MHz)

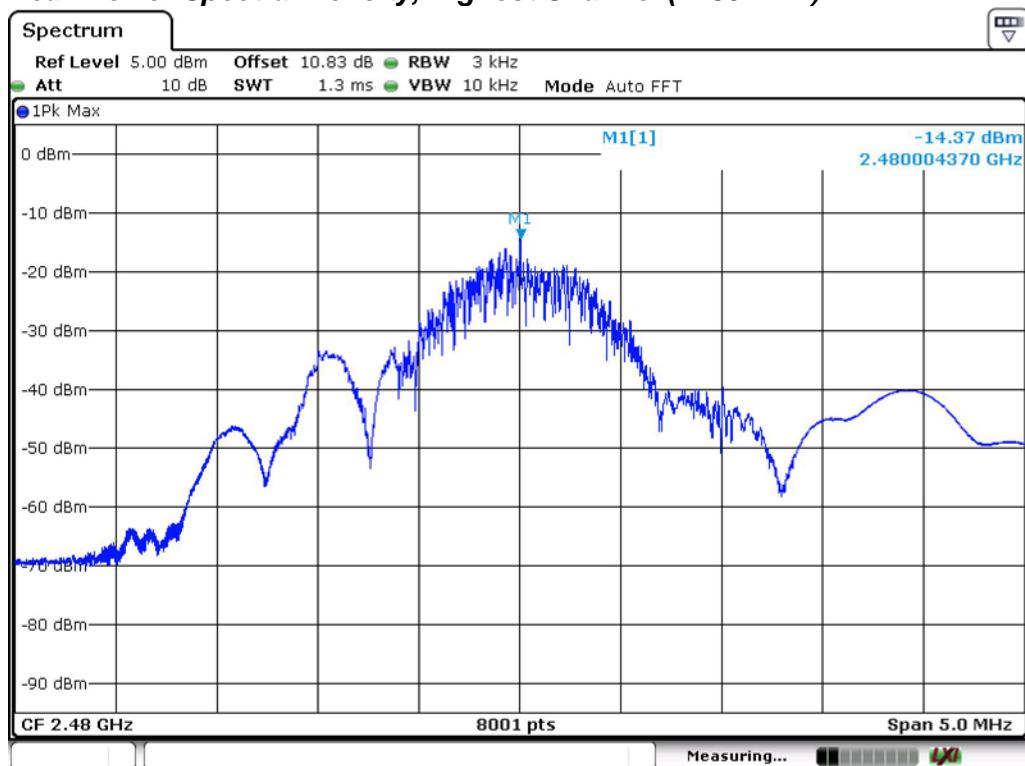

## TEST DATA

**8.6 Conducted Spurious Emissions****FCC §15.247(d)****Test Mode : Set to Lowest channel, Middle channel and Highest channel****Result**


Channel	Frequency (MHz)	Reference Level (dBm)*	Conducted Spurious Emissions (dBc)	Limit (dBc)
Low	2402	-2.44	More than 20 dBc	20
Middle	2442	-1.47	More than 20 dBc	20
High	2480	-1.21	More than 20 dBc	20

**Note:**

\*Peak Power Spectral Density measured in 8.5 was used for Reference Level.


The cable and attenuator loss from 30 MHz to 25 GHz was reflected in spectrum analyzer with correction factor for the spurious emissions test.

## PLOT OF TEST DATA

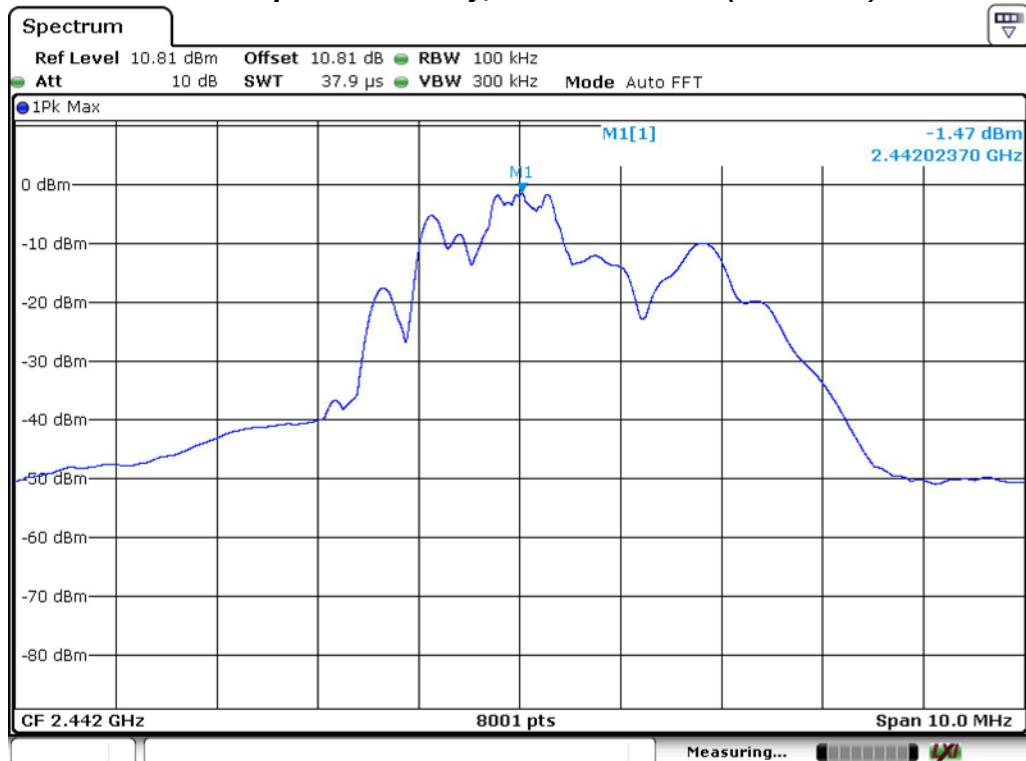Reference level**Reference Power Spectral Density, Lowest Channel (2402 MHz)****Reference Power Spectral Density, Middle Channel (2442 MHz)**

## PLOT OF TEST DATA


## Reference Power Spectral Density, Highest Channel (2480 MHz)

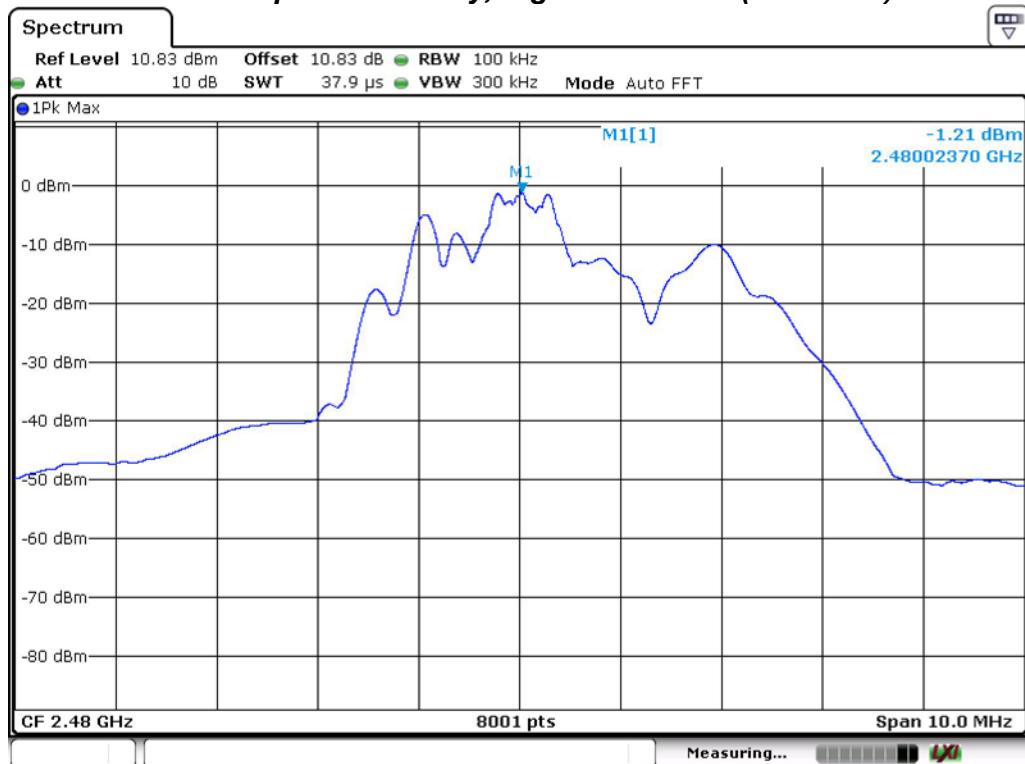


NTREE

## PLOT OF TEST DATA

## Conducted Spurious Emissions, 30 MHz ~ 26.5 GHz (2402 MHz)

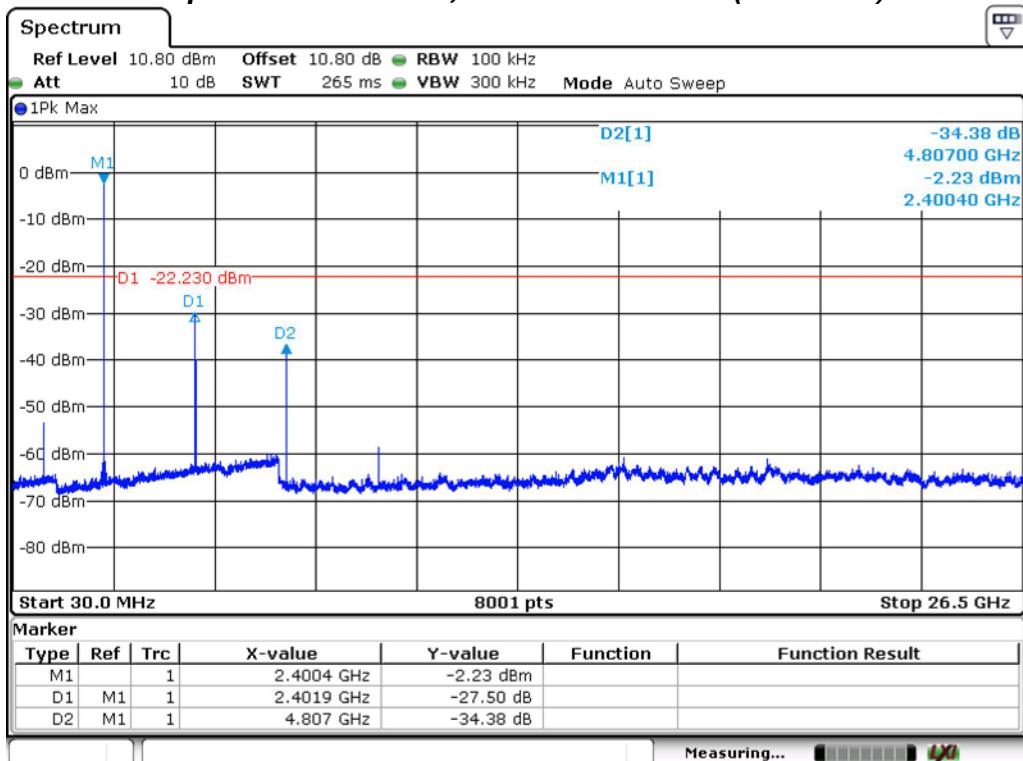


## Conducted Spurious Emissions, 30 MHz ~ 26.5 GHz (2442 MHz)

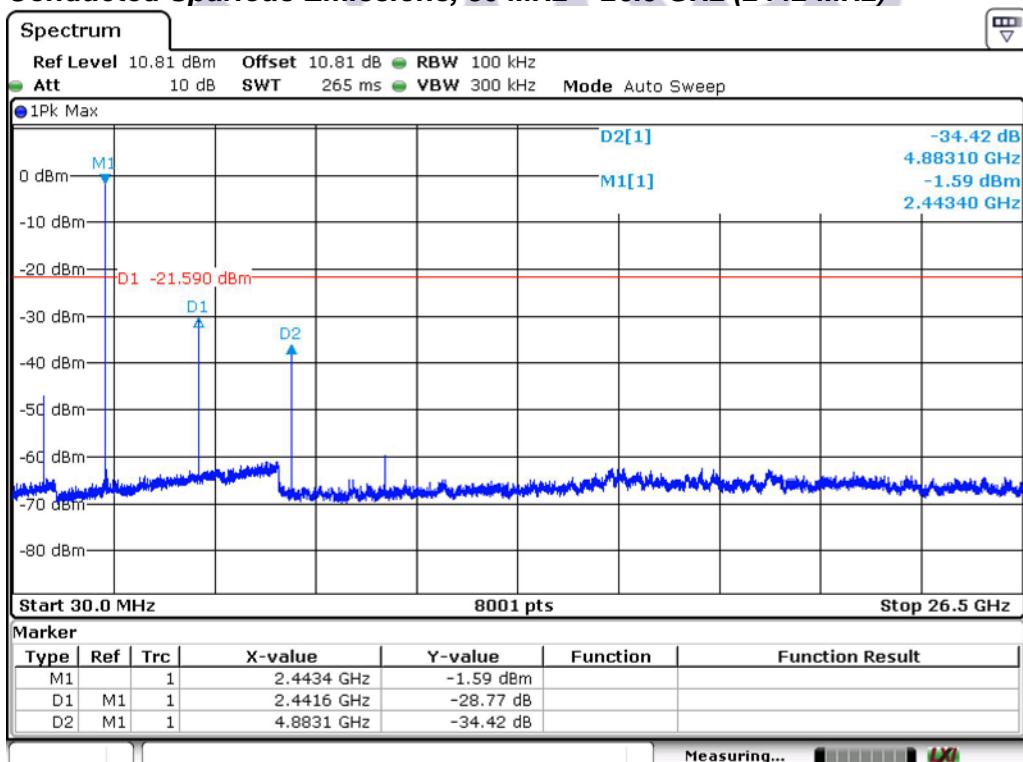


## PLOT OF TEST DATA

## Conducted Spurious Emissions, 30 MHz ~ 26.5 GHz (2480 MHz)

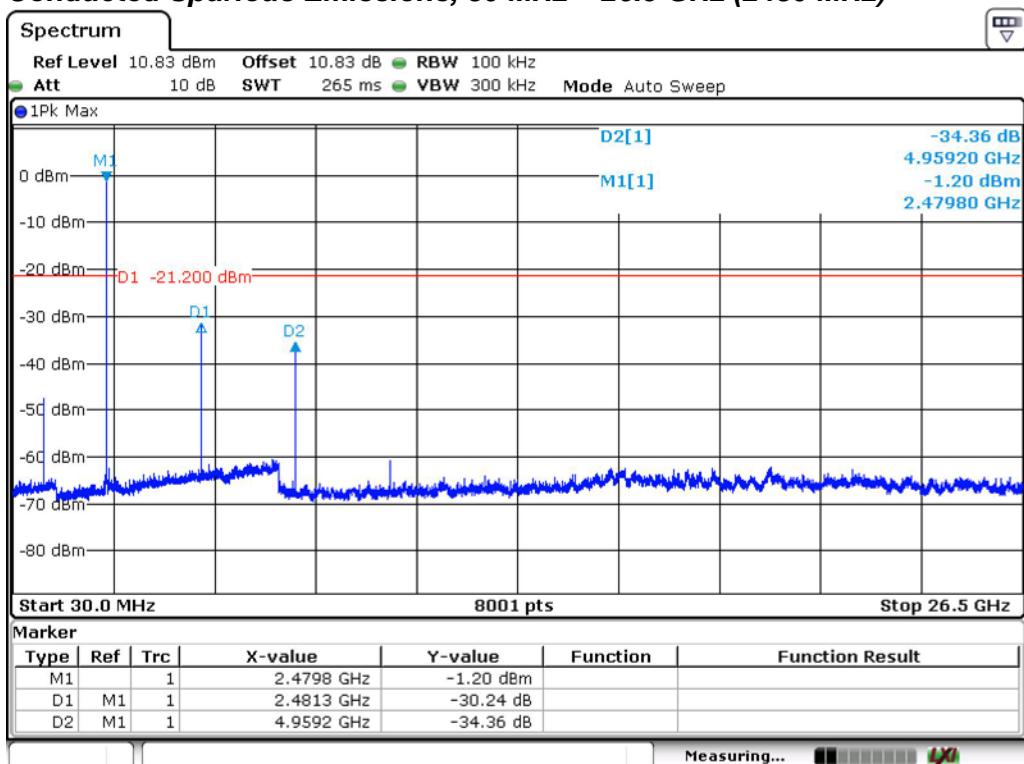


## PLOT OF TEST DATA

### Band Edge, Lowest Channel (2402 MHz)

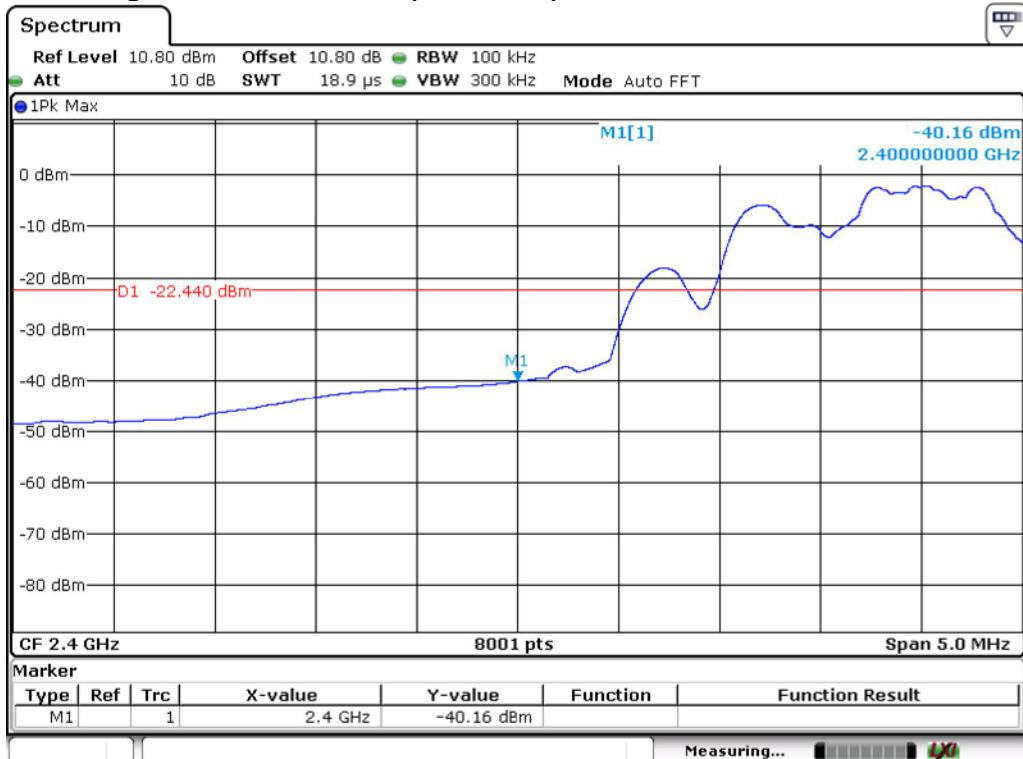

### Band Edge, Highest Channel (2480 MHz)

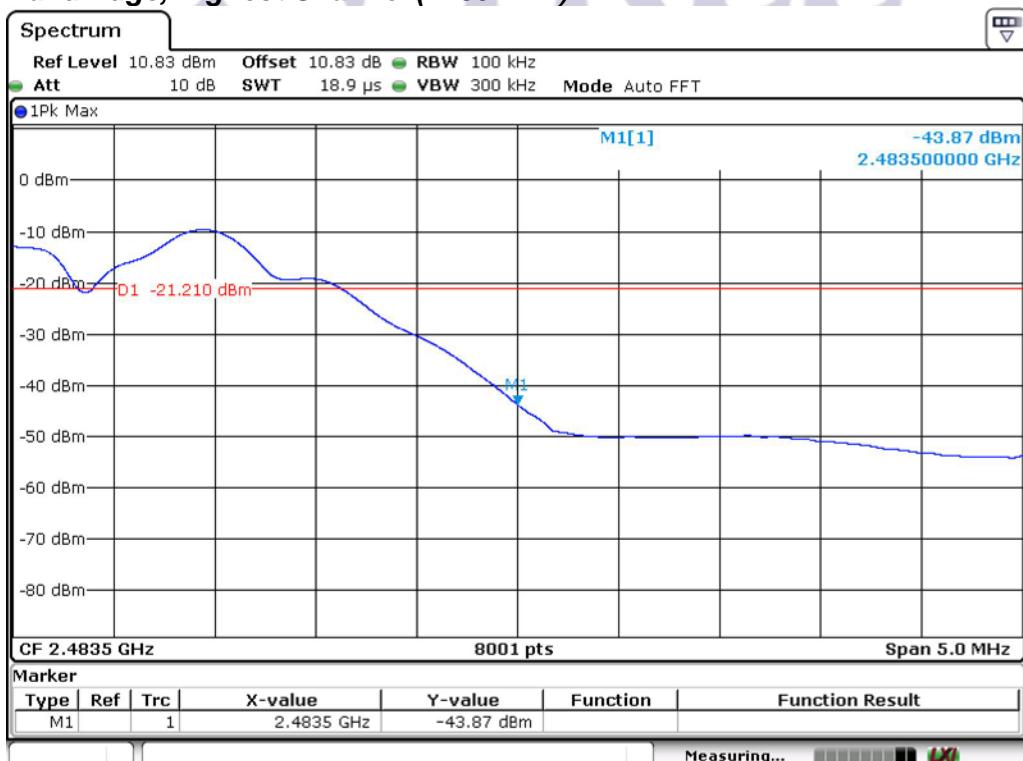

## TEST DATA

### 8.7 Radiated Spurious Emissions

#### FCC §15.247(d)

**Test Mode : Set to Lowest channel, Middle channel and Highest channel**

#### 1 GHz to 18 GHz Result

##### **Lowest Channel**

Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
4804.600000	---	50.11	54.00	3.89	1000.0	1000.000	150.0	V	320.0	-0.1
4804.600000	58.45	---	74.00	15.55	1000.0	1000.000	150.0	V	320.0	-0.1
7205.000000	---	53.06	54.00	0.94	1000.0	1000.000	150.0	H	229.0	7.4
7206.700000	58.83	---	74.00	15.17	1000.0	1000.000	150.0	V	299.0	7.4

##### **Middle Channel**

Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
4884.500000	57.56	---	74.00	16.44	1000.0	1000.000	150.0	V	296.0	0.0
4884.500000	---	49.96	54.00	4.04	1000.0	1000.000	150.0	V	296.0	0.0
7325.700000	62.05	---	74.00	11.95	1000.0	1000.000	150.0	V	48.0	8.0
7327.400000	---	47.16	54.00	6.84	1000.0	1000.000	150.0	V	336.0	8.0

##### **Highest Channel**

Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
4961.000000	---	51.17	54.00	2.83	1000.0	1000.000	150.0	V	19.0	0.0
4961.000000	62.10	---	74.00	11.90	1000.0	1000.000	150.0	V	19.0	0.0
7439.600000	---	52.53	54.00	1.47	1000.0	1000.000	150.0	H	345.0	8.6
7439.600000	61.28	---	74.00	12.72	1000.0	1000.000	150.0	H	345.0	8.6

**Note:**

1. \*Pol. H = Horizontal V = Vertical
2. \*\*AF + CL + Amp. = Antenna Factor + Cable Loss + Amplifier.
3. Other spurious was under 20 dB below Fundamental.
4. GFSK modulation on the highest channel (2402MHz) was the worst condition.
5. The radiated emissions testing were made by rotating EUT through three orthogonal axes and rotating the receive antenna with horizontal, Vertical polarization. The worst data was recorded.
6. Peak emissions were measured using RBW = 1 MHz, VBW = 3 MHz, Detector = Peak.
7. Average emissions were measured using RBW = 1 MHz, VBW = 3kHz, Detector = Peak
8. The spectrum was measured from 9 kHz to 10<sup>th</sup> harmonic and the worst-case emissions were reported. No significant emissions were found beyond the 5nd harmonic for this device.

N  
T  
R  
E  
E

**Test Mode : Set to Lowest channel, Middle channel and Highest channel**

**18 GHz to 20 GHz Result**

**Lowest Channel**

Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
19834.00	---	40.09	54.00	13.91	1000.0	1000.0	150.0	H	183.0	8.6
19834.00	52.66	---	74.00	21.34	1000.0	1000.0	150.0	H	183.0	8.6

**Middle Channel**

Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
19771.44	---	39.26	54.00	14.74	1000.0	1000.0	150.0	V	263.0	8.6
19771.44	52.16	---	74.00	21.84	1000.0	1000.0	150.0	V	263.0	8.6

**Highest Channel**

Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
19827.89	---	40.01	54.00	13.99	1000.0	1000.0	150.0	H	251.0	8.6
19827.89	53.18	---	74.00	20.82	1000.0	1000.0	150.0	H	251.0	8.6

**Test Mode : Set to Lowest channel, Middle channel and Highest channel**

**2.4 GHz to 2.4835 GHz Result**

**Lowest Channel**

Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
2402.251200	79.94	---	93.98	14.04	1000.0	1000.000	150.0	V	353.0	-8.6

**Middle Channel**


Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
2442.033600	78.71	---	93.98	15.27	1000.0	1000.000	150.0	V	353.0	-8.4

**Highest Channel**


Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
2479.816800	78.11	---	93.98	15.87	1000.0	1000.000	150.0	V	0.0	-8.2

## PLOTS OF EMISSIONS

### Worst Case : 2402 MHz GFSK modulation : 1 GHz to 18 GHz

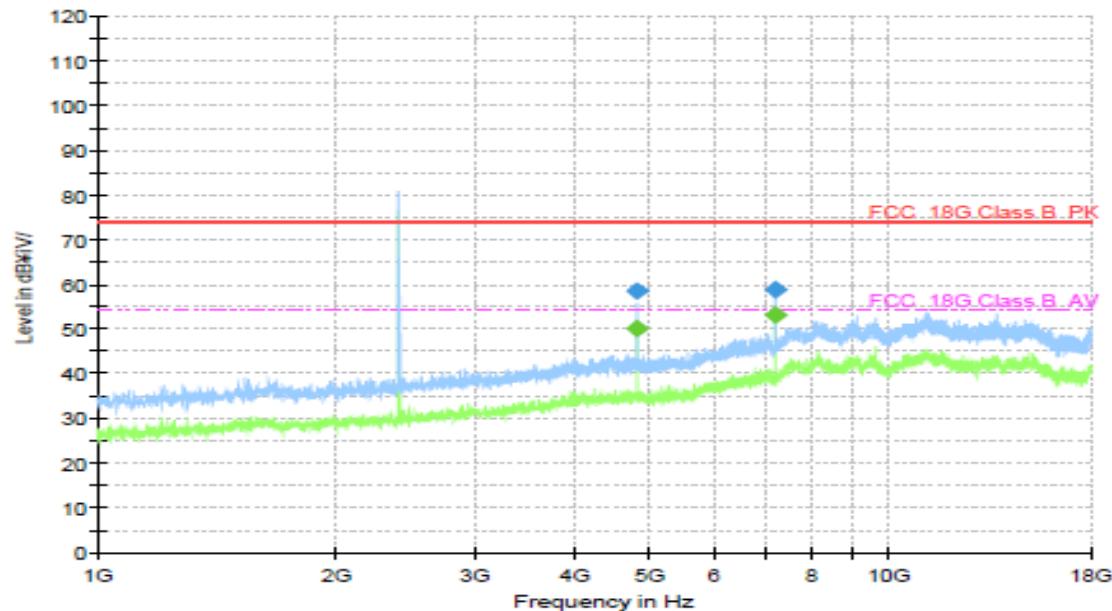


### Worst Case : 2442 MHz GFSK modulation : 1 GHz to 18 GHz

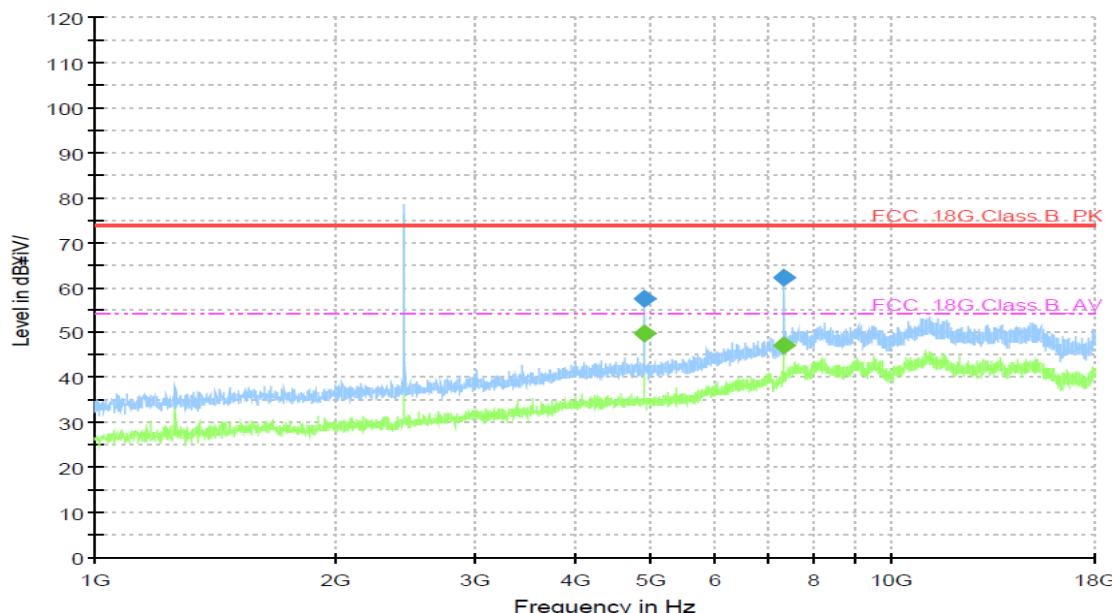

## PLOTS OF EMISSIONS


### Worst Case : 2480MHz GFSK modulation : 1 GHz to 18 GHz

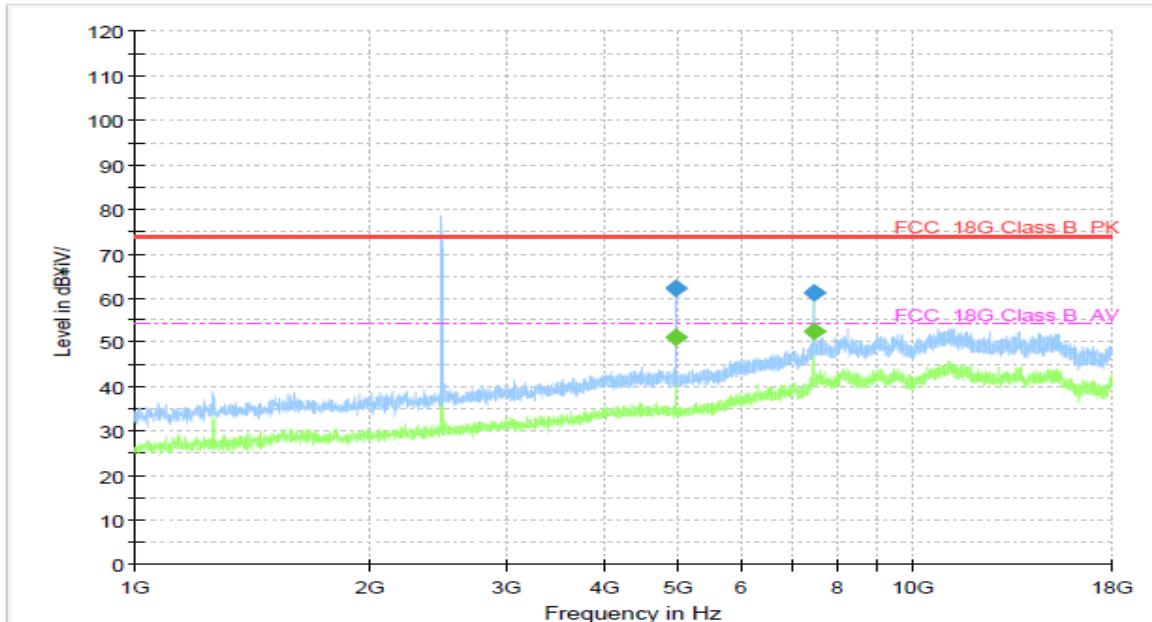


NTREE

## PLOTS OF EMISSIONS

### Worst Case : 2402 MHz GFSK modulation : 18 GHz to 20 GHz

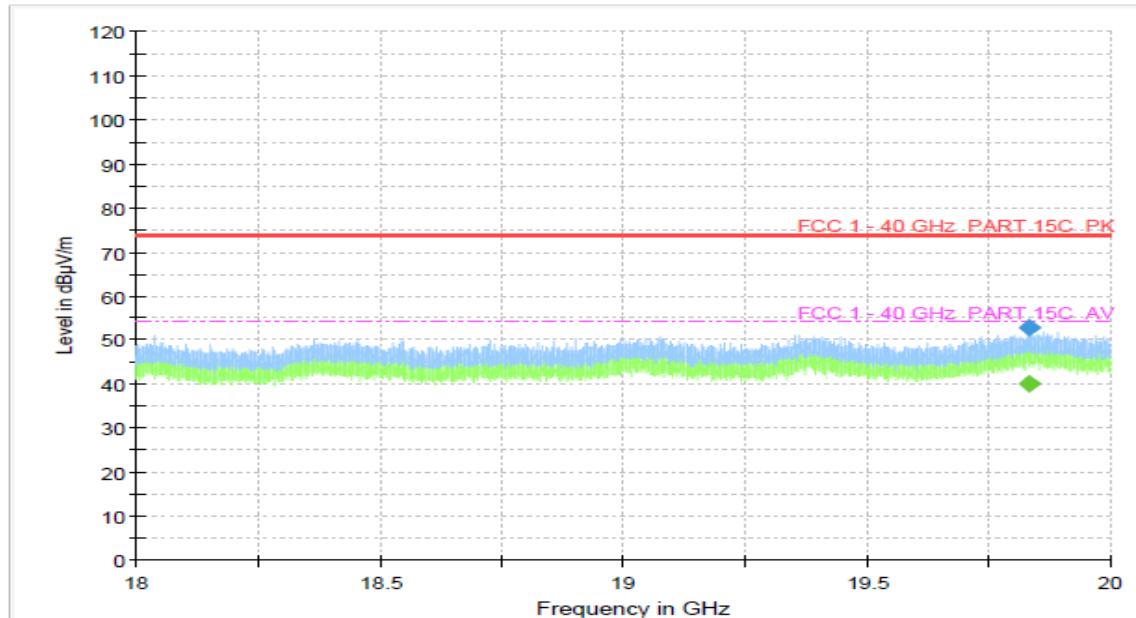


### Worst Case : 2442 MHz GFSK modulation : 18 GHz to 20 GHz

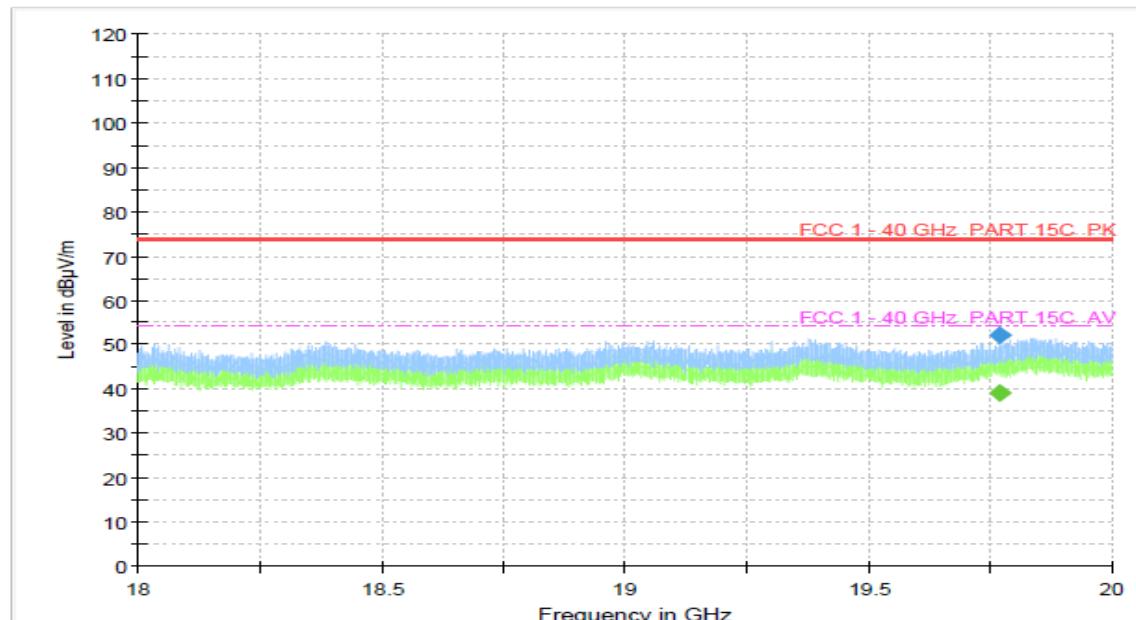

## PLOTS OF EMISSIONS


### **Worst Case : 2480MHz GFSK modulation : 18 GHz to 20 GHz**

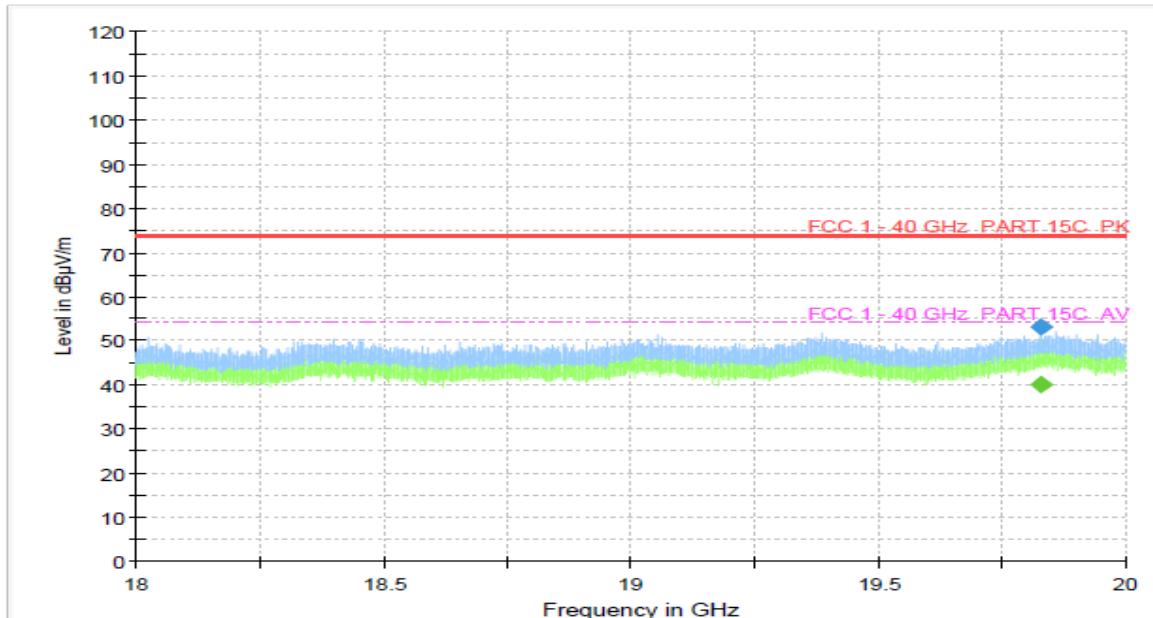


N  
T  
R  
E  
E

## PLOTS OF EMISSIONS

### Worst Case : 2402 MHz GFSK modulation : 2.4 GHz to 2.4835 GHz

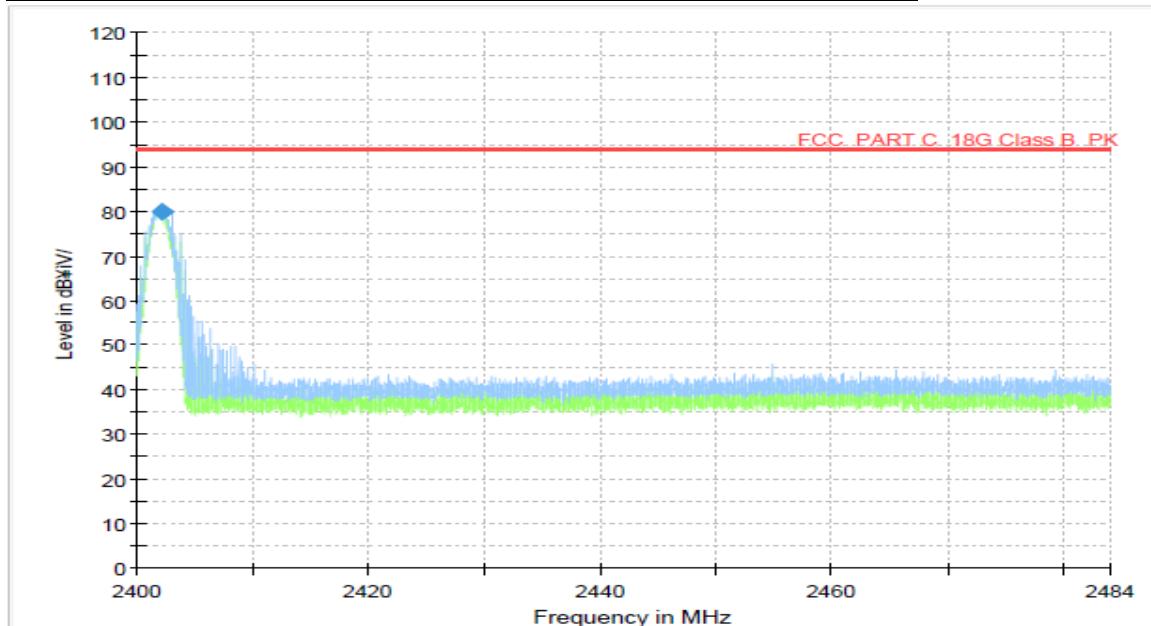


### Worst Case : 2442 MHz GFSK modulation : 2.4 GHz to 2.4835 GHz

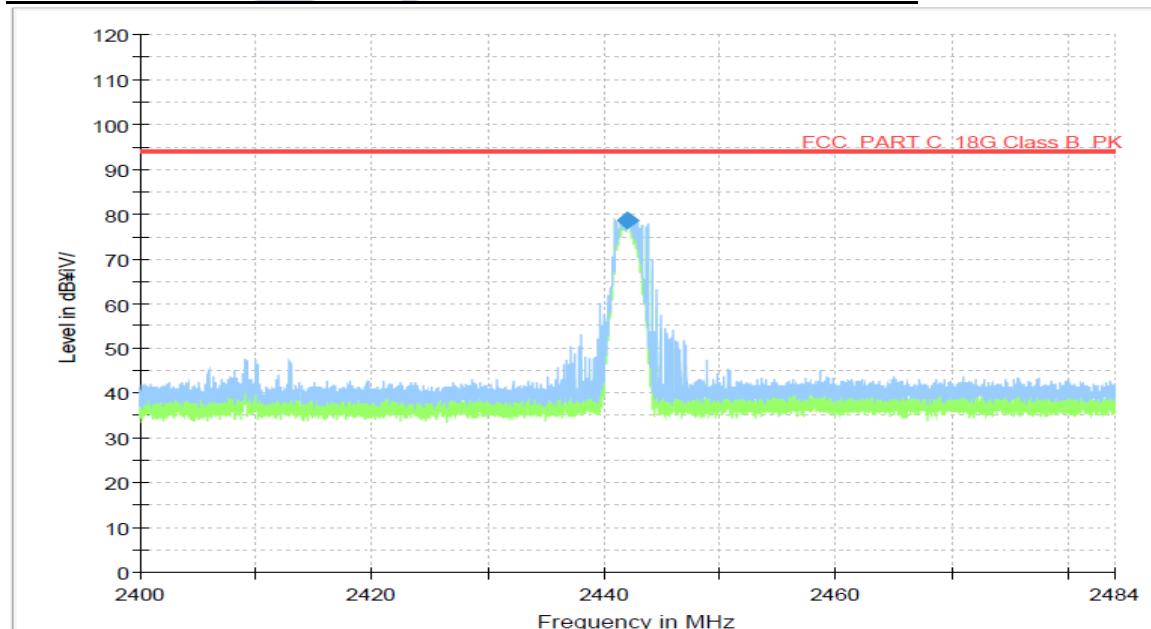

## PLOTS OF EMISSIONS

**Worst Case : 2480MHz GFSK modulation : 2.4 GHz to 2.4835 GHz**

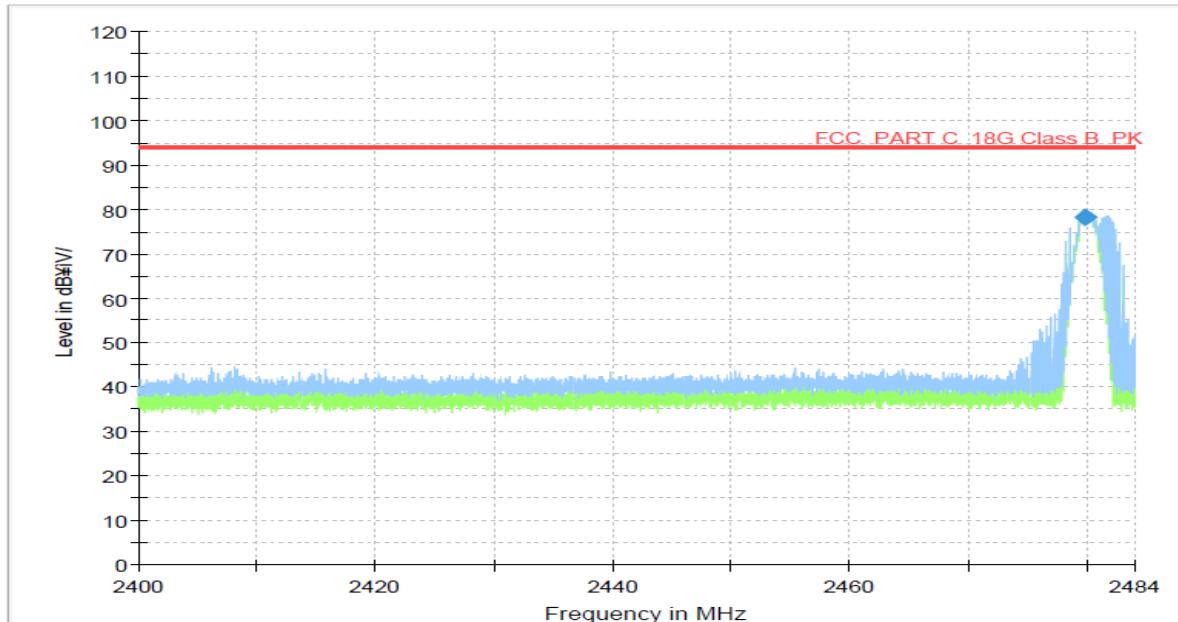

**N**TREE

## TEST DATA

8.8 Radiated Band EdgeFCC §15.247(d)Test Mode : Set to Lowest channel and Highest channelResultLowest and Highest Channels


Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
2390.000000	---	30.85	54.00	23.15	1000.0	1000.000	100.0	V	0.0	-7.7
2390.000000	44.58	---	74.00	29.42	1000.0	1000.000	100.0	V	0.0	-7.7
2401.944444	---	76.87	54.00	-22.87	1000.0	1000.000	100.0	V	0.0	-7.6
2401.944444	80.77	---	74.00	-6.77	1000.0	1000.000	100.0	V	0.0	-7.6
Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
2480.000000	---	74.78	54.00	-20.78	1000.0	1000.000	100.0	V	323.0	-7.1
2480.000000	78.63	---	74.00	-4.63	1000.0	1000.000	100.0	V	323.0	-7.1
2483.611111	51.58	---	74.00	22.42	1000.0	1000.000	100.0	V	27.0	-7.1
2483.611111	---	31.40	54.00	22.60	1000.0	1000.000	100.0	V	27.0	-7.1

Note:

1. \*Pol. H = Horizontal V = Vertical
2. \*\*AF + CL + Amp. = Antenna Factor + Cable Loss + Amplifier.
3. Other spurious was under 20 dB below Fundamental.
4. \*\*\* Duty Cycle Correction Factor Calculation
  - Channel hop rate = 1600 hops/second
  - Adjusted channel hop rate = 1600 hops/second
  - Time per channel hop = 1/1600 hops/second = 0.625 ms
  - Time to cycle through all channels = 0.625 x 40 channels = 25 ms
  - Number of times transmitter hits on one channel = 100 ms / 25 ms = 4 time(s)
  - Worst case dwell time = 2.5 ms
  - Duty cycle correction factor =  $20\log_{10}(2.5\text{ms}/100\text{ms}) = -32.0 \text{ dB}$
5. GFSK modulation mode was the worst condition.
6. The radiated emissions testing were made by rotating EUT through three orthogonal axes and rotating the receive antenna with horizontal, Vertical polarization. The worst data was recorded.
7. Peak emissions were measured using RBW = 1 MHz, VBW = 3 MHz, Detector = Peak.
8. Average emissions were measured using RBW = 1 MHz, VBW = 3kHz, Detector = Peak


## PLOT OF TEST DATA

### Restricted Band Spurious Emissions, Lowest channel (Peak / Average)

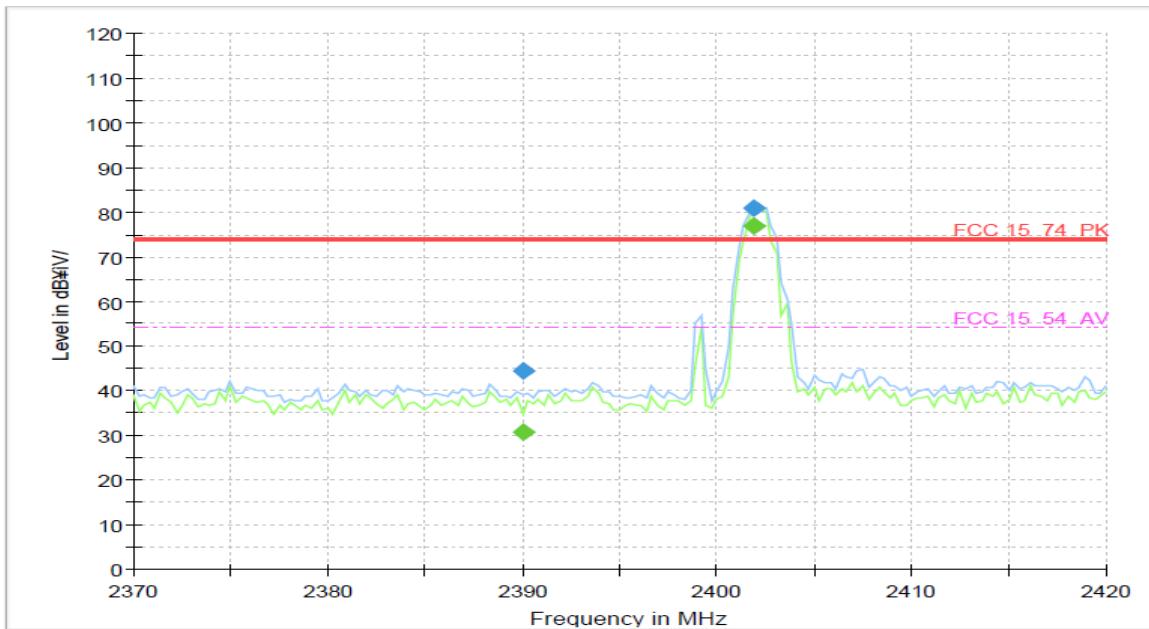

## PLOT OF TEST DATA

### Restricted Band Spurious Emissions, Highest channel (Peak / Average)

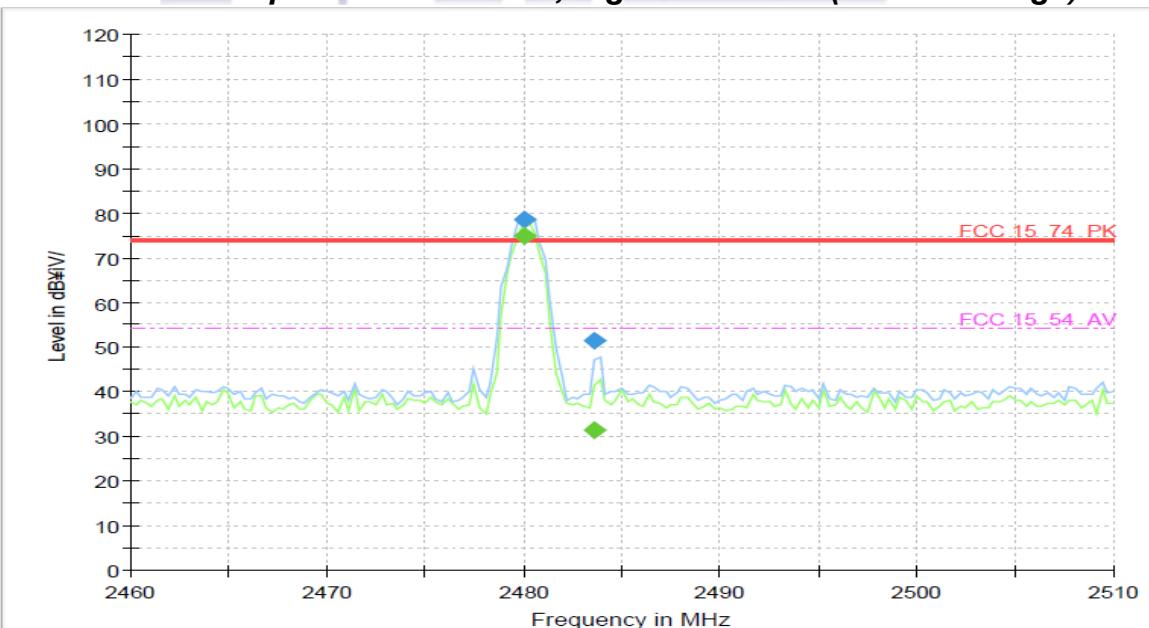

## 9. TEST EQUIPMENT

No	Instrument	Manufacturer	Model	Serial No.	Calibration Date	Calibration Interval
1	EMI Test Receiver	ROHDE & SCHWARZ	ESR7	101542	2019.03.14	1 Year
2	Tri-Log Antenna	Schwarzbeck	VULB9168	9168-721	2019.04.03	2 Year
3	Amplifier	TESTEK	TK-PA6S	120018	2019.03.14	1 Year
4	Attenuator	SRTechnology Corporate	N-ATTEN	101785#2	2019.03.14	1 Year
5	EMI Test Receiver	ROHDE & SCHWARZ	FSV40	100994	2019.03.14	1 Year
6	EMI Test Receiver	ROHDE & SCHWARZ	ESR7	101302	2019.03.14	1 Year
7	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-1245	2020.04.02	2 Year
8	BROADBAND HORN ANTENNA	Schwarzbeck	BBHA9170	BBHA9170 573	2020.04.20	2 Year
9	Amplifier	TESTEK	TK-PA1840H	140003	2019.03.15	1 Year
10	Amplifier	TESTEK	TK-PA1840H	140002	2019.03.14	1 Year

\*) Test equipment used during the test