

DONGGUAN KIMCHEN INDUSTRY INTL LIMITED



PRODUCT SPECIFICATION

Guangdong Gaopuda Group Co., Ltd.	
CUSTOMER:	_____
CUST P/N:	_3010800344_____
K C P/N::	J30-000022-001
D E S E:	20.5*39.5*0.08*80P*10TS*10MM

	Nov. 18, 2023
D A T E :	_____
VERSION :	A.0_____

ACCEPTANCE STAMP

PREPARED BY	MERCHANDISER	ENGINEER CHECKED BY	APPROVED BY
Wang Yunfan			

Address: No. 2, Xisha Road, Shijie Town, Dongguan City
 Tel: 86-076986018114 Fax: 86-076986015646

[Http://www.jzcoil.com](http://www.jzcoil.com)

FilNo: KC-JZ-09-008

DONGGUAN KIMCHEN INDUSTRY INTL LIMITED

Version Change History	CUST P/N	3010800344
	KC DESE	20.5*39.5*0.08*80P*10TS*10MM

[illegible]

PREPARED BY	ENGINEER CHECKED BY
Wang yufan	Lv shuqi

Address: No. 2, Xisha Road, Shijie Town, Dongguan City
Tel: 86-076986018114 **Fax:** 86-076986015646

[Http://www.jzcoil.com](http://www.jzcoil.com)

FilNo: KC-JZ-09-008


DONGGUAN KIMCHEN INDUSTRY INTL LIMITED

Specification

CUST P/N : 3010800344

KC DESE : 20.5*39.5*0.08*80P*10TS*10MM

1. OVERALL DIMENSIONS OF PRODUCTS:

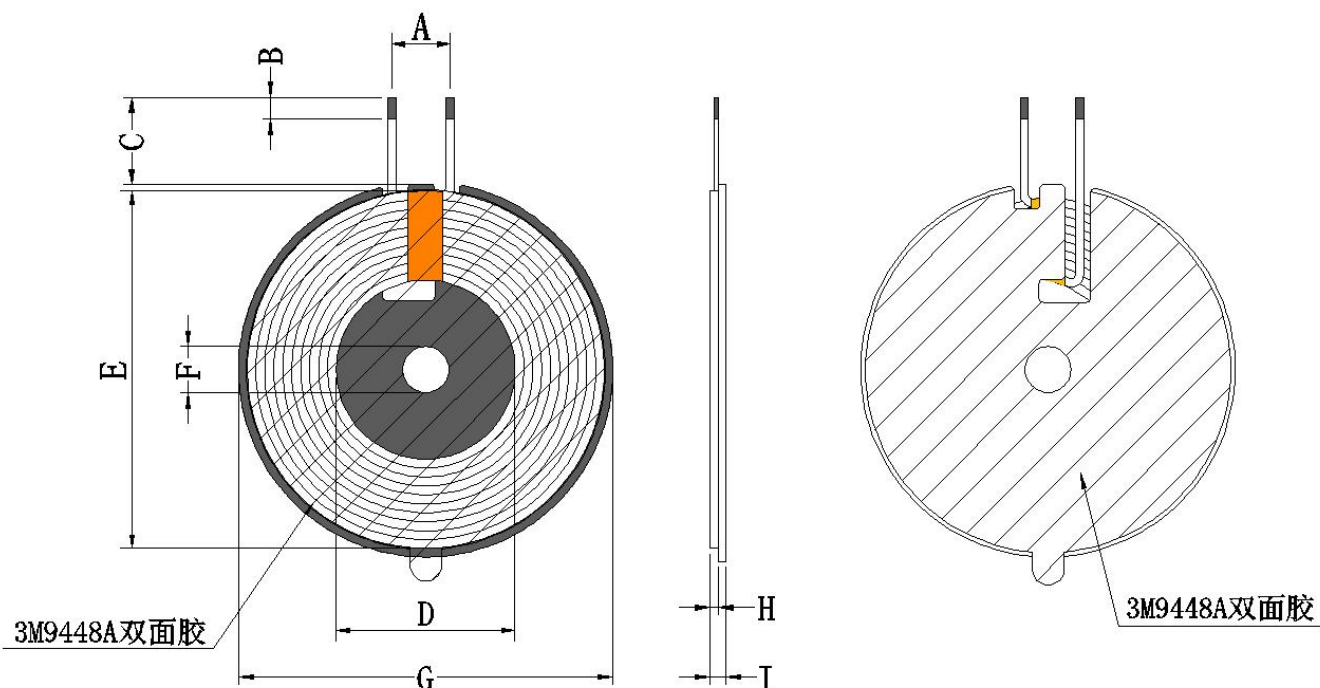

Unit : mm

A	B	C	D	E	F	G	H	I
7±2	3±1	10±1	20.5±0.5	39.5±0.5 (41MAX)	5.3±0.5	43+0/-1	0.85±0.05	2.3MAX

PS:1. (C) Magnetic external lead length; 2. (I) Includes the inlet but excludes the release paper.

Turns	Wire Dia.	Wdg. Type Spred/Close	Wdg. Direction	Intersect Yes/Not	Coil Positive/Anti Paste
10TS	0.08*80P Stranded wire	Close	Anticlockwise	Yes	Anti/-Paste

PREPARED BY

ENGINEER CHECKED BY

Wang yufan

Lv shuqi

Address: No. 2, Xisha Road, Shijie Town, Dongguan City

Tel: 86-076986018114 Fax: 86-076986015646

Http://www.jzcoil.com

FilNo: KC-JZ-09-008

DONGGUAN KIMCHEN INDUSTRY INTL LIMITED

Specification

CUST P/N :

3010800344

KC DESE :

20.5*39.5*0.08*80P*10TS*10MM

All materials must meet the ROHS standards.

2. ELECTRICAL CHARACTERISTICS:

TEMPERATURE: $25 \pm 10^{\circ}\text{C}$, RELATIVE HUMIDITY: $65 \pm 10\%$

NO.	ITEM	TERMINAL	SPECIFICATION	TEST FREQUENCY	TEST EQUIPMENTS
1	IND	S-F	Coil with magnetic sheet: $6.3 \mu\text{H} \pm 10\%$	1kHz/V	LCZ METER 1062

3. BILL OF MATERIALS:

NO.	Material name	Description	Material Code	Vendor code
1	wire rod	0.08 * 80P hot air twisted wire	JX-2U-F-0025	ZY
2	ferrite	G43 + 0/-1 * 5.3 * 0.8H ± 0.1 (with holes, with double slots, L slot)	GCP-T-00189	KL
3	3M 9448A Double-sided Adhesive Tape	41 * 5.3 * 0.12H (with holes, with double slots, L-shaped slot on the upper right corner, with tear-off function)	SMJ-3M-00109	HWD
4	3M 9448A Double-sided Adhesive Tape	38.5 * 5.3 * 0.12H (with holes, with tear-off handle)	SMJ-3M-00035	MYS
5	Gold Finger Adhesive Tape	5mm	High-temperature adhesive tape 5MM	JRM
6	glue	JS-E7202 (Thickened) White Adhesive	E7202W	HZY
7	tin bar	Environmentally friendly lead-free solder wire	Lead-free high-temperature solder wire	XC

PREPARED BY

ENGINEER CHECKED BY

Wang yufan

Lv shuqi

Address: No. 2, Xisha Road, Shijie Town, Dongguan City

Tel: 86-076986018114 Fax: 86-076986015646

Http://www.jzcoil.com

FilNo: KC-JZ-09-008