



FCC 47 CFR PART 15 SUBPART C

CERTIFICATION TEST REPORT

For

Soundbar Speaker

MODEL NUMBER: HTL3310/XX

FCC ID: 2AR2SHTL3310

REPORT NUMBER: 4788995020-4

ISSUE DATE: May 30, 2019

Prepared for

**MMD Hong Kong Holding Limited
Units 1006-1007,10/F, C-Bons International Center 108 Wai Yip Street, Kwun Tong,
Kowloon, Hong Kong**

Prepared by

**UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch
Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake
Hi-Tech Development Zone Dongguan, People's Republic of China**

Tel: +86 769 22038881

Fax: +86 769 33244054

Website: www.ul.com



Revision History

Rev.	Issue Date	Revisions	Revised By
V0	05/30/2019	Initial Issue	



Summary of Test Results			
Clause	Test Items	FCC Rules	Test Results
1	20dB Bandwidth and 99% Occupied Bandwidth	FCC 15.247 (a) (1)	Pass
2	Conducted Output Power	FCC 15.247 (b) (1)	Pass
3	Carrier Hopping Channel Separation	FCC 15.247 (a) (1)	Pass
4	Number of Hopping Frequency	15.247 (a) (1) III	Pass
5	Time of Occupancy (Dwell Time)	15.247 (a) (1) III	Pass
6	Conducted Bandedge	FCC 15.247 (d)	Pass
7	Radiated Bandedge and Spurious	FCC 15.247 (d) FCC 15.209 FCC 15.205	Pass
8	Conducted Emission Test For AC Power Port	FCC 15.207	Pass
9	Antenna Requirement	FCC 15.203	Pass



TABLE OF CONTENTS

1. ATTESTATION OF TESCT RESULTS	6
2. TEST METHODOLOGY	7
3. FACILITIES AND ACCREDITATION	7
4. CALIBRATION AND UNCERTAINTY	8
4.1. MEASURING INSTRUMENT CALIBRATION	8
4.2. MEASUREMENT UNCERTAINTY	8
5. EQUIPMENT UNDER TEST	9
5.1. DESCRIPTION OF EUT	9
5.2. MAXIMUM OUTPUT POWER.....	9
5.3. PACKET TYPE CONFIGURATION	9
5.4. CHANNEL LIST	10
5.5. TEST CHANNEL CONFIGURATION.....	10
5.6. THE WORSE CASE POWER SETTING PARAMETER.....	10
5.7. DESCRIPTION OF AVAILABLE ANTENNAS	11
5.8. WORST-CASE CONFIGURATIONS.....	11
5.9. DESCRIPTION OF TEST SETUP.....	12
5.10. MEASURING INSTRUMENT AND SOFTWARE USED	13
6. ANTENNA PORT TEST RESULTS	15
6.1. ON TIME AND DUTY CYCLE	15
6.2. 20 dB BANDWIDTH AND 99% BANDWIDTH	17
6.2.1. GFSK MODE	18
6.2.2. $\Pi/4$ -DQPSK MODE.....	20
6.3. PEAK CONDUCTED OUTPUT POWER.....	22
6.3.1. GFSK MODE	23
6.3.2. $\Pi/4$ -DQPSK MODE.....	23
6.4. CARRIER HOPPING CHANNEL SEPARATION.....	24
6.4.1. GFSK MODE	25
6.4.2. $\Pi/4$ -DQPSK MODE.....	26
6.5. NUMBER OF HOPPING FREQUENCY	27
6.5.1. GFSK MODE	28
6.5.2. $\Pi/4$ -DQPSK MODE.....	29
6.6. TIME OF OCCUPANCY (DWEELL TIME).....	30
6.6.1. GFSK MODE	31
6.6.2. $\Pi/4$ -DQPSK MODE.....	34



6.7.	CONDUCTED SPURIOUS EMISSION	36
6.7.1.	GFSK MODE	37
6.7.2.	Π/4-DQPSK MODE.....	43
7.	RADIATED TEST RESULTS.....	49
7.1.	LIMITS AND PROCEDURE	49
7.2.	RESTRICTED BANDEDGE	55
7.2.1.	GFSK MODE	55
7.2.2.	Π/4-DQPSK MODE.....	60
7.3.	SPURIOUS EMISSIONS (1~3GHz)	65
7.3.1.	GFSK MODE	65
7.3.2.	Π/4-DQPSK MODE.....	71
7.4.	SPURIOUS EMISSIONS (3~18GHz)	77
7.4.1.	GFSK MODE	77
7.4.2.	Π/4-DQPSK MODE.....	83
7.5.	WORST-CASE CO-LOCATION	89
7.5.1.	BT Π/4-DQPSK AND 2.4G FSK MODE	89
7.6.	SPURIOUS EMISSIONS 18G ~ 26GHz.....	91
7.6.1.	Π/4-DQPSK MODE.....	91
7.7.	SPURIOUS EMISSIONS 30M ~ 1 GHz	93
7.7.1.	Π/4-DQPSK MODE.....	93
7.8.	SPURIOUS EMISSIONS BELOW 30M.....	95
7.8.1.	Π/4-DQPSK MODE.....	95
8.	AC POWER LINE CONDUCTED EMISSIONS	98
8.1.1.	Π/4-DQPSK MODE.....	99
9.	ANTENNA REQUIREMENTS.....	101



1. ATTESTATION OF TESCT RESULTS

Applicant Information

Company Name: MMD Hong Kong Holding Limited
Address: Units 1006-1007,10/F, C-Bons International Center 108 Wai Yip Street, Kwun Tong, Kowloon, Hong Kong

Manufacturer Information

Company Name: MMD Hong Kong Holding Limited
Address: Units 1006-1007,10/F, C-Bons International Center 108 Wai Yip Street, Kwun Tong, Kowloon, Hong Kong

EUT Description

Product Name: Soundbar Speaker
Brand Name: Philips
Model Name: HTL3310/XX
Model difference: XX=blank or /00 to /99, denoted for different country destination
Sample Status: Normal
Sample Received date: May 20, 2019
Date Tested: May 21~28, 2019

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 15 SUBPART C	PASS

Tested By:

Kebo Zhang
Engineer Project Associate

Checked By:

Shawn Wen
Laboratory Leader

Approved By:

Stephen Guo
Laboratory Manager



2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with KDB414788 D01 Radiated Test Site v01r01, KDB 558074 D01 15.247 Meas Guidance v05r02 , ANSI C63.10-2013, CFR 47 FCC Part 2 and CFR 47 FCC Part 15.

3. FACILITIES AND ACCREDITATION

Accreditation Certificate	A2LA (Certificate No.: 4102.01) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA. FCC (FCC Designation No.: CN1187) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules IC(Company No.: 21320) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320. VCCI (Registration No.: G-20019, R-20004, C-20012 and T-20011) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber D, the VCCI registration No. is G-20019 and R-20004 Shielding Room B , the VCCI registration No. is C-20012 and T-20011
---------------------------	--

Note:

1. All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, Song Shan Lake Hi tech Development Zone, Dongguan, 523808, China
2. The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.
3. For below 30MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30MHz had been correlated to measurements performed on an OFS.



4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62dB
Radiation Emission test(include Fundamental emission) (9kHz-30MHz)	2.2dB
Radiation Emission test(include Fundamental emission) (30MHz-1GHz)	4.00dB
Radiation Emission test (1GHz to 26GHz)(include Fundamental emission)	5.78dB (1GHz-18Gz)
	5.23dB (18GHz-26Gz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	



5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

Equipment	Soundbar Speaker		
Model Name	HTL3310/XX		
Model difference	XX=blank or /00 to /99, denoted for different country destination		
Product Description (Bluetooth)	Operation Frequency	2402 MHz ~ 2480 MHz	
	Modulation Type		Data Rate
	GFSK		1Mbps
	π/4-DQPSK		2Mbps
Supply Voltage	AC120V,60Hz		
Bluetooth Version	BT 4.2+EDR		

5.2. MAXIMUM OUTPUT POWER

Bluetooth Mode	Frequency (MHz)	Channel Number	Max Output Power (dBm)	EIRP (dBm)
GFSK	2402-2480	0-78[79]	-1.371	-0.371
π/4-DQPSK	2402-2480	0-78[79]	-1.489	-0.489

5.3. PACKET TYPE CONFIGURATION

Test Mode	Packet Type	Setting(Packet Length)
GFSK	DH1	27
	DH3	183
	DH5	339
π/4-DQPSK	2-DH1	54
	2-DH3	367
	2-DH5	679



5.4. CHANNEL LIST

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	20	2422	40	2442	60	2462
01	2403	21	2423	41	2443	61	2463
02	2404	22	2424	42	2444	62	2464
03	2405	23	2425	43	2445	63	2465
04	2406	24	2426	44	2446	64	2466
05	2407	25	2427	45	2447	65	2467
06	2408	26	2428	46	2448	66	2468
07	2409	27	2429	47	2449	67	2469
08	2410	28	2430	48	2450	68	2470
09	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

5.5. TEST CHANNEL CONFIGURATION

Test Mode	Test Channel Number	Test Channel
GFSK	CH 00, CH 39, CH 78	Low, Middle, High
π/4-DQPSK	CH 00, CH 39, CH 78	Low, Middle, High

5.6. THE WORSE CASE POWER SETTING PARAMETER

The Worse Case Power Setting Parameter under 2400 ~ 2483.5MHz Band				
Test Software		FCC Assist		
Modulation Type	Transmit Antenna Number	Test Channel		
		CH 00	CH 39	CH 78
GFSK	1	Default	Default	Default
π/4-DQPSK	1	Default	Default	Default



5.7. DESCRIPTION OF AVAILABLE ANTENNAS

Frequency (MHz)	Antenna Type	Antenna Gain (dBi)
2402-2480	Integral antenna	1

5.8. WORST-CASE CONFIGURATIONS

Bluetooth Mode	Modulation Technology	Modulation Type	Data Rate (Mbps)
BR	FHSS	GFSK	1Mbit/s
EDR	FHSS	π/4-DQPSK	2Mbit/s

Note: Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates.



5.9. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	P/N
1	Laptop	ThinkPad	T460S	SL10K24796 JS
2	USB TO UART	/	/	/

I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	USB	/	/	0.50	/


ACCESSORY

Item	Accessory	Brand Name	Model Name	Description
1	/		/	/

TEST SETUP

The EUT can work in an engineer mode with software through a PC.

SETUP DIAGRAM FOR TESTS

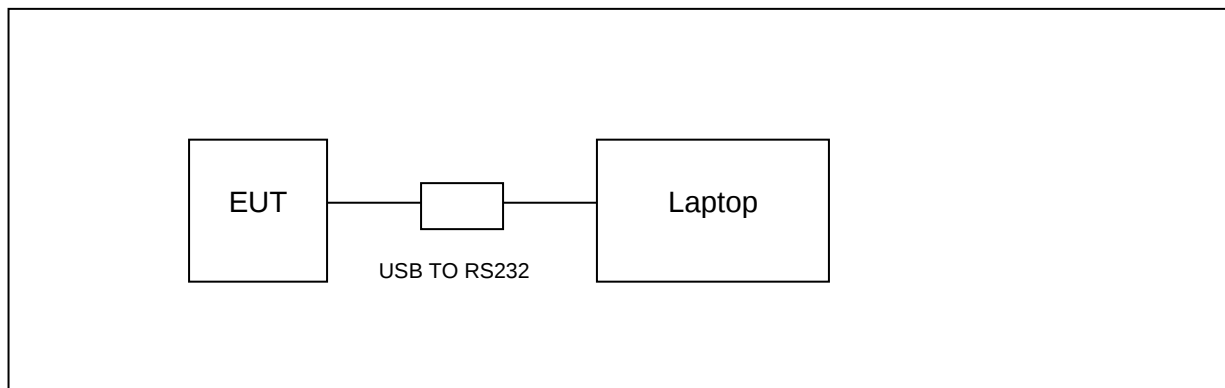

**5.10. MEASURING INSTRUMENT AND SOFTWARE USED**

Conducted Emissions						
Instrument						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
☒	EMI Test Receiver	R&S	ESR3	101961	Dec.10,2018	Dec.10,2019
☒	Two-Line V-Network	R&S	ENV216	101983	Dec.10,2018	Dec.10,2019
☒	Artificial Mains Networks	Schwarzbeck	NSLK 8126	8126465	Dec.10,2018	Dec.10,2019
Software						
Used	Description		Manufacturer	Name		Version
☒	Test Software for Conducted disturbance		Farad	EZ-EMC		Ver. UL-3A1
Radiated Emissions						
Instrument						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
☒	MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Dec.10,2018	Dec.10,2019
☒	Hybrid Log Periodic Antenna	TDK	HLP-3003C	130960	Sep.17, 2018	Sep.17, 2021
☒	Preamplifier	HP	8447D	2944A09099	Dec.10,2018	Dec.10,2019
☒	EMI Measurement Receiver	R&S	ESR26	101377	Dec.10,2018	Dec.10,2019
☒	Horn Antenna	TDK	HRN-0118	130939	Sep.17, 2018	Sep.17, 2021
☒	High Gain Horn Antenna	Schwarzbeck	BBHA-9170	691	Aug.11, 2018	Aug.11, 2021
☒	Preamplifier	TDK	PA-02-0118	TRS-305-00066	Dec.10,2018	Dec.10,2019
☒	Preamplifier	TDK	PA-02-2	TRS-307-00003	Dec.10,2018	Dec.10,2019
☒	Loop antenna	Schwarzbeck	1519B	00008	Jan.01,2019	Jan.01, 2022
☒	Band Reject Filter	Wainwright	WRCJV8-2350-2400-2483.5-2533.5-40SS	4	Dec.10,2018	Dec.10,2019
☒	High Pass Filter	Wi	WHKX10-2700-3000-18000-40SS	23	Dec.10,2018	Dec.10,2019
Software						
Used	Description		Manufacturer	Name		Version
☒	Test Software for Radiated disturbance		Farad	EZ-EMC		Ver. UL-3A1



Other instruments						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
☒	Spectrum Analyzer	Keysight	N9030A	MY55410512	Dec.10,2018	Dec.10,2019
☒	Power Meter	Keysight	N1911A	MY55416024	Dec.10,2018	Dec.10,2019
☒	Power Sensor	Keysight	U2021XA	MY5100022	Dec.10,2018	Dec.10,2019




6. ANTENNA PORT TEST RESULTS

6.1. ON TIME AND DUTY CYCLE

LIMITS

None; for reporting purposes only

TEST SETUP



TEST ENVIRONMENT

Temperature	23.4°C	Relative Humidity	60%
Atmosphere Pressure	101kPa	Test Voltage	AC120V,60Hz



RESULTS

Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)	Final setting For VBW (kHz)
GFSK	2.880	3.744	0.769	76.9	1.14	0.35	0.5
$\pi/4$ -DQPSK	2.896	3.764	0.769	76.9	1.14	0.35	0.5

Note: Duty Cycle Correction Factor= $10\log(1/x)$.

Where: x is Duty Cycle(Linear)

Where: T is On Time (transmit duration)

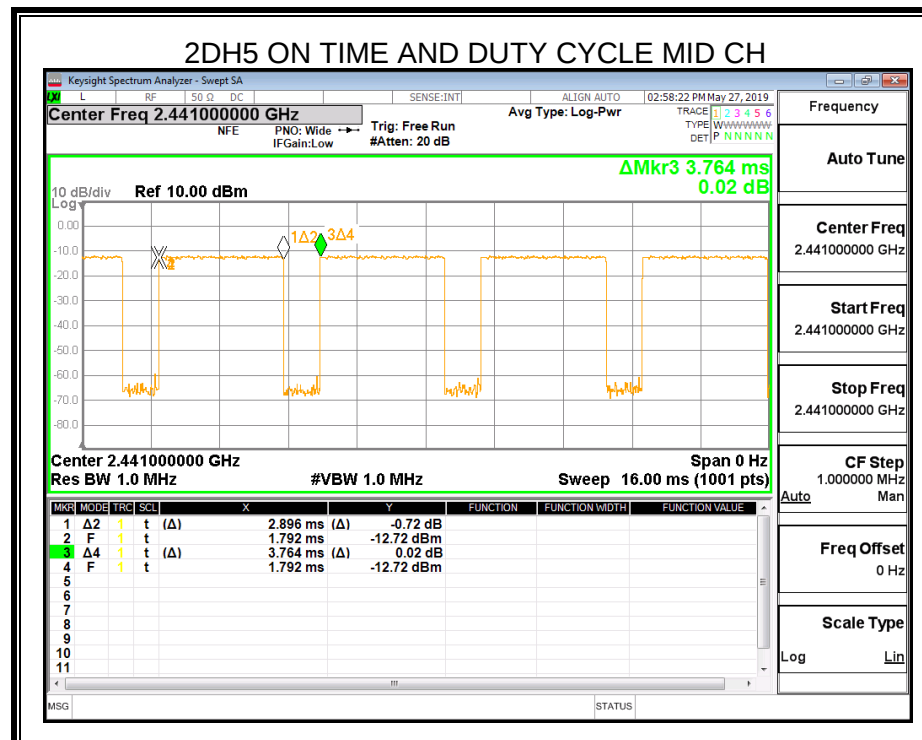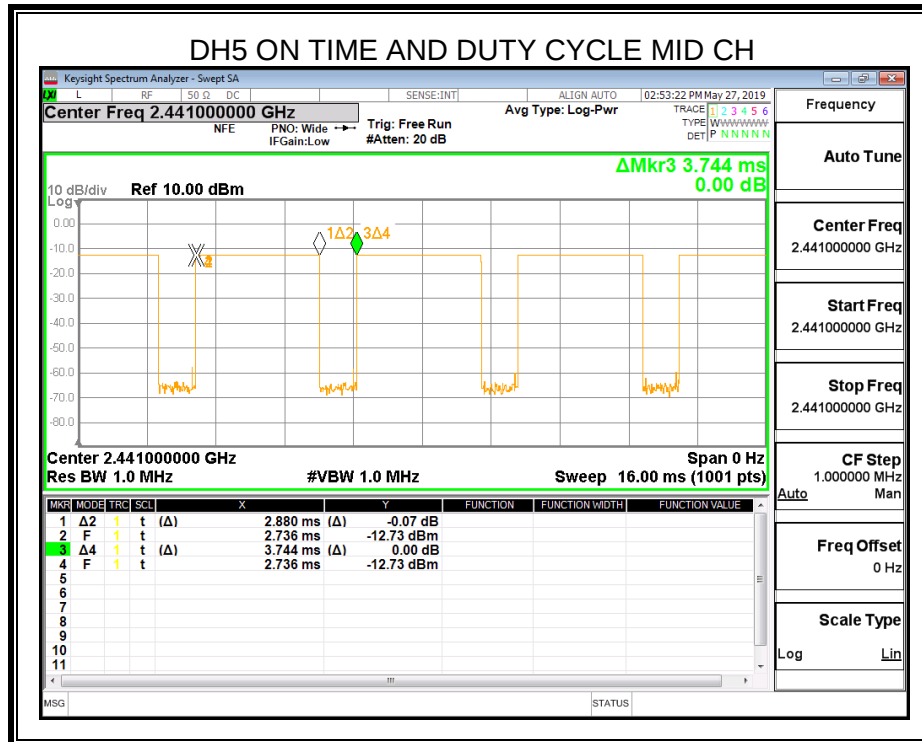



6.2. 20 dB BANDWIDTH AND 99% BANDWIDTH

LIMITS

CFR 47FCC Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247 (a) (1)	20dB Occupied Bandwidth	N/A	2400-2483.5
C63.10 Clause 6.9.3	99% Occupied Bandwidth	N/A	2400-2483.5


TEST PROCEDURE

Connect the UUT to the spectrum analyser and use the following settings:

Center Frequency	The centre frequency of the channel under test
Detector	Peak
RBW	For 20dB Occupied Bandwidth: 1% to 5% of the 20 dB bandwidth For 99% Occupied Bandwidth: 1% to 5% of the occupied bandwidth
VBW	For 20dB Occupied Bandwidth: $\geq$ RBW For 99% Occupied Bandwidth: approximately $3 \times$ RBW
Span	approximately 2 to 3 times the 20 dB bandwidth
Trace	Max hold
Sweep	Auto couple

Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB and 99% relative to the maximum level measured in the fundamental emission.

TEST SETUP





TEST ENVIRONMENT


Temperature	23.4°C	Relative Humidity	60%
Atmosphere Pressure	101kPa	Test Voltage	AC120V,60Hz

RESULTS

6.2.1. GFSK MODE


Channel	Frequency (MHz)	20dB bandwidth (MHz)	99% bandwidth (MHz)	Result
Low	2402	0.936	0.84615	PASS
Middle	2441	0.933	0.84421	PASS
High	2480	0.934	0.84508	PASS

Test Graph

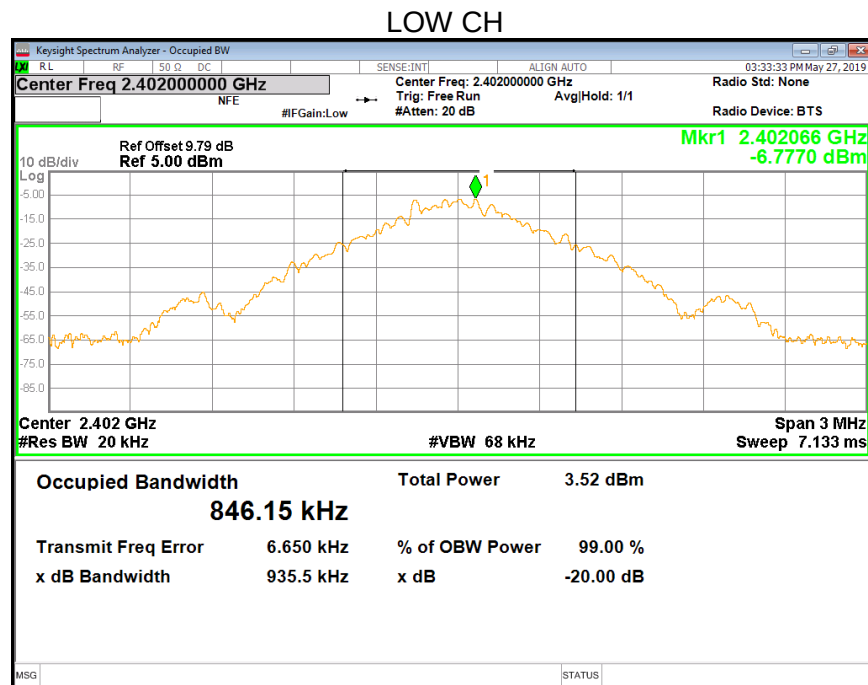




MID CH

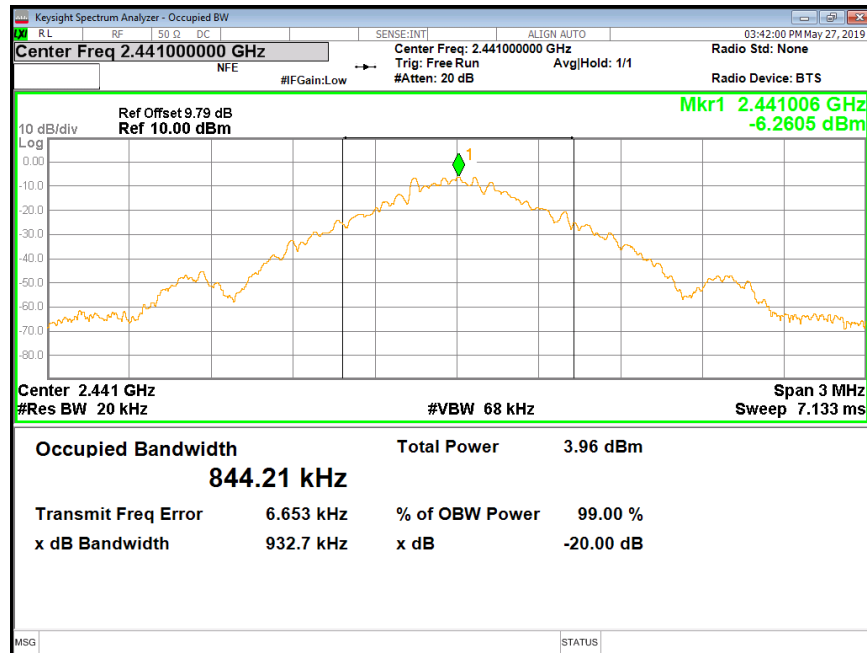


HIGH CH

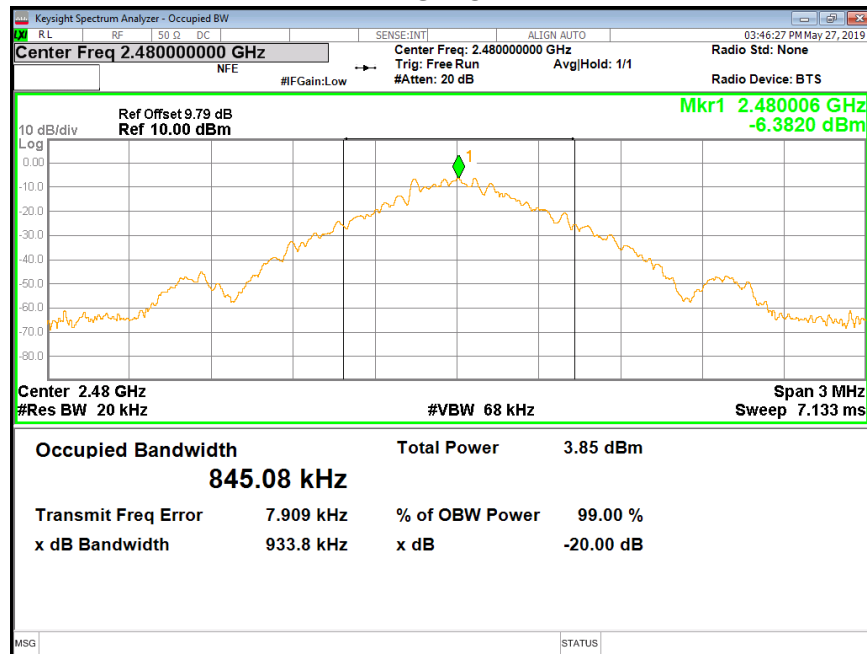

6.2.2. $\pi/4$ -DQPSK MODE


Channel	Frequency (MHz)	20dB bandwidth (MHz)	99% bandwidth (MHz)	Result
Low	2402	1.255	1.1713	Pass
Middle	2441	1.278	1.1719	Pass
High	2480	1.281	1.1714	Pass

LOW CH

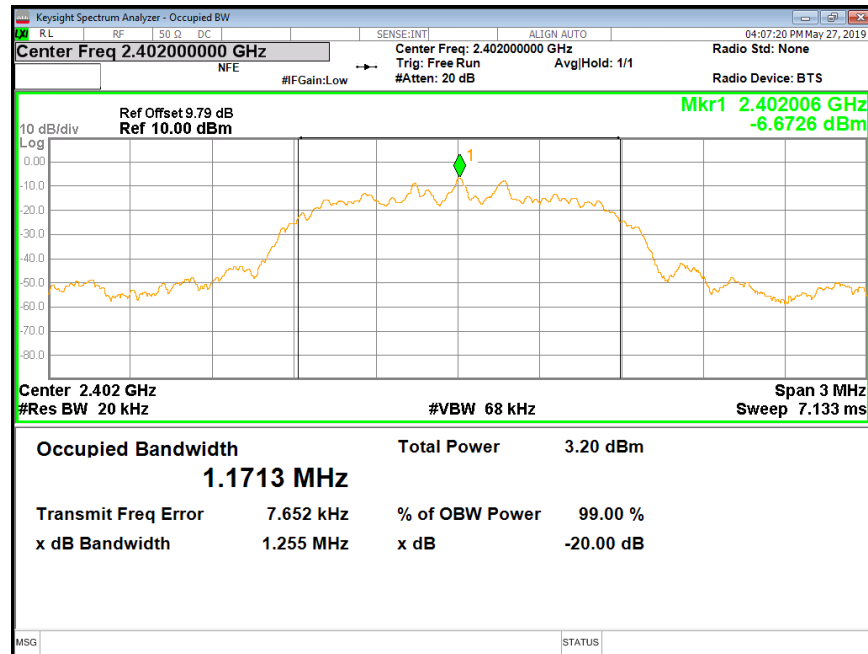




MID CH

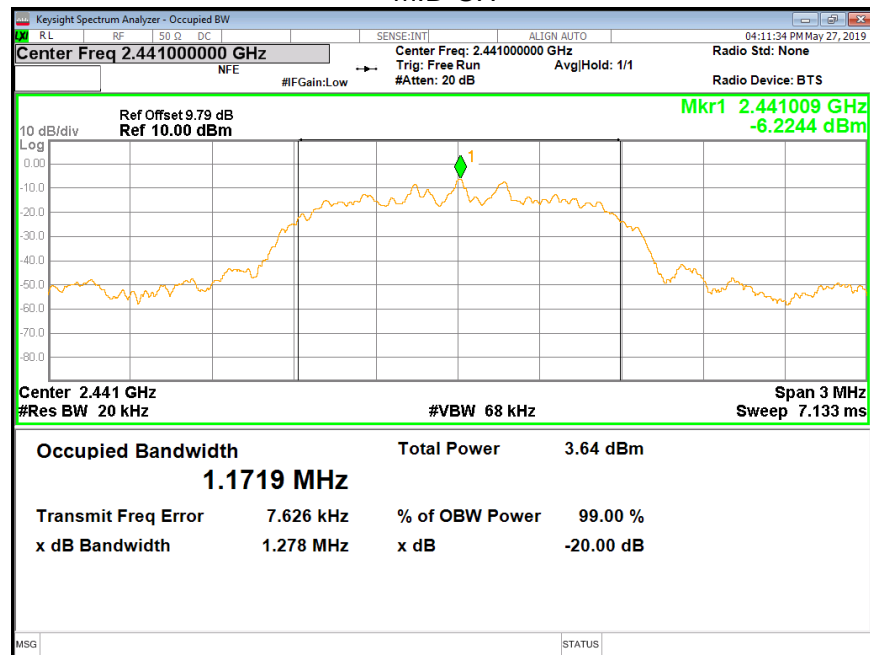

HIGH CH

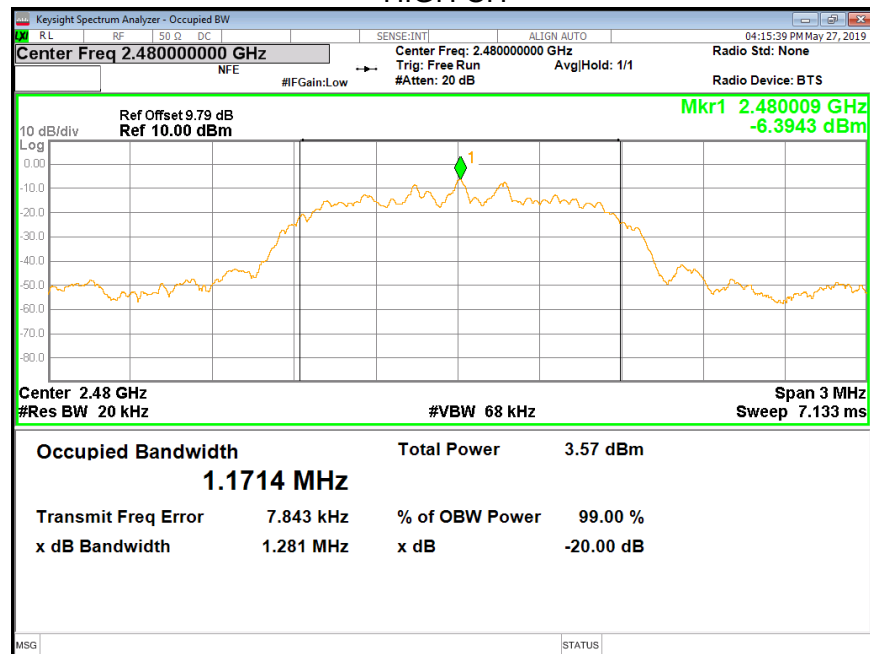



6.3. PEAK CONDUCTED OUTPUT POWER


LIMITS

CFR 47 FCC Part15 (15.247) , Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247 (b) (1)	Peak Conducted Output Power	Hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel : 1 watt or 30dBm; Hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel : 125 mW or 21dBm	2400-2483.5

TEST PROCEDURE

Place the EUT on the table and set it in the transmitting mode.
Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Power sensor.
Measure the power of each channel.
Peak Detector use for Peak result.

TEST SETUP

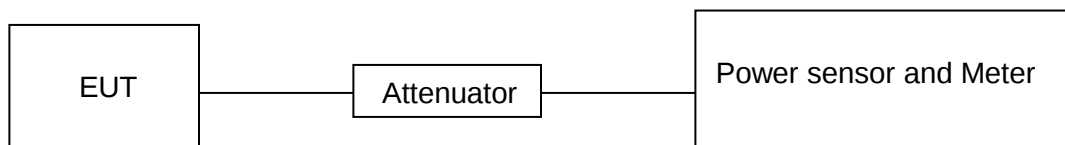



TEST ENVIRONMENT

Temperature	23.4°C	Relative Humidity	60%
Atmosphere Pressure	101kPa	Test Voltage	AC120V,60Hz

RESULTS

6.3.1. GFSK MODE

Channel	Frequency	Maximum Conducted Output Power(PK)	EIRP	Limit	Result
	(MHz)	(dBm)	(dBm)	(dBm)	
Low	2402	-1.371	-0.371	30	Pass
Middle	2441	-2.766	-1.766	30	Pass
High	2480	-2.856	-1.856	30	Pass

Note: EIRP= Maximum Conducted Output Power + Antenna Gain

Note: The channel separation is 1MHz and the 20dB Bandwidth is less than 1MHz.

6.3.2. $\pi/4$ -DQPSK MODE

Channel	Frequency	Maximum Conducted Output Power(PK)	EIRP	Limit	Result
	(MHz)	(dBm)	(dBm)	(dBm)	
Low	2402	-1.903	-0.903	21	Pass
Middle	2441	-1.489	-0.489	21	Pass
High	2480	-1.500	-0.500	21	Pass

Note: EIRP= Maximum Conducted Output Power + Antenna Gain

Note: The channel separation is 1MHz and the 20dB Bandwidth is bigger than 1MHz.



6.4. CARRIER HOPPING CHANNEL SEPARATION

LIMITS

CFR 47 FCC Part15 (15.247) , Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247 (a) (1)	Carrier Hopping Channel Separation	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel.	2400-2483.5

TEST PROCEDURE

Connect the UUT to the spectrum Analyzer and use the following settings:


Center Frequency	The center frequency of the channel under test
Span	wide enough to capture the peaks of two adjacent channels
Detector	Peak
RBW	Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
VBW	$\geq$ RBW
Trace	Max hold
Sweep time	Auto couple

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

Compliance of an EUT with the appropriate regulatory limit shall be determined.

A plot of the data shall be included in the test report.

TEST SETUP






TEST ENVIRONMENT

Temperature	23.4°C	Relative Humidity	60%
Atmosphere Pressure	101kPa	Test Voltage	AC120V,60Hz

RESULTS

6.4.1. GFSK MODE

Channel	Carrier Hopping Channel Separation (MHz)	Limit (MHz)	Result
Middle	1.0	≥ 20 dB Bandwidth Of The Hopping Channel	PASS

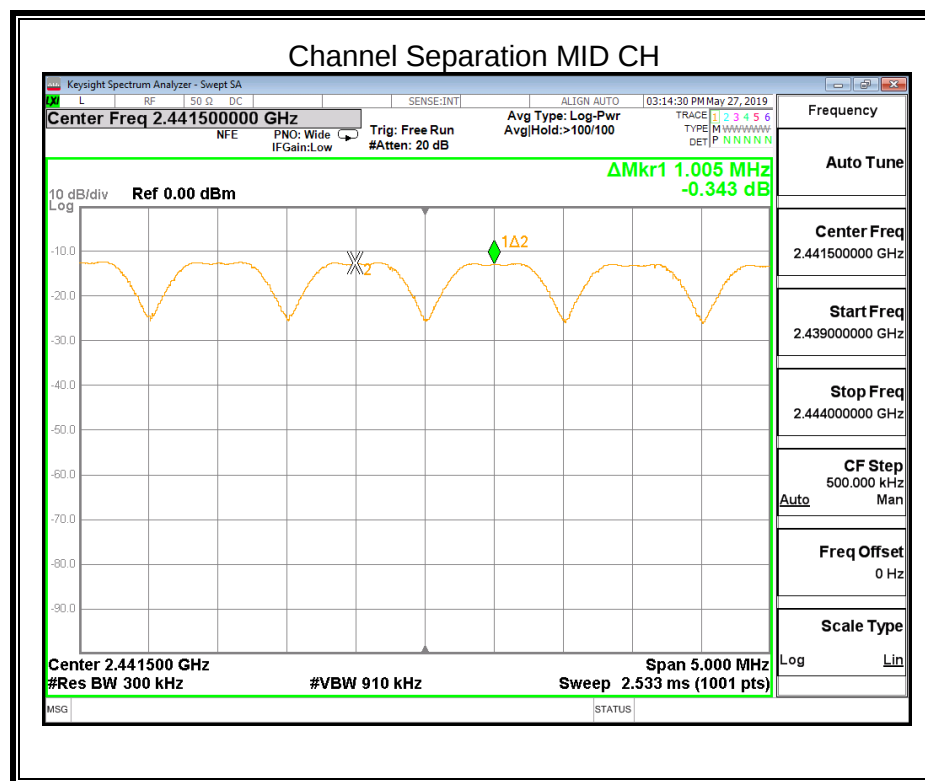


Note: For 20 dB Bandwidth of The Hopping Channel, please refer to clause 6.2.1.



6.4.2. $\pi/4$ -DQPSK MODE

Channel	Carrier Hopping Channel Separation (MHz)	Limit (MHz)	Result
Middle	1.0	$\geq$ two-thirds of the 20 dB Bandwidth Of The Hopping Channel	PASS

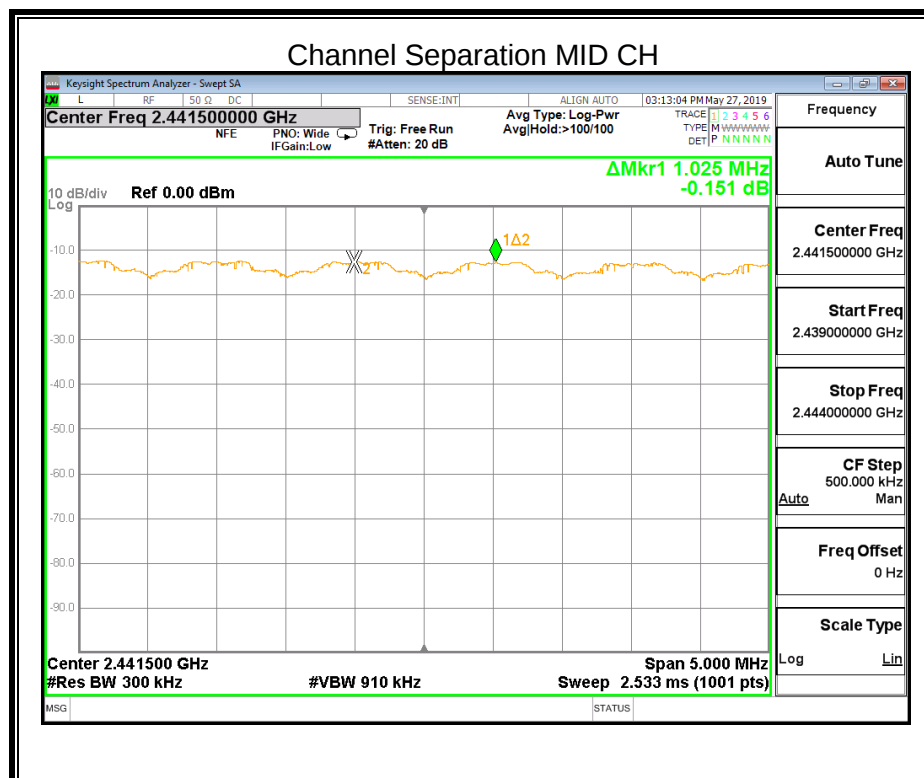

Note: For 20 dB Bandwidth of The Hopping Channel, please refer to clause 6.2.2.



6.5. NUMBER OF HOPPING FREQUENCY

LIMITS

CFR 47 FCC Part15 (15.247) , Subpart C		
Section	Test Item	Limit
CFR 47 15.247 (a) (1) III	Number of Hopping Frequency	at least 15 hopping channels

TEST PROCEDURE

Connect the EUT to the spectrum Analyzer and use the following settings:

Detector	Peak
RBW	RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
VBW	≥RBW
Span	The frequency band of operation
Trace	Max hold
Sweep time	Auto couple


Set EUT to transmit maximum output power and switch on frequency hopping function. then set enough count time (larger than 5000 times) to get all the hopping frequency channel displayed on the screen of spectrum analyzer.

Count the quantity of peaks to get the number of hopping channels.

FHSS Mode: 79 Channels observed.

AFHSS Mode: 20 Channels declared.

TEST SETUP

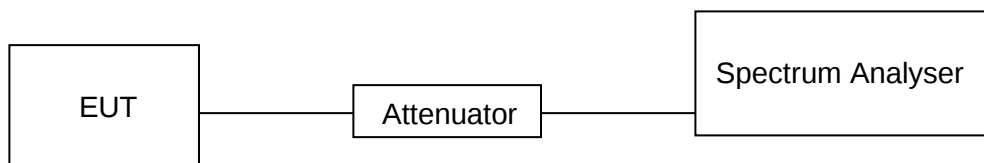

TEST ENVIRONMENT


Temperature	23.4°C	Relative Humidity	60%
Atmosphere Pressure	101kPa	Test Voltage	AC120V,60Hz

RESULTS




6.5.1. GFSK MODE

Hopping numbers	Limit	Results
79	>15	Pass

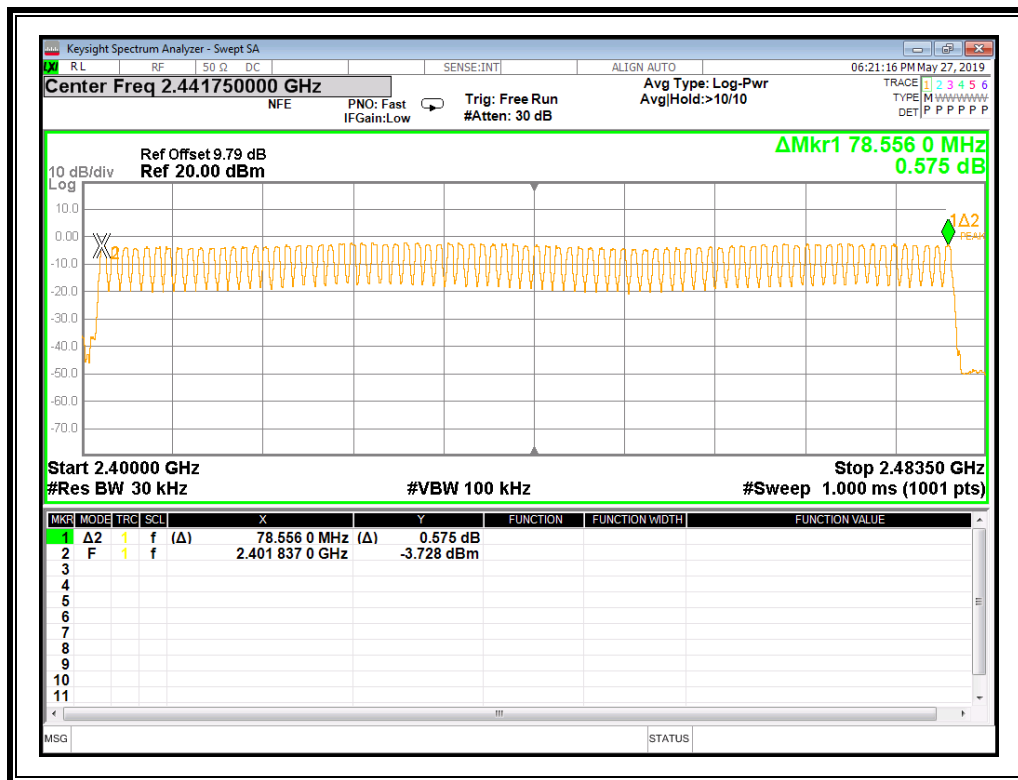

6.5.2. $\pi/4$ -DQPSK MODE

Hopping numbers	Limit	Results
79	>15	Pass

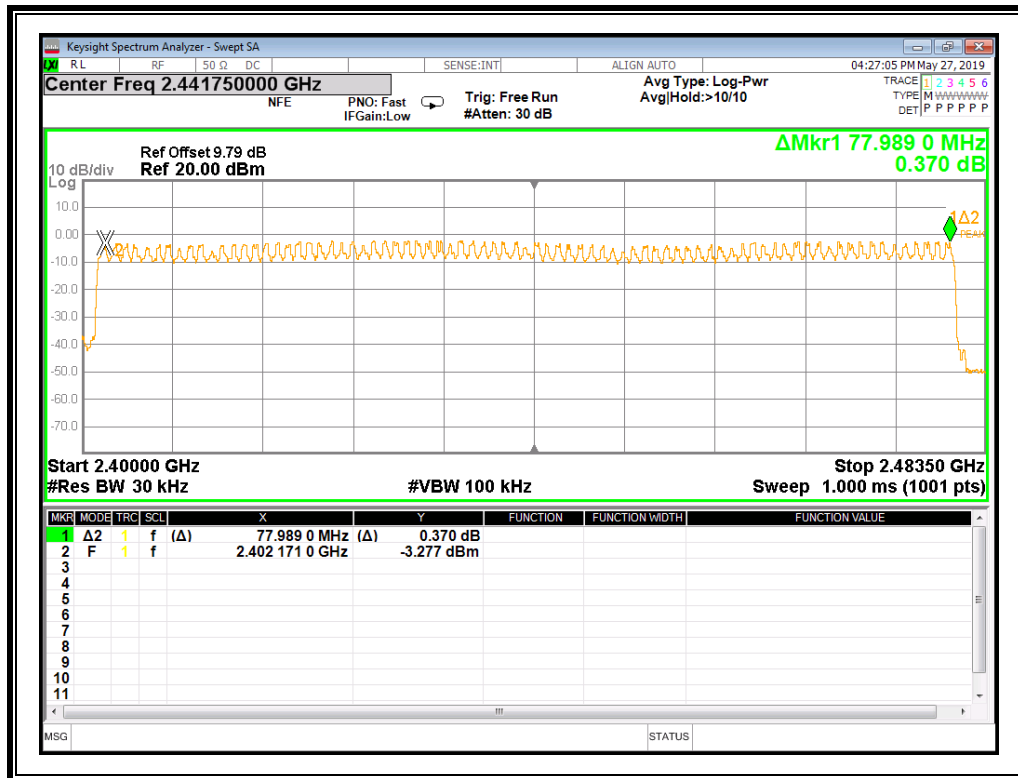



6.6. TIME OF OCCUPANCY (DWELL TIME)

LIMITS

CFR 47 FCC Part15 (15.247) , Subpart C		
Section	Test Item	Limit
CFR 47 15.247 (a) (1) III	Time of Occupancy (Dwell Time)	The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds, multiplied by the number of hopping channels employed.

TEST PROCEDURE

Connect the UUT to the spectrum analyser and use the following settings:

Center Frequency	The centre frequency of the channel under test
Detector	Peak
RBW	1 MHz
VBW	≥RBW
Span	zero span
Trace	Max hold
Sweep time	As necessary to capture the entire dwell time per hopping channel

- The transmitter output (antenna port) was connected to the spectrum analyzer
- Set RBW of spectrum analyzer to 1MHz and VBW to 1MHz.
- Use a video trigger with the trigger level set to enable triggering only on full pulses.
- Sweep Time is more than once pulse time.
- Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- Measure the maximum time duration of one single pulse.
- Set the EUT for DH5, DH3 and DH1 packet transmitting.
- Measure the maximum time duration of one single pulse.
 $A \text{ Period Time} = (\text{channel number}) \times 0.4$

For Normal Mode (79 Channel):

DH1 Time Slot: Reading * $(1600/2) \times 31.6 / (\text{channel number})$

DH3 Time Slot: Reading * $(1600/4) \times 31.6 / (\text{channel number})$

DH5 Time Slot: Reading * $(1600/6) \times 31.6 / (\text{channel number})$

For AFH Mode (20 Channel):


DH1 Time Slot: Reading * $(800/2) \times 8 / (\text{channel number})$

DH3 Time Slot: Reading * $(800/4) \times 8 / (\text{channel number})$

DH5 Time Slot: Reading * $(800/6) \times 8 / (\text{channel number})$



TEST SETUP

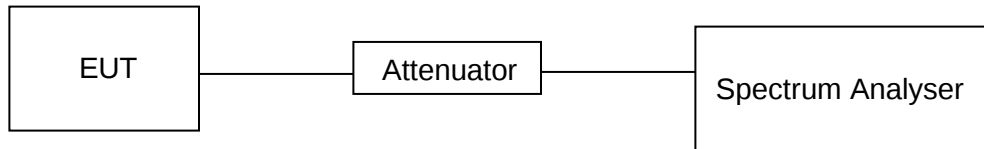

TEST ENVIRONMENT

Temperature	23.4°C	Relative Humidity	60%
Atmosphere Pressure	101kPa	Test Voltage	AC120V,60Hz



RESULTS


6.6.1. GFSK MODE

Normal Mode				
Packet	Channel	Burst Width [ms/hop/ch]	Dwell Time [s]	Results
DH1	MCH	0.385	0.1232	PASS
DH3	MCH	1.640	0.2624	PASS
DH5	MCH	2.880	0.3072	PASS
AFH Mode				
DH1	MCH	0.385	0.0616	PASS
DH3	MCH	1.640	0.1312	PASS
DH5	MCH	2.880	0.1536	PASS



Test Graph

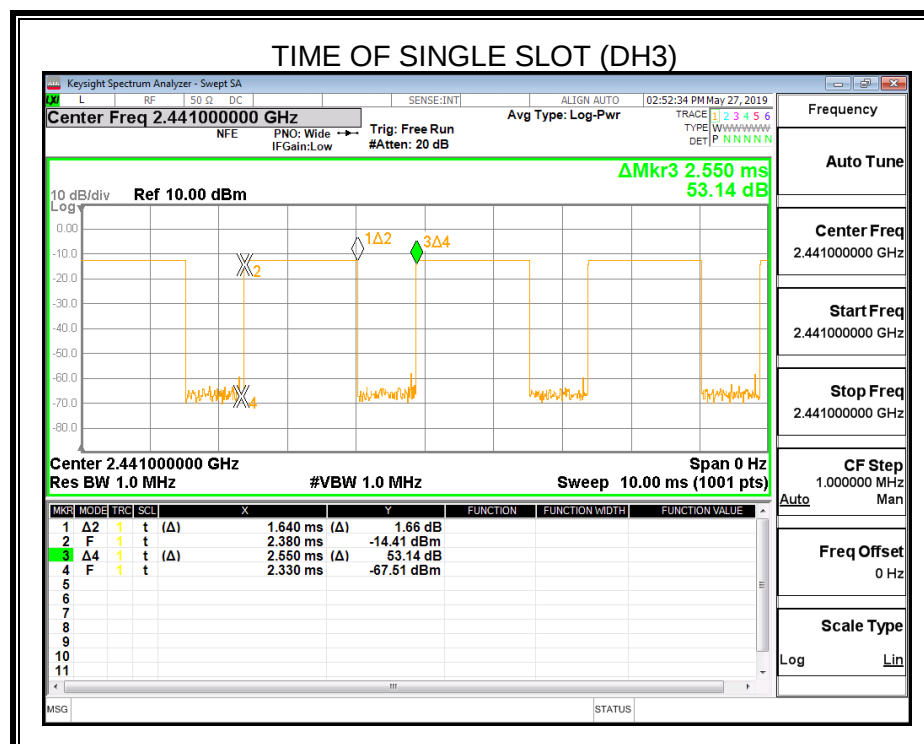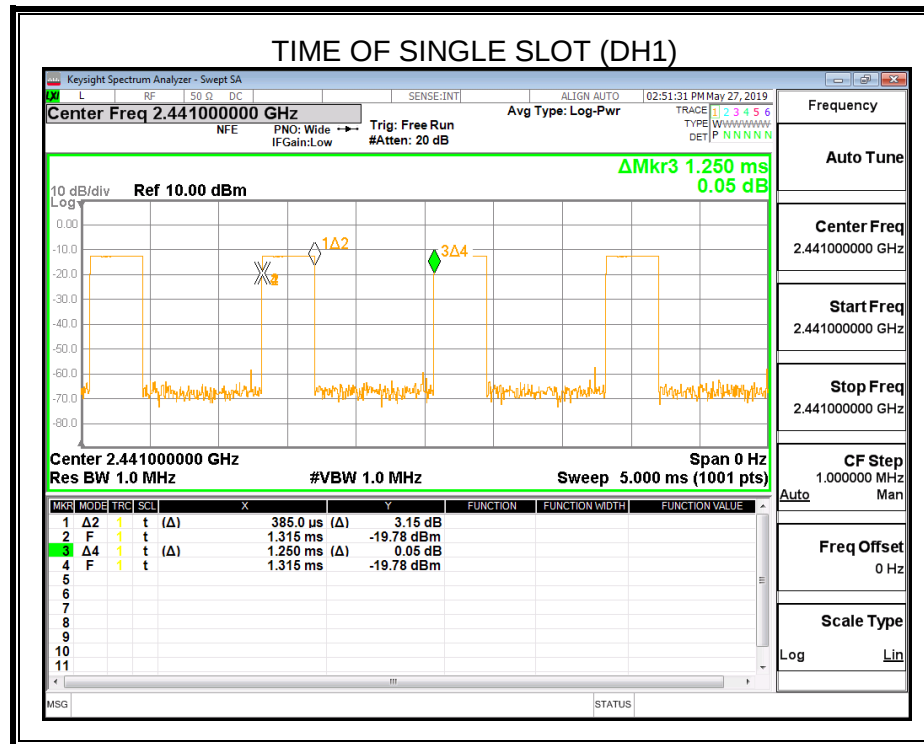



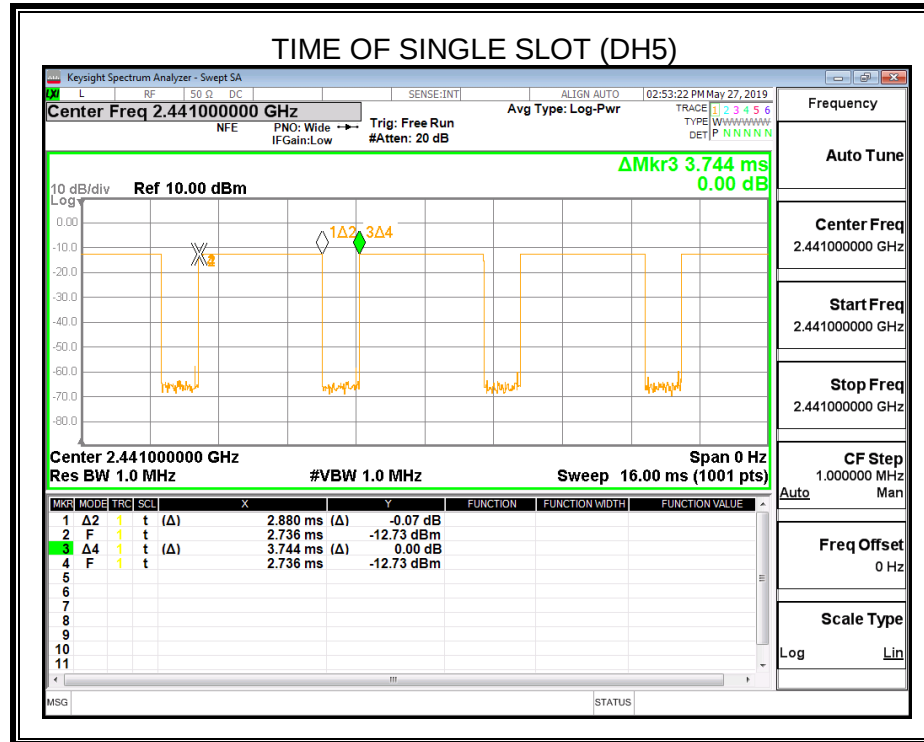


6.6.2. $\pi/4$ -DQPSK MODE

Normal Mode				
Packet	Channel	Burst Width [ms/hop/ch]	Dwell Time [s]	Results
2DH1	MCH	0.390	0.1248	PASS
2DH3	MCH	1.640	0.2624	PASS
2DH5	MCH	2.896	0.3089	PASS
AFH Mode				
2DH1	MCH	0.390	0.0624	PASS
2DH3	MCH	1.640	0.1312	PASS
2DH5	MCH	2.896	0.15445	PASS

Test Graph

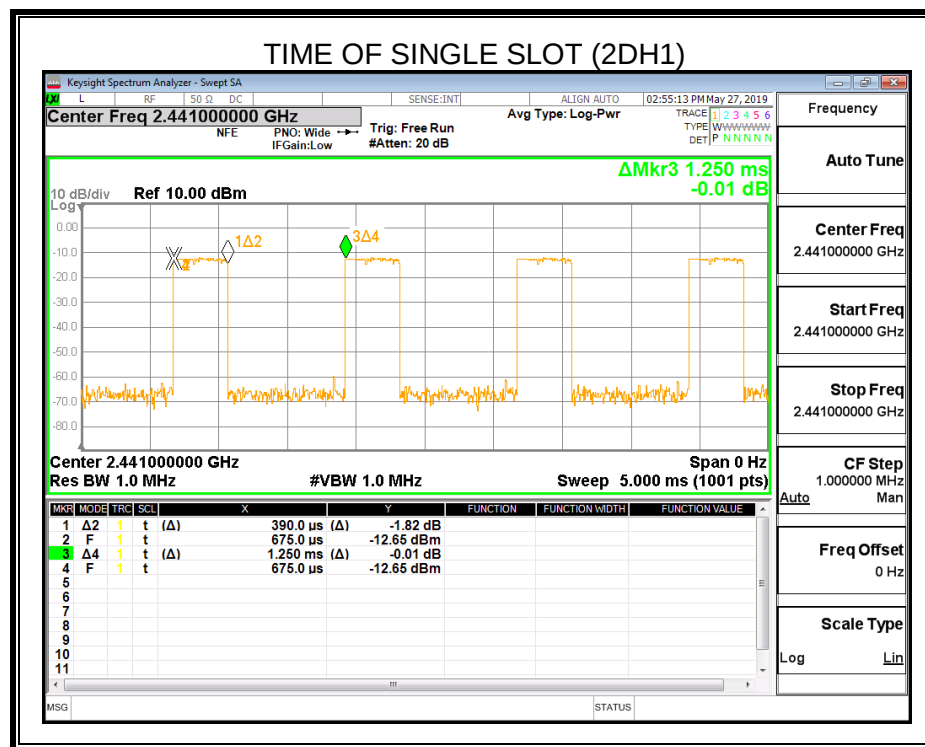

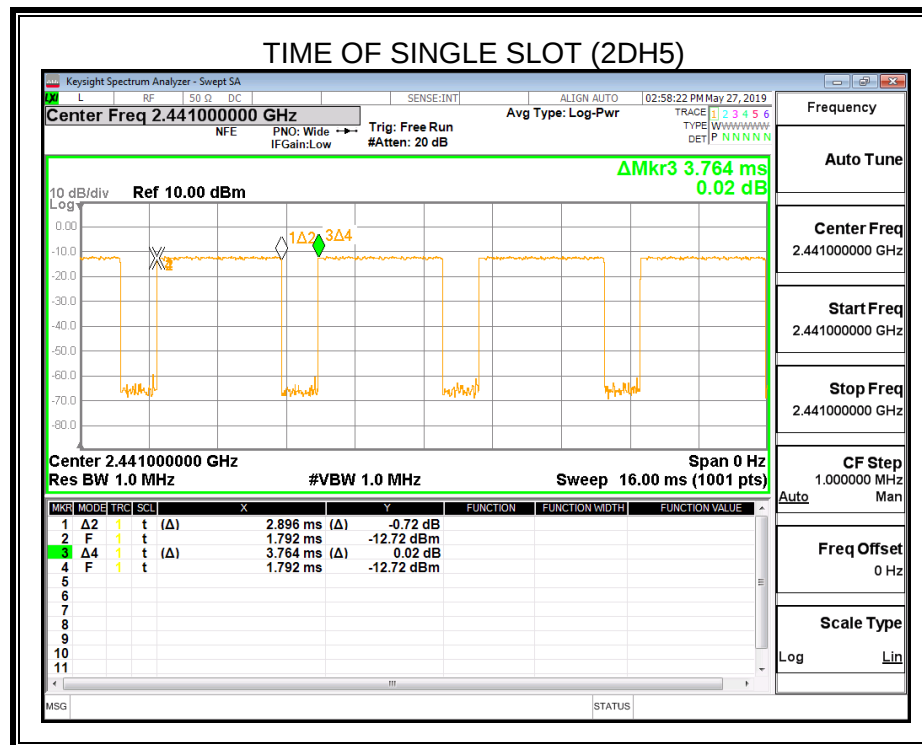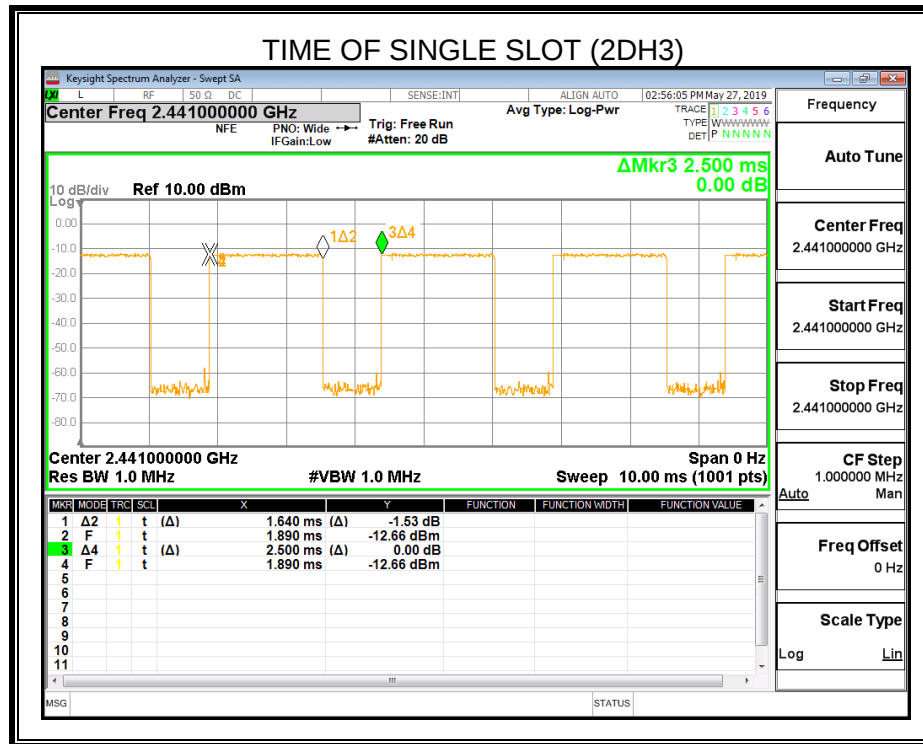



6.7. CONDUCTED SPURIOUS EMISSION

LIMITS

CFR 47 FCC Part15 (15.247) , Subpart C		
Section	Test Item	Limit
CFR 47 FCC §15.247 (d)	Conducted Spurious Emission	at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

TEST PROCEDURE

Please refer to the ANSI C63.10 section 6.10.

For Bandedge use the following settings:


Detector	Peak
RBW	100kHz
VBW	300kHz
Span	wide enough to fully capture the emission being measured
Trace	Max hold
Sweep time	Auto couple.

For Spurious Emission use the following settings:

Detector	Peak
RBW	100kHz
VBW	300kHz
Span	wide enough to fully capture the emission being measured
Trace	Max hold
Sweep time	Auto couple.

Use the peak marker function to determine the maximum amplitude level.

TEST SETUP



TEST ENVIRONMENT


Temperature	23.4°C	Relative Humidity	60%
Atmosphere Pressure	101kPa	Test Voltage	AC120V,60Hz




RESULTS

6.7.1. GFSK MODE

LOW CH BANDEDGE

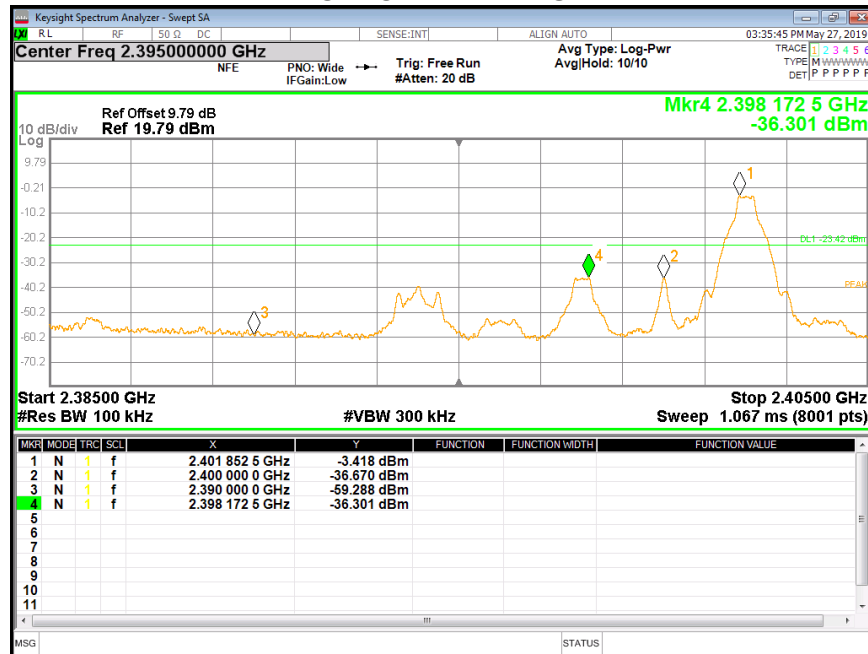


LOW CH SPURIOUS REFERENCE

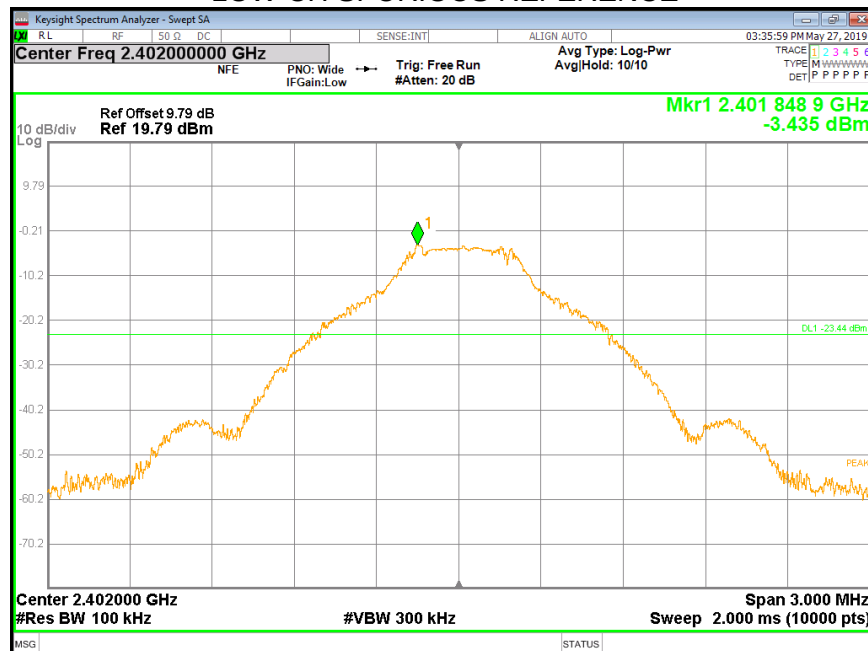





LOW CH SPURIOUS 30MHz ~ 10GHz

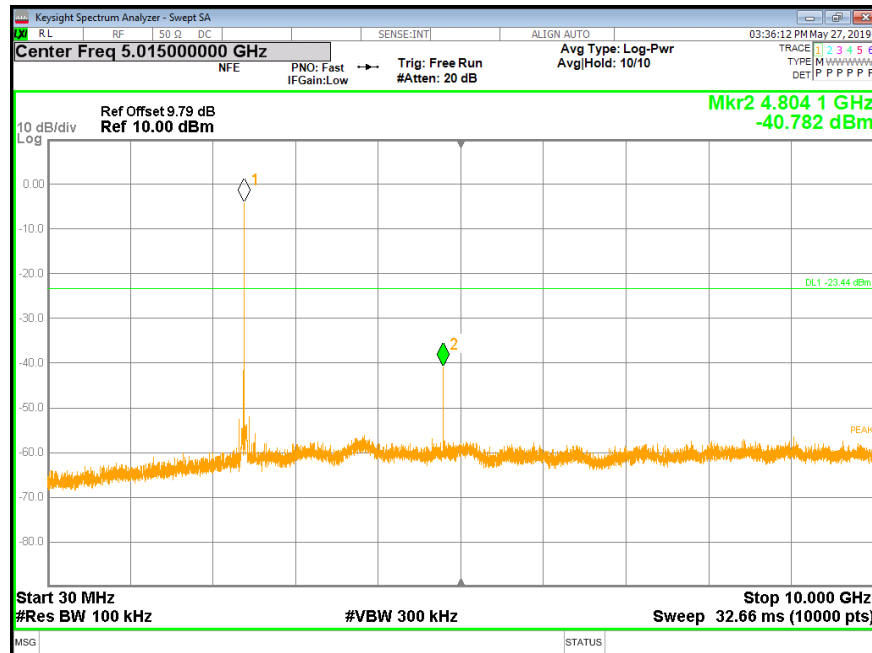


LOW CH SPURIOUS 10GHz ~ 26GHz

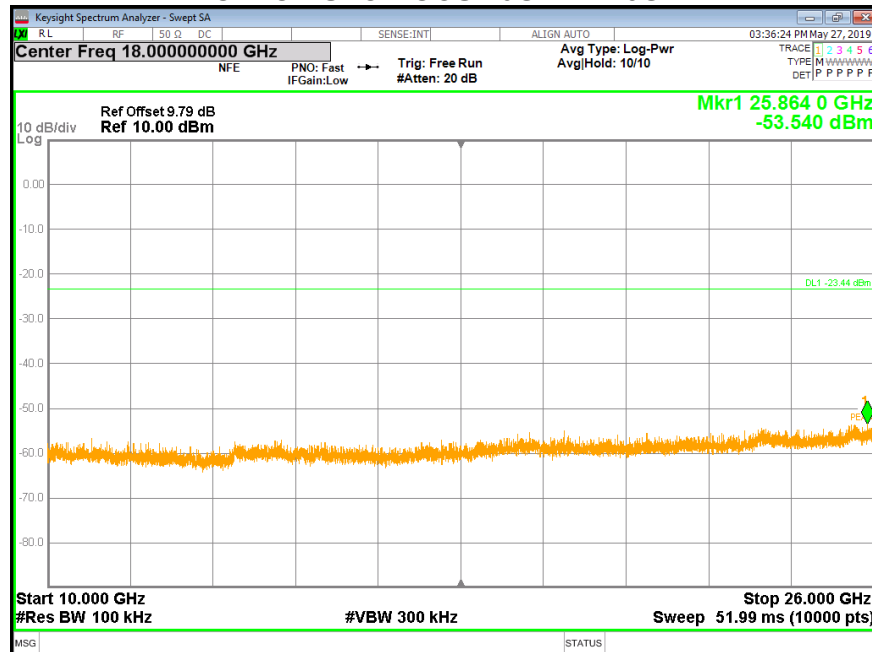

MID CH SPURIOUS REFERENCE

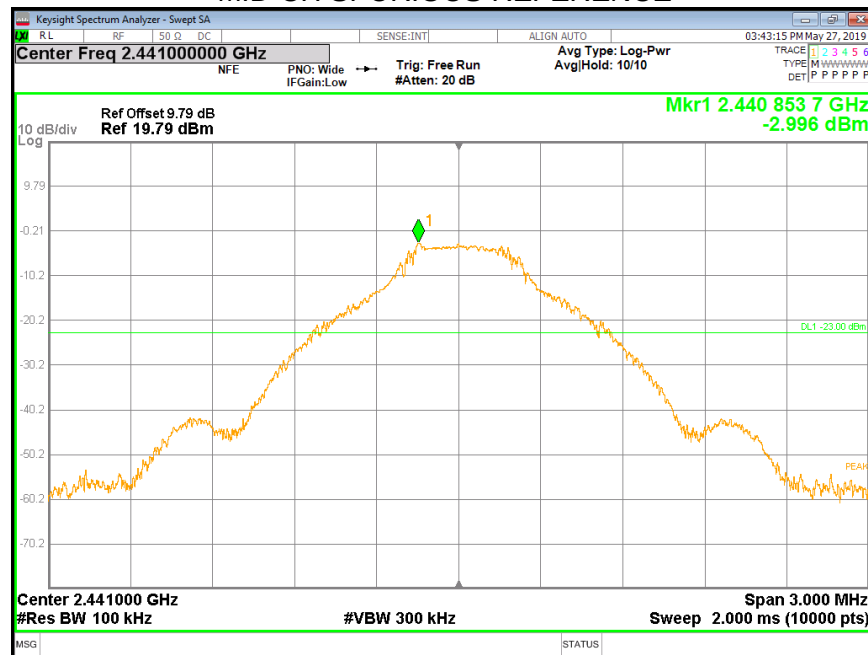


MID CH SPURIOUS 30MHz ~ 10GHz

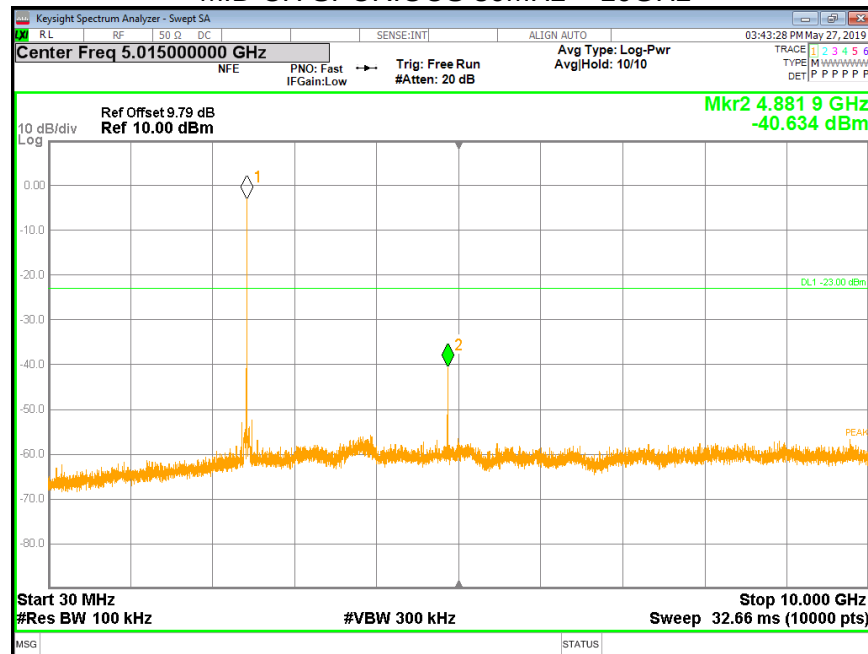





MID CH SPURIOUS 10GHz ~ 26GHz

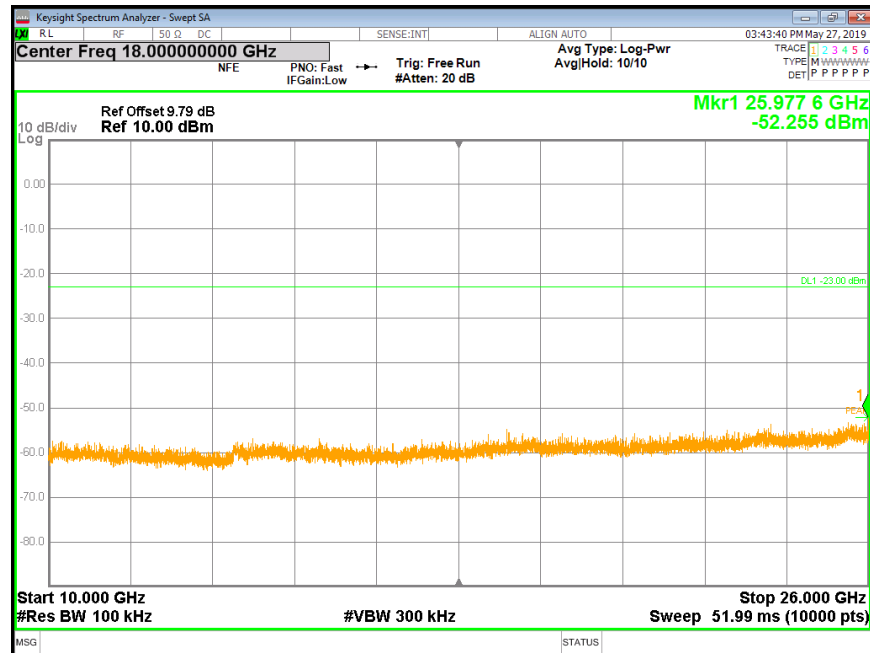


HIGH CH BANDEDGE

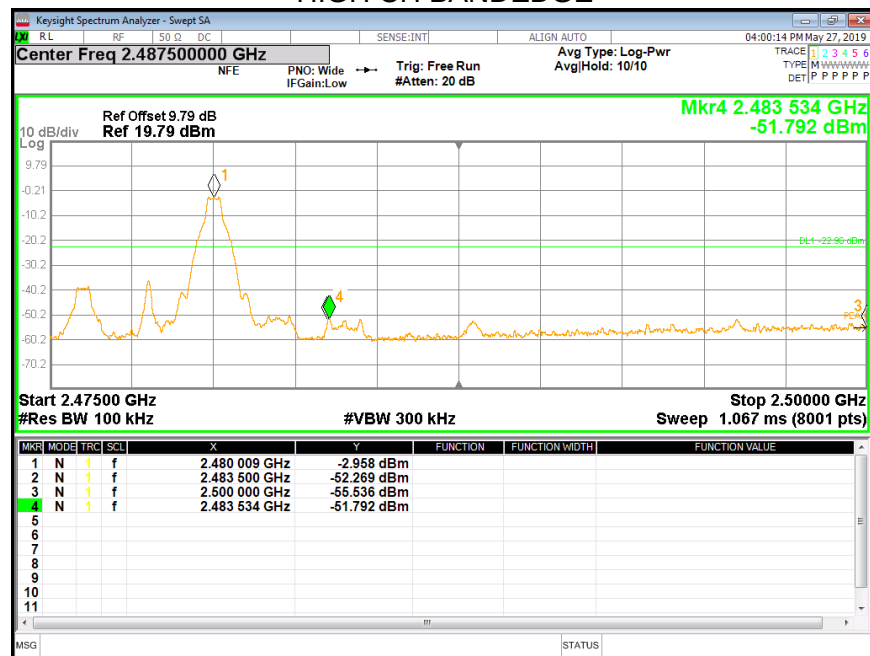

HIGH CH SPURIOUS REFERENCE

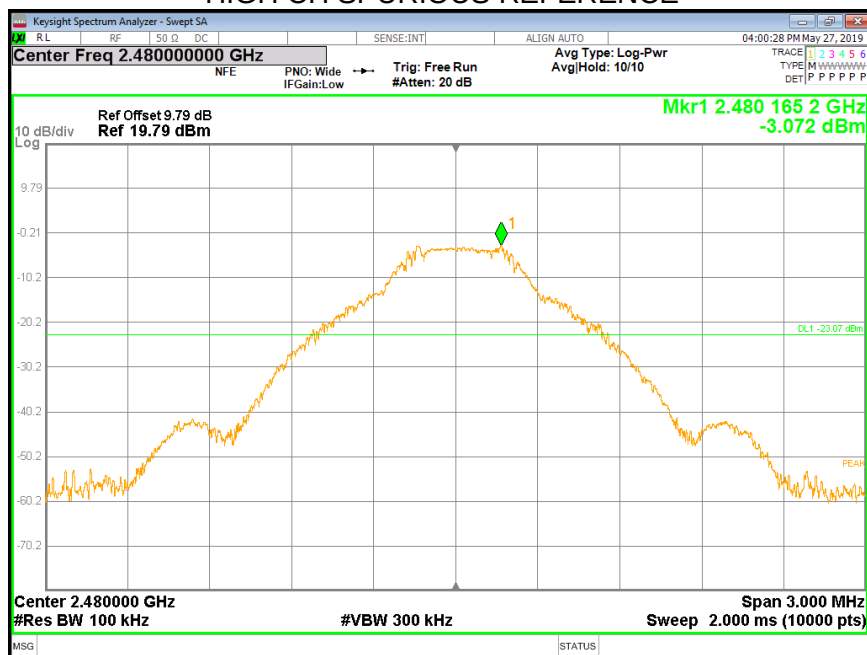


HIGH CH SPURIOUS 30MHz ~ 10GHz

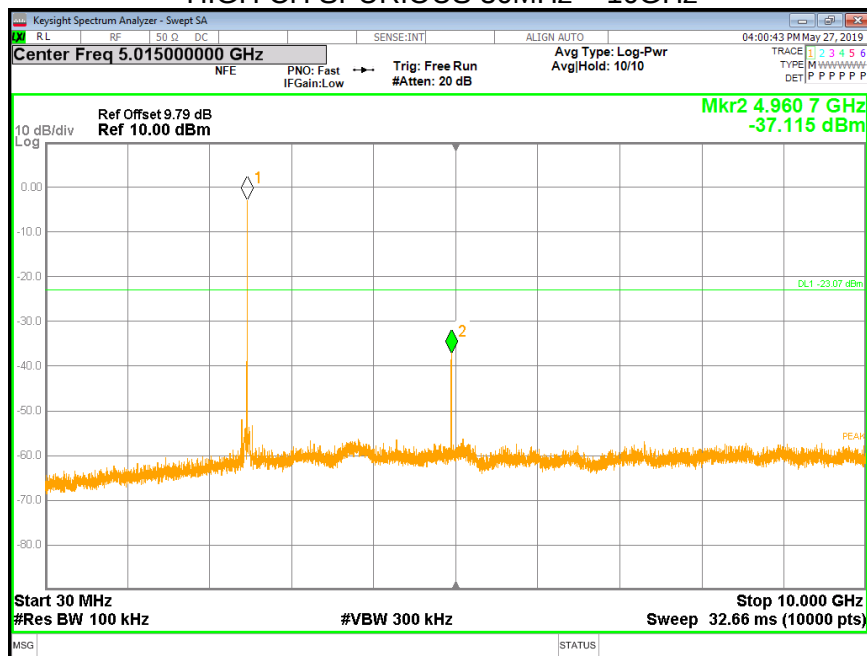




HIGH CH SPURIOUS 10GHz ~ 26GHz

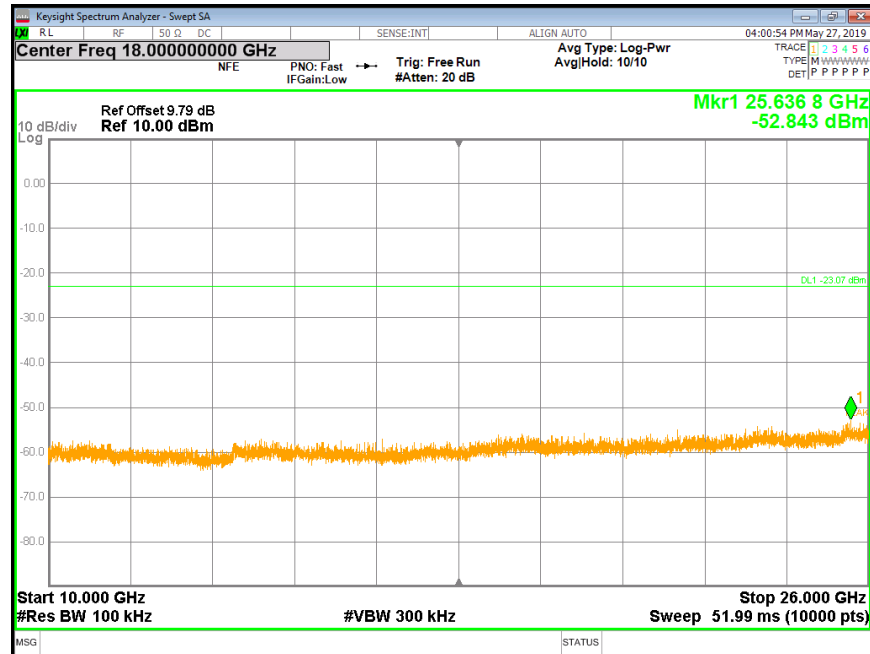




6.7.2. $\pi/4$ -DQPSK MODE

LOW CH BANDEDGE

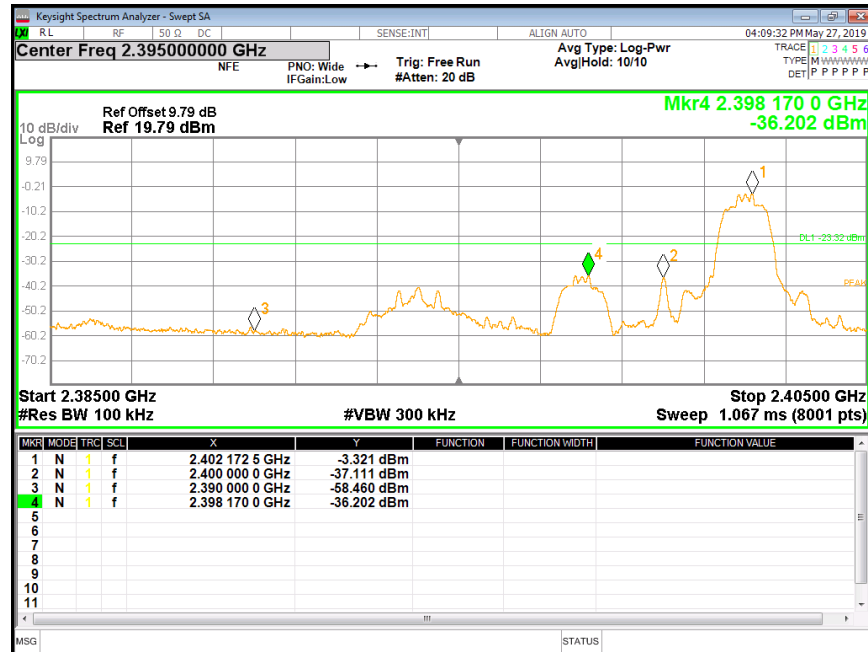


LOW CH SPURIOUS REFERENCE

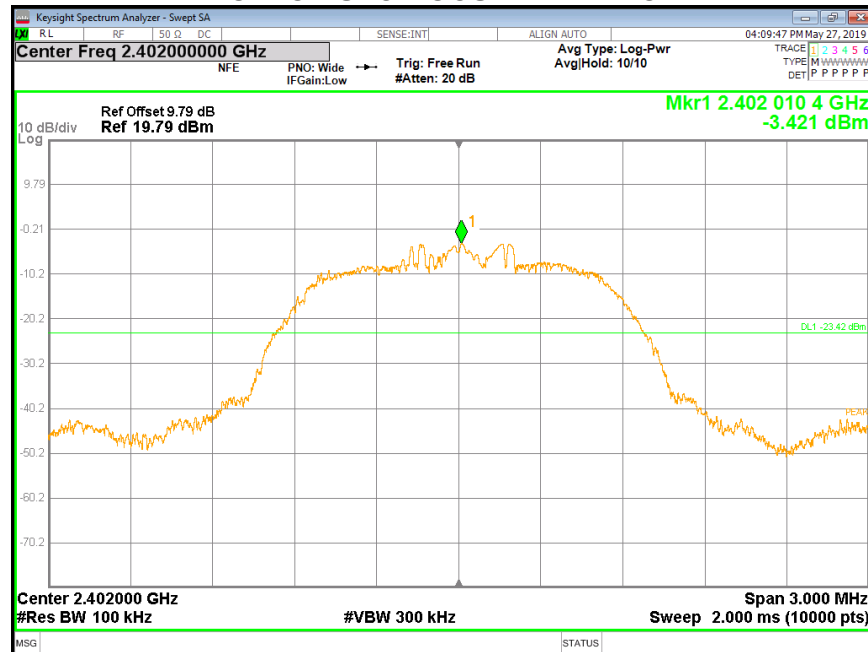




LOW CH SPURIOUS 30MHz ~ 10GHz

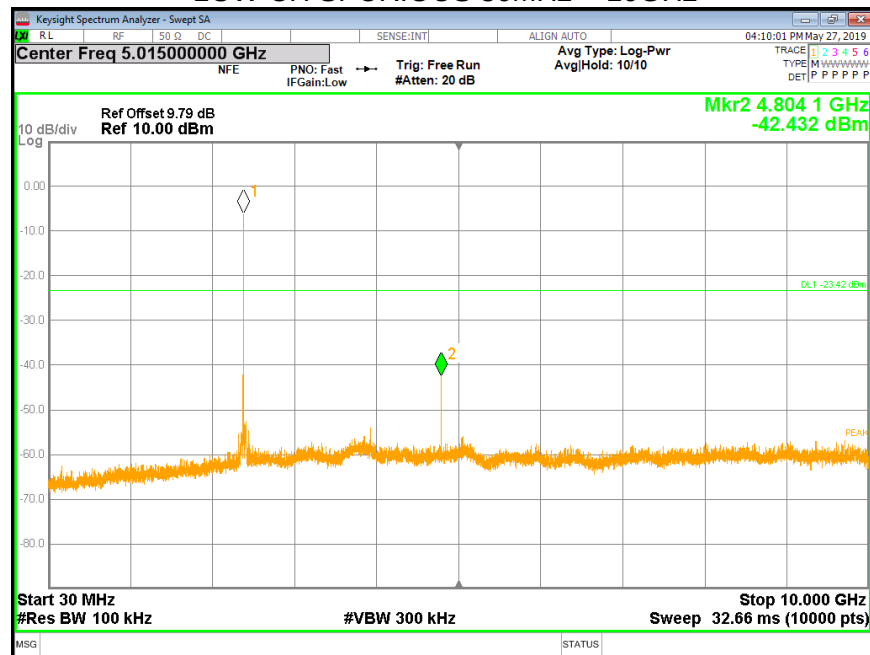


LOW CH SPURIOUS 10GHz ~ 26GHz

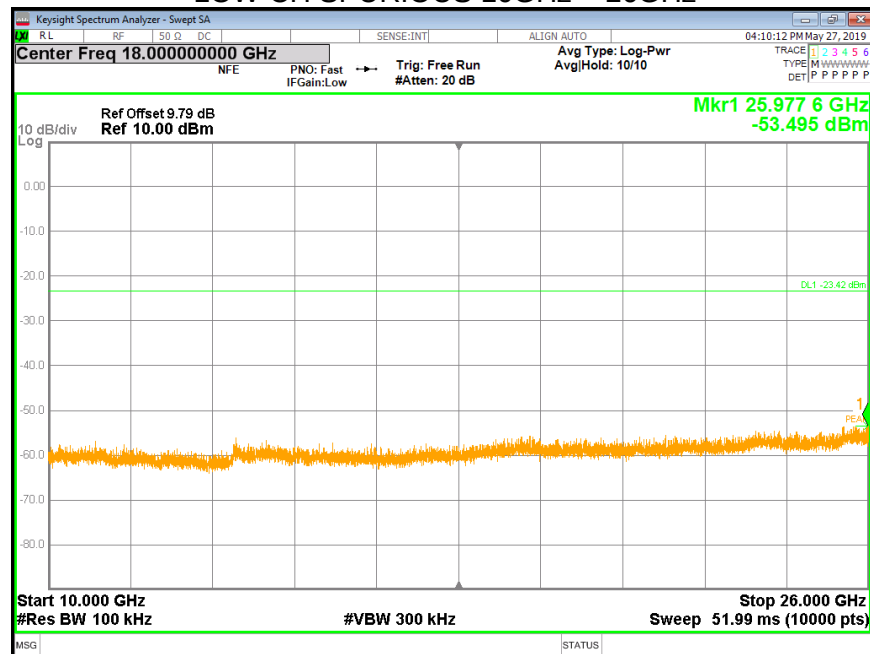




MID CH SPURIOUS REFERENCE

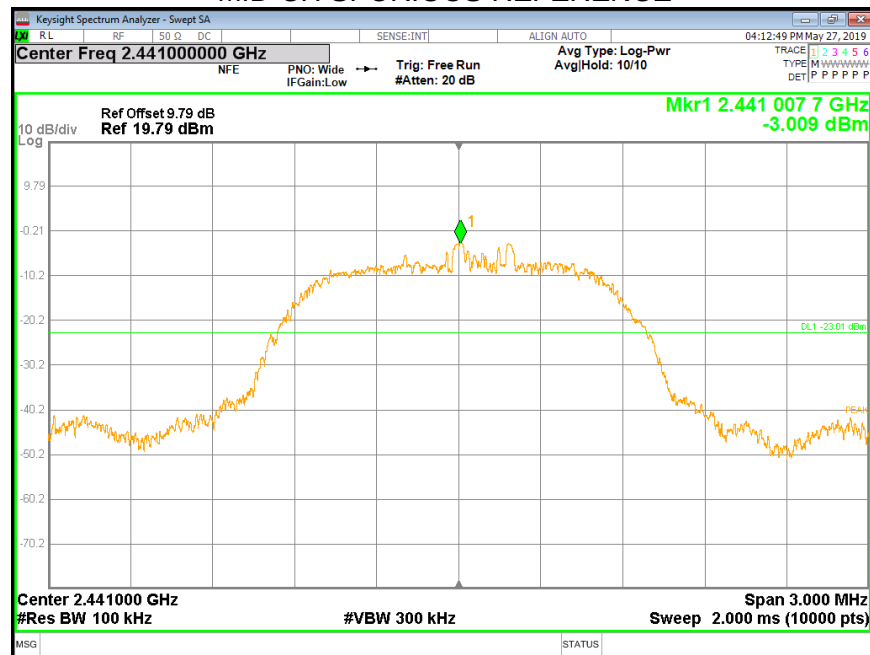


MID CH SPURIOUS 30MHz ~ 10GHz

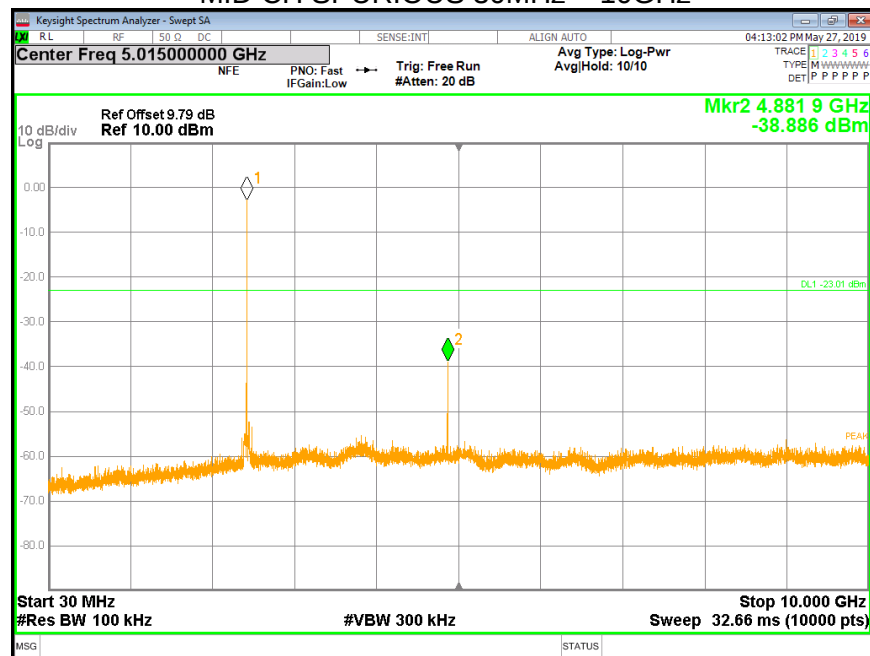




MID CH SPURIOUS 10GHz ~ 26GHz

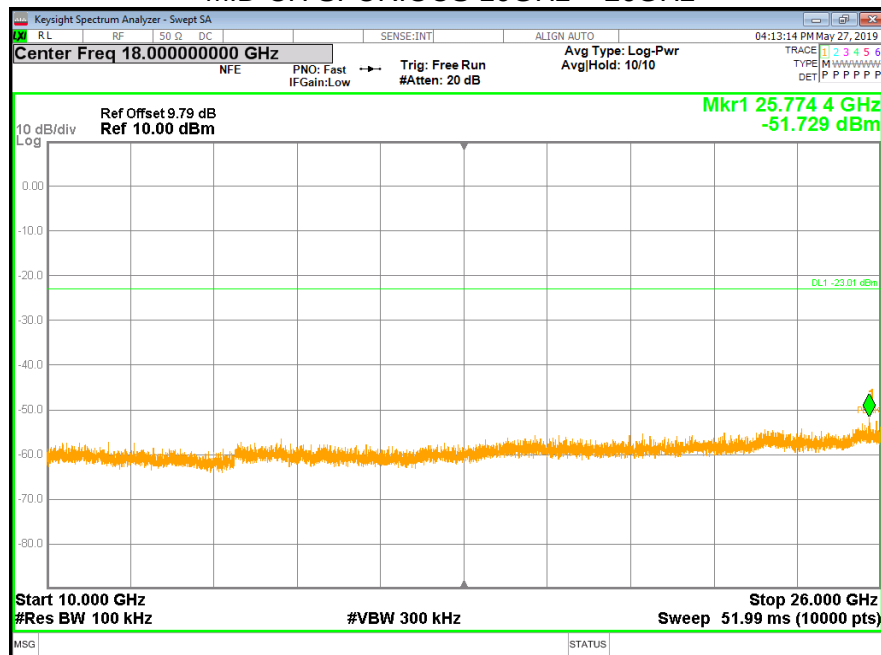


HIGH CH BANDEDGE

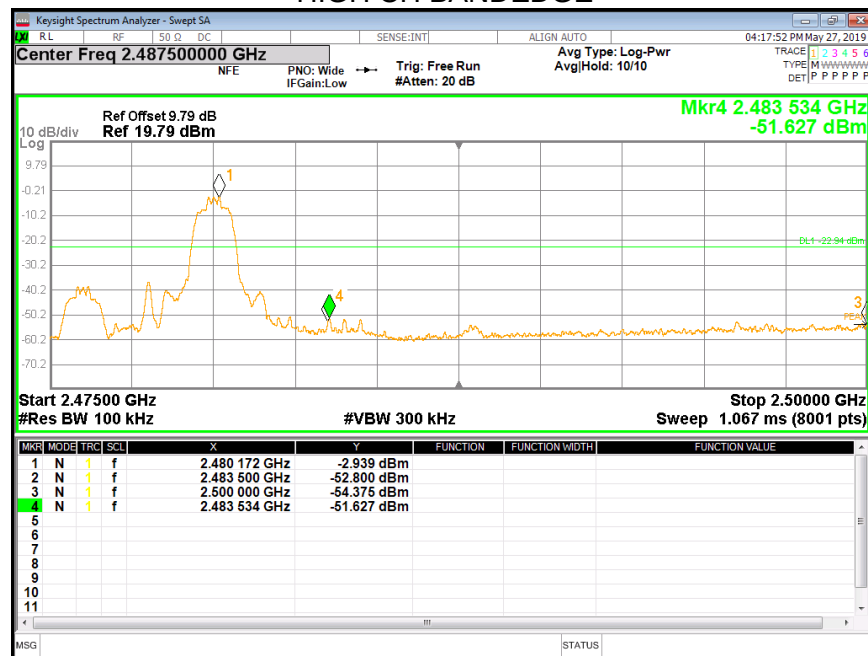




HIGH CH SPURIOUS REFERENCE

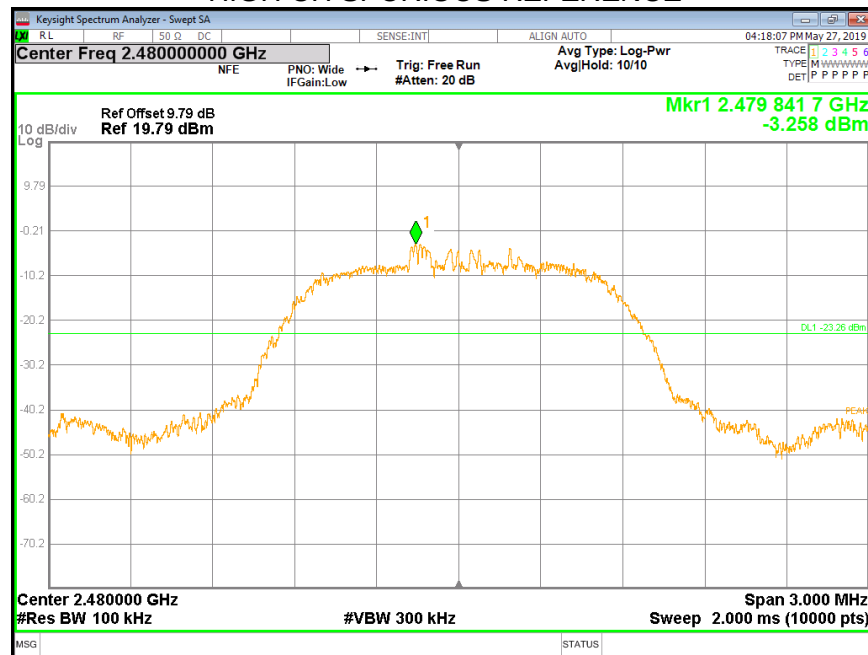


HIGH CH SPURIOUS 30MHz ~ 10GHz

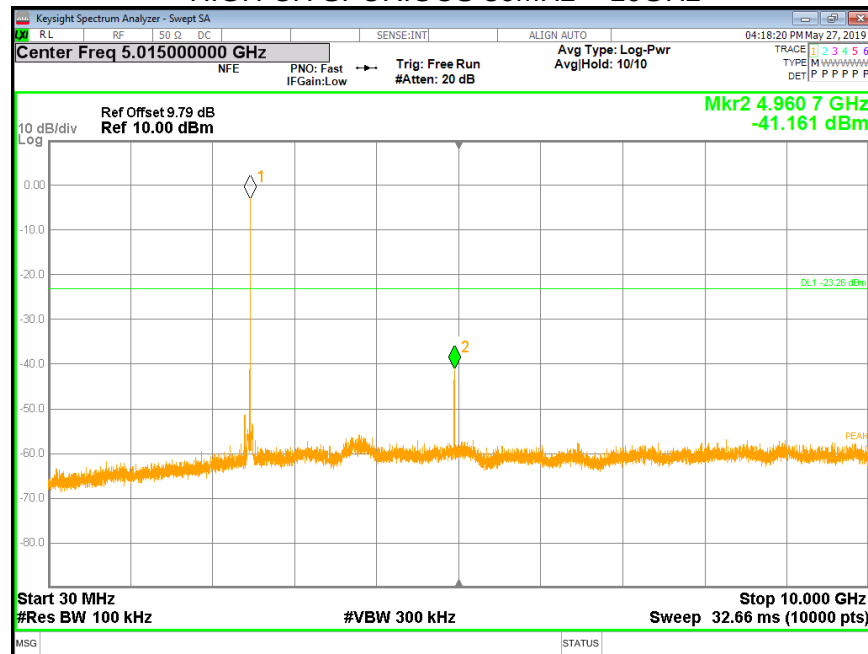



HIGH CH SPURIOUS 10GHz ~ 26GHz

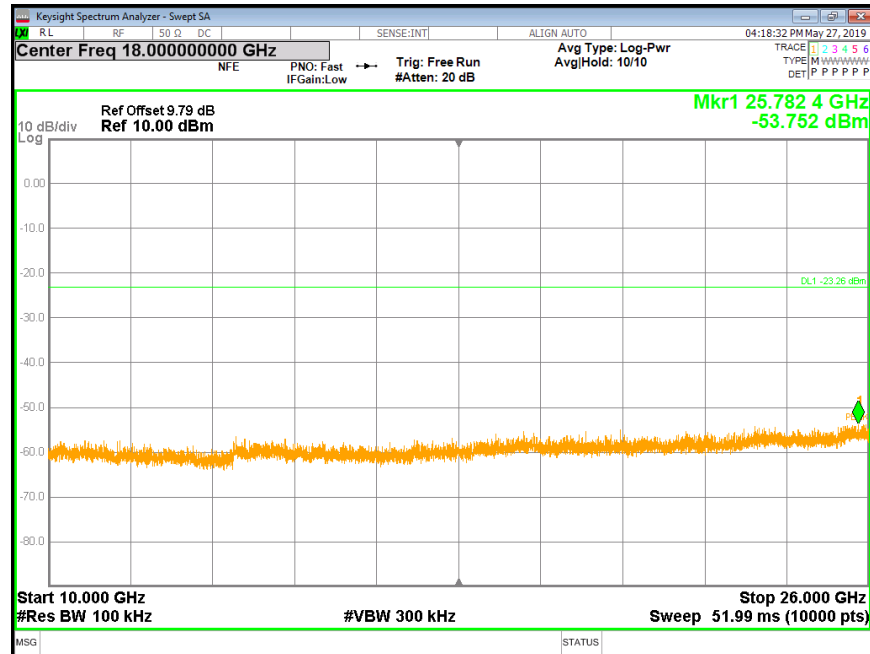



7. RADIATED TEST RESULTS

7.1. LIMITS AND PROCEDURE

LIMITS

Please refer to CFR 47 FCC §15.205 and §15.209

Radiation Disturbance Test Limit for FCC (Class B)(9kHz-1GHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

Note: 1) At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

(2) At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). This paragraph (f) shall not apply to Access BPL devices operating below 30 MHz.



Radiation Disturbance Test Limit for FCC (Above 1G)

Frequency (MHz)	dB(uV/m) (at 3 meters)	
	Peak	Average
Above 1000	74	54

Restricted bands of operation


MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6c

TEST SETUP AND PROCEDURE

Below 30MHz

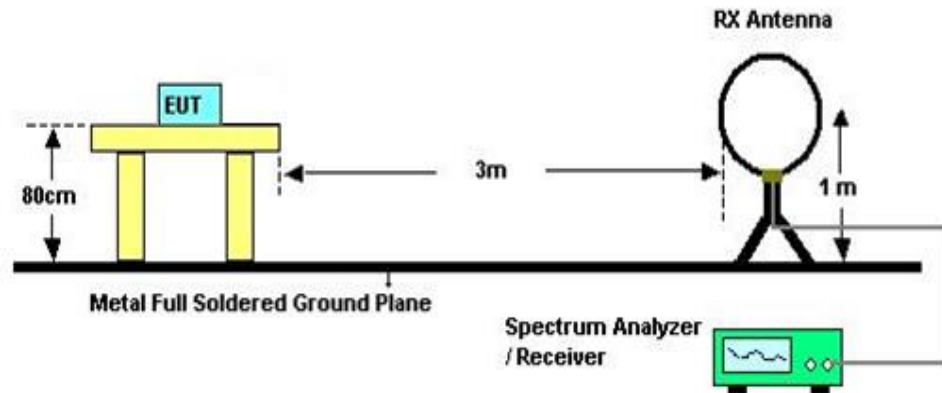


The setting of the spectrum analyser

RBW	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)
VBW	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)
Sweep	Auto
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80cm meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30m open area test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

Below 1G and above 30MHz

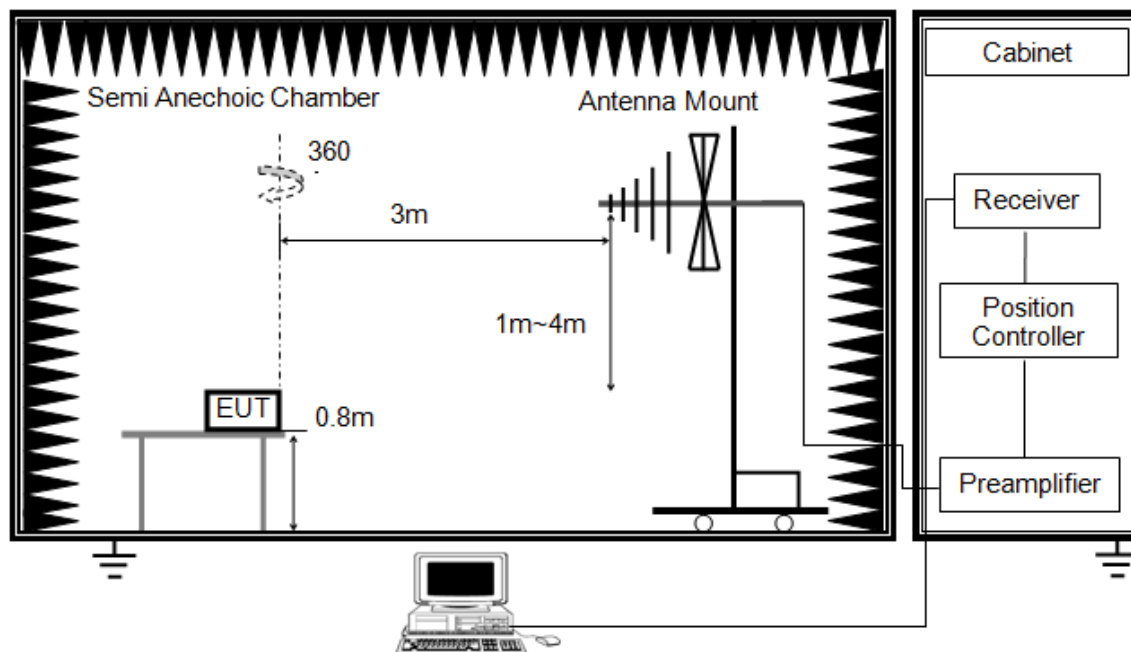


The setting of the spectrum analyser

RBW	120K
VBW	300K
Sweep	Auto
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.


Above 1G

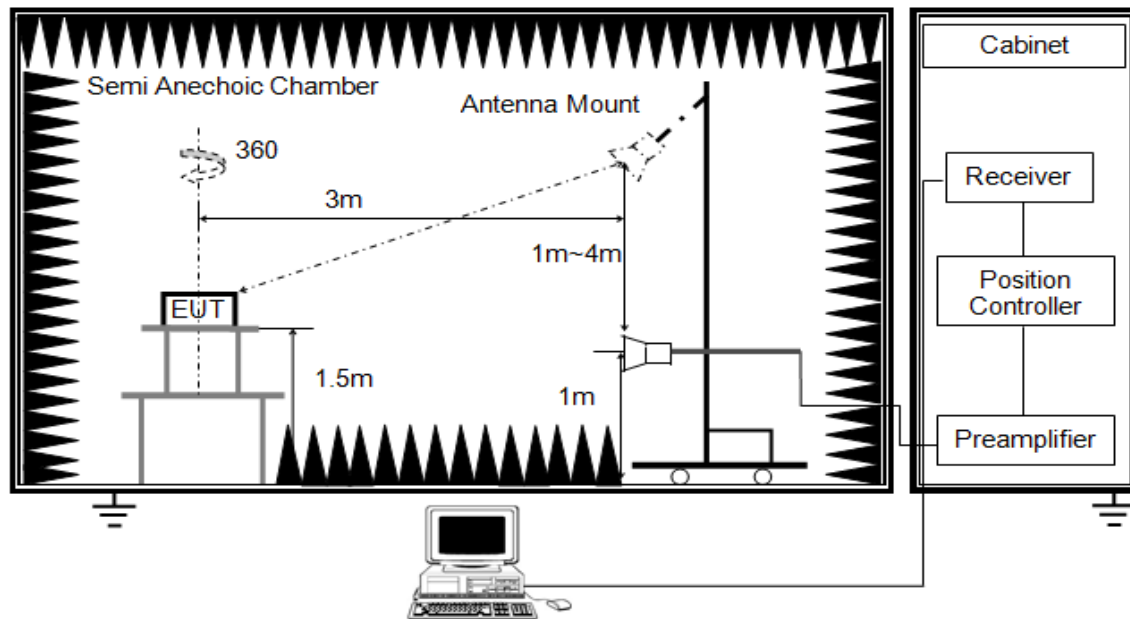

RBW	1M
VBW	PEAK: 3M AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector. For the Duty Cycle please refer to clause 6.1.ON TIME AND DUTY CYCLE.

X axis, Y axis, Z axis positions:

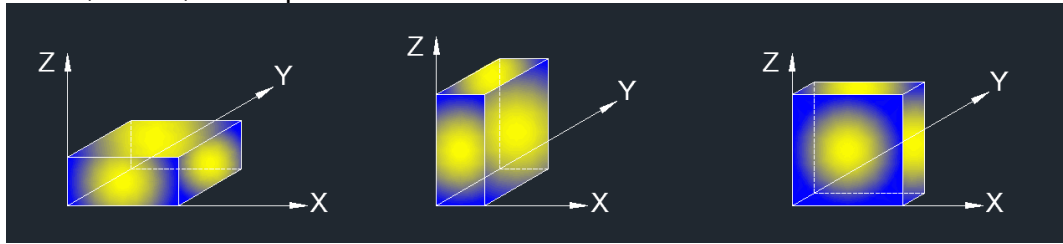

Note: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

TEST ENVIRONMENT

Temperature	23.4°C	Relative Humidity	60%
Atmosphere Pressure	101kPa	Test Voltage	AC120V,60Hz


RESULTS



7.2. RESTRICTED BANDEDGE

7.2.1. GFSK MODE

RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

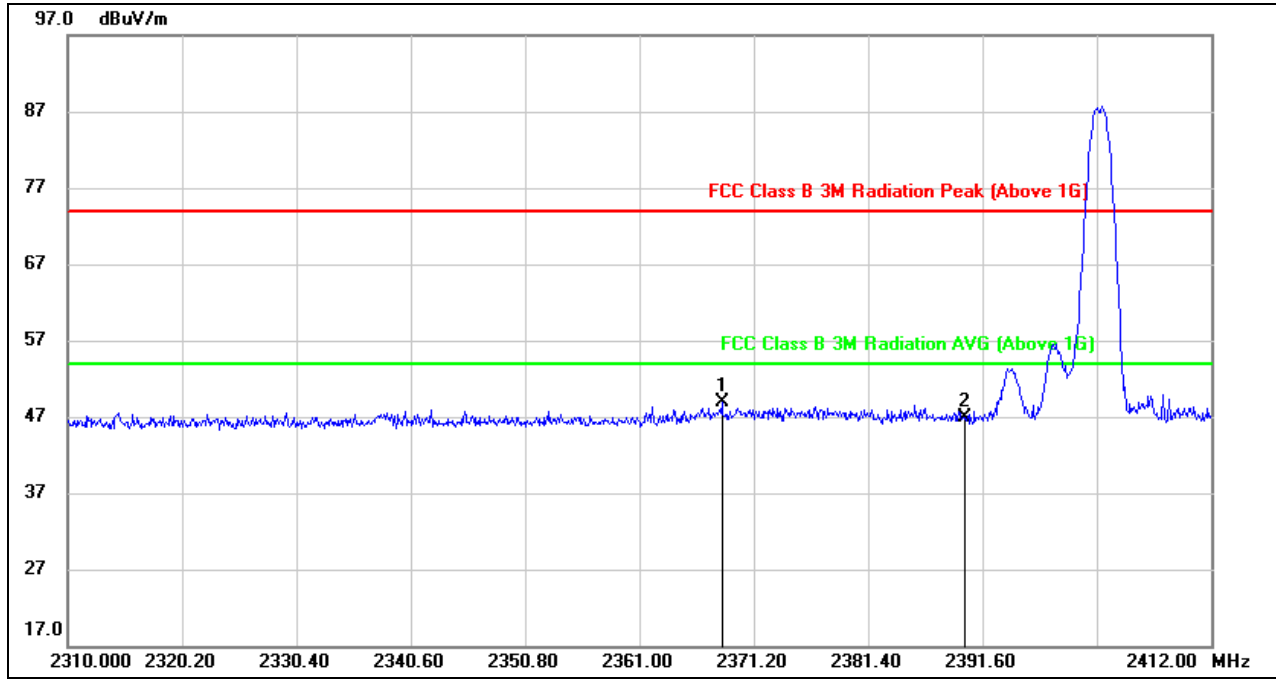


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2368.344	16.01	32.87	48.88	74.00	-25.12	peak
2	2390.000	13.88	32.94	46.82	74.00	-27.18	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.




RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

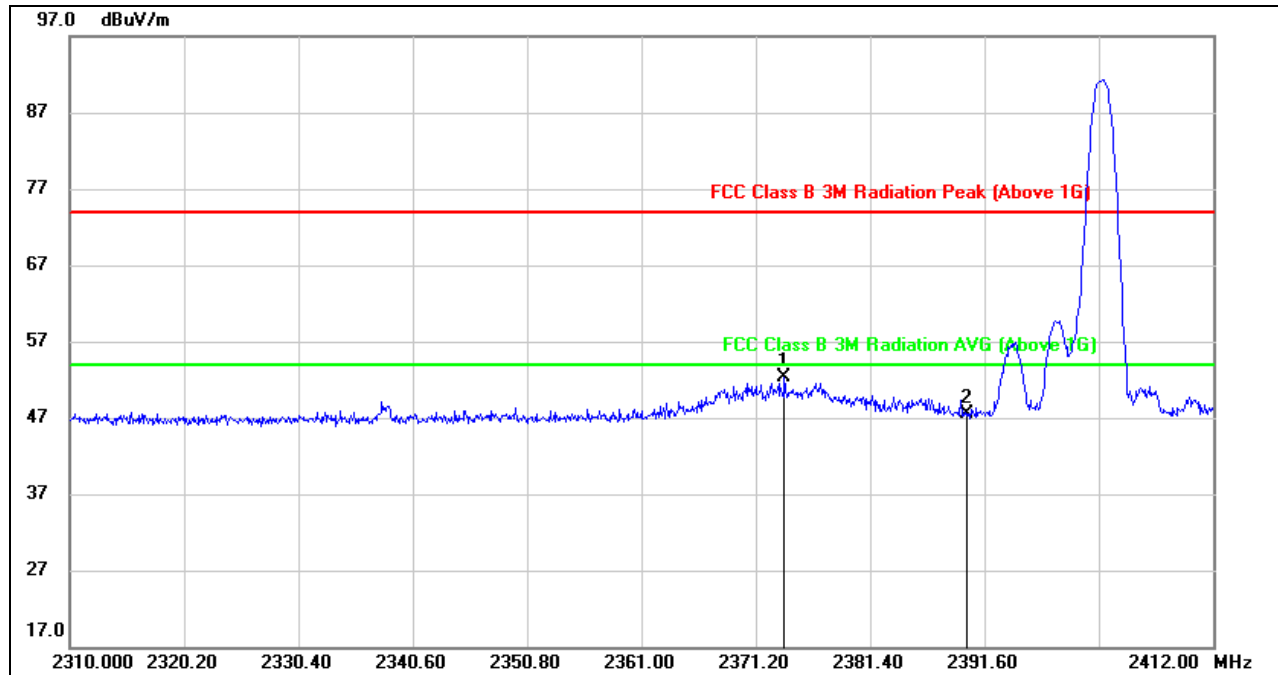


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2373.750	19.35	32.89	52.24	74.00	-21.76	peak
2	2390.000	14.62	32.94	47.56	74.00	-26.44	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

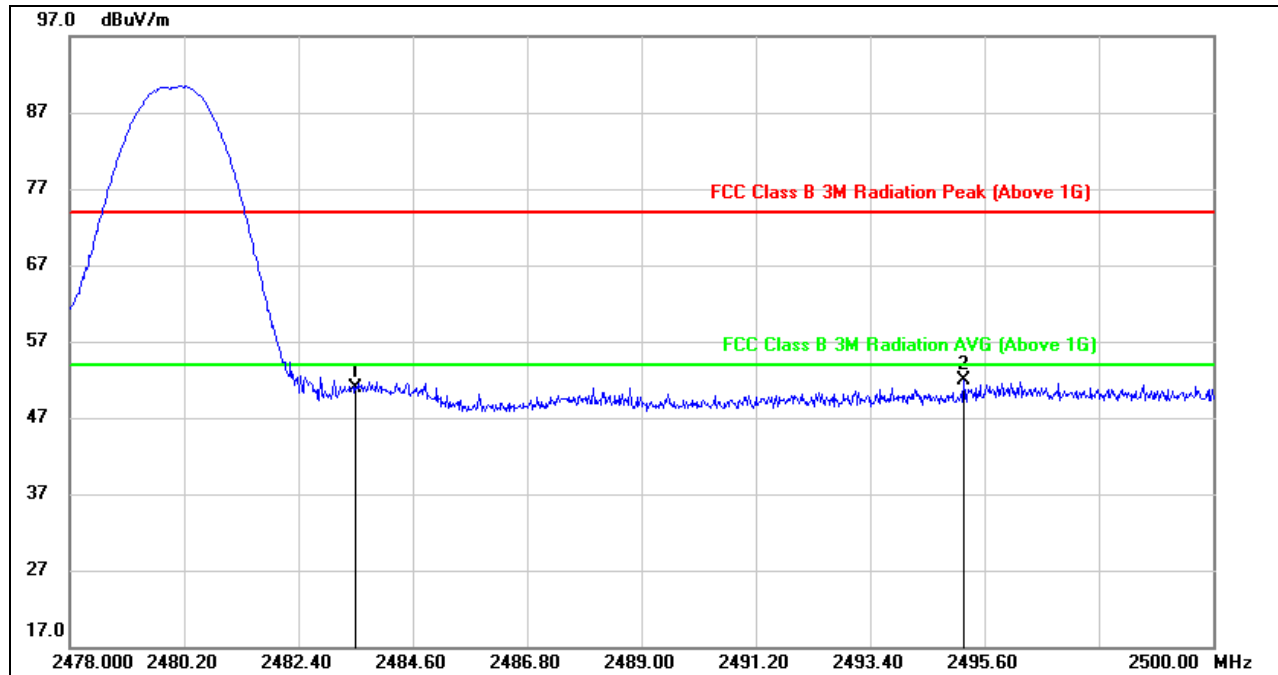**RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	17.25	33.58	50.83	74.00	-23.17	peak
2	2495.204	18.24	33.66	51.90	74.00	-22.10	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

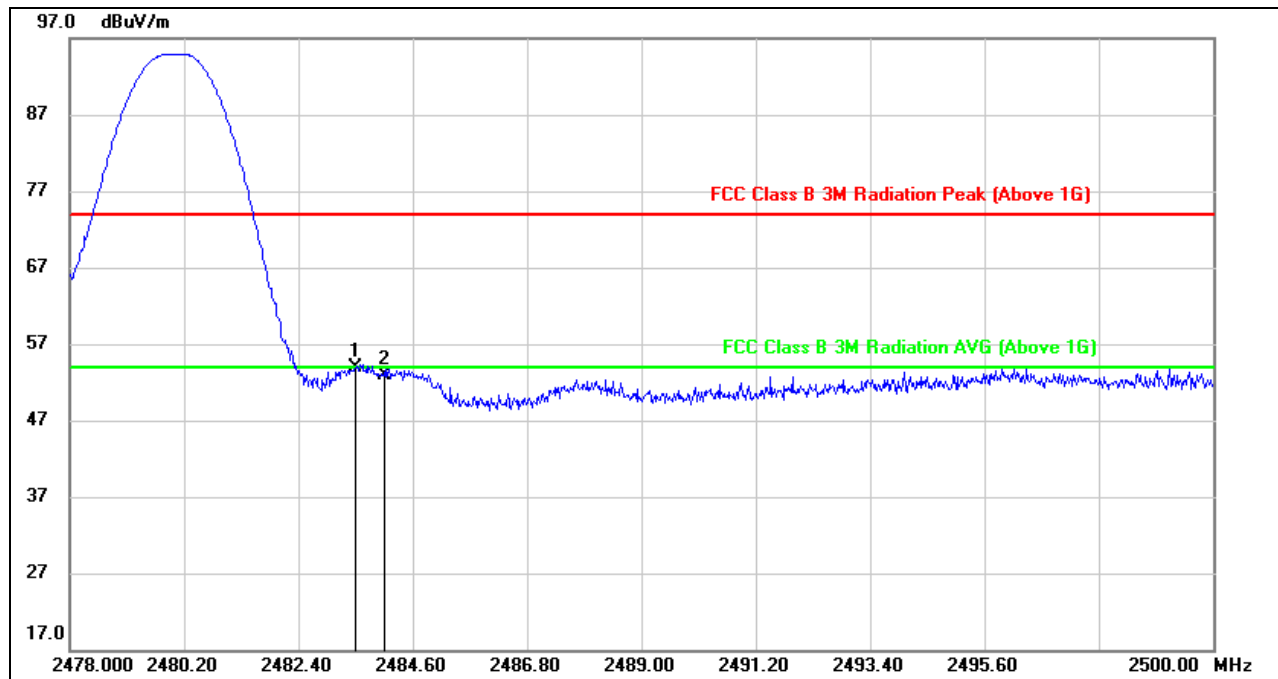
**RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)****PEAK**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	20.23	33.58	53.81	74.00	-20.19	peak
2	2484.050	19.33	33.58	52.91	74.00	-21.09	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



AVG

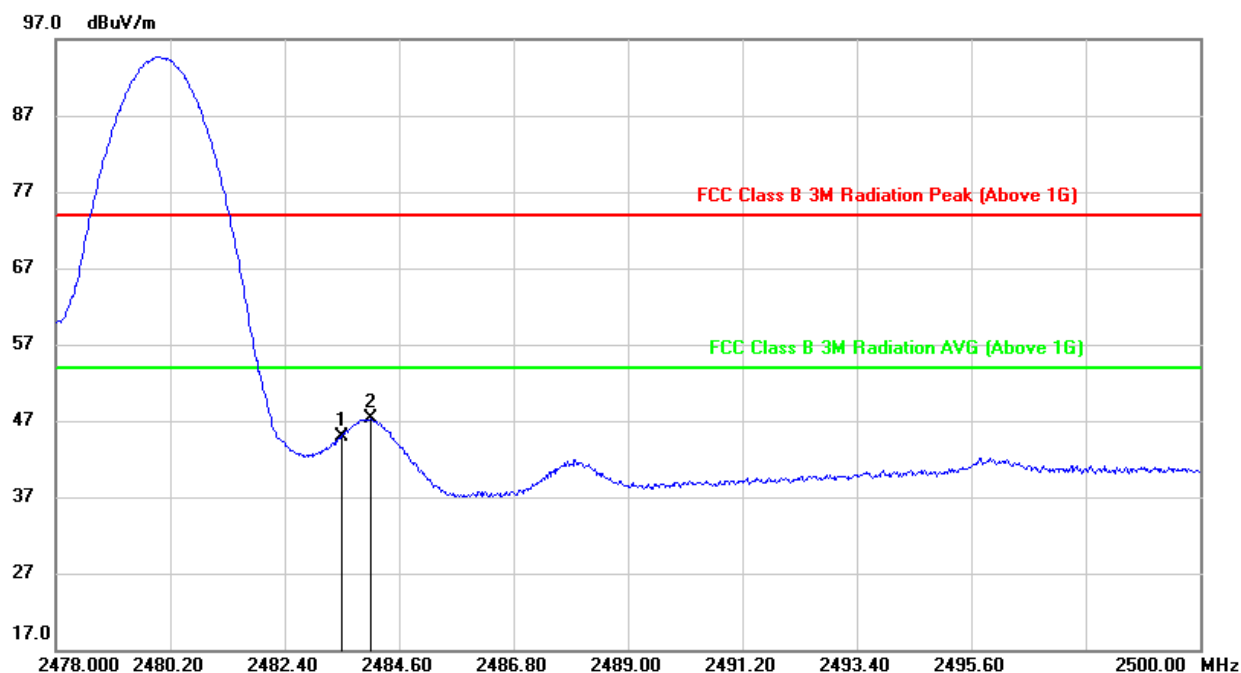


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	11.36	33.58	44.94	54.00	-9.06	AVG
2	2484.050	13.72	33.58	47.30	54.00	-6.70	AVG

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. AVG: VBW=1/Ton where: ton is transmit duration.
5. For transmit duration, please refer to clause 6.1.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

7.2.2. $\pi/4$ -DQPSK MODE

RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

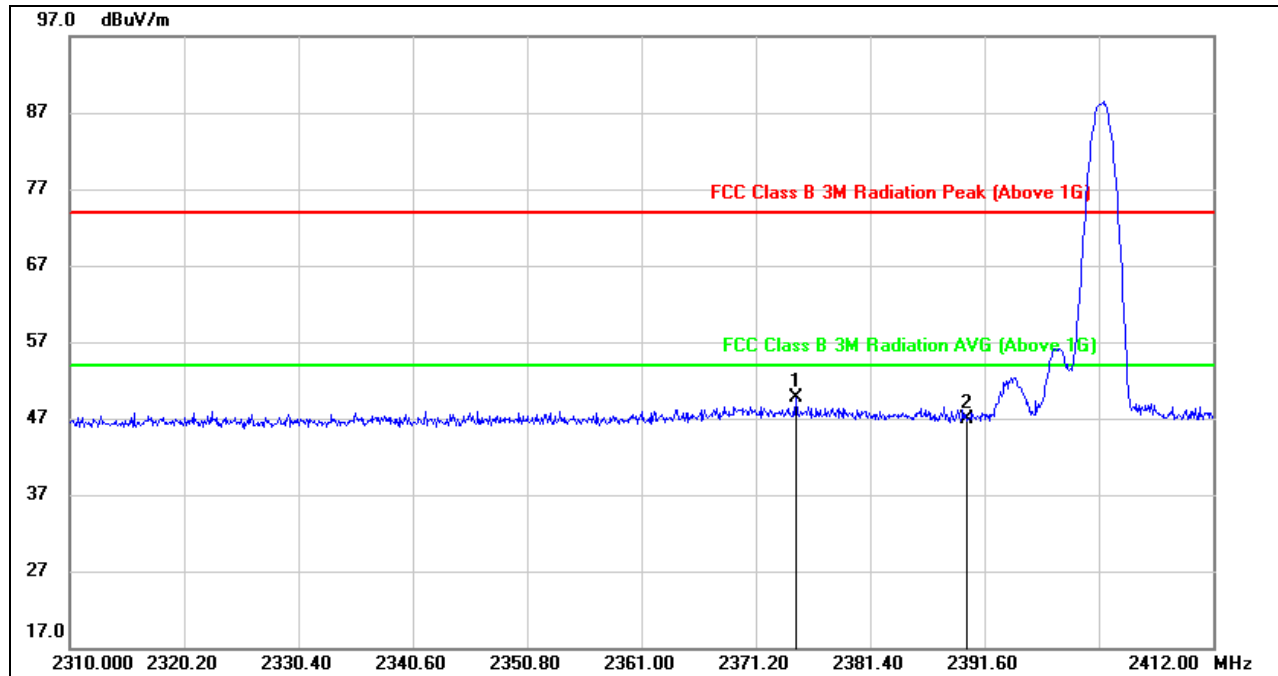


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2374.770	16.83	32.89	49.72	74.00	-24.28	peak
2	2390.000	13.87	32.94	46.81	74.00	-27.19	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

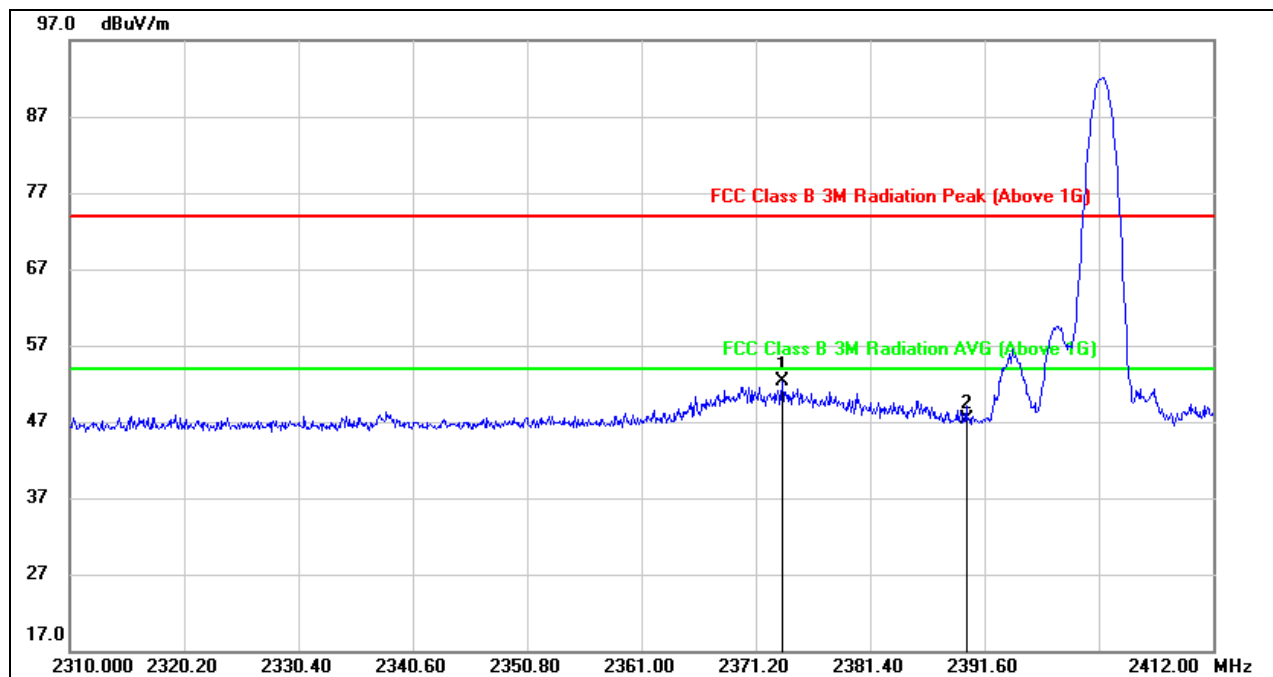


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2373.546	19.34	32.89	52.23	74.00	-21.77	peak
2	2390.000	14.38	32.94	47.32	74.00	-26.68	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

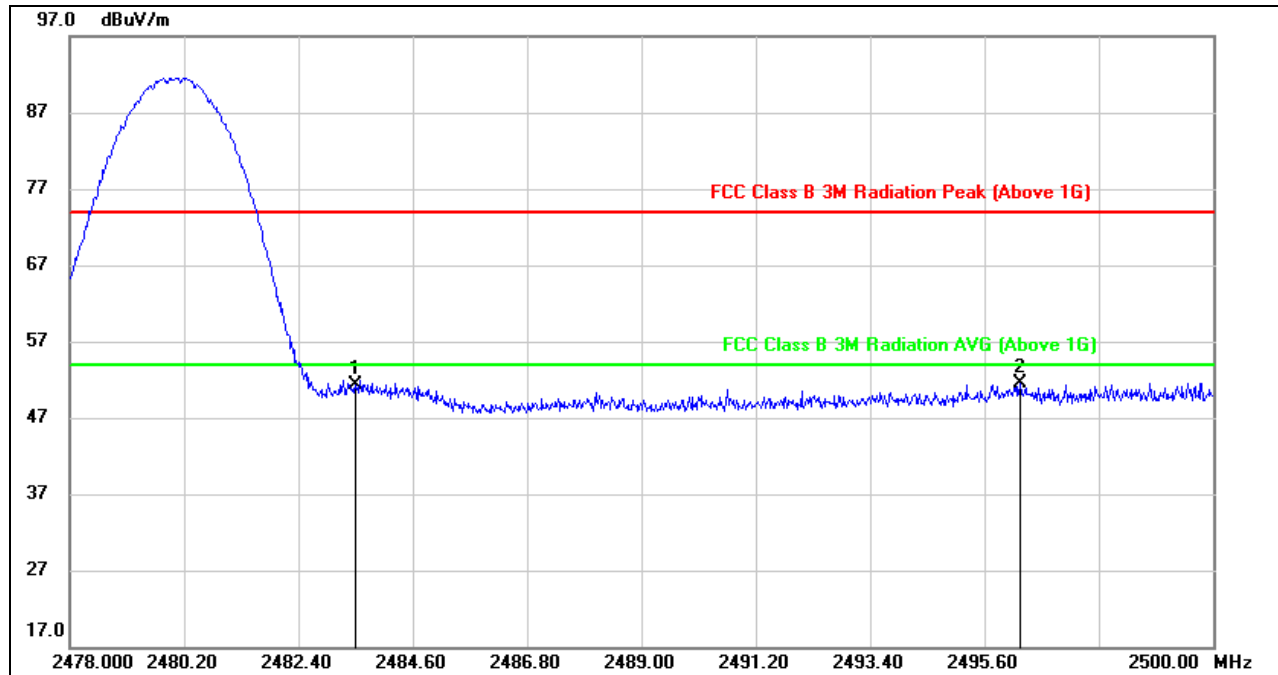


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	17.70	33.58	51.28	74.00	-22.72	peak
2	2496.282	17.75	33.67	51.42	74.00	-22.58	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

PEAK

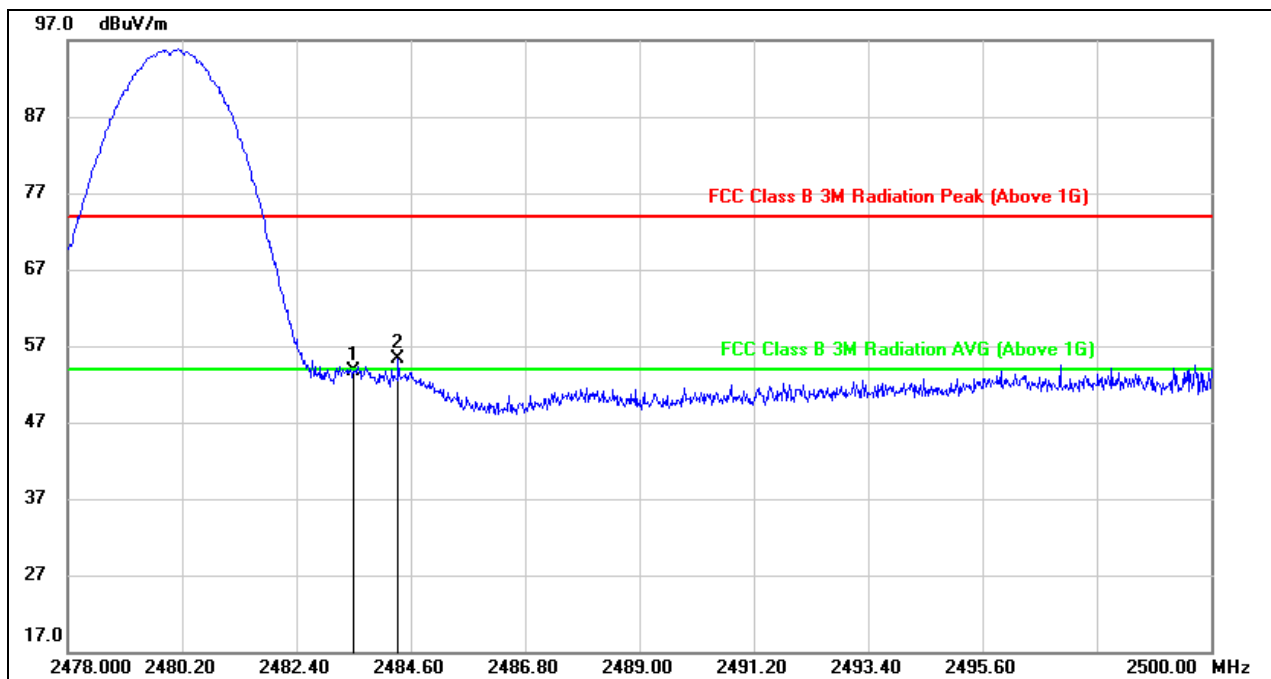


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	20.03	33.58	53.61	74.00	-20.39	peak
2	2484.358	21.64	33.59	55.23	74.00	-18.77	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



AVG

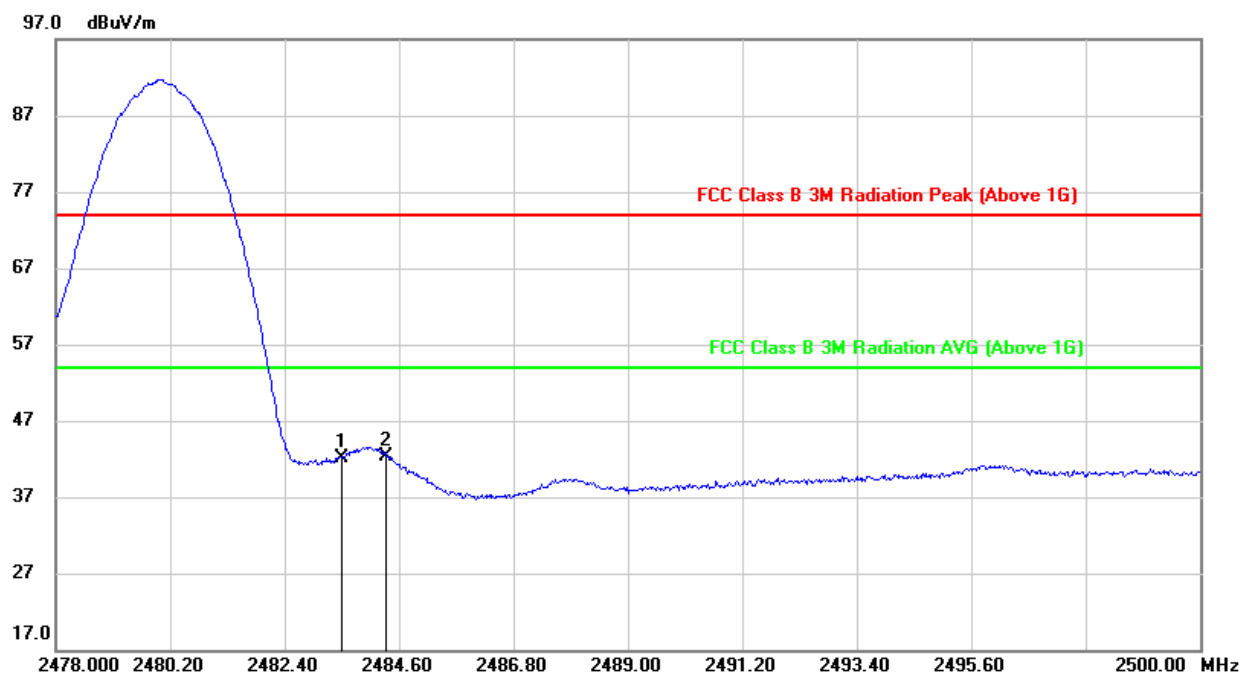

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	8.50	33.58	42.08	54.00	-11.92	AVG
2	2484.358	8.79	33.59	42.38	54.00	-11.62	AVG


Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. AVG: VBW=1/Ton where: ton is transmit duration.
5. For transmit duration, please refer to clause 6.1.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



7.3. SPURIOUS EMISSIONS (1~3GHz)


7.3.1. GFSK MODE

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

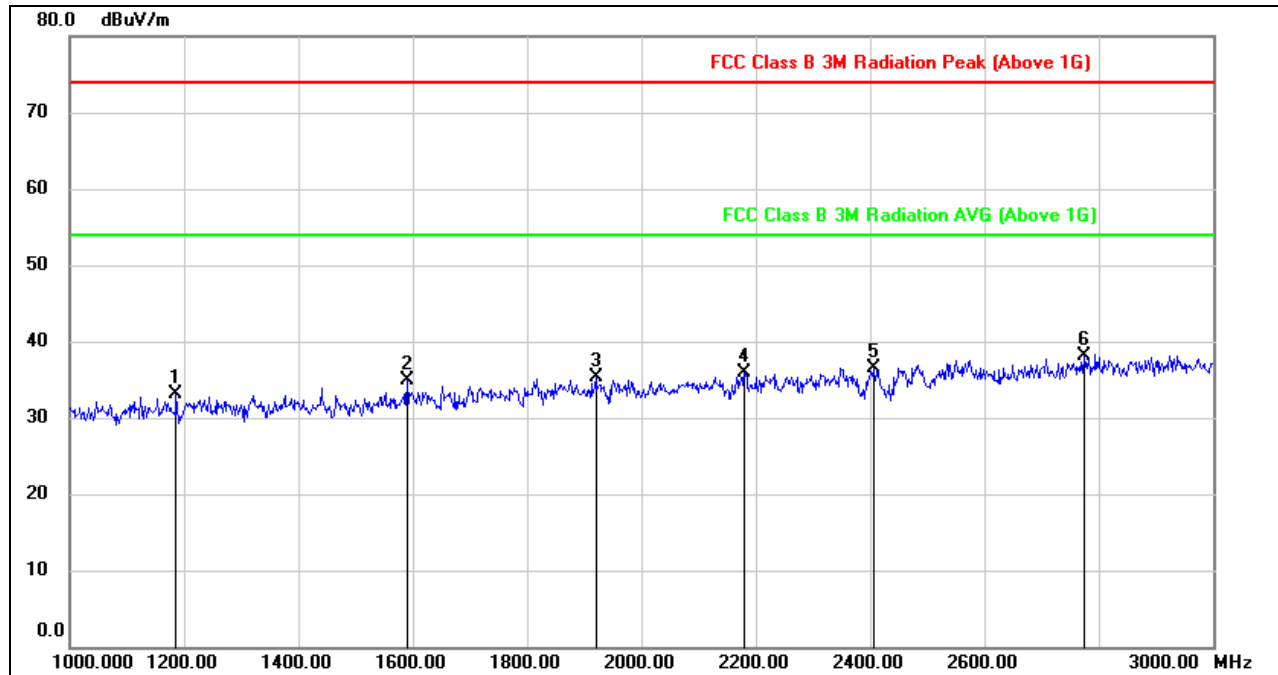

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1186.000	45.51	-12.34	33.17	74.00	-40.83	peak
2	1590.000	45.91	-10.93	34.98	74.00	-39.02	peak
3	1920.000	44.58	-9.36	35.22	74.00	-38.78	peak
4	2180.000	44.07	-8.20	35.87	74.00	-38.13	peak
5	2406.000	43.41	-6.95	36.46	74.00	-37.54	peak
6	2774.000	43.49	-5.46	38.03	74.00	-35.97	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in then spurious frequency bands and the authorized band was not corrected for BRF losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

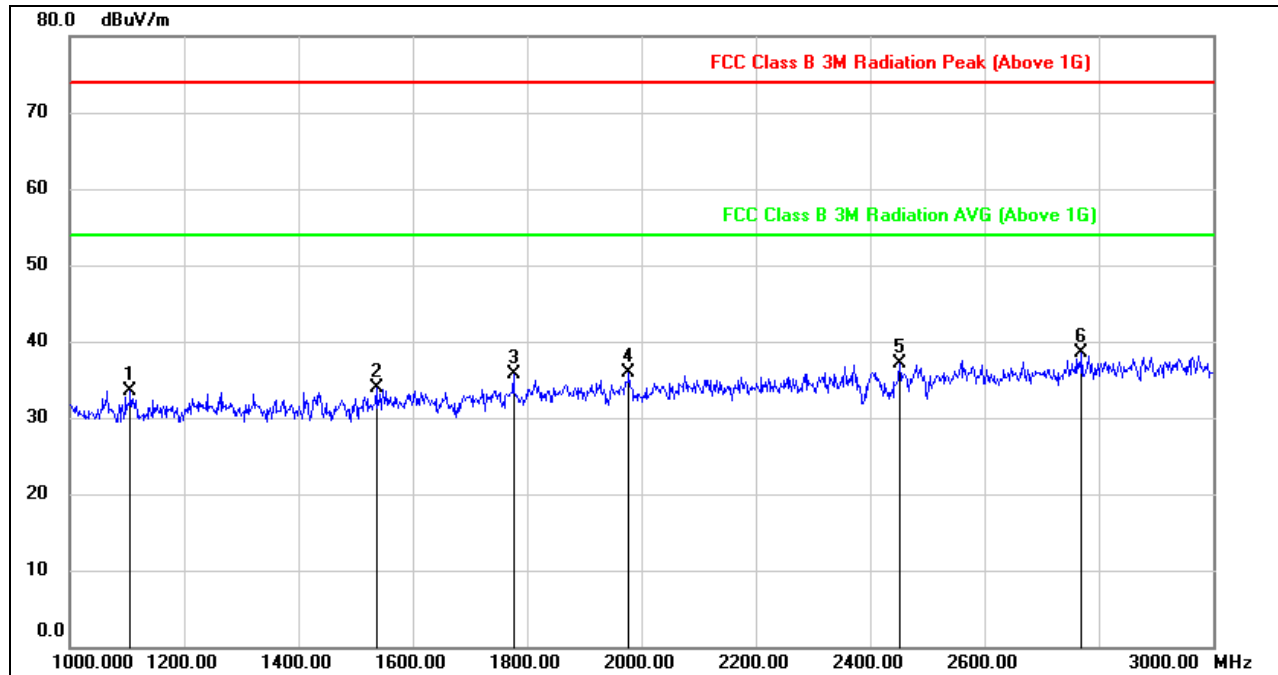**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1106.000	46.65	-13.08	33.57	74.00	-40.43	peak
2	1536.000	45.24	-11.42	33.82	74.00	-40.18	peak
3	1776.000	45.58	-9.86	35.72	74.00	-38.28	peak
4	1978.000	45.30	-9.41	35.89	74.00	-38.11	peak
5	2452.000	43.65	-6.57	37.08	74.00	-36.92	peak
6	2770.000	44.02	-5.50	38.52	74.00	-35.48	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Peak: Peak detector.

4. Filter losses were only considered in then spurious frequency bands and the authorized band was not corrected for BRF losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.




HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

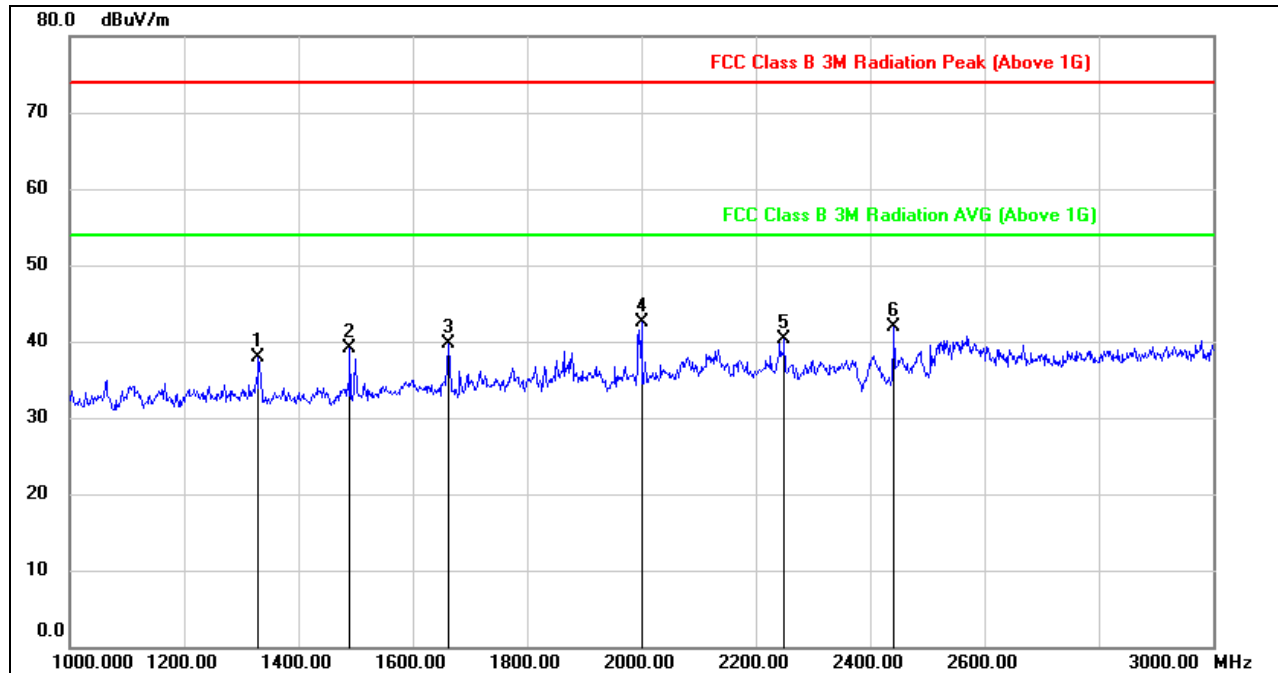

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1330.000	49.72	-11.87	37.85	74.00	-36.15	peak
2	1490.000	50.83	-11.78	39.05	74.00	-34.95	peak
3	1662.000	50.38	-10.69	39.69	74.00	-34.31	peak
4	2000.000	51.93	-9.43	42.50	74.00	-31.50	peak
5	2250.000	48.11	-7.79	40.32	74.00	-33.68	peak
6	2442.000	48.49	-6.65	41.84	74.00	-32.16	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in then spurious frequency bands and the authorized band was not corrected for BRF losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

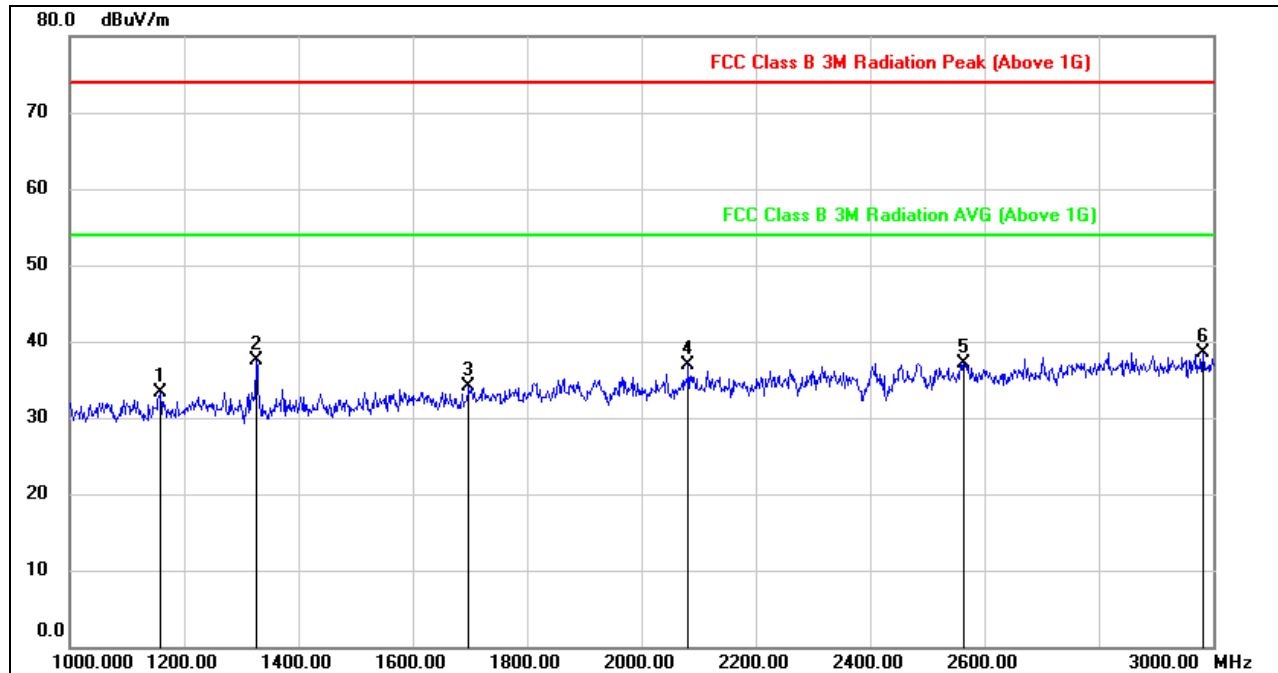**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1158.000	45.97	-12.60	33.37	74.00	-40.63	peak
2	1326.000	49.42	-11.86	37.56	74.00	-36.44	peak
3	1698.000	44.70	-10.61	34.09	74.00	-39.91	peak
4	2082.000	45.58	-8.74	36.84	74.00	-37.16	peak
5	2564.000	43.53	-6.43	37.10	74.00	-36.90	peak
6	2982.000	42.91	-4.40	38.51	74.00	-35.49	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in then spurious frequency bands and the authorized band was not corrected for BRF losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

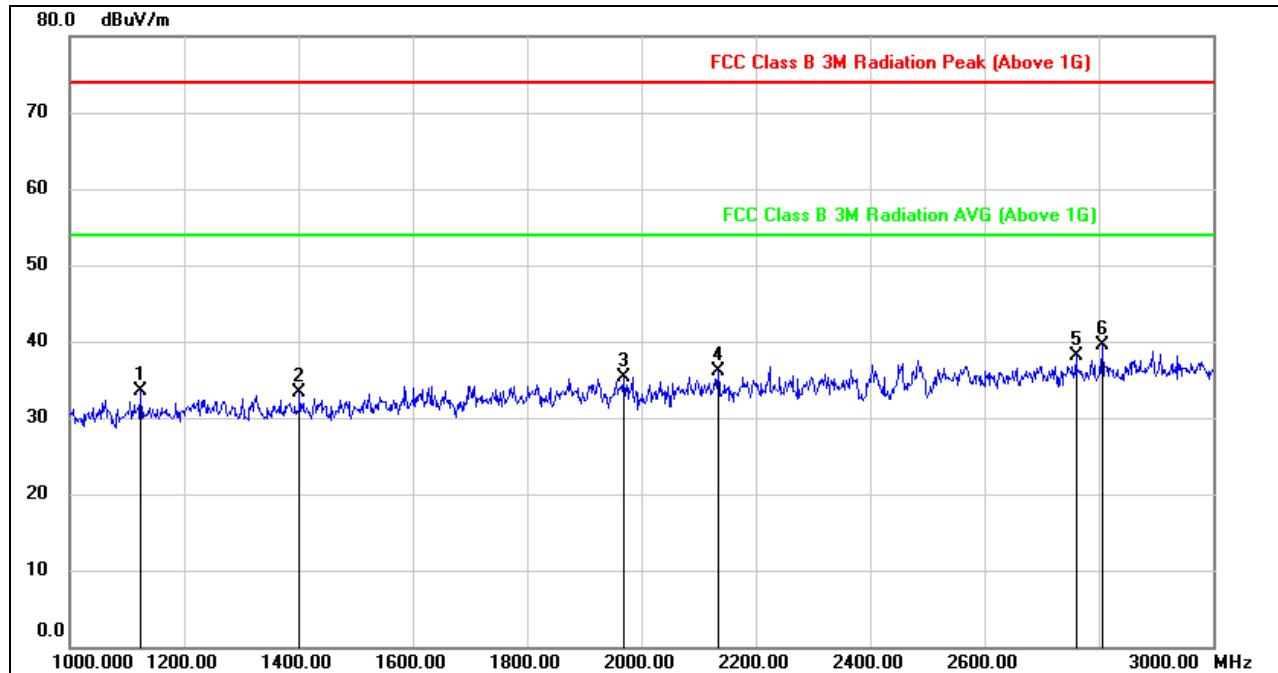**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1124.000	46.33	-12.92	33.41	74.00	-40.59	peak
2	1402.000	45.17	-11.91	33.26	74.00	-40.74	peak
3	1970.000	44.71	-9.40	35.31	74.00	-38.69	peak
4	2134.000	44.61	-8.42	36.19	74.00	-37.81	peak
5	2760.000	43.67	-5.56	38.11	74.00	-35.89	peak
6	2806.000	44.71	-5.25	39.46	74.00	-34.54	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Peak: Peak detector.

4. Filter losses were only considered in then spurious frequency bands and the authorized band was not corrected for BRF losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

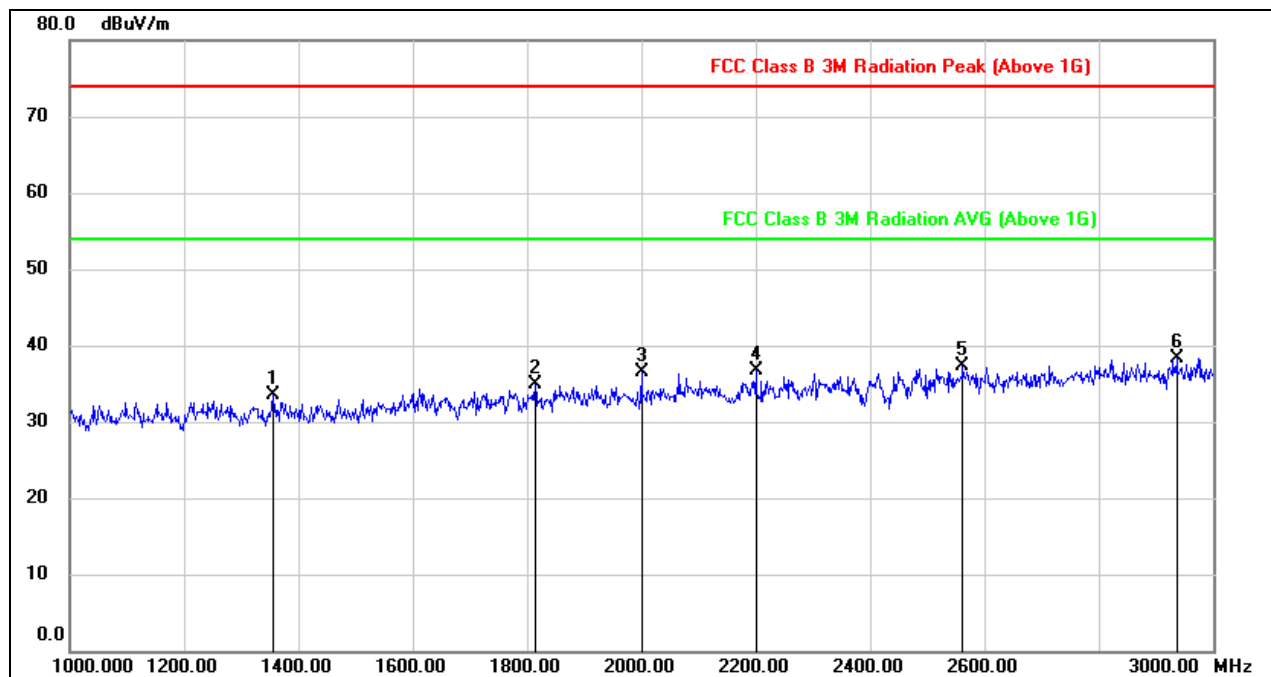


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1356.000	45.38	-11.89	33.49	74.00	-40.51	peak
2	1814.000	44.40	-9.58	34.82	74.00	-39.18	peak
3	2000.000	46.02	-9.43	36.59	74.00	-37.41	peak
4	2200.000	44.75	-8.09	36.66	74.00	-37.34	peak
5	2562.000	43.66	-6.43	37.23	74.00	-36.77	peak
6	2936.000	42.84	-4.59	38.25	74.00	-35.75	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in then spurious frequency bands and the authorized band was not corrected for BRF losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



7.3.2. $\pi/4$ -DQPSK MODE

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

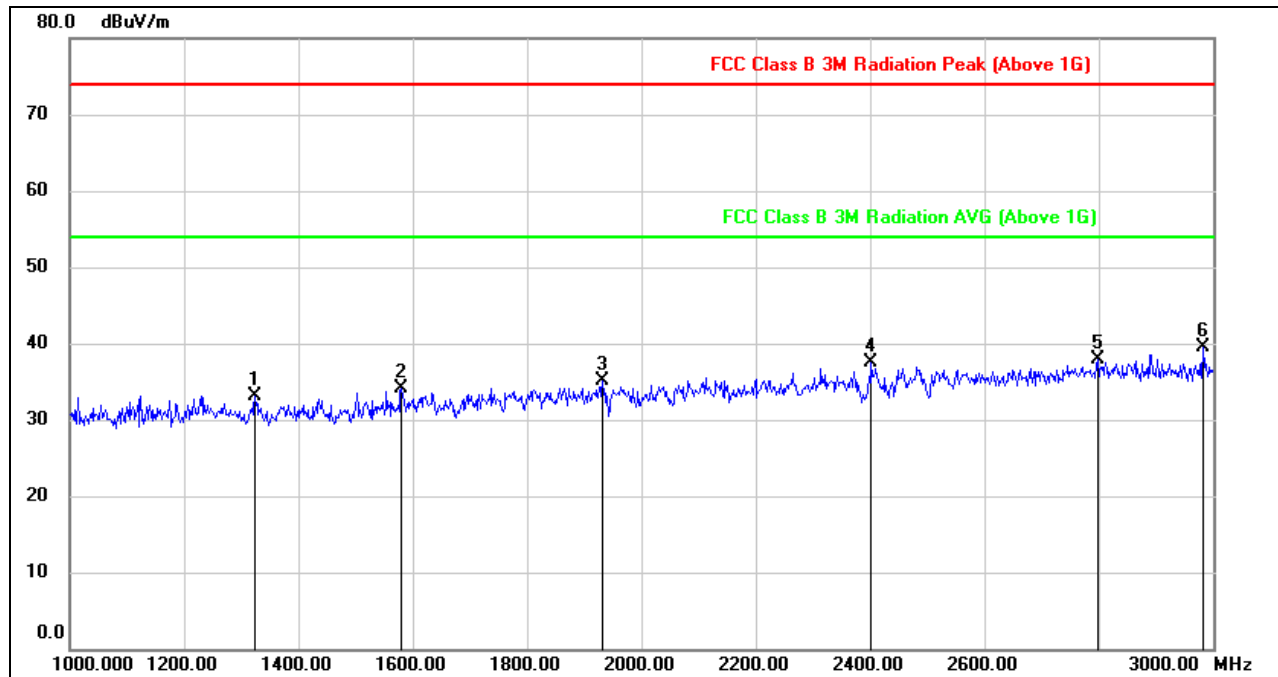


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1324.000	45.05	-11.87	33.18	74.00	-40.82	peak
2	1580.000	45.16	-11.02	34.14	74.00	-39.86	peak
3	1932.000	44.54	-9.37	35.17	74.00	-38.83	peak
4	2402.000	44.46	-7.00	37.46	74.00	-36.54	peak
5	2798.000	43.13	-5.31	37.82	74.00	-36.18	peak
6	2982.000	43.95	-4.40	39.55	74.00	-34.45	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in then spurious frequency bands and the authorized band was not corrected for BRF losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.




HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

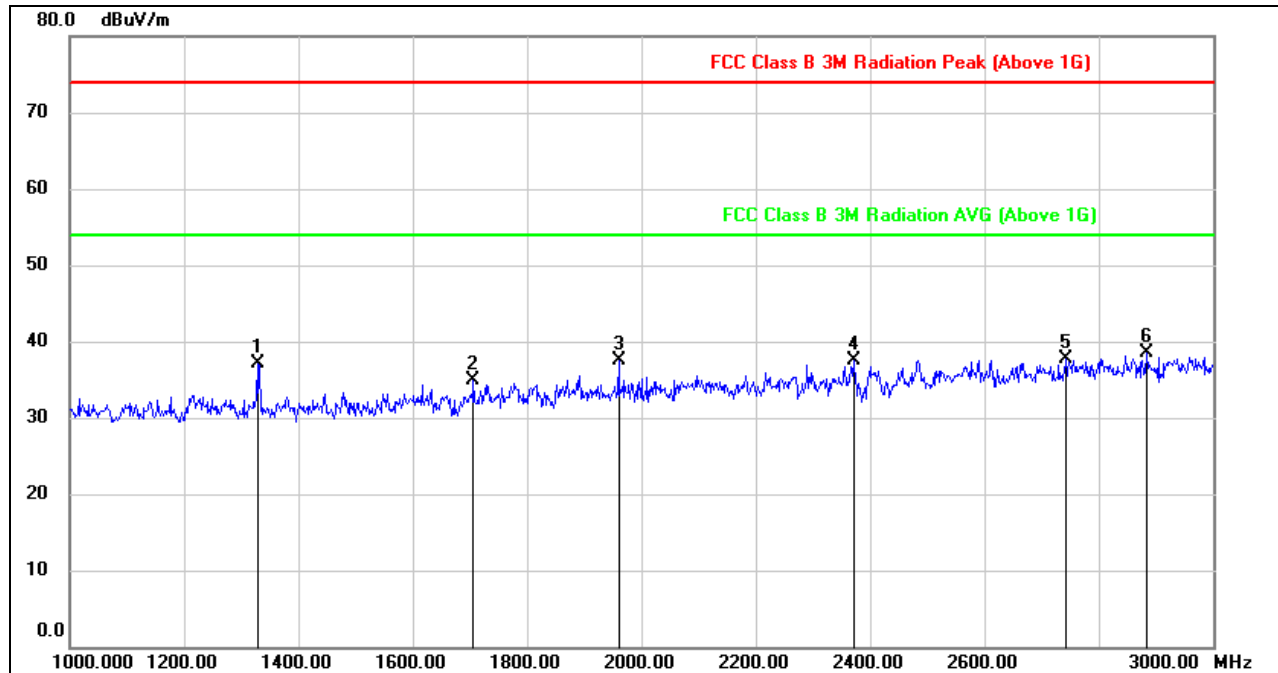

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1328.000	48.97	-11.86	37.11	74.00	-36.89	peak
2	1706.000	45.51	-10.54	34.97	74.00	-39.03	peak
3	1960.000	46.84	-9.40	37.44	74.00	-36.56	peak
4	2372.000	44.66	-7.14	37.52	74.00	-36.48	peak
5	2742.000	43.34	-5.69	37.65	74.00	-36.35	peak
6	2884.000	43.26	-4.83	38.43	74.00	-35.57	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in then spurious frequency bands and the authorized band was not corrected for BRF losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

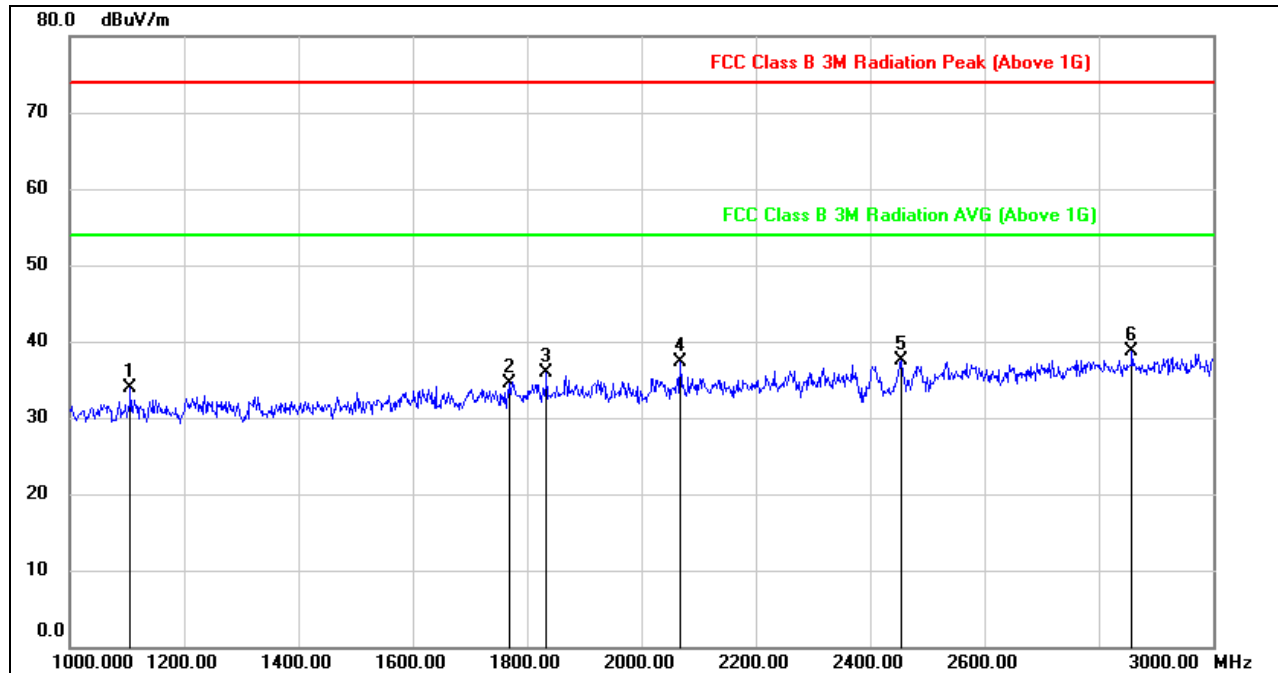**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1106.000	46.99	-13.08	33.91	74.00	-40.09	peak
2	1770.000	44.41	-9.91	34.50	74.00	-39.50	peak
3	1834.000	45.34	-9.52	35.82	74.00	-38.18	peak
4	2068.000	46.18	-8.86	37.32	74.00	-36.68	peak
5	2454.000	43.99	-6.55	37.44	74.00	-36.56	peak
6	2858.000	43.65	-4.97	38.68	74.00	-35.32	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in then spurious frequency bands and the authorized band was not corrected for BRF losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

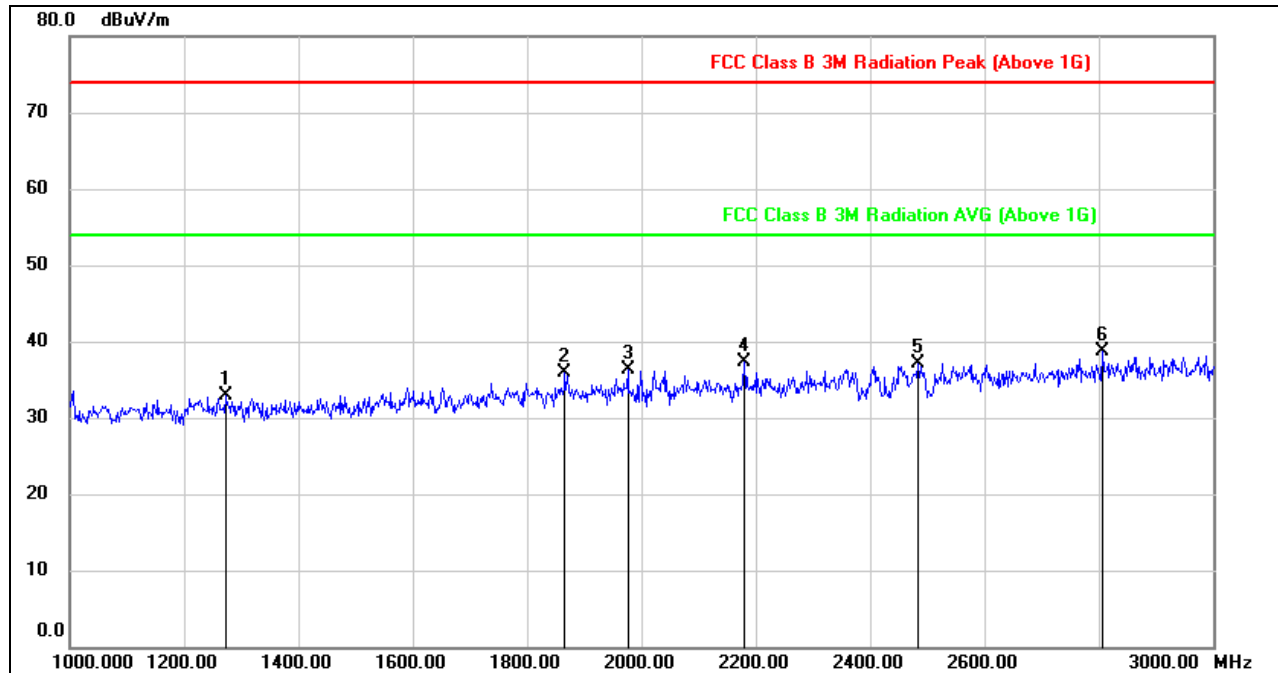**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1272.000	44.77	-11.95	32.82	74.00	-41.18	peak
2	1866.000	45.34	-9.45	35.89	74.00	-38.11	peak
3	1976.000	45.75	-9.41	36.34	74.00	-37.66	peak
4	2180.000	45.54	-8.20	37.34	74.00	-36.66	peak
5	2484.000	43.46	-6.30	37.16	74.00	-36.84	peak
6	2806.000	43.96	-5.25	38.71	74.00	-35.29	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in then spurious frequency bands and the authorized band was not corrected for BRF losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

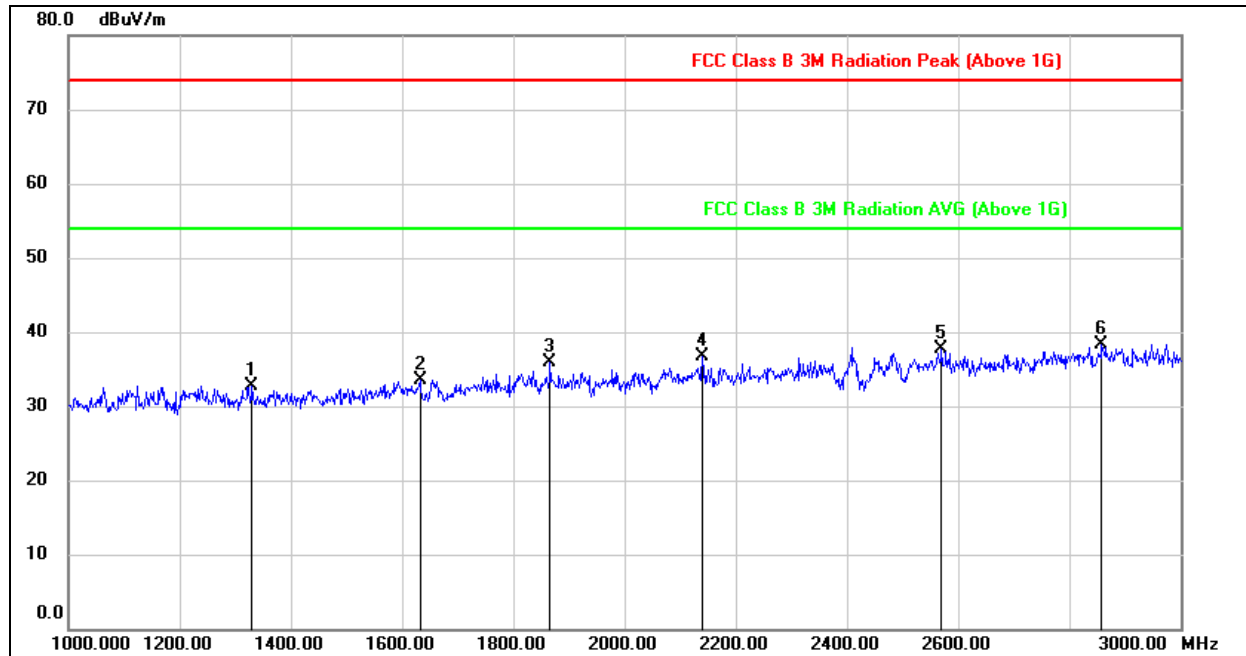**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1330.000	44.61	-11.87	32.74	74.00	-41.26	peak
2	1632.000	44.33	-10.75	33.58	74.00	-40.42	peak
3	1866.000	45.26	-9.45	35.81	74.00	-38.19	peak
4	2140.000	45.16	-8.39	36.77	74.00	-37.23	peak
5	2570.000	44.25	-6.46	37.79	74.00	-36.21	peak
6	2858.000	43.20	-4.97	38.23	74.00	-35.77	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for BRF losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

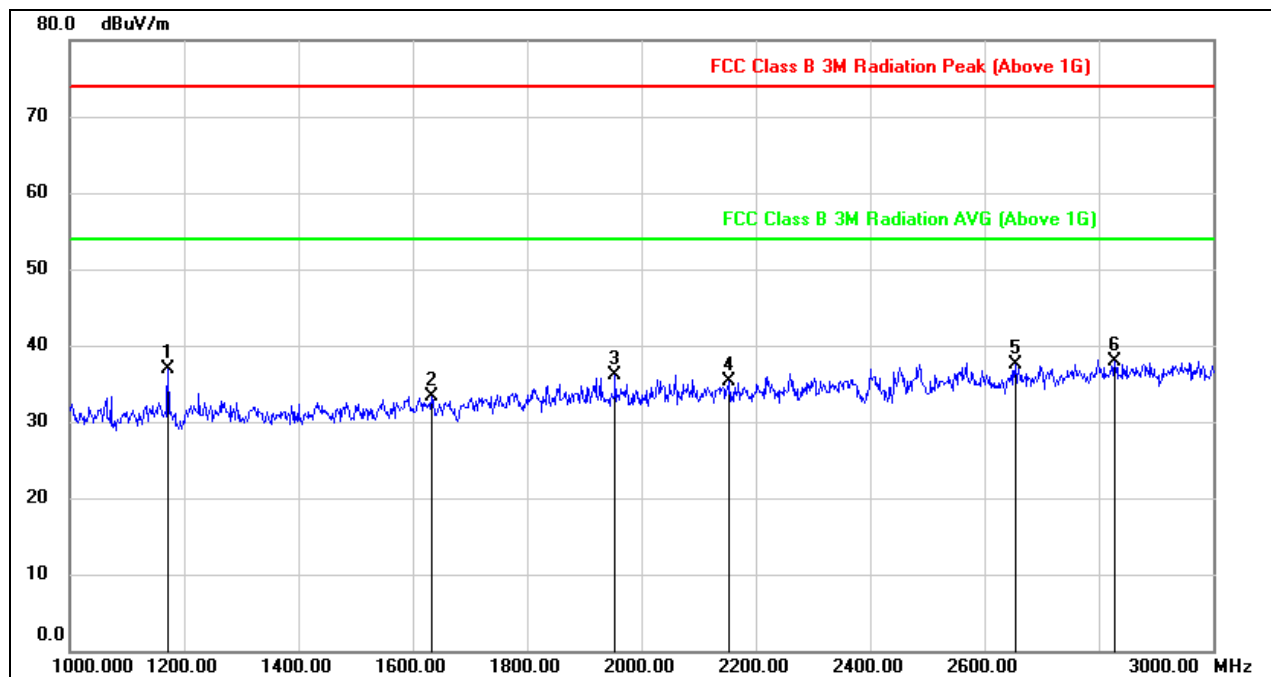

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1172.000	49.41	-12.47	36.94	74.00	-37.06	peak
2	1632.000	44.00	-10.75	33.25	74.00	-40.75	peak
3	1954.000	45.46	-9.39	36.07	74.00	-37.93	peak
4	2154.000	43.67	-8.32	35.35	74.00	-38.65	peak
5	2654.000	43.76	-6.26	37.50	74.00	-36.50	peak
6	2828.000	43.01	-5.14	37.87	74.00	-36.13	peak


Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in then spurious frequency bands and the authorized band was not corrected for BRF losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.



7.4. SPURIOUS EMISSIONS (3~18GHz)

7.4.1. GFSK MODE

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

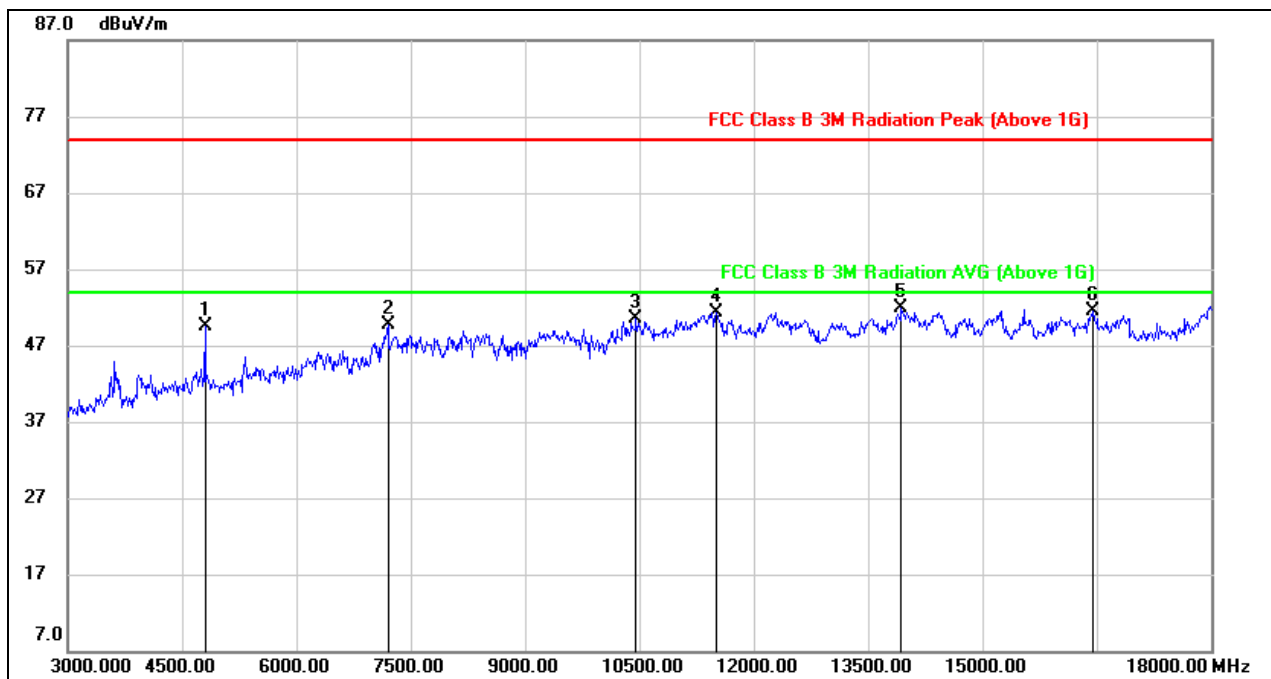


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4800.000	48.77	0.78	49.55	74.00	-24.45	peak
2	7200.000	41.14	8.56	49.70	74.00	-24.30	peak
3	10455.000	36.69	13.90	50.59	74.00	-23.41	peak
4	11505.000	35.11	16.22	51.33	74.00	-22.67	peak
5	13935.000	32.59	19.31	51.90	74.00	-22.10	peak
6	16455.000	29.28	22.24	51.52	74.00	-22.48	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. High pass filter losses had already added into the correct factor.



HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

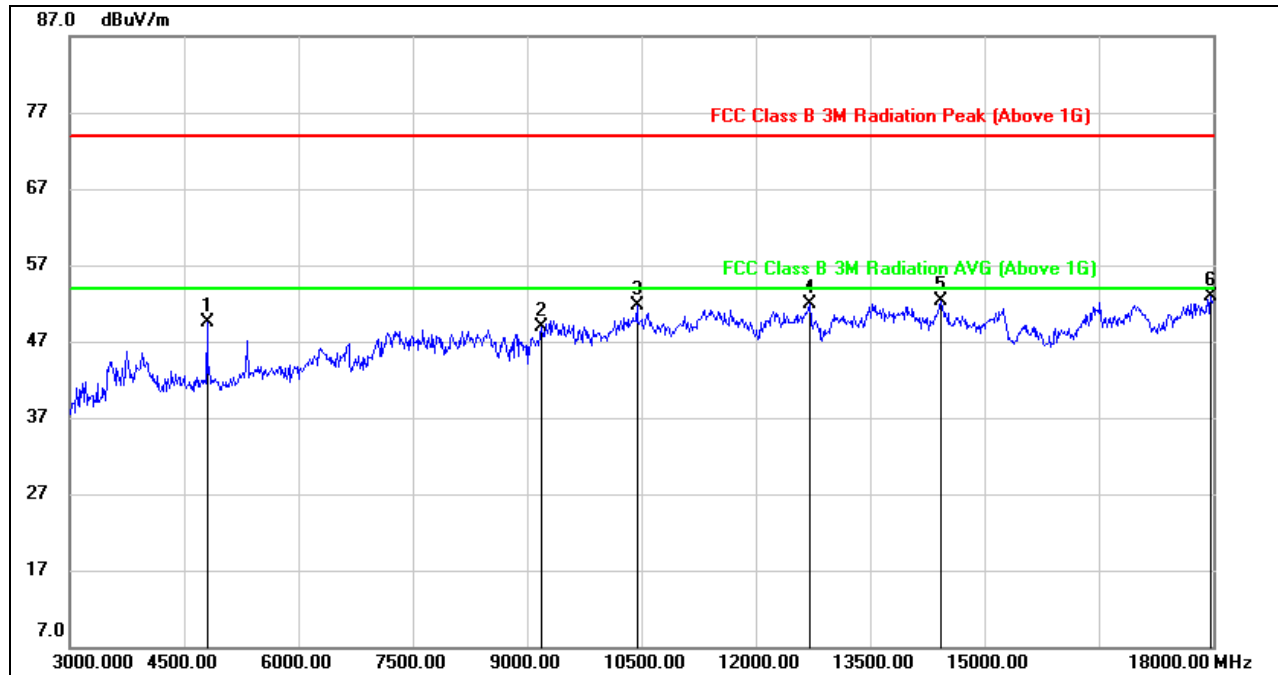


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4800.000	48.70	0.78	49.48	74.00	-24.52	peak
2	9195.000	37.74	11.23	48.97	74.00	-25.03	peak
3	10440.000	37.82	13.80	51.62	74.00	-22.38	peak
4	12705.000	34.81	17.16	51.97	74.00	-22.03	peak
5	14430.000	32.87	19.41	52.28	74.00	-21.72	peak
6	17970.000	25.82	27.02	52.84	74.00	-21.16	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. High pass filter losses had already added into the correct factor.



HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

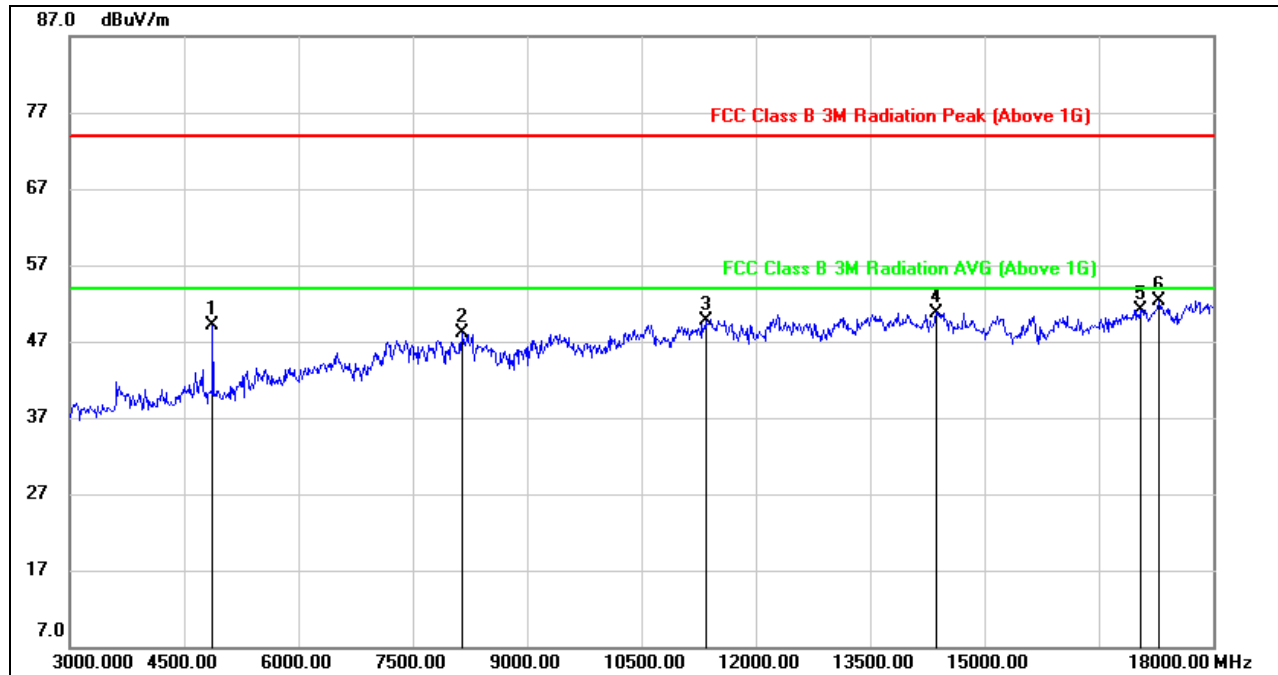


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	49.15	-0.12	49.03	74.00	-24.97	peak
2	8145.000	38.86	9.30	48.16	74.00	-25.84	peak
3	11340.000	36.57	13.08	49.65	74.00	-24.35	peak
4	14370.000	34.41	16.39	50.80	74.00	-23.20	peak
5	17040.000	30.62	20.51	51.13	74.00	-22.87	peak
6	17280.000	30.53	21.72	52.25	74.00	-21.75	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. High pass filter losses had already added into the correct factor.



HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

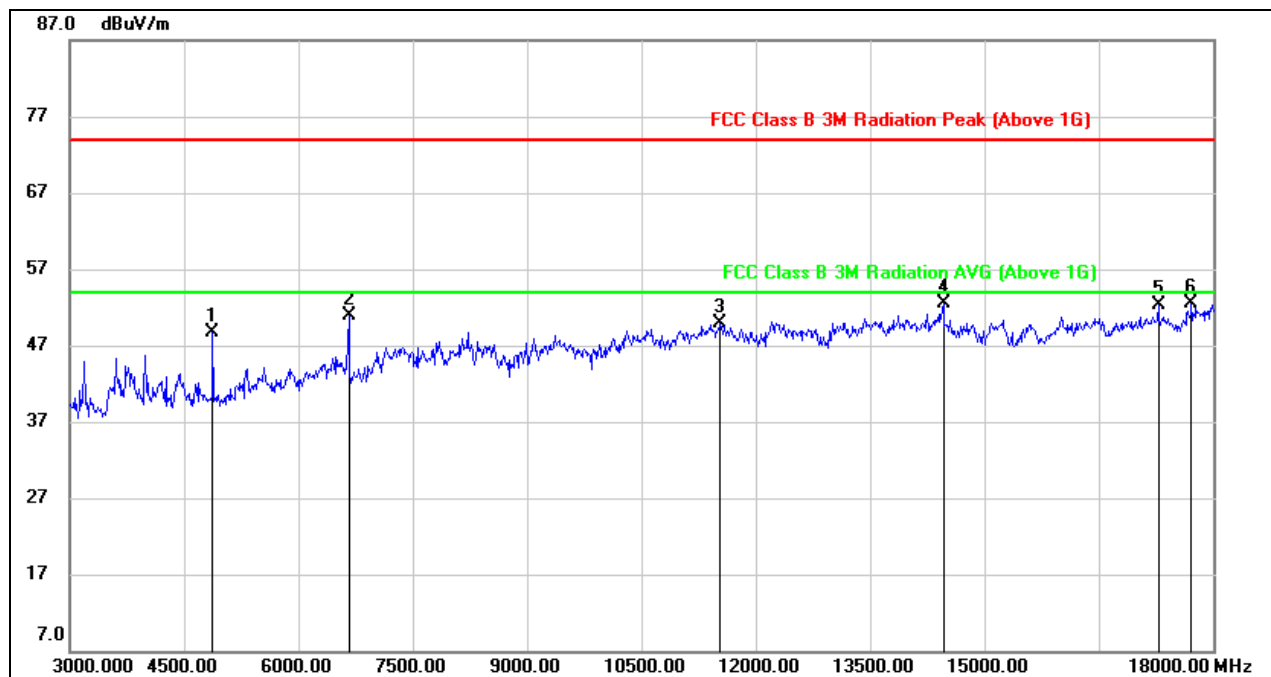


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	48.73	-0.12	48.61	74.00	-25.39	peak
2	6660.000	44.81	6.00	50.81	74.00	-23.19	peak
3	11535.000	35.89	14.10	49.99	74.00	-24.01	peak
4	14460.000	36.13	16.35	52.48	74.00	-21.52	peak
5	17280.000	30.65	21.72	52.37	74.00	-21.63	peak
6	17715.000	30.10	22.39	52.49	74.00	-21.51	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. High pass filter losses had already added into the correct factor.



HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

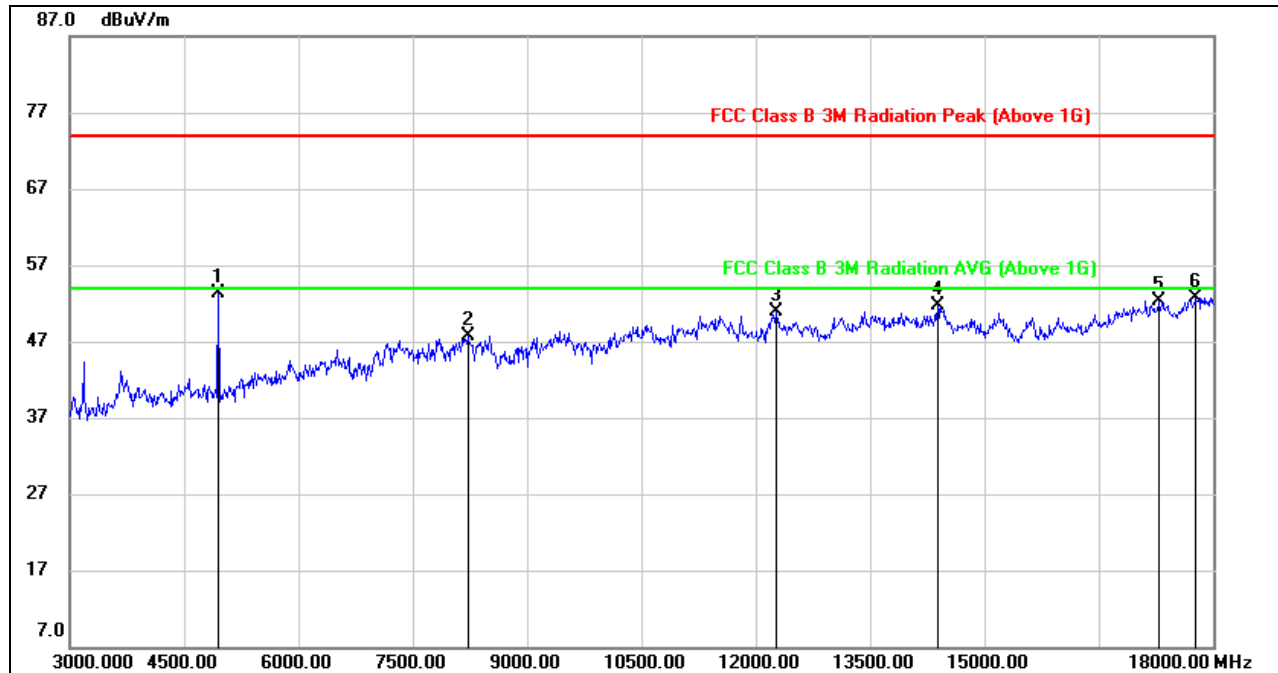


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	52.97	0.25	53.22	74.00	-20.78	peak
2	8220.000	38.39	9.40	47.79	74.00	-26.21	peak
3	12270.000	36.65	14.34	50.99	74.00	-23.01	peak
4	14385.000	35.23	16.41	51.64	74.00	-22.36	peak
5	17295.000	30.43	21.86	52.29	74.00	-21.71	peak
6	17775.000	29.79	22.97	52.76	74.00	-21.24	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. High pass filter losses had already added into the correct factor.



HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

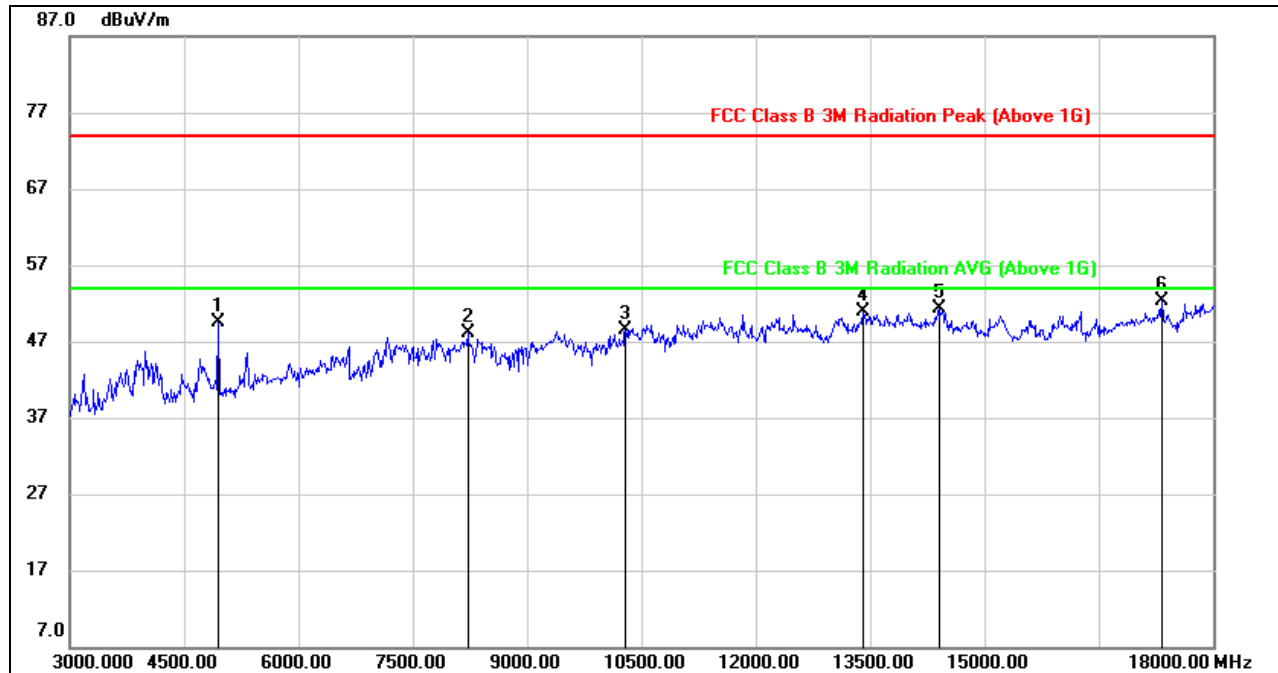


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4950.000	49.36	0.19	49.55	74.00	-24.45	peak
2	8220.000	38.65	9.40	48.05	74.00	-25.95	peak
3	10290.000	37.07	11.51	48.58	74.00	-25.42	peak
4	13410.000	35.01	15.86	50.87	74.00	-23.13	peak
5	14400.000	34.96	16.43	51.39	74.00	-22.61	peak
6	17325.000	30.55	21.80	52.35	74.00	-21.65	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. AVG: VBW=1/Ton where: ton is transmit duration.
5. For transmit duration, please refer to clause 6.1.
6. High pass filter losses had already added into the correct factor.


7.4.2. $\pi/4$ -DQPSK MODE

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

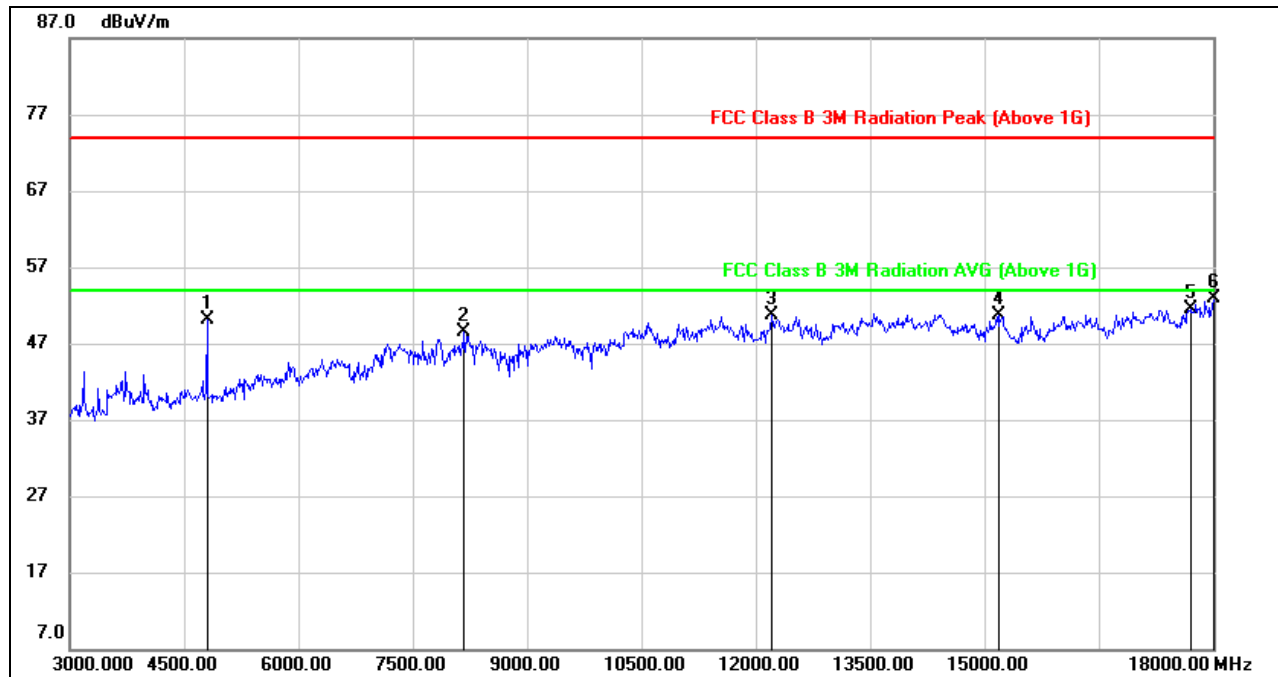

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4800.000	50.29	-0.25	50.04	74.00	-23.96	peak
2	8175.000	39.00	9.48	48.48	74.00	-25.52	peak
3	12210.000	36.54	14.25	50.79	74.00	-23.21	peak
4	15195.000	35.19	15.56	50.75	74.00	-23.25	peak
5	17700.000	29.23	22.24	51.47	74.00	-22.53	peak
6	18000.000	29.55	23.27	52.82	74.00	-21.18	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. High pass filter losses had already added into the correct factor.

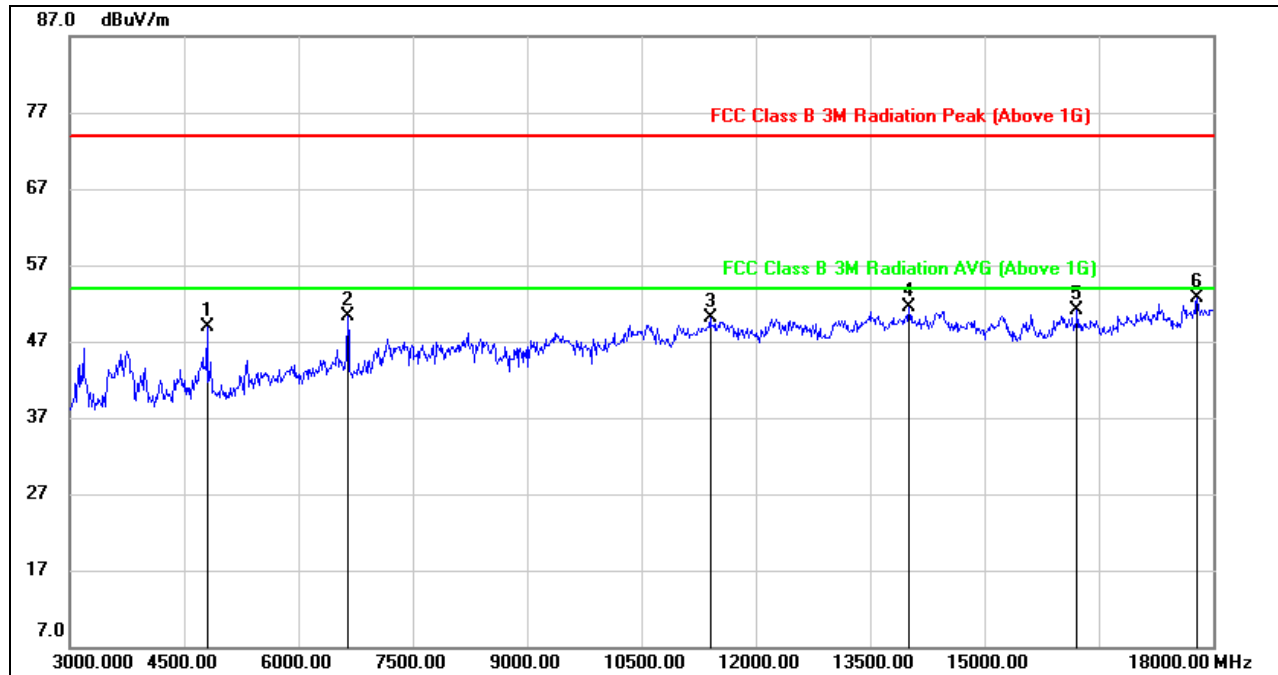**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4800.000	49.16	-0.25	48.91	74.00	-25.09	peak
2	6645.000	44.27	5.99	50.26	74.00	-23.74	peak
3	11400.000	36.65	13.36	50.01	74.00	-23.99	peak
4	14010.000	35.07	16.34	51.41	74.00	-22.59	peak
5	16215.000	33.02	18.00	51.02	74.00	-22.98	peak
6	17790.000	29.62	23.12	52.74	74.00	-21.26	peak

Note: 1. Peak Result = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. High pass filter losses had already added into the correct factor.




HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

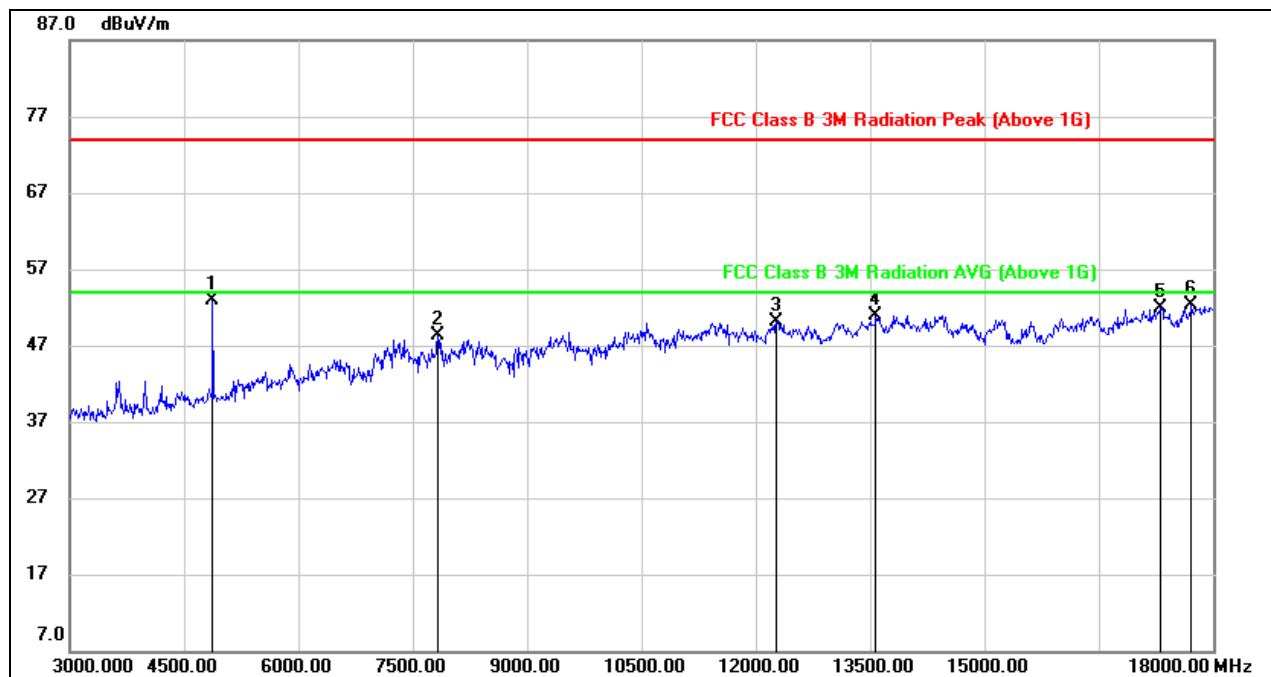

- Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. High pass filter losses had already added into the correct factor.



HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

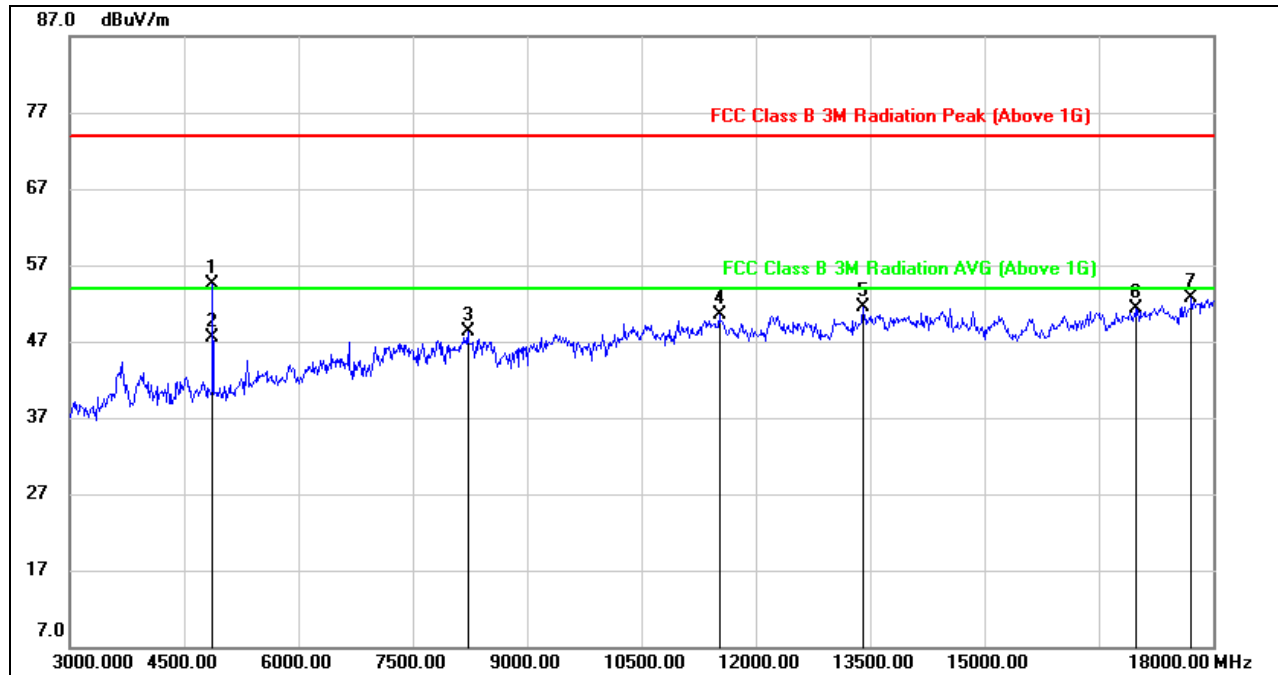


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4881.973	54.56	-0.12	54.44	74.00	-19.56	peak
2	4881.973	47.66	-0.12	47.54	54.00	-6.46	AVG
3	8220.000	38.90	9.40	48.30	74.00	-25.70	peak
4	11520.000	36.31	14.10	50.41	74.00	-23.59	peak
5	13410.000	35.62	15.86	51.48	74.00	-22.52	peak
6	16995.000	30.95	20.32	51.27	74.00	-22.73	peak
7	17715.000	30.39	22.39	52.78	74.00	-21.22	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. AVG: VBW=1/Ton where: ton is transmit duration.
5. For transmit duration, please refer to clause 6.1.
6. High pass filter losses had already added into the correct factor.




HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

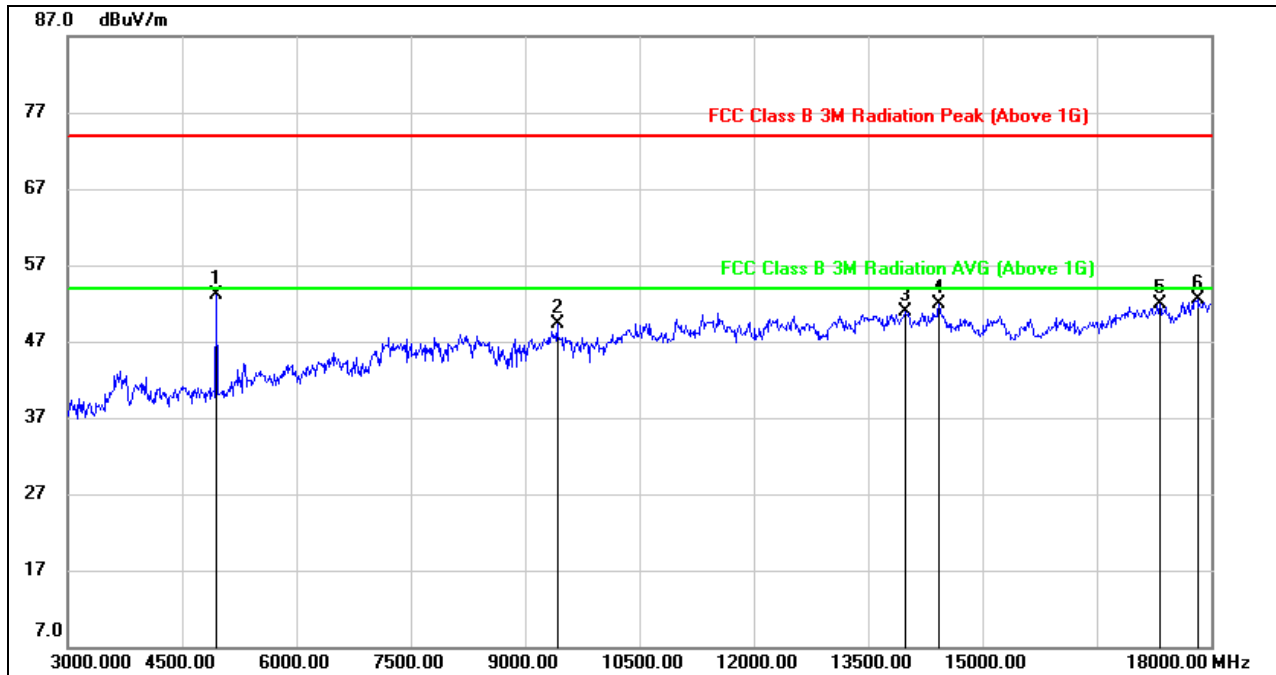

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	52.92	0.25	53.17	74.00	-20.83	peak
2	9420.000	39.05	10.34	49.39	74.00	-24.61	peak
3	13980.000	34.61	16.32	50.93	74.00	-23.07	peak
4	14430.000	35.49	16.39	51.88	74.00	-22.12	peak
5	17325.000	30.17	21.80	51.97	74.00	-22.03	peak
6	17820.000	29.21	23.21	52.42	74.00	-21.58	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. High pass filter losses had already added into the correct factor.

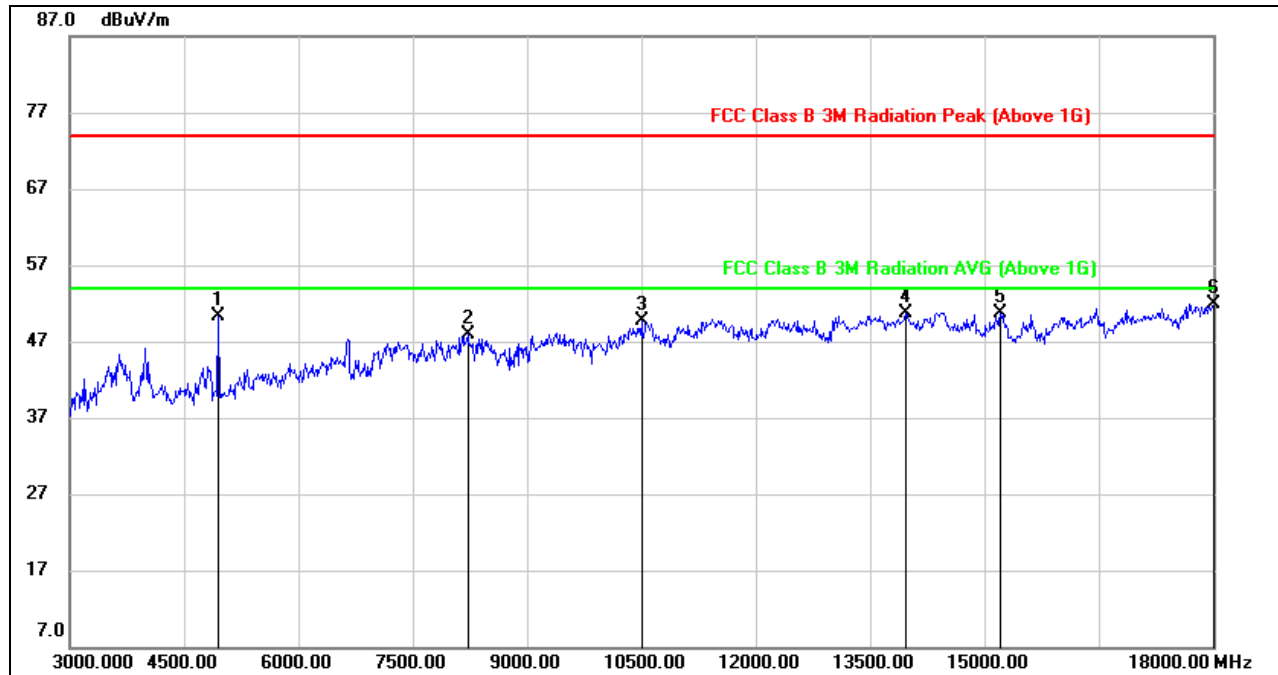**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4950.000	50.17	0.19	50.36	74.00	-23.64	peak
2	8220.000	38.46	9.40	47.86	74.00	-26.14	peak
3	10500.000	37.88	11.73	49.61	74.00	-24.39	peak
4	13965.000	34.37	16.29	50.66	74.00	-23.34	peak
5	15210.000	35.24	15.55	50.79	74.00	-23.21	peak
6	18000.000	28.68	23.27	51.95	74.00	-22.05	peak

Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.


4. High pass filter losses had already added into the correct factor.



7.5. WORST-CASE CO-LOCATION

7.5.1. BT $\pi/4$ -DQPSK AND 2.4G FSK MODE

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

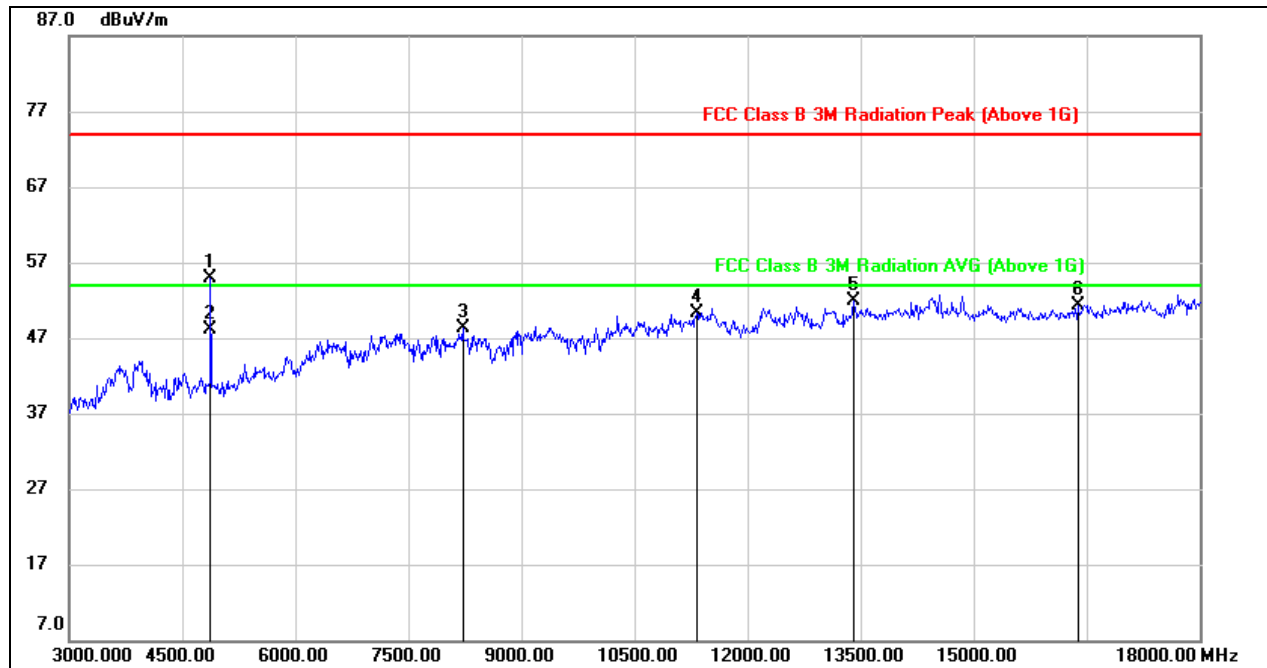

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	4875.000	55.06	-0.12	54.94	74.00	-19.06	peak
2	4875.000	48.17	-0.12	48.05	54.00	-5.95	AVG
3	8220.000	38.90	9.40	48.30	74.00	-25.70	peak
4	11325.000	37.28	13.02	50.30	74.00	-23.70	peak
5	13410.000	36.12	15.86	51.98	74.00	-22.02	peak
6	16380.000	32.93	18.47	51.40	74.00	-22.60	peak

Note: 1. Peak Result = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. High pass filter losses had already added into the correct factor.



HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

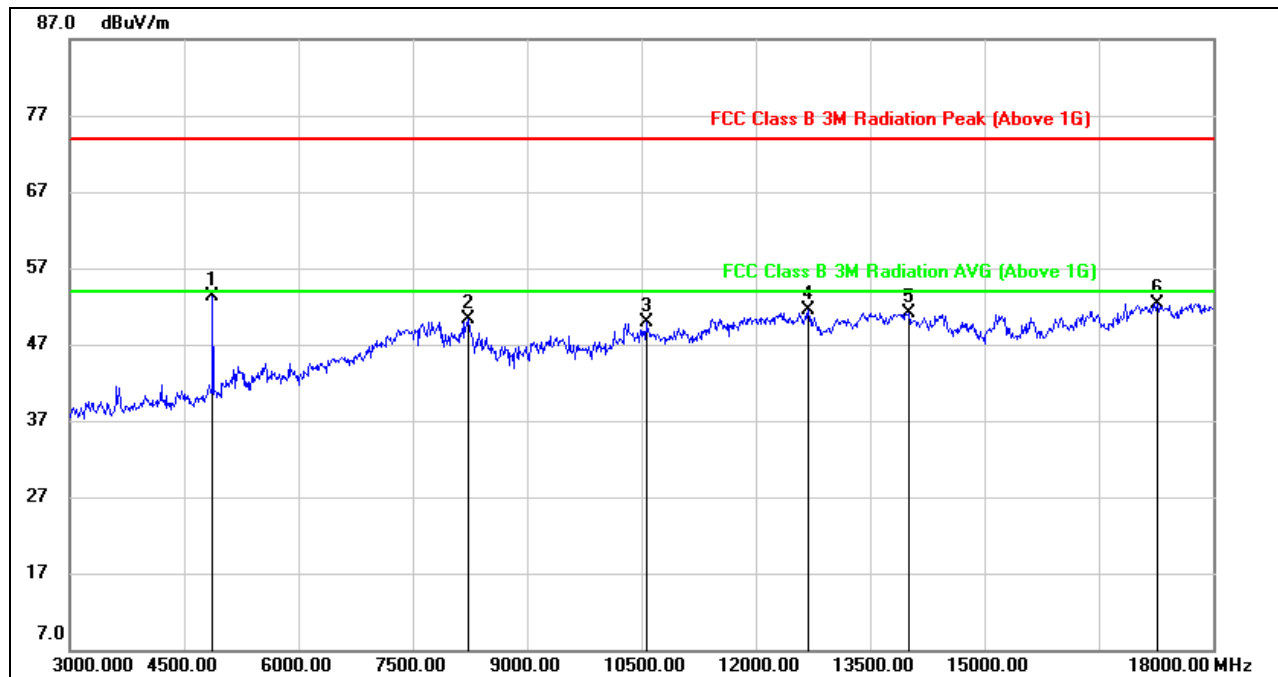

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	4875.000	53.44	-0.12	53.32	74.00	-20.68	peak
2	8235.000	41.06	9.23	50.29	74.00	-23.71	peak
3	10560.000	37.57	12.37	49.94	74.00	-24.06	peak
4	12690.000	37.31	14.28	51.59	74.00	-22.41	peak
5	14010.000	34.86	16.34	51.20	74.00	-22.80	peak
6	17265.000	30.70	21.59	52.29	74.00	-21.71	peak


- Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. High pass filter losses had already added into the correct factor.



7.6. SPURIOUS EMISSIONS 18G ~ 26GHz

7.6.1. $\pi/4$ -DQPSK MODE

SPURIOUS EMISSIONS (LOW CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

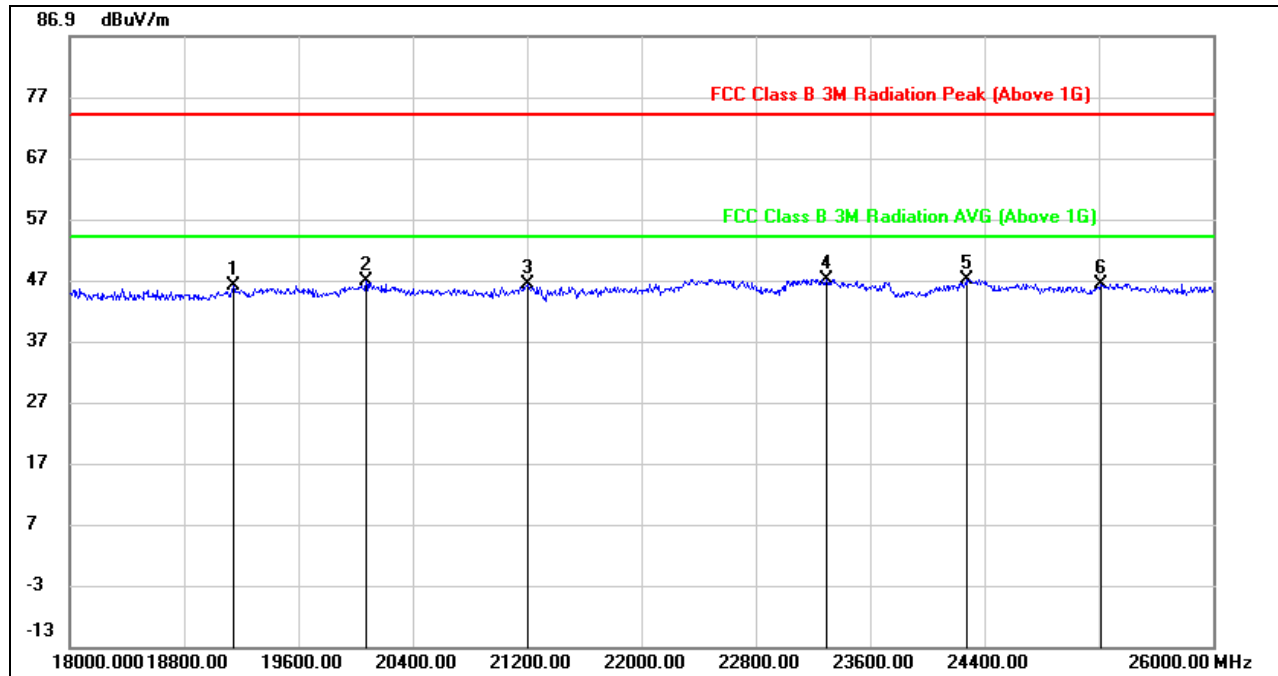


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	19144.000	50.97	-4.98	45.99	74.00	-28.01	peak
2	20072.000	51.34	-4.51	46.83	74.00	-27.17	peak
3	21200.000	51.65	-5.46	46.19	74.00	-27.81	peak
4	23296.000	52.30	-5.16	47.14	74.00	-26.86	peak
5	24280.000	50.52	-3.48	47.04	74.00	-26.96	peak
6	25216.000	47.55	-1.16	46.39	74.00	-27.61	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. High pass filter losses had already added into the correct factor.



SPURIOUS EMISSIONS (LOW CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)

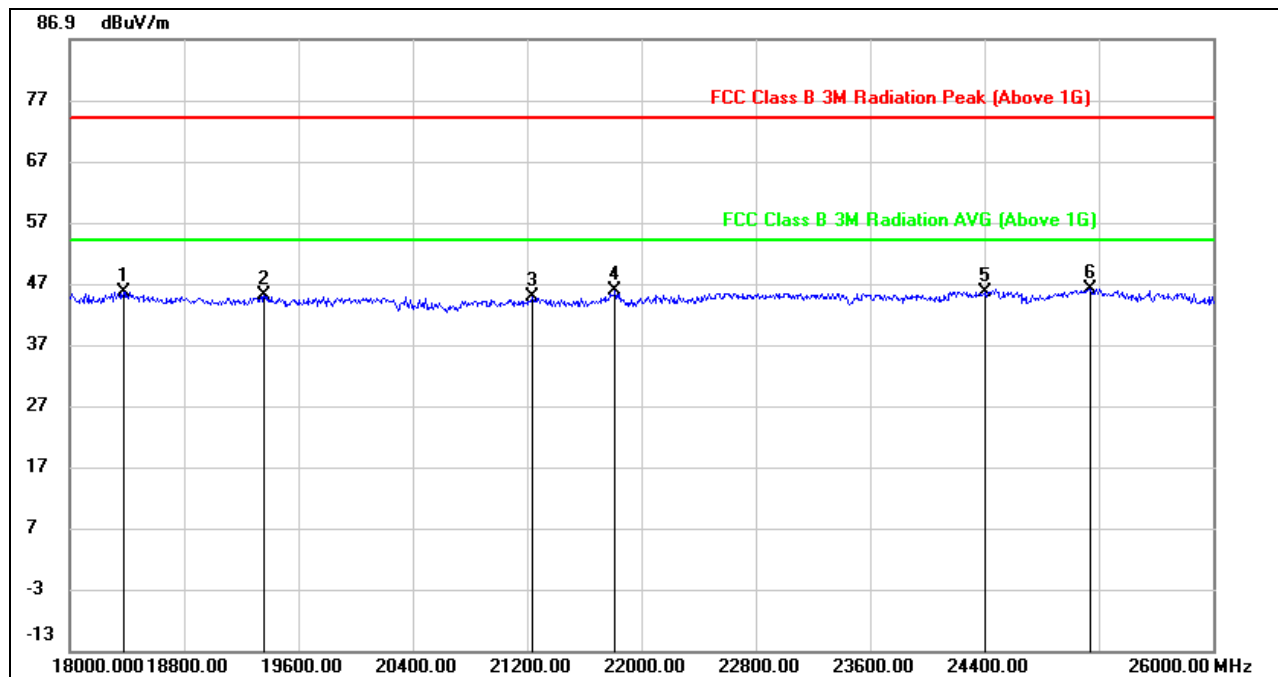

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18376.000	49.88	-4.37	45.51	74.00	-28.49	peak
2	19360.000	50.04	-4.93	45.11	74.00	-28.89	peak
3	21232.000	50.38	-5.49	44.89	74.00	-29.11	peak
4	21816.000	51.58	-5.88	45.70	74.00	-28.30	peak
5	24400.000	48.64	-2.99	45.65	74.00	-28.35	peak
6	25136.000	47.16	-1.14	46.02	74.00	-27.98	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. High pass filter losses had already added into the correct factor.


Note: All test mode has been tested, only the worst data record in the report.



7.7. SPURIOUS EMISSIONS 30M ~ 1 GHz


7.7.1. $\pi/4$ -DQPSK MODE

SPURIOUS EMISSIONS (LOW CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

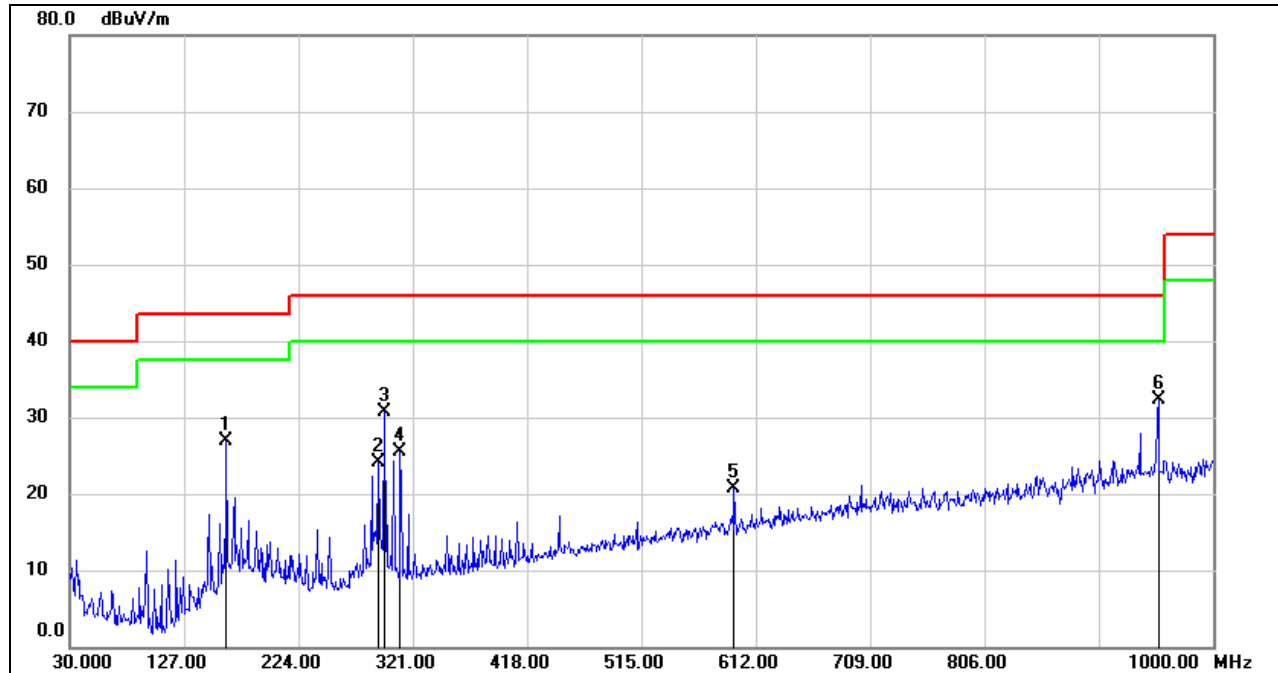

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	162.8900	44.52	-17.62	26.90	43.50	-16.60	QP
2	291.9000	38.43	-14.34	24.09	46.00	-21.91	QP
3	296.7500	44.82	-14.04	30.78	46.00	-15.22	QP
4	310.3299	39.31	-13.79	25.52	46.00	-20.48	QP
5	593.5700	29.24	-8.57	20.67	46.00	-25.33	QP
6	953.4400	35.73	-3.37	32.36	46.00	-13.64	QP

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

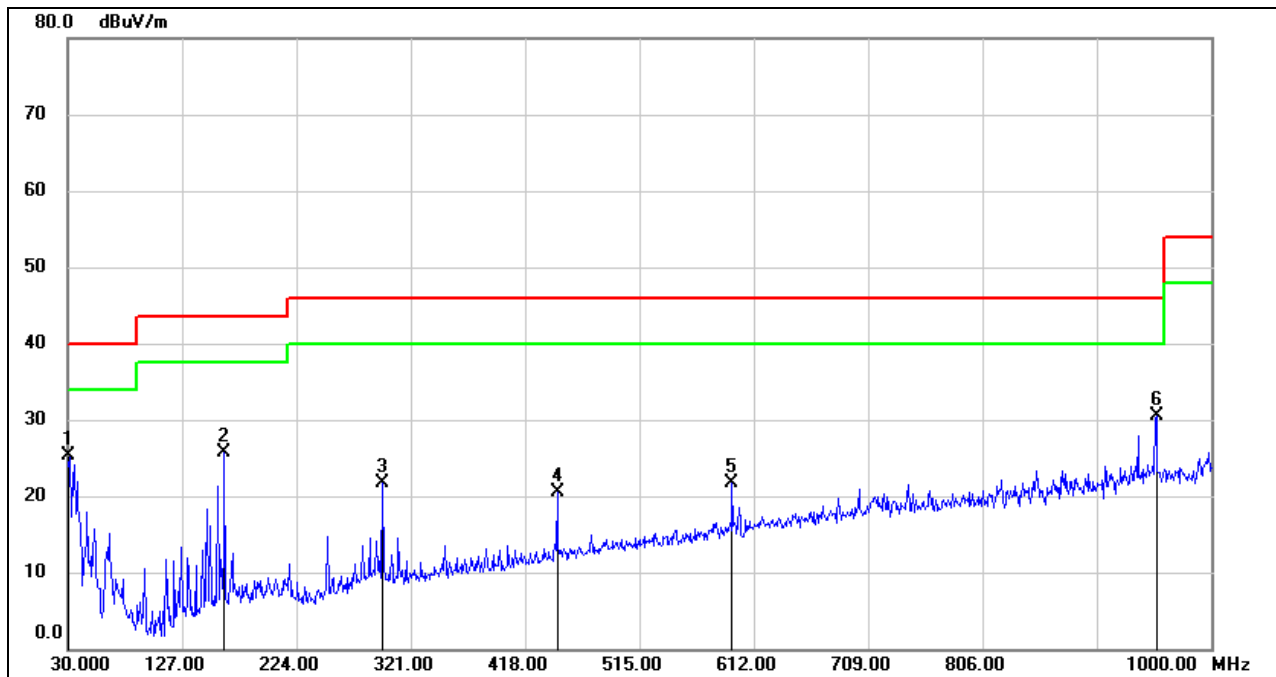**SPURIOUS EMISSIONS (LOW CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.0000	42.39	-17.00	25.39	40.00	-14.61	QP
2	162.8900	43.33	-17.62	25.71	43.50	-17.79	QP
3	296.7500	35.77	-14.04	21.73	46.00	-24.27	QP
4	445.1600	31.96	-11.50	20.46	46.00	-25.54	QP
5	593.5700	30.27	-8.57	21.70	46.00	-24.30	QP
6	953.4400	33.88	-3.37	30.51	46.00	-15.49	QP

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto




7.8. SPURIOUS EMISSIONS BELOW 30M

7.8.1. $\pi/4$ -DQPSK MODE

(LOW CHANNEL, LOOP ANTENNA FACE ON TO THE EUT, WORST-CASE CONFIGURATION)

9KHz~ 150KHz

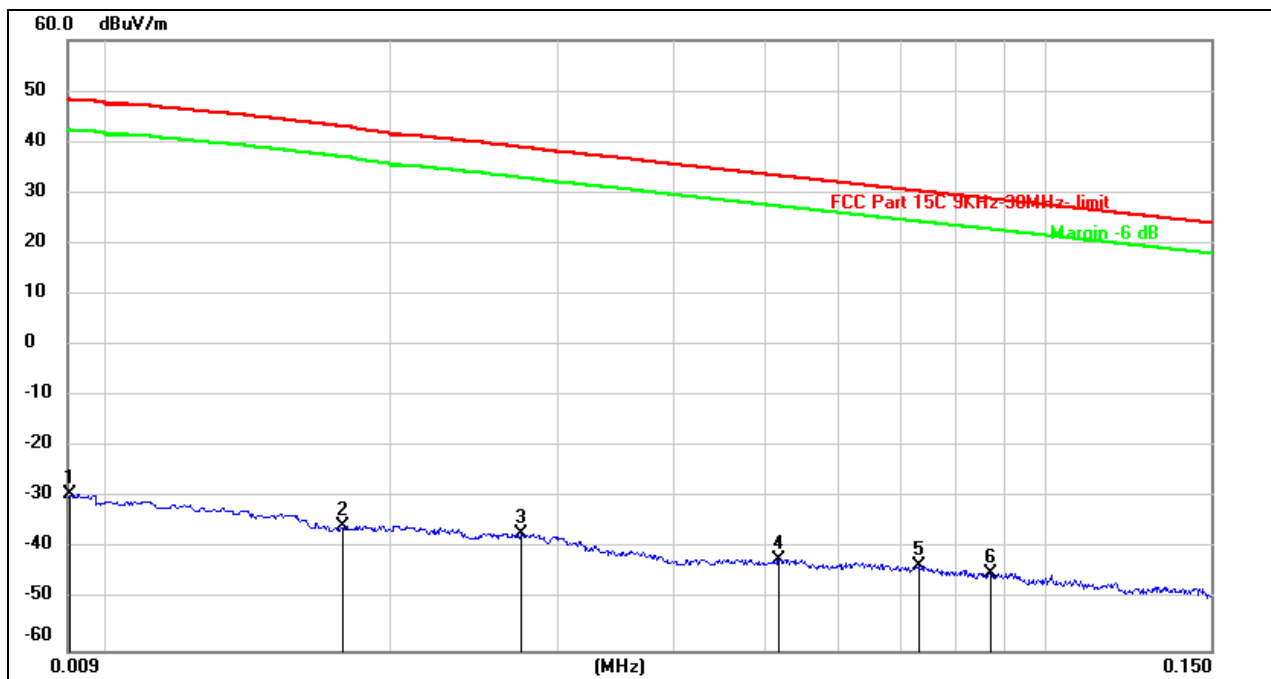

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.0091	72.08	-101.33	-29.25	48.29	-77.54	peak
2	0.0177	65.84	-101.35	-35.51	42.96	-78.47	peak
3	0.0274	64.31	-101.38	-37.07	38.98	-76.05	peak
4	0.0517	59.37	-101.49	-42.12	33.35	-75.47	peak
5	0.0733	58.16	-101.58	-43.42	30.32	-73.74	peak
6	0.0873	56.96	-101.69	-44.73	28.80	-73.53	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.



150KHz ~ 0.49MHz

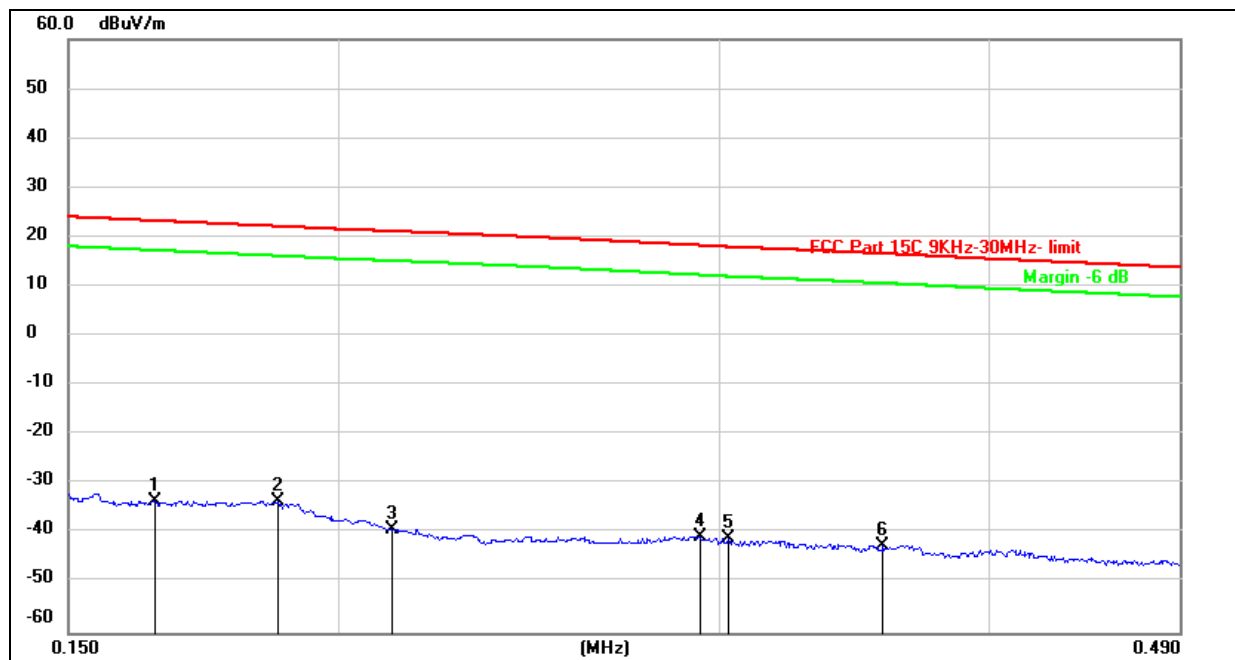

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.1645	68.25	-101.66	-33.41	23.29	-56.70	peak
2	0.1877	68.22	-101.70	-33.48	22.14	-55.62	peak
3	0.2116	62.53	-101.73	-39.20	21.17	-60.37	peak
4	0.2942	61.32	-101.85	-40.53	18.26	-58.79	peak
5	0.3029	60.81	-101.86	-41.05	17.99	-59.04	peak
6	0.3573	59.58	-101.91	-42.33	16.63	-58.96	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.



0.49MHz ~ 30MHz

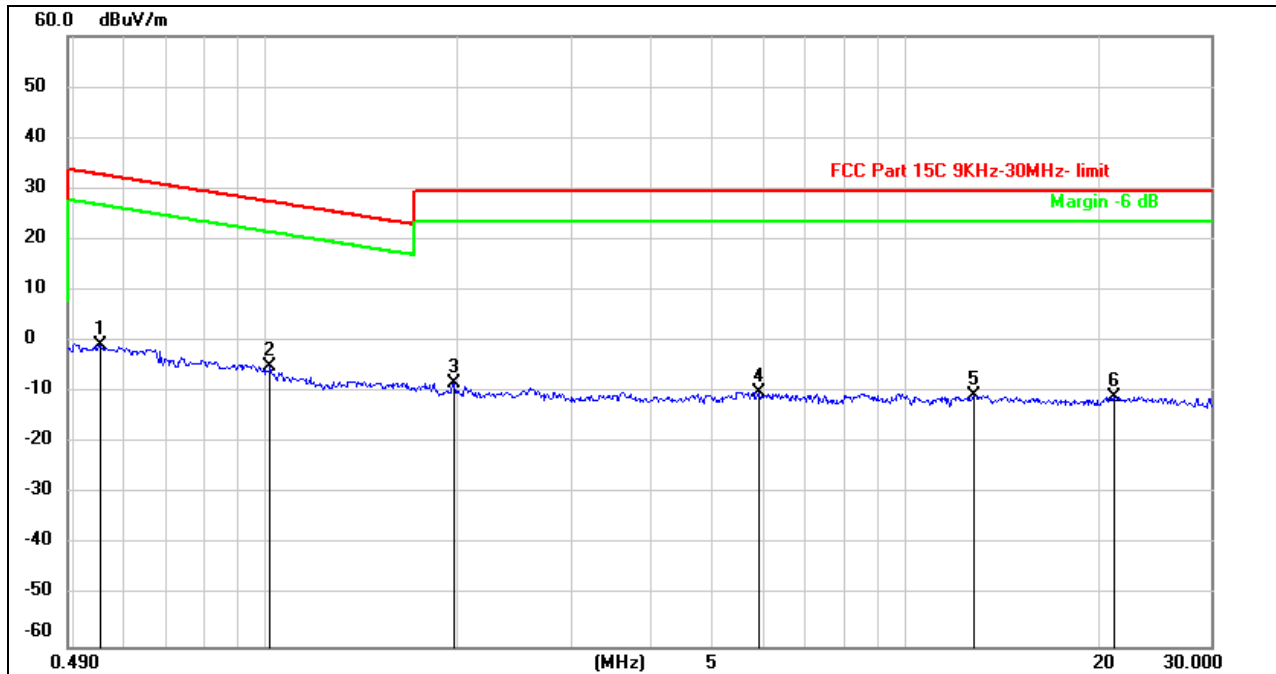

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.5521	61.34	-62.08	-0.74	32.81	-33.55	peak
2	1.0144	57.18	-62.27	-5.09	27.48	-32.57	peak
3	1.9681	53.50	-61.83	-8.33	29.54	-37.87	peak
4	5.9198	51.43	-61.36	-9.93	29.54	-39.47	peak
5	12.7660	50.40	-60.92	-10.52	29.54	-40.06	peak
6	21.2056	49.73	-60.74	-11.01	29.54	-40.55	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.
3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

Note: All test mode has been tested, only the worst data record in the report.



8. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

Please refer to CFR 47 FCC §15.207 (a).

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

TEST SETUP AND PROCEDURE

The EUT is put on a table of non-conducting material that is 12mm high. The vertical conducting wall of shielding is located 40cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

TEST ENVIRONMENT

Temperature	23.4°C	Relative Humidity	60%
Atmosphere Pressure	101kPa	Test Voltage	AC120V,60Hz


RESULTS



8.1.1. $\pi/4$ -DQPSK MODE

TEST RESULTS (LOW CHANNEL, WORST-CASE CONFIGURATION)

LINE N RESULTS

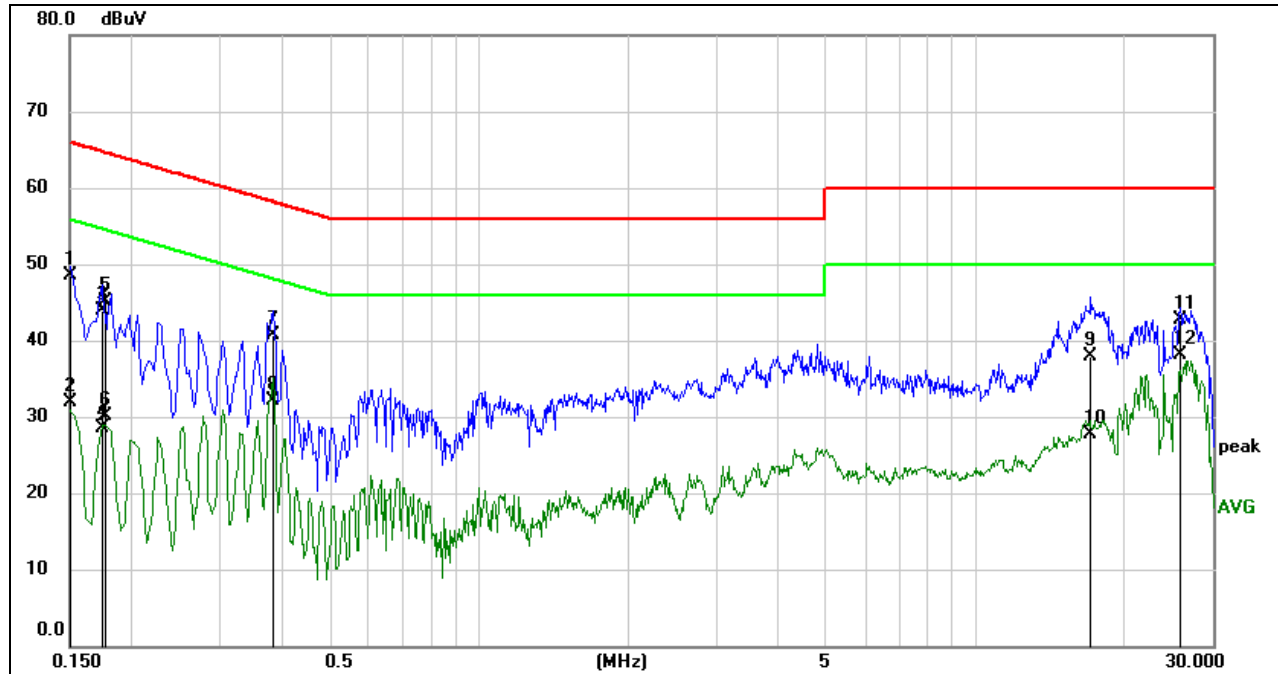


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1515	38.88	9.60	48.48	65.92	-17.44	QP
2	0.1515	22.23	9.60	31.83	55.92	-24.09	AVG
3	0.1747	34.35	9.60	43.95	64.73	-20.78	QP
4	0.1747	18.98	9.60	28.58	54.73	-26.15	AVG
5	0.1771	35.51	9.60	45.11	64.62	-19.51	QP
6	0.1771	20.47	9.60	30.07	54.62	-24.55	AVG
7	0.3852	31.01	9.60	40.61	58.17	-17.56	QP
8	0.3852	22.42	9.60	32.02	48.17	-16.15	AVG
9	17.0401	27.91	10.04	37.95	60.00	-22.05	QP
10	17.0401	17.76	10.04	27.80	50.00	-22.20	AVG
11	25.7602	32.73	10.04	42.77	60.00	-17.23	QP
12	25.7602	28.02	10.04	38.06	50.00	-11.94	AVG

- Note: 1. Result = Reading +Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.



LINE L RESULTS

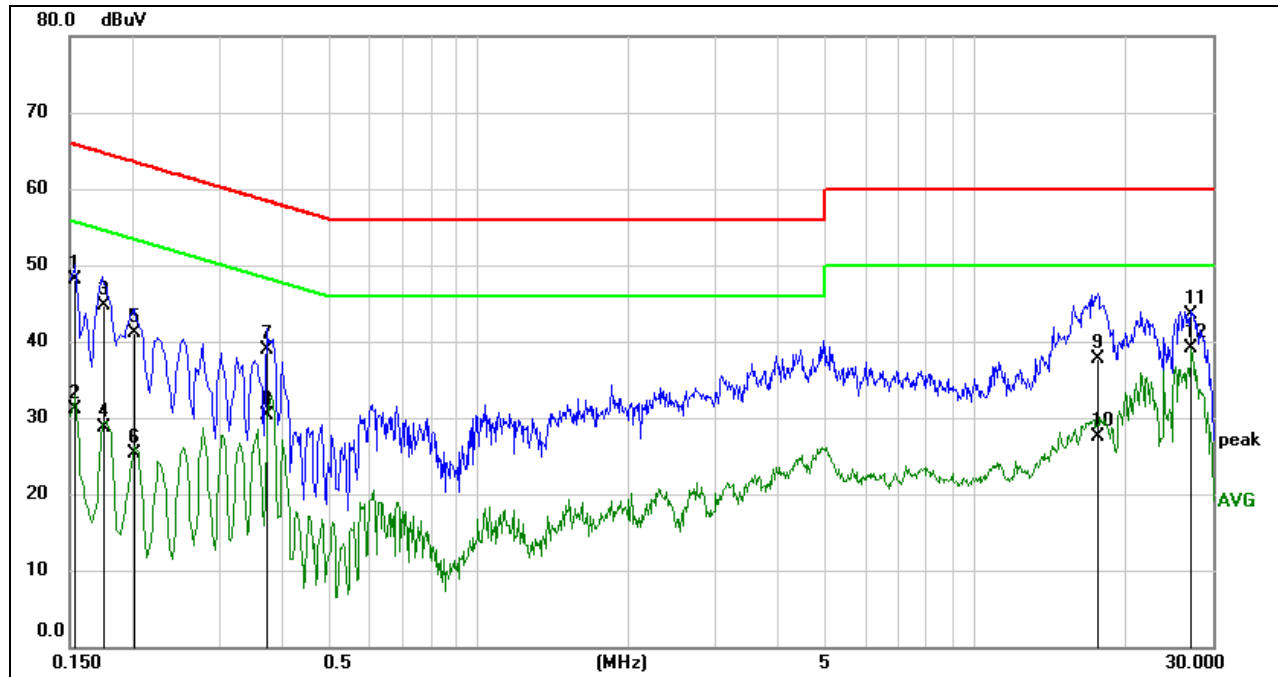

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1529	38.55	9.61	48.16	65.84	-17.68	QP
2	0.1529	21.56	9.61	31.17	55.84	-24.67	AVG
3	0.1759	35.06	9.61	44.67	64.68	-20.01	QP
4	0.1759	19.03	9.61	28.64	54.68	-26.04	AVG
5	0.2009	31.44	9.60	41.04	63.57	-22.53	QP
6	0.2009	15.80	9.60	25.40	53.57	-28.17	AVG
7	0.3779	29.39	9.60	38.99	58.33	-19.34	QP
8	0.3779	20.79	9.60	30.39	48.33	-17.94	AVG
9	17.6402	27.68	10.00	37.68	60.00	-22.32	QP
10	17.6402	17.56	10.00	27.56	50.00	-22.44	AVG
11	27.2007	33.59	9.89	43.48	60.00	-16.52	QP
12	27.2007	29.21	9.89	39.10	50.00	-10.90	AVG

- Note: 1. Result = Reading +Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

Note: All the modulation and channels had been tested, but only the worst data recorded in the report.



9. ANTENNA REQUIREMENTS

APPLICABLE REQUIREMENTS

Please refer to FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC §15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

RESULTS

Complies

END OF REPORT