

# FCC EMC Test Report

## FCC ID: 2AR2SPDS50CP

**Project No.** : 2008C086  
**Equipment** : Wireless Charger  
**Brand Name** : PORSCHE DESIGN  
**Test Model** : PDS50-charging pad  
**Series Model** : PDS50/00-charging pad  
**Applicant** : MMD Hong Kong Holding Limited  
**Address** : Units 1006-1007, 10th Floor, C-Bons International Center, 108 Wai Yip Street, Kwun Tong, Kowloon, Hong Kong  
**Manufacturer** : MMD Hong Kong Holding Limited  
**Address** : Units 1006-1007, 10th Floor, C-Bons International Center, 108 Wai Yip Street, Kwun Tong, Kowloon, Hong Kong  
**Factory** : Guoguang Electric Co.,Ltd.  
**Address** : No.8 Jinghu Road, Xinya Street, Huadu Reg, Guangzhou, China  
**Date of Receipt** : Aug. 07, 2020  
**Date of Test** : Aug. 10, 2020 ~ Aug. 21, 2020  
**Issued Date** : Sep. 10, 2020  
**Report Version** : R01  
**Test Sample** : Engineering Sample No.: DG20200810208, DG20200810209, DG20200810210  
**Standard(s)** : FCC Part 18

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

*Karpin Zhong*  
Prepared by : Karpin Zhong  
*Kevin Li*  
Approved by : Kevin Li



Certificate #5123.02

Add: No.3, Jinshagang 1<sup>st</sup> Road, Shixia, Dalang Town, Dongguan, Guangdong, China.  
Tel: +86-769-8318-3000  
Web: [www.newbtl.com](http://www.newbtl.com)

### **Declaration**

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

**BTL**'s reports apply only to the specific samples tested under conditions. It is manufacturer's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

The report must not be used by the client to claim product certification, approval, or endorsement by NIST, A2LA, or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

**BTL**'s laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

**BTL** is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

### **Limitation**

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

**Table of Contents**

	<b>Page</b>
REPORT ISSUED HISTORY	4
1 . SUMMARY OF TEST RESULTS	5
1.1 TEST FACILITY	6
1.2 MEASUREMENT UNCERTAINTY	6
1.3 TEST ENVIRONMENT CONDITIONS	6
2 . GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 DESCRIPTION OF TEST MODES	7
2.3 EUT OPERATING CONDITIONS	8
2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	8
2.5 DESCRIPTION OF SUPPORT UNITS	8
3 . EMC EMISSION TEST	9
3.1 AC POWER LINE CONDUCTED EMISSIONS TEST	9
3.1.1 LIMIT	9
3.1.2 MEASUREMENT INSTRUMENTS LIST	9
3.1.3 TEST PROCEDURE	9
3.1.4 DEVIATION FROM TEST STANDARD	10
3.1.5 TEST SETUP	10
3.1.6 TEST RESULTS	10
3.2 RADIATED EMISSIONS	13
3.2.1 LIMITS	13
3.2.2 MEASUREMENT INSTRUMENTS LIST	13
3.2.3 TEST PROCEDURE	14
3.2.4 DEVIATION FROM TEST STANDARD	14
3.2.5 TEST SETUP	14
3.2.6 TEST RESULTS-9 KHZ to 30 MHZ	14
4 . EUT TEST PHOTO	17

**REPORT ISSUED HISTORY**

Report Version	Description	Issued Date
R00	Original Issue.	Sep. 07, 2020
R01	Added FCC ID.	Sep. 10, 2020

**1. SUMMARY OF TEST RESULTS**

Emission		
Ref Standard(s)	Test Item	Result
FCC/OST MP-5 (1986)	AC Power Line Conducted Emissions	PASS
	Radiated emission 9kHz to 30MHz	PASS
	Radiated emission between 30MHz and 1000MHz	N/A
	Radiated emission Above 1 GHz	N/A

**NOTE:**

(1) "N/A" denotes test is not applicable to this device.

## 1.1 TEST FACILITY

The test facilities used to collect the test data in this report at the location of No.3, Jinshagang 1st Road,

Shixia, Dalang Town, Dongguan, Guangdong, China.

BTL's Test Firm Registration Number for FCC: 357015

BTL's Designation Number for FCC: CN1240

## 1.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

The BTL measurement uncertainty as below table:

A. AC power line conducted emissions test:

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-C01	CISPR	150kHz ~ 30MHz	3.18

B. Radiated emissions test:

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-CB01	CISPR	9kHz ~ 30MHz	3.02

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

## 1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Tested By
AC Power Line Conducted Emissions	25°C	53%	Bang Liang
Radiated emissions 9kHz to 30MHz	25°C	53%	Lea Lu

## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

Equipment	Wireless Charger
Brand Name	PORSCHE DESIGN
Test Model	PDS50-charging pad
Series Model	PDS50/00-charging pad
Model Difference(s)	The model PDS50-charging pad, PDS50/00-charging pad are only differing in model name to distinguish between different markets.
Power Source	Supplied from Type-C port.
Power Rating	5V == 2A, 9V == 1.67A, 12V == 1.5A
Connecting I/O Port(s)	1* Type-C port
Highest Internal Frequency(Fx)	190 kHz

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

### 2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Charging(With wireless speaker)

AC Power Line Conducted Emissions test	
Final Test Mode	Description
Mode 1	Charging(With wireless speaker)


Radiated Emissions 9kHz to 30MHz test	
Final Test Mode	Description
Mode 1	Charging(With wireless speaker)

## 2.3 EUT OPERATING CONDITIONS

The EUT exercise program used during radiated and/or conducted emission measurement was designed to exercise the various system components in a manner similar to a typical use. The standard test signals and output signal as following:

1. Wireless Speaker is put on the EUT Charging Pad.
2. EUT Charging Pad connected to Adapter via Type-C cable.

## 2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

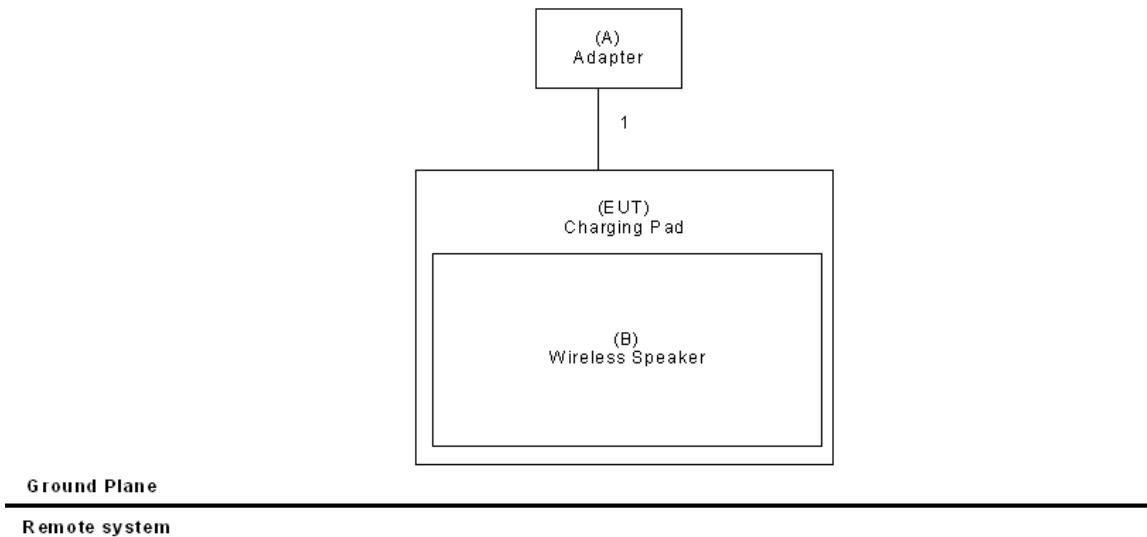

## 2.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.
A	Adapter	N/A	N/A	N/A
B	Wireless Speaker	N/A	PDS50	N/A

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	Type-C Cable	NO	NO	0.5m

### 3. EMC EMISSION TEST

#### 3.1 AC POWER LINE CONDUCTED EMISSIONS TEST

##### 3.1.1 LIMIT

Frequency of Emission (MHz)	(dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46 *
0.5 - 5.0	56.00	46.00
5.0 - 30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:  
Measurement Value = Reading Level + Correct Factor  
Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)  
Margin Level = Measurement Value - Limit Value

##### 3.1.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	50Ω Terminator	SHX	TF2-3G-A	8122901	Feb. 28, 2021
2	TWO-LINE V-NETWORK	R&S	ENV216	100526	Mar. 01, 2021
3	EMI Test Receiver	R&S	ESR3	101862	Jul. 25, 2021
4	Artificial-Mains Network	SCHWARZBECK	NSLK 8127	8127685	Mar. 01, 2021
5	TRANSIENT LIMITER	EM	EM-7600	772	Mar. 01, 2021
6	Cable	N/A	RG400	N/A(12m)	Mar. 10, 2021
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.


##### 3.1.3 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.
- f. Measuring frequency range from 150KHz to 30MHz.

### 3.1.4 DEVIATION FROM TEST STANDARD

No deviation

### 3.1.5 TEST SETUP

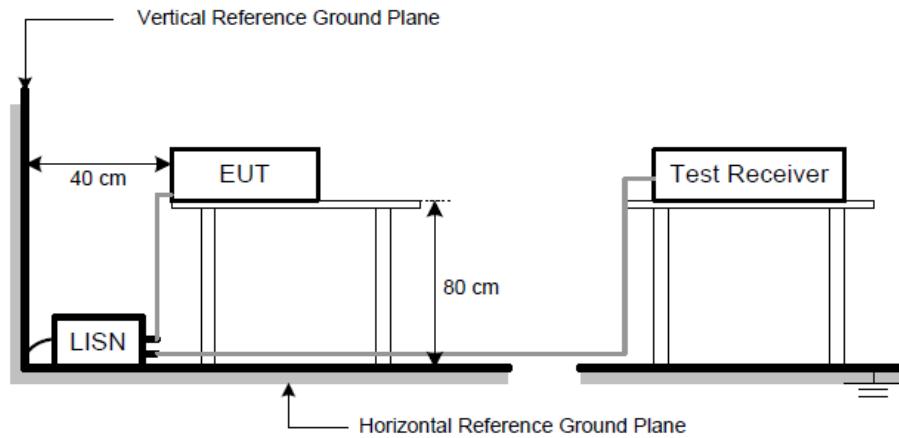


### 3.1.6 TEST RESULTS

#### Remark


- (1) Reading in which marked as QP means measurements by using are Quasi-Peak Mode with Detector BW=9 kHz; SPA setting in RBW=10 kHz, VBW =10 kHz, Swp. Time = 0.3 sec./MHz. Reading in which marked as AVG means measurements by using are Average Mode with instrument setting in RBW=10 kHz, VBW=10 kHz, Swp. Time =0.3 sec./MHz.
- (2) All readings are QP Mode value unless otherwise stated AVG in column of 『Note』 . If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “ \* ” marked in AVG Mode column of Interference Voltage Measured.

Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Mode 1		

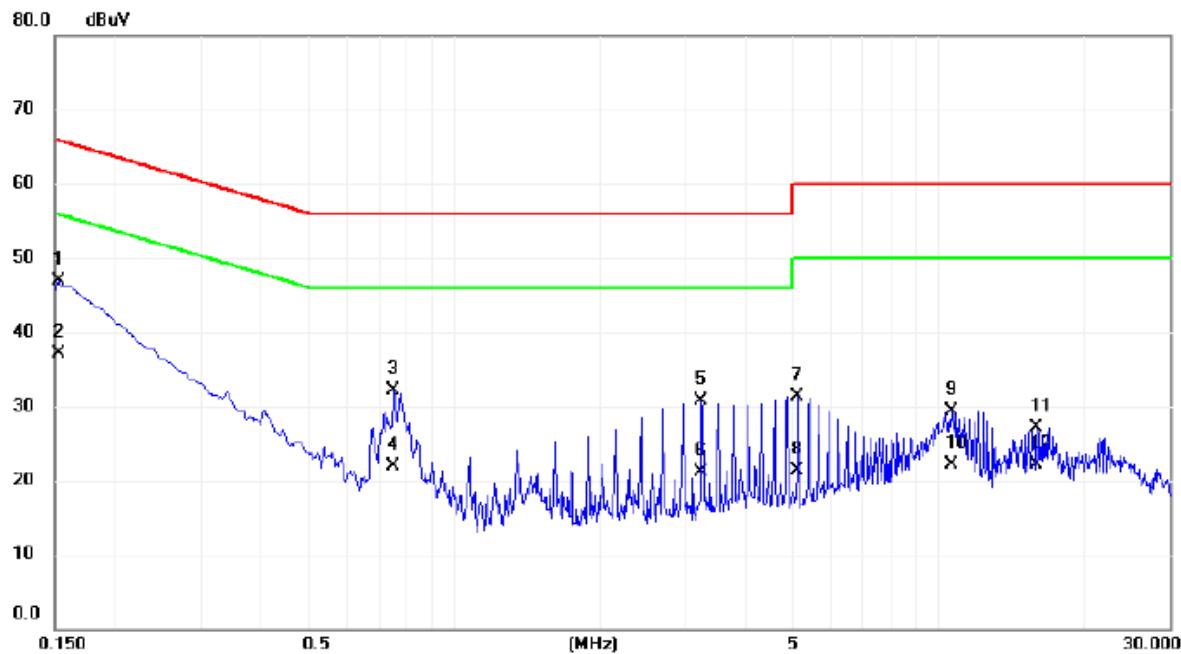

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1522	37.24	9.60	46.84	65.88	-19.04	QP	
2	*	0.1522	27.50	9.60	37.10	55.88	-18.78	AVG	
3		0.7507	22.49	9.65	32.14	56.00	-23.86	QP	
4		0.7507	12.20	9.65	21.85	46.00	-24.15	AVG	
5		3.2370	20.92	9.84	30.76	56.00	-25.24	QP	
6		3.2370	11.30	9.84	21.14	46.00	-24.86	AVG	
7		5.1248	21.34	9.96	31.30	60.00	-28.70	QP	
8		5.1248	11.40	9.96	21.36	50.00	-28.64	AVG	
9		10.6575	19.16	10.24	29.40	60.00	-30.60	QP	
10		10.6575	11.90	10.24	22.14	50.00	-27.86	AVG	
11		15.9248	16.58	10.52	27.10	60.00	-32.90	QP	
12		15.9248	11.50	10.52	22.02	50.00	-27.98	AVG	

Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Mode 1		

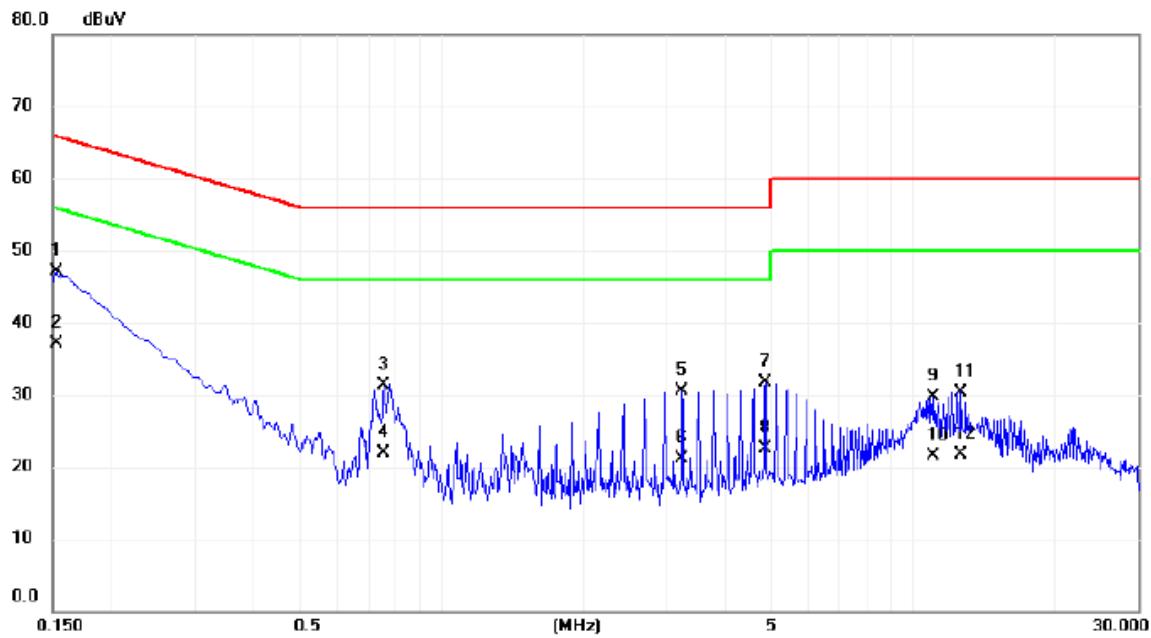

No.	Mk.	Freq. MHz	Reading	Correct	Measure-	Limit dBuV	Margin dB	Detector	Comment
			Level dBuV	Factor dB	ment dBuV				
1		0.1522	37.46	9.57	47.03	65.88	-18.85	QP	
2	*	0.1522	27.50	9.57	37.07	55.88	-18.81	AVG	
3		0.7552	21.67	9.63	31.30	56.00	-24.70	QP	
4		0.7552	12.20	9.63	21.83	46.00	-24.17	AVG	
5		3.2348	20.58	9.83	30.41	56.00	-25.59	QP	
6		3.2348	11.30	9.83	21.13	46.00	-24.87	AVG	
7		4.8525	21.70	9.94	31.64	56.00	-24.36	QP	
8		4.8525	12.60	9.94	22.54	46.00	-23.46	AVG	
9		11.0580	19.43	10.28	29.71	60.00	-30.29	QP	
10		11.0580	11.20	10.28	21.48	50.00	-28.52	AVG	
11		12.6668	20.03	10.37	30.40	60.00	-29.60	QP	
12		12.6668	11.40	10.37	21.77	50.00	-28.23	AVG	

## 3.2 RADIATED EMISSIONS

### 3.2.1 LIMITS

Operating frequency	Field Strength (uV/m)	Measurement Distance (meters)	F.S Limitation at 3m Distance
			(dBuV/m)
Any non-ISM	15	300	103.5

NOTE:

- (1) The Equipment is for 18.305(b) Any type unless otherwise specified (miscellaneous)  
Operating frequency in any non-ISM frequency
- (2) Operation of ISM equipment within the following safety, search and rescue frequency bands is prohibited: 490–510 kHz, 2170–2194 kHz, 8354–8374 kHz, 121.4–121.6 MHz, 156.7–156.9 MHz, and 242.8–243.2 MHz.
- (3) Distance extrapolation factor =  $40 \log(\text{specific distance} / \text{test distance})$  (dB);  
Limit line = specific limits (dBuV) + distance extrapolation factor.
- (4) The test result calculated as following:  
Measurement Value = Reading Level + Correct Factor  
Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)  
Margin Level = Measurement Value - Limit Value

### 3.2.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI Test Receiver	R&S	ESCI	100895	Feb. 28, 2021
2	Antenna	EM	EM-6876-1	230	Apr. 16, 2021
3	Cable	N/A	RG 213/U	N/A	May 29, 2021
4	Controller	ETS-Lindgren	2090	N/A	N/A
5	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.


### 3.2.3 TEST PROCEDURE

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The height of the equipment or of the substitution antenna shall be 0.8 m; the antenna shall be supported in the vertical plane and be rotatable about a vertical axis. The lowest point of the loop shall be 1 m above ground level.
- c. The initial step in collecting radiated emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- d. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

### 3.2.4 DEVIATION FROM TEST STANDARD

No deviation

### 3.2.5 TEST SETUP

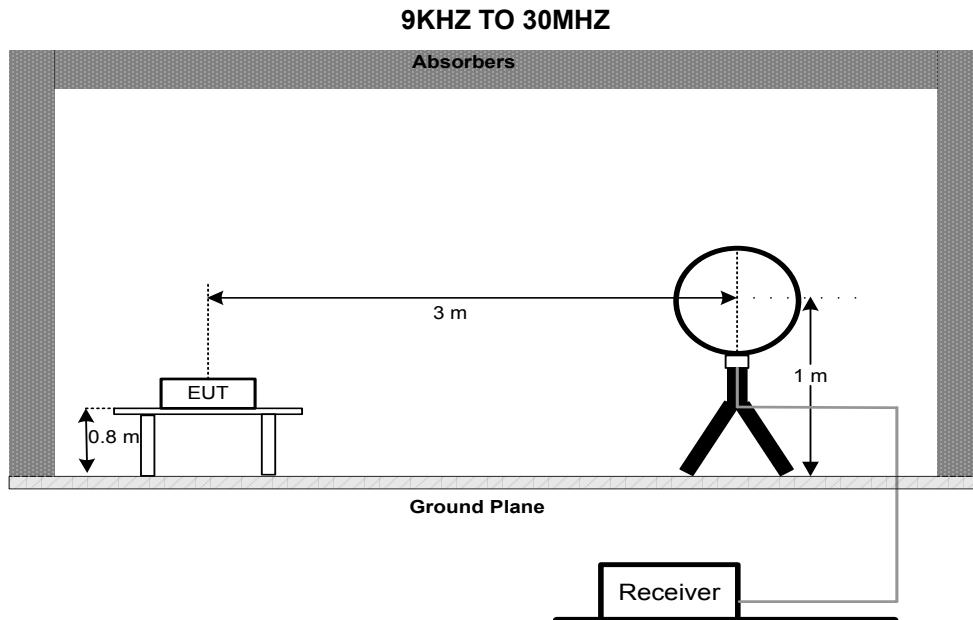


### 3.2.6 TEST RESULTS-9 KHZ to 30 MHZ

Remark:


- (1) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Measuring frequency range from 9kHz to 30MHz.
- (3) If the peak scan value lower limit more than 20dB, then this signal data does not show in table.

Test Voltage:	AC 120V/60Hz
Test Mode:	Mode 1

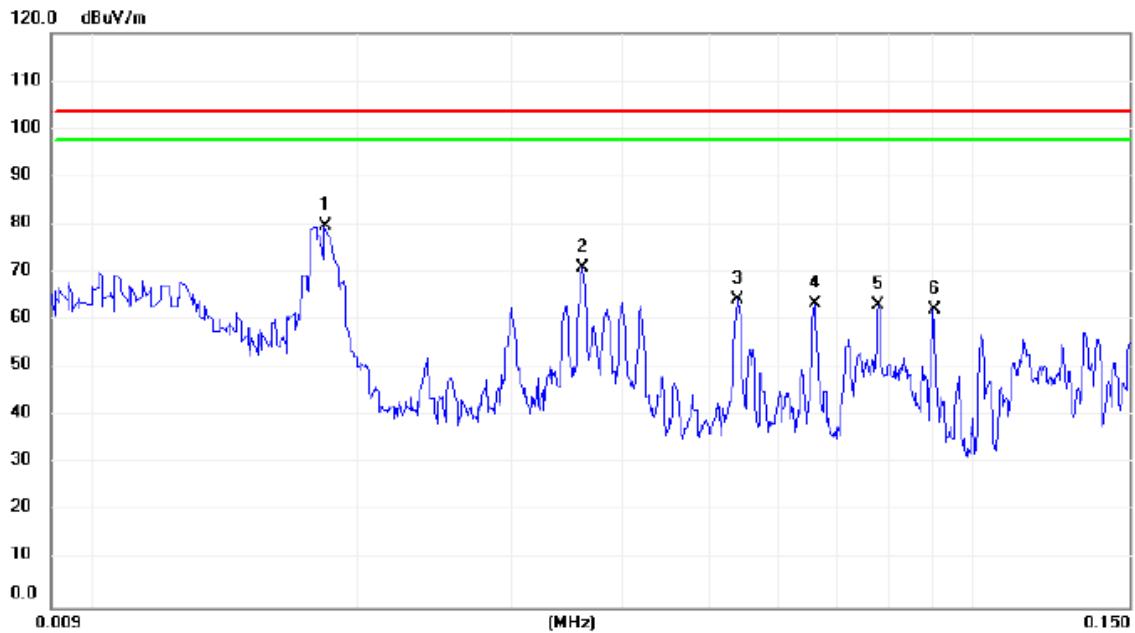

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Comment
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	*	0.0184	58.43	21.30	79.73	103.50	-23.77	QP
2		0.0360	49.87	21.11	70.98	103.50	-32.52	QP
3		0.0540	43.37	21.04	64.41	103.50	-39.09	QP
4		0.0661	42.42	21.08	63.50	103.50	-40.00	QP
5		0.0780	41.95	21.08	63.03	103.50	-40.47	QP
6		0.0901	41.17	20.94	62.11	103.50	-41.39	QP


Test Voltage:	AC 120V/60Hz
Test Mode:	Mode 1

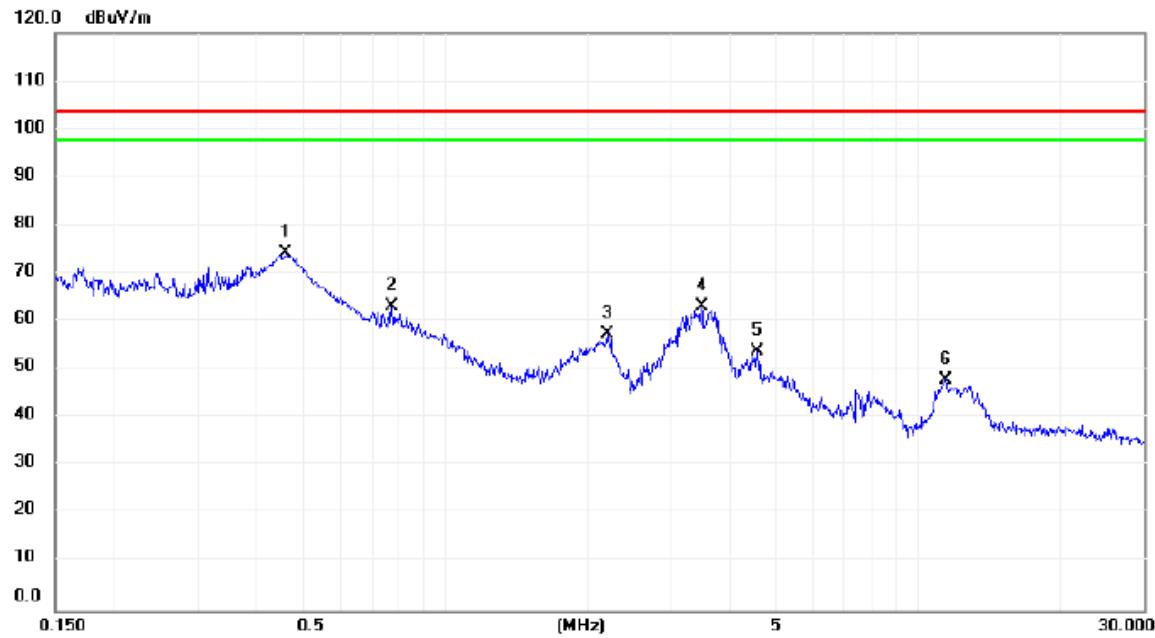



No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	0.4588	53.11	21.01	74.12	103.50	-29.38	QP	
2		0.7711	41.52	21.62	63.14	103.50	-40.36	QP	
3		2.2015	35.17	22.14	57.31	103.50	-46.19	QP	
4		3.4906	40.89	22.26	63.15	103.50	-40.35	QP	
5		4.5736	31.59	22.27	53.86	103.50	-49.64	QP	
6		11.4376	24.59	23.16	47.75	103.50	-55.75	QP	

#### 4. EUT TEST PHOTO

AC Power Line Conducted Emissions

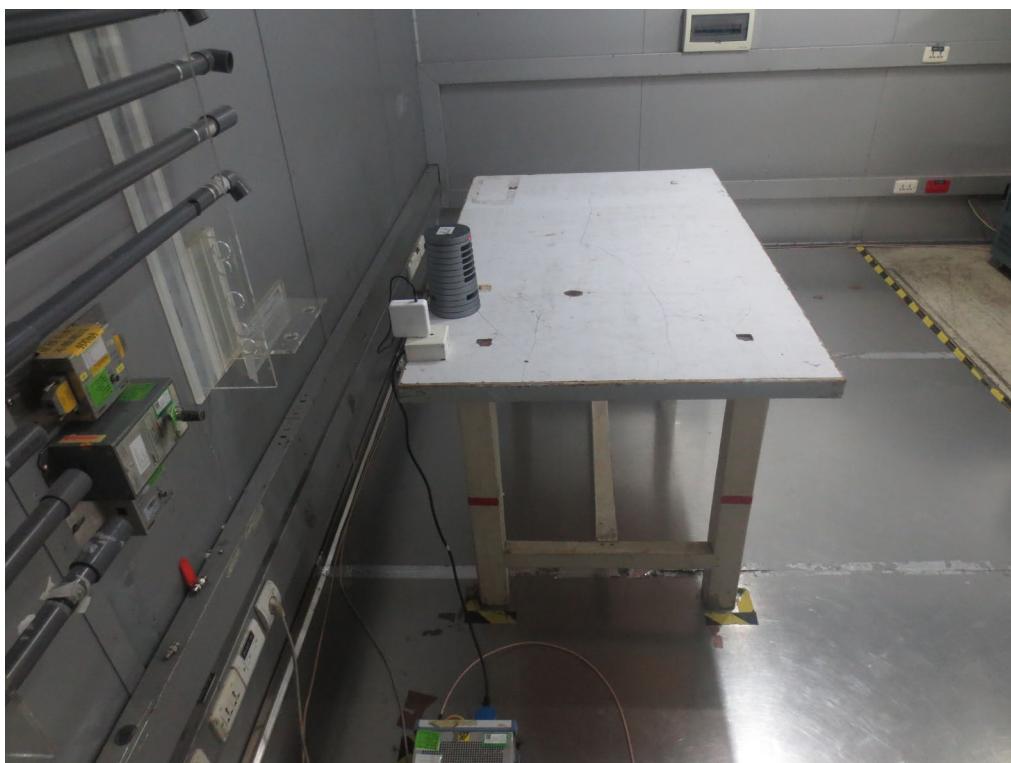

Radiated Emissions 9kHz to 30MHz

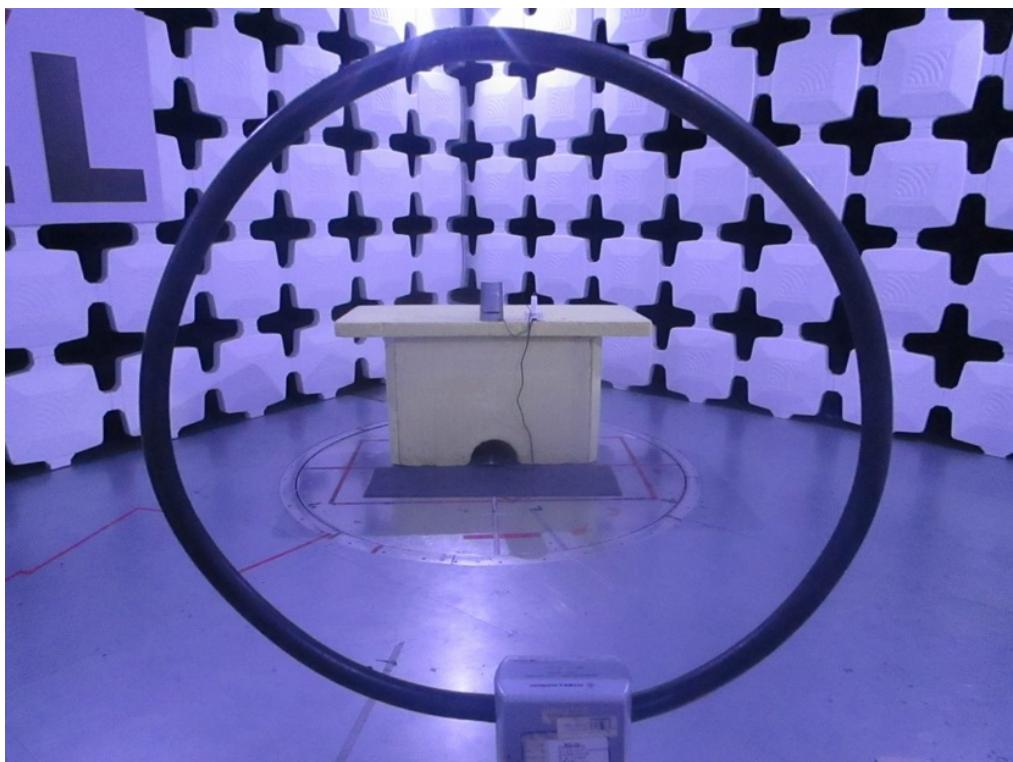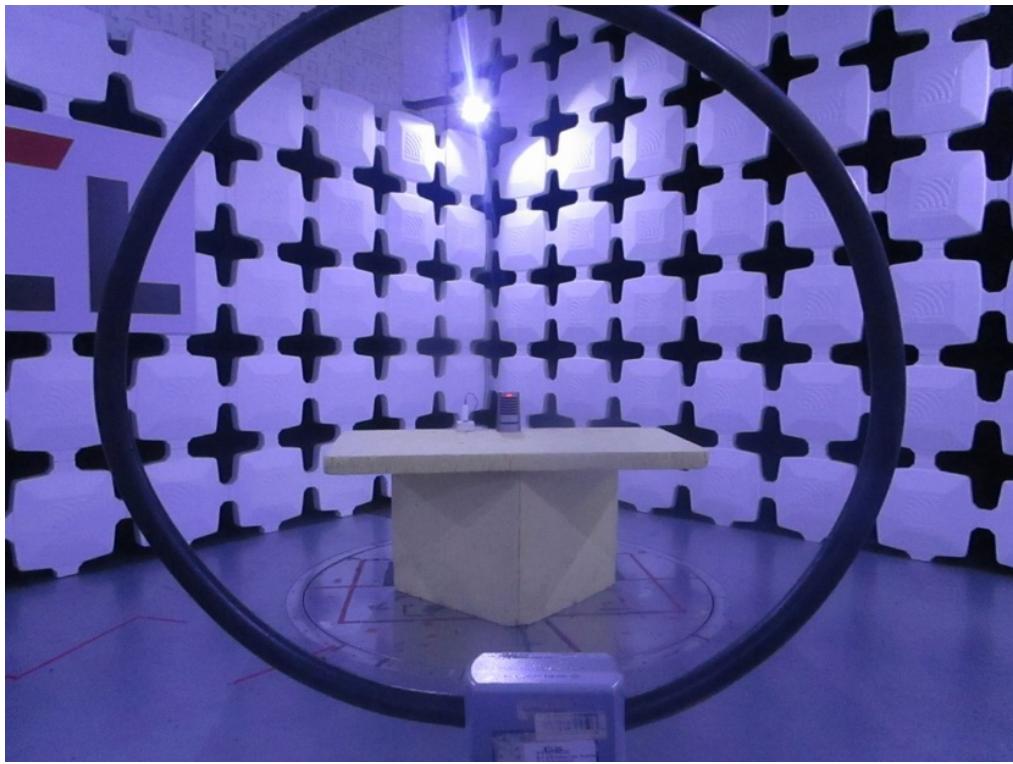

**End of Test Report**