

FCC & ISED TEST REPORT

Product Name: Sports headphones

Trade Mark:



or PHILIPS

Model No./HVIN: TAA5508

Add. Model No.: TAA5508xx/yy, TAA5508 II, TAA5508 II
xx/yy (xx=AA-ZZ or blank denoted different
color; yy=00-99 denoted different country
destination)

Report Number: 2212163226RFC-2

Test Standards: FCC 47 CFR Part 15 Subpart C
RSS-247 Issue 2
RSS-Gen Issue 5

FCC ID: 2AR2STAA5508

IC: 24589-TAA5508

Test Result: PASS

Date of Issue: March 21, 2023

Prepared for:

MMD Hong Kong Holding Limited

**Units 1208-11, 12th Floor, C-Bons International Center, 108 Wai Yip
Street, Kwun Tong, Kowloon, Hong Kong**

Prepared by:

Shenzhen UnionTrust Quality and Technology Co., Ltd.
**Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and
technology park, Longhua district, Shenzhen, China**

TEL: +86-755-2823 0888

FAX: +86-755-2823 0886

Prepared by:

Kieron Luo
Project Engineer

Reviewed by:

Henry Lu
Team Leader

Approved by:

Kevin Liang
Assistant Manager

Date:

March 21, 2023

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

Version

Version No.	Date	Description
V1.0	March 21, 2023	Original



Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

CONTENTS

1. GENERAL INFORMATION	4
1.1 CLIENT INFORMATION	4
1.2 EUT INFORMATION	4
1.2.1 GENERAL DESCRIPTION OF EUT	4
1.2.2 DESCRIPTION OF ACCESSORIES	4
1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	5
1.4 OTHER INFORMATION	5
1.5 DESCRIPTION OF SUPPORT UNITS	5
1.6 TEST LOCATION	6
1.7 TEST FACILITY	6
1.8 DEVIATION FROM STANDARDS	6
1.9 ABNORMALITIES FROM STANDARD CONDITIONS	6
1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER	6
1.11 MEASUREMENT UNCERTAINTY	7
2. TEST SUMMARY	8
3. EQUIPMENT LIST	9
4. TEST CONFIGURATION	10
4.1 ENVIRONMENTAL CONDITIONS FOR TESTING	10
4.1.1 NORMAL OR EXTREME TEST CONDITIONS	10
4.1.2 RECORD OF NORMAL ENVIRONMENT	10
4.2 TEST CHANNELS	10
4.3 EUT TEST STATUS	11
4.4 PRE-SCAN	11
PRE-SCAN UNDER ALL PACKETS AT MIDDLE CHANNEL	11
4.4.1 WORST-CASE DATA PACKETS	11
4.4.2 TESTED CHANNEL DETAIL	12
4.5 TEST SETUP	13
4.5.1 FOR RADIATED EMISSIONS TEST SETUP	13
4.5.2 FOR CONDUCTED EMISSIONS TEST SETUP	14
4.5.3 FOR CONDUCTED RF TEST SETUP	15
4.6 SYSTEM TEST CONFIGURATION	15
4.7 DUTY CYCLE	16
5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION	17
5.1 REFERENCE DOCUMENTS FOR TESTING	17
5.2 ANTENNA REQUIREMENT	17
5.3 CONDUCTED PEAK OUTPUT POWER	18
5.4 20 dB BANDWIDTH & OCCUPIED BANDWIDTH	21
5.5 CARRIER FREQUENCIES SEPARATION	24
5.6 NUMBER OF HOPPING CHANNEL	26
5.7 DWELL TIME	30
5.8 CONDUCTED OUT OF BAND EMISSION	34
5.9 RADIATED SPURIOUS EMISSIONS	39
5.10 BAND EDGE MEASUREMENTS (RADIATED)	46
APPENDIX 1 PHOTOS OF TEST SETUP	51
APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS	51

1. GENERAL INFORMATION

1.1 CLIENT INFORMATION

Applicant:	MMD Hong Kong Holding Limited
Address of Applicant:	Units 1208-11,12th Floor,C-Bons International Center, 108 Wai Yip Street, Kwun Tong, Kowloon,Hong Kong
Manufacturer:	MMD Hong Kong Holding Limited
Address of Manufacturer:	Units 1208-11,12th Floor,C-Bons International Center, 108 Wai Yip Street, Kwun Tong, Kowloon,Hong Kong

1.2 EUT INFORMATION

1.2.1 General Description of EUT

Product Name:	Sports headphones	
Model No. /HVIN:	TAA5508	
Add. Model No.:	TAA5508xx/yy,TAA5508 II,TAA5508 II xx/yy (xx=AA-ZZ or blank denoted different color; yy=00-99 denoted different country destination)	
Trade Mark:	 or PHILIPS	
DUT Stage:	Production Unit	
EUT Supports Function: (Provided by the customer)	2.4 GHz ISM Band:	Bluetooth 5.3
Software Version:	V1.1.0.19(Provided by the customer)	
Hardware Version:	V04(Provided by the customer)	
Sample Received Date:	December 14, 2022	
Sample Tested Date:	February 7, 2023 to February 17, 2023	
Note: The additional model TAA5508xx/yy,TAA5508 II,TAA5508 II xx/yy (xx=AA-ZZ or blank denoted different color; yy=00-99 denoted different country destination) is identical with the test model TAA5508 except the model number for marketing purpose.		

1.2.2 Description of Accessories

Cable	
Description:	USB Type-C Plug Cable
Cable Type:	Unshielded without ferrite
Length:	0.3 Meter

Battery (Charging Box)	
Model No.:	902035
Battery Type:	Lithium-ion Rechargeable Battery
Rated Voltage:	3.7 Vdc
Limited Charge Voltage:	4.2 Vdc
Rated Capacity:	600 mAh

Battery (Earbuds)	
Model No.:	M1154A6-S01
Battery Type:	Lithium-ion Rechargeable Battery
Rated Voltage:	3.85 Vdc
Limited Charge Voltage:	4.4 Vdc
Rated Capacity:	53 mAh

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD

Frequency Band:	2400 MHz to 2483.5 MHz
Frequency Range:	2402 MHz to 2480 MHz
Bluetooth Version:	Bluetooth BR + EDR
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)
Type of Modulation:	GFSK, $\pi/4$ DQPSK, 8DPSK
Number of Channels:	79
Channel Separation:	1 MHz
Hopping Channel Type:	Adaptive Frequency Hopping Systems
Antenna Type:	FPCB Antenna
Antenna Gain: (Provided by the customer)	-0.5 dBi
Maximum Conducted Peak Power:	11.17 dBm
Normal Test Voltage:	3.85 Vdc

1.4 OTHER INFORMATION

Operation Frequency Each of Channel	
$f = 2402 + k \text{ MHz}, k = 0, \dots, 78$	
Note:	
f	is the operating frequency (MHz);
k	is the operating channel.

Modulation Configure			
Modulation	Packet	Packet Type	Packet Size
GFSK	1-DH1	4	27
	1-DH3	11	183
	1-DH5	15	339
$\pi/4$ DQPSK	2-DH1	20	54
	2-DH3	26	367
	2-DH5	30	679
8DPSK	3-DH1	24	83
	3-DH3	27	552
	3-DH5	31	1021

1.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested with associated equipment below.

1) Support Equipment

Description	Manufacturer	Model No.	Serial Number	Supplied by
Notebook	DELL	Latitude3400	16238087894	UnionTrust
Mouse	DELL	MS111	CN-011D3V-738	UnionTrust

2) Support Cable

Cable No.	Description	Connector	Length	Supplied by
1	Antenna Cable	SMA	0.10 Meter	UnionTrust

1.6 TEST LOCATION

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Telephone: +86 (0) 755 2823 0888

Fax: +86 (0) 755 2823 0886

1.7 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L9069

The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable under the ISO/IEC 17025 to international or national standards. Equipment has been calibrated by accredited calibration laboratories.

A2LA-Lab Certificate No.: 4312.01

Shenzhen UnionTrust Quality and Technology Co., Ltd. has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

ISED Wireless Device Testing Laboratories

CAB identifier: CN0032

FCC Accredited Lab.

Designation Number: CN1194

Test Firm Registration Number: 259480

1.8 DEVIATION FROM STANDARDS

None.

1.9 ABNORMALITIES FROM STANDARD CONDITIONS

None.

1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER

None.

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

1.11 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Measurement Uncertainty
1	Conducted emission 9KHz-150KHz	±3.2 dB
2	Conducted emission 150KHz-30MHz	±2.7 dB
3	Radiated emission 9KHz-30MHz	± 4.7 dB
4	Radiated emission 30MHz-1GHz	± 4.6 dB
5	Radiated emission 1GHz-18GHz	± 4.4 dB
6	Radiated emission 18GHz-26GHz	± 4.6 dB
7	Radiated emission 26GHz-40GHz	± 4.6 dB
8	RF Power, Conducted	± 0.69 dB
9	Transmission Time	± 0.19 %
10	Occupied Bandwidth	± 1.86 %
11	Power Spectral Density, conducted	± 0.6 dB
12	Radio Frequency	± 6.5 x 10 ⁻⁸
13	Conducted out of band emission	± 2.7 dB

2. TEST SUMMARY

FCC 47 CFR Part 15 Subpart C Test Cases			
Test Item	Test Requirement	Test Method	Result
Antenna Requirement	FCC 47 CFR Part 15 Subpart C Section 15.203/15.247 (c) RSS-Gen Issue 5, Section 6.8	N/A	PASS
AC Power Line Conducted Emission	FCC 47 CFR Part 15 Subpart C Section 15.207 RSS-Gen Issue 5, Section 8.8	ANSI C63.10-2013 Section 6.2	N/A ^(Note2)
Conducted Peak Output Power	FCC 47 CFR Part 15 Subpart C Section 15.247 (b)(1) RSS-247 Issue 2, Section 5.4(b)	ANSI C63.10-2013 Section 7.8.5	PASS
20 dB Bandwidth	FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(1) RSS-247 Issue 2, Section 5.1(a)	ANSI C63.10-2013 Section 6.9.2	PASS
Occupied Bandwidth	RSS-Gen section 6.7	RSS-Gen section 6.7	PASS
Carrier Frequencies Separation	FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(1) RSS-247 Issue 2, Section 5.1(b)	ANSI C63.10-2013 Section 7.8.2	PASS
Number of Hopping Channel	FCC 47 CFR Part 15 Subpart C Section 15.247 (b)(1) RSS-247 Issue 2, Section 5.1(d)	ANSI C63.10-2013 Section 7.8.3	PASS
Dwell Time	FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(1) RSS-247 Issue 2, Section 5.1(d)	ANSI C63.10-2013 Section 7.8.4	PASS
Conducted Out of Band Emission	FCC 47 CFR Part 15 Subpart C Section 15.247(d) RSS-247 Issue 2, Section 5.5	ANSI C63.10-2013 Section 6.10.4 & Section 7.8.8	PASS
Radiated Emissions	FCC 47 CFR Part 15 Subpart C Section 15.205/15.209 RSS-Gen Issue 5, Section 6.13/8.9/8.10	ANSI C63.10-2013 Section 6.3 & 6.5 & 6.6	PASS
Note: 1) N/A: In this whole report not applicable. 2) This EUT is charged by AC adapter to the battery, when charging, it doesn't transmitting while charging.			

3. EQUIPMENT LIST

Radiated Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date (dd mm, yyyy)	Cal. Due date (dd mm, yyyy)
☒	3m SAC	ETS-Lindgren	3m	Euroshiedpn-C T001270-1317	22-Jan-2021	21-Jan-2024
☒	Loop Antenna	ETS-Lindgren	6502	00202525	11-Nov-2021	10-Nov-2023
☒	Receiver	ROHDE & SCHWARZ	ESIB26	100114	3-Nov-2022	2-Nov-2023
☒	Broadband Antenna (Pre-amplifier)	ETS-Lindgren	3142E	00201566	11-Nov-2021	10-Nov-2023
☒	Pre-amplifier	HP	8447F	2805A02960	1-Nov-2022	31-Oct-2023
☒	6dB Attenuator	Talent	RA6A5-N-18	18103001	11-Nov-2021	10-Nov-2023
☒	Double-Ridged Waveguide Horn Antenna (Pre-amplifier)	ETS-Lindgren	3117-PA	00201541	17-Apr-2022	16-Apr-2024
☒	Pre-amplifier	ETS-Lindgren	00118385	00201874	1-Nov-2022	31-Oct-2023
☒	Double-Ridged Waveguide Horn Antenna (Pre-amplifier)	ETS-Lindgren	3116C-PA	00202652	21-Nov-2022	20-Nov-2023
☒	Pre-amplifier	ETS-Lindgren	00118384	202652	21-Nov-2022	20-Nov-2023
☒	Multi device Controller	ETS-LINDGREN	7006-001	00160105	N/A	N/A
☒	Test Software	Audix	e3	Software Version: 9.160323		

Conducted RF test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date (dd mm, yyyy)	Cal. Due date (dd mm, yyyy)
☒	EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY51440197	15-Apr-2022	14-Apr-2023
☒	USB Wideband Power Sensor	KEYSIGHT	U2021XA	MY55430035	3-Nov-2022	2-Nov-2023
☒	MXG X-Series RF Vector Signal Generator	KEYSIGHT	N5182B	MY51350267	1-Nov-2022	31-Oct-2023
☒	Wideband Radio Communication Tester	R&S	CMW500	120932	15-Apr-2022	14-Apr-2023
☒	Test Software	Automation Test System	ECIT	Software Version: 1.0.7515.16529		

4. TEST CONFIGURATION

4.1 ENVIRONMENTAL CONDITIONS FOR TESTING

4.1.1 Normal or Extreme Test Conditions

Environment Parameter	Selected Values During Tests		
Test Condition	Ambient		
	Temperature (°C)	Voltage (V)	Relative Humidity (%)
NT/NV	+15 to +35	3.85Vdc and or 5Vdc	20 to 75
Remark: 1) NV: Normal Voltage; NT: Normal Temperature			

4.1.2 Record of Normal Environment

Test Item	Temperature (°C)	Relative Humidity (%)	Pressure (kPa)	Sample No.	Tested by
Conducted Peak Output Power	23.2	53.7	99.9	S20221214934-ZJA26/26	Bowie Zhang
20 dB Bandwidth & Occupied Bandwidth	23.2	53.7	99.9	S20221214934-ZJA26/26	Bowie Zhang
Carrier Frequencies Separation	23.2	53.7	99.9	S20221214934-ZJA26/26	Bowie Zhang
Number of Hopping Channel	23.2	53.7	99.9	S20221214934-ZJA26/26	Bowie Zhang
Dwell Time	23.2	53.7	99.9	S20221214934-ZJA26/26	Bowie Zhang
Conducted Out of Band Emission	23.2	53.7	99.9	S20221214934-ZJA26/26	Bowie Zhang
Radiated Emissions	22.5	38.6	101.8	S20221214934-ZJA26/26	Lucas Ouyang
Band Edge Measurement	22.5	38.6	101.8	S20221214934-ZJA26/26	Lucas Ouyang

4.2 TEST CHANNELS

Mode	Tx/Rx Frequency	Test RF Channel Lists		
		Lowest(L)	Middle(M)	Highest(H)
GFSK (DH1, DH3, DH5)	2402 MHz to 2480 MHz	Channel 0	Channel 39	Channel 78
		2402 MHz	2441 MHz	2480 MHz
π /4DQPSK (DH1, DH3, DH5)	2402 MHz to 2480 MHz	Channel 0	Channel 39	Channel 78
		2402 MHz	2441 MHz	2480 MHz
8DPSK (DH1, DH3, DH5)	2402 MHz to 2480 MHz	Channel 0	Channel 39	Channel 78
		2402 MHz	2441 MHz	2480 MHz

4.3 EUT TEST STATUS

Type of Modulation	Tx Function	Description
GFSK/ π /4DQPSK/ 8DPSK	1Tx	1. Keep the EUT in continuously transmitting with Modulation test single 2. Keep the EUT in continuously transmitting with Modulation test Hopping Frequency.

Power Setting
Power Setting: power level is 7

Test Software
Test software name: bt_tool_v1.1.2

4.4 PRE-SCAN

Pre-scan under all packets at middle channel

Conducted Average Power (dBm) for packets									
Type of Modulation	GFSK			π /4DQPSK			8DPSK		
Packets	1-DH1	1-DH3	1-DH5	2-DH1	2-DH3	2-DH5	3-DH1	3-DH3	3-DH5
Power (dBm)	8.06	7.98	7.82	7.76	7.67	7.55	7.77	7.68	7.56

4.4.1 Worst-case data packets

Type of Modulation	Worst-case data rates
GFSK	1-DH5
π /4DQPSK	2-DH5
8DPSK	3-DH5

4.4.2 Tested channel detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data packets and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.

Type of Modulation	GFSK			$\pi/4$ DQPSK			8DPSK		
Data Packets	1-DH 1	1-DH 3	1-DH 5	2-DH 1	2-DH 3	2-DH 5	3-DH 1	3-DH 3	3-DH 5
Available Channel	0 to 78								
Test Item	Test channel and choose of data packets								
AC Power Line Conducted Emission	Frequency Hopping Channel 0 to 78								
	☐ Link								
Conducted Peak Output Power	Channel 0 & 39 & 78								
	☐	☐	☒	☐	☐	☒	☐	☐	☒
20 dB Bandwidth	Channel 0 & 39 & 78								
	☐	☐	☒	☐	☐	☒	☐	☐	☒
Carrier Frequencies Separation	Frequency Hopping Channel 0 to 78								
	☐	☐	☒	☐	☐	☒	☐	☐	☒
Number of Hopping Channel	Frequency Hopping Channel 0 to 78								
	☐	☐	☒	☐	☐	☒	☐	☐	☒
Dwell Time	Channel 39								
	☒	☒	☒	☒	☒	☒	☒	☒	☒
Conducted Out of Band Emission	Channel 0 & 39 & 78								
	☐	☐	☒	☐	☐	☒	☐	☐	☒
Radiated Emissions	Channel 0 & 39 & 78								
	☐	☐	☐	☐	☐	☐	☐	☐	☒
Band Edge Measurements (Radiated)	Channel 0 & 78								
	☐	☐	☐	☐	☐	☐	☐	☐	☒
Remark: 1. The mark "☒" means is chosen for testing; 2. The mark "☐" means is not chosen for testing.									

4.5 TEST SETUP

4.5.1 For Radiated Emissions test setup



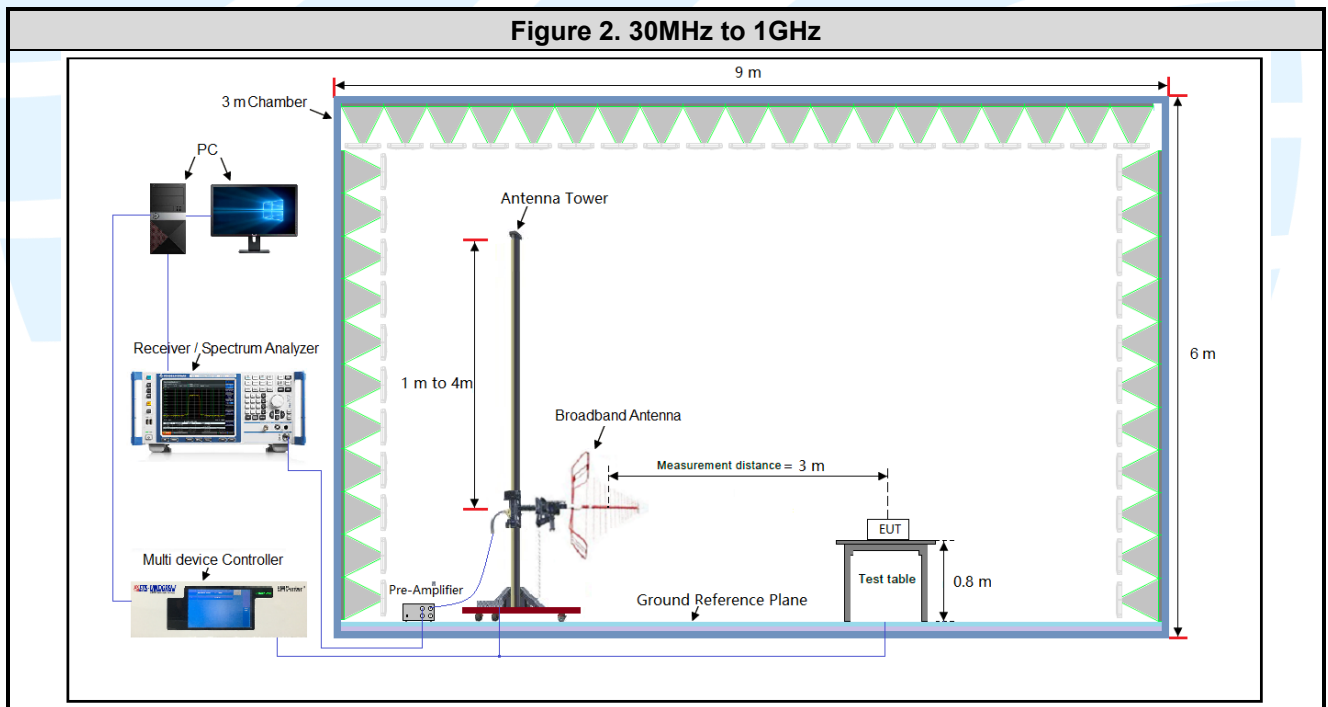


Figure 3. Above 1GHz

The diagram illustrates the measurement setup for frequencies above 1 GHz. The setup is contained within a 3 m Chamber with dimensions 9 m by 6 m. An Antenna Tower, adjustable from 1 m to 4 m, holds a Horn Antenna. A Pre-Amplifier is connected to the antenna. The measurement distance to the EUT is 3 m. The EUT is on a Test table (1.5 m high) which sits on a Turntable. A Ground Reference Plane is at the base. A Receiver / Spectrum Analyzer and Multi device Controller are connected to the system.

The diagram illustrates the layout of a Shielding Room used for testing. On the left, a workstation on a table includes a PC, a Receiver, and a Pulse Limiter. A Ground Reference Plane is indicated below the table. Two LISN (Line Impedance Stabilization Network) units, LISN 1 and LISN 2, are connected to the AC Mains. LISN 1 is connected to the Pulse Limiter and the Receiver. LISN 2 is connected to the AC Mains. The test area consists of a Test table with two EUT/AE (Equipment Under Test/Accessory) units and a PSU (Power Supply Unit). The EUT/AE units are spaced 10 cm apart, and the PSU is 10 cm from the second EUT/AE. The Test table is 80 cm high and is supported by a base with Insulation ≤ 0.15 m. The distance from the AC Mains to the Test table is 40 cm. The entire setup is enclosed in a Shielding Room.

4.5.3 For Conducted RF test setup

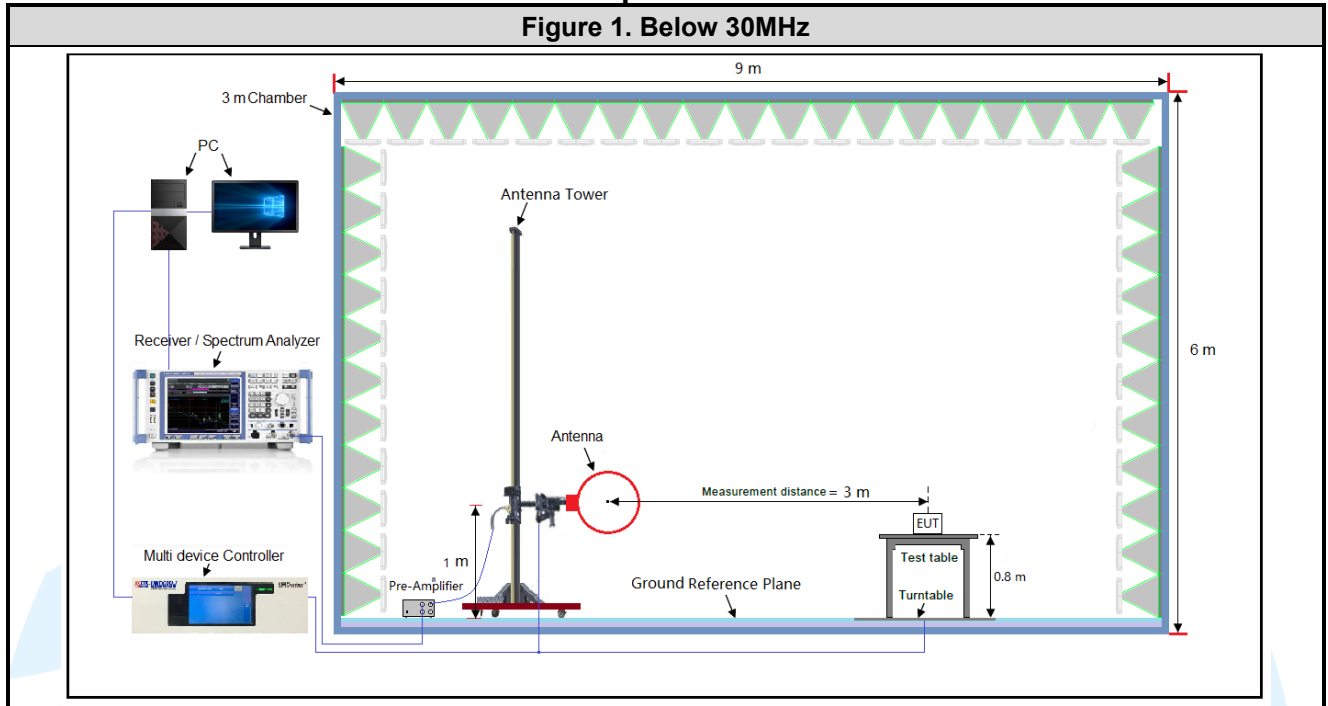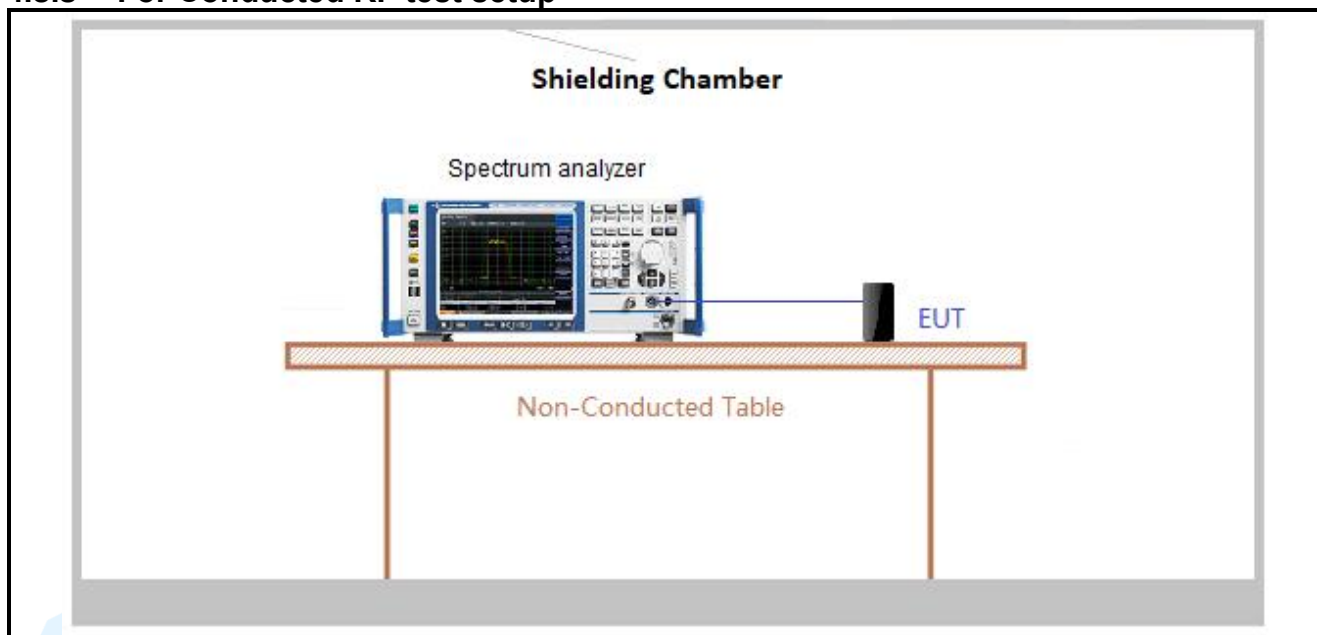

4.6 SYSTEM TEST CONFIGURATION

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, radiated emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario. It was powered by a 3.7V battery. Only the worst case data were recorded in this test report.

The signal is maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters. Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance. Therefore, all final radiated testing was performed with the EUT in (see table below) orientation.

Frequency	Mode	Antenna Port	Worst-case axis positioning
Above 1GHz	1TX	Chain 0	Y axis

All readings are extrapolated back to the equivalent three-meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000 MHz. The resolution is 1 MHz or greater for frequencies above 1000 MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

Radiated emission measurement were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

4.7 DUTY CYCLE

Test Procedure: ANSI C63.10-2013 Clause 11.6.


Test Results

Modulation	On Time (msec)	Period (msec)	Duty Cycle (linear)	Duty Cycle (%)	Duty Cycle Factor (dB)	1/T Minimum VBW (kHz)
GFSK	2.880	3.750	0.7680	76.80	1.146	0.35

Remark:

- 1) Duty cycle= On Time/ Period;
- 2) Duty Cycle factor = $10 * \log(1/ \text{Duty cycle})$;
- 3) Average factor = $20 \log_{10} \text{Duty Cycle}$.

The test plot as follows

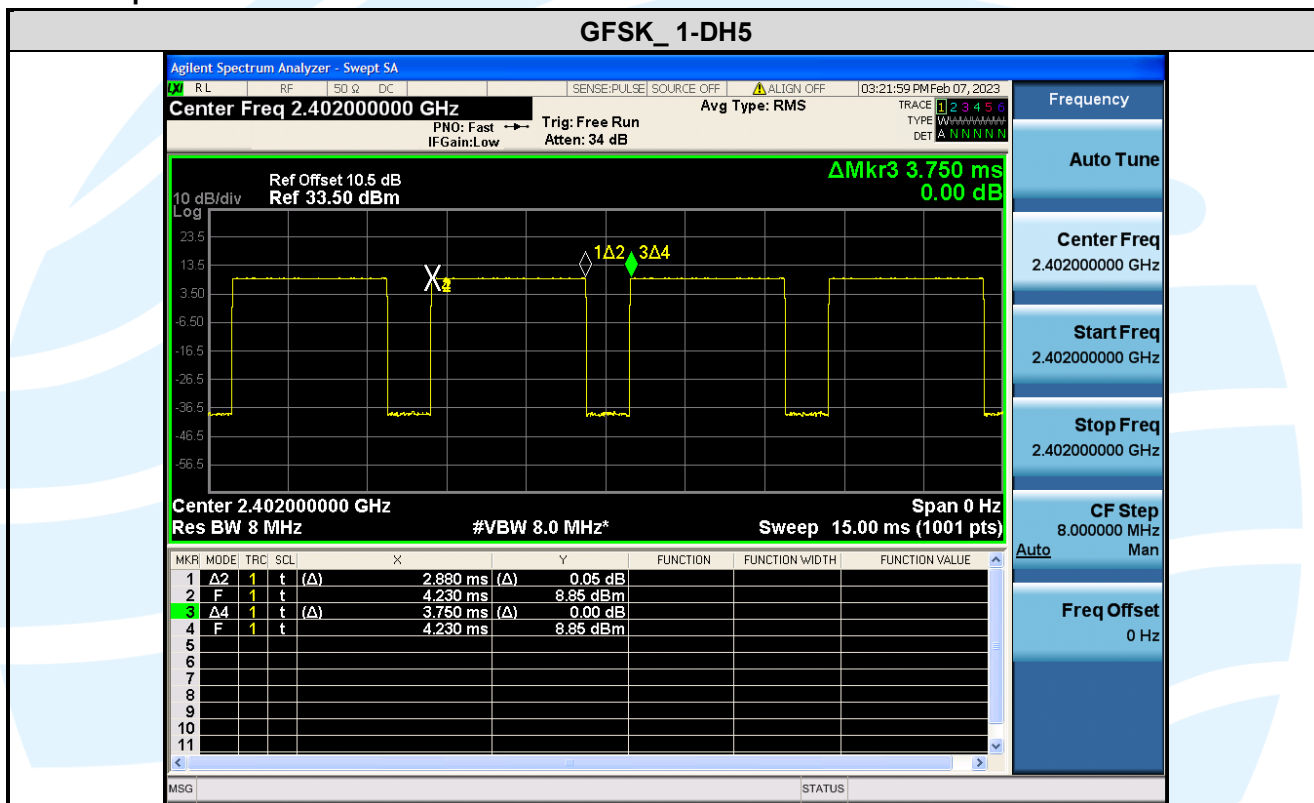

5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION

5.1 REFERENCE DOCUMENTS FOR TESTING

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 15	Radio Frequency Devices
3	RSS-247 Issue 2	Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices
4	RSS-Gen Issue 5	General Requirements for Compliance of Radio Apparatus
5	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
6	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on Digital Transmission Systems, Frequency Hopping Spread Spectrum system, and Hybrid system devices operating under Section 15.247 of the FCC rules

5.2 ANTENNA REQUIREMENT

Standard Requirement
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi. RSS-Gen Issue 5, Section 6.8 requirement: According to RSS-Gen Issue 5, section 6.8, a transmitter can only be sold or operated with antennas with which it was certified. A transmitter may be certified with multiple antenna types. An antenna type comprises antennas having similar in-band and out-of-band radiation patterns. EUT Antenna: Antenna in the interior of the equipment and no consideration of replacement. The gain of the antenna is -0.5 dBi.


5.3 CONDUCTED PEAK OUTPUT POWER

Test Requirement:	FCC 47 CFR Part 15 Subpart C Section 15.247 (b)(1) RSS-247 Issue 2, Section 5.4(b)
Test Method:	ANSI C63.10-2013 Section 7.8.5
Limit:	For FHSs operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W if the hopset uses less than 75 hopping channels. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e). FHSs shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, FHSs operating in the band 2400-2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided that the systems operate with an output power no greater than 0.125 W.
Test Procedure:	Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer. a) Use the following spectrum analyzer settings: 1) Span: Approximately 5 x 20 dB bandwidth, centered on a hopping channel. 2) RBW > 20 dB bandwidth of the emission being measured. 3) VBW $\geq$ RBW. 4) Sweep: Auto. 5) Detector function: Peak. 6) Trace: Max hold. b) Allow trace to stabilize. c) Use the marker-to-peak function to set the marker to the peak of the emission. d) The indicated level is the peak output power, after any corrections for external attenuators and cables. e) A plot of the test results and setup description shall be included in the test report.
Test Setup:	Refer to section 4.5.3 for details.
Instruments Used:	Refer to section 3 for details
Test Results:	Pass

Type of Modulation	Peak Output Power (dbm)			Average Output Power (dbm)		
	Channel 0	Channel 39	Channel 78	Channel 0	Channel 39	Channel 78
GFSK	9.340	9.181	9.049	8.06	7.98	7.82
$\pi/4$ DQPSK	10.938	10.769	10.697	7.76	7.67	7.55
8DPSK	11.167	11.081	11.049	7.77	7.68	7.56

Note: The antenna gain of -0.5dBi less than 6dBi maximum permission antenna gain value based on 125 mW peak output power limit.

The test plots as follows:

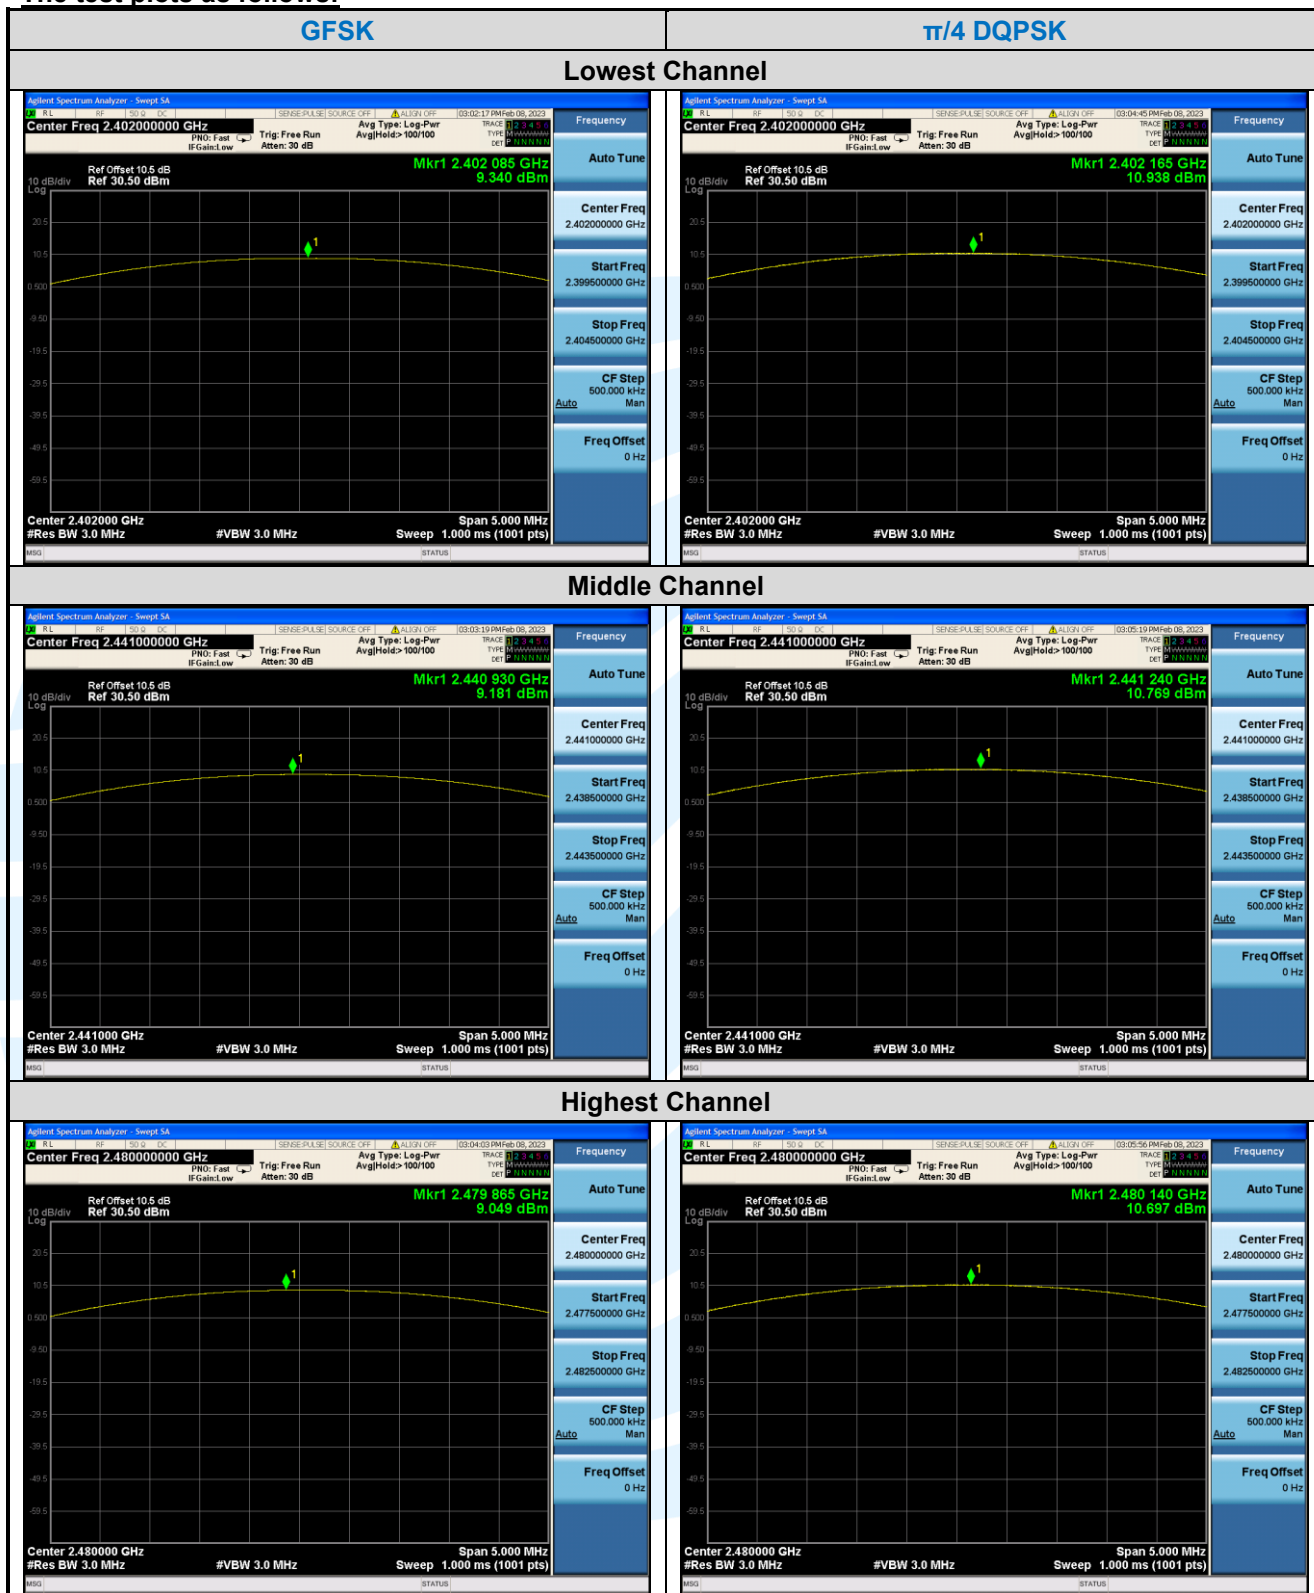

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

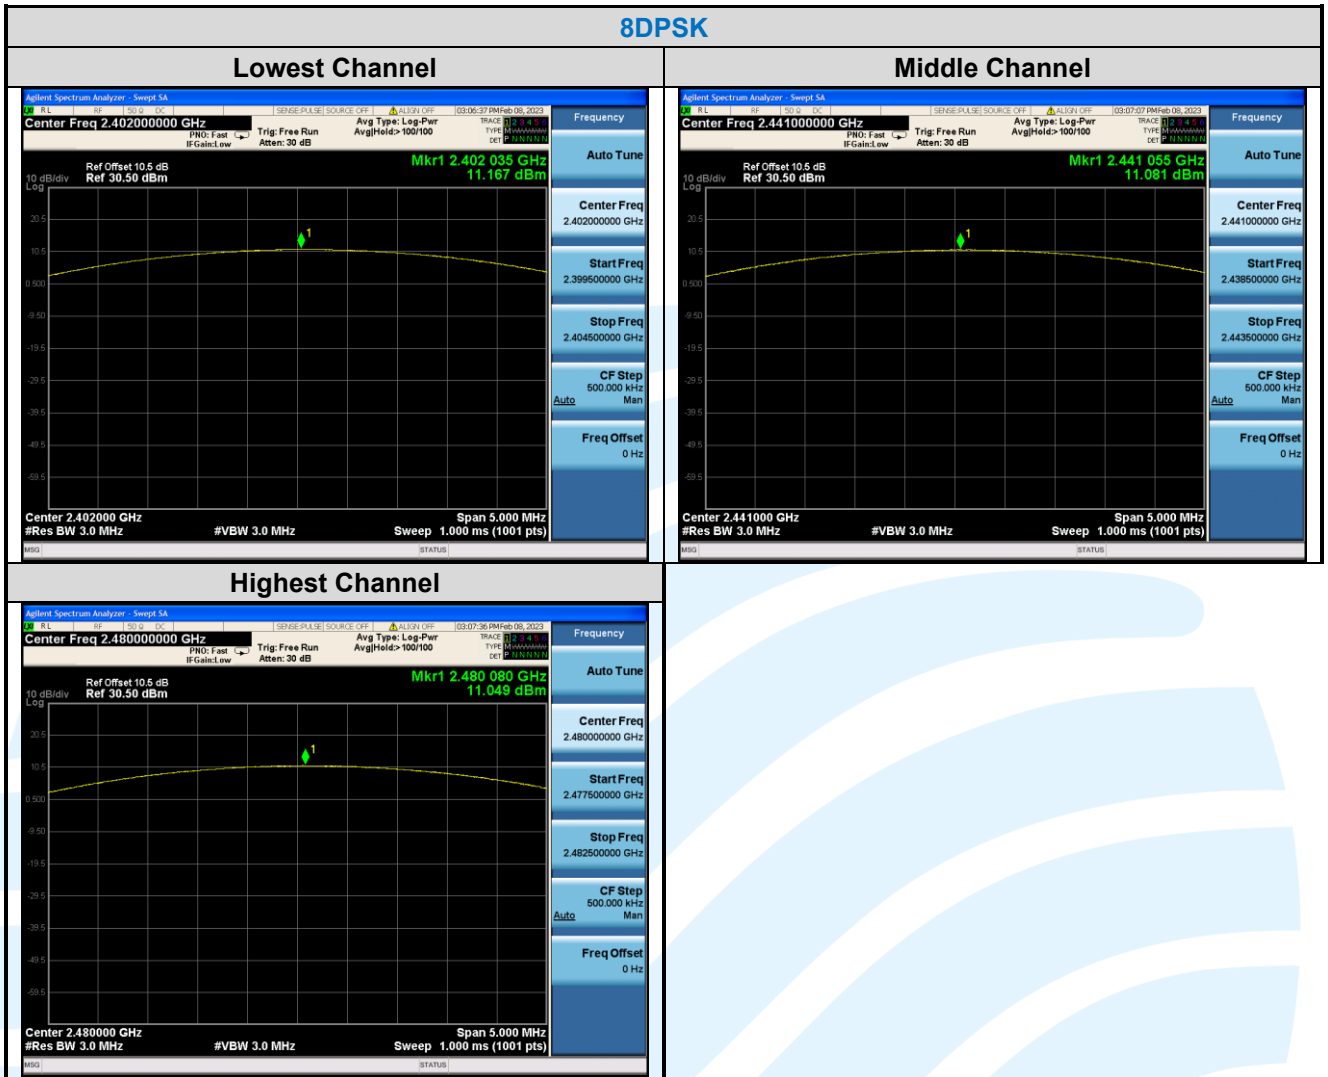


5.420 DB BANDWIDTH & OCCUPIED BANDWIDTH

	FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(1)
Test Requirement:	RSS-247 Issue 2, Section 5.1(a) RSS-Gen section 6.7
Test Method:	ANSI C63.10-2013 Section 6.9.2 RSS-Gen section 6.7
Limit:	None; for reporting purposes only.
Test Procedure:	Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer. Use the following spectrum analyzer settings: a) Span = approximately 2 to 5 times the OBW, centered on a hopping channel. b) RBW = 1% to 5% of the OBW. c) VBW $\geq 3 \times$ RBW d) Sweep = auto; e) Detector function = peak f) Trace = max hold g) All the trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission, use the marker-delta function to measure and record the 20dB down bandwidth of the emission.
	Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.
Test Setup:	Refer to section 4.5.3 for details.
Instruments Used:	Refer to section 3 for details
Test Results:	Pass

Type of Modulation	20 dB Bandwidth (MHz)			Occupied Bandwidth (MHz)		
	Channel 0	Channel 39	Channel 78	Channel 0	Channel 39	Channel 78
GFSK	1.147	1.163	1.143	0.86165	0.86375	0.86585
$\pi/4$ DQPSK	1.402	1.400	1.399	1.1883	1.1843	1.1612
8DPSK	1.404	1.399	1.401	1.2018	1.1980	1.1763

The test plots as follows:

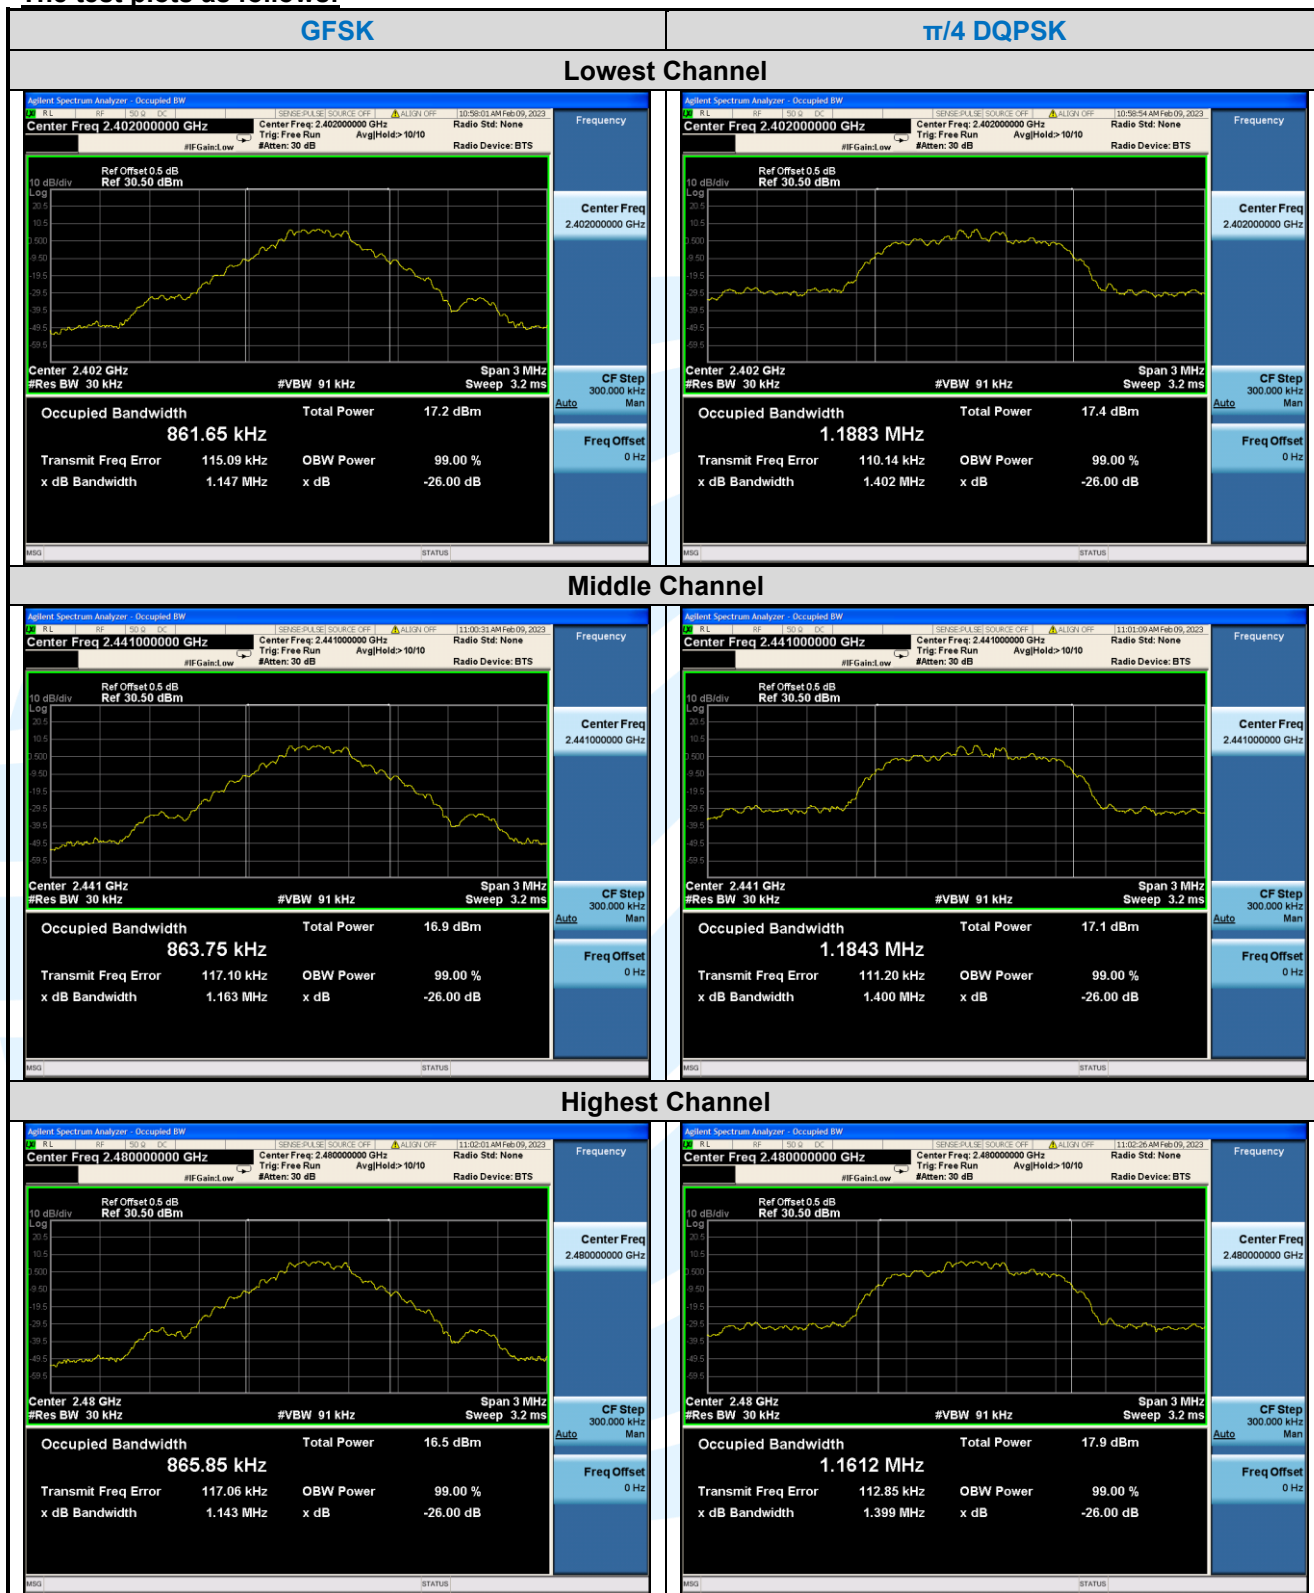




5.5 CARRIER FREQUENCIES SEPARATION

Test Requirement:	FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(1) RSS-247 Issue 2, Section 5.1(b)
Test Method:	ANSI C63.10-2013 Section 7.8.2
Limit:	Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.
Test Procedure:	Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer. Use the following spectrum analyzer settings: a) Span: Wide enough to capture the peaks of two adjacent channels. b) RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel. c) Video (or average) bandwidth (VBW) $\geq$ RBW. d) Sweep: Auto. e) Detector function: Peak. f) Trace: Max hold. g) Allow the trace to stabilize. h) Use the marker-delta function to determine the separation between the peaks of the adjacent channels. Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.
Test Setup:	Refer to section 4.5.3 for details.
Instruments Used:	Refer to section 3 for details
Test Results:	Pass

Type of Modulation	Adjacent Channel Separation (MHz)	Minimum Limit (MHz)
	Channel 39	Channel 39
GFSK	1.000	0.7620
$\pi/4$ DQPSK	1.000	0.9327
8DPSK	1.000	0.9327

Note: The minimum limit is two-third 20 dB bandwidth.

The test plots as follows:

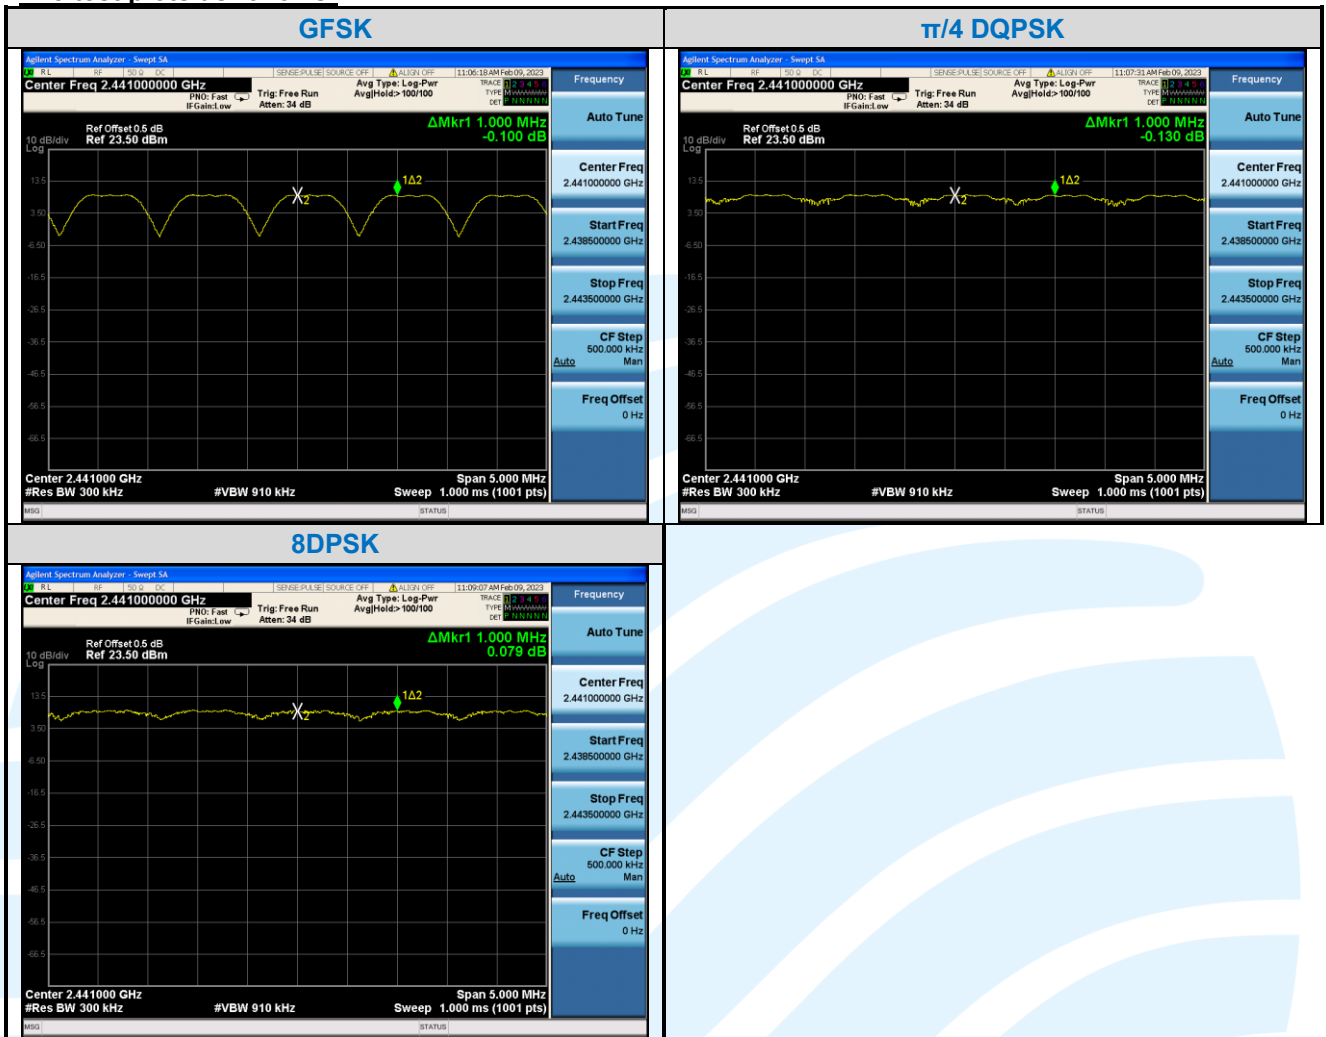

5.6 NUMBER OF HOPPING CHANNEL

Test Requirement: FCC 47 CFR Part 15 Subpart C Section 15.247(b)(1)
RSS-247 Issue 2, Section 5.1(d)

Test Method: ANSI C63.10-2013 Section 7.8.3

Limit: Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.

Test Procedure: Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
Use the following spectrum analyzer settings:

- a) Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- b) RBW < 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- c) VBW ≥ RBW.
- d) Sweep: Auto.
- e) Detector function: Peak.
- f) Trace: Max hold.
- g) Allow the trace to stabilize.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.


Test Setup: Refer to section 4.5.3 for details.

Instruments Used: Refer to section 3 for details

Test Results: Pass

Type of Modulation	Number of Hopping Channel
GFSK	79
$\pi/4$ DQPSK	79
8DPSK	79

The test plots as follows:

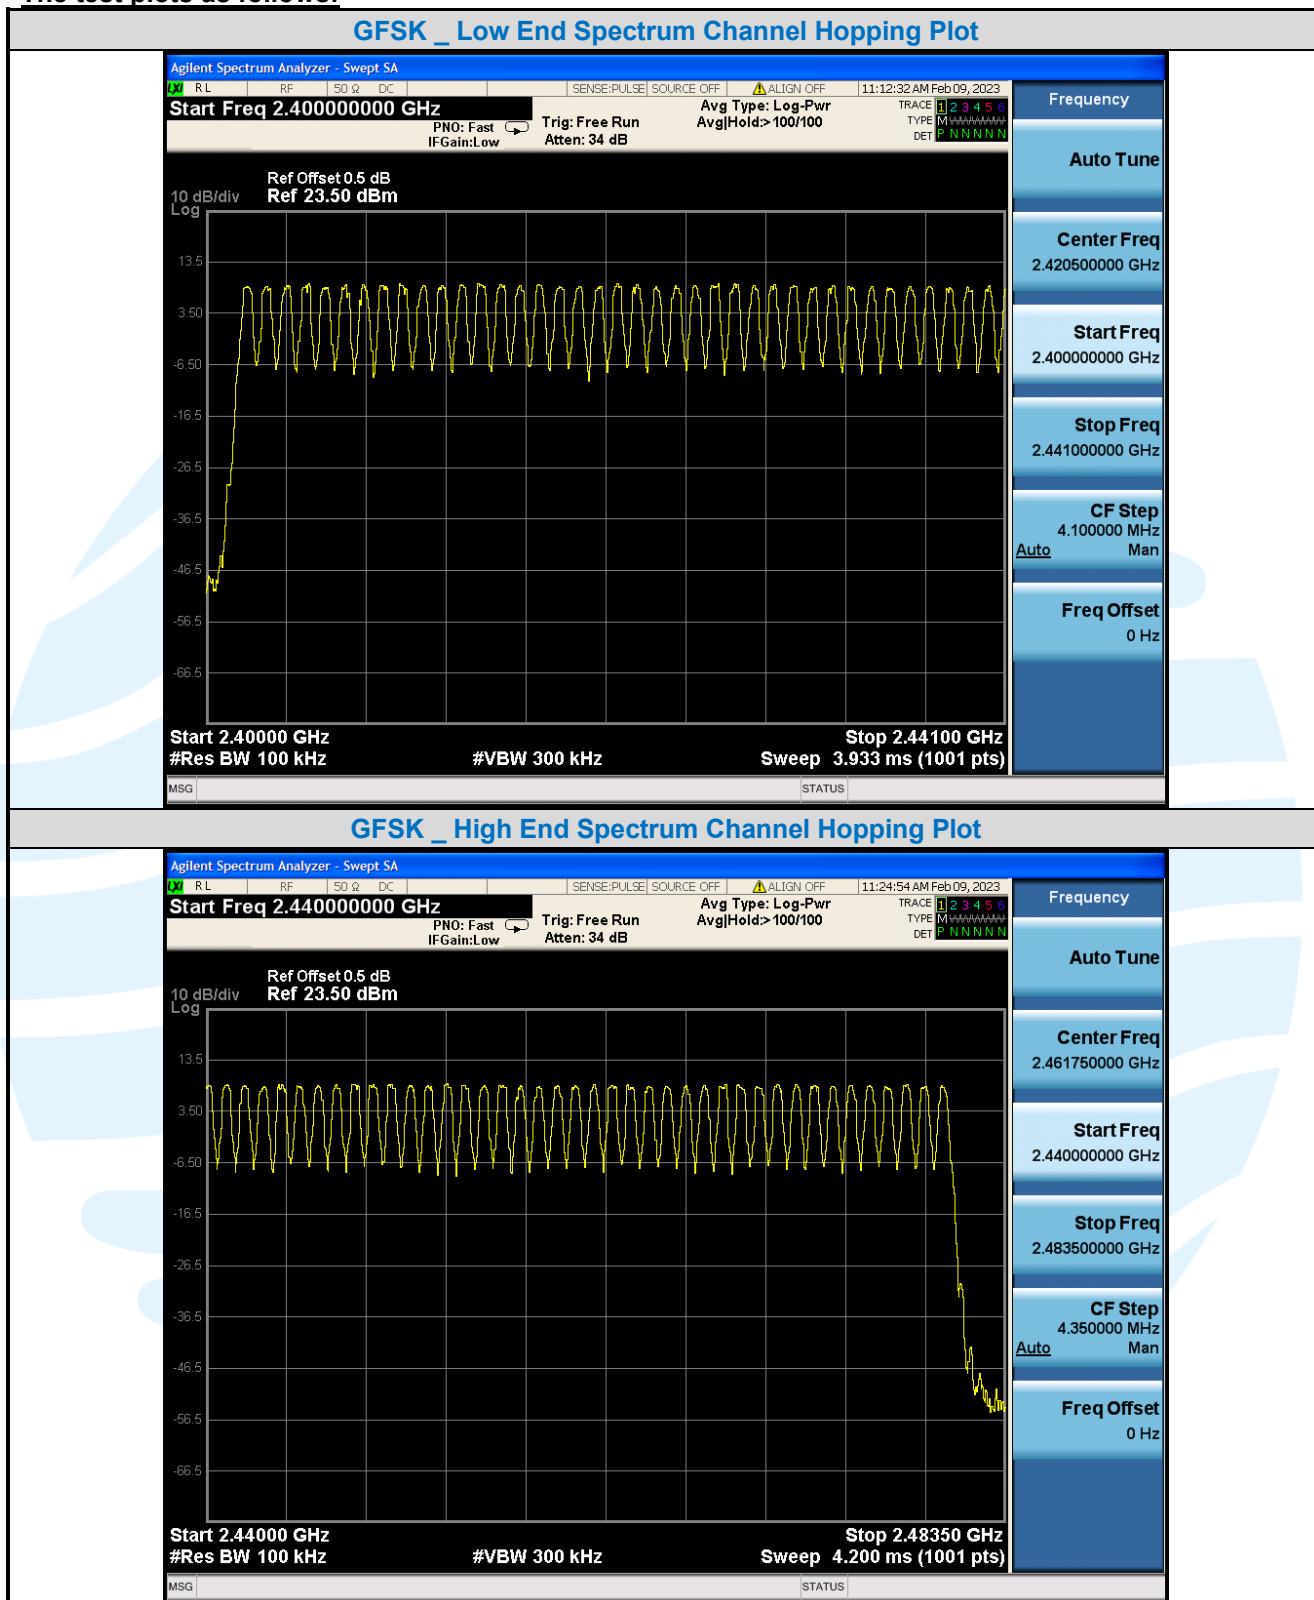

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

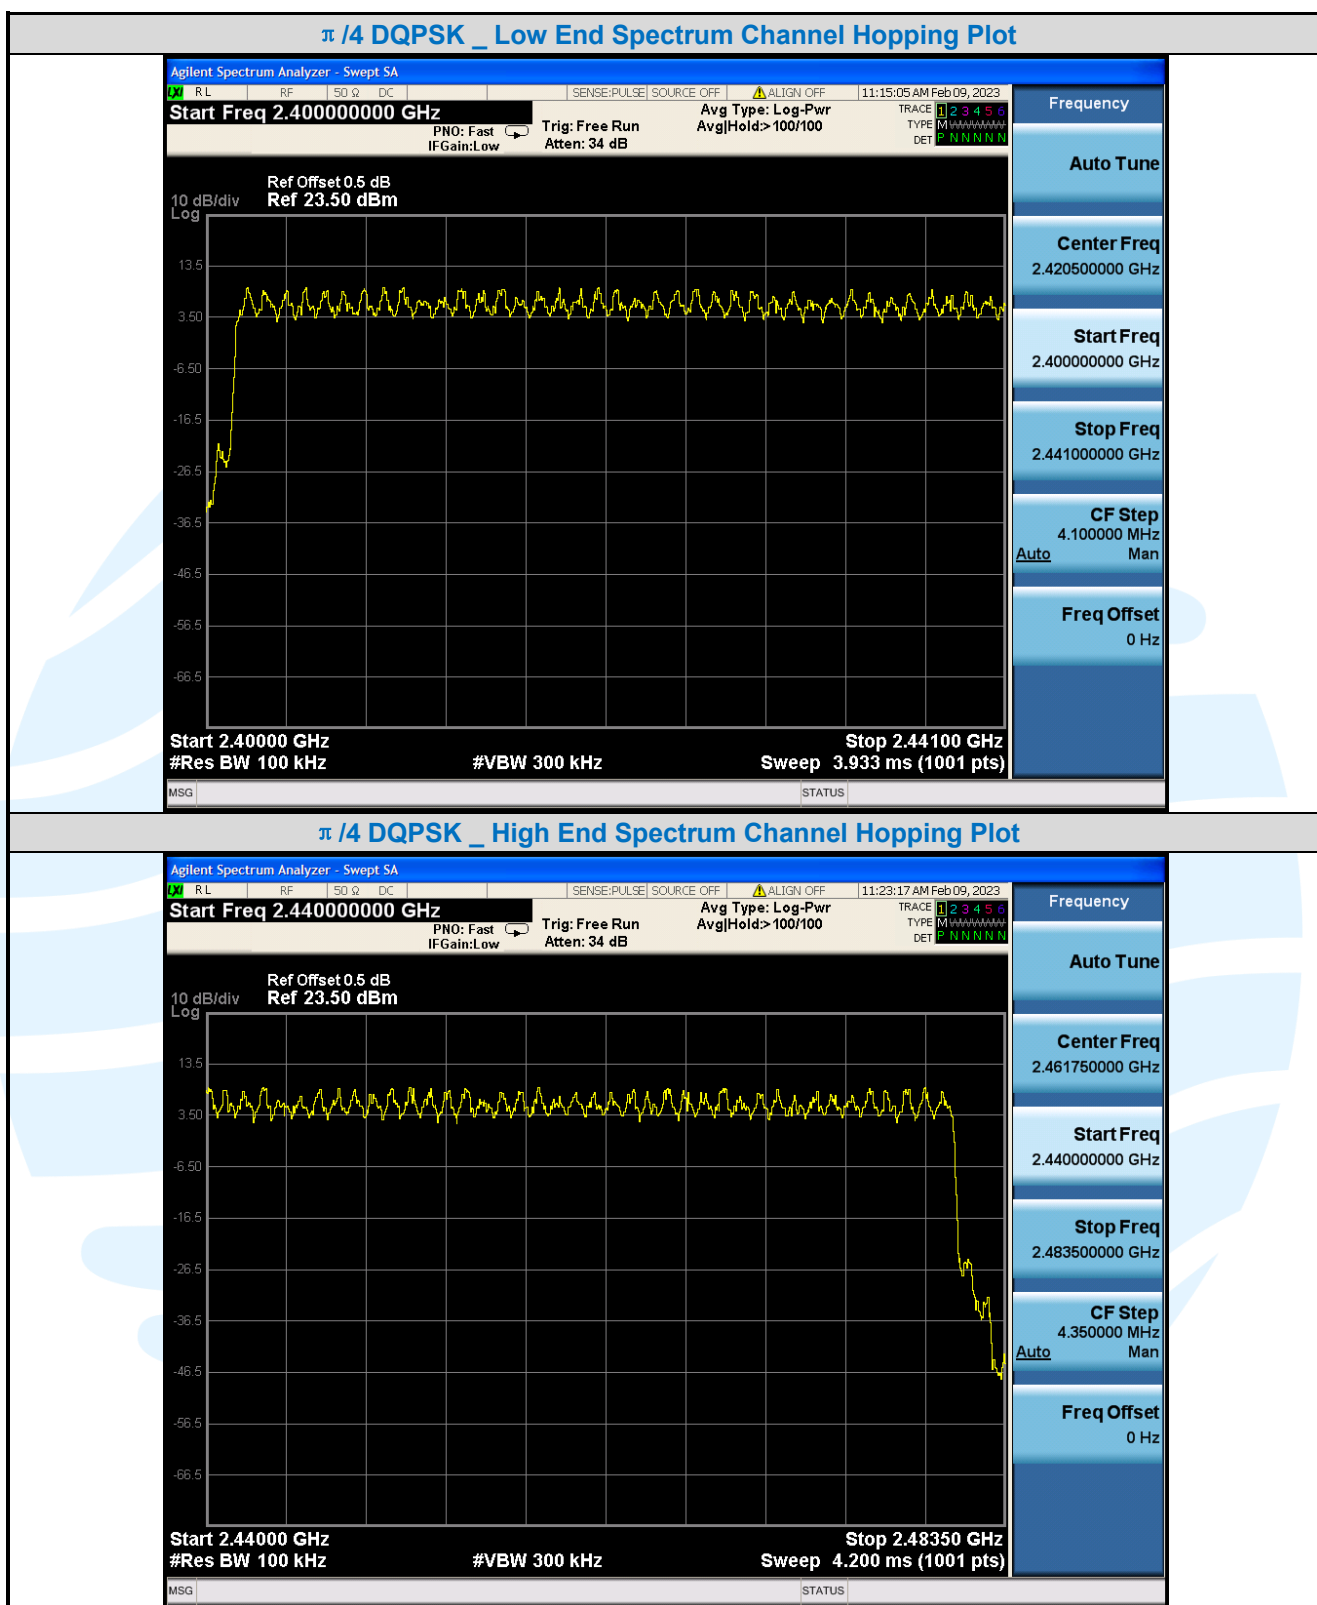

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886


E-mail: info@uttlab.com
<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

8DPSK _ Low End Spectrum Channel Hopping Plot

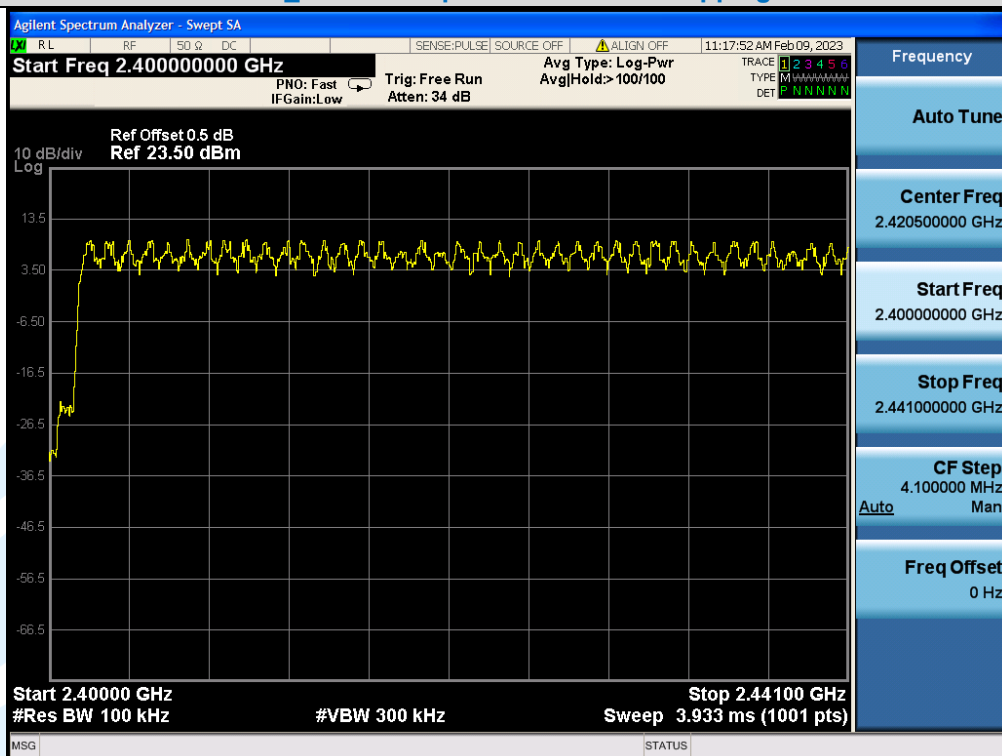

8DPSK _ High End Spectrum Channel Hopping Plot

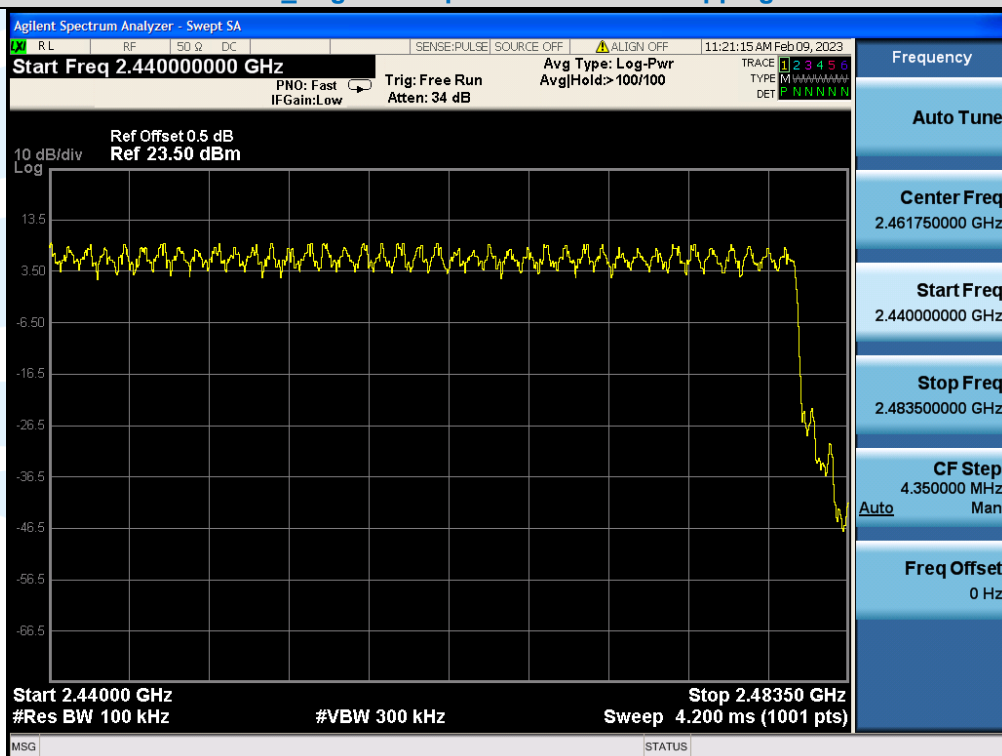

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>


UTTR-RF-RSS247-V1.1

5.7 DWELL TIME

Test Requirement:	FCC 47 CFR Part 15 Subpart C Section 15.247(a)(1) RSS-247 Issue 2, Section 5.1(d)
Test Method:	ANSI C63.10-2013 Section 7.8.4
Limit:	Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.
Test Procedure:	Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer. Use the following spectrum analyzer settings: a) Span = zero span, centered on a hopping channel b) RBW shall be $\leq$ channel spacing and where possible RBW should be set $\gg 1 / T$, where T is the expected dwell time per channel. c) Sweep = As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel. d) Detector function = peak e) Trace = max hold f) Use the marker-delta function to determine the dwell time Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.
Test Setup:	Refer to section 4.5.3 for details.
Instruments Used:	Refer to section 3 for details
Test Results:	Pass

Modulation	Test Frequency (MHz)	Packet	Pulse Width (ms)	Number of Pulses in 31.6 seconds	Dwell Time	Limit (ms)
GFSK	2441	1-DH1	0.396	320	126.72	< 400
		1-DH3	1.656	150	248.40	< 400
		1-DH5	2.900	50	145.00	< 400
$\pi/4$ DQPSK	2441	2-DH1	0.404	320	129.28	< 400
		2-DH3	1.656	160	264.96	< 400
		2-DH5	2.888	120	346.56	< 400
8DPSK	2441	3-DH1	0.404	330	133.32	< 400
		3-DH3	1.656	160	264.96	< 400
		3-DH5	2.908	60	174.48	< 400

The test plots as follows:

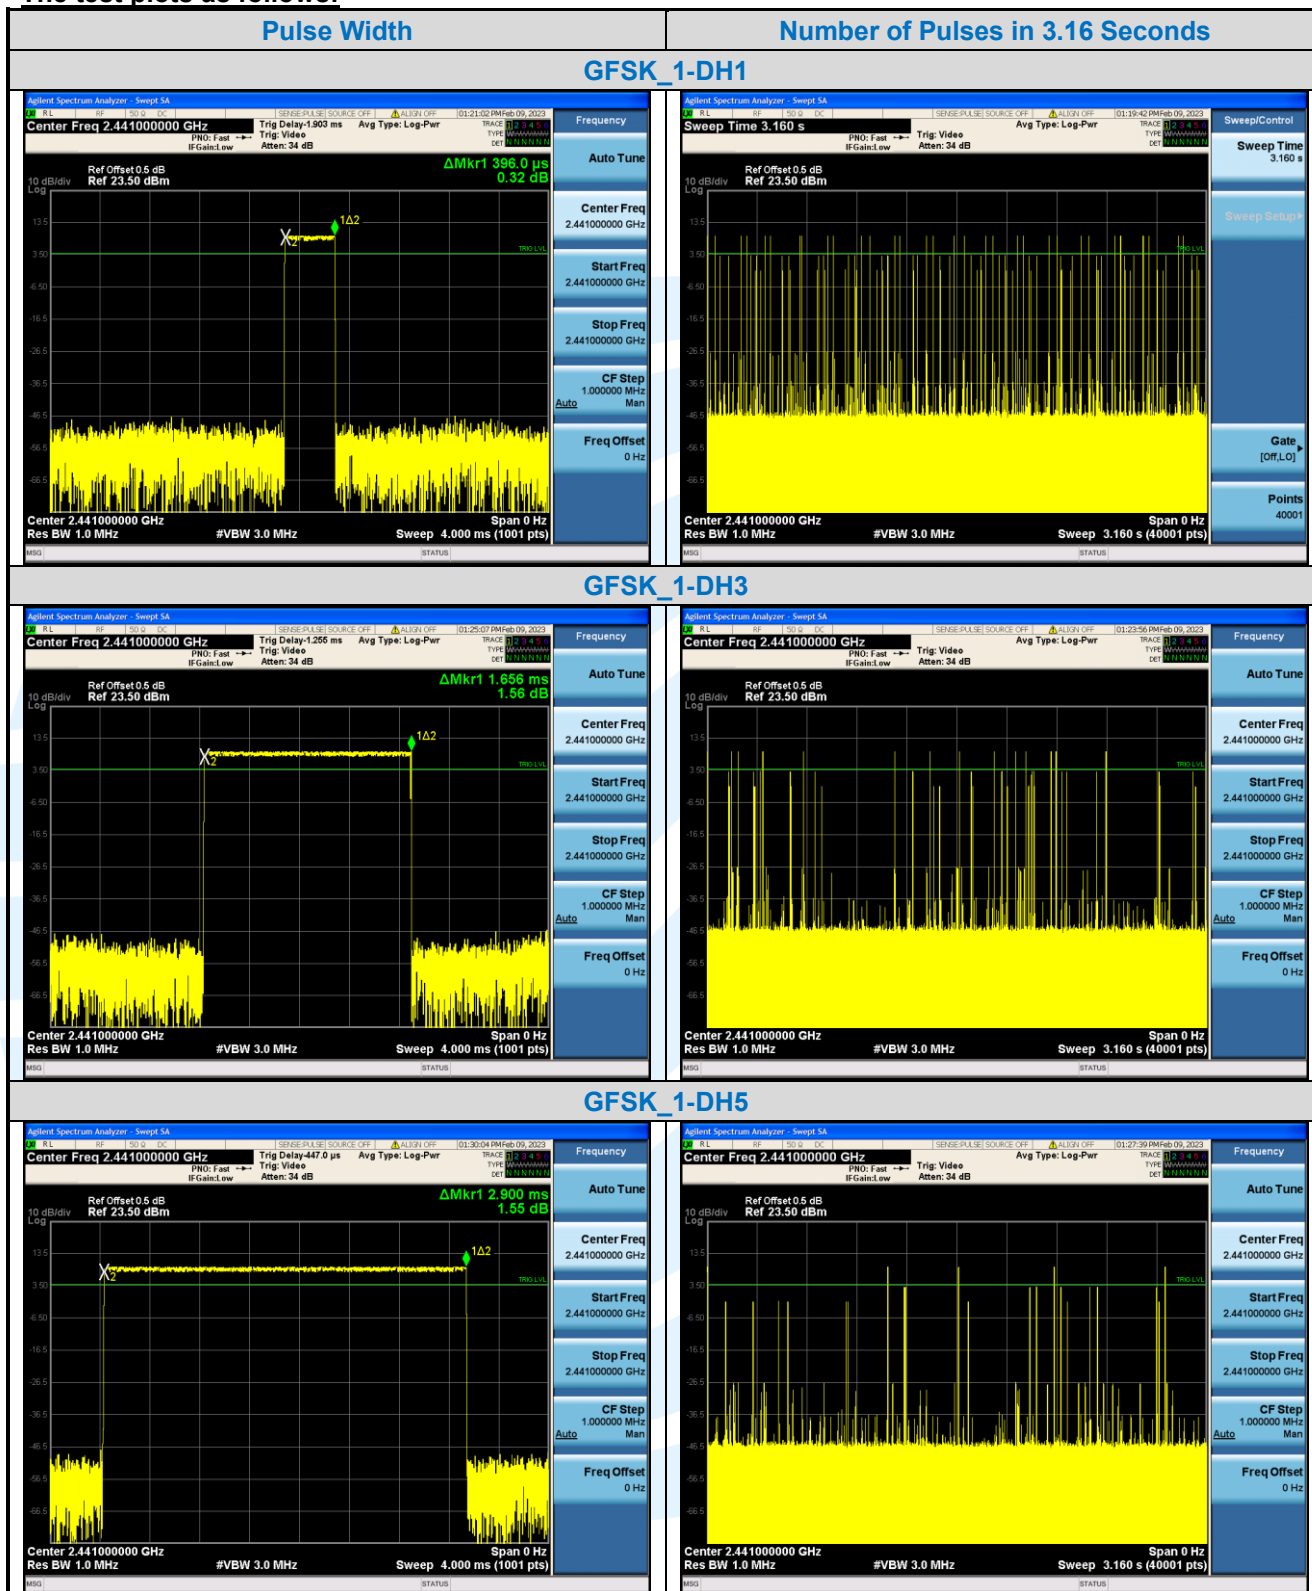

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

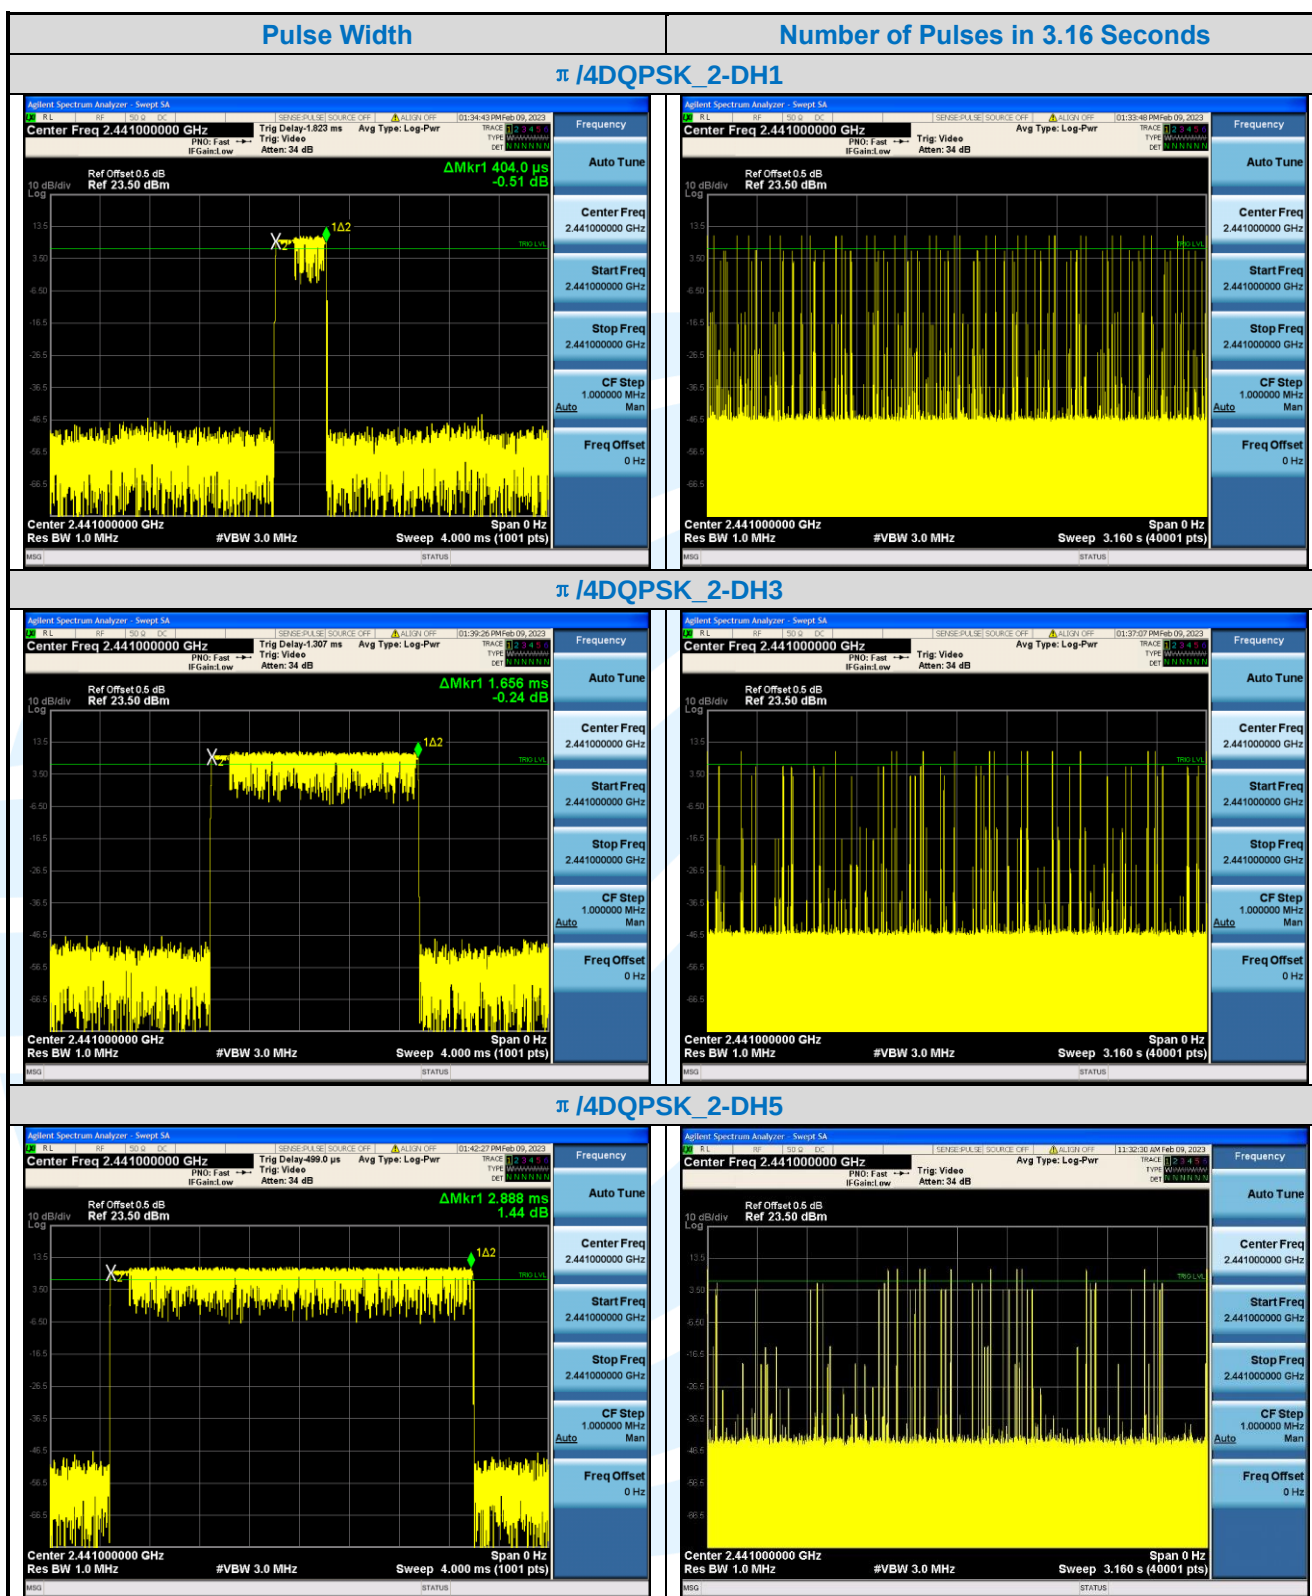**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

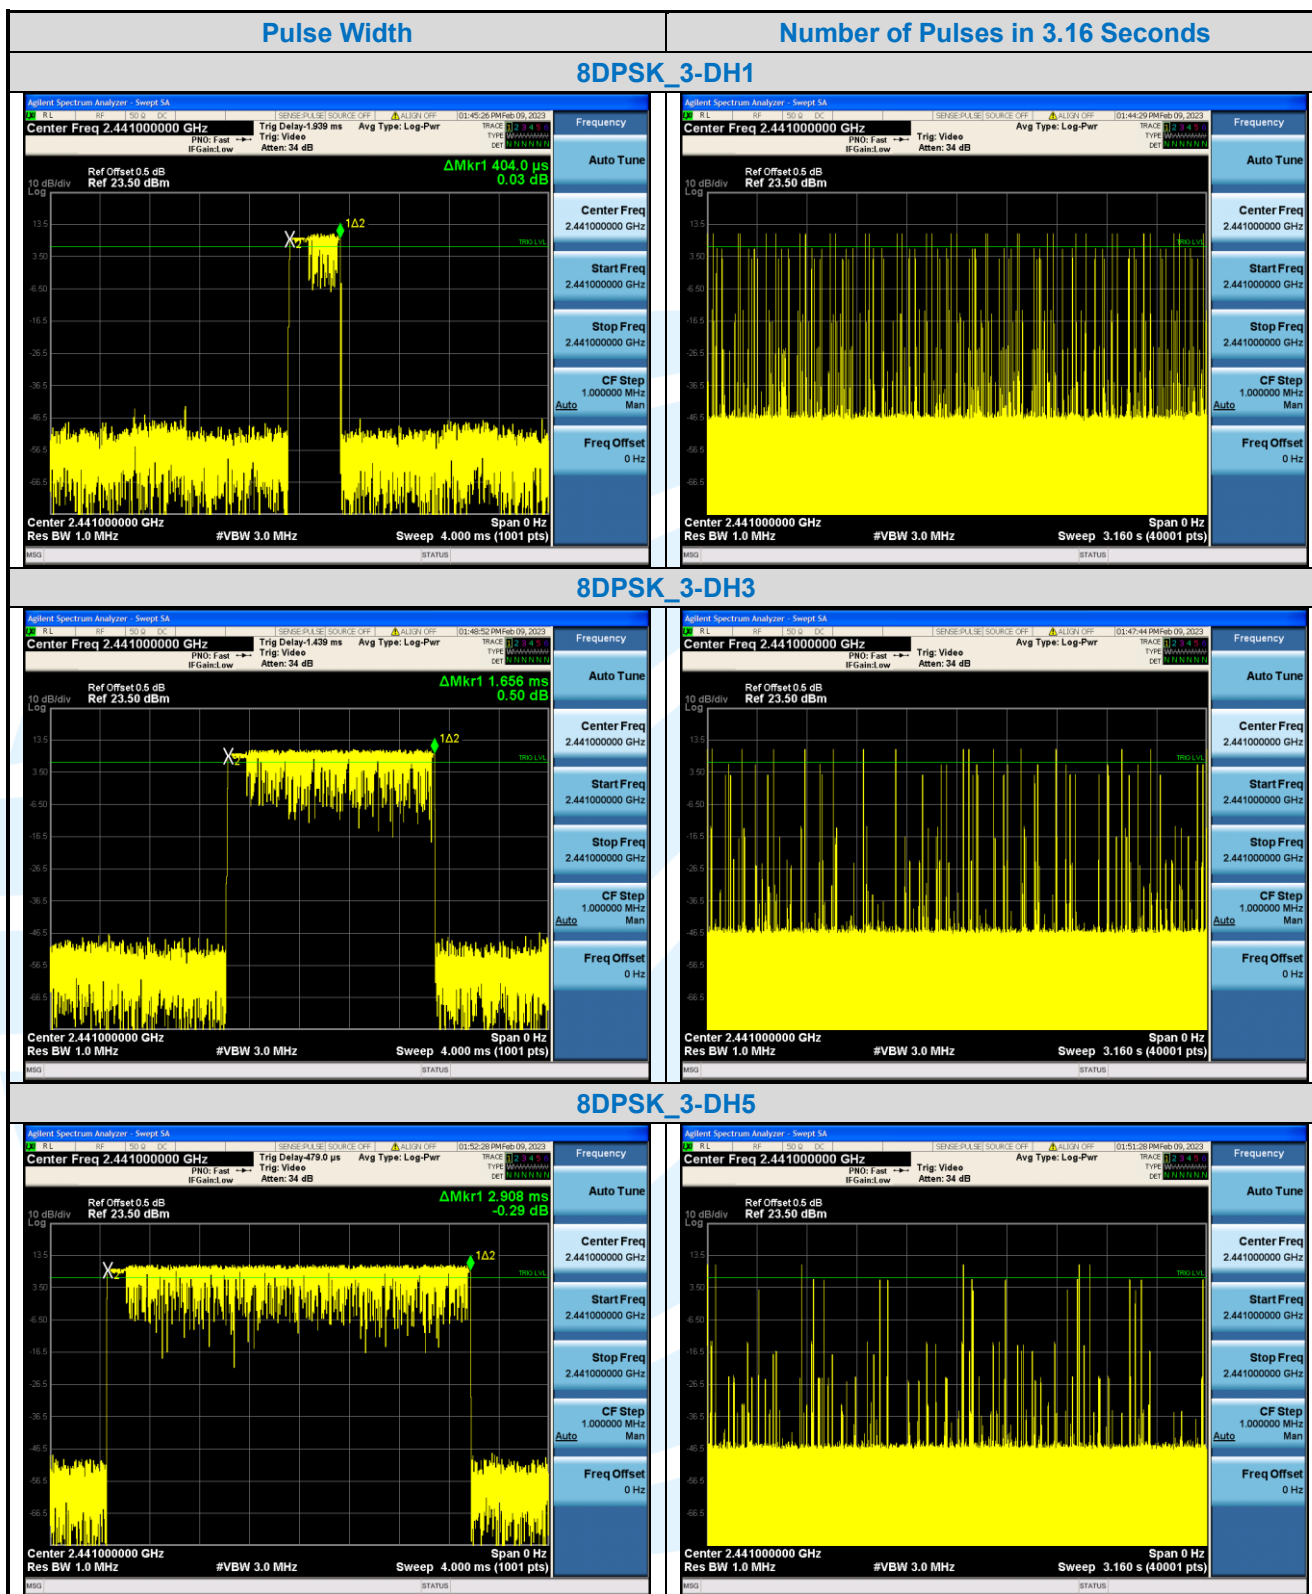**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

5.8 CONDUCTED OUT OF BAND EMISSION

Test Requirement:	FCC 47 CFR Part 15 Subpart C Section 15.247(d) RSS-247 Issue 2, Section 5.5
Test Method:	ANSI C63.10-2013 Section 6.10.4 & Section 7.8.8
Limit:	In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.
Test Procedure:	Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer. Use the following spectrum analyzer settings:

Step 1: Measurement Procedure REF

- Set instrument center frequency to 2400 MHz or 2483.5 MHz.
- Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products that fall outside of the authorized band of operation.
- Set the RBW = 100 kHz.
- Set the VBW $\geq 3 \times$ RBW.
- Detector = peak.
- Sweep time = auto couple.
- Sweep points $\geq 2 \times$ Span/RBW
- Trace mode = max hold.
- Allow the trace to stabilize.
- Set the marker on the emission at the band edge, or on the highest modulation product outside of the band, if this level is greater than that at the band edge. Enable the marker-delta function, and then use the marker-to-peak function to move the marker to the peak of the in-band emission.

Step 2: Measurement Procedure OOB

- Set RBW = 100 kHz.
- Set VBW ≥ 300 kHz.
- Detector = peak.
- Sweep = auto couple.
- Trace Mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup:	Refer to section 4.5.3 for details.
Instruments Used:	Refer to section 3 for details
Test Mode:	Hopping Frequencies Transmitter mode
Test Results:	Pass
Test Data:	