

## FCC Part 15, Subpart C

### Test Report

FCC ID: 2AR2STAB8507RE

Applicant: MMD Hong Kong Holding Limited

Address: Unit 1006, 10th Floor, C-Bons International Center, 108 Wai Yip Street,  
Kwun Tong, Kowloon, Hong Kong

Manufacturer: MMD Hong Kong Holding Limited

Address: Unit 1006, 10th Floor, C-Bons International Center, 108 Wai Yip Street,  
Kwun Tong, Kowloon, Hong Kong

Product(s): Soundbar speaker

Brand(s): PHILIPS or 

Test Model(s): TAB8507

Series Model(s): See section 2.1

Test Date: Apr. 06, 2022 ~ Apr. 25, 2022

Issued Date: May 17, 2022

Issued By: Hwa-Hsing (Dongguan) Testing Co., Ltd.


Address: No.101, Bld. N1, Yuyuan 2Rd, Yuyuan Industrial Park, HuangJiang Town,  
Dongguan, China

Test Firm Registration No.: 915896


Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)  
ANSI C63.10:2013

The above equipment has been tested by **Hwa-Hsing (Dongguan) Testing Co., Ltd.**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.


Prepared by :

  
\_\_\_\_\_  
Tank Tan

Reviewed by :

  
\_\_\_\_\_  
Scott He

Approved by :

  
\_\_\_\_\_  
Harry Li

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the federal government. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Lab: [Hwa-Hsing \(Dongguan\) Testing Co., Ltd.](#)  
Address: [No.101, Bld N1, Yuyuan 2Rd, Yuyuan Industrial Park,](#)  
[HuangJiang Town, Dongguan, China](#)Tel: [0769-83078199](#)  
Web.: [www.hwa-hsing.com](#)  
E-Mail: [customerservice.dg@hwa-hsing.com](#)Release  
Ver. 1.5



## Table of Contents

|                                                                   |           |
|-------------------------------------------------------------------|-----------|
| <b>Release Control Record .....</b>                               | <b>4</b>  |
| <b>1. Summary of Test Results .....</b>                           | <b>5</b>  |
| 1.1 Measurement Uncertainty .....                                 | 5         |
| 1.2 Modification Record .....                                     | 5         |
| <b>2. General Information .....</b>                               | <b>6</b>  |
| 2.1 General Description of EUT .....                              | 6         |
| 2.2 Description of Test Channels .....                            | 7         |
| 2.3 Test Mode Applicability and Tested Channel Detail .....       | 8         |
| 2.4 Description of Support Units .....                            | 9         |
| 2.5 Configuration of System under Test .....                      | 9         |
| 2.6 Duty Cycle of Test Signal .....                               | 10        |
| <b>3. Test Types and Results .....</b>                            | <b>11</b> |
| 3.1 Radiated Emission and Band-edge Measurement .....             | 11        |
| 3.1.1 Limits of radiated emission and band-edge measurement ..... | 11        |
| 3.1.2 Test Instruments .....                                      | 12        |
| 3.1.3 Test Procedures .....                                       | 13        |
| 3.1.4 Deviation from Test Standard .....                          | 14        |
| 3.1.5 Test Setup .....                                            | 15        |
| 3.1.6 EUT Operating Conditions .....                              | 16        |
| 3.1.7 Test Results .....                                          | 17        |
| 3.2 Conducted Emission Measurement .....                          | 39        |
| 3.2.1 Limits of Conducted Emission Measurement .....              | 39        |
| 3.2.2 Test Instruments .....                                      | 39        |
| 3.2.3 Test Procedures .....                                       | 39        |
| 3.2.4 Deviation from Test Standard .....                          | 39        |
| 3.2.5 Test setup .....                                            | 40        |
| 3.2.6 EUT Operating Conditions .....                              | 40        |
| 3.2.7 Test Results .....                                          | 41        |
| 3.3 6dB Bandwidth Measurement .....                               | 43        |
| 3.3.1 Limits of 6dB Bandwidth Measurement .....                   | 43        |
| 3.3.2 Test Setup .....                                            | 43        |
| 3.3.3 Test Instruments .....                                      | 43        |
| 3.3.4 Test Procedure .....                                        | 43        |
| 3.3.5 Deviation from Test Standard .....                          | 44        |
| 3.3.6 EUT Operating Conditions .....                              | 44        |
| 3.3.7 Test Result .....                                           | 44        |
| 3.4 Occupied Bandwidth Measurement .....                          | 47        |
| 3.4.1 Test Setup .....                                            | 47        |
| 3.4.2 Test Instruments .....                                      | 47        |
| 3.4.3 Test Procedure .....                                        | 47        |
| 3.4.4 Deviation from Test Standard .....                          | 47        |
| 3.4.5 EUT Operating Conditions .....                              | 47        |
| 3.4.6 Test Results .....                                          | 48        |
| 3.5 Conducted Output Power Measurement .....                      | 51        |
| 3.5.1 Limits of Conducted Output Power Measurement .....          | 51        |
| 3.5.2 Test Setup .....                                            | 51        |
| 3.5.3 Test Instruments .....                                      | 51        |
| 3.5.4 Test Procedures .....                                       | 51        |
| 3.5.5 Deviation from Test Standard .....                          | 52        |
| 3.5.6 EUT Operating Conditions .....                              | 52        |



|       |                                                           |    |
|-------|-----------------------------------------------------------|----|
| 3.5.7 | Test Results.....                                         | 53 |
| 3.6   | Power Spectral Density Measurement .....                  | 58 |
| 3.6.1 | Limits of Power Spectral Density Measurement.....         | 58 |
| 3.6.2 | Test Setup .....                                          | 58 |
| 3.6.3 | Test Instruments .....                                    | 58 |
| 3.6.4 | Test Procedure .....                                      | 58 |
| 3.6.5 | Deviation from Test Standard .....                        | 59 |
| 3.6.6 | EUT Operating Condition .....                             | 59 |
| 3.6.7 | Test Results.....                                         | 60 |
| 3.7   | Conducted Out of Band Emission Measurement .....          | 63 |
| 3.7.1 | Limits of Conducted Out of Band Emission Measurement..... | 63 |
| 3.7.2 | Test Setup .....                                          | 63 |
| 3.7.3 | Test Instruments .....                                    | 63 |
| 3.7.4 | Test Procedure .....                                      | 64 |
| 3.7.5 | Deviation from Test Standard .....                        | 64 |
| 3.7.6 | EUT Operating Condition .....                             | 64 |
| 3.7.7 | Test results .....                                        | 65 |
| 4.    | Pictures of Test Arrangements .....                       | 75 |
| 5.    | Test Instruments.....                                     | 76 |
|       | Appendix – Information on The Testing Laboratories .....  | 77 |



**HWA-HSING** Test Report No.: 220218KH01-1-RF-US-03

**Release Control Record**

| Issue No.             | Description      | Date Issued  |
|-----------------------|------------------|--------------|
| 220218KH01-1-RF-US-03 | Original Release | May 17, 2022 |



## 1. Summary of Test Results

| 47 CFR FCC Part 15, Subpart C (Section 15.247)<br>KDB 558074 D01 15.247 Meas Guidance v05r02<br>KDB 662911 D01 v02r01<br>ANSI C63.10:2013 |                                |        |                                                                         |
|-------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|--------|-------------------------------------------------------------------------|
| Clause                                                                                                                                    | Test Item                      | Result | Remarks                                                                 |
| 15.207                                                                                                                                    | AC Power Conducted Emission    | Pass   | Meet the requirement of limit.                                          |
| 15.205 & 209                                                                                                                              | Radiated Emissions             | Pass   | Meet the requirement of limit.                                          |
| 15.247(d)                                                                                                                                 | Band Edge Measurement          | Pass   | Meet the requirement of limit.                                          |
| 15.247(d)                                                                                                                                 | Antenna Port Emission          | Pass   | Meet the requirement of limit.                                          |
| 15.247(a)(2)                                                                                                                              | 6dB Bandwidth                  | Pass   | Meet the requirement of limit.                                          |
| ---                                                                                                                                       | Occupied Bandwidth Measurement | Pass   | Reference only                                                          |
| 15.247(b)                                                                                                                                 | Conducted power                | Pass   | Meet the requirement of limit.                                          |
| 15.247(e)                                                                                                                                 | Power Spectral Density         | Pass   | Meet the requirement of limit.                                          |
| 15.203                                                                                                                                    | Antenna Requirement            | Pass   | No antenna connector is used.<br>The device is professionally installed |

**Note:** The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC).  
The test report has been issued separately.

### 1.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

The listed uncertainties are the worst cases uncertainty for the entire range of measurement. Please note that the uncertainty values are provided for informational purposes only and are not used in determining the PASS/FAIL results.

| Measurement                        | Frequency       | Expanded Uncertainty<br>(k=2) (±) |
|------------------------------------|-----------------|-----------------------------------|
| Conducted Emissions at mains ports | 150kHz ~ 30MHz  | 2.66 dB                           |
| Radiated Emissions up to 1 GHz     | 9KHz ~ 30MHz    | 2.16 dB                           |
|                                    | 30MHz ~ 1000MHz | 3.47 dB                           |
| Radiated Emissions above 1 GHz     | 1GHz ~ 18GHz    | 4.84 dB                           |
|                                    | 18GHz ~ 40GHz   | 4.67 dB                           |

### 1.2 Modification Record

There were no modifications required for compliance.



## 2. General Information

### 2.1 General Description of EUT

|                      |                                                                                                                                                                                                                                                                                     |
|----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product(s)           | Soundbar speaker                                                                                                                                                                                                                                                                    |
| Test Model(s)        | TAB8507                                                                                                                                                                                                                                                                             |
| Sample No.           | HS220311-02-07; HS220311-02-09                                                                                                                                                                                                                                                      |
| Series Model(s)      | TAB8507B, TAB8507RE, TAB8507BRE, TAB8507/10, TAB8507B/10, TAB8507RE/10, TAB8507BRE/10, TAB8507/37, TAB8507B/37, TAB8507RE/37, TAB8507BRE/37, TAB8507/98, TAB8507B/98, TAB8507RE/98, TAB8507BRE/98, TAB8507xx/yy, TAB8507Bxx/yy (x=A-Z or blank, yy=00-99 or blank for country code) |
| Status of EUT        | Engineering prototype                                                                                                                                                                                                                                                               |
| Power Supply Rating  | 100-240V~, 50/60Hz, 35W                                                                                                                                                                                                                                                             |
| Modulation Type      | CCK, DQPSK, DBPSK for DSSS<br>64QAM, 16QAM, QPSK, BPSK for OFDM                                                                                                                                                                                                                     |
| Transfer Rate        | DSSS, OFDM                                                                                                                                                                                                                                                                          |
| Operating Frequency  | 802.11b: 11.0/ 5.5/ 2.0/ 1.0Mbps<br>802.11g: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps<br>802.11n: up to 300.0Mbps                                                                                                                                                           |
| Number of Channel    | 802.11b, 802.11g, 802.11n (20MHz): 2412 ~ 2462MHz<br>802.11n (40MHz): 2422 ~ 2452MHz                                                                                                                                                                                                |
| Maximum Output Power | 18.06dBm                                                                                                                                                                                                                                                                            |
| Antenna Type         | FPC Antenna                                                                                                                                                                                                                                                                         |
| Max. Antenna Gain    | 2.48dBi                                                                                                                                                                                                                                                                             |
| Antenna Connector    | I-PEX                                                                                                                                                                                                                                                                               |
| Accessory Device     | N/A                                                                                                                                                                                                                                                                                 |
| Data Cable Supplied  | AC Line: 150cm                                                                                                                                                                                                                                                                      |

Note:

1. Please refer to the EUT photo document (Reference No.: 220218KH01-1-01&-02) for detailed product photo.
2. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.
3. Model difference: These models are only different for model name for trade purpose.
4. The EUT incorporates SISO function. with 1 antenna transmission and 1 antenna reception.

| Support mode | Frequency band | Transmit and receive mode | Transmit and Receive Chain |
|--------------|----------------|---------------------------|----------------------------|
| 802.11b      | 2412~2462MHz   | SISO                      | 1TX/1RX                    |
| 802.11g      | 2412~2462MHz   | SISO                      | 1TX/1RX                    |
| 802.11n HT20 | 2412~2462MHz   | SISO                      | 1TX/1RX                    |
| 802.11n HT40 | 2422~2452MHz   | SISO                      | 1TX/1RX                    |



## 2.2 Description of Test Channels

11 channels are provided for 802.11b, 802.11g and 802.11n (20MHz):

| Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|
| 1       | 2412MHz   | 7       | 2442MHz   |
| 2       | 2417MHz   | 8       | 2447MHz   |
| 3       | 2422MHz   | 9       | 2452MHz   |
| 4       | 2427MHz   | 10      | 2457MHz   |
| 5       | 2432MHz   | 11      | 2462MHz   |
| 6       | 2437MHz   |         |           |

7 channels are provided for 802.11n (40MHz):

| Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|
| 3       | 2422MHz   | 7       | 2442MHz   |
| 4       | 2427MHz   | 8       | 2447MHz   |
| 5       | 2432MHz   | 9       | 2452MHz   |
| 6       | 2437MHz   |         |           |

\*Power setting value from test software:

| Mode       | Channel No. | Freq. (MHz) | Power Setting |
|------------|-------------|-------------|---------------|
|            |             |             |               |
| 802.11b    | 1           | 2412        | Default       |
|            | 6           | 2437        | Default       |
|            | 11          | 2462        | Default       |
| 802.11g    | 1           | 2412        | Default       |
|            | 6           | 2437        | Default       |
|            | 11          | 2462        | Default       |
| 802.11 n20 | 1           | 2412        | Default       |
|            | 6           | 2437        | Default       |
|            | 11          | 2462        | Default       |
| 802.11 n40 | 1           | 2422        | Default       |
|            | 6           | 2437        | Default       |
|            | 11          | 2452        | Default       |

**2.3 Test Mode Applicability and Tested Channel Detail**

| Applicable test items                                                                         | X-Axis | Y-Axis | Z-Axis | Voltage Supply |
|-----------------------------------------------------------------------------------------------|--------|--------|--------|----------------|
| AC Power Conducted Emission                                                                   | N/A    | N/A    | N/A    | AC120V, 50Hz   |
| Radiated Emissions                                                                            | √      | √      | √      |                |
| Band Edge Measurement                                                                         | N/A    | N/A    | N/A    |                |
| Antenna Port Emission                                                                         | N/A    | N/A    | N/A    |                |
| 6dB Bandwidth                                                                                 | N/A    | N/A    | N/A    |                |
| Occupied Bandwidth Measurement                                                                | N/A    | N/A    | N/A    |                |
| Conducted power                                                                               | N/A    | N/A    | N/A    |                |
| Power Spectral Density                                                                        | N/A    | N/A    | N/A    |                |
| 1. The EUT had been pre-tested on the positioned of each 3 Axis.<br>2. “N/A” means no effect. |        |        |        |                |

| Applicable test items | Antenna Transmit and receive mode | X-Axis | Y-Axis | Z-Axis |
|-----------------------|-----------------------------------|--------|--------|--------|
| Radiated Emissions    | SISO                              | √      | √      | √      |

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).  
Following channel(s) was (were) selected for the final test as listed below.

**Test Condition:**

| Applicable test items              | Environmental Conditions | Tested by   |
|------------------------------------|--------------------------|-------------|
| AC Power Conducted Emission        | 25deg. C, 65%RH          | Jim Xu      |
| Radiated Emissions                 | 25deg. C, 65%RH          | Jim Xu      |
| Antenna Port Conducted Measurement | 25deg. C, 65%RH          | Dragon long |

**Radiated Emission Test (Above 1GHz):**

| EUT Configure Mode | Tested Channel | Modulation Type | Data Rate (Mbps) |
|--------------------|----------------|-----------------|------------------|
| 802.11b            | 1, 6, 11       | DSSS            | 1.0              |
| 802.11g            | 1, 6, 11       | OFDM            | 6.0              |
| 802.11n (20MHz)    | 1, 6, 11       | OFDM            | 7.2              |
| 802.11n (40MHz)    | 3, 6, 9        | OFDM            | 15.0             |

**Radiated Emission Test (Below 1GHz):**

| EUT Configure Mode | Tested Channel | Modulation Type | Data Rate (Mbps) |
|--------------------|----------------|-----------------|------------------|
| 802.11b            | 1, 6, 11       | DSSS            | 1                |



### Power Line Conducted Emission Test:

| EUT Configure Mode | Tested Channel | Modulation Type | Data Rate (Mbps) |
|--------------------|----------------|-----------------|------------------|
| 802.11b            | 1, 6, 11       | DSSS            | 1                |

### Antenna Port Conducted Measurement:

\*This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.

| EUT Configure Mode | Tested Channel | Modulation Type | Data Rate (Mbps) |
|--------------------|----------------|-----------------|------------------|
| 802.11b            | 1 to 11        | DSSS            | 1.0              |
| 802.11g            | 1 to 11        | OFDM            | 6.0              |
| 802.11n (20MHz)    | 1 to 11        | OFDM            | 7.2              |
| 802.11n (40MHz)    | 3 to 9         | OFDM            | 15.0             |

## 2.4 Description of Support Units


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| No. | Product  | Brand  | Model No.     | Serial No. | FCC ID |
|-----|----------|--------|---------------|------------|--------|
| 1.  | Notebook | Lenovo | ThinkPad X280 | SL10P97665 | N/A    |

Insert Cable Connections to/from EUT provided by test team.

| No. | Signal Cable Description Of The Above Support Units |
|-----|-----------------------------------------------------|
| 1.  | USB serial cable Un-shielding 1.0m                  |


## 2.5 Configuration of System under Test

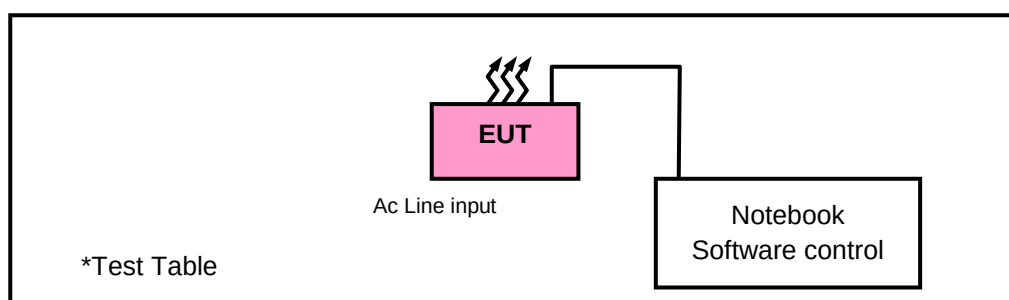



## 2.6 Duty Cycle of Test Signal

| Test mode    | Duty cycle (%) | Duty cycle factor= $10 \cdot \log(1/\text{duty cycle})$ (dB) |
|--------------|----------------|--------------------------------------------------------------|
| 802.11b      | 98.89%         | 0.049                                                        |
| 802.11g      | 93.67%         | 0.284                                                        |
| 802.11n HT20 | 91.87%         | 0.368                                                        |
| 802.11n HT40 | 86.53%         | 0.628                                                        |

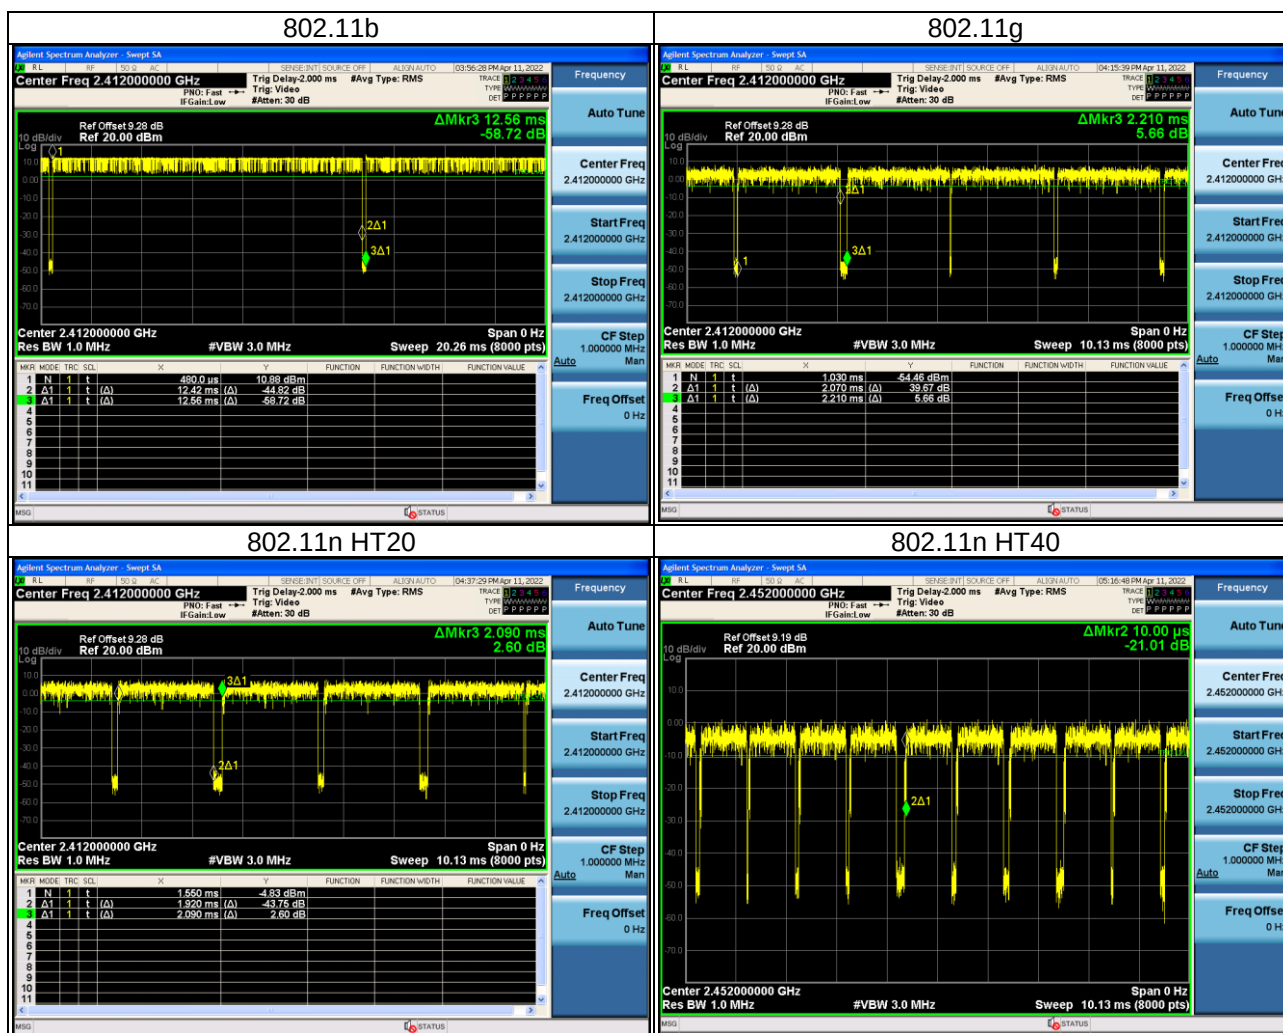



### 3. Test Types and Results

#### 3.1 Radiated Emission and Band-edge Measurement

##### 3.1.1 Limits of radiated emission and band-edge measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

| Frequencies<br>(MHz)                                                                            | Field Strength<br>(microvolts/meter) | Measurement Distance<br>(meters) |
|-------------------------------------------------------------------------------------------------|--------------------------------------|----------------------------------|
| 0.009 ~ 0.490                                                                                   | 2400/F(kHz)                          | 300                              |
| 0.490 ~ 1.705                                                                                   | 24000/F(kHz)                         | 30                               |
| 1.705 ~ 30.0                                                                                    | 30                                   | 30                               |
| 30 ~ 88                                                                                         | 100                                  | 3                                |
| 88 ~ 216                                                                                        | 150                                  | 3                                |
| 216 ~ 960                                                                                       | 200                                  | 3                                |
| Above 960                                                                                       | 500                                  | 3                                |
| * DTS emissions in non-restricted frequency bands Subclause 11.11 of ANSI C63.10 is applicable. |                                      |                                  |
| * DTS emissions in restricted frequency bands Subclause 11.12 of ANSI C63.10 is applicable      |                                      |                                  |

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



### 3.1.2 Test Instruments

Radiated emission below 30MHz:

| Equipment                           | Manufacturer  | Model No. | Serial No.     | Next Cal.   |
|-------------------------------------|---------------|-----------|----------------|-------------|
| EMI Test Receiver                   | Rohde&Schwarz | ESR7      | 100962         | 2023-01-13  |
| 3m Semi-anechoic Chamber            | MAORUI        | 9m*6m*6m  | NSEMC003       | 2023-04-15* |
| Test software                       | FARAD         | FARAD     | EZ EMCV1.1.4.2 | N/A         |
| Loop Antenna                        | EMCI          | HLA 6121  | 56735          | 2023-04-15* |
| Preamplifier                        | EMCI          | EMC001340 | 980201         | 2022-09-08  |
| Antenna Tower                       | MF            | MFA-440H  | NA             | NA          |
| Turn Table                          | MF            | MFT-201SS | NA             | NA          |
| Antenna Tower&Turn Table Controller | MF            | MF-7802   | NA             | NA          |

Frequency Range below 1GHz:

| Equipment                | Manufacturer  | Model No. | Serial No.     | Next Cal.   |
|--------------------------|---------------|-----------|----------------|-------------|
| 3m Semi-anechoic Chamber | MAORUI        | 9m*6m*6m  | NSEMC003       | 2023-04-15* |
| EMI Test Receiver        | Rohde&Schwarz | ESR7      | 100962         | 2023-01-13  |
| Broadband antenna        | Schwarzbeck   | VULB 9168 | 00937          | 2023-09-12* |
| Signal Amplifier         | Com-power     | PAM-103   | 18020051       | 2022-09-08  |
| Attenuator               | Rohde&Schwarz | TS2GA-6dB | 18101101       | N/A         |
| Test software            | FARAD         | FARAD     | EZ EMCV1.1.4.2 | N/A         |

Frequency Range 1-18GHz:

| Equipment                           | Manufacturer | Model No.  | Serial No. | Next Cal.   |
|-------------------------------------|--------------|------------|------------|-------------|
| 3m Semi-anechoic Chamber            | MAORUI       | 9m*6m*6m   | NSEMC003   | 2023-04-15* |
| Horn Antenna                        | Schwarzbeck  | BBHA 9120D | 01959      | 2022-09-12* |
| Broadband Coaxial Preamplifier      | Com-power    | PAM-118A   | 1804003    | 2022-09-07  |
| Spectrum                            | Keysight     | N9020A     | MY51240612 | 2022-09-08  |
| Antenna Tower                       | MF           | MFA-440H   | NA         | NA          |
| Turn Table                          | MF           | MFT-201SS  | NA         | NA          |
| Antenna Tower&Turn Table Controller | MF           | MF-7802    | NA         | NA          |

Frequency Range 18-40GHz:

| Equipment                           | Manufacturer  | Model No.  | Serial No.  | Next Cal.   |
|-------------------------------------|---------------|------------|-------------|-------------|
| 3m Semi-anechoic Chamber            | MAORUI        | 9m*6m*6m   | NSEMC003    | 2023-04-15* |
| Spectrum Analyzer                   | Rohde&Schwarz | FSV-40N    | 101783      | 2023-01-13  |
| Horn Antenna                        | Schwarzbeck   | BBHA 9170  | BBHA9170242 | 2023-04-10* |
| Pre-Amplifier                       | EMCI          | EMC 184045 | 980102      | 2023-01-12  |
| Antenna Tower                       | MF            | MFA-440H   | NA          | NA          |
| Turn Table                          | MF            | MFT-201SS  | NA          | NA          |
| Antenna Tower&Turn Table Controller | MF            | MF-7802    | NA          | NA          |

Note: 1. The calibration interval of the above test instruments is 12/24months(\*) and the calibrations are traceable to CEPREI/CHINA.  
2. The test was performed in 966.



### 3.1.3 Test Procedures

#### a. Peak emission levels are measured by setting the instrument as follow:

- 1) RBW & VBW setting as a function of frequency:

| Frequency     | RBW    | VBW    |
|---------------|--------|--------|
| 9kHz~150kHz   | 200Hz  | 600Hz  |
| 0.15MHz~30MHz | 9kHz   | 30kHz  |
| 30MHz~1000MHz | 120kHz | 300kHz |
| >1000MHz      | 1MHz   | 3MHz   |

- 2) Detector = peak.  
3) Sweep time = auto.  
4) Trace mode = max hold.  
5) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be lengthened for low-duty-cycle applications.)

Note: If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement

#### b. Average emission levels are measured by setting the instrument as follow:

##### ● Trace averaging with continuous EUT transmission at full power

If the EUT can be configured or modified to transmit continuously ( $D \geq 98\%$ ), then the average emission levels shall be measured using the following method (with EUT transmitting continuously):

- 1) RBW=1 MHz (unless otherwise specified).  
2) VBW  $\geq 3 \times$  RBW.  
3) Detector =RMS  
4) Sweep time = auto.  
5) Perform a trace average of at least 100 traces.

##### ● Trace averaging across ON and OFF times of the EUT transmissions followed by duty cycle correction

If continuous transmission of the EUT ( $D \geq 98\%$ ) cannot be achieved and the duty cycle is constant (duty cycle variations are less than  $\pm 2\%$ ), then the following procedure shall be used

- 1) The EUT shall be configured to operate at the maximum achievable duty cycle.  
2) Measure the duty cycle D of the transmitter output signal as described in 11.6.  
3) RBW=1 MHz (unless otherwise specified).  
4) VBW  $\geq 3 \times$  RBW.  
5) Detector =RMS  
6) Sweep time = auto.  
7) Perform a trace average of at least 100 traces.

A correction factor shall be added to the measurement results prior to comparing with the emission limit to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:

\*If power averaging (rms) mode was used in step 5), then the applicable correction factor is  $[10 \log (1/D)]$ , where D is the duty cycle.

\*\*If linear voltage averaging mode was used in step f), then the applicable correction factor is  $[20 \log (1/D)]$ , where D is the duty cycle.

\*\*\*If a specific emission is demonstrated to be continuous ( $D > 98\%$ ) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that



● **Reduced VBW Averaging across ON and OFF times of the EUT transmissions with max hold**

If continuous transmission of the EUT ( $D > 98\%$ ) cannot be achieved and the duty cycle is not constant (duty cycle variations exceed  $\pm 2\%$ ), then the following procedure shall be used:

- 1) RBW = 1MHz.
  - 2) VBW  $\geq 1/T$ .
  - 3) Detector = peak
  - 4) Sweep time = auto.
  - 5) Trace mode = max hold.
  - 6) Allow max hold to run for at least  $[50 \times (1/D)]$  traces
- c. The EUT was placed on the top of a rotating table 0.8 meters (below 1GHz) / 1.5 meters (1-18GHz) / 1.5 meters (18-40GHz) above the reference ground. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The EUT was set 3meters away from the interference-receiving antenna (Below 1GHz) & (Above 1-18GHz), which was mounted on the top of a variable-height antenna tower. The EUT was set 1meters away from the interference-receiving antenna (18-40GHz).
- e. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- f. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- g. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- h. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

**Note:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz & 360kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth = 3mHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth =  $1/T$  for Average (Duty cycle  $< 98\%$ ) detection at frequency above 1 GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is = 10Hz (Duty cycle  $\geq 98\%$ ) for Average detection (AV) at frequency above 1GHz.
5. All modes of operation were investigated and the worst-case emissions are reported.


3.1.4 Deviation from Test Standard

No deviation.




### 3.1.5 Test Setup

#### Radiated emission below 30MHz:

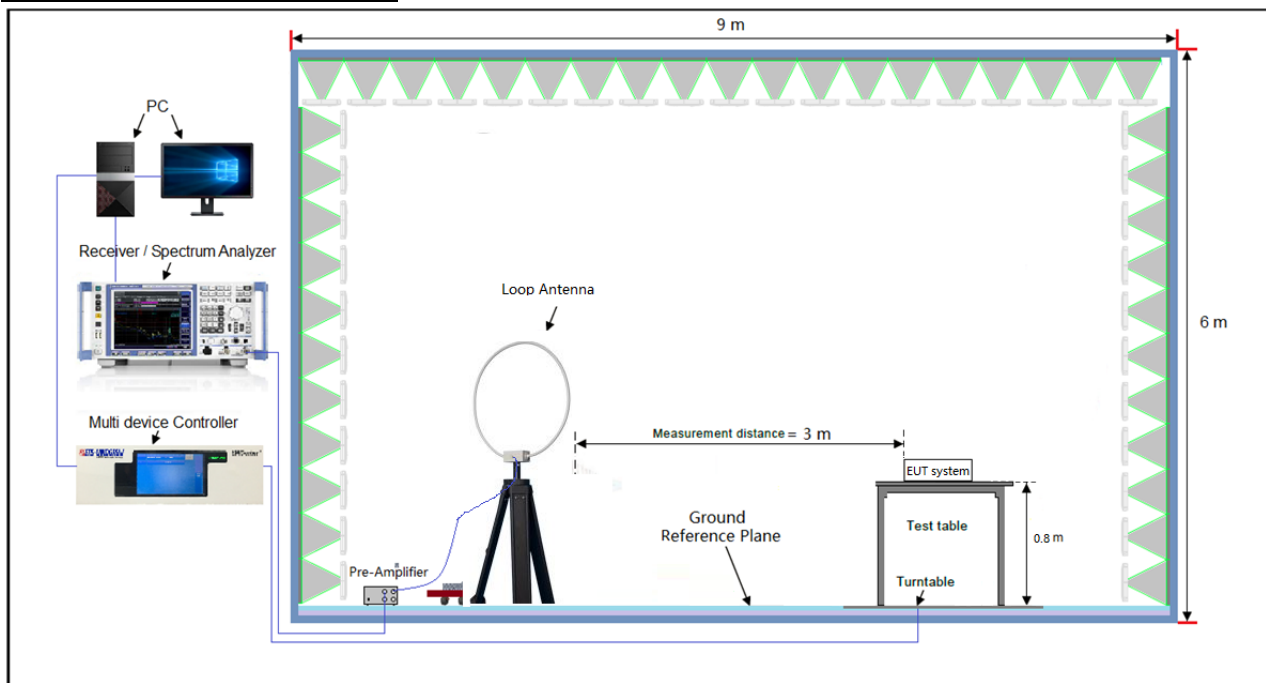


#### Frequency Range below 1GHz:

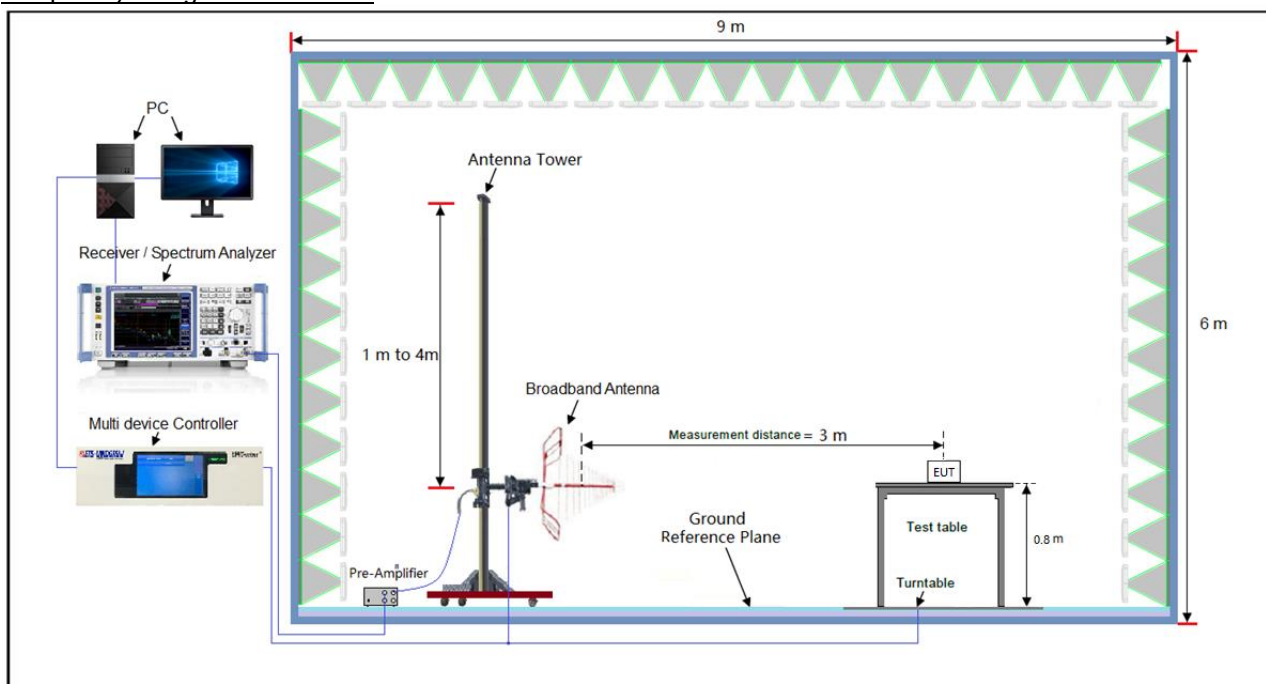






### Frequency Range 1-18GHz:

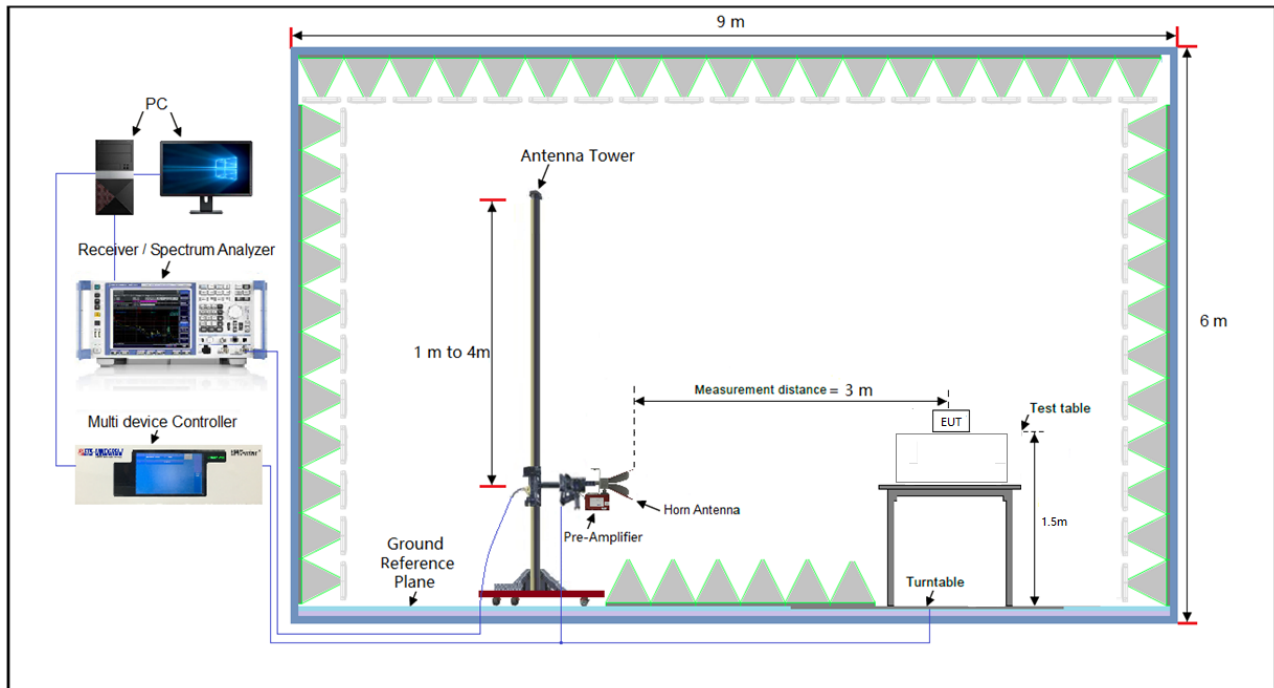

### Frequency Range 18-40GHz:

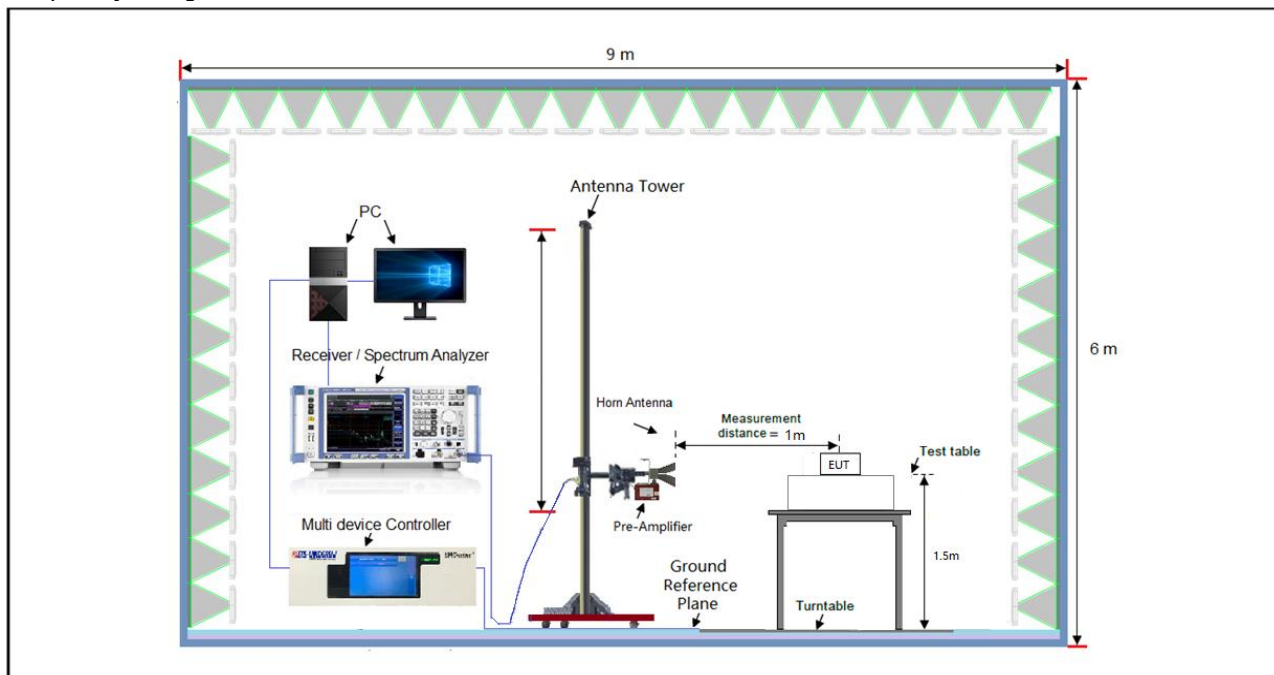

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 3.1.6 EUT Operating Conditions

- Placed the EUT on the testing table.
- Set the EUT under transmission condition continuously at specific channel frequency.






### 3.1.7 Test Results

#### 9kHz ~ 30MHz Data:

The amplitude of spurious emissions attenuated more than 20dB below the permissible value is not required to be report.

#### 30MHz ~ 1GHz Worst-Case Data:

|                   |                              |                 |              |
|-------------------|------------------------------|-----------------|--------------|
| Test Mode         | 802.11b 2462MHz TX           |                 |              |
| Test Channel      | Channel 11                   | Frequency Range | 30MHz ~ 1GHz |
| Detector Function | Peak (PK)<br>Quasi-peak (QP) | Tested By       | Jim Xu       |

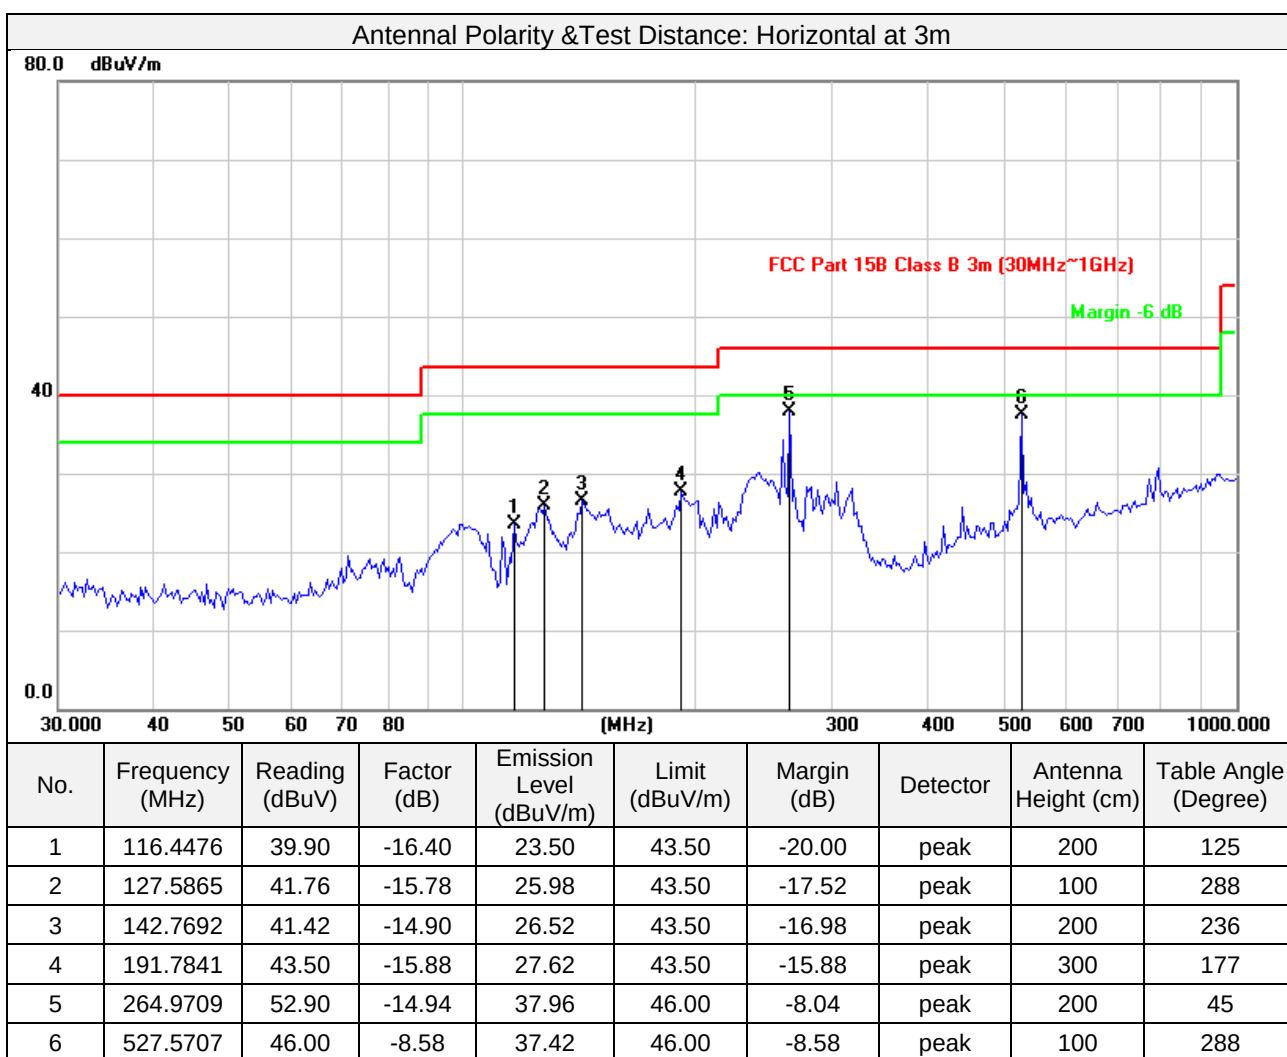


#### Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
2. Margin value = Emission level – Limit value



|                   |                              |                 |              |
|-------------------|------------------------------|-----------------|--------------|
| Test Mode         | 802.11b 2462MHz TX           |                 |              |
| Test Channel      | Channel 11                   | Frequency Range | 30MHz ~ 1GHz |
| Detector Function | Peak (PK)<br>Quasi-peak (QP) | Tested By       | Jim Xu       |

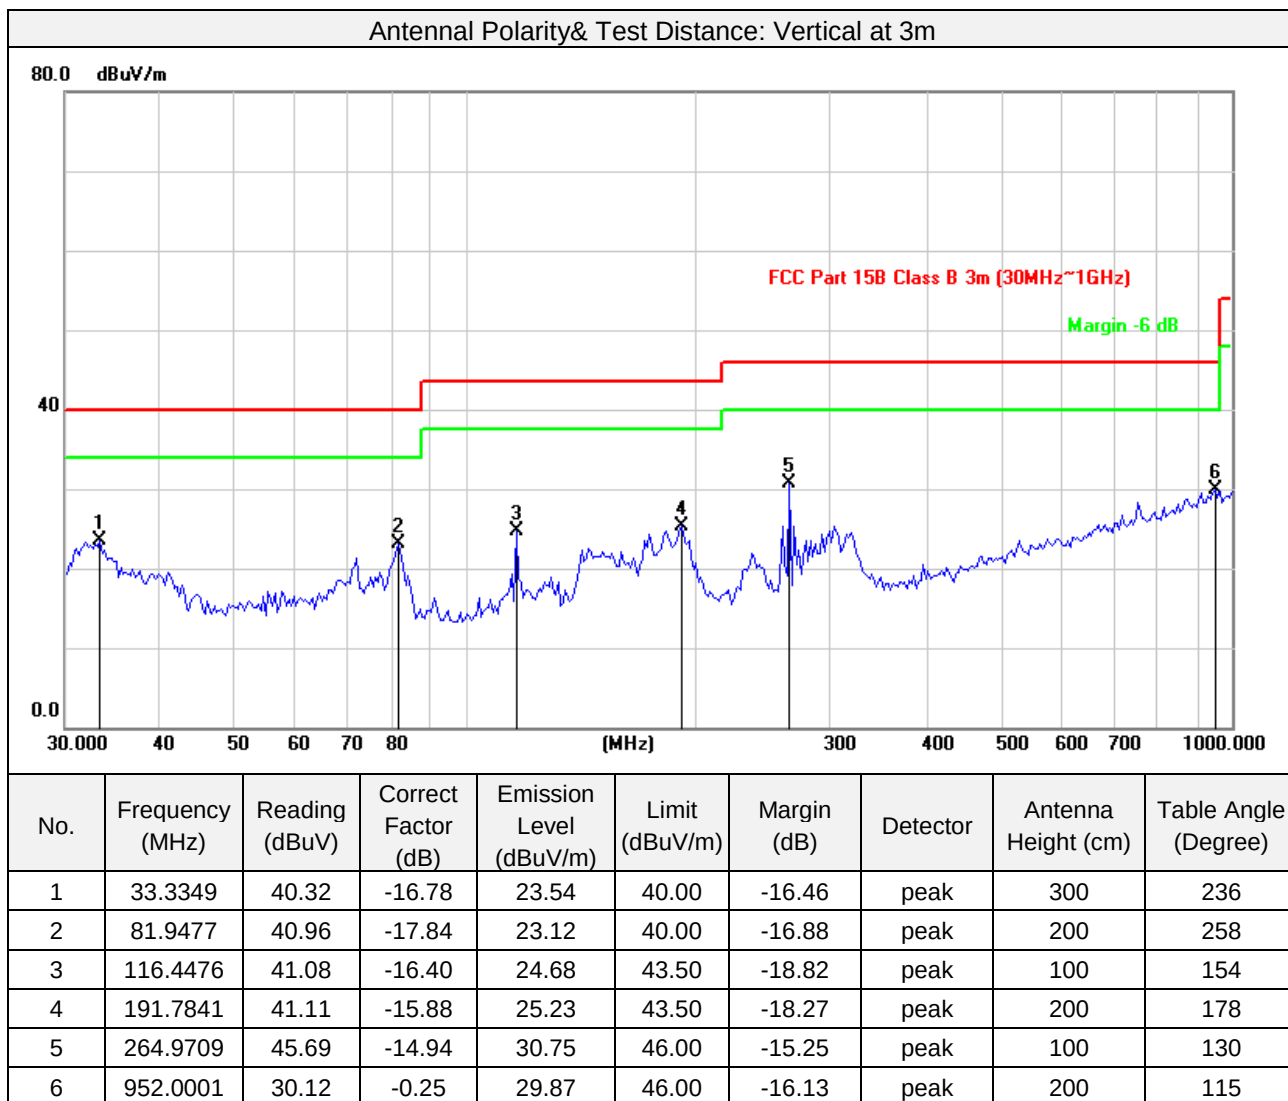


Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
2. Margin value = Emission level – Limit value



Above 1GHz Data:

|                   |                            |                 |              |
|-------------------|----------------------------|-----------------|--------------|
| Test Mode         | 802.11b: 2412MHz TX        |                 |              |
| Test channel      | Channel 1                  | Frequency Range | 1GHz ~ 25GHz |
| Detector Function | Peak (PK)<br>Average (AVG) | Tested By       | Jim Xu       |

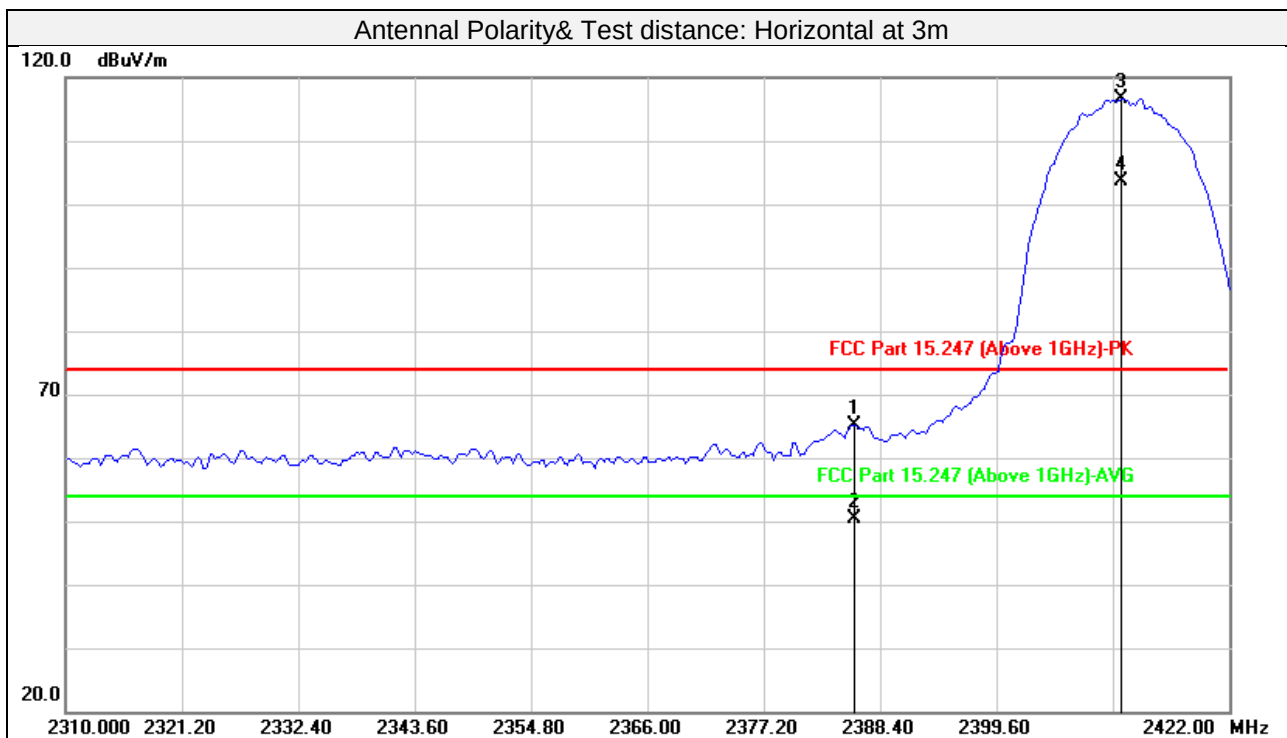


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Antenna Height (cm) | Table Angle (Degree) |
|-----|-----------------|----------------|---------------------|-------------------------|----------------|-------------|----------|---------------------|----------------------|
| 1   | 2385.864        | 31.74          | 33.50               | 65.24                   | 74.00          | -8.76       | peak     | 100                 | 182                  |
| 2   | 2385.864        | 16.81          | 33.50               | 50.31                   | 54.00          | -3.69       | AVG      | 100                 | 182                  |
| 3   | 2411.675        | 83.09          | 33.56               | 116.65                  |                |             | peak     | 100                 | 182                  |
| 4   | 2411.675        | 70.15          | 33.56               | 103.71                  |                |             | AVG      | 100                 | 182                  |
| 5   | 4824.000        | 52.49          | 4.51                | 57.00                   | 74.00          | -17.00      | peak     | 100                 | 82                   |
| 6   | 4824.000        | 38.64          | 4.51                | 43.15                   | 54.00          | -10.85      | AVG      | 100                 | 82                   |
| 7   | 7236.000        | 47.22          | 9.13                | 56.35                   | 74.00          | -17.65      | peak     | 100                 | 344                  |
| 8   | 7236.000        | 32.32          | 9.13                | 41.45                   | 54.00          | -12.55      | AVG      | 100                 | 344                  |

Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamplifier Factor)
2. Margin value = Emission level – Limit value
3. 2412MHz: Fundamental frequency.



|                   |                            |                 |              |
|-------------------|----------------------------|-----------------|--------------|
| Test Mode         | 802.11b: 2412MHz TX        |                 |              |
| Test channel      | Channel 1                  | Frequency Range | 1GHz ~ 25GHz |
| Detector Function | Peak (PK)<br>Average (AVG) | Tested By       | Jim Xu       |

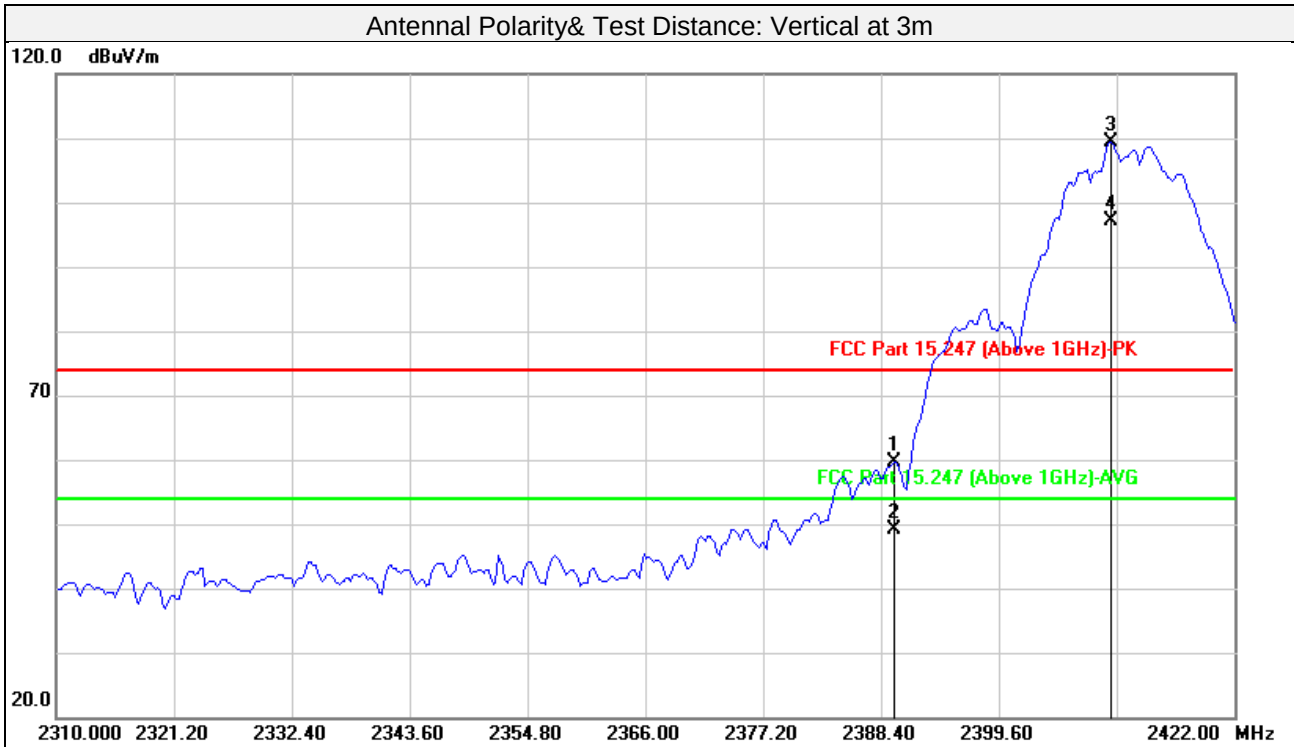

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Antenna Height (cm) | Table Angle (Degree) |
|-----|-----------------|----------------|---------------------|-------------------------|----------------|-------------|----------|---------------------|----------------------|
| 1   | 2389.679        | 61.93          | -2.39               | 59.54                   | 74.00          | -14.46      | peak     | 234                 | 126                  |
| 2   | 2389.679        | 51.55          | -2.39               | 49.16                   | 54.00          | -4.84       | AVG      | 234                 | 126                  |
| 3   | 2410.329        | 111.79         | -2.37               | 109.42                  |                |             | peak     | 234                 | 126                  |
| 4   | 2410.329        | 99.51          | -2.37               | 97.14                   |                |             | AVG      | 234                 | 126                  |
| 5   | 4824.000        | 61.00          | 4.51                | 65.51                   | 74.00          | -8.49       | peak     | 204                 | 51                   |
| 6   | 4824.000        | 45.98          | 4.51                | 50.49                   | 54.00          | -3.51       | AVG      | 204                 | 51                   |
| 7   | 7236.000        | 44.79          | 9.13                | 53.92                   | 74.00          | -20.08      | peak     | 100                 | 321                  |
| 8   | 7236.000        | 34.35          | 9.13                | 43.48                   | 54.00          | -10.52      | AVG      | 100                 | 321                  |

Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
2. Margin value = Emission level – Limit value
3. 2412MHz: Fundamental frequency.



|                   |                            |                 |              |
|-------------------|----------------------------|-----------------|--------------|
| Test Mode         | 802.11b: 2437MHz TX        |                 |              |
| Test channel      | Channel 6                  | Frequency Range | 1GHz ~ 25GHz |
| Detector Function | Peak (PK)<br>Average (AVG) | Tested By       | Jim Xu       |


| Antennal Polarity& Test Distance: Horizontal at 3m |                 |                |                     |                         |                |             |          |                     |                      |
|----------------------------------------------------|-----------------|----------------|---------------------|-------------------------|----------------|-------------|----------|---------------------|----------------------|
| No.                                                | Frequency (MHz) | Reading (dBUV) | Correct Factor (dB) | Emission Level (dBUV/m) | Limit (dBUV/m) | Margin (dB) | Detector | Antenna Height (cm) | Table Angle (Degree) |
| 1                                                  | 2437.000        | 116.44         | -1.27               | 115.17                  |                |             | peak     | 158                 | 102                  |
| 2                                                  | 2437.000        | 103.58         | -1.27               | 102.31                  |                |             | AVG      | 158                 | 102                  |
| 3                                                  | 4874.000        | 52.30          | 4.64                | 56.94                   | 74.00          | -17.06      | peak     | 100                 | 133                  |
| 4                                                  | 4874.000        | 37.47          | 4.64                | 42.11                   | 54.00          | -11.89      | AVG      | 100                 | 133                  |
| 5                                                  | 7311.000        | 45.70          | 9.24                | 54.94                   | 74.00          | -19.06      | peak     | 121                 | 210                  |
| 6                                                  | 7311.000        | 33.12          | 9.24                | 42.36                   | 54.00          | -11.64      | AVG      | 121                 | 210                  |
| Antennal Polarity& Test Distance: Vertical at 3m   |                 |                |                     |                         |                |             |          |                     |                      |
| No.                                                | Frequency (MHz) | Reading (dBUV) | Factor (dB)         | Emission Level (dBUV/m) | Limit (dBUV/m) | Margin (dB) | Detector | Antenna Height (cm) | Table Angle (Degree) |
| 1                                                  | 2437.000        | 103.40         | -1.27               | 102.13                  |                |             | peak     | 175                 | 166                  |
| 2                                                  | 2437.000        | 97.75          | -1.27               | 96.48                   |                |             | AVG      | 175                 | 166                  |
| 3                                                  | 4874.000        | 53.49          | 4.64                | 58.13                   | 74.00          | -15.87      | peak     | 151                 | 215                  |
| 4                                                  | 4874.000        | 37.52          | 4.64                | 42.16                   | 54.00          | -11.84      | AVG      | 151                 | 215                  |
| 5                                                  | 7311.000        | 45.92          | 9.24                | 55.16                   | 74.00          | -18.84      | peak     | 100                 | 101                  |
| 6                                                  | 7311.000        | 31.40          | 9.24                | 40.64                   | 54.00          | -13.36      | AVG      | 100                 | 101                  |

Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamplifier Factor)
2. Margin value = Emission level – Limit value
3. 2437MHz: Fundamental frequency.



|                   |                            |                 |              |
|-------------------|----------------------------|-----------------|--------------|
| Test Mode         | 802.11b: 2462MHz TX        |                 |              |
| Test channel      | Channel 11                 | Frequency Range | 1GHz ~ 25GHz |
| Detector Function | Peak (PK)<br>Average (AVG) | Tested By       | Jim Xu       |

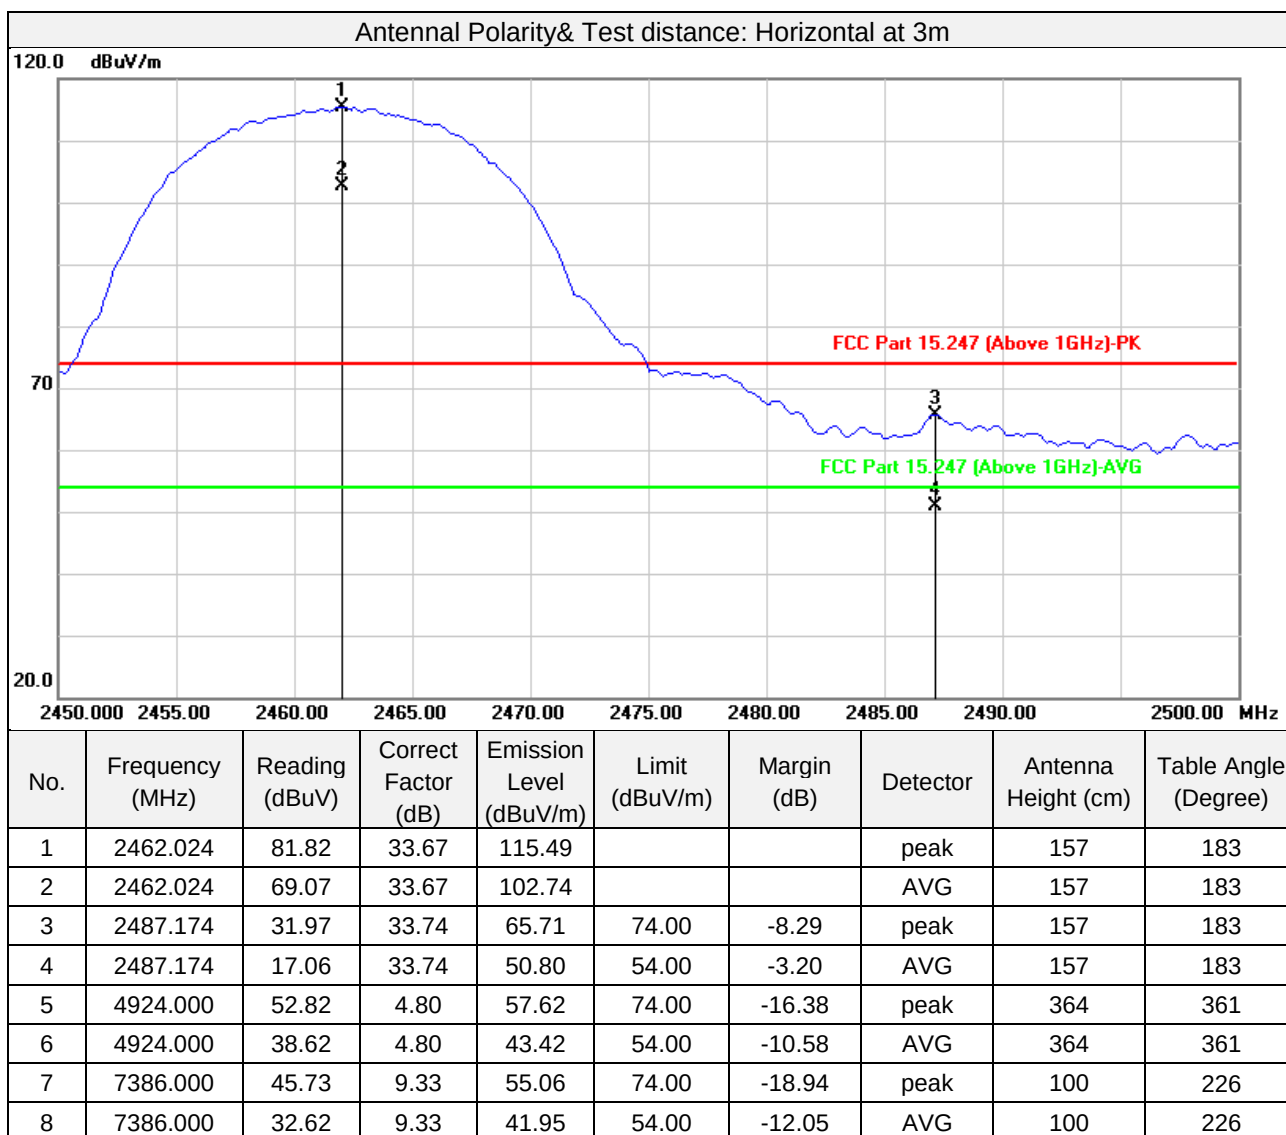


Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamplifier Factor)
2. Margin value = Emission level – Limit value
3. 2462MHz: Fundamental frequency.



|                   |                            |                 |              |
|-------------------|----------------------------|-----------------|--------------|
| Test Mode         | 802.11b: 2462MHz TX        |                 |              |
| Test channel      | Channel 11                 | Frequency Range | 1GHz ~ 25GHz |
| Detector Function | Peak (PK)<br>Average (AVG) | Tested By       | Jim Xu       |

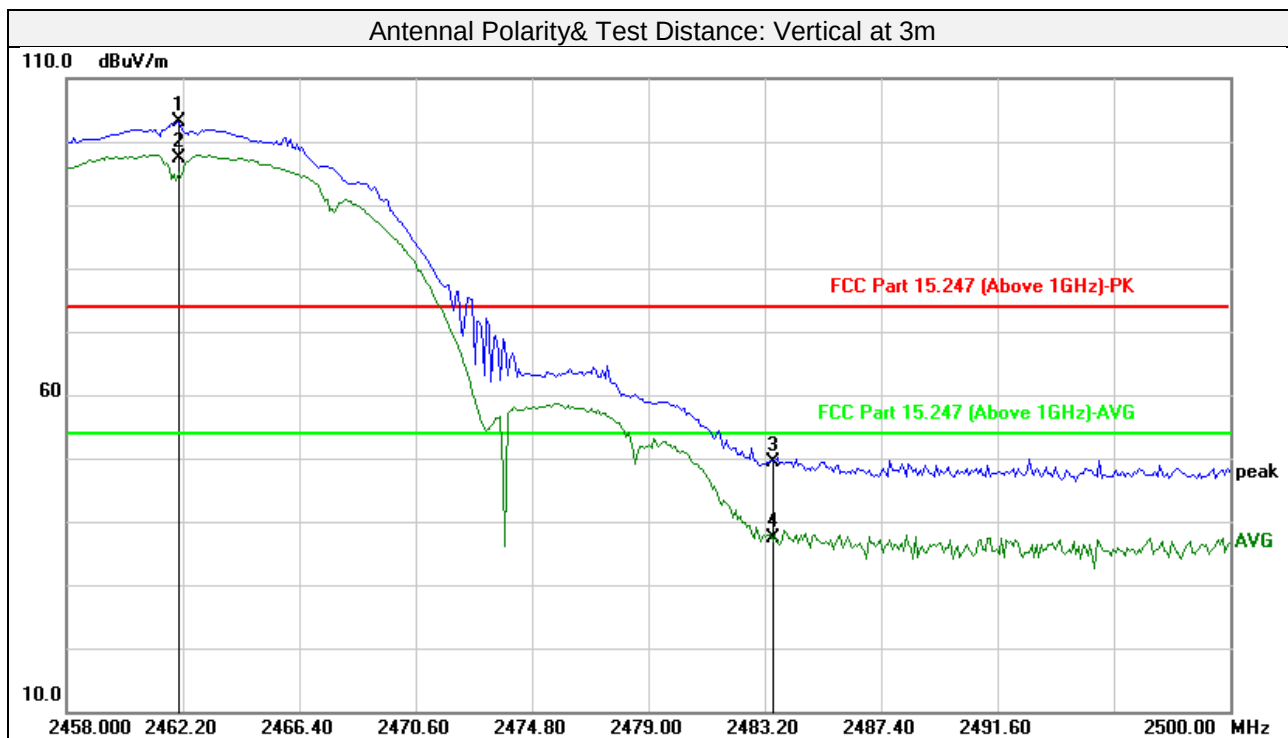


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Antenna Height (cm) | Table Angle (Degree) |
|-----|-----------------|----------------|---------------------|-------------------------|----------------|-------------|----------|---------------------|----------------------|
| 1   | 2462.040        | 104.30         | -1.27               | 103.03                  |                |             | peak     | 100                 | 67                   |
| 2   | 2462.040        | 98.58          | -1.27               | 97.31                   |                |             | AVG      | 100                 | 67                   |
| 3   | 2483.500        | 50.60          | -1.25               | 49.35                   | 74.00          | -24.65      | peak     | 100                 | 67                   |
| 4   | 2483.500        | 38.73          | -1.25               | 37.48                   | 54.00          | -16.52      | AVG      | 100                 | 67                   |
| 5   | 4924.000        | 53.58          | 4.80                | 58.38                   | 74.00          | -15.62      | peak     | 268                 | 0                    |
| 6   | 4924.000        | 39.84          | 4.80                | 44.64                   | 54.00          | -9.36       | AVG      | 268                 | 0                    |
| 7   | 7386.000        | 45.81          | 9.33                | 55.14                   | 74.00          | -18.86      | peak     | 100                 | 106                  |
| 8   | 7386.000        | 32.11          | 9.33                | 41.44                   | 54.00          | -12.56      | AVG      | 100                 | 106                  |

Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
2. Margin value = Emission level – Limit value
3. 2462MHz: Fundamental frequency.



|                   |                            |                 |              |
|-------------------|----------------------------|-----------------|--------------|
| Test Mode         | 802.11g: 2412MHz TX        |                 |              |
| Test channel      | Channel 1                  | Frequency Range | 1GHz ~ 25GHz |
| Detector Function | Peak (PK)<br>Average (AVG) | Tested By       | Jim Xu       |

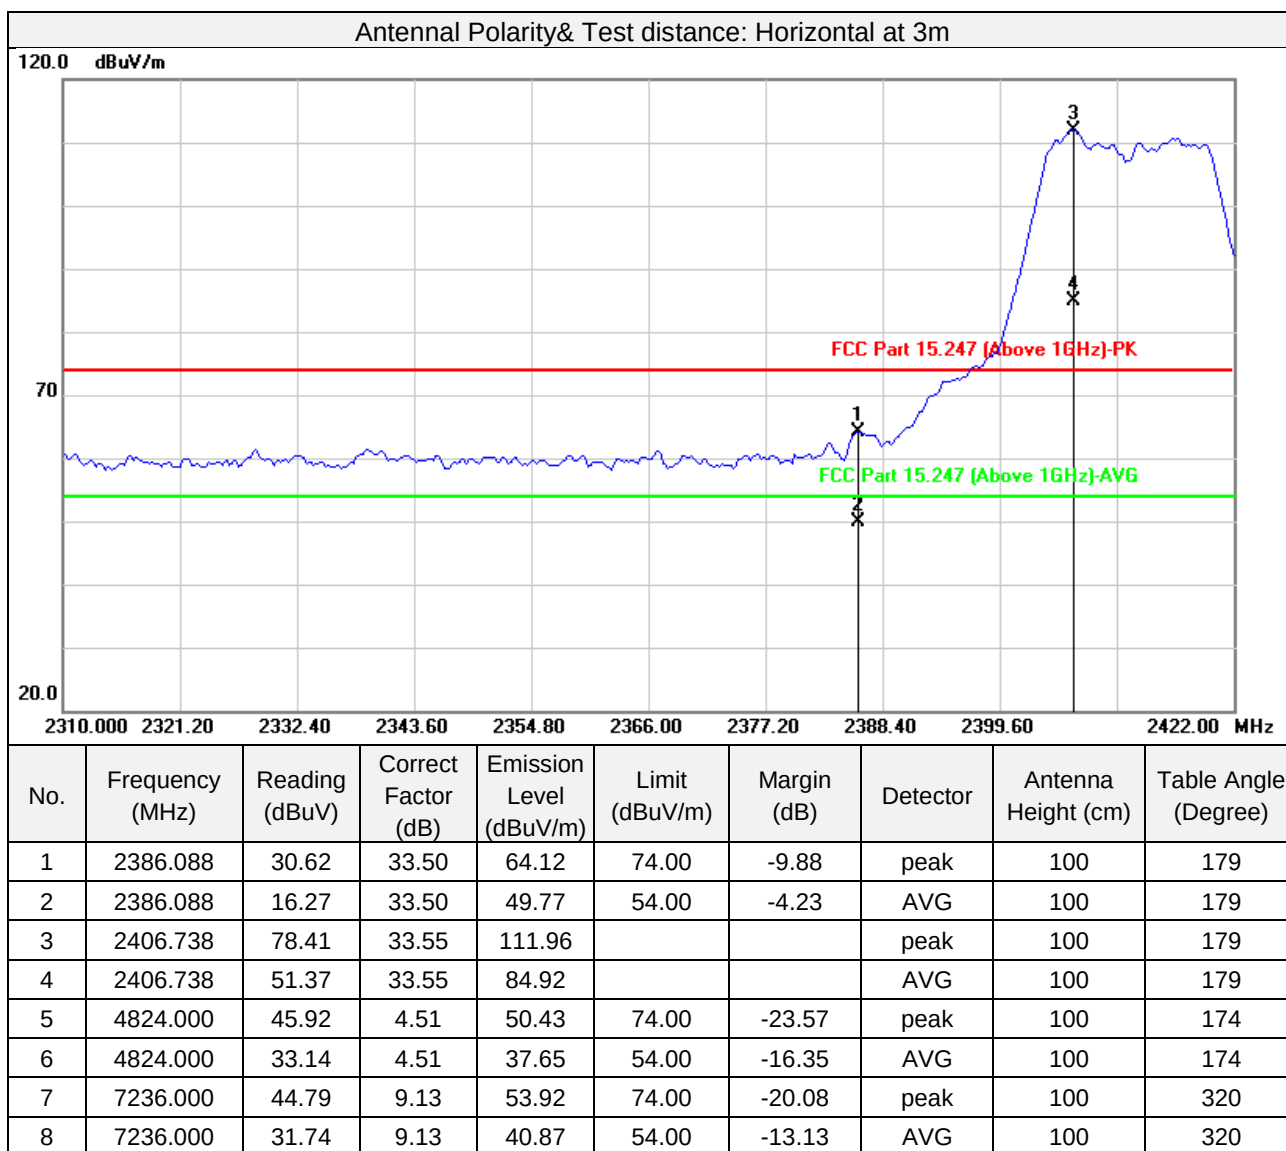


Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
2. Margin value = Emission level – Limit value
3. 2412MHz: Fundamental frequency.





|                   |                            |                 |              |
|-------------------|----------------------------|-----------------|--------------|
| Test Mode         | 802.11g: 2412MHz TX        |                 |              |
| Test channel      | Channel 1                  | Frequency Range | 1GHz ~ 25GHz |
| Detector Function | Peak (PK)<br>Average (AVG) | Tested By       | Jim Xu       |

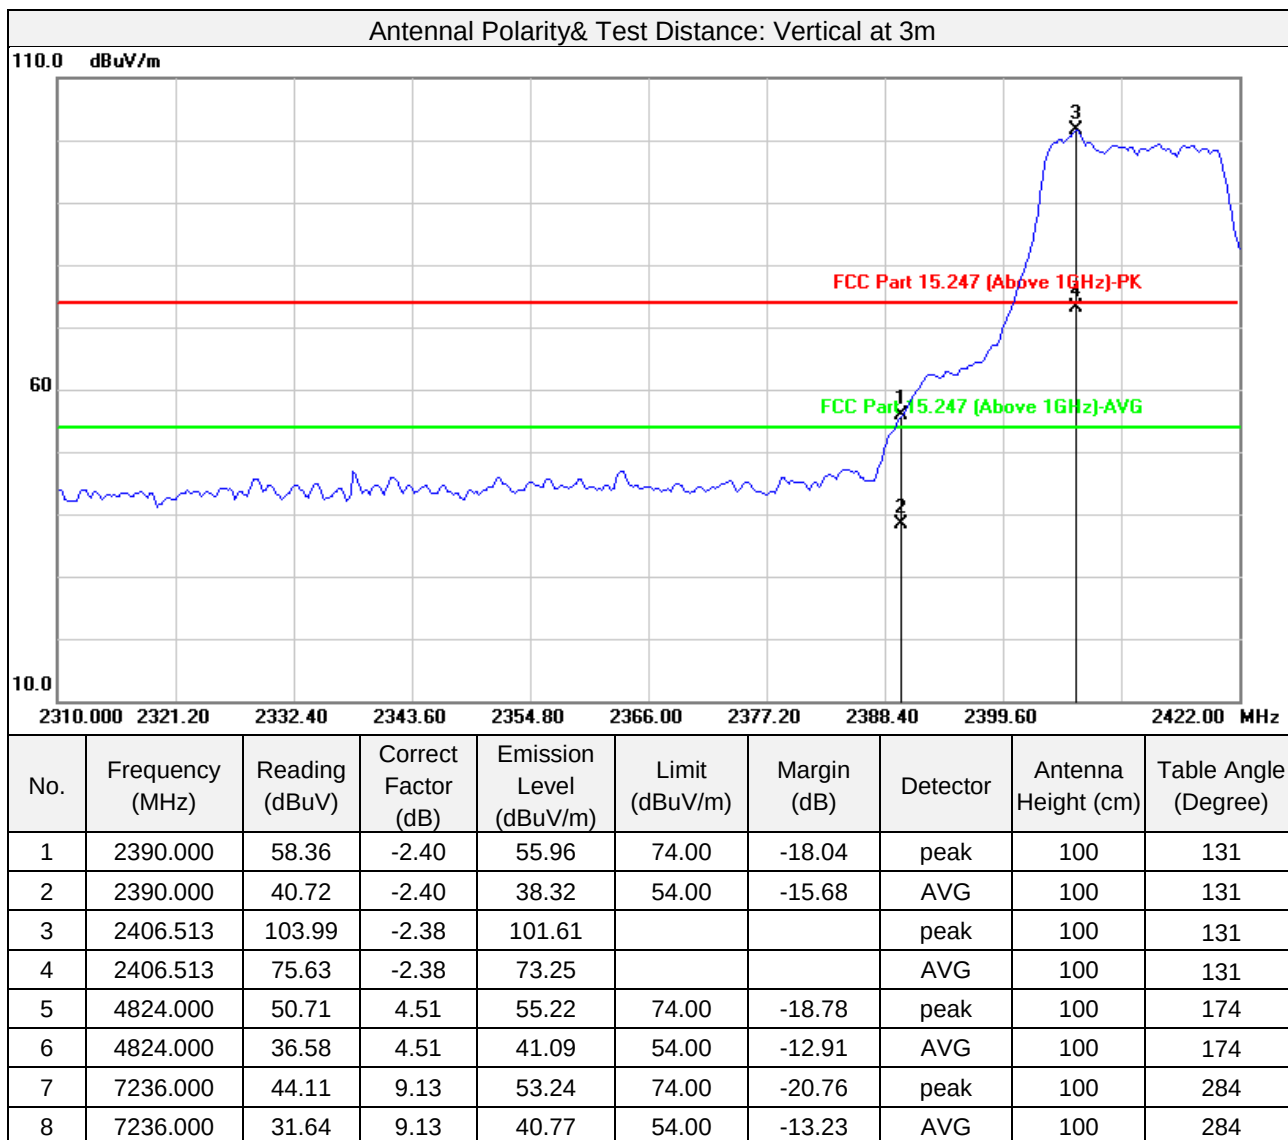

## Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamplifier Factor)
2. Margin value = Emission level – Limit value
3. 2412MHz: Fundamental frequency.



|                   |                            |                 |              |
|-------------------|----------------------------|-----------------|--------------|
| Test Mode         | 802.11g: 2437MHz TX        |                 |              |
| Test channel      | Channel 6                  | Frequency Range | 1GHz ~ 25GHz |
| Detector Function | Peak (PK)<br>Average (AVG) | Tested By       | Jim Xu       |


| Antennal Polarity& Test Distance: Horizontal at 3m |                 |                |                     |                         |                |             |          |                     |                      |
|----------------------------------------------------|-----------------|----------------|---------------------|-------------------------|----------------|-------------|----------|---------------------|----------------------|
| No.                                                | Frequency (MHz) | Reading (dBUV) | Correct Factor (dB) | Emission Level (dBUV/m) | Limit (dBUV/m) | Margin (dB) | Detector | Antenna Height (cm) | Table Angle (Degree) |
| 1                                                  | 2437.000        | 111.61         | -1.27               | 110.34                  |                |             | peak     | 215                 | 177                  |
| 2                                                  | 2437.000        | 84.94          | -1.27               | 83.67                   |                |             | AVG      | 215                 | 177                  |
| 3                                                  | 4874.000        | 54.50          | 4.64                | 59.14                   | 74.00          | -14.86      | peak     | 203                 | 166                  |
| 4                                                  | 4874.000        | 40.04          | 4.64                | 44.68                   | 54.00          | -9.32       | AVG      | 203                 | 166                  |
| 5                                                  | 7311.000        | 44.45          | 9.24                | 53.69                   | 74.00          | -20.31      | peak     | 100                 | 155                  |
| 6                                                  | 7311.000        | 33.90          | 9.24                | 43.14                   | 54.00          | -10.86      | AVG      | 100                 | 155                  |
| Antennal Polarity& Test Distance: Vertical at 3m   |                 |                |                     |                         |                |             |          |                     |                      |
| No.                                                | Frequency (MHz) | Reading (dBUV) | Factor (dB)         | Emission Level (dBUV/m) | Limit (dBUV/m) | Margin (dB) | Detector | Antenna Height (cm) | Table Angle (Degree) |
| 1                                                  | 2437.000        | 101.88         | -1.27               | 100.61                  |                |             | peak     | 201                 | 181                  |
| 2                                                  | 2437.000        | 73.58          | -1.27               | 72.31                   |                |             | AVG      | 201                 | 181                  |
| 3                                                  | 4874.000        | 53.02          | 4.64                | 57.66                   | 74.00          | -16.34      | peak     | 217                 | 147                  |
| 4                                                  | 4874.000        | 39.30          | 4.64                | 43.94                   | 54.00          | -10.06      | AVG      | 217                 | 147                  |
| 5                                                  | 7311.000        | 45.03          | 9.24                | 54.27                   | 74.00          | -19.73      | peak     | 141                 | 264                  |
| 6                                                  | 7311.000        | 32.95          | 9.24                | 42.19                   | 54.00          | -11.81      | AVG      | 141                 | 264                  |

Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamplifier Factor)
2. Margin value = Emission level – Limit value
3. 2437MHz: Fundamental frequency.



|                   |                            |                 |              |
|-------------------|----------------------------|-----------------|--------------|
| Test Mode         | 802.11g: 2462MHz TX        |                 |              |
| Test channel      | Channel 11                 | Frequency Range | 1GHz ~ 25GHz |
| Detector Function | Peak (PK)<br>Average (AVG) | Tested By       | Jim Xu       |

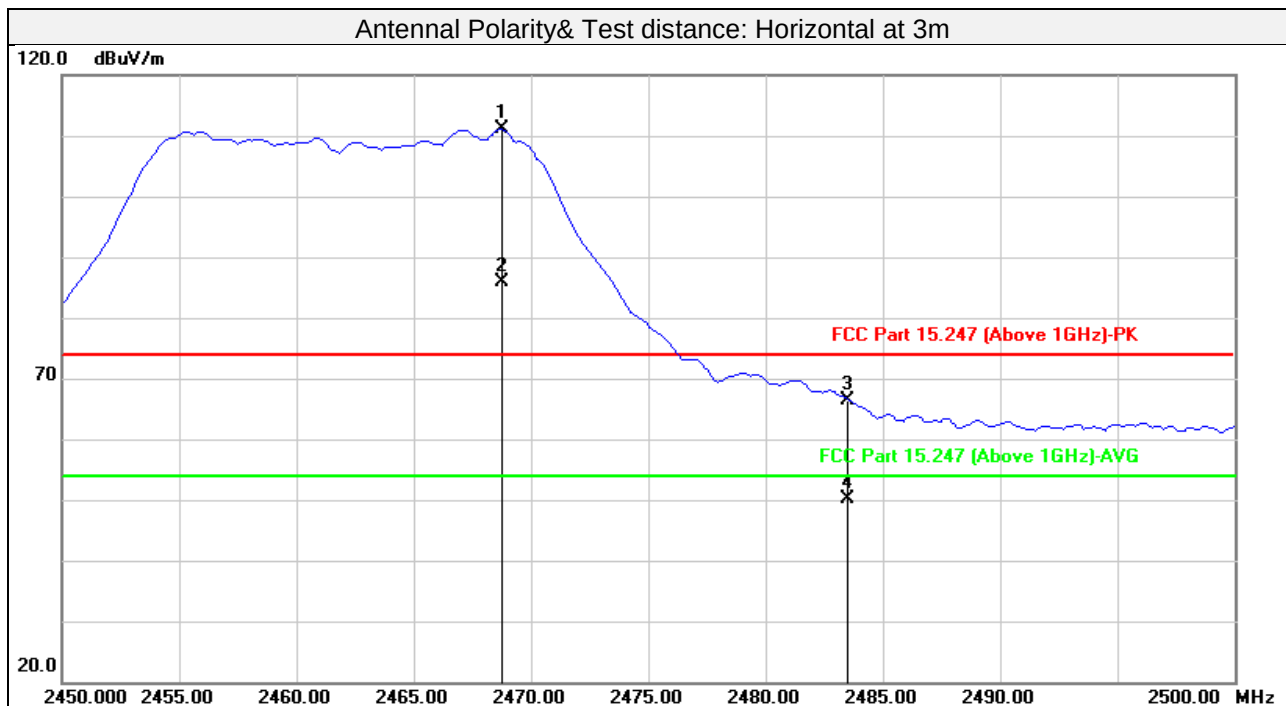


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Antenna Height (cm) | Table Angle (Degree) |
|-----|-----------------|----------------|---------------------|-------------------------|----------------|-------------|----------|---------------------|----------------------|
| 1   | 2468.738        | 77.33          | 33.69               | 111.02                  |                |             | peak     | 100                 | 185                  |
| 2   | 2468.738        | 52.12          | 33.69               | 85.81                   |                |             | AVG      | 100                 | 185                  |
| 3   | 2483.500        | 32.71          | 33.73               | 66.44                   | 74.00          | -7.56       | peak     | 100                 | 185                  |
| 4   | 2483.500        | 16.30          | 33.73               | 50.03                   | 54.00          | -3.97       | AVG      | 100                 | 185                  |
| 5   | 4924.000        | 43.68          | 4.80                | 48.48                   | 74.00          | -25.52      | peak     | 100                 | 165                  |
| 6   | 4924.000        | 31.48          | 4.80                | 36.28                   | 54.00          | -17.72      | AVG      | 100                 | 165                  |
| 7   | 7386.000        | 44.69          | 9.33                | 54.02                   | 74.00          | -19.98      | peak     | 100                 | 171                  |
| 8   | 7386.000        | 31.80          | 9.33                | 41.13                   | 54.00          | -12.87      | AVG      | 100                 | 171                  |

Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
2. Margin value = Emission level – Limit value
3. 2462MHz: Fundamental frequency.



|                   |                            |                 |              |
|-------------------|----------------------------|-----------------|--------------|
| Test Mode         | 802.11g: 2462MHz TX        |                 |              |
| Test channel      | Channel 11                 | Frequency Range | 1GHz ~ 25GHz |
| Detector Function | Peak (PK)<br>Average (AVG) | Tested By       | Jim Xu       |

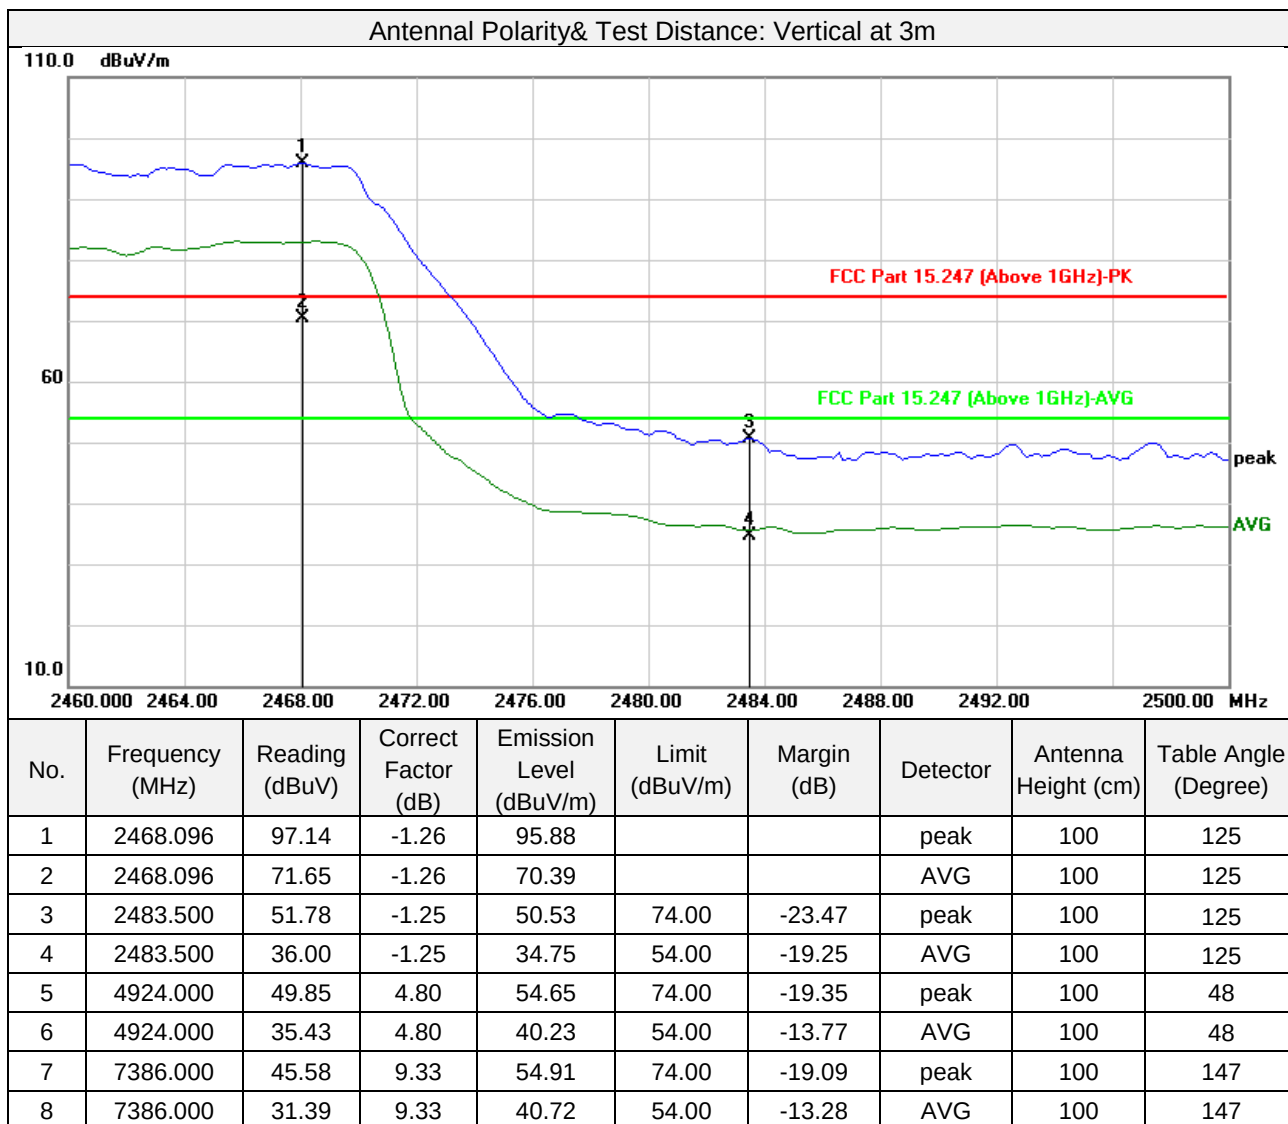


Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamplifier Factor)
2. Margin value = Emission level – Limit value
3. 2462MHz: Fundamental frequency.



|                   |                            |                 |              |
|-------------------|----------------------------|-----------------|--------------|
| Test Mode         | 802.11n HT20: 2412MHz TX   |                 |              |
| Test channel      | Channel 1                  | Frequency Range | 1GHz ~ 25GHz |
| Detector Function | Peak (PK)<br>Average (AVG) | Tested By       | Jim Xu       |

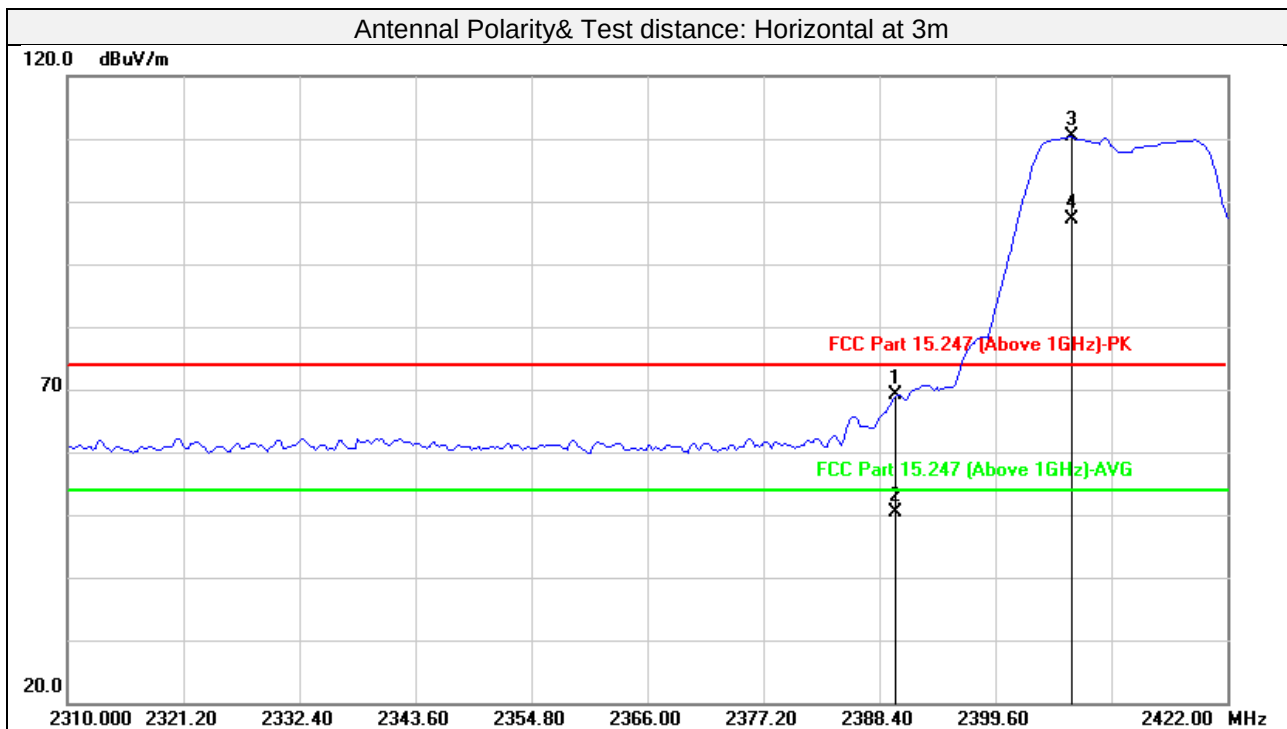


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Antenna Height (cm) | Table Angle (Degree) |
|-----|-----------------|----------------|---------------------|-------------------------|----------------|-------------|----------|---------------------|----------------------|
| 1   | 2390.000        | 35.53          | 33.51               | 69.04                   | 74.00          | -4.96       | peak     | 100                 | 180                  |
| 2   | 2390.000        | 16.90          | 33.51               | 50.41                   | 54.00          | -3.59       | AVG      | 100                 | 180                  |
| 3   | 2406.962        | 76.75          | 33.55               | 110.30                  |                |             | peak     | 100                 | 180                  |
| 4   | 2406.962        | 63.49          | 33.55               | 97.04                   |                |             | AVG      | 100                 | 180                  |
| 5   | 4824.000        | 43.61          | 4.51                | 48.12                   | 74.00          | -25.88      | peak     | 100                 | 132                  |
| 6   | 4824.000        | 31.44          | 4.51                | 35.95                   | 54.00          | -18.05      | AVG      | 100                 | 132                  |
| 7   | 7236.000        | 44.26          | 9.13                | 53.39                   | 74.00          | -20.61      | peak     | 100                 | 246                  |
| 8   | 7236.000        | 31.64          | 9.13                | 40.77                   | 54.00          | -13.23      | AVG      | 100                 | 246                  |

Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
2. Margin value = Emission level – Limit value
3. 2412MHz: Fundamental frequency.



|                   |                            |                 |              |
|-------------------|----------------------------|-----------------|--------------|
| Test Mode         | 802.11n HT20: 2412MHz TX   |                 |              |
| Test channel      | Channel 1                  | Frequency Range | 1GHz ~ 25GHz |
| Detector Function | Peak (PK)<br>Average (AVG) | Tested By       | Jim Xu       |

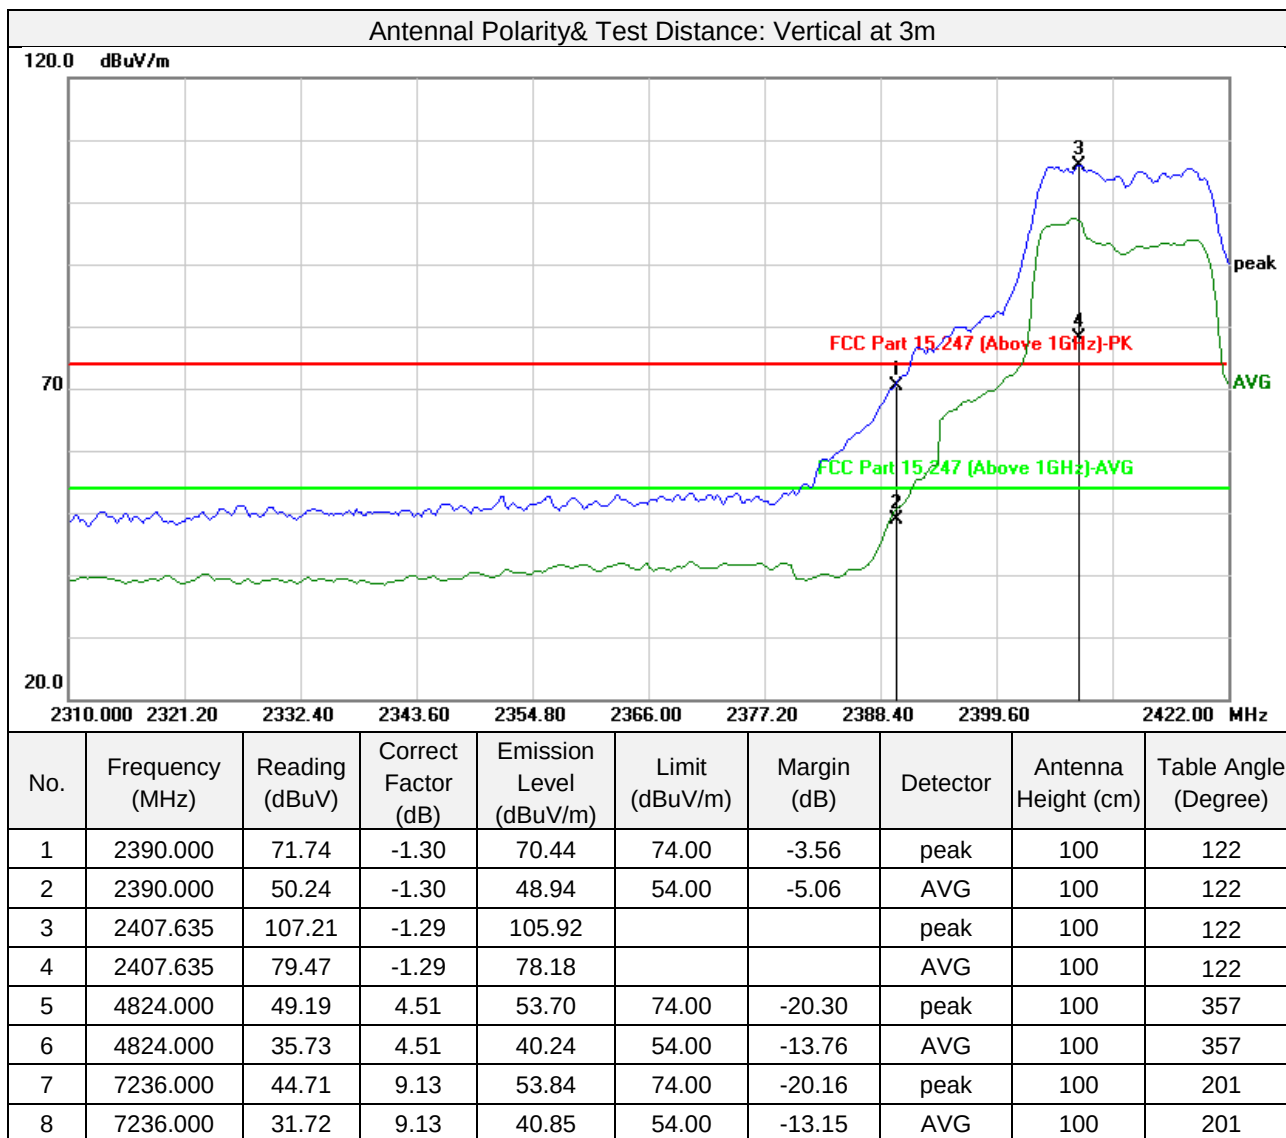

Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamplifier Factor)
2. Margin value = Emission level – Limit value
3. 2412MHz: Fundamental frequency.



|                   |                            |                 |              |
|-------------------|----------------------------|-----------------|--------------|
| Test Mode         | 802.11n HT20: 2437MHz TX   |                 |              |
| Test channel      | Channel 6                  | Frequency Range | 1GHz ~ 25GHz |
| Detector Function | Peak (PK)<br>Average (AVG) | Tested By       | Jim Xu       |


| Antennal Polarity& Test Distance: Horizontal at 3m |                 |                |                     |                         |                |             |          |                     |                      |
|----------------------------------------------------|-----------------|----------------|---------------------|-------------------------|----------------|-------------|----------|---------------------|----------------------|
| No.                                                | Frequency (MHz) | Reading (dBUV) | Correct Factor (dB) | Emission Level (dBUV/m) | Limit (dBUV/m) | Margin (dB) | Detector | Antenna Height (cm) | Table Angle (Degree) |
| 1                                                  | 2437.000        | 110.74         | -1.27               | 109.47                  |                |             | peak     | 100                 | 216                  |
| 2                                                  | 2437.000        | 78.69          | -1.27               | 77.42                   |                |             | AVG      | 100                 | 216                  |
| 3                                                  | 4874.000        | 53.50          | 4.64                | 58.14                   | 74.00          | -15.86      | peak     | 100                 | 184                  |
| 4                                                  | 4874.000        | 38.64          | 4.64                | 43.28                   | 54.00          | -10.72      | AVG      | 100                 | 184                  |
| 5                                                  | 7311.000        | 44.93          | 9.24                | 54.17                   | 74.00          | -19.83      | peak     | 218                 | 98                   |
| 6                                                  | 7311.000        | 33.37          | 9.24                | 42.61                   | 54.00          | -11.39      | AVG      | 218                 | 98                   |
| Antennal Polarity& Test Distance: Vertical at 3m   |                 |                |                     |                         |                |             |          |                     |                      |
| No.                                                | Frequency (MHz) | Reading (dBUV) | Factor (dB)         | Emission Level (dBUV/m) | Limit (dBUV/m) | Margin (dB) | Detector | Antenna Height (cm) | Table Angle (Degree) |
| 1                                                  | 2437.000        | 106.12         | -1.27               | 104.85                  |                |             | peak     | 311                 | 151                  |
| 2                                                  | 2437.000        | 77.62          | -1.27               | 76.35                   |                |             | AVG      | 311                 | 151                  |
| 3                                                  | 4874.000        | 53.04          | 4.64                | 57.68                   | 74.00          | -16.32      | peak     | 216                 | 124                  |
| 4                                                  | 4874.000        | 39.55          | 4.64                | 44.19                   | 54.00          | -9.81       | AVG      | 216                 | 124                  |
| 5                                                  | 7311.000        | 44.70          | 9.24                | 53.94                   | 74.00          | -20.06      | peak     | 100                 | 175                  |
| 6                                                  | 7311.000        | 34.89          | 9.24                | 44.13                   | 54.00          | -9.87       | AVG      | 100                 | 175                  |

Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamplifier Factor)
2. Margin value = Emission level – Limit value
3. 2437MHz: Fundamental frequency.



|                   |                            |                 |              |
|-------------------|----------------------------|-----------------|--------------|
| Test Mode         | 802.11n HT20: 2462MHz TX   |                 |              |
| Test channel      | Channel 11                 | Frequency Range | 1GHz ~ 25GHz |
| Detector Function | Peak (PK)<br>Average (AVG) | Tested By       | Jim Xu       |

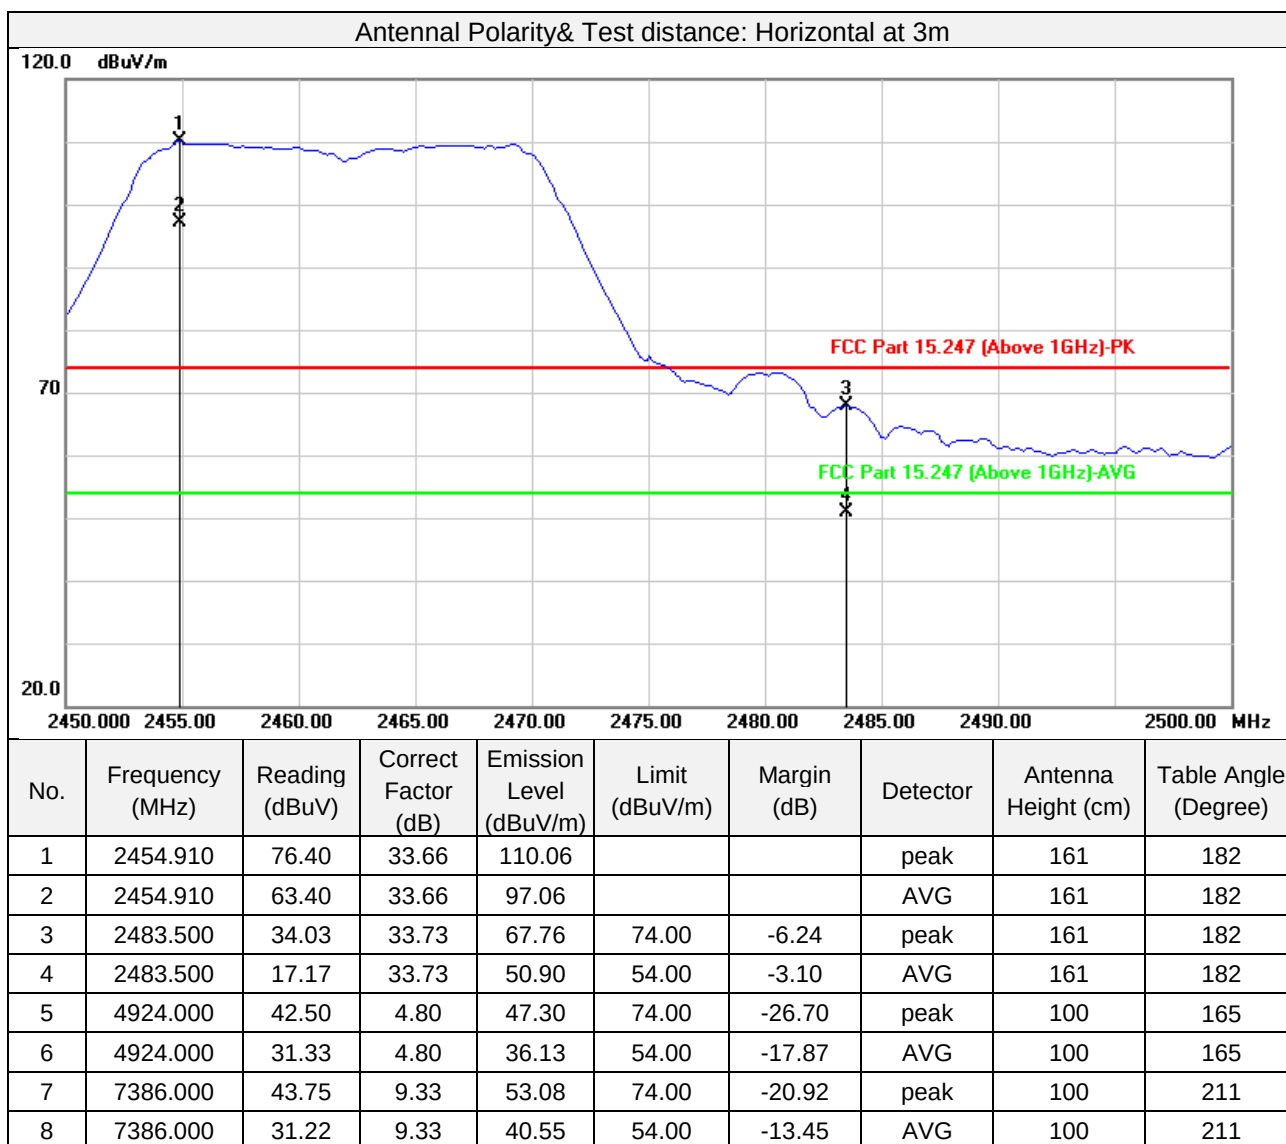


Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
2. Margin value = Emission level – Limit value
3. 2462MHz: Fundamental frequency.





|                   |                            |                 |              |
|-------------------|----------------------------|-----------------|--------------|
| Test Mode         | 802.11n HT20: 2462MHz TX   |                 |              |
| Test channel      | Channel 11                 | Frequency Range | 1GHz ~ 25GHz |
| Detector Function | Peak (PK)<br>Average (AVG) | Tested By       | Jim Xu       |

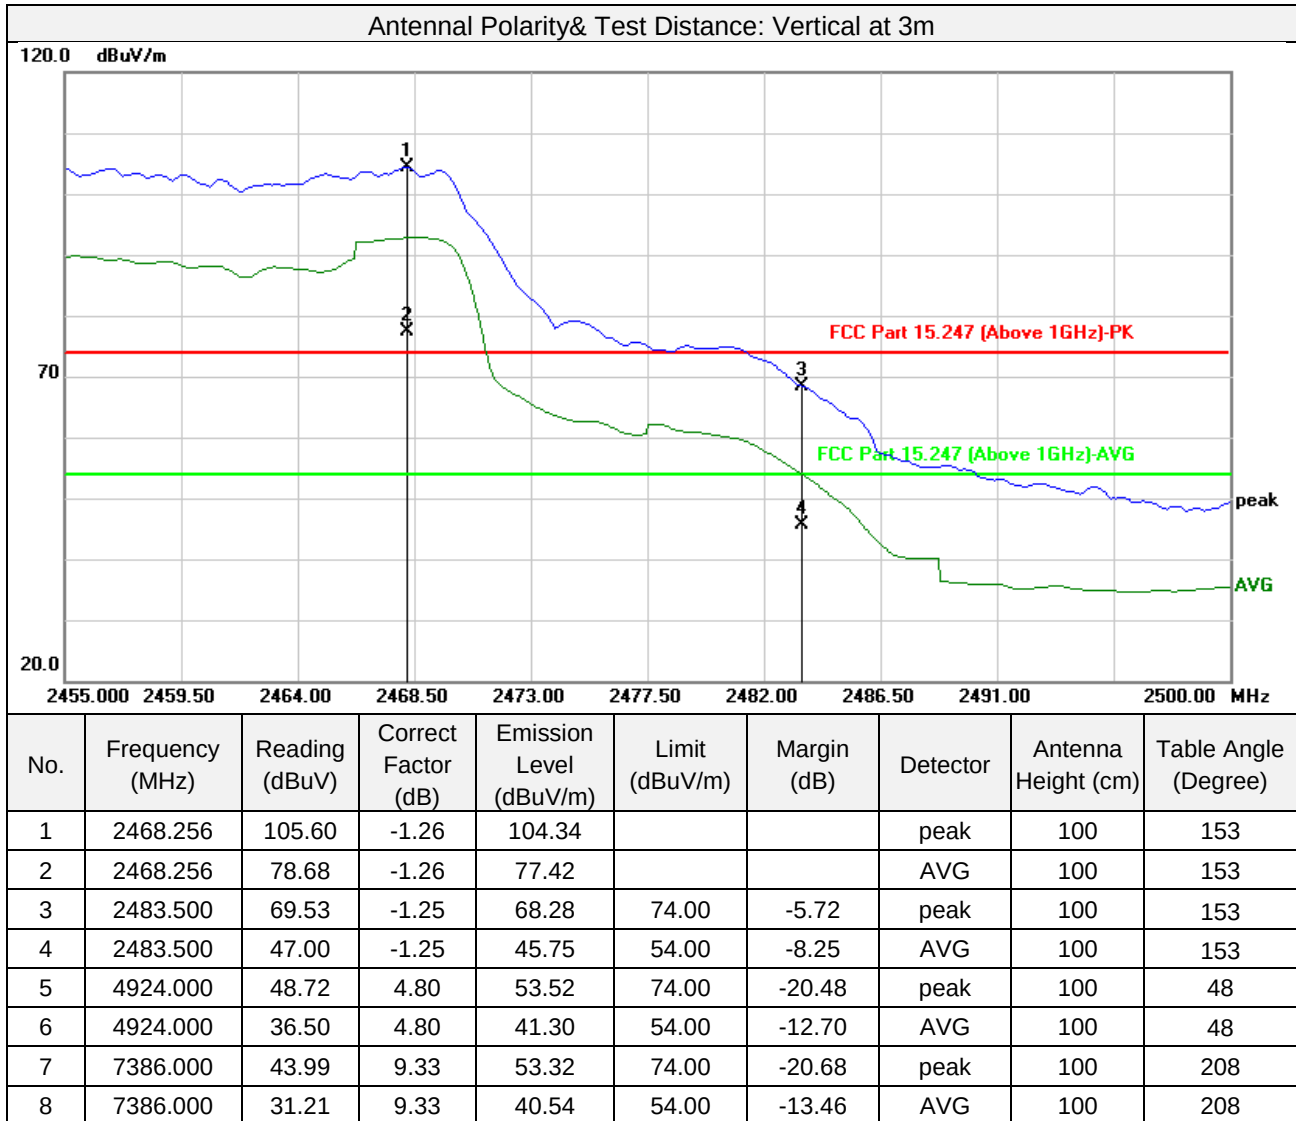


Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamplifier Factor)
2. Margin value = Emission level – Limit value
3. 2462MHz: Fundamental frequency.



|                   |                            |                 |              |
|-------------------|----------------------------|-----------------|--------------|
| Test Mode         | 802.11n HT40: 2422MHz TX   |                 |              |
| Test channel      | Channel 3                  | Frequency Range | 1GHz ~ 25GHz |
| Detector Function | Peak (PK)<br>Average (AVG) | Tested By       | Jim Xu       |

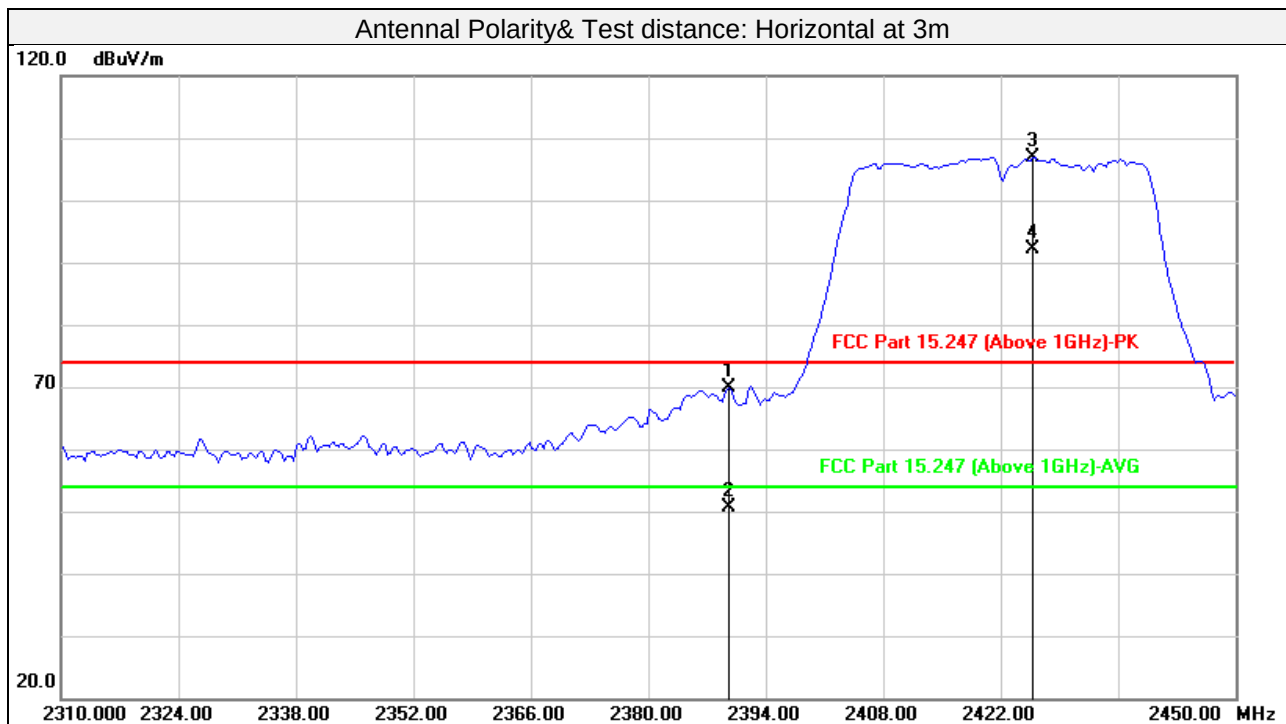


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Antenna Height (cm) | Table Angle (Degree) |
|-----|-----------------|----------------|---------------------|-------------------------|----------------|-------------|----------|---------------------|----------------------|
| 1   | 2389.679        | 36.28          | 33.50               | 69.78                   | 74.00          | -4.22       | peak     | 100                 | 184                  |
| 2   | 2389.679        | 17.02          | 33.50               | 50.52                   | 54.00          | -3.48       | AVG      | 100                 | 184                  |
| 3   | 2425.872        | 73.37          | 33.59               | 106.96                  |                |             | peak     | 100                 | 184                  |
| 4   | 2425.872        | 58.52          | 33.59               | 92.11                   |                |             | AVG      | 100                 | 184                  |
| 5   | 4844.000        | 43.23          | 4.56                | 47.79                   | 74.00          | -26.21      | peak     | 100                 | 43                   |
| 6   | 4844.000        | 32.10          | 4.56                | 36.66                   | 54.00          | -17.34      | AVG      | 100                 | 43                   |
| 7   | 7266.000        | 42.14          | 9.16                | 51.30                   | 74.00          | -22.70      | peak     | 100                 | 164                  |
| 8   | 7266.000        | 31.62          | 9.16                | 40.78                   | 54.00          | -13.22      | AVG      | 100                 | 164                  |

Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
2. Margin value = Emission level – Limit value
3. 2412MHz: Fundamental frequency.



|                   |                            |                 |              |
|-------------------|----------------------------|-----------------|--------------|
| Test Mode         | 802.11n HT40: 2422MHz TX   |                 |              |
| Test channel      | Channel 3                  | Frequency Range | 1GHz ~ 25GHz |
| Detector Function | Peak (PK)<br>Average (AVG) | Tested By       | Jim Xu       |

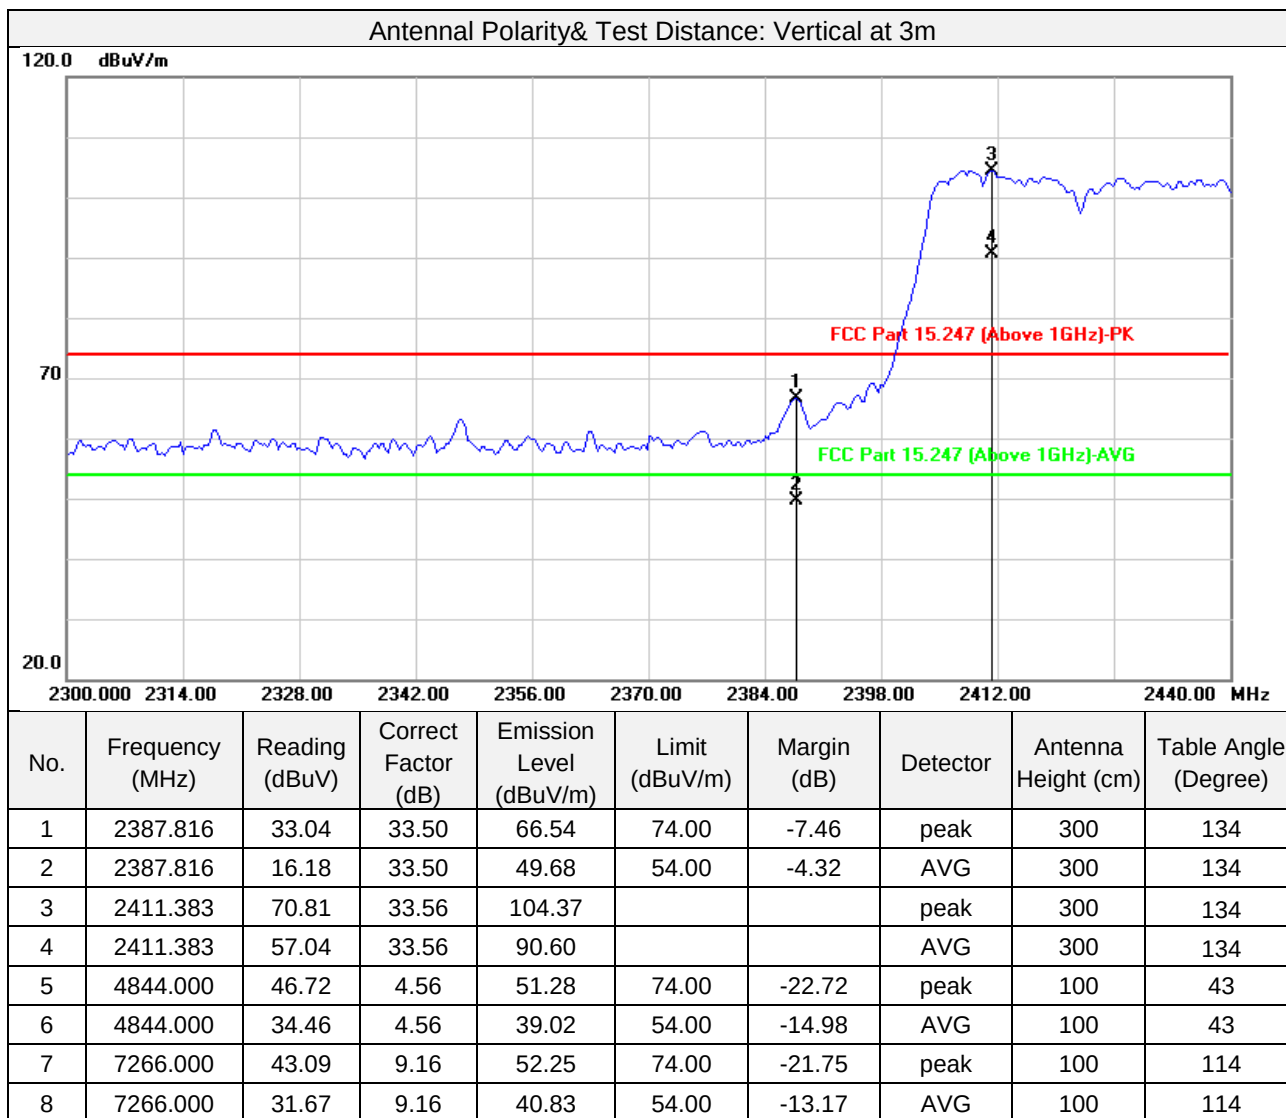

## Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
2. Margin value = Emission level – Limit value
3. 2412MHz: Fundamental frequency.



|                   |                            |                 |              |
|-------------------|----------------------------|-----------------|--------------|
| Test Mode         | 802.11n HT40: 2437MHz TX   |                 |              |
| Test channel      | Channel 6                  | Frequency Range | 1GHz ~ 25GHz |
| Detector Function | Peak (PK)<br>Average (AVG) | Tested By       | Jim Xu       |


| Antennal Polarity& Test Distance: Horizontal at 3m |                 |                |                     |                         |                |             |          |                     |                      |
|----------------------------------------------------|-----------------|----------------|---------------------|-------------------------|----------------|-------------|----------|---------------------|----------------------|
| No.                                                | Frequency (MHz) | Reading (dBUV) | Correct Factor (dB) | Emission Level (dBUV/m) | Limit (dBUV/m) | Margin (dB) | Detector | Antenna Height (cm) | Table Angle (Degree) |
| 1                                                  | 2437.000        | 106.58         | -1.27               | 105.31                  |                |             | peak     | 100                 | 118                  |
| 2                                                  | 2437.000        | 92.52          | -1.27               | 91.25                   |                |             | AVG      | 100                 | 118                  |
| 3                                                  | 4874.000        | 54.08          | 4.64                | 58.72                   | 74.00          | -15.28      | peak     | 174                 | 269                  |
| 4                                                  | 4874.000        | 39.05          | 4.64                | 43.69                   | 54.00          | -10.31      | AVG      | 174                 | 269                  |
| 5                                                  | 7311.000        | 46.04          | 9.24                | 55.28                   | 74.00          | -18.72      | peak     | 211                 | 87                   |
| 6                                                  | 7311.000        | 34.71          | 9.24                | 43.95                   | 54.00          | -10.05      | AVG      | 211                 | 87                   |
| Antennal Polarity& Test Distance: Vertical at 3m   |                 |                |                     |                         |                |             |          |                     |                      |
| No.                                                | Frequency (MHz) | Reading (dBUV) | Factor (dB)         | Emission Level (dBUV/m) | Limit (dBUV/m) | Margin (dB) | Detector | Antenna Height (cm) | Table Angle (Degree) |
| 1                                                  | 2437.000        | 105.12         | -1.27               | 103.85                  |                |             | peak     | 100                 | 112                  |
| 2                                                  | 2437.000        | 91.01          | -1.27               | 89.74                   |                |             | AVG      | 100                 | 112                  |
| 3                                                  | 4874.000        | 52.50          | 4.64                | 57.14                   | 74.00          | -16.86      | peak     | 148                 | 266                  |
| 4                                                  | 4874.000        | 38.32          | 4.64                | 42.96                   | 54.00          | -11.04      | AVG      | 148                 | 266                  |
| 5                                                  | 7311.000        | 46.07          | 9.24                | 55.31                   | 74.00          | -18.69      | peak     | 100                 | 103                  |
| 6                                                  | 7311.000        | 32.77          | 9.24                | 42.01                   | 54.00          | -11.99      | AVG      | 100                 | 103                  |

Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamplifier Factor)
2. Margin value = Emission level – Limit value
3. 2437MHz: Fundamental frequency.



|                   |                            |                 |              |
|-------------------|----------------------------|-----------------|--------------|
| Test Mode         | 802.11n HT40: 2452MHz TX   |                 |              |
| Test channel      | Channel 9                  | Frequency Range | 1GHz ~ 25GHz |
| Detector Function | Peak (PK)<br>Average (AVG) | Tested By       | Jim Xu       |

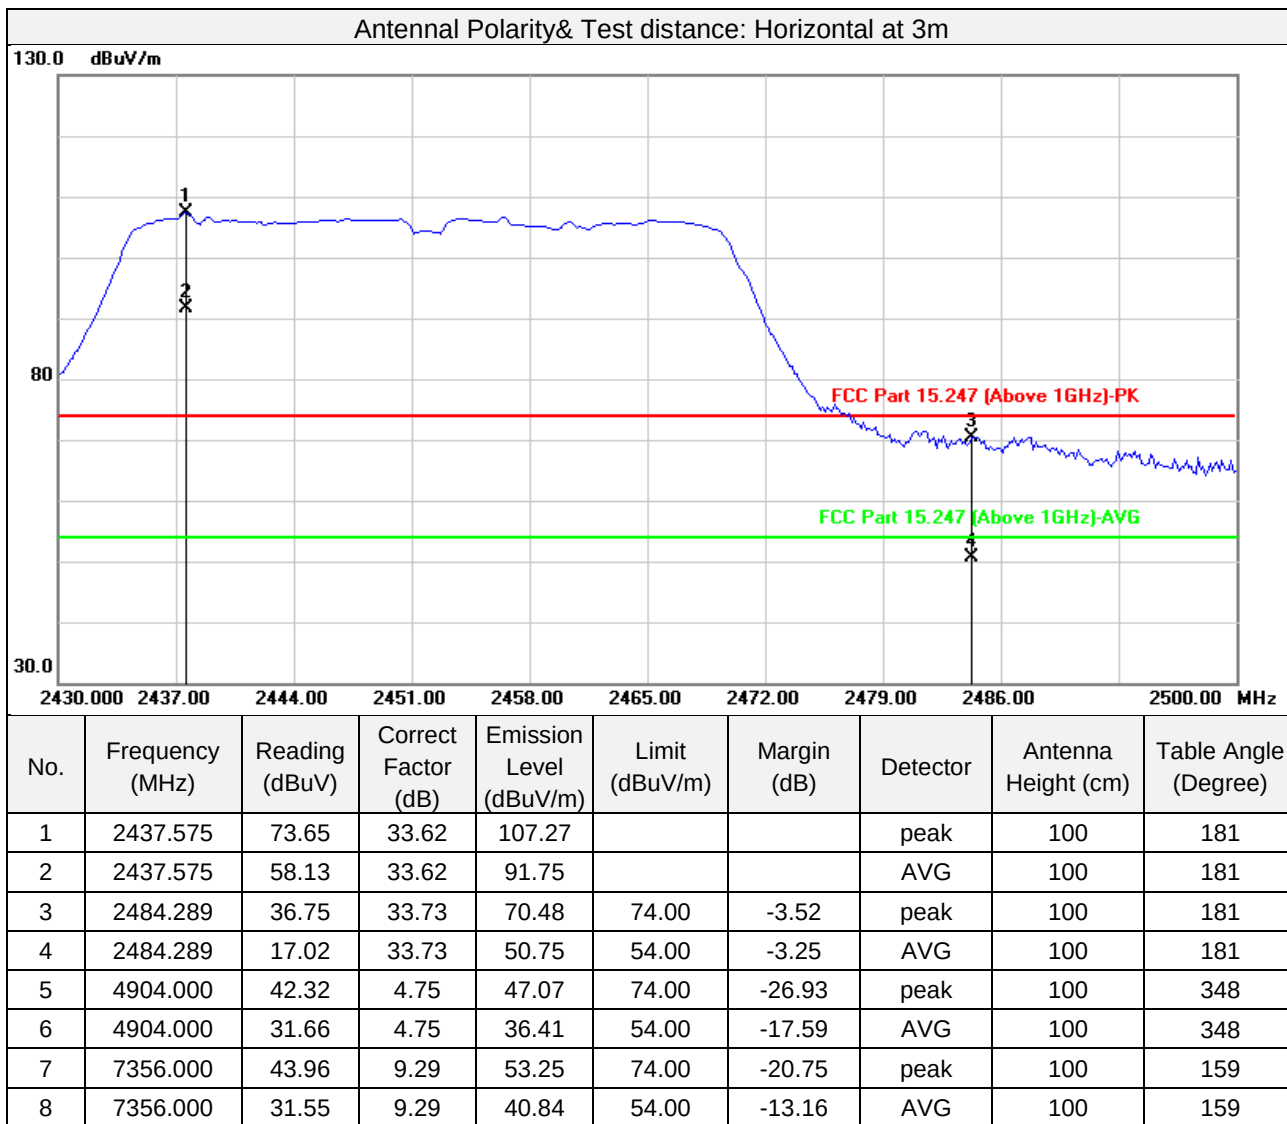


Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
2. Margin value = Emission level – Limit value
3. 2462MHz: Fundamental frequency.



|                   |                            |                 |              |
|-------------------|----------------------------|-----------------|--------------|
| Test Mode         | 802.11n HT40: 2452MHz TX   |                 |              |
| Test channel      | Channel 9                  | Frequency Range | 1GHz ~ 25GHz |
| Detector Function | Peak (PK)<br>Average (AVG) | Tested By       | Jim Xu       |

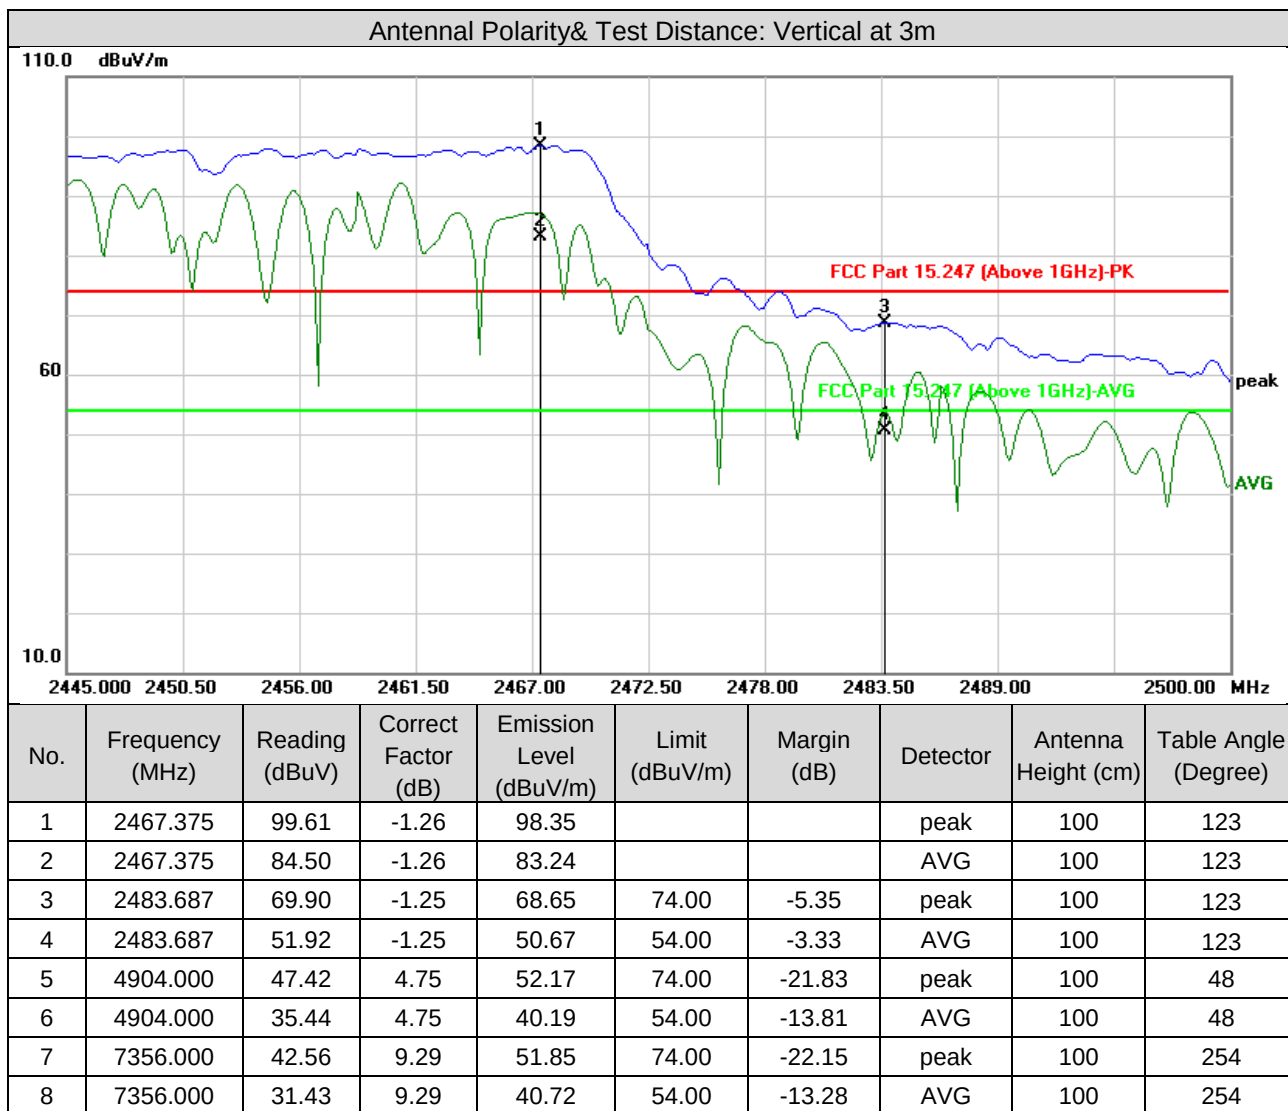

Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
2. Margin value = Emission level – Limit value
3. 2462MHz: Fundamental frequency.



### 3.2 Conducted Emission Measurement

#### 3.2.1 Limits of Conducted Emission Measurement

| Frequency (MHz) | Conducted Limit (dBuV) |         |
|-----------------|------------------------|---------|
|                 | Quasi-Peak             | Average |
| 0.15 - 0.5      | 66 - 56                | 56 - 46 |
| 0.50 - 5.0      | 56                     | 46      |
| 5.0 - 30.0      | 60                     | 50      |

- Note: 1. The lower limit shall apply at the transition frequencies.  
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

#### 3.2.2 Test Instruments

| Description & Manufacturer                | Model No.          | Serial No.   | Due Date of Calibration |
|-------------------------------------------|--------------------|--------------|-------------------------|
| EMI Test Receiver<br>Rohde&Schwarz        | ESCI3              | 101418       | 2021/09/05              |
| Artificial Mains Network<br>Rohde&Schwarz | ENV216             | 3560.6550.15 | 2021/09/16              |
| Test software<br>FARAD                    | EZ_EMC<br>V1.1.4.2 | N/A          | N/A                     |

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA.  
2. The test was performed in Shielded Room 1.

#### 3.2.3 Test Procedures

- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit – 20dB) was not recorded.


**Note:** All modes of operation were investigated and the worst-case emissions are reported.

#### 3.2.4 Deviation from Test Standard

No deviation.



### 3.2.5 Test setup

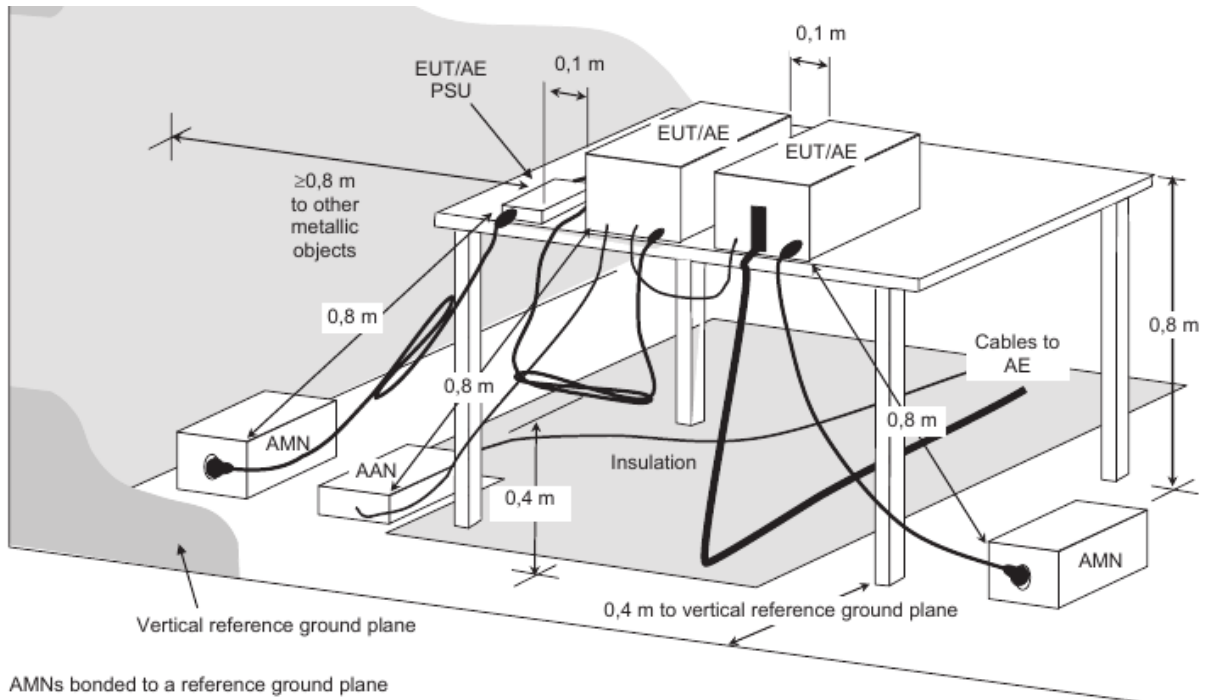

### 3.2.6 EUT Operating Conditions


- Placed the EUT on the testing table.
- Set the EUT under transmission condition continuously at specific channel frequency.





### 3.2.7 Test Results

|                 |                |                                          |                                      |
|-----------------|----------------|------------------------------------------|--------------------------------------|
| Frequency Range | 150kHz ~ 30MHz | Detector Function & Resolution bandwidth | Quasi-Peak (QP) / Average (AV), 9kHz |
|-----------------|----------------|------------------------------------------|--------------------------------------|

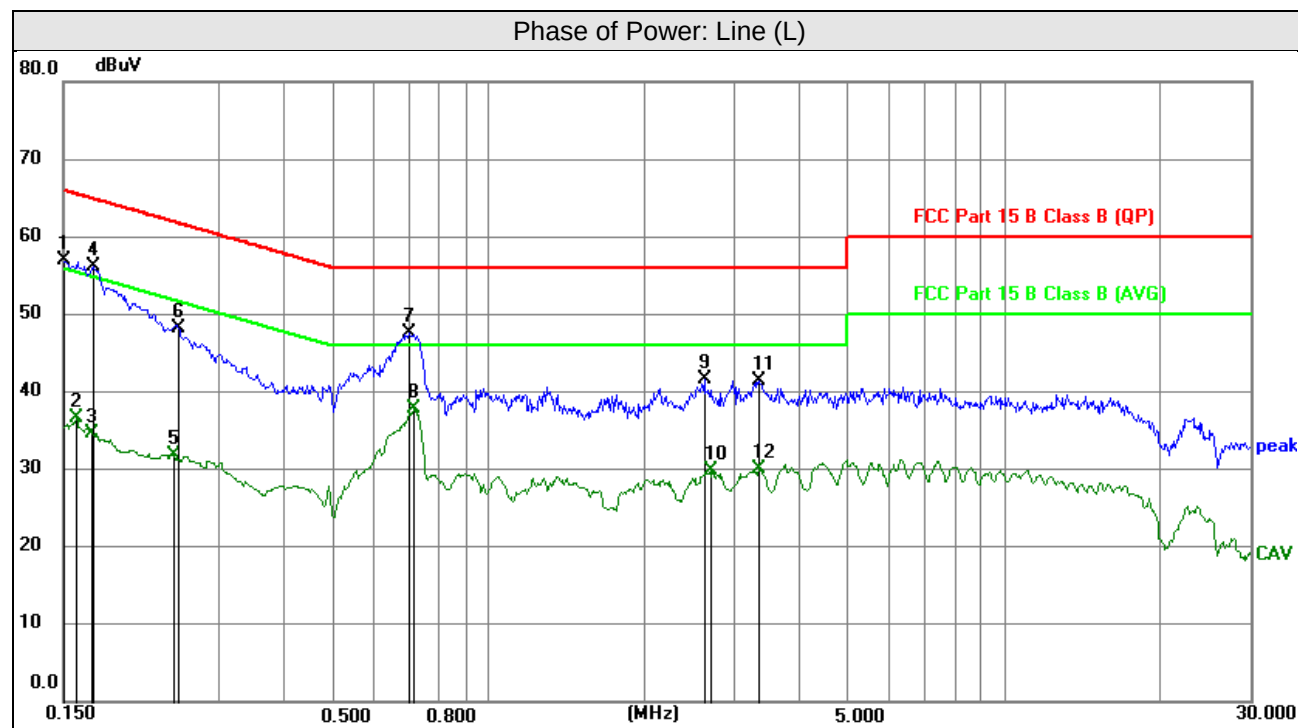


| No | Frequency | Reading | Correction Factor | Emission Level | Limit  | Margin | Remark   |
|----|-----------|---------|-------------------|----------------|--------|--------|----------|
|    | (MHz)     | (dBuV)  | dB                | (dBuV)         | (dBuV) | (dB)   | Detector |
| 1  | 0.1500    | 46.76   | 10.19             | 56.95          | 66.00  | -9.05  | peak     |
| 2  | 0.1590    | 26.38   | 10.17             | 36.55          | 55.52  | -18.97 | AVG      |
| 3  | 0.1701    | 24.40   | 10.16             | 34.56          | 54.96  | -20.40 | AVG      |
| 4  | 0.1720    | 46.05   | 10.16             | 56.21          | 64.86  | -8.65  | peak     |
| 5  | 0.2454    | 21.64   | 10.17             | 31.81          | 51.91  | -20.10 | AVG      |
| 6  | 0.2505    | 37.94   | 10.17             | 48.11          | 61.74  | -13.63 | peak     |
| 7  | 0.7034    | 37.51   | 10.11             | 47.62          | 56.00  | -8.38  | peak     |
| 8  | 0.7167    | 27.71   | 10.11             | 37.82          | 46.00  | -8.18  | AVG      |
| 9  | 2.6295    | 31.43   | 10.09             | 41.52          | 56.00  | -14.48 | peak     |
| 10 | 2.7082    | 19.74   | 10.09             | 29.83          | 46.00  | -16.17 | AVG      |
| 11 | 3.3471    | 31.25   | 10.09             | 41.34          | 56.00  | -14.66 | peak     |
| 12 | 3.3471    | 19.98   | 10.09             | 30.07          | 46.00  | -15.93 | AVG      |

#### Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value



|                 |                |                                          |                                      |
|-----------------|----------------|------------------------------------------|--------------------------------------|
| Frequency Range | 150kHz ~ 30MHz | Detector Function & Resolution bandwidth | Quasi-Peak (QP) / Average (AV), 9kHz |
|-----------------|----------------|------------------------------------------|--------------------------------------|

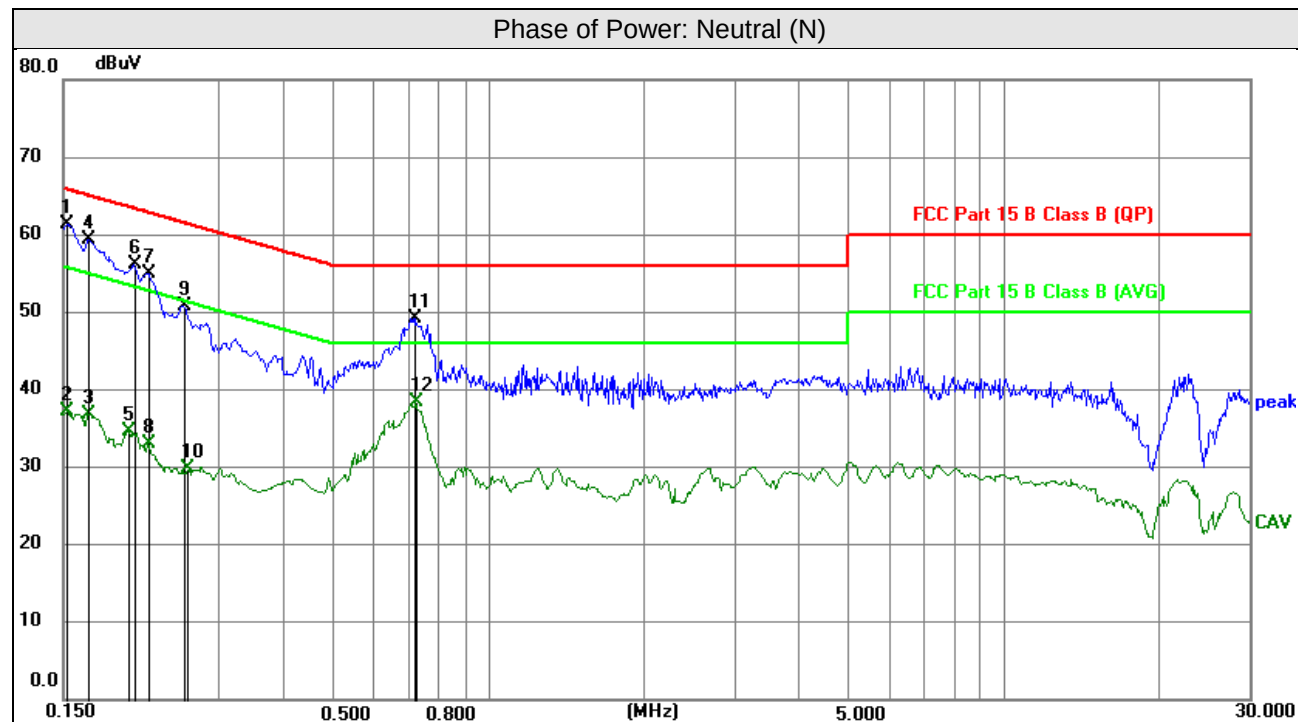

| No. | Frequency | Reading | Correction Factor | Emission Level | Limit  | Margin | Remark   |
|-----|-----------|---------|-------------------|----------------|--------|--------|----------|
|     | (MHz)     | (dBuV)  | dB                | (dBuV)         | (dBuV) | (dB)   | Detector |
| 1   | 0.1524    | 51.16   | 10.18             | 61.34          | 65.87  | -4.53  | peak     |
| 2   | 0.1524    | 26.99   | 10.18             | 37.17          | 55.87  | -18.70 | AVG      |
| 3   | 0.1668    | 26.73   | 10.17             | 36.90          | 55.12  | -18.22 | AVG      |
| 4   | 0.1685    | 49.28   | 10.16             | 59.44          | 65.03  | -5.59  | peak     |
| 5   | 0.2007    | 24.46   | 10.14             | 34.60          | 53.58  | -18.98 | AVG      |
| 6   | 0.2050    | 46.04   | 10.14             | 56.18          | 63.41  | -7.23  | peak     |
| 7   | 0.2185    | 44.78   | 10.15             | 54.93          | 62.88  | -7.95  | peak     |
| 8   | 0.2185    | 22.77   | 10.15             | 32.92          | 52.88  | -19.96 | AVG      |
| 9   | 0.2562    | 40.68   | 10.16             | 50.84          | 61.55  | -10.71 | peak     |
| 10  | 0.2615    | 19.57   | 10.16             | 29.73          | 51.38  | -21.65 | AVG      |
| 11  | 0.7160    | 39.03   | 10.10             | 49.13          | 56.00  | -6.87  | peak     |
| 12  | 0.7236    | 28.40   | 10.10             | 38.50          | 46.00  | -7.50  | AVG      |

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.




### 3.3 6dB Bandwidth Measurement

#### 3.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5MHz.

#### 3.3.2 Test Setup

Subclause 11.8 of ANSI C63.10 is applicable.

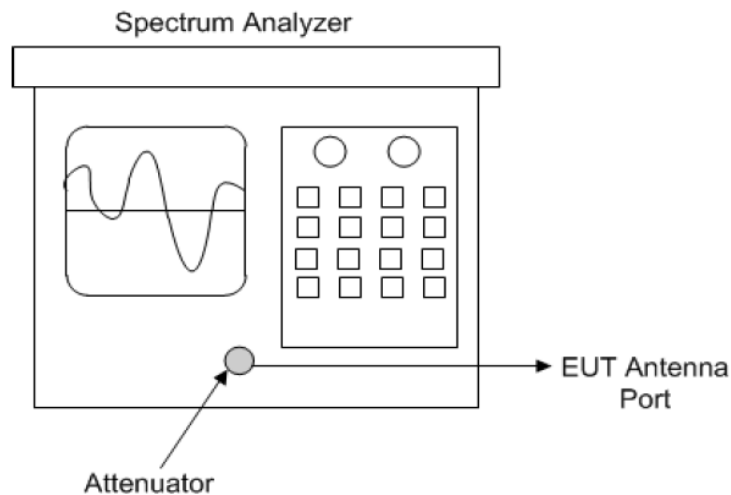

Spectrum analyzer test configuration

#### 3.3.3 Test Instruments

Refer to section 5 to get information of above instrument.

#### 3.3.4 Test Procedure

Option 1:

- Set resolution bandwidth (RBW) = 30kHz
- Set the video bandwidth (VBW)  $\geq 3 \times$  RBW
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

Option 2:

The automatic bandwidth measurement capability of an instrument may be employed using the dB bandwidth mode with X set to 6 dB. if the functionality described in 11.8.1 (i.e. RBW= 100 kHz. VBW  $\geq 3 \times$  RBW. and peak detector with maximum hold) is implemented by the instrumentation function. When using this capability. care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be  $\geq 6$  dB



### 3.3.5 Deviation from Test Standard

No deviation.

### 3.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

### 3.3.7 Test Result


| Test Mode   | Channel | Frequency (MHz) | 6dB Bandwidth (MHz) | Minimum Limit (MHz) | Pass / Fail |
|-------------|---------|-----------------|---------------------|---------------------|-------------|
| 11b         | 1       | 2412            | 11.04               | 0.5                 | Pass        |
|             | 6       | 2437            | 9.52                | 0.5                 | Pass        |
|             | 11      | 2462            | 10.08               | 0.5                 | Pass        |
| 11g         | 1       | 2412            | 16.36               | 0.5                 | Pass        |
|             | 6       | 2437            | 16.32               | 0.5                 | Pass        |
|             | 11      | 2462            | 16.36               | 0.5                 | Pass        |
| 11n<br>HT20 | 1       | 2412            | 17.24               | 0.5                 | Pass        |
|             | 6       | 2437            | 17.24               | 0.5                 | Pass        |
|             | 11      | 2462            | 17.08               | 0.5                 | Pass        |
| 11n<br>HT40 | 3       | 2412            | 35.44               | 0.5                 | Pass        |
|             | 6       | 2437            | 35.44               | 0.5                 | Pass        |
|             | 9       | 2462            | 35.44               | 0.5                 | Pass        |






## 802.11n HT20

## CH 1

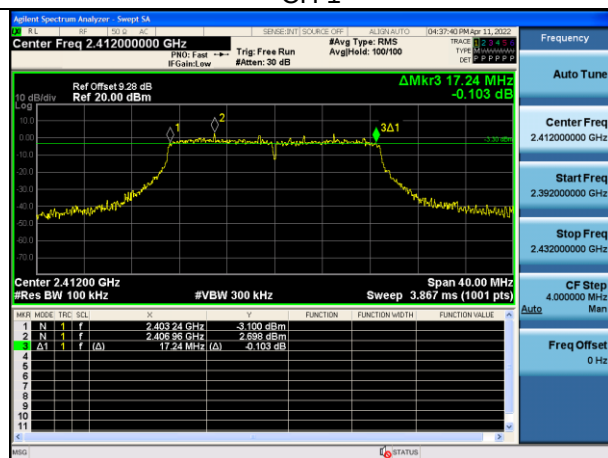


## 802.11n HT40


## CH 3

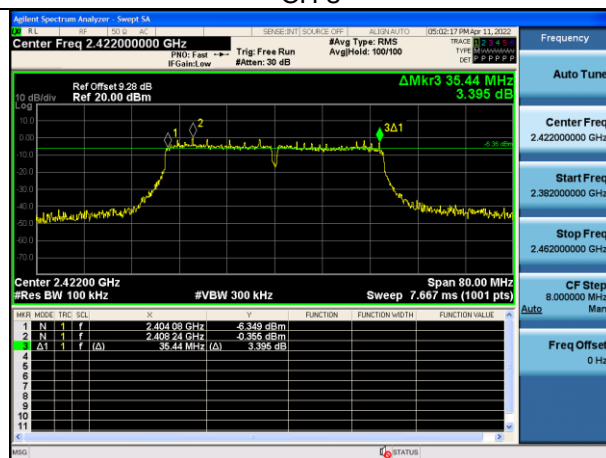


## CH 6

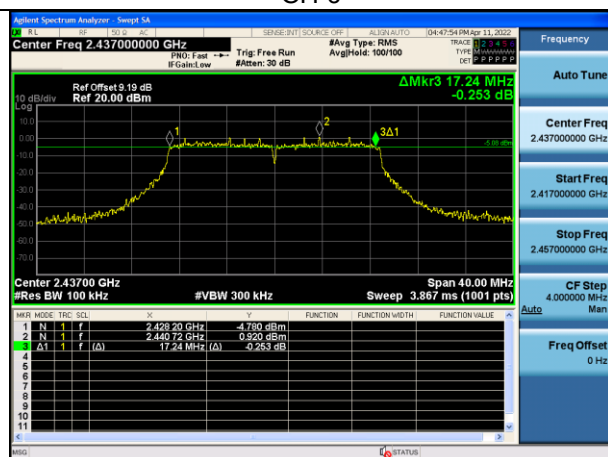


## CH 6

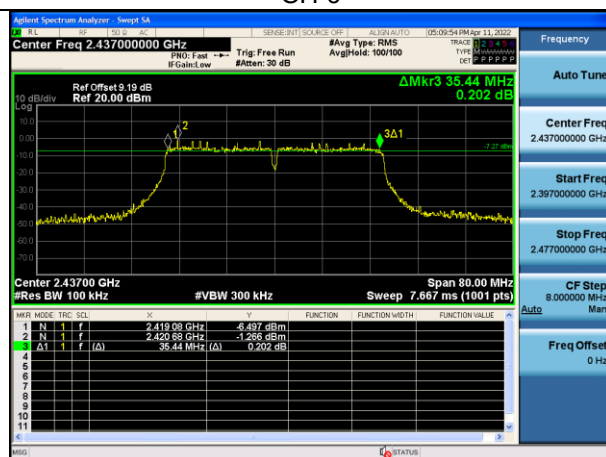

## CH 11

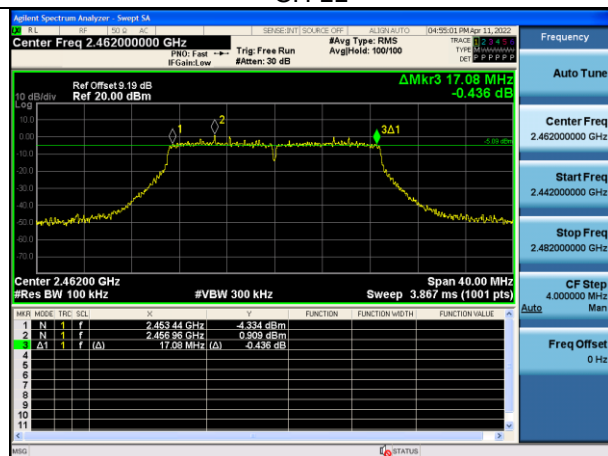


## CH 9

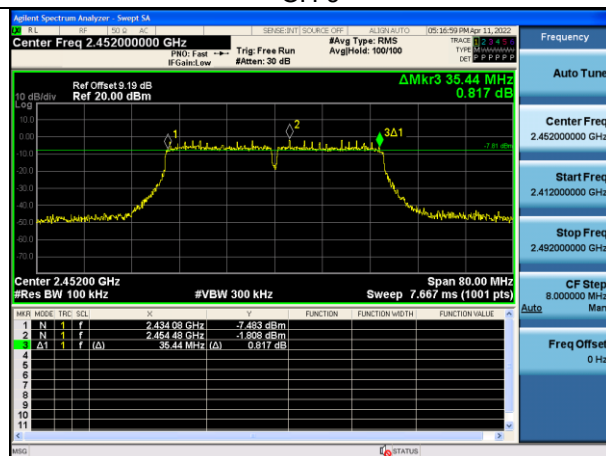



### 3.4 Occupied Bandwidth Measurement

#### 3.4.1 Test Setup

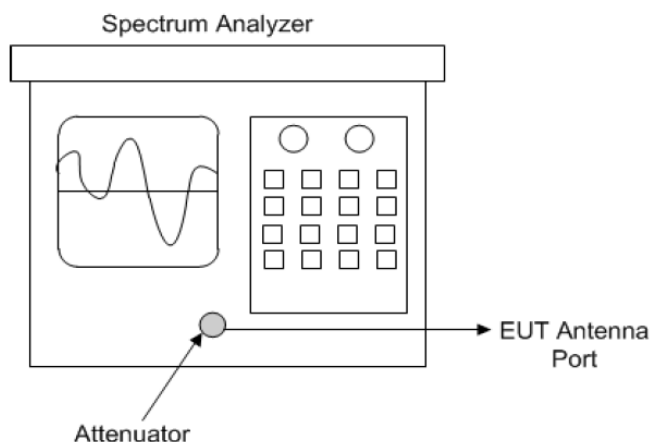

#### 3.4.2 Test Instruments

Refer to section 5 to get information of above instrument.

#### 3.4.3 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to peak. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 %of the total mean power of a given emission.

#### 3.4.4 Deviation from Test Standard

No deviation.

#### 3.4.5 EUT Operating Conditions


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.




3.4.6 Test Results

| Test Mode   | Channel | Frequency (MHz) | Occupied Bandwidth (MHz) | Pass / Fail |
|-------------|---------|-----------------|--------------------------|-------------|
| 11b         | 1       | 2412            | 15.030                   | Pass        |
|             | 6       | 2437            | 15.015                   | Pass        |
|             | 11      | 2462            | 14.987                   | Pass        |
| 11g         | 1       | 2412            | 16.557                   | Pass        |
|             | 6       | 2437            | 16.559                   | Pass        |
|             | 11      | 2462            | 16.531                   | Pass        |
| 11n<br>HT20 | 1       | 2412            | 17.665                   | Pass        |
|             | 6       | 2437            | 17.754                   | Pass        |
|             | 11      | 2462            | 17.652                   | Pass        |
| 11n<br>HT40 | 3       | 2412            | 36.188                   | Pass        |
|             | 6       | 2437            | 36.265                   | Pass        |
|             | 9       | 2462            | 36.187                   | Pass        |



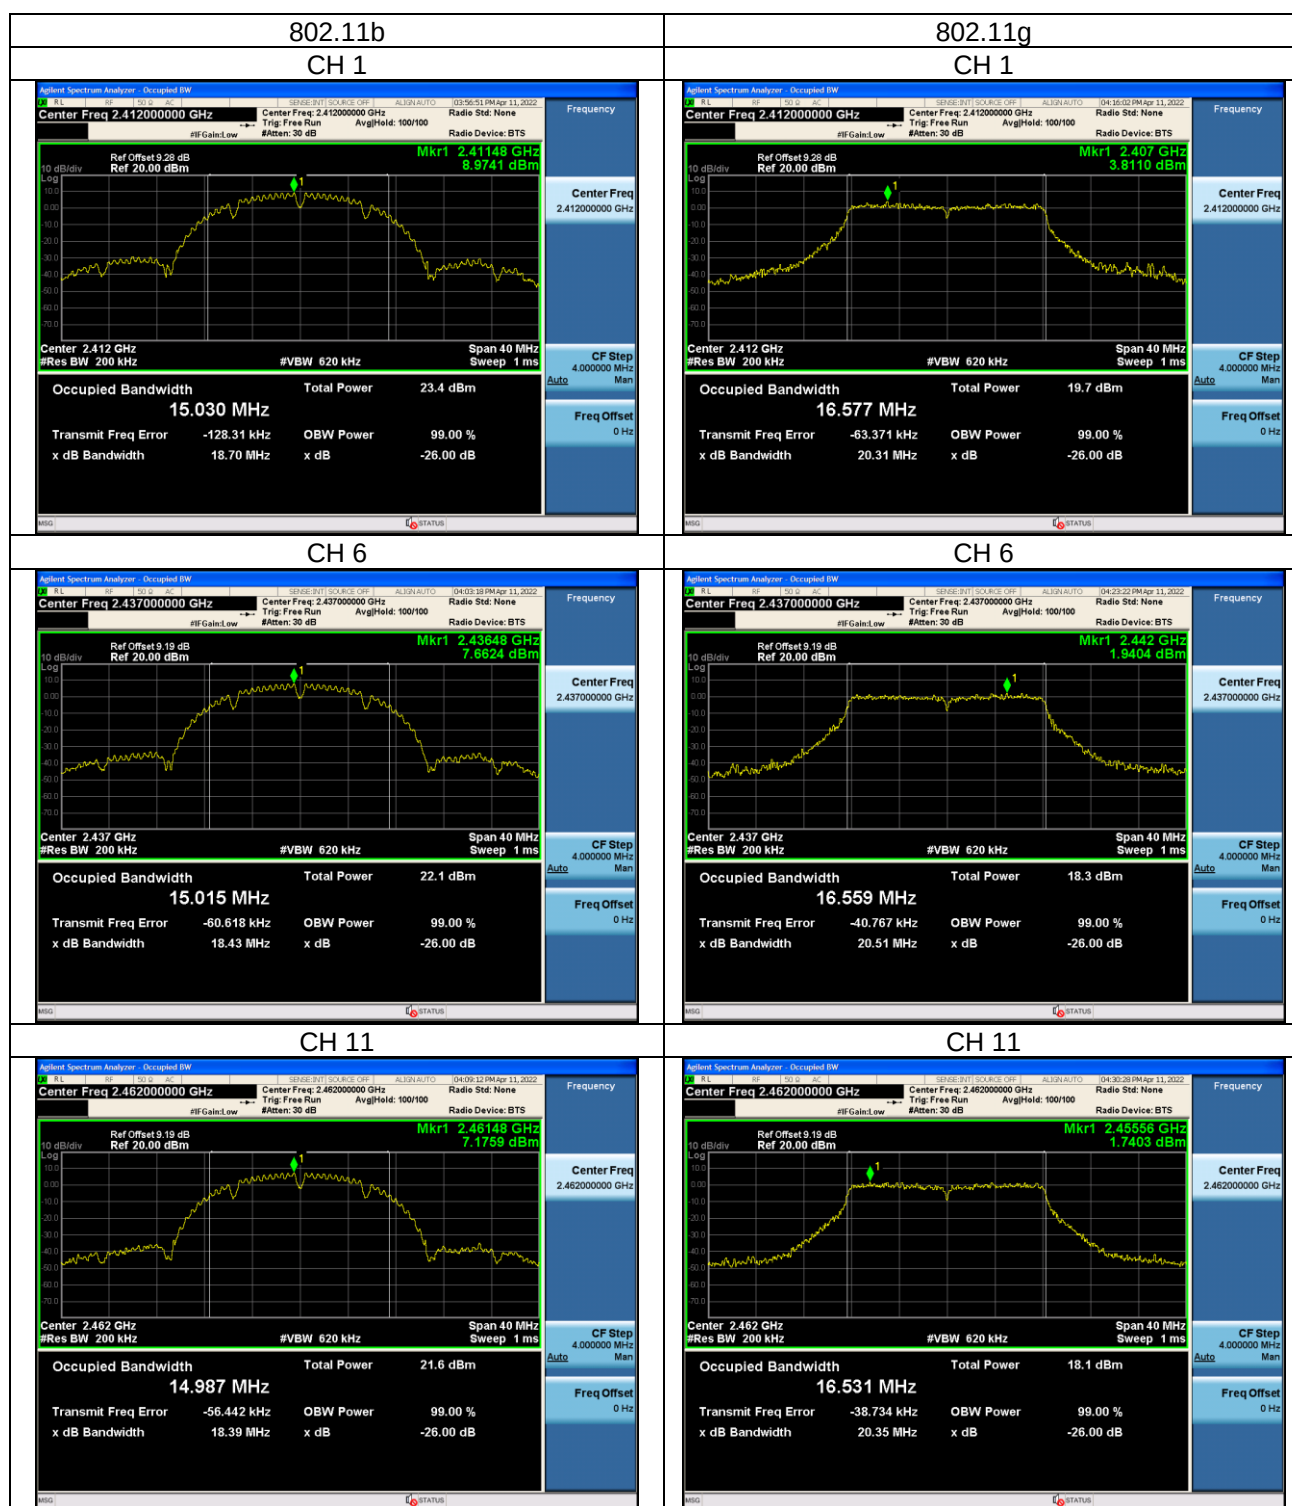

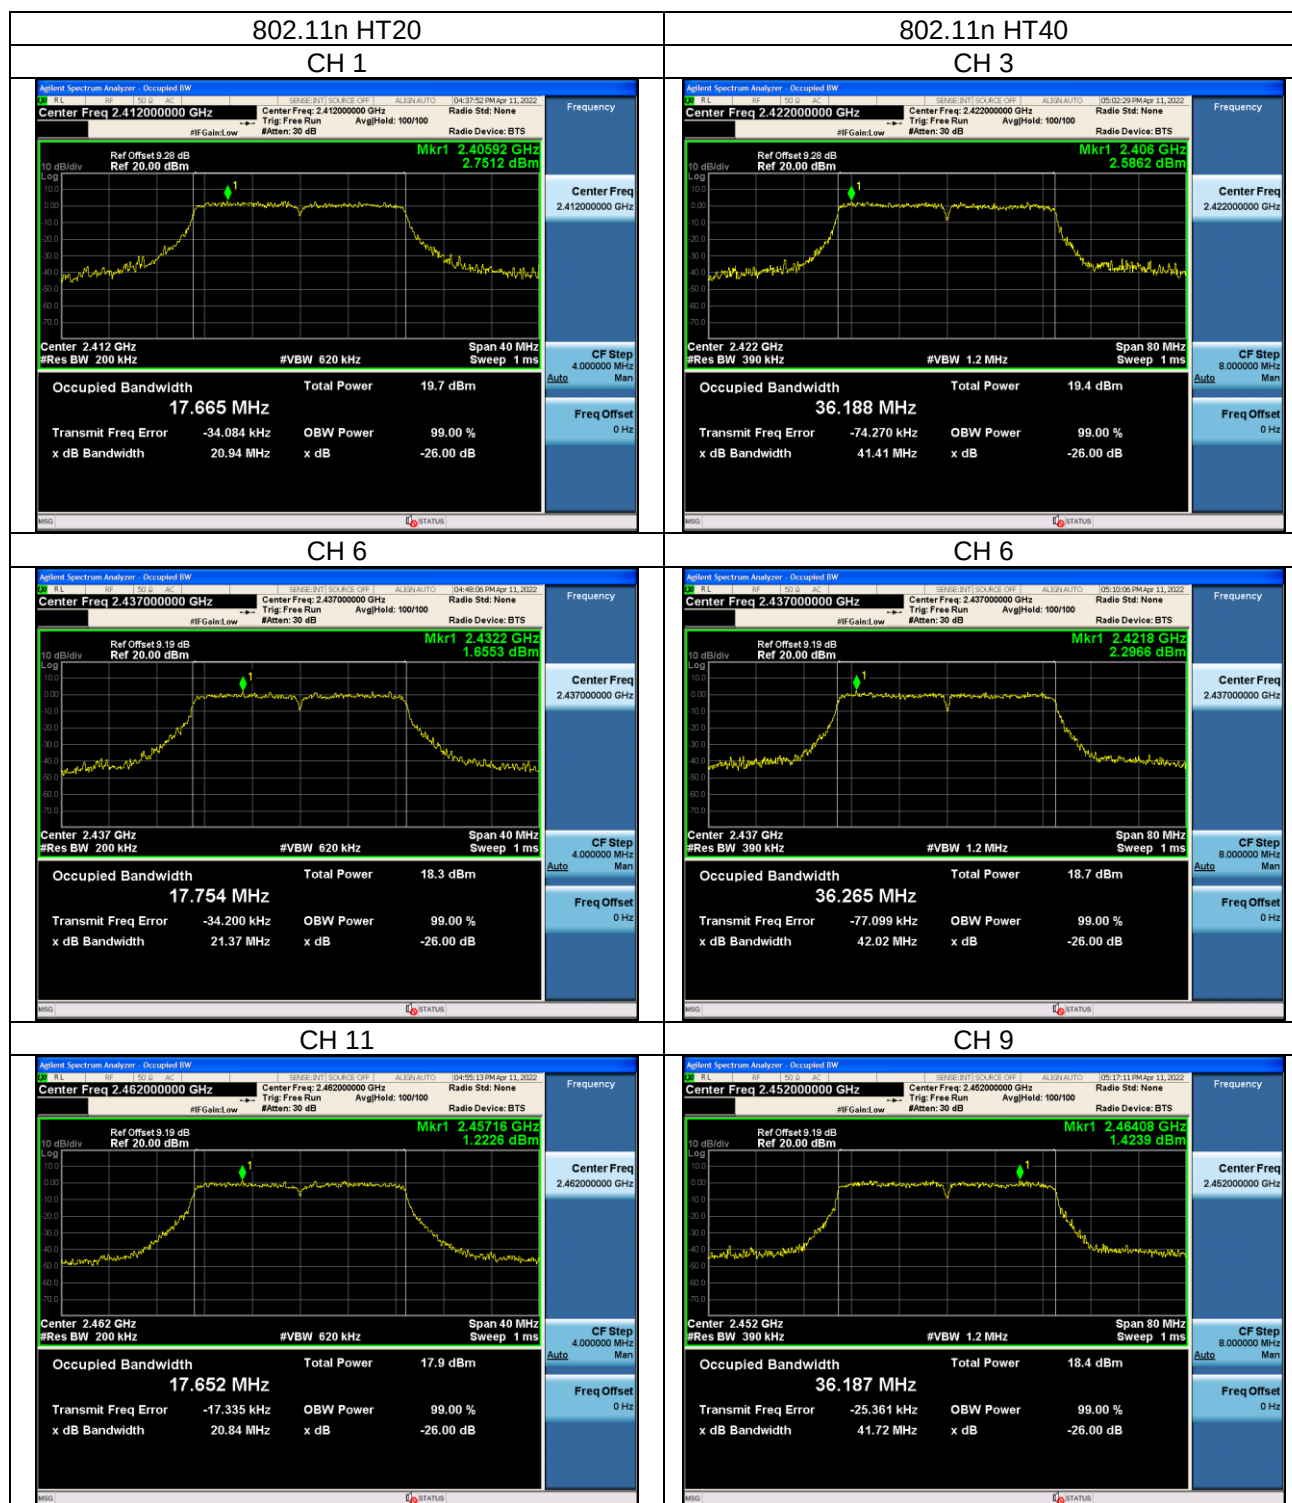




### 3.5 Conducted Output Power Measurement

#### 3.5.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

#### 3.5.2 Test Setup

- Measurement using a spectrum analyzer (SA) Subclause 11.9.2.2 of ANSI C63.10 is applicable

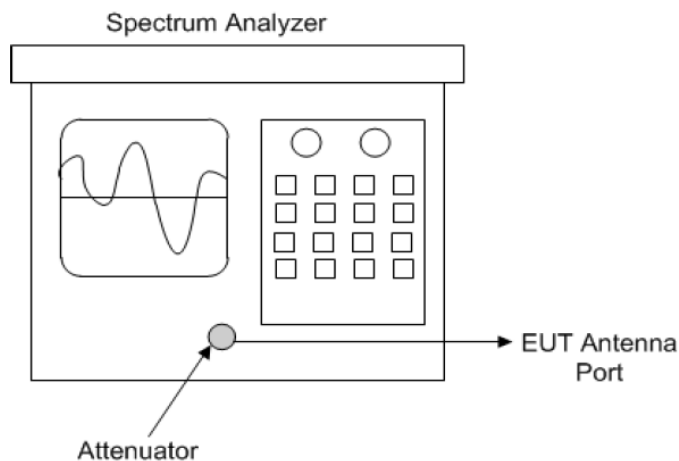

Spectrum analyzer output power test configuration

#### 3.5.3 Test Instruments

Refer to section 5 to get information of above instrument.

#### 3.5.4 Test Procedures

Measurement using a spectrum analyzer (SA), Selection of test method:

The proper test method is selected based on the following criteria:

- Method AVGSA-1 or method AVGSA-1A (alternative)** shall be applied if either of the following conditions can be satisfied:
  - 1) The EUT transmits continuously (or with a  $D > 98\%$ ).
  - 2) Sweep triggering can be implemented in such a way that the device transmits at the maximum power control level throughout the duration of each of the instrument sweeps to be averaged. This condition can generally be achieved by triggering the instrument's sweep if the duration of the sweep (with the instrument configured as in method AVGSA-1) is equal to or shorter than the duration  $T$  of each transmission from the EUT, and if those transmissions exhibit full power throughout their durations.
- Method AVGSA-2 or method AVGSA-2A (alternative)** shall be applied if the conditions of the preceding item a) cannot be achieved and the transmissions exhibit a constant duty cycle during the measurement duration. Duty cycle will be considered to be constant if variations are less than  $+2\%$ .
- Method AVGSA-3 or method AVGSA-3A (alternative)** shall be applied if the conditions of the preceding item a) and item b) cannot be achieved.



**Method AVGSA-3 or method AVGSA-3A:**

- a) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b) Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c) SA Setting:
  - 1\* Set span to at least 1.5 times the OBW
  - 2\* Set sweep trigger to "free run."
  - 3\* Set RBW= 1% to 5% of the OBW. not to exceed 1MHz.
  - 4\* Set VBW  $\geq 3 \times$  RBW
  - 5\* Number of points in sweep  $\geq 2 \times$  span /RBW. (This gives bin-to-bin spacing  $\leq$  RBW / 2. so that narrowband signals are not lost between frequency bins).
  - 6\* Sweep time  $\leq$  (number of points in sweep)  $\times$  T. where T is defined in 11.6. If this gives a sweep time less than the auto sweep time of the instrument. then method AVGSA-3 shall not be used (use AVGSA-3A). The purpose of this step is so that the averaging time in each bin is less than or equal to the minimum time of a transmission.
  - 7\* Detector =RMS (power averaging).
  - 8\* Trace mode =max hold.
  - 9\* Allow max hold to run for at least 60 s or longer as needed to allow the trace to stabilize.
  - 10\* Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges. If the instrument does not have a band power function. then sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW
- d. Measure the captured power within the band and recording the plot.
- e. Repeat above procedures until all frequencies required were complete.

**3.5.5 Deviation from Test Standard**

No deviation.

**3.5.6 EUT Operating Conditions**

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.




3.5.7 Test Results

| Test Mode   | Test Channel | Channel Fre.<br>(MHz) | Average Power<br>(dBm) | Limit<br>(dBm) |
|-------------|--------------|-----------------------|------------------------|----------------|
| 11b         | 1            | 2412                  | 18.06                  | 30             |
|             | 6            | 2437                  | 16.66                  | 30             |
|             | 11           | 2462                  | 16.28                  | 30             |
| 11g         | 1            | 2412                  | 13.34                  | 30             |
|             | 6            | 2437                  | 12.44                  | 30             |
|             | 11           | 2462                  | 11.98                  | 30             |
| 11n<br>HT20 | 1            | 2412                  | 13.92                  | 30             |
|             | 6            | 2437                  | 12.62                  | 30             |
|             | 11           | 2462                  | 12.19                  | 30             |
| 11n<br>HT40 | 3            | 2412                  | 13.10                  | 30             |
|             | 6            | 2437                  | 15.40                  | 30             |
|             | 9            | 2462                  | 11.95                  | 30             |

| Test Mode   | Test Channel | Channel Fre.<br>(MHz) | Peak Power<br>(dBm) | Limit<br>(dBm) |
|-------------|--------------|-----------------------|---------------------|----------------|
| 11b         | 1            | 2412                  | 20.66               | 30             |
|             | 6            | 2437                  | 19.14               | 30             |
|             | 11           | 2462                  | 18.66               | 30             |
| 11g         | 1            | 2412                  | 20.74               | 30             |
|             | 6            | 2437                  | 19.35               | 30             |
|             | 11           | 2462                  | 18.85               | 30             |
| 11n<br>HT20 | 1            | 2412                  | 20.67               | 30             |
|             | 6            | 2437                  | 19.33               | 30             |
|             | 11           | 2462                  | 18.82               | 30             |
| 11n<br>HT40 | 3            | 2412                  | 20.44               | 30             |
|             | 6            | 2437                  | 19.76               | 30             |
|             | 9            | 2462                  | 19.29               | 30             |




Average Power

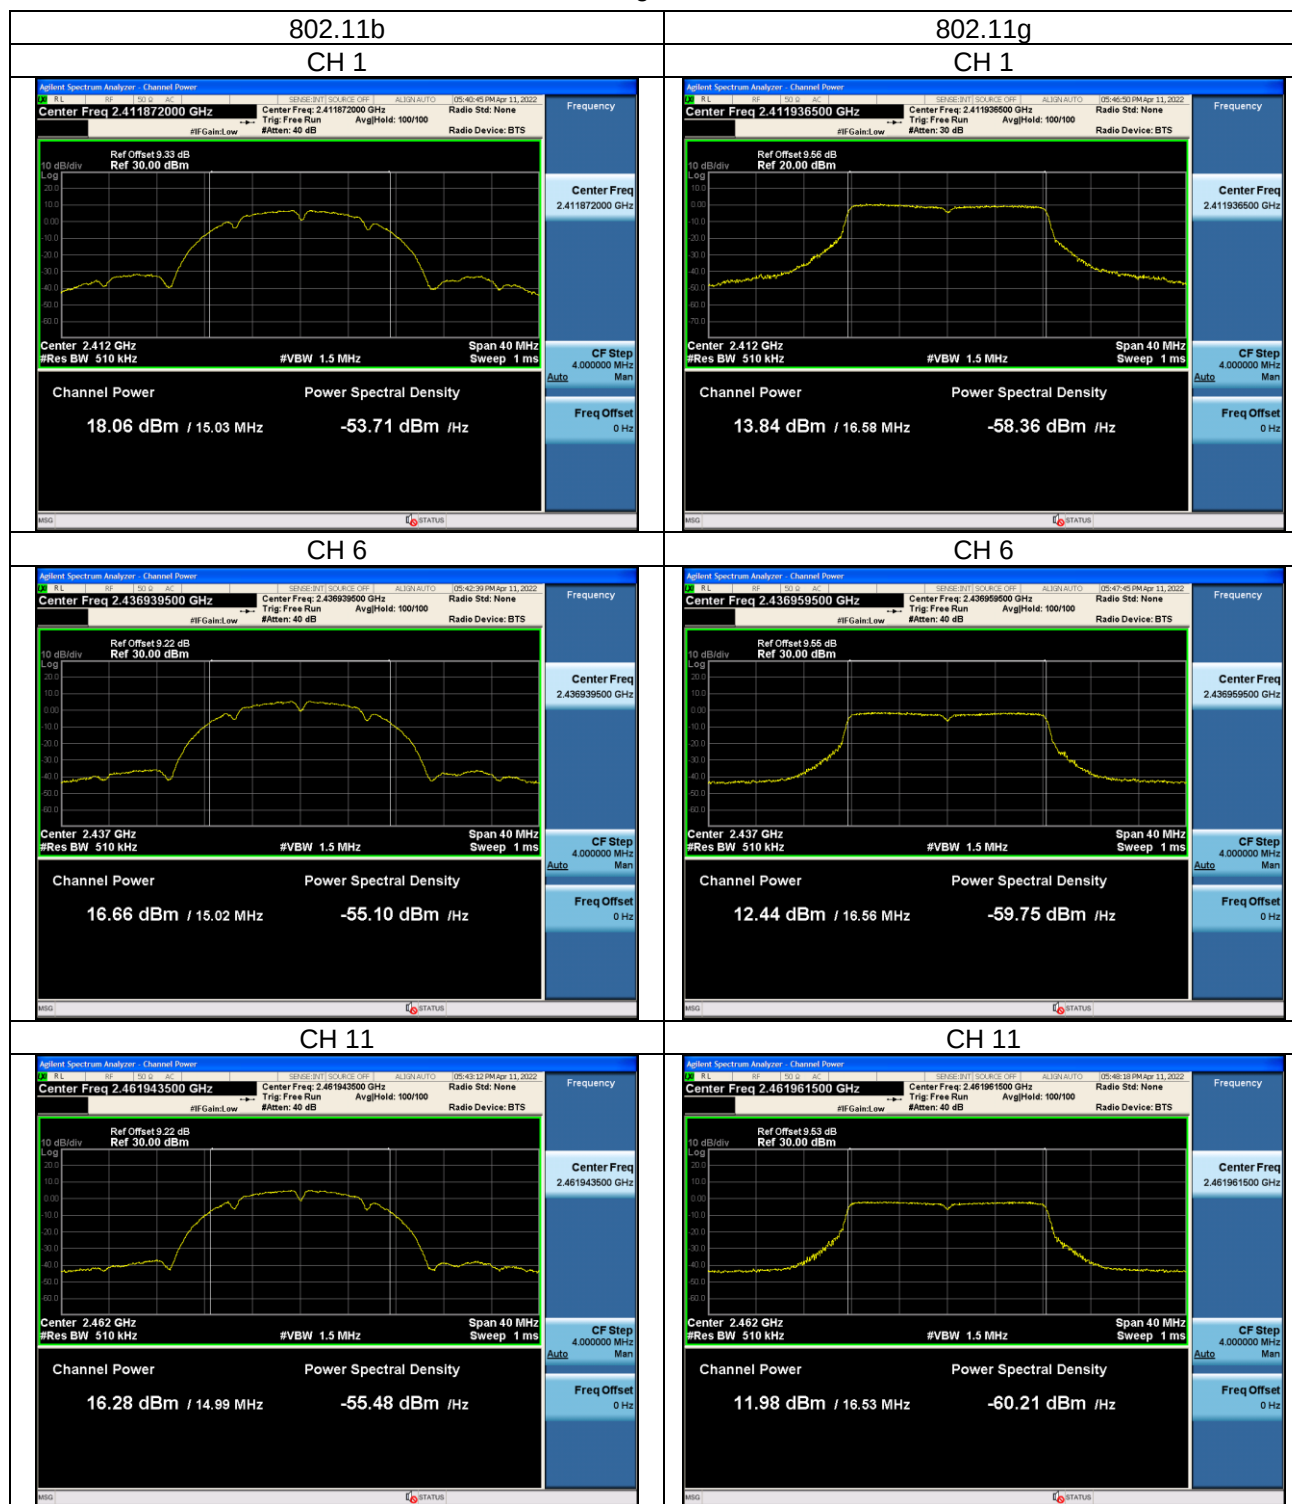




Average Power

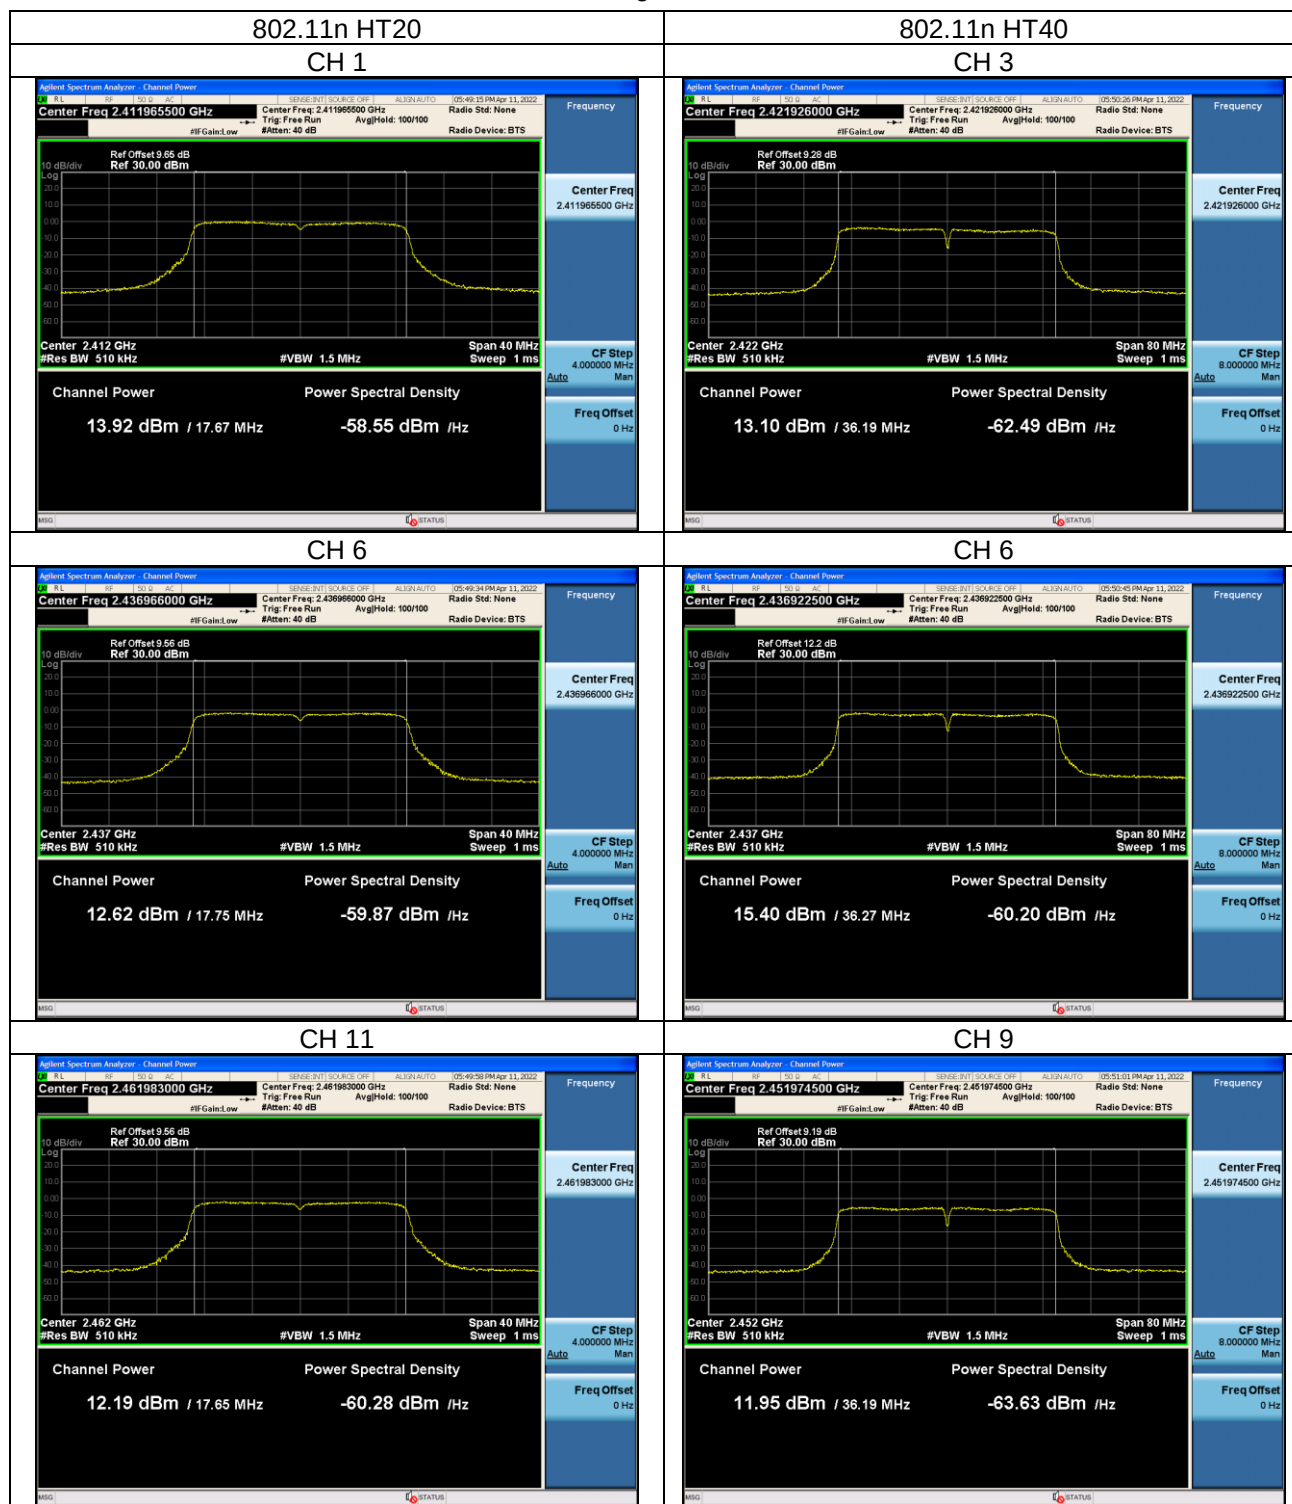




Peak Power

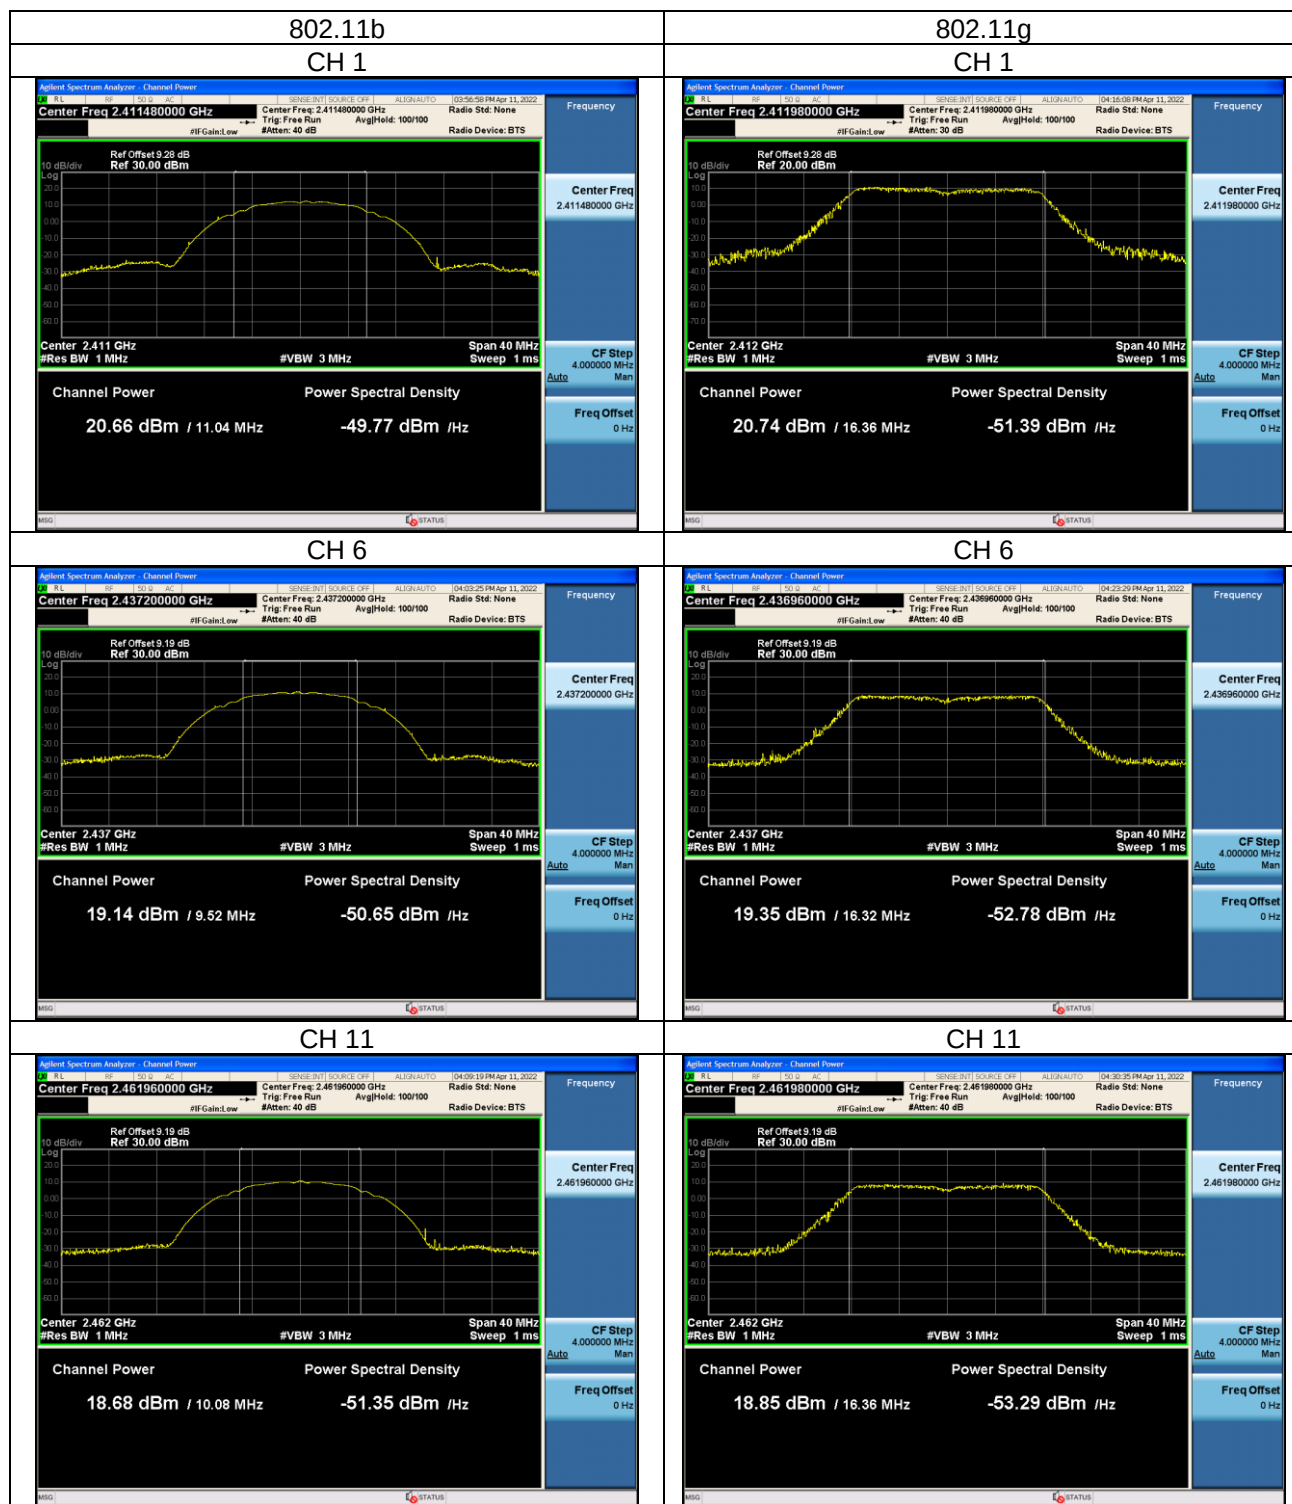





Peak Power

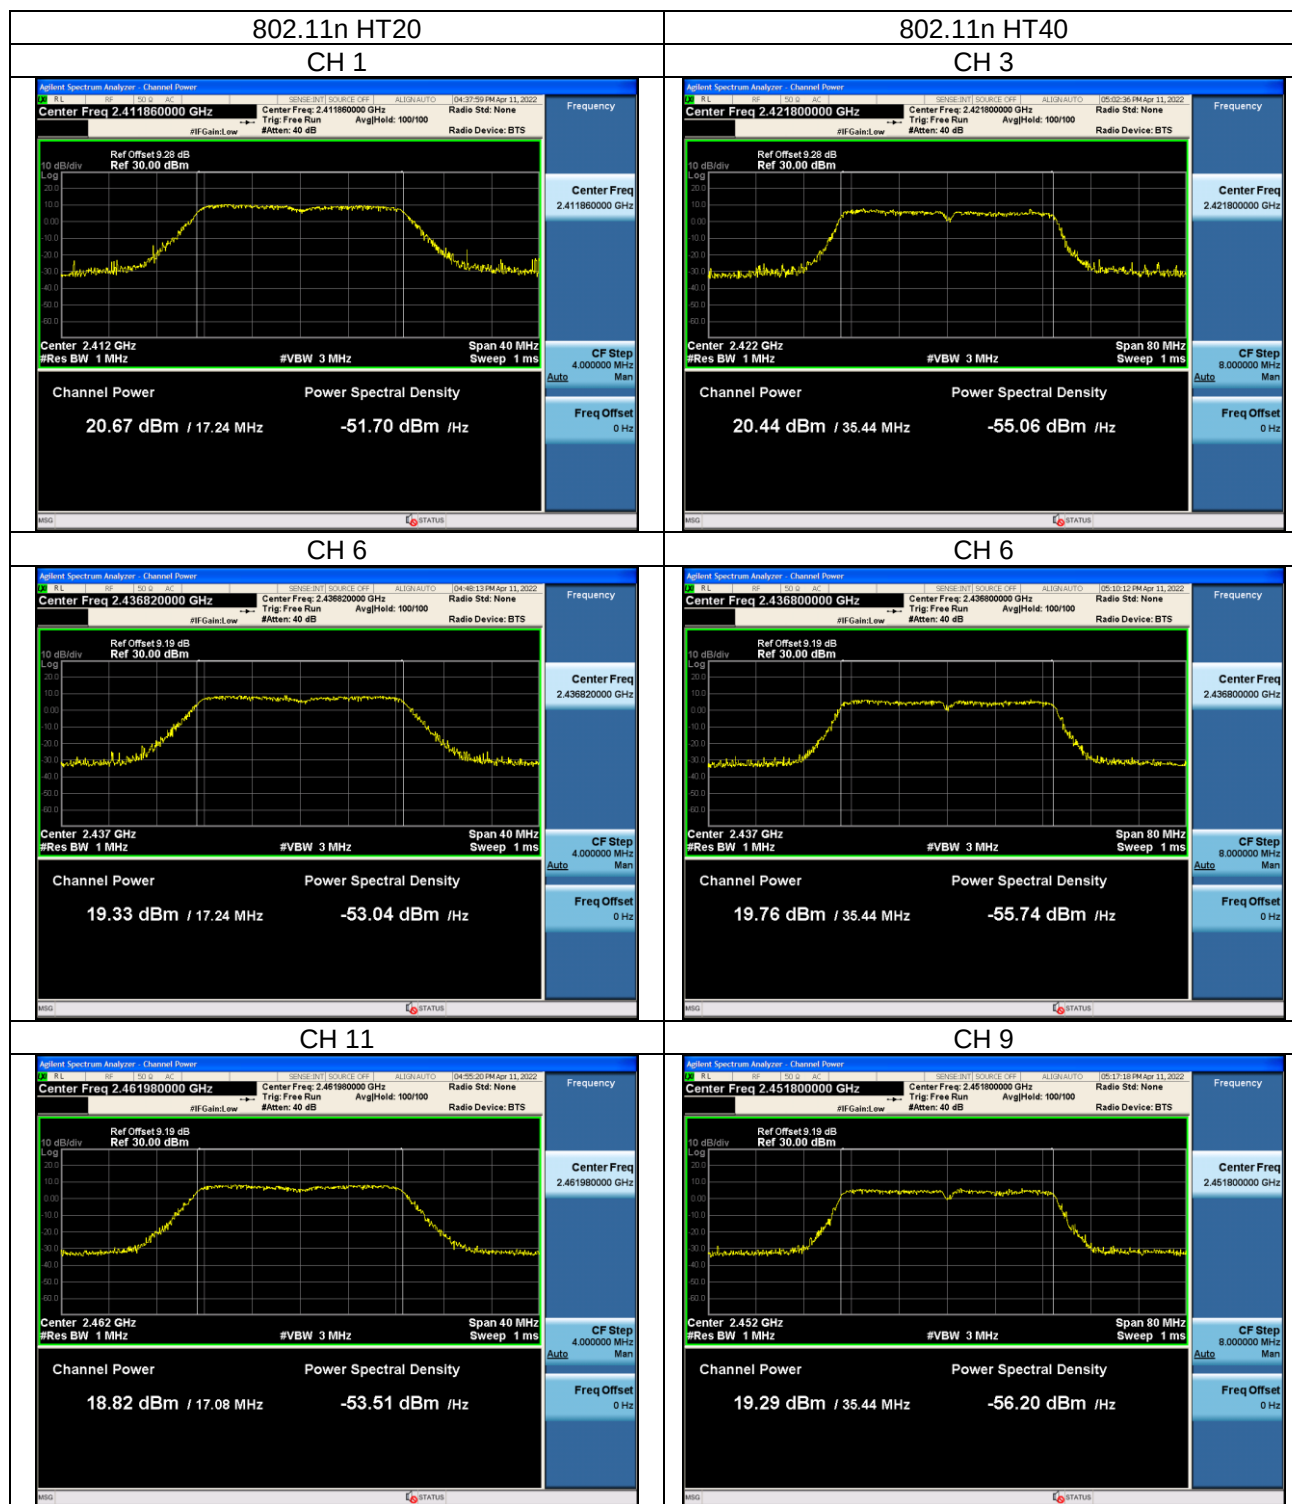




### 3.6 Power Spectral Density Measurement

#### 3.6.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm/3kHz.

#### 3.6.2 Test Setup

- DTS maximum power spectral density level in the fundamental emission Subclause 11.10 of ANSI C63.10 is applicable

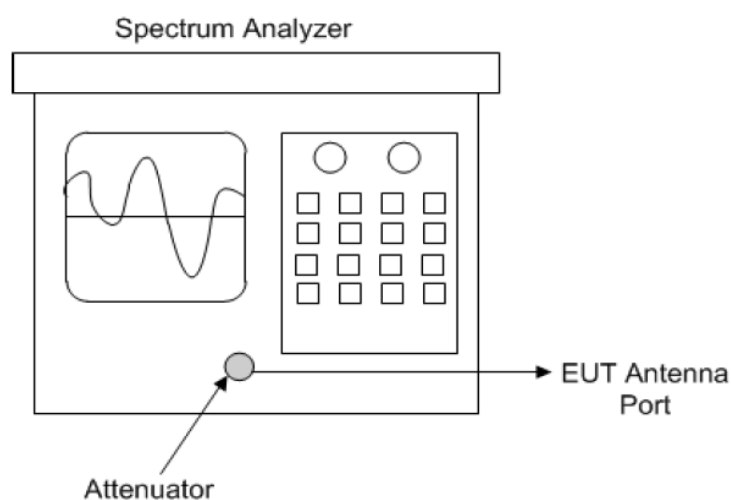

Spectrum analyzer test configuration

#### 3.6.3 Test Instruments

Refer to section 5 to get information of above instrument.

#### 3.6.4 Test Procedure

- Method AVGPS-1 or method AVGPS-1A (alternative)** shall be applied if either of the following conditions can be satisfied:
  - 1) The EUT transmits continuously (or with a  $D \geq 98\%$ ).
  - 2) Sweep triggering can be implemented in such a way that the device transmits at the maximum power control level throughout the duration of each of the instrument sweeps to be averaged. This condition can generally be achieved by triggering the instrument's sweep if the duration of the sweep is equal to or shorter than the duration  $I$  of each transmission from the EUT, and if those transmissions exhibit full power throughout these durations.
- Method AVGPS-2 or method AVGPS-2A (alternative)** shall be applied if the conditions of the preceding item a) cannot be achieved. and the transmissions exhibit a constant duty cycle during the measurement duration. Duty cycle will be considered to be constant if variations are less than  $\pm 2\%$ .
- Method AVGPS-3 or method AVGPS-3A (alternative)** shall be applied if the conditions of the preceding paragraphs a) and b) cannot be achieved.



### Method AVGPSD-3:

Method AVGPSD-3 uses mms detection across ON and OFF times of the EUT with max hold. The following procedure is applicable when the EUT cannot be configured to transmit continuously (i.e.  $D < 98\%$ ), when sweep triggering/signal gating cannot be used to measure only when the EUT is transmitting at its maximum power control level. and when the transmission duty cycle is not constant (i.e., duty cycle variations exceed  $\pm 2\%$ ),

#### SA Setting:

- a. Set the instrument span to a minimum of 1.5 times the OBW.
  - b. Set sweep trigger to "free run."
  - c. Set the RBW = 3 kHz, VBW = 10 kHz,
  - d. Detector = RMS (power averaging).
  - e. Sweep time = Auto couple,
  - f. Allow max hold to run for at least 60 s or longer as needed to allow the trace to stabilize.
  - g. Use the peak marker function to determine the maximum PSD level
- If the measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced).

#### 3.6.5 Deviation from Test Standard

No deviation.

#### 3.6.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



3.6.7 Test Results

| Test Mode   | CH. | Fre.<br>(MHz) | Conducted<br>PSD<br>(dBm/3kHz) | Duty cycle<br>factor=10*log (1/duty<br>cycle)<br>(dB) | Total PSD<br>(dBm/3kHz) | Limit<br>(dBm/3kHz) |
|-------------|-----|---------------|--------------------------------|-------------------------------------------------------|-------------------------|---------------------|
| 11b         | 1   | 2412          | -4.337                         | 0.049                                                 | -4.288                  | 8                   |
|             | 6   | 2437          | -6.010                         | 0.049                                                 | -5.961                  | 8                   |
|             | 11  | 2462          | -5.739                         | 0.049                                                 | -5.690                  | 8                   |
| 11g         | 1   | 2412          | -10.338                        | 0.284                                                 | -10.054                 | 8                   |
|             | 6   | 2437          | -11.785                        | 0.284                                                 | -11.501                 | 8                   |
|             | 11  | 2462          | -12.761                        | 0.284                                                 | -12.477                 | 8                   |
| 11n<br>HT20 | 1   | 2412          | -11.978                        | 0.368                                                 | -11.61                  | 8                   |
|             | 6   | 2437          | -13.054                        | 0.368                                                 | -12.686                 | 8                   |
|             | 11  | 2462          | -13.081                        | 0.368                                                 | -12.713                 | 8                   |
| 11n<br>HT40 | 3   | 2412          | -15.059                        | 0.628                                                 | -14.431                 | 8                   |
|             | 6   | 2437          | -15.315                        | 0.628                                                 | -14.687                 | 8                   |
|             | 9   | 2462          | -16.362                        | 0.628                                                 | -15.734                 | 8                   |