



No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053

Fax: +86 (0) 755 2671 0594

Email: ee.shenzhen@sgs.com

Report No.: SZEM171201274102

Page: 1 of 157

FCC TEST REPORT

Application No: SZEM1712012741RG
Applicant: Ventus Technologies
Address of Applicant: 10 Norden Place, Norwalk, CT 06855
Manufacturer: Ventus Technologies
Address of Manufacturer: 10 Norden Place, Norwalk, CT 06855
Factory: Ventus Technologies
Address of Factory: 10 Norden Place, Norwalk, CT 06855
EUT Description: Router
Model No.: LC100
Trade Mark: Ventus
FCC ID: 2AR44-LC100
Standards: 47 CFR FCC Part 2, Subpart J
47 CFR Part 15, Subpart C
KDB558074 D01 15.247 Meas Guidance v05
Test Method: ANSI C63.4(2014)
ANSI C63.10 (2013)
Date of Receipt: 2018/12/1
Date of Test: 2018/12/2to 2018/12/24
Date of Issue: 2019/1/22

Test Result:	PASS *
---------------------	---------------

. * In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

Derek Yang

Wireless Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



1 Version

Revision Record				
Version	Chapter	Date	Modifier	Remark
00		2018/12/24		Original

Authorized for issue by:				
Tested By		 (Mike Hu) /Project Engineer		2018/12/24
				Date
Checked By		 (David Chen) /Reviewer		2018/12/24
				Date



2 Test Summary

Test Item	Test Requirement	Test method	Test Result	Result
AC Power Line Conducted Emission	15.207	ANSI C63.10 2013	Clause 4.2	PASS
Duty Cycle	--	--	Clause 4.3	PASS
Conducted Output Power	15.247 (b)(3)	ANSI C63.10 2013	Clause 4.4	PASS
DTS (6 dB) Bandwidth	15.247 (a)(2)	ANSI C63.10 2013	Clause 4.5	PASS
Power Spectral Density	15.247 (e)	ANSI C63.10 2013	Clause 4.6	PASS
Band-edge for RF Conducted Emissions	15.247(d)	ANSI C63.10 2013	Clause 4.7	PASS
RF Conducted Spurious Emissions	15.247(d)	ANSI C63.10 2013	Clause 4.8	PASS
Radiated Spurious Emissions	15.247(d) ;15.205/15.209	ANSI C63.10 2013	Clause 4.9	PASS
Restricted bands around fundamental frequency (Radiated Emission)	15.247(d) ;15.205/15.209	ANSI C63.10 2013	Clause 4.10	PASS



Contents

1	VERSION.....	2
2	TEST SUMMARY.....	3
3	GENERAL INFORMATION.....	5
3.1	CLIENT INFORMATION.....	5
3.2	TEST LOCATION.....	5
3.3	TEST FACILITY.....	5
3.4	GENERAL DESCRIPTION OF EUT.....	6
3.5	TEST ENVIRONMENT AND MODE.....	7
3.6	DESCRIPTION OF SUPPORT UNITS.....	7
4	TEST RESULTS AND MEASUREMENT DATA.....	8
4.1	ANTENNA REQUIREMENT.....	8
4.2	AC POWER LINE CONDUCTED EMISSIONS.....	9
4.3	DUTY CYCLE.....	13
4.3.1	<i>Test Results</i>	13
4.3.1	<i>Test Plots</i>	13
4.4	CONDUCTED OUTPUT POWER.....	19
4.4.1	<i>Test Results</i>	20
4.5	DTS (6 dB) BANDWIDTH.....	21
4.5.1	<i>Test Results</i>	21
4.5.2	<i>Test plots</i>	22
4.6	POWER SPECTRAL DENSITY.....	37
4.6.1	<i>Test Results</i>	37
4.6.2	<i>Test plots</i>	38
4.7	BAND-EDGE FOR RF CONDUCTED EMISSIONS.....	53
4.7.1	<i>Test plots</i>	54
4.8	RF CONDUCTED SPURIOUS EMISSIONS.....	64
4.8.1	<i>Test plots</i>	65
4.9	RADIATED SPURIOUS EMISSIONS.....	80
4.9.1	<i>Radiated emission below 1GHz</i>	82
4.9.2	<i>Transmitter emission above 1GHz</i>	84
4.10	RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY.....	113
4.10.1	<i>ANT1</i>	115
4.10.2	<i>ANT2</i>	123
4.10.3	<i>MIMO</i>	147
5	MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2).....	155
6	EQUIPMENT LIST.....	156
7	PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS.....	157



3 General Information

3.1 Client Information

Applicant:	Ventus Technologies
Address of Applicant:	10 Norden Place, Norwalk, CT 06855
Manufacturer:	Ventus Technologies
Address of Manufacturer:	10 Norden Place, Norwalk, CT 06855
Factory:	Ventus Technologies
Address of Factory:	10 Norden Place, Norwalk, CT 06855

3.2 Test Location

Company:	SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch
Address:	No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen, Guangdong, China
Post code:	518057
Telephone:	+86 (0) 755 2601 2053
Fax:	+86 (0) 755 2671 0594
E-mail:	ee.shenzhen@sgs.com

3.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L2929)**

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **A2LA (Certificate No. 3816.01)**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

- **VCCI**

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

- **FCC –Designation Number: CN1178**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1178. Test Firm Registration Number: 406779.

- **Industry Canada (IC)**

Two 3m Semi-anechoic chambers and the 10m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1, 4620C-2, 4620C-3.



3.4 General Description of EUT

EUT Description::	Router
Model No.:	LC100
Trade Mark:	Ventus
Hardware Version:	B
Software Version:	1
IEEE 802.11 WLAN Mode Supported	☒ 802.11B (20 MHz channel bandwidth), ☒ 802.11G (20 MHz channel bandwidth) ☒ 802.11N (20 MHz channel bandwidth), ☐ 802.11N (40 MHz channel bandwidth)
Operation Frequency:	2400 MHz -2483.5MHz $f_c = 2407 \text{ MHz} + N * 5 \text{ MHz}$, where: - f_c = "Operating Frequency" in MHz, - N = "Channel Number" with the range from 1 to 11 for the 20 MHz channel bandwidth, or 3 to 9 for the 40 MHz channel bandwidth.
Type of Modulation:	IEEE for 802.11B: DSSS IEEE for 802.11G : OFDM IEEE for 802.11N(HT20) : OFDM
Sample Type:	☐ Portable Device, ☒ Module
Antenna Type:	☐ External, ☒ Integrated
Antenna Ports	☒ Ant 1, ☒ Ant 2, ☐ Ant 3
Smart System	☒ SISO (for 802.11B/G/N), ☒ MIMO (for 802.11N): 2 Tx & 2 Rx, ☐ Diversity (for 802.11B/G) : Tx & Rx
Antenna Gain:	ANT1:3.2dBi; ANT2:2.5dBi
Power Supply	☒ AC/DC Adapter; ☐ Battery ☐ PoE;; ☐ Other:

Operation Frequency of each channel (802.11B/G/N HT20)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		



Remark:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency for 802.11B/G/N (HT20)
The Lowest channel	2412MHz
The Middle channel	2437MHz
The Highest channel	2462MHz

3.5 Test Environment and Mode

Operating Environment:	
Temperature:	25.0 °C
Humidity:	50 % RH
Atmospheric Pressure:	101.30 KPa
Test mode:	
Transmitting mode:	Keep the EUT in transmitting mode with all kind of modulation and all kind of data rate.

3.6 Description of Support Units

The EUT has been tested independent unit.




4 Test results and Measurement Data

4.1 Antenna Requirement

Standard requirement:	47 CFR Part 15C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	
The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is ANT1:3.2dBi; ANT2:2.5dBi.	

4.2 AC Power Line Conducted Emissions

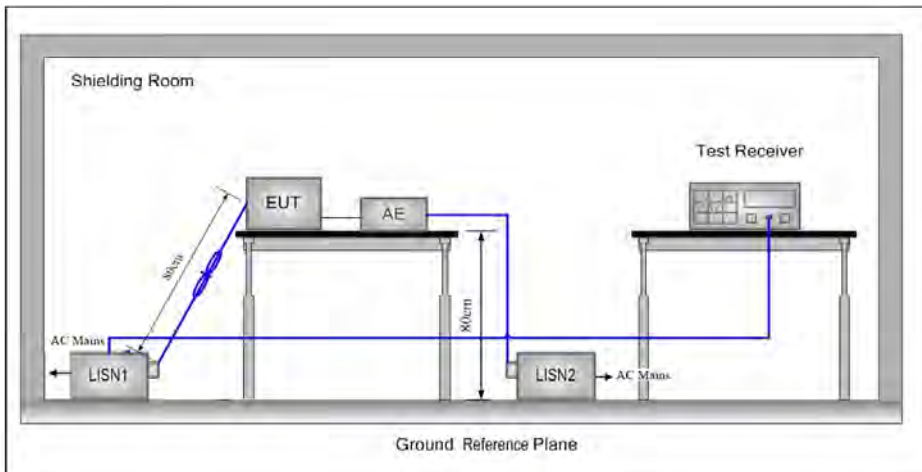Test Requirement:	47 CFR Part 15C Section 15.207		
Test Method:	ANSI C63.10: 2013		
Test Frequency Range:	150kHz to 30MHz		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test Procedure:	1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.		
Test Setup:			



Exploratory Test Mode:	Transmitting with all kind of modulations, data rates at lowest, middle and highest channel. Charge + Transmitting mode.
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate of 802.11B at lowest channel is the worst case. Charge + Transmitting mode. Only the worst case is recorded in the report.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass




Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live Line:

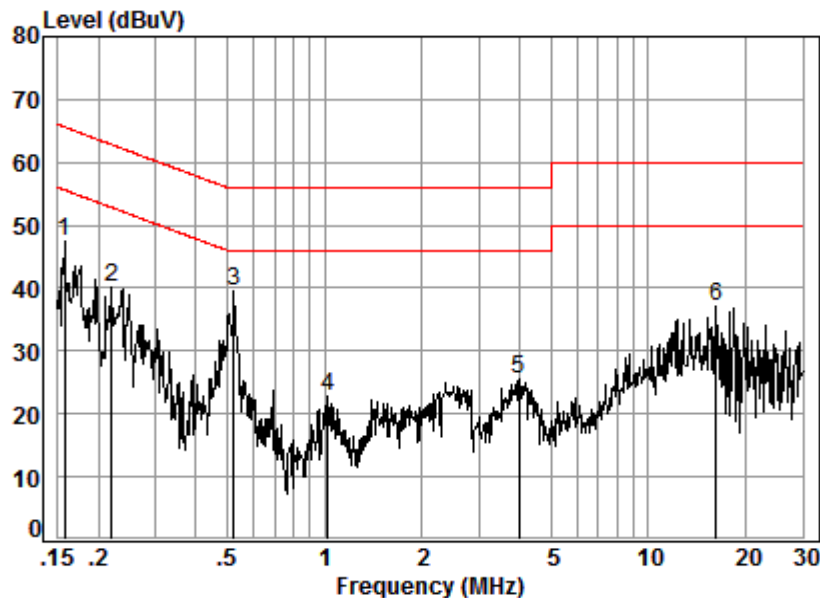

Site : Shielding Room


Condition: Line

Job No. : 12741RG LC 100

Test mode: b

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.16	0.01	9.66	37.74	47.41	55.60	-8.19	Peak
2	0.22	0.03	9.66	30.46	40.15	52.83	-12.68	Peak
3	0.52	0.06	9.67	29.72	39.45	46.00	-6.55	Peak
4	1.02	0.09	9.74	13.05	22.88	46.00	-23.12	Peak
5	3.99	0.16	9.72	15.62	25.50	46.00	-20.50	Peak
6	16.23	0.22	10.27	26.65	37.14	50.00	-12.86	Peak

Neutral Line:

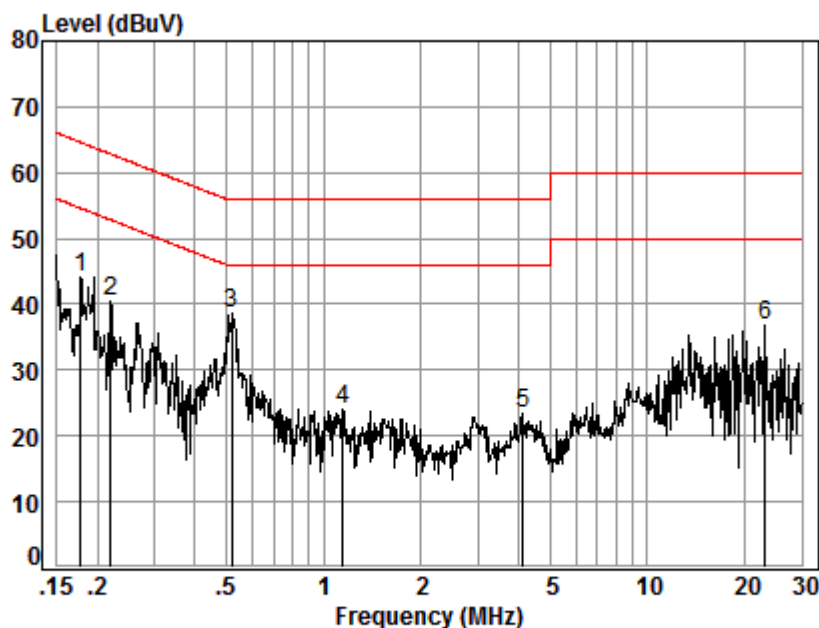

Site : Shielding Room

Condition: Neutral

Job No. : 12741RG LC 100

Test mode: b

	Freq	Cable	LISN	Read	Level	Limit	Over	
	MHz	Loss	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.18	0.02	9.64	34.37	44.03	54.59	-10.56	Peak
2	0.22	0.03	9.64	30.76	40.43	52.83	-12.40	Peak
3	0.52	0.06	9.64	28.97	38.67	46.00	-7.33	Peak
4	1.15	0.10	9.70	14.09	23.89	46.00	-22.11	Peak
5	4.14	0.16	9.69	13.52	23.37	46.00	-22.63	Peak
6	23.14	0.25	10.23	26.18	36.66	50.00	-13.34	Peak

Remarks:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.

4.3 Duty Cycle


4.3.1 Test Results

Test Mode	TX Freq. [MHz]	Duty cycle [%]
11B	Ant 1: CH1	99.55
11G	Ant 1: CH1	96.88
11N20	Ant 1: CH1	96.65
11G_CDD	Ant 1: CH1	97.34
11N20_MIMO	Ant 1: CH1	94.12
11B	Ant 2: CH1	99.59
11G	Ant 2: CH1	97.11
11N20	Ant 2: CH1	97.16
11G_CDD	Ant 2: CH1	97.11
11N20_MIMO	Ant 2: CH1	94.12

4.3.1 Test Plots


4.3.1.1 ANT1

4.3.1.1.1 11B

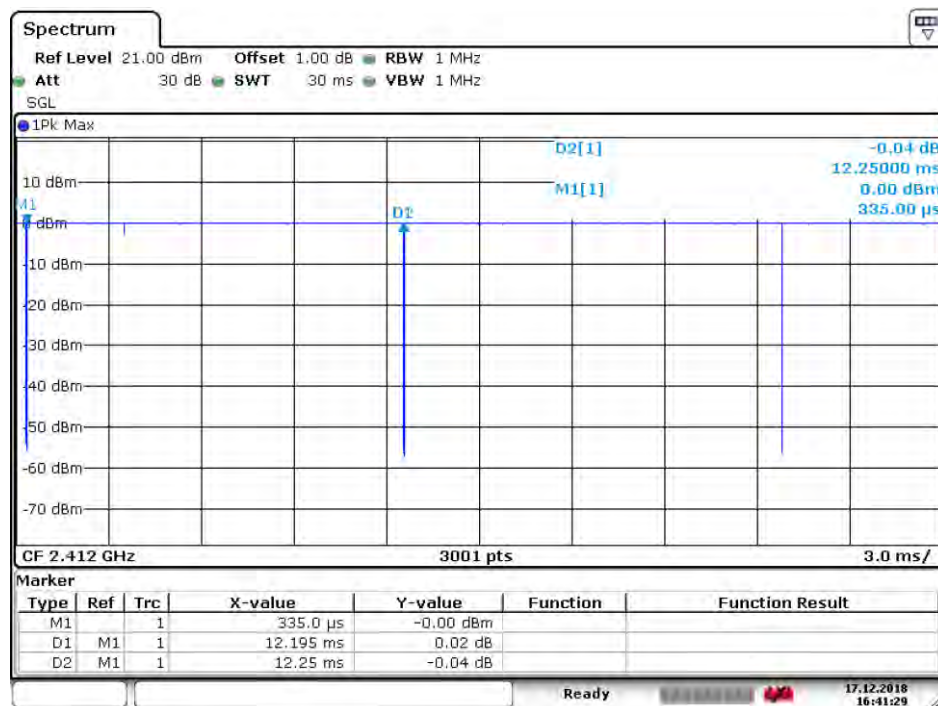


Date: 17 DEC.2018 16:41:30

4.3.1.1.2 11G

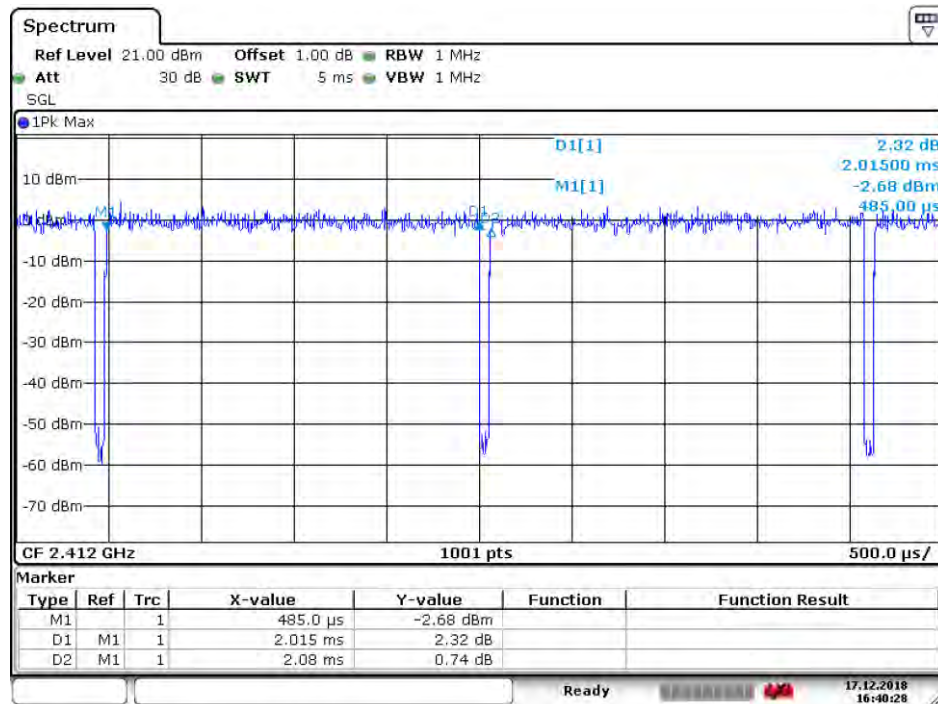

Date: 17 DEC.2018 16:40:29


4.3.1.1.3 11N20

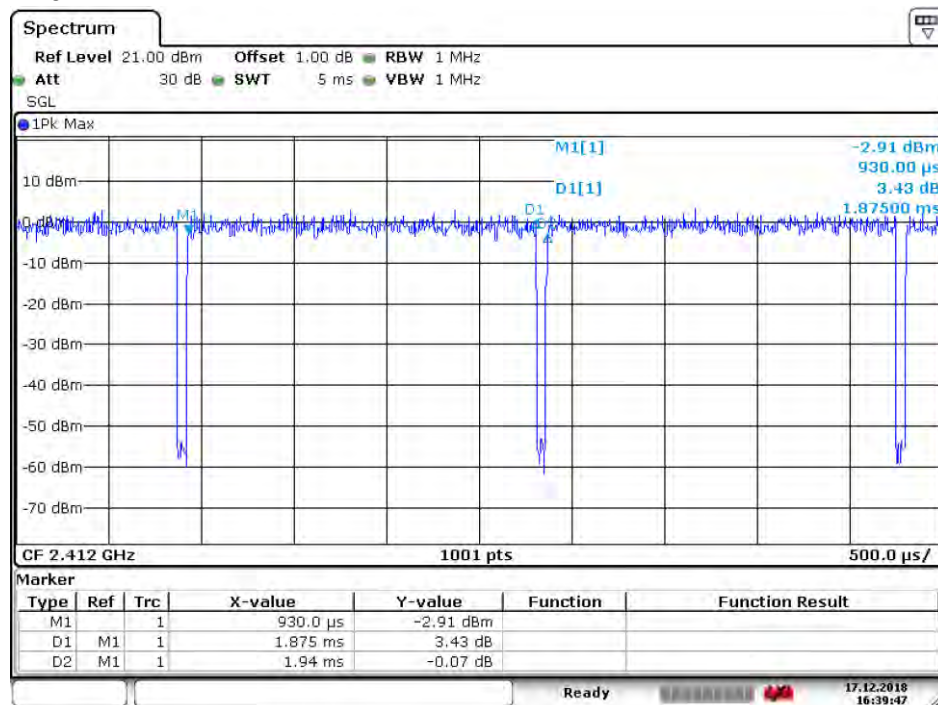


Date: 17 DEC.2018 16:39:47



4.3.1.1.4 11G_CDD

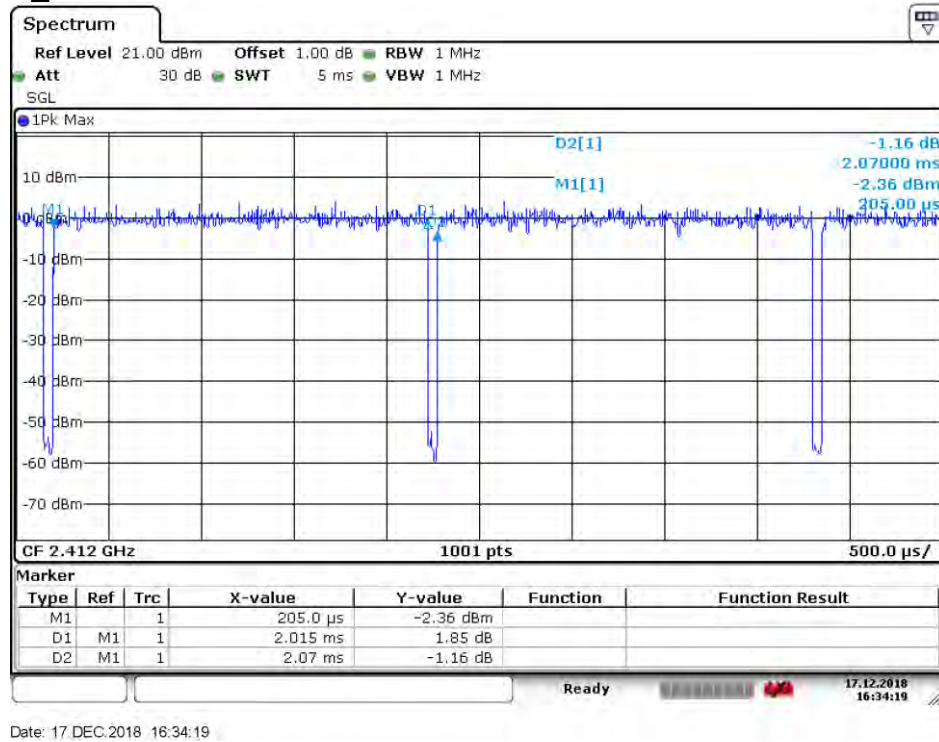


4.3.1.1.5 11N20_MIMO

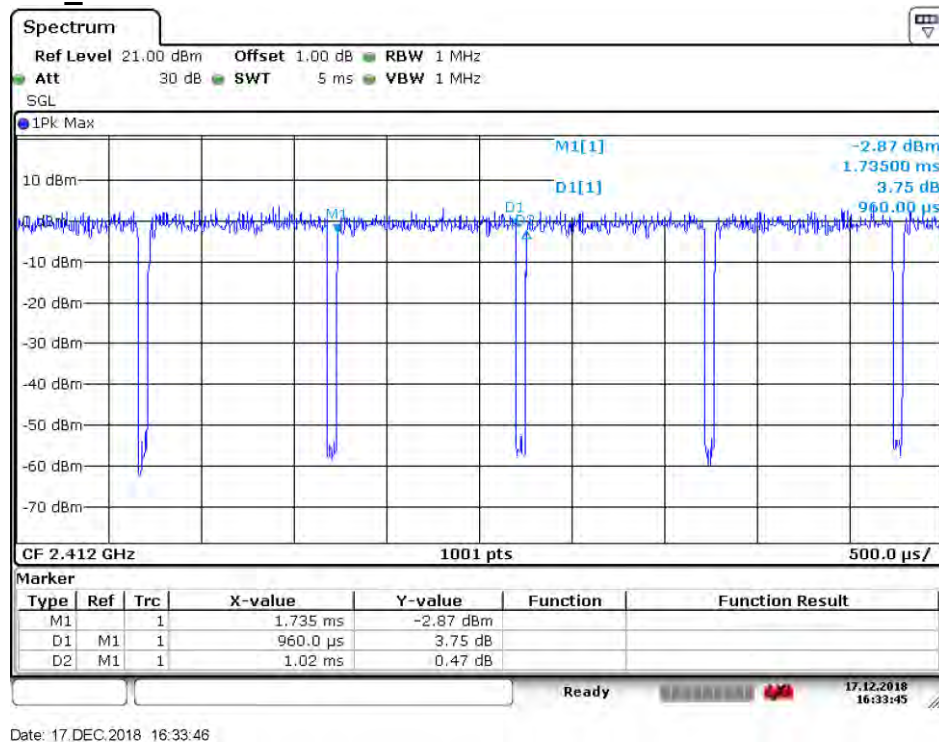


4.3.1.2 ANT2

4.3.1.2.1 11B

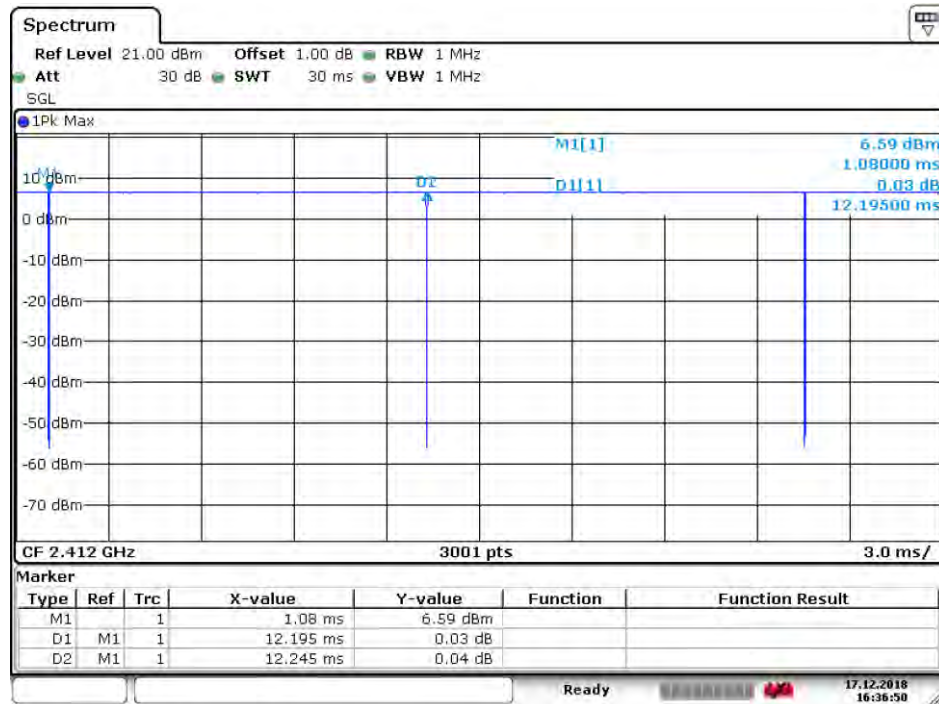

Date: 17 DEC.2018 16:36:50


4.3.1.2.2 11G

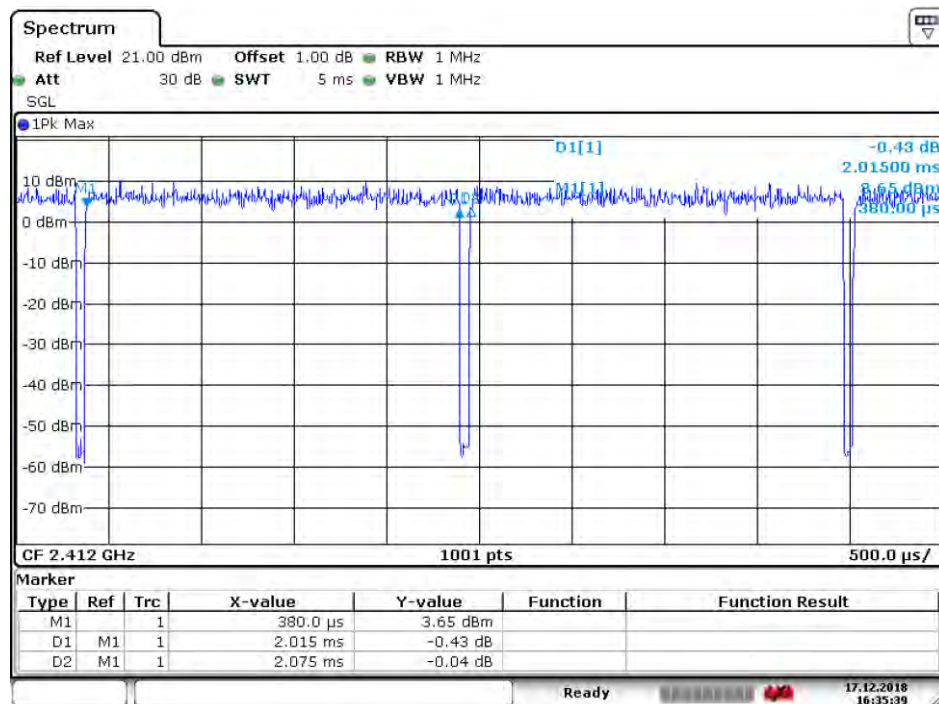


Date: 17 DEC.2018 16:35:40



4.3.1.2.3 11N20

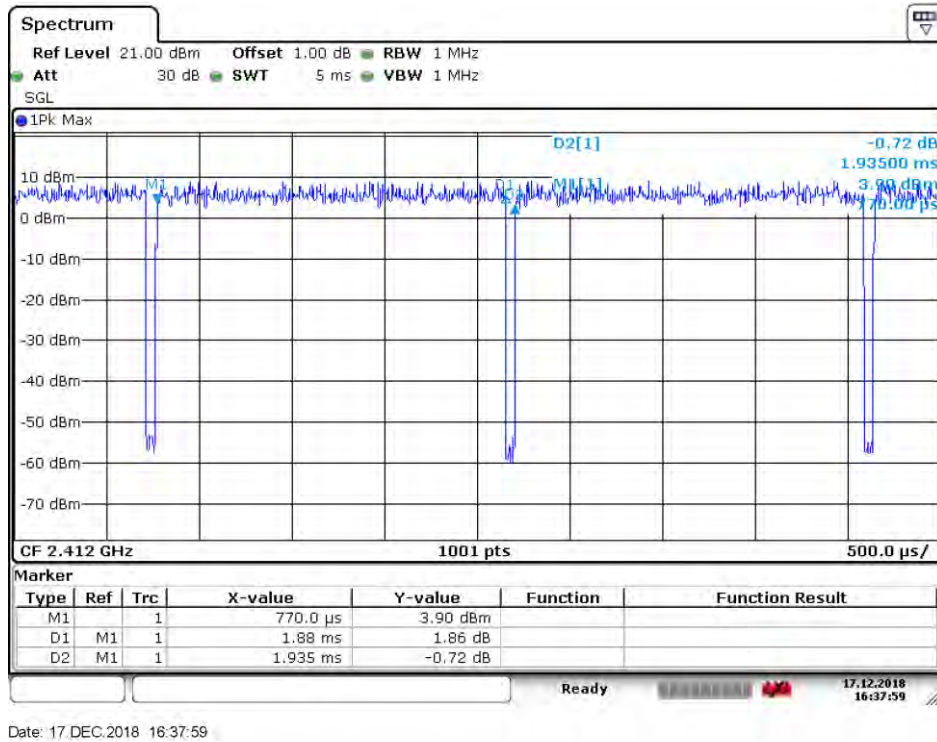


4.3.1.2.4 11G_CDD

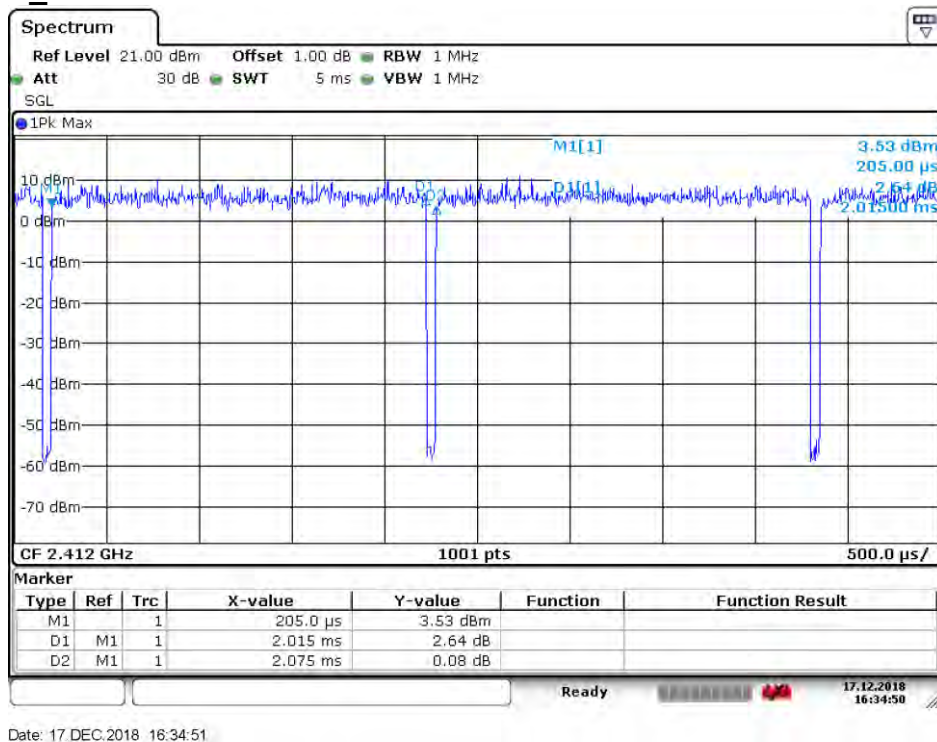




4.3.1.2.5 11N20_MIMO

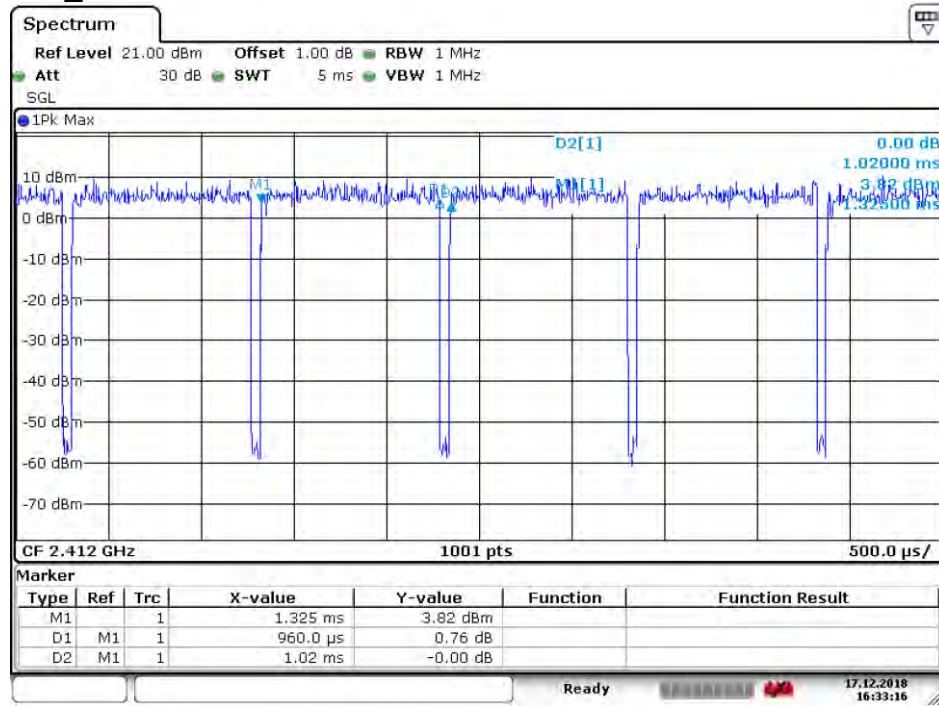

Date: 17_DEC.2018 16:33:16

4.4 Conducted Output Power

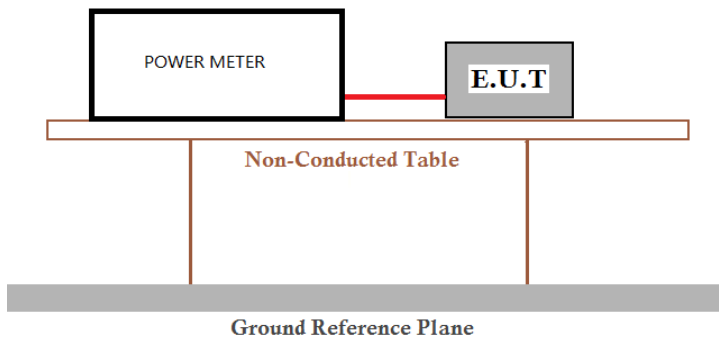Test Requirement:	47 CFR Part 15C Section 15.247 (b)(3)
Test Method:	ANSI C63.10 :2013 Section 11.9.1.3
Test Setup:	
Test Instruments:	Refer to section 5.10 for details
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11B; 6Mbps of rate is the worst case of 802.11G ; 6.5Mbps of rate is the worst case of 802.11N(HT20);
Limit:	30dBm
Test Results:	Pass



4.4.1 Test Results


Measurement Data of Average Power:

Mode	Test Channel	Average Output Power (dBm)			Result
		ANT 1	ANT 2	SUM	
802.11B	Lowest	7.02	13.90	---	Report purpose only
	Middle	7.31	14.25	---	Report purpose only
	Highest	7.30	14.07	---	Report purpose only
802.11G	Lowest	7.27	14.05	---	Report purpose only
	Middle	7.30	14.41	---	Report purpose only
	Highest	7.54	14.25	---	Report purpose only
802.11N20	Lowest	6.97	13.79	---	Report purpose only
	Middle	7.20	14.11	---	Report purpose only
	Highest	7.22	13.98	---	Report purpose only
802.11G_CDD	Lowest	7.80	14.07	14.99	Report purpose only
	Middle	7.68	14.38	15.22	Report purpose only
	Highest	8.01	14.22	15.15	Report purpose only
802.11N20_MIMO	Lowest	7.53	13.82	14.74	Report purpose only
	Middle	7.41	14.20	15.03	Report purpose only
	Highest	7.76	14.05	14.97	Report purpose only

Measurement Data of Peak Power:

Mode	Test Channel	Peak Output Power (dBm)			Limit (dBm)	Result
		ANT 1	ANT 2	SUM		
802.11B	Lowest	11.06	17.47	---	30.00	Pass
	Middle	11.00	17.95	---	30.00	Pass
	Highest	11.39	17.80	---	30.00	Pass
802.11G	Lowest	14.31	20.88	---	30.00	Pass
	Middle	14.58	21.41	---	30.00	Pass
	Highest	14.68	21.29	---	30.00	Pass
802.11N20	Lowest	14.23	20.70	---	30.00	Pass
	Middle	14.38	21.15	---	30.00	Pass
	Highest	14.34	21.04	---	30.00	Pass
802.11G_CDD	Lowest	14.79	21.28	22.16	30.00	Pass
	Middle	14.67	21.60	22.40	30.00	Pass
	Highest	14.96	21.45	22.33	30.00	Pass
802.11N20_MIMO	Lowest	14.52	21.09	21.95	30.00	Pass
	Middle	14.41	21.47	22.25	30.00	Pass
	Highest	14.81	21.30	22.18	30.00	Pass

4.5 DTS (6 dB) Bandwidth

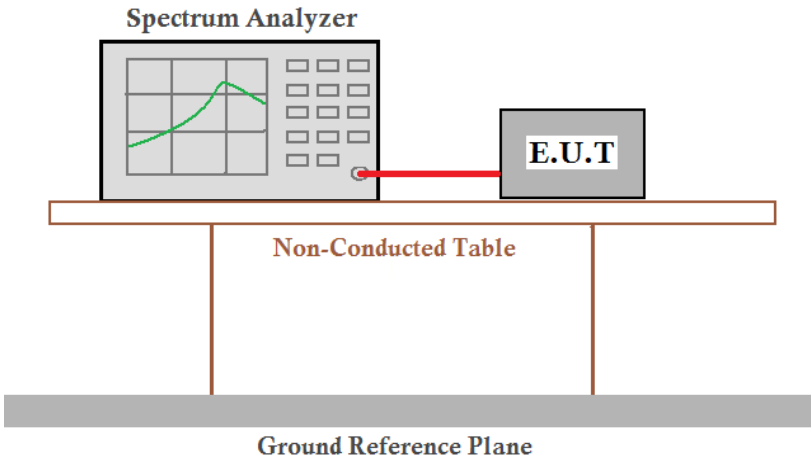Test Requirement:	47 CFR Part 15C Section 15.247 (a)(2)
Test Method:	ANSI C63.10: 2013 Section 11.8.1 Option 1
Test Setup:	
Instruments Used:	Refer to section 5.10 for details
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11B; 6Mbps of rate is the worst case of 802.11G; 6.5Mbps of rate is the worst case of 802.11N(HT20);
Limit:	≥ 500 kHz
Test Results:	Pass


4.5.1 Test Results

Mode	Test Channel	6dB Emission Bandwidth (MHz)		Limit (kHz)	Result
		ANT 1	ANT 2		
802.11B	Lowest	10.04	9.59	≥ 500	Pass
	Middle	10.07	9.56	≥ 500	Pass
	Highest	10.01	10.07	≥ 500	Pass
802.11G	Lowest	15.14	15.11	≥ 500	Pass
	Middle	15.14	15.14	≥ 500	Pass
	Highest	15.11	15.11	≥ 500	Pass
802.11N20	Lowest	15.14	15.14	≥ 500	Pass
	Middle	15.14	15.14	≥ 500	Pass
	Highest	15.14	15.17	≥ 500	Pass
802.11G_CDD	Lowest	15.14	15.14	≥ 500	Pass
	Middle	15.14	15.11	≥ 500	Pass
	Highest	15.14	15.14	≥ 500	Pass
802.11N20_MIMO	Lowest	15.14	15.14	≥ 500	Pass
	Middle	15.14	15.14	≥ 500	Pass
	Highest	15.14	15.14	≥ 500	Pass


4.5.2 Test plots

4.5.2.1 ANT1


4.5.2.1.1 802.11B_Lowest Channel

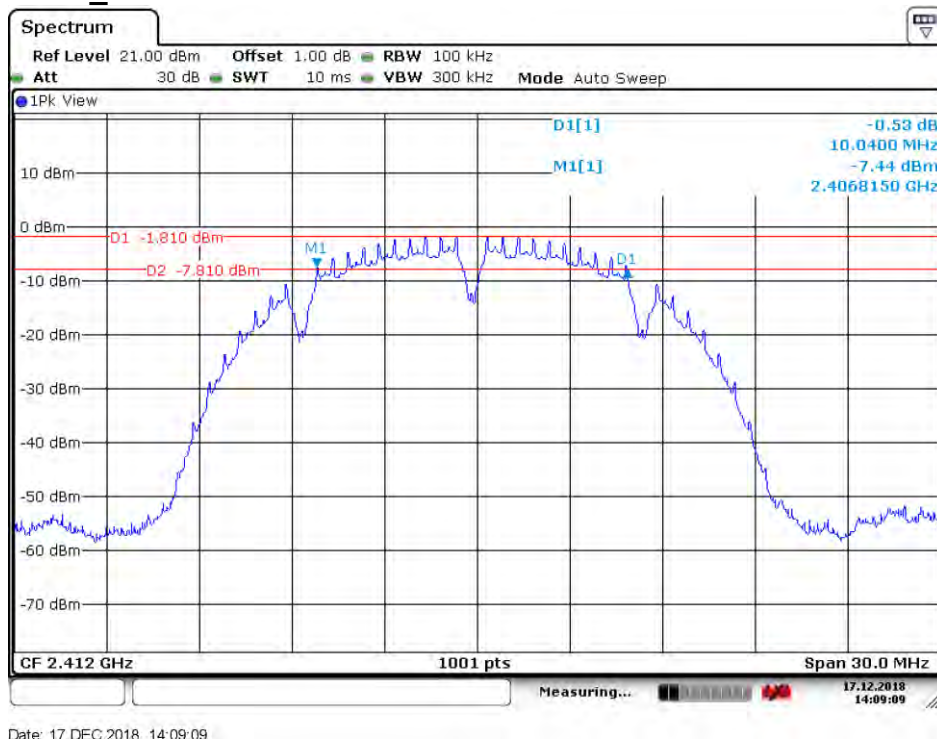


4.5.2.1.2 802.11B_Middle Channel

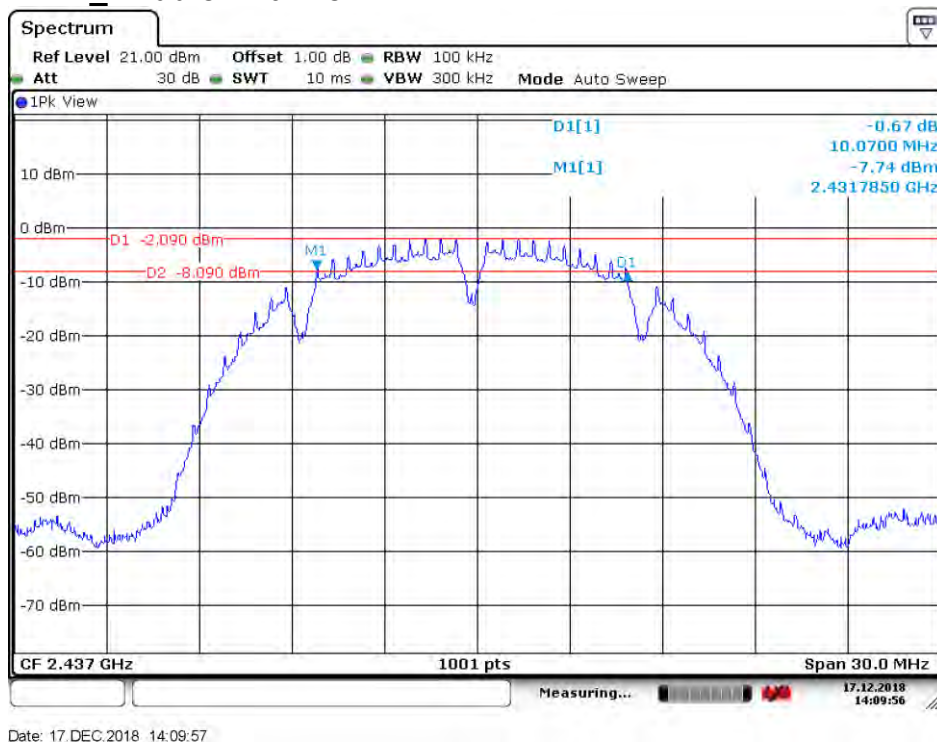


4.5.2.1.3 802.11B_Highest Channel

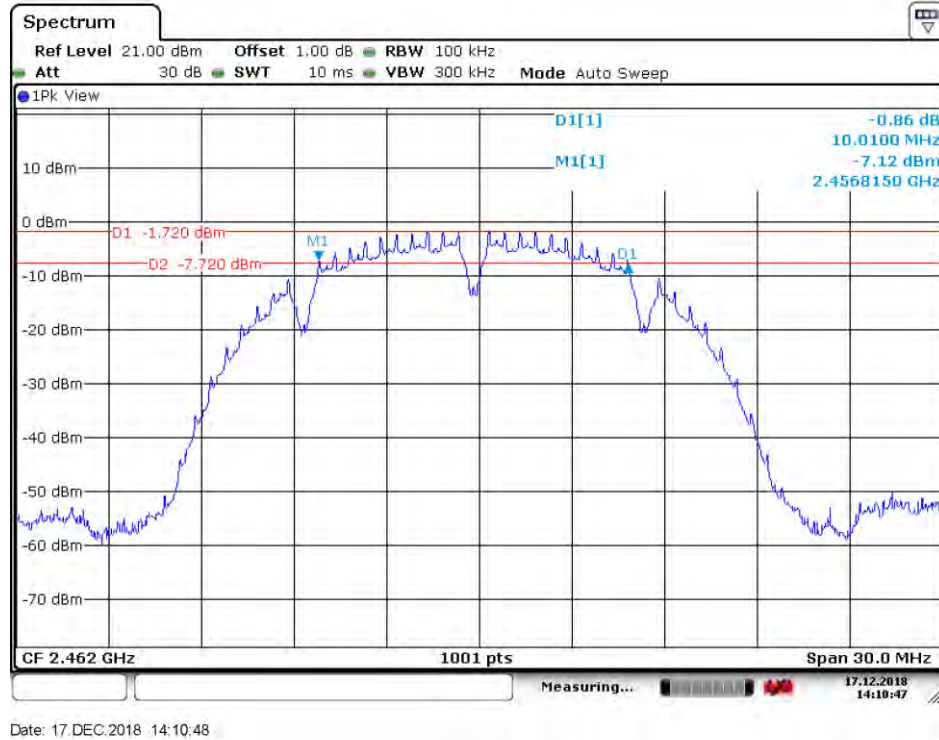

4.5.2.1.4 802.11G_Lowest Channel

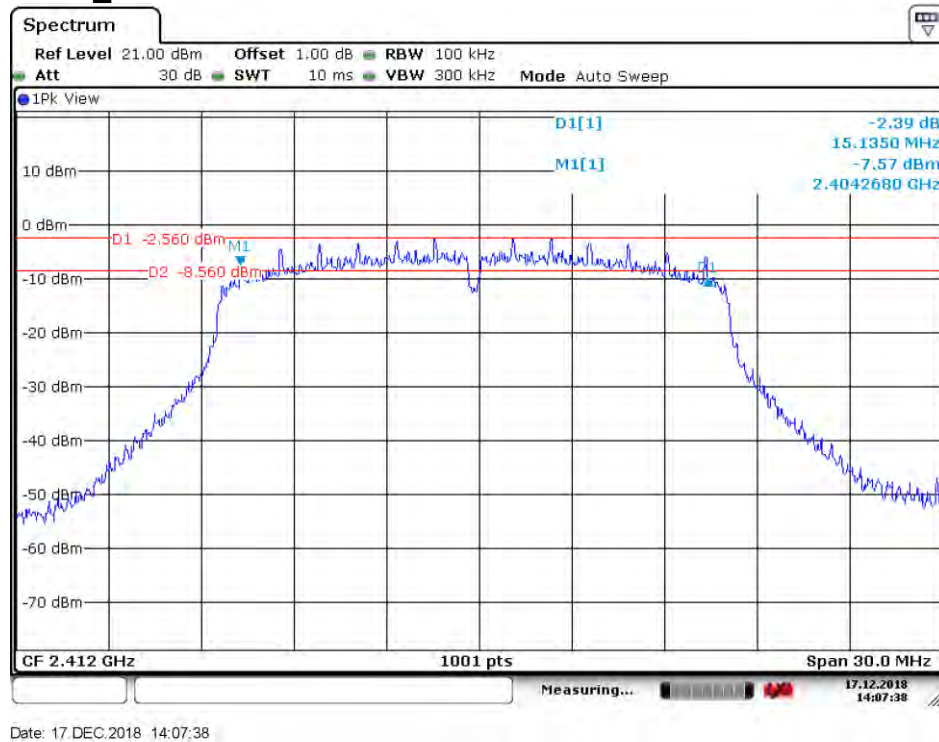


4.5.2.1.5 802.11G_Middle Channel

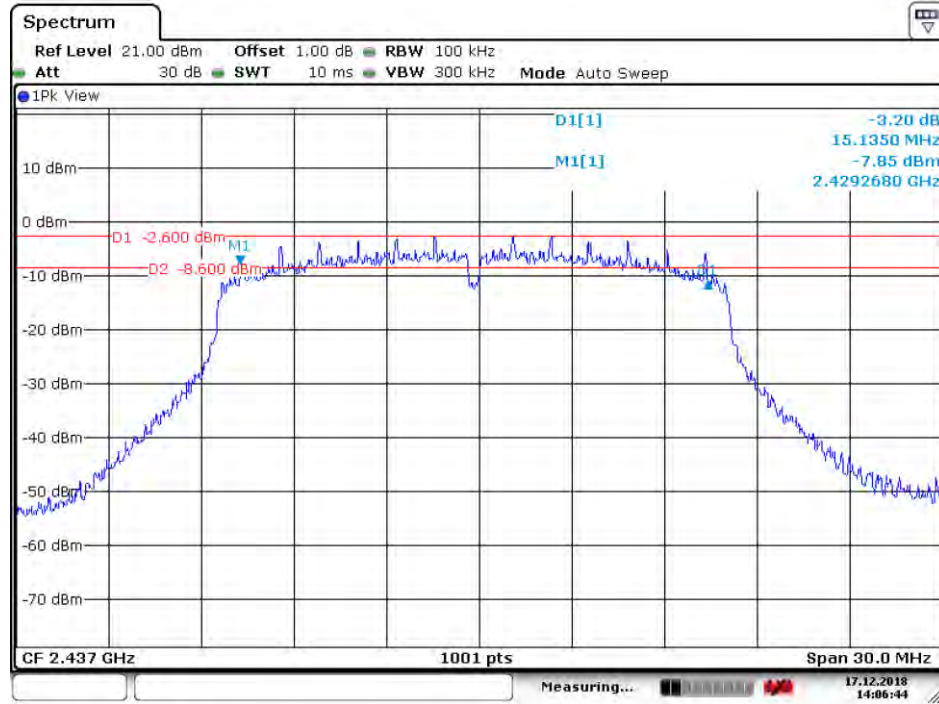


Date: 17 DEC. 2018 14:06:44

4.5.2.1.6 802.11G_Highest Channel

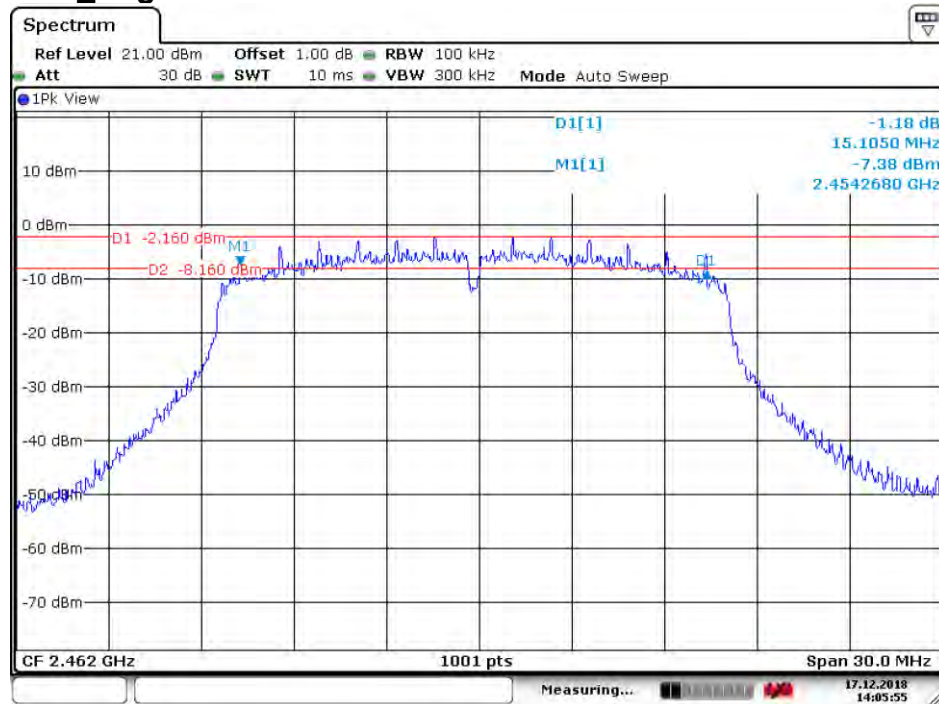


Date: 17 DEC. 2018 14:05:55


4.5.2.1.7 802.11N20_Lowest Channel

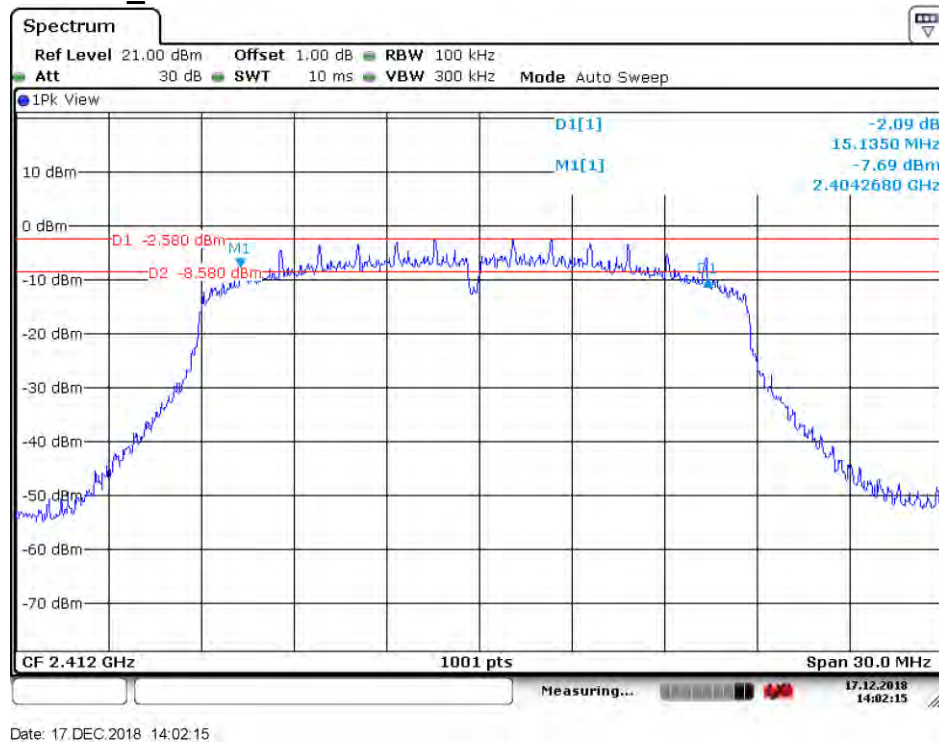


4.5.2.1.8 802.11 N20_ Middle Channel

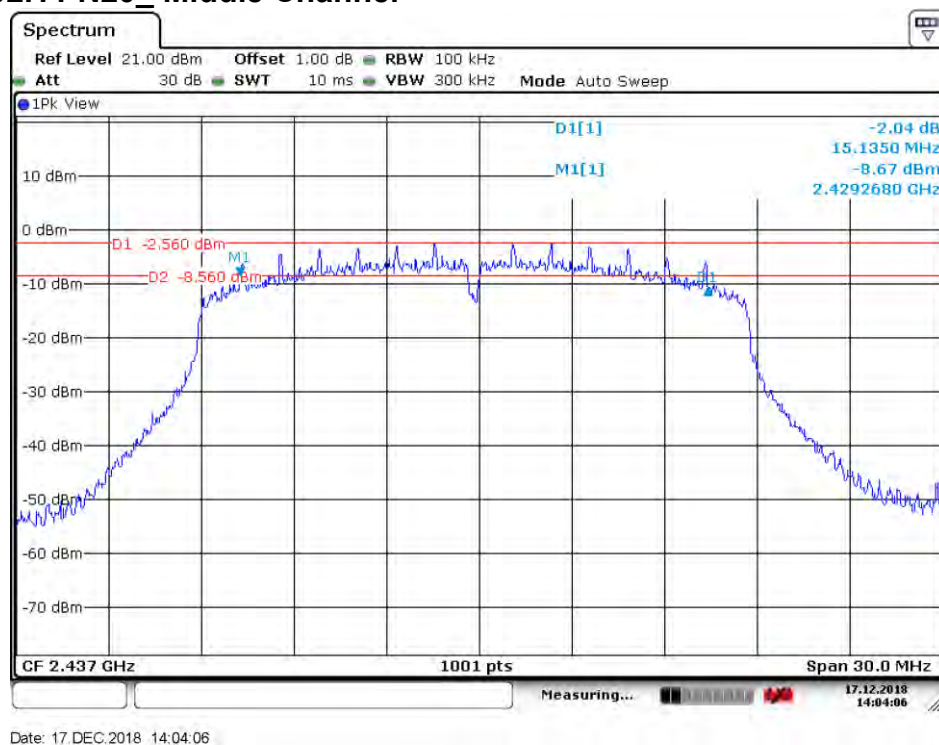


4.5.2.1.9 802.11 N20_ Highest Channel

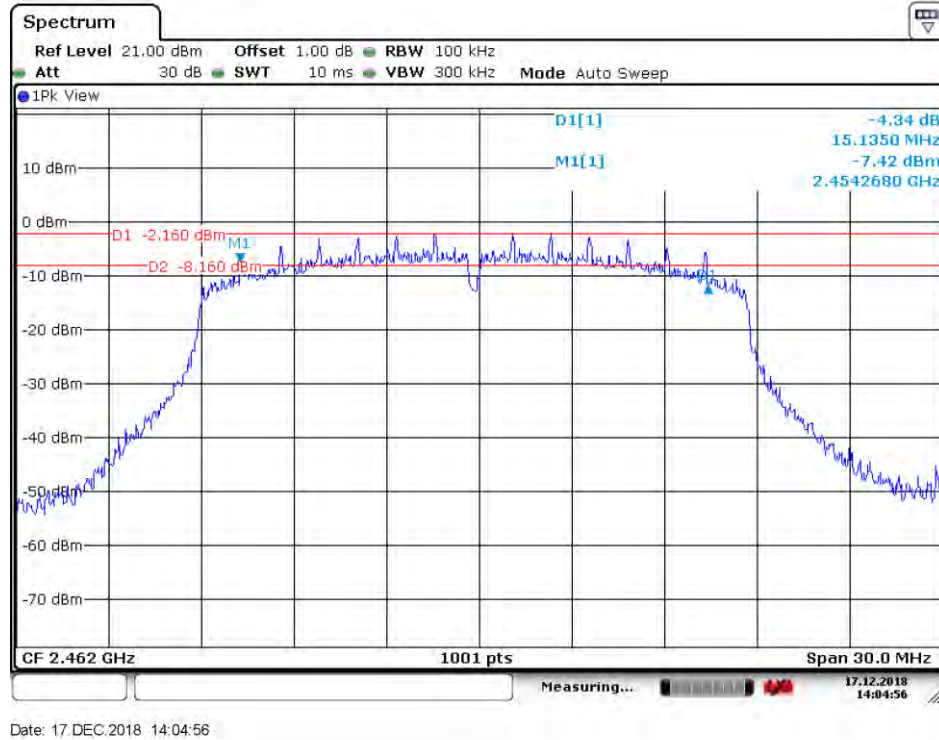


4.5.2.1.10 802.11G_CDD_Lowest Channel

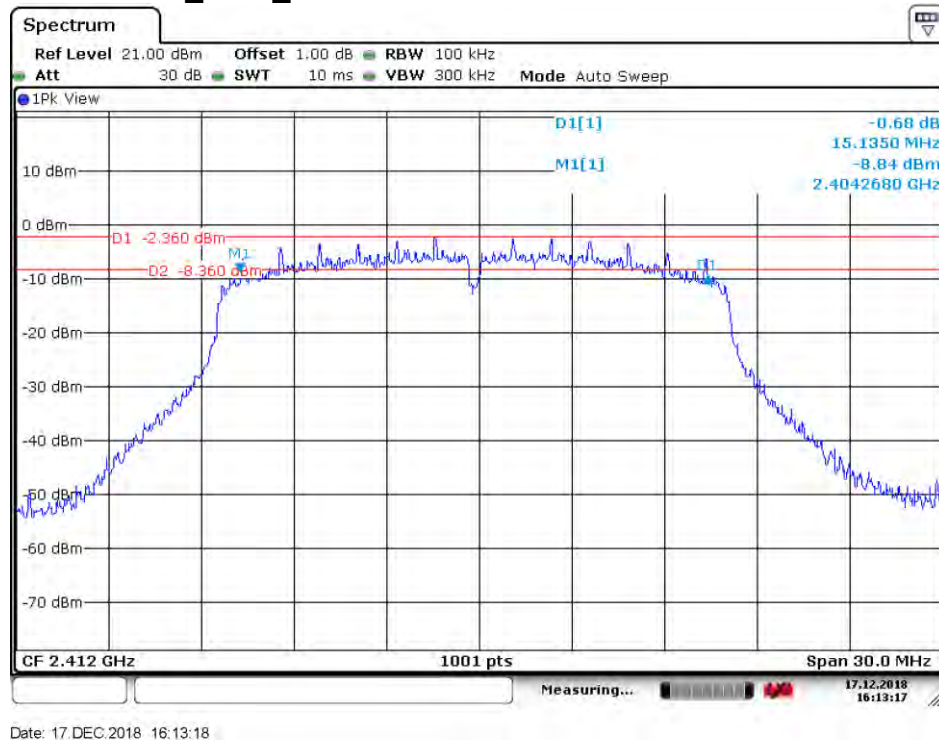


4.5.2.1.11 802.11G_CDD _ Middle Channel

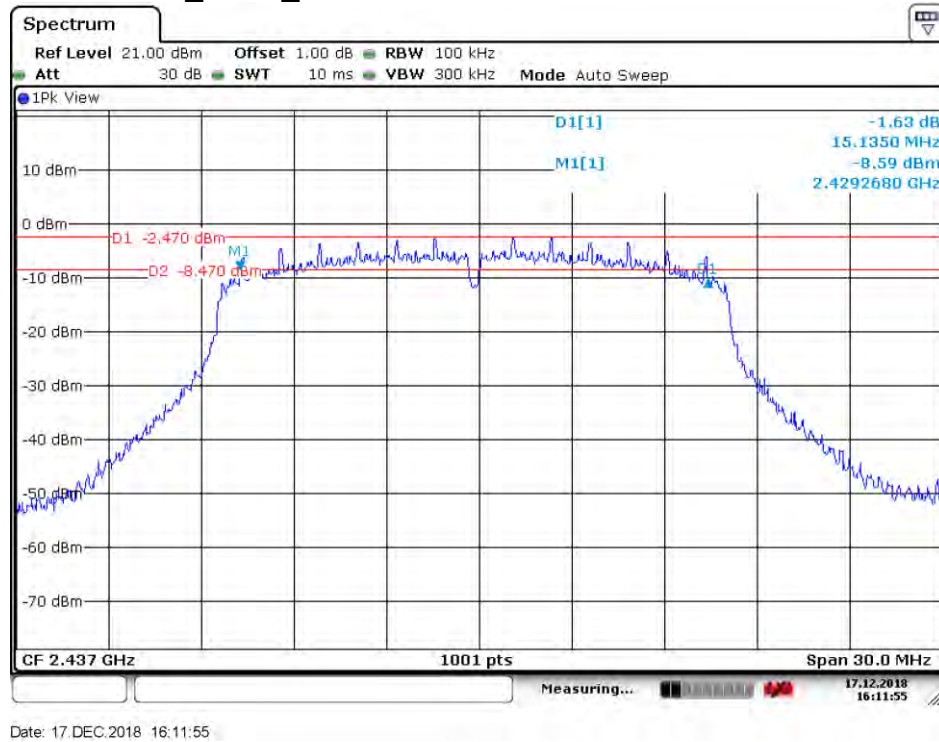


4.5.2.1.12 802.11G_CDD _ Highest Channel

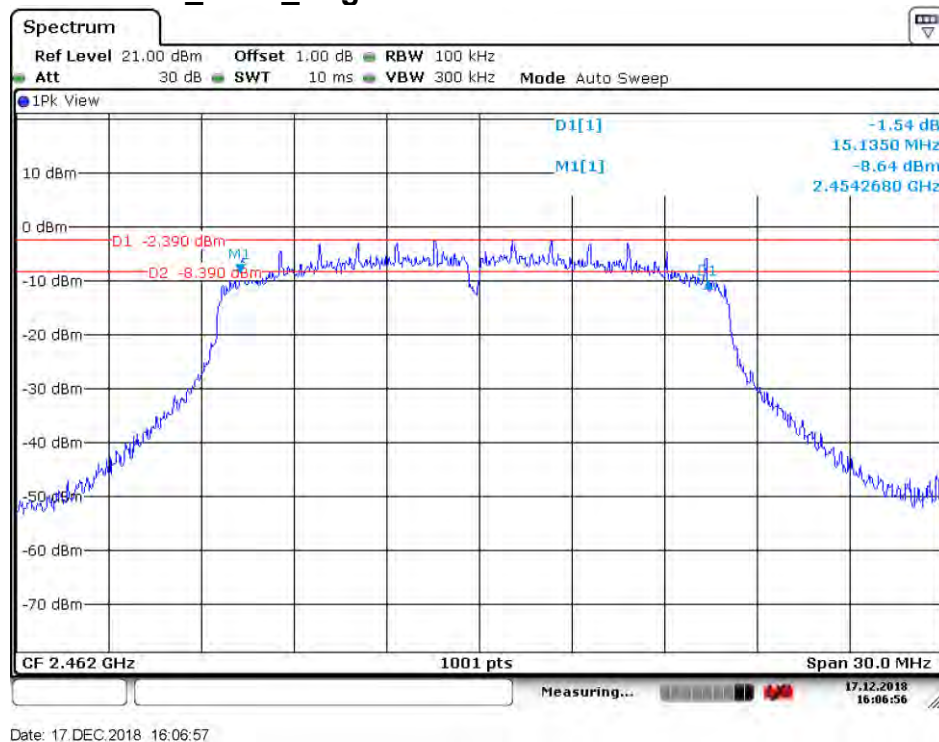


4.5.2.1.13 802.11N20_MIMO_Lowest Channel

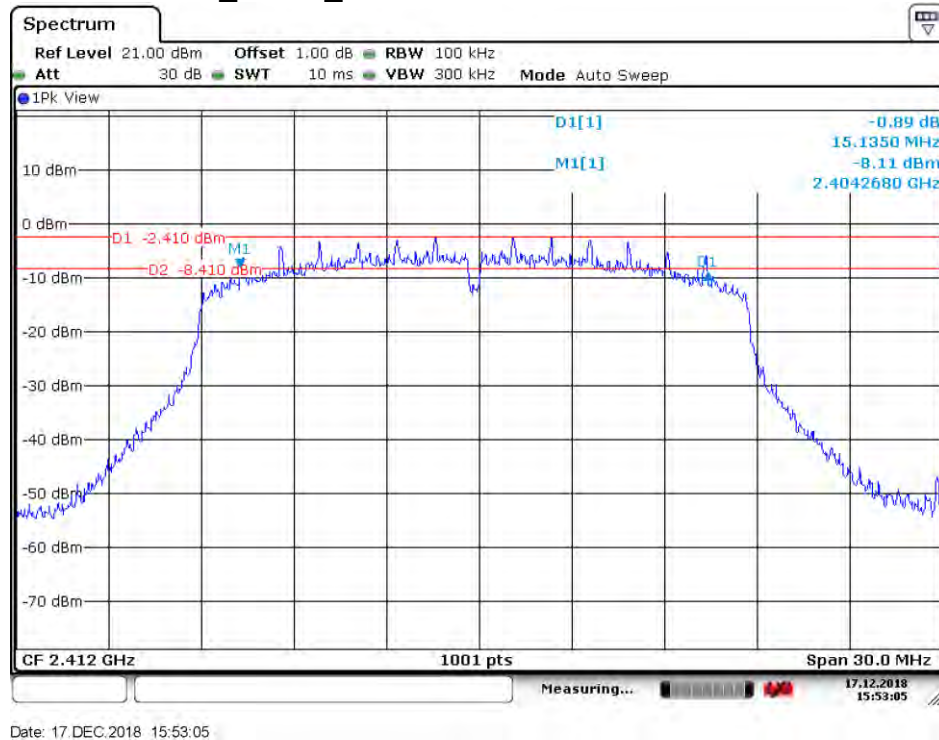

4.5.2.1.14 802.11N20_MIMO_Middle Channel

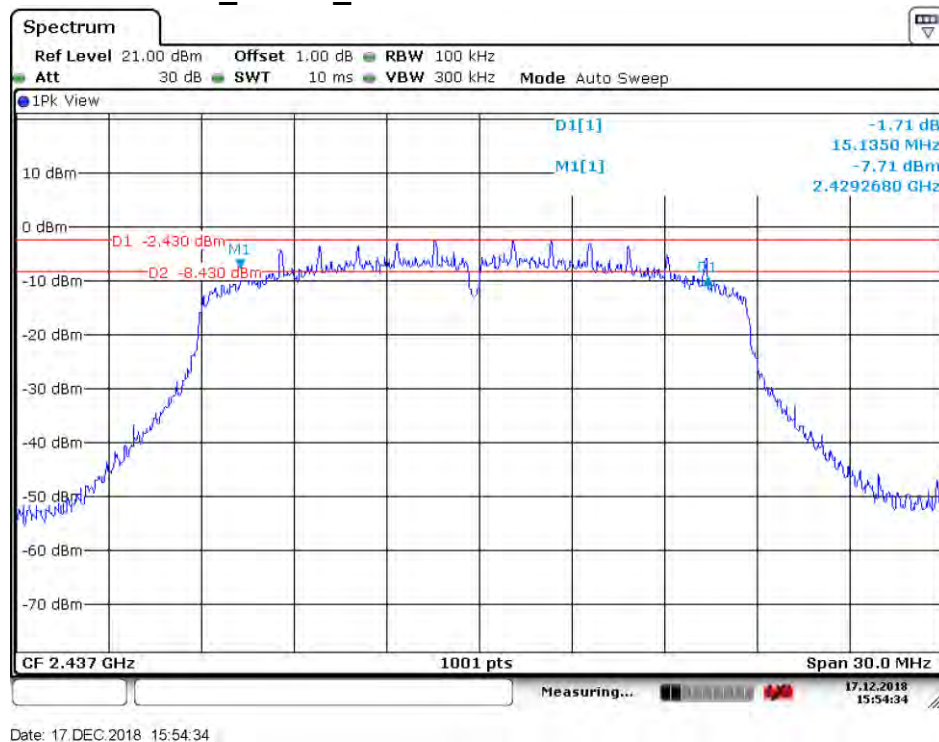


4.5.2.1.15 802.11N20_MIMO _ Highest Channel

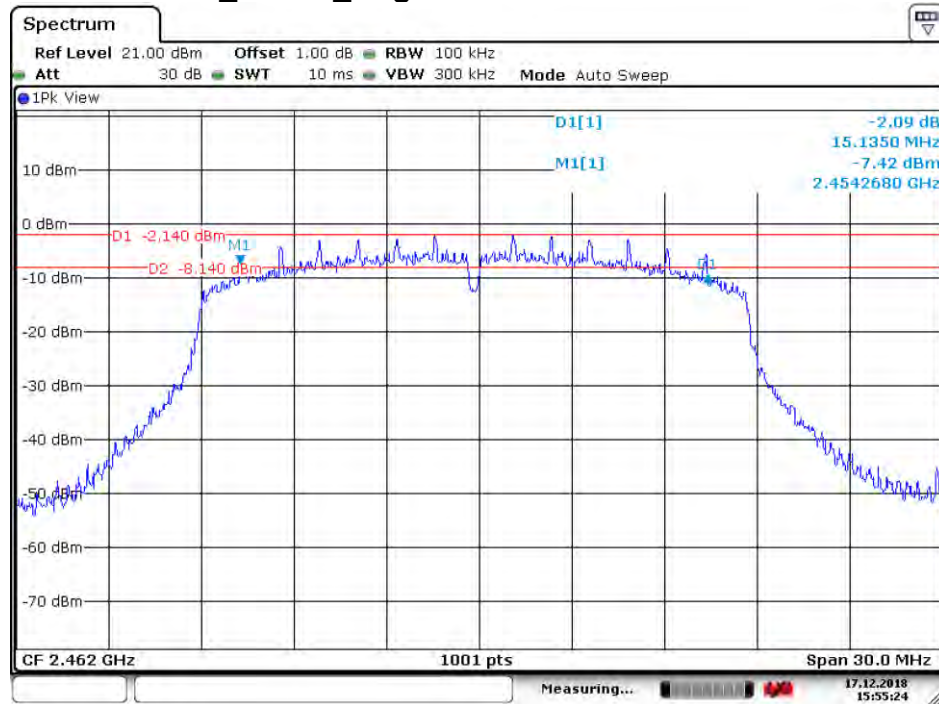

Date: 17 DEC. 2018 15:55:25


4.5.2.2 ANT2

4.5.2.2.1 802.11B_Lowest Channel

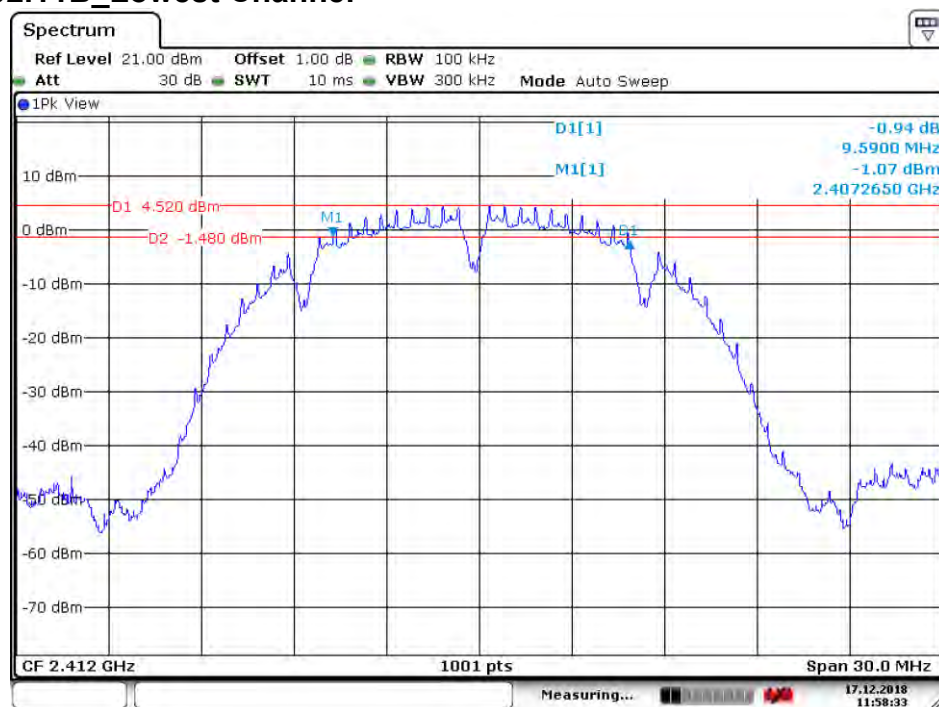


Date: 17 DEC. 2018 11:58:33


4.5.2.2.2 802.11B_ Middle Channel

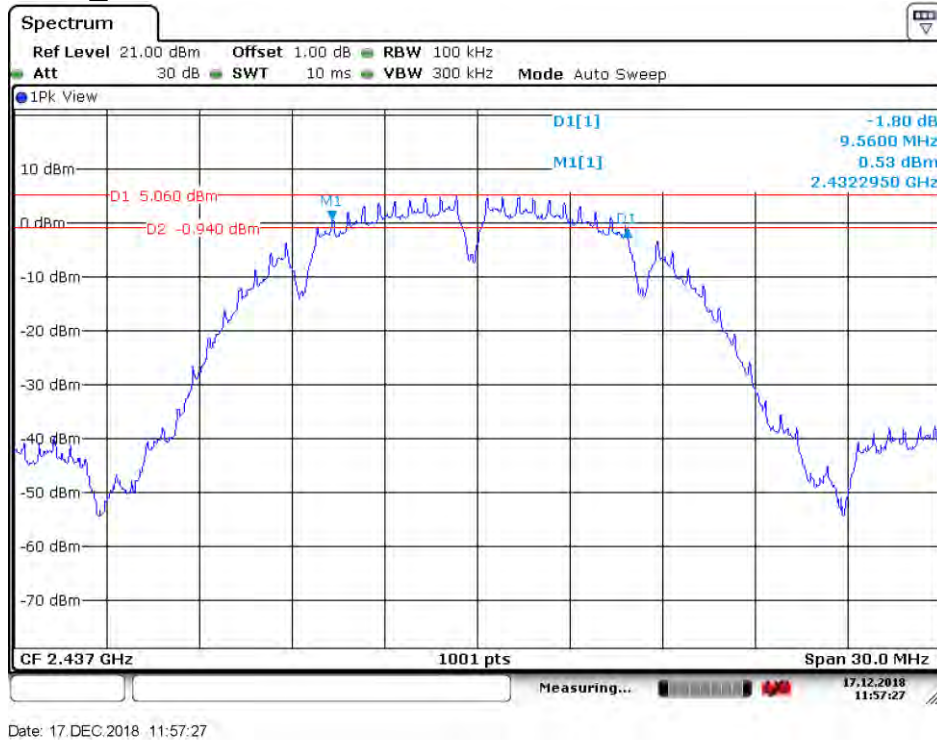

4.5.2.2.3 802.11B_ Highest Channel

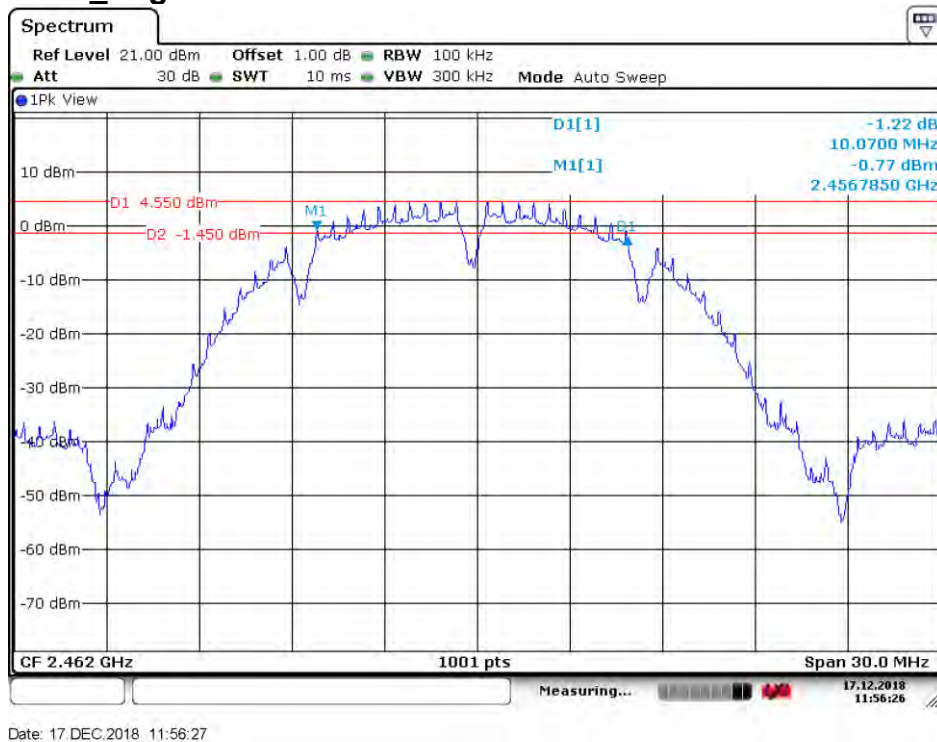


4.5.2.2.4 802.11G_Lowest Channel

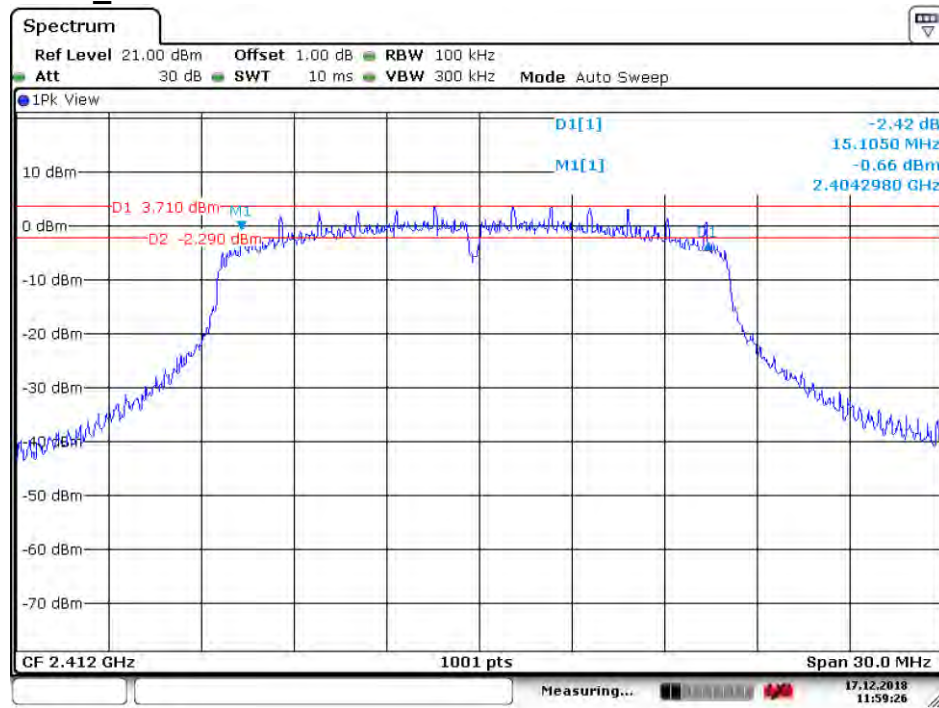


Date: 17 DEC 2018 11:59:26

4.5.2.2.5 802.11G_Middle Channel

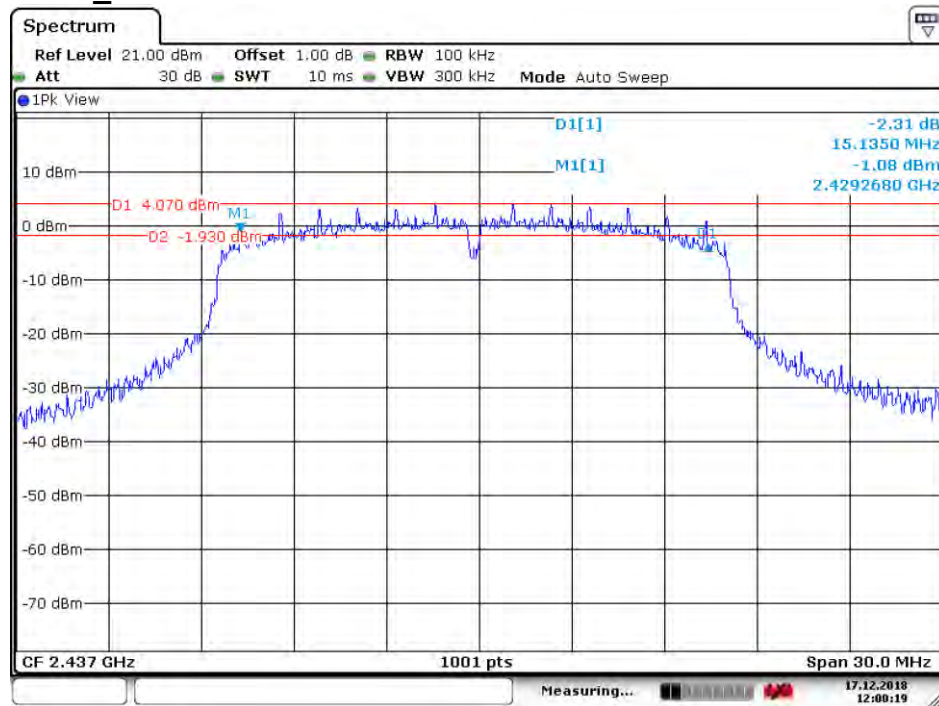


Date: 17 DEC 2018 12:00:19


4.5.2.2.6 802.11G_Highest Channel

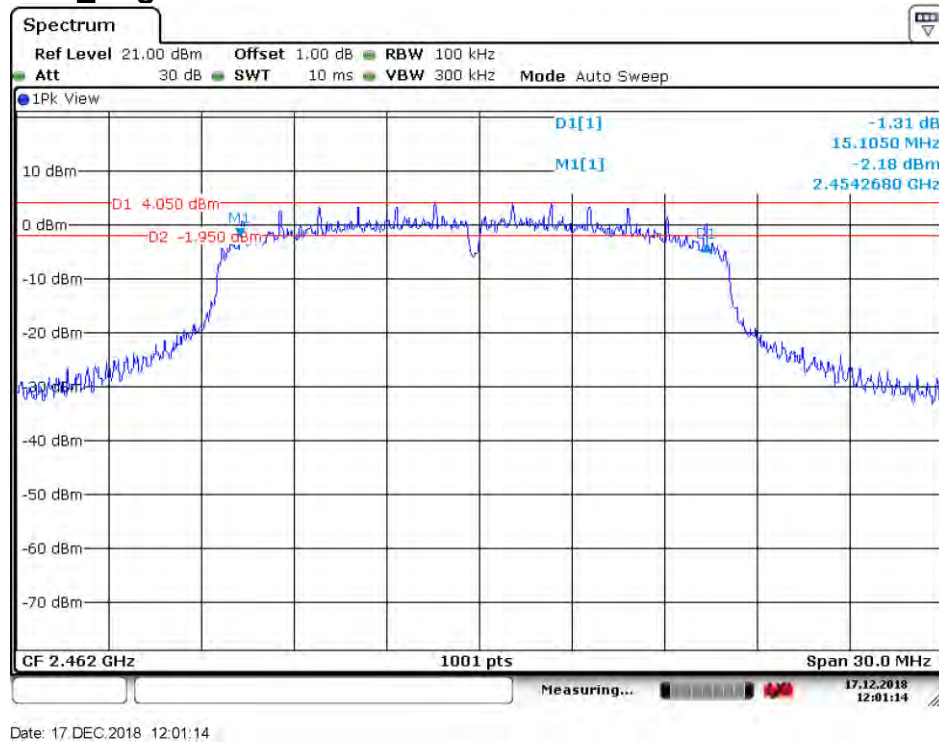


4.5.2.2.7 802.11N20_Lowest Channel

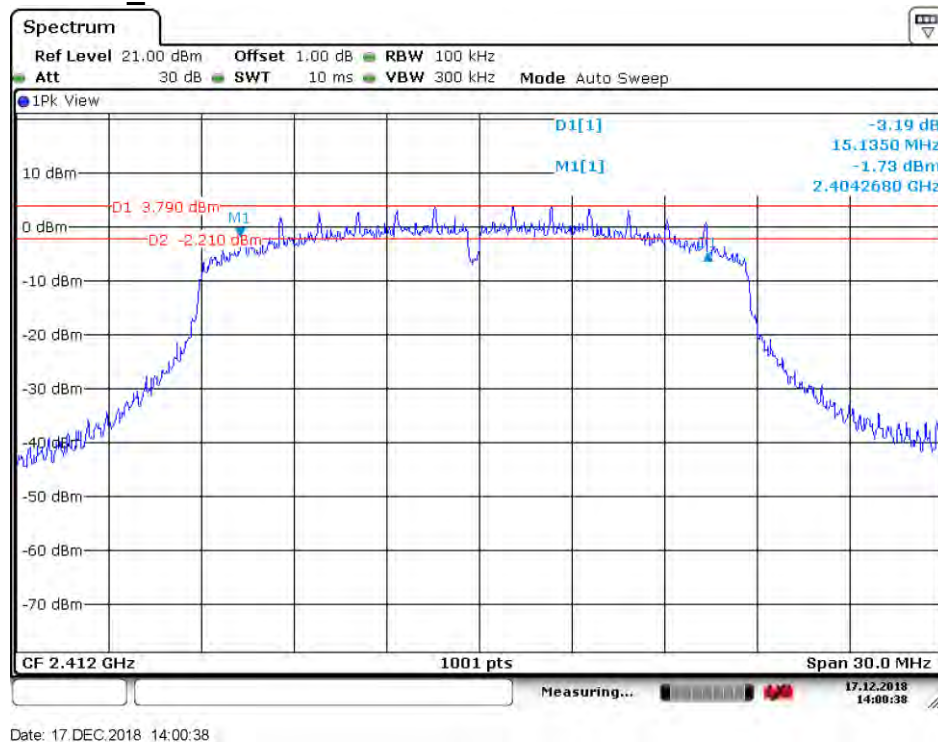


4.5.2.2.8 802.11 N20_ Middle Channel

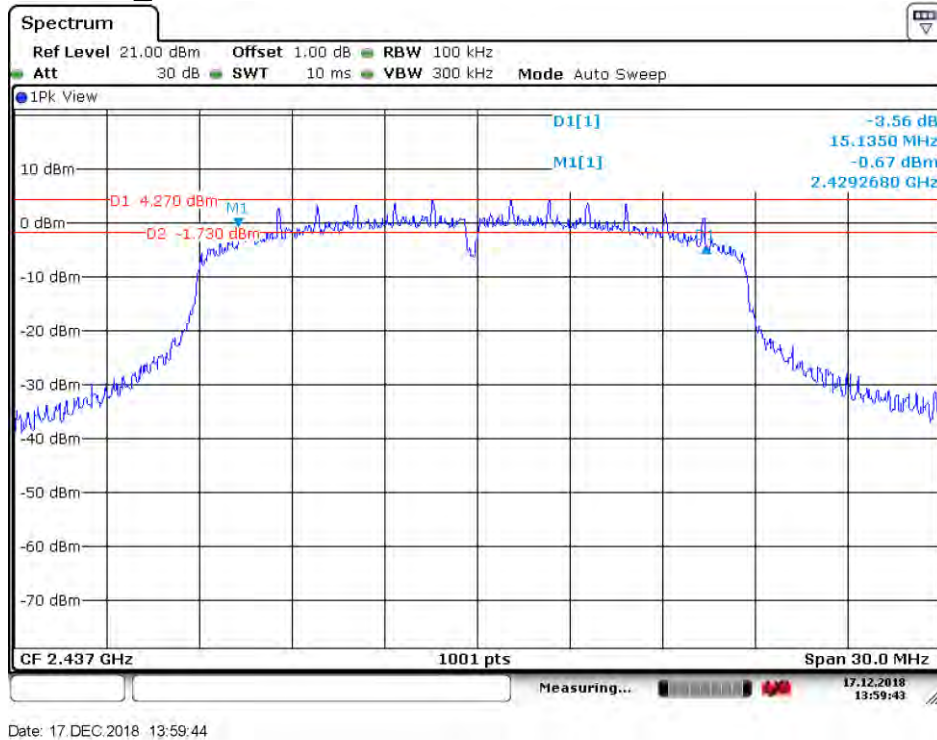

4.5.2.2.9 802.11 N20_ Highest Channel

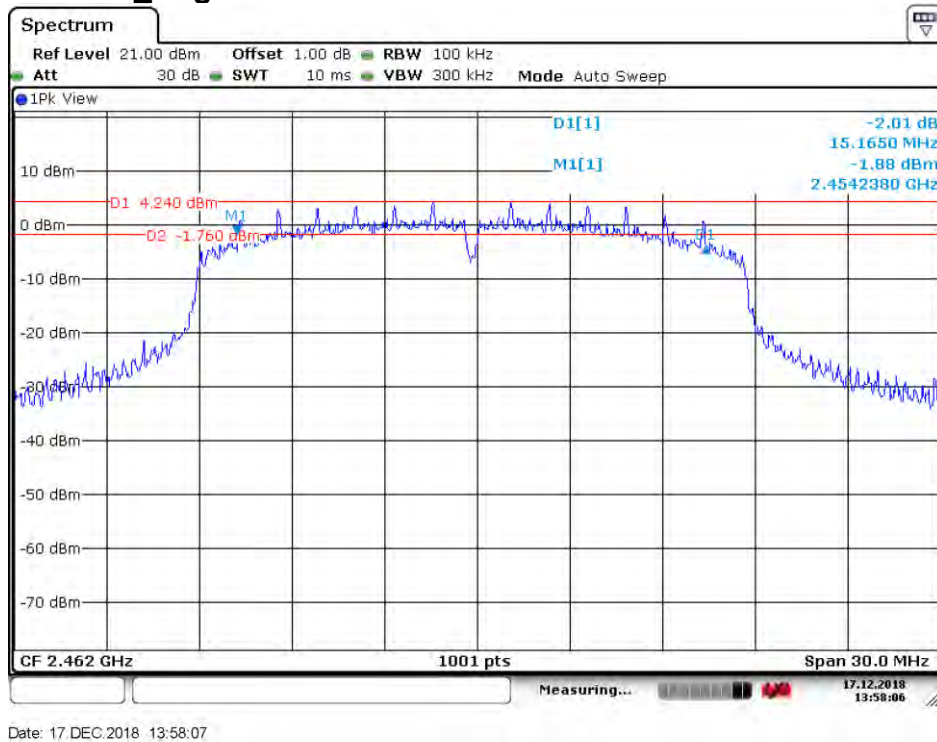


4.5.2.2.10 802.11G_CDD_Lowest Channel

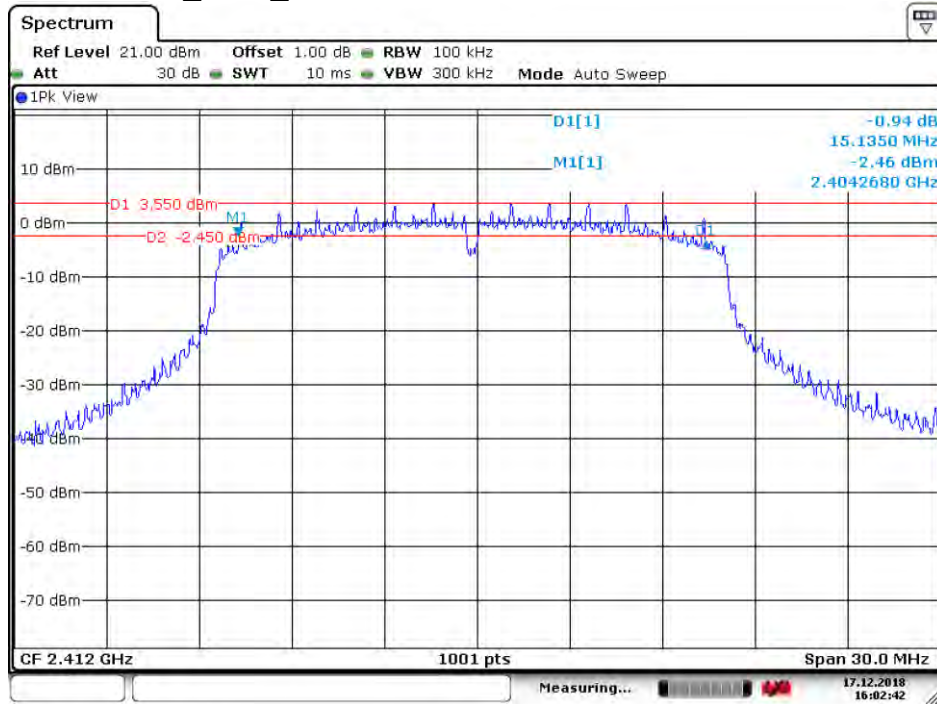


Date: 17 DEC 2018 16:02:42

4.5.2.2.11 802.11G_CDD_Middle Channel

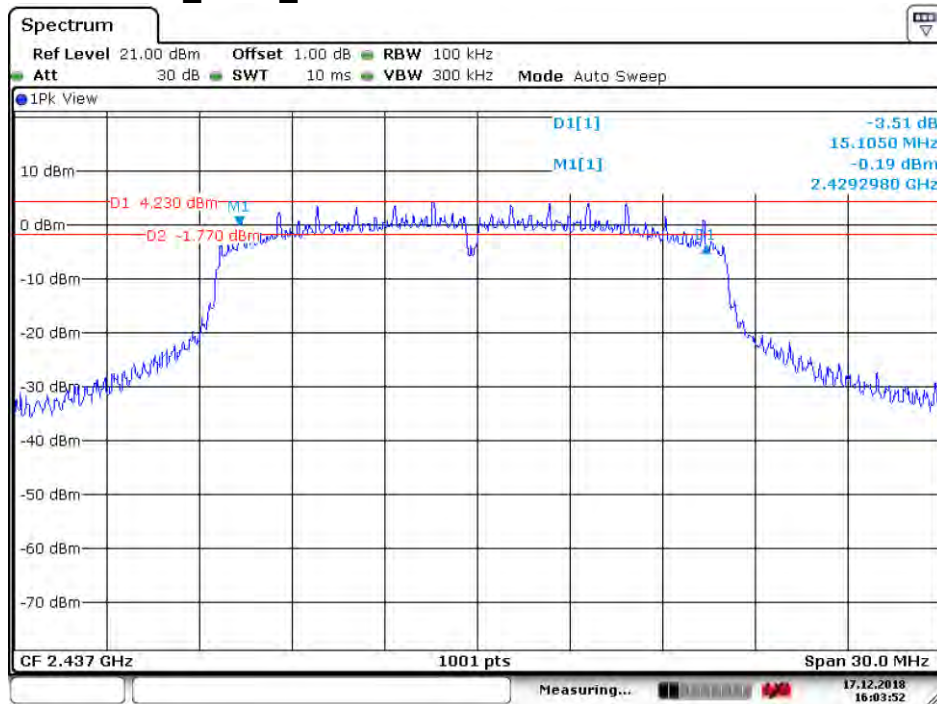


Date: 17 DEC 2018 16:03:52

4.5.2.2.12 802.11G_CDD _ Highest Channel

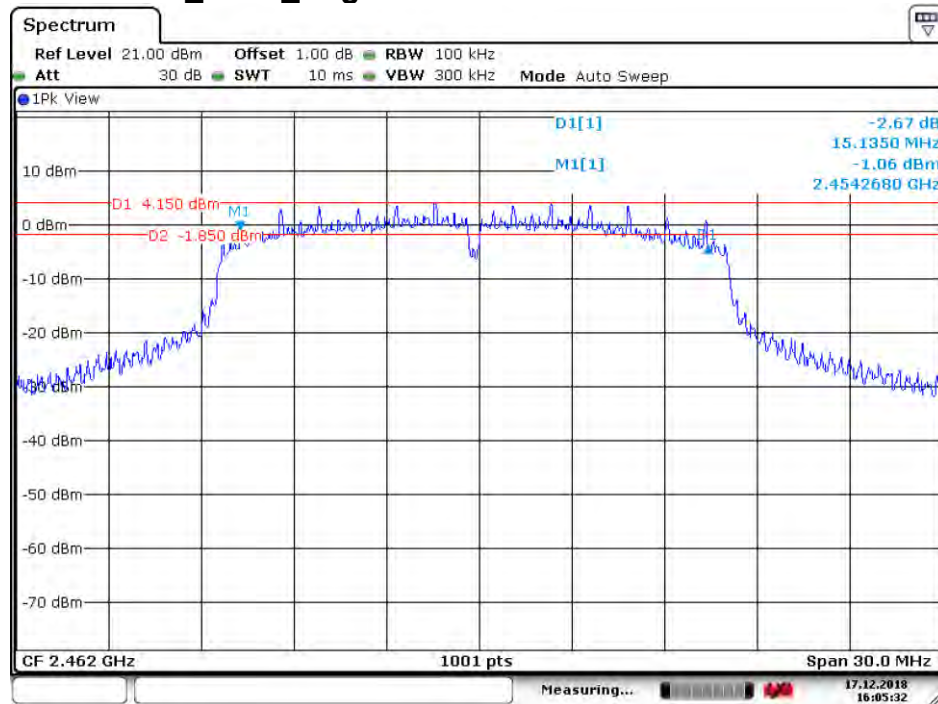


Date: 17 DEC 2018 16:05:33

4.5.2.2.13 802.11N20_MIMO_Lowest Channel

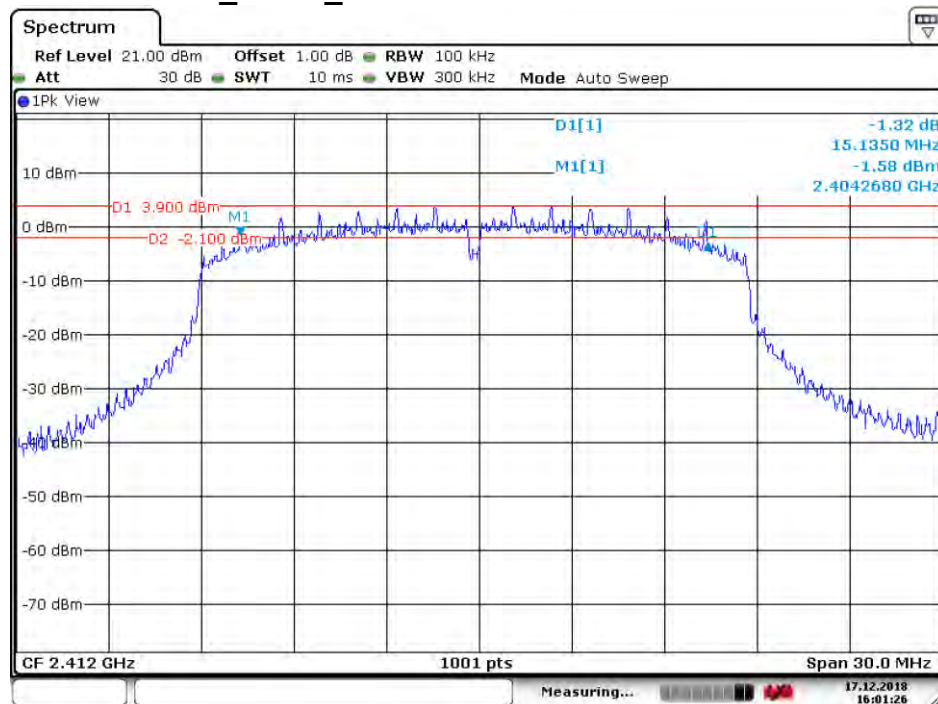


Date: 17 DEC 2018 16:01:26


4.5.2.2.14 802.11N20_MIMO _ Middle Channel

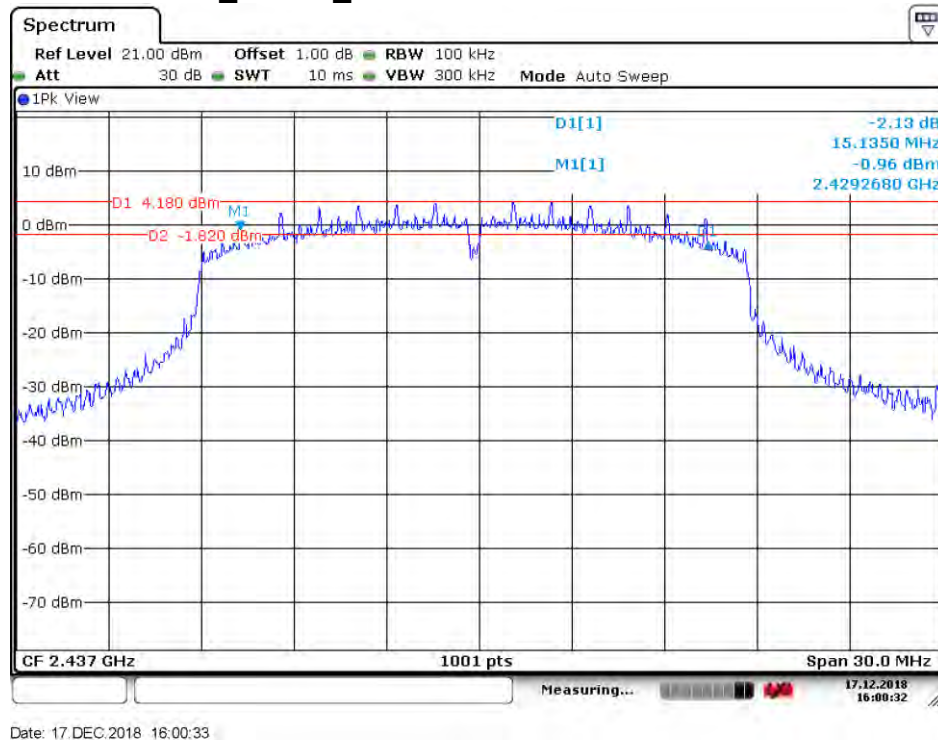

4.5.2.2.15 802.11N20_MIMO _ Highest Channel

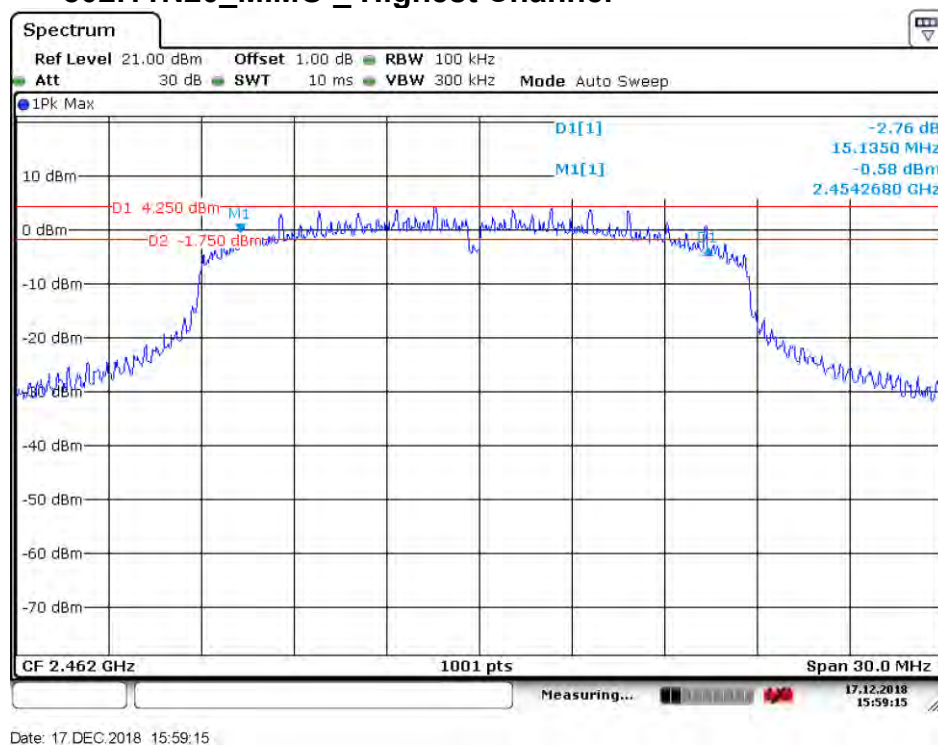

4.6 Power Spectral Density

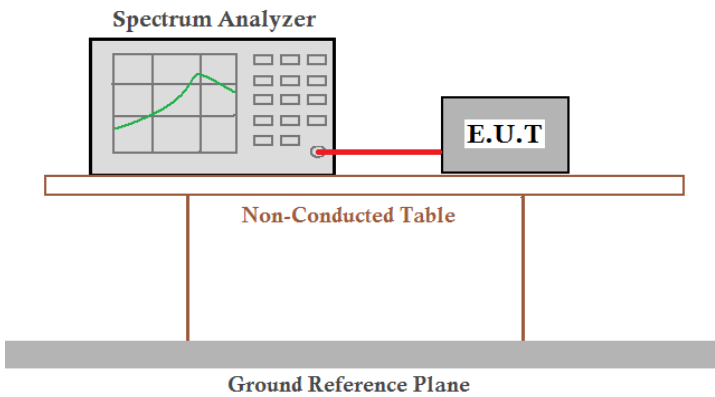Test Requirement:	47 CFR Part 15C Section 15.247 (e)
Test Method:	ANSI C63.10 :2013 Section 11.10.2
Test Setup:	
Test Instruments:	Refer to section 5.10 for details
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11B; 6Mbps of rate is the worst case of 802.11G ; 6.5Mbps of rate is the worst case of 802.11N(HT20);
Limit:	≤8.00dBm/3kHz
Test Results:	Pass


4.6.1 Test Results

Mode	Test Channel	Power Spectral Density (dBm/3kHz)		Limit (dBm/3kHz)	Result
		ANT 1	ANT 2		
802.11B	Lowest	-15.93	-9.65	≤8.00	Pass
	Middle	-16.00	-8.76	≤8.00	Pass
	Highest	-15.70	-9.22	≤8.00	Pass
802.11G	Lowest	-15.83	-9.71	≤8.00	Pass
	Middle	-16.26	-9.40	≤8.00	Pass
	Highest	-16.05	-9.08	≤8.00	Pass
802.11N20	Lowest	-16.77	-9.71	≤8.00	Pass
	Middle	-16.54	-9.96	≤8.00	Pass
	Highest	-16.29	-9.84	≤8.00	Pass
802.11G_CDD	Lowest	-15.78	-9.33	≤8.00	Pass
	Middle	-16.06	-8.93	≤8.00	Pass
	Highest	-15.77	-9.05	≤8.00	Pass
802.11N20_MIMO	Lowest	-15.83	-9.19	≤8.00	Pass
	Middle	-15.91	-9.06	≤8.00	Pass
	Highest	-15.59	-8.59	≤8.00	Pass


4.6.2 Test plots

4.6.2.1 ANT1


4.6.2.1.1 802.11B_Lowest Channel

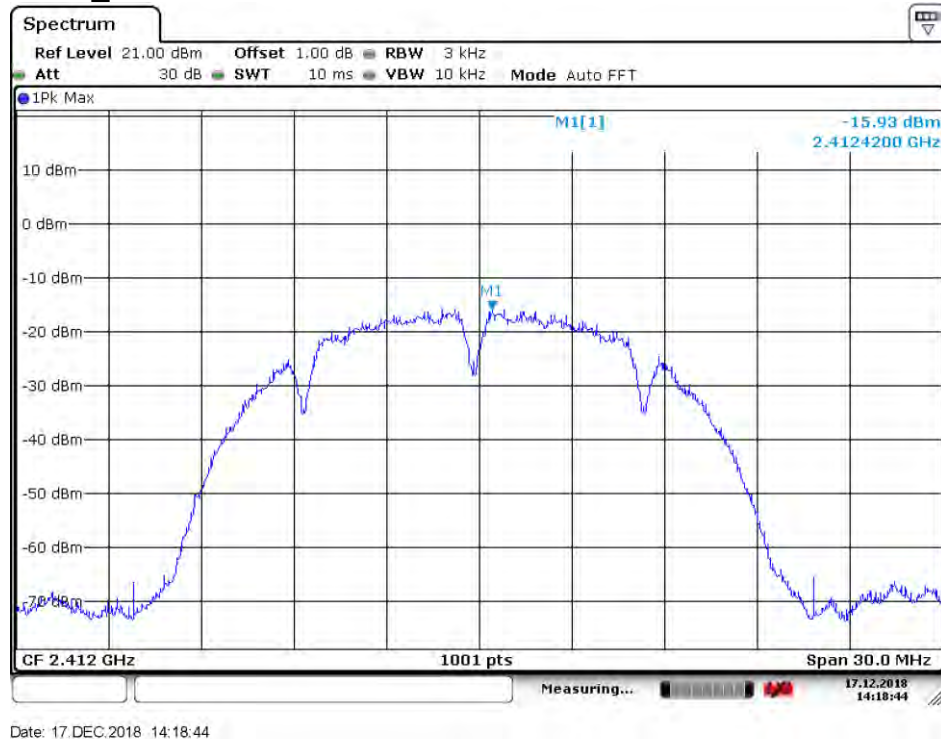


4.6.2.1.2 802.11B_Middle Channel

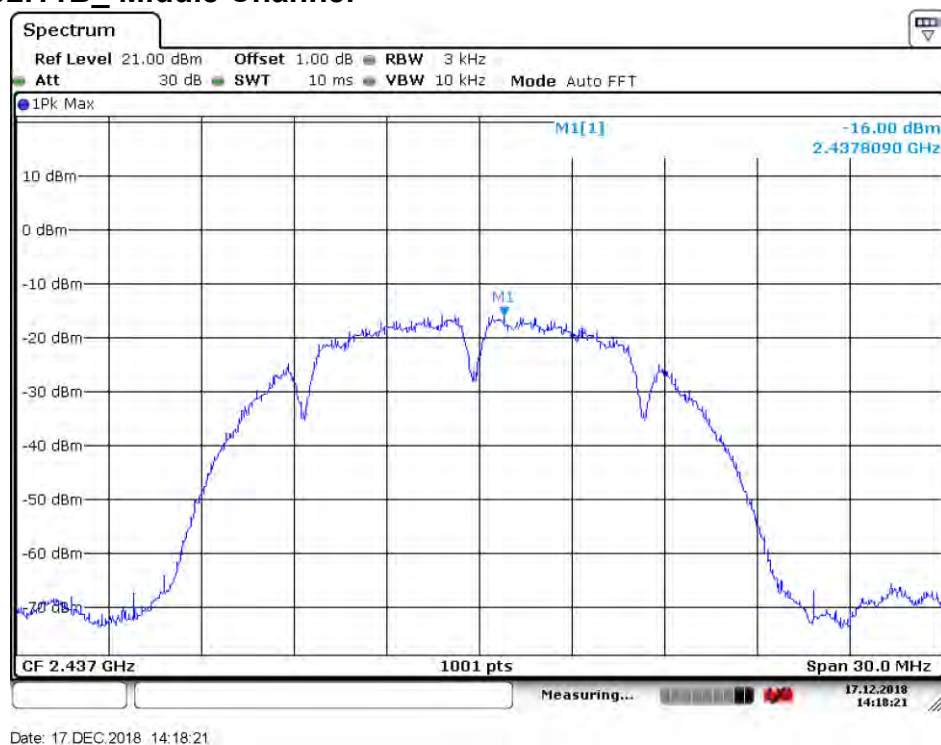


4.6.2.1.3 802.11B_Highest Channel

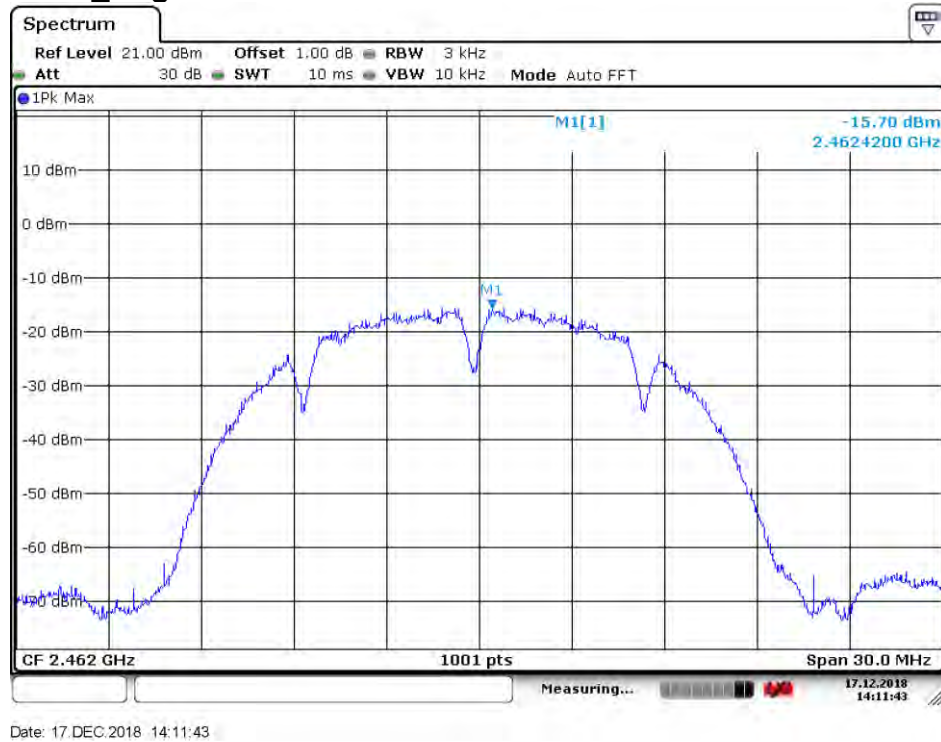


4.6.2.1.4 802.11G_Lowest Channel

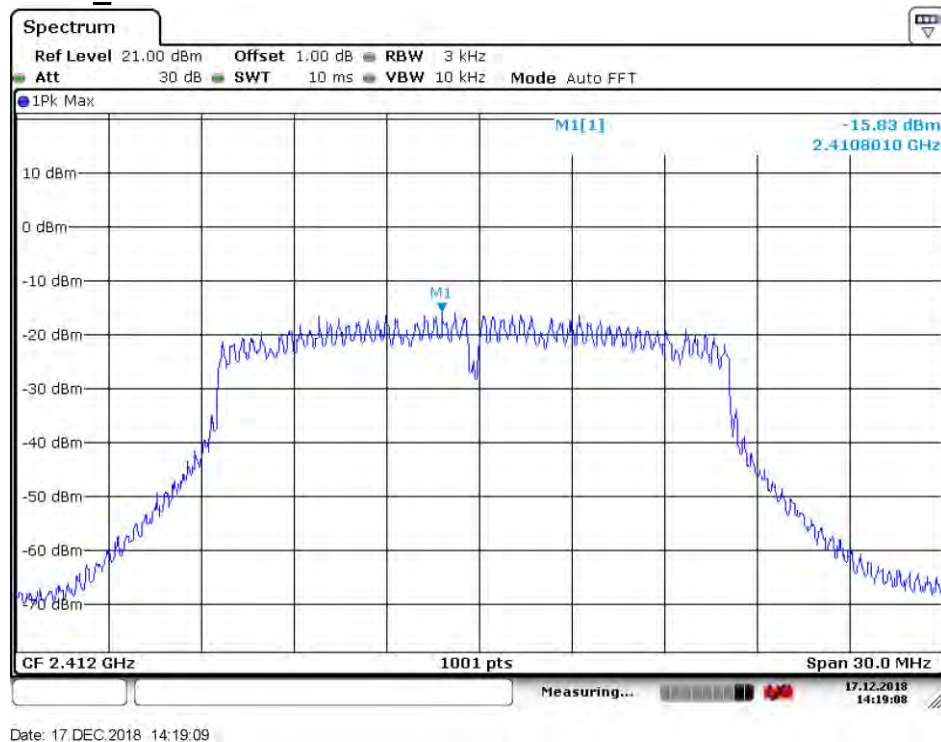


4.6.2.1.5 802.11G_ Middle Channel

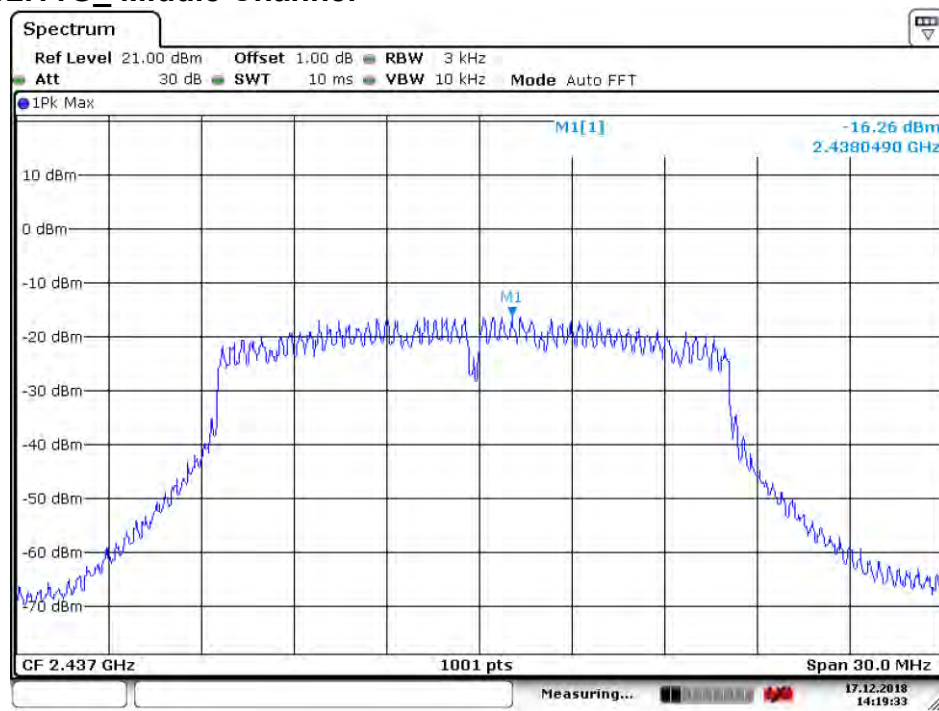

4.6.2.1.6 802.11G_ Highest Channel

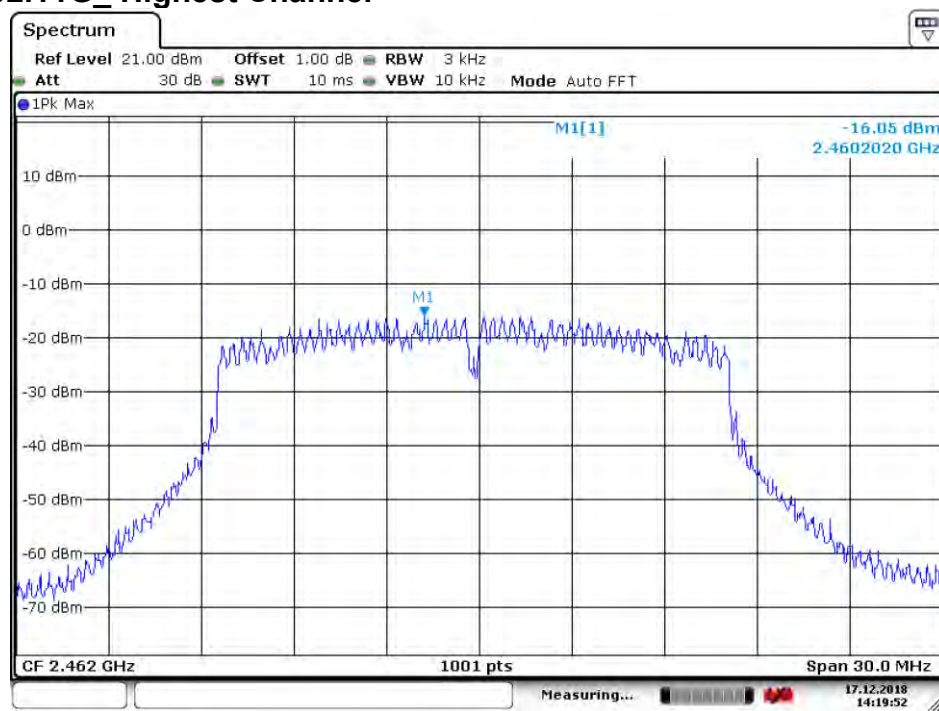


4.6.2.1.7 802.11N20_Lowest Channel

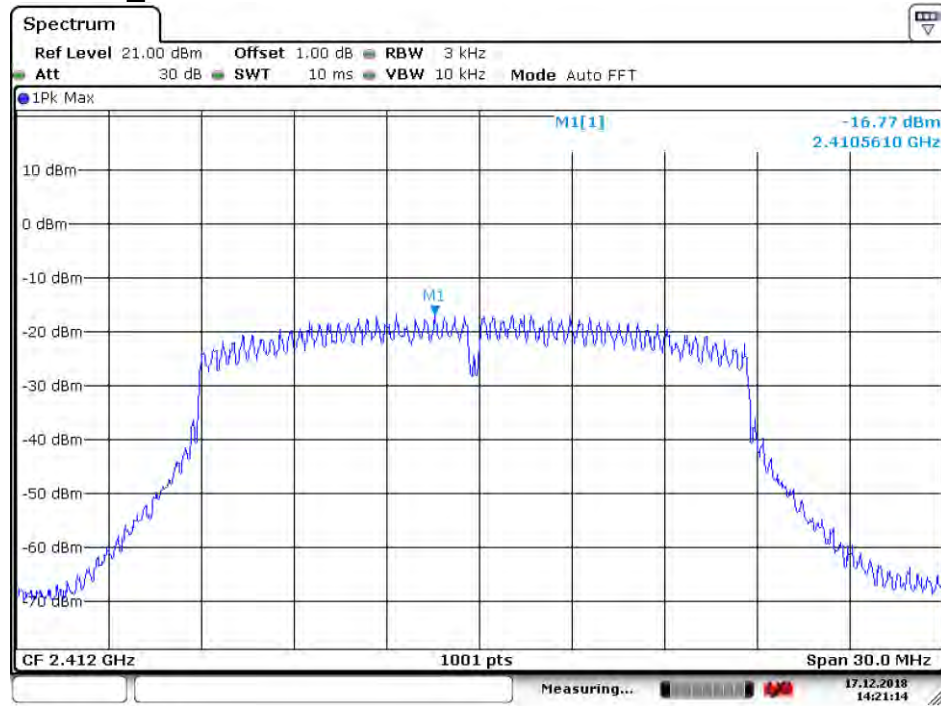


Date: 17.DEC.2018 14:21:14

4.6.2.1.8 802.11 N20_Middle Channel

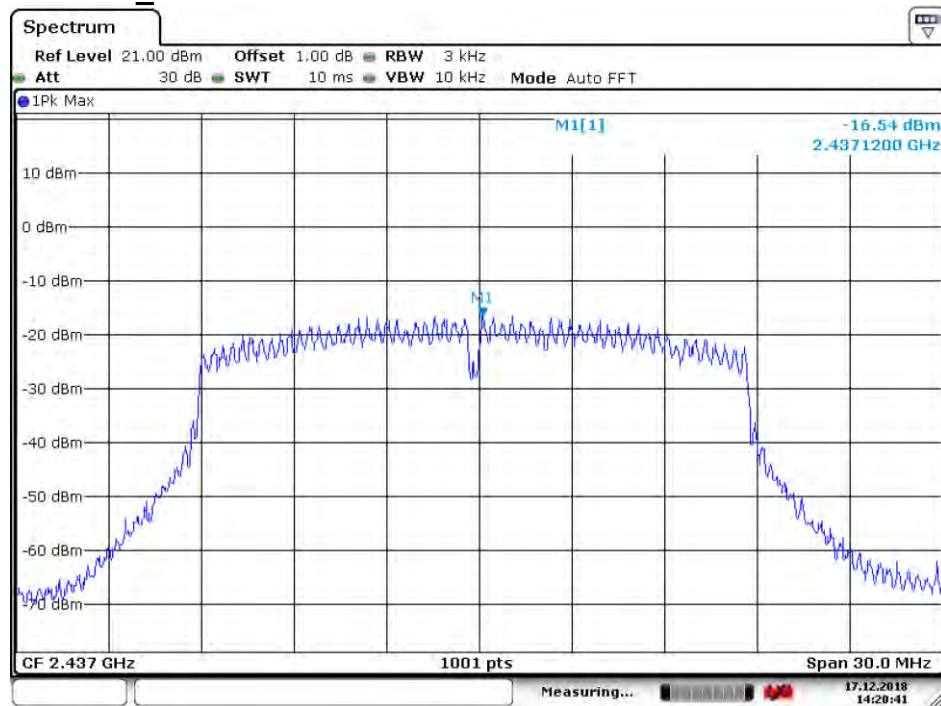


Date: 17.DEC.2018 14:20:41

4.6.2.1.9 802.11 N20_ Highest Channel

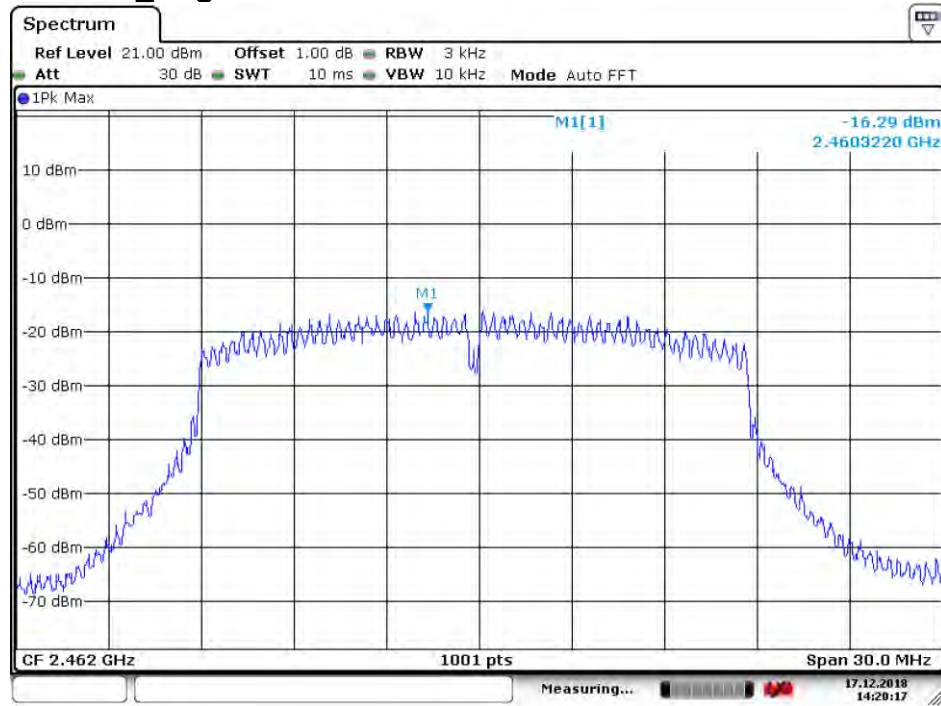


Date: 17 DEC. 2018 14:20:17

4.6.2.1.10 802.11G_CDD_Lowest Channel

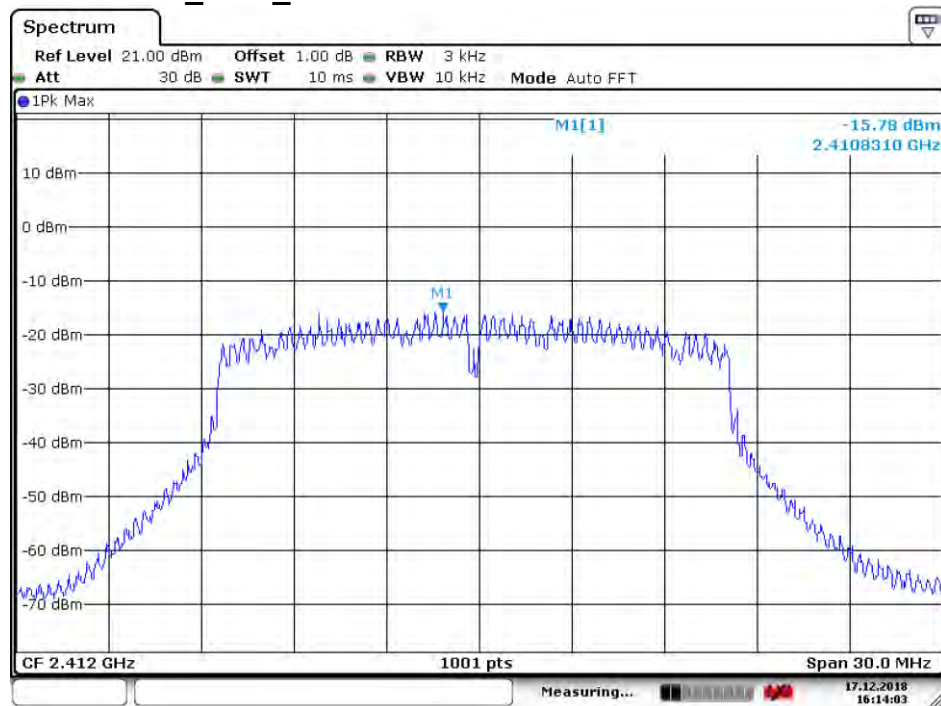


Date: 17 DEC. 2018 16:14:04

4.6.2.1.11 802.11G_CDD _ Middle Channel

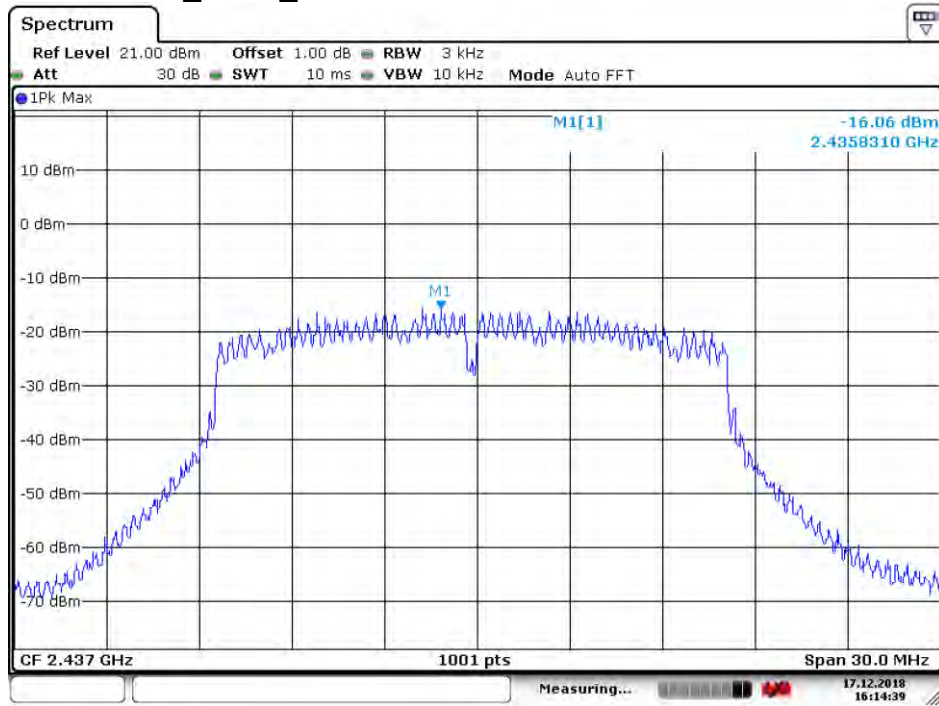


Date: 17.DEC.2018 16:14:38

4.6.2.1.12 802.11G_CDD _ Highest Channel

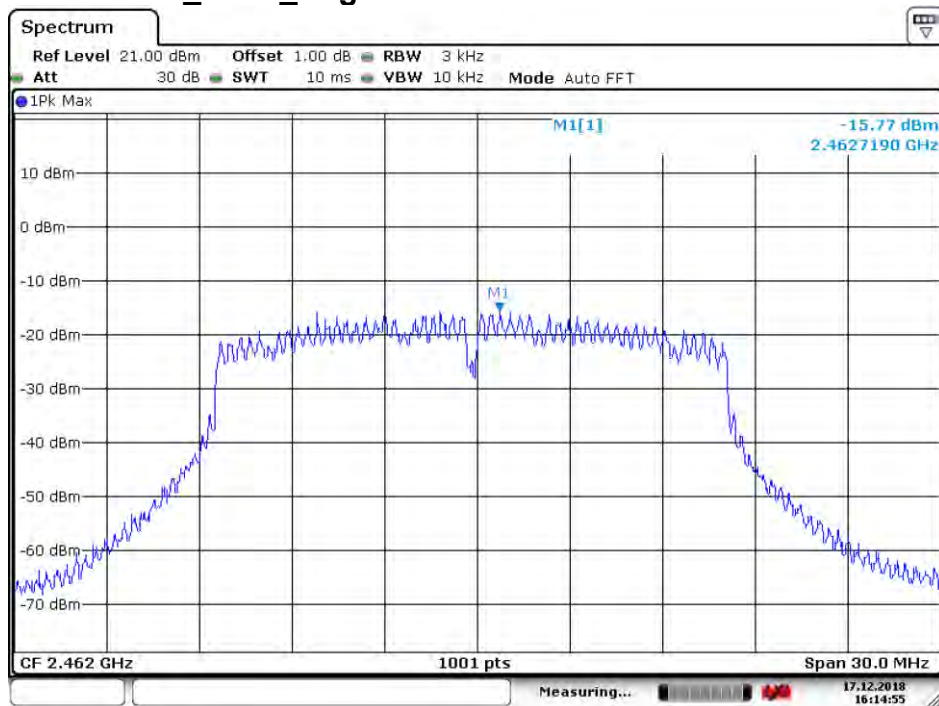


Date: 17.DEC.2018 16:14:55

4.6.2.1.13 802.11N20_MIMO_Lowest Channel

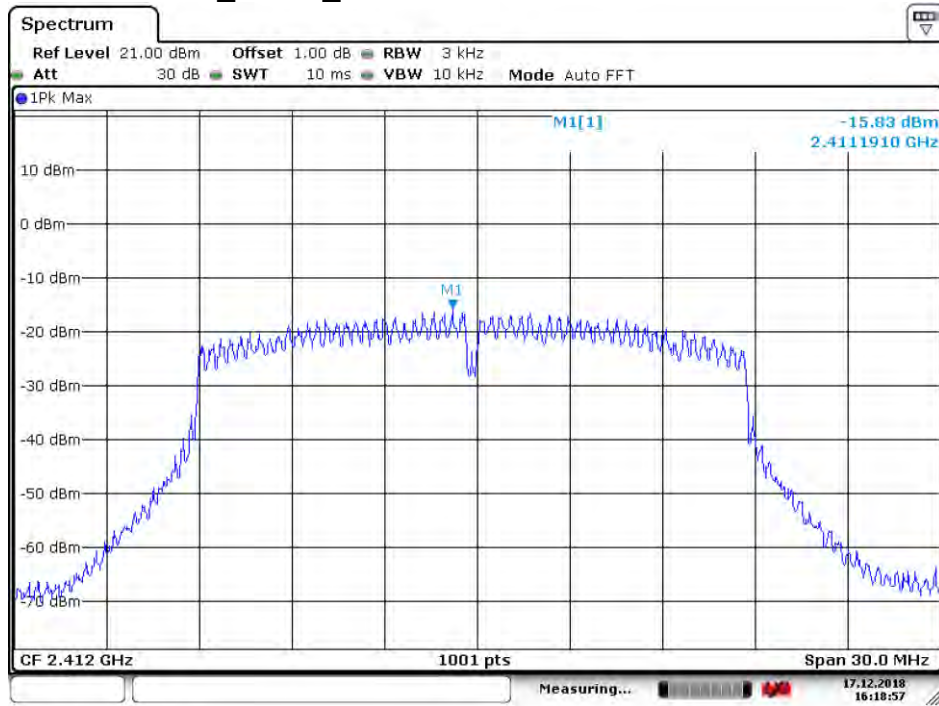


Date: 17 DEC. 2018 16:18:57

4.6.2.1.14 802.11N20_MIMO_Middle Channel

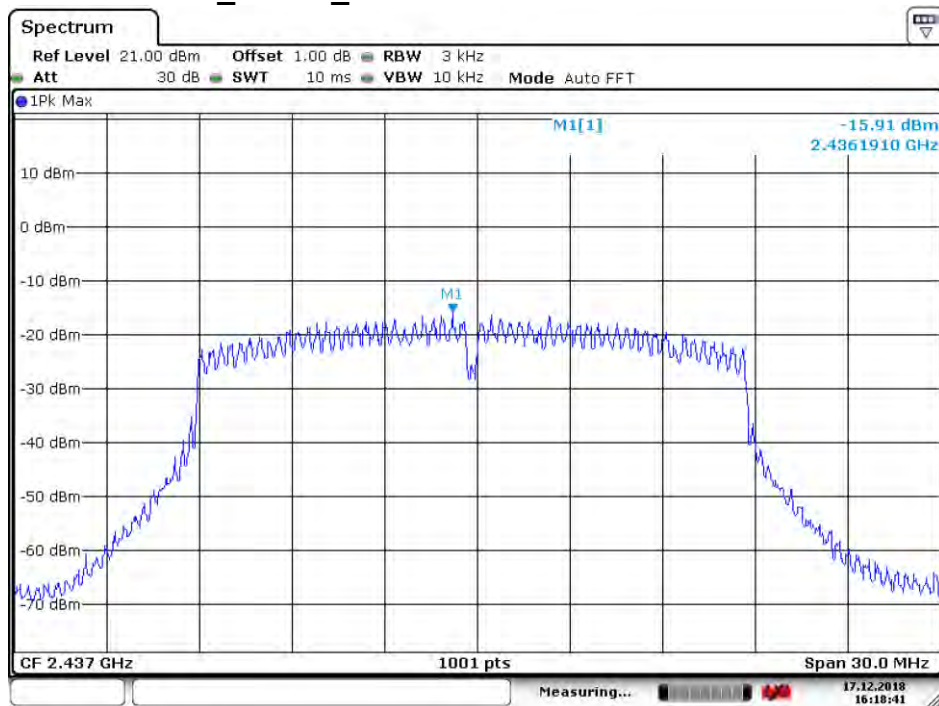

Date: 17 DEC. 2018 16:18:42


4.6.2.1.15 802.11N20_MIMO _ Highest Channel

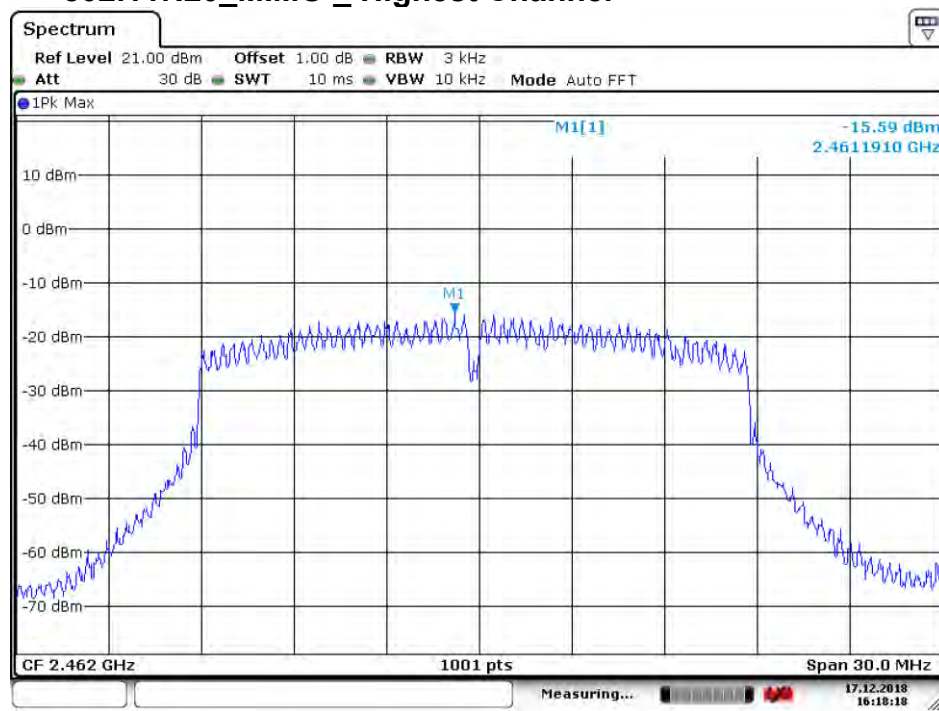

Date: 17.DEC.2018 16:18:18


4.6.2.2 ANT2

4.6.2.2.1 802.11B_Lowest Channel

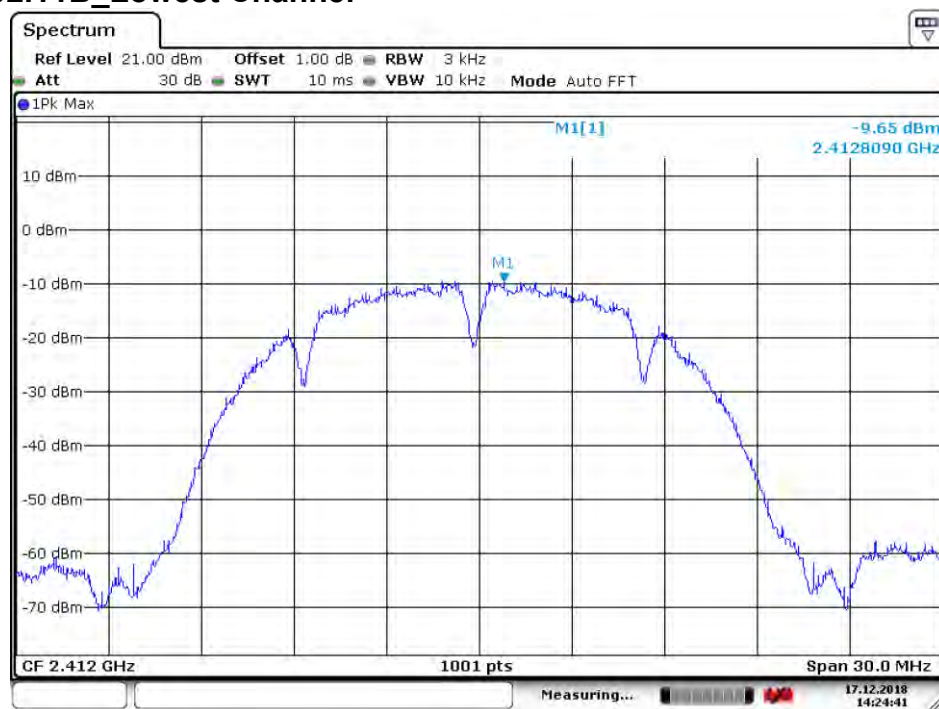


Date: 17.DEC.2018 14:24:41

4.6.2.2.2 802.11B_Middle Channel

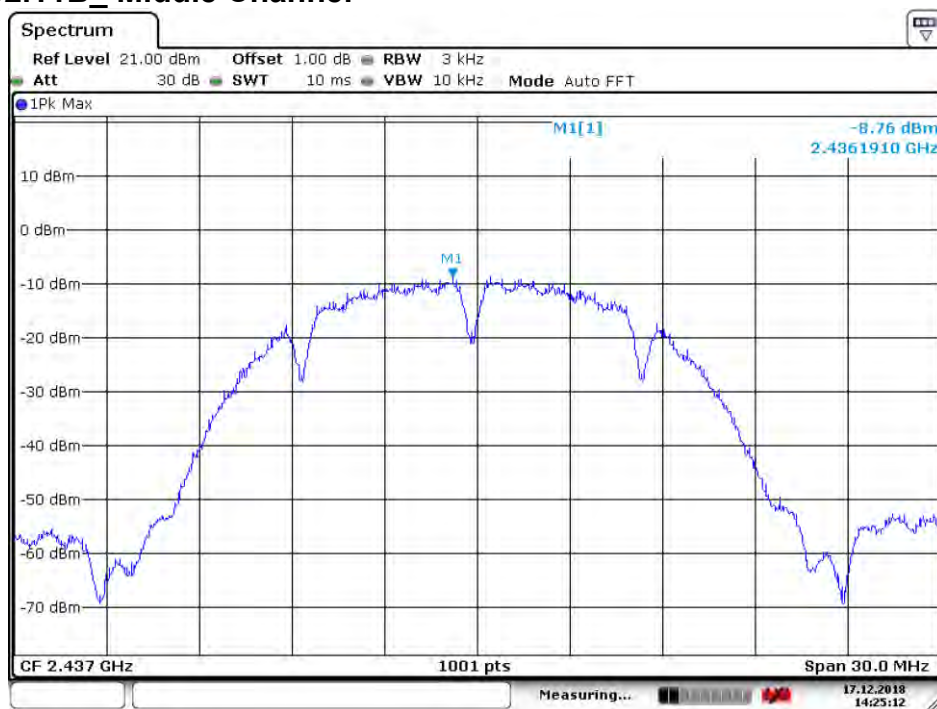


Date: 17. DEC. 2018 14:25:12

4.6.2.2.3 802.11B_Highest Channel

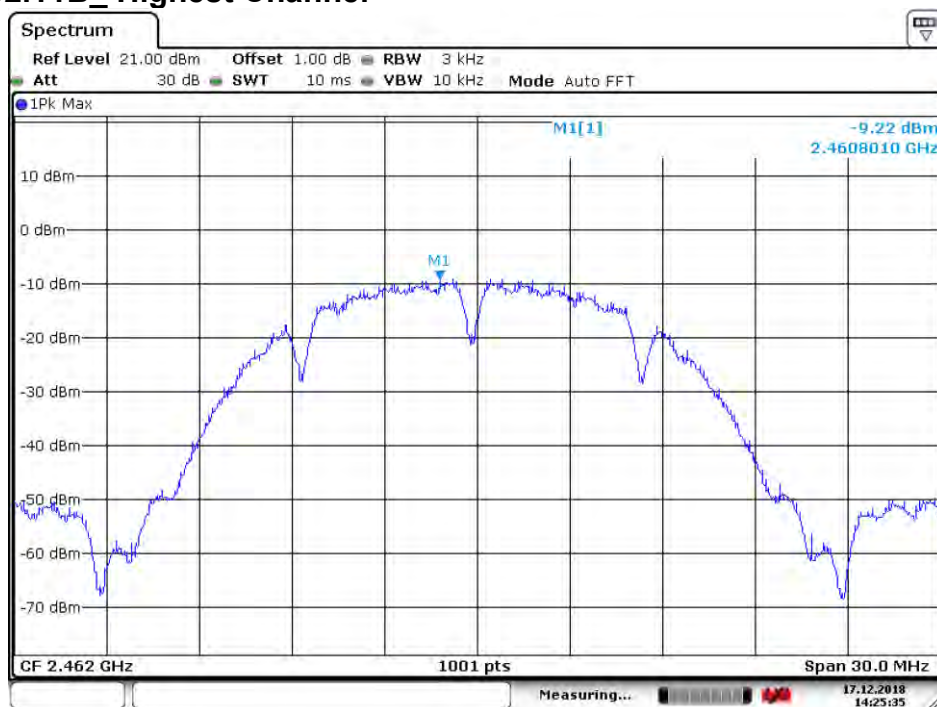


Date: 17. DEC. 2018 14:25:35

4.6.2.2.4 802.11G_Lowest Channel

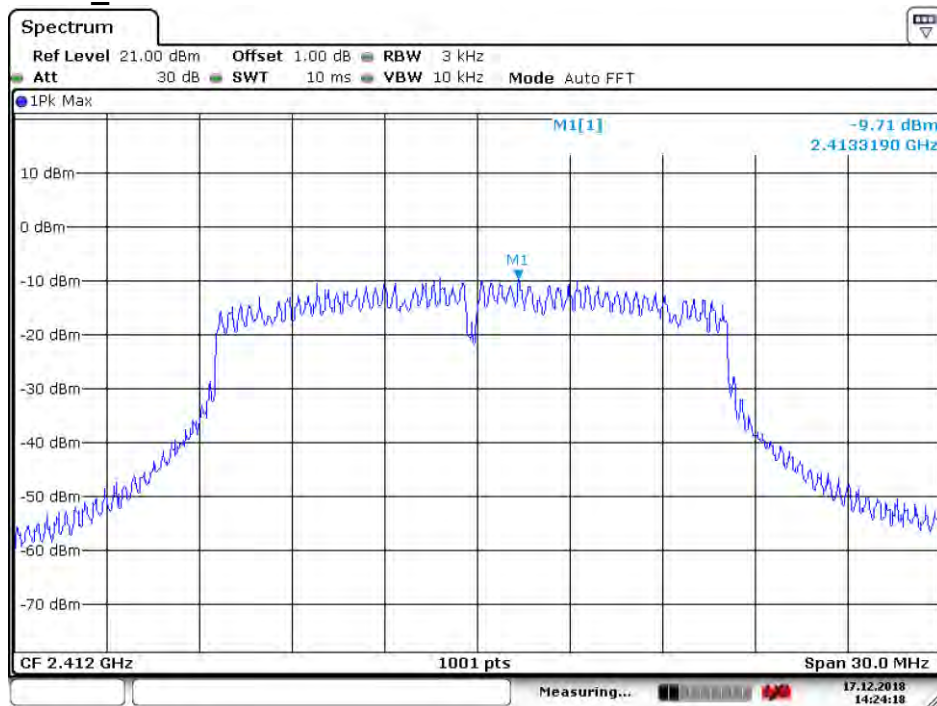


Date: 17. DEC. 2018 14:24:19

4.6.2.2.5 802.11G_Middle Channel

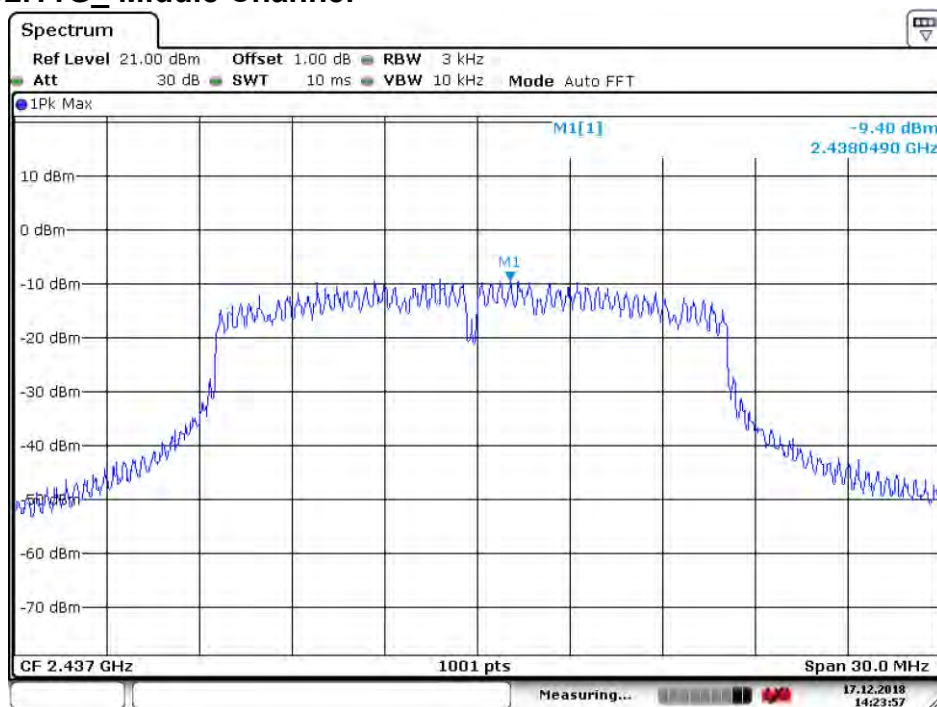


Date: 17. DEC. 2018 14:23:57

4.6.2.2.6 802.11G_Highest Channel

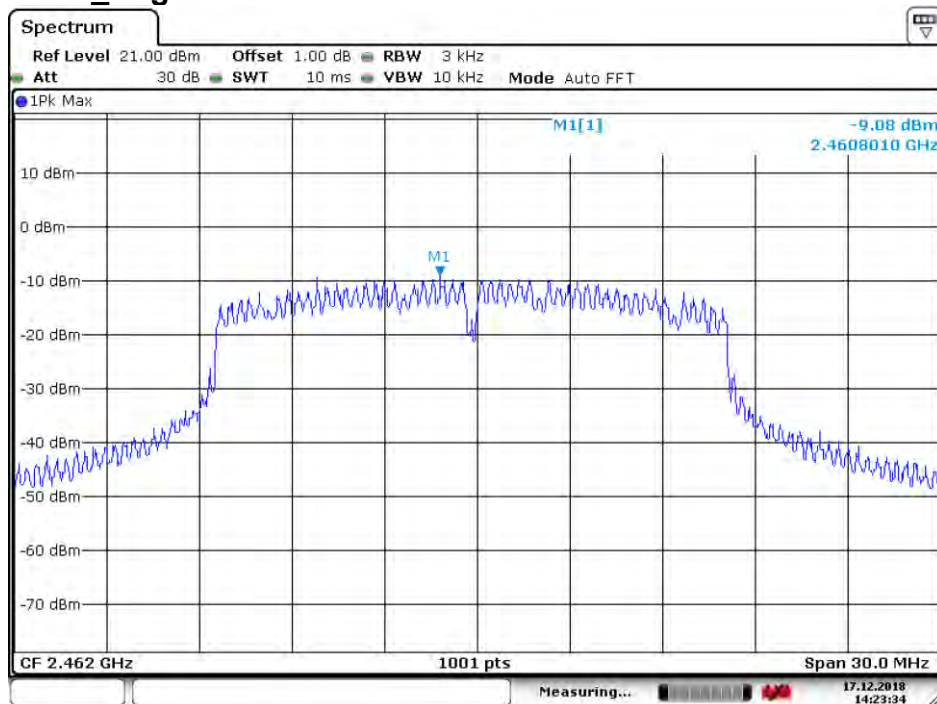


Date: 17 DEC. 2018 14:23:34

4.6.2.2.7 802.11N20_Lowest Channel

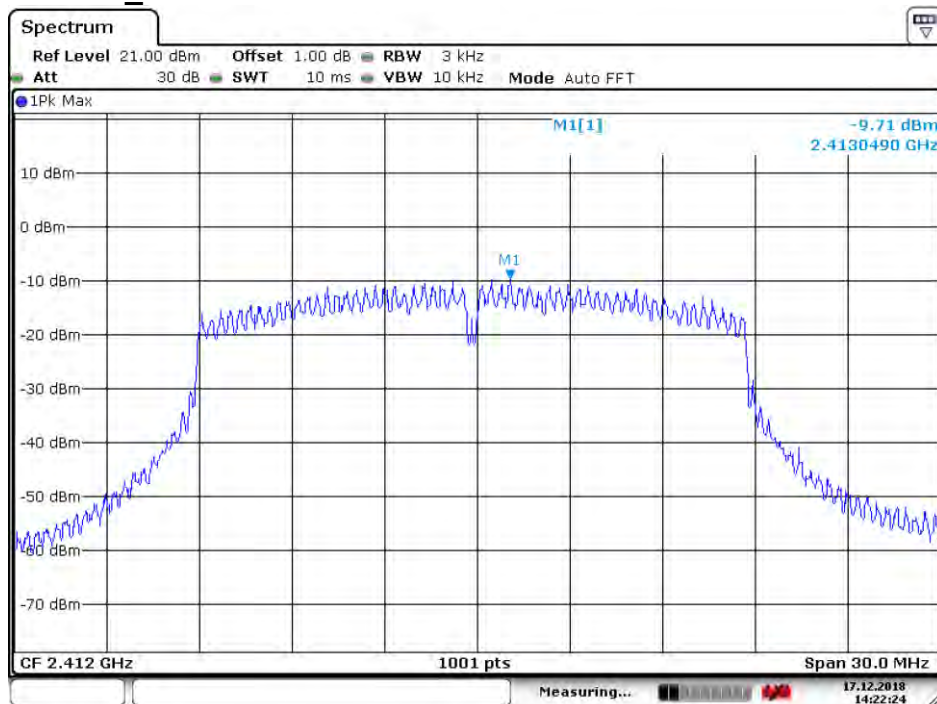


Date: 17 DEC. 2018 14:22:24

4.6.2.2.8 802.11 N20_ Middle Channel

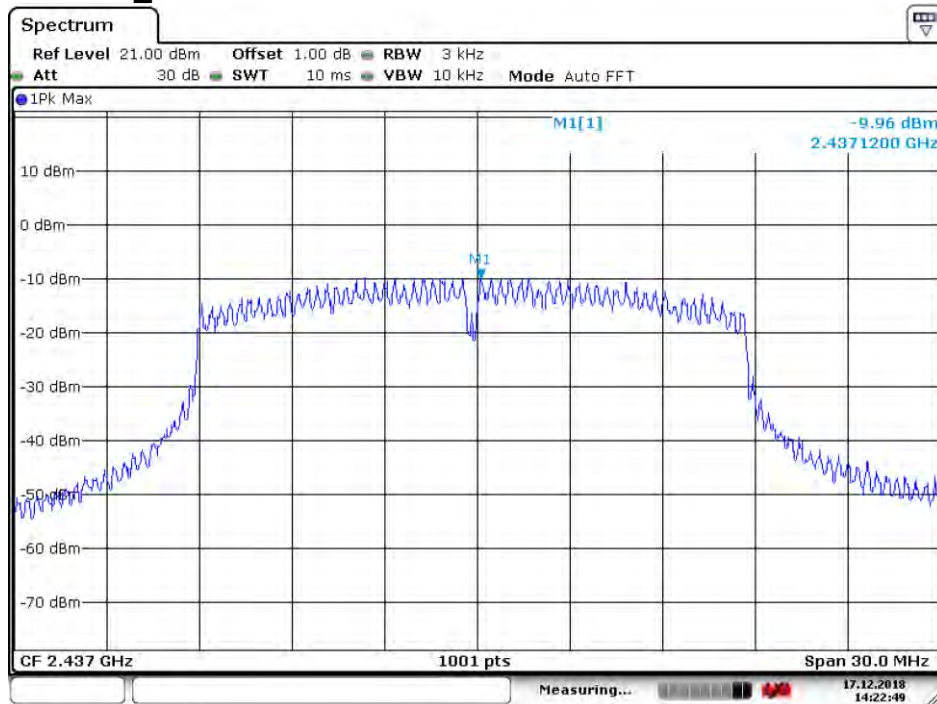


Date: 17 DEC. 2018 14:22:49

4.6.2.2.9 802.11 N20_ Highest Channel

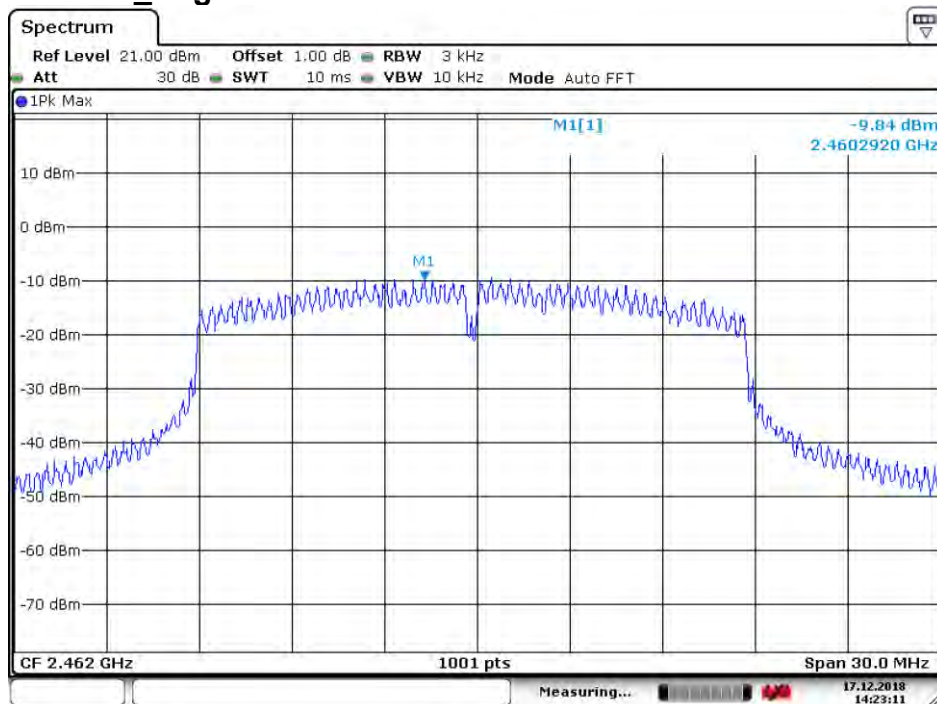


Date: 17 DEC. 2018 14:23:12

4.6.2.2.10 802.11G_CDD_Lowest Channel

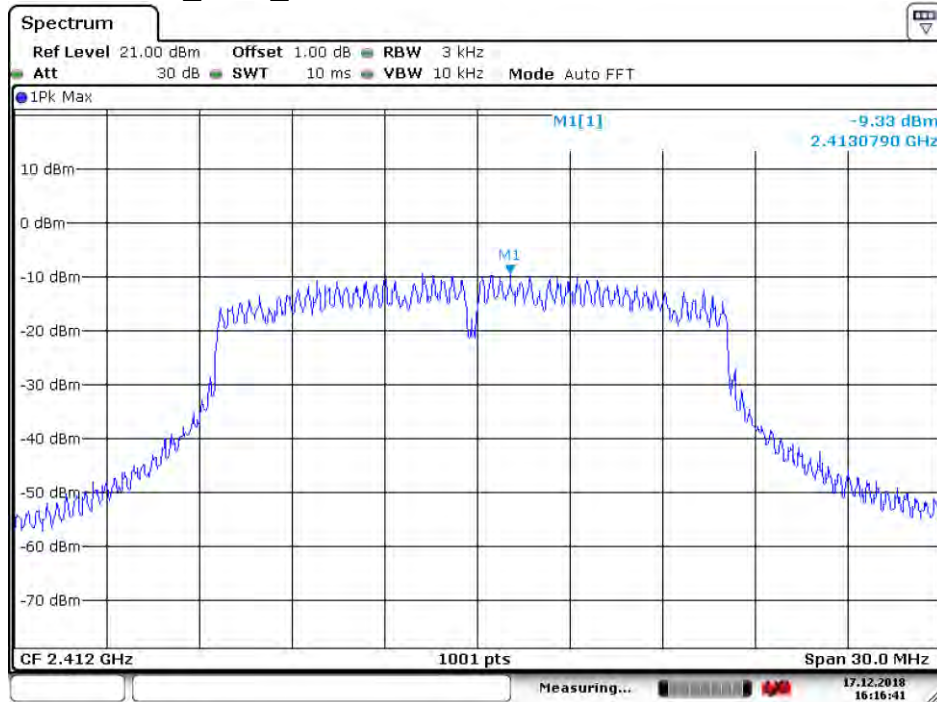


Date: 17 DEC. 2018 16:16:42

4.6.2.2.11 802.11G_CDD_Middle Channel

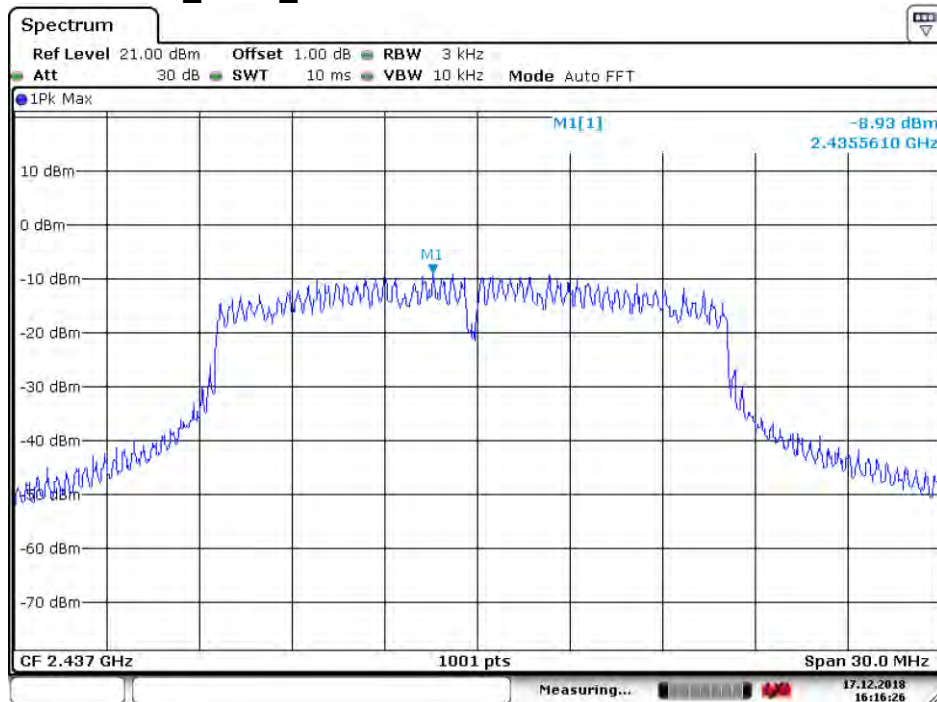


Date: 17 DEC. 2018 16:16:26


4.6.2.2.12 802.11G_CDD _ Highest Channel

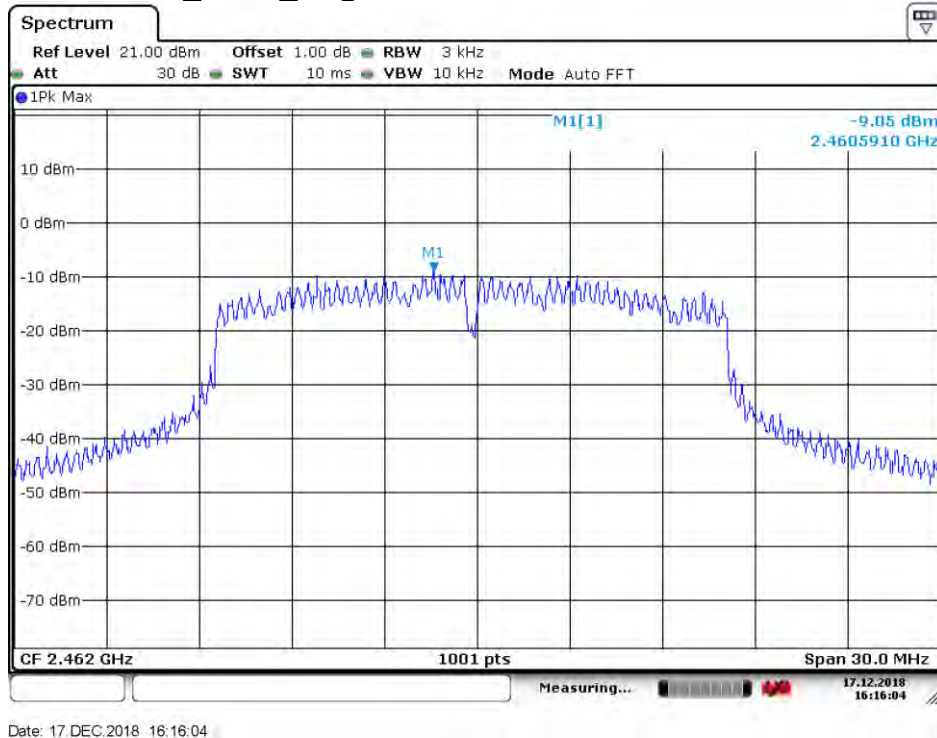

4.6.2.2.13 802.11N20_MIMO_Lowest Channel

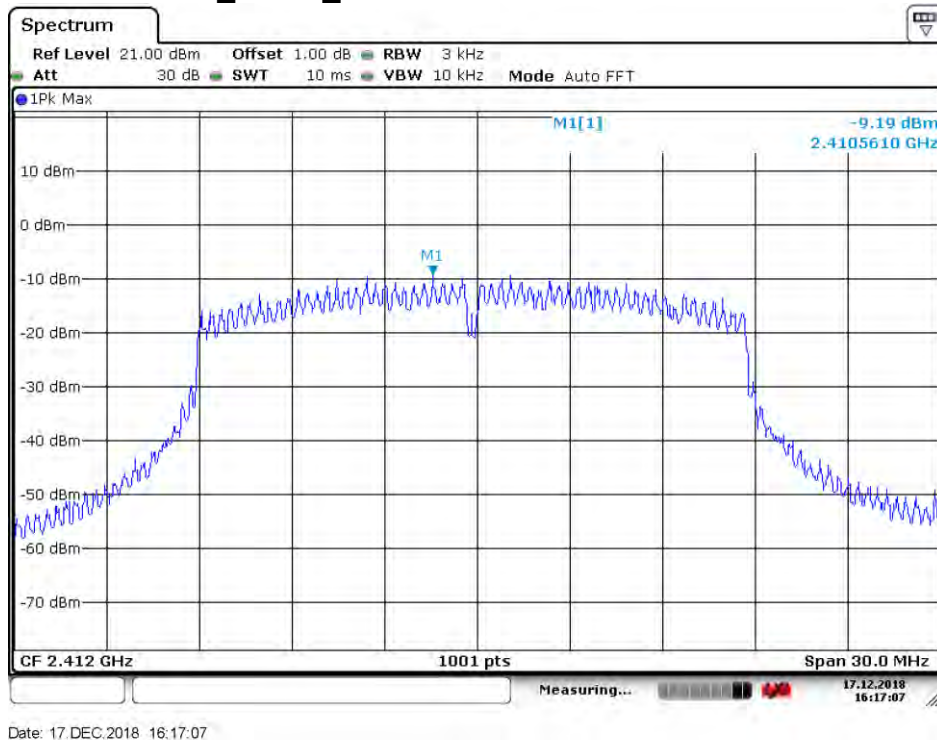


4.6.2.2.14 802.11N20_MIMO _ Middle Channel

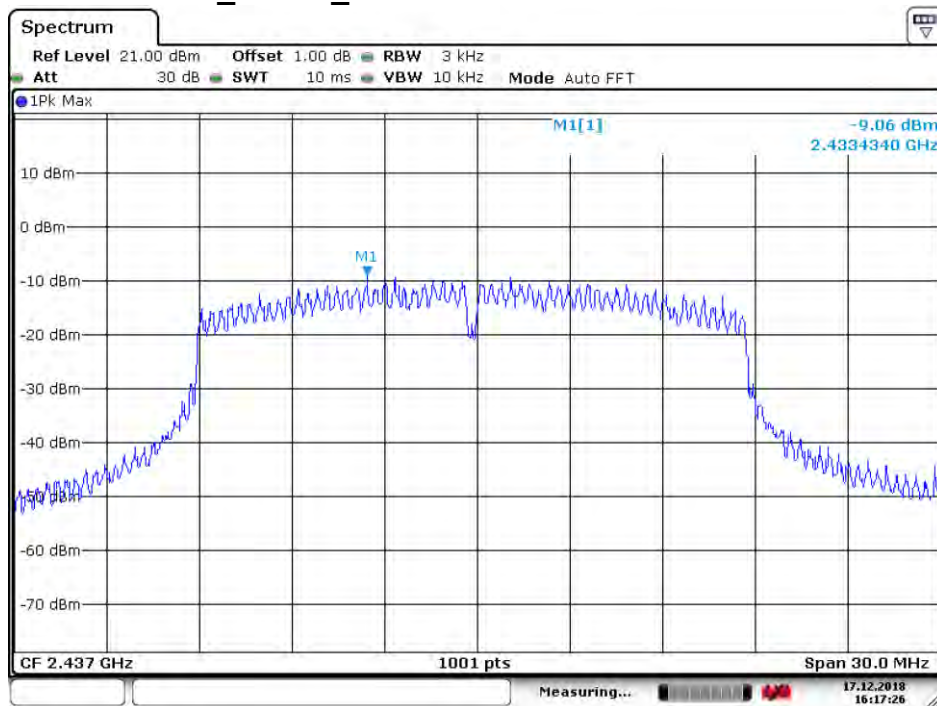


Date: 17. DEC. 2018 16:17:26

4.6.2.2.15 802.11N20_MIMO _ Highest Channel

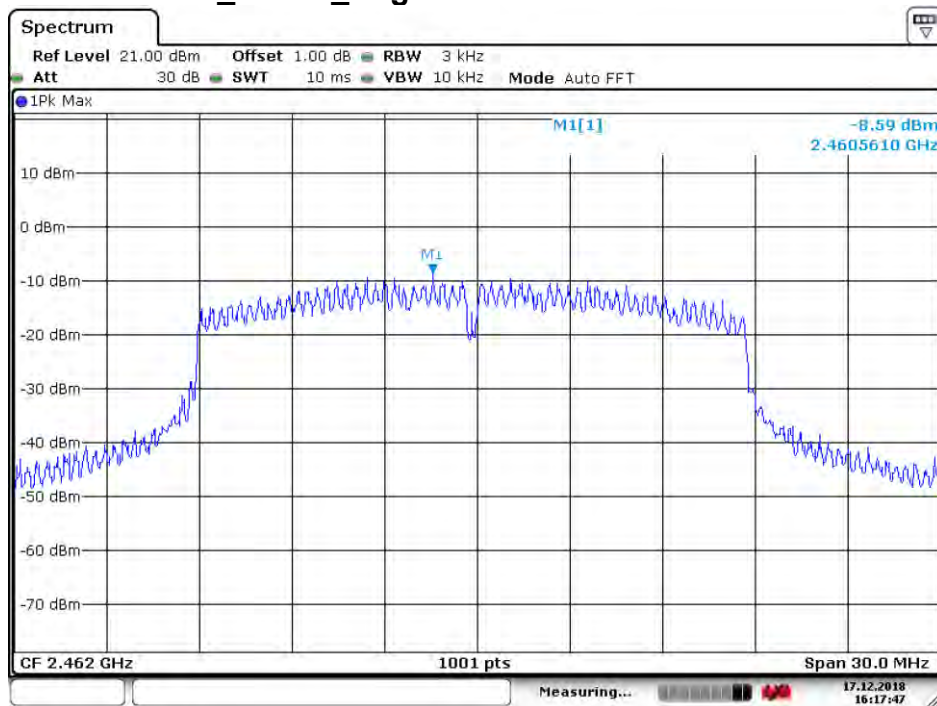

Date: 17. DEC. 2018 16:17:48


4.7 Band-edge for RF Conducted Emissions

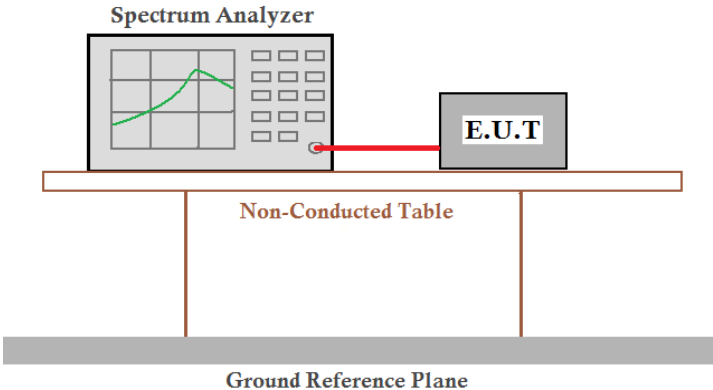Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10: 2013 Section 11.13
Test Setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11B; 6Mbps of rate is the worst case of 802.11G ; 6.5Mbps of rate is the worst case of 802.11N(HT20) ;
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass


4.7.1 Test plots

4.7.1.1 ANT1


4.7.1.1.1 802.11B_Lowest Channel

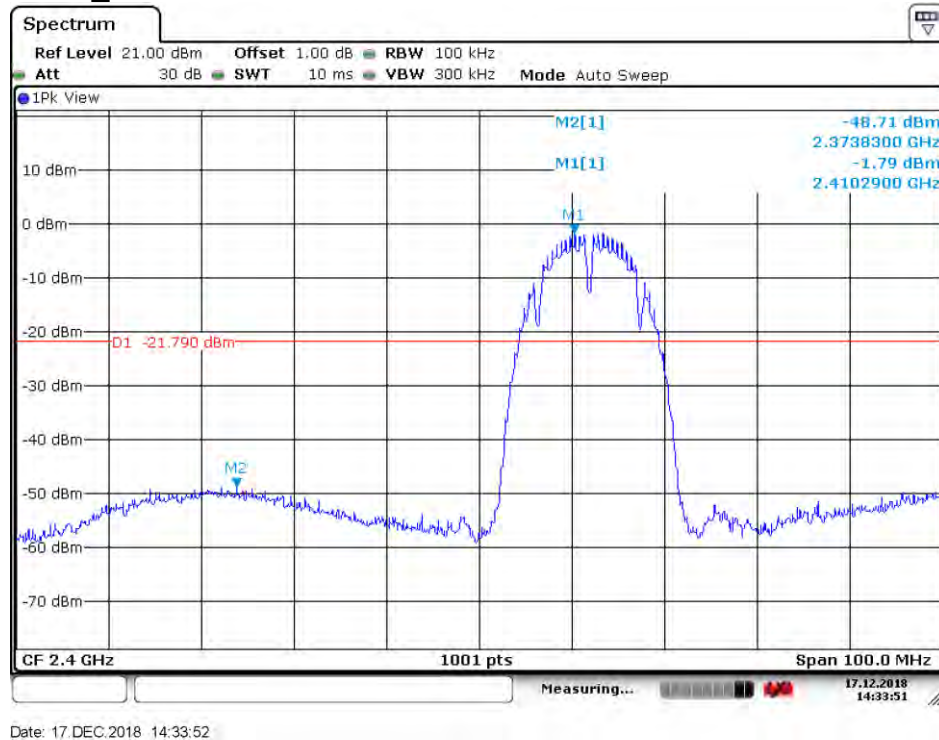


4.7.1.1.2 802.11B_Highest Channel

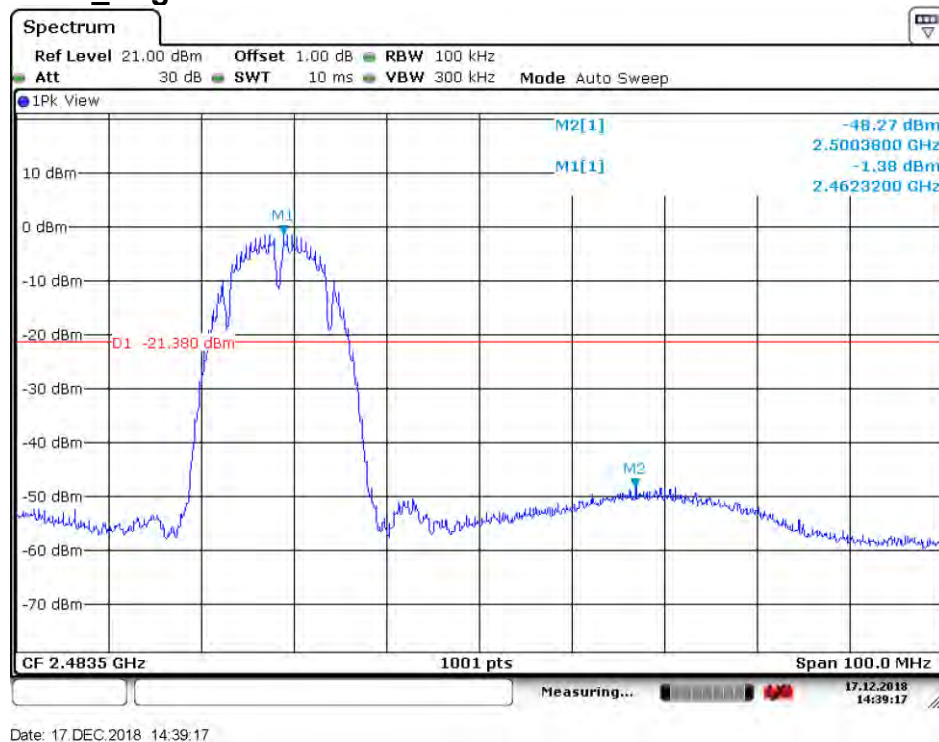


4.7.1.1.3 802.11G_Lowest Channel

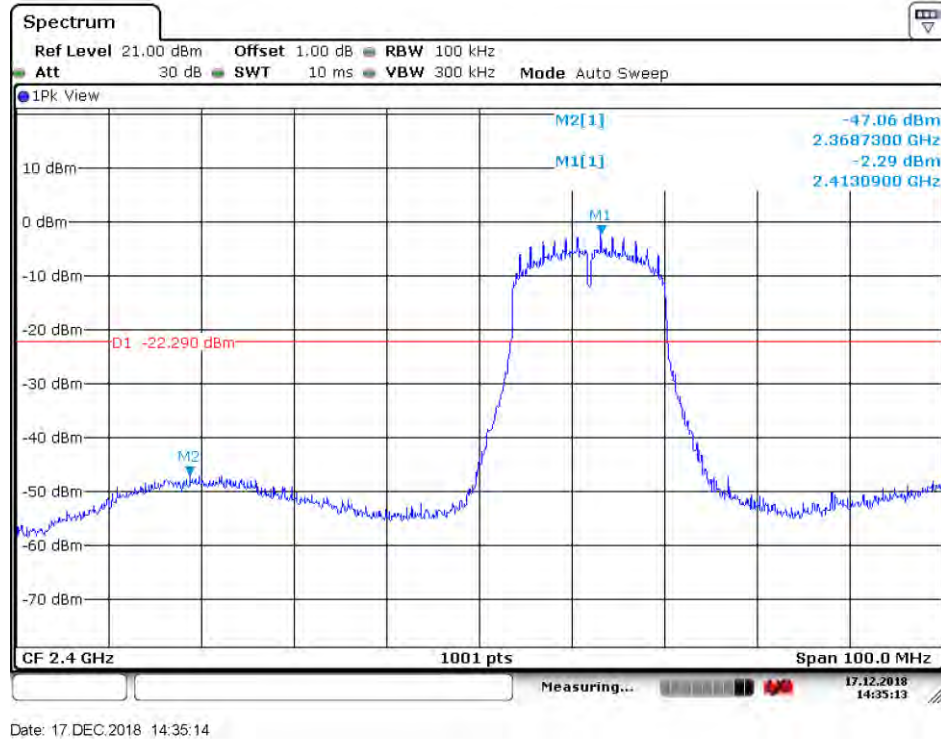


4.7.1.1.4 802.11G_Highest Channel

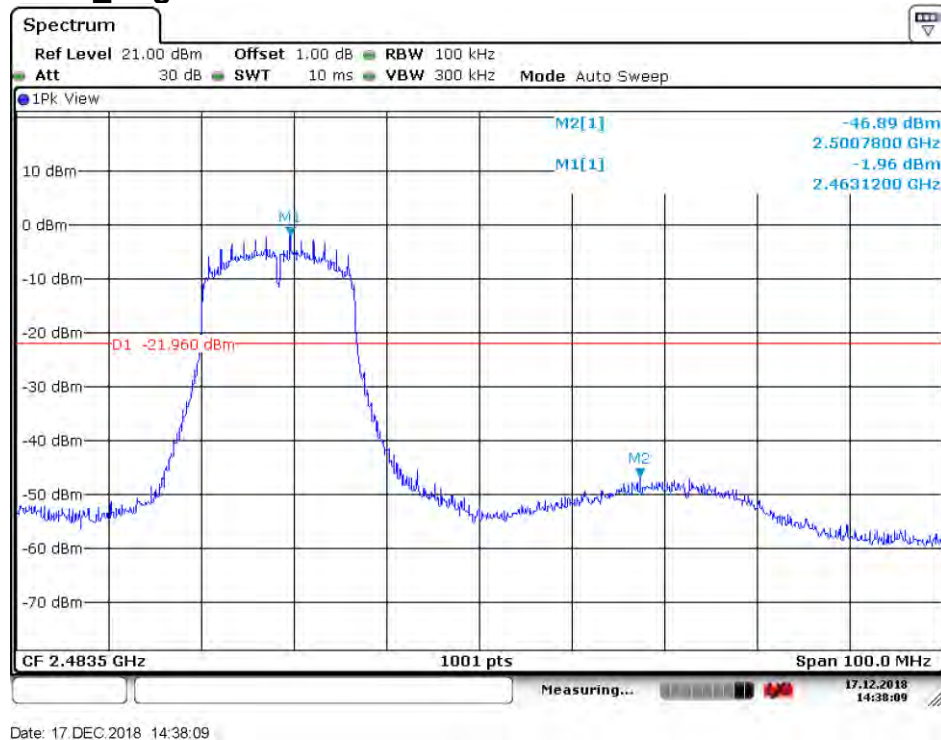


4.7.1.1.5 802.11N20_Lowest Channel

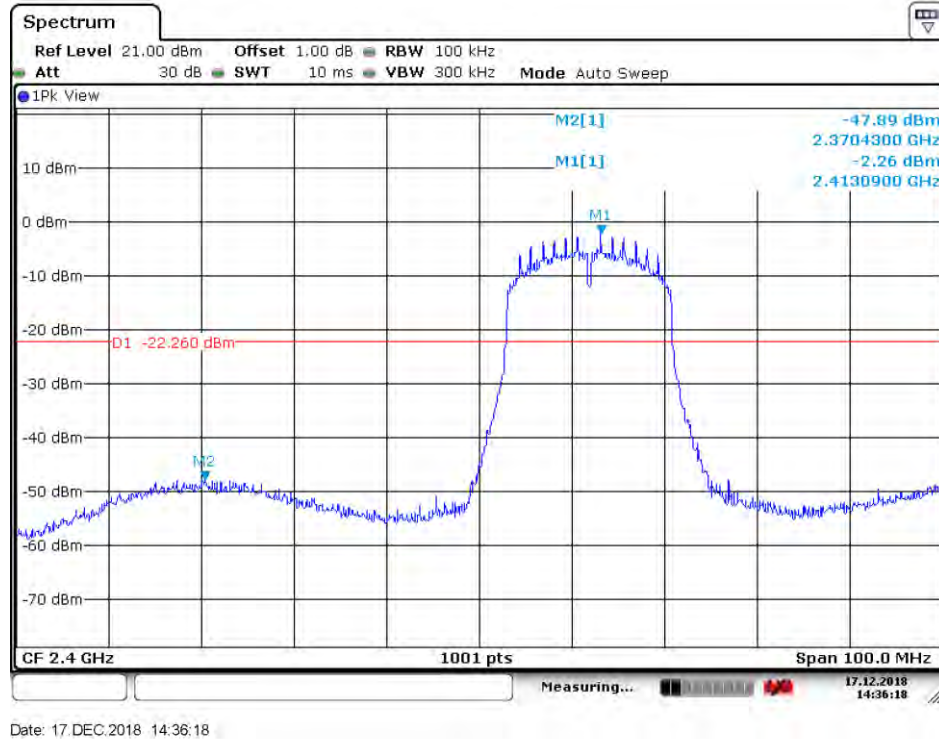


4.7.1.1.6 802.11 N20_ Highest Channel

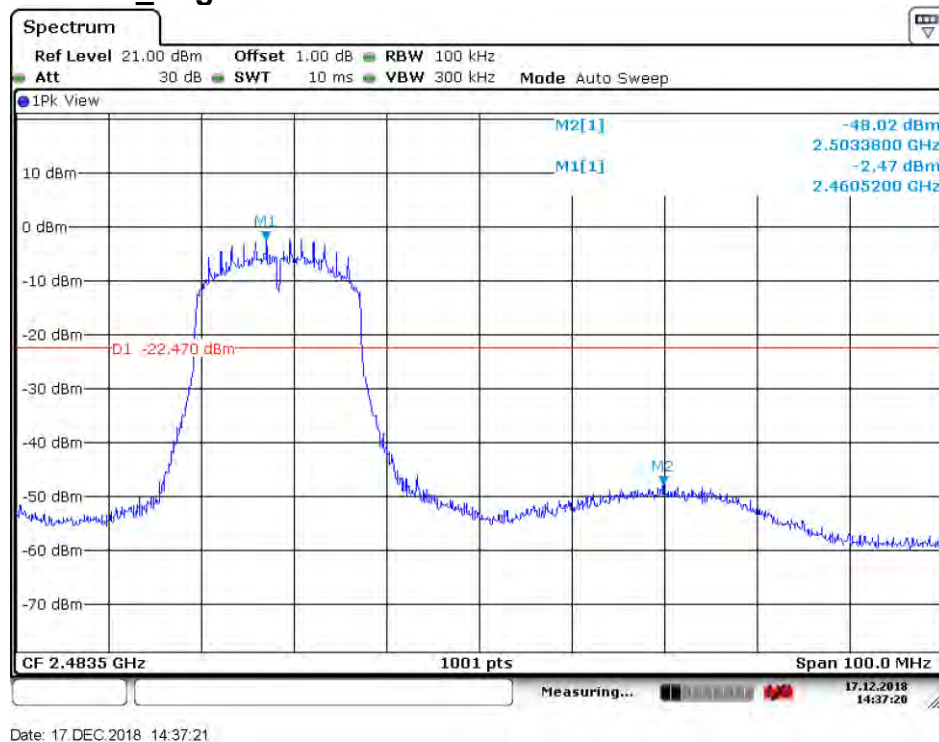


4.7.1.1.7 802.11G_CDD_Lowest Channel

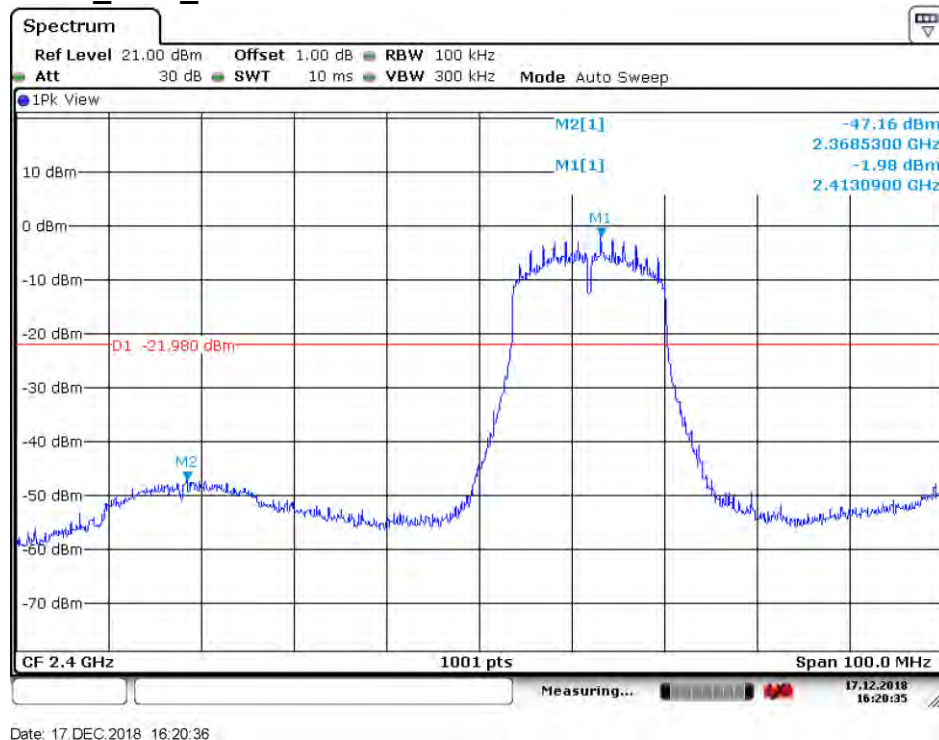

4.7.1.1.8 802.11G_CDD_Highest Channel

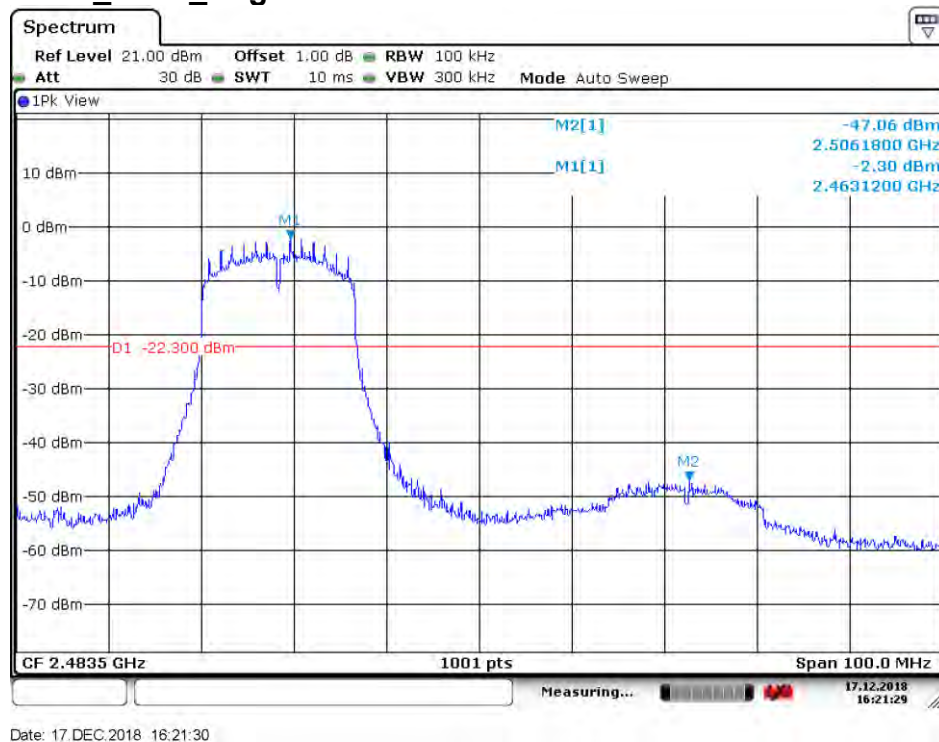


4.7.1.1.9 802.11N20_MIMO_Lowest Channel

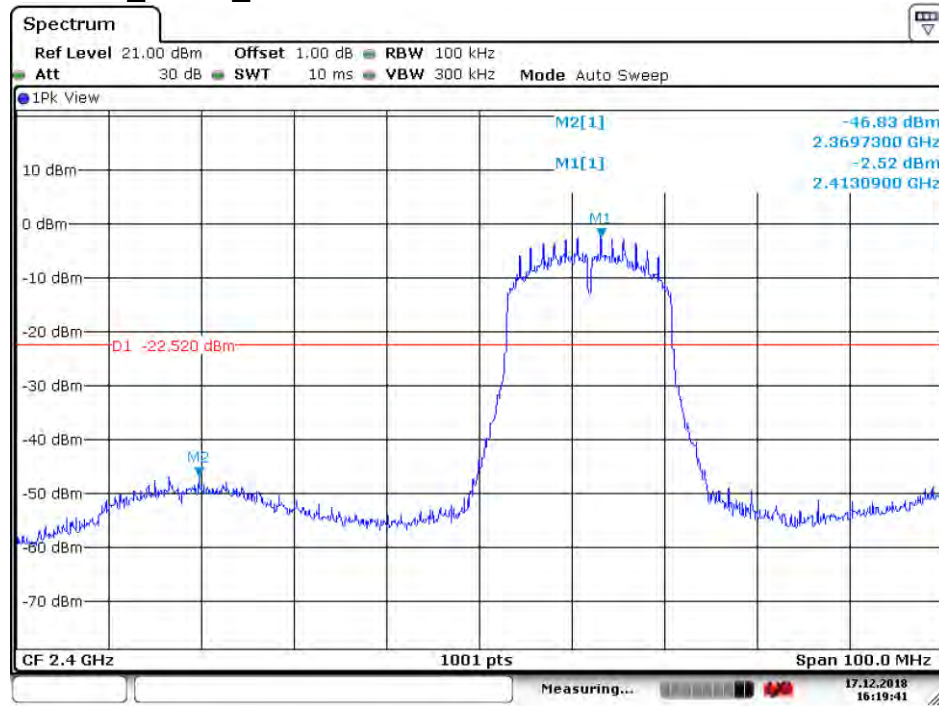

Date: 17.DEC.2018 16:19:41


4.7.1.1.10 802.11N20_MIMO_Highest Channel

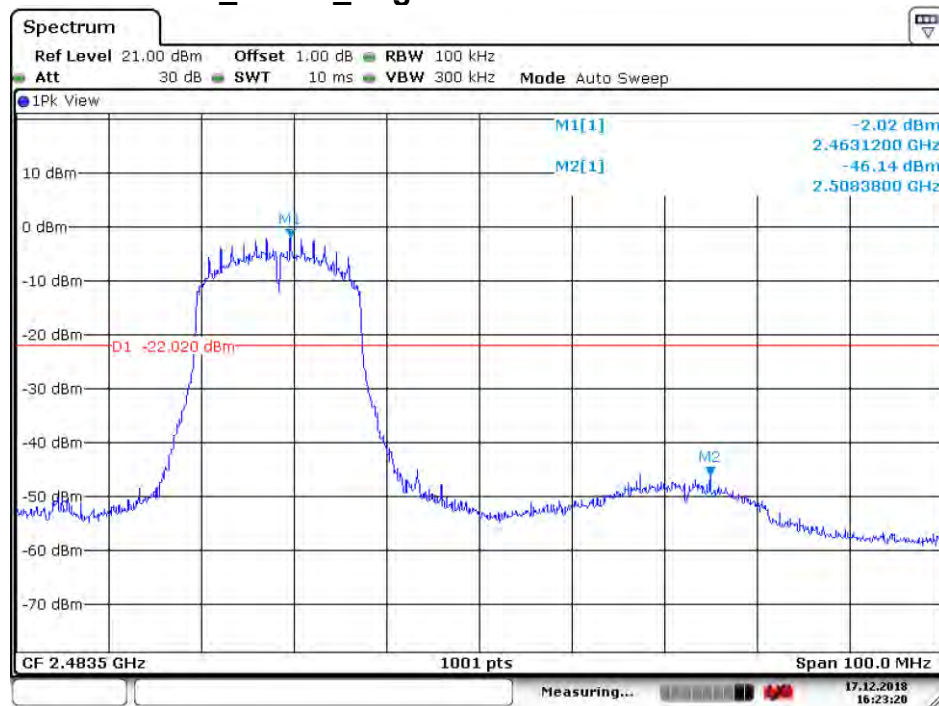

Date: 17.DEC.2018 16:23:20

4.7.1.2 ANT2


4.7.1.2.1 802.11B_Lowest Channel

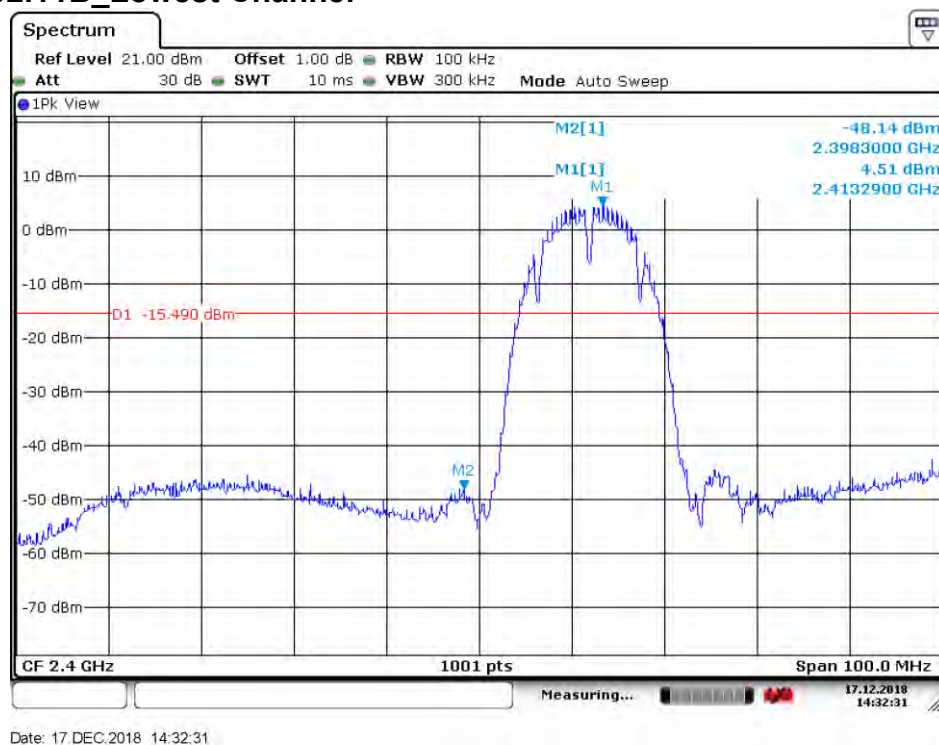


4.7.1.2.2 802.11B_Highest Channel




4.7.1.2.3 802.11G_Lowest Channel

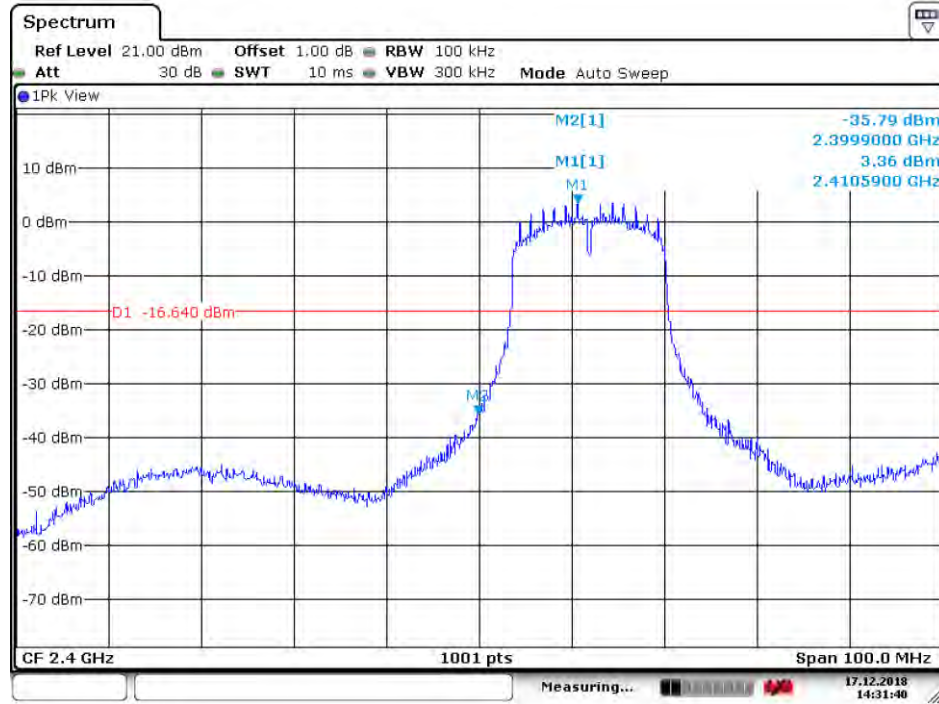


4.7.1.2.4 802.11G_Highest Channel

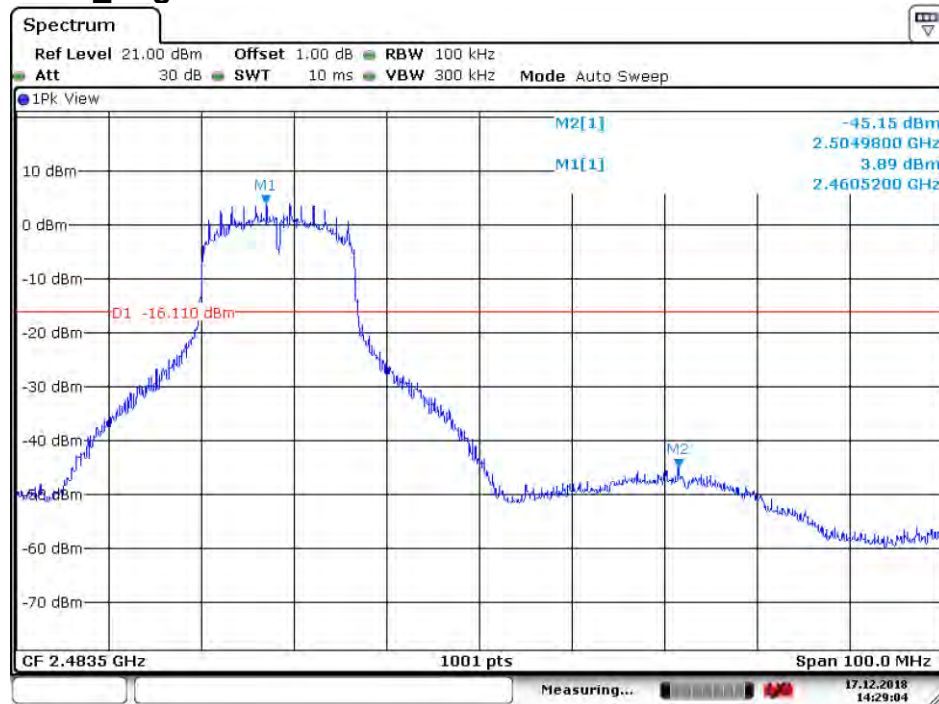


4.7.1.2.5 802.11N20_Lowest Channel

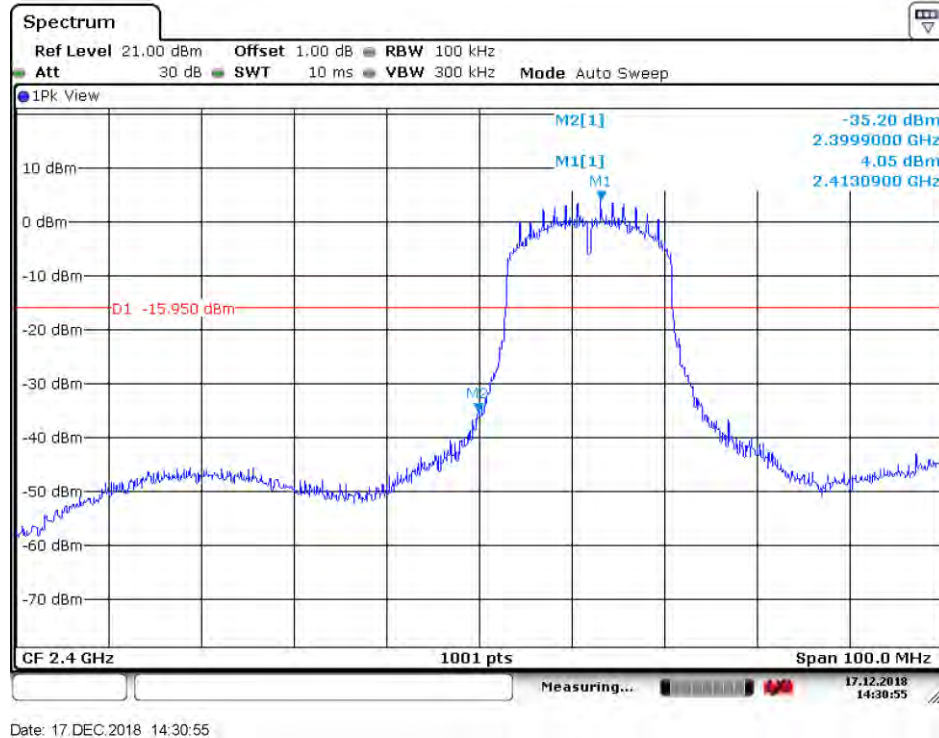

4.7.1.2.6 802.11 N20_ Highest Channel

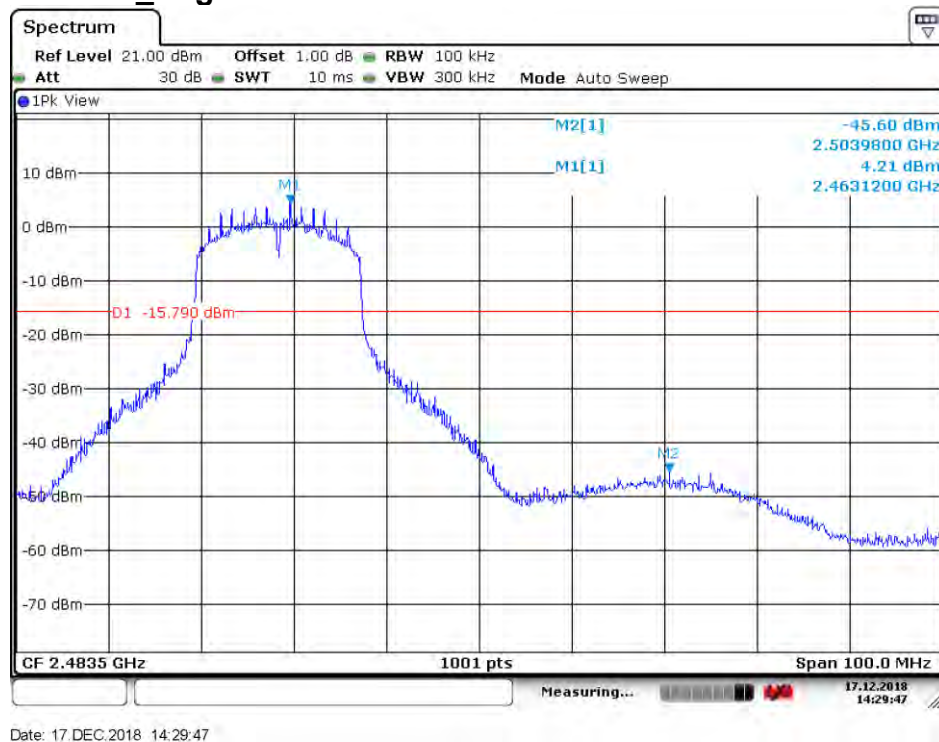


4.7.1.2.7 802.11G_CDD_Lowest Channel

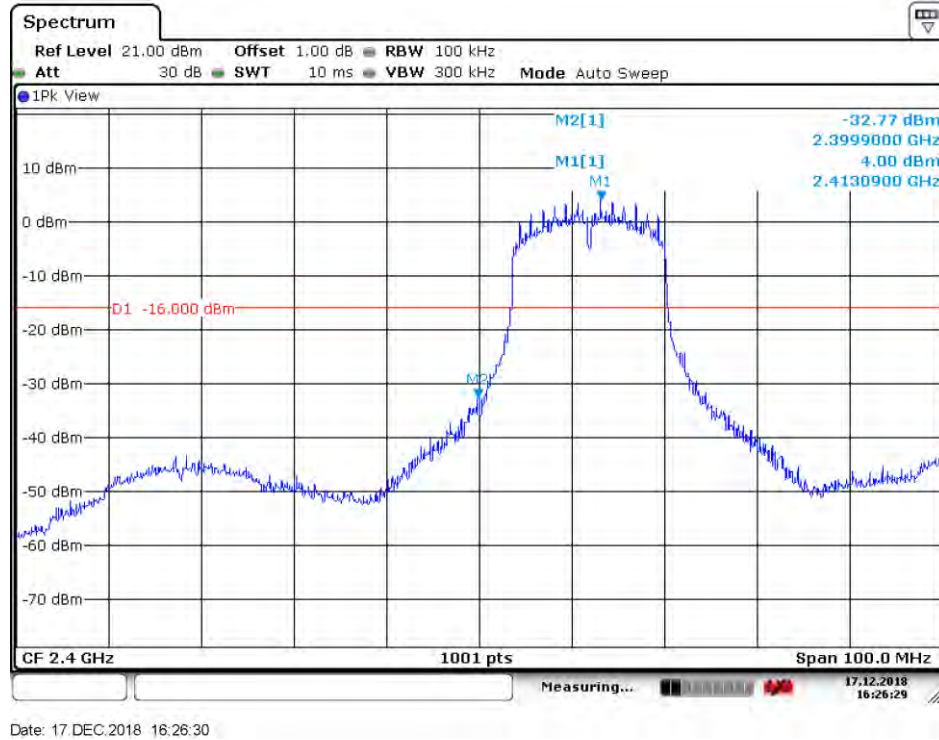

4.7.1.2.8 802.11G_CDD_Highest Channel




4.7.1.2.9 802.11N20_MIMO_Lowest Channel

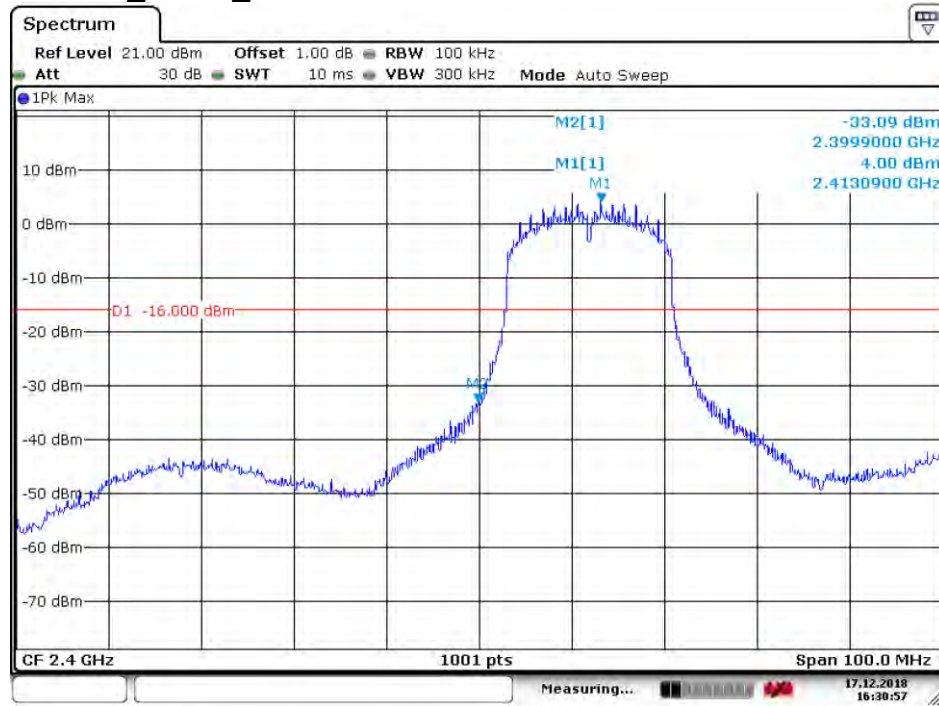


Date: 17 DEC. 2018 16:30:57

4.7.1.2.10 802.11N20_MIMO_Highest Channel

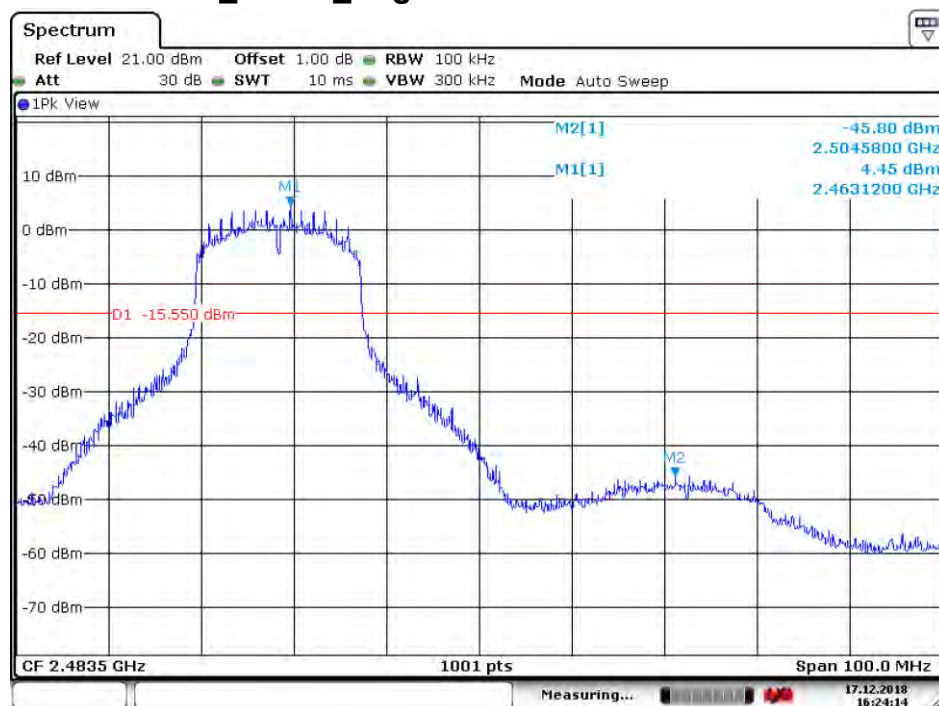

Date: 17 DEC. 2018 16:24:14


4.8 RF Conducted Spurious Emissions

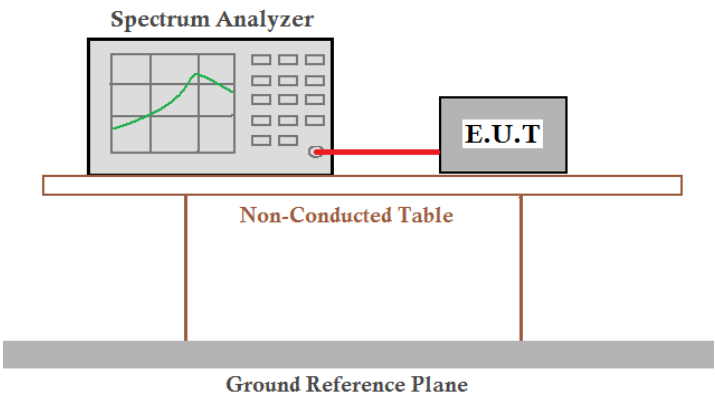Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10: 2013 Section 11.11
Test Setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by two vertical legs. Below the table is a Ground Reference Plane.
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11B; 6Mbps of rate is the worst case of 802.11G; 6.5Mbps of rate is the worst case of 802.11N(HT20);
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass


4.8.1 Test plots

4.8.1.1 ANT1


4.8.1.1.1 802.11B_Lowest Channel

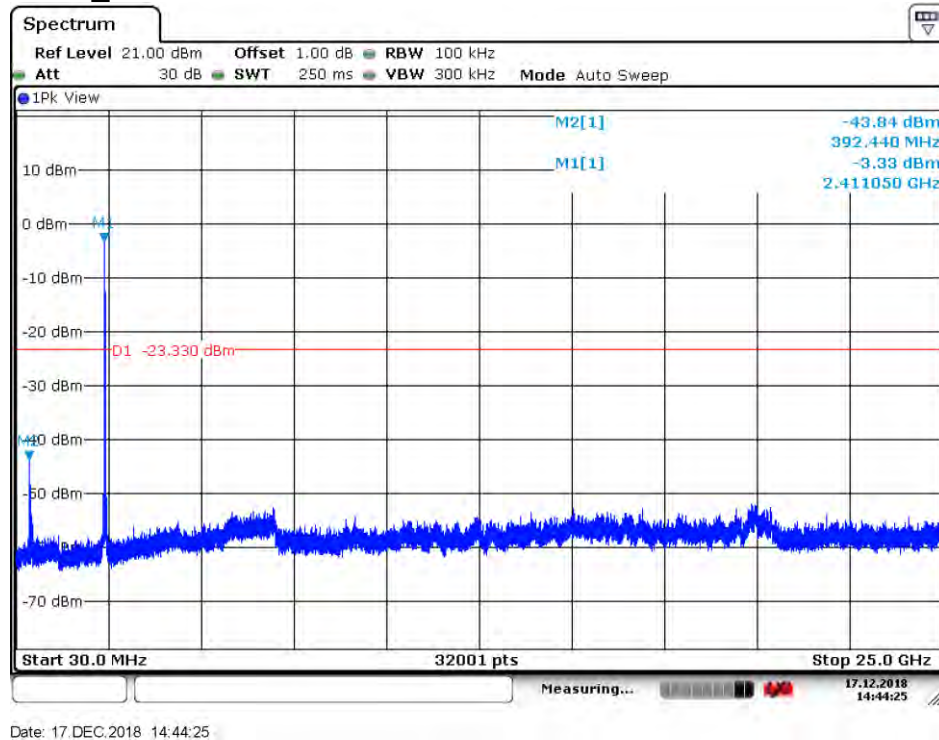

4.8.1.1.2 802.11B_Middle Channel

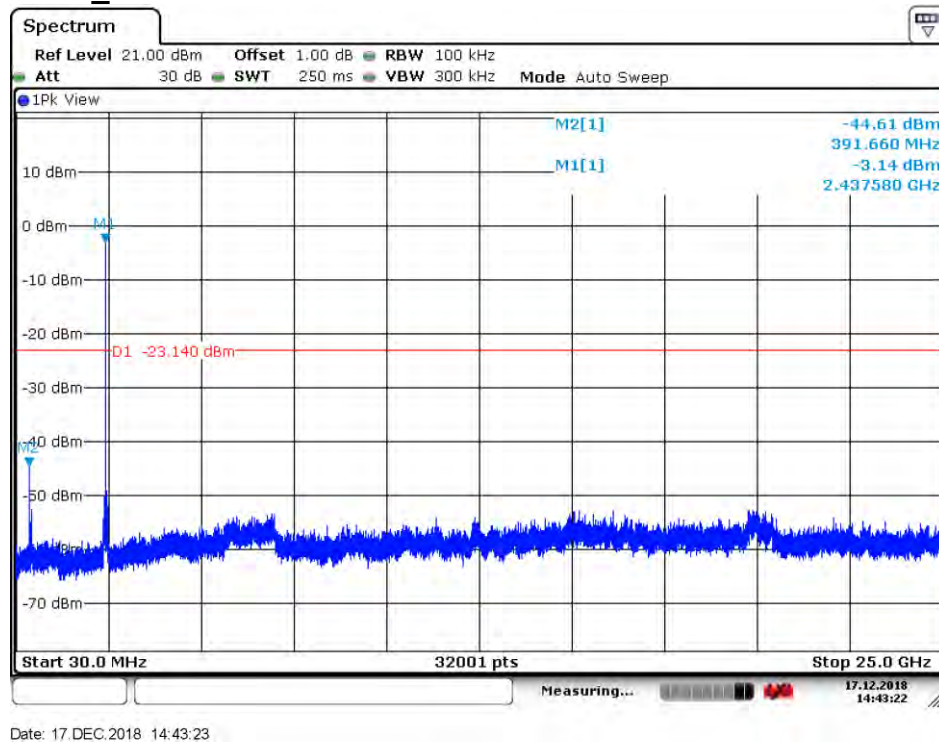


4.8.1.1.3 802.11B_Highest Channel

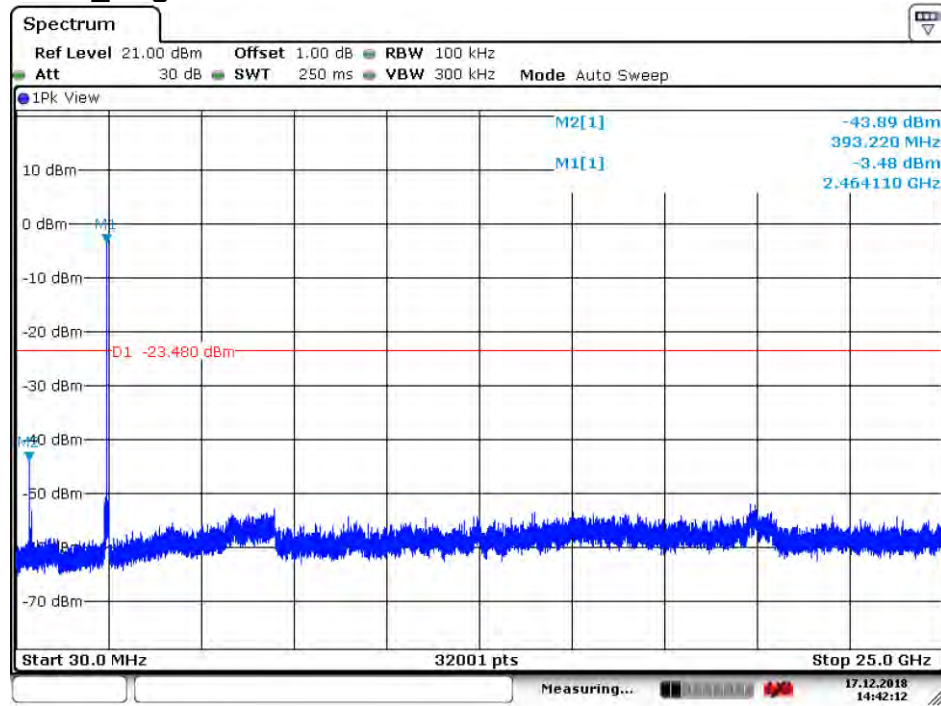


Date: 17.DEC.2018 14:42:12

4.8.1.1.4 802.11G_Lowest Channel

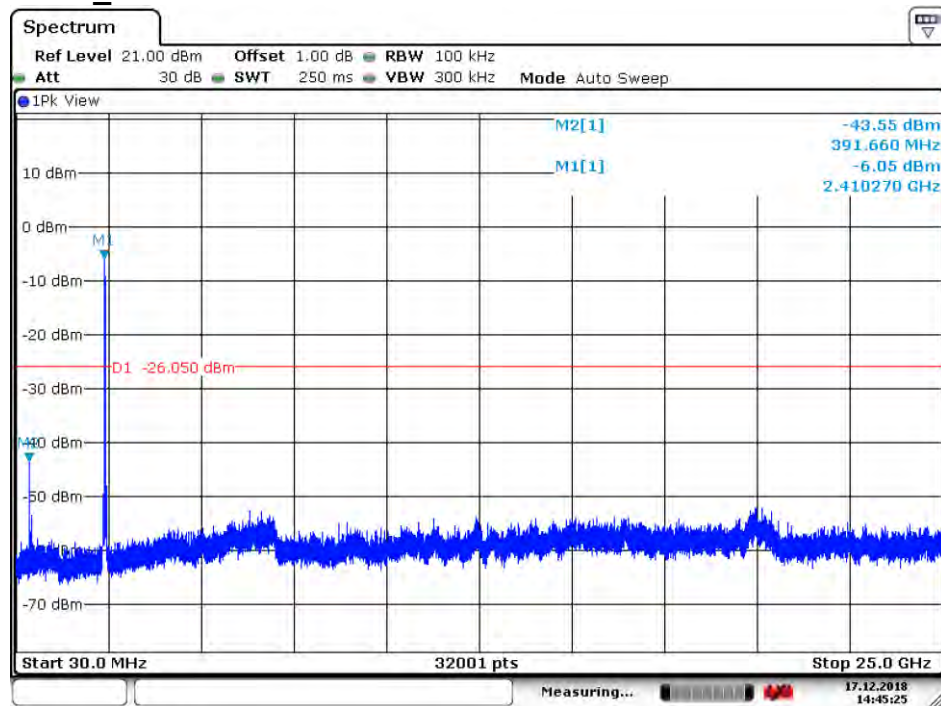


Date: 17.DEC.2018 14:45:25


4.8.1.1.5 802.11G_Middle Channel

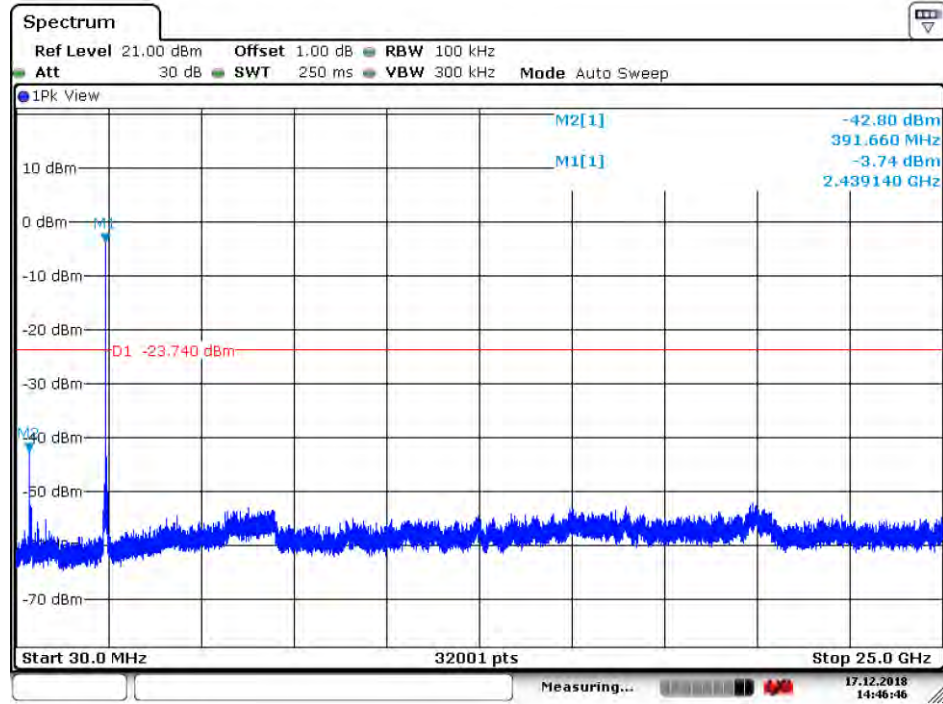

4.8.1.1.6 802.11G_Highest Channel

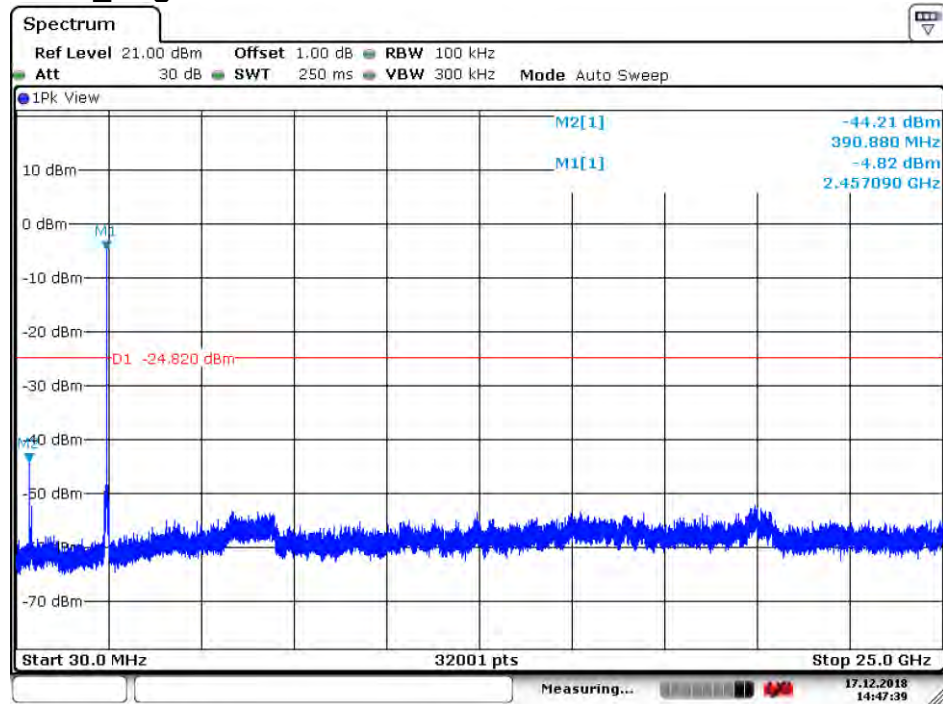


4.8.1.1.7 802.11N20_Lowest Channel

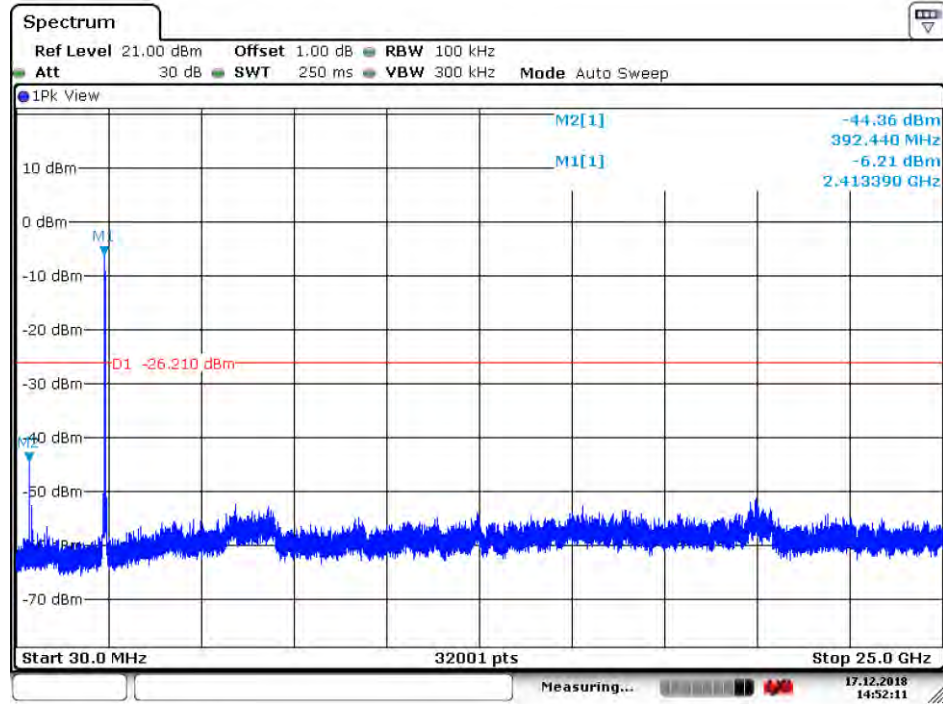


Date: 17.DEC.2018 14:52:12

4.8.1.1.8 802.11 N20_Middle Channel

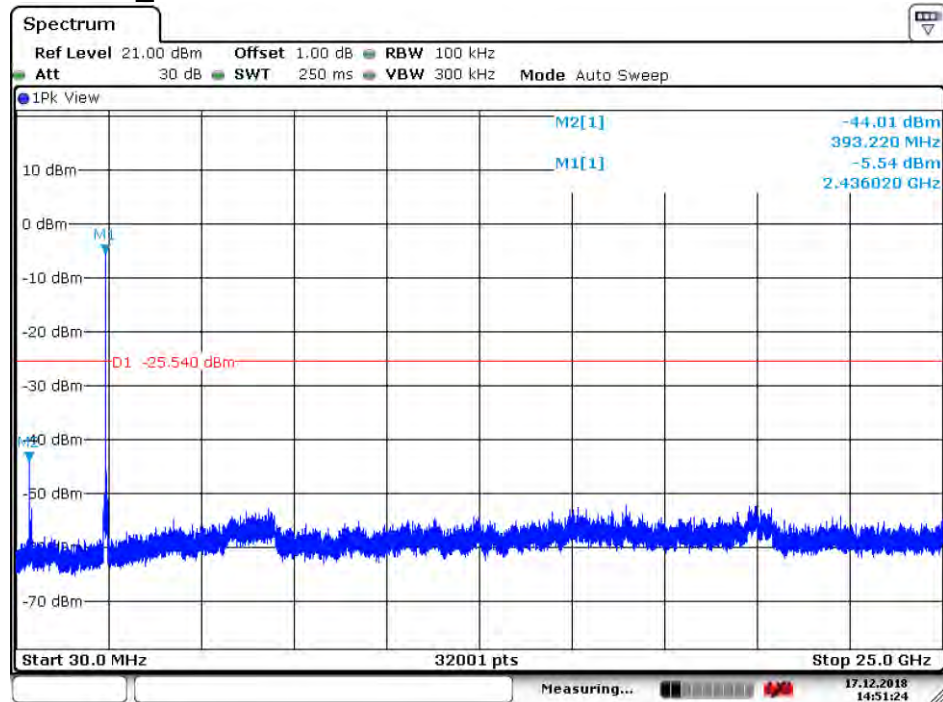


Date: 17.DEC.2018 14:51:24

4.8.1.1.9 802.11 N20_ Highest Channel

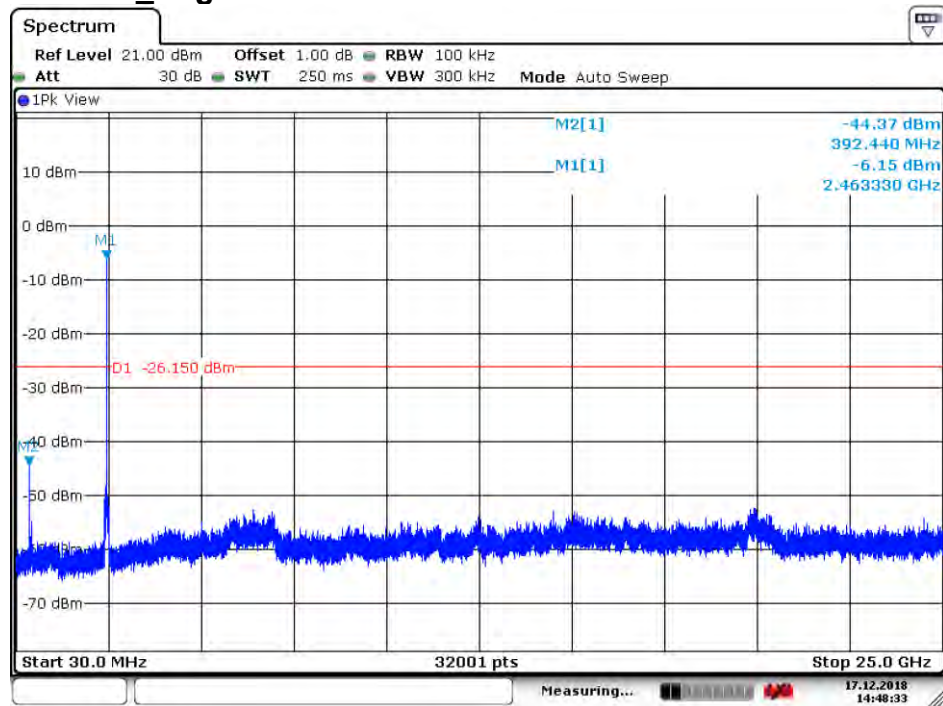


Date: 17. DEC. 2018 14:48:34

4.8.1.1.10 802.11G_CDD_Lowest Channel

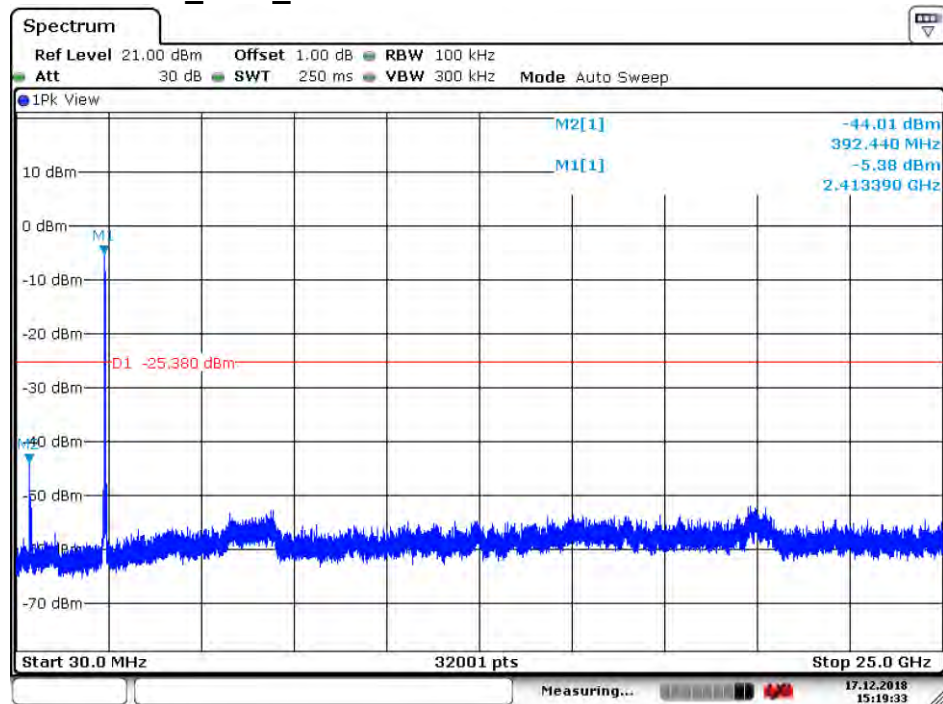


Date: 17. DEC. 2018 15:19:34

4.8.1.1.11 802.11G_CDD _ Middle Channel

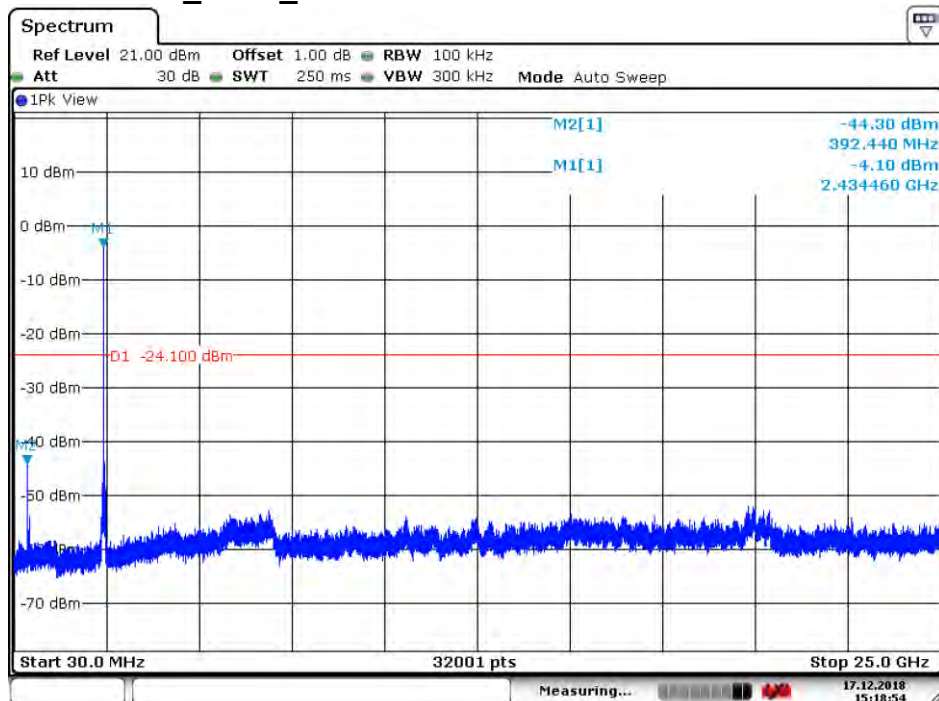


Date: 17 DEC 2018 15:18:54

4.8.1.1.12 802.11G_CDD _ Highest Channel

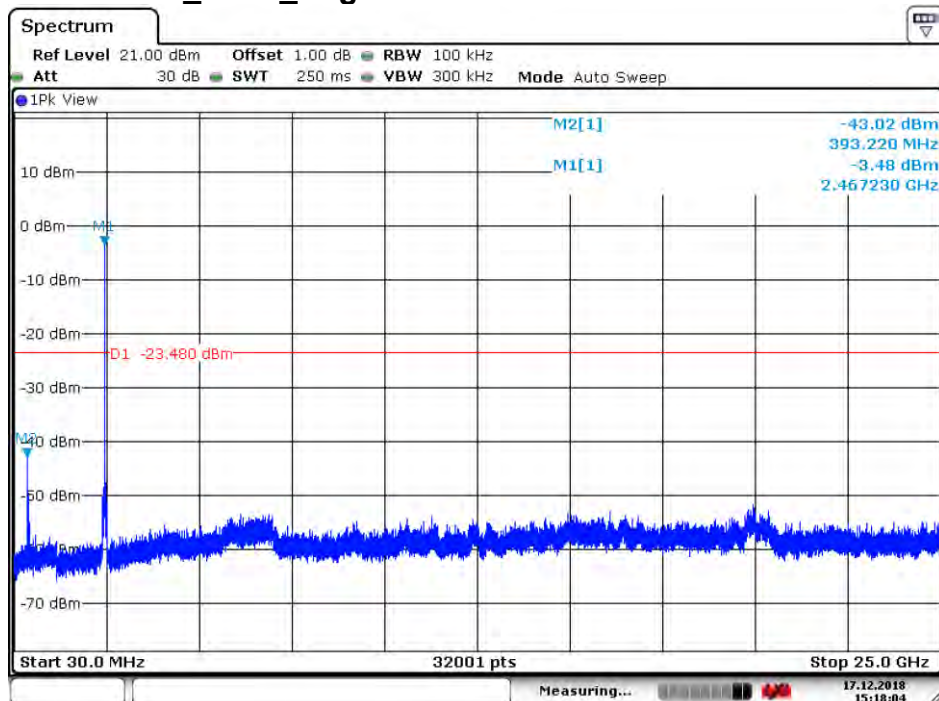


Date: 17 DEC 2018 15:18:04


4.8.1.1.13 802.11N20_MIMO_Lowest Channel

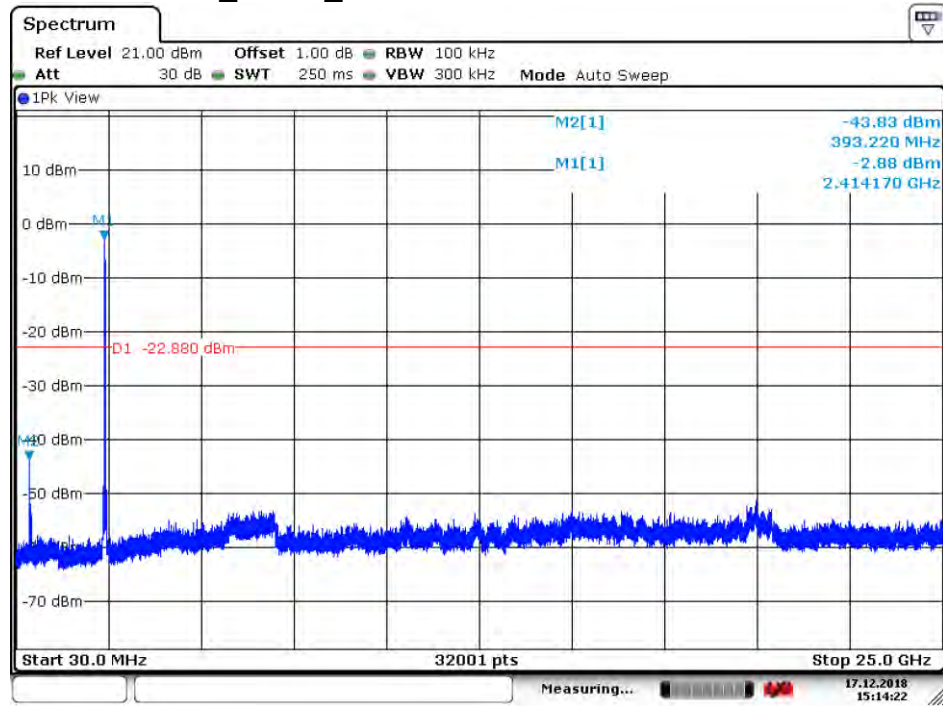

4.8.1.1.14 802.11N20_MIMO_Middle Channel

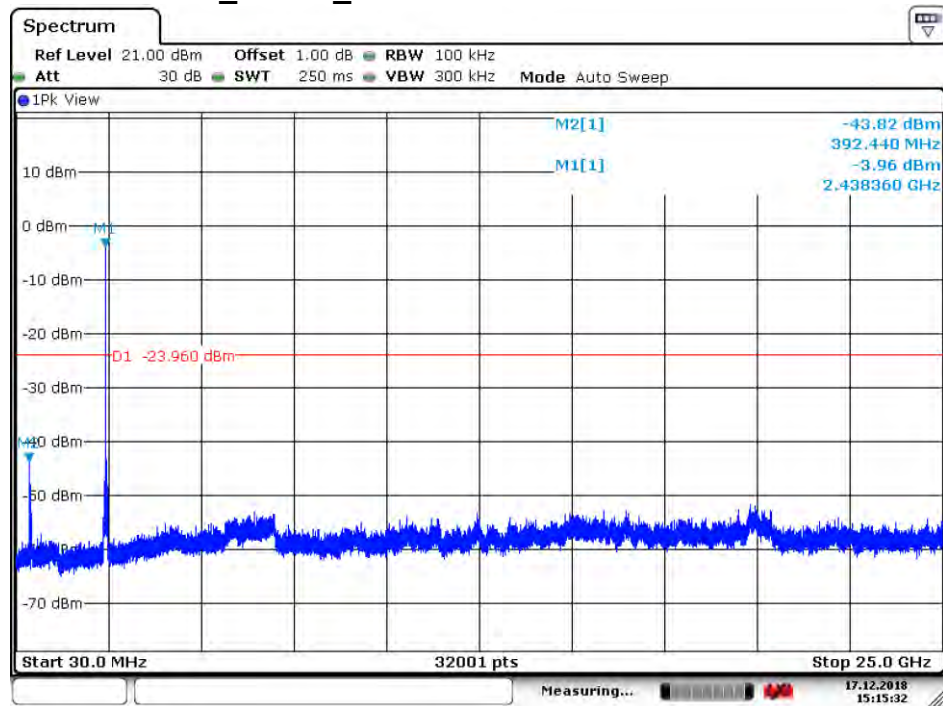


4.8.1.1.15 802.11N20_MIMO _ Highest Channel

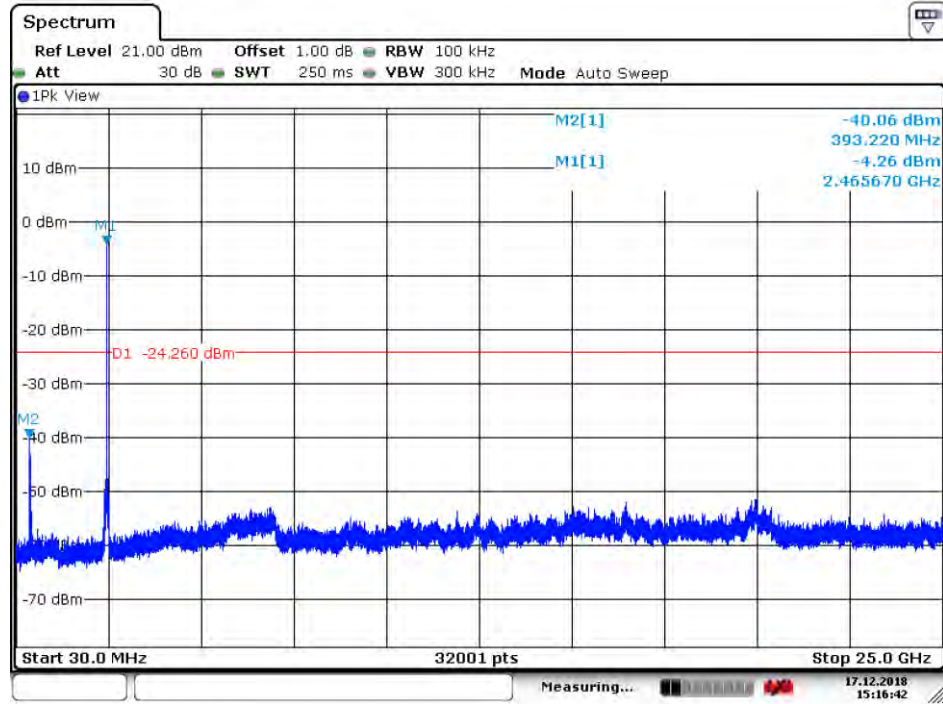

Date: 17. DEC. 2018 15:16:42


4.8.1.2 ANT2

4.8.1.2.1 802.11B_Lowest Channel

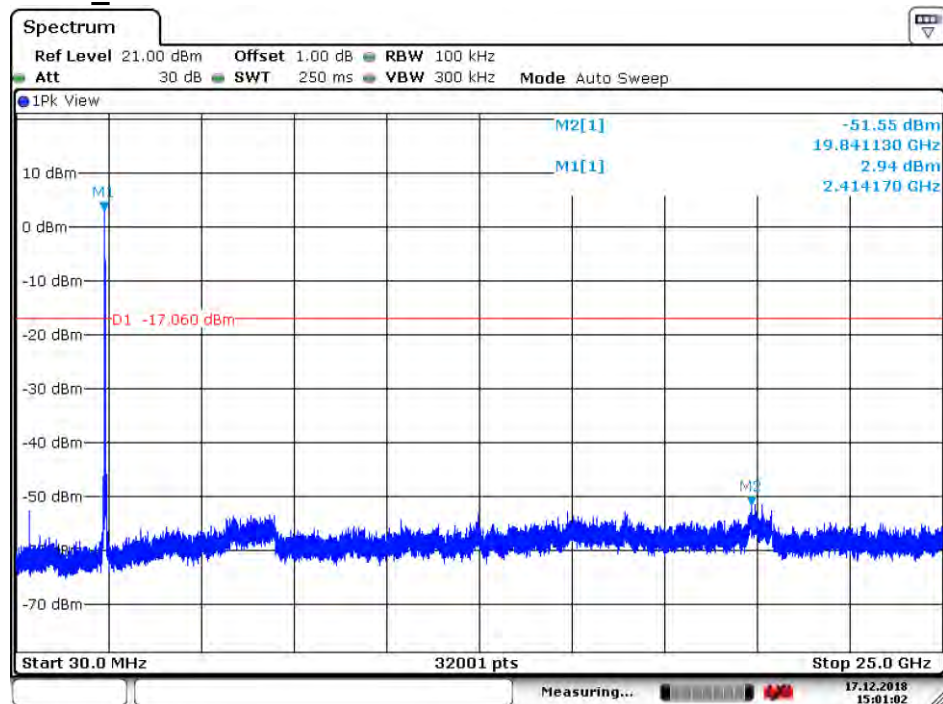


Date: 17. DEC. 2018 15:01:02

4.8.1.2.2 802.11B_Middle Channel

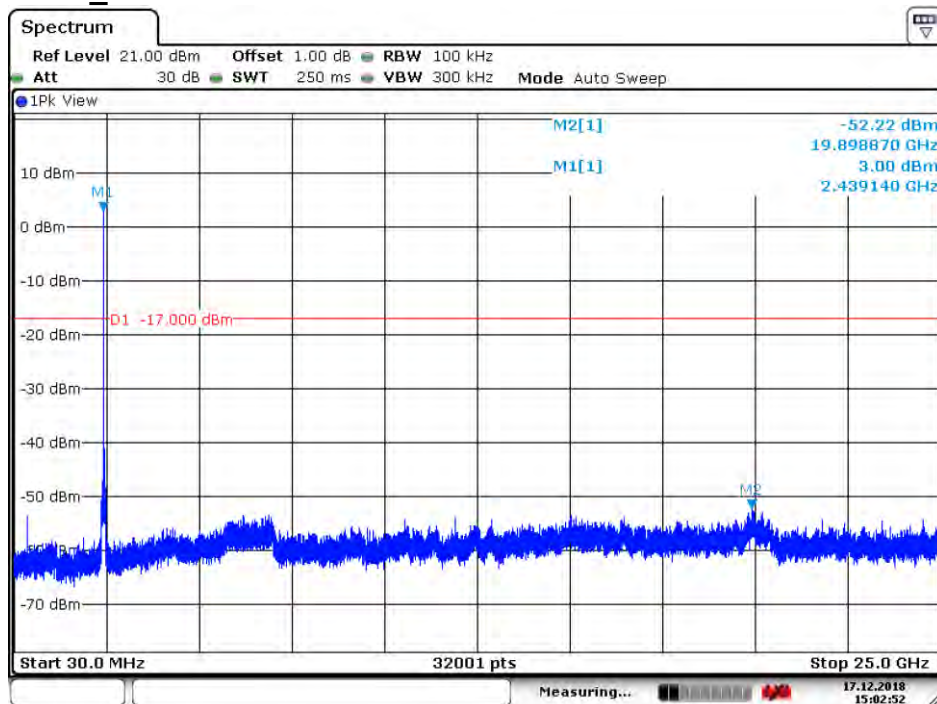


Date: 17.DEC.2018 15:02:52

4.8.1.2.3 802.11B_Highest Channel

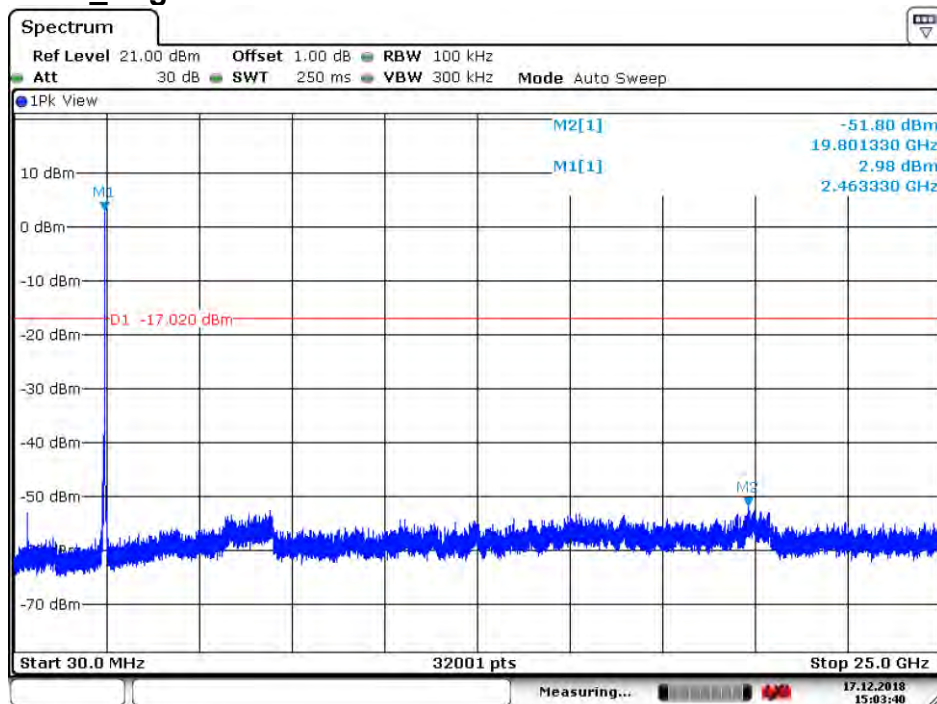


Date: 17.DEC.2018 15:03:40


4.8.1.2.4 802.11G_Lowest Channel

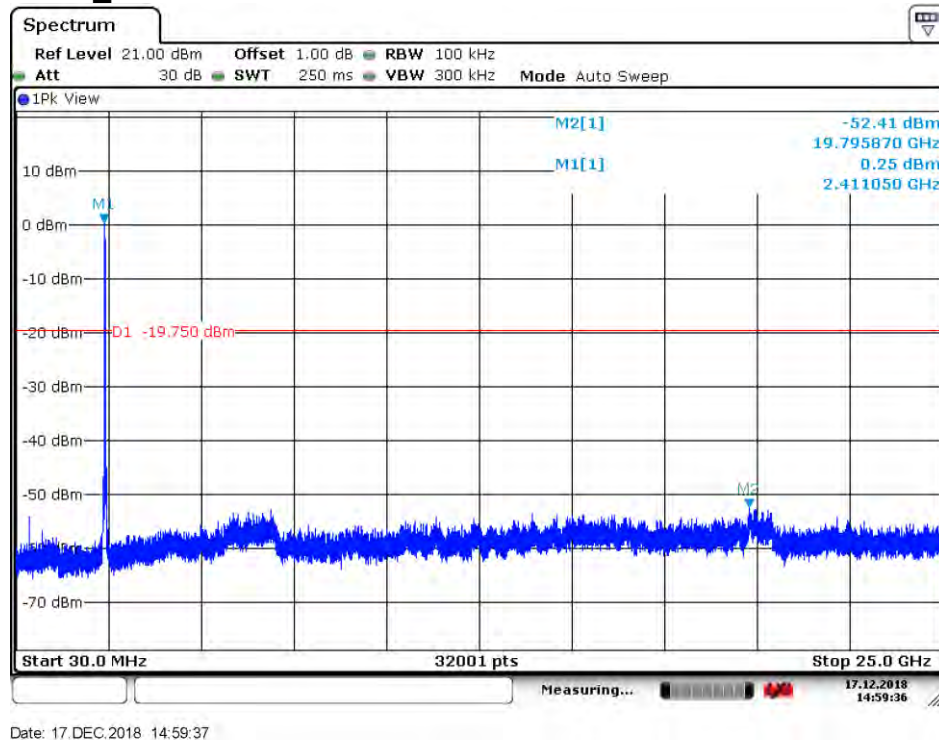

4.8.1.2.5 802.11G_Middle Channel

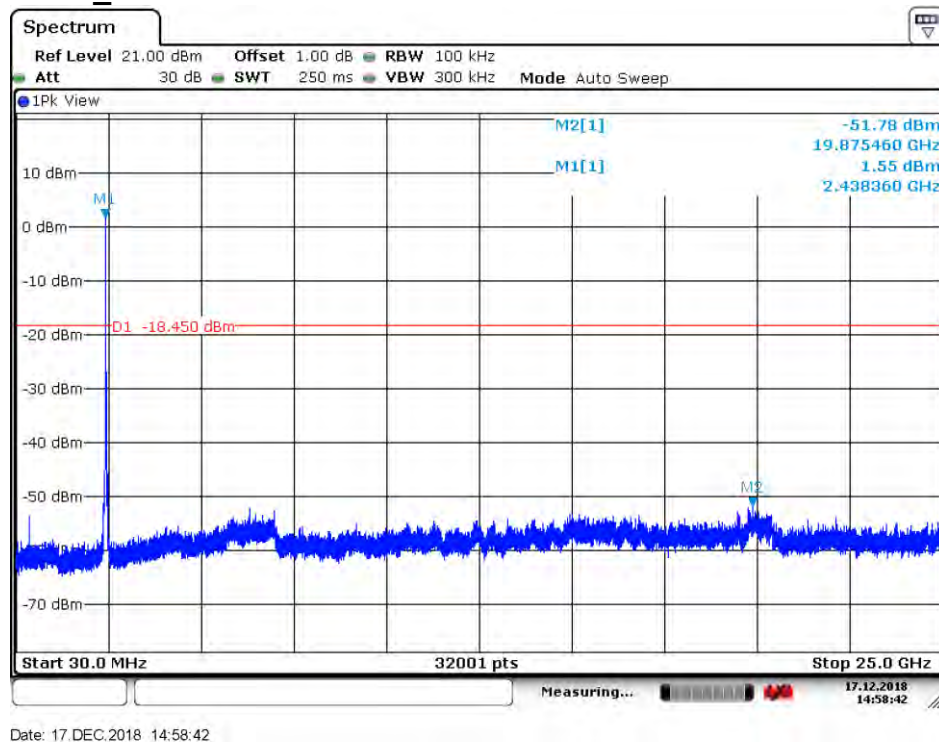


4.8.1.2.6 802.11G_Highest Channel

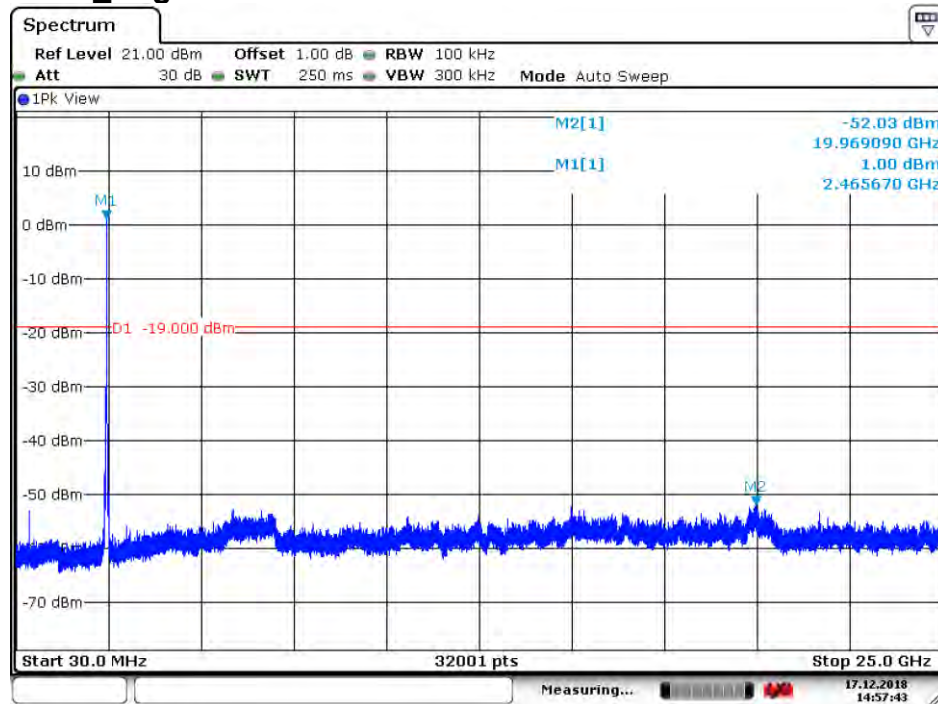


Date: 17. DEC. 2018 14:57:43

4.8.1.2.7 802.11N20_Lowest Channel

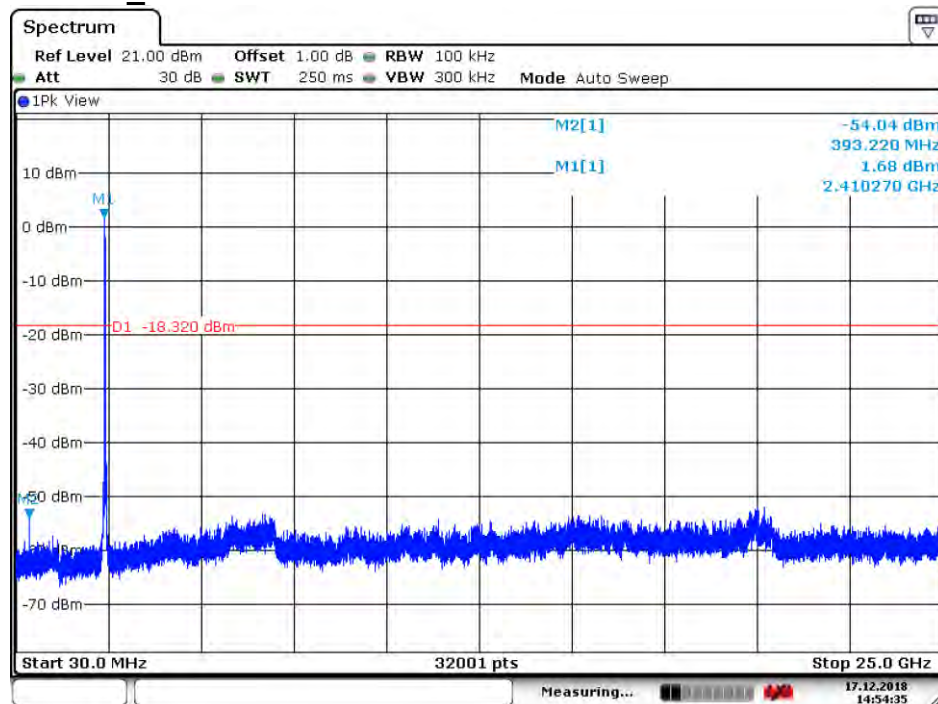


Date: 17. DEC. 2018 14:54:35


4.8.1.2.8 802.11 N20_ Middle Channel

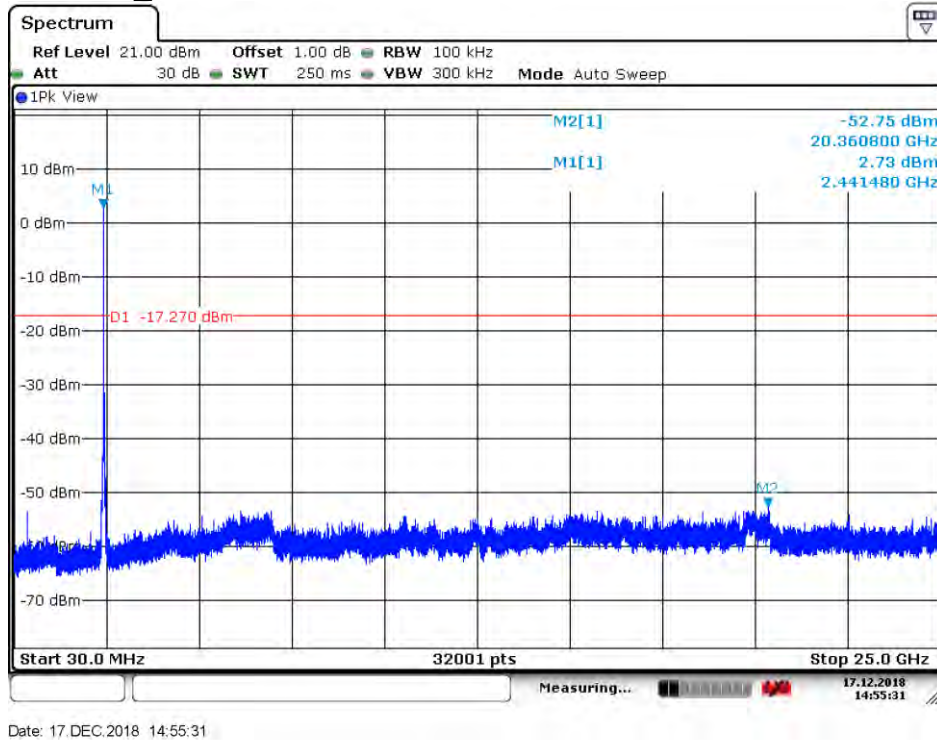


4.8.1.2.9 802.11 N20_ Highest Channel

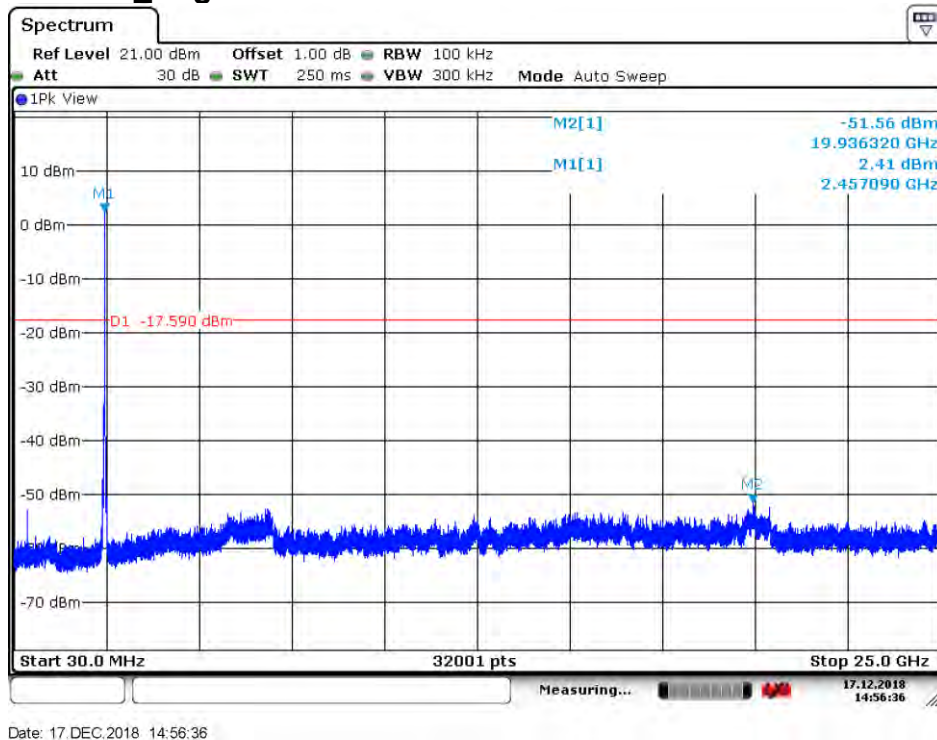


4.8.1.2.10 802.11G_CDD_Lowest Channel

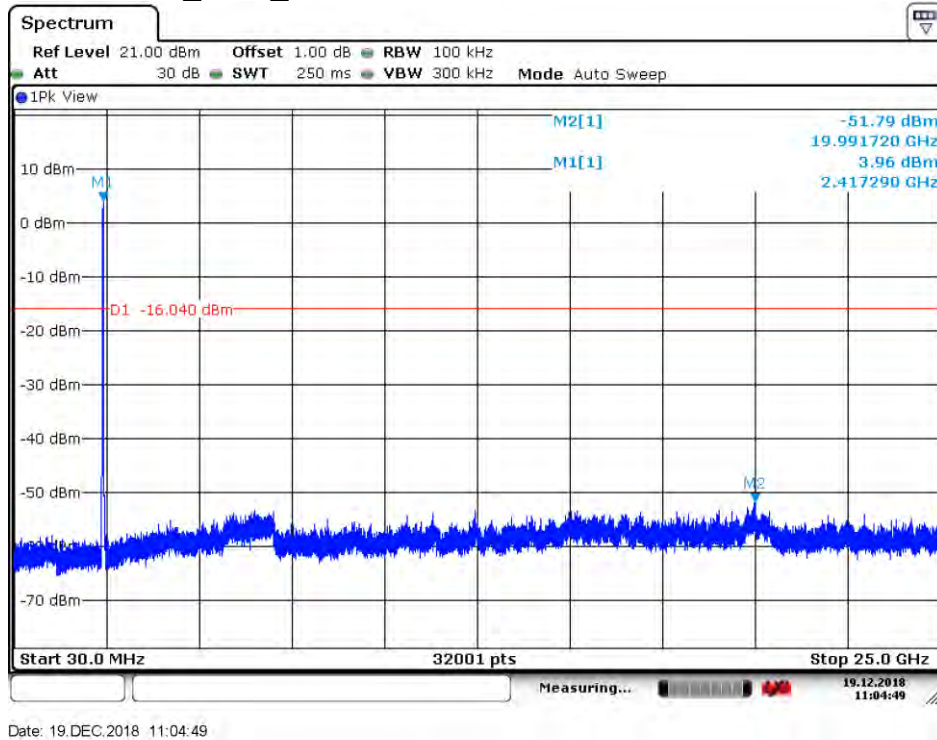

4.8.1.2.11 802.11G_CDD_Middle Channel

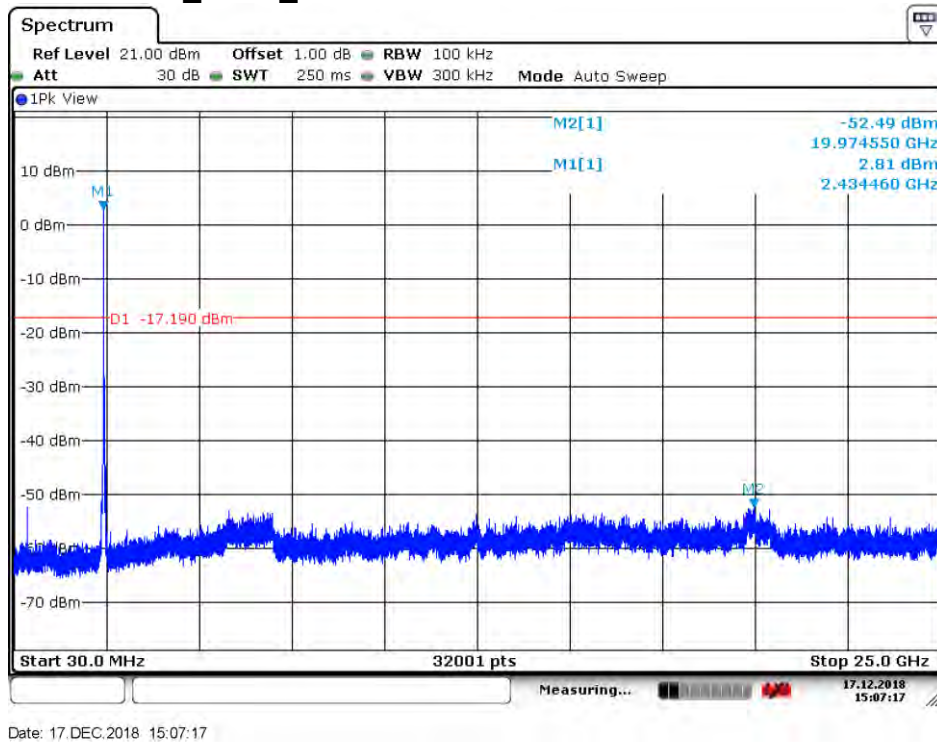


4.8.1.2.12 802.11G_CDD _ Highest Channel

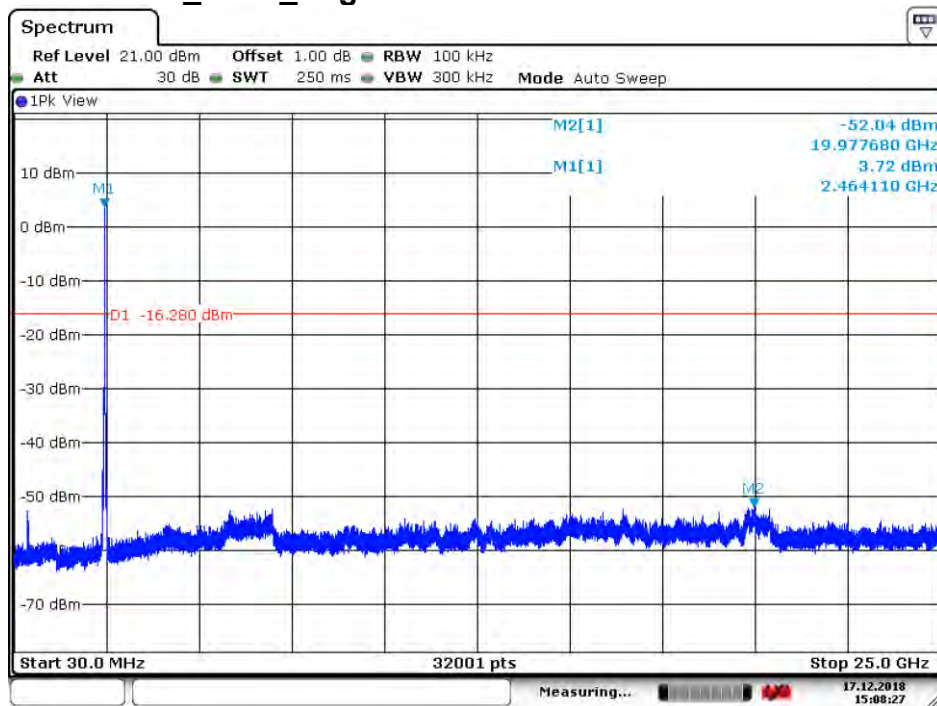


Date: 17. DEC. 2018 15:08:27

4.8.1.2.13 802.11N20_MIMO_Lowest Channel

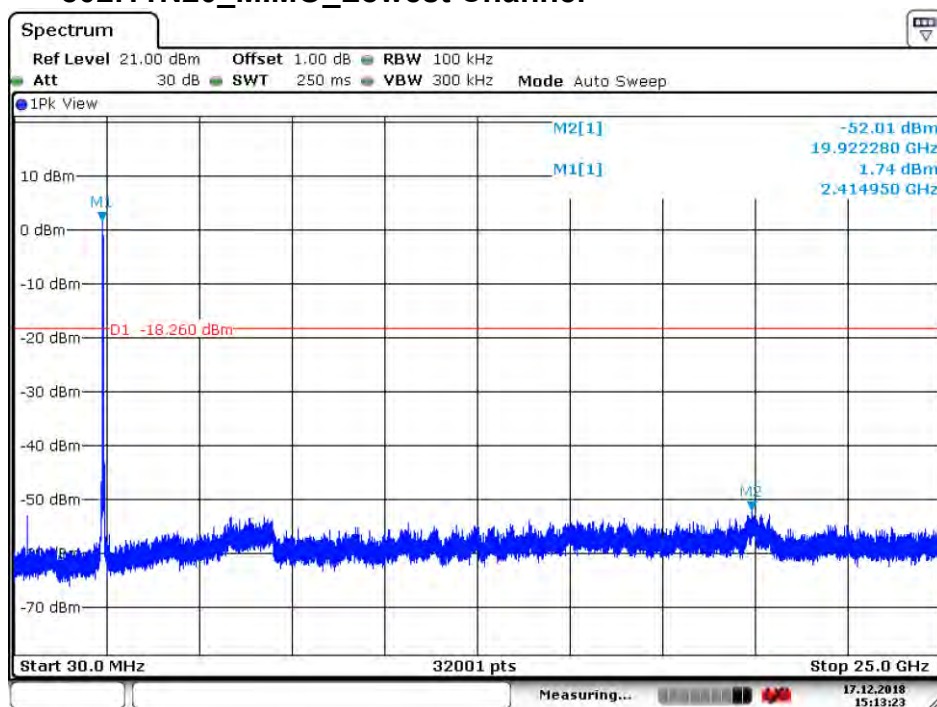


Date: 17. DEC. 2018 15:13:24

4.8.1.2.14 802.11N20_MIMO _ Middle Channel

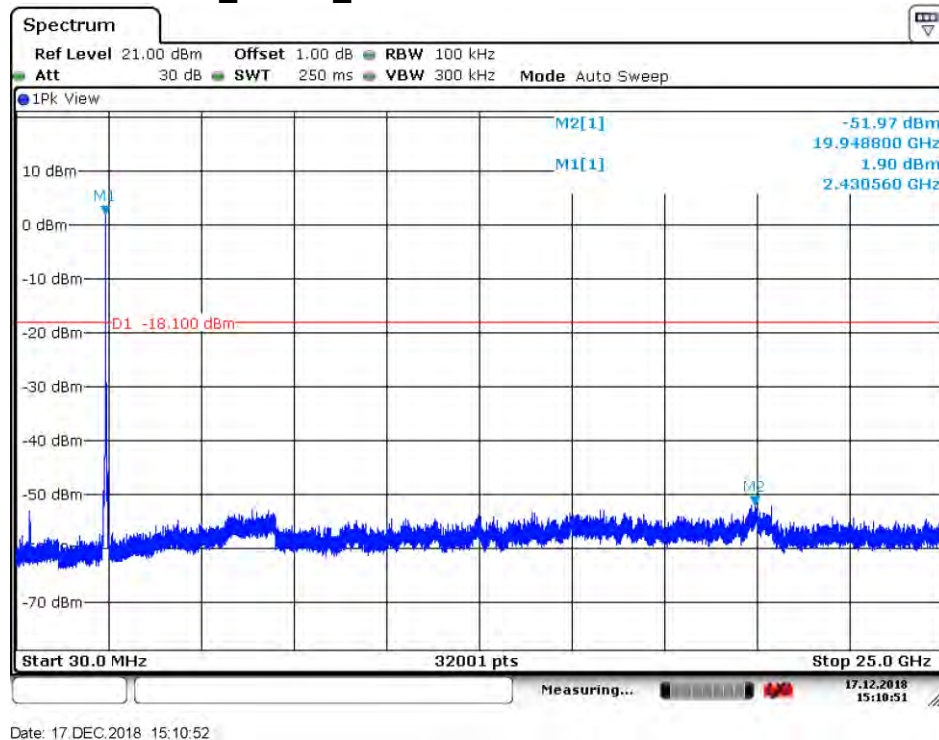

4.8.1.2.15 802.11N20_MIMO _ Highest Channel

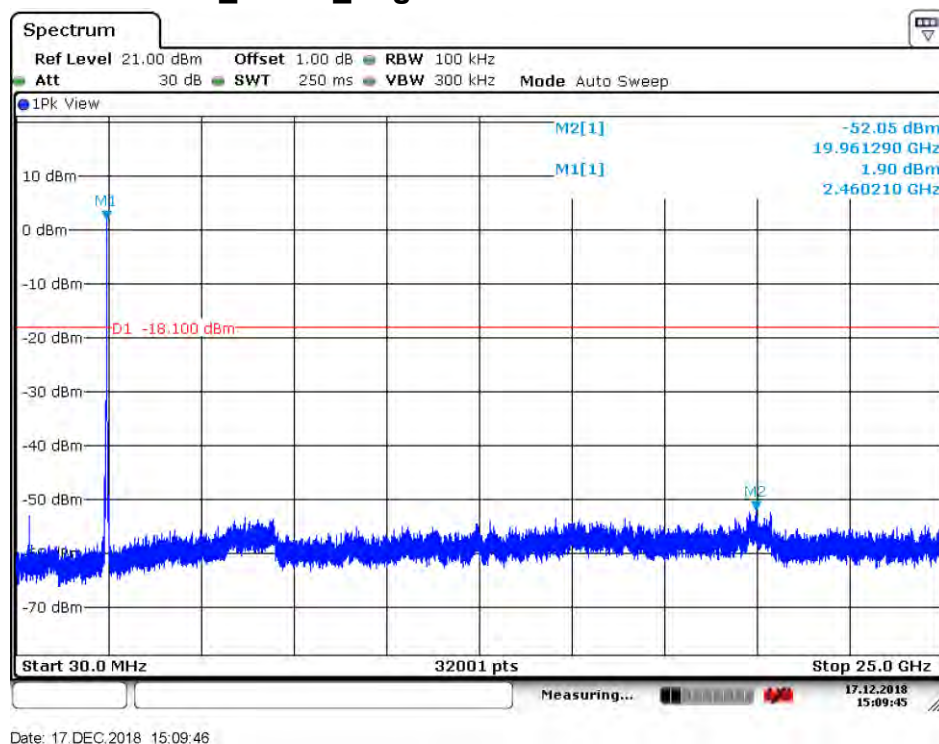


Remark:

Scan from 9kHz to 25GHz, the disturbance between 9KHz to 30MHz was very low, and the above harmonics were the highest point could be found when testing, The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

4.9 Radiated Spurious Emissions

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205				
Test Method:	ANSI C63.10 :2013 Section 11.12				
Test Site:	Measurement Distance: 3m or 10m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	Remark: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.				

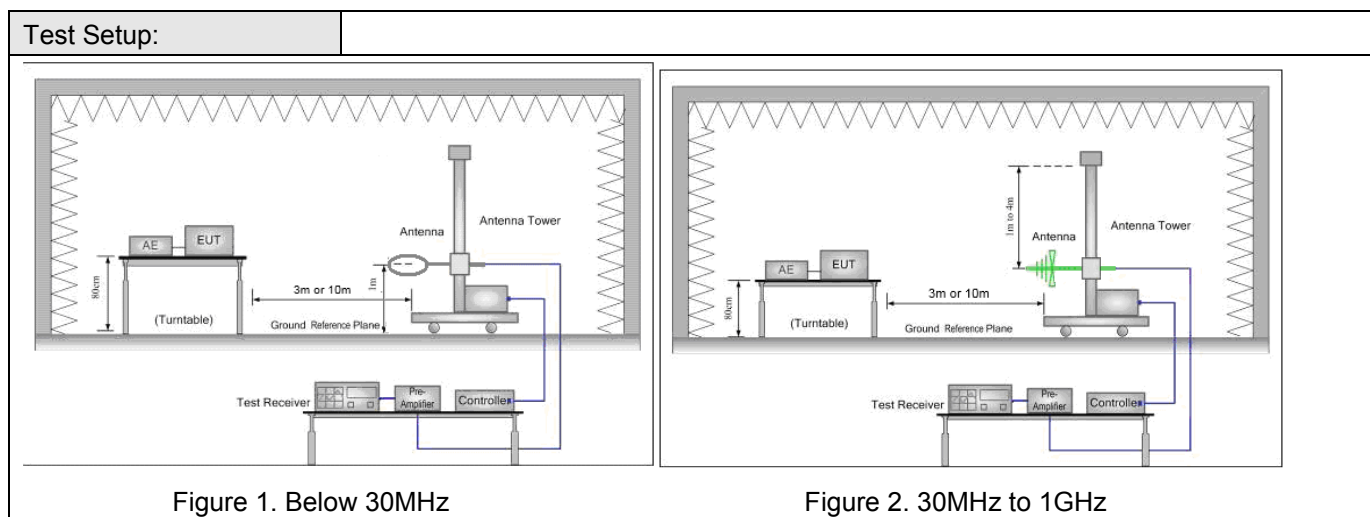


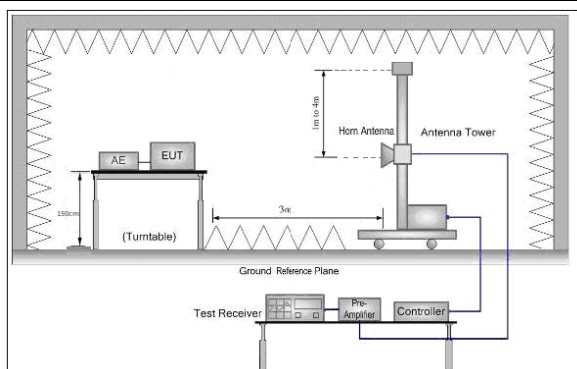


Figure 3. Above 1 GHz

Test Procedure:	a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. h. Test the EUT in the lowest channel, the middle channel, the Highest channel i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case. j. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates. Charge + Transmitting mode.
Final Test Mode:	Pretest the EUT at Charge + Transmitting mode. Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11B; 6Mbps of rate is the worst case of 802.11G; 6.5Mbps of rate is the worst case of 802.11N(HT20); For below 1GHz, through Pre-scan, find the 1Mbps of rate of 802.11B at lowest channel is the worst case. Only the worst case is recorded in the report.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass

4.9.1 Radiated emission below 1GHz

4.9.1.1 Charge + Transmitting, Vertical

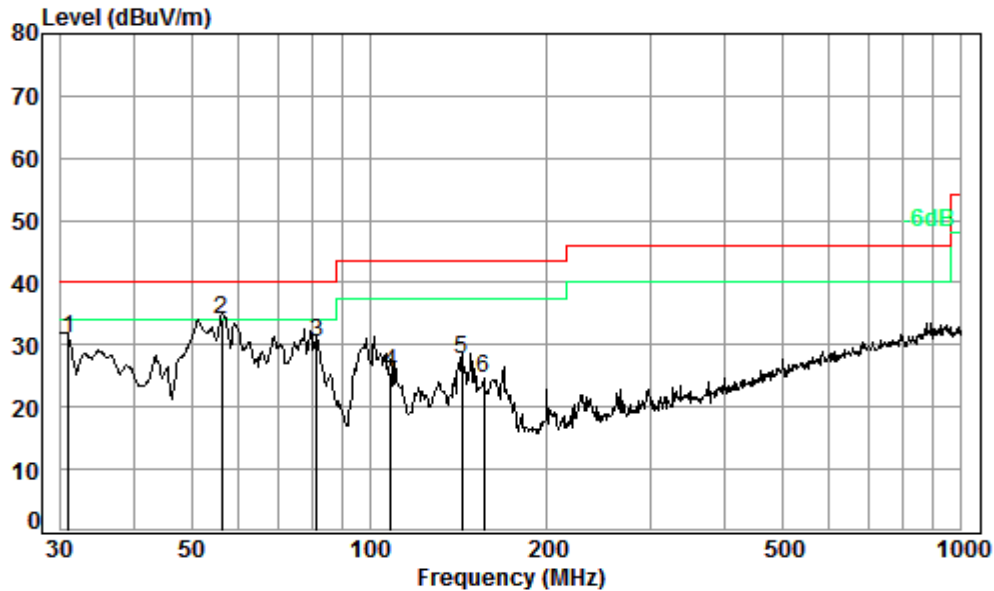


Condition: 3m VERTICAL

Job No. : 12741RG

Test mode: b

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	30.96	0.60	21.95	27.67	36.20	31.08	40.00	-8.92
2 pp	56.20	0.80	13.56	27.58	47.39	34.17	40.00	-5.83
3	81.50	1.10	12.17	27.50	44.65	30.42	40.00	-9.58
4	108.65	1.22	13.59	27.51	38.35	25.65	43.50	-17.85
5	143.33	1.30	14.02	27.52	39.73	27.53	43.50	-15.97
6	155.91	1.33	15.15	27.52	35.56	24.52	43.50	-18.98

4.9.1.2 Charge + Transmitting, Horizontal

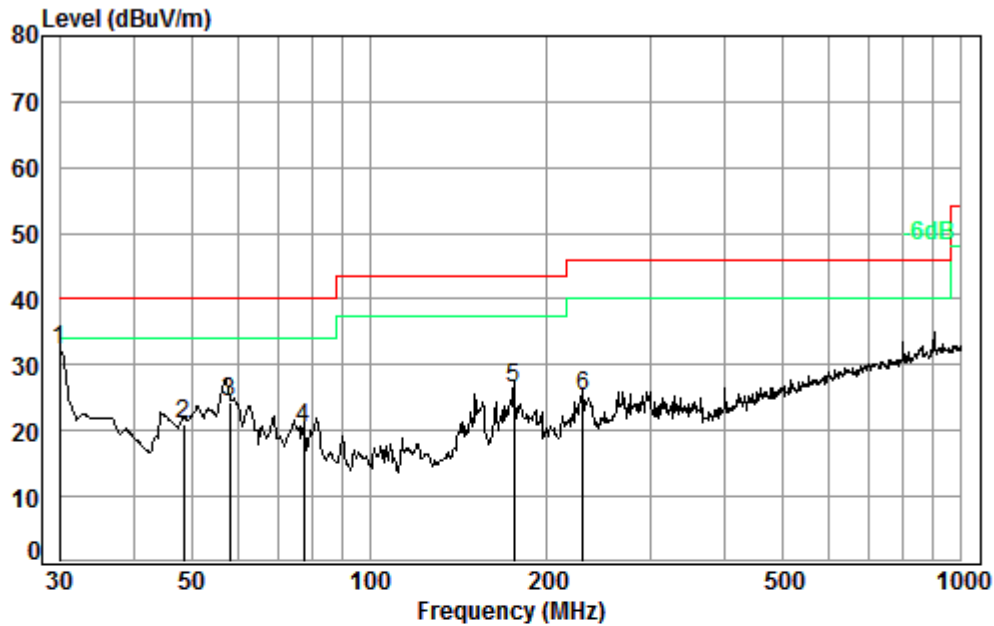

Condition: 3m HORIZONTAL

Job No. : 12741RG


Test mode: b

		Cable	Ant	Preamp	Read		Limit	Over
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	30.00	0.60	22.50	27.67	36.75	32.18	40.00	-7.82
2	48.50	0.77	14.65	27.60	33.26	21.08	40.00	-18.92
3	58.00	0.80	13.39	27.57	37.74	24.36	40.00	-15.64
4	77.59	1.03	12.18	27.51	34.54	20.24	40.00	-19.76
5	175.65	1.36	15.82	27.53	36.93	26.58	43.50	-16.92
6	230.10	1.57	18.03	27.53	33.27	25.34	46.00	-20.66

4.9.2 Transmitter emission above 1GHz

4.9.2.1 ANT1


4.9.2.1.1 802.11B_Lowest Channel_ Peak_ Vertical

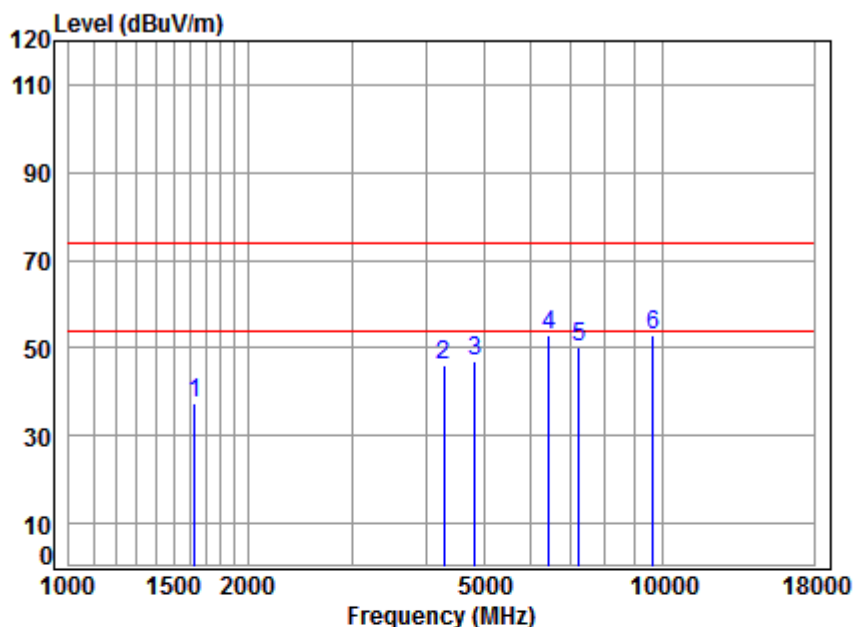

Site : chamber
Condition: 3m VERTICAL
Job No : 12741RG
Mode : 2412 TX SE
Note : 2.4G WIFI 11B
: ANT1

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1629.825	5.31	26.38	40.79	46.66	37.56	74.00	-36.44	peak
2	4291.977	7.33	33.24	43.08	48.37	45.86	74.00	-28.14	peak
3	4824.000	7.91	34.00	43.63	48.90	47.18	74.00	-26.82	peak
4	6451.353	11.45	35.55	42.44	48.59	53.15	74.00	-20.85	peak
5	7236.000	10.07	36.09	41.83	45.76	50.09	74.00	-23.91	peak
6	9648.000	10.77	37.69	38.36	42.82	52.92	74.00	-21.08	peak


4.9.2.1.2 802.11B_Lowest Channel_ Peak_ Horizontal

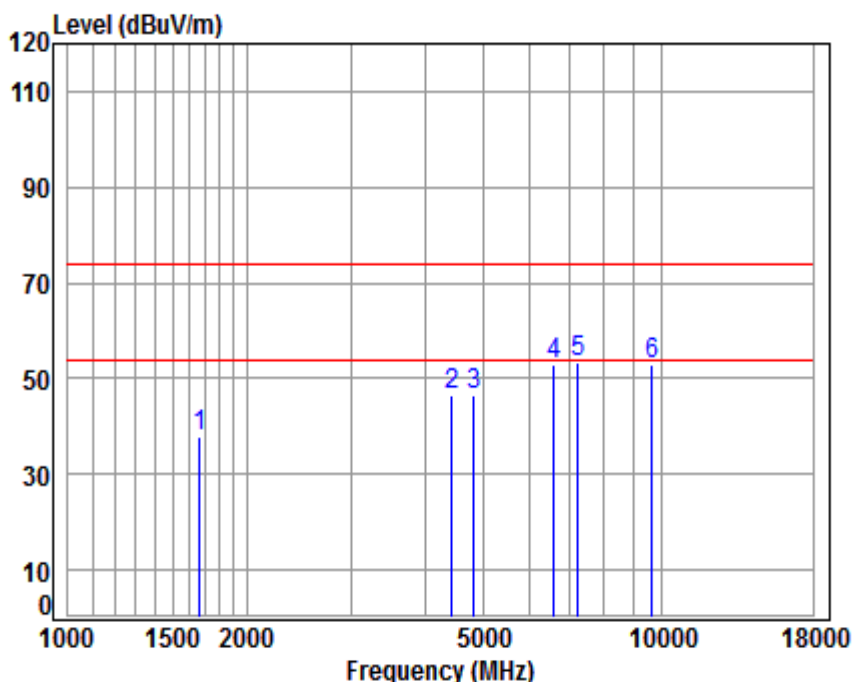

Site : chamber
Condition: 3m HORIZONTAL
Job No : 12741RG
Mode : 2412 TX SE
Note : 2.4G WIFI 11B
: ANT1

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1667.951	5.27	26.54	40.81	46.67	37.67	74.00	-36.33	peak
2	4443.453	7.50	33.50	43.25	48.97	46.72	74.00	-27.28	peak
3	4824.000	7.91	34.00	43.63	48.41	46.69	74.00	-27.31	peak
4	6602.265	11.24	35.66	42.32	48.32	52.90	74.00	-21.10	peak
5	7236.000	10.07	36.09	41.83	48.99	53.32	74.00	-20.68	peak
6	9648.000	10.77	37.69	38.36	42.89	52.99	74.00	-21.01	peak


4.9.2.1.3 802.11G_Lowest Channel_ Peak_ Vertical

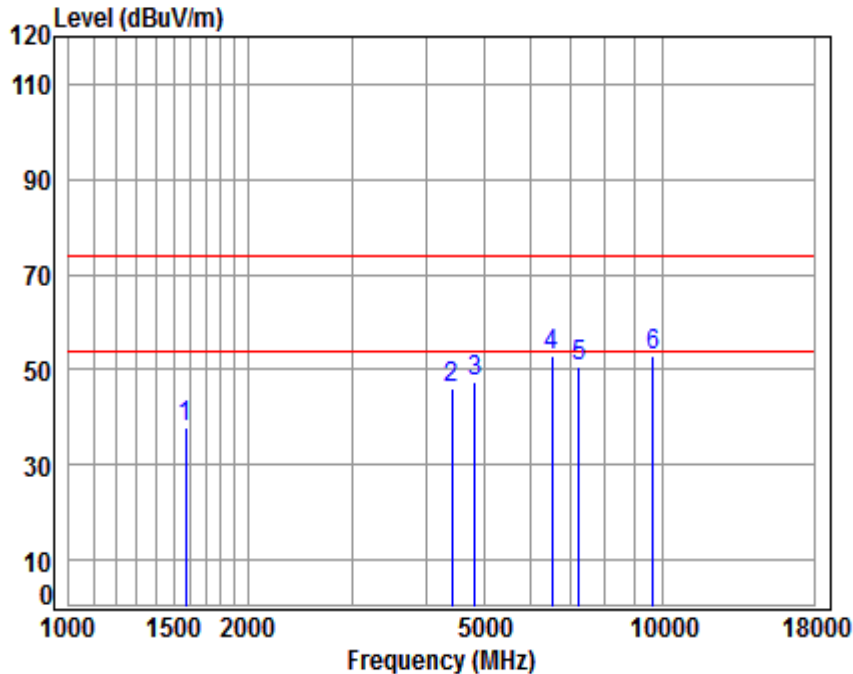

Site : chamber
Condition: 3m VERTICAL
Job No : 12741RG
Mode : 2412 TX SE
Note : 2.4G WIFI 11G
: ANT1

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1574.265	5.38	26.14	40.75	46.95	37.72	74.00	-36.28	peak
2	4417.841	7.47	33.46	43.22	48.29	46.00	74.00	-28.00	peak
3	4824.000	7.91	34.00	43.63	49.10	47.38	74.00	-26.62	peak
4	6507.536	11.52	35.60	42.40	48.23	52.95	74.00	-21.05	peak
5	7236.000	10.07	36.09	41.83	46.29	50.62	74.00	-23.38	peak
6	9648.000	10.77	37.69	38.36	42.97	53.07	74.00	-20.93	peak

4.9.2.1.4 802.11G_Lowest Channel_ Peak_ Horizontal

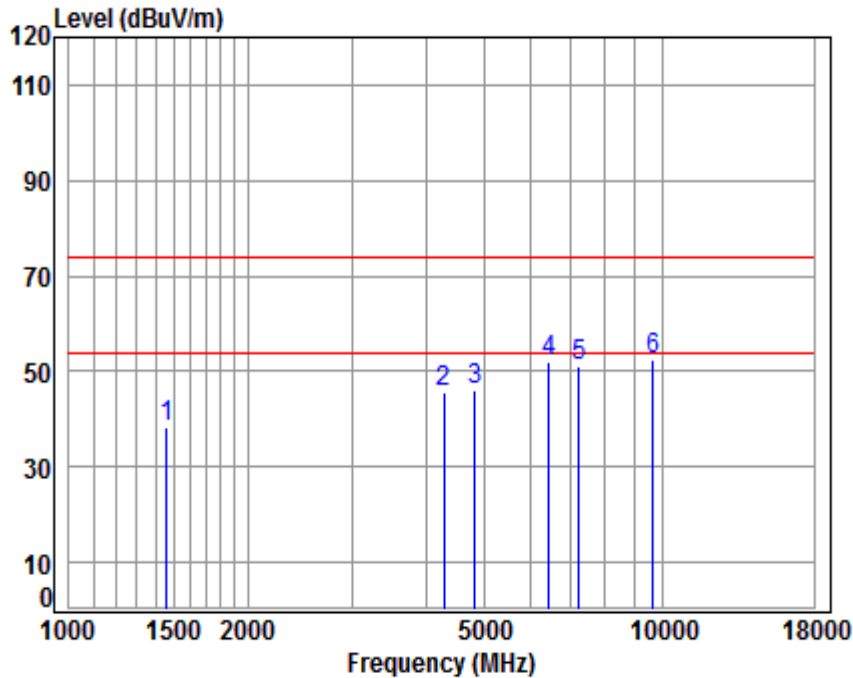


Site : chamber
Condition: 3m HORIZONTAL
Job No : 12741RG
Mode : 2412 TX SE
Note : 2.4G WIFI 11G
: ANT1

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1460.295	5.35	25.65	40.68	48.20	38.52	74.00	-35.48	peak
2	4291.977	7.33	33.24	43.08	48.07	45.56	74.00	-28.44	peak
3	4824.000	7.91	34.00	43.63	47.88	46.16	74.00	-27.84	peak
4	6432.732	11.41	35.54	42.46	47.51	52.00	74.00	-22.00	peak
5	7236.000	10.07	36.09	41.83	46.63	50.96	74.00	-23.04	peak
6	9648.000	10.77	37.69	38.36	42.49	52.59	74.00	-21.41	peak

4.9.2.2 ANT2


4.9.2.2.1 802.11B_Lowest Channel_ Peak_ Vertical

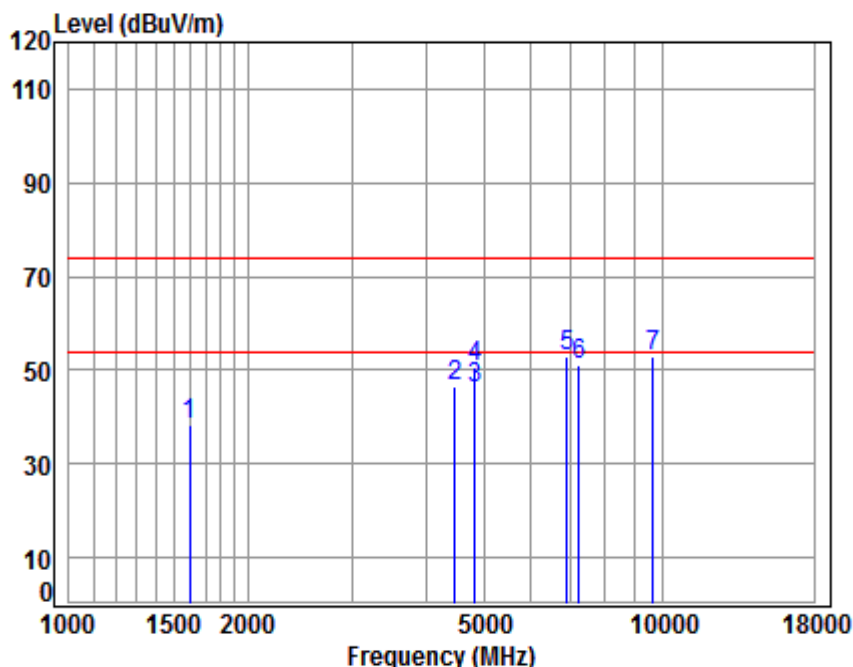

Site : chamber
Condition: 3m VERTICAL
Job No : 12741RG
Mode : 2412 TX SE
Note : 2.4G WIFI 11B
: ANT2

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1597.181	5.35	26.24	40.77	47.32	38.14	74.00	-35.86	peak
2	4469.214	7.53	33.55	43.27	48.71	46.52	74.00	-27.48	peak
3	4824.000	7.90	33.99	43.63	47.63	45.89	54.00	-8.11	Average
4	4824.000	7.91	34.00	43.63	52.25	50.53	74.00	-23.47	peak
5	6894.806	10.42	35.84	42.09	48.80	52.97	74.00	-21.03	peak
6	7236.000	10.07	36.09	41.83	46.80	51.13	74.00	-22.87	peak
7	9648.000	10.77	37.69	38.36	42.89	52.99	74.00	-21.01	peak


4.9.2.2.2 802.11B_ Middle Channel_ Peak_ Vertical

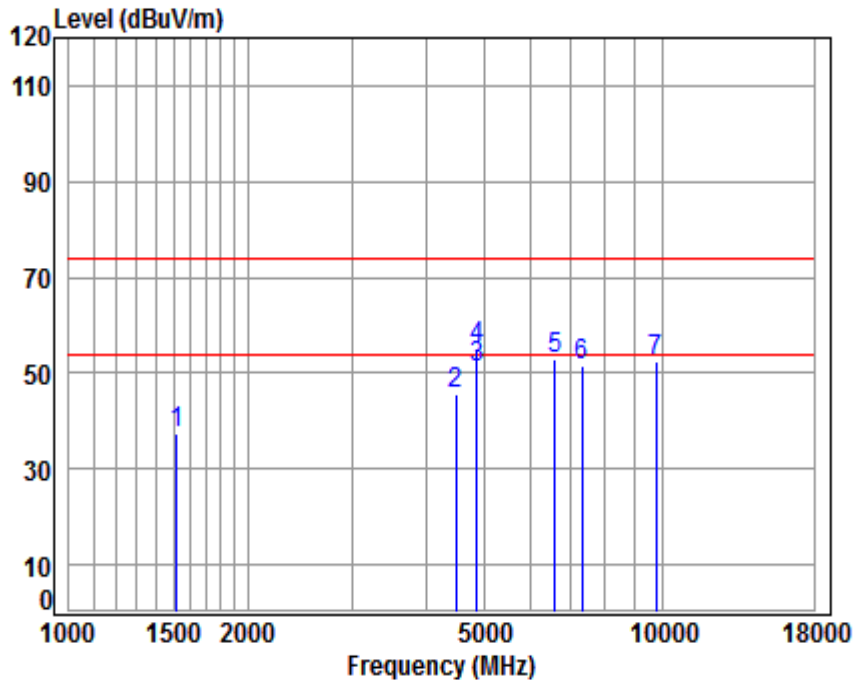

Site : chamber
Condition: 3m VERTICAL
Job No : 12741RG
Mode : 2437 TX SE
Note : 2.4G WIFI 11B
: ANT2

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1516.210	5.46	25.87	40.72	46.92	37.53	74.00	-36.47 peak
2	4482.150	7.54	33.57	43.29	48.03	45.85	74.00	-28.15 peak
3	4874.000	7.96	34.05	43.68	52.93	51.26	54.00	-2.74 Average
4	4874.000	7.96	34.05	43.68	56.74	55.07	74.00	-18.93 peak
5	6583.209	11.30	35.65	42.34	48.19	52.80	74.00	-21.20 peak
6	7311.000	10.05	36.15	41.78	47.03	51.45	74.00	-22.55 peak
7	9748.000	10.82	37.75	38.20	41.99	52.36	74.00	-21.64 peak


4.9.2.2.3 802.11B_ Highest Channel_ Peak_ Vertical

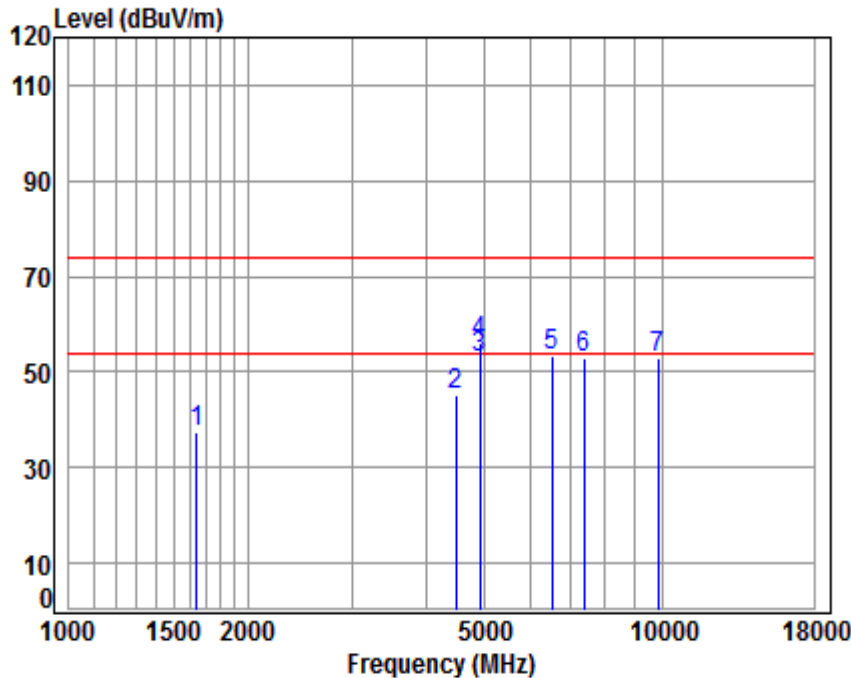

Site : chamber
Condition: 3m VERTICAL
Job No : 12741RG
Mode : 2462 TX SE
Note : 2.4G WIFI 11B
: ANT2

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1644.019	5.30	26.44	40.80	46.66	37.60	74.00	-36.40	peak
2	4495.125	7.55	33.59	43.30	47.52	45.36	74.00	-28.64	peak
3	4924.000	8.01	34.10	43.72	54.67	53.06	54.00	-0.94	Average
4	4924.000	8.01	34.10	43.72	57.95	56.34	74.00	-17.66	Peak
5	6507.536	11.52	35.60	42.40	48.49	53.21	74.00	-20.79	peak
6	7386.000	10.03	36.21	41.72	48.48	53.00	74.00	-21.00	peak
7	9848.000	10.87	37.81	38.04	42.20	52.84	74.00	-21.16	peak


4.9.2.2.4 802.11B_Lowest Channel_ Peak_ Horizontal

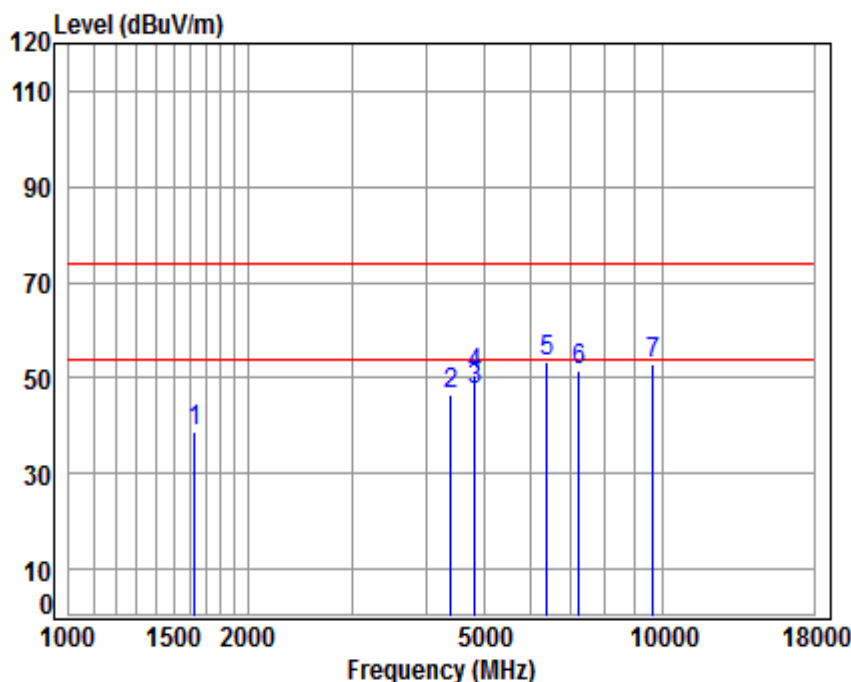

Site : chamber
Condition: 3m HORIZONTAL
Job No : 12741RG
Mode : 2412 TX SE
Note : 2.4G WIFI 11B
: ANT2

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1629.825	5.31	26.38	40.79	47.77	38.67	74.00	-35.33	peak
2	4405.090	7.46	33.44	43.20	49.01	46.71	74.00	-27.29	peak
3	4824.000	7.92	34.01	43.64	49.19	47.48	54.00	-6.52	Average
4	4824.000	7.91	34.00	43.63	52.23	50.51	74.00	-23.49	peak
5	6395.654	11.34	35.50	42.49	48.96	53.31	74.00	-20.69	peak
6	7236.000	10.07	36.09	41.83	47.35	51.68	74.00	-22.32	peak
7	9648.000	10.77	37.69	38.36	42.67	52.77	74.00	-21.23	peak


4.9.2.2.5 802.11B_ Middle Channel_ Peak_ Horizontal

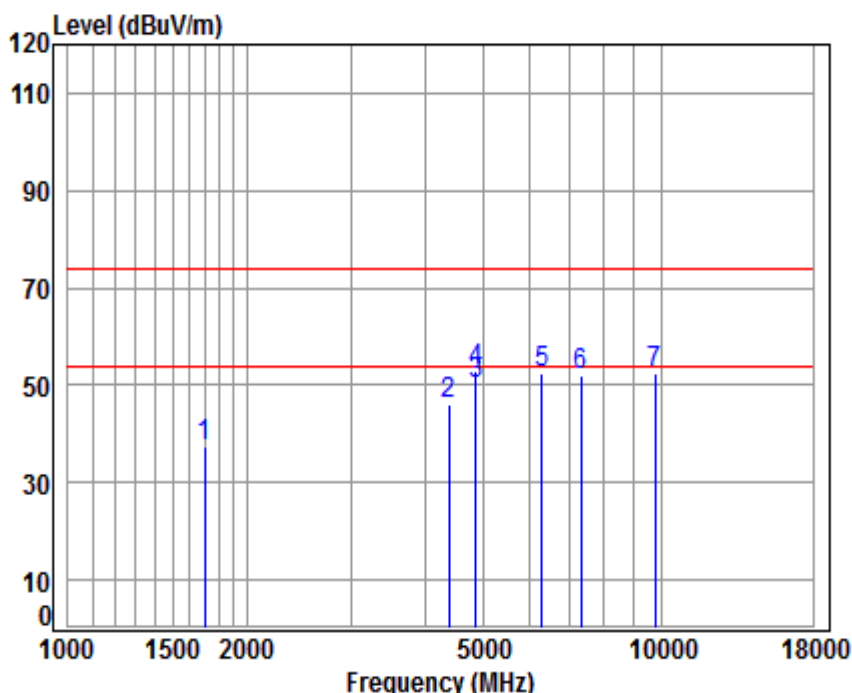

Site : chamber
Condition: 3m HORIZONTAL
Job No : 12741RG
Mode : 2437 TX SE
Note : 2.4G WIFI 11B
: ANT2

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1697.129	5.23	26.66	40.83	46.54	37.60	74.00	-36.40	peak
2	4379.699	7.43	33.39	43.18	48.30	45.94	74.00	-28.06	peak
3	4874.000	7.96	34.05	43.68	51.66	49.99	54.00	-4.01	Average
4	4874.000	7.96	34.05	43.68	54.43	52.76	74.00	-21.24	peak
5	6303.890	11.17	35.41	42.57	48.67	52.68	74.00	-21.32	peak
6	7311.000	10.05	36.15	41.78	47.40	51.82	74.00	-22.18	peak
7	9748.000	10.82	37.75	38.20	42.14	52.51	74.00	-21.49	peak


4.9.2.2.6 802.11B_ Highest Channel_ Peak_ Horizontal

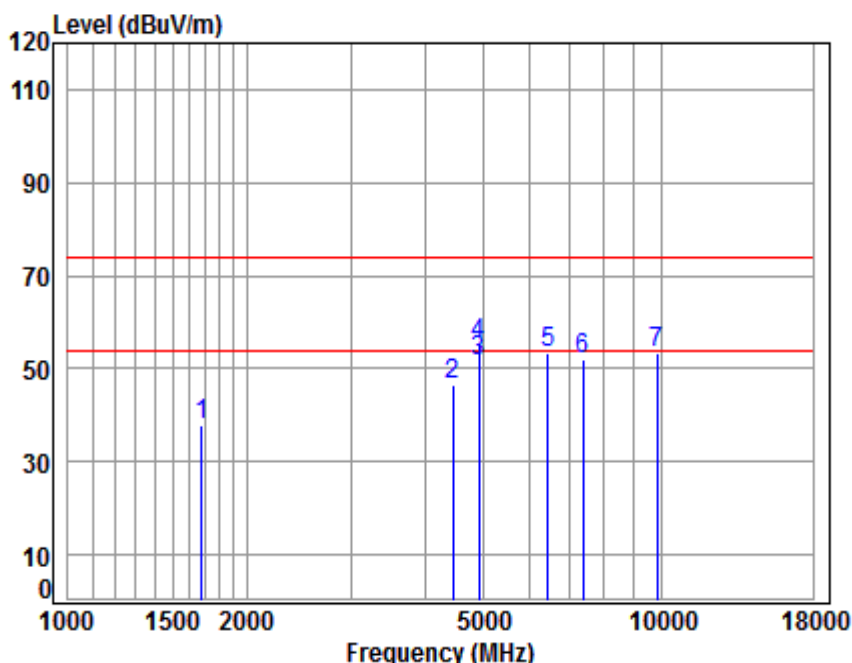

Site : chamber
Condition: 3m HORIZONTAL
Job No : 12741RG
Mode : 2462 TX SE
Note : 2.4G WIFI 11B
: ANT2

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1682.477	5.25	26.60	40.82	46.61	37.64	74.00	-36.36	peak
2	4456.315	7.51	33.53	43.26	48.57	46.35	74.00	-27.65	peak
3	4924.000	8.01	34.10	43.72	53.14	51.53	54.00	-2.47	Average
4	4924.000	8.01	34.10	43.72	56.84	55.23	74.00	-18.77	Peak
5	6451.353	11.45	35.55	42.44	48.82	53.38	74.00	-20.62	peak
6	7386.000	10.03	36.21	41.72	47.55	52.07	74.00	-21.93	peak
7	9848.000	10.87	37.81	38.04	42.91	53.55	74.00	-20.45	peak


4.9.2.2.7 802.11G_Lowest Channel_ Peak_ Vertical

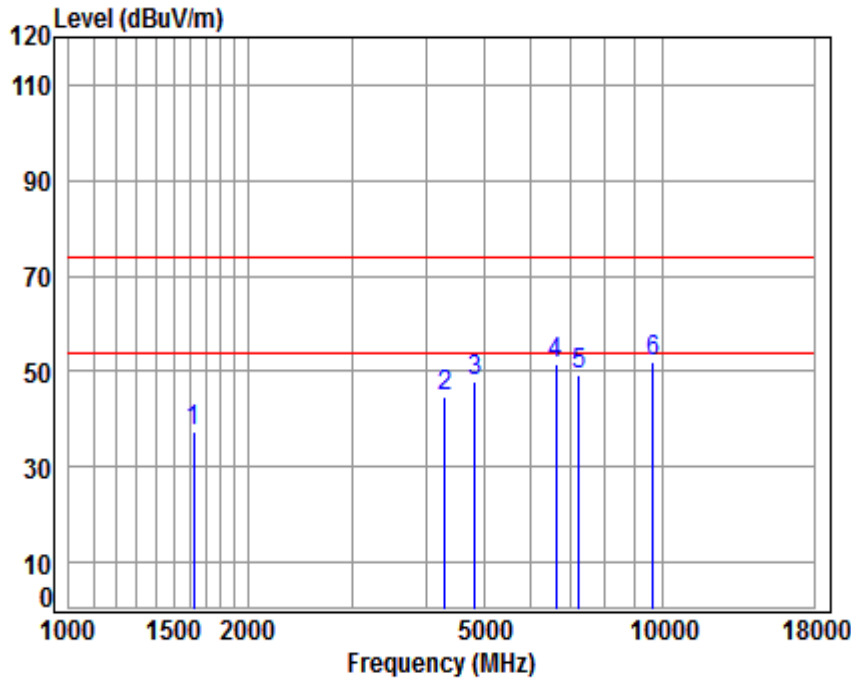

Site : chamber
 Condition: 3m VERTICAL
 Job No : 12741RG
 Mode : 2412 TX SE
 Note : 2.4G WIFI 11G
 : ANT2

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1620.431	5.32	26.34	40.78	46.60	37.48	74.00	-36.52	peak
2	4304.400	7.34	33.26	43.10	47.24	44.74	74.00	-29.26	peak
3	4824.000	7.91	34.00	43.63	49.41	47.69	74.00	-26.31	peak
4	6621.375	11.19	35.67	42.31	47.20	51.75	74.00	-22.25	peak
5	7236.000	10.07	36.09	41.83	45.09	49.42	74.00	-24.58	peak
6	9648.000	10.77	37.69	38.36	41.71	51.81	74.00	-22.19	peak


4.9.2.2.8 802.11G_ Middle Channel_ Peak_ Vertical

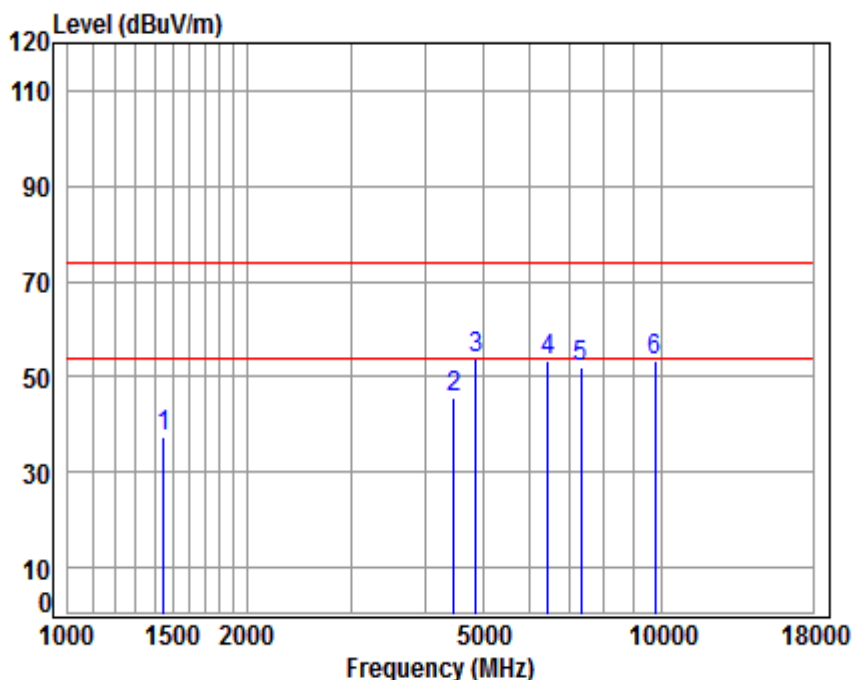

Site : chamber
Condition: 3m VERTICAL
Job No : 12741RG
Mode : 2437 TX SE
Note : 2.4G WIFI 11G
: ANT2

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1451.878	5.32	25.62	40.67	47.31	37.58	74.00	-36.42	peak
2	4469.214	7.53	33.55	43.27	47.90	45.71	74.00	-28.29	peak
3	4874.000	7.96	34.05	43.68	55.46	53.79	74.00	-20.21	peak
4	6451.353	11.45	35.55	42.44	48.74	53.30	74.00	-20.70	peak
5	7311.000	10.05	36.15	41.78	47.42	51.84	74.00	-22.16	peak
6	9748.000	10.82	37.75	38.20	42.86	53.23	74.00	-20.77	peak

4.9.2.2.9 802.11G_ Highest Channel_ Peak_ Vertical

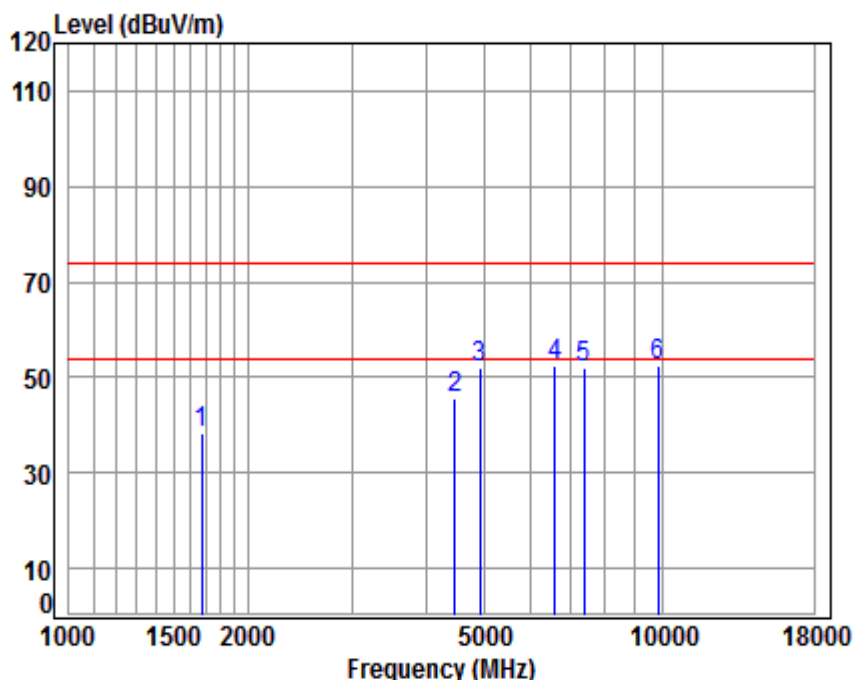


Site : chamber
Condition: 3m VERTICAL
Job No : 12741RG
Mode : 2462 TX SE
Note : 2.4G WIFI 11G
: ANT2

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1672.779	5.26	26.56	40.82	47.25	38.25	74.00	-35.75	peak
2	4469.214	7.53	33.55	43.27	47.91	45.72	74.00	-28.28	peak
3	4924.000	8.01	34.11	43.73	53.62	52.01	74.00	-21.99	peak
4	6583.209	11.30	35.65	42.34	48.04	52.65	74.00	-21.35	peak
5	7386.000	10.03	36.21	41.72	47.66	52.18	74.00	-21.82	peak
6	9848.000	10.87	37.81	38.04	41.98	52.62	74.00	-21.38	peak




4.9.2.2.10 802.11G_Lowest Channel_ Peak_ Horizontal

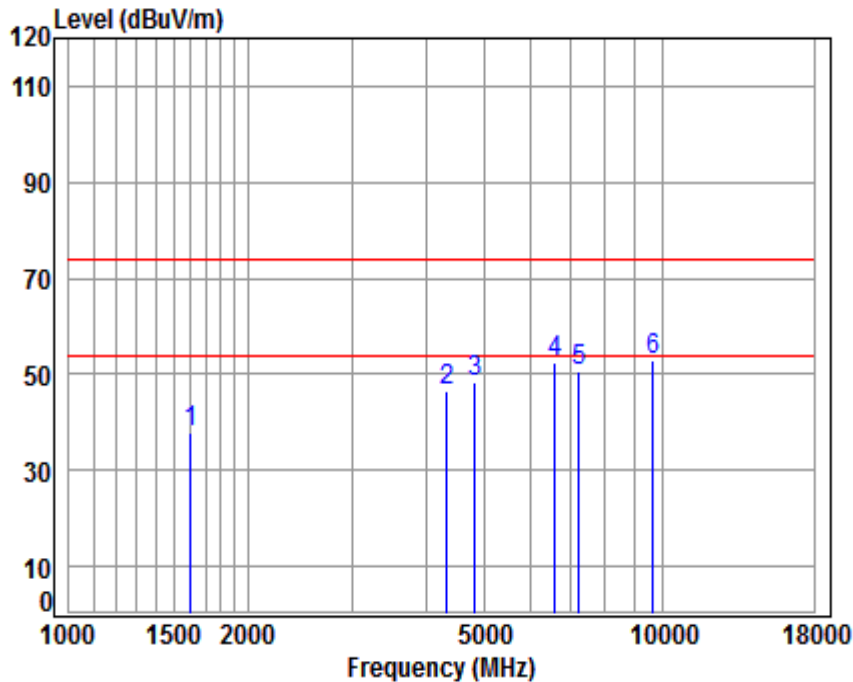

Site : chamber
Condition: 3m HORIZONTAL
Job No : 12741RG
Mode : 2412 TX SE
Note : 2.4G WIFI 11G
: ANT2

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1601.804	5.35	26.26	40.77	47.17	38.01	74.00	-35.99	peak
2	4341.886	7.38	33.33	43.14	48.77	46.34	74.00	-27.66	peak
3	4824.000	7.91	34.00	43.63	49.95	48.23	74.00	-25.77	peak
4	6602.265	11.24	35.66	42.32	47.94	52.52	74.00	-21.48	peak
5	7236.000	10.07	36.09	41.83	46.33	50.66	74.00	-23.34	peak
6	9648.000	10.77	37.69	38.36	42.73	52.83	74.00	-21.17	peak

4.9.2.2.11 802.11G_ Middle Channel_ Peak_ Horizontal

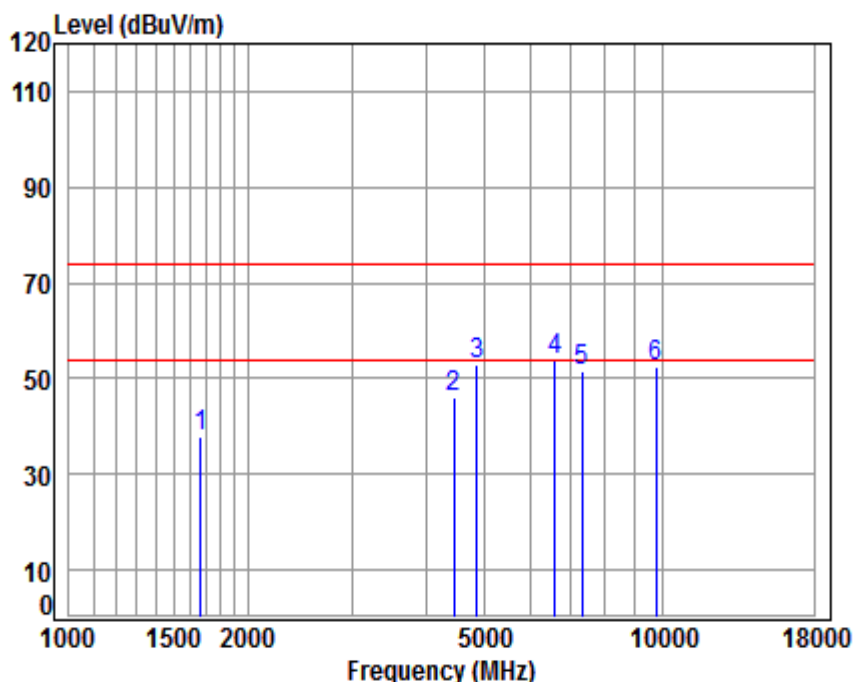


Site : chamber
Condition: 3m HORIZONTAL
Job No : 12741RG
Mode : 2437 TX SE
Note : 2.4G WIFI 11G
: ANT2

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1667.951	5.27	26.54	40.81	46.68	37.68	74.00	-36.32	peak
2	4456.315	7.51	33.53	43.26	48.16	45.94	74.00	-28.06	peak
3	4874.000	7.96	34.05	43.68	54.54	52.87	74.00	-21.13	peak
4	6583.209	11.30	35.65	42.34	49.14	53.75	74.00	-20.25	peak
5	7311.000	10.05	36.15	41.78	47.09	51.51	74.00	-22.49	peak
6	9748.000	10.82	37.75	38.20	41.96	52.33	74.00	-21.67	peak




4.9.2.2.12 802.11G_ Highest Channel_ Peak_ Horizontal

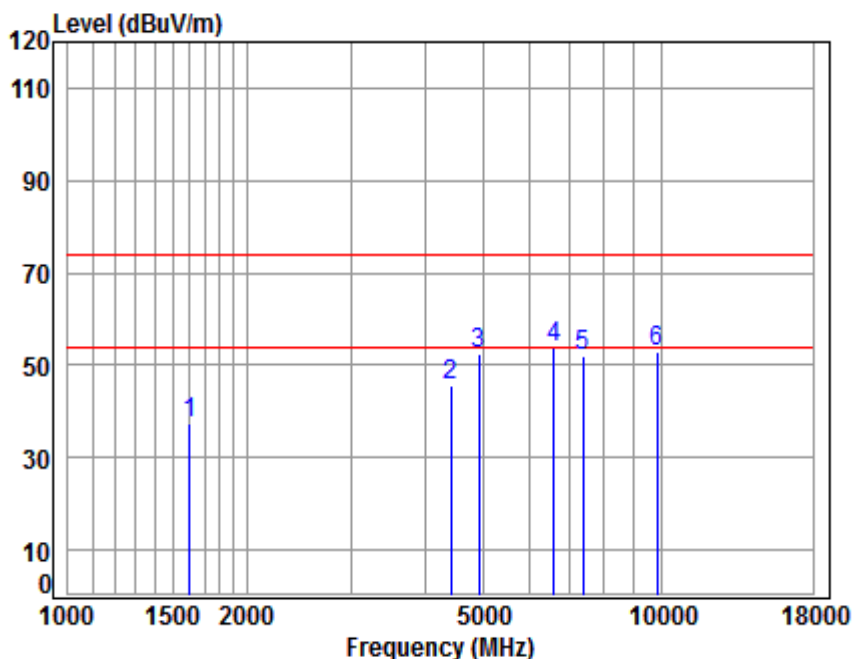

Site : chamber
Condition: 3m HORIZONTAL
Job No : 12741RG
Mode : 2462 TX SE
Note : 2.4G WIFI 11G
: ANT2

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1601.804	5.35	26.26	40.77	46.57	37.41	74.00	-36.59	peak
2	4417.841	7.47	33.46	43.22	48.12	45.83	74.00	-28.17	peak
3	4924.000	8.01	34.11	43.73	54.02	52.41	74.00	-21.59	peak
4	6602.265	11.24	35.66	42.32	49.08	53.66	74.00	-20.34	peak
5	7386.000	10.03	36.21	41.72	47.61	52.13	74.00	-21.87	peak
6	9848.000	10.87	37.81	38.04	42.42	53.06	74.00	-20.94	peak


4.9.2.2.13 802.11N20_Lowest Channel_Peak_Vertical

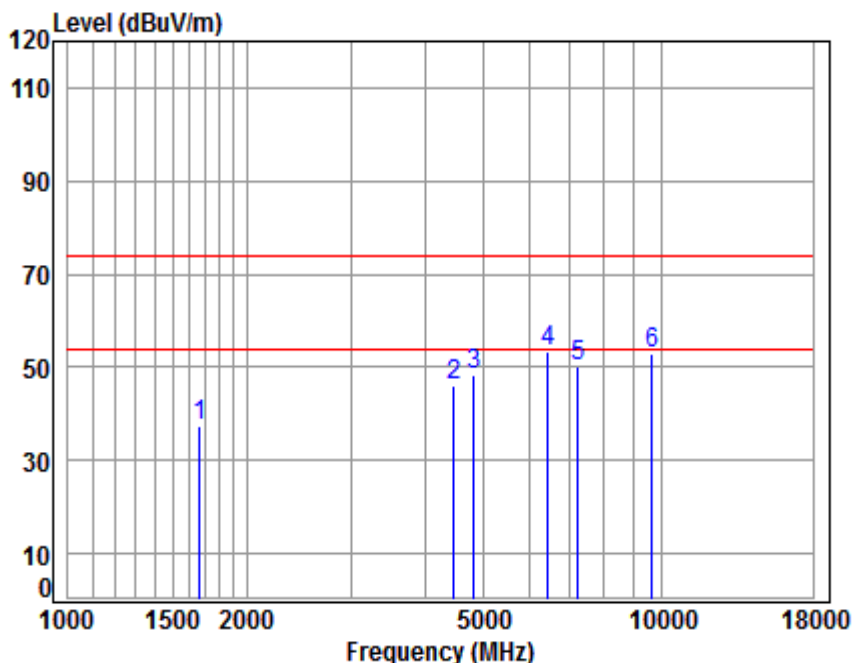

Site : chamber
Condition: 3m VERTICAL
Job No : 12741RG
Mode : 2412 TX SE
Note : 2.4G WIFI 11N20
: ANT2

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1667.951	5.27	26.54	40.81	46.32	37.32	74.00	-36.68	peak
2	4469.214	7.53	33.55	43.27	48.26	46.07	74.00	-27.93	peak
3	4824.000	7.91	34.00	43.63	50.17	48.45	74.00	-25.55	peak
4	6451.353	11.45	35.55	42.44	48.81	53.37	74.00	-20.63	peak
5	7236.000	10.07	36.09	41.83	45.68	50.01	74.00	-23.99	peak
6	9648.000	10.77	37.69	38.36	42.92	53.02	74.00	-20.98	peak


4.9.2.2.14 802.11N20_ Middle Channel_ Peak_ Vertical

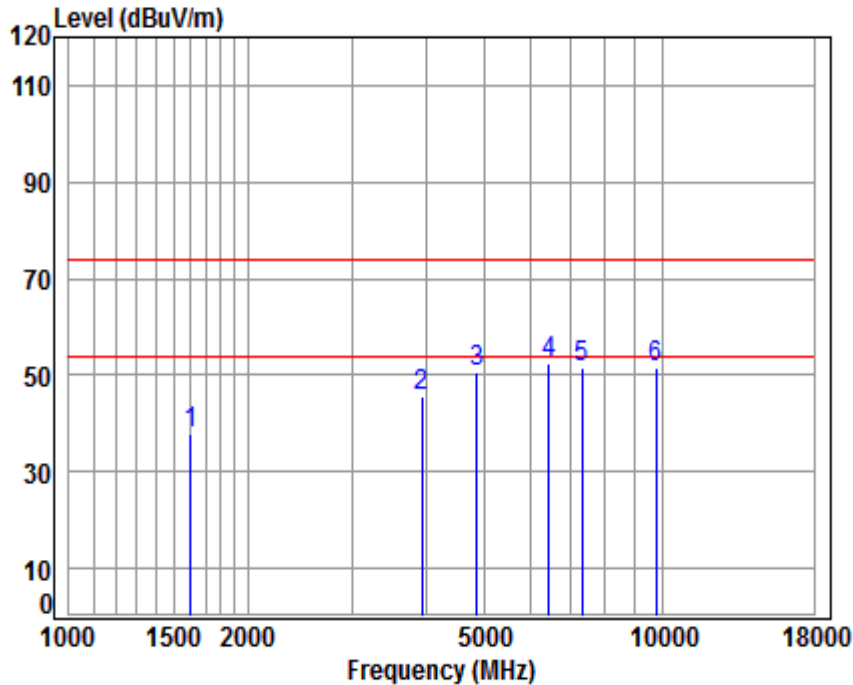

Site : chamber
Condition: 3m VERTICAL
Job No : 12741RG
Mode : 2437 TX SE
Note : 2.4G WIFI 11N20
: ANT2

		Cable	Ant	Preamp	Read	Limit	Over	
Freq		Loss	Factor	Factor	Level	Line	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1601.804	5.35	26.26	40.77	47.14	37.98	74.00	-36.02 peak
2	3935.493	6.92	32.58	42.68	48.81	45.63	74.00	-28.37 peak
3	4874.000	7.96	34.05	43.68	52.11	50.44	74.00	-23.56 peak
4	6432.732	11.41	35.54	42.46	48.00	52.49	74.00	-21.51 peak
5	7311.000	10.05	36.15	41.78	47.27	51.69	74.00	-22.31 peak
6	9748.000	10.82	37.75	38.20	41.24	51.61	74.00	-22.39 peak


4.9.2.2.15 802.11N20_ Highest Channel_ Peak_ Vertical

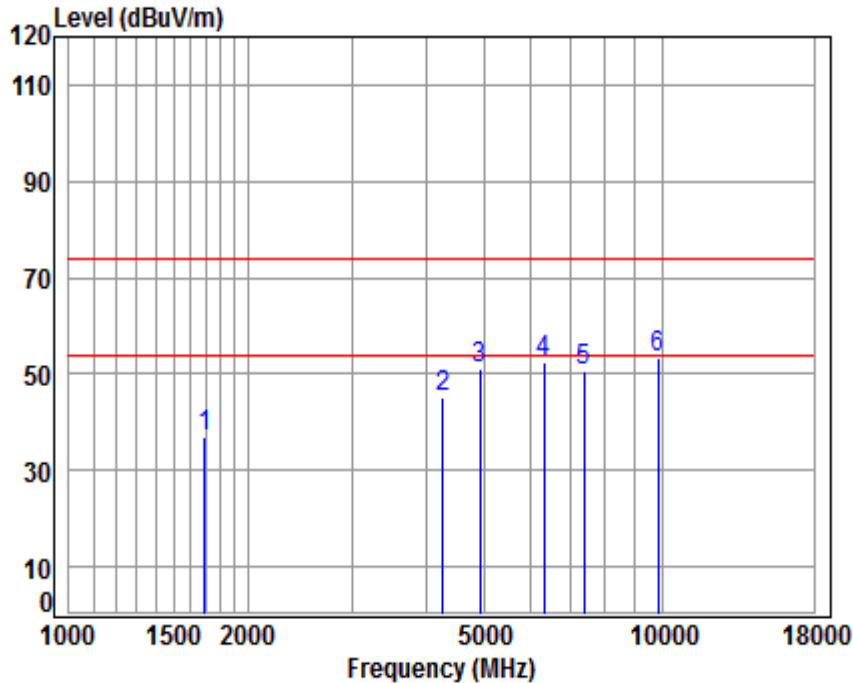

Site : chamber
Condition: 3m VERTICAL
Job No : 12741RG
Mode : 2462 TX SE
Note : 2.4G WIFI 11N20
: ANT2

		Cable	Ant	Preamp	Read		Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1692.231	5.24	26.64	40.83	45.85	36.90	74.00	-37.10	peak
2	4267.237	7.30	33.19	43.06	47.93	45.36	74.00	-28.64	peak
3	4924.000	8.01	34.11	43.73	52.60	50.99	74.00	-23.01	peak
4	6322.136	11.20	35.43	42.55	48.34	52.42	74.00	-21.58	peak
5	7386.000	10.03	36.21	41.72	46.06	50.58	74.00	-23.42	peak
6	9848.000	10.87	37.81	38.04	42.52	53.16	74.00	-20.84	peak

4.9.2.2.16 802.11N20_Lowest Channel_Peak_Horizontal

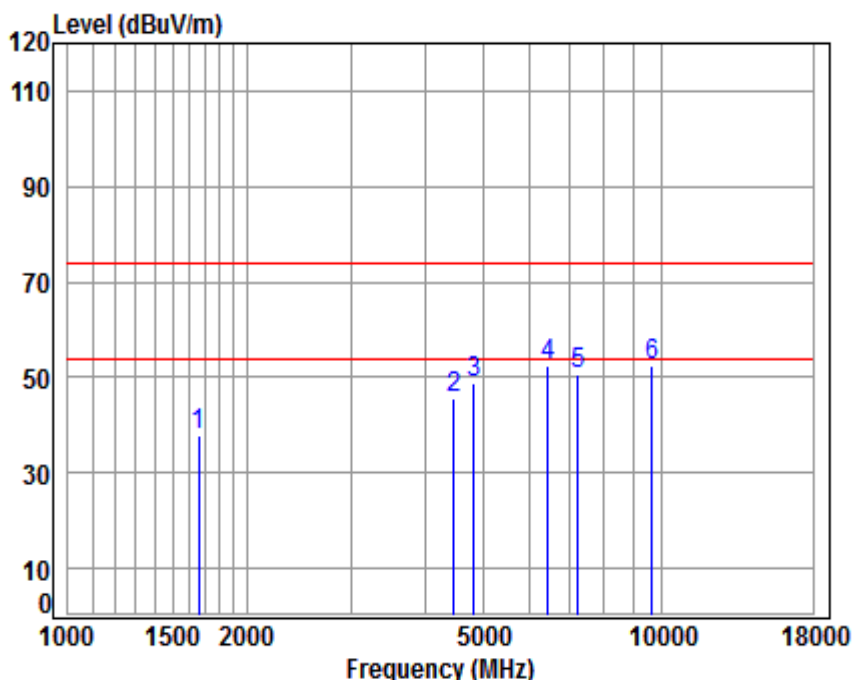


Site : chamber
Condition: 3m HORIZONTAL
Job No : 12741RG
Mode : 2412 TX SE
Note : 2.4G WIFI 11N20
: ANT2

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1663.137	5.27	26.52	40.81	46.83	37.81	74.00	-36.19	peak
2	4469.214	7.53	33.55	43.27	47.96	45.77	74.00	-28.23	peak
3	4824.000	7.91	34.00	43.63	50.60	48.88	74.00	-25.12	peak
4	6451.353	11.45	35.55	42.44	47.94	52.50	74.00	-21.50	peak
5	7236.000	10.07	36.09	41.83	46.20	50.53	74.00	-23.47	peak
6	9648.000	10.77	37.69	38.36	42.51	52.61	74.00	-21.39	peak




4.9.2.2.17 802.11N20_ Middle Channel_ Peak_ Horizontal

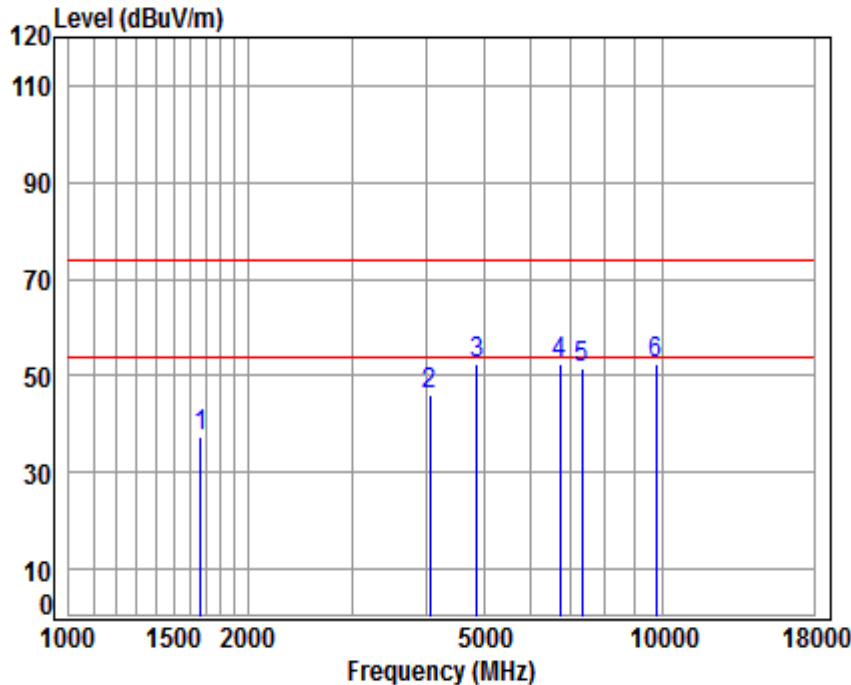

Site : chamber
Condition: 3m HORIZONTAL
Job No : 12741RG
Mode : 2437 TX SE
Note : 2.4G WIFI 11N20
: ANT2

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1667.951	5.27	26.54	40.81	46.47	37.47	74.00	-36.53	peak
2	4062.629	7.06	32.82	42.82	49.11	46.17	74.00	-27.83	peak
3	4874.000	7.96	34.05	43.68	54.27	52.60	74.00	-21.40	peak
4	6717.762	10.91	35.73	42.23	48.10	52.51	74.00	-21.49	peak
5	7311.000	10.05	36.15	41.78	47.17	51.59	74.00	-22.41	peak
6	9748.000	10.82	37.75	38.20	42.21	52.58	74.00	-21.42	peak

4.9.2.2.18 802.11N20_ Highest Channel_ Peak_ Horizontal

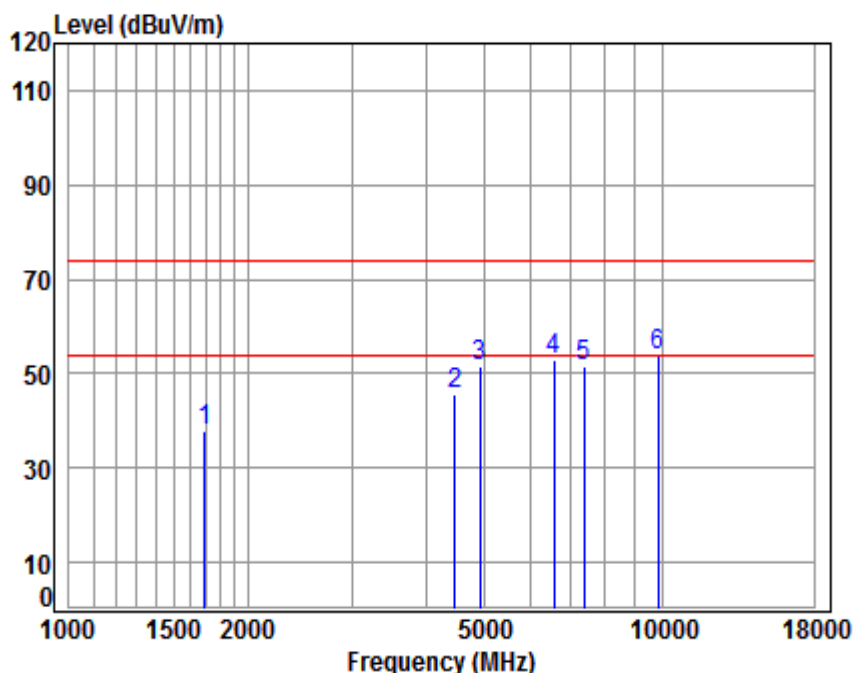


Site : chamber
Condition: 3m HORIZONTAL
Job No : 12741RG
Mode : 2462 TX SE
Note : 2.4G WIFI 11N20
: ANT2

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1692.231	5.24	26.64	40.83	46.96	38.01	74.00	-35.99	peak
2	4469.214	7.53	33.55	43.27	47.88	45.69	74.00	-28.31	peak
3	4924.000	8.01	34.11	43.73	53.31	51.70	74.00	-22.30	peak
4	6564.209	11.35	35.64	42.35	48.38	53.02	74.00	-20.98	peak
5	7386.000	10.03	36.21	41.72	46.82	51.34	74.00	-22.66	peak
6	9848.000	10.87	37.81	38.04	42.98	53.62	74.00	-20.38	peak

4.9.2.3 MIMO


4.9.2.3.1 802.11N20_MIMO_Lowest Channel_Peak_Vertical

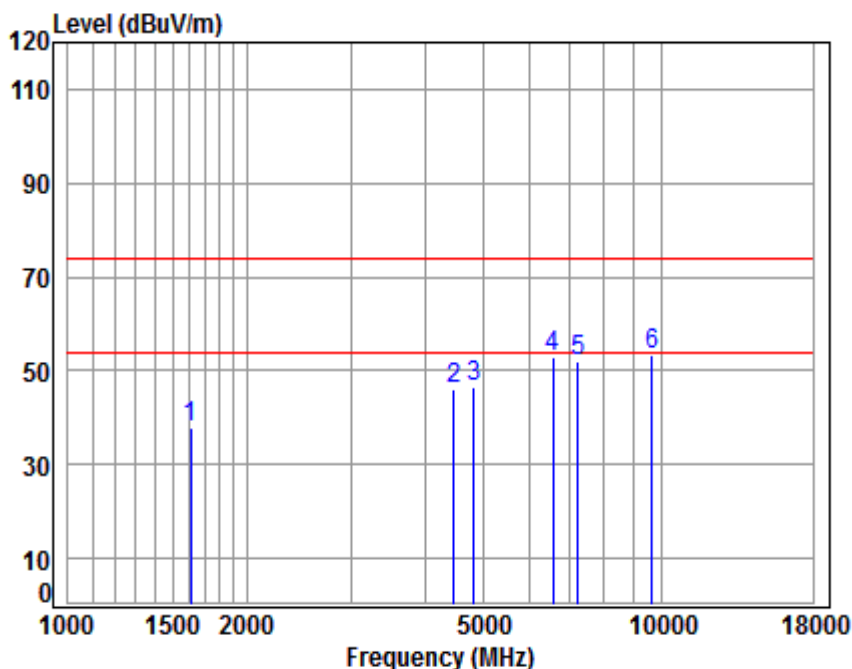

Site : chamber
Condition: 3m VERTICAL
Job No : 12741RG
Mode : 2412 TX SE
Note : 2.4G WIFI 11N20
: MIMO

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1611.091	5.34	26.30	40.78	47.01	37.87	74.00	-36.13	peak
2	4469.214	7.53	33.55	43.27	48.36	46.17	74.00	-27.83	peak
3	4824.000	7.91	34.00	43.63	48.26	46.54	74.00	-27.46	peak
4	6564.209	11.35	35.64	42.35	48.33	52.97	74.00	-21.03	peak
5	7236.000	10.07	36.09	41.83	47.67	52.00	74.00	-22.00	peak
6	9648.000	10.77	37.69	38.36	43.08	53.18	74.00	-20.82	peak


4.9.2.3.2 802.11N20_MIMO_Middle Channel_Peak_Vertical

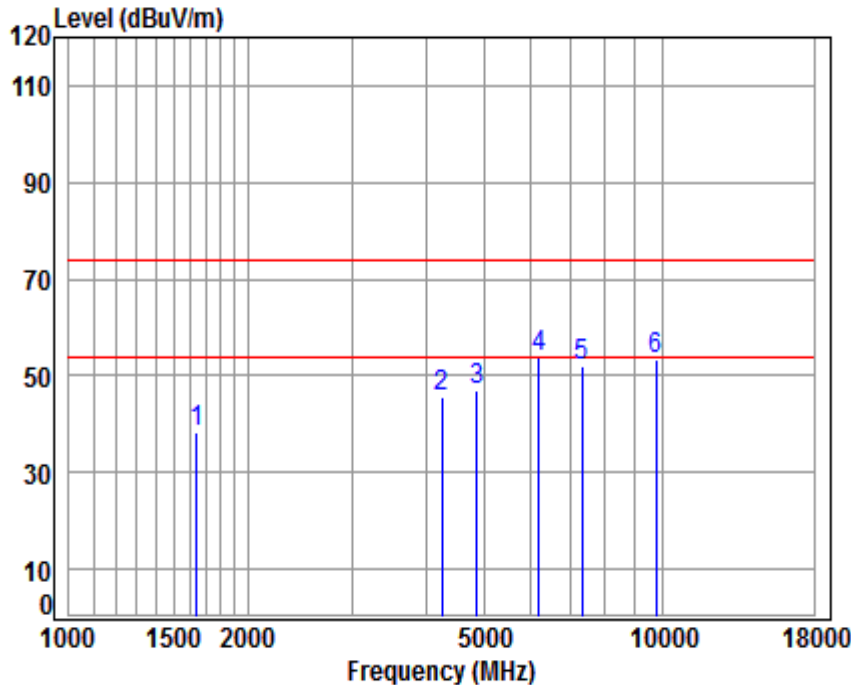

Site : chamber
Condition: 3m VERTICAL
Job No : 12741RG
Mode : 2437 TX SE
Note : 2.4G WIFI 11N20
: MIMO

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1639.274	5.30	26.42	40.79	47.25	38.18	74.00	-35.82	peak
2	4242.641	7.27	33.15	43.03	48.30	45.69	74.00	-28.31	peak
3	4874.000	7.96	34.05	43.68	48.63	46.96	74.00	-27.04	peak
4	6195.508	10.96	35.30	42.66	50.16	53.76	74.00	-20.24	peak
5	7311.000	10.05	36.15	41.78	47.70	52.12	74.00	-21.88	peak
6	9748.000	10.82	37.75	38.20	43.06	53.43	74.00	-20.57	peak


4.9.2.3.3 802.11N20_MIMO_Highest Channel_Peak_Vertical

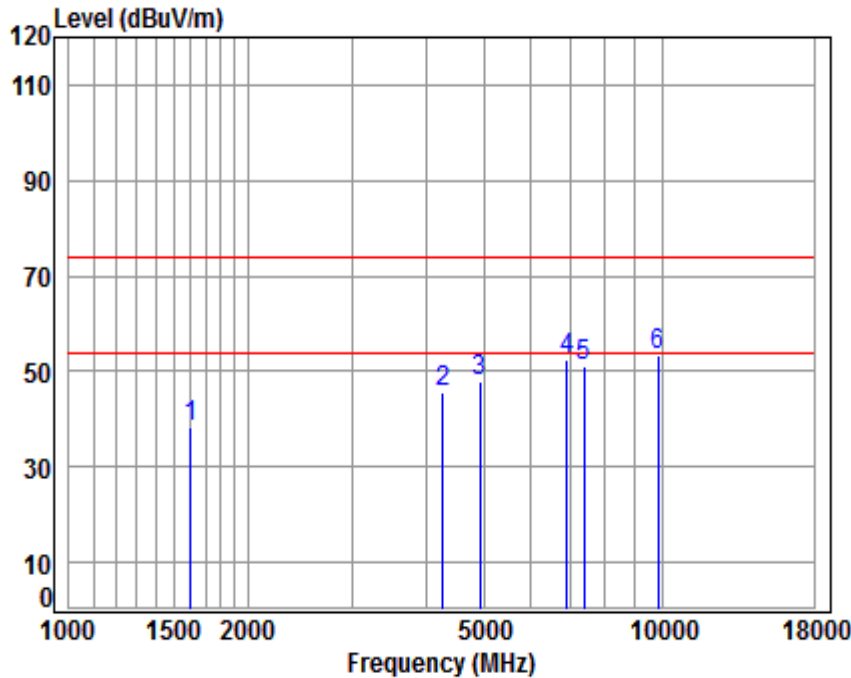

Site : chamber
 Condition: 3m VERTICAL
 Job No : 12741RG
 Mode : 2462 TX SE
 Note : 2.4G WIFI 11N20
 : MIMO

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1606.441	5.34	26.28	40.77	47.44	38.29	74.00	-35.71	peak
2	4267.237	7.30	33.19	43.06	48.38	45.81	74.00	-28.19	peak
3	4924.000	8.01	34.11	43.73	49.39	47.78	74.00	-26.22	peak
4	6894.806	10.42	35.84	42.09	48.34	52.51	74.00	-21.49	peak
5	7386.000	10.03	36.21	41.72	46.66	51.18	74.00	-22.82	peak
6	9848.000	10.87	37.81	38.04	42.59	53.23	74.00	-20.77	peak


4.9.2.3.4 802.11N20_MIMO_Lowest Channel_Peak_Horizontal

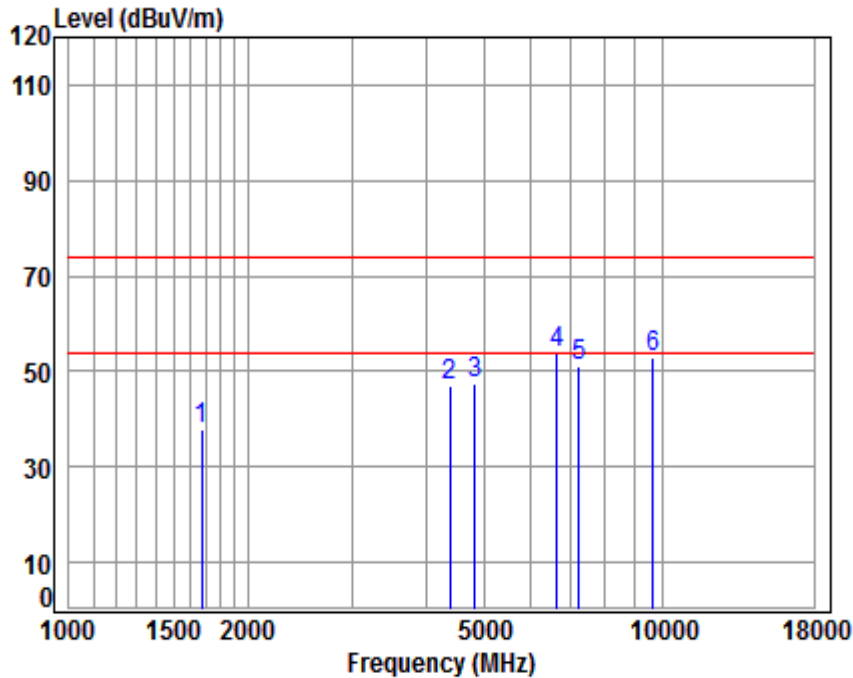

Site : chamber
Condition: 3m HORIZONTAL
Job No : 12741RG
Mode : 2412 TX SE
Note : 2.4G WIFI 11N20
: MIMO

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1672.779	5.26	26.56	40.82	46.97	37.97	74.00	-36.03	peak
2	4379.699	7.43	33.39	43.18	49.17	46.81	74.00	-27.19	peak
3	4824.000	7.91	34.00	43.63	49.09	47.37	74.00	-26.63	peak
4	6640.542	11.13	35.69	42.29	49.19	53.72	74.00	-20.28	peak
5	7236.000	10.07	36.09	41.83	46.96	51.29	74.00	-22.71	peak
6	9648.000	10.77	37.69	38.36	42.97	53.07	74.00	-20.93	peak

4.9.2.3.5 802.11N20_MIMO_Middle Channel_Peak_Horizontal

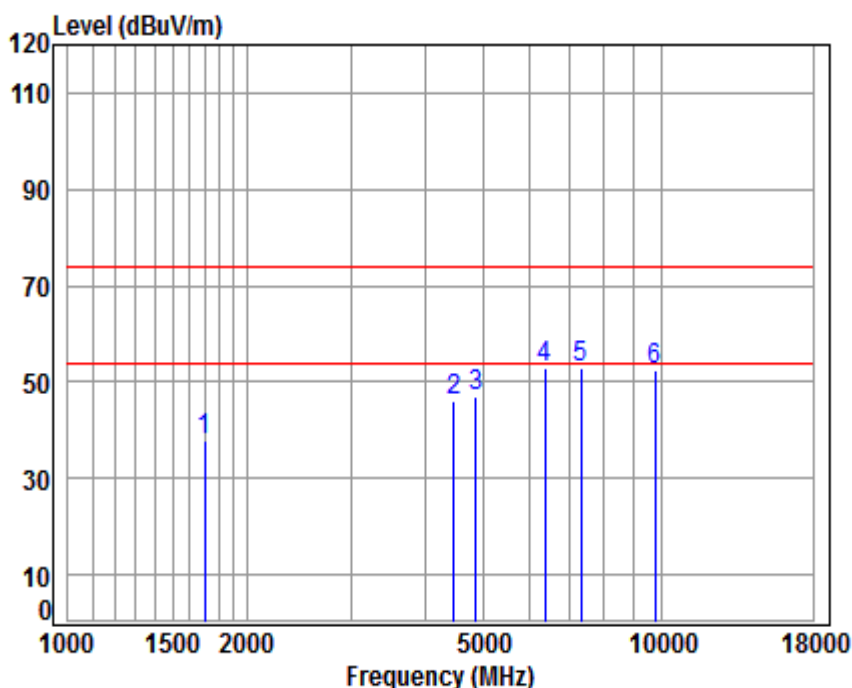


Site : chamber
Condition: 3m HORIZONTAL
Job No : 12741RG
Mode : 2437 TX SE
Note : 2.4G WIFI 11N20
: MIMO

		Cable	Ant	Preamp	Read		Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1702.042	5.23	26.68	40.83	46.71	37.79	74.00	-36.21	peak
2	4469.214	7.53	33.55	43.27	48.46	46.27	74.00	-27.73	peak
3	4874.000	7.96	34.05	43.68	48.77	47.10	74.00	-26.90	peak
4	6377.195	11.31	35.48	42.51	48.43	52.71	74.00	-21.29	peak
5	7311.000	10.05	36.15	41.78	48.42	52.84	74.00	-21.16	peak
6	9748.000	10.82	37.75	38.20	42.04	52.41	74.00	-21.59	peak



4.9.2.3.6 802.11N20_MIMO_Highest Channel_Peak_Horizontal

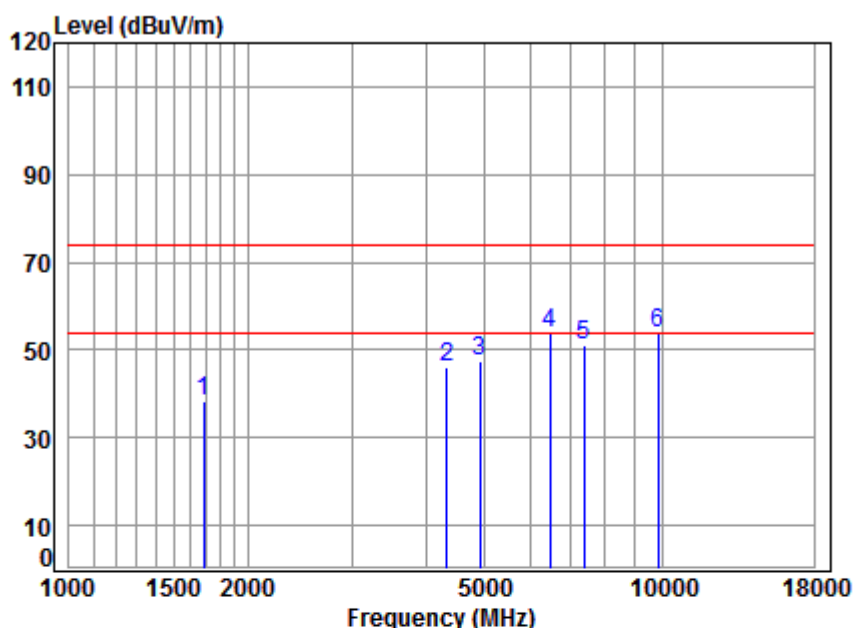

Site : chamber
Condition: 3m HORIZONTAL
Job No : 12741RG
Mode : 2462 TX SE
Note : 2.4G WIFI 11N20
: MIMO

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1687.347	5.24	26.62	40.82	47.21	38.25	74.00	-35.75	peak
2	4341.886	7.38	33.33	43.14	48.44	46.01	74.00	-27.99	peak
3	4924.000	8.01	34.11	43.73	49.05	47.44	74.00	-26.56	peak
4	6470.026	11.48	35.57	42.43	49.02	53.64	74.00	-20.36	peak
5	7386.000	10.03	36.21	41.72	46.54	51.06	74.00	-22.94	peak
6	9848.000	10.87	37.81	38.04	43.06	53.70	74.00	-20.30	peak



Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 2) Scan from 9kHz to 25GHz, the disturbance between 9kHz to 30MHz and 18GHz to 25GHz was very low, and the above harmonics were the highest point could be found when testing, The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.
- 4) All Modes have been tested, but only the worst case data displayed in this report.

4.10 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205		
Test Method:	ANSI C63.10: 2013 Section 11.12		
Test Site:	Measurement Distance: 3m or 10m (Semi-Anechoic Chamber)		
Limit:	Frequency	Limit (dBuV/m @3m)	Remark
	30MHz-88MHz	40.0	Quasi-peak Value
	88MHz-216MHz	43.5	Quasi-peak Value
	216MHz-960MHz	46.0	Quasi-peak Value
	960MHz-1GHz	54.0	Quasi-peak Value
	Above 1GHz	54.0	Average Value
		74.0	Peak Value
Test Setup:			

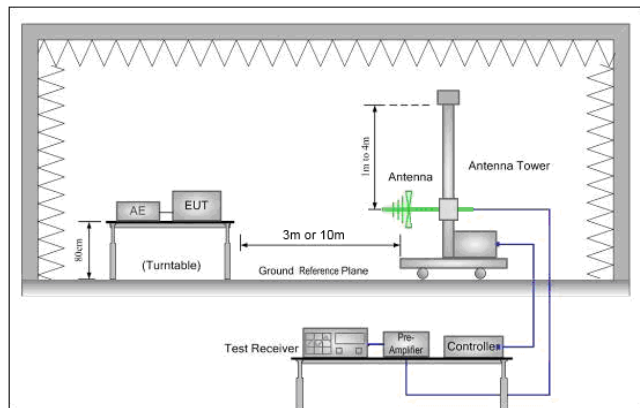


Figure 1. 30MHz to 1GHz

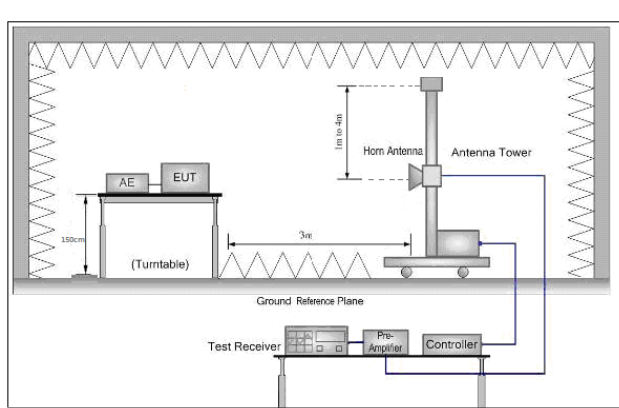


Figure 2. Above 1 GHz




Test Procedure:	a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. g. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel h. Test the EUT in the lowest channel , the Highest channel i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case. j. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates. Charge + Transmitting mode.
Final Test Mode:	Pretest the EUT at Charge +Transmitting mode. Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11B; 6Mbps of rate is the worst case of 802.11G ; 6.5Mbps of rate is the worst case of 802.11N(HT20); Only the worst case is recorded in the report.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass



Test plot as follows:

4.10.1 ANT1


4.10.1.1 802.11B_Lowest Channel_ Peak_ Vertical

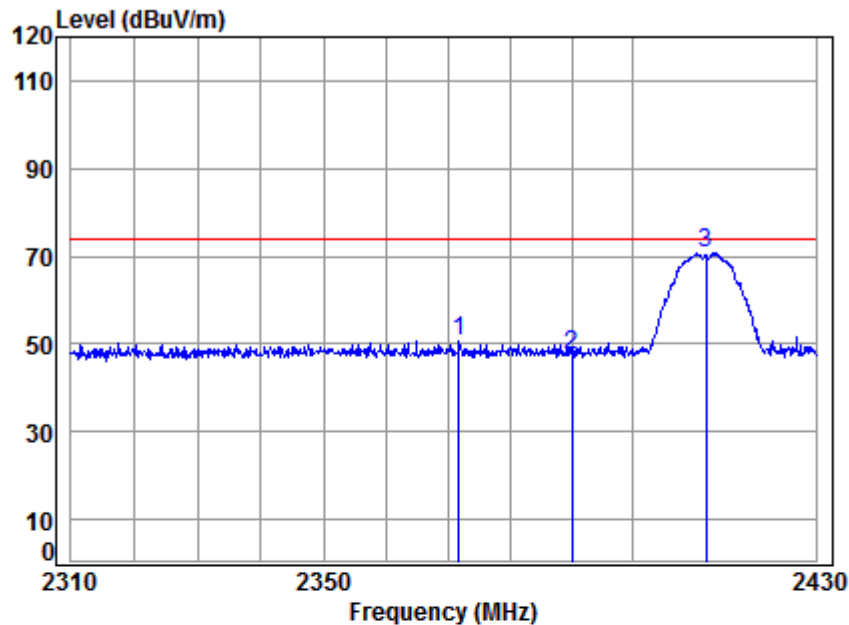

Site : chamber
Condition: 3m VERTICAL
Job No : 12741RG
Mode : 2412 Band edge
: 2.4G WIFI 11B
: ANT1

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2371.761	5.45	28.49	41.16	57.89	50.67	74.00	-23.33	peak
2	2390.000	5.47	28.52	41.17	54.74	47.56	74.00	-26.44	peak
3	2412.000	5.50	28.56	41.18	77.68	70.56	74.00	-3.44	peak


4.10.1.2 802.11B_Lowest Channel_ Peak_ Horizontal

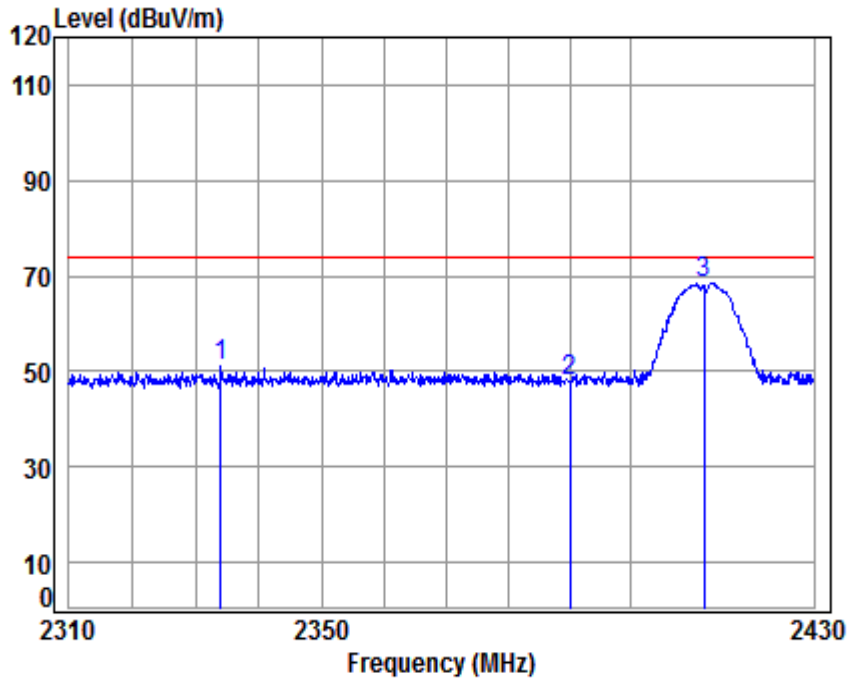

Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 12741RG
 Mode : 2412 Band edge
 : 2.4G WIFI 11B
 : ANT1

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
2333.989	5.40	28.42	41.15	58.55	51.22	74.00	-22.78	peak
2390.000	5.47	28.52	41.17	54.86	47.68	74.00	-26.32	peak
2412.000	5.50	28.56	41.18	75.50	68.38	74.00	-5.62	peak


4.10.1.3 802.11B_Lowest Channel_ Average_ Vertical

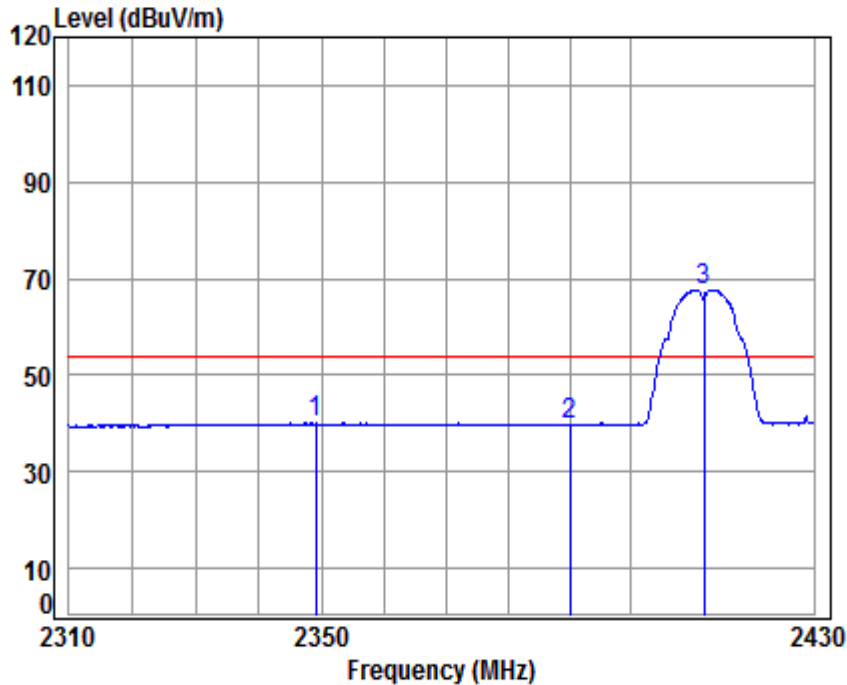

Site : chamber
Condition: 3m VERTICAL
Job No : 12741RG
Mode : 2412 Band edge
: 2.4G WIFI 11B
: ANT1

		Cable	Ant	Preamp	Read		Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2349.168	5.42	28.45	41.16	47.33	40.04	54.00	-13.96	Average
2	2390.000	5.47	28.52	41.17	46.98	39.80	54.00	-14.20	Average
3 *	2412.000	5.50	28.56	41.18	74.84	67.72	54.00	13.72	Average


4.10.1.4 802.11B_Lowest Channel_ Average _ Horizontal

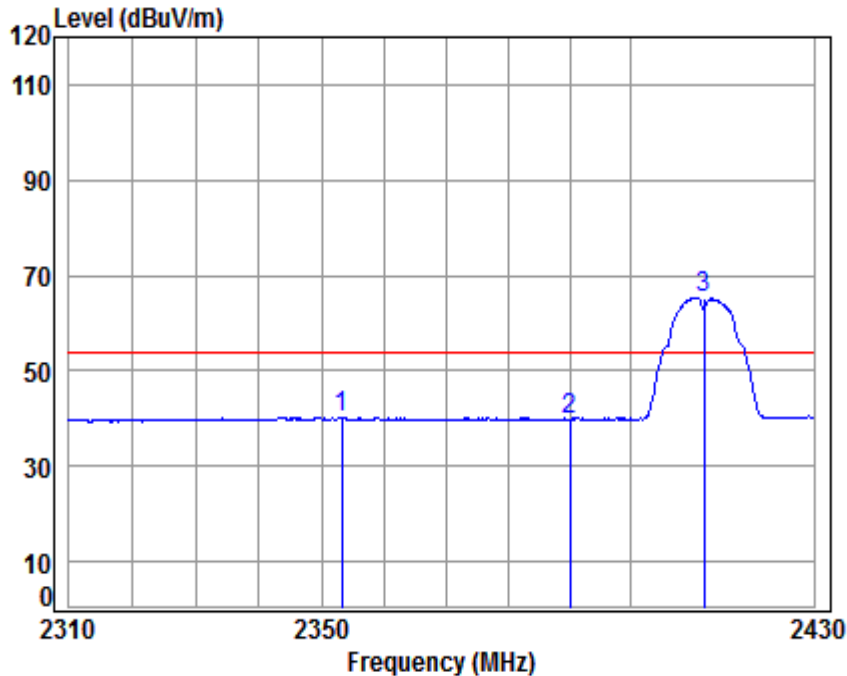

Site : chamber
Condition: 3m HORIZONTAL
Job No : 12741RG
Mode : 2412 Band edge
: 2.4G WIFI 11B
: ANT1

		Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark	
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	2353.217	5.42	28.46	41.16	47.55	40.27	54.00	-13.73	Average
2	2390.000	5.47	28.52	41.17	47.05	39.87	54.00	-14.13	Average
3 *	2412.000	5.50	28.56	41.18	72.53	65.41	54.00	11.41	Average


4.10.1.5 802.11G_Lowest Channel_ Peak_ Vertical

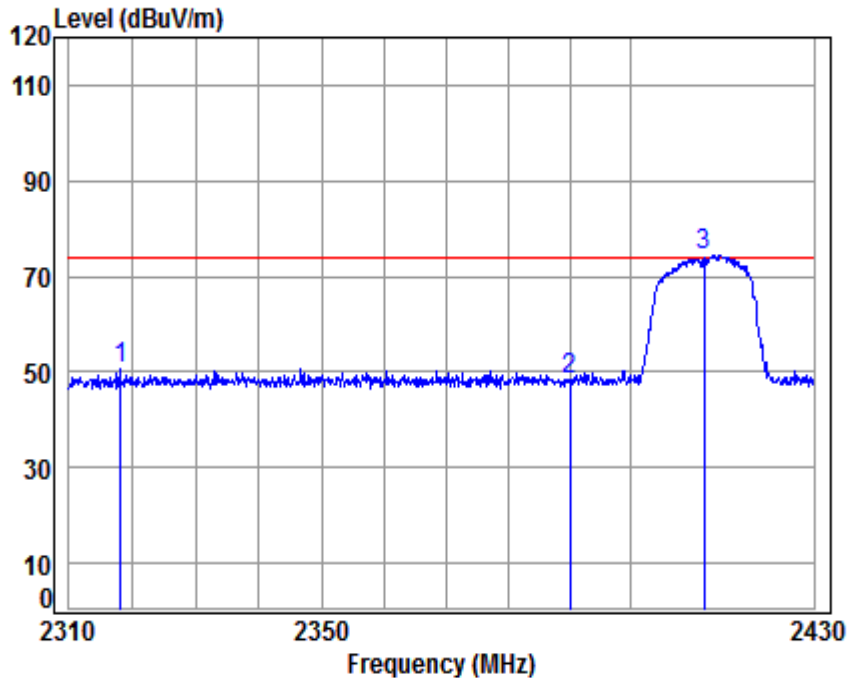

Site : chamber
Condition: 3m VERTICAL
Job No : 12741RG
Mode : 2412 Band edge
: 2.4G WIFI 11G
: ANT1

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2318.086	5.38	28.40	41.14	58.23	50.87	74.00	-23.13 peak
2	2390.000	5.47	28.52	41.17	55.37	48.19	74.00	-25.81 peak
3 *	2412.000	5.50	28.56	41.18	81.58	74.46	74.00	0.46 peak


4.10.1.6 802.11G_Lowest Channel_ Peak_ Horizontal

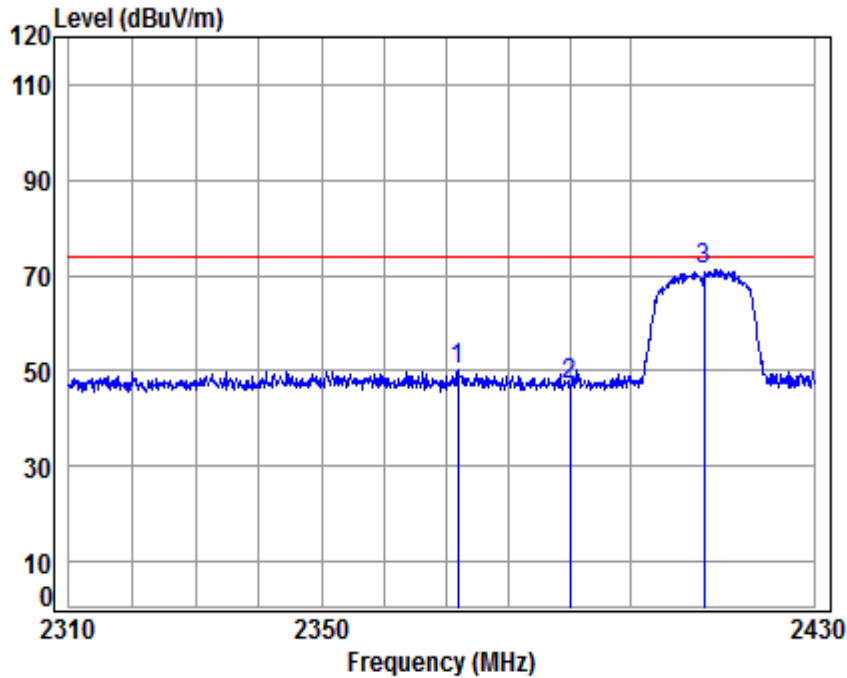

Site : chamber
Condition: 3m HORIZONTAL
Job No : 12741RG
Mode : 2412 Band edge
: 2.4G WIFI 11G
: ANT1

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2371.882	5.45	28.49	41.16	57.61	50.39	74.00	-23.61 peak
2 2390.000	5.47	28.52	41.17	53.97	46.79	74.00	-27.21 peak
3 2412.000	5.50	28.56	41.18	78.34	71.22	74.00	-2.78 peak

4.10.1.7 802.11G_Lowest Channel_ Average_ Vertical

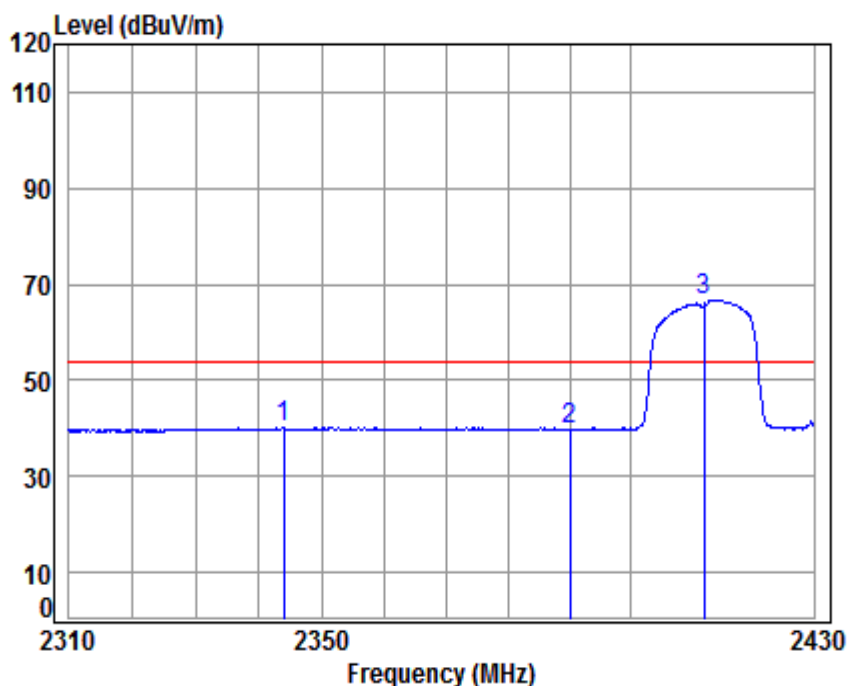


Site : chamber
Condition: 3m VERTICAL
Job No : 12741RG
Mode : 2412 Band edge
: 2.4G WIFI 11G
: ANT1

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2343.939	5.41	28.44	41.15	47.52	40.22	54.00	-13.78	Average
2	2390.000	5.47	28.52	41.17	46.97	39.79	54.00	-14.21	Average
3 *	2412.000	5.50	28.56	41.18	73.74	66.62	54.00	12.62	Average



4.10.1.8 802.11G_Lowest Channel_ Average _ Horizontal

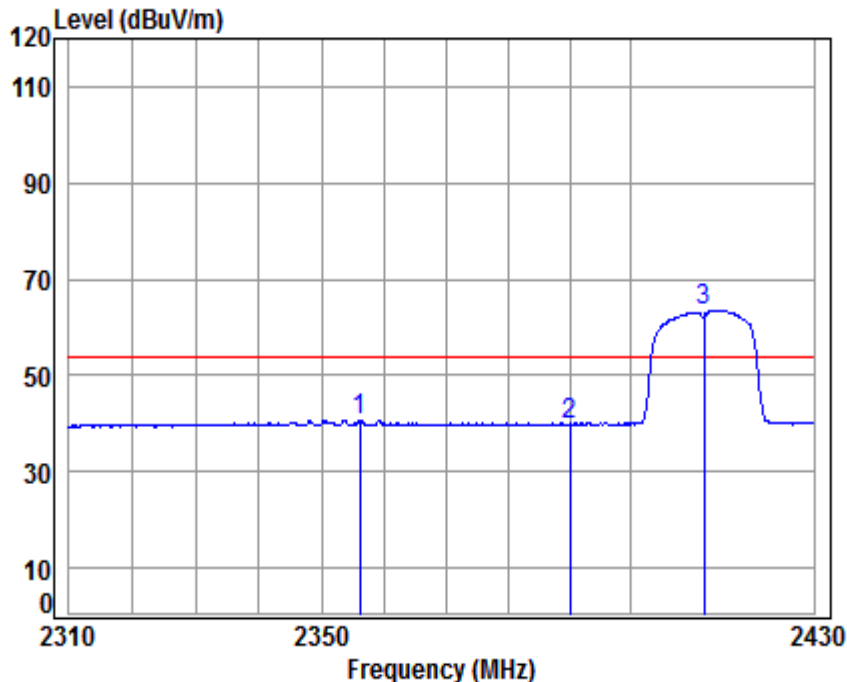


Site : chamber
Condition: 3m HORIZONTAL
Job No : 12741RG
Mode : 2412 Band edge
: 2.4G WIFI 11G
: ANT1

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2356.078	5.43	28.46	41.16	48.02	40.75	54.00	-13.25	Average
2	2390.000	5.47	28.52	41.17	46.97	39.79	54.00	-14.21	Average
3 *	2412.000	5.50	28.56	41.18	70.72	63.60	54.00	9.60	Average



4.10.2 ANT2


4.10.2.1 802.11B_Lowest Channel_ Peak_ Vertical

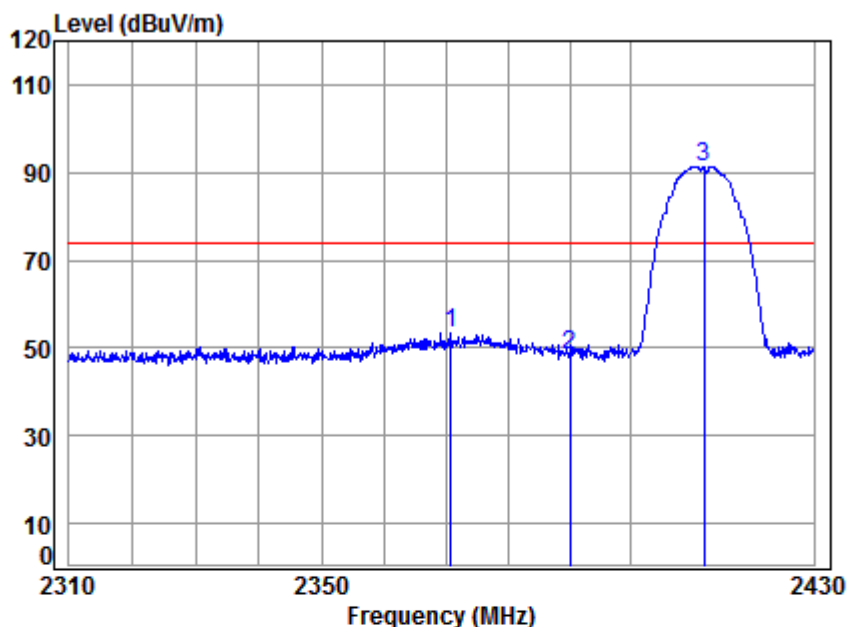

Site : chamber
Condition: 3m VERTICAL
Job No : 12741RG
Mode : 2412 Band edge
: 2.4G WIFI 11B
: ANT2

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2370.801	5.45	28.49	41.16	60.79	53.57	74.00	-20.43	peak
2	2390.000	5.47	28.52	41.17	55.66	48.48	74.00	-25.52	peak
3 *	2412.000	5.50	28.56	41.18	98.60	91.48	74.00	17.48	peak


4.10.2.2 802.11B_Highest Channel_Peak_Vertical

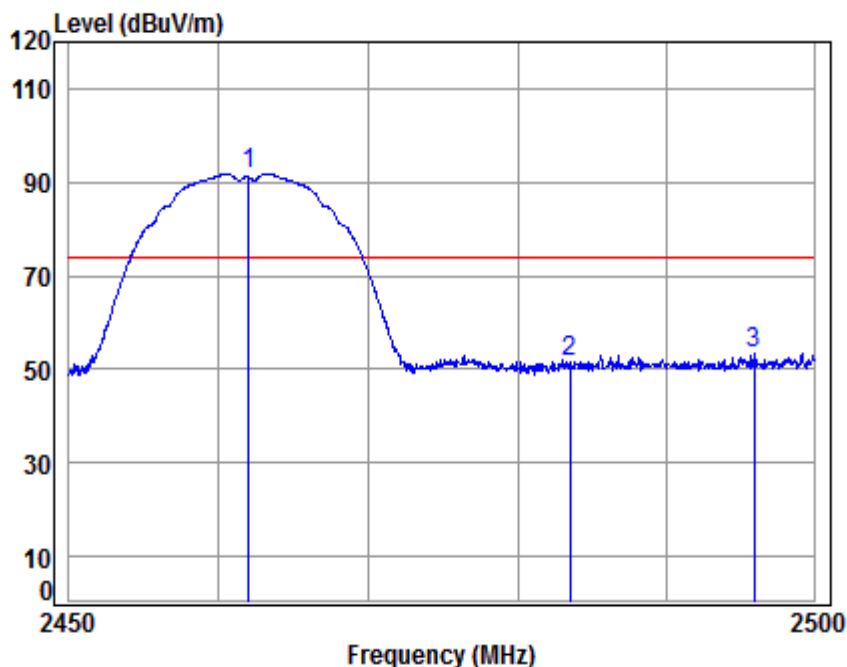

Site : chamber
Condition: 3m VERTICAL
Job No : 12741RG
Mode : 2462 Band edge
: 2.4G WIFI 11B
: ANT2

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 * 2462.000	5.57	28.64	41.20	98.67	91.68	74.00	17.68	peak
2 2483.500	5.60	28.67	41.21	58.28	51.34	74.00	-22.66	peak
3 2495.963	5.61	28.69	41.22	60.25	53.33	74.00	-20.67	peak


4.10.2.3 802.11B_Lowest Channel_ Peak_ Horizontal

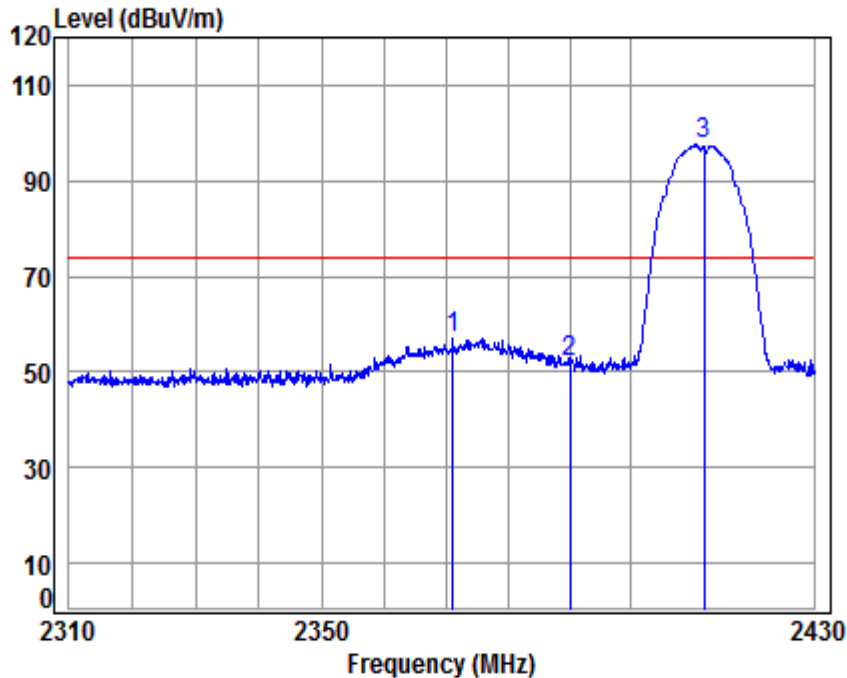

Site : chamber
Condition: 3m HORIZONTAL
Job No : 12741RG
Mode : 2412 Band edge
: 2.4G WIFI 11B
: ANT2

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2371.041	5.45	28.49	41.16	64.18	56.96	74.00	-17.04 peak
2	2390.000	5.47	28.52	41.17	59.10	51.92	74.00	-22.08 peak
3 *	2412.000	5.50	28.56	41.18	104.56	97.44	74.00	23.44 peak


4.10.2.4 802.11B_Highest Channel_Peak_Horizontal

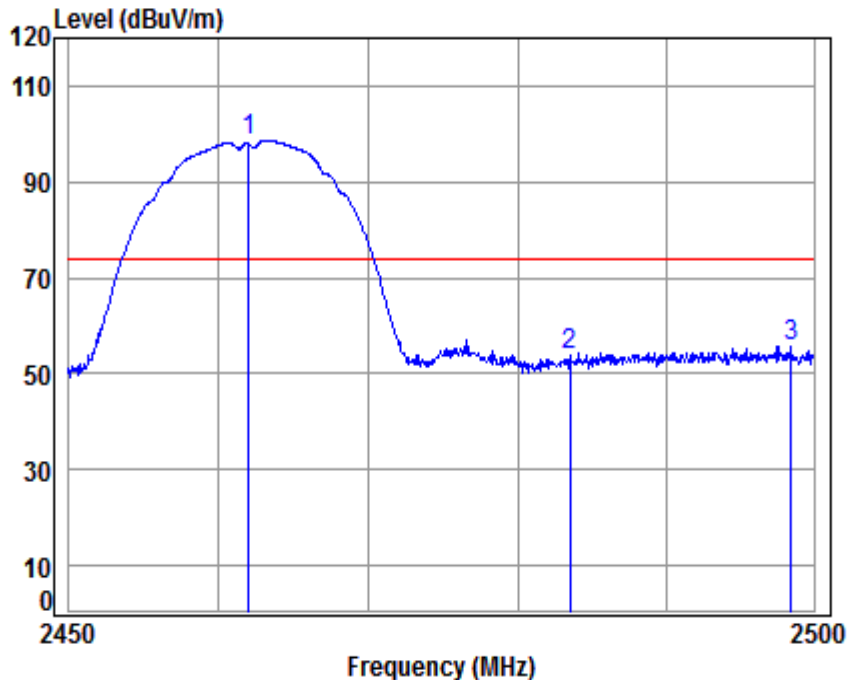

Site : chamber
Condition: 3m HORIZONTAL
Job No : 12741RG
Mode : 2462 Band edge
: 2.4G WIFI 11B
: ANT2

		Cable	Ant	Preamp	Read		Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 *	2462.000	5.57	28.64	41.20	105.65	98.66	74.00	24.66	peak
2	2483.500	5.60	28.67	41.21	60.56	53.62	74.00	-20.38	peak
3	2498.435	5.62	28.70	41.22	62.61	55.71	74.00	-18.29	peak


4.10.2.5 802.11B_Lowest Channel_ Average_ Vertical

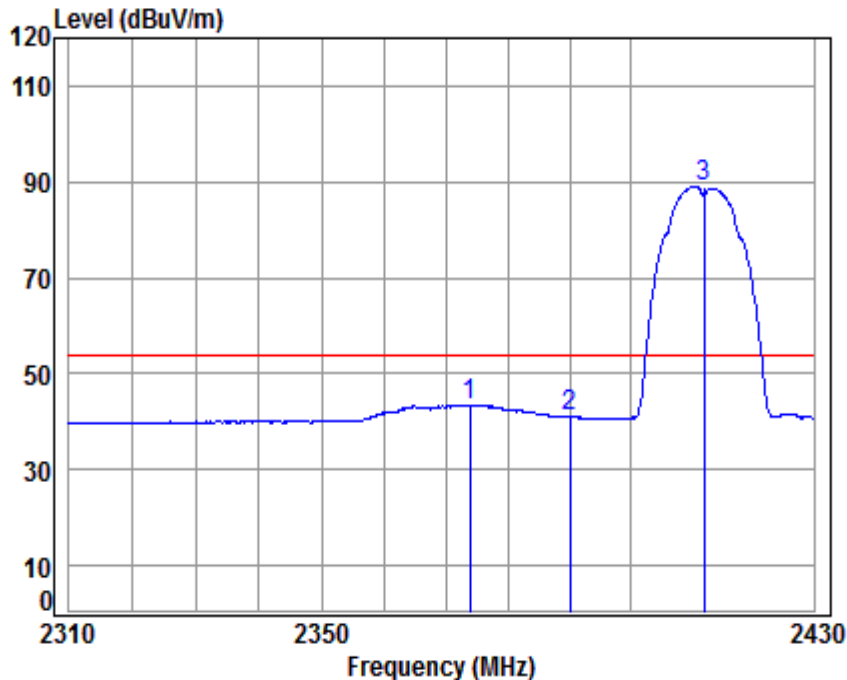

Site : chamber
 Condition: 3m VERTICAL
 Job No : 12741RG
 Mode : 2412 Band edge
 : 2.4G WIFI 11B
 : ANT2

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2373.804	5.45	28.49	41.17	50.78	43.55	54.00	-10.45	Average
2	2390.000	5.47	28.52	41.17	48.13	40.95	54.00	-13.05	Average
3 *	2412.000	5.50	28.56	41.18	96.12	89.00	54.00	35.00	Average


4.10.2.6 802.11B_ Highest Channel_ Average _ Vertical

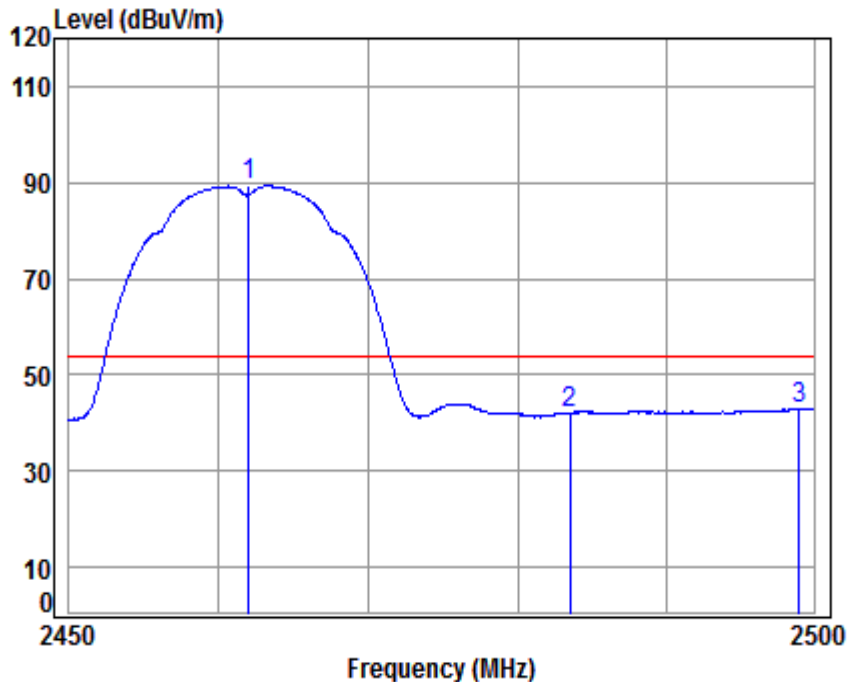

Site : chamber
Condition: 3m VERTICAL
Job No : 12741RG
Mode : 2462 Band edge
: 2.4G WIFI 11B
: ANT2

		Cable	Ant	Preamp	Read	Limit	Over	
Freq		Loss	Factor	Factor	Level	Line	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 *	2462.000	5.57	28.64	41.20	96.24	89.25	54.00	35.25 Average
2	2483.500	5.60	28.67	41.21	48.99	42.05	54.00	-11.95 Average
3	2498.990	5.62	28.70	41.22	49.74	42.84	54.00	-11.16 Average


4.10.2.7 802.11B_Lowest Channel_ Average _ Horizontal

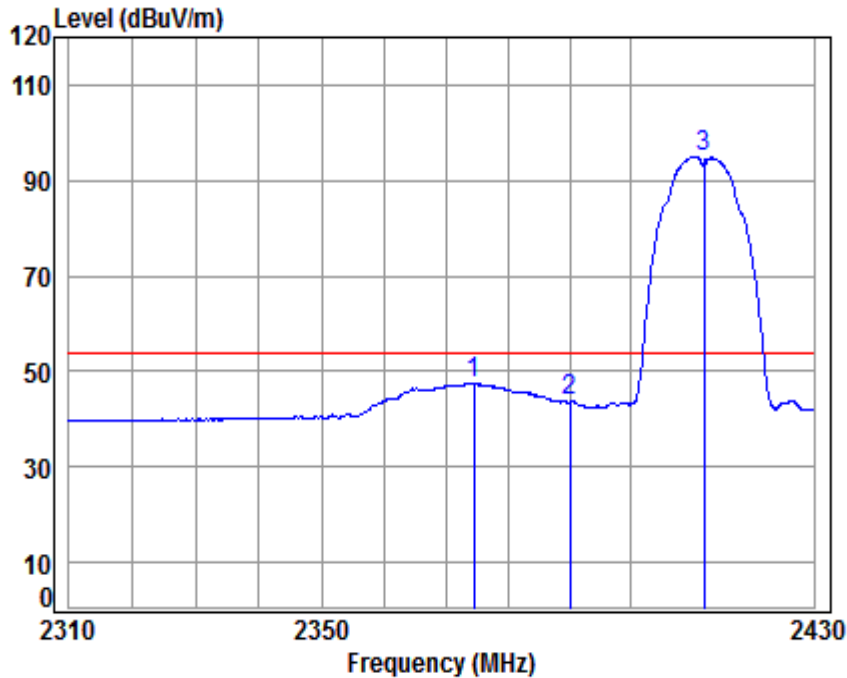

Site : chamber
Condition: 3m HORIZONTAL
Job No : 12741RG
Mode : 2412 Band edge
: 2.4G WIFI 11B
: ANT2

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2374.526	5.45	28.49	41.17	54.84	47.61	54.00	-6.39 Average
2 2390.000	5.47	28.52	41.17	50.82	43.64	54.00	-10.36 Average
3 * 2412.000	5.50	28.56	41.18	102.06	94.94	54.00	40.94 Average


4.10.2.8 802.11B_ Highest Channel_ Average_ Horizontal

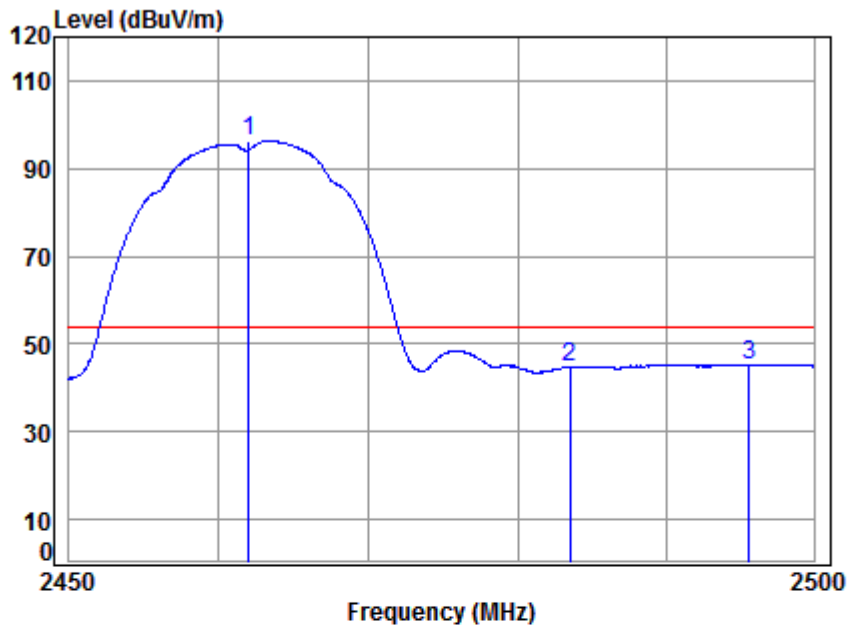

Site : chamber
Condition: 3m HORIZONTAL
Job No : 12741RG
Mode : 2462 Band edge
: 2.4G WIFI 11B
: ANT2

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 * 2462.000	5.57	28.64	41.20	103.18	96.19	54.00	42.19	Average
2 2483.500	5.60	28.67	41.21	51.71	44.77	54.00	-9.23	Average
3 2495.610	5.61	28.69	41.22	52.28	45.36	54.00	-8.64	Average


4.10.2.9 802.11G_Lowest Channel_ Peak_ Vertical

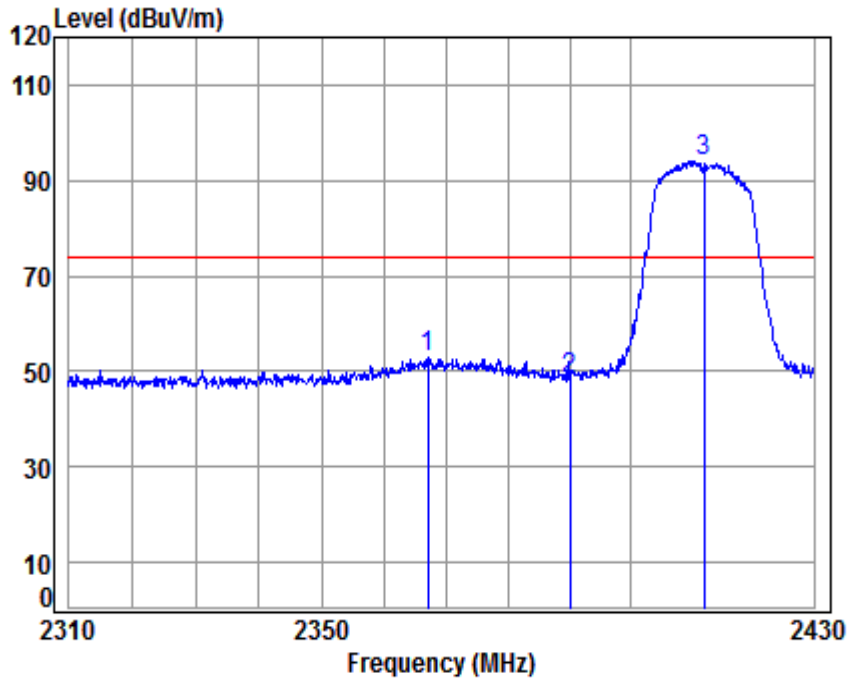

Site : chamber
Condition: 3m VERTICAL
Job No : 12741RG
Mode : 2412 Band edge
: 2.4G WIFI 11G
: ANT2

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5.44	28.48	41.16	60.37	53.13	74.00	-20.87	peak
2	5.47	28.52	41.17	55.36	48.18	74.00	-25.82	peak
3 *	5.50	28.56	41.18	101.19	94.07	74.00	20.07	peak


4.10.2.10 802.11G_ Highest Channel_ Peak_ Vertical

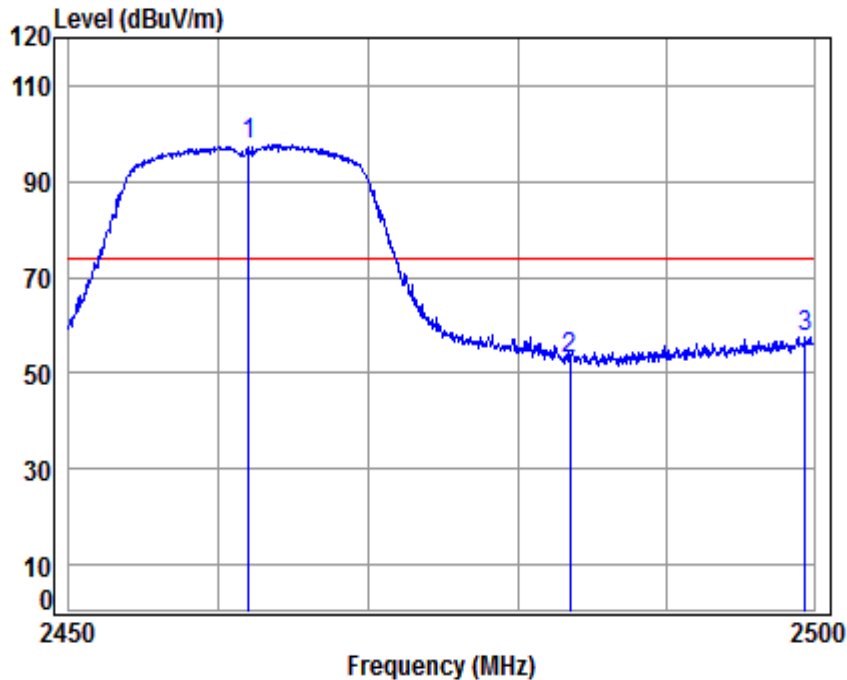

Site : chamber
Condition: 3m VERTICAL
Job No : 12741RG
Mode : 2462 Band edge
: 2.4G WIFI 11G
: ANT2

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 * 2462.000	5.57	28.64	41.20	104.84	97.85	74.00	23.85	peak
2 2483.500	5.60	28.67	41.21	59.87	52.93	74.00	-21.07	peak
3 2499.394	5.62	28.70	41.22	64.57	57.67	74.00	-16.33	peak


4.10.2.11 802.11G_Lowest Channel_ Peak_ Horizontal

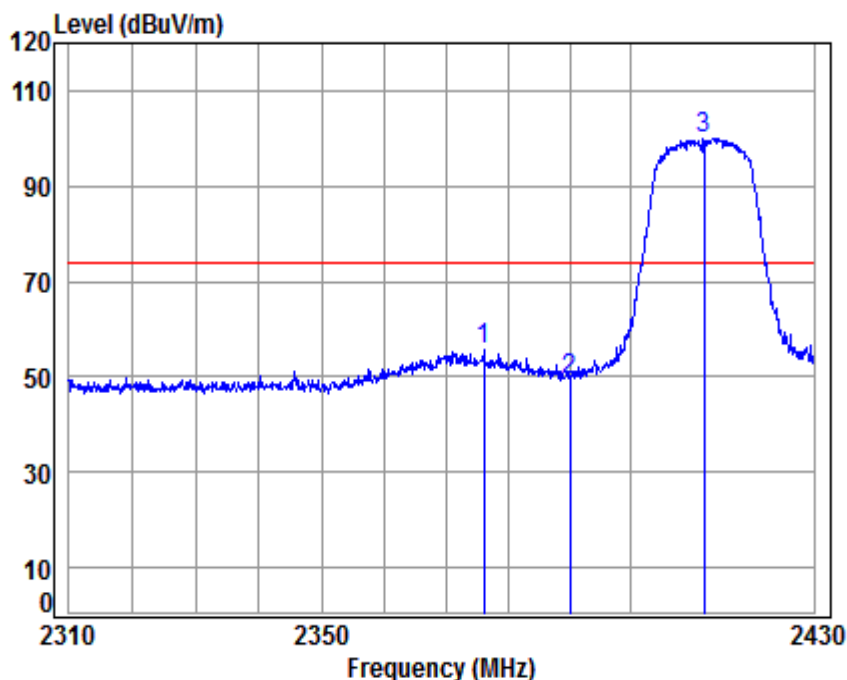

Site : chamber
Condition: 3m HORIZONTAL
Job No : 12741RG
Mode : 2412 Band edge
: 2.4G WIFI 11G
: ANT2

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
2376.090	5.46	28.49	41.17	62.87	55.65	74.00	-18.35	peak
2390.000	5.47	28.52	41.17	56.68	49.50	74.00	-24.50	peak
* 2412.000	5.50	28.56	41.18	107.18	100.06	74.00	26.06	peak


4.10.2.12 802.11G_ Highest Channel_ Peak_ Horizontal

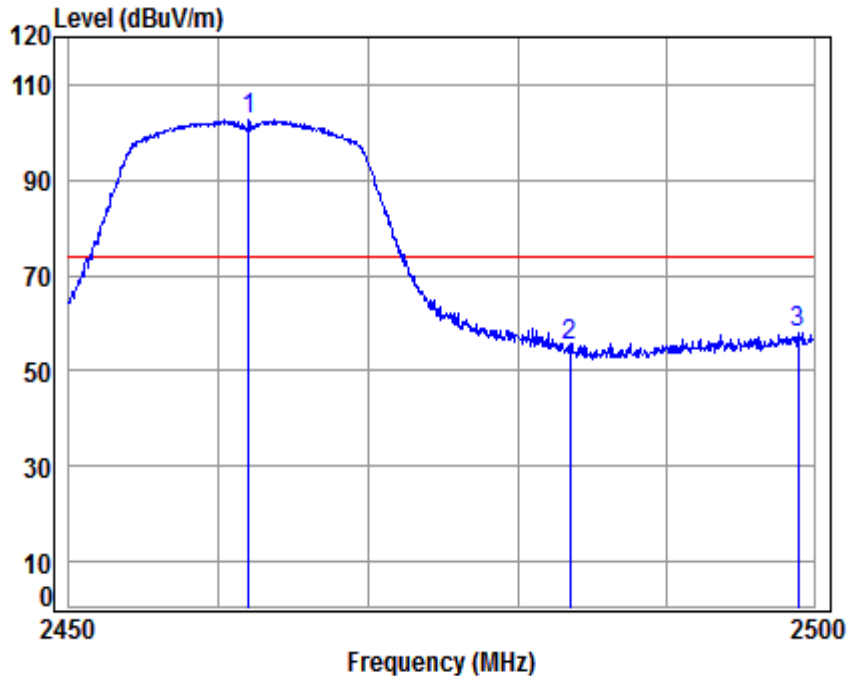

Site : chamber
Condition: 3m HORIZONTAL
Job No : 12741RG
Mode : 2462 Band edge
: 2.4G WIFI 11G
: ANT2

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 * 2462.000	5.57	28.64	41.20	109.55	102.56	74.00	28.56	peak
2 2483.500	5.60	28.67	41.21	62.33	55.39	74.00	-18.61	peak
3 2498.940	5.62	28.70	41.22	65.01	58.11	74.00	-15.89	peak


4.10.2.13 802.11G_Lowest Channel_ Average_ Vertical

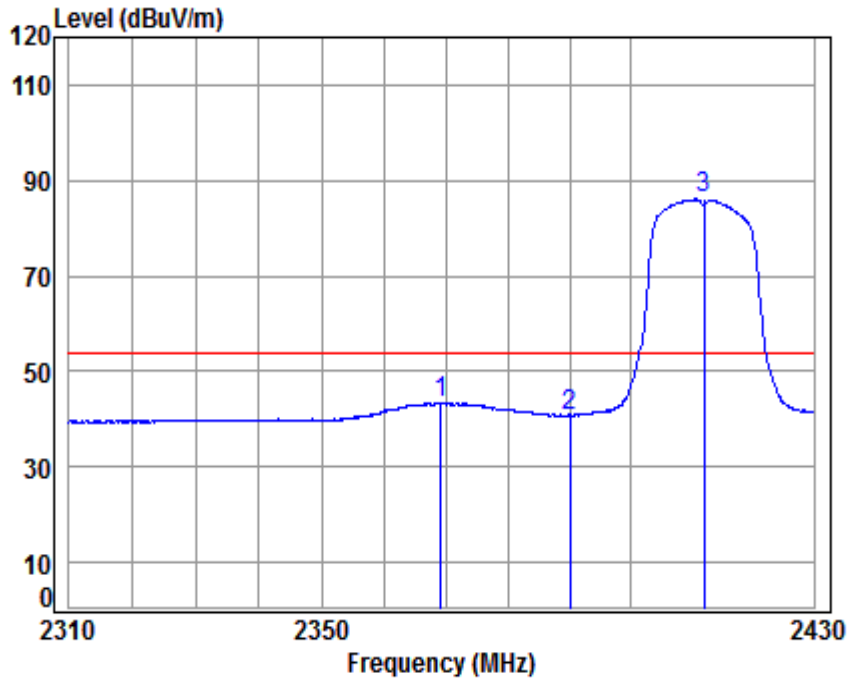

Site : chamber
 Condition: 3m VERTICAL
 Job No : 12741RG
 Mode : 2412 Band edge
 : 2.4G WIFI 11G
 : ANT2

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2369.240	5.45	28.48	41.16	50.61	43.38	54.00	-10.62 Average
2	2390.000	5.47	28.52	41.17	47.94	40.76	54.00	-13.24 Average
3 *	2412.000	5.50	28.56	41.18	93.17	86.05	54.00	32.05 Average

4.10.2.14 802.11G_ Highest Channel_ Average _ Vertical

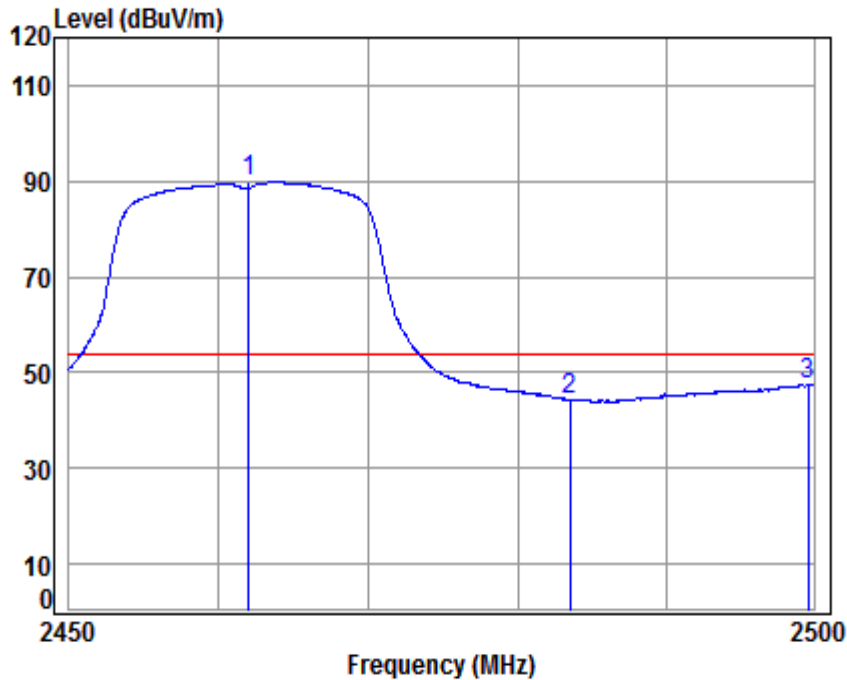


Site : chamber
Condition: 3m VERTICAL
Job No : 12741RG
Mode : 2462 Band edge
: 2.4G WIFI 11G
: ANT2

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 * 2462.000	5.57	28.64	41.20	96.78	89.79	54.00	35.79	Average
2 2483.500	5.60	28.67	41.21	51.27	44.33	54.00	-9.67	Average
3 2499.646	5.62	28.70	41.22	54.22	47.32	54.00	-6.68	Average



4.10.2.15 802.11G_Lowest Channel_ Average _ Horizontal

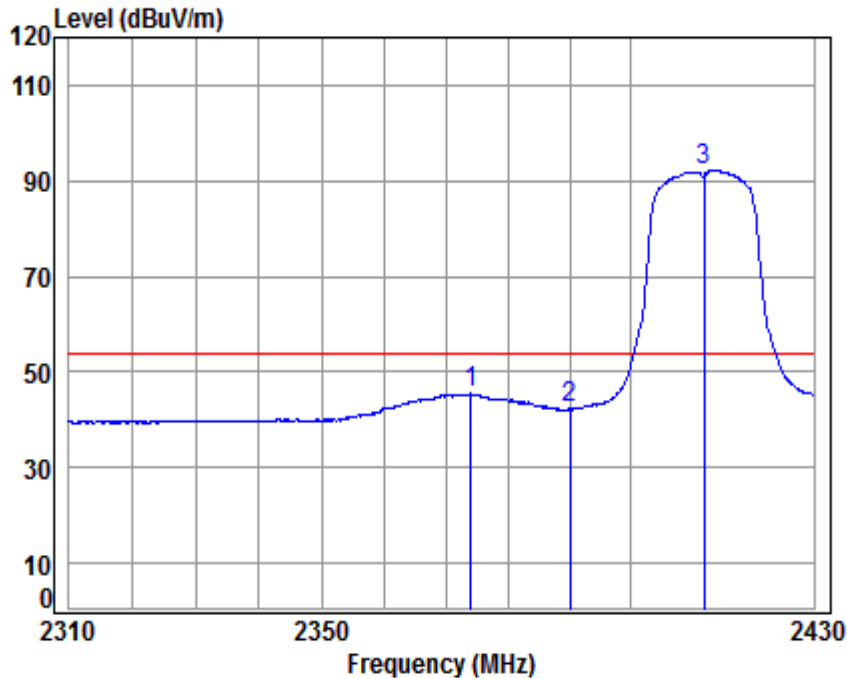


Site : chamber
Condition: 3m HORIZONTAL
Job No : 12741RG
Mode : 2412 Band edge
: 2.4G WIFI 11G
: ANT2

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2373.925	5.45	28.49	41.17	52.69	45.46	54.00	-8.54 Average
2	2390.000	5.47	28.52	41.17	49.47	42.29	54.00	-11.71 Average
3 *	2412.000	5.50	28.56	41.18	99.27	92.15	54.00	38.15 Average



4.10.2.16 802.11G_ Highest Channel_ Average_ Horizontal

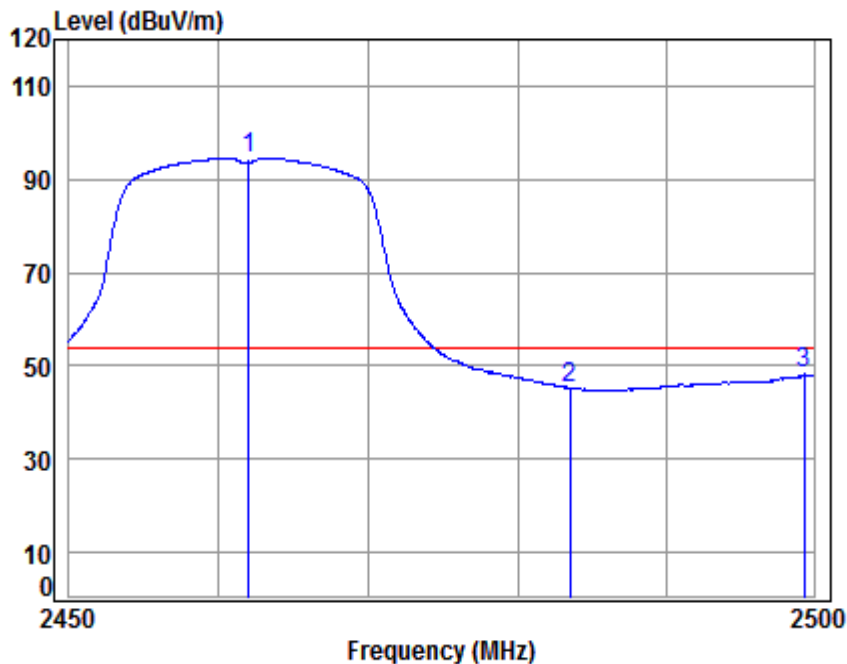


Site : chamber
Condition: 3m HORIZONTAL
Job No : 12741RG
Mode : 2462 Band edge
: 2.4G WIFI 11G
: ANT2

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 *	2462.000	5.57	28.64	41.20	101.50	94.51	54.00	40.51	Average
2	2483.500	5.60	28.67	41.21	52.15	45.21	54.00	-8.79	Average
3	2499.344	5.62	28.70	41.22	55.13	48.23	54.00	-5.77	Average




4.10.2.17 802.11N20 _Lowest Channel_ Peak_ Vertical

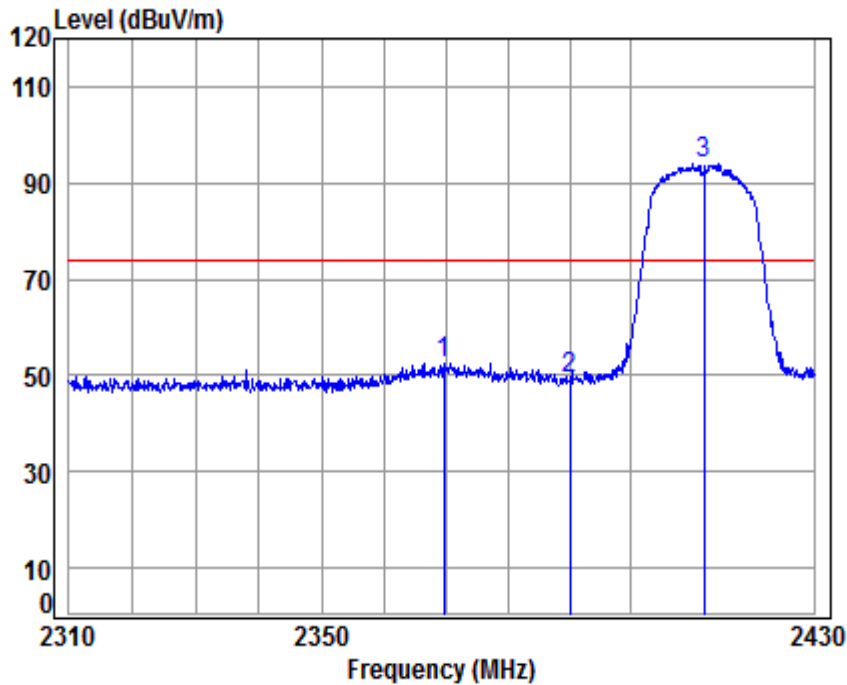

Site : chamber
Condition: 3m VERTICAL
Job No : 12741RG
Mode : 2412 Band edge
: 2.4G WIFI 11N20
: ANT2

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2369.720	5.45	28.48	41.16	59.74	52.51	74.00	-21.49	peak
2	2390.000	5.47	28.52	41.17	56.58	49.40	74.00	-24.60	peak
3 *	2412.000	5.50	28.56	41.18	101.16	94.04	74.00	20.04	peak


4.10.2.18 802.11N20 _ Highest Channel_ Peak_ Vertical

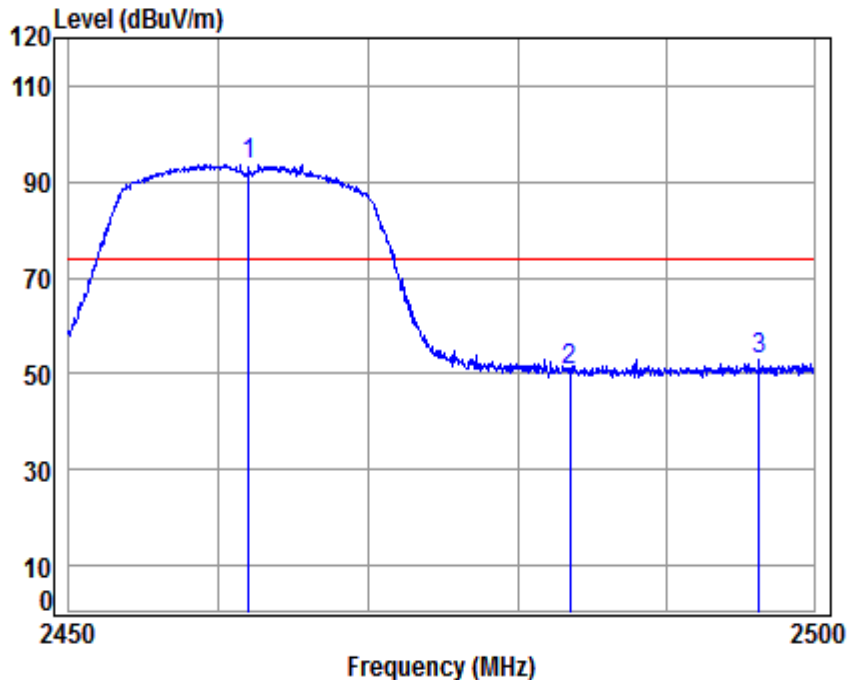

Site : chamber
Condition: 3m VERTICAL
Job No : 12741RG
Mode : 2462 Band edge
: 2.4G WIFI 11N20
: ANT2

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 * 2462.000	5.57	28.64	41.20	100.70	93.71	74.00	19.71	peak
2 2483.500	5.60	28.67	41.21	57.42	50.48	74.00	-23.52	peak
3 2496.316	5.62	28.69	41.22	59.79	52.88	74.00	-21.12	peak


4.10.2.19 802.11N20 _Lowest Channel_ Peak_ Horizontal

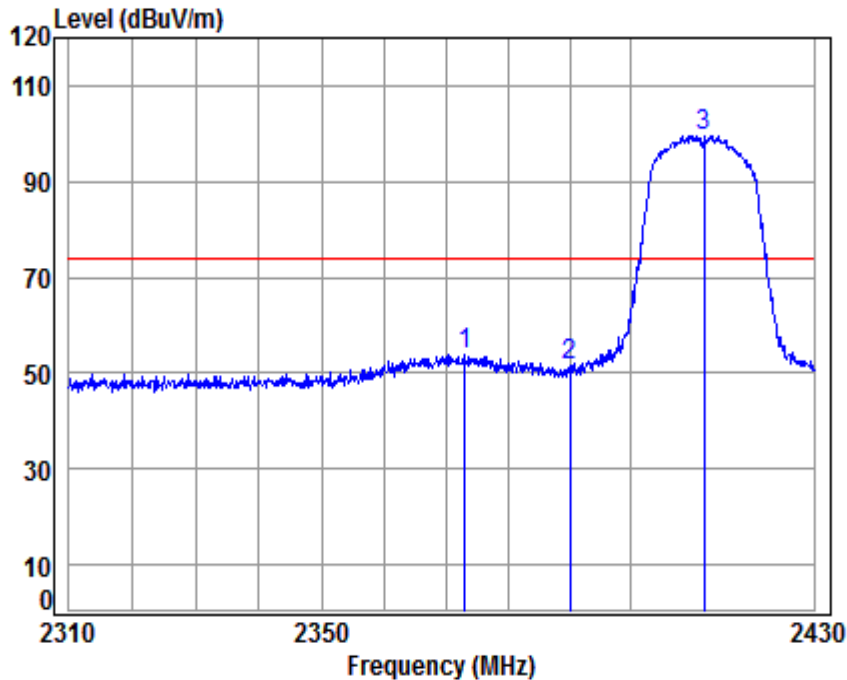

Site : chamber
Condition: 3m HORIZONTAL
Job No : 12741RG
Mode : 2412 Band edge
: 2.4G WIFI 11N20
: ANT2

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBUV	dBUV/m	dBUV/m	dB	
1	2373.083	5.45	28.49	41.17	61.26	54.03	74.00	-19.97	peak
2	2390.000	5.47	28.52	41.17	58.60	51.42	74.00	-22.58	peak
3 *	2412.000	5.50	28.56	41.18	106.64	99.52	74.00	25.52	peak


4.10.2.20 802.11N20 _Highest Channel_ Peak_ Horizontal

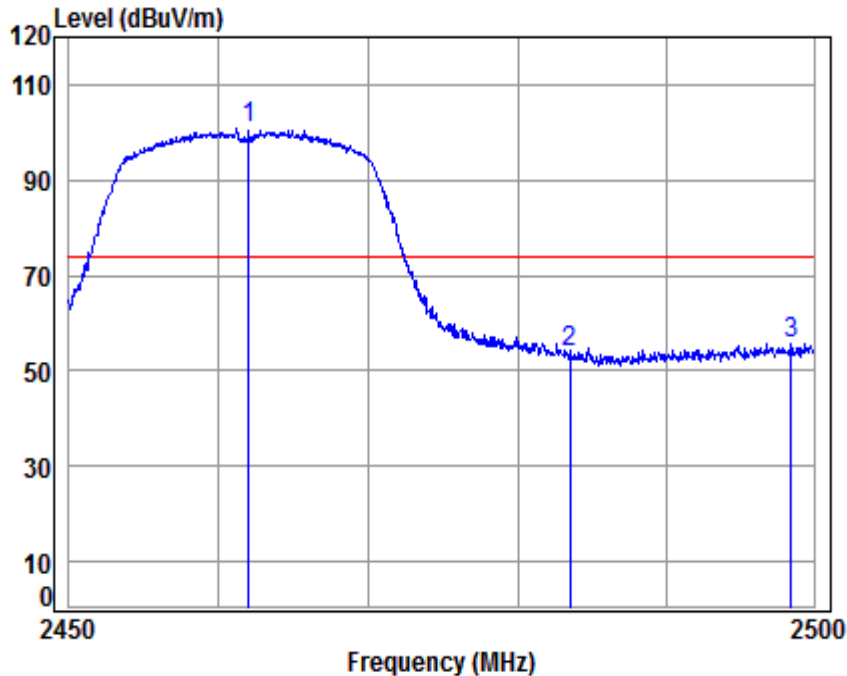

Site : chamber
Condition: 3m HORIZONTAL
Job No : 12741RG
Mode : 2462 Band edge
: 2.4G WIFI 11N20
: ANT2

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 * 2462.000	5.57	28.64	41.20	107.81	100.82	74.00	26.82	peak
2 2483.500	5.60	28.67	41.21	60.56	53.62	74.00	-20.38	peak
3 2498.485	5.62	28.70	41.22	62.57	55.67	74.00	-18.33	peak


4.10.2.21 802.11N20 _Lowest Channel_ Average_ Vertical

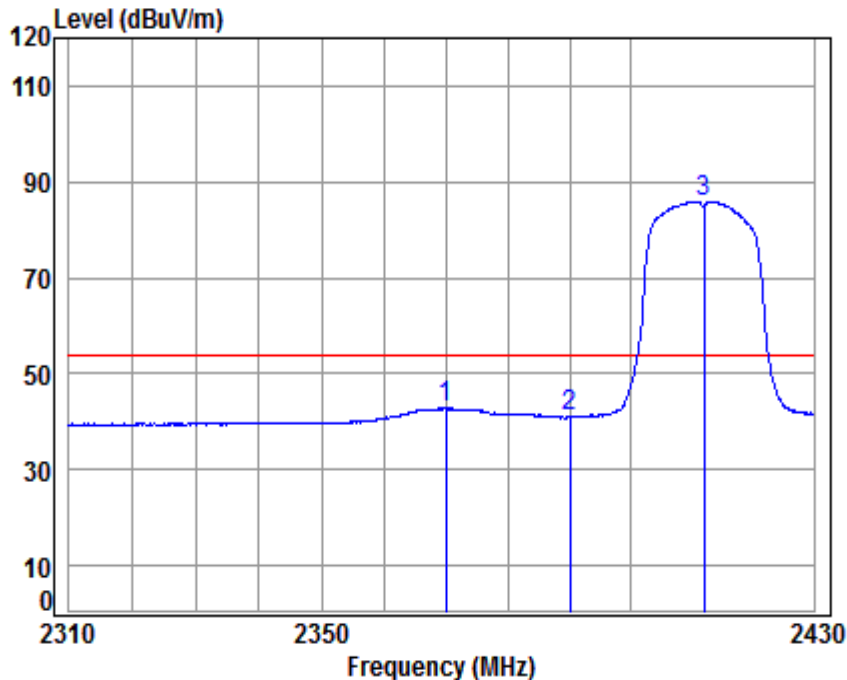

Site : chamber
Condition: 3m VERTICAL
Job No : 12741RG
Mode : 2412 Band edge
: 2.4G WIFI 11N20
: ANT2

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2369.960	5.45	28.48	41.16	50.21	42.98	54.00	-11.02	Average
2	2390.000	5.47	28.52	41.17	48.08	40.90	54.00	-13.10	Average
3 *	2412.000	5.50	28.56	41.18	93.00	85.88	54.00	31.88	Average


4.10.2.22 802.11N20 _ Highest Channel_ Average _ Vertical

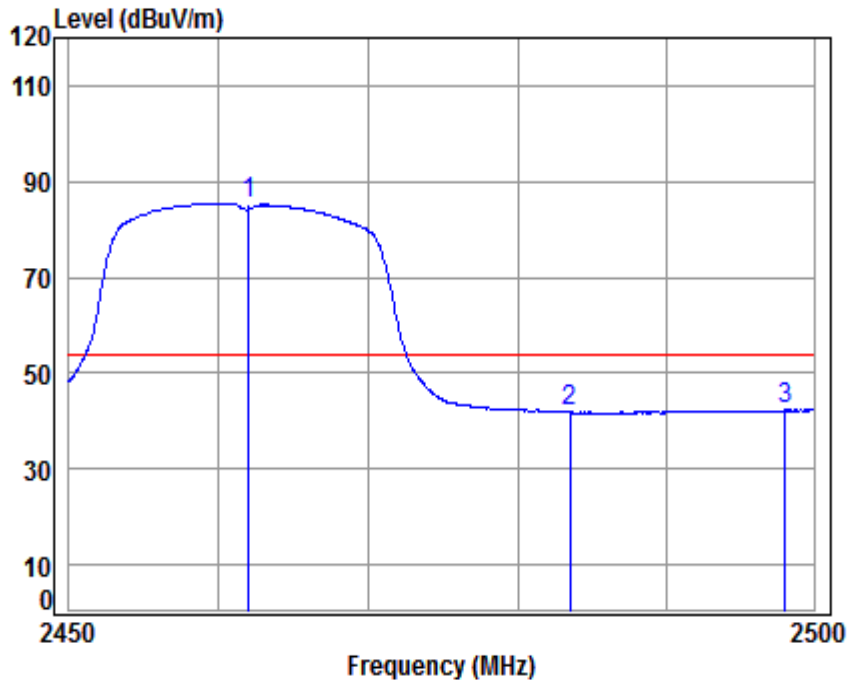

Site : chamber
Condition: 3m VERTICAL
Job No : 12741RG
Mode : 2462 Band edge
: 2.4G WIFI 11N20
: ANT2

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 * 2462.000	5.57	28.64	41.20	92.49	85.50	54.00	31.50	Average
2 2483.500	5.60	28.67	41.21	48.74	41.80	54.00	-12.20	Average
3 2498.031	5.62	28.70	41.22	49.22	42.32	54.00	-11.68	Average

4.10.2.23 802.11N20 _Lowest Channel_ Average _ Horizontal

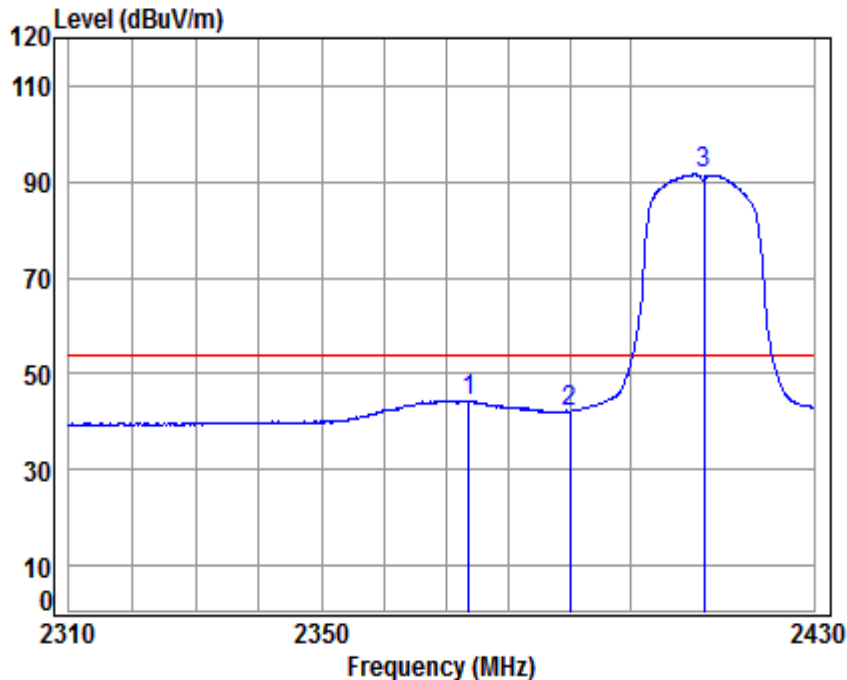


Site : chamber
 Condition: 3m HORIZONTAL
 Job No : 12741RG
 Mode : 2412 Band edge
 : 2.4G WIFI 11N20
 : ANT2

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2373.684	5.45	28.49	41.17	51.58	44.35	54.00	-9.65	Average
2	2390.000	5.47	28.52	41.17	49.34	42.16	54.00	-11.84	Average
3 *	2412.000	5.50	28.56	41.18	98.68	91.56	54.00	37.56	Average



4.10.2.24 802.11N20 _Highest Channel_ Average_ Horizontal

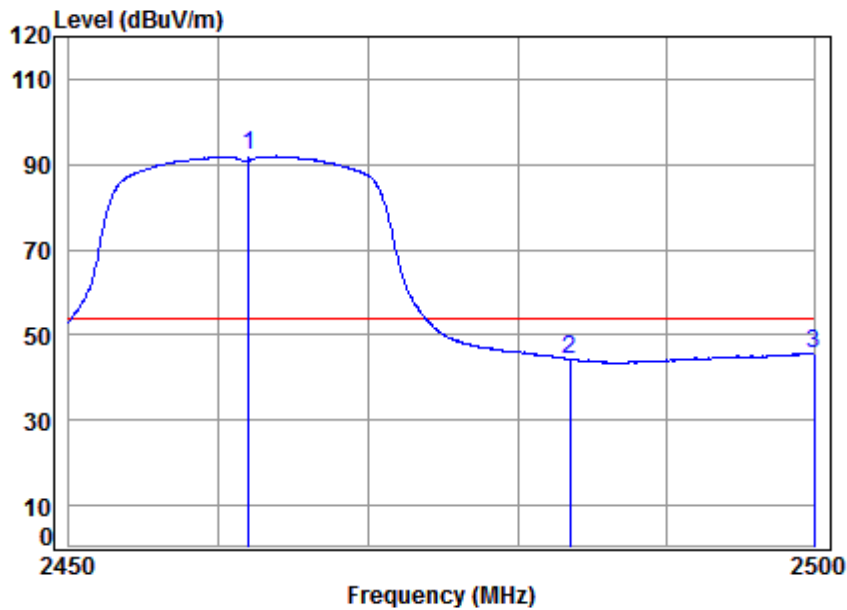


Site : chamber
Condition: 3m HORIZONTAL
Job No : 12741RG
Mode : 2462 Band edge
: 2.4G WIFI 11N20
: ANT2

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 *	2462.000	5.57	28.64	41.20	98.97	91.98	54.00	37.98	Average
2	2483.500	5.60	28.67	41.21	51.22	44.28	54.00	-9.72	Average
3	2500.000	5.62	28.70	41.22	52.55	45.65	54.00	-8.35	Average

4.10.3 MIMO


4.10.3.1 802.11N20_MIMO_Lowest Channel_ Peak_Vertical

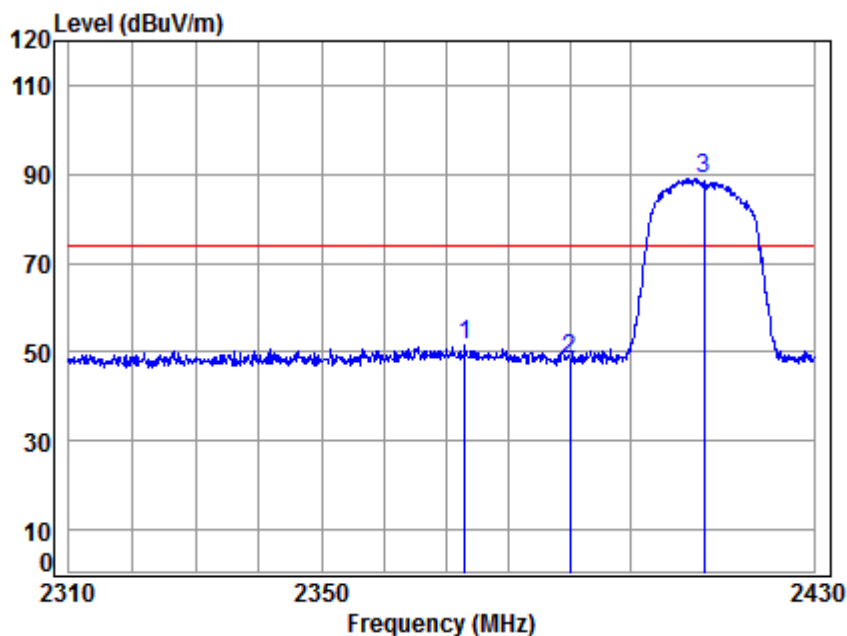

Site : chamber
Condition: 3m VERTICAL
Job No : 12741RG
Mode : 2412 Band edge
: 2.4G WIFI 11N20
: MIMO

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2373.083	5.45	28.49	41.17	58.77	51.54	74.00	-22.46 peak
2	2390.000	5.47	28.52	41.17	55.33	48.15	74.00	-25.85 peak
3 *	2412.000	5.50	28.56	41.18	96.32	89.20	74.00	15.20 peak


4.10.3.2 802.11N20_MIMO_Highest Channel_Peak_Vertical

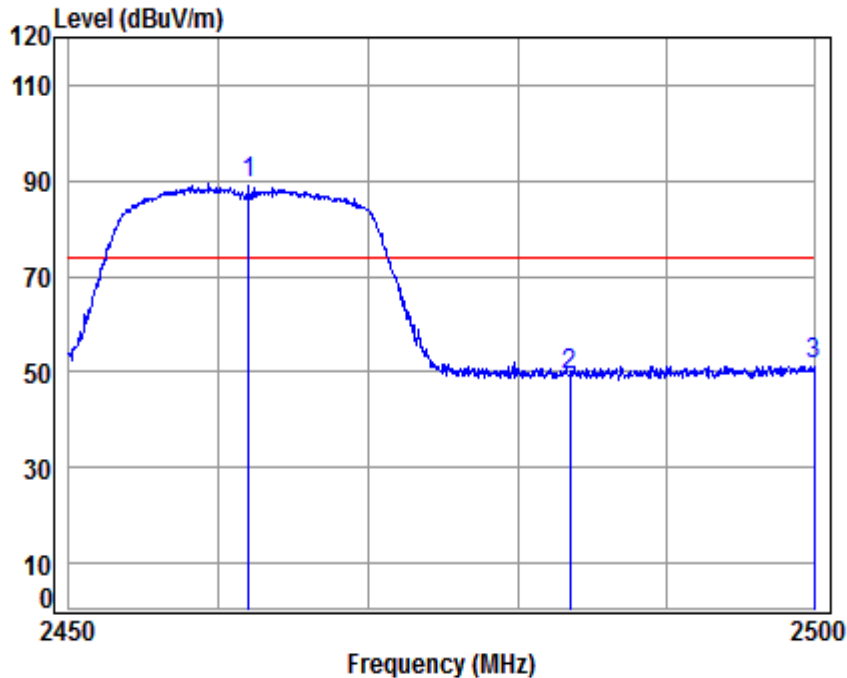

Site : chamber
Condition: 3m VERTICAL
Job No : 12741RG
Mode : 2462 Band edge
: 2.4G WIFI 11N20
: MIMO

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 * 2462.000	5.57	28.64	41.20	96.27	89.28	74.00	15.28	peak
2 2483.500	5.60	28.67	41.21	56.37	49.43	74.00	-24.57	peak
3 2500.000	5.62	28.70	41.22	58.38	51.48	74.00	-22.52	peak


4.10.3.3 802.11N20_ MIMO_Lowest Channel_ Peak_ Horizontal

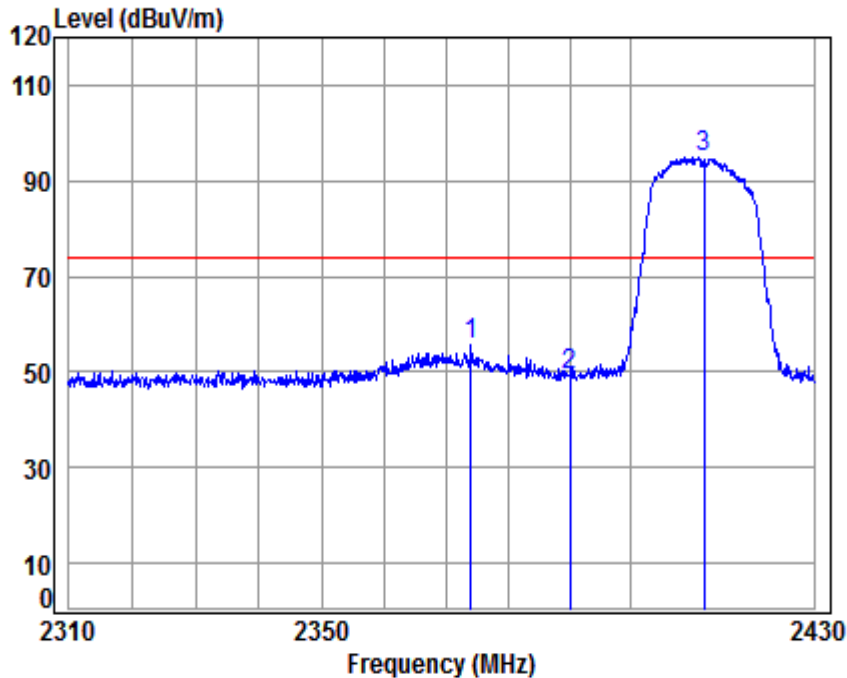

Site : chamber
Condition: 3m HORIZONTAL
Job No : 12741RG
Mode : 2412 Band edge
: 2.4G WIFI 11N20
: MIMO

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2373.925	5.45	28.49	41.17	62.75	55.52	74.00	-18.48 peak
2	2390.000	5.47	28.52	41.17	56.34	49.16	74.00	-24.84 peak
3 *	2412.000	5.50	28.56	41.18	102.10	94.98	74.00	20.98 peak


4.10.3.4 802.11N20_ MIMO_Highest Channel_ Peak_ Horizontal

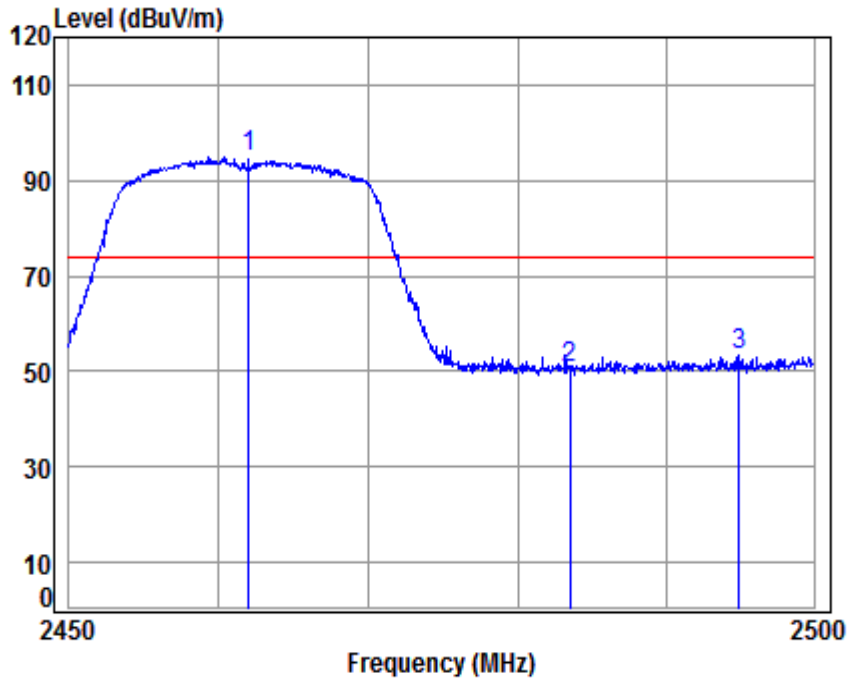

Site : chamber
Condition: 3m HORIZONTAL
Job No : 12741RG
Mode : 2462 Band edge
: 2.4G WIFI 11N20
: MIMO

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 * 2462.000	5.57	28.64	41.20	101.76	94.77	74.00	20.77	peak
2 2483.500	5.60	28.67	41.21	57.73	50.79	74.00	-23.21	peak
3 2494.954	5.61	28.69	41.22	60.13	53.21	74.00	-20.79	peak


4.10.3.5 802.11N20_ MIMO_Lowest Channel_ Average_ Vertical

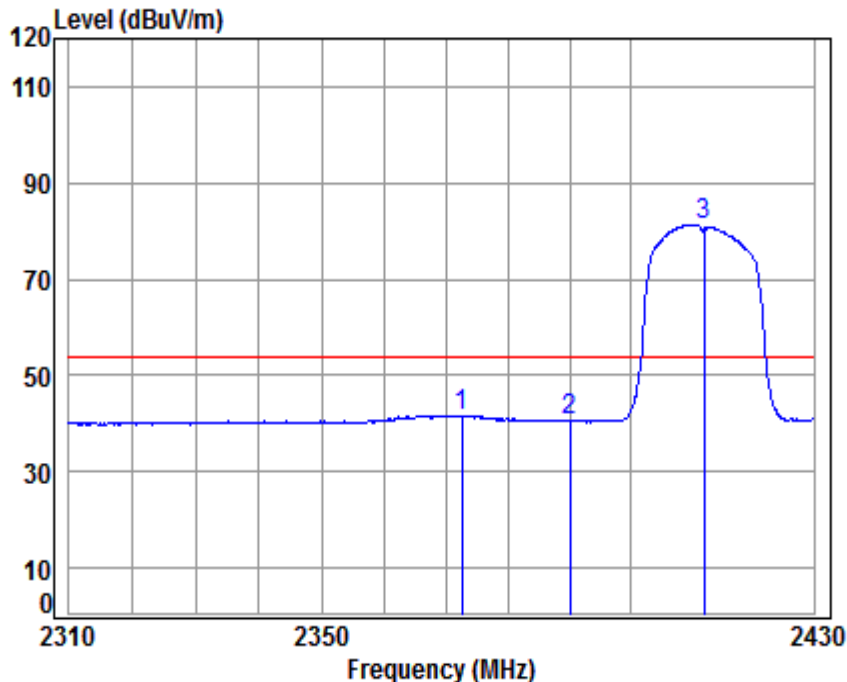

Site : chamber
Condition: 3m VERTICAL
Job No : 12741RG
Mode : 2412 Band edge
: 2.4G WIFI 11N20
: MIMO

		Cable	Ant	Preamp	Read		Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2372.482	5.45	28.49	41.17	48.88	41.65	54.00	-12.35	Average
2	2390.000	5.47	28.52	41.17	47.65	40.47	54.00	-13.53	Average
3 *	2412.000	5.50	28.56	41.18	88.49	81.37	54.00	27.37	Average


4.10.3.6 802.11N20_ MIMO_ Highest Channel_ Average _ Vertical

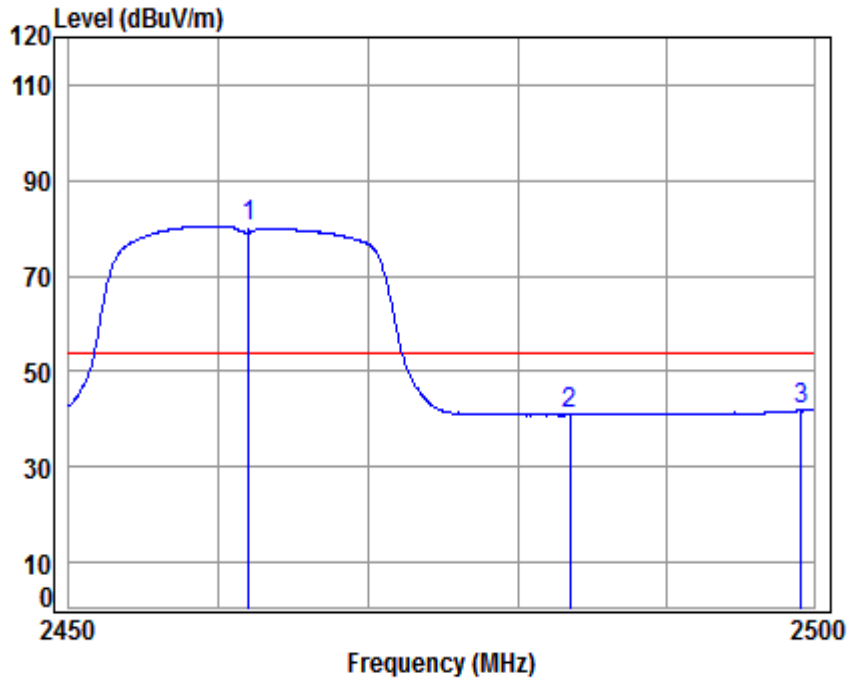

Site : chamber
Condition: 3m VERTICAL
Job No : 12741RG
Mode : 2462 Band edge
: 2.4G WIFI 11N20
: MIMO

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 * 2462.000	5.57	28.64	41.20	87.41	80.42	54.00	26.42	Average
2 2483.500	5.60	28.67	41.21	47.80	40.86	54.00	-13.14	Average
3 2499.142	5.62	28.70	41.22	48.94	42.04	54.00	-11.96	Average


4.10.3.7 802.11N20_ MIMO_Lowest Channel_ Average _ Horizontal

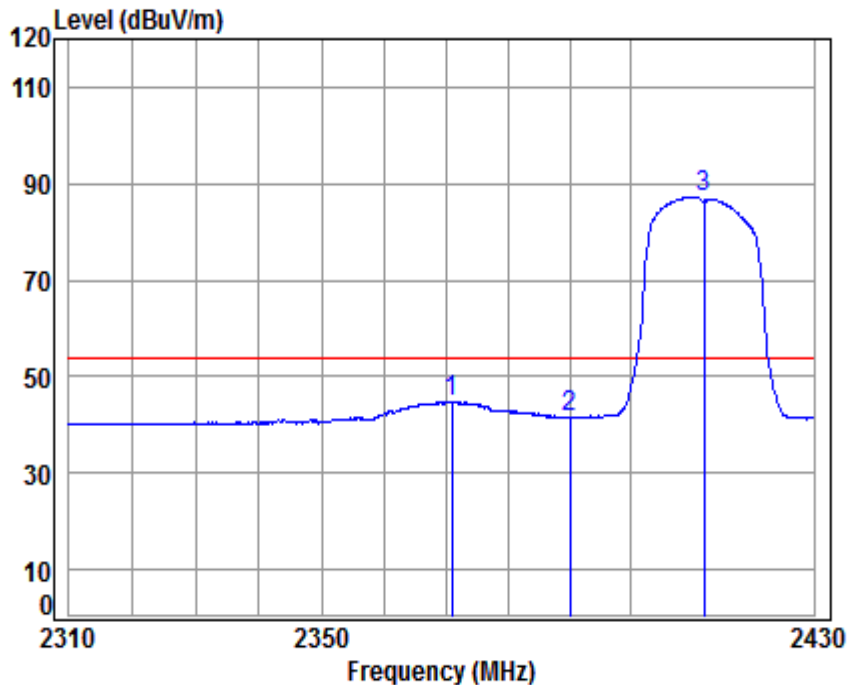

Site : chamber
Condition: 3m HORIZONTAL
Job No : 12741RG
Mode : 2412 Band edge
: 2.4G WIFI 11N20
: MIMO

		Cable	Ant	Preamp	Read		Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2370.921	5.45	28.49	41.16	51.94	44.72	54.00	-9.28	Average
2	2390.000	5.47	28.52	41.17	48.72	41.54	54.00	-12.46	Average
3 *	2412.000	5.50	28.56	41.18	94.44	87.32	54.00	33.32	Average

4.10.3.8 802.11N20_ MIMO_Highest Channel_ Average_ Horizontal

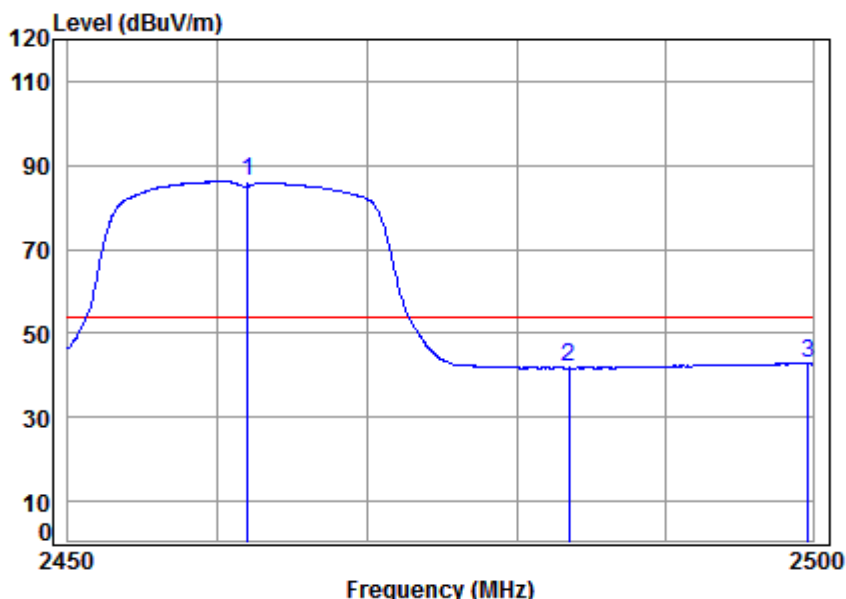

Site : chamber
Condition: 3m HORIZONTAL
Job No : 12741RG
Mode : 2462 Band edge
: 2.4G WIFI 11N20
: MIMO

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 * 2462.000	5.57	28.64	41.20	93.12	86.13	54.00	32.13	Average
2 2483.500	5.60	28.67	41.21	48.70	41.76	54.00	-12.24	Average
3 2499.697	5.62	28.70	41.22	49.90	43.00	54.00	-11.00	Average

Remark:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor

All Modes have been tested, but only the worst case data displayed in this report.



5 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Total RF power, conducted	$\pm 0.75\text{dB}$
2	RF power density, conducted	$\pm 2.84\text{dB}$
3	Spurious emissions, conducted	$\pm 0.75\text{dB}$
4	Radiated Spurious emission test	$\pm 4.5\text{dB}$ (30MHz-1GHz)
		$\pm 4.8\text{dB}$ (1GHz-25GHz)
5	Conduct emission test	$\pm 3.12\text{ dB}$ (9KHz- 30MHz)
6	Temperature test	$\pm 1^{\circ}\text{C}$
7	Humidity test	$\pm 3\%$
8	DC and low frequency voltages	$\pm 0.5\%$

6 Equipment List

Conducted Emission					
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date	Cal.Due date
				(yyyy-mm-dd)	(yyyy-mm-dd)
Shielding Room	ZhongYu Electron	GB-88	SEM001-06	2017/5/10	2020/5/9
LISN	Rohde & Schwarz	ENV216	SEM007-01	2018/9/2	2019/9/2
LISN	ETS-LINDGREN	Feb-16	SEM007-02	2018/4/2	2019/4/1
Measurement Software	AUDIX	e3 V5.4.1221d	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM024-01	2018/7/12	2019/7/11
2 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T2-02	EMC0122	2018/2/14	2019/2/13
EMI Test Receiver	Rohde & Schwarz	ESCI	SEM004-02	2018/4/2	2019/4/1
RF conducted test					
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date	Cal.Due date
				(yyyy-mm-dd)	(yyyy-mm-dd)
DC Power Supply	Agilent Technologies Inc	66311B	W009-09	2018/9/15	2019/9/15
Signal Analyzer	Rohde & Schwarz	FSV	W025-05	2018/3/13	2019/3/12
Coaxial Cable	SGS	N/A	SEM031-01	2018/7/13	2019/7/12
Attenuator	Weinschel Associates	WA41	SEM021-09	N/A	N/A
Signal Generator	KEYSIGHT	N5173B	SEM006-05	2018/9/2	2019/9/2
Temperature Chamber	GIANT FORCE	ICT-150-40-CP-AR	W027-03	2018/11/27	2019/11/27
Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2018/9/2	2019/9/2
RE in Chamber					
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date	Cal. Due date
				(yyyy-mm-dd)	(yyyy-mm-dd)
10m Semi-Anechoic Chamber	SAEMC	FSAC1018	SEM001-03	2018/3/31	2021/3/30
EMI Test Receiver (9k-7GHz)	Rohde & Schwarz	ESR	SEM004-03	2018/4/2	2019/4/1
Trilog-Broadband Antenna(25M-2GHz)	Schwarzbeck	VULB9168	SEM003-18	2016/6/29	2019/6/28
Pre-amplifier (9k-1GHz)	Sonoma	310N	SEM005-03	2018/4/13	2019/4/12
Loop Antenna (9kHz-30MHz)	ETS-Lindgren	6502	SEM003-08	2017/8/22	2020/8/21
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM029-01	2018/7/12	2019/7/11
RE in Chamber					
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date	Cal.Due date
				(yyyy-mm-dd)	(yyyy-mm-dd)
3m Semi-Anechoic Chamber	AUDIX	N/A	SEM001-02	2018/3/13	2021/3/12
Measurement Software	AUDIX	e3V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM026-01	2018/7/12	2019/7/11
EXA Signal Analyzer (10Hz-26.5GHz)	Agilent Technologies Inc	N9010A	SEM004-09	2018/4/13	2019/4/12
BiConiLog Antenna (26-3000MHz)	ETS-Lindgren	3142C	SEM003-01	2017/6/27	2020/6/26
Horn Antenna (0.8-18GHz)	Rohde & Schwarz	HF907	SEM003-07	2018/4/13	2021/4/12
Pre-amplifier(0.1-1.3GHz)	HP	8447D	SEM005-02	2018/9/2	2019/9/2
Low Noise Amplifier(100MHz-18GHz)	Black Diamond Series	BDLNA-0118-352810	SEM005-05	2018/9/27	2019/9/27
Pre-amplifier(18-26GHz)	Rohde & Schwarz	CH14-H052	SEM005-17	2018/4/2	2019/4/1
Band filter	N/A	N/A	SEM023-01	N/A	N/A



7 Photographs - EUT Constructional Details

Refer to Appendix A - Photographs of EUT Constructional Details for SZEM1712012741RG.

The End