



No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053  
Fax: +86 (0) 755 2671 0594  
Email: ee.shenzhen@sgs.com

Report No.: SZEM171201274502  
Page: 1 of 158

## FCC TEST REPORT

<b>Application No:</b>	SZEM1712012745RG
<b>Applicant:</b>	Ventus Technologies
<b>Address of Applicant</b>	10 Norden Place, Norwalk, CT 06855
<b>Manufacturer:</b>	Ventus Technologies
<b>Address of Manufacturer</b>	10 Norden Place, Norwalk, CT 06855
<b>Factory:</b>	Ventus Technologies
<b>Address of Factory</b>	10 Norden Place, Norwalk, CT 06855
<b>EUT Description:</b>	Router
<b>Model No.:</b>	VRB842
<b>Trade Mark:</b>	Ventus
<b>FCC ID:</b>	2AR44-VRB842
<b>Standards:</b>	47 CFR FCC Part 2, Subpart J 47 CFR Part 15, Subpart C KDB558074 D01 15.247 Meas Guidance v05
<b>Test Method</b>	ANSI C63.4(2014) ANSI C63.10 (2013)
<b>Date of Receipt:</b>	2018/12/1
<b>Date of Test:</b>	2018/12/2 to 2018/12/20
<b>Date of Issue:</b>	2019/1/22
<b>Test Result:</b>	<b>PASS *</b>

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

Derek Yang

Wireless Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



## 1 Version

Revision Record				
Version	Chapter	Date	Modifier	Remark
00		2018/12/18		Original

Authorized for issue by:				
Tested By				2018/12/18
		(Mike Hu) /Project Engineer		Date
Checked By				2018/12/18
		(David Chen) /Reviewer		Date

## 2 Test Summary

Test Item	Test Requirement	Test method	Test Result	Result
<b>AC Power Line Conducted Emission</b>	15.207	ANSI C63.10 2013	Clause 4.2	PASS
<b>Duty Cycle</b>	--	--	Clause 4.3	PASS
<b>Conducted Output Power</b>	15.247 (b)(3)	ANSI C63.10 2013	Clause 4.4	PASS
<b>DTS (6 dB) Bandwidth</b>	15.247 (a)(2)	ANSI C63.10 2013	Clause 4.5	PASS
<b>Power Spectral Density</b>	15.247 (e)	ANSI C63.10 2013	Clause 4.6	PASS
<b>Band-edge for RF Conducted Emissions</b>	15.247(d)	ANSI C63.10 2013	Clause 4.7	PASS
<b>RF Conducted Spurious Emissions</b>	15.247(d)	ANSI C63.10 2013	Clause 4.8	PASS
<b>Radiated Spurious Emissions</b>	15.247(d) ;15.205/15.209	ANSI C63.10 2013	Clause 4.9	PASS
<b>Restricted bands around fundamental frequency (Radiated Emission)</b>	15.247(d) ;15.205/15.209	ANSI C63.10 2013	Clause 4.10	PASS

## Contents

<b>1</b>	<b>VERSION</b>	<b>2</b>
<b>2</b>	<b>TEST SUMMARY</b>	<b>3</b>
<b>3</b>	<b>GENERAL INFORMATION</b>	<b>5</b>
3.1	CLIENT INFORMATION	5
3.2	TEST LOCATION	5
3.3	TEST FACILITY	5
3.4	GENERAL DESCRIPTION OF EUT	6
3.5	TEST ENVIRONMENT AND MODE	7
3.6	DESCRIPTION OF SUPPORT UNITS	7
<b>4</b>	<b>TEST RESULTS AND MEASUREMENT DATA</b>	<b>8</b>
4.1	ANTENNA REQUIREMENT	8
4.2	AC POWER LINE CONDUCTED EMISSIONS	9
4.3	DUTY CYCLE	13
4.3.1	<i>Test Results</i>	13
4.3.1	<i>Test Plots</i>	13
4.4	CONDUCTED OUTPUT POWER	19
4.4.1	<i>Test Results</i>	20
4.5	DTS (6 dB) BANDWIDTH	21
4.5.1	<i>Test Results</i>	21
4.5.2	<i>Test plots</i>	23
4.6	POWER SPECTRAL DENSITY	39
4.6.1	<i>Test Results</i>	39
4.6.2	<i>Test plots</i>	41
4.7	BAND-EDGE FOR RF CONDUCTED EMISSIONS	57
4.7.1	<i>Test plots</i>	58
4.8	RF CONDUCTED SPURIOUS EMISSIONS	68
4.8.1	<i>Test plots</i>	69
4.9	RADIATED SPURIOUS EMISSIONS	85
4.9.1	<i>Radiated emission below 1GHz</i>	87
4.9.2	<i>Transmitter emission above 1GHz</i>	89
4.10	RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY	114
4.10.1	ANT1	116
4.10.2	ANT2&MIMO	140
<b>5</b>	<b>MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2)</b>	<b>156</b>
<b>6</b>	<b>EQUIPMENT LIST</b>	<b>157</b>
<b>7</b>	<b>PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS</b>	<b>158</b>



## 3 General Information

### 3.1 Client Information

Applicant:	Ventus Technologies
Address of Applicant:	10 Norden Place, Norwalk, CT 06855
Manufacturer:	Ventus Technologies
Address of Manufacturer:	10 Norden Place, Norwalk, CT 06855
Factory:	Ventus Technologies
Address of Factory:	10 Norden Place, Norwalk, CT 06855

### 3.2 Test Location

Company:	SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch
Address:	No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen, Guangdong, China
Post code:	518057
Telephone:	+86 (0) 755 2601 2053
Fax:	+86 (0) 755 2671 0594
E-mail:	ee.shenzhen@sgs.com

### 3.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### • CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

#### • A2LA (Certificate No. 3816.01)

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

#### • VCCI

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

#### • FCC –Designation Number: CN1178

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1178. Test Firm Registration Number: 406779.

#### • Industry Canada (IC)

Two 3m Semi-anechoic chambers and the 10m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1, 4620C-2, 4620C-3.



### 3.4 General Description of EUT

EUT Description::	Router
Model No.:	VRB842
Trade Mark:	Ventus
Hardware Version:	B
Software Version:	1
IEEE 802.11 WLAN Mode Supported	<input checked="" type="checkbox"/> 802.11B (20 MHz channel bandwidth), <input checked="" type="checkbox"/> 802.11G (20 MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11N (20 MHz channel bandwidth), <input type="checkbox"/> 802.11N (40 MHz channel bandwidth)
Operation Frequency:	2400 MHz -2483.5MHz fc = 2407 MHz + N * 5 MHz, where: -fc = "Operating Frequency" in MHz, -N = "Channel Number" with the range from 1 to 11 for the 20 MHz channel bandwidth, or 3 to 9 for the 40 MHz channel bandwidth.
Type of Modulation:	IEEE for 802.11B: DSSS IEEE for 802.11G : OFDM IEEE for 802.11N(HT20) : OFDM
Sample Type:	<input type="checkbox"/> Portable Device, <input checked="" type="checkbox"/> Module
Antenna Type:	<input checked="" type="checkbox"/> External, <input type="checkbox"/> Integrated
Antenna Ports	<input checked="" type="checkbox"/> Ant 1, <input checked="" type="checkbox"/> Ant 2, <input type="checkbox"/> Ant 3
Smart System	<input checked="" type="checkbox"/> SISO (for 802.11B/G/N), <input checked="" type="checkbox"/> MIMO (for 802.11N): 2 Tx & 2 Rx, <input type="checkbox"/> Diversity (for 802.11B/G) : Tx & Rx
Antenna Gain:	ANT1:2dBi; ANT2:2dBi
Power Supply	<input checked="" type="checkbox"/> AC/DC Adapter; <input type="checkbox"/> Battery <input type="checkbox"/> PoE; <input type="checkbox"/> Other:

Operation Frequency of each channel (802.11B/G/N HT20)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

**Remark:**

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency for 802.11B/G/N (HT20)
The Lowest channel	2412MHz
The Middle channel	2437MHz
The Highest channel	2462MHz

### **3.5 Test Environment and Mode**

<b>Operating Environment:</b>	
Temperature:	25.0 °C
Humidity:	50 % RH
Atmospheric Pressure:	101.30 KPa
<b>Test mode:</b>	
Transmitting mode:	Keep the EUT in transmitting mode with all kind of modulation and all kind of data rate.

### **3.6 Description of Support Units**

The EUT has been tested independent unit.

## 4 Test results and Measurement Data

### 4.1 Antenna Requirement

Standard requirement:	47 CFR Part 15C Section 15.203 /247(c)
15.203 requirement:	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.
15.247(b) (4) requirement:	The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
	The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is ANT1:2dBi; ANT2:2dBi.

## 4.2 AC Power Line Conducted Emissions

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



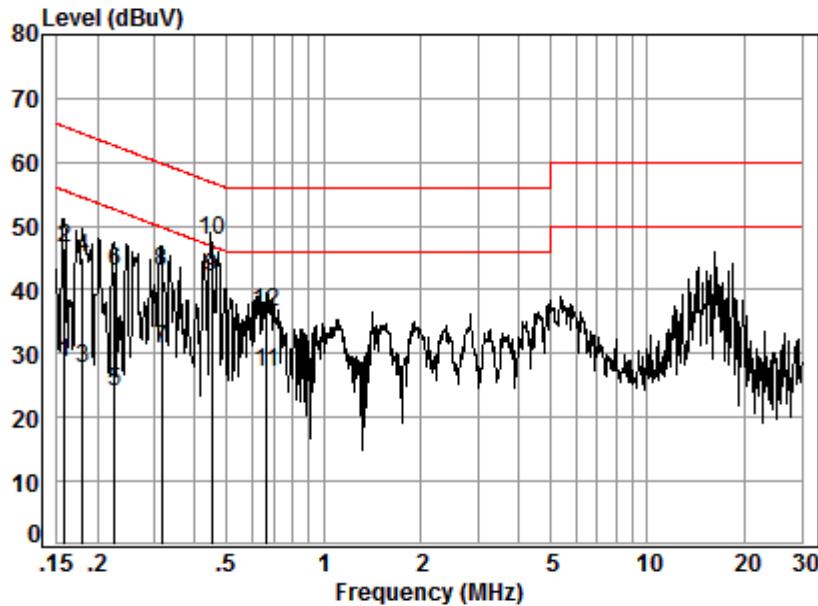
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates at lowest, middle and highest channel. Charge + Transmitting mode.
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate of 802.11B at lowest channel is the worst case. Charge + Transmitting mode. Only the worst case is recorded in the report.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass

**Measurement Data**

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live Line:



Site : Shielding Room

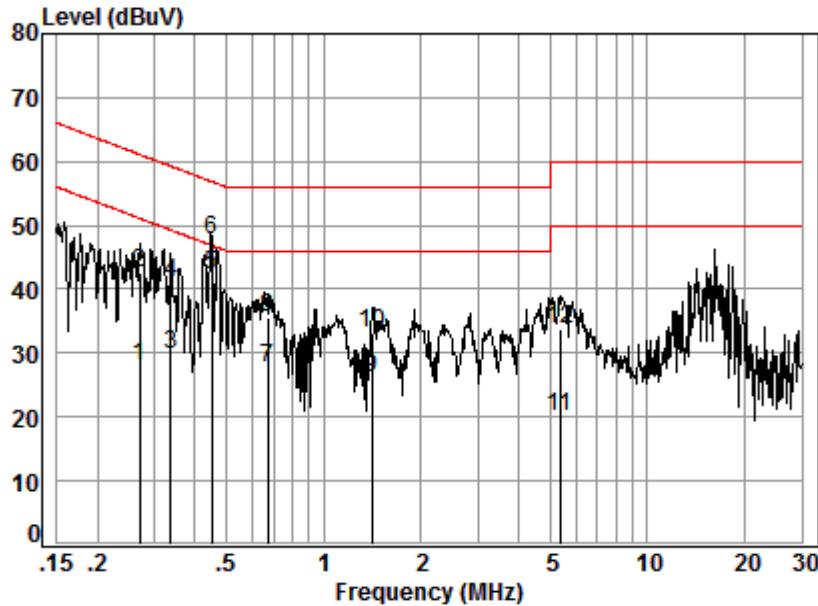
Condition: Line

Job No. : 12745RG VRB 842

Test mode: a

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.16	0.01	9.66	19.05	28.72	55.56	-26.84	Average
2	0.16	0.01	9.66	36.90	46.57	65.56	-18.99	QP
3	0.18	0.02	9.66	18.12	27.80	54.50	-26.70	Average
4	0.18	0.02	9.66	35.43	45.11	64.50	-19.39	QP
5	0.23	0.03	9.67	14.33	24.03	52.61	-28.58	Average
6	0.23	0.03	9.67	33.23	42.93	62.61	-19.68	QP
7	0.31	0.04	9.67	21.10	30.81	49.84	-19.03	Average
8	0.31	0.04	9.67	33.30	43.01	59.84	-16.83	QP
9	0.45	0.06	9.67	32.29	42.02	46.87	-4.85	Average
10	0.45	0.06	9.67	38.10	47.83	56.87	-9.04	QP
11	0.66	0.07	9.68	17.30	27.05	46.00	-18.95	Average
12	0.66	0.07	9.68	26.81	36.56	56.00	-19.44	QP

Neutral Line:



Site : Shielding Room

Condition: Neutral

Job No. : 12745RG VRB 842

Test mode: a

Freq	Cable	LISN	Read	Limit	Over	Remark	
	Loss	Factor	Level				
	MHz	dB	dB	dBuV	dBuV	dB	
1	0.27	0.03	9.64	18.20	27.87	51.12	-23.25 Average
2	0.27	0.03	9.64	32.92	42.59	61.12	-18.53 QP
3	0.34	0.04	9.64	20.18	29.86	49.31	-19.45 Average
4	0.34	0.04	9.64	31.40	41.08	59.31	-18.23 QP
5	0.45	0.06	9.64	32.69	42.39	46.88	-4.49 Average
6	0.45	0.06	9.64	38.15	47.85	56.88	-9.03 QP
7	0.67	0.07	9.65	17.86	27.58	46.00	-18.42 Average
8	0.67	0.07	9.65	26.00	35.72	56.00	-20.28 QP
9	1.41	0.12	9.70	16.35	26.17	46.00	-19.83 Average
10	1.41	0.12	9.70	23.41	33.23	56.00	-22.77 QP
11	5.36	0.17	9.72	10.06	19.95	50.00	-30.05 Average
12	5.36	0.17	9.72	23.89	33.78	60.00	-26.22 QP

**Remarks:**

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.

## 4.3 Duty Cycle

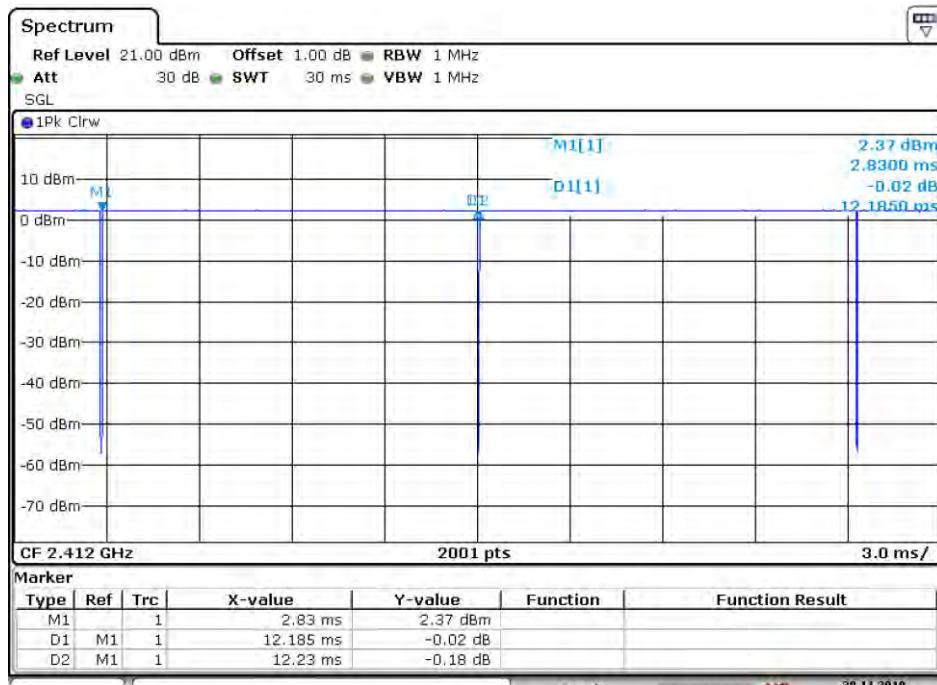
### 4.3.1 Test Results

Test Mode	TX Freq. [MHz]	Duty cycle [%]
11B	Ant 1: CH1	99.63
11G	Ant 1: CH1	96.64
11N20	Ant 1: CH1	96.91
11G_CDD	Ant 1: CH1	96.87
11N20_MIMO	Ant 1: CH1	96.91
11B	Ant 2: CH1	99.63
11G	Ant 2: CH1	96.91
11N20	Ant 2: CH1	96.65
11G_CDD	Ant 2: CH1	96.63
11N20_MIMO	Ant 2: CH1	96.90

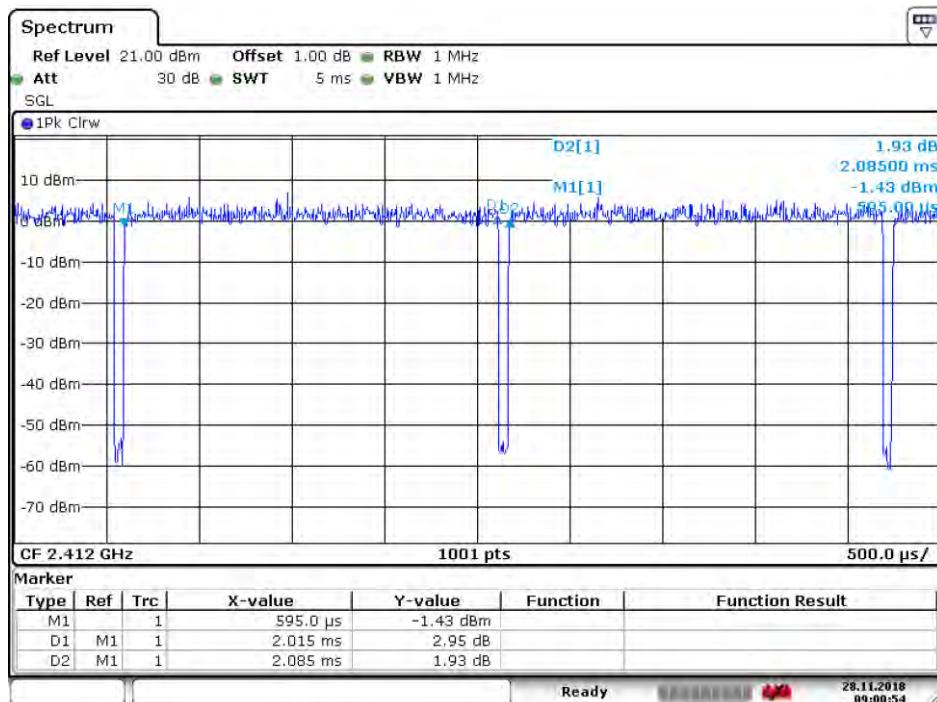
### 4.3.1 Test Plots

#### 4.3.1.1 ANT1

##### 4.3.1.1.1 11B

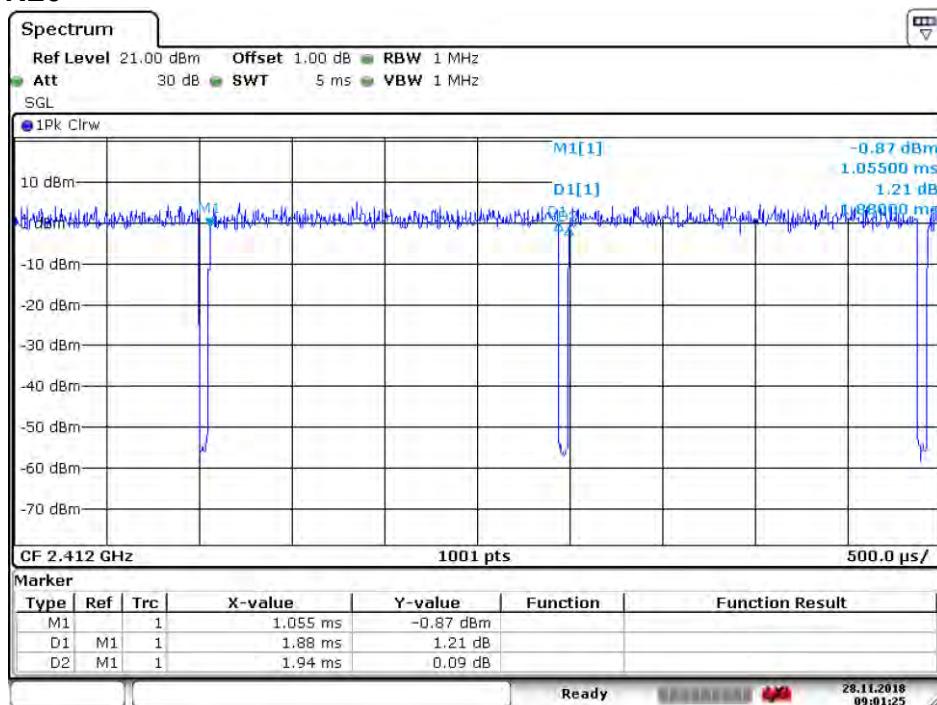


## 4.3.1.1.2 11G



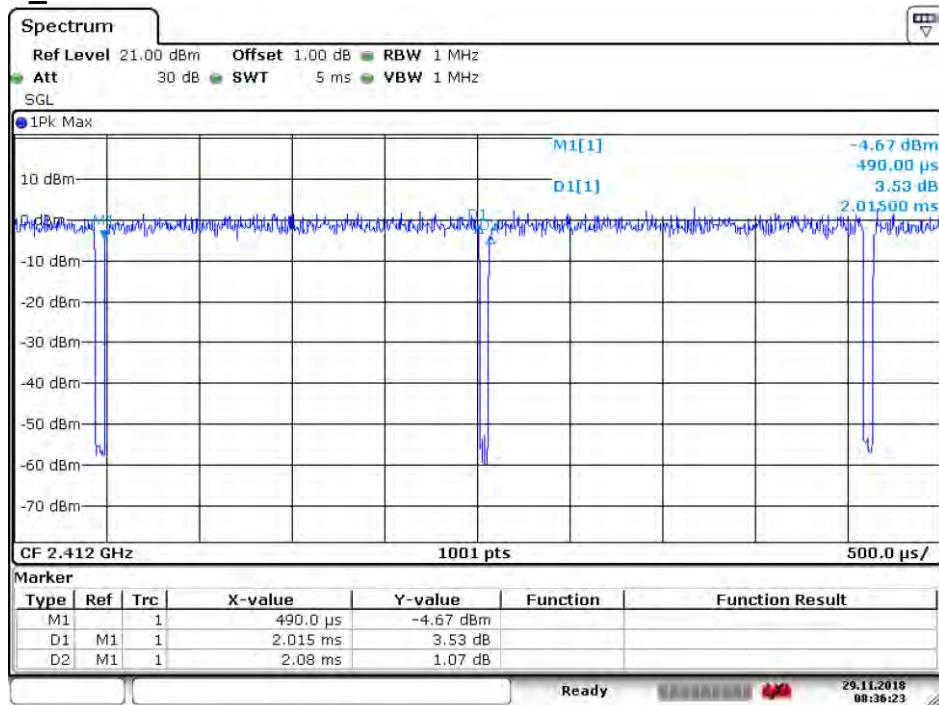
Date: 28.NOV.2018 09:00:54

## 4.3.1.1.3 11N20



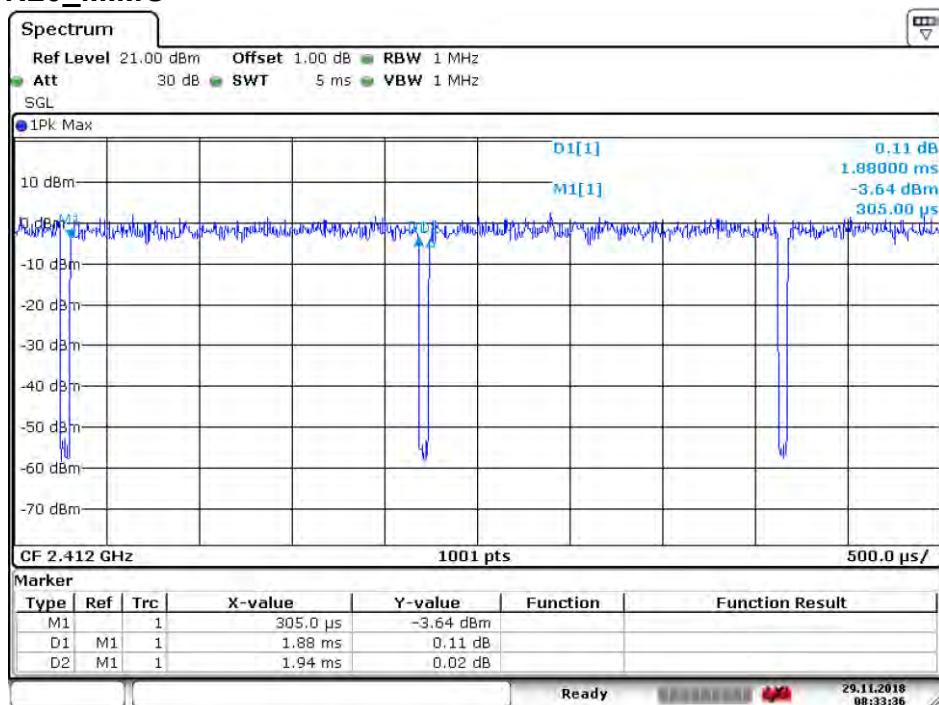
Date: 28.NOV.2018 09:01:25

## 4.3.1.1.4 11G\_CDD

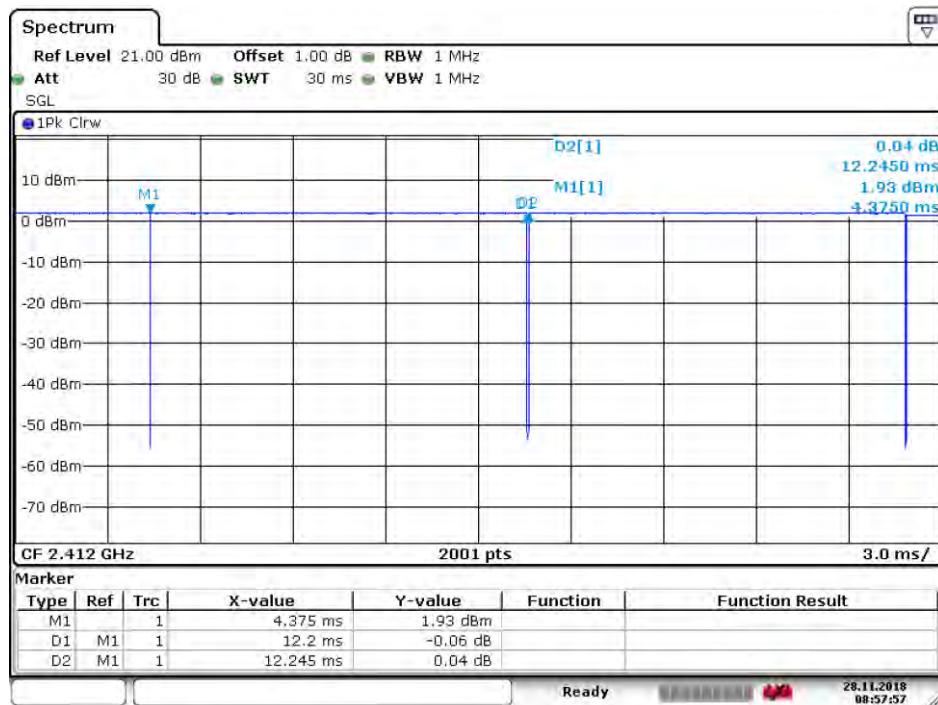


Date: 29.NOV.2018 08:36:23

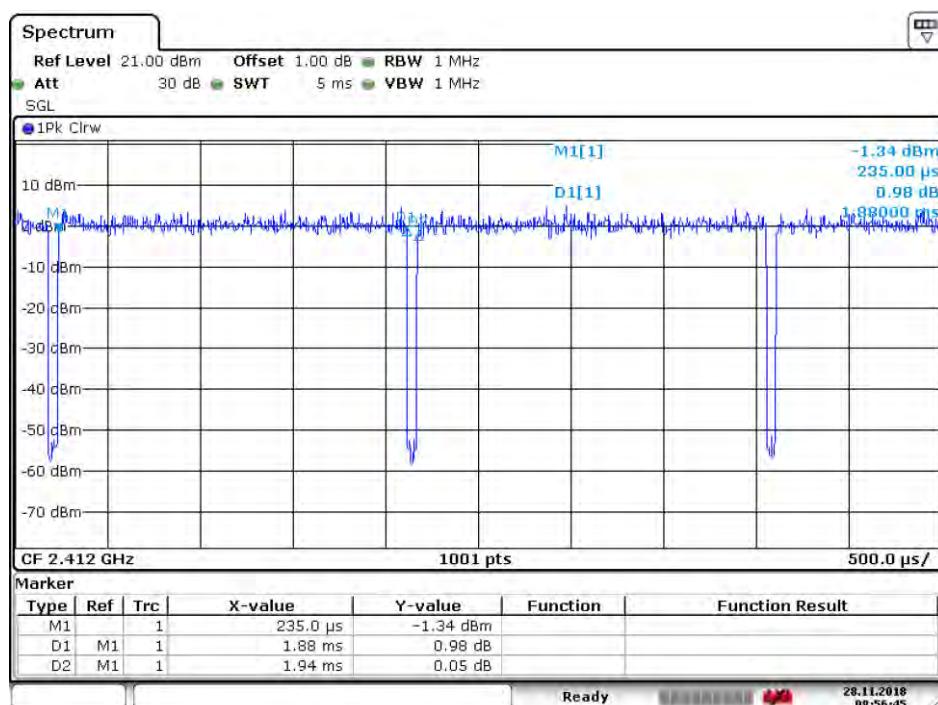
## 4.3.1.1.5 11N20\_MIMO



Date: 29.NOV.2018 08:33:56

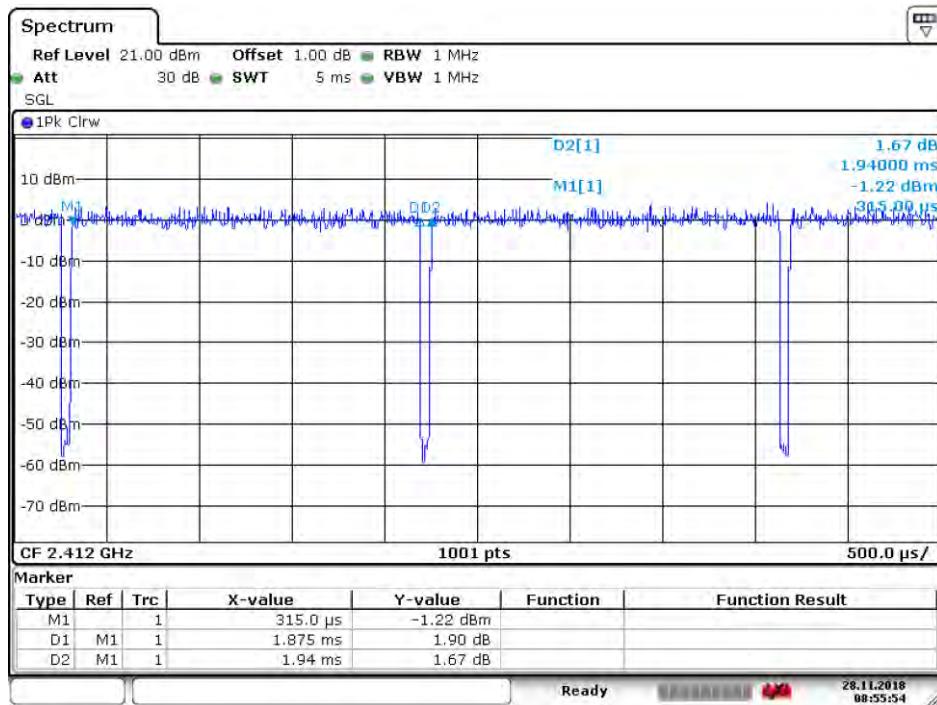
**4.3.1.2 ANT2****4.3.1.2.1 11B**

Date: 28 NOV 2018 08:57:57

**4.3.1.2.2 11G**

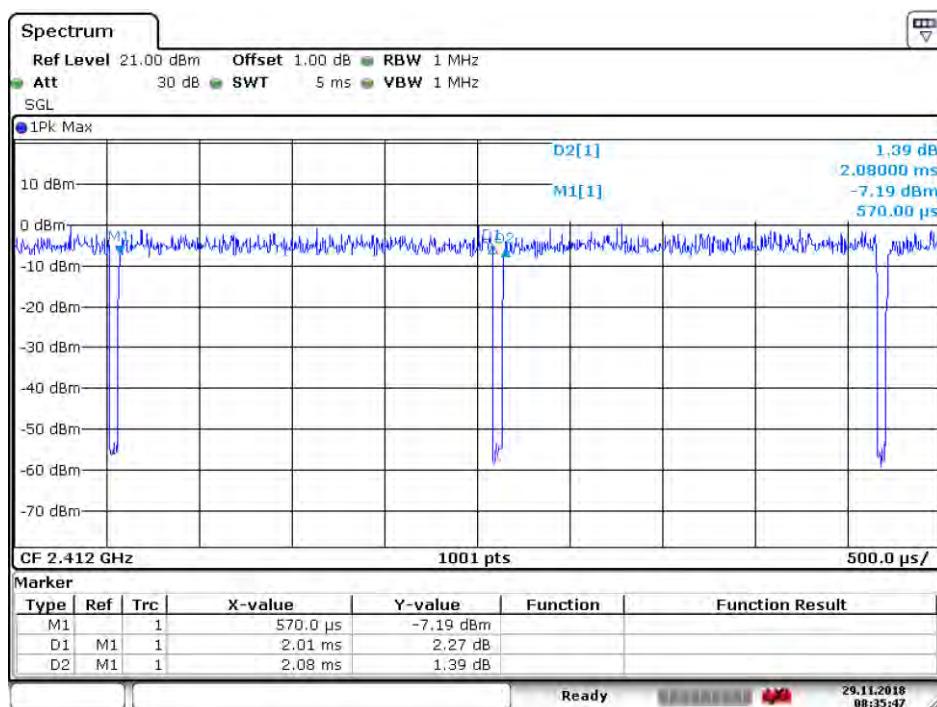
Date: 28 NOV 2018 08:56:46

## 4.3.1.2.3 11N20

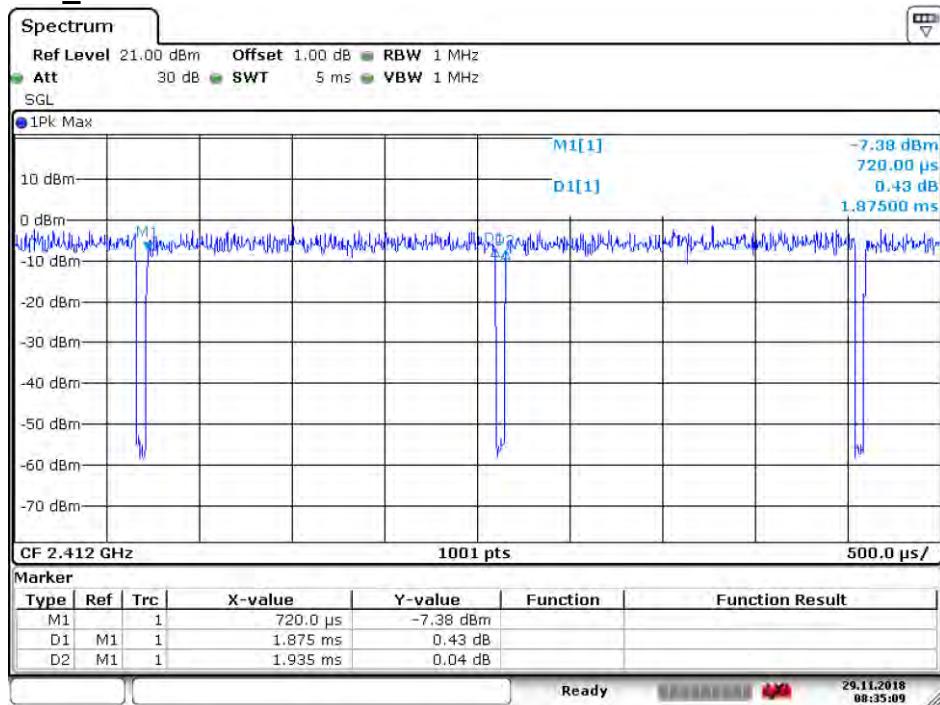


Date: 28.NOV.2018 08:55:54

## 4.3.1.2.4 11G\_CDD

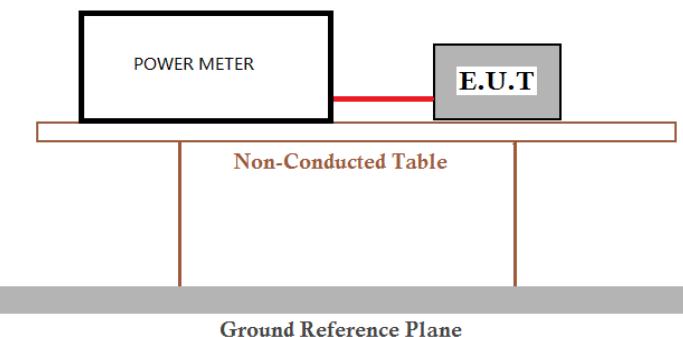


Date: 29.NOV.2018 08:35:46

**4.3.1.2.5 11N20\_MIMO**

Date: 29.NOV.2018 08:35:10

## 4.4 Conducted Output Power

Test Requirement:	47 CFR Part 15C Section 15.247 (b)(3)
Test Method:	ANSI C63.10 :2013 Section 11.9.1.3
Test Setup:	 <p>The diagram illustrates the test setup. A 'POWER METER' is connected to an 'E.U.T' (Equipment Under Test) via a red line. The E.U.T is positioned on a 'Non-Conducted Table'. The entire setup is placed on a 'Ground Reference Plane'.</p>
Test Instruments:	Refer to section 5.10 for details
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11B; 6Mbps of rate is the worst case of 802.11G ; 6.5Mbps of rate is the worst case of 802.11N(HT20);
Limit:	30dBm
Test Results:	Pass

#### 4.4.1 Test Results

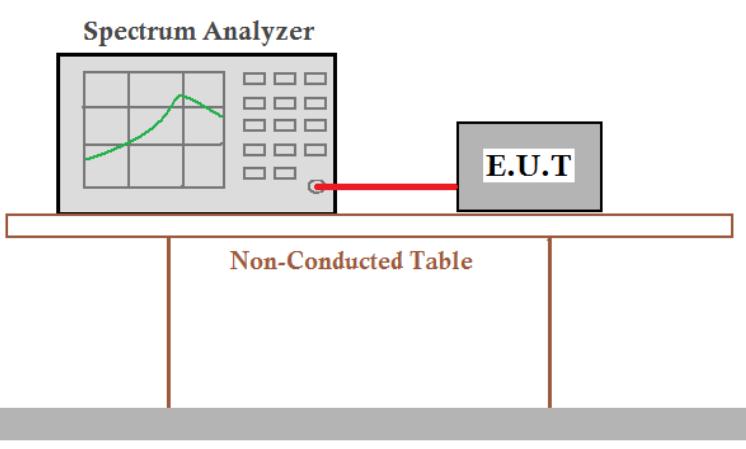
**Measurement Data of Average Power:**

Mode	Test Channel	Average Output Power (dBm)			Result
		ANT 1	ANT 2	SUM	
802.11B	Lowest	9.42	8.69	---	Report purpose only
	Middle	8.70	8.24	---	Report purpose only
	Highest	8.28	7.78	---	Report purpose only
802.11G	Lowest	9.48	8.76	---	Report purpose only
	Middle	8.86	8.50	---	Report purpose only
	Highest	8.48	7.85	---	Report purpose only
802.11N20	Lowest	9.17	8.52	---	Report purpose only
	Middle	8.52	8.21	---	Report purpose only
	Highest	8.14	7.54	---	Report purpose only
802.11G_CDD	Lowest	9.90	9.03	12.50	Report purpose only
	Middle	9.31	8.26	11.83	Report purpose only
	Highest	8.51	7.97	11.26	Report purpose only
802.11N20_MIMO	Lowest	9.43	8.87	12.17	Report purpose only
	Middle	8.58	8.18	11.39	Report purpose only
	Highest	8.27	7.86	11.08	Report purpose only

**Measurement Data of Peak Power:**

Mode	Test Channel	Peak Output Power (dBm)			Limit (dBm)	Result
		ANT 1	ANT 2	SUM		
802.11B	Lowest	12.64	12.43	---	30.00	Pass
	Middle	11.93	12.17	---	30.00	Pass
	Highest	11.29	11.47	---	30.00	Pass
802.11G	Lowest	18.32	16.89	---	30.00	Pass
	Middle	17.69	16.13	---	30.00	Pass
	Highest	17.23	15.94	---	30.00	Pass
802.11N20	Lowest	18.26	16.68	---	30.00	Pass
	Middle	17.45	15.98	---	30.00	Pass
	Highest	17.04	15.85	---	30.00	Pass
802.11G_CDD	Lowest	17.78	17.29	20.55	30.00	Pass
	Middle	17.03	16.63	19.84	30.00	Pass
	Highest	16.77	16.27	19.54	30.00	Pass
802.11N20_MIMO	Lowest	16.24	17.03	19.66	30.00	Pass
	Middle	16.68	16.16	19.44	30.00	Pass
	Highest	16.49	16.02	19.27	30.00	Pass

## 4.5 DTS (6 dB) Bandwidth

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(2)
Test Method:	ANSI C63.10: 2013 Section 11.8.1 Option 1
Test Setup:	
Instruments Used:	Refer to section 5.10 for details
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11B; 6Mbps of rate is the worst case of 802.11G; 6.5Mbps of rate is the worst case of 802.11N(HT20);
Limit:	$\geq 500$ kHz
Test Results:	Pass

### 4.5.1 Test Results

#### ANT1:

Mode	Test Channel	6dB Emission Bandwidth (MHz)	Limit (kHz)	Result
802.11B	Lowest	10.07	$\geq 500$	Pass
	Middle	10.07	$\geq 500$	Pass
	Highest	10.04	$\geq 500$	Pass
802.11G	Lowest	15.14	$\geq 500$	Pass
	Middle	15.14	$\geq 500$	Pass
	Highest	15.14	$\geq 500$	Pass
802.11N20	Lowest	15.14	$\geq 500$	Pass
	Middle	15.14	$\geq 500$	Pass
	Highest	15.14	$\geq 500$	Pass
802.11G_CDD	Lowest	15.13	$\geq 500$	Pass
	Middle	15.14	$\geq 500$	Pass
	Highest	15.11	$\geq 500$	Pass
802.11N20_MIMO	Lowest	15.14	$\geq 500$	Pass
	Middle	15.14	$\geq 500$	Pass
	Highest	15.14	$\geq 500$	Pass

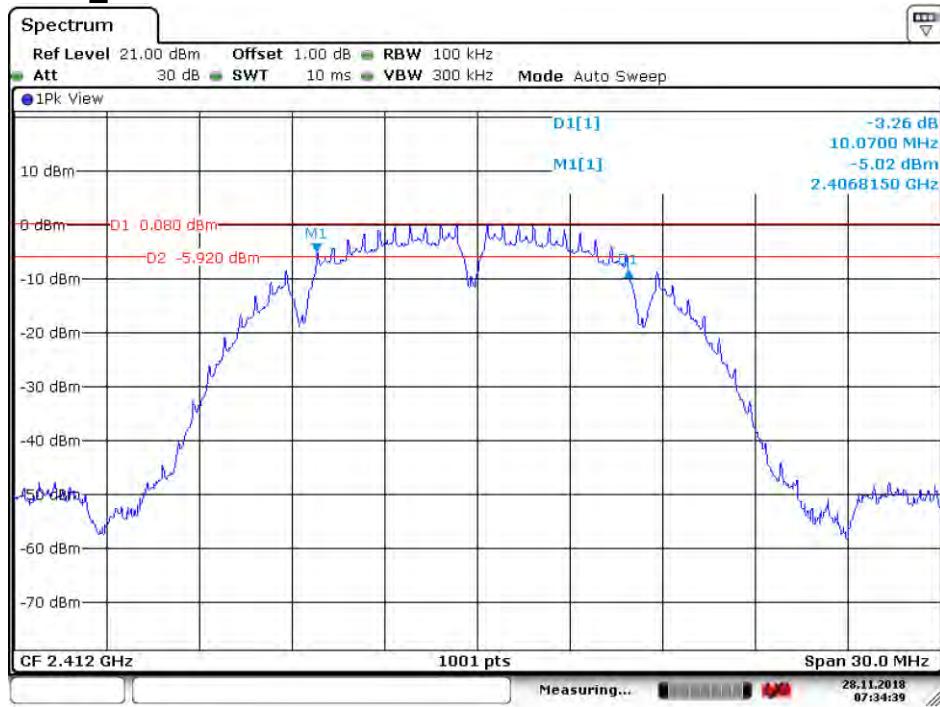
**ANT2:**

Mode	Test Channel	6dB Emission Bandwidth (MHz)	Limit (kHz)	Result
802.11B	Lowest	9.56	≥500	Pass
	Middle	10.04	≥500	Pass
	Highest	10.07	≥500	Pass
802.11G	Lowest	15.14	≥500	Pass
	Middle	15.14	≥500	Pass
	Highest	15.14	≥500	Pass
802.11N20	Lowest	15.14	≥500	Pass
	Middle	15.14	≥500	Pass
	Highest	15.08	≥500	Pass
802.11G_CDD	Lowest	15.11	≥500	Pass
	Middle	15.14	≥500	Pass
	Highest	15.14	≥500	Pass
802.11N20_MIMO	Lowest	15.14	≥500	Pass
	Middle	15.14	≥500	Pass
	Highest	15.14	≥500	Pass

## 4.5.2 Test plots

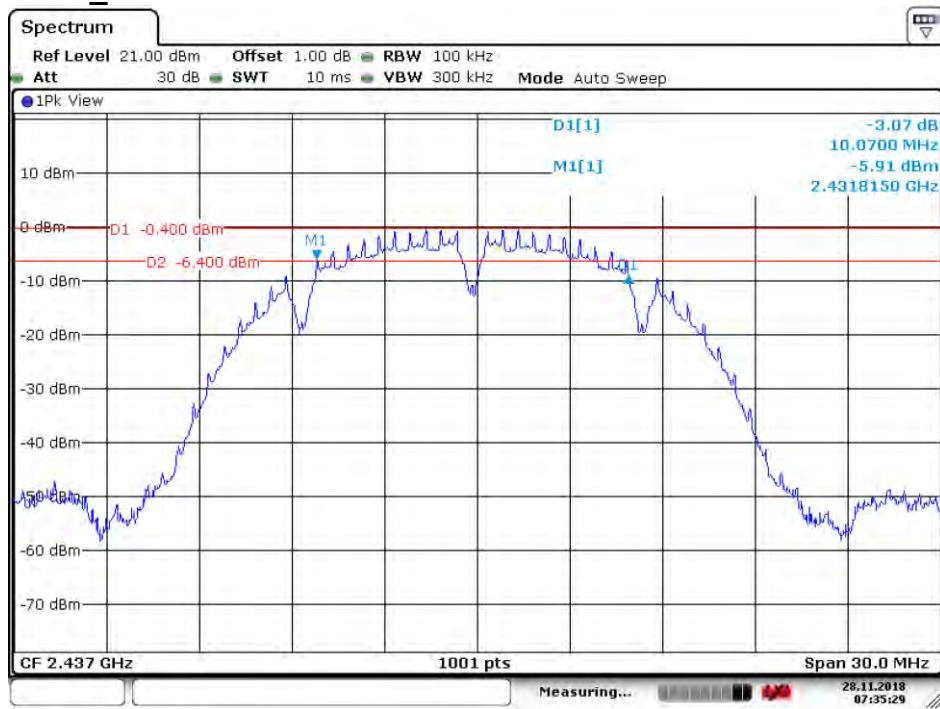
### 4.5.2.1 ANT1

#### 4.5.2.1.1 802.11B\_Lowest Channel

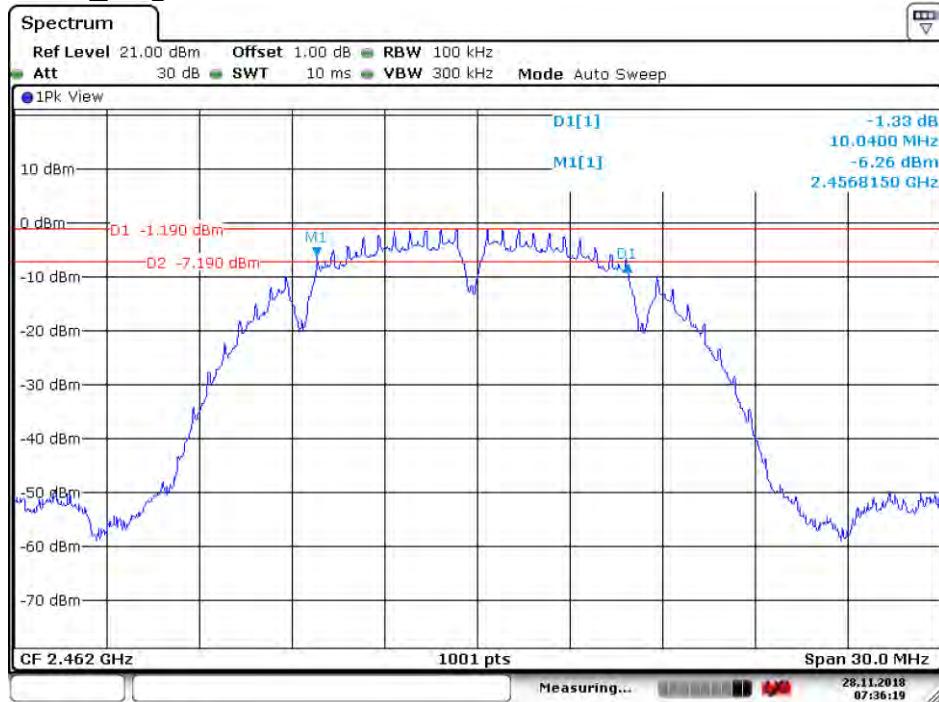


Date: 28.NOV.2018 07:34:39

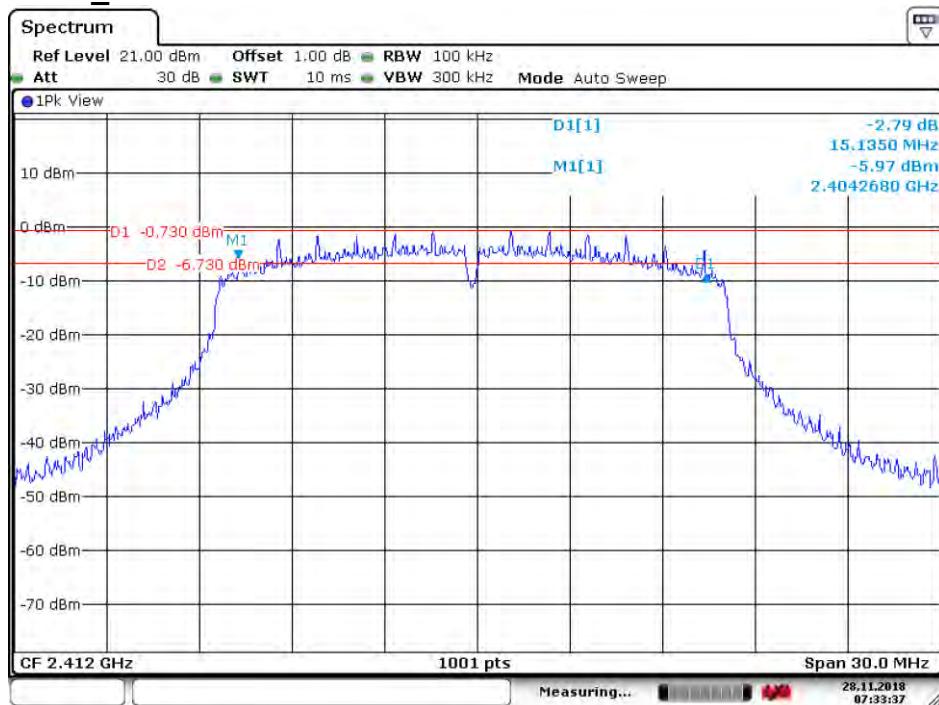
#### 4.5.2.1.2 802.11B\_Middle Channel



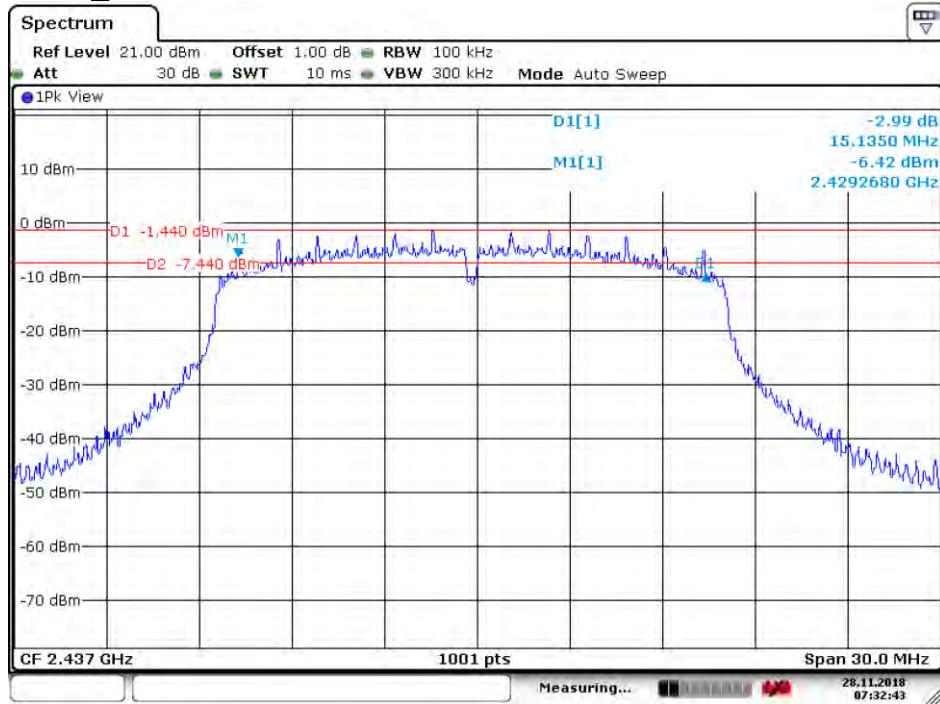
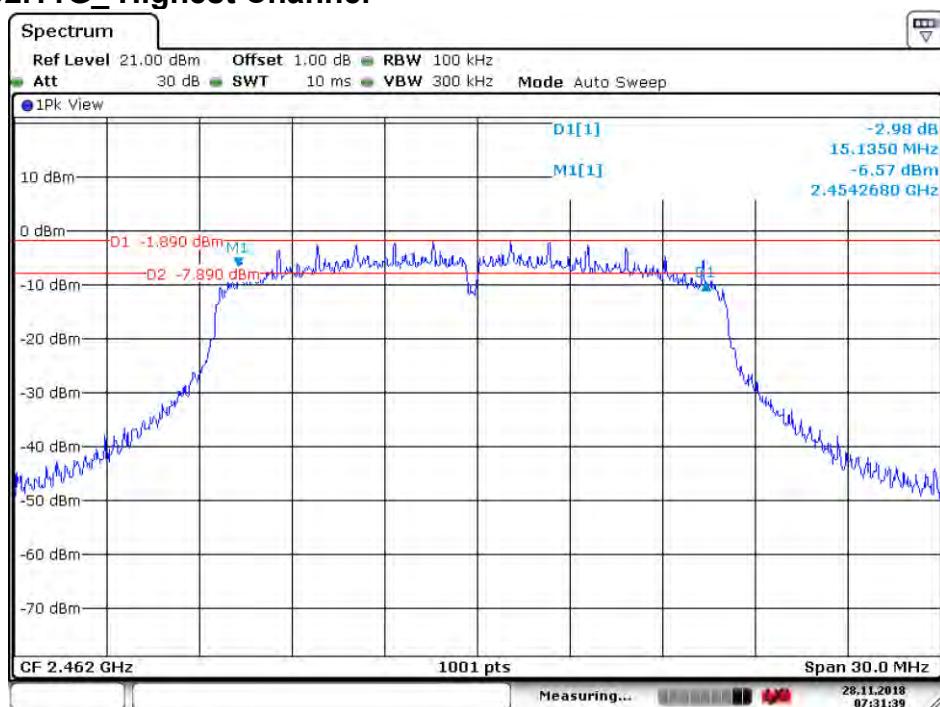
Date: 28.NOV.2018 07:35:30

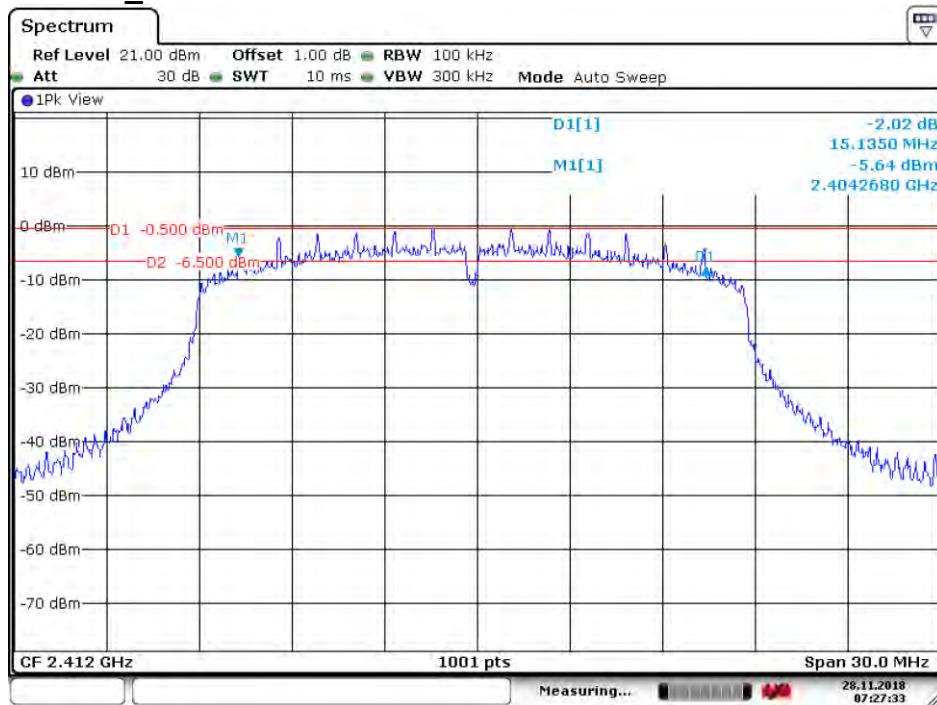
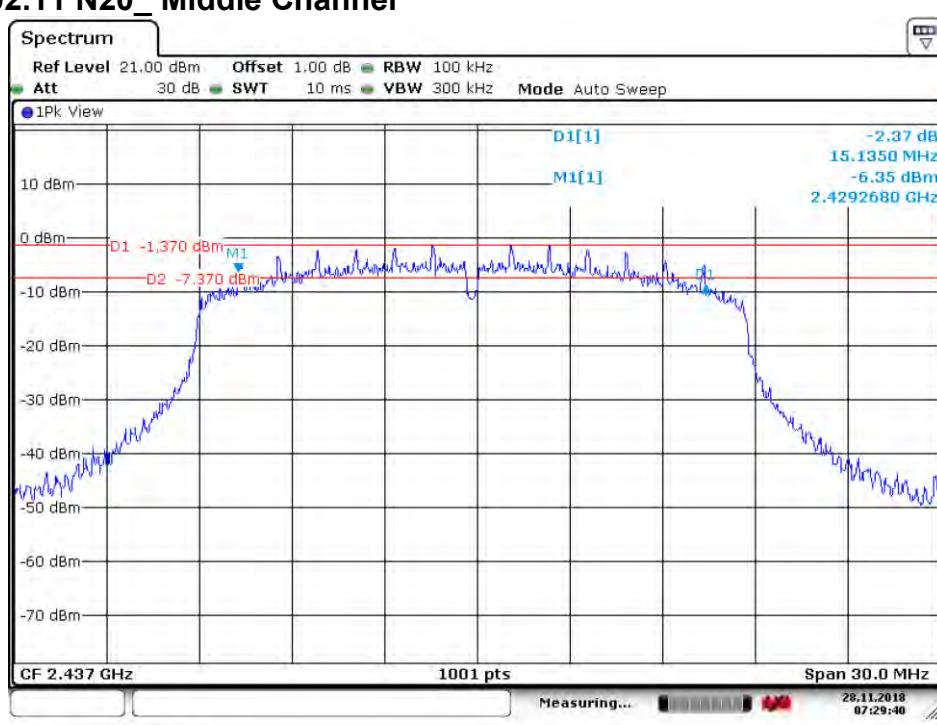
**4.5.2.1.3 802.11B\_Highest Channel**

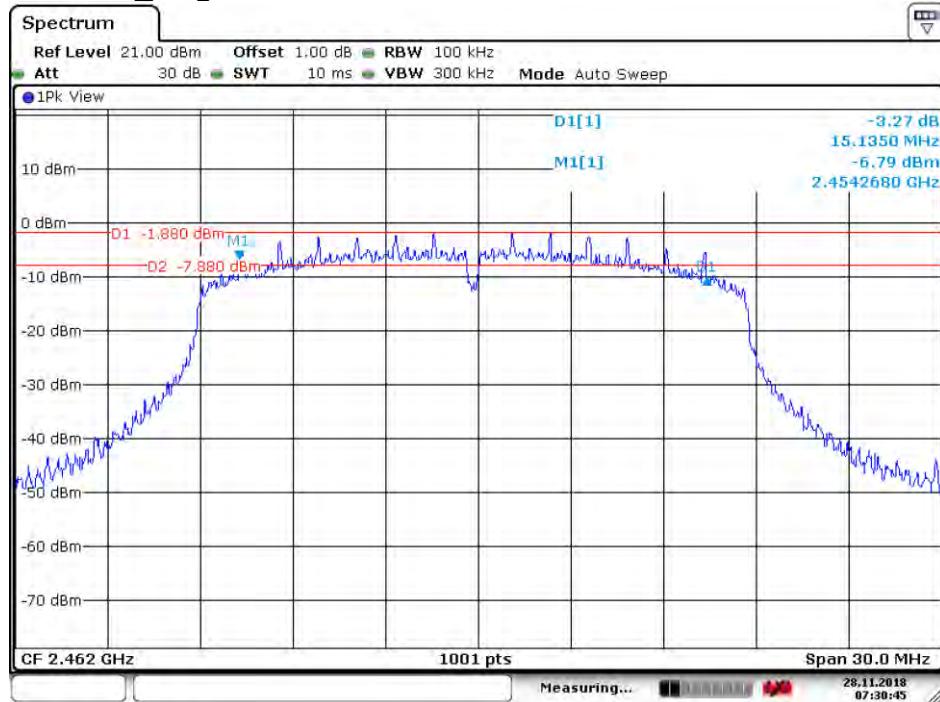
Date: 28.NOV.2018 07:36:19

**4.5.2.1.4 802.11G\_Lowest Channel**

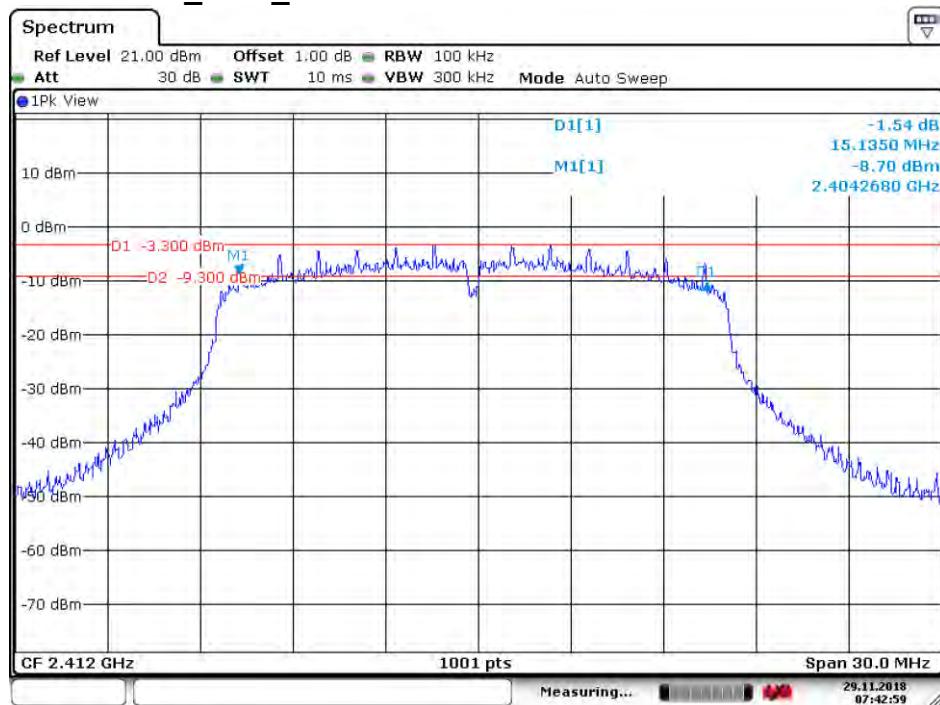
Date: 28.NOV.2018 07:33:38

**4.5.2.1.5 802.11G\_Middle Channel****4.5.2.1.6 802.11G\_Highest Channel**

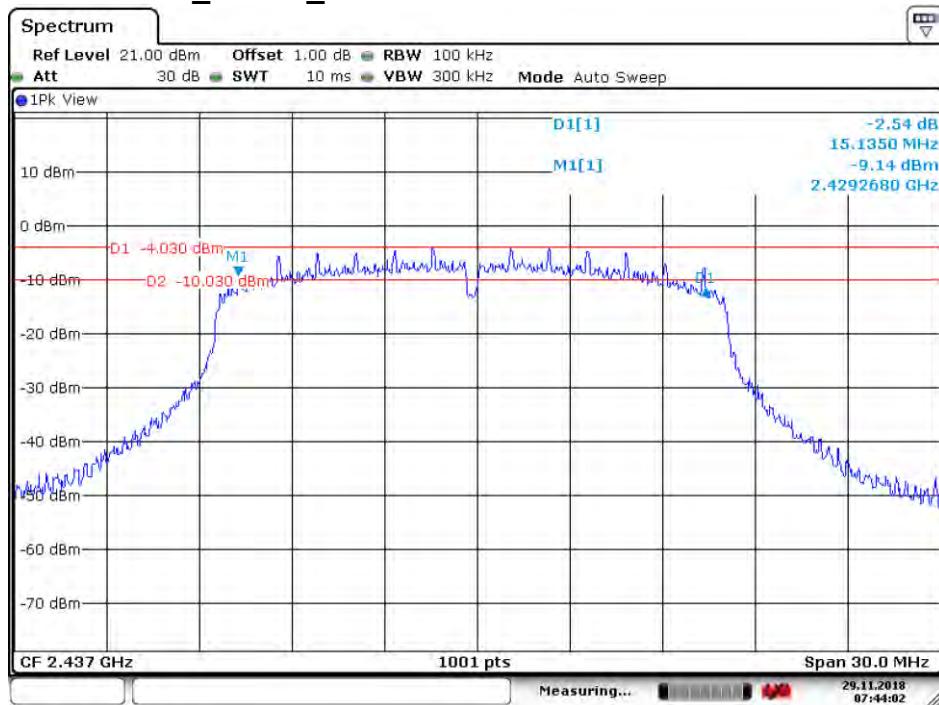
**4.5.2.1.7 802.11N20\_Lowest Channel****4.5.2.1.8 802.11 N20\_Middle Channel**

**4.5.2.1.9 802.11 N20\_Highest Channel**

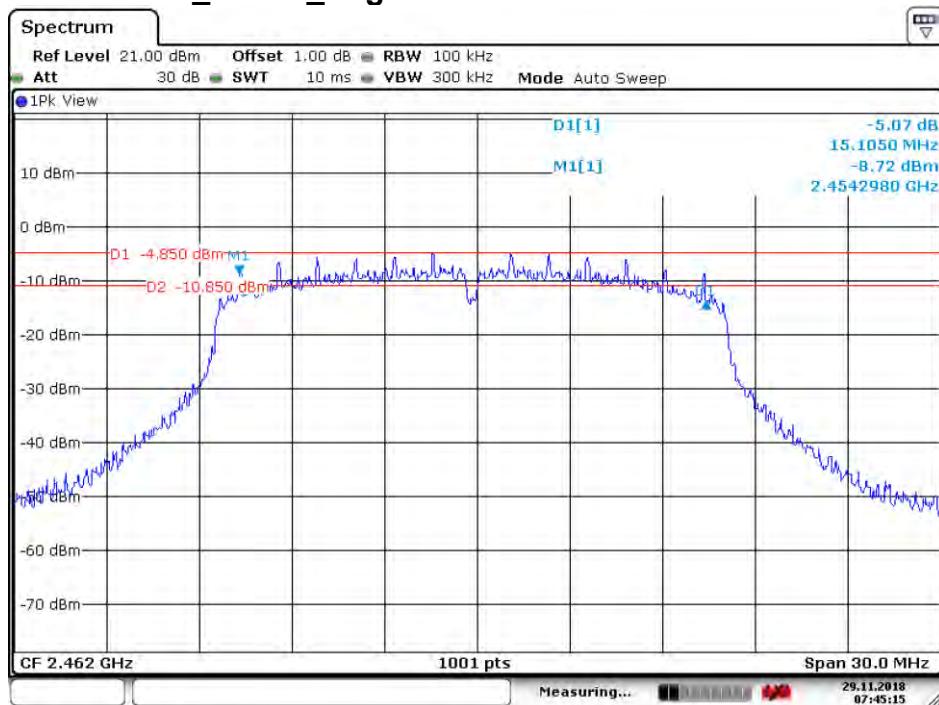
Date: 28.NOV.2018 07:30:45

**4.5.2.1.10 802.11G\_CDD\_Lowest Channel**

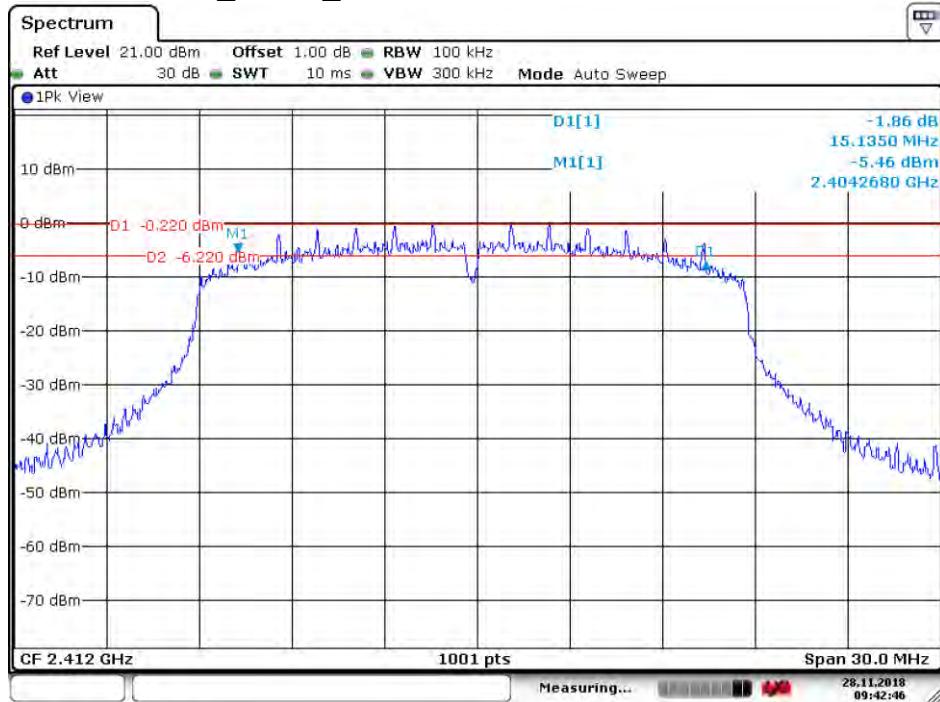
Date: 29.NOV.2018 07:43:00

**4.5.2.1.11 802.11 G\_MIMO \_ Middle Channel**

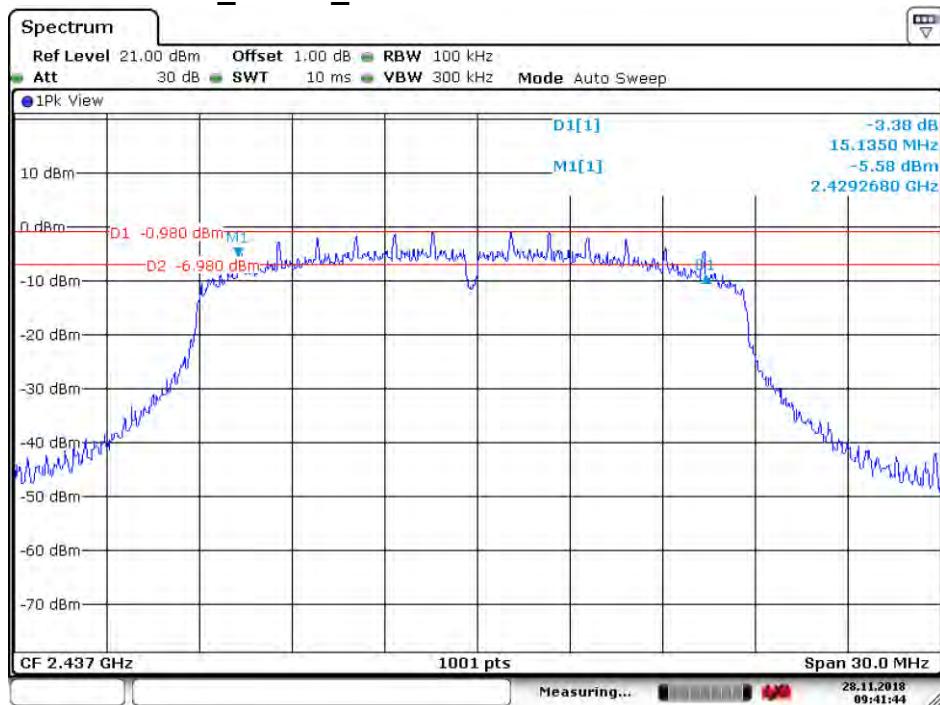
Date: 29.NOV.2018 07:44:02

**4.5.2.1.12 802.11 G\_MIMO \_ Highest Channel**

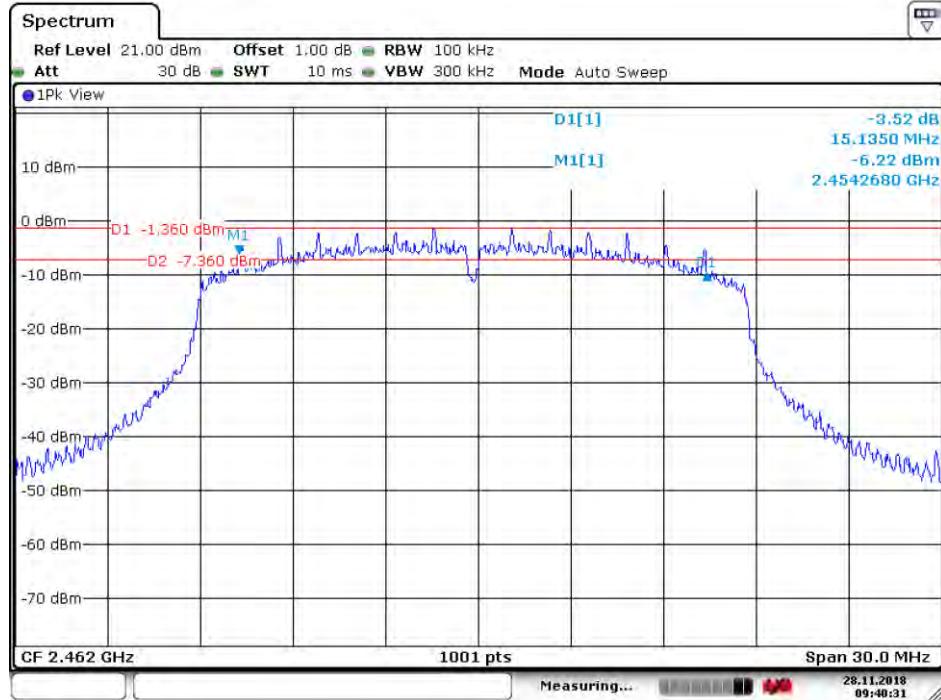
Date: 29.NOV.2018 07:45:15

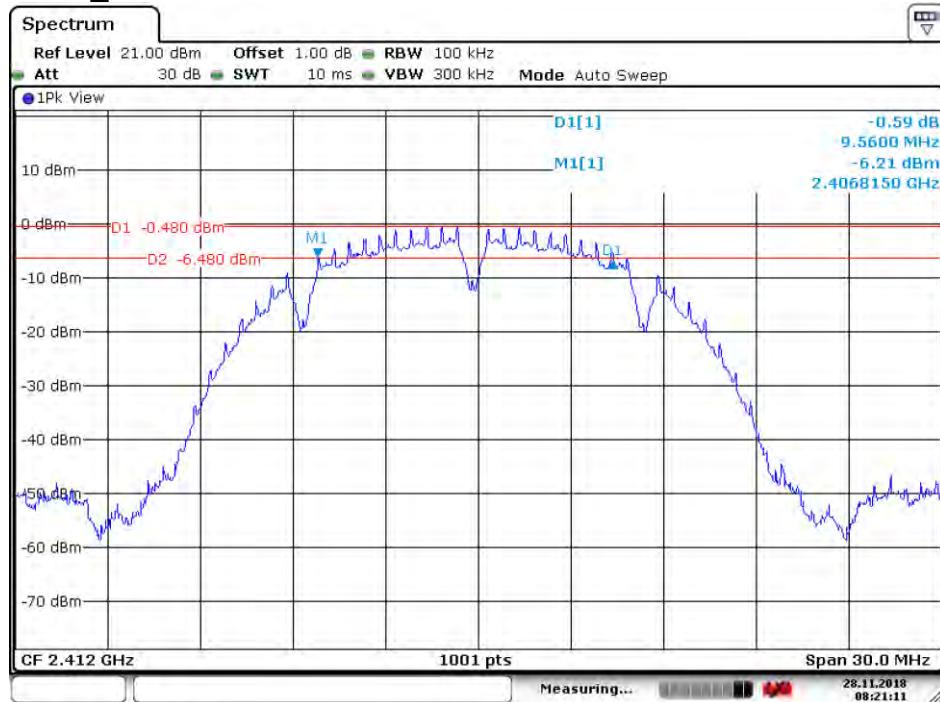
**4.5.2.1.13 802.11N20\_MIMO\_Lowest Channel**

Date: 28.NOV.2018 09:42:46

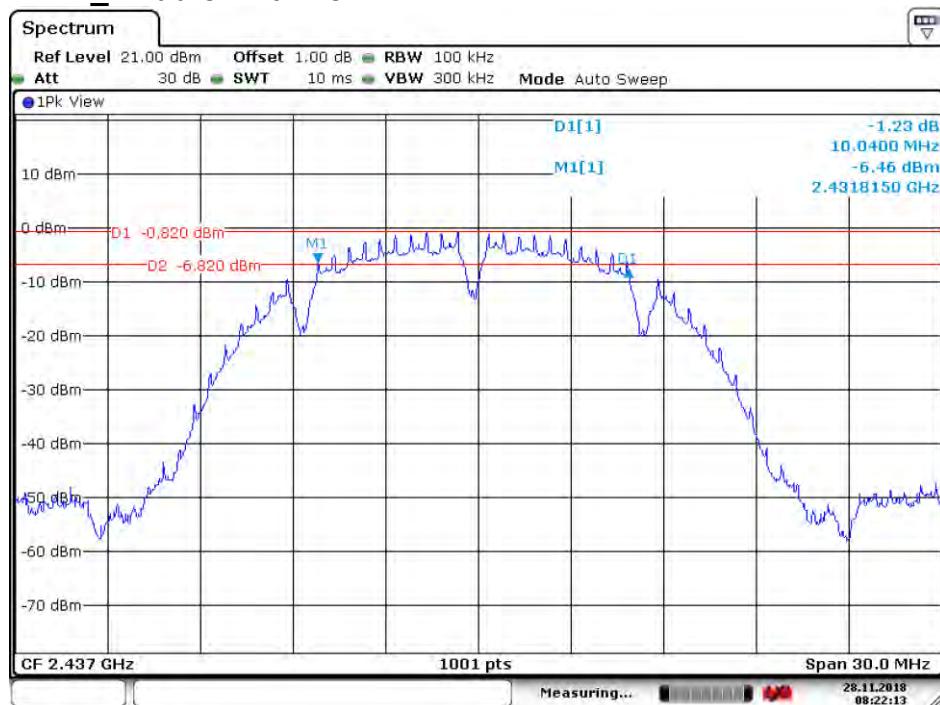
**4.5.2.1.14 802.11N20\_MIMO\_Middle Channel**

Date: 28.NOV.2018 09:41:44

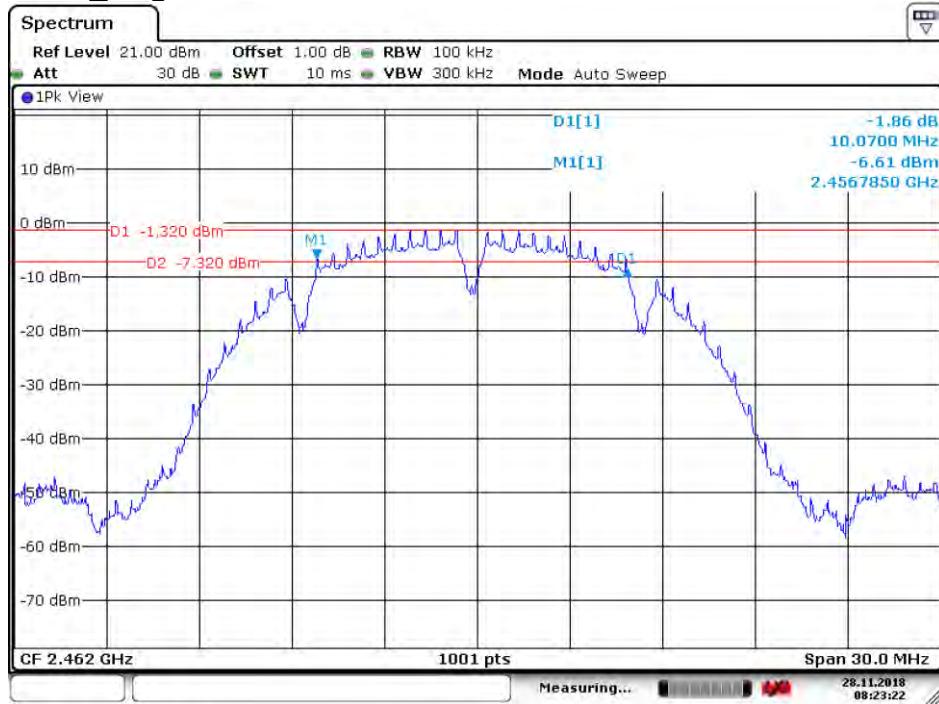
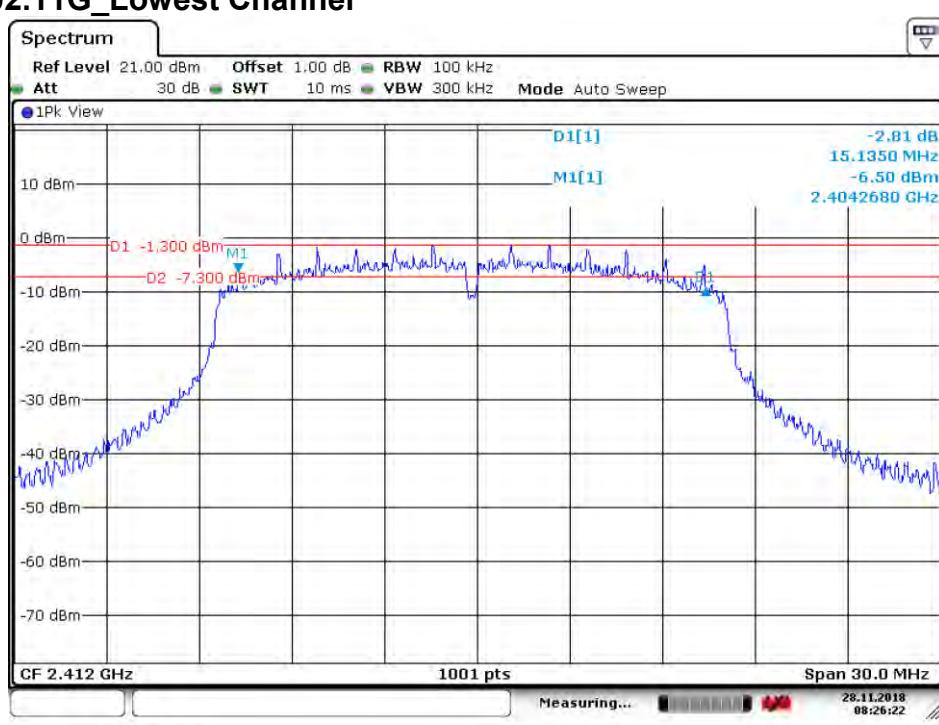
**4.5.2.1.15 802.11N20\_MIMO \_ Highest Channel**

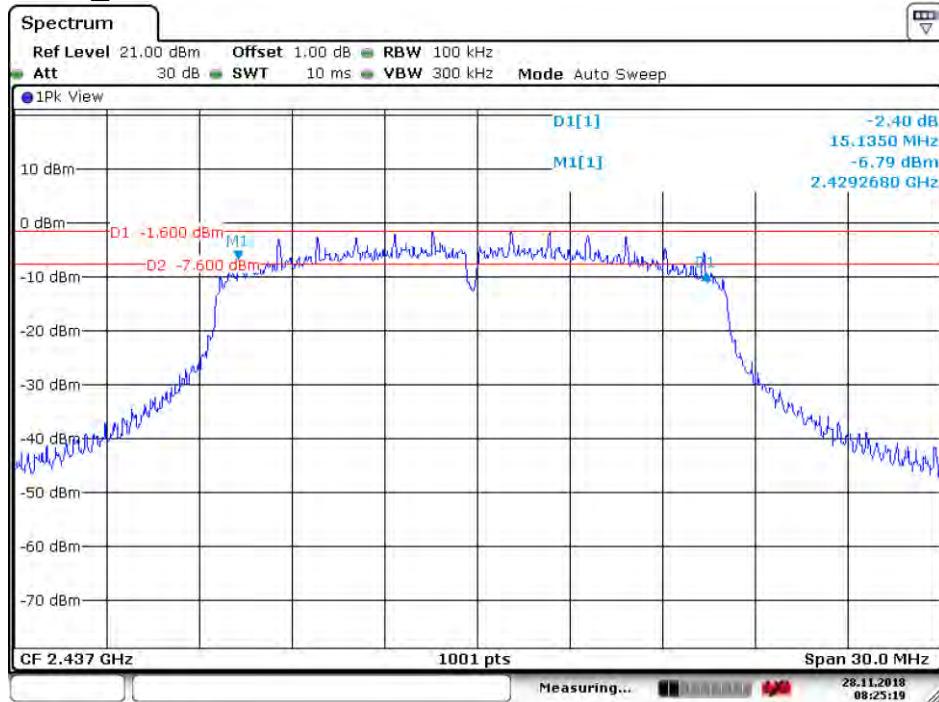
**4.5.2.2 ANT2****4.5.2.2.1 802.11B\_Lowest Channel**

Date: 28.NOV.2018 08:21:11

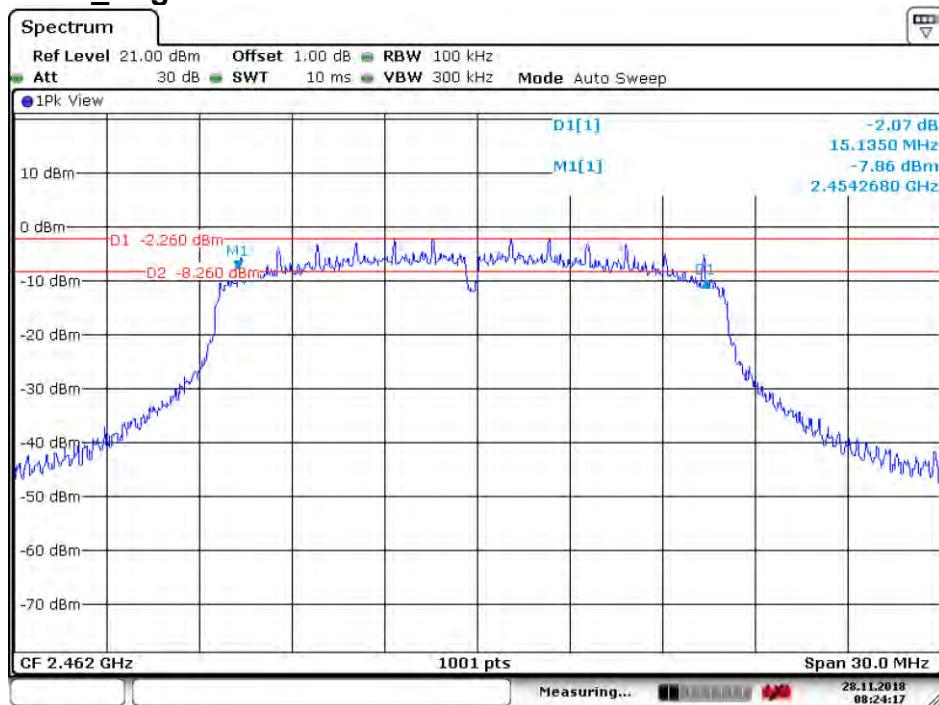
**4.5.2.2.2 802.11B\_Middle Channel**

Date: 28.NOV.2018 08:22:13

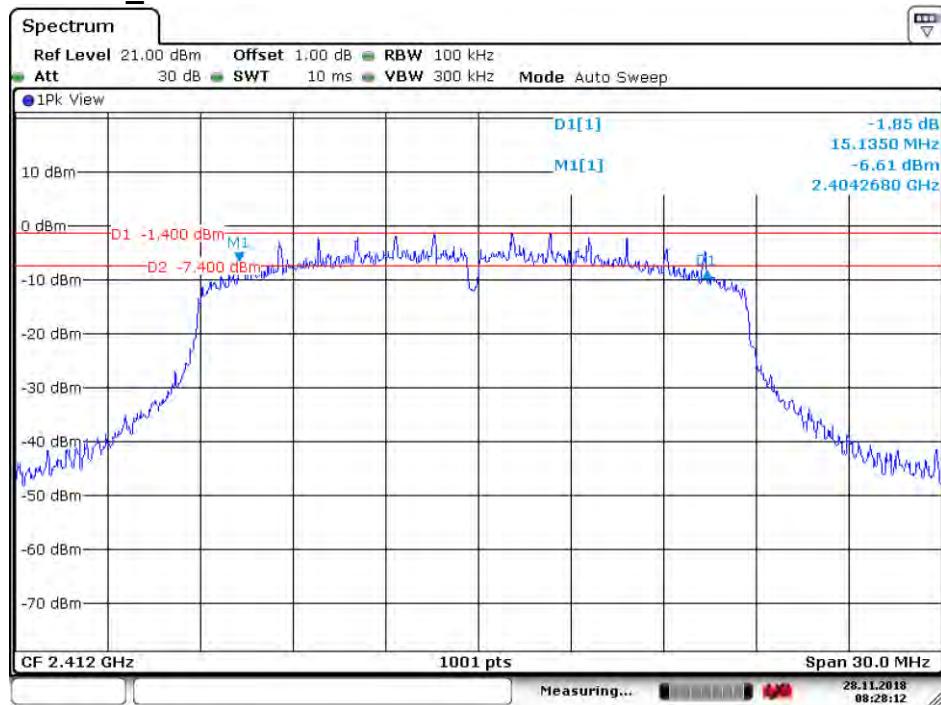
**4.5.2.2.3 802.11B\_Highest Channel****4.5.2.2.4 802.11G\_Lowest Channel**

**4.5.2.2.5 802.11G\_Middle Channel**

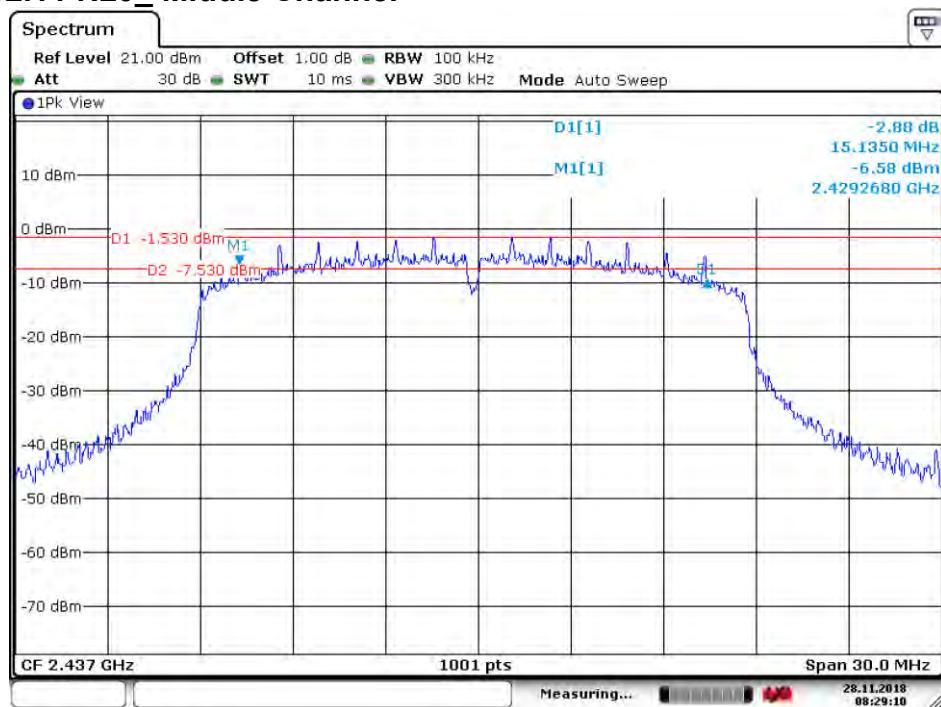
Date: 28.NOV.2018 08:25:20

**4.5.2.2.6 802.11G\_Highest Channel**

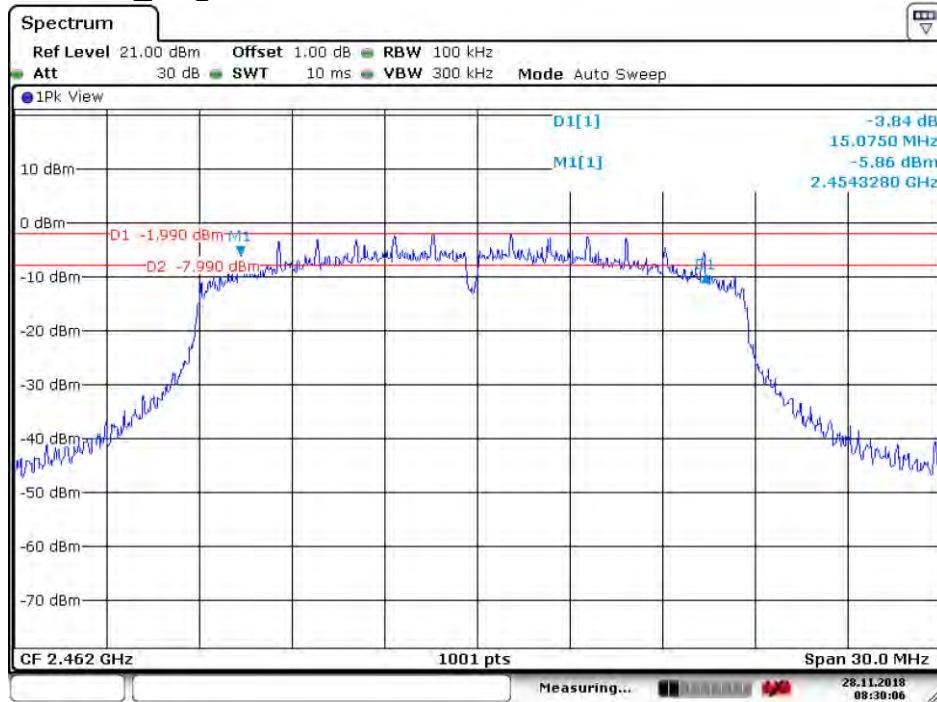
Date: 28.NOV.2018 08:24:17

**4.5.2.2.7 802.11N20\_Lowest Channel**

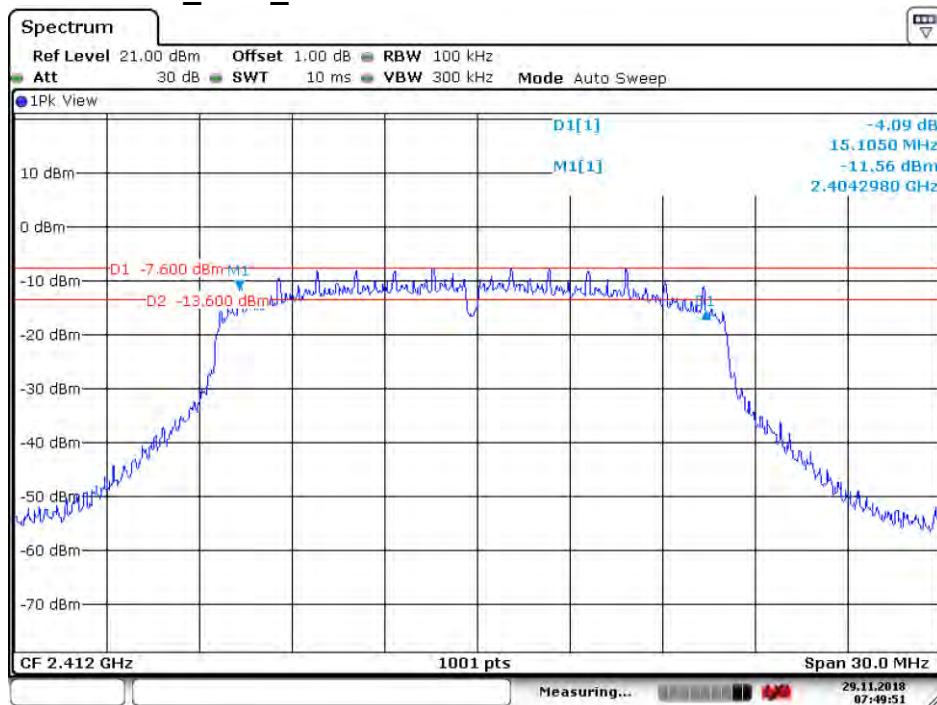
Date: 28.NOV.2018 08:28:12

**4.5.2.2.8 802.11 N20\_Middle Channel**

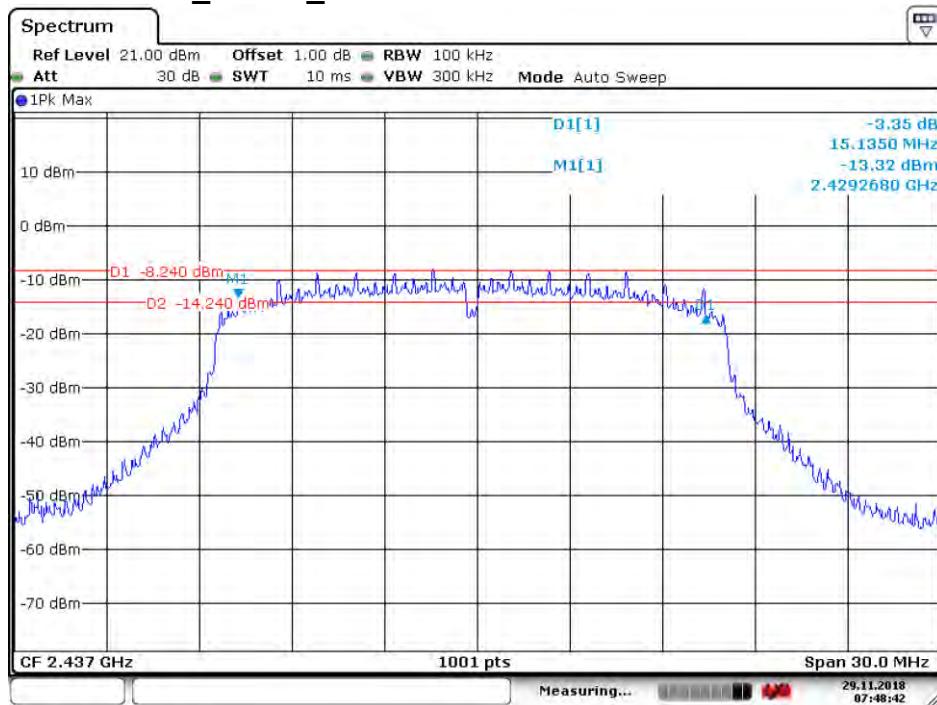
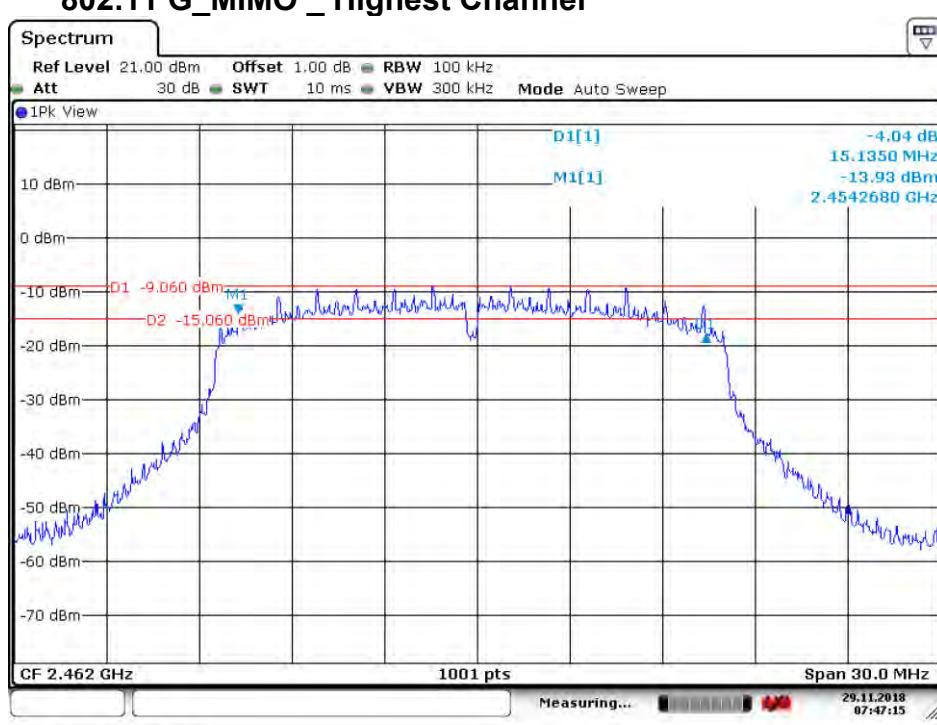
Date: 28.NOV.2018 08:29:10

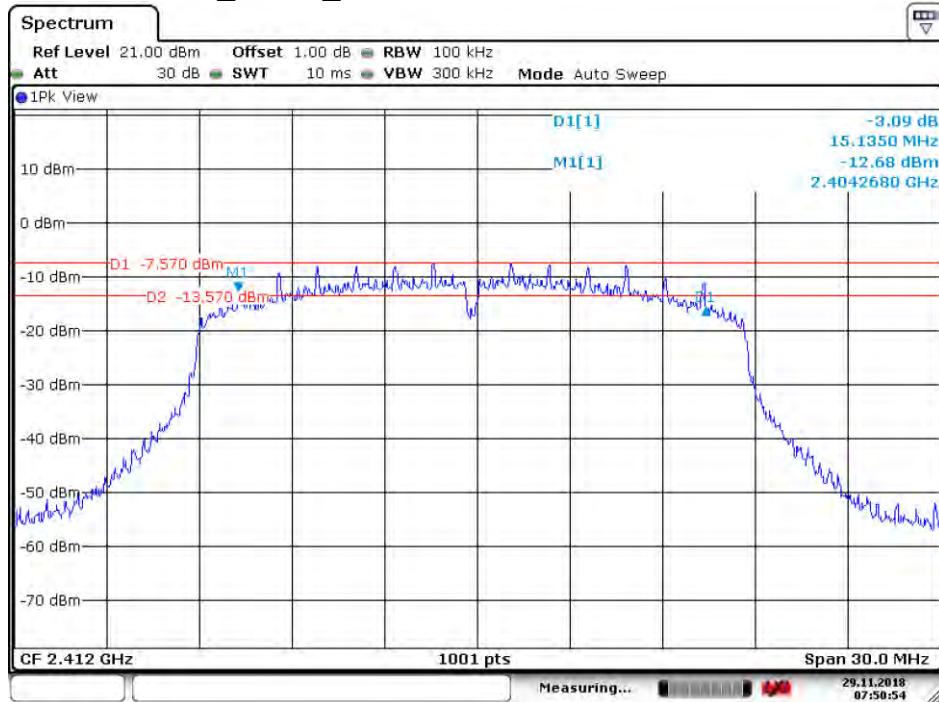
**4.5.2.2.9 802.11 N20\_Highest Channel**

Date: 28.NOV.2018 08:30:07

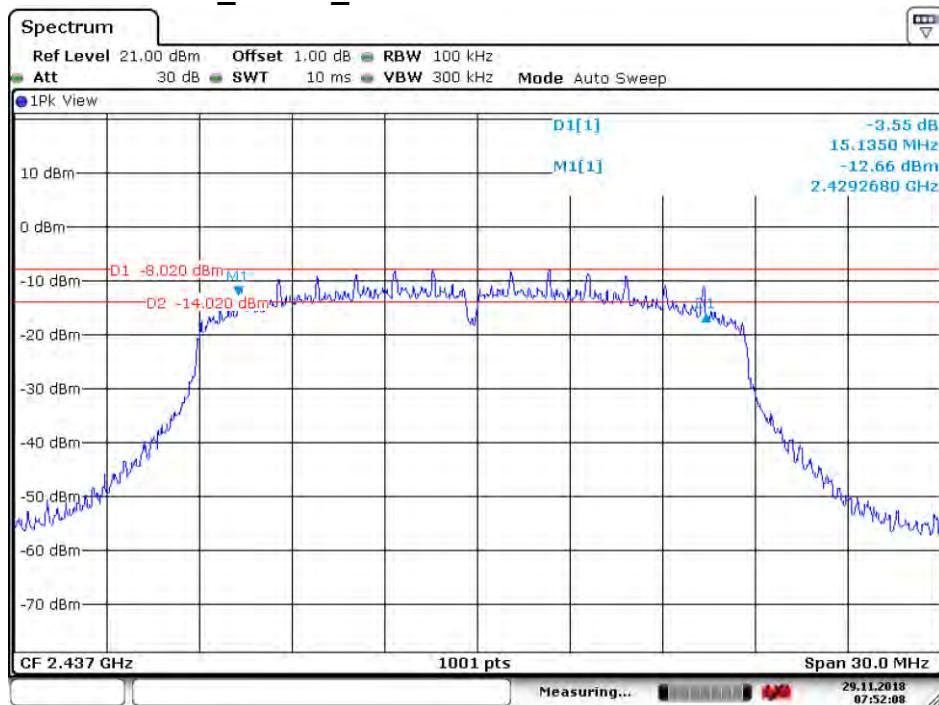
**4.5.2.2.10 802.11G\_CDD\_Lowest Channel**

Date: 29.NOV.2018 07:49:51

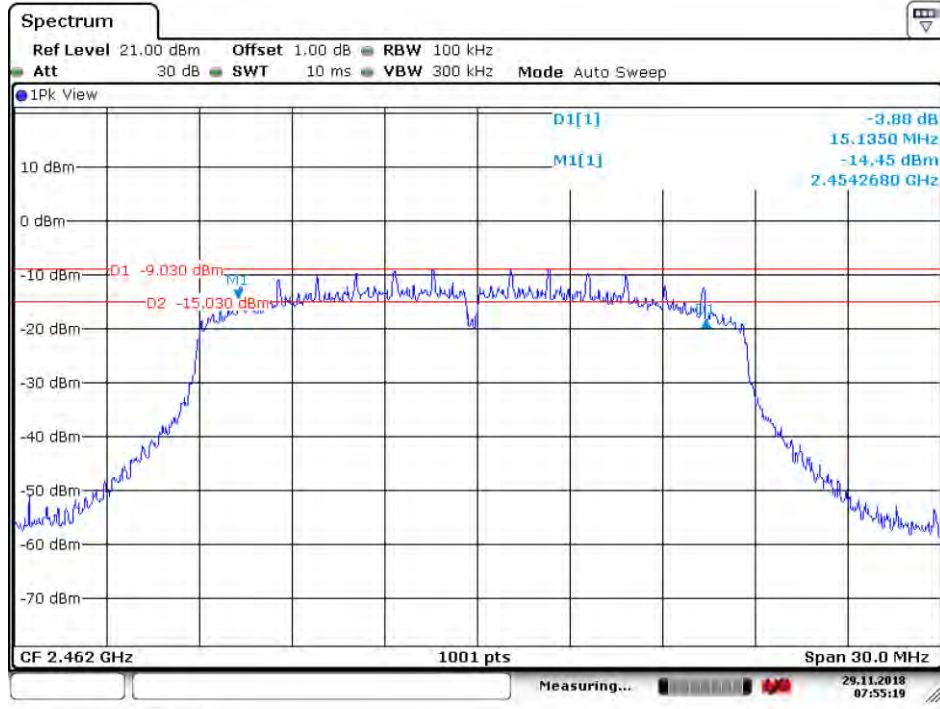
**4.5.2.2.11 802.11 G\_MIMO \_ Middle Channel****4.5.2.2.12 802.11 G\_MIMO \_ Highest Channel**

**4.5.2.2.13 802.11N20\_MIMO\_Lowest Channel**

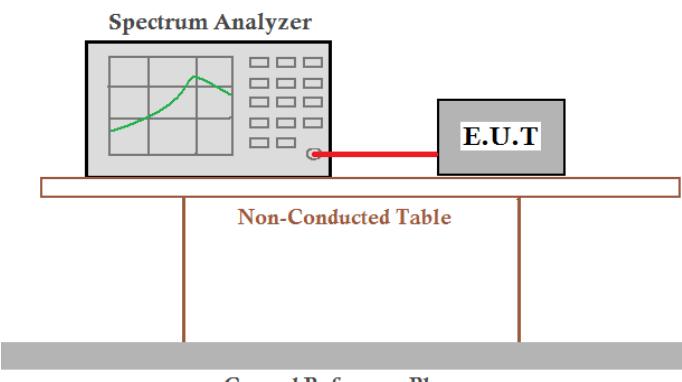
Date: 29.NOV.2018 07:50:54

**4.5.2.2.14 802.11N20\_MIMO\_Middle Channel**

Date: 29.NOV.2018 07:52:08

**4.5.2.2.15 802.11N20\_MIMO \_ Highest Channel**

## 4.6 Power Spectral Density

Test Requirement:	47 CFR Part 15C Section 15.247 (e)
Test Method:	ANSI C63.10 :2013 Section 11.10.2
Test Setup:	
Test Instruments:	Refer to section 5.10 for details
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11B; 6Mbps of rate is the worst case of 802.11G ; 6.5Mbps of rate is the worst case of 802.11N(HT20);
Limit:	$\leq 8.00 \text{dBm/3kHz}$
Test Results:	Pass

### 4.6.1 Test Results

#### ANT1:

Mode	Test Channel	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
802.11B	Lowest	-13.76	$\leq 8.00$	Pass
	Middle	-14.44	$\leq 8.00$	Pass
	Highest	-15.15	$\leq 8.00$	Pass
802.11G	Lowest	-13.97	$\leq 8.00$	Pass
	Middle	-14.59	$\leq 8.00$	Pass
	Highest	-14.84	$\leq 8.00$	Pass
802.11N20	Lowest	-14.10	$\leq 8.00$	Pass
	Middle	-15.09	$\leq 8.00$	Pass
	Highest	-15.34	$\leq 8.00$	Pass
802.11G_CDD	Lowest	-16.62	$\leq 8.00$	Pass
	Middle	-17.19	$\leq 8.00$	Pass
	Highest	-18.00	$\leq 8.00$	Pass
802.11N20_MIMO	Lowest	-17.13	$\leq 8.00$	Pass
	Middle	-17.58	$\leq 8.00$	Pass
	Highest	-18.75	$\leq 8.00$	Pass

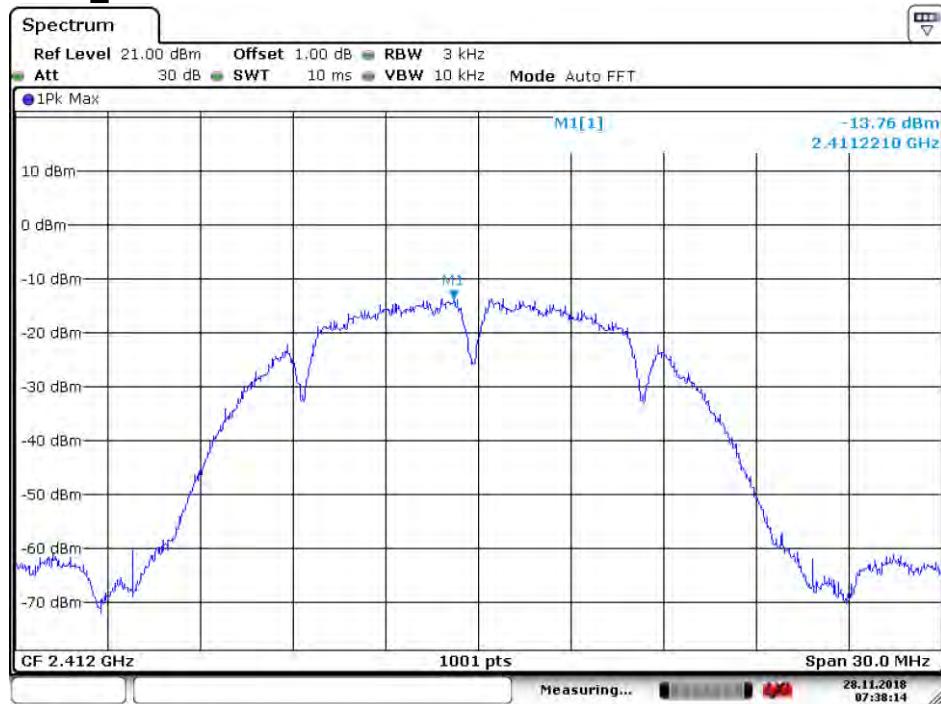
**ANT2:**

Mode	Test Channel	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
802.11B	Lowest	-14.20	≤8.00	Pass
	Middle	-14.83	≤8.00	Pass
	Highest	-15.09	≤8.00	Pass
802.11G	Lowest	-14.32	≤8.00	Pass
	Middle	-14.64	≤8.00	Pass
	Highest	-14.88	≤8.00	Pass
802.11N20	Lowest	-14.72	≤8.00	Pass
	Middle	-14.96	≤8.00	Pass
	Highest	-15.32	≤8.00	Pass
802.11G_CDD	Lowest	-19.80	≤8.00	Pass
	Middle	-20.73	≤8.00	Pass
	Highest	-21.39	≤8.00	Pass
802.11N20_MIMO	Lowest	-20.49	≤8.00	Pass
	Middle	-21.90	≤8.00	Pass
	Highest	-22.50	≤8.00	Pass

## 4.6.2 Test plots

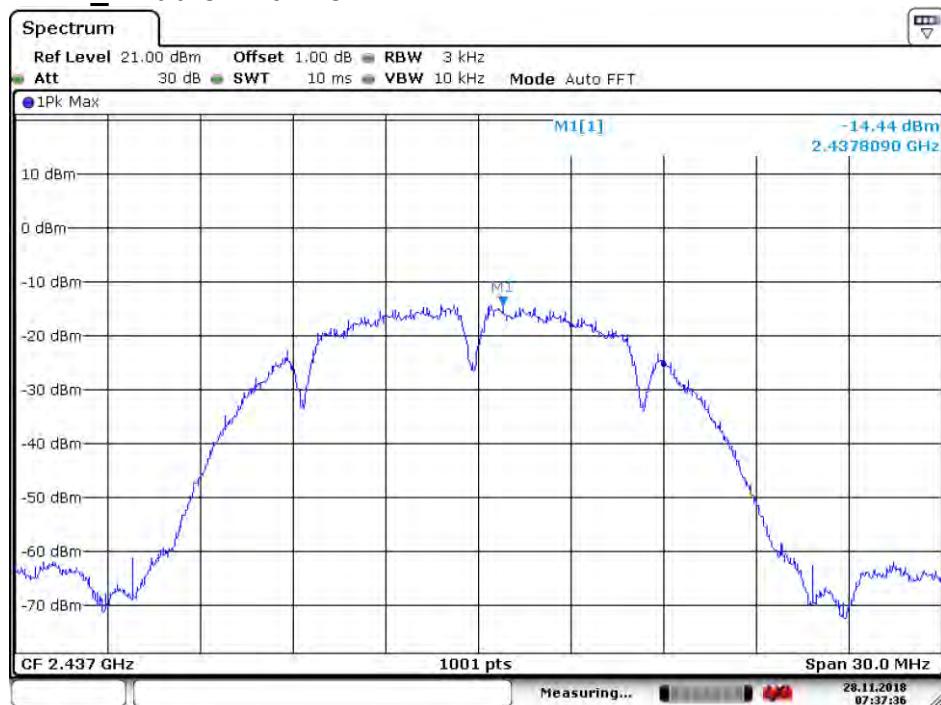
### 4.6.2.1 ANT1

#### 4.6.2.1.1 802.11B\_Lowest Channel

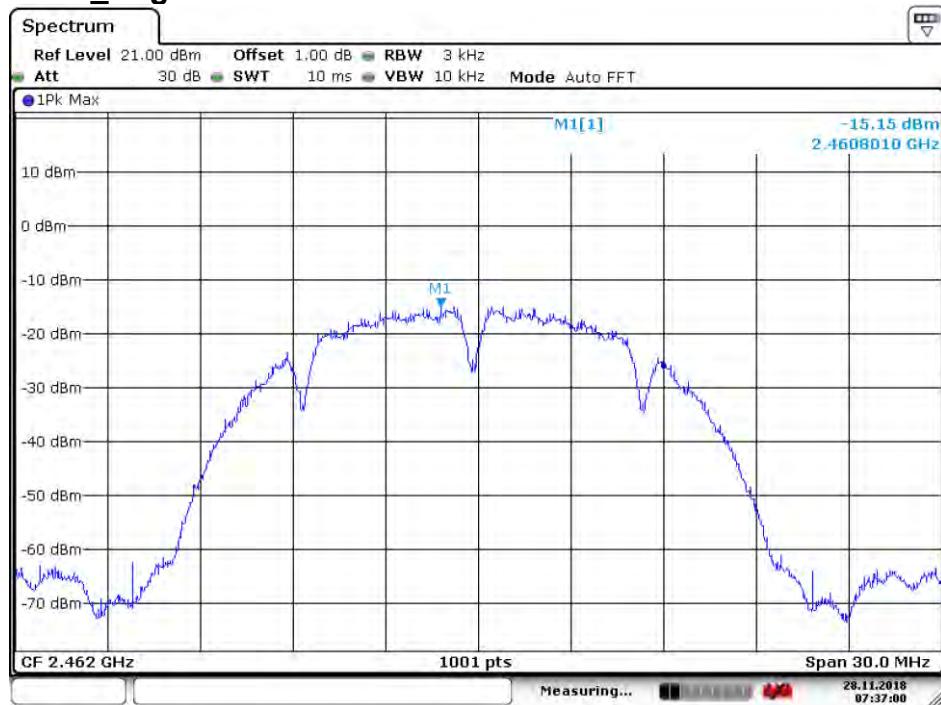


Date: 28.NOV.2018 07:38:14

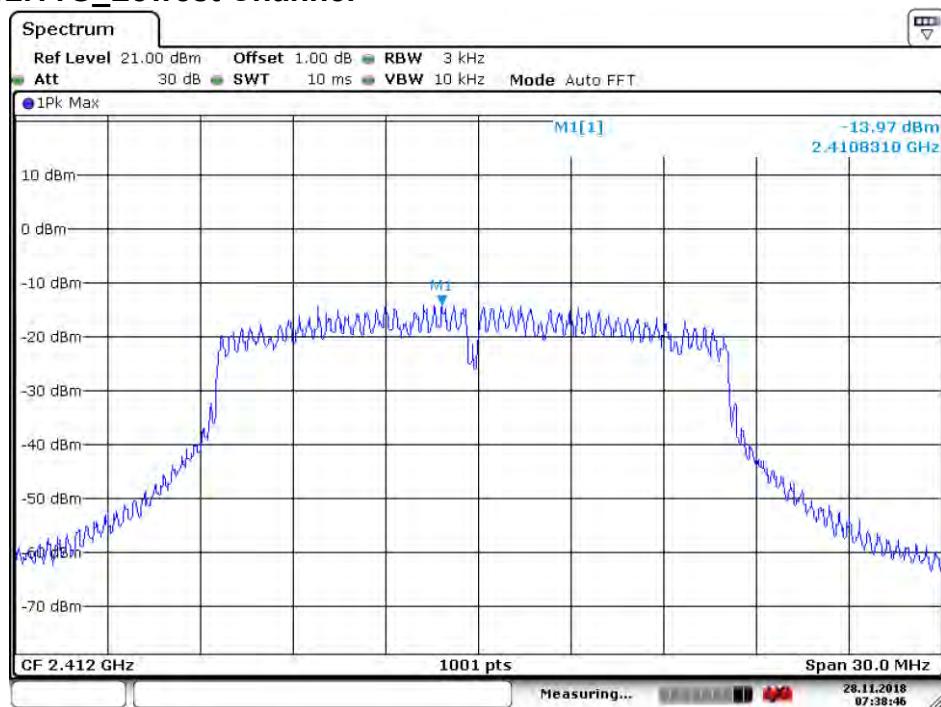
#### 4.6.2.1.2 802.11B\_Middle Channel



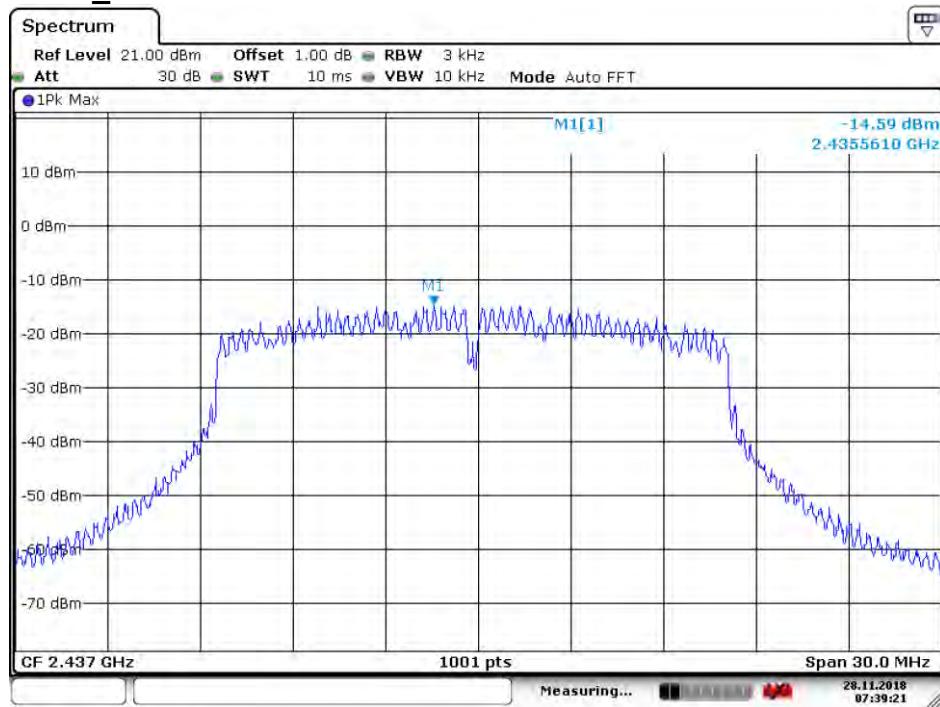
Date: 28.NOV.2018 07:37:36

**4.6.2.1.3 802.11B\_Highest Channel**

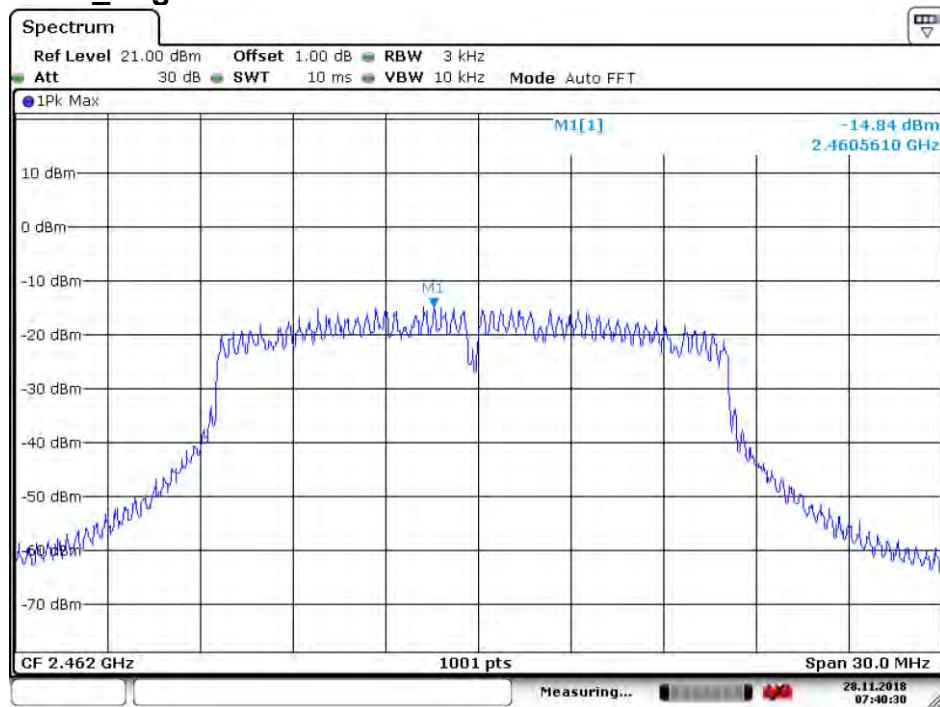
Date: 28.NOV.2018 07:37:01

**4.6.2.1.4 802.11G\_Lowest Channel**

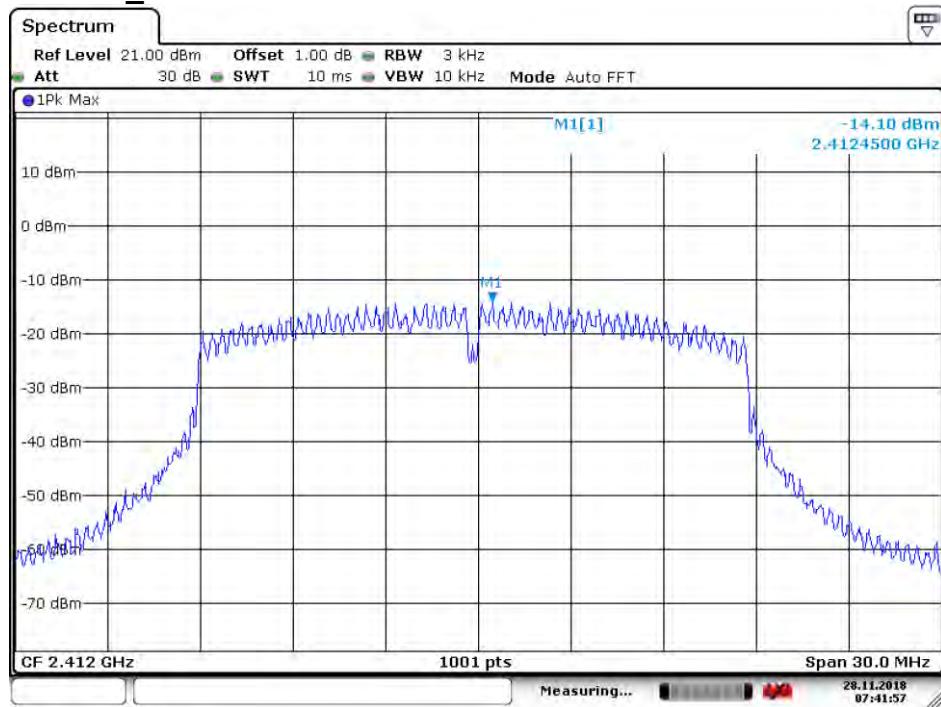
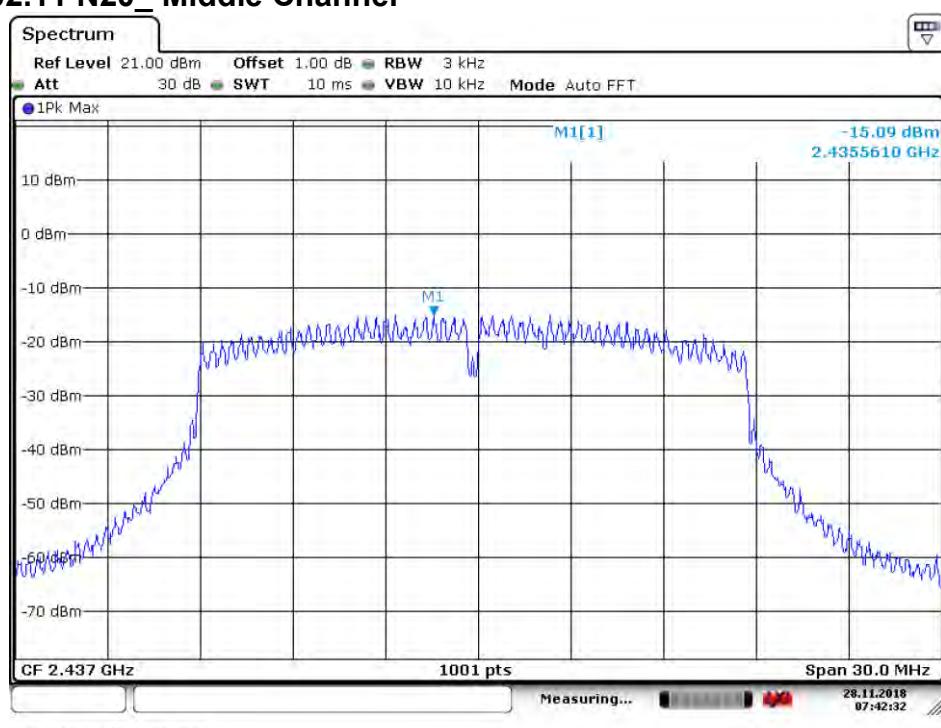
Date: 28.NOV.2018 07:38:46

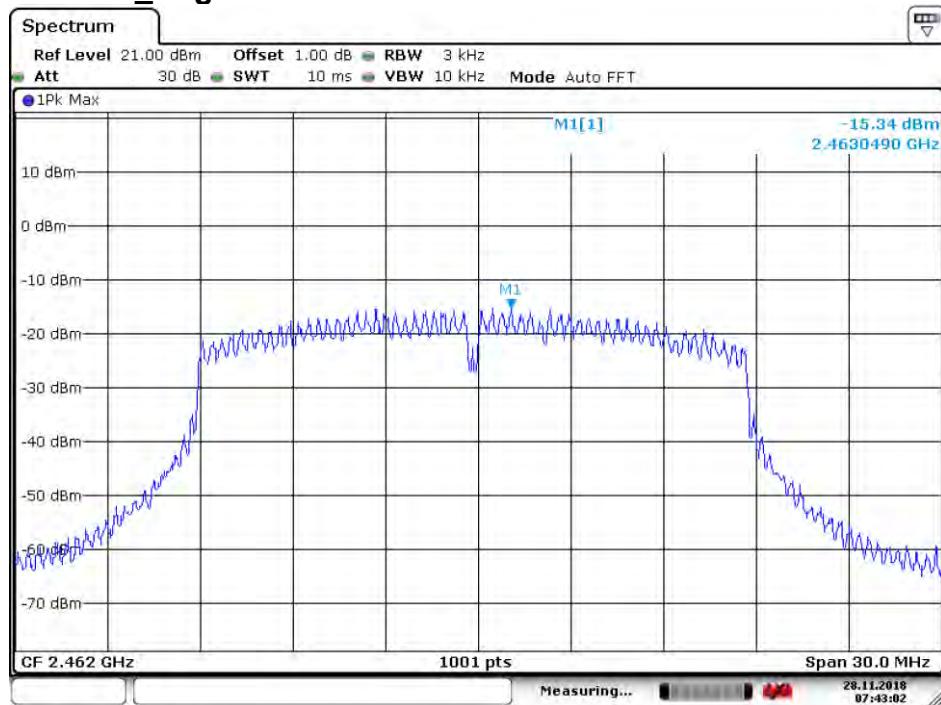
**4.6.2.1.5 802.11G\_ Middle Channel**

Date: 28.NOV.2018 07:39:21

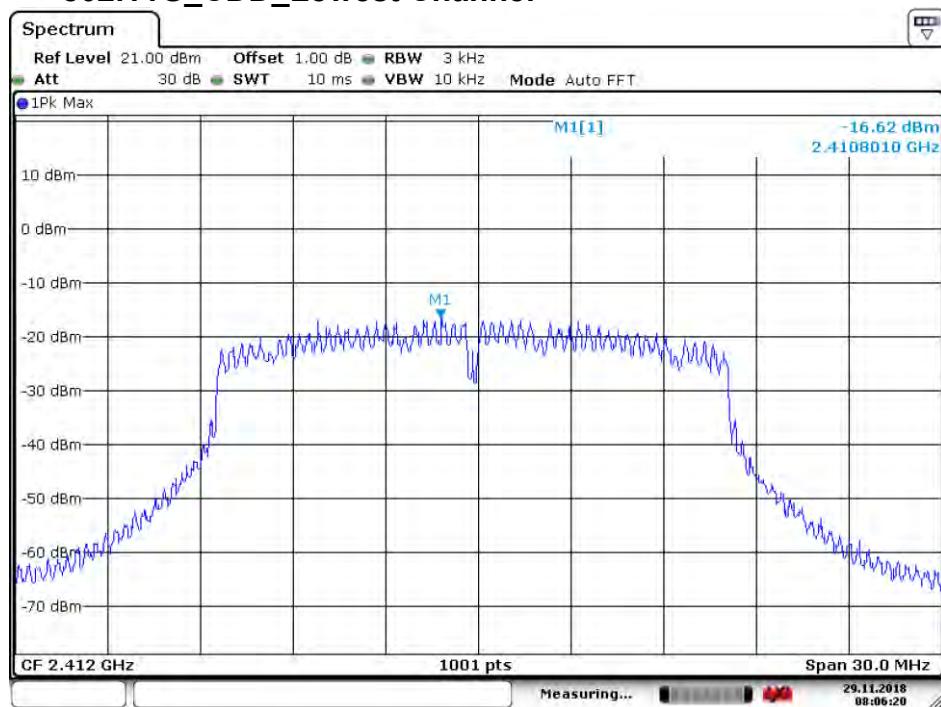
**4.6.2.1.6 802.11G\_ Highest Channel**

Date: 28.NOV.2018 07:40:30

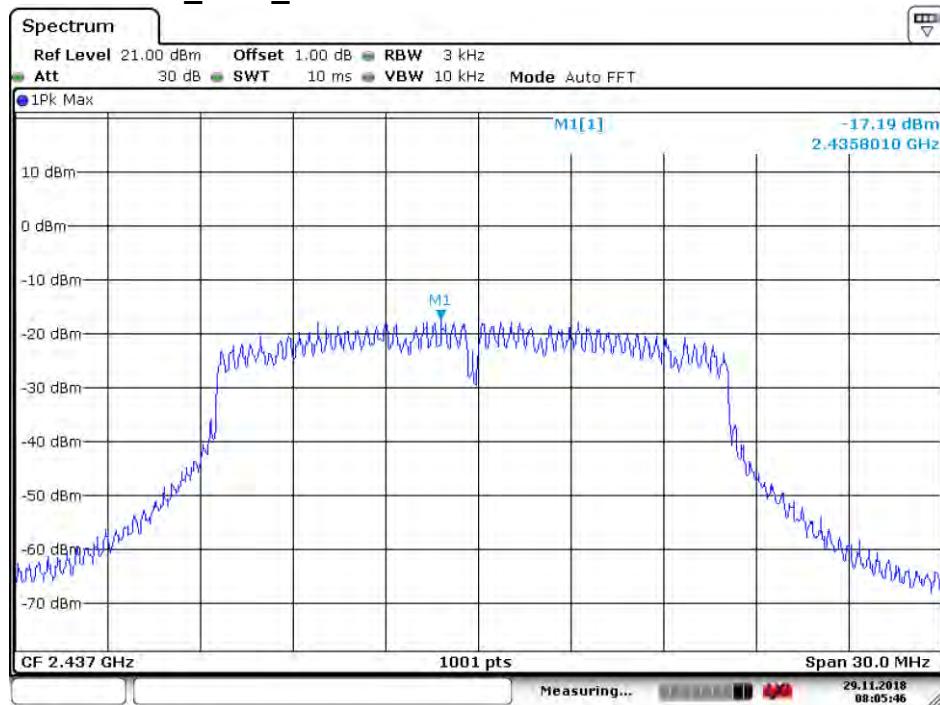
**4.6.2.1.7 802.11N20\_Lowest Channel****4.6.2.1.8 802.11 N20\_Middle Channel**

**4.6.2.1.9 802.11 N20\_Highest Channel**

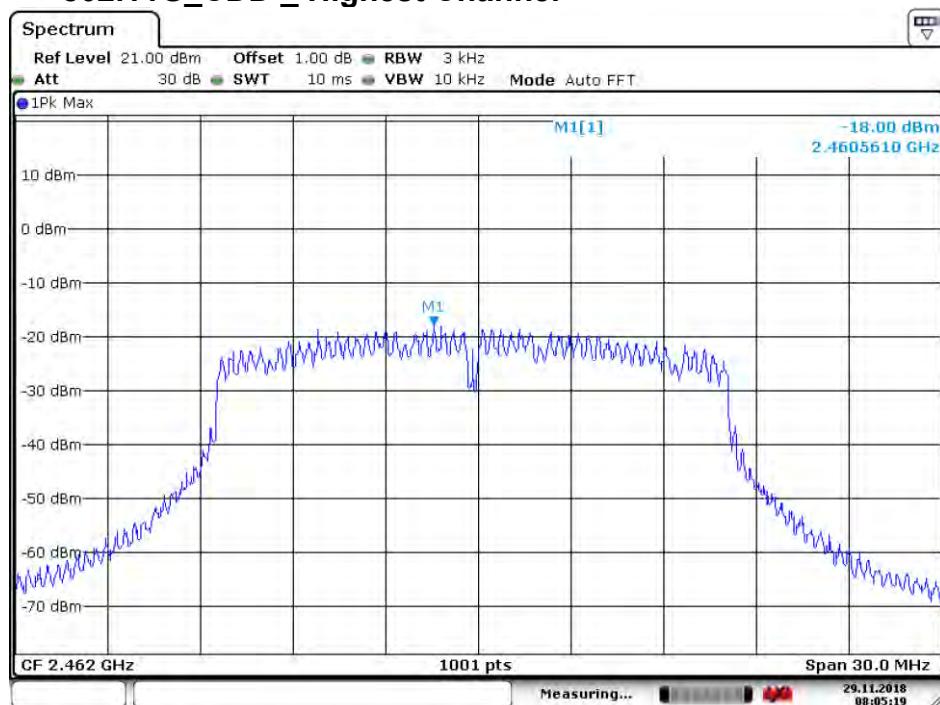
Date: 28.NOV.2018 07:43:02

**4.6.2.1.10 802.11G\_CDD\_Lowest Channel**

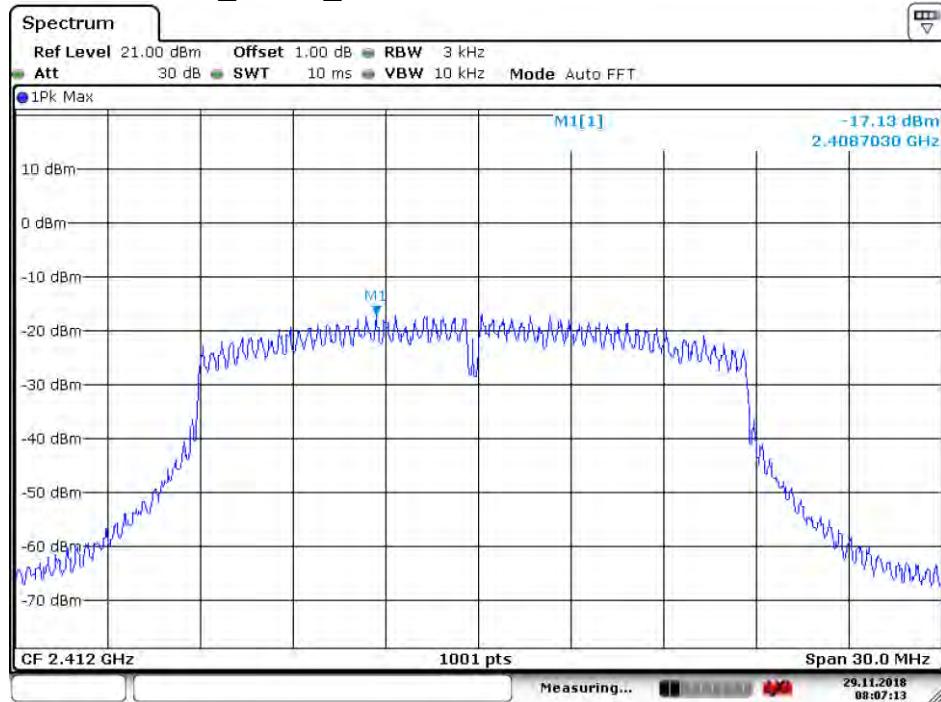
Date: 29.NOV.2018 08:06:21

**4.6.2.1.11 802.11G\_CDD\_ Middle Channel**

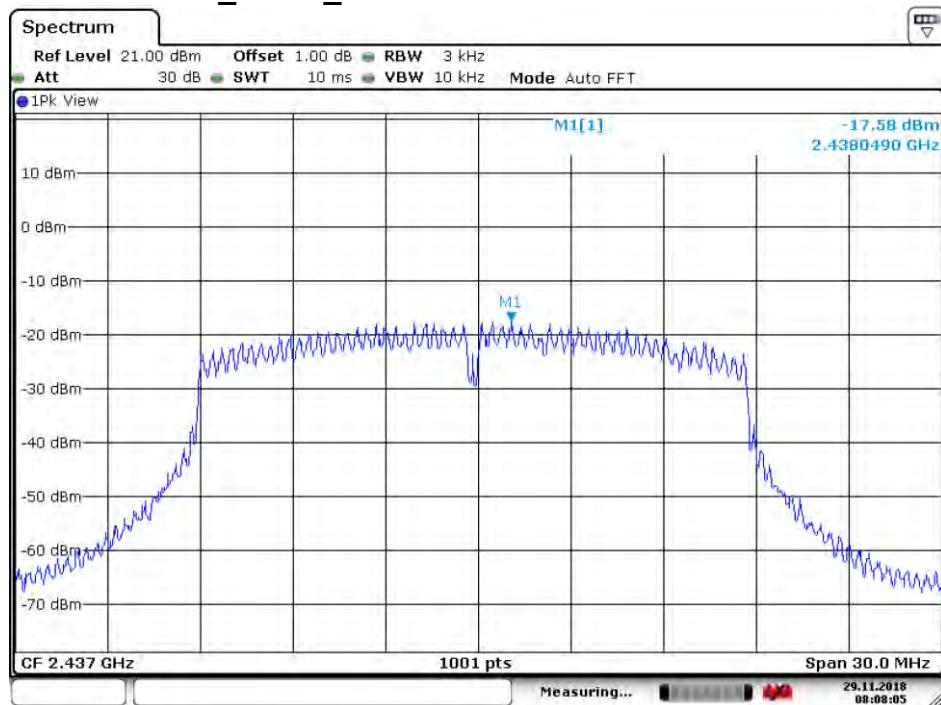
Date: 29.NOV.2018 08:05:47

**4.6.2.1.12 802.11G\_CDD \_ Highest Channel**

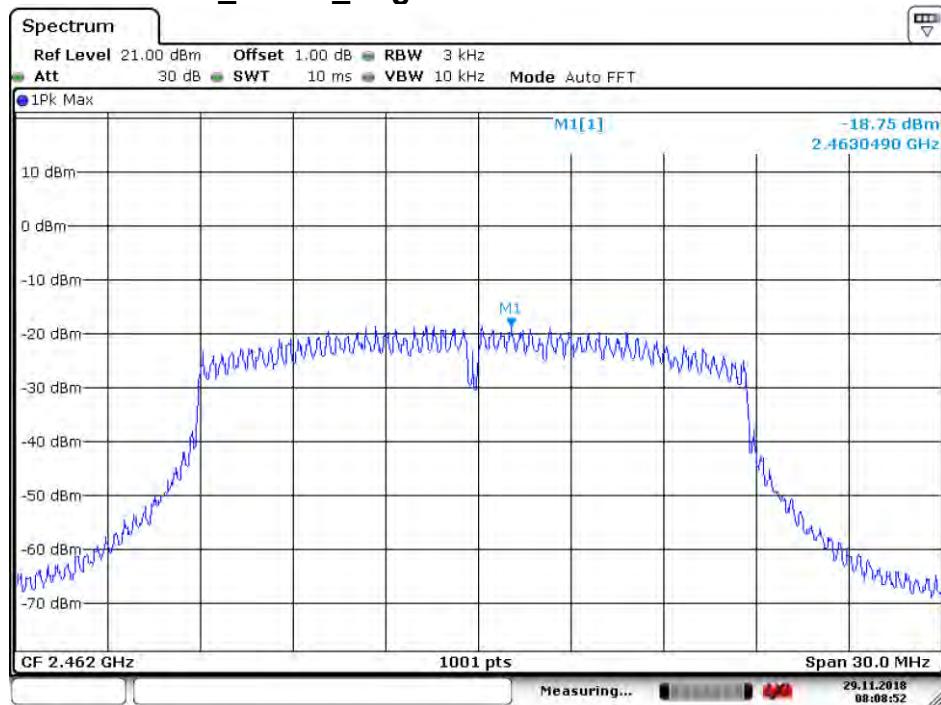
Date: 29.NOV.2018 08:05:19

**4.6.2.1.13 802.11N20\_MIMO\_Lowest Channel**

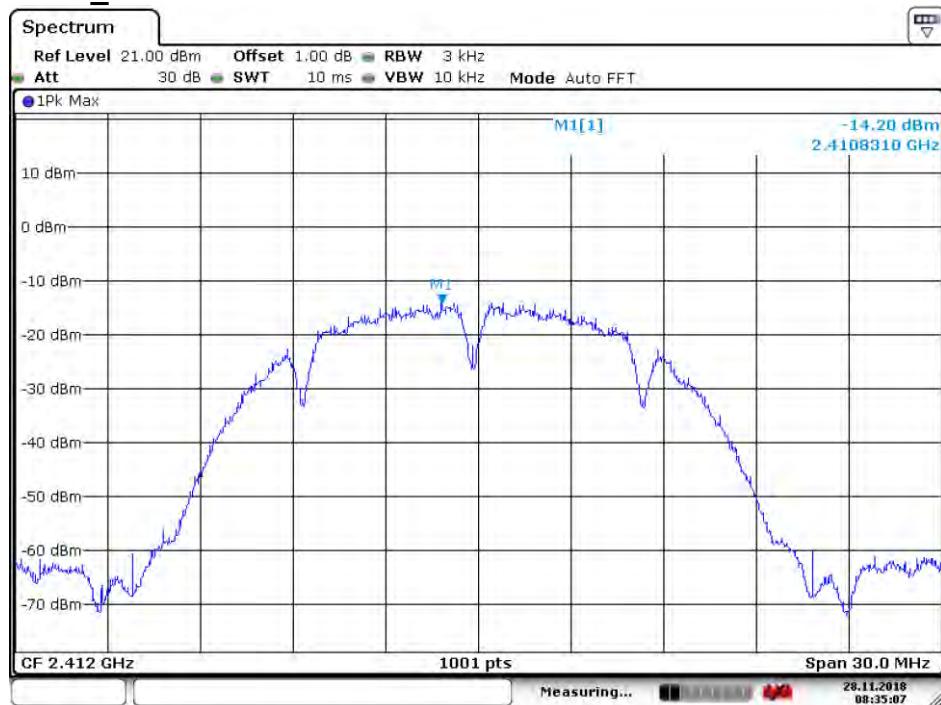
Date: 29.NOV.2018 08:07:14

**4.6.2.1.14 802.11N20\_MIMO\_Middle Channel**

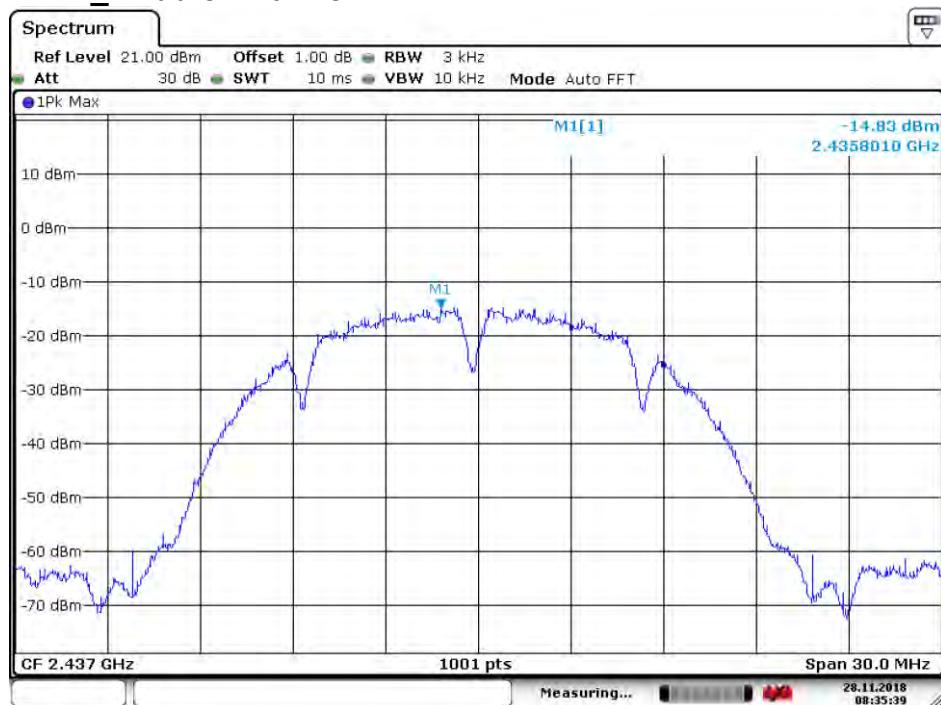
Date: 29.NOV.2018 08:08:06

**4.6.2.1.15 802.11N20\_MIMO \_ Highest Channel**

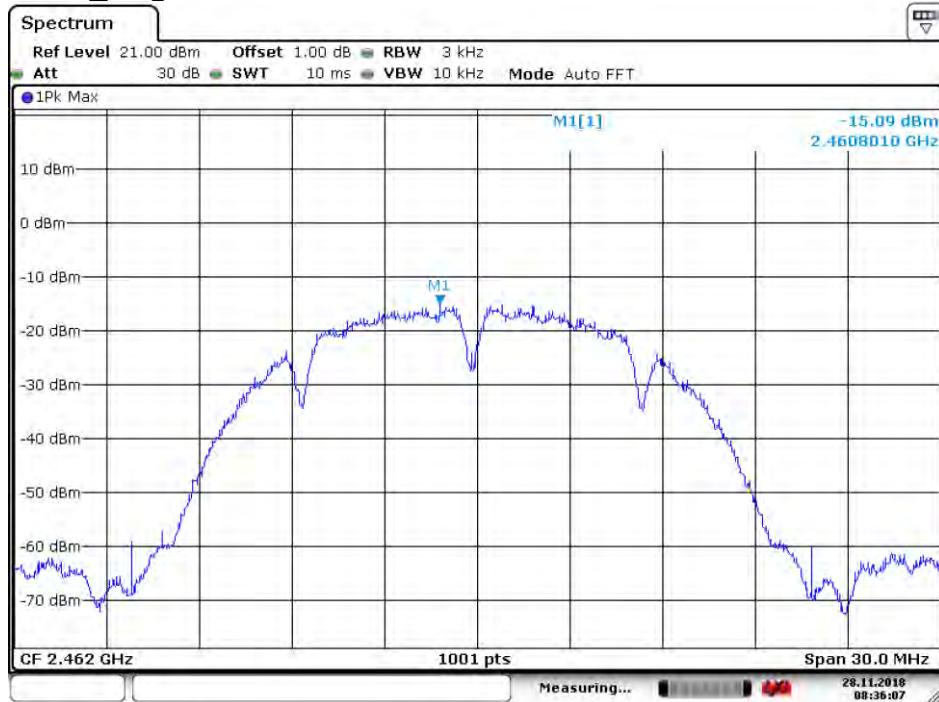
Date: 29.NOV.2018 08:08:52

**4.6.2.2 ANT2****4.6.2.2.1 802.11B\_Lowest Channel**

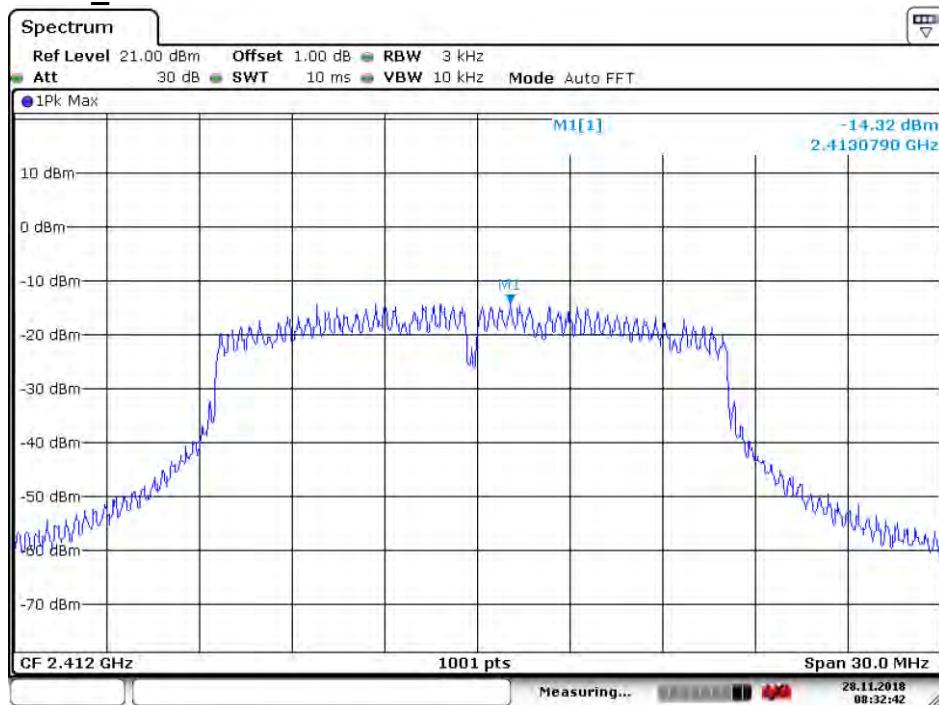
Date: 28.NOV.2018 08:35:06

**4.6.2.2.2 802.11B\_Middle Channel**

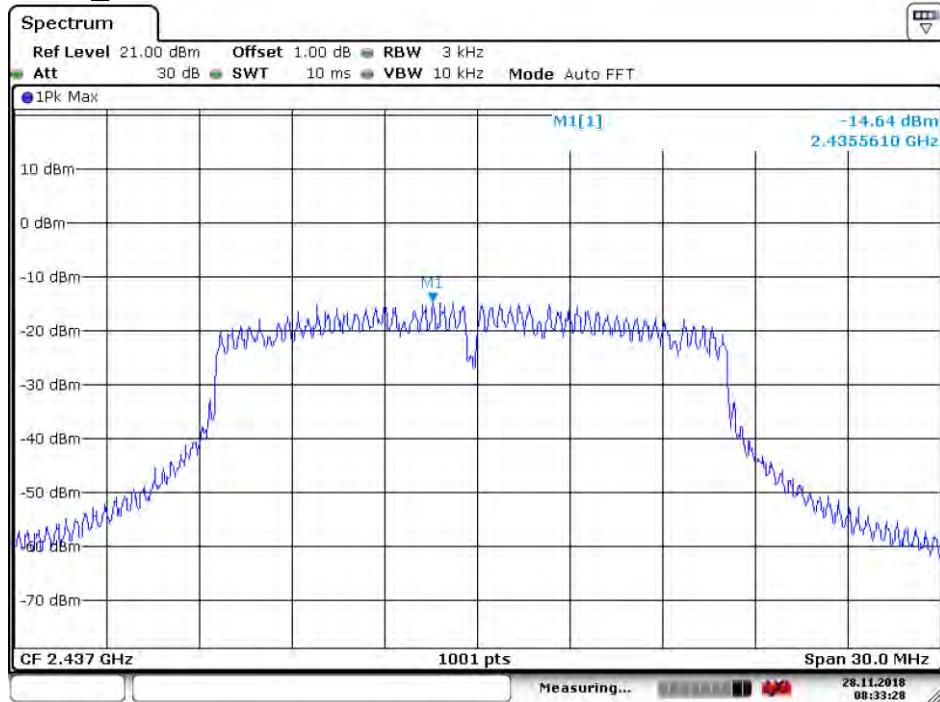
Date: 28.NOV.2018 08:35:39

**4.6.2.2.3 802.11B\_Highest Channel**

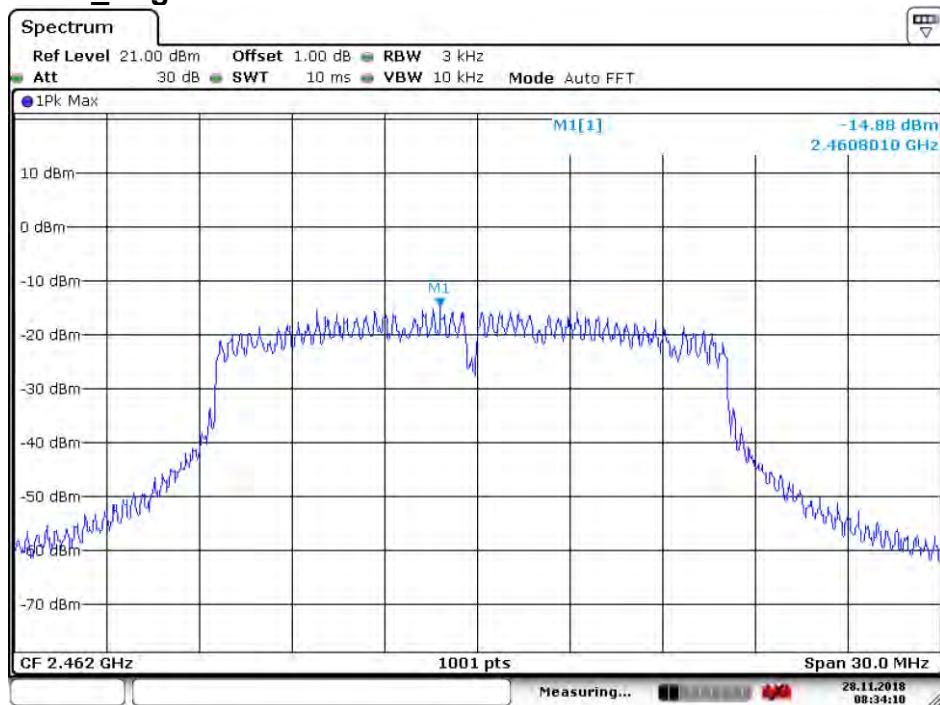
Date: 28.NOV.2018 08:36:08

**4.6.2.2.4 802.11G\_Lowest Channel**

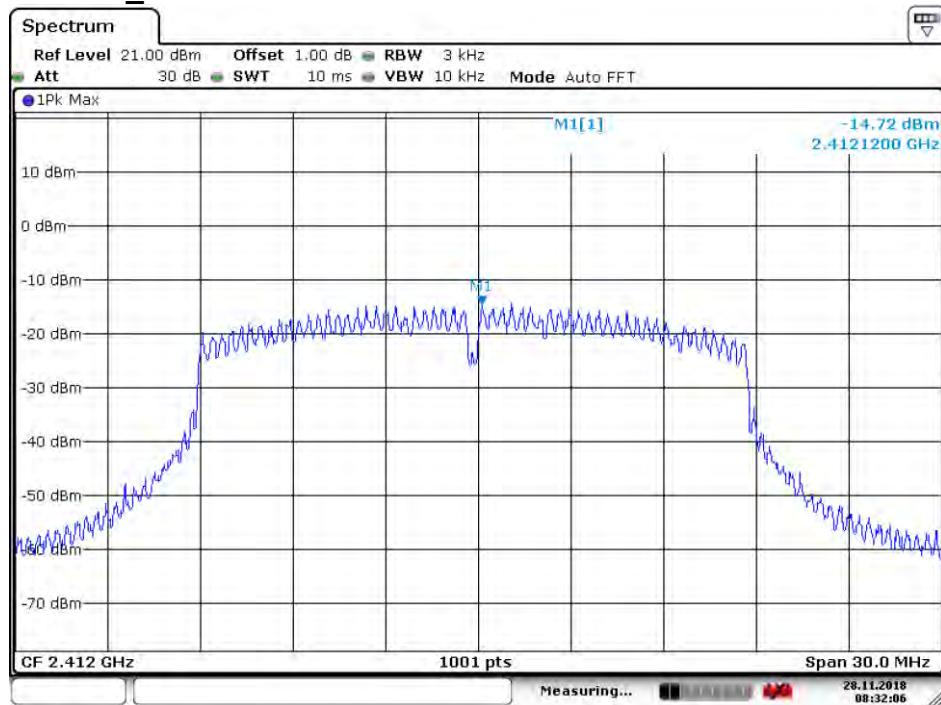
Date: 28.NOV.2018 08:32:42

**4.6.2.2.5 802.11G\_ Middle Channel**

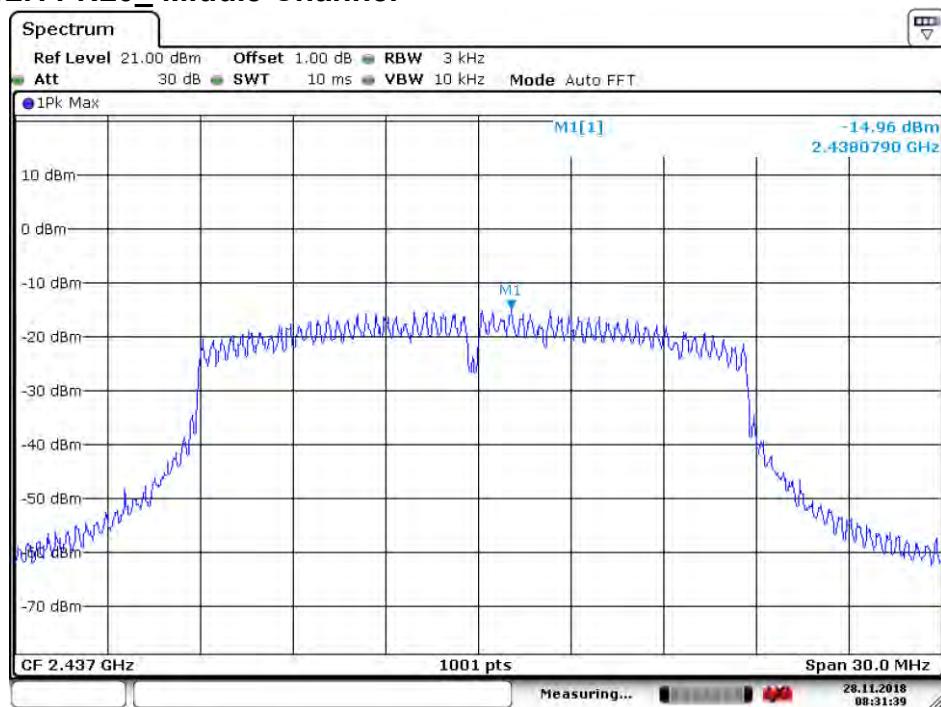
Date: 28.NOV.2018 08:33:29

**4.6.2.2.6 802.11G\_ Highest Channel**

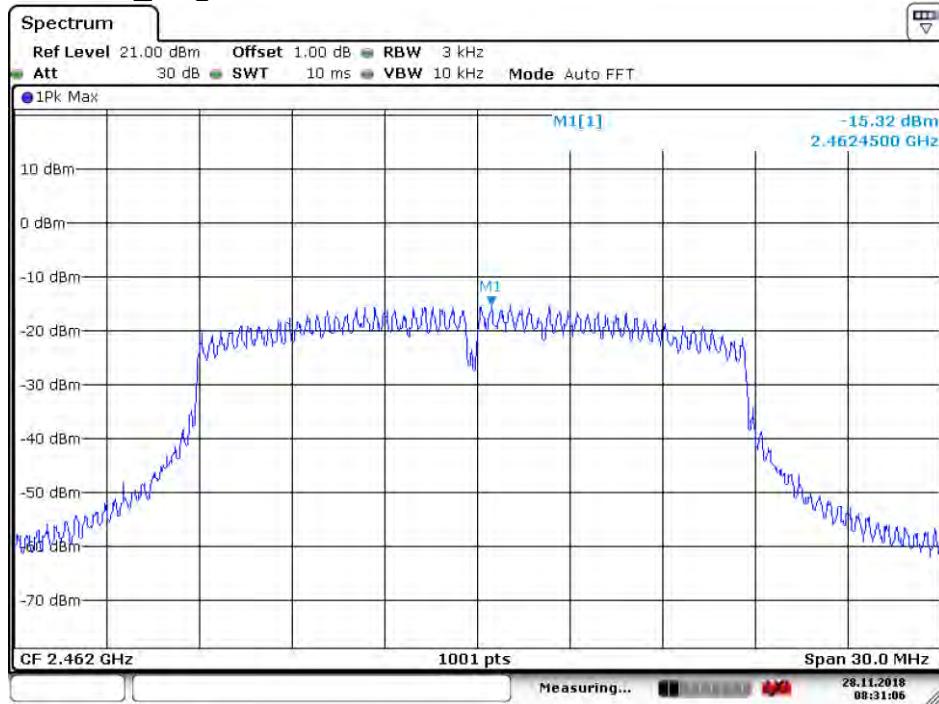
Date: 28.NOV.2018 08:34:10

**4.6.2.2.7 802.11N20\_Lowest Channel**

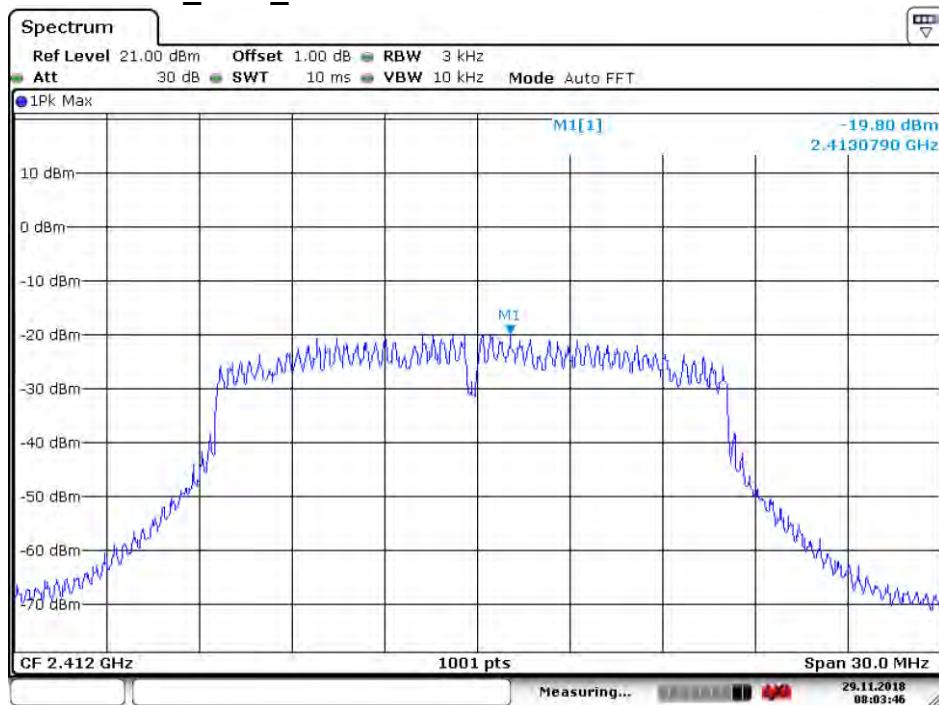
Date: 28.NOV.2018 08:32:07

**4.6.2.2.8 802.11 N20\_Middle Channel**

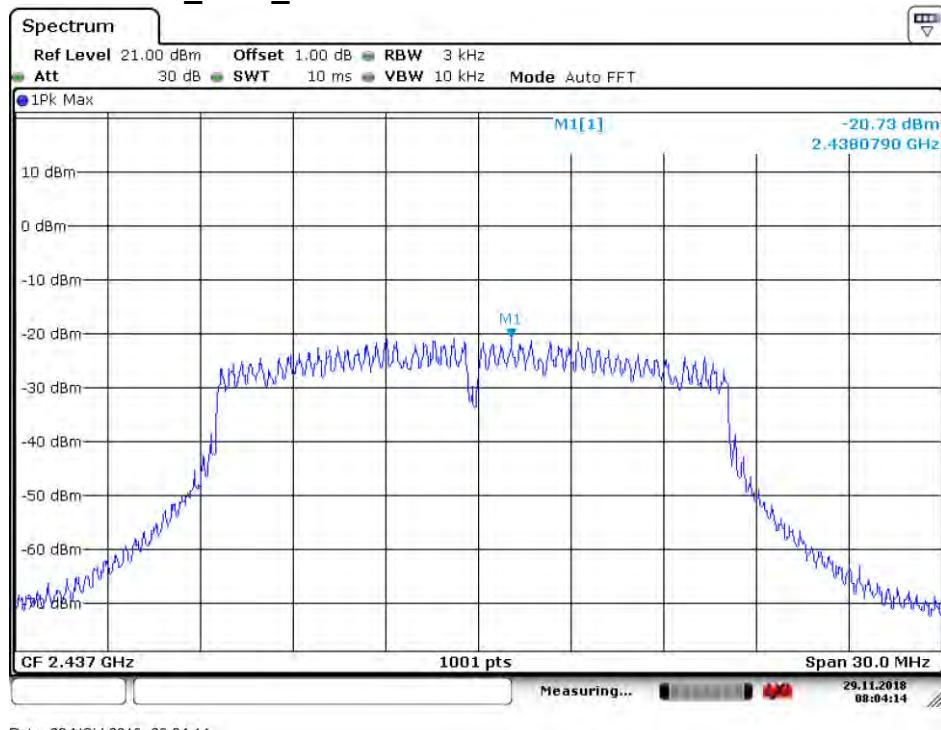
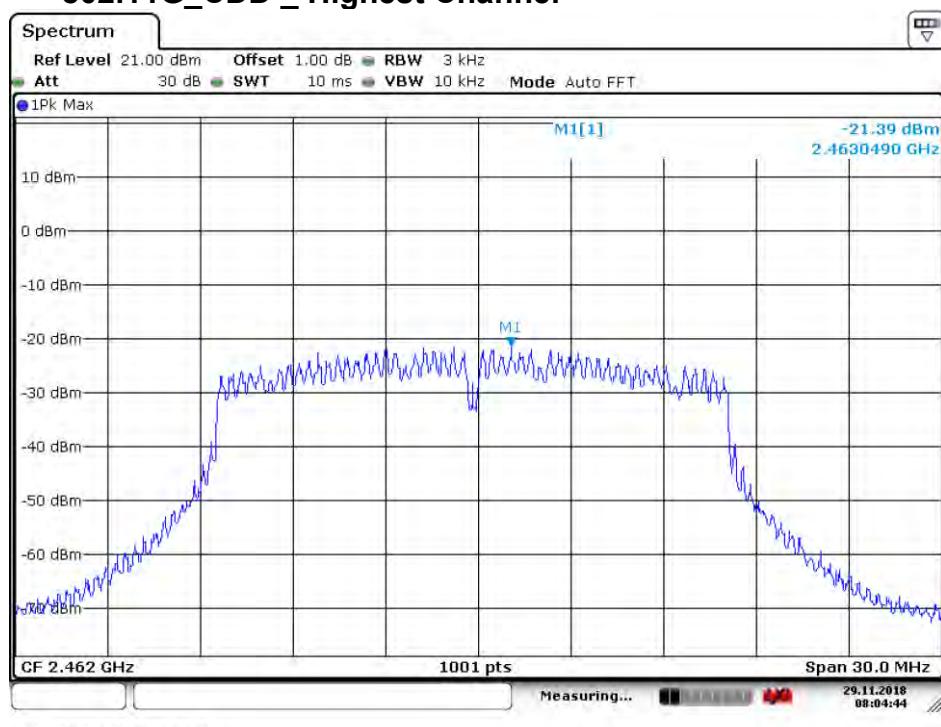
Date: 28.NOV.2018 08:31:39

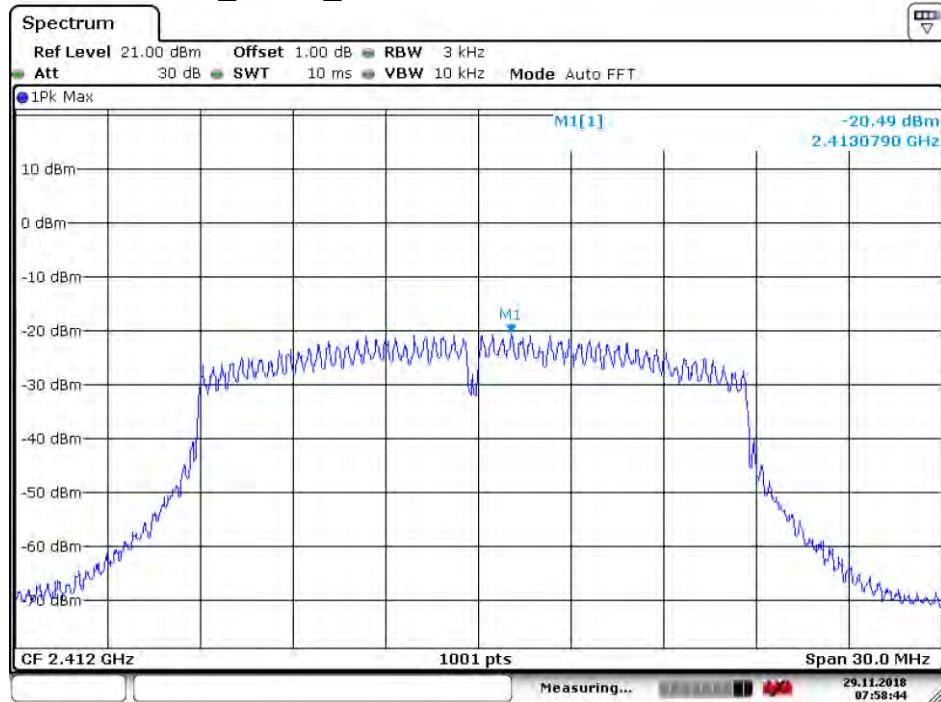
**4.6.2.2.9 802.11 N20\_Highest Channel**

Date: 28.NOV.2018 08:31:06

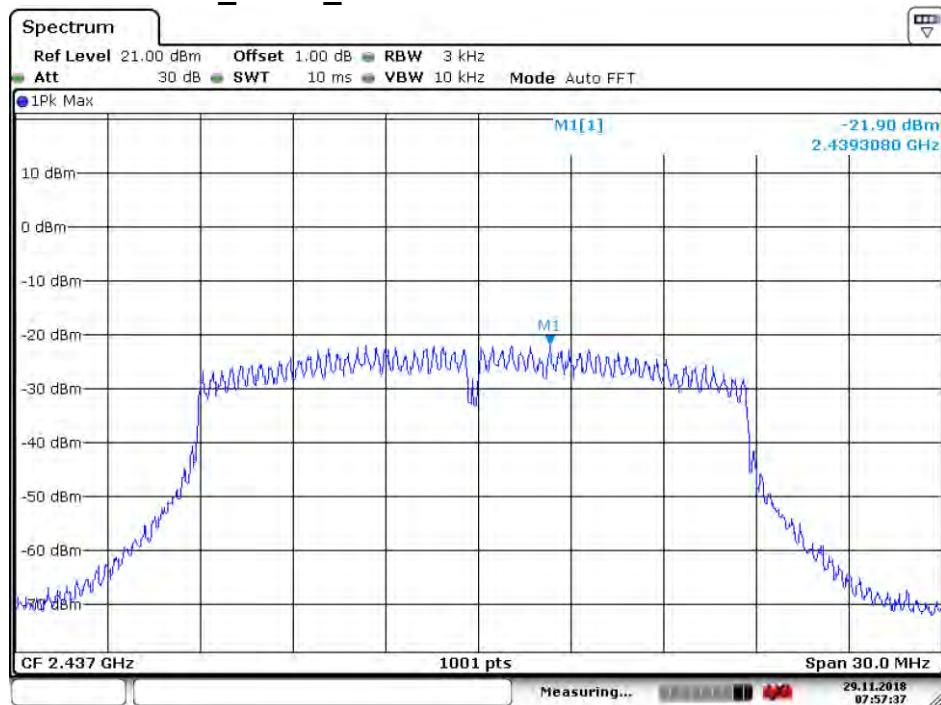
**4.6.2.2.10 802.11G\_CDD\_Lowest Channel**

Date: 29.NOV.2018 08:03:47

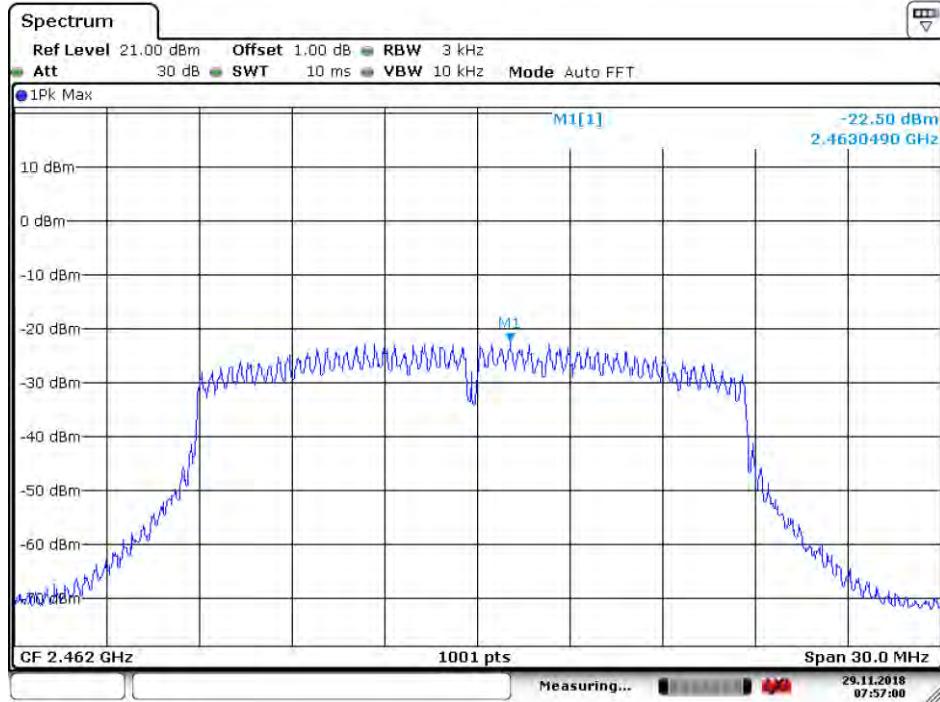
**4.6.2.2.11 802.11G\_CDD\_ Middle Channel****4.6.2.2.12 802.11G\_CDD \_ Highest Channel**

**4.6.2.2.13 802.11N20\_MIMO\_Lowest Channel**

Date: 29.NOV.2018 07:58:45

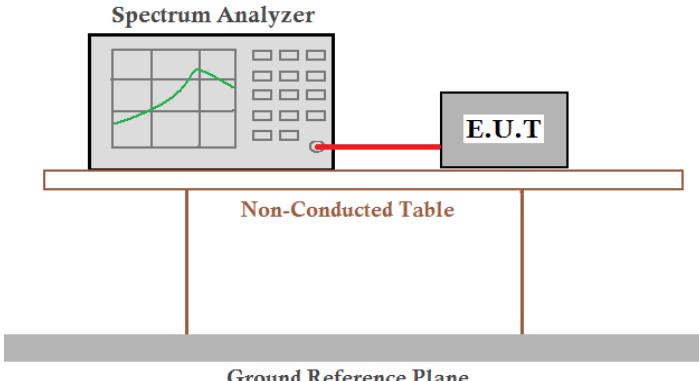
**4.6.2.2.14 802.11N20\_MIMO\_Middle Channel**

Date: 29.NOV.2018 07:57:38

**4.6.2.2.15 802.11N20\_MIMO \_ Highest Channel**

Date: 29.NOV.2018 07:57:01

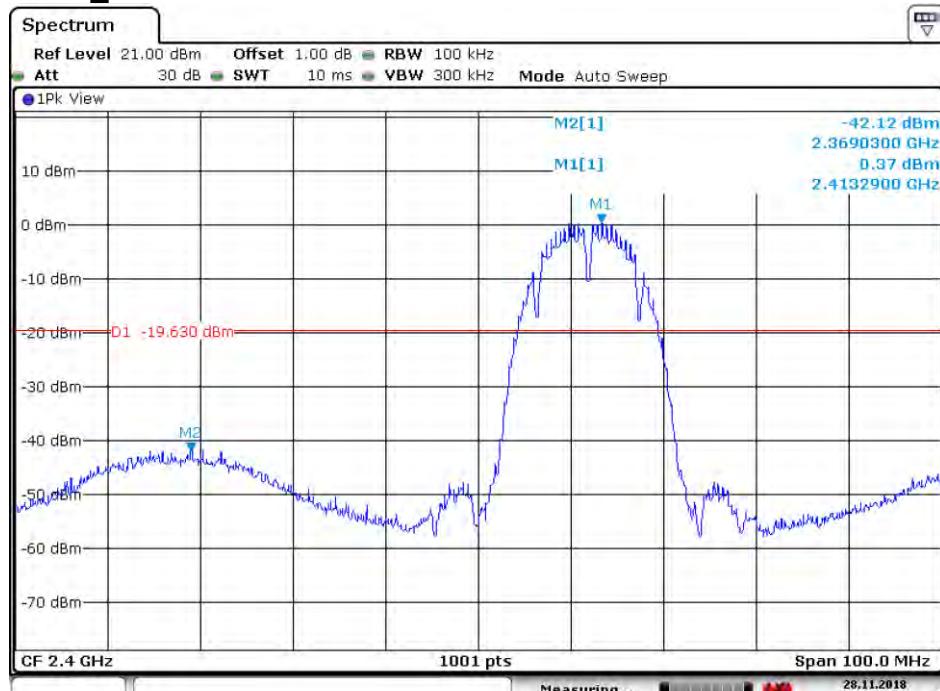
## 4.7 Band-edge for RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10: 2013 Section 11.13
Test Setup:	
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11B; 6Mbps of rate is the worst case of 802.11G ; 6.5Mbps of rate is the worst case of 802.11N(HT20) ;
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass

## 4.7.1 Test plots

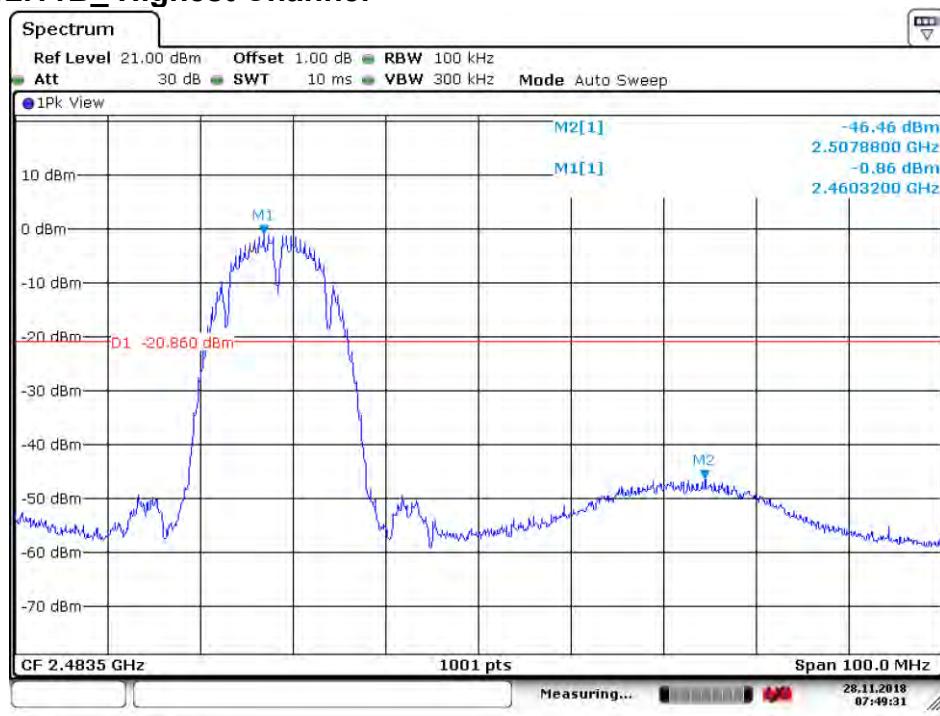
### 4.7.1.1 ANT1

#### 4.7.1.1.1 802.11B\_Lowest Channel

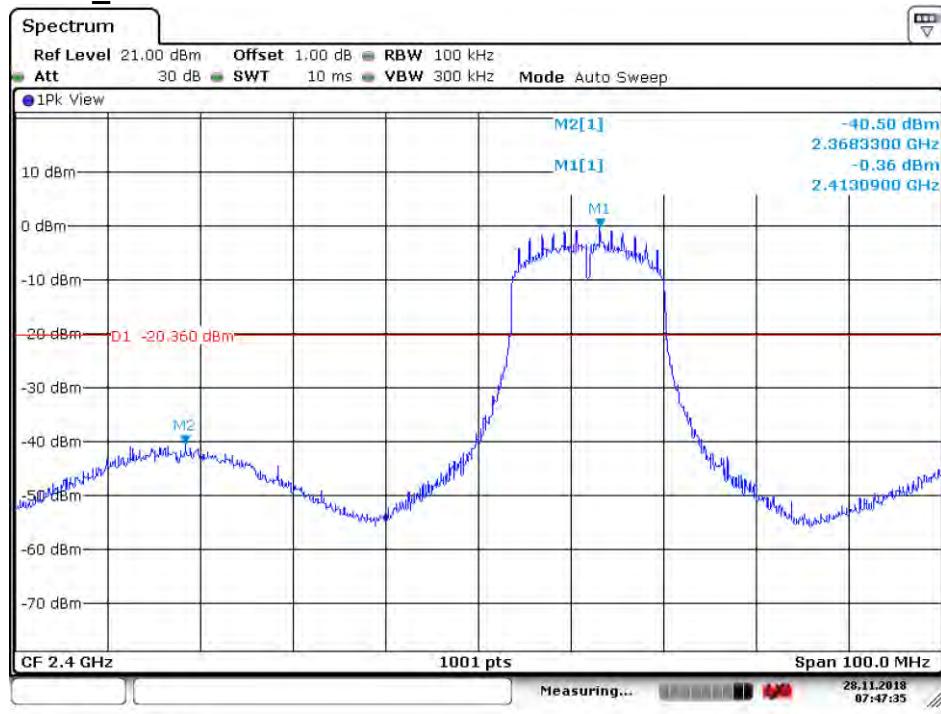
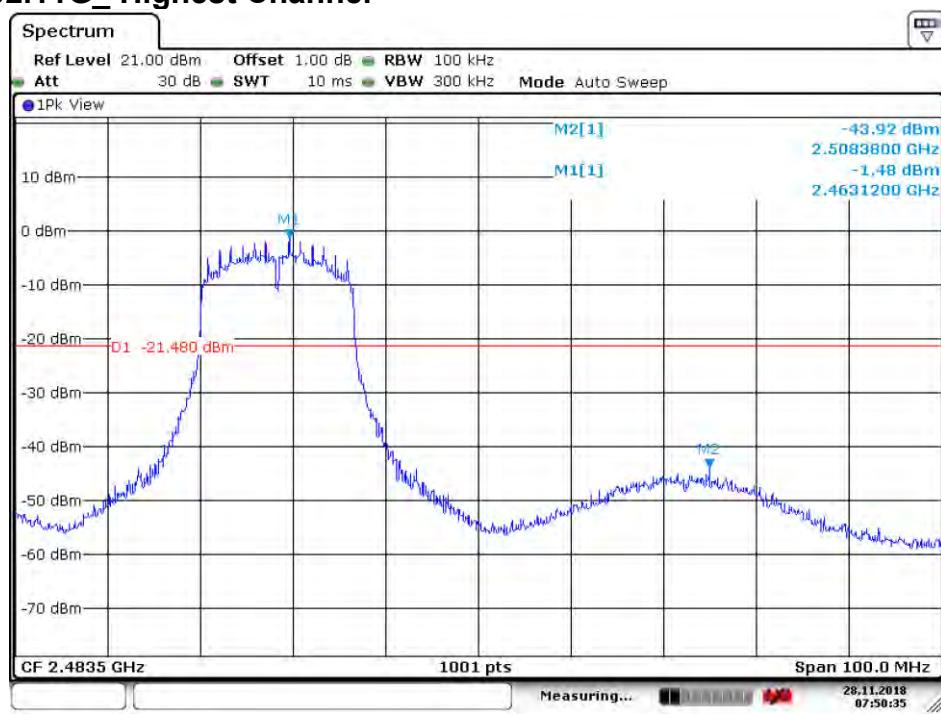


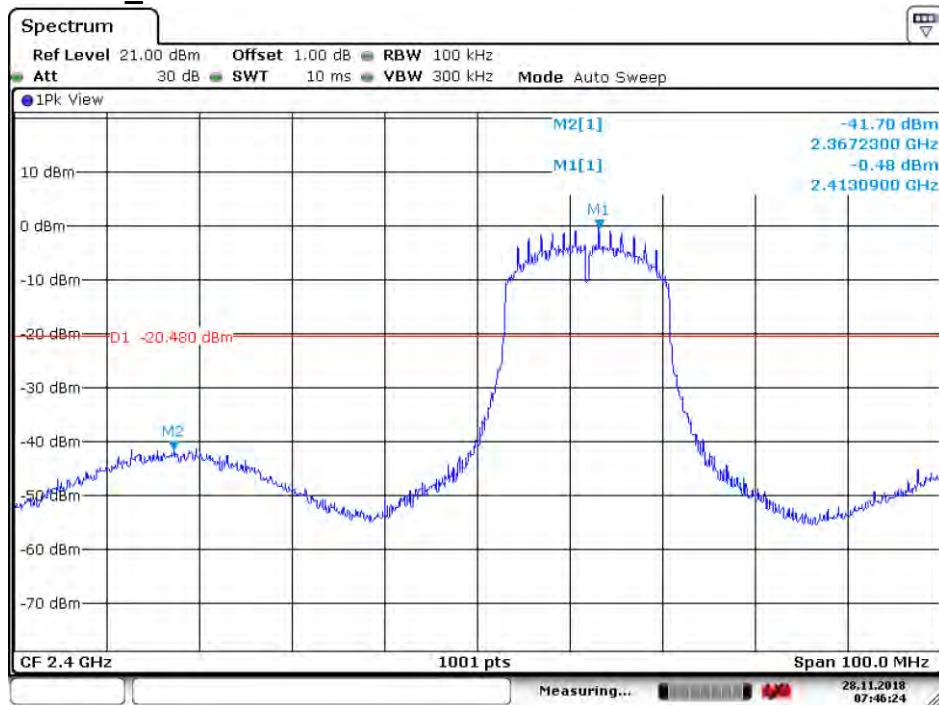
Date: 28.NOV.2018 07:48:27

#### 4.7.1.1.2 802.11B\_Highest Channel

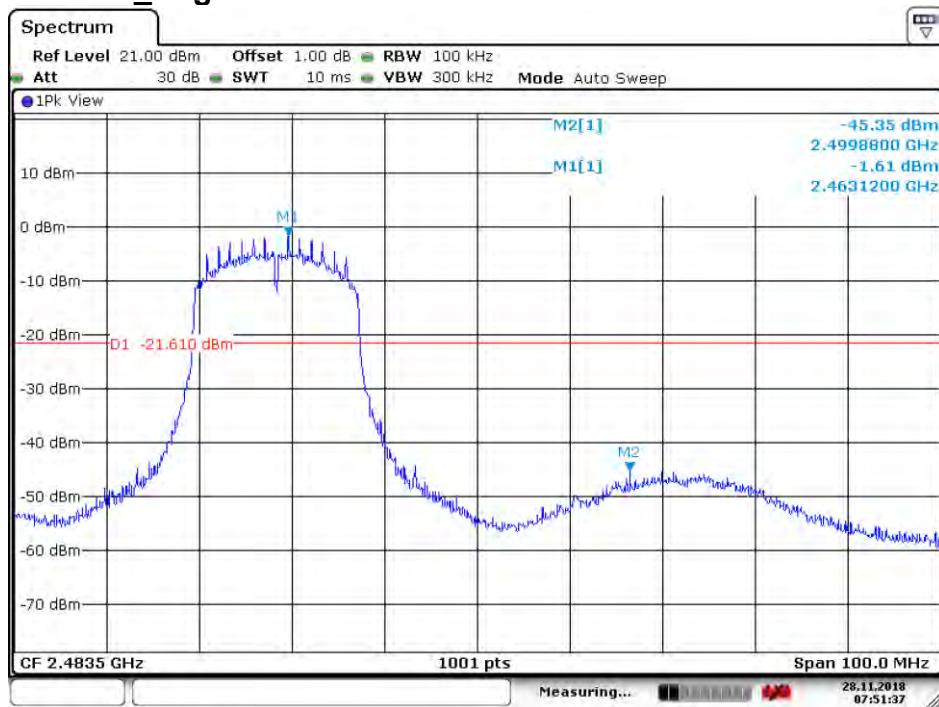


Date: 28.NOV.2018 07:49:31

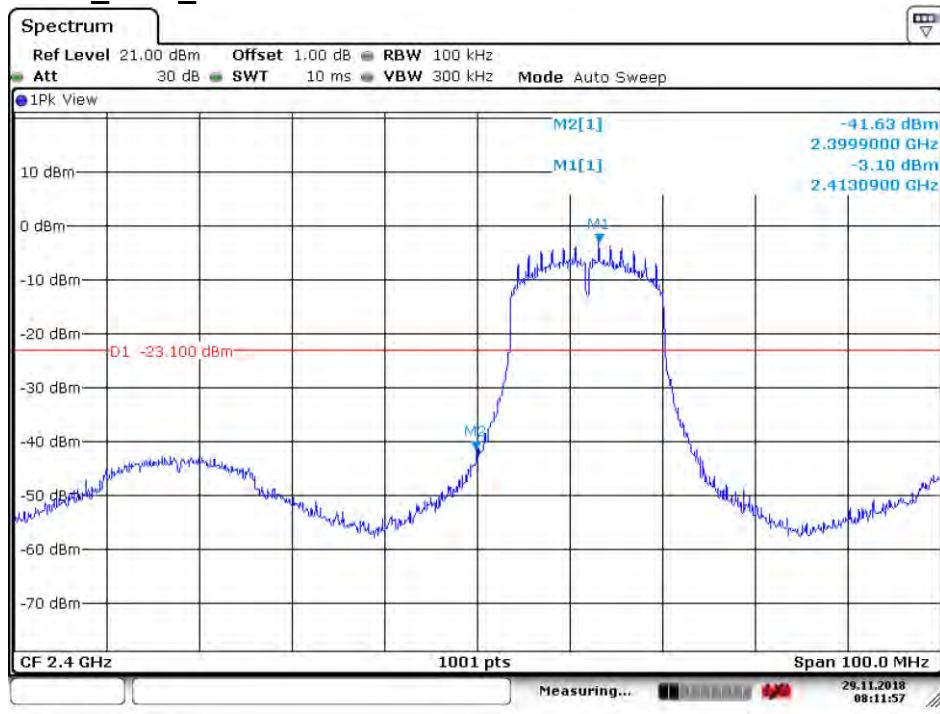
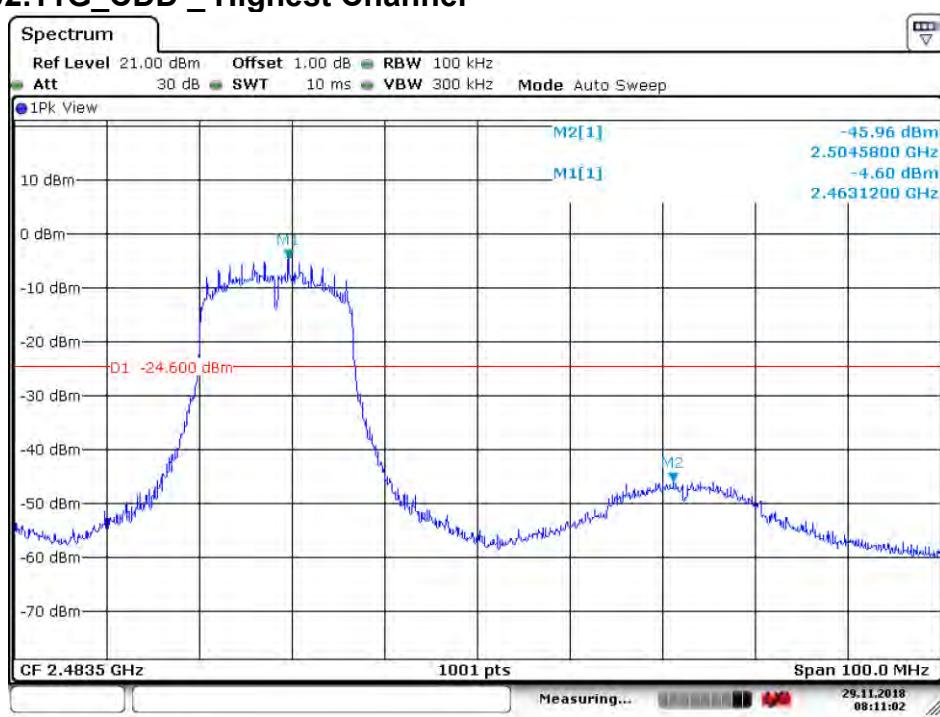
**4.7.1.1.3 802.11G\_Lowest Channel****4.7.1.1.4 802.11G\_Highest Channel**

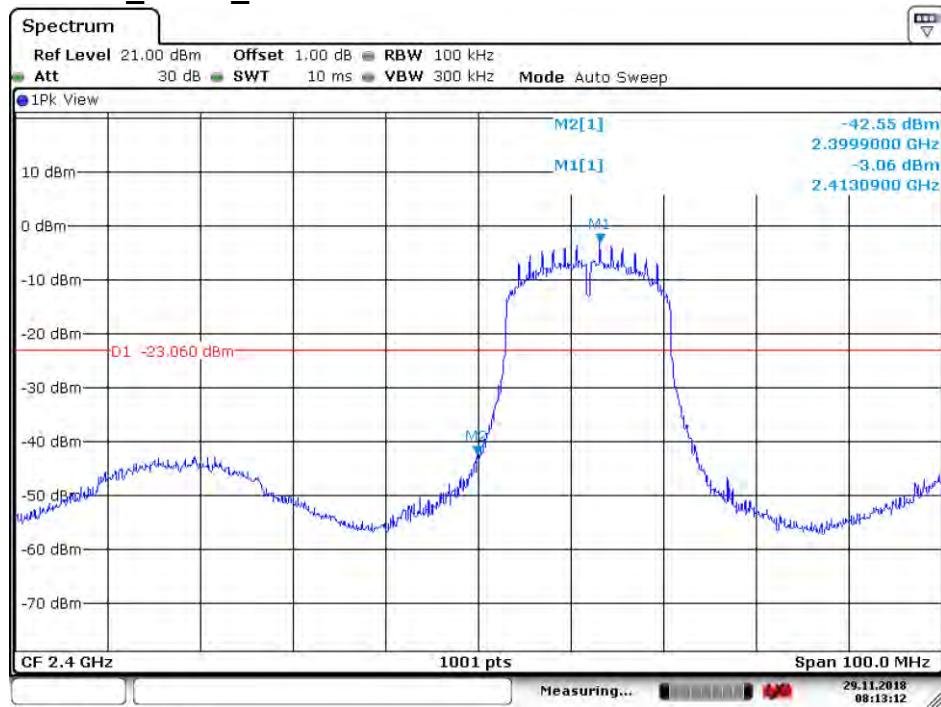
**4.7.1.1.5 802.11N20\_Lowest Channel**

Date: 28.NOV.2018 07:46:24

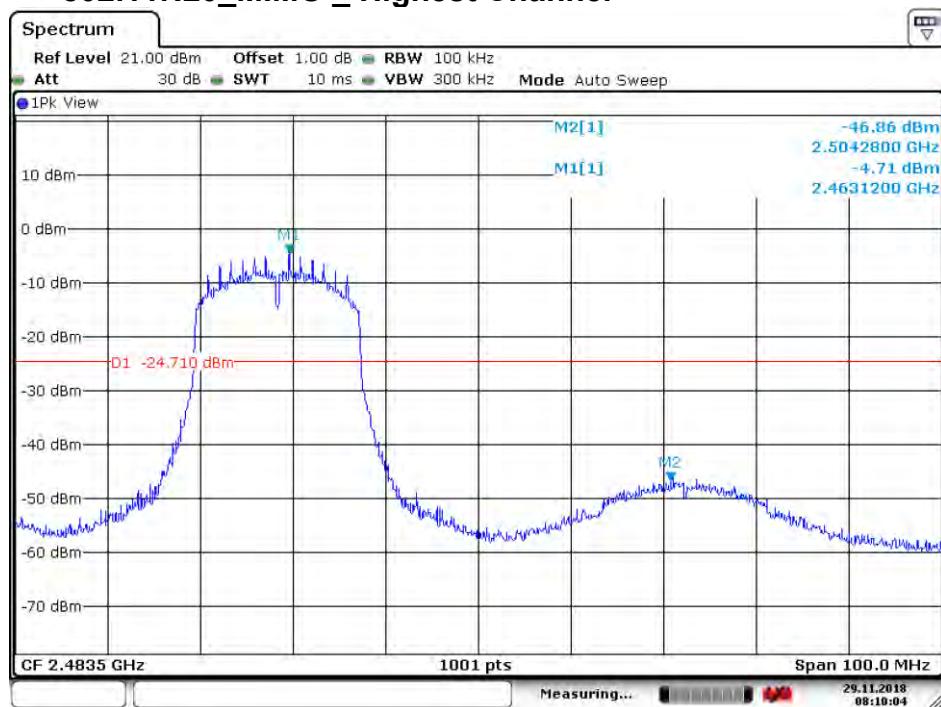
**4.7.1.1.6 802.11 N20\_Highest Channel**

Date: 28.NOV.2018 07:51:38

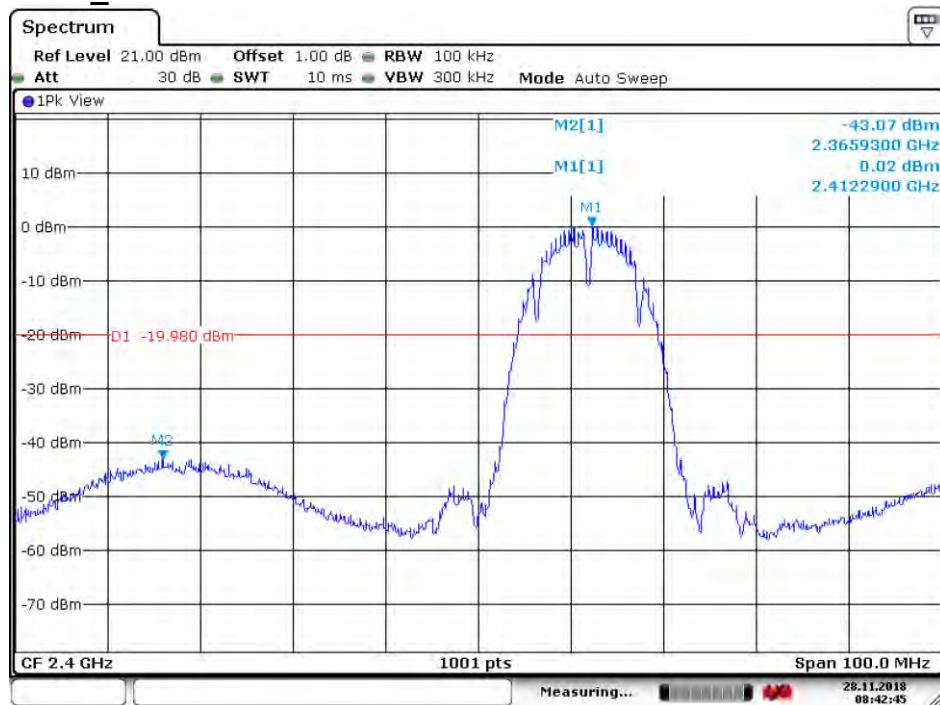
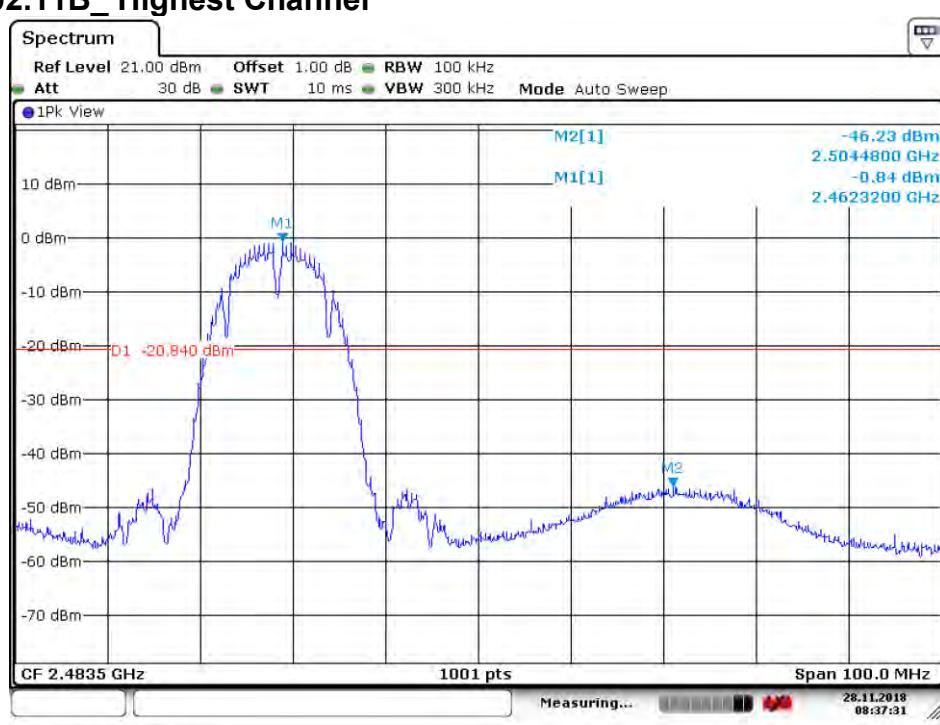
**4.7.1.1.7 802.11G\_CDD\_Lowest Channel****4.7.1.1.8 802.11G\_CDD \_ Highest Channel**

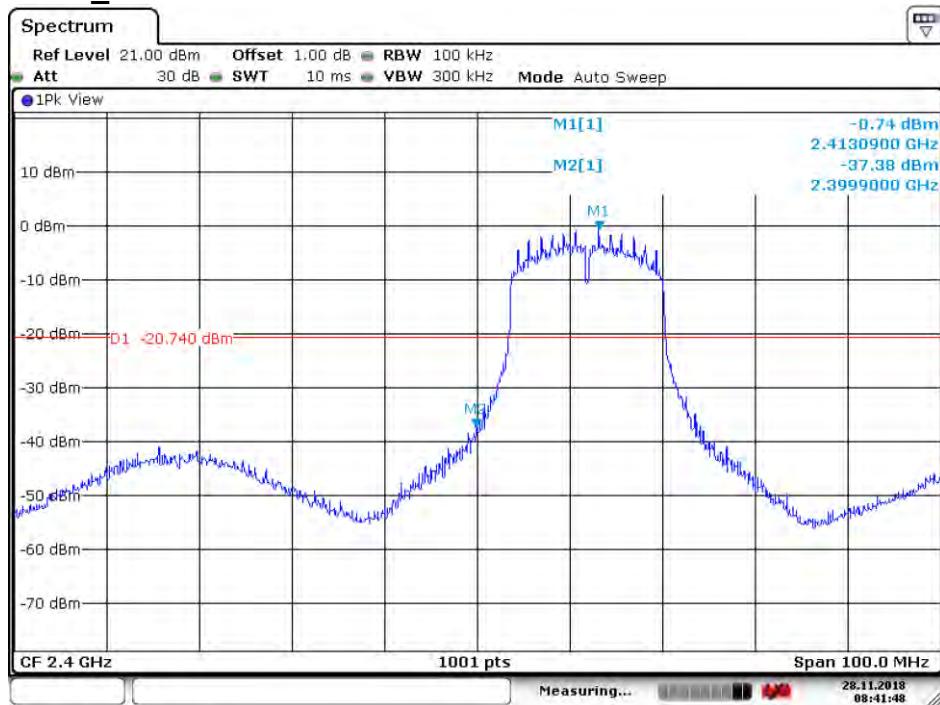
**4.7.1.1.9 802.11N20\_MIMO\_Lowest Channel**

Date: 29.NOV.2018 08:13:12

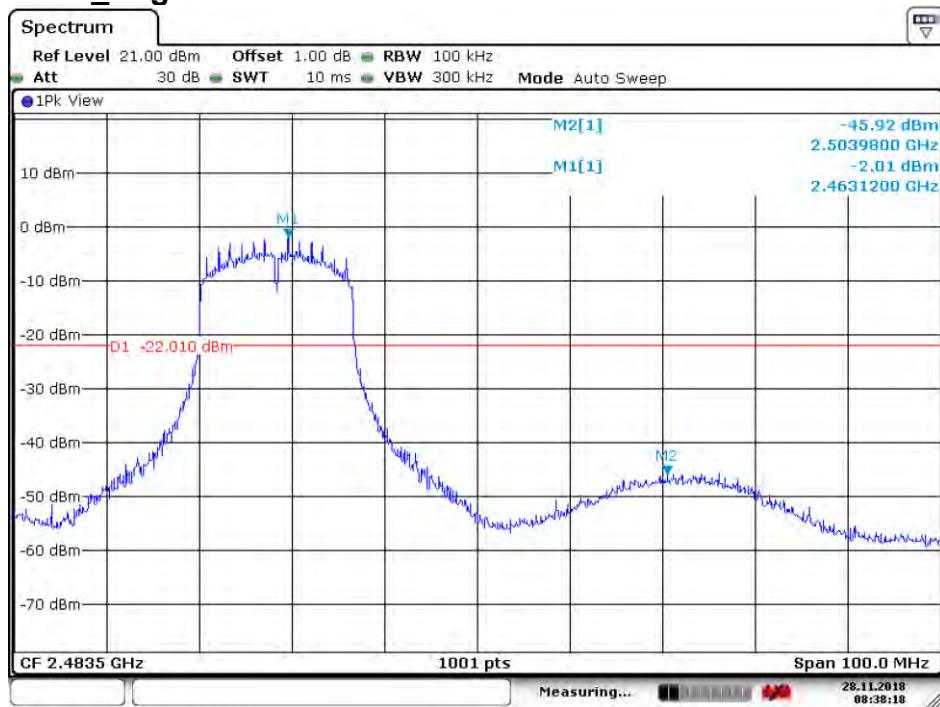
**4.7.1.1.10 802.11N20\_MIMO\_Highest Channel**

Date: 29.NOV.2018 08:10:04

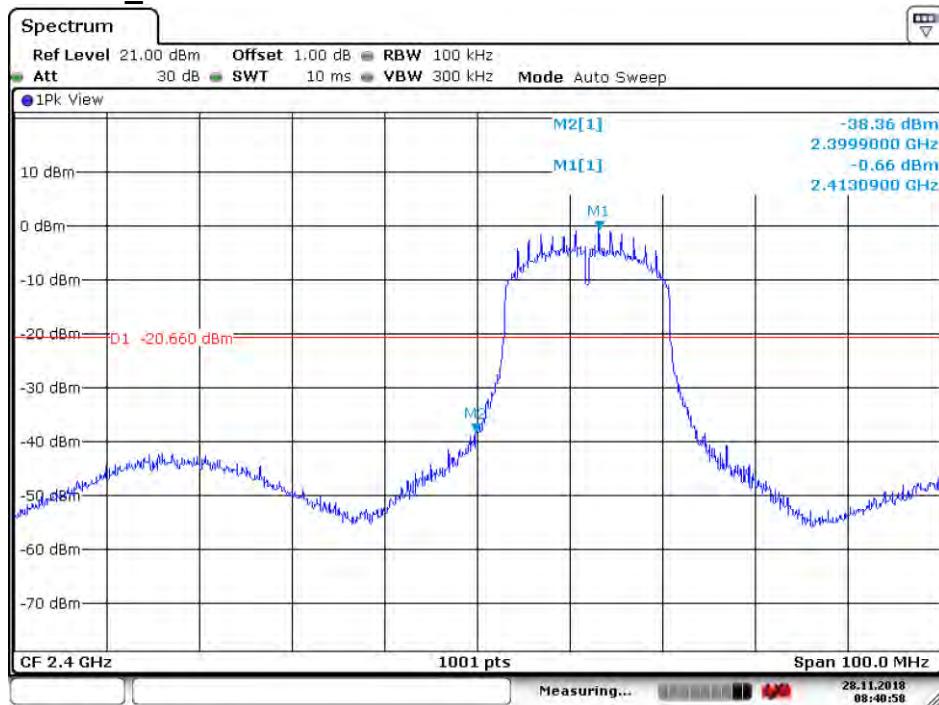
**4.7.1.2 ANT2****4.7.1.2.1 802.11B\_Lowest Channel****4.7.1.2.2 802.11B\_Highest Channel**

**4.7.1.2.3 802.11G\_Lowest Channel**

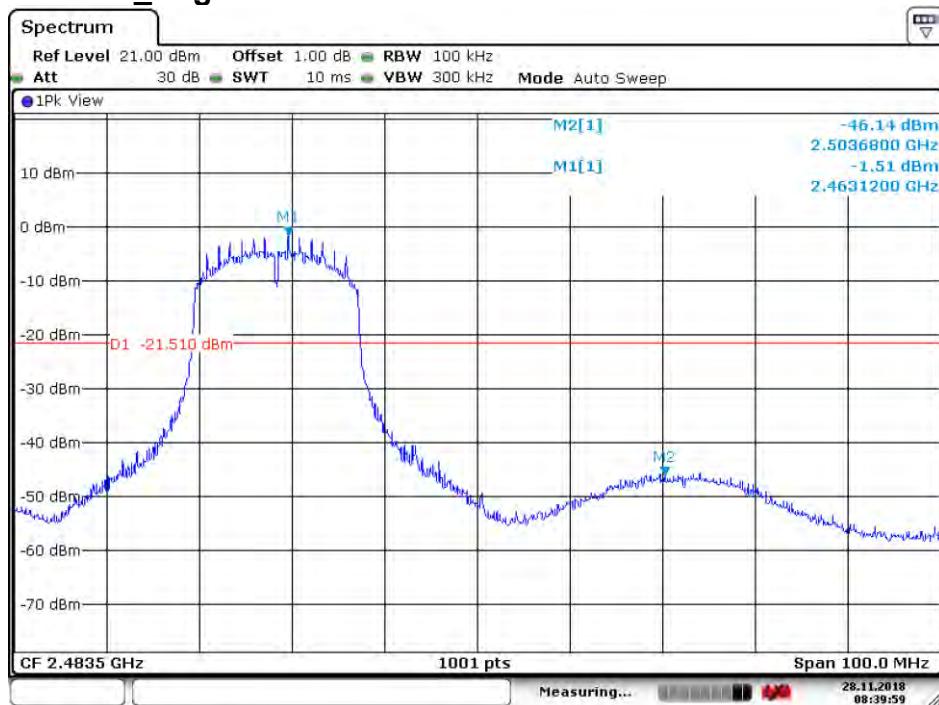
Date: 28.NOV.2018 08:41:48

**4.7.1.2.4 802.11G\_Highest Channel**

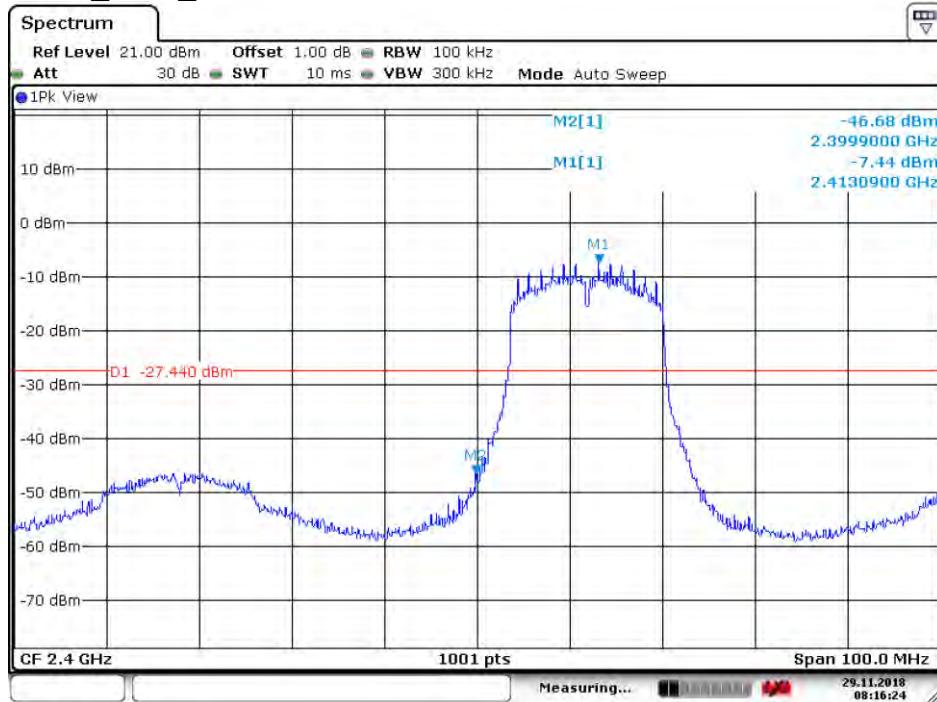
Date: 28.NOV.2018 08:38:19

**4.7.1.2.5 802.11N20\_Lowest Channel**

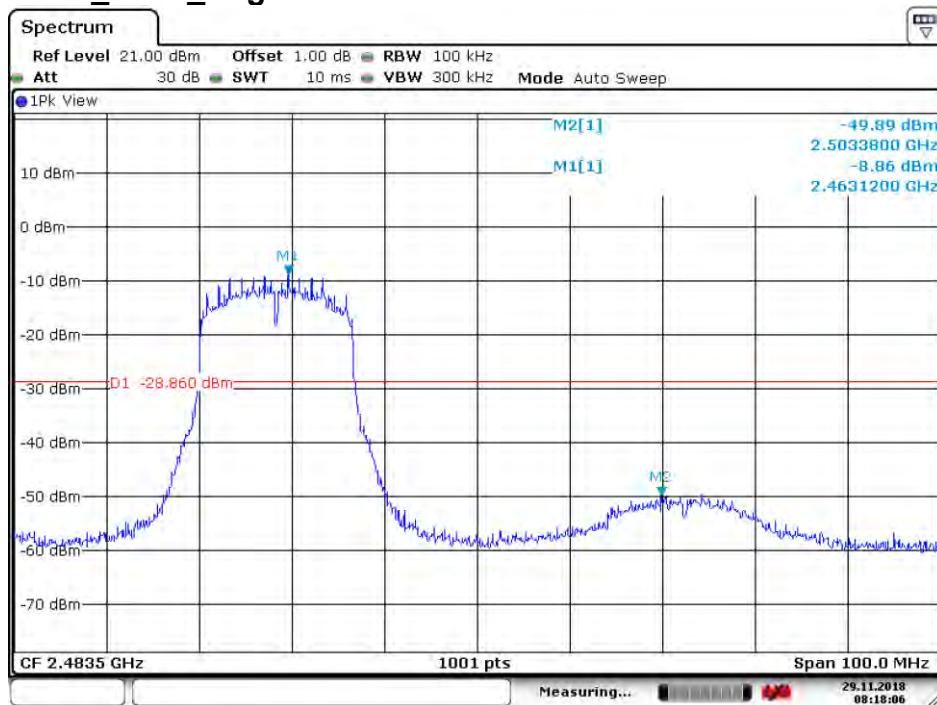
Date: 28.NOV.2018 08:40:59

**4.7.1.2.6 802.11 N20\_Highest Channel**

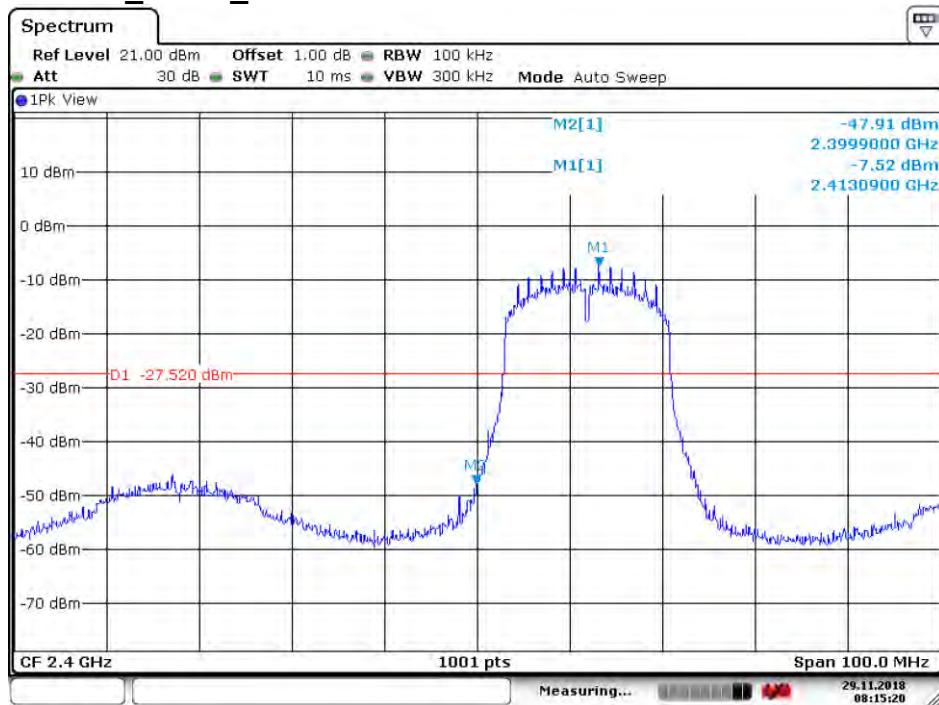
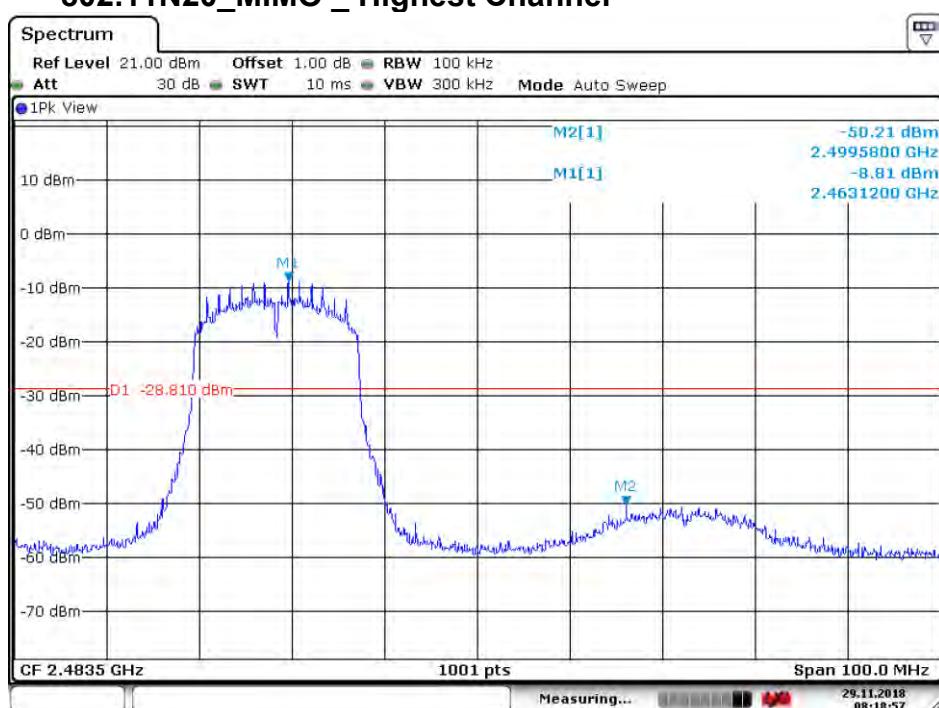
Date: 28.NOV.2018 08:39:59

**4.7.1.2.7 802.11G\_CDD\_Lowest Channel**

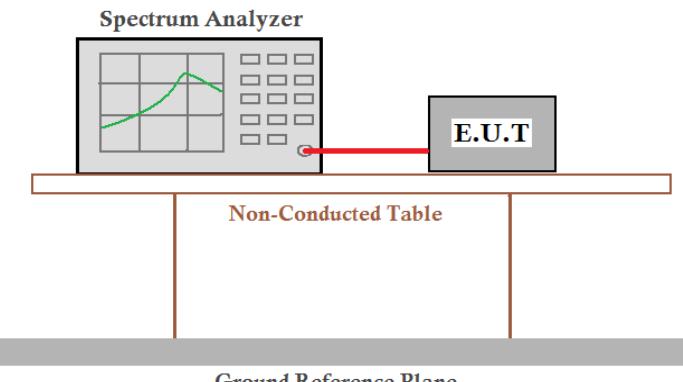
Date: 29.NOV.2018 08:16:24

**4.7.1.2.8 802.11G\_CDD \_ Highest Channel**

Date: 29.NOV.2018 08:18:07

**4.7.1.2.9 802.11N20\_MIMO\_Lowest Channel****4.7.1.2.10 802.11N20\_MIMO\_Highest Channel**

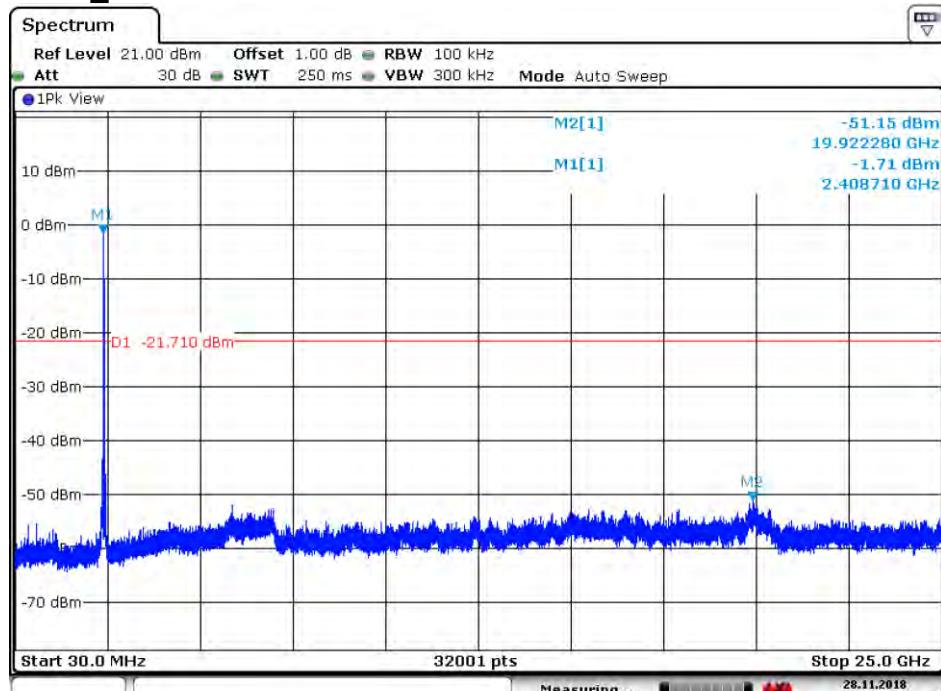
## 4.8 RF Conducted Spurious Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10: 2013 Section 11.11
Test Setup:	
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11B; 6Mbps of rate is the worst case of 802.11G; 6.5Mbps of rate is the worst case of 802.11N(HT20);
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass

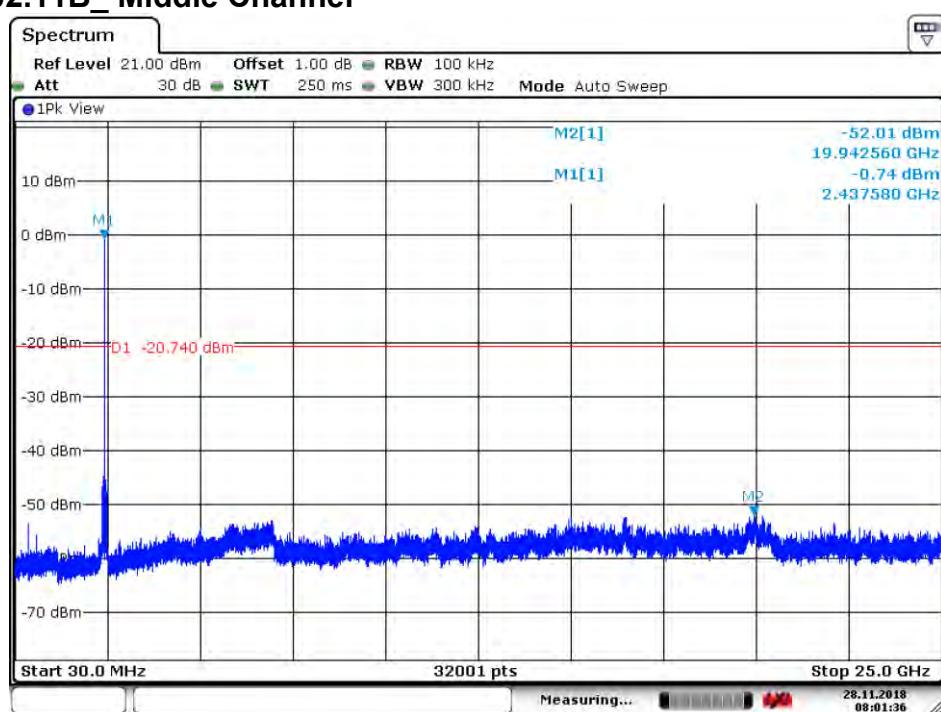
## 4.8.1 Test plots

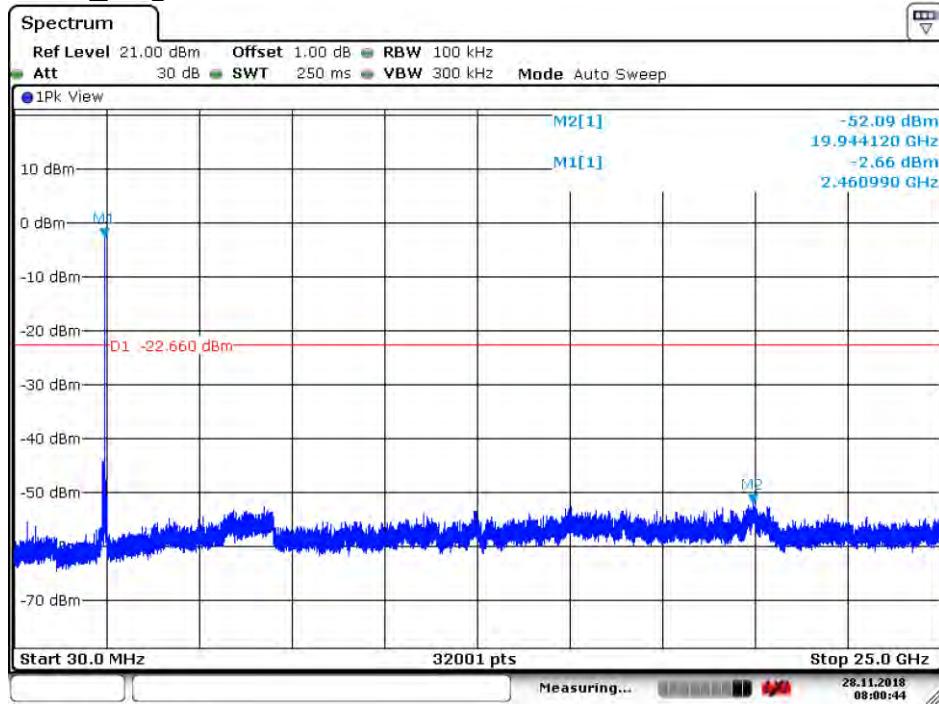
### 4.8.1.1 ANT1

#### 4.8.1.1.1 802.11B\_Lowest Channel

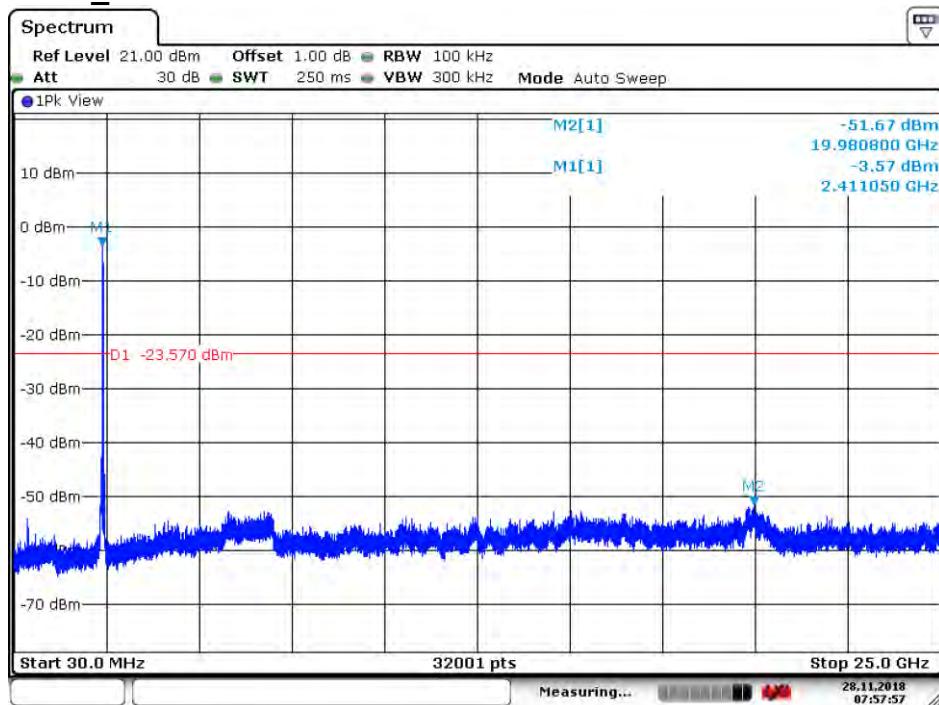


#### 4.8.1.1.2 802.11B\_Middle Channel

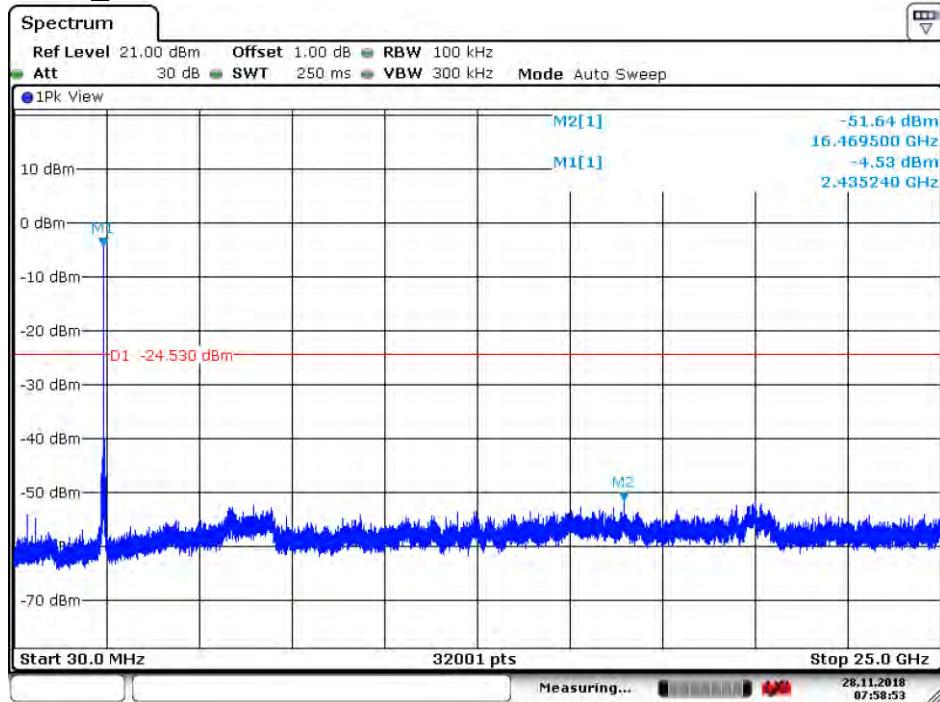


**4.8.1.1.3 802.11B\_Highest Channel**

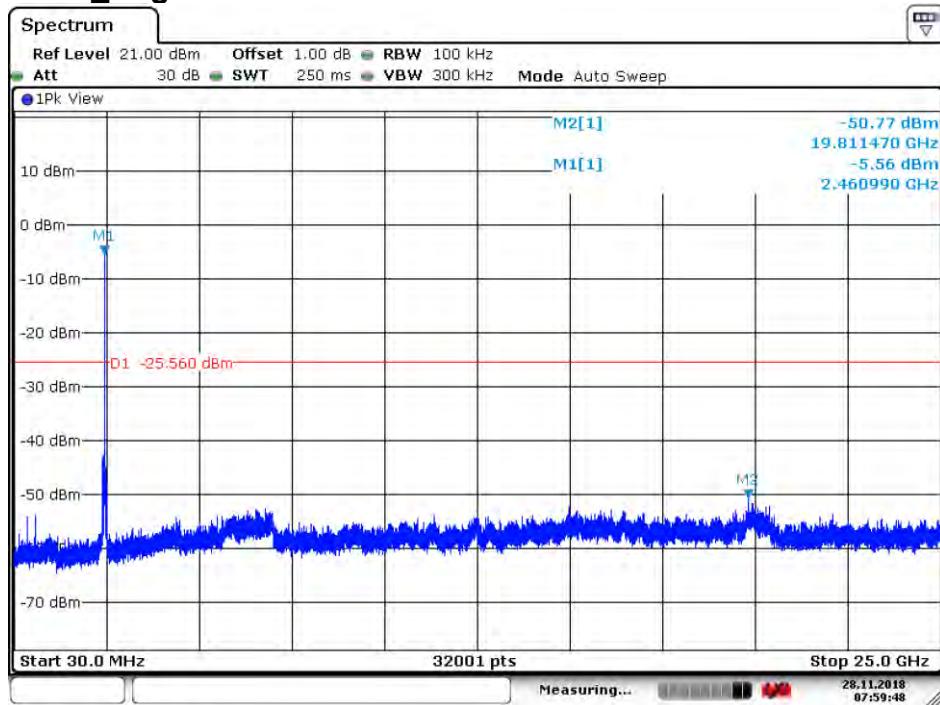
Date: 28.NOV.2018 08:00:45

**4.8.1.1.4 802.11G\_Lowest Channel**

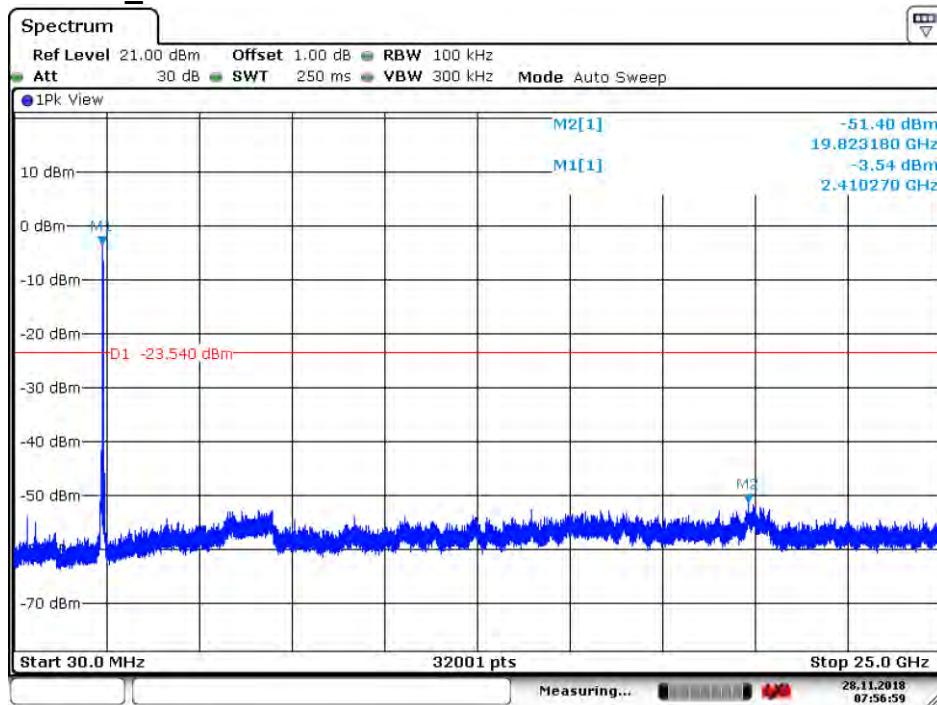
Date: 28.NOV.2018 07:57:57

**4.8.1.1.5 802.11G\_Middle Channel**

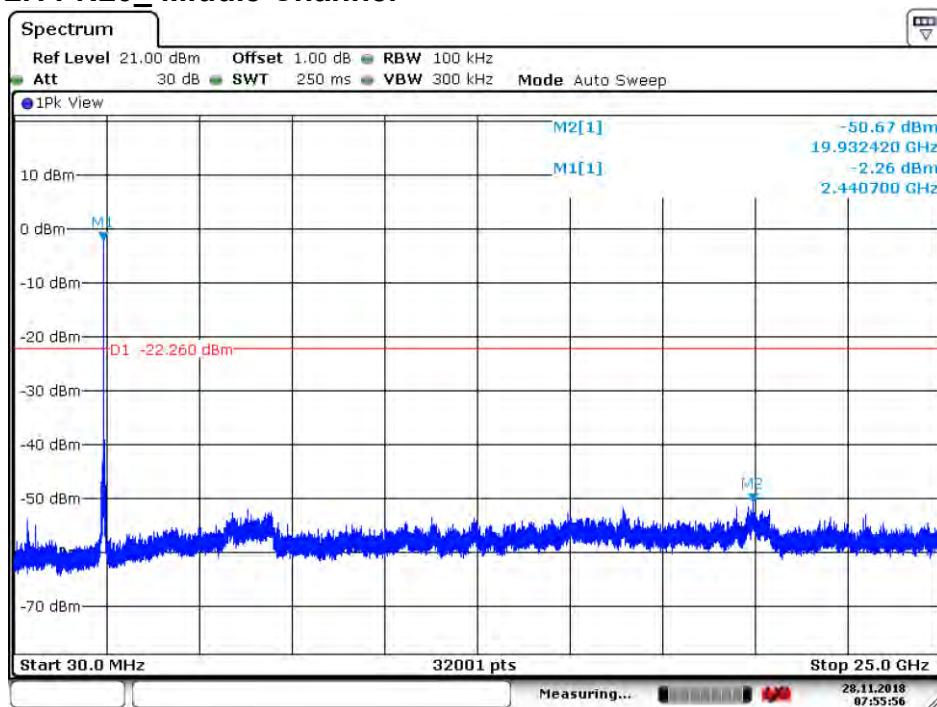
Date: 28.NOV.2018 07:58:54

**4.8.1.1.6 802.11G\_Highest Channel**

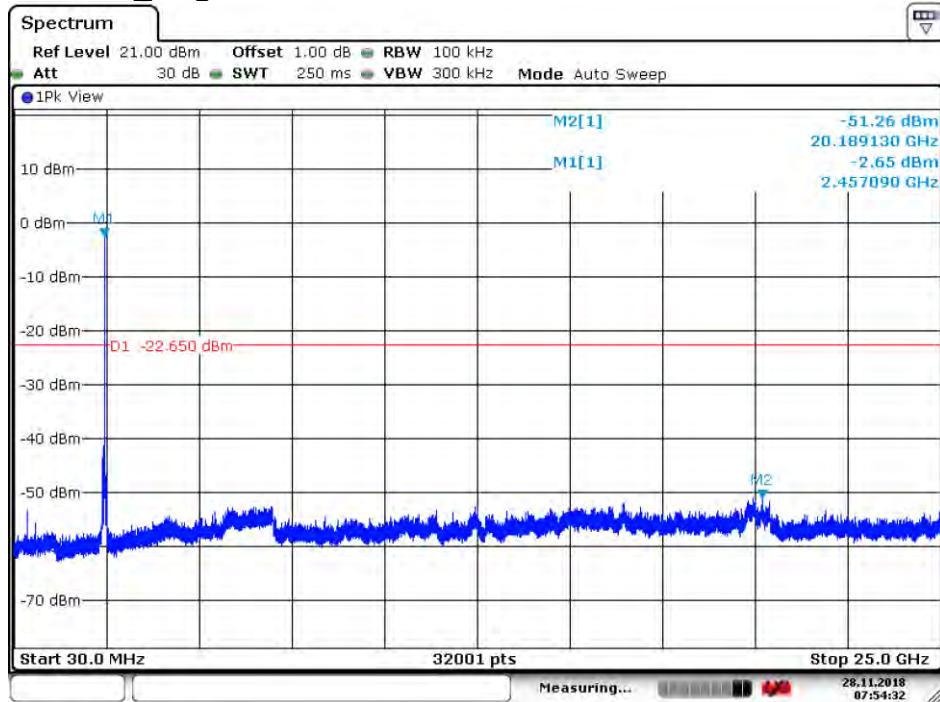
Date: 28.NOV.2018 07:59:49

**4.8.1.1.7 802.11N20\_Lowest Channel**

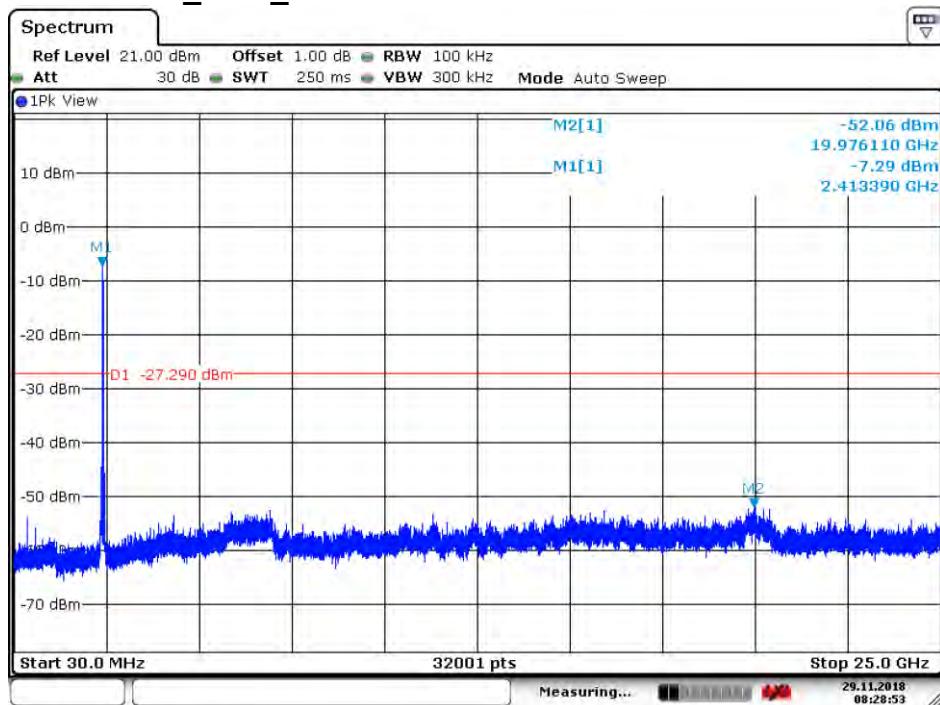
Date: 28.NOV.2018 07:57:00

**4.8.1.1.8 802.11 N20\_Middle Channel**

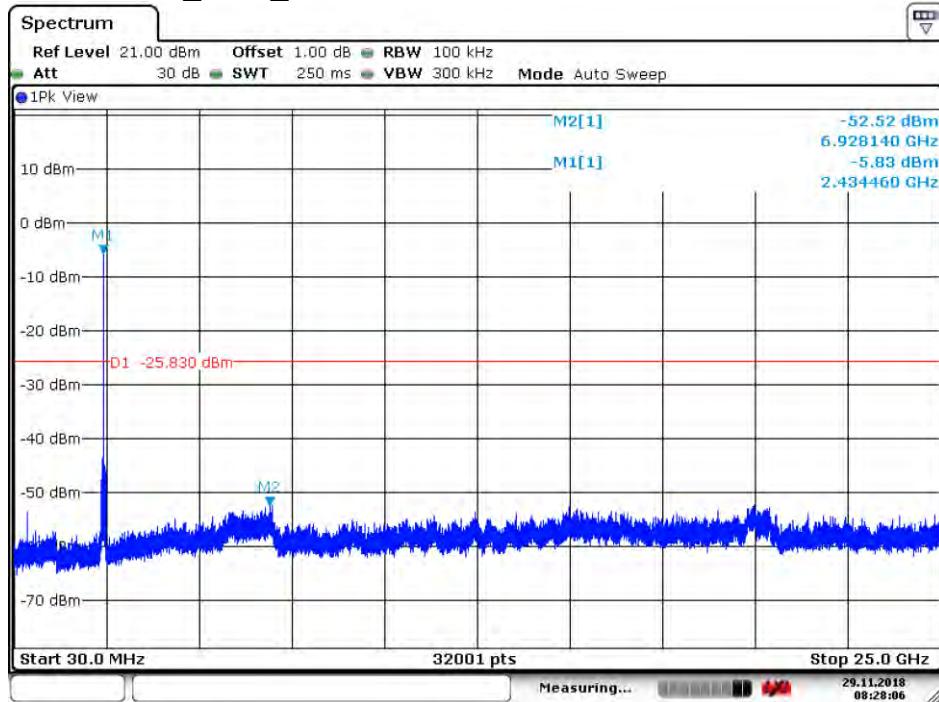
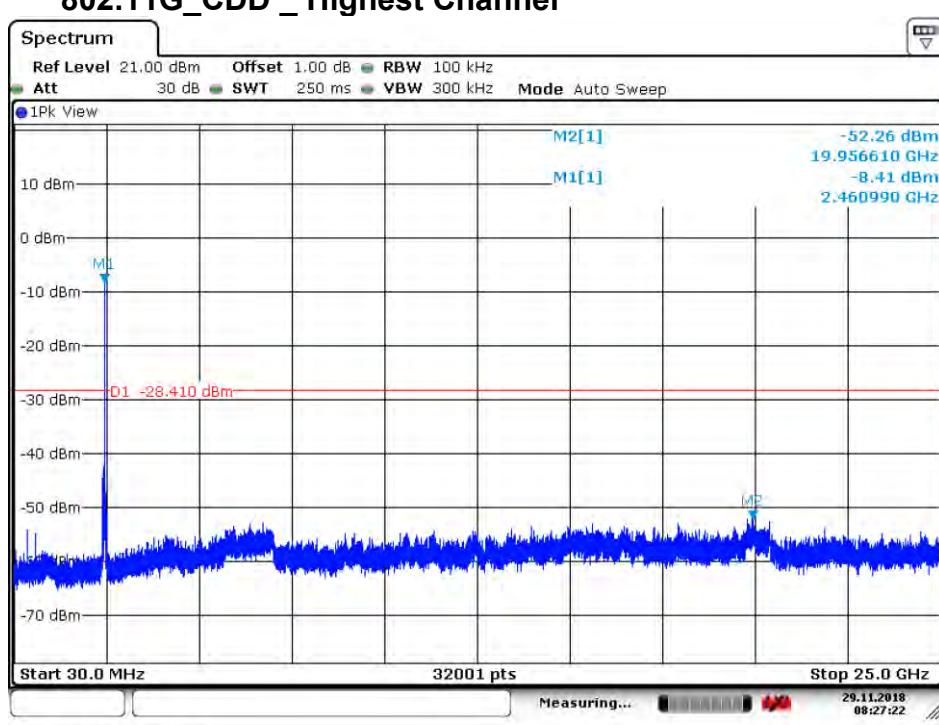
Date: 28.NOV.2018 07:55:57

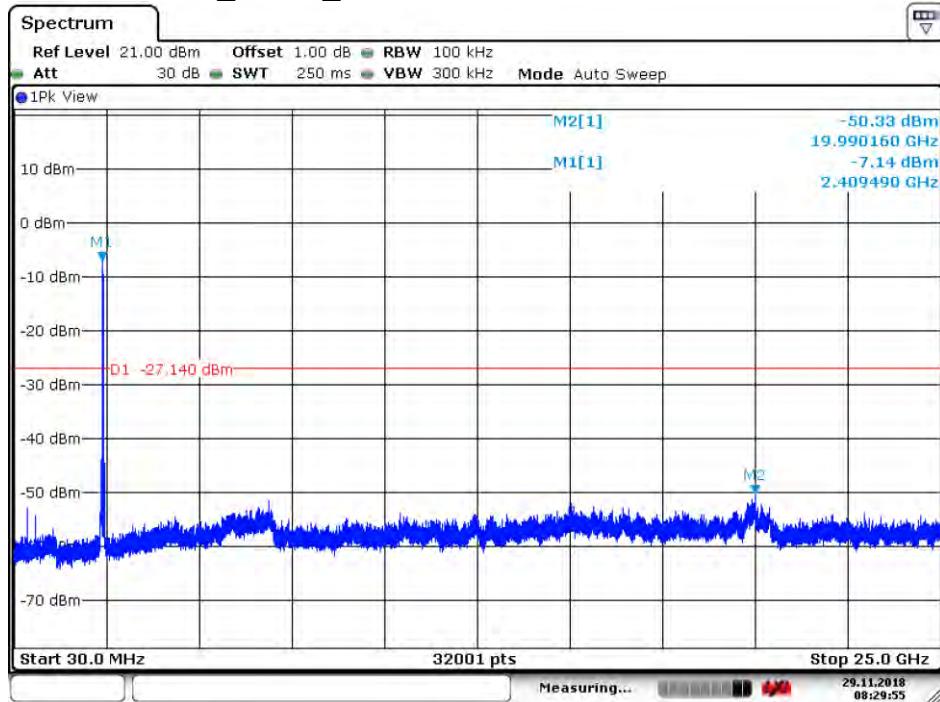
**4.8.1.1.9 802.11 N20\_Highest Channel**

Date: 28.NOV.2018 07:54:32

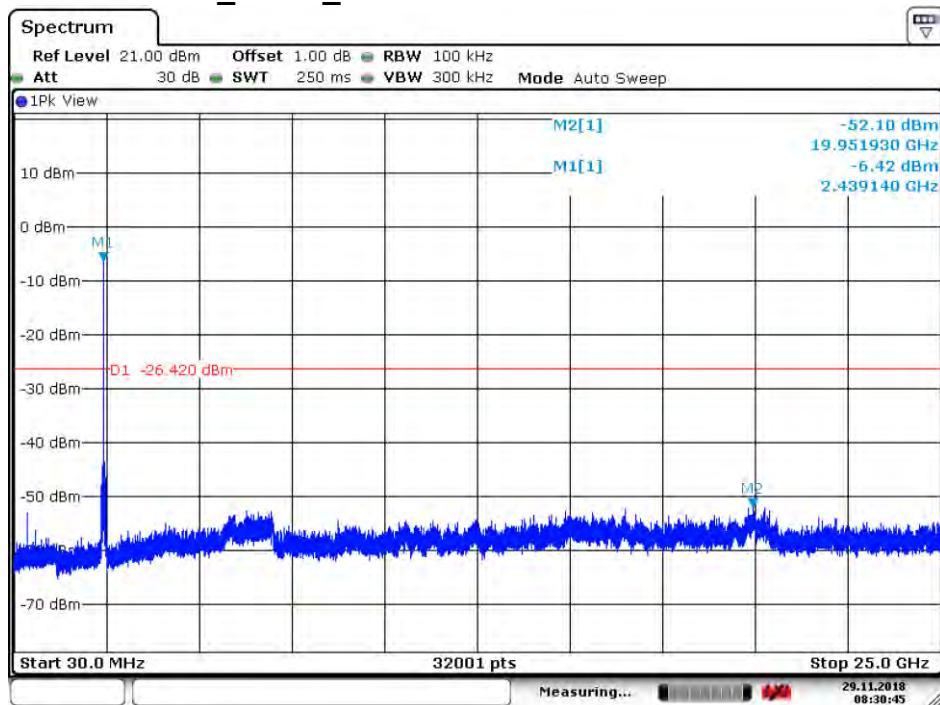
**4.8.1.1.10 802.11G\_CDD\_Lowest Channel**

Date: 29.NOV.2018 08:28:54

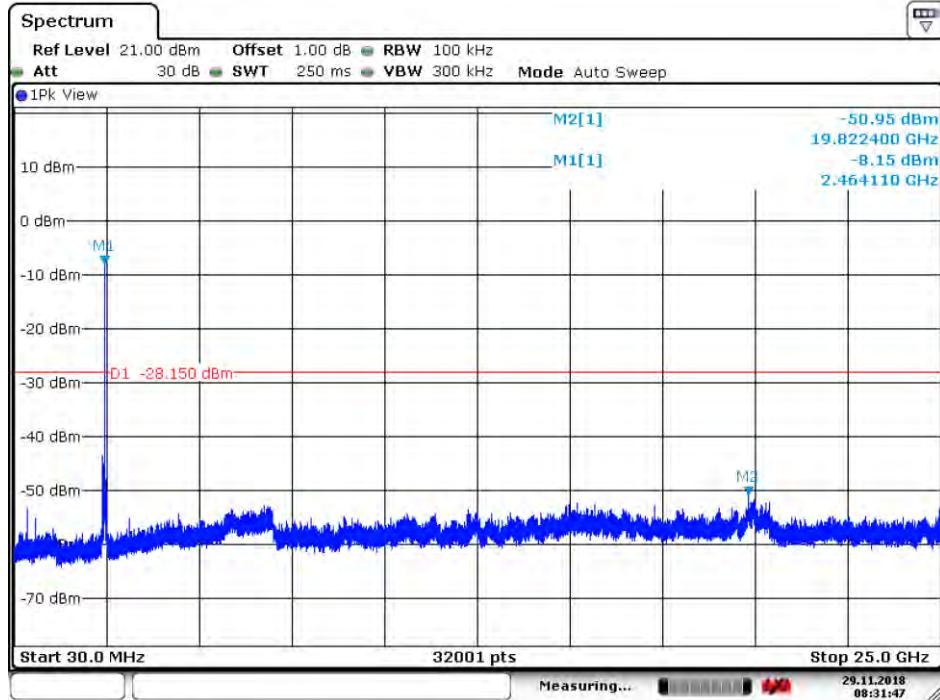
**4.8.1.1.11 802.11G\_CDD\_ Middle Channel****4.8.1.1.12 802.11G\_CDD \_ Highest Channel**

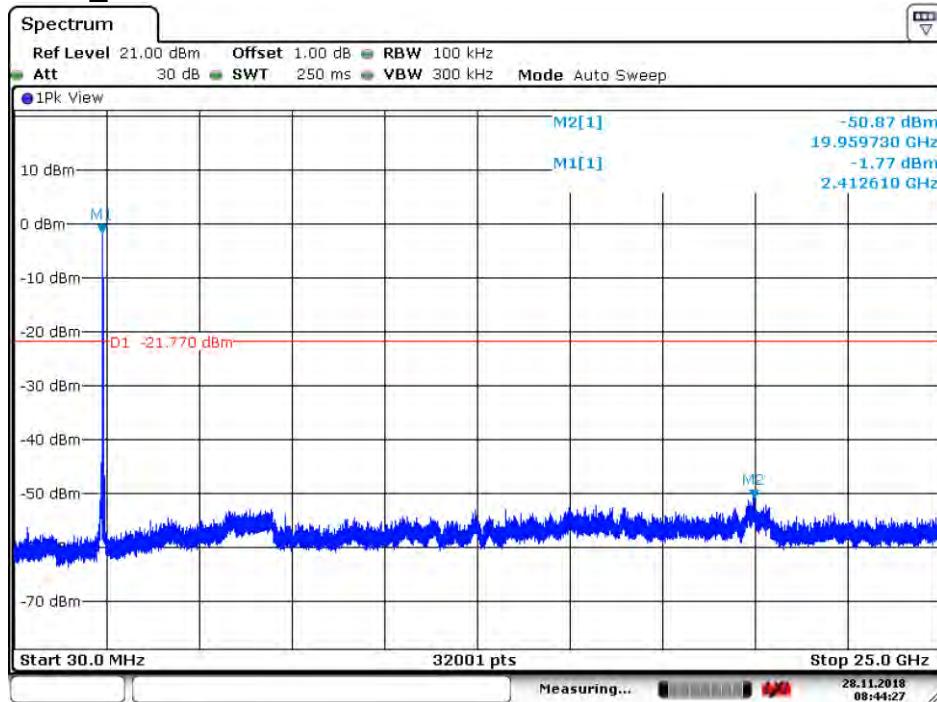
**4.8.1.1.13 802.11N20\_MIMO\_Lowest Channel**

Date: 29.NOV.2018 08:29:55

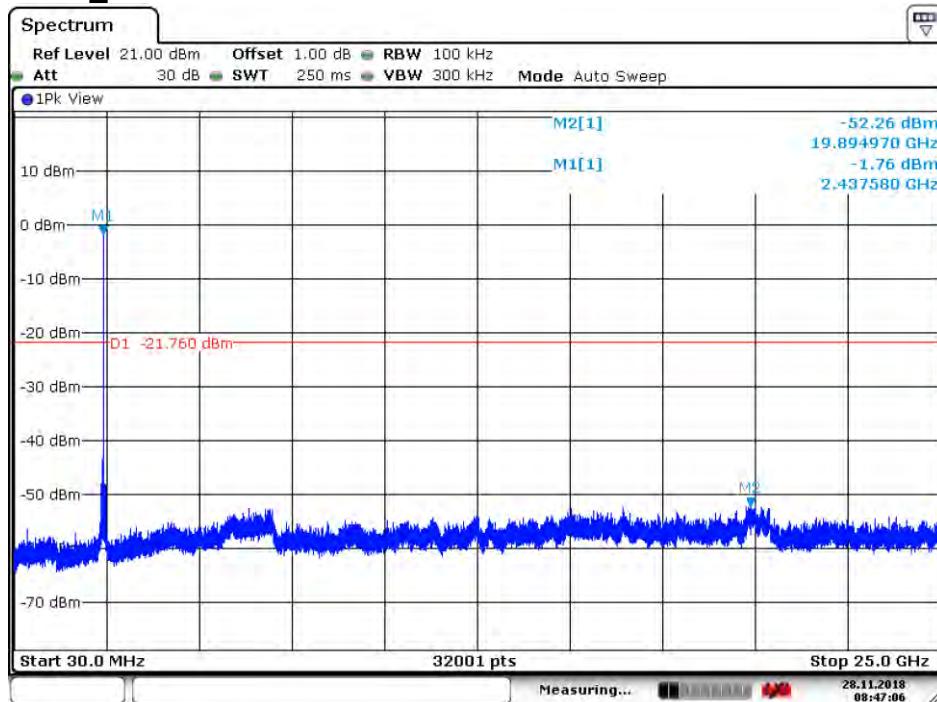
**4.8.1.1.14 802.11N20\_MIMO\_Middle Channel**

Date: 29.NOV.2018 08:30:45

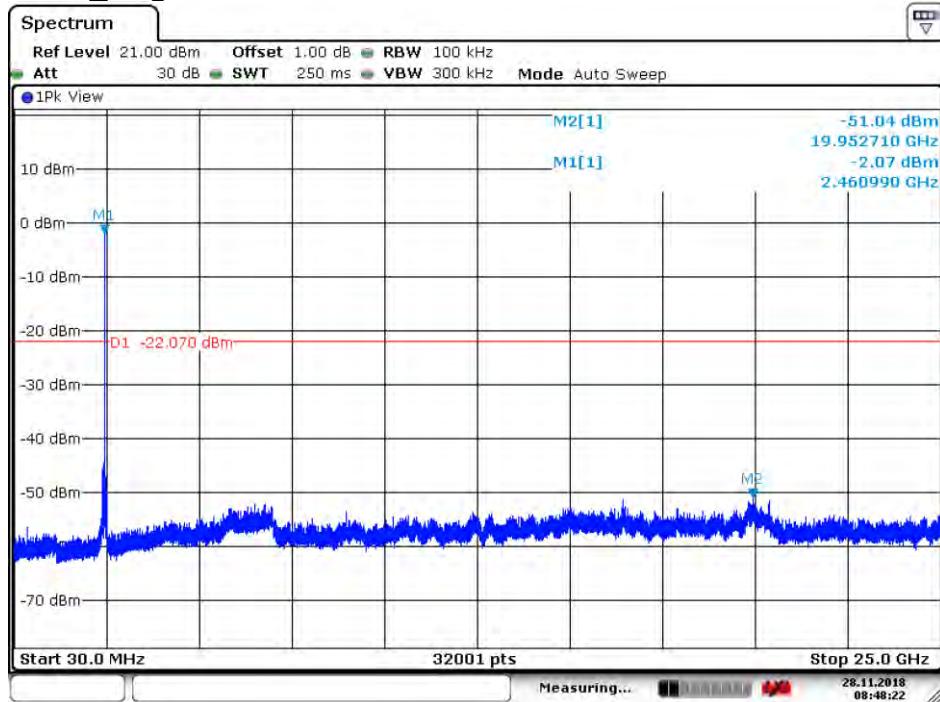
**4.8.1.1.15 802.11N20\_MIMO \_ Highest Channel**

**4.8.1.2 ANT2****4.8.1.2.1 802.11B\_Lowest Channel**

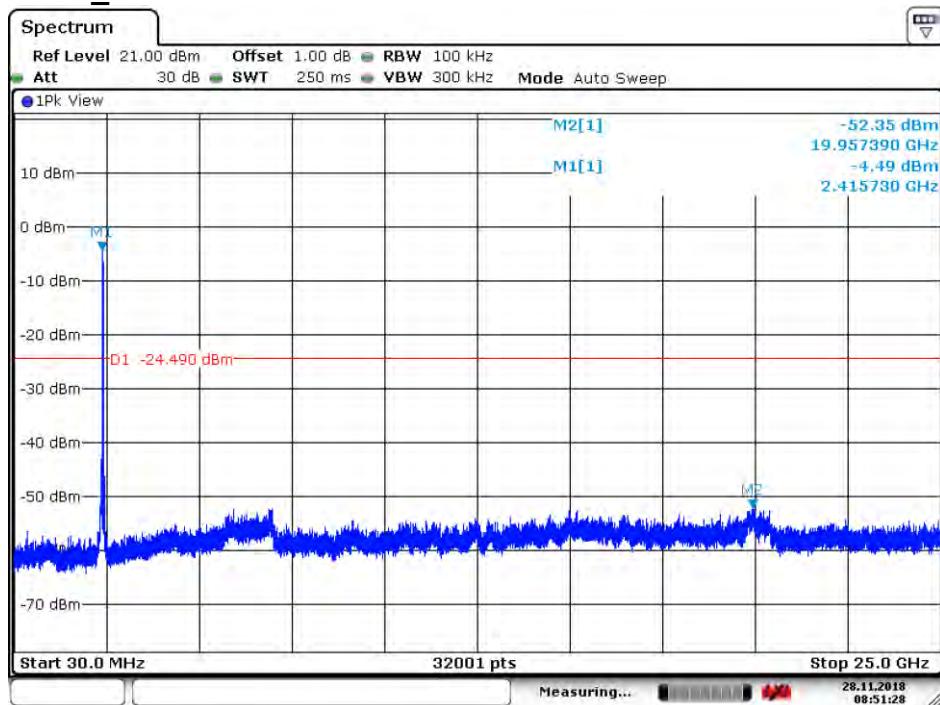
Date: 28.NOV.2018 08:44:28

**4.8.1.2.2 802.11B\_Middle Channel**

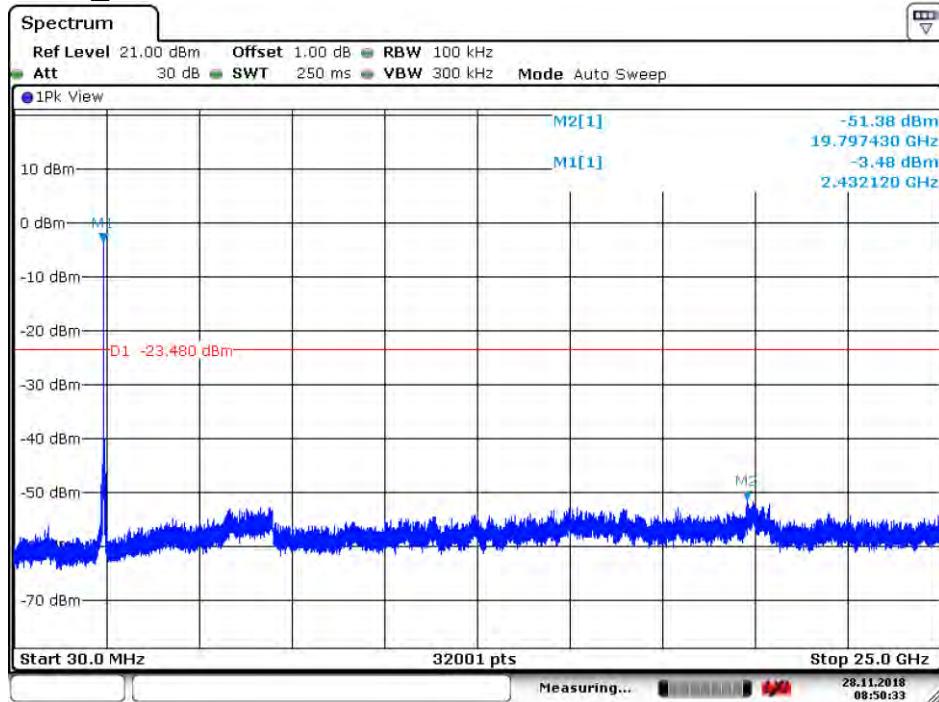
Date: 28.NOV.2018 08:47:06

**4.8.1.2.3 802.11B\_Highest Channel**

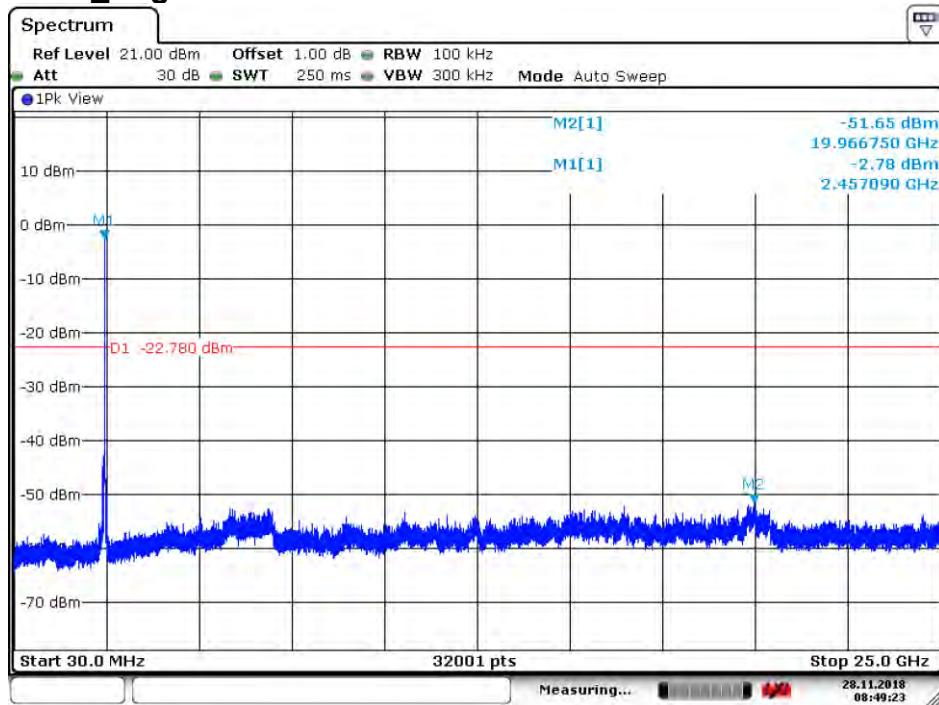
Date: 28.NOV.2018 08:48:22

**4.8.1.2.4 802.11G\_Lowest Channel**

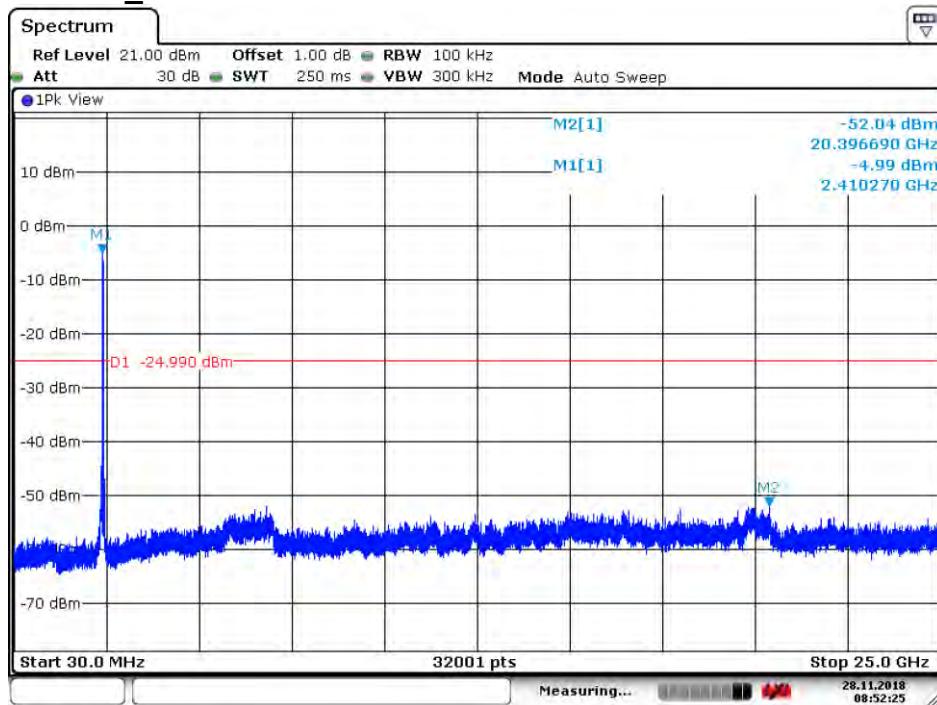
Date: 28.NOV.2018 08:51:29

**4.8.1.2.5 802.11G\_ Middle Channel**

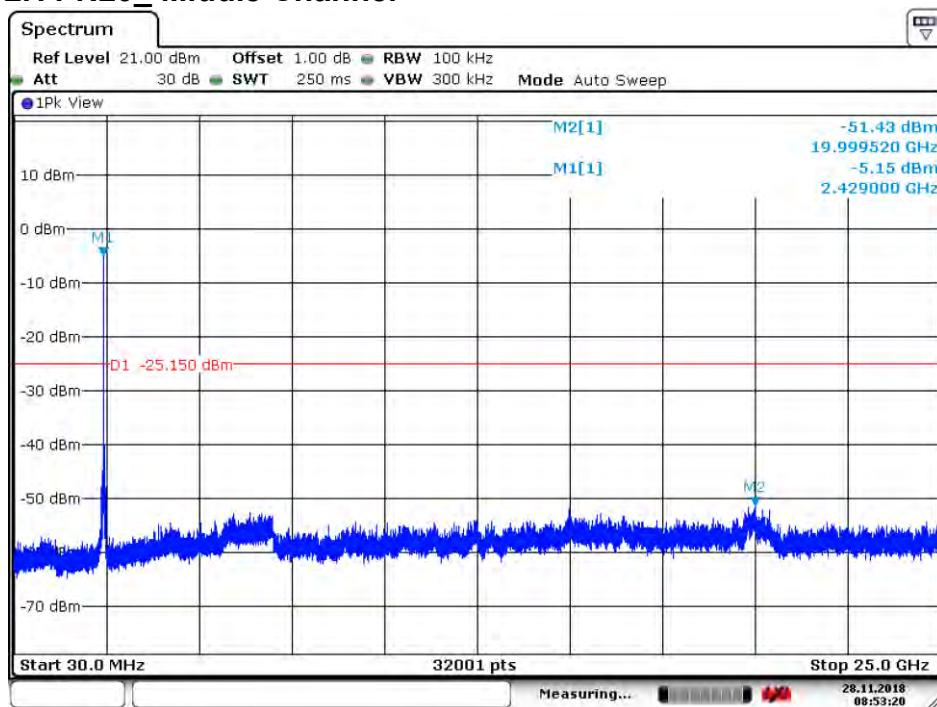
Date: 28.NOV.2018 08:50:34

**4.8.1.2.6 802.11G\_ Highest Channel**

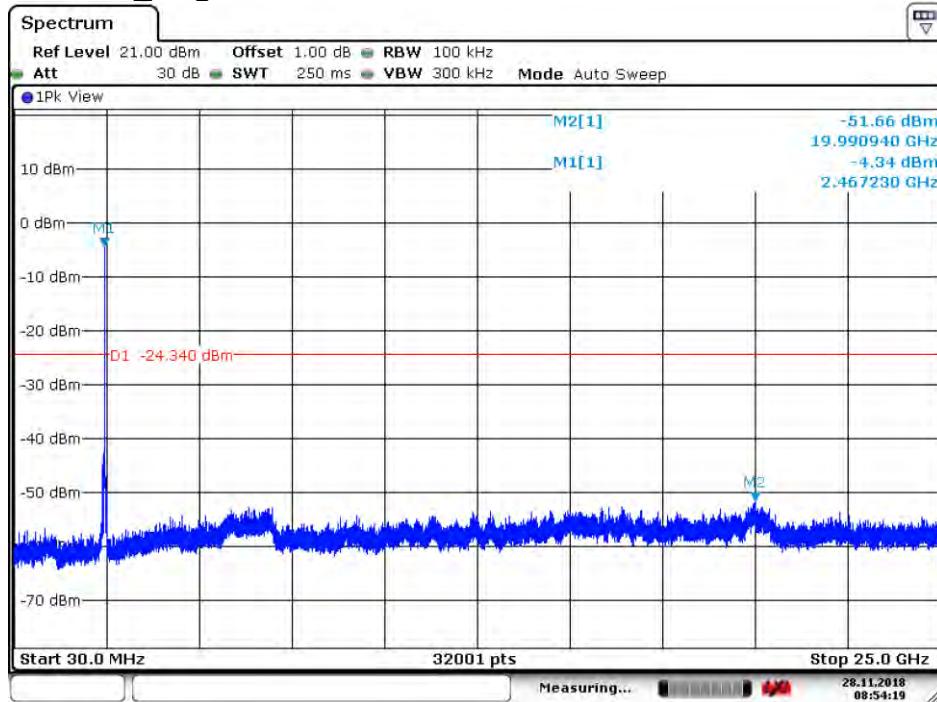
Date: 28.NOV.2018 08:49:23

**4.8.1.2.7 802.11N20\_Lowest Channel**

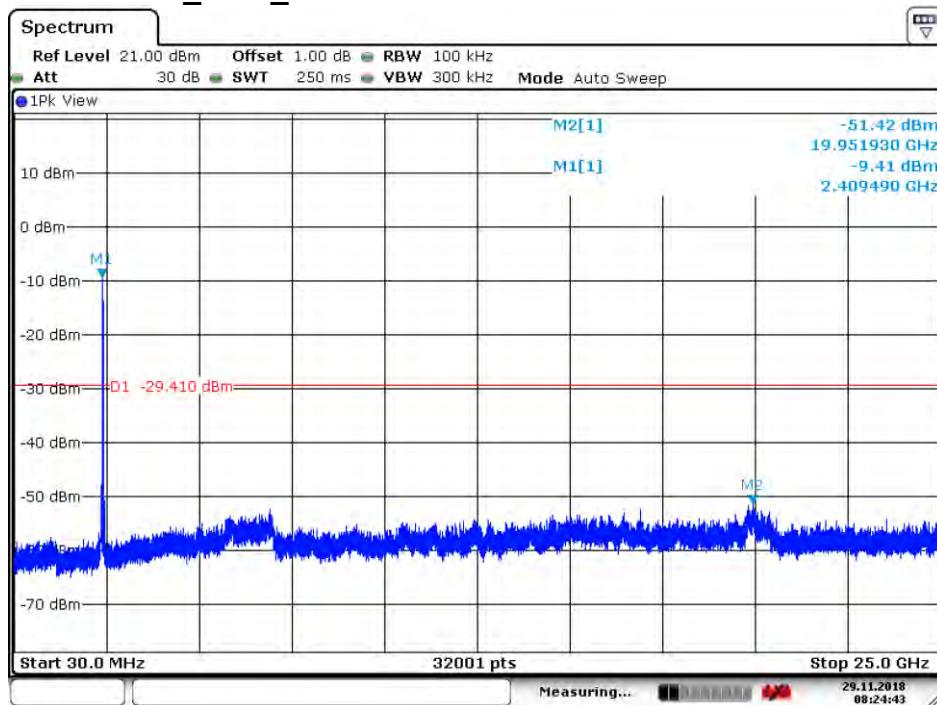
Date: 28.NOV.2018 08:52:25

**4.8.1.2.8 802.11 N20\_Middle Channel**

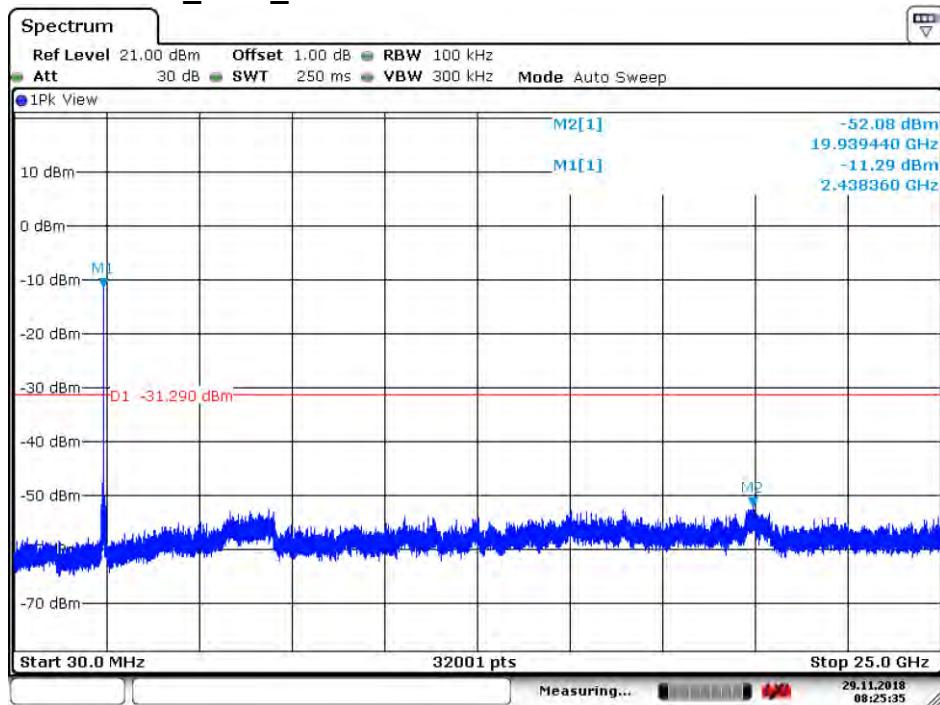
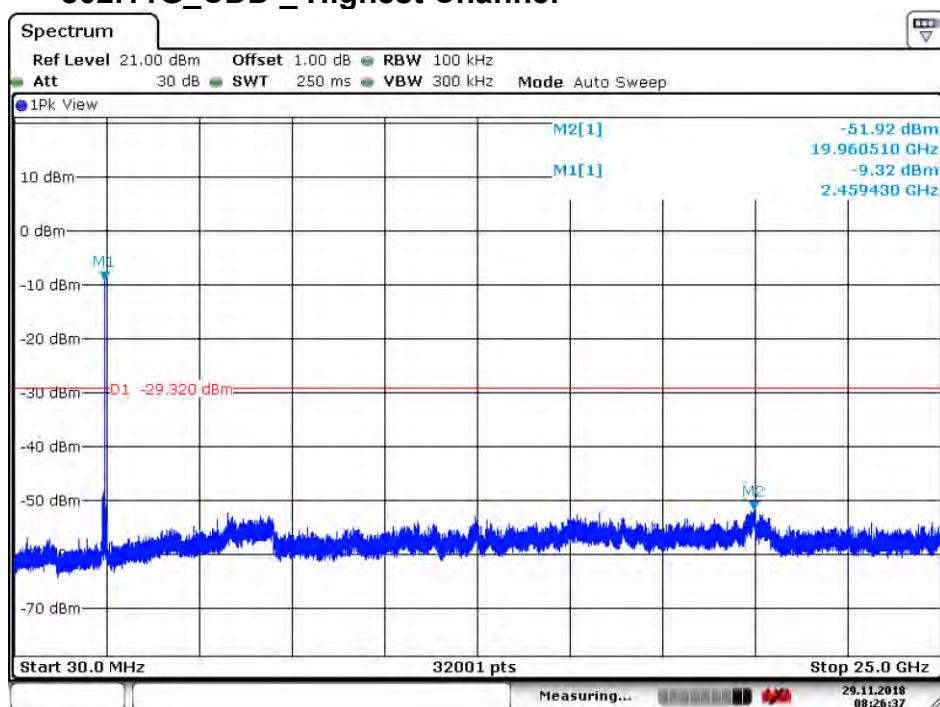
Date: 28.NOV.2018 08:53:21

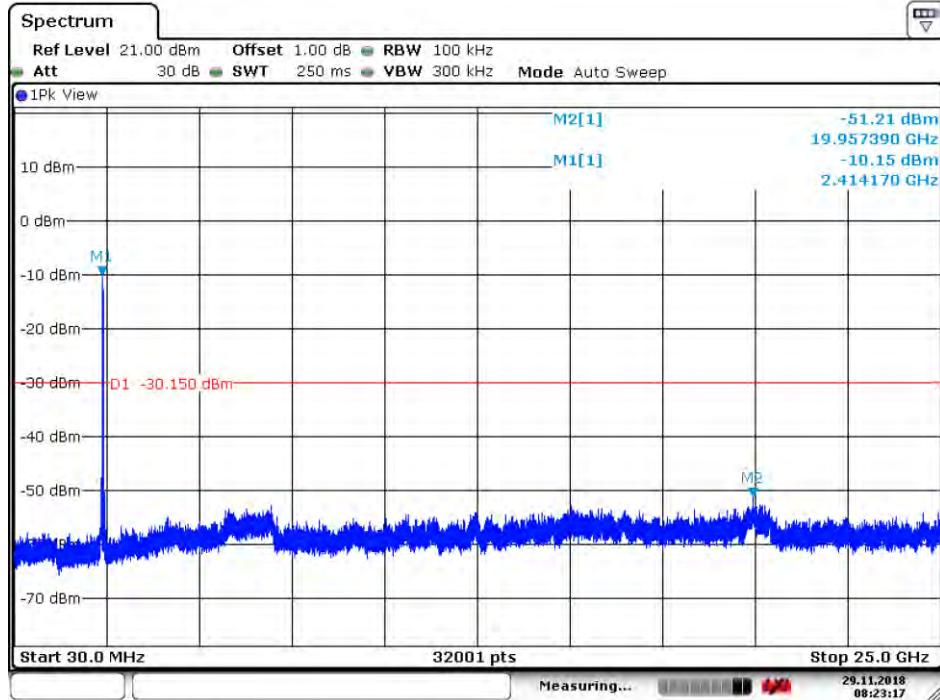
**4.8.1.2.9 802.11 N20\_Highest Channel**

Date: 28.NOV.2018 08:54:20

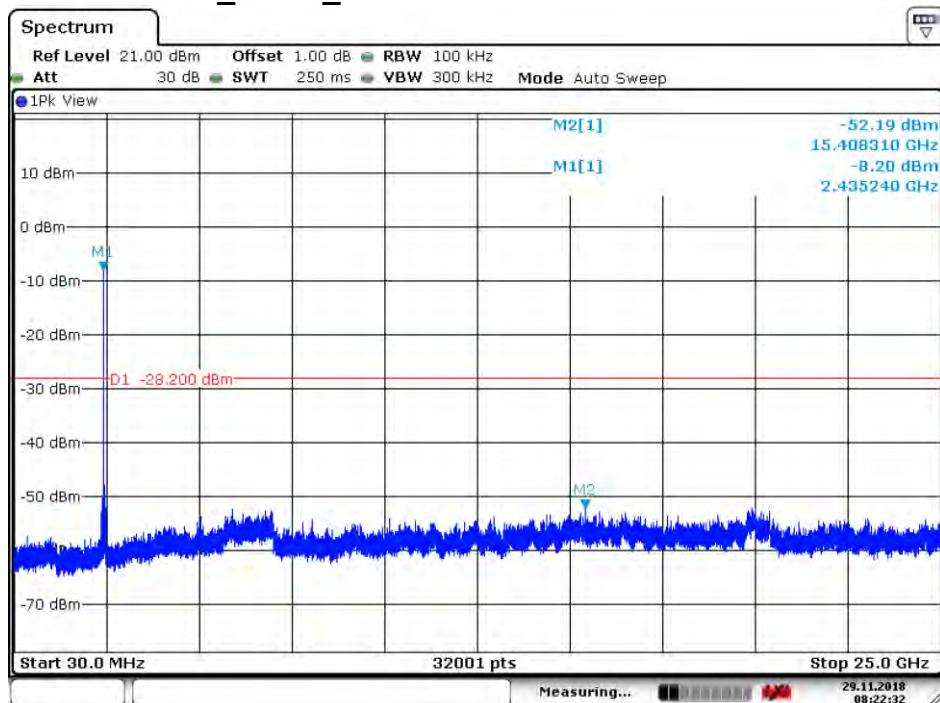
**4.8.1.2.10 802.11G\_CDD\_Lowest Channel**

Date: 29.NOV.2018 08:24:44

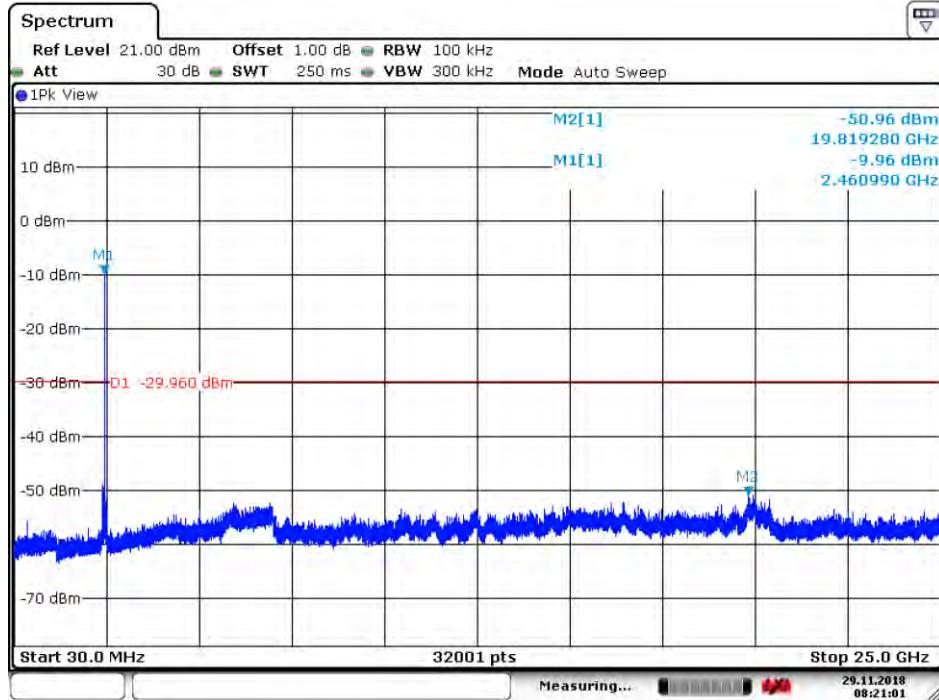
**4.8.1.2.11 802.11G\_CDD\_ Middle Channel****4.8.1.2.12 802.11G\_CDD \_ Highest Channel**

**4.8.1.2.13 802.11N20\_MIMO\_Lowest Channel**

Date: 29.NOV.2018 08:23:17

**4.8.1.2.14 802.11N20\_MIMO\_Middle Channel**

Date: 29.NOV.2018 08:22:32

**4.8.1.2.15 802.11N20\_MIMO \_ Highest Channel**

Date: 29.NOV.2018 08:21:01

**Remark:**

Scan from 9kHz to 25GHz, the disturbance between 9KHz to 30MHz was very low, and the above harmonics were the highest point could be found when testing, The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

## 4.9 Radiated Spurious Emissions

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205				
Test Method:	ANSI C63.10 :2013 Section 11.12				
Test Site:	Measurement Distance: 3m or 10m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	Remark: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.				

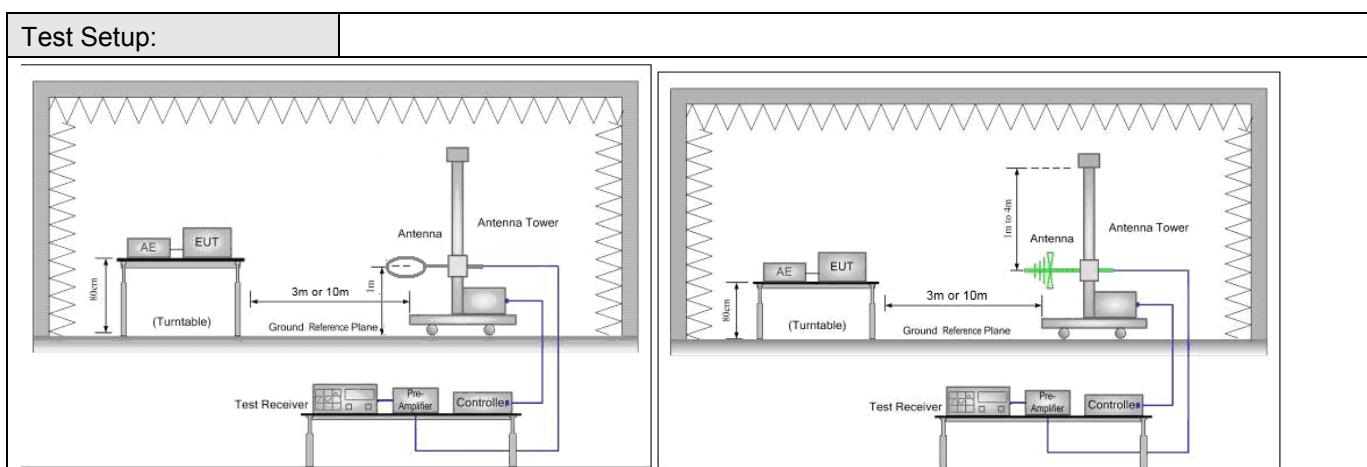


Figure 1. Below 30MHz

Figure 2. 30MHz to 1GHz

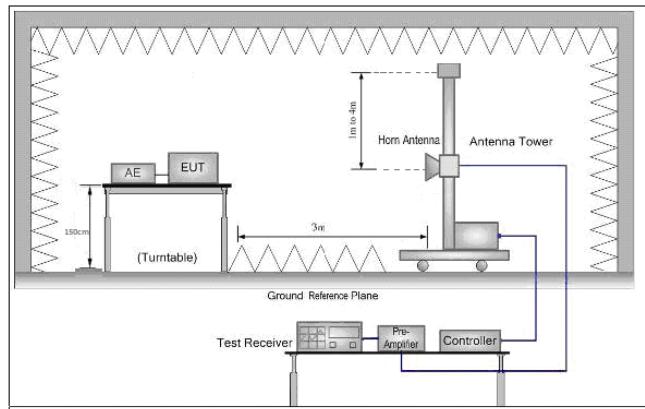
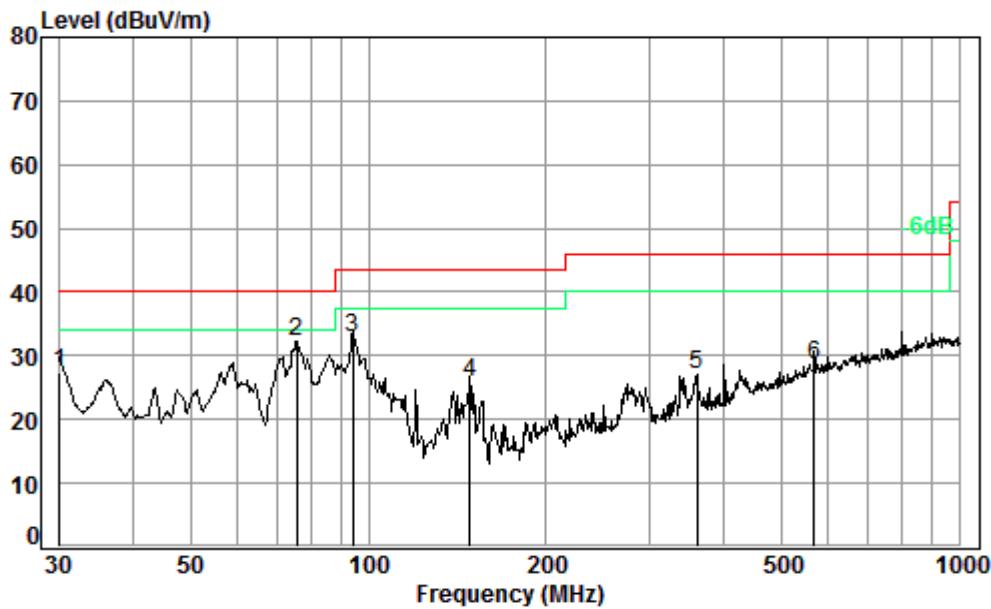


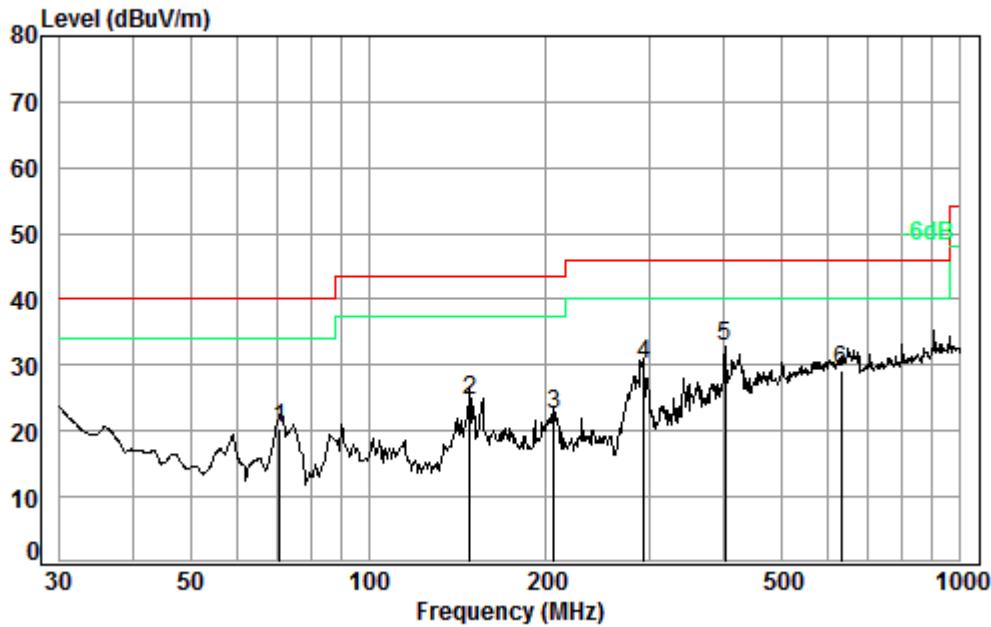
Figure 3. Above 1 GHz

Test Procedure:	<ol style="list-style-type: none"><li>For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</li><li>For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation</li><li>The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li><li>The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li><li>For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters(for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</li><li>The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li><li>If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li><li>Test the EUT in the lowest channel, the middle channel ,the Highest channel</li><li>The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case.</li><li>Repeat above procedures until all frequencies measured was complete.</li></ol>
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates. Charge + Transmitting mode.
Final Test Mode:	Pretest the EUT at Charge + Transmitting mode. Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11B; 6Mbps of rate is the worst case of 802.11G; 6.5Mbps of rate is the worst case of 802.11N(HT20); For below 1GHz, through Pre-scan, find the 1Mbps of rate of 802.11B at lowest channel is the worst case. Only the worst case is recorded in the report.
Instruments Used:	Refer to section 5.10 for details

Test Results:	Pass
---------------	------

**4.9.1 Radiated emission below 1GHz****4.9.1.1 Charge + Transmitting, Vertical**

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit		Over Limit
					Level	Line	
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m
1	30.11	0.60	22.44	27.67	31.92	27.29	40.00 -12.71
2 pp	75.71	0.97	12.33	27.51	46.48	32.27	40.00 -7.73
3	94.10	1.14	13.48	27.51	45.87	32.98	43.50 -10.52
4	148.44	1.31	14.49	27.52	37.48	25.76	43.50 -17.74
5	359.19	2.09	21.35	27.66	31.42	27.20	46.00 -18.80
6	566.62	2.67	25.97	27.76	27.74	28.62	46.00 -17.38

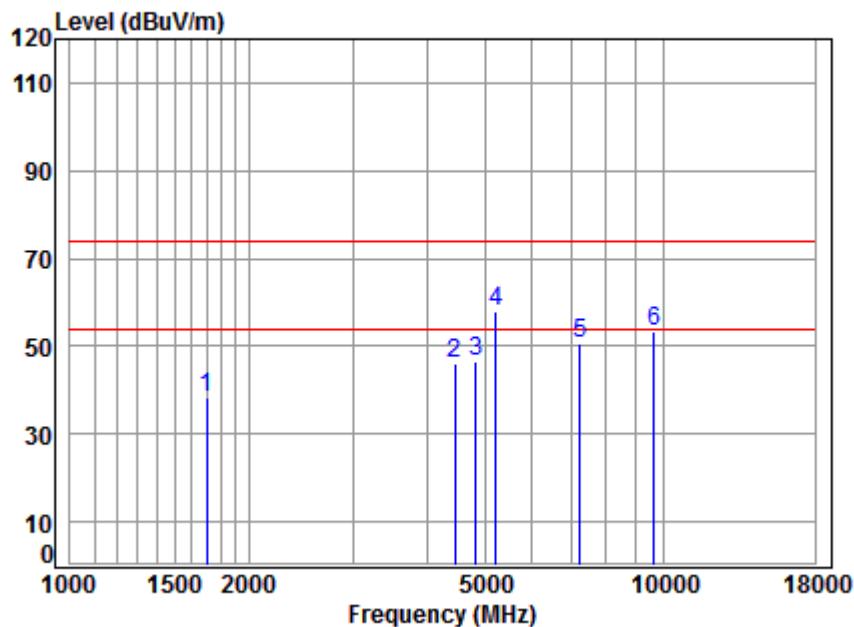
**4.9.1.2 Charge + Transmitting, Horizontal**

Condition: 3m HORIZONTAL

Job No. : 12745RG

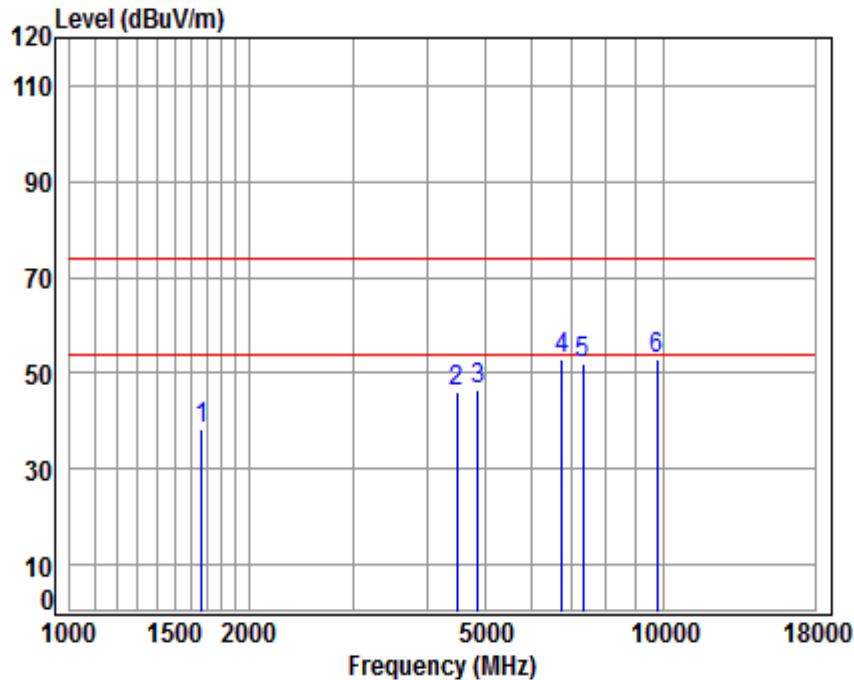
Test mode: a

Freq	Cable	Ant	Preamp	Read	Limit	Line	Over	
	Loss	Factor	Factor	Level				
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	70.83	0.82	12.73	27.53	34.50	20.52	40.00	-19.48
2	148.44	1.31	14.49	27.52	36.30	24.58	43.50	-18.92
3	205.68	1.43	16.71	27.53	31.96	22.57	43.50	-20.93
4	292.06	1.87	19.29	27.54	36.41	30.03	46.00	-15.97
5 pp	400.43	2.20	22.41	27.73	35.83	32.71	46.00	-13.29
6	629.48	2.76	27.00	27.65	27.24	29.35	46.00	-16.65

**4.9.2 Transmitter emission above 1GHz****4.9.2.1 ANT1****4.9.2.1.1 802.11B\_Lowest Channel\_Peak\_Virtual**

Site : chamber  
Condition: 3m VERTICAL  
Job No : 12745RG  
Mode : 2412 Band edge  
Note : 2.4G WIFI 11B  
: ANT1

	Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1697.129	5.23	26.66	40.83	47.10	38.16	74.00	-35.84 peak
2	4456.315	7.51	33.53	43.26	48.24	46.02	74.00	-27.98 peak
3	4824.000	7.91	34.00	43.63	48.09	46.37	74.00	-27.63 peak
4	5224.153	8.44	34.38	43.57	58.49	57.74	74.00	-16.26 peak
5	7236.000	10.07	36.09	41.83	46.12	50.45	74.00	-23.55 peak
6	9648.000	10.77	37.69	38.36	43.46	53.56	74.00	-20.44 peak

**4.9.2.1.2 802.11B\_ Middle Channel\_ Peak\_ Vertical**

Site : chamber

Condition: 3m VERTICAL

Job No : 12745RG

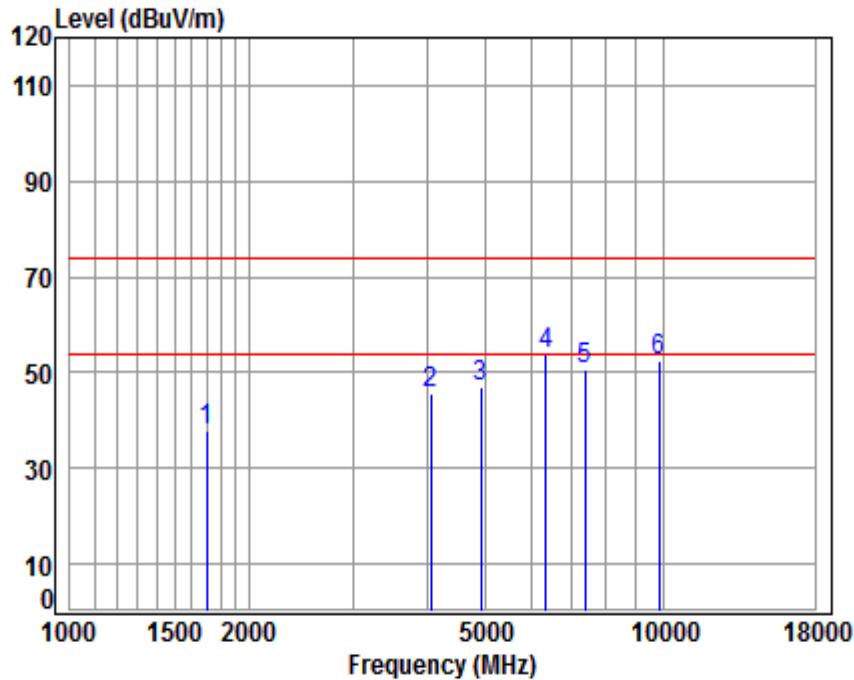
Mode : 2437 Band edge

Note : 2.4G WIFI 11B

: ANT1

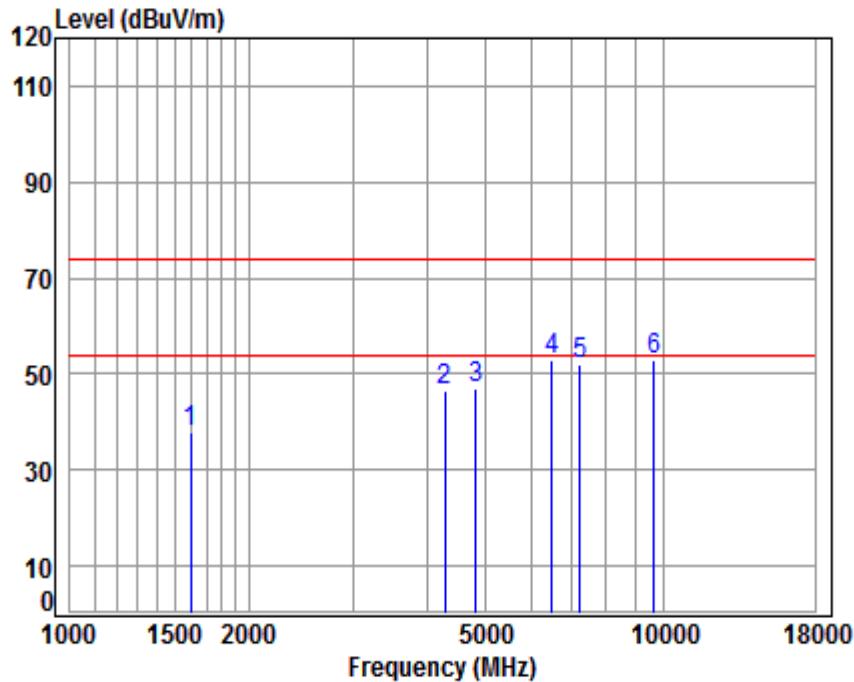
	Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line Level	Over Line	Over Limit	Remark
--	---------------	-------------	------------------	---------------	----------------	---------------	--------------	---------------	--------

	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1667.951	5.27	26.54	40.81	47.33	38.33	74.00	-35.67	peak
2	4482.150	7.54	33.57	43.29	48.39	46.21	74.00	-27.79	peak
3	4874.000	7.96	34.05	43.68	48.30	46.63	74.00	-27.37	peak
4	6737.207	10.86	35.75	42.21	48.54	52.94	74.00	-21.06	peak
5	7311.000	10.05	36.15	41.78	47.59	52.01	74.00	-21.99	peak
6	9748.000	10.82	37.75	38.20	42.46	52.83	74.00	-21.17	peak

**4.9.2.1.3 802.11B\_Highest Channel\_Peak\_Verical**

Site : chamber  
Condition: 3m VERTICAL  
Job No : 12745RG  
Mode : 2462 Band edge  
Note : 2.4G WIFI 11B  
: ANT1

	Cable Freq	Loss MHz	Ant Factor	Preamp Factor	Read Level dB	Limit Level dBuV	Line Level dBuV/m	Over Line dBuV/m	Over Limit dB	Over Remark
1	1702.042	5.23	26.68	40.83	47.00	38.08	74.00	-35.92	peak	
2	4062.629	7.06	32.82	42.82	48.59	45.65	74.00	-28.35	peak	
3	4924.000	8.01	34.11	43.73	48.78	47.17	74.00	-26.83	peak	
4	6340.436	11.24	35.44	42.54	49.81	53.95	74.00	-20.05	peak	
5	7386.000	10.03	36.21	41.72	46.12	50.64	74.00	-23.36	peak	
6	9848.000	10.87	37.81	38.04	41.99	52.63	74.00	-21.37	peak	

**4.9.2.1.4 802.11B\_Lowest Channel\_ Peak\_ Horizontal**

Site : chamber

Condition: 3m HORIZONTAL

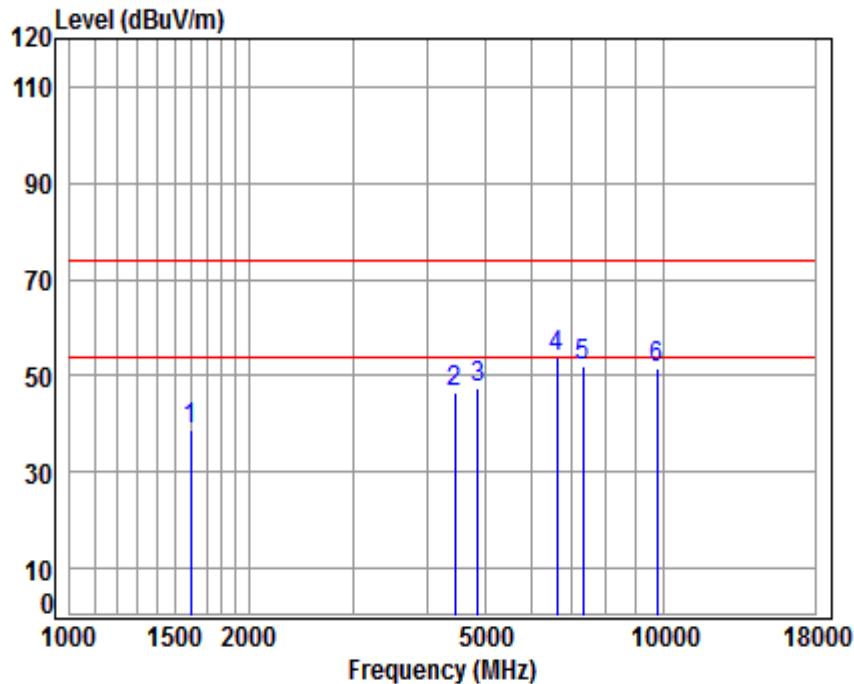
Job No : 12745RG

Mode : 2412 Band edge

Note : 2.4G WIFI 11B

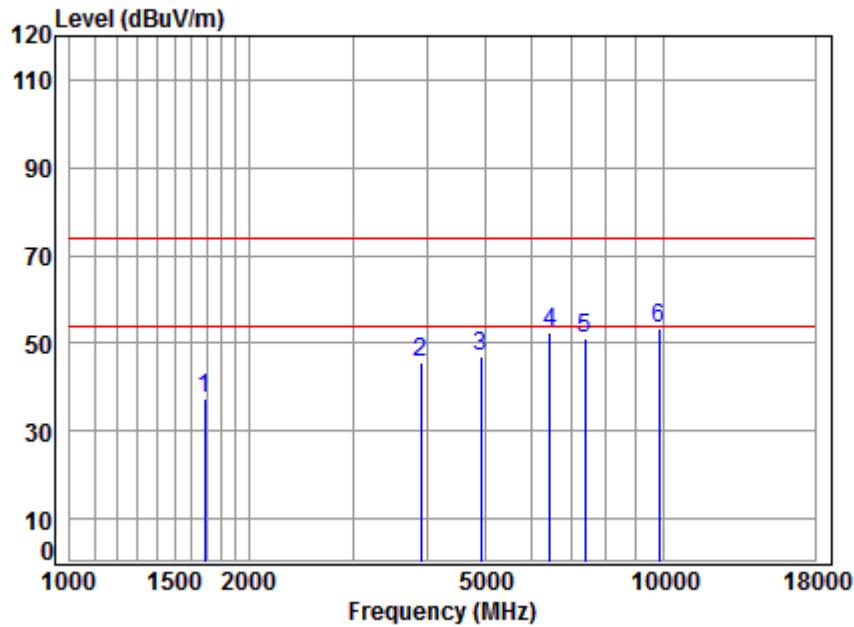
: ANT1

	Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1597.181	5.35	26.24	40.77	46.97	37.79	74.00	-36.21 peak
2	4279.589	7.31	33.22	43.07	49.02	46.48	74.00	-27.52 peak
3	4824.000	7.91	34.00	43.63	48.84	47.12	74.00	-26.88 peak
4	6488.754	11.52	35.59	42.41	48.32	53.02	74.00	-20.98 peak
5	7236.000	10.07	36.09	41.83	47.83	52.16	74.00	-21.84 peak
6	9648.000	10.77	37.69	38.36	42.92	53.02	74.00	-20.98 peak

**4.9.2.1.5 802.11B\_ Middle Channel\_ Peak\_ Horizontal**

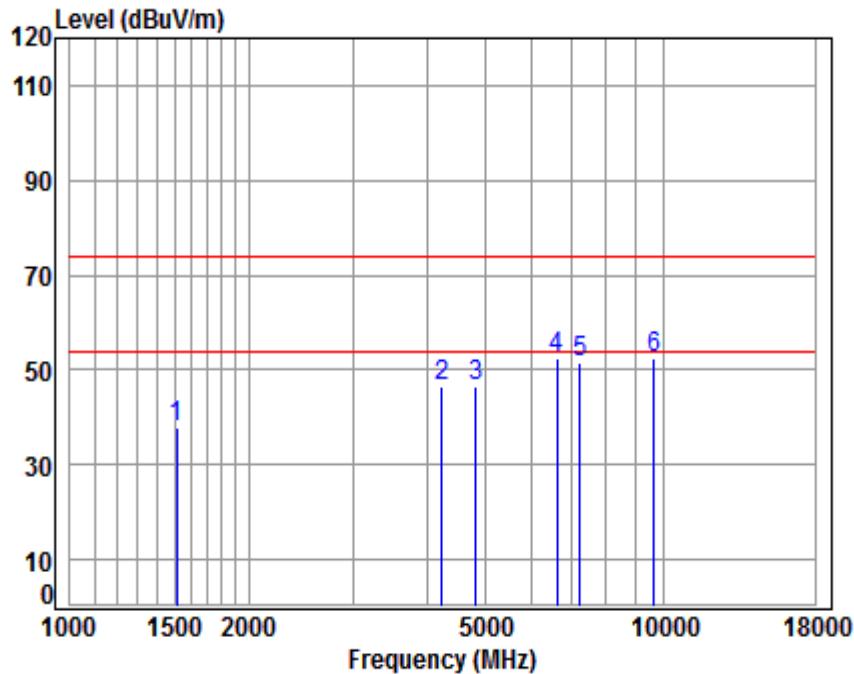
Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 12745RG  
Mode : 2437 Band edge  
Note : 2.4G WIFI 11B  
: ANT1

	Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1597.181	5.35	26.24	40.77	47.97	38.79	74.00	-35.21 peak
2	4456.315	7.51	33.53	43.26	48.83	46.61	74.00	-27.39 peak
3	4874.000	7.96	34.05	43.68	49.09	47.42	74.00	-26.58 peak
4	6621.375	11.19	35.67	42.31	49.15	53.70	74.00	-20.30 peak
5	7311.000	10.05	36.15	41.78	47.40	51.82	74.00	-22.18 peak
6	9748.000	10.82	37.75	38.20	41.24	51.61	74.00	-22.39 peak

**4.9.2.1.6 802.11B\_Highest Channel\_Peak\_Horizontal**

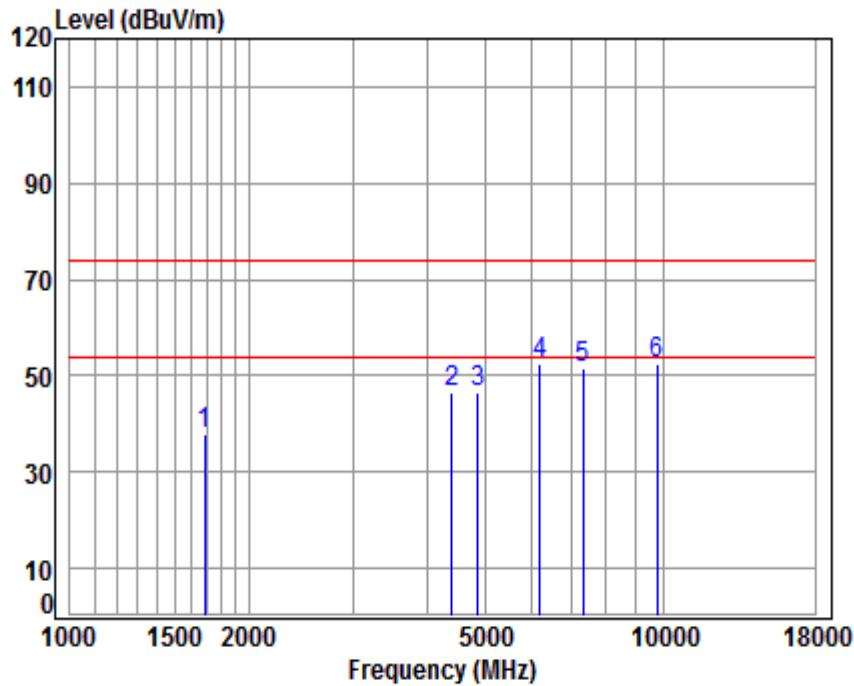
Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 12745RG  
Mode : 2462 Band edge  
Note : 2.4G WIFI 11B  
: ANT1

	Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark
		Loss	Factor	Factor	Level			
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1687.347	5.24	26.62	40.82	46.56	37.60	74.00	-36.40 peak
2	3901.516	6.88	32.51	42.63	49.02	45.78	74.00	-28.22 peak
3	4924.000	8.01	34.11	43.73	48.43	46.82	74.00	-27.18 peak
4	6451.353	11.45	35.55	42.44	48.12	52.68	74.00	-21.32 peak
5	7386.000	10.03	36.21	41.72	46.49	51.01	74.00	-22.99 peak
6	9848.000	10.87	37.81	38.04	42.83	53.47	74.00	-20.53 peak

**4.9.2.1.7 802.11G\_Lowest Channel\_ Peak\_ Vertical**

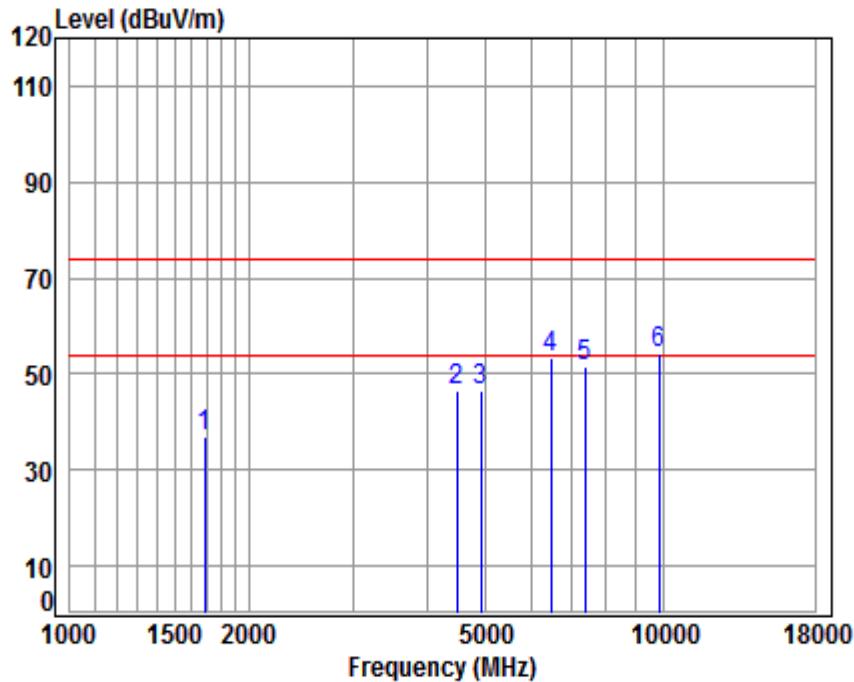
Site : chamber  
Condition: 3m VERTICAL  
Job No : 12745RG  
Mode : 2412 Band edge  
Note : 2.4G WIFI 11G  
: ANT1

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level		Limit Line	Over Limit	Remark
				dB	dB/m			
1 1511.833	5.46	25.85	40.71	47.34	37.94	74.00	-36.06	peak
2 4230.396	7.26	33.13	43.01	49.16	46.54	74.00	-27.46	peak
3 4824.000	7.91	34.00	43.63	48.48	46.76	74.00	-27.24	peak
4 6621.375	11.19	35.67	42.31	48.00	52.55	74.00	-21.45	peak
5 7236.000	10.07	36.09	41.83	47.36	51.69	74.00	-22.31	peak
6 9648.000	10.77	37.69	38.36	42.40	52.50	74.00	-21.50	peak

**4.9.2.1.8 802.11G\_ Middle Channel\_ Peak\_ Vertical**

Site : chamber  
Condition: 3m VERTICAL  
Job No : 12745RG  
Mode : 2437 Band edge  
Note : 2.4G WIFI 11G  
: ANT1

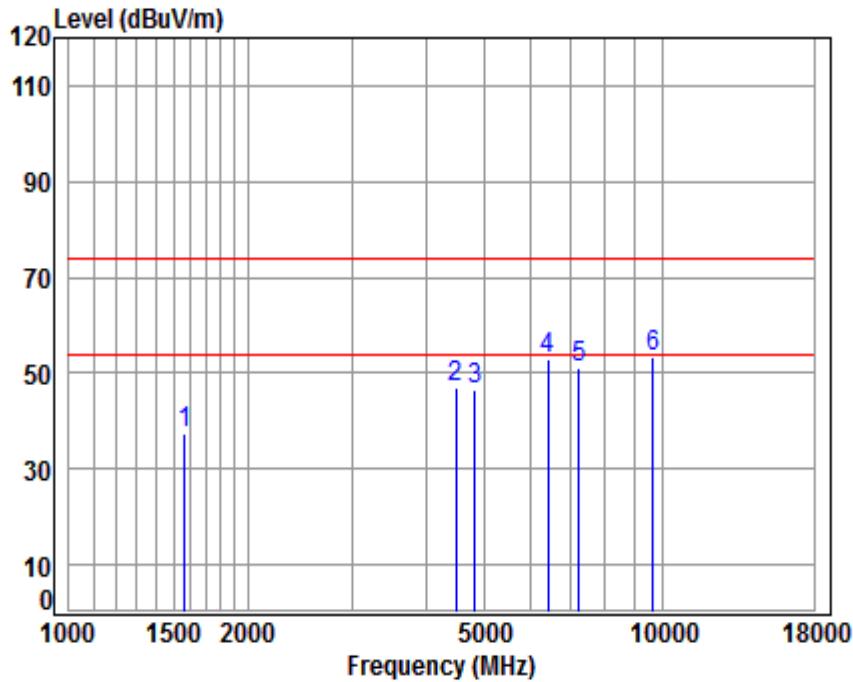
	Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1687.347	5.24	26.62	40.82	47.01	38.05	74.00	-35.95 peak
2	4405.090	7.46	33.44	43.20	48.85	46.55	74.00	-27.45 peak
3	4874.000	7.96	34.05	43.68	48.20	46.53	74.00	-27.47 peak
4	6195.508	10.96	35.30	42.66	49.00	52.60	74.00	-21.40 peak
5	7311.000	10.05	36.15	41.78	47.01	51.43	74.00	-22.57 peak
6	9748.000	10.82	37.75	38.20	42.14	52.51	74.00	-21.49 peak

**4.9.2.1.9 802.11G\_Highest Channel\_Peak\_Verical**

Site : chamber  
Condition: 3m VERTICAL  
Job No : 12745RG  
Mode : 2462 Band edge  
Note : 2.4G WIFI 11G  
: ANT1

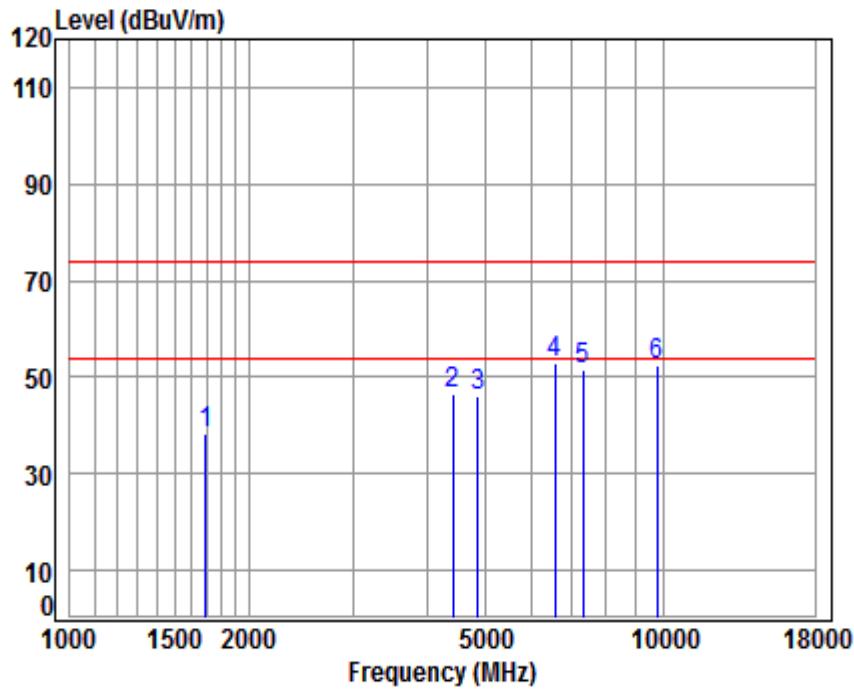
	Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line Level	Over Line	Over Limit	Remark
--	---------------	-------------	------------------	---------------	----------------	---------------	--------------	---------------	--------

	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1687.347	5.24	26.62	40.82	46.09	37.13	74.00	-36.87	peak
2	4482.150	7.54	33.57	43.29	48.66	46.48	74.00	-27.52	peak
3	4924.000	8.01	34.11	43.73	48.09	46.48	74.00	-27.52	peak
4	6470.026	11.48	35.57	42.43	48.89	53.51	74.00	-20.49	peak
5	7386.000	10.03	36.21	41.72	47.16	51.68	74.00	-22.32	peak
6	9848.000	10.87	37.81	38.04	43.50	54.14	74.00	-19.86	peak

**4.9.2.1.10 802.11G\_Lowest Channel\_Peak\_Horizontal**

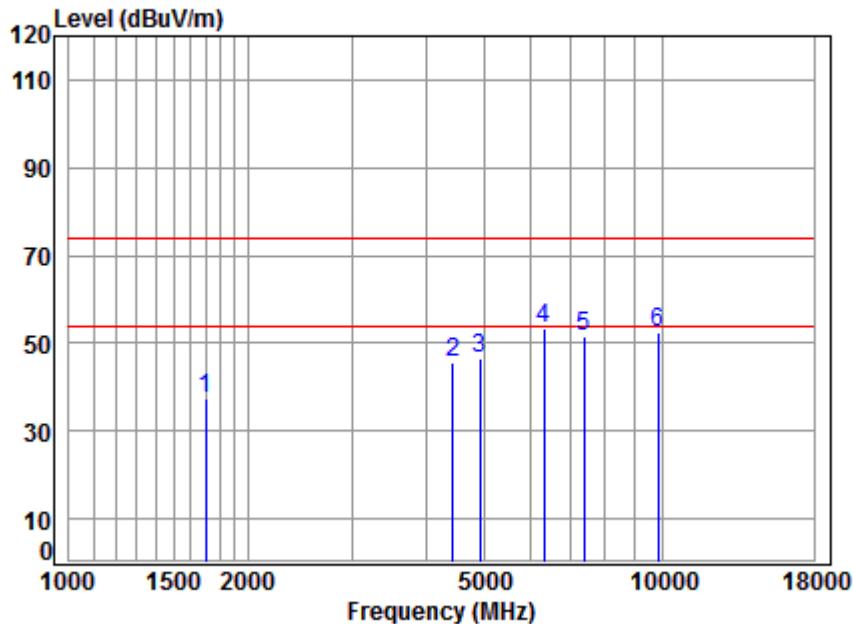
Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 12745RG  
Mode : 2412 Band edge  
Note : 2.4G WIFI 11G  
: ANT1

	Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line Level	Over Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1569.721	5.39	26.12	40.75	46.60	37.36	74.00	-36.64	peak
2	4495.125	7.55	33.59	43.30	49.28	47.12	74.00	-26.88	peak
3	4824.000	7.91	34.00	43.63	48.48	46.76	74.00	-27.24	peak
4	6414.167	11.38	35.52	42.48	48.34	52.76	74.00	-21.24	peak
5	7236.000	10.07	36.09	41.83	46.90	51.23	74.00	-22.77	peak
6	9648.000	10.77	37.69	38.36	43.41	53.51	74.00	-20.49	peak

**4.9.2.1.11 802.11G\_Middle Channel\_Peak\_Horizontal**

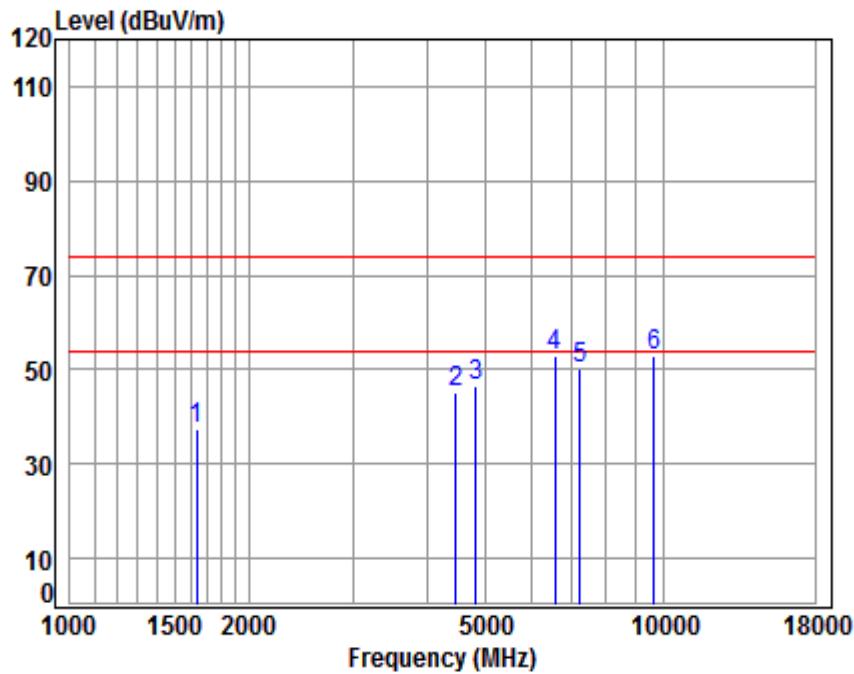
Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 12745RG  
Mode : 2437 Band edge  
Note : 2.4G WIFI 11G  
: ANT1

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level		Limit Line	Over Limit	Remark
				dB	dBuV			
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1692.231	5.24	26.64	40.83	47.27	38.32	74.00	-35.68 peak
2	4417.841	7.47	33.46	43.22	48.77	46.48	74.00	-27.52 peak
3	4874.000	7.96	34.05	43.68	47.94	46.27	74.00	-27.73 peak
4	6564.209	11.35	35.64	42.35	48.22	52.86	74.00	-21.14 peak
5	7311.000	10.05	36.15	41.78	47.09	51.51	74.00	-22.49 peak
6	9748.000	10.82	37.75	38.20	41.94	52.31	74.00	-21.69 peak

**4.9.2.1.12 802.11G\_Highest Channel\_Peak\_Horizontal**

Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 12745RG  
Mode : 2462 Band edge  
Note : 2.4G WIFI 11G  
: ANT1

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark
	Loss	Factor	Factor	Level			
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1697.129	5.23	26.66	40.83	46.25	37.31	74.00	-36.69 peak
2 4430.628	7.48	33.48	43.23	47.96	45.69	74.00	-28.31 peak
3 4924.000	8.01	34.11	43.73	48.11	46.50	74.00	-27.50 peak
4 6322.136	11.20	35.43	42.55	49.46	53.54	74.00	-20.46 peak
5 7386.000	10.03	36.21	41.72	47.03	51.55	74.00	-22.45 peak
6 9848.000	10.87	37.81	38.04	41.75	52.39	74.00	-21.61 peak

**4.9.2.1.13 802.11N20\_Lowest Channel\_Peak\_Verical**

Site : chamber

Condition: 3m VERTICAL

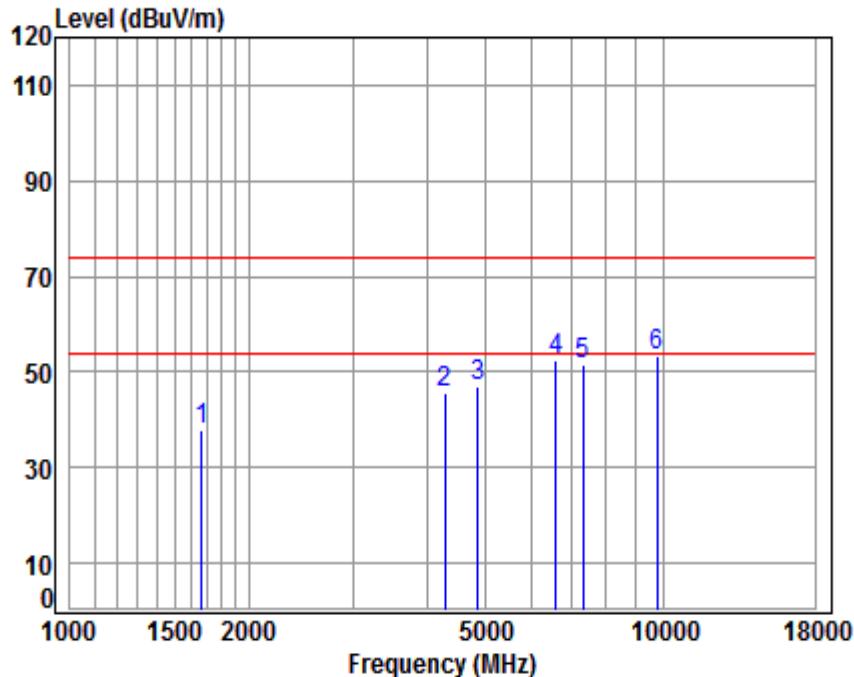
Job No : 12745RG

Mode : 2412 Band edge

Note : 2.4G WIFI 11N20

: ANT1

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Line	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	1634.543	5.31	26.40	40.79	46.57	37.49	74.00	74.00	-36.51	peak	
2	4469.214	7.53	33.55	43.27	47.56	45.37	74.00	74.00	-28.63	peak	
3	4824.000	7.91	34.00	43.63	48.24	46.52	74.00	74.00	-27.48	peak	
4	6564.209	11.35	35.64	42.35	48.29	52.93	74.00	74.00	-21.07	peak	
5	7236.000	10.07	36.09	41.83	45.86	50.19	74.00	74.00	-23.81	peak	
6	9648.000	10.77	37.69	38.36	42.70	52.80	74.00	74.00	-21.20	peak	

**4.9.2.1.14 802.11N20\_ Middle Channel\_ Peak\_ Vertical**

Site : chamber

Condition: 3m VERTICAL

Job No : 12745RG

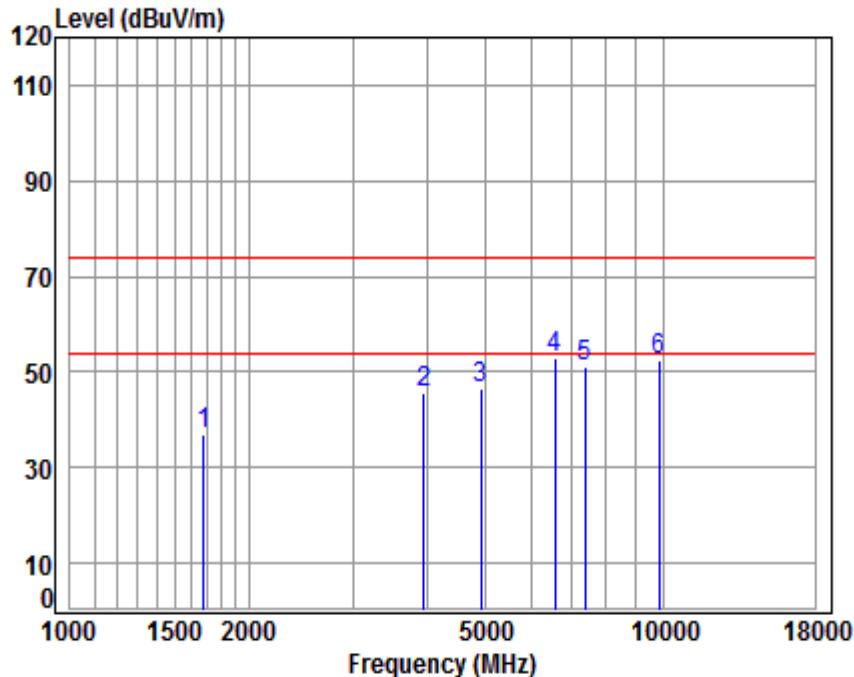
Mode : 2437 Band edge

Note : 2.4G WIFI 11N20

: ANT1

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit

	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1667.951	5.27	26.54	40.81	46.65	37.65	74.00	-36.35 peak
2	4279.589	7.31	33.22	43.07	48.16	45.62	74.00	-28.38 peak
3	4874.000	7.96	34.05	43.68	48.60	46.93	74.00	-27.07 peak
4	6602.265	11.24	35.66	42.32	48.07	52.65	74.00	-21.35 peak
5	7311.000	10.05	36.15	41.78	47.01	51.43	74.00	-22.57 peak
6	9748.000	10.82	37.75	38.20	42.95	53.32	74.00	-20.68 peak

**4.9.2.1.15 802.11N20\_ Highest Channel\_ Peak\_ Vertical**

Site : chamber

Condition: 3m VERTICAL

Job No : 12745RG

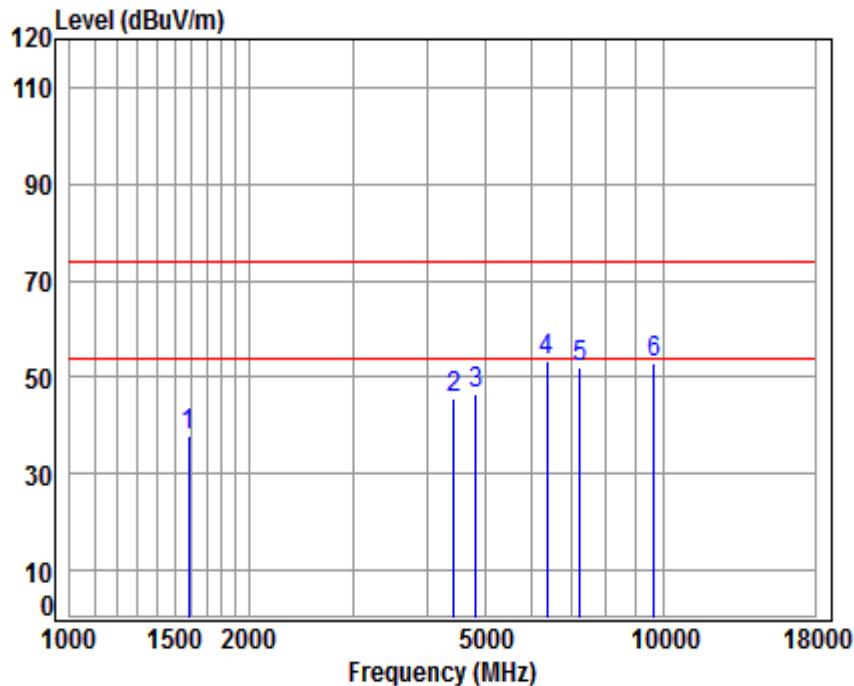
Mode : 2462 Band edge

Note : 2.4G WIFI 11N20

: ANT1

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit

	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1677.621	5.25	26.58	40.82	45.91	36.92	74.00	-37.08 peak
2	3946.885	6.93	32.60	42.69	48.65	45.49	74.00	-28.51 peak
3	4924.000	8.01	34.11	43.73	47.97	46.36	74.00	-27.64 peak
4	6564.209	11.35	35.64	42.35	48.20	52.84	74.00	-21.16 peak
5	7386.000	10.03	36.21	41.72	46.36	50.88	74.00	-23.12 peak
6	9848.000	10.87	37.81	38.04	41.88	52.52	74.00	-21.48 peak

**4.9.2.1.16 802.11N20\_Lowest Channel\_Peak\_Horizontal**

Site : chamber

Condition: 3m HORIZONTAL

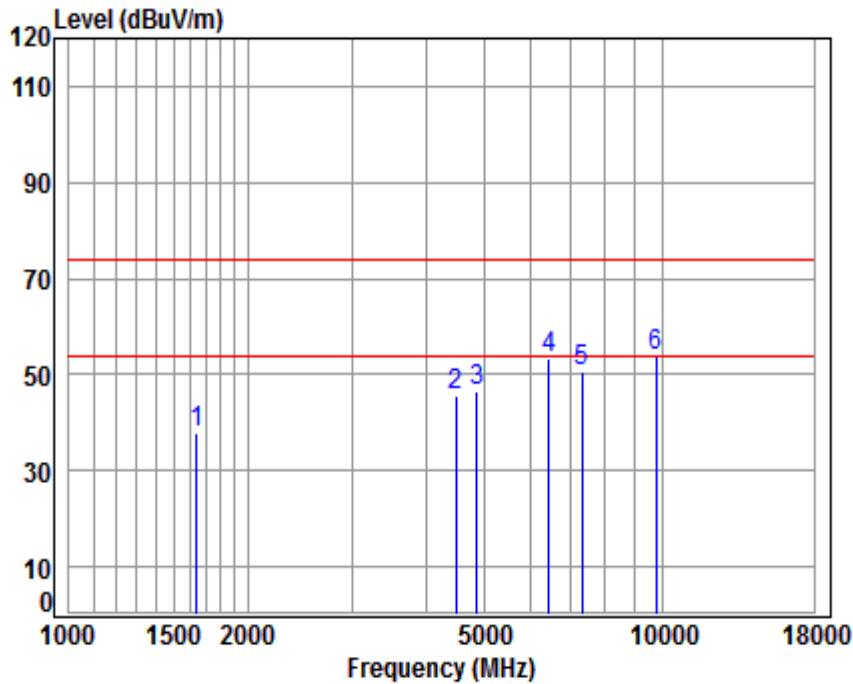
Job No : 12745RG

Mode : 2412 Band edge

Note : 2.4G WIFI 11N20

: ANT1

Freq	Cable	Ant	Preamp	Read	Limit	Over	Line	Limit	Remark
	Loss	Factor	Factor	Level					
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1583.392	5.37	26.18	40.76	47.04	37.83	74.00	-36.17	peak
2	4430.628	7.48	33.48	43.23	47.93	45.66	74.00	-28.34	peak
3	4824.000	7.91	34.00	43.63	48.38	46.66	74.00	-27.34	peak
4	6377.195	11.31	35.48	42.51	49.33	53.61	74.00	-20.39	peak
5	7236.000	10.07	36.09	41.83	47.90	52.23	74.00	-21.77	peak
6	9648.000	10.77	37.69	38.36	42.99	53.09	74.00	-20.91	peak

**4.9.2.1.17 802.11N20\_ Middle Channel\_ Peak\_ Horizontal**

Site : chamber

Condition: 3m HORIZONTAL

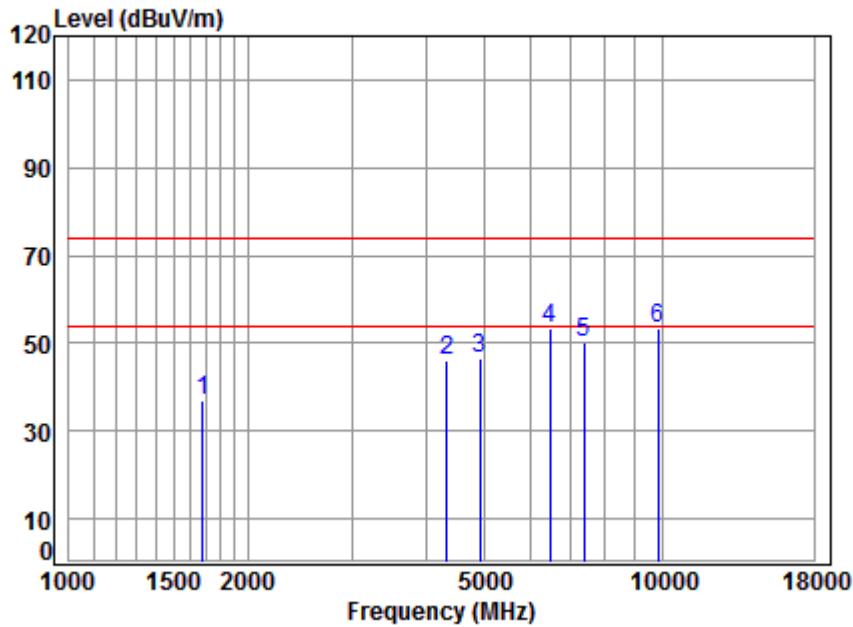
Job No : 12745RG

Mode : 2437 Band edge

Note : 2.4G WIFI 11N20

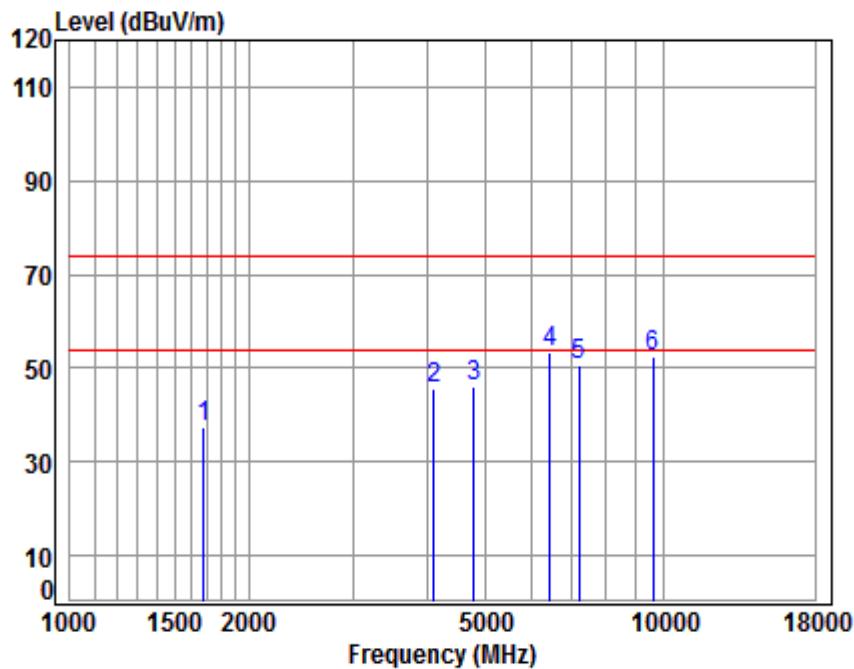
: ANT1

	Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Limit Line	Over Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1644.019	5.30	26.44	40.80	46.95	37.89	74.00	-36.11	peak
2	4495.125	7.55	33.59	43.30	48.00	45.84	74.00	-28.16	peak
3	4874.000	7.96	34.05	43.68	48.21	46.54	74.00	-27.46	peak
4	6451.353	11.45	35.55	42.44	48.80	53.36	74.00	-20.64	peak
5	7311.000	10.05	36.15	41.78	46.31	50.73	74.00	-23.27	peak
6	9748.000	10.82	37.75	38.20	43.62	53.99	74.00	-20.01	peak

**4.9.2.1.18 802.11N20\_ Highest Channel\_ Peak\_ Horizontal**

Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 12745RG  
Mode : 2462 Band edge  
Note : 2.4G WIFI 11N20  
: ANT1

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark
	Loss	Factor	Factor	Level			
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1677.621	5.25	26.58	40.82	46.09	37.10	74.00	-36.90 peak
2 4341.886	7.38	33.33	43.14	48.55	46.12	74.00	-27.88 peak
3 4924.000	8.01	34.11	43.73	48.00	46.39	74.00	-27.61 peak
4 6470.026	11.48	35.57	42.43	48.55	53.17	74.00	-20.83 peak
5 7386.000	10.03	36.21	41.72	45.82	50.34	74.00	-23.66 peak
6 9848.000	10.87	37.81	38.04	42.78	53.42	74.00	-20.58 peak

**4.9.2.2 MIMO****4.9.2.2.1 802.11N20\_MIMO\_Lowest Channel\_Peak\_Verical**

Site : chamber

Condition: 3m VERTICAL

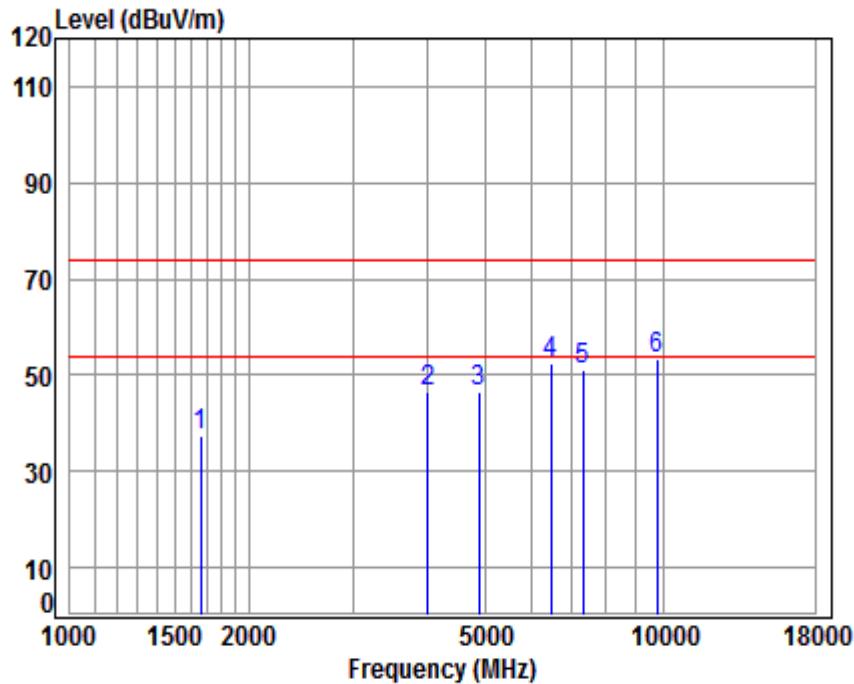
Job No : 12745RG

Mode : 2412 Band edge

Note : 2.4G WIFI 11N20

: MIMO

		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1677.621	5.25	26.58	40.82	46.34	37.35	74.00	-36.65	peak
2	4109.872	7.11	32.91	42.88	48.64	45.78	74.00	-28.22	peak
3	4804.000	7.89	33.97	43.61	47.77	46.02	74.00	-27.98	peak
4	6451.353	11.45	35.55	42.44	48.62	53.18	74.00	-20.82	peak
5	7206.000	10.08	36.07	41.86	46.20	50.49	74.00	-23.51	peak
6	9608.000	10.75	37.67	38.43	42.28	52.27	74.00	-21.73	peak

**4.9.2.2.2 802.11N20\_MIMO \_ Middle Channel\_ Peak\_ Vertical**

Site : chamber

Condition: 3m VERTICAL

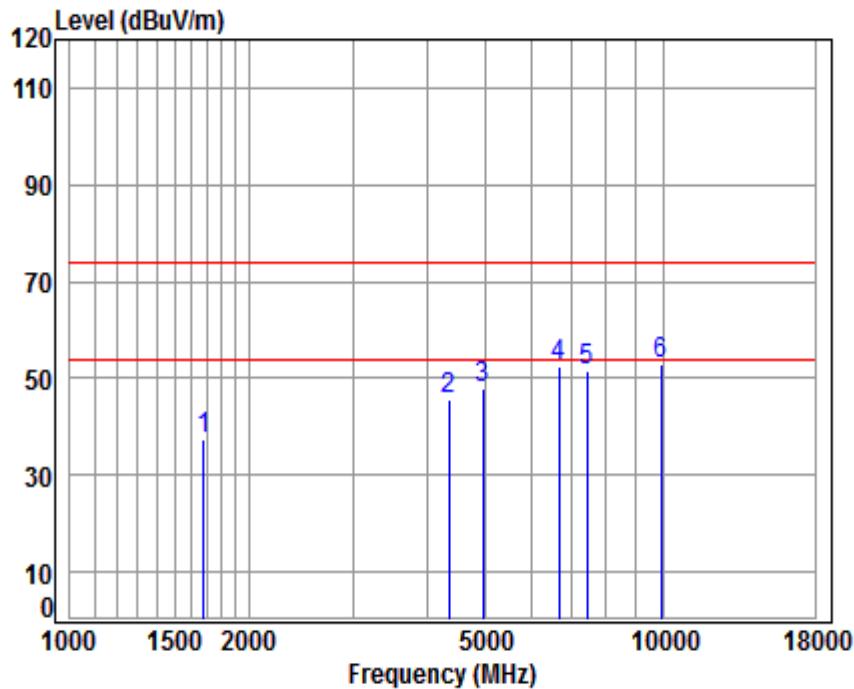
Job No : 12745RG

Mode : 2437 Band edge

Note : 2.4G WIFI 11N20

: MIMO

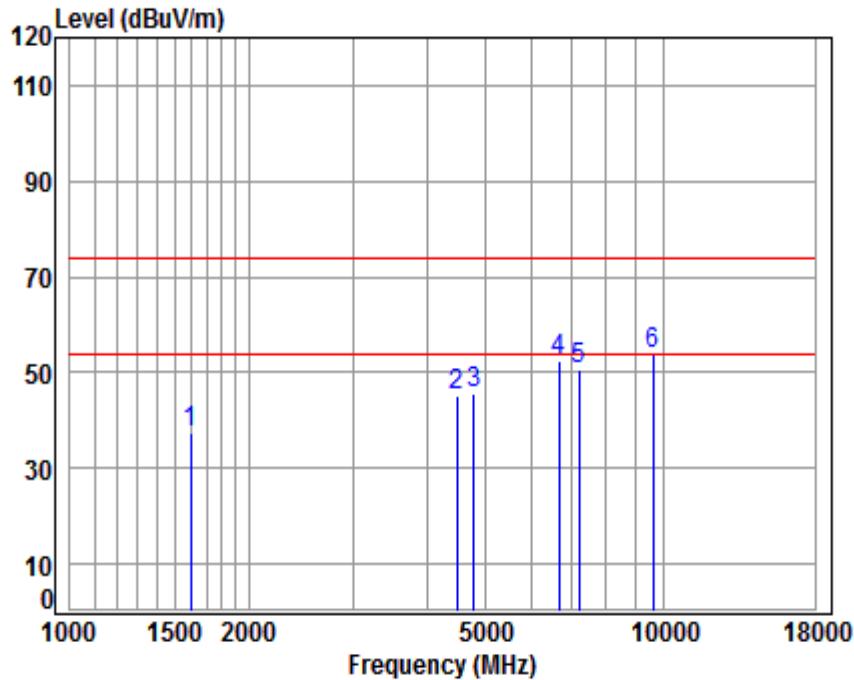
	Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1663.137	5.27	26.52	40.81	46.44	37.42	74.00	-36.58 peak
2	4004.339	6.99	32.71	42.76	49.67	46.61	74.00	-27.39 peak
3	4880.000	7.97	34.06	43.69	48.37	46.71	74.00	-27.29 peak
4	6470.026	11.48	35.57	42.43	47.86	52.48	74.00	-21.52 peak
5	7320.000	10.05	36.16	41.77	46.75	51.19	74.00	-22.81 peak
6	9760.000	10.82	37.76	38.18	43.00	53.40	74.00	-20.60 peak

**4.9.2.2.3 802.11N20\_MIMO \_ Highest Channel\_ Peak\_ Vertical**

Site : chamber  
Condition: 3m VERTICAL  
Job No : 12745RG  
Mode : 2462 Band edge  
Note : 2.4G WIFI 11N20  
: MIMO

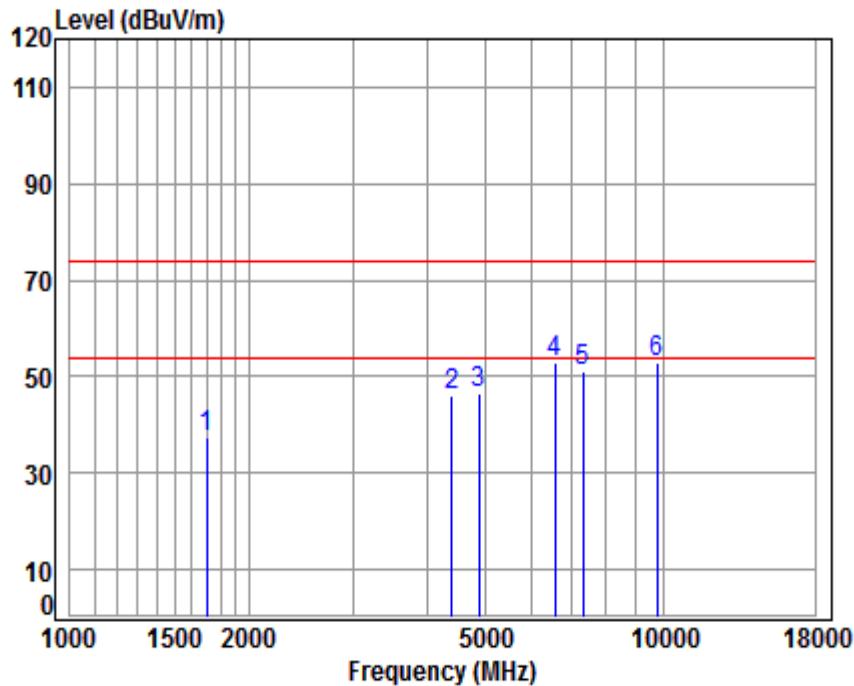
	Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
--	------------	----------	---------------	------------	-------------	-----------	------------	--------

	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1677.621	5.25	26.58	40.82	46.46	37.47	74.00	-36.53 peak
2	4354.454	7.40	33.35	43.15	47.88	45.48	74.00	-28.52 peak
3	4960.000	8.05	34.15	43.76	49.44	47.88	74.00	-26.12 peak
4	6659.763	11.08	35.70	42.28	48.08	52.58	74.00	-21.42 peak
5	7440.000	10.02	36.25	41.69	47.10	51.68	74.00	-22.32 peak
6	9920.000	10.90	37.85	37.93	42.13	52.95	74.00	-21.05 peak

**4.9.2.2.4 802.11N20\_MIMO \_Lowest Channel\_ Peak\_ Horizontal**

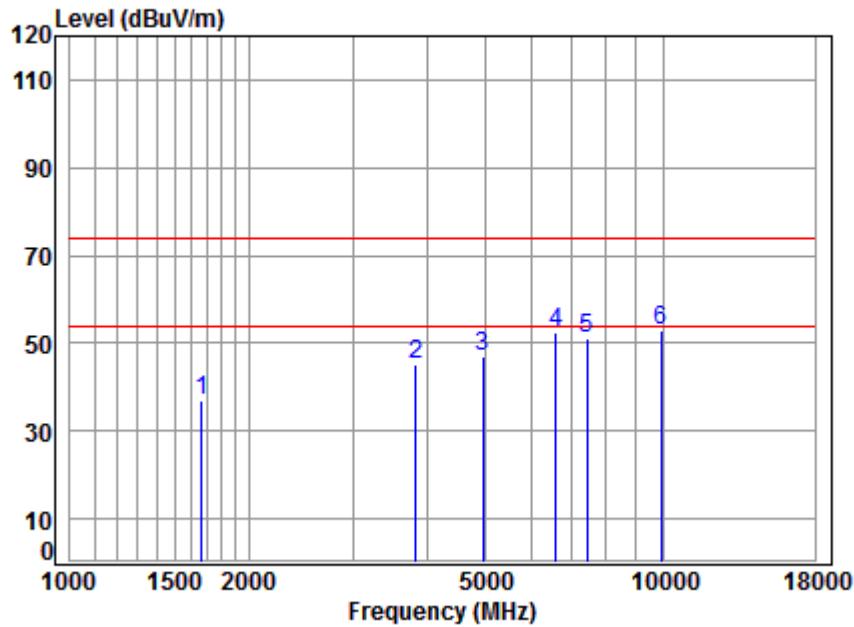
Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 12745RG  
Mode : 2412 Band edge  
Note : 2.4G WIFI 11N20  
: MIMO

		Cable Freq	Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
		MHz	dB	dB/m		dB	dBuV	dBuV/m	dBuV/m	
1	1597.181	5.35	26.24	40.77	46.41	37.23	74.00	-36.77	peak	
2	4495.125	7.55	33.59	43.30	47.34	45.18	74.00	-28.82	peak	
3	4804.000	7.89	33.97	43.61	47.36	45.61	74.00	-28.39	peak	
4	6659.763	11.08	35.70	42.28	48.08	52.58	74.00	-21.42	peak	
5	7206.000	10.08	36.07	41.86	46.41	50.70	74.00	-23.30	peak	
6	9608.000	10.75	37.67	38.43	43.80	53.79	74.00	-20.21	peak	

**4.9.2.2.5 802.11N20\_MIMO \_ Middle Channel\_ Peak\_ Horizontal**

Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 12745RG  
Mode : 2437 Band edge  
Note : 2.4G WIFI 11N20  
: MIMO

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level		Limit Line	Over Line	Remark
				dB	dBuV			
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dBuV/m	dB
1 1697.129	5.23	26.66	40.83	46.42	37.48	74.00	-36.52	peak
2 4405.090	7.46	33.44	43.20	48.44	46.14	74.00	-27.86	peak
3 4880.000	7.97	34.06	43.69	48.11	46.45	74.00	-27.55	peak
4 6564.209	11.35	35.64	42.35	48.37	53.01	74.00	-20.99	peak
5 7320.000	10.05	36.16	41.77	46.44	50.88	74.00	-23.12	peak
6 9760.000	10.82	37.76	38.18	42.50	52.90	74.00	-21.10	peak

**4.9.2.2.6 802.11N20\_MIMO \_ Highest Channel\_ Peak\_ Horizontal**

Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 12745RG  
Mode : 2462 Band edge  
Note : 2.4G WIFI 11N20  
: MIMO

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark
	Loss	Factor	Factor	Level			
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1667.951	5.27	26.54	40.81	46.04	37.04	74.00 -36.96 peak
2	3823.371	6.80	32.36	42.54	48.77	45.39	74.00 -28.61 peak
3	4960.000	8.05	34.15	43.76	48.45	46.89	74.00 -27.11 peak
4	6602.265	11.24	35.66	42.32	48.07	52.65	74.00 -21.35 peak
5	7440.000	10.02	36.25	41.69	46.60	51.18	74.00 -22.82 peak
6	9920.000	10.90	37.85	37.93	42.08	52.90	74.00 -21.10 peak

Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:  
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 2) Scan from 9kHz to 25GHz, the disturbance between 9KHz to 30MHz and 18GHz to 25GHz was very low, and the above harmonics were the highest point could be found when testing, The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.
- 4) All Modes have been tested, but only the worst case data displayed in this report.

## 4.10 Restricted bands around fundamental frequency

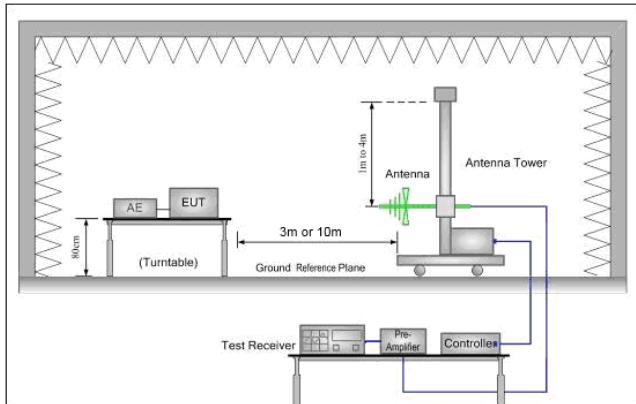
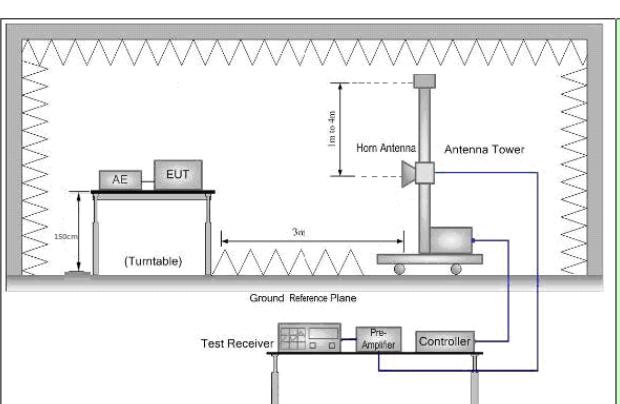
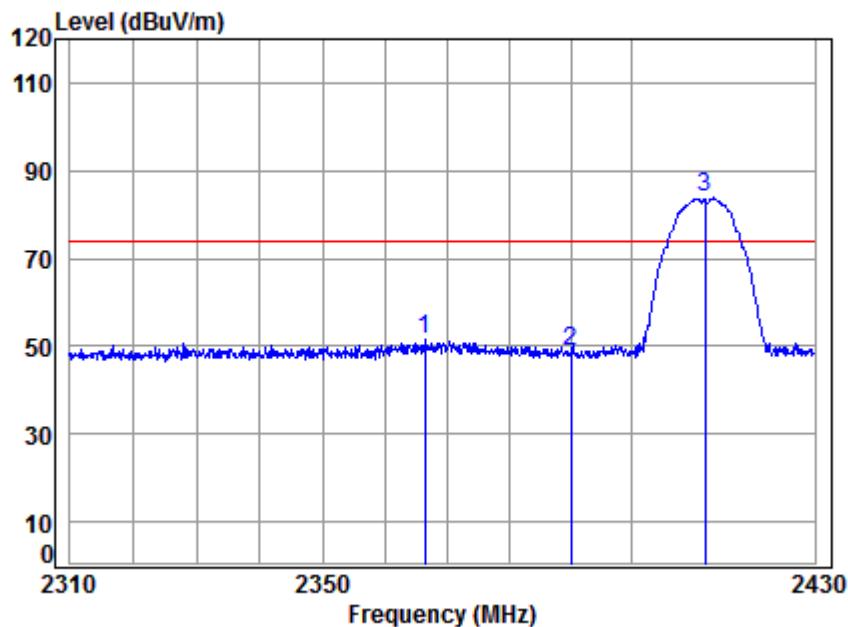
Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205					
Test Method:	ANSI C63.10: 2013 Section 11.12					
Test Site:	Measurement Distance: 3m or 10m (Semi-Anechoic Chamber)					
Limit:	Frequency	Limit (dB <sub>V</sub> /m @3m)	Remark			
	30MHz-88MHz	40.0	Quasi-peak Value			
	88MHz-216MHz	43.5	Quasi-peak Value			
	216MHz-960MHz	46.0	Quasi-peak Value			
	960MHz-1GHz	54.0	Quasi-peak Value			
	Above 1GHz	54.0	Average Value			
		74.0	Peak Value			
Test Setup:						
						
						

Figure 1. 30MHz to 1GHz

Figure 2. Above 1 GHz

Test Procedure:	<ul style="list-style-type: none"><li>a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</li><li>b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</li><li>c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li><li>d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li><li>e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</li><li>f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li><li>g. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel</li><li>h. Test the EUT in the lowest channel, the Highest channel</li><li>i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case.</li><li>j. Repeat above procedures until all frequencies measured was complete.</li></ul>
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates. Charge + Transmitting mode.
Final Test Mode:	Pretest the EUT at Charge +Transmitting mode. Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11B; 6Mbps of rate is the worst case of 802.11G ; 6.5Mbps of rate is the worst case of 802.11N(HT20); Only the worst case is recorded in the report.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass

Test plot as follows:

**4.10.1 ANT1****4.10.1.1 802.11B\_Lowest Channel\_Peak\_Verical**

Site : chamber

Condition: 3m VERTICAL

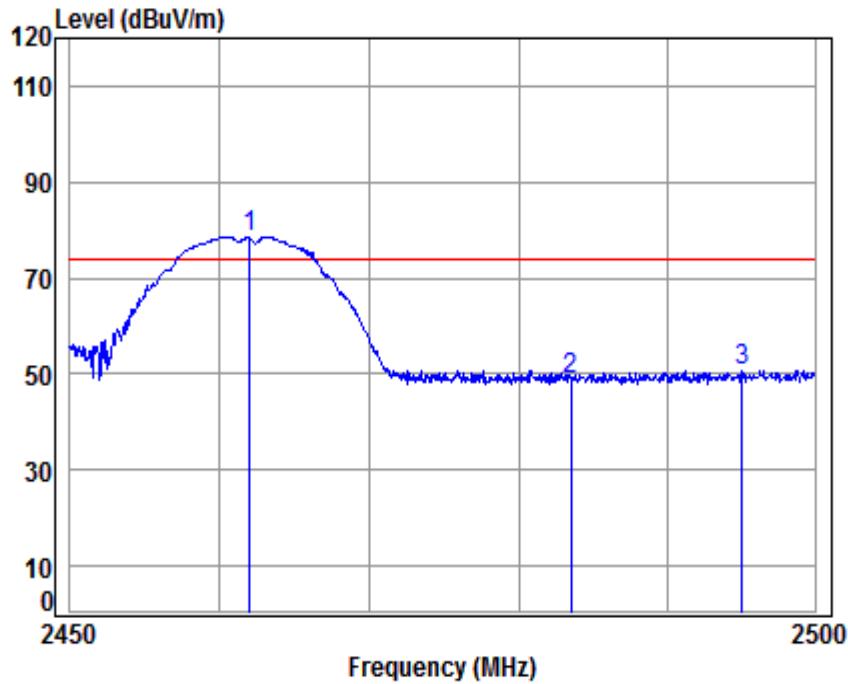
Job No : 12745RG

Mode : 2412 Band edge

: 2.4G WIFI 11B

: ANT1

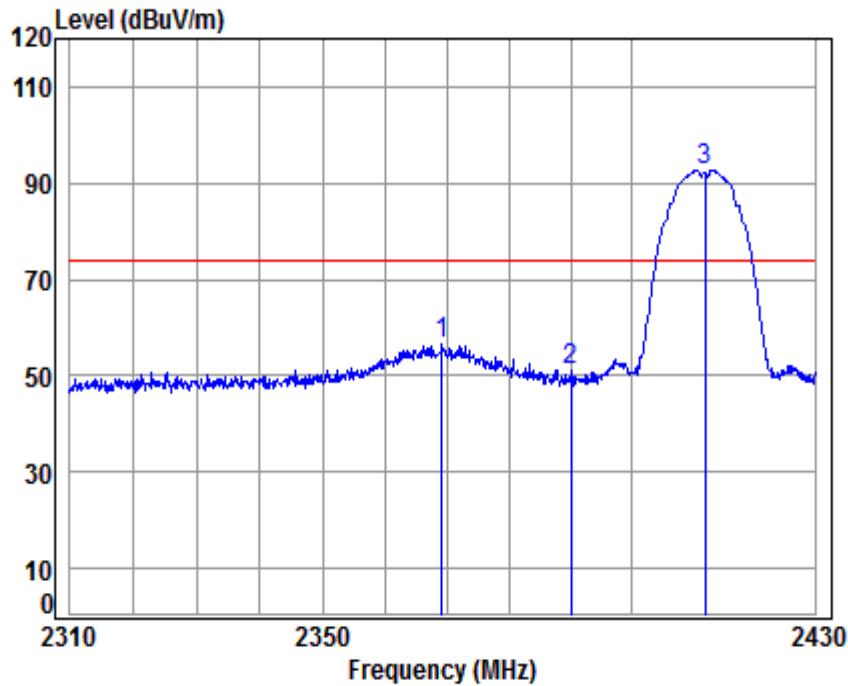
	Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line Level	Over Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2366.363	5.44	28.48	41.16	58.66	51.42	74.00	-22.58	peak
2	2390.000	5.47	28.52	41.17	55.83	48.65	74.00	-25.35	peak
3 *	2412.000	5.50	28.56	41.18	90.86	83.74	74.00	9.74	peak

**4.10.1.2 802.11B\_Highest Channel\_Peak\_Vertical**

Site : chamber  
Condition: 3m VERTICAL  
Job No : 12745RG  
Mode : 2462 Band edge  
: 2.4G WIFI 11B  
: ANT1

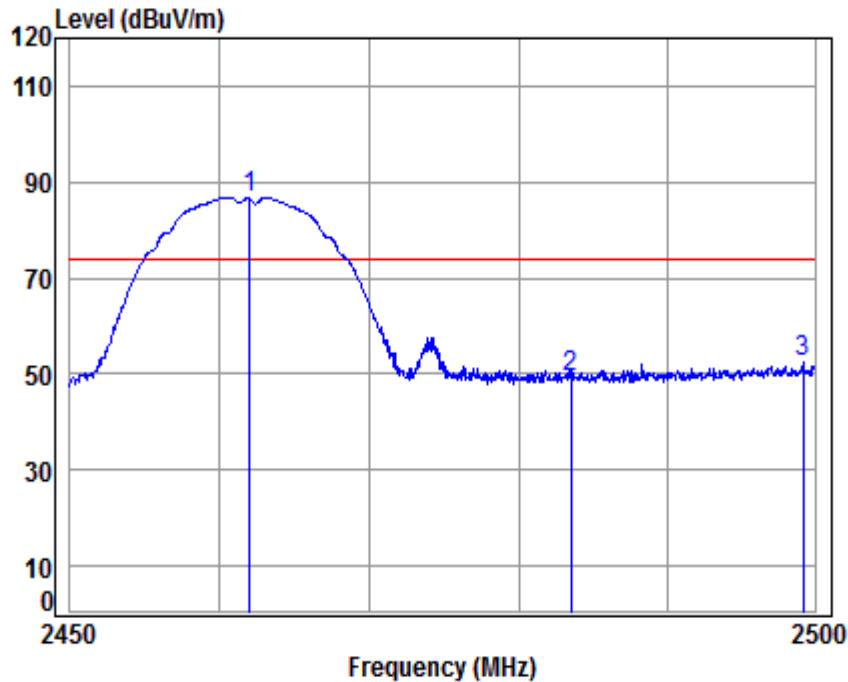
	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit

	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 *	2462.000	5.57	28.64	41.20	85.61	78.62	74.00	4.62 peak
2	2483.500	5.60	28.67	41.21	55.87	48.93	74.00	-25.07 peak
3	2495.055	5.61	28.69	41.22	57.79	50.87	74.00	-23.13 peak

**4.10.1.3 802.11B\_Lowest Channel\_Peak\_Horizontal**

Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 12745RG  
Mode : 2412 Band edge  
: 2.4G WIFI 11B  
: ANT1

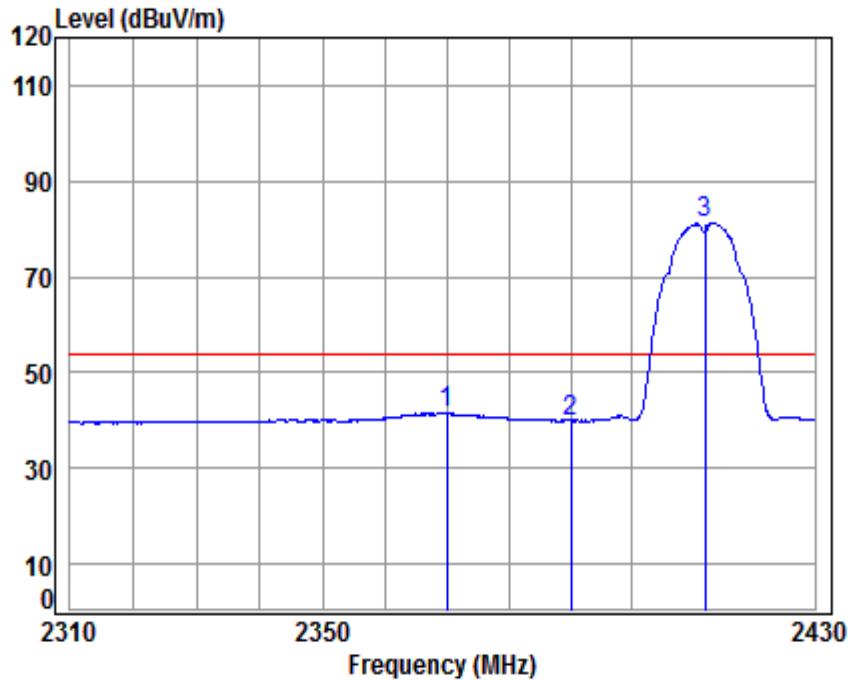
	Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2369.120	5.45	28.48	41.16	63.68	56.45	74.00	-17.55 peak
2	2390.000	5.47	28.52	41.17	58.25	51.07	74.00	-22.93 peak
3 *	2412.000	5.50	28.56	41.18	99.70	92.58	74.00	18.58 peak

**4.10.1.4 802.11B\_Highest Channel\_Peak\_Horizontal**

Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 12745RG  
Mode : 2462 Band edge  
: 2.4G WIFI 11B  
: ANT1

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit

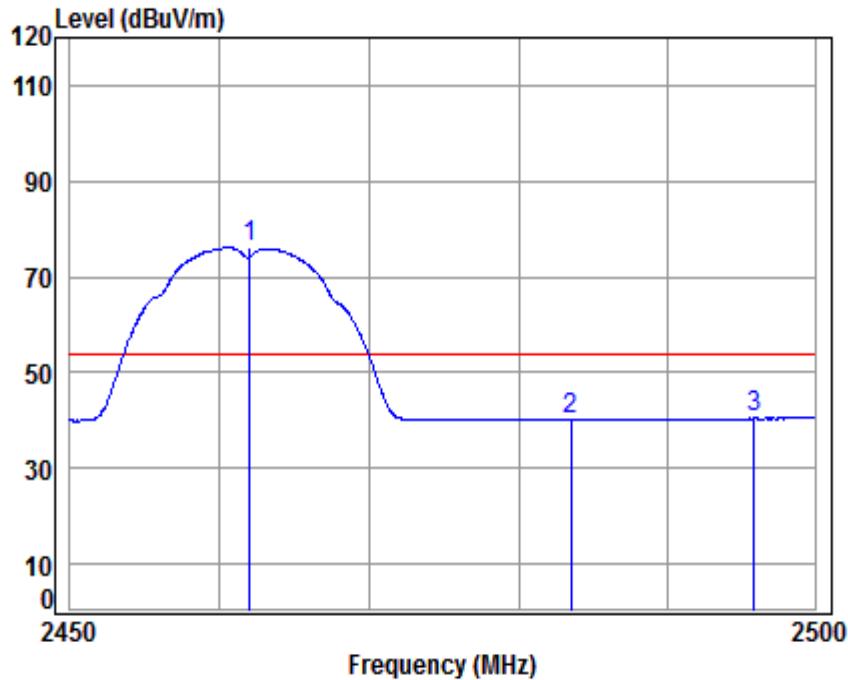
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
	Freq	Loss	Factor	Factor	Level	Level	Level	Line	Limit
1 *	2462.000	5.57	28.64	41.20	93.78	86.79	74.00	12.79	peak
2	2483.500	5.60	28.67	41.21	56.12	49.18	74.00	-24.82	peak
3	2499.242	5.62	28.70	41.22	59.50	52.60	74.00	-21.40	peak

**4.10.1.5 802.11B\_Lowest Channel\_Average\_Virtual**

Site : chamber  
Condition: 3m VERTICAL  
Job No : 12745RG  
Mode : 2412 Band edge  
: 2.4G WIFI 11B  
: ANT1

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit

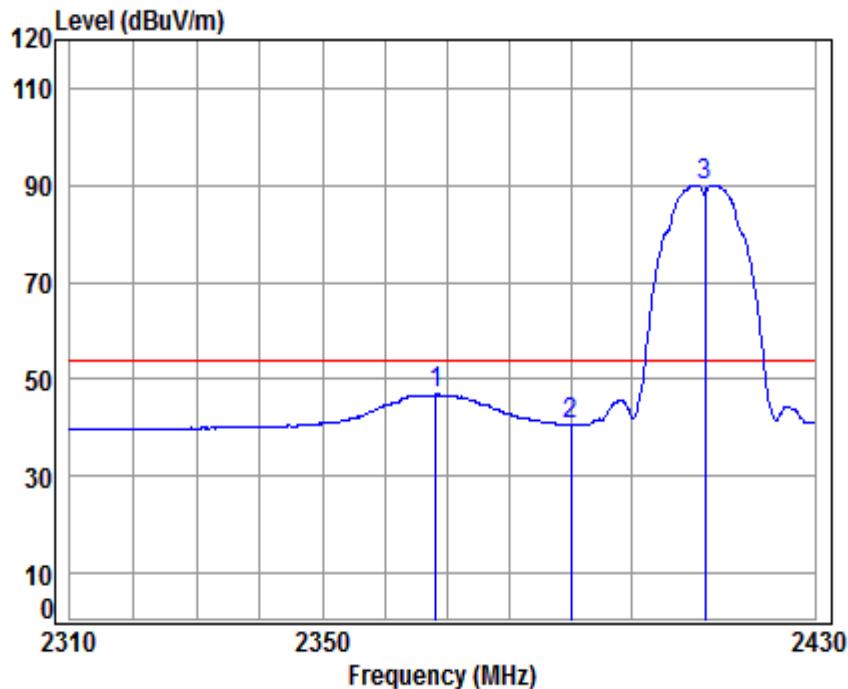
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2369.960	5.45	28.48	41.16	48.69	41.46	54.00	-12.54	Average
2	2390.000	5.47	28.52	41.17	47.09	39.91	54.00	-14.09	Average
3 *	2412.000	5.50	28.56	41.18	88.32	81.20	54.00	27.20	Average

**4.10.1.6 802.11B\_Highest Channel\_Average\_Verical**

Site : chamber  
Condition: 3m VERTICAL  
Job No : 12745RG  
Mode : 2462 Band edge  
: 2.4G WIFI 11B  
: ANT1

	Cable Freq	Loss MHz	Ant Factor	Preamp Factor	Read Level dB	Limit Level dBuV	Line Level dBuV/m	Over Line dBuV/m	Over Limit dB	Remark
--	---------------	-------------	---------------	------------------	---------------------	------------------------	-------------------------	------------------------	---------------------	--------

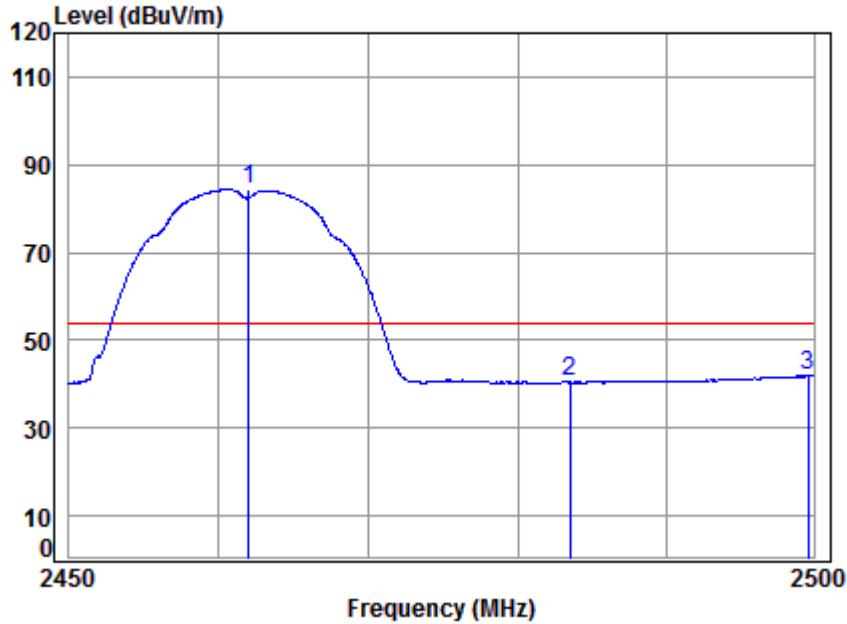
1 *	2462.000	5.57	28.64	41.20	83.03	76.04	54.00	22.04	Average
2	2483.500	5.60	28.67	41.21	47.10	40.16	54.00	-13.84	Average
3	2495.912	5.61	28.69	41.22	47.38	40.46	54.00	-13.54	Average

**4.10.1.7 802.11B\_Lowest Channel\_Average \_ Horizontal**

Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 12745RG  
Mode : 2412 Band edge  
: 2.4G WIFI 11B  
: ANT1

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit

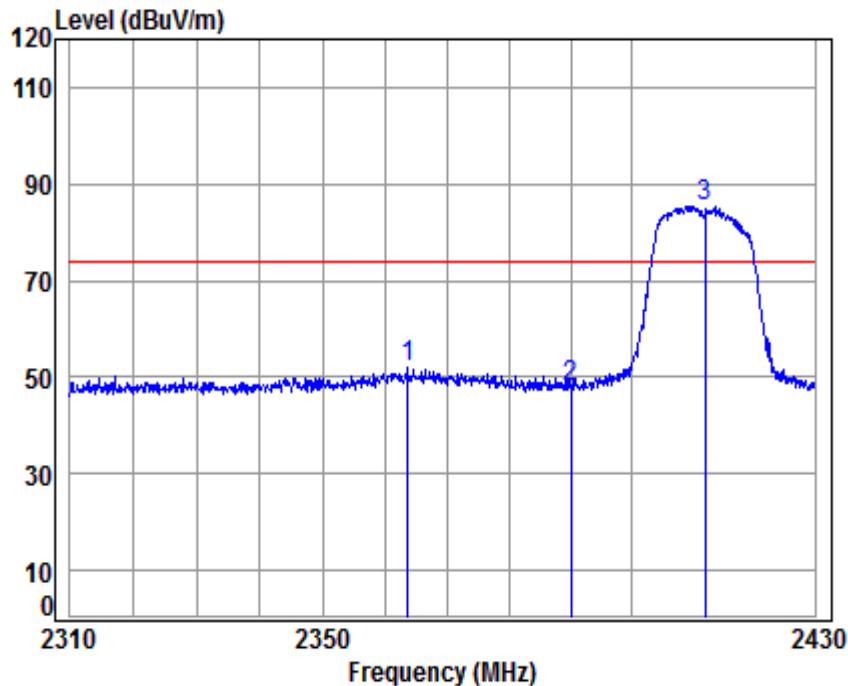
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2368.161	5.45	28.48	41.16	54.12	46.89	54.00	-7.11 Average
2	2390.000	5.47	28.52	41.17	47.92	40.74	54.00	-13.26 Average
3 *	2412.000	5.50	28.56	41.18	97.20	90.08	54.00	36.08 Average

**4.10.1.8 802.11B\_Highest Channel\_Average\_Horizontal**

Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 12745RG  
Mode : 2462 Band edge  
: 2.4G WIFI 11B  
: ANT1

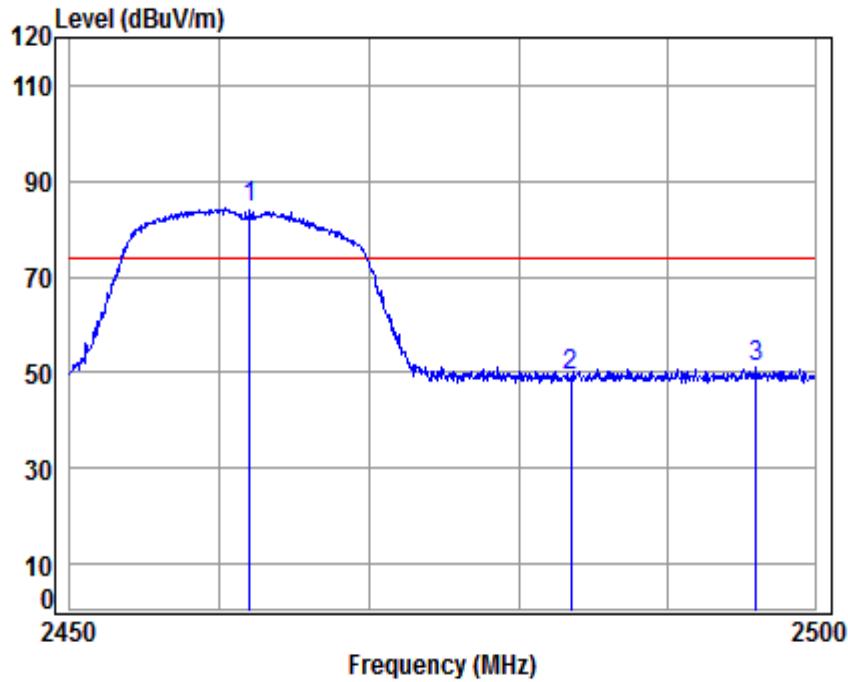
	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit

1 *	2462.000	5.57	28.64	41.20	91.27	84.28	54.00	30.28	Average
2	2483.500	5.60	28.67	41.21	47.36	40.42	54.00	-13.58	Average
3	2499.596	5.62	28.70	41.22	48.86	41.96	54.00	-12.04	Average

**4.10.1.9 802.11G\_Lowest Channel\_Peak\_Virtual**

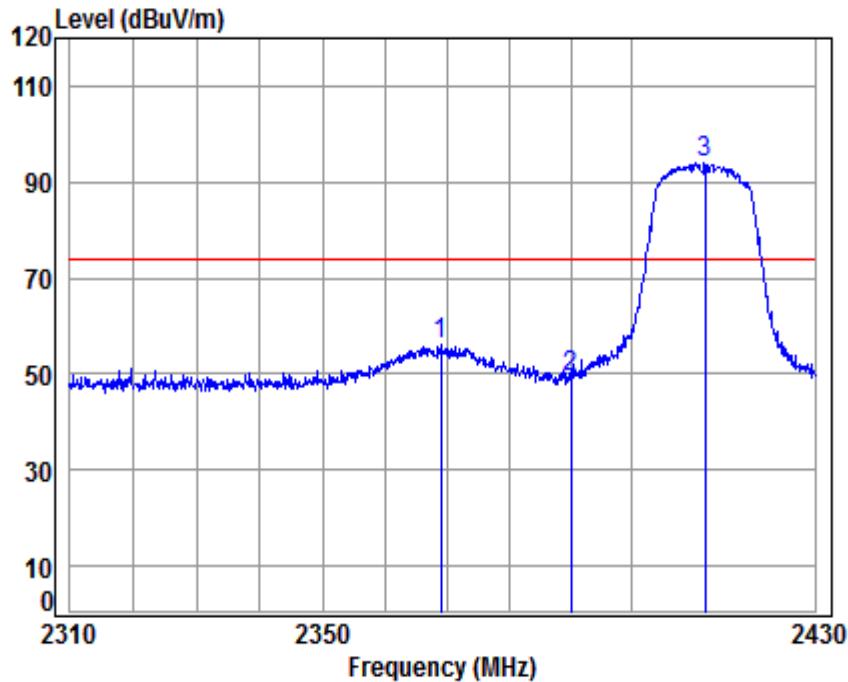
Site : chamber  
Condition: 3m VERTICAL  
Job No : 12745RG  
Mode : 2412 Band edge  
: 2.4G WIFI 11G  
: ANT1

	Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2363.608	5.44	28.47	41.16	59.28	52.03	74.00	-21.97 peak
2	2390.000	5.47	28.52	41.17	55.19	48.01	74.00	-25.99 peak
3 *	2412.000	5.50	28.56	41.18	92.62	85.50	74.00	11.50 peak

**4.10.1.10 802.11G\_Highest Channel\_Peak\_Virtual**

Site : chamber  
Condition: 3m VERTICAL  
Job No : 12745RG  
Mode : 2462 Band edge  
: 2.4G WIFI 11G  
: ANT1

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark
	Loss	Factor	Factor	Level	Level	Line	
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 * 2462.000	5.57	28.64	41.20	91.26	84.27	74.00	10.27 peak
2 2483.500	5.60	28.67	41.21	56.19	49.25	74.00	-24.75 peak
3 2496.013	5.61	28.69	41.22	57.80	50.88	74.00	-23.12 peak

**4.10.1.11 802.11G\_Lowest Channel\_Peak\_Horizontal**

Site : chamber

Condition: 3m HORIZONTAL

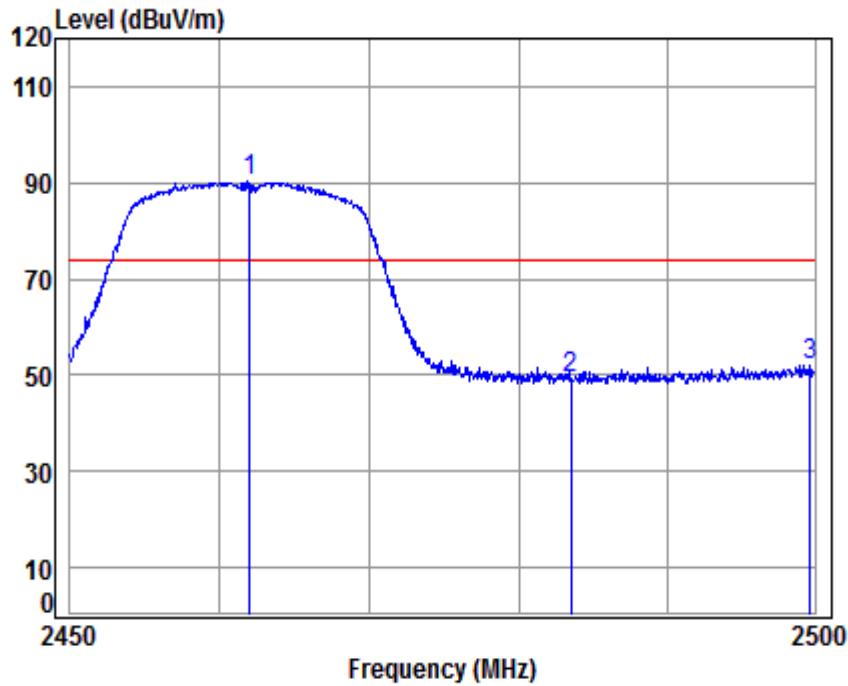
Job No : 12745RG

Mode : 2412 Band edge

: 2.4G WIFI 11G

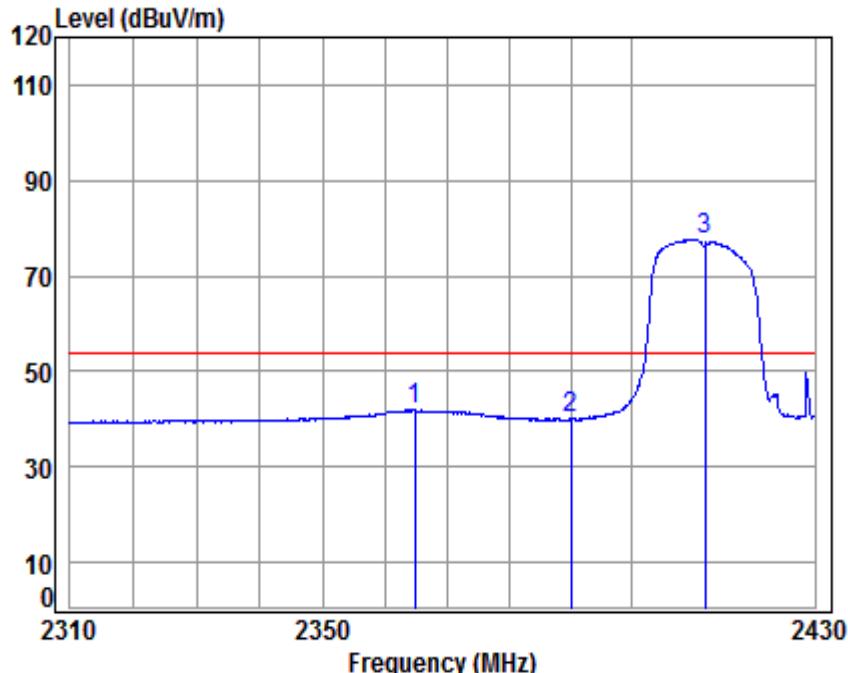
: ANT1

	Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line Level	Over Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2369.000	5.45	28.48	41.16	63.33	56.10	74.00	-17.90	peak
2	2390.000	5.47	28.52	41.17	56.62	49.44	74.00	-24.56	peak
3 *	2412.000	5.50	28.56	41.18	101.18	94.06	74.00	20.06	peak

**4.10.1.12 802.11G\_Highest Channel\_Peak\_Horizontal**

Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 12745RG  
Mode : 2462 Band edge  
: 2.4G WIFI 11G  
: ANT1

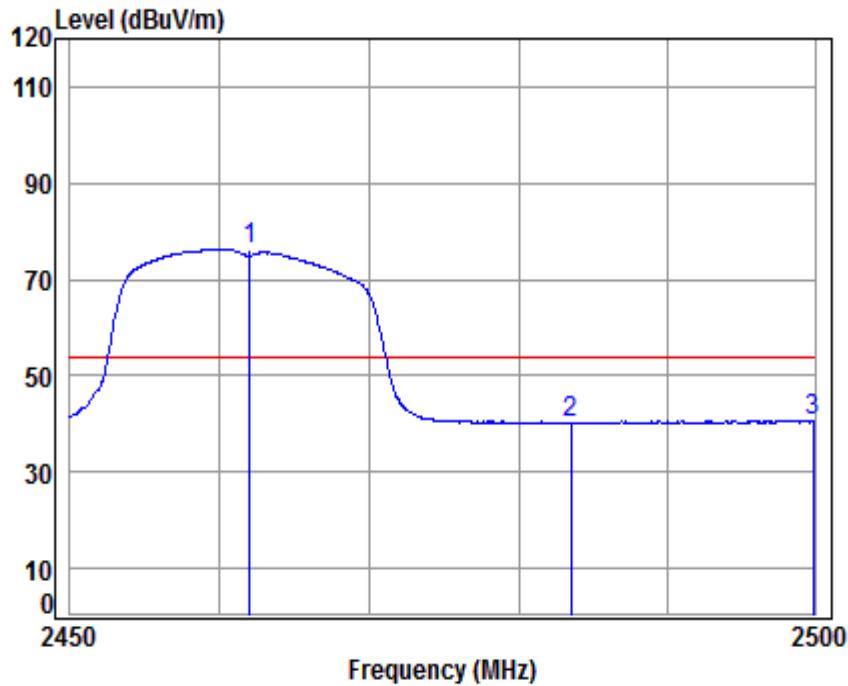
	Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 *	2462.000	5.57	28.64	41.20	97.25	90.26	74.00	16.26 peak
2	2483.500	5.60	28.67	41.21	56.19	49.25	74.00	-24.75 peak
3	2499.697	5.62	28.70	41.22	58.80	51.90	74.00	-22.10 peak

**4.10.1.13 802.11G\_Lowest Channel\_Average\_Virtual**

Site : chamber  
Condition: 3m VERTICAL  
Job No : 12745RG  
Mode : 2412 Band edge  
: 2.4G WIFI 11G  
: ANT1

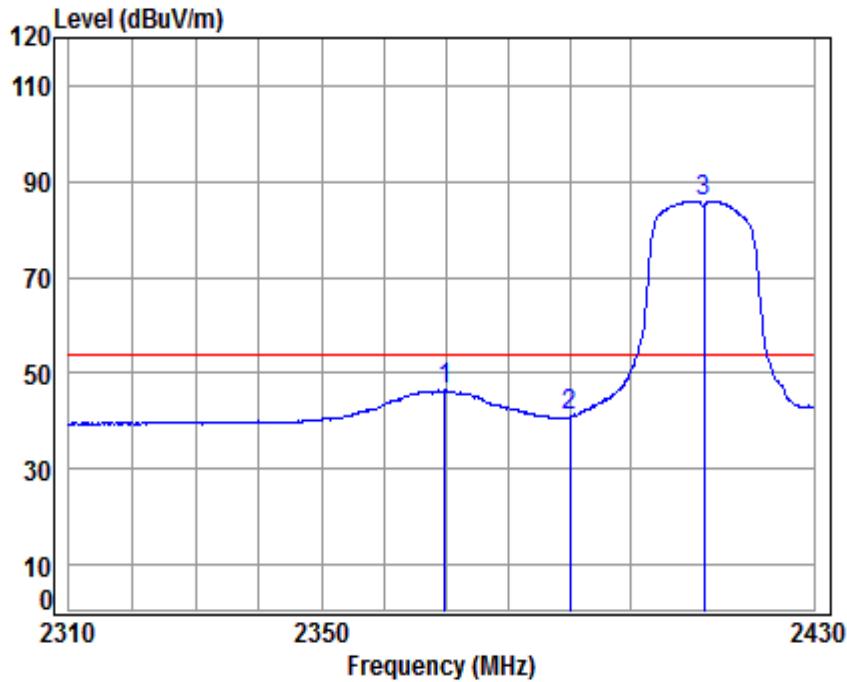
	Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
--	---------------	-------------	------------------	---------------	----------------	--------------	---------------	--------

	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2364.805	5.44	28.48	41.16	49.11	41.87	54.00	-12.13 Average
2	2390.000	5.47	28.52	41.17	47.24	40.06	54.00	-13.94 Average
3 *	2412.000	5.50	28.56	41.18	84.62	77.50	54.00	23.50 Average

**4.10.1.14 802.11G\_Highest Channel\_Average\_Verical**

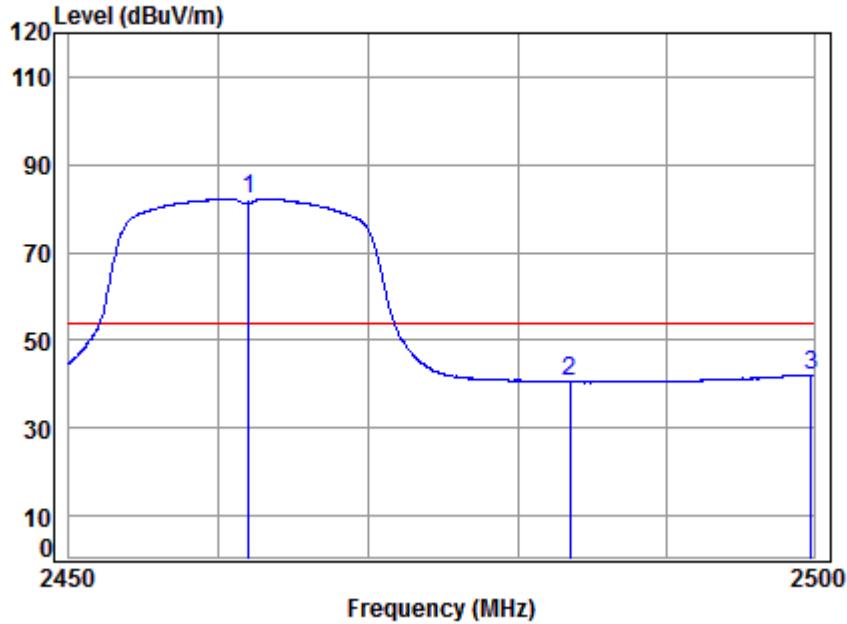
Site : chamber  
Condition: 3m VERTICAL  
Job No : 12745RG  
Mode : 2462 Band edge  
: 2.4G WIFI 11G  
: ANT1

	Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 *	2462.000	5.57	28.64	41.20	83.24	76.25	54.00	22.25 Average
2	2483.500	5.60	28.67	41.21	47.14	40.20	54.00	-13.80 Average
3	2499.899	5.62	28.70	41.22	47.63	40.73	54.00	-13.27 Average

**4.10.1.15 802.11G\_Lowest Channel\_Average \_ Horizontal**

Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 12745RG  
Mode : 2412 Band edge  
: 2.4G WIFI 11G  
: ANT1

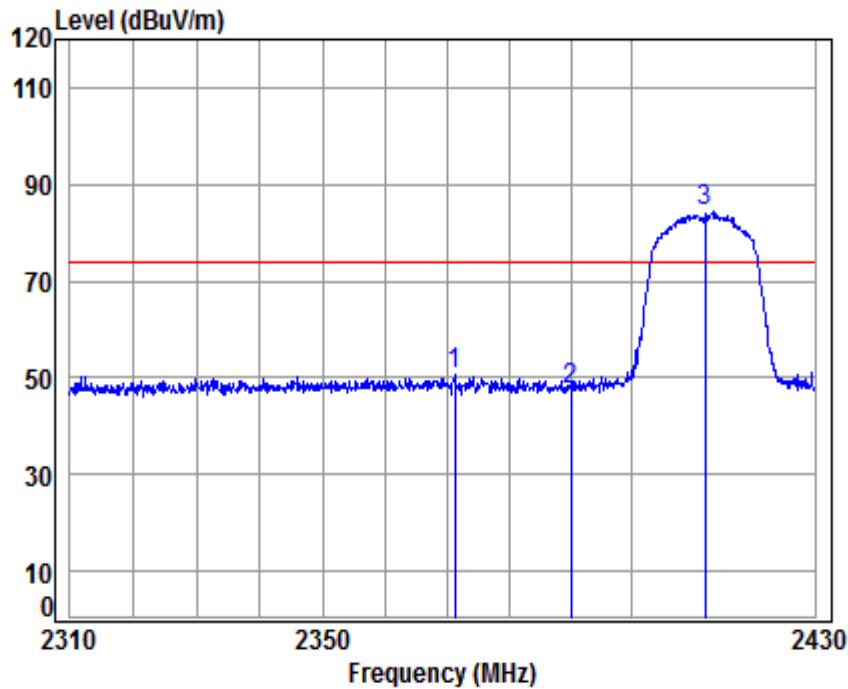
	Cable Freq	Loss MHz	Ant Factor	Preamp Factor	Read Level dB	Limit Level dBuV	Line Level dBuV/m	Over Line dBuV/m	Over Limit dB	Over Remark
1	2369.840	5.45	28.48	41.16	53.67	46.44	54.00	-7.56	Average	
2	2390.000	5.47	28.52	41.17	48.11	40.93	54.00	-13.07	Average	
3 *	2412.000	5.50	28.56	41.18	93.11	85.99	54.00	31.99	Average	

**4.10.1.16 802.11G\_Highest Channel\_Average\_Horizontal**

Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 12745RG  
Mode : 2462 Band edge  
: 2.4G WIFI 11G  
: ANT1

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit

1 *	2462.000	5.57	28.64	41.20	89.22	82.23	54.00	28.23	Average
2	2483.500	5.60	28.67	41.21	47.42	40.48	54.00	-13.52	Average
3	2499.798	5.62	28.70	41.22	49.10	42.20	54.00	-11.80	Average

**4.10.1.17 802.11N20\_Lowest Channel\_Peak\_Ver**

Site : chamber

Condition: 3m VERTICAL

Job No : 12745RG

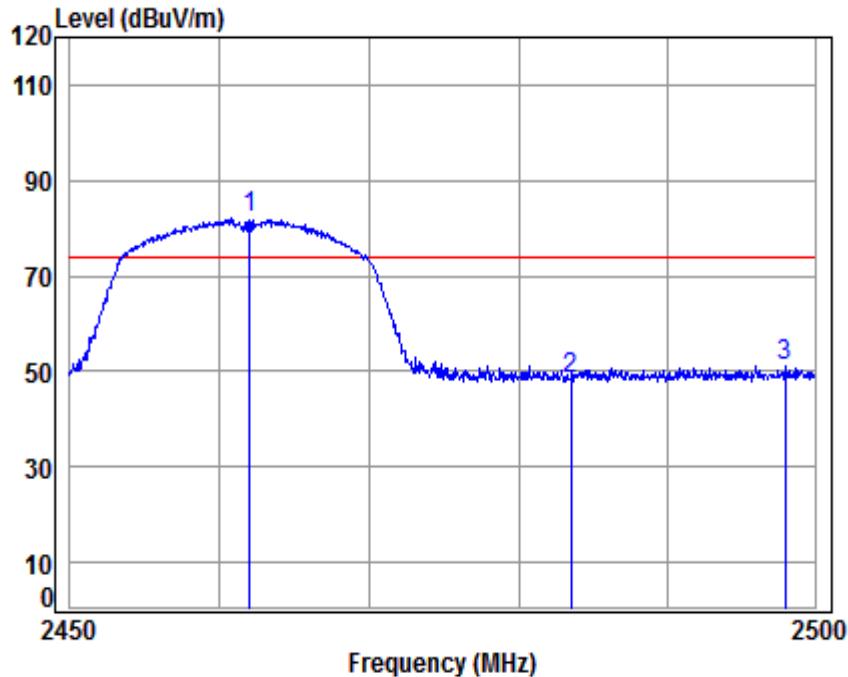
Mode : 2412 Band edge

: 2.4G WIFI 11N20

: ANT1

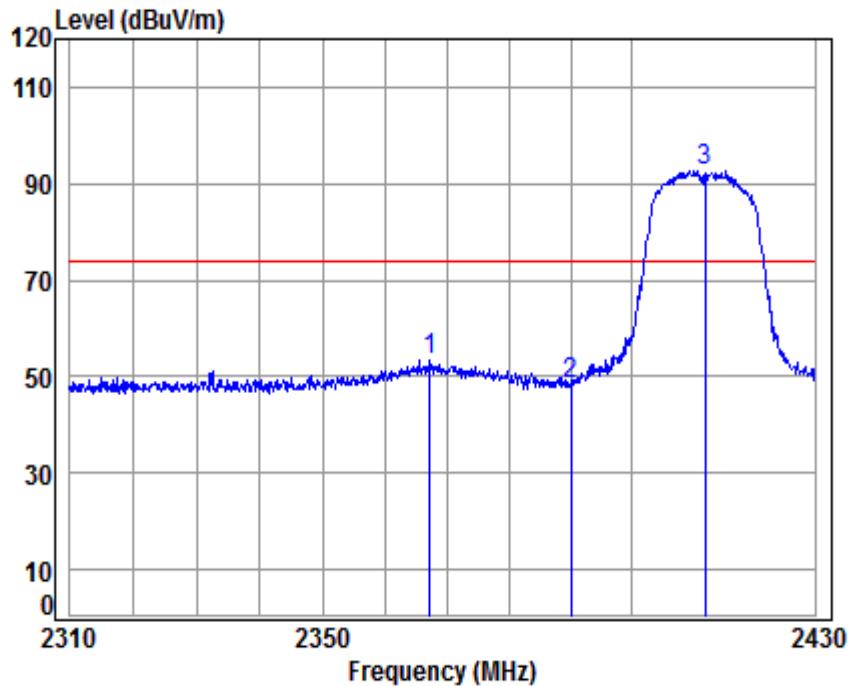
: 10

	Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line dBuV/m	Over Line dBuV/m	Over Limit dB	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2371.281	5.45	28.49	41.16	57.85	50.63	74.00	-23.37	peak
2	2390.000	5.47	28.52	41.17	54.54	47.36	74.00	-26.64	peak
3 *	2412.000	5.50	28.56	41.18	91.46	84.34	74.00	10.34	peak

**4.10.1.18 802.11N20\_ Highest Channel\_ Peak\_ Vertical**

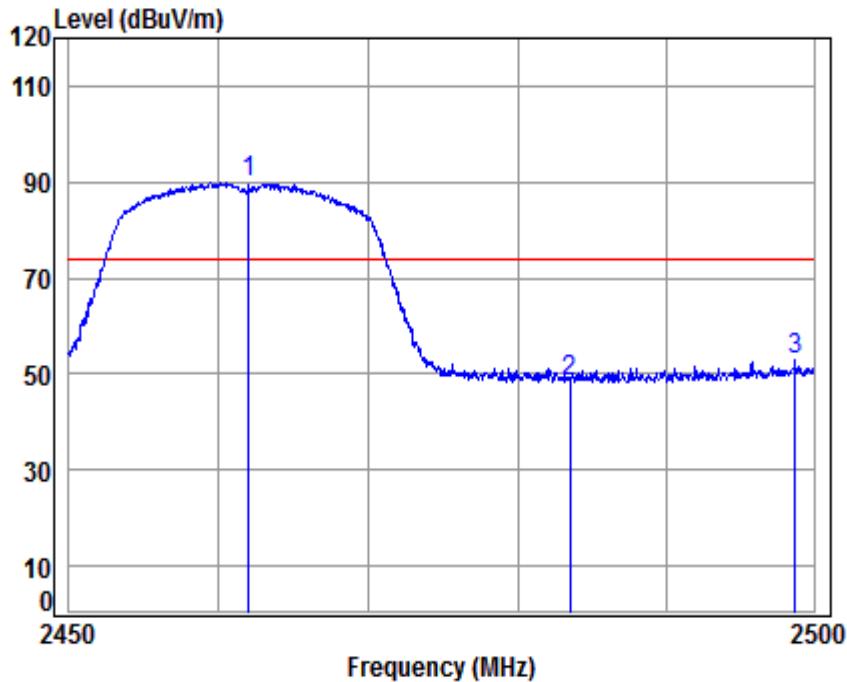
Site : chamber  
Condition: 3m VERTICAL  
Job No : 12745RG  
Mode : 2462 Band edge  
: 2.4G WIFI 11N20  
: ANT1  
: 10

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level		Limit Line	Over Limit	Remark
				Level	Level			
1 * 2462.000	5.57	28.64	41.20	89.05	82.06	74.00	8.06	peak
2 2483.500	5.60	28.67	41.21	55.39	48.45	74.00	-25.55	peak
3 2497.980	5.62	28.70	41.22	58.15	51.25	74.00	-22.75	peak

**4.10.1.19 802.11N20\_Lowest Channel\_Peak\_Horizontal**

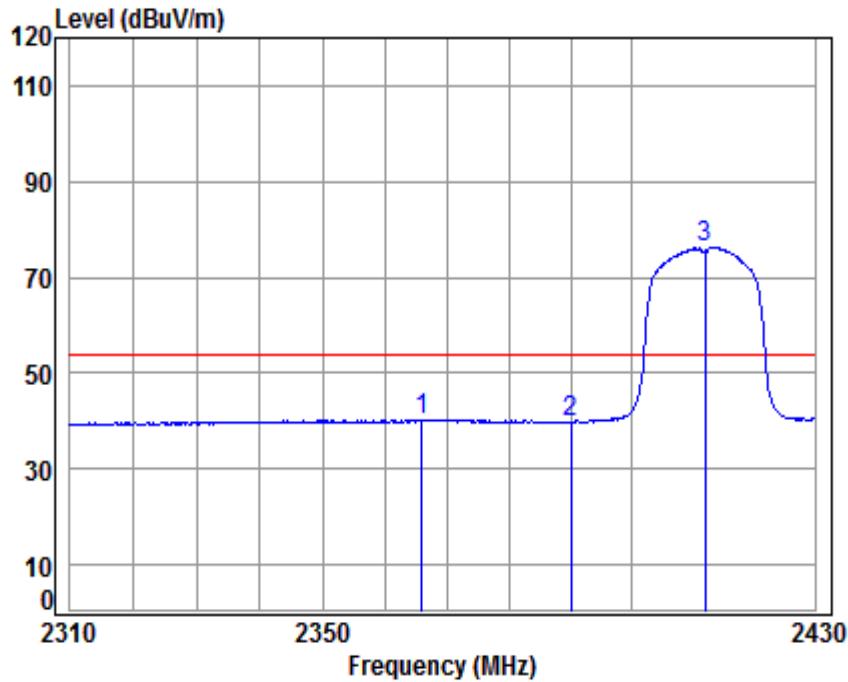
Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 12745RG  
Mode : 2412 Band edge  
: 2.4G WIFI 11N20  
: ANT1  
: 10

		Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Remark
Freq	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2367.201	5.44	28.48	41.16	60.65	53.41	74.00	-20.59 peak
2	2390.000	5.47	28.52	41.17	55.35	48.17	74.00	-25.83 peak
3 *	2412.000	5.50	28.56	41.18	99.89	92.77	74.00	18.77 peak

**4.10.1.20 802.11N20\_ Highest Channel\_ Peak\_ Horizontal**

Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 12745RG  
Mode : 2462 Band edge  
: 2.4G WIFI 11N20  
: ANT1  
: 10

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level		Limit Line	Over Limit	Remark
				dB	dB/m			
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dBuV/m	dB
1 * 2462.000	5.57	28.64	41.20	96.97	89.98	74.00	15.98	peak
2 2483.500	5.60	28.67	41.21	55.42	48.48	74.00	-25.52	peak
3 2498.738	5.62	28.70	41.22	59.83	52.93	74.00	-21.07	peak

**4.10.1.21 802.11N20\_Lowest Channel\_Average\_Virtual**

Site : chamber

Condition: 3m VERTICAL

Job No : 12745RG

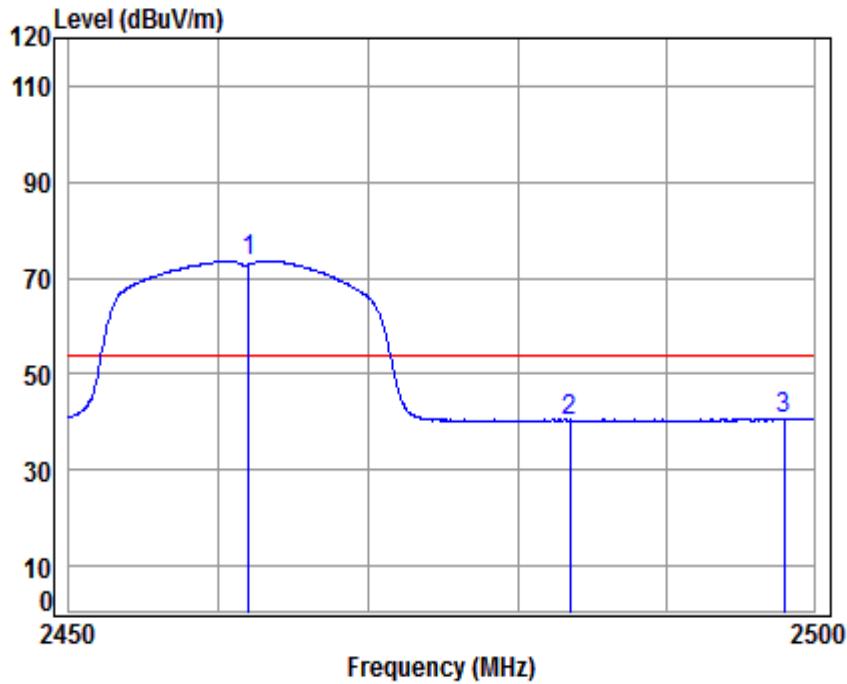
Mode : 2412 Band edge

: 2.4G WIFI 11N20

: ANT1

: 10

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m		dBuV	dBuV/m	dBuV/m	dB	
1	2365.883	5.44	28.48	41.16	47.46	40.22	54.00	-13.78	Average
2	2390.000	5.47	28.52	41.17	47.05	39.87	54.00	-14.13	Average
3 *	2412.000	5.50	28.56	41.18	83.29	76.17	54.00	22.17	Average

**4.10.1.22 802.11N20\_ Highest Channel\_ Average \_ Vertical**

Site : chamber

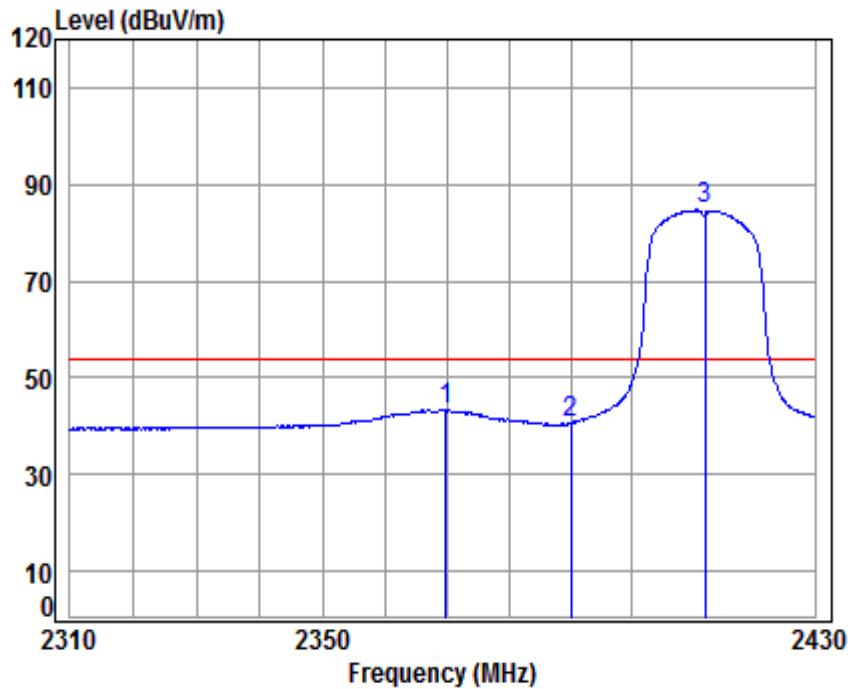
Condition: 3m VERTICAL

Job No : 12745RG

Mode : 2462 Band edge  
: 2.4G WIFI 11N20  
: ANT1  
: 10

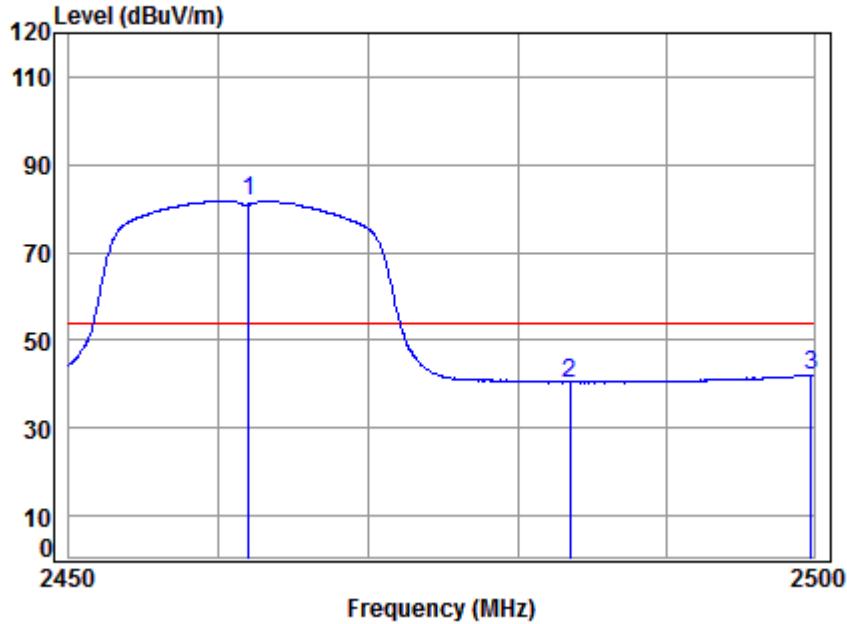
Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
------	------------	------------	---------------	------------	-------------	------------	------------	--------

	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 *	2462.000	5.57	28.64	41.20	80.63	73.64	54.00	19.64	Average
2	2483.500	5.60	28.67	41.21	47.21	40.27	54.00	-13.73	Average
3	2497.980	5.62	28.70	41.22	47.51	40.61	54.00	-13.39	Average

**4.10.1.23 802.11N20\_Lowest Channel\_Average \_ Horizontal**

Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 12745RG  
Mode : 2412 Band edge  
: 2.4G WIFI 11N20  
: ANT1  
: 10

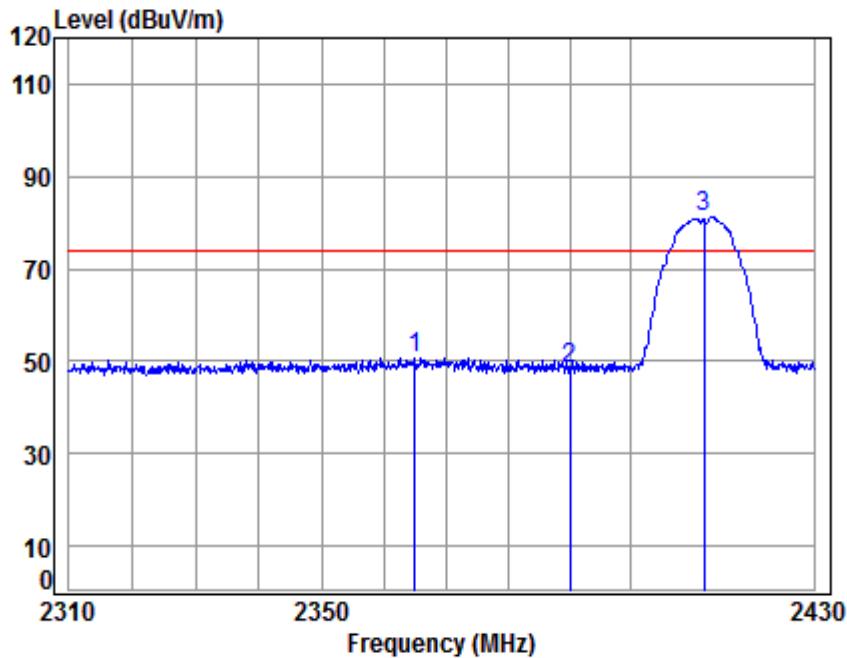
		Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2369.840	5.45	28.48	41.16	50.56	43.33	54.00	-10.67	Average
2	2390.000	5.47	28.52	41.17	47.70	40.52	54.00	-13.48	Average
3 *	2412.000	5.50	28.56	41.18	91.81	84.69	54.00	30.69	Average

**4.10.1.24 802.11N20\_ Highest Channel\_ Average\_ Horizontal**

Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 12745RG  
Mode : 2462 Band edge  
: 2.4G WIFI 11N20  
: ANT1  
: 10

	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit	Remark
Freq	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB

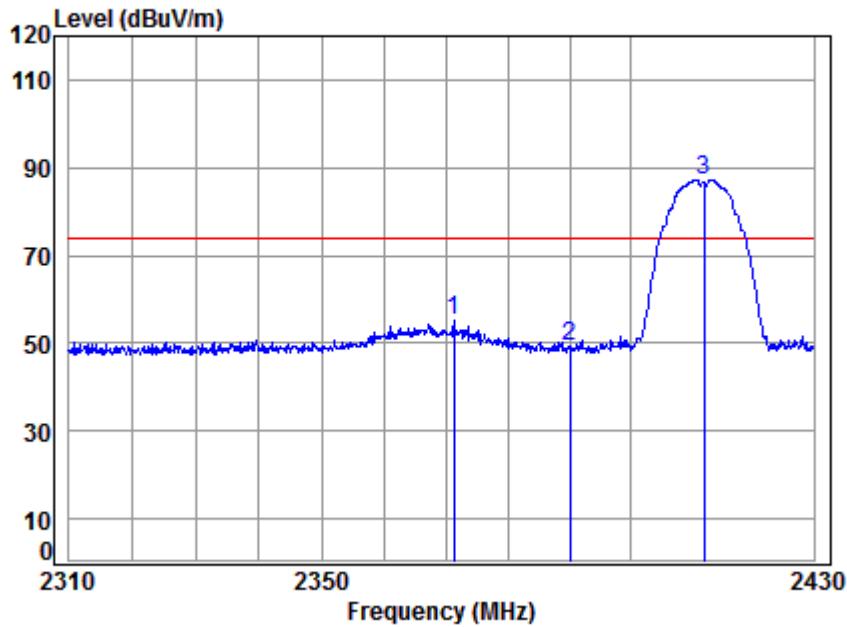
1 *	2462.000	5.57	28.64	41.20	88.88	81.89	54.00	27.89 Average
2	2483.500	5.60	28.67	41.21	47.32	40.38	54.00	-13.62 Average
3	2499.798	5.62	28.70	41.22	48.94	42.04	54.00	-11.96 Average

**4.10.2 ANT2&MIMO****4.10.2.1 802.11B\_Lowest Channel\_Peak\_Verical**

Site : chamber  
Condition: 3m VERTICAL  
Job No : 12745RG  
Mode : 2412 Band edge  
: 2.4G WIFI 11B  
: ANT2

	Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
--	---------------	-------------	------------------	---------------	----------------	--------------	---------------	--------

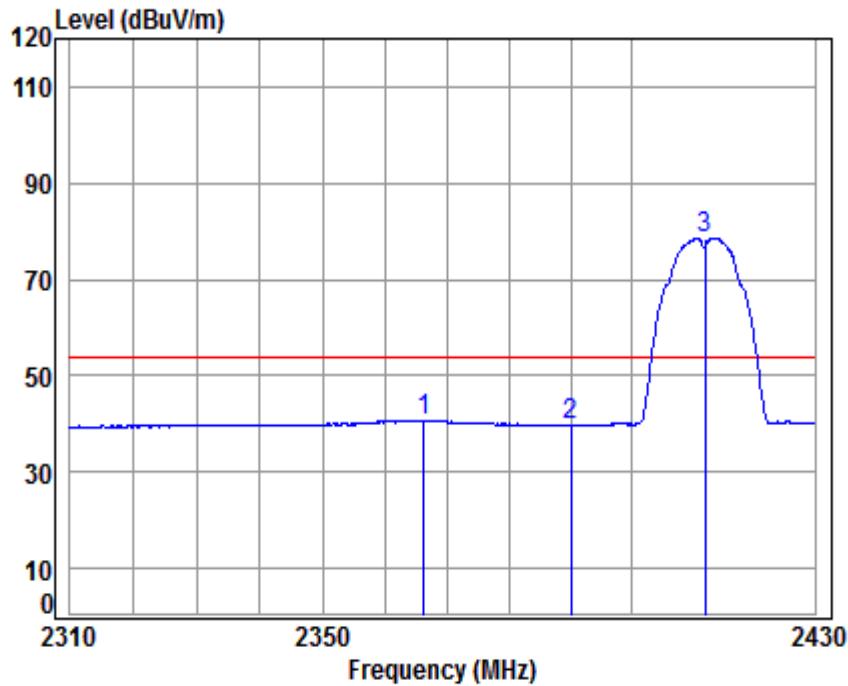
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2364.925	5.44	28.48	41.16	57.95	50.71	74.00	-23.29 peak
2	2390.000	5.47	28.52	41.17	55.34	48.16	74.00	-25.84 peak
3 *	2412.000	5.50	28.56	41.18	88.25	81.13	74.00	7.13 peak

**4.10.2.2 802.11B\_Lowest Channel\_Peak\_Horizontal**

Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 12745RG  
Mode : 2412 Band edge  
: 2.4G WIFI 11B  
: ANT2

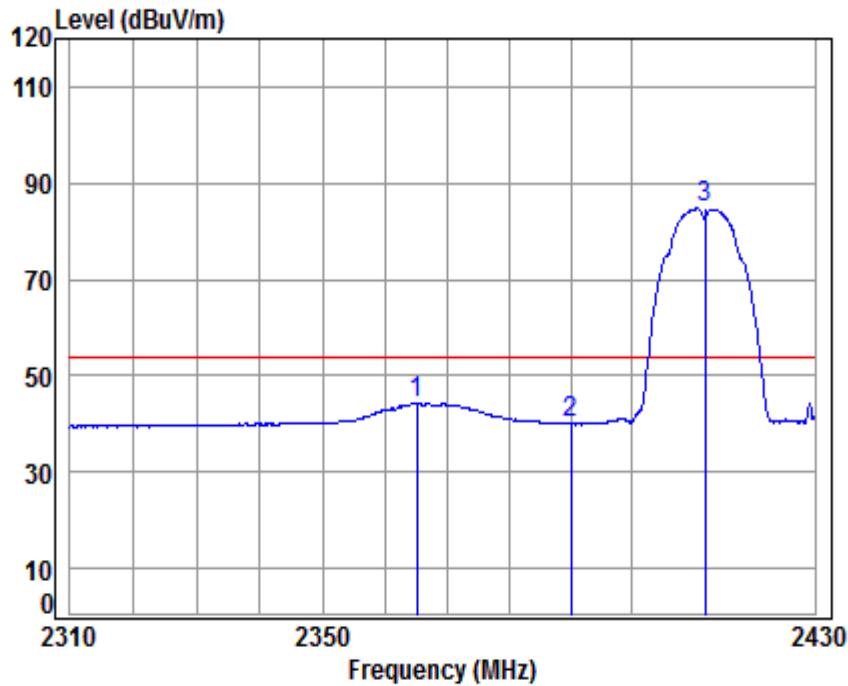
	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark

	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2371.281	5.45	28.49	41.16	62.45	55.23	74.00	-18.77 peak
2	2390.000	5.47	28.52	41.17	56.37	49.19	74.00	-24.81 peak
3 *	2412.000	5.50	28.56	41.18	94.29	87.17	74.00	13.17 peak

**4.10.2.3 802.11B\_Lowest Channel\_Average\_Virtual**

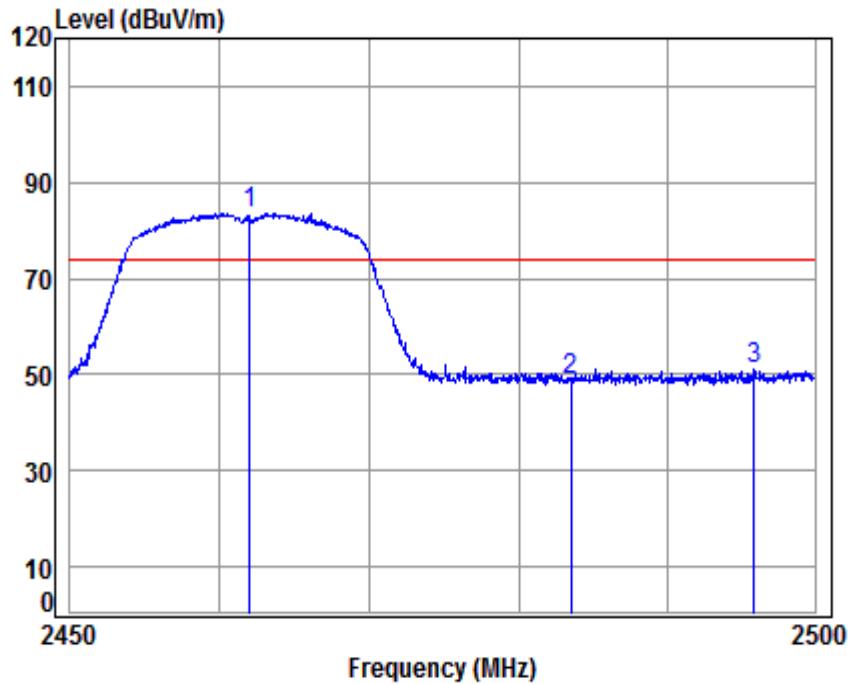
Site : chamber  
Condition: 3m VERTICAL  
Job No : 12745RG  
Mode : 2412 Band edge  
: 2.4G WIFI 11B  
: ANT2

	Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2366.243	5.44	28.48	41.16	48.04	40.80	54.00	-13.20 Average
2	2390.000	5.47	28.52	41.17	46.93	39.75	54.00	-14.25 Average
3 *	2412.000	5.50	28.56	41.18	85.69	78.57	54.00	24.57 Average

**4.10.2.4 802.11B\_Lowest Channel\_Average \_ Horizontal**

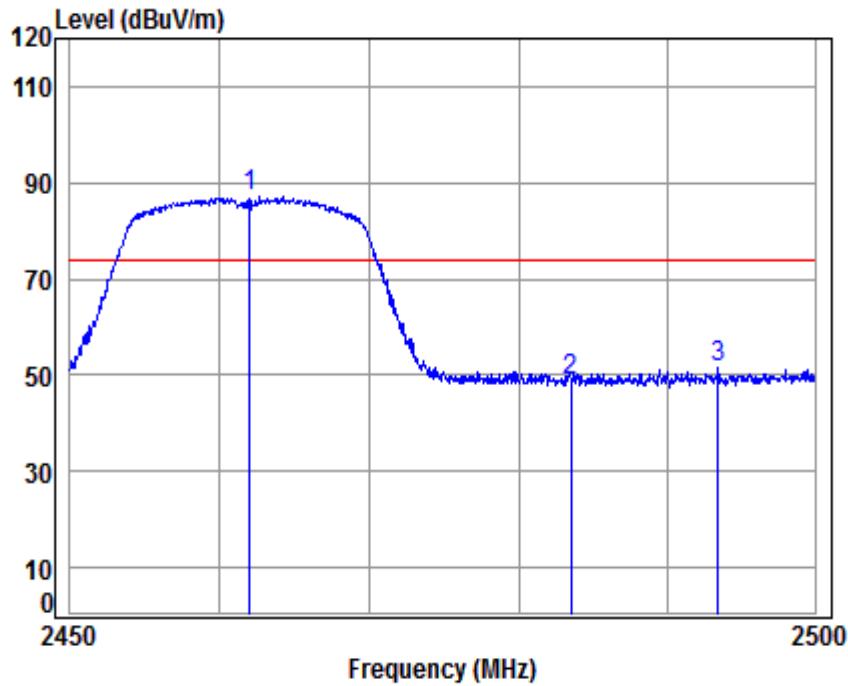
Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 12745RG  
Mode : 2412 Band edge  
: 2.4G WIFI 11B  
: ANT2

	Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2365.164	5.44	28.48	41.16	51.57	44.33	54.00	-9.67 Average
2	2390.000	5.47	28.52	41.17	47.25	40.07	54.00	-13.93 Average
3 *	2412.000	5.50	28.56	41.18	91.79	84.67	54.00	30.67 Average

**4.10.2.5 802.11G\_Highest Channel\_Peak\_Vertical**

Site : chamber  
Condition: 3m VERTICAL  
Job No : 12745RG  
Mode : 2462 Band edge  
: 2.4G WIFI 11G  
: ANT2

	Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Line Level	Over Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 *	2462.000	5.57	28.64	41.20	90.64	83.65	74.00	9.65	peak
2	2483.500	5.60	28.67	41.21	55.83	48.89	74.00	-25.11	peak
3	2495.862	5.61	28.69	41.22	57.86	50.94	74.00	-23.06	peak

**4.10.2.6 802.11G\_Highest Channel\_Peak\_Horizontal**

Site : chamber

Condition: 3m HORIZONTAL

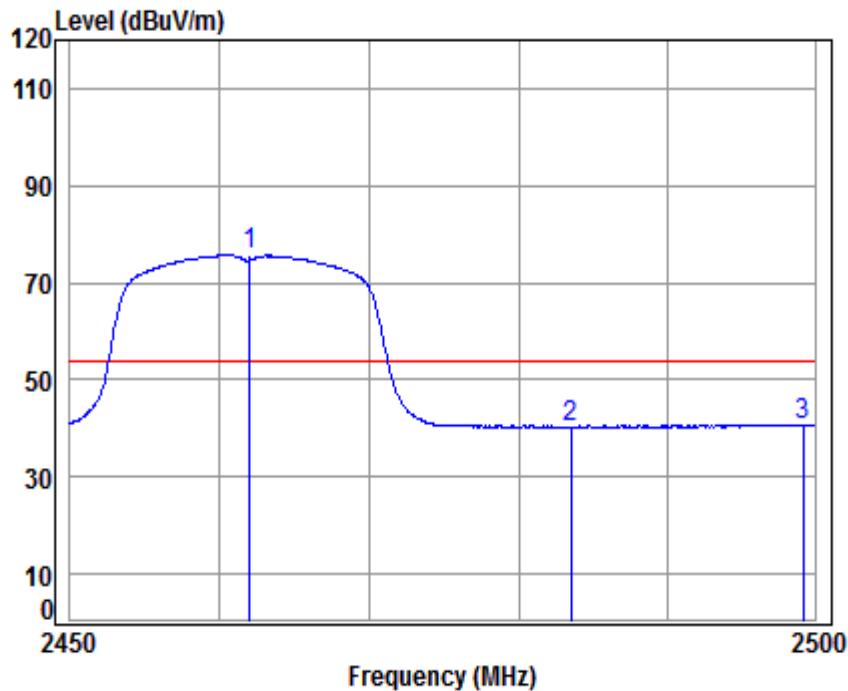
Job No : 12745RG

Mode : 2462 Band edge

: 2.4G WIFI 11G

: ANT2

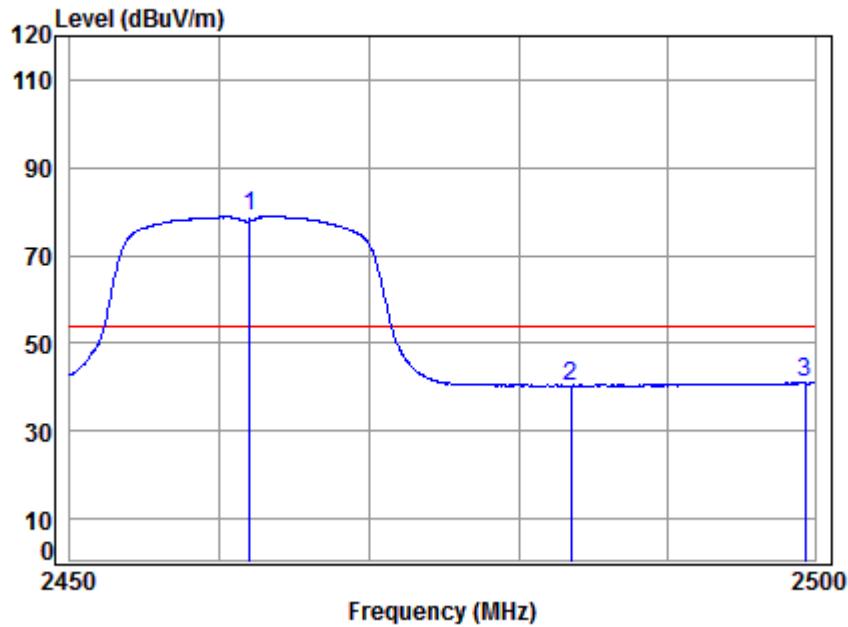
	Cable Freq	Ant Loss	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 *	2462.000	5.57	28.64	41.20	94.16	87.17	74.00	13.17 peak
2	2483.500	5.60	28.67	41.21	55.76	48.82	74.00	-25.18 peak
3	2493.443	5.61	28.69	41.21	58.67	51.76	74.00	-22.24 peak

**4.10.2.7 802.11G\_Highest Channel\_Average\_Verical**

Site : chamber  
Condition: 3m VERTICAL  
Job No : 12745RG  
Mode : 2462 Band edge  
: 2.4G WIFI 11G  
: ANT2

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit

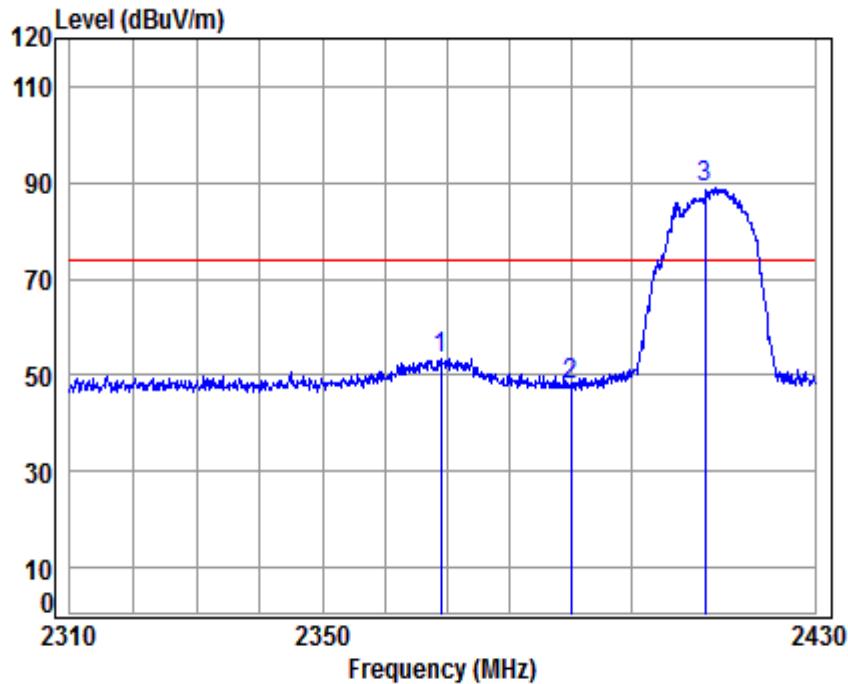
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 *	2462.000	5.57	28.64	41.20	82.64	75.65	54.00	21.65
2	2483.500	5.60	28.67	41.21	47.17	40.23	54.00	-13.77
3	2499.242	5.62	28.70	41.22	47.70	40.80	54.00	-13.20

**4.10.2.8 802.11G\_Highest Channel\_Average\_Horizontal**

Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 12745RG  
Mode : 2462 Band edge  
: 2.4G WIFI 11G  
: ANT2

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit

	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 *	2462.000	5.57	28.64	41.20	85.92	78.93	54.00	24.93	Average
2	2483.500	5.60	28.67	41.21	47.23	40.29	54.00	-13.71	Average
3	2499.344	5.62	28.70	41.22	47.93	41.03	54.00	-12.97	Average

**4.10.2.10 802.11N20\_MIMO\_Lowest Channel\_ Peak\_ Vertical**

Site : chamber

Condition: 3m VERTICAL

Job No : 12745RG

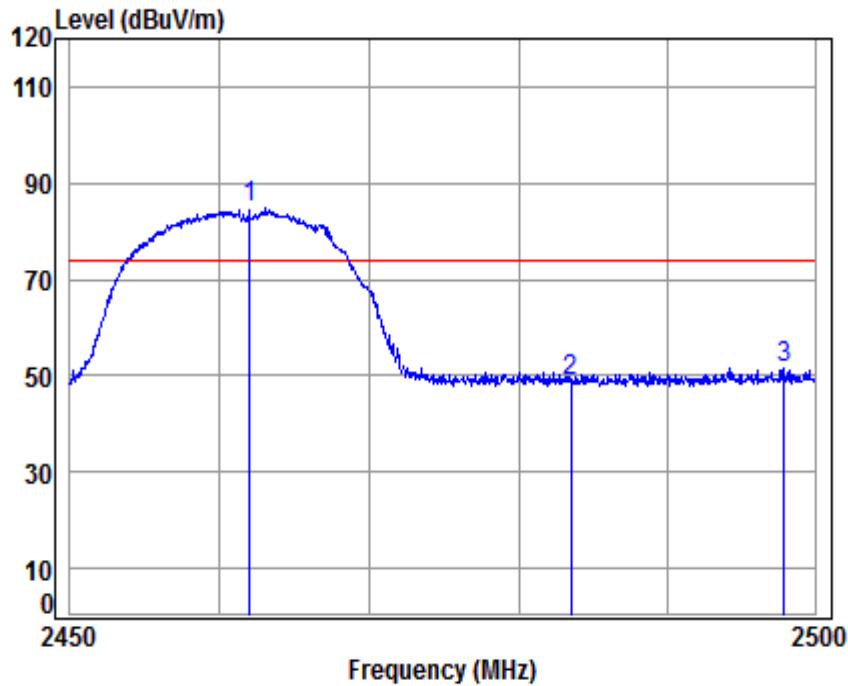
Mode : 2412 Band edge

: 2.4G WIFI 11N20

: MIMO

: 10

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Remark
	MHz	dB	dB/m		dBuV	dBuV/m	dBuV/m	dB
1	2369.000	5.45	28.48	41.16	60.77	53.54	74.00	-20.46 peak
2	2390.000	5.47	28.52	41.17	55.22	48.04	74.00	-25.96 peak
3 *	2412.000	5.50	28.56	41.18	96.28	89.16	74.00	15.16 peak

**4.10.2.11 802.11N20\_MIMO\_Highest Channel\_Peak\_Verical**

Site : chamber

Condition: 3m VERTICAL

Job No : 12745RG

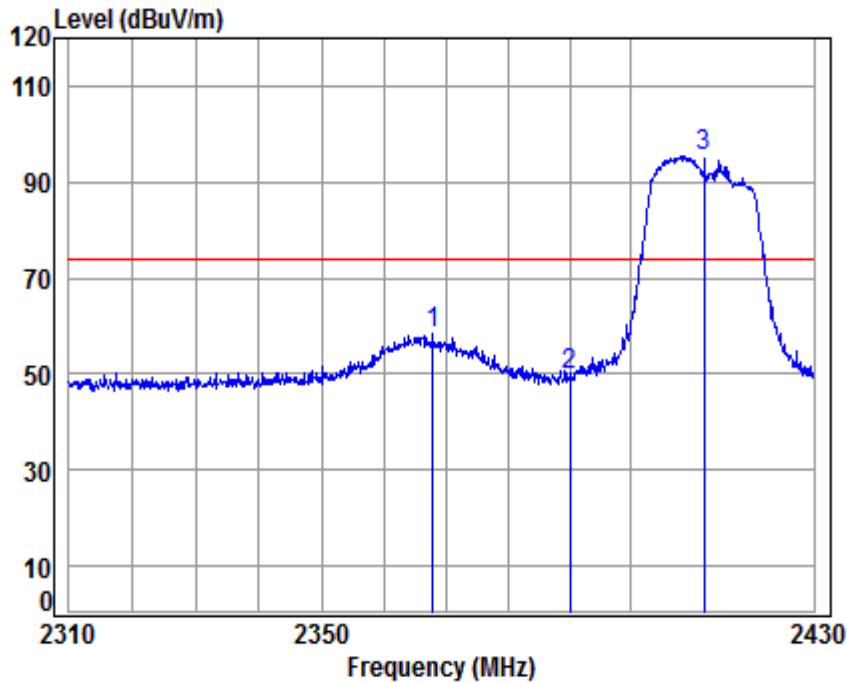
Mode : 2462 Band edge

: 2.4G WIFI 11N20

: MIMO

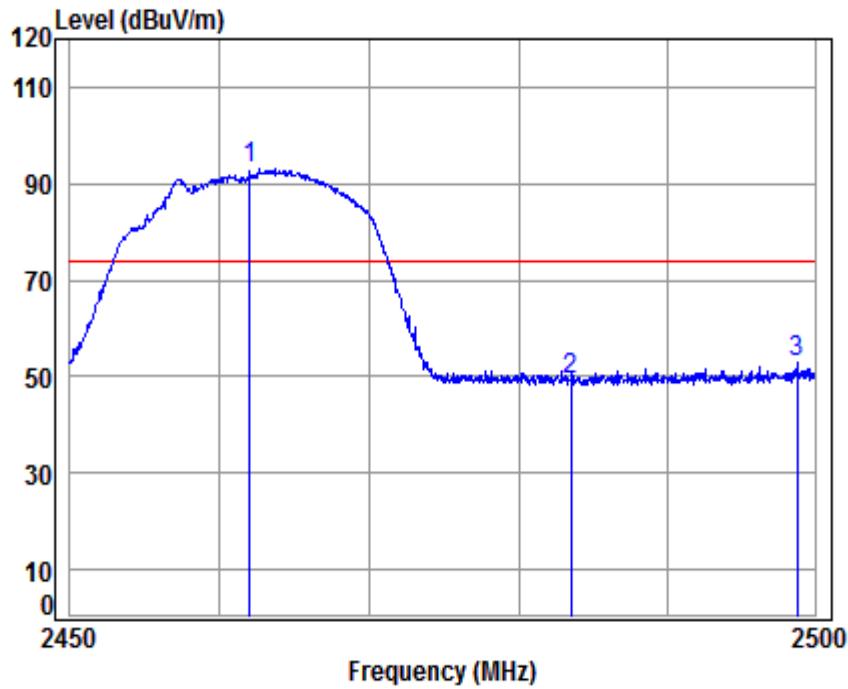
: 10

	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
Freq	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 *	2462.000	5.57	28.64	41.20	91.67	84.68	74.00	10.68 peak
2	2483.500	5.60	28.67	41.21	55.65	48.71	74.00	-25.29 peak
3	2497.930	5.62	28.70	41.22	58.34	51.44	74.00	-22.56 peak

**4.10.2.12 802.11N20\_MIMO\_Lowest Channel\_ Peak\_ Horizontal**

Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 12745RG  
Mode : 2412 Band edge  
: 2.4G WIFI 11N20  
: MIMO  
: 10

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2367.921	5.44	28.48	41.16	65.54	58.30	74.00	-15.70	peak
2	2390.000	5.47	28.52	41.17	57.13	49.95	74.00	-24.05	peak
3 *	2412.000	5.50	28.56	41.18	102.50	95.38	74.00	21.38	peak

**4.10.2.13 802.11N20\_MIMO\_Highest Channel\_Peak\_Horizontal**

Site : chamber

Condition: 3m HORIZONTAL

Job No : 12745RG

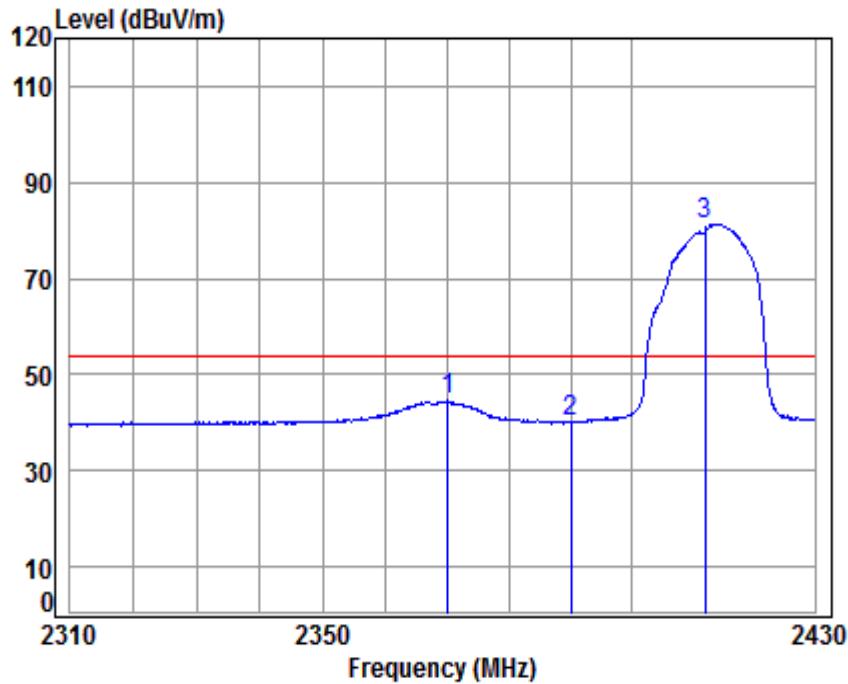
Mode : 2462 Band edge

: 2.4G WIFI 11N20

: MIMO

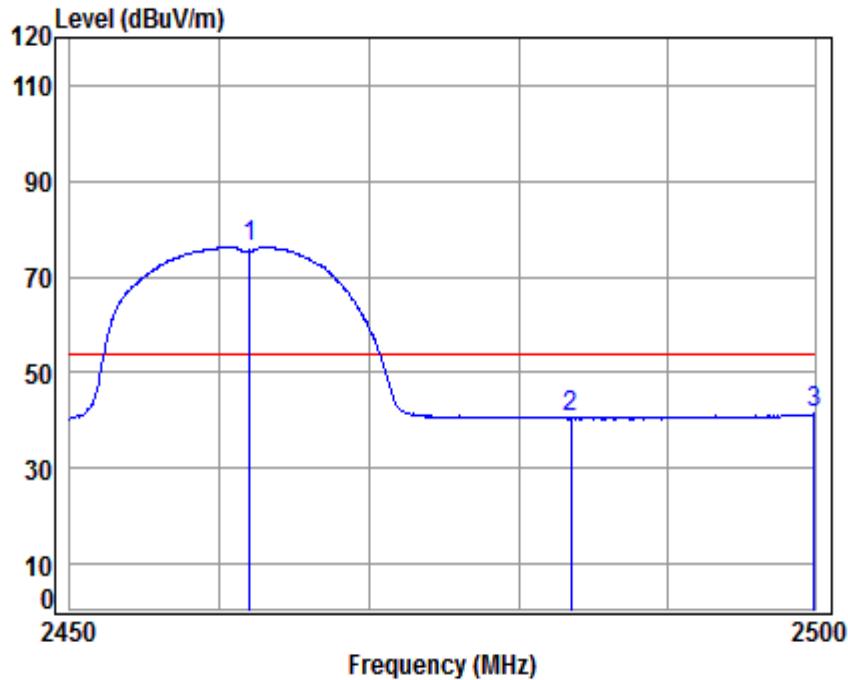
: 10

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark
	Loss	Factor	Factor	Level	Level	Line	
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 * 2462.000	5.57	28.64	41.20	100.23	93.24	74.00	19.24 peak
2 2483.500	5.60	28.67	41.21	56.44	49.50	74.00	-24.50 peak
3 2498.788	5.62	28.70	41.22	60.03	53.13	74.00	-20.87 peak

**4.10.2.14 802.11N20\_MIMO\_Lowest Channel\_Average\_Ver**

Site : chamber  
Condition: 3m VERTICAL  
Job No : 12745RG  
Mode : 2412 Band edge  
: 2.4G WIFI 11N20  
: MIMO  
: 10

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2370.080	5.45	28.48	41.16	51.80	44.57	54.00	-9.43	Average
2	2390.000	5.47	28.52	41.17	47.36	40.18	54.00	-13.82	Average
3 *	2412.000	5.50	28.56	41.18	88.36	81.24	54.00	27.24	Average

**4.10.2.15 802.11N20\_MIMO\_Highest Channel\_Average\_Verical**

Site : chamber

Condition: 3m VERTICAL

Job No : 12745RG

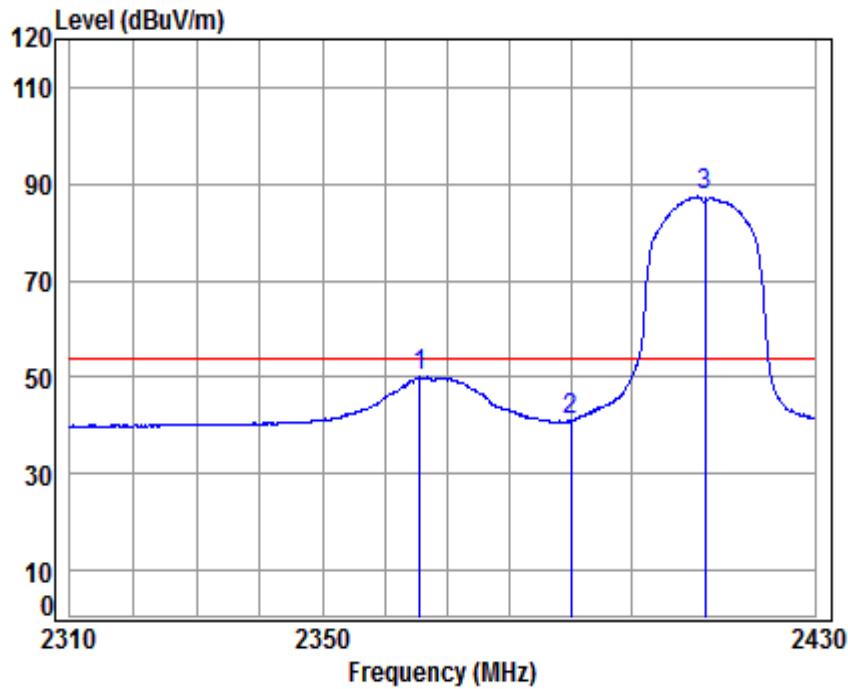
Mode : 2462 Band edge

: 2.4G WIFI 11N20

: MIMO

: 10

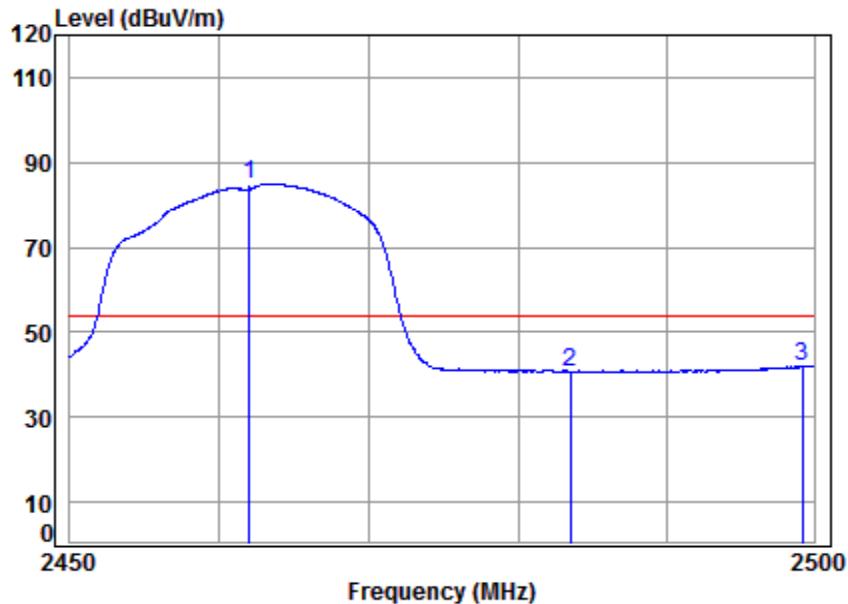
	Cable Freq	Loss dB	Ant Factor	Preamp Factor	Read Level dB	Level dBuV	Limit dBuV/m	Line dBuV/m	Over Limit dB	Over Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dBuV/m	dB	
1 *	2462.000	5.57	28.64	41.20	83.21	76.22	54.00	22.22		Average
2	2483.500	5.60	28.67	41.21	47.35	40.41	54.00	-13.59		Average
3	2499.949	5.62	28.70	41.22	48.26	41.36	54.00	-12.64		Average

**4.10.2.16 802.11N20\_MIMO\_Lowest Channel\_ Average \_ Horizontal**

Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 12745RG  
Mode : 2412 Band edge  
: 2.4G WIFI 11N20  
: MIMO  
: 10

	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
--	------------	------------	---------------	------------	-------------	------------	------------	--------

	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2365.644	5.44	28.48	41.16	57.27	50.03	54.00	-3.97	Average
2	2390.000	5.47	28.52	41.17	48.28	41.10	54.00	-12.90	Average
3 *	2412.000	5.50	28.55	41.18	94.54	87.41	54.00	33.41	Average

**4.10.2.17 802.11N20\_MIMO\_Highest Channel\_Average\_Horizontal**

Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 12745RG  
Mode : 2462 Band edge  
: 2.4G WIFI 11N20  
: MIMO  
: 10

Freq	Cable	Ant	Preamp	Read	Limit	Over	Remark
	Loss	Factor	Factor	Level			
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 * 2462.000	5.57	28.64	41.20	91.95	84.96	54.00	30.96 Average
2 2483.500	5.60	28.67	41.21	47.64	40.70	54.00	-13.30 Average
3 2499.192	5.62	28.70	41.22	49.03	42.13	54.00	-11.87 Average

**Remark:**

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor

All Modes have been tested, but only the worst case data displayed in this report.

## 5 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Total RF power, conducted	±0.75dB
2	RF power density, conducted	±2.84dB
3	Spurious emissions, conducted	±0.75dB
4	Radiated Spurious emission test	±4.5dB (30MHz-1GHz)
		±4.8dB (1GHz-25GHz)
5	Conduct emission test	±3.12 dB (9KHz- 30MHz)
6	Temperature test	±1°C
7	Humidity test	±3%
8	DC and low frequency voltages	±0.5%

## 6 Equipment List

Conducted Emission					
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Duedate (yyyy-mm-dd)
Shielding Room	ZhongYu Electron	GB-88	SEM001-06	2017/5/10	2020/5/9
LISN	Rohde & Schwarz	ENV216	SEM007-01	2018/9/2	2019/9/2
LISN	ETS-LINDGREN	Feb-16	SEM007-02	2018/4/2	2019/4/1
Measurement Software	AUDIX	e3 V5.4.1221d	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM024-01	2018/7/12	2019/7/11
2 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T2-02	EMC0122	2018/2/14	2019/2/13
EMI Test Receiver	Rohde & Schwarz	ESCI	SEM004-02	2018/4/2	2019/4/1
RF conducted test					
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Duedate (yyyy-mm-dd)
DC Power Supply	Agilent Technologies Inc	66311B	W009-09	2018/9/15	2019/9/15
Signal Analyzer	Rohde & Schwarz	FSV	W025-05	2018/3/13	2019/3/12
Coaxial Cable	SGS	N/A	SEM031-01	2018/7/13	2019/7/12
Attenuator	Weinschel Associates	WA41	SEM021-09	N/A	N/A
Signal Generator	KEYSIGHT	N5173B	SEM006-05	2018/9/2	2019/9/2
Temperature Chamber	GIANT FORCE	ICT-150-40-CP-AR	W027-03	2018/11/27	2019/11/27
Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2018/9/2	2019/9/2
RE in Chamber					
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (yyyy-mm-dd)	Cal. Due date (yyyy-mm-dd)
10m Semi-Anechoic Chamber	SAEMC	FSAC1018	SEM001-03	2018/3/31	2021/3/30
EMI Test Receiver (9k-7GHz)	Rohde & Schwarz	ESR	SEM004-03	2018/4/2	2019/4/1
Trilog-Broadband Antenna(25M-2GHz)	Schwarzbeck	VULB9168	SEM003-18	2016/6/29	2019/6/28
Pre-amplifier (9k-1GHz)	Sonoma	310N	SEM005-03	2018/4/13	2019/4/12
Loop Antenna (9kHz-30MHz)	ETS-Lindgren	6502	SEM003-08	2017/8/22	2020/8/21
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM029-01	2018/7/12	2019/7/11
RE in Chamber					
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)
3m Semi-Anechoic Chamber	AUDIX	N/A	SEM001-02	2018/3/13	2021/3/12
Measurement Software	AUDIX	e3V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM026-01	2018/7/12	2019/7/11
EXA Signal Analyzer (10Hz-26.5GHz)	Agilent Technologies Inc	N9010A	SEM004-09	2018/4/13	2019/4/12
BiConiLog Antenna (26-3000MHz)	ETS-Lindgren	3142C	SEM003-01	2017/6/27	2020/6/26
Horn Antenna (0.8-18GHz)	Rohde & Schwarz	HF907	SEM003-07	2018/4/13	2021/4/12
Pre-amplifier(0.1-1.3GHz)	HP	8447D	SEM005-02	2018/9/2	2019/9/2
Low Noise Amplifier(100MHz-18GHz)	Black Diamond Series	BDLNA-0118-352810	SEM005-05	2018/9/27	2019/9/27
Pre-amplifier(18-26GHz)	Rohde & Schwarz	CH14-H052	SEM005-17	2018/4/2	2019/4/1
Band filter	N/A	N/A	SEM023-01	N/A	N/A



## **7 Photographs - EUT Constructional Details**

Refer to Appendix A - Photographs of EUT Constructional Details for SZEM1712012745RG.

---

The End