



Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT20) Mode 5240 MHz (U-NII-1) Antenna 0+1+2		
Remark:			

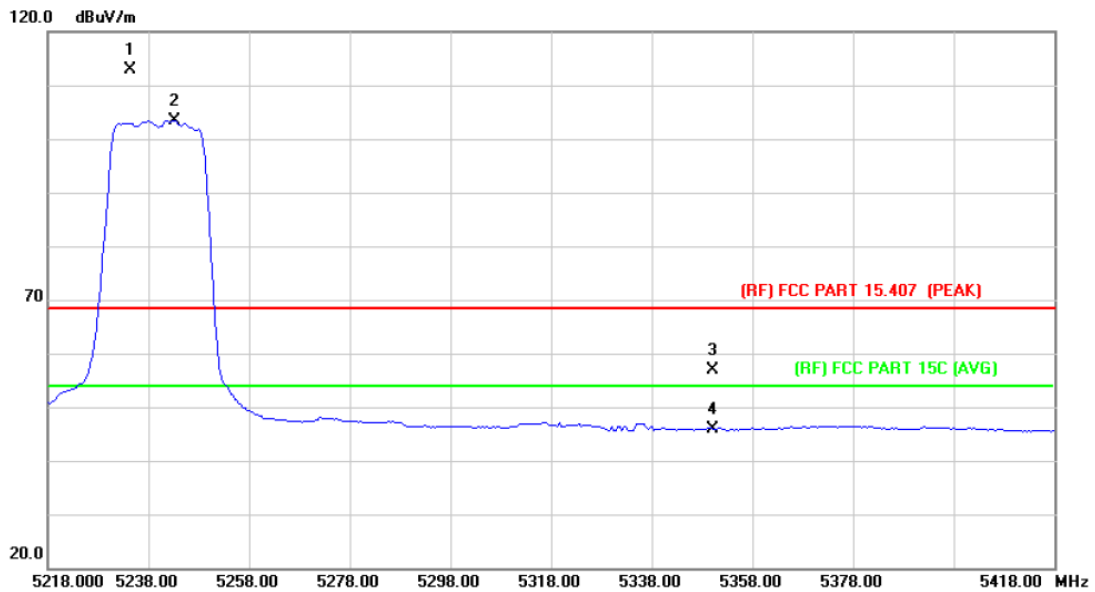

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	X	5234.500	96.15	16.70	112.85	Fundamental Frequency		peak
2	*	5243.200	86.70	16.72	103.42	Fundamental Frequency		AVG
3		5350.000	39.96	16.83	56.79	68.30	-11.51	peak
4		5350.000	29.08	16.83	45.91	54.00	-8.09	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT20) Mode 5180 MHz (U-NII-1) Antenna 0+1+2		
Remark:			

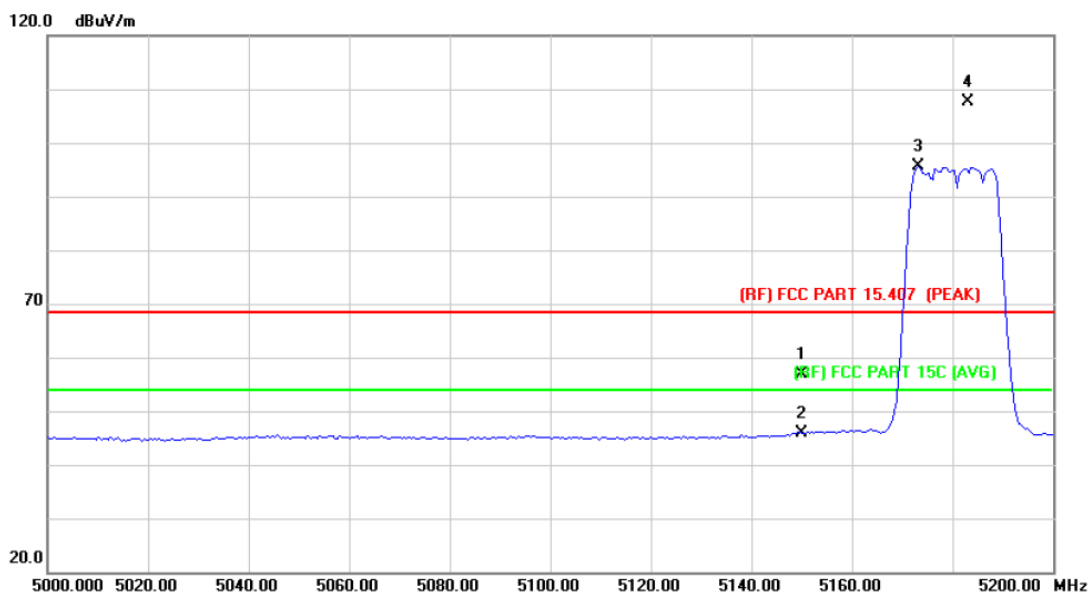

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB Detector
1		5150.000	40.21	16.61	56.82	68.30	-11.48 peak
2		5150.000	29.22	16.61	45.83	54.00	-8.17 AVG
3	*	5173.200	79.02	16.63	95.65	Fundamental Frequency AVG	
4	X	5183.200	91.01	16.65	107.66	Fundamental Frequency peak	

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT20) Mode 5180 MHz (U-NII-1) Antenna 0+1+2		
Remark:			

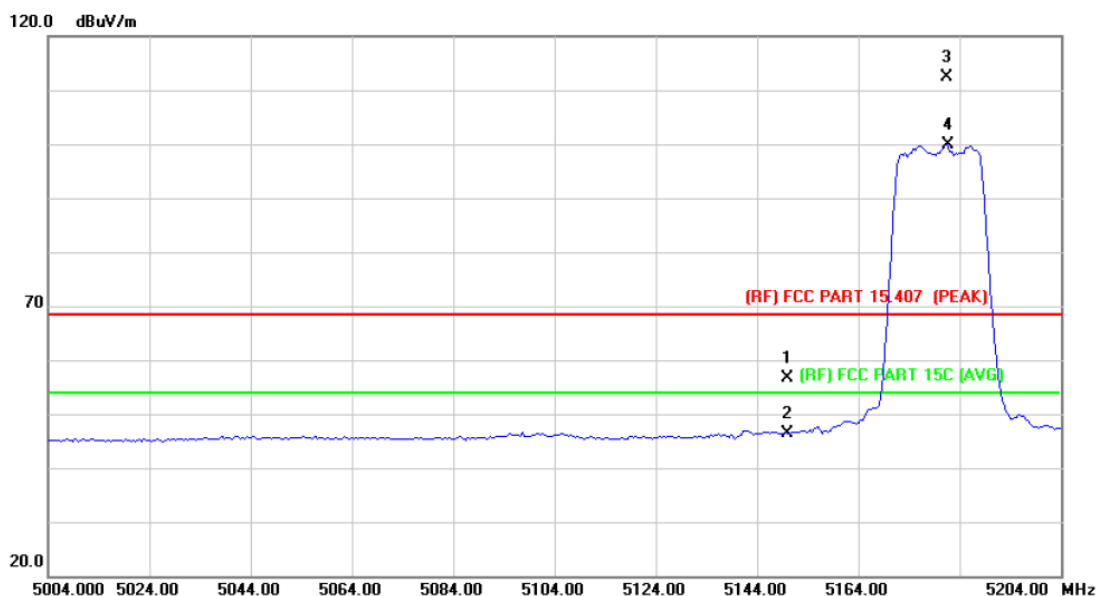

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB Detector
1		5150.000	40.13	16.61	56.74	68.30	-11.56 peak
2		5150.000	29.72	16.61	46.33	54.00	-7.67 AVG
3	X	5181.347	95.71	16.64	112.35	Fundamental Frequency peak	
4	*	5181.674	83.20	16.64	99.84	Fundamental Frequency AVG	

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT20) Mode 5240 MHz (U-NII-1) Antenna 0+1+2		
Remark:			

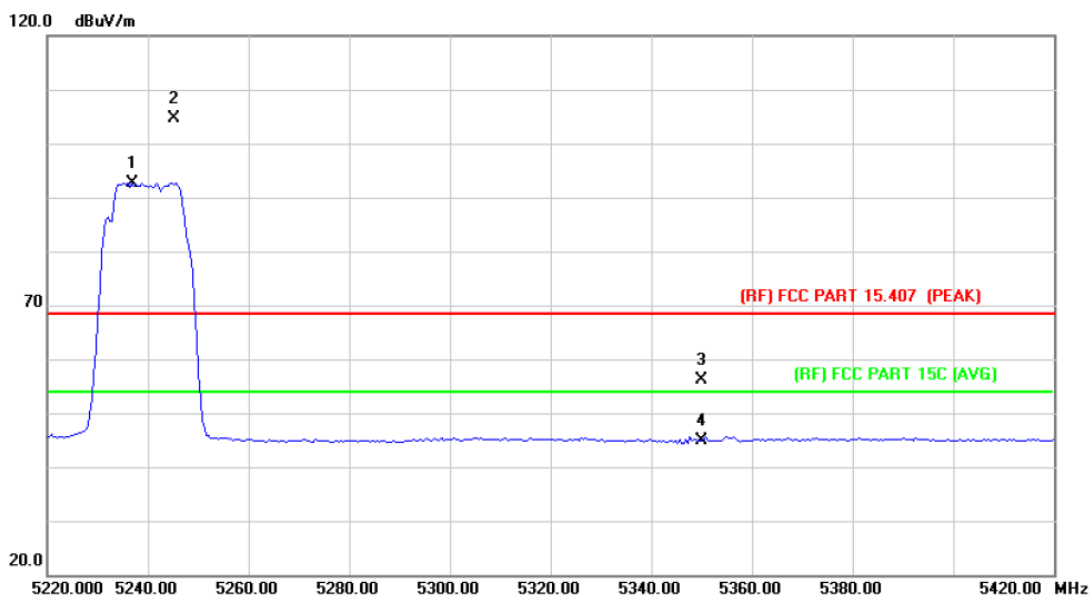

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	5236.800	76.00	16.70	92.70	Fundamental Frequency		AVG
2	X	5245.200	87.84	16.71	104.55	Fundamental Frequency		peak
3		5350.000	39.25	16.83	56.08	68.30	-12.22	peak
4		5350.000	28.01	16.83	44.84	54.00	-9.16	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT20) Mode 5240 MHz (U-NII-1) Antenna 0+1+2		
Remark:			

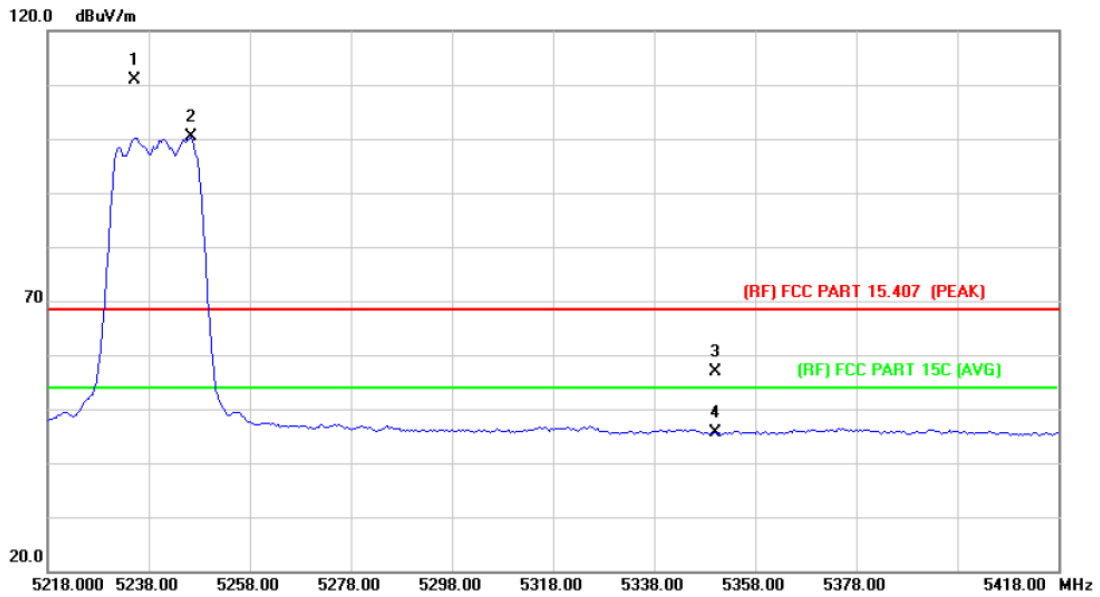

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	X	5235.200	94.15	16.70	110.85	Fundamental Frequency		peak
2	*	5246.400	83.74	16.71	100.45	Fundamental Frequency		AVG
3		5350.000	40.02	16.83	56.85	68.30	-11.45	peak
4		5350.000	28.71	16.83	45.54	54.00	-8.46	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT40) Mode 5190 MHz (U-NII-1) Antenna 0+1+2		
Remark:			

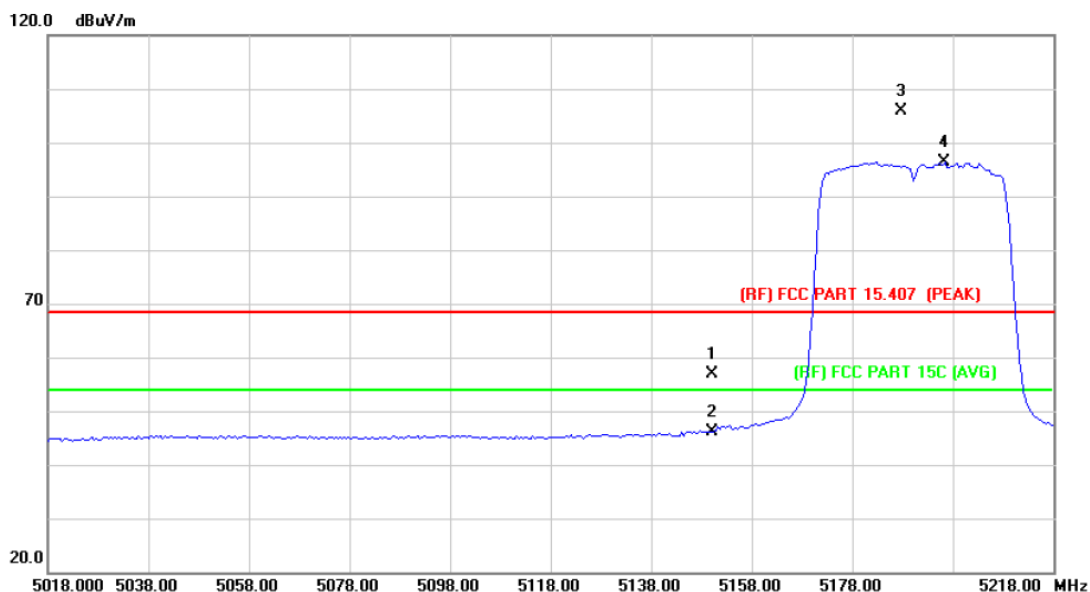

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		5150.000	40.26	16.61	56.87	68.30	-11.43	peak
2		5150.000	29.47	16.61	46.08	54.00	-7.92	AVG
3	X	5187.650	89.21	16.65	105.86	Fundamental Frequency		peak
4	*	5196.400	79.68	16.65	96.33	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT40) Mode 5190 MHz (U-NII-1) Antenna 0+1+2		
Remark:			

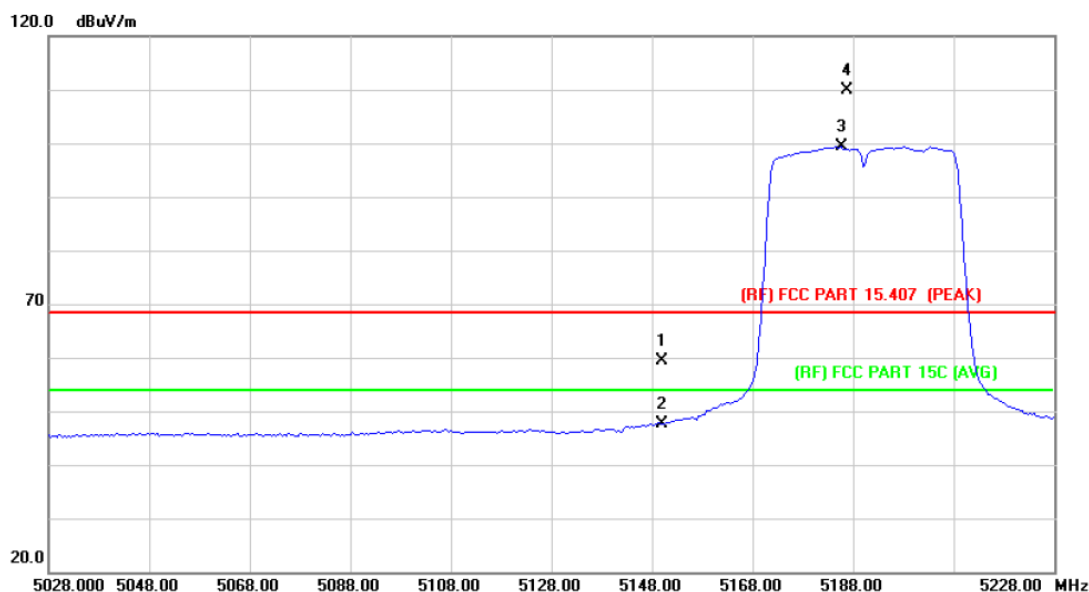

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	42.73	16.61	59.34	68.30	-8.96	peak
2		5150.000	31.08	16.61	47.69	54.00	-6.31	AVG
3	*	5185.600	82.62	16.65	99.27	Fundamental Frequency		AVG
4	X	5186.670	93.20	16.65	109.85	Fundamental Frequency		peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT40) Mode 5230 MHz (U-NII-1) Antenna 0+1+2		
Remark:			

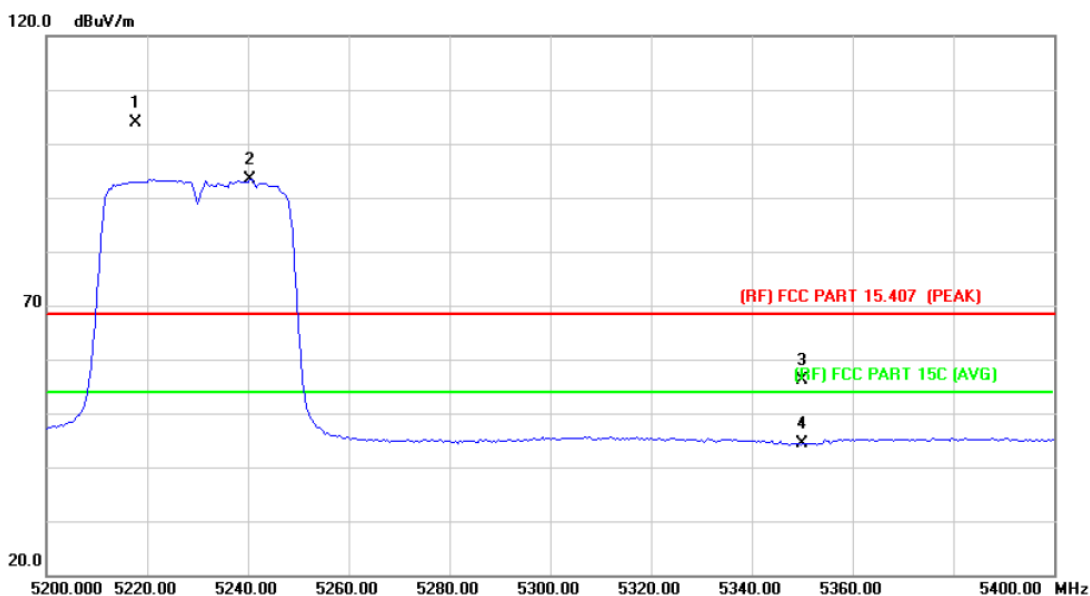

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	5217.600	87.20	16.68	103.88	Fundamental Frequency		peak
2	*	5240.400	76.67	16.72	93.39	Fundamental Frequency		AVG
3		5350.000	39.39	16.83	56.22	68.30	-12.08	peak
4		5350.000	27.55	16.83	44.38	54.00	-9.62	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT40) Mode 5230 MHz (U-NII-1) Antenna 0+1+2		
Remark:			

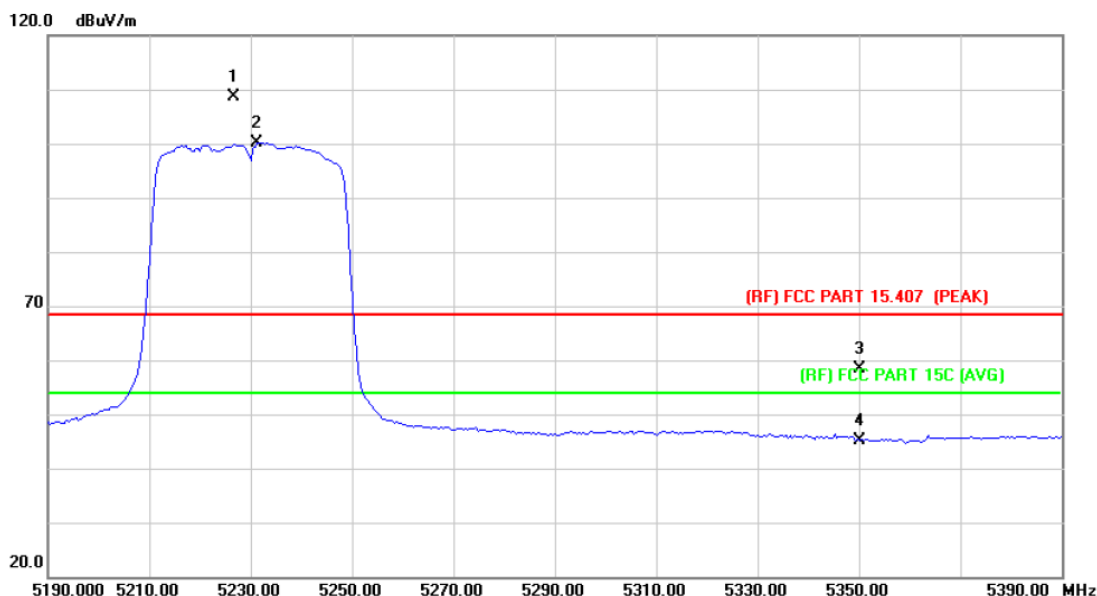

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	5226.540	91.99	16.70	108.69	Fundamental Frequency		peak
2	*	5231.200	83.38	16.70	100.08	Fundamental Frequency		AVG
3		5350.000	41.53	16.83	58.36	68.30	-9.94	peak
4		5350.000	28.34	16.83	45.17	54.00	-8.83	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT40) Mode 5190 MHz (U-NII-1) Antenna 0+1+2		
Remark:			

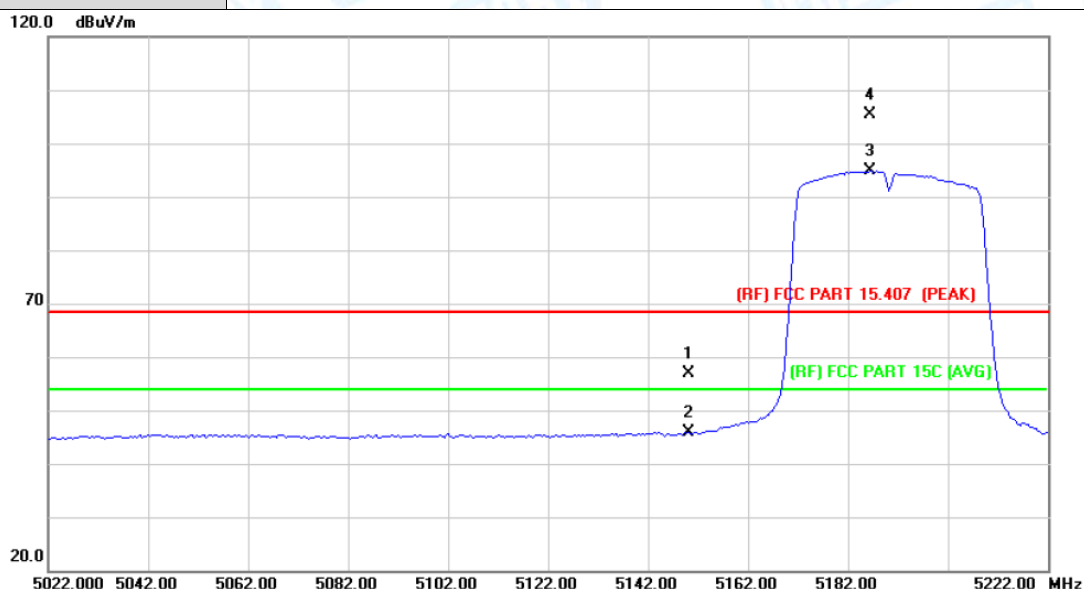

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB Detector
1		5150.000	40.28	16.61	56.89	68.30	-11.41 peak
2		5150.000	29.24	16.61	45.85	54.00	-8.15 AVG
3	*	5186.400	78.19	16.65	94.84	Fundamental Frequency	
4	X	5186.530	88.72	16.65	105.37	Fundamental Frequency	

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT40) Mode 5190 MHz (U-NII-1) Antenna 0+1+2		
Remark:			

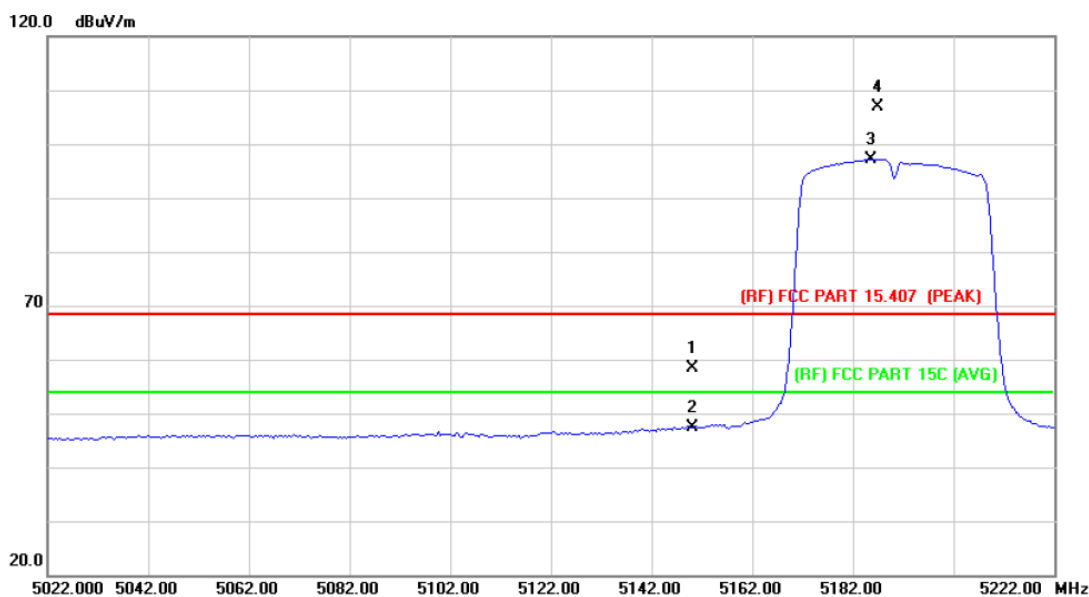

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	41.73	16.61	58.34	68.30	-9.96	peak
2		5150.000	30.87	16.61	47.48	54.00	-6.52	AVG
3	*	5185.600	80.57	16.65	97.22	Fundamental Frequency		AVG
4	X	5186.970	90.23	16.65	106.88	Fundamental Frequency		peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT40) Mode 5230 MHz (U-NII-1) Antenna 0+1+2		
Remark:			

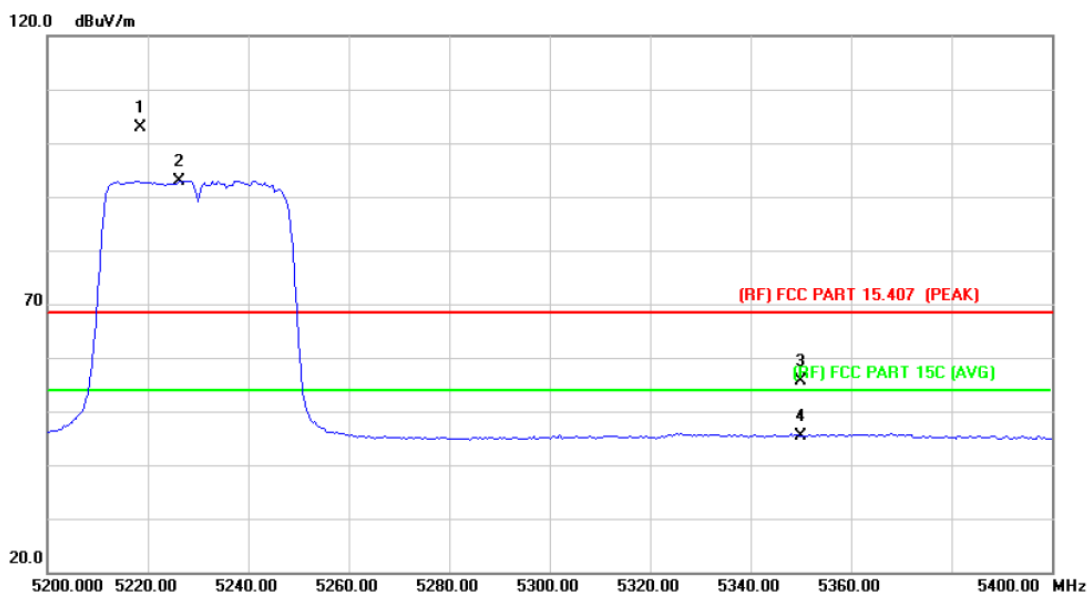

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	5218.640	86.27	16.69	102.96	Fundamental Frequency		peak
2	*	5226.400	76.26	16.70	92.96	Fundamental Frequency		AVG
3		5350.000	38.85	16.83	55.68	68.30	-12.62	peak
4		5350.000	28.46	16.83	45.29	54.00	-8.71	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT40) Mode 5230 MHz (U-NII-1) Antenna 0+1+2		
Remark:			

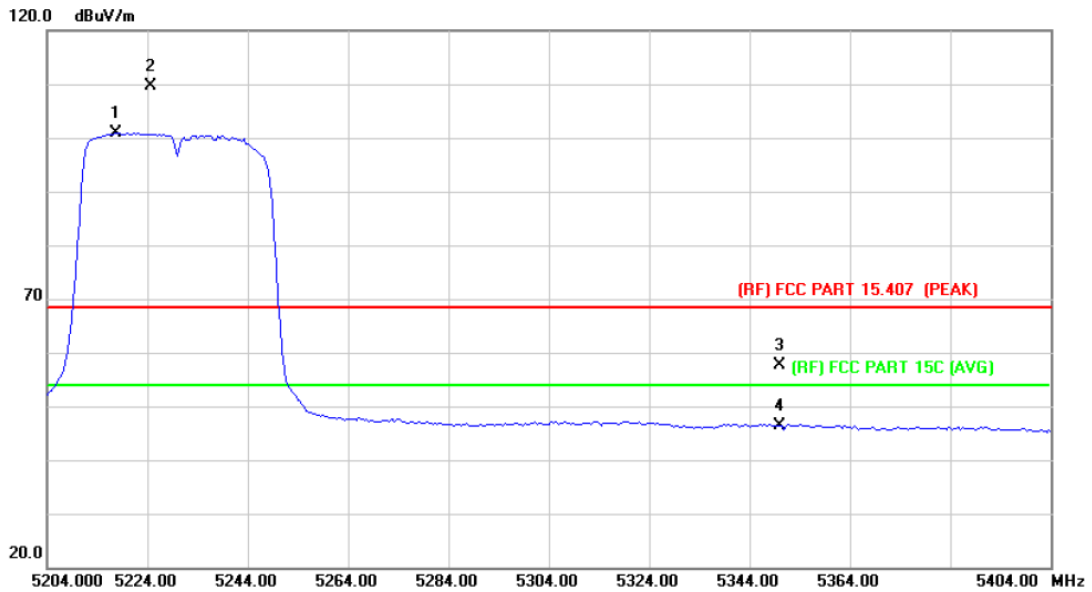

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	5217.600	84.15	16.68	100.83	Fundamental Frequency		AVG
2	X	5224.620	93.00	16.69	109.69	Fundamental Frequency		peak
3		5350.000	40.72	16.83	57.55	68.30	-10.75	peak
4		5350.000	29.63	16.83	46.46	54.00	-7.54	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT80) Mode 5210 MHz (U-NII-1) Antenna 0+1+2		
Remark:			

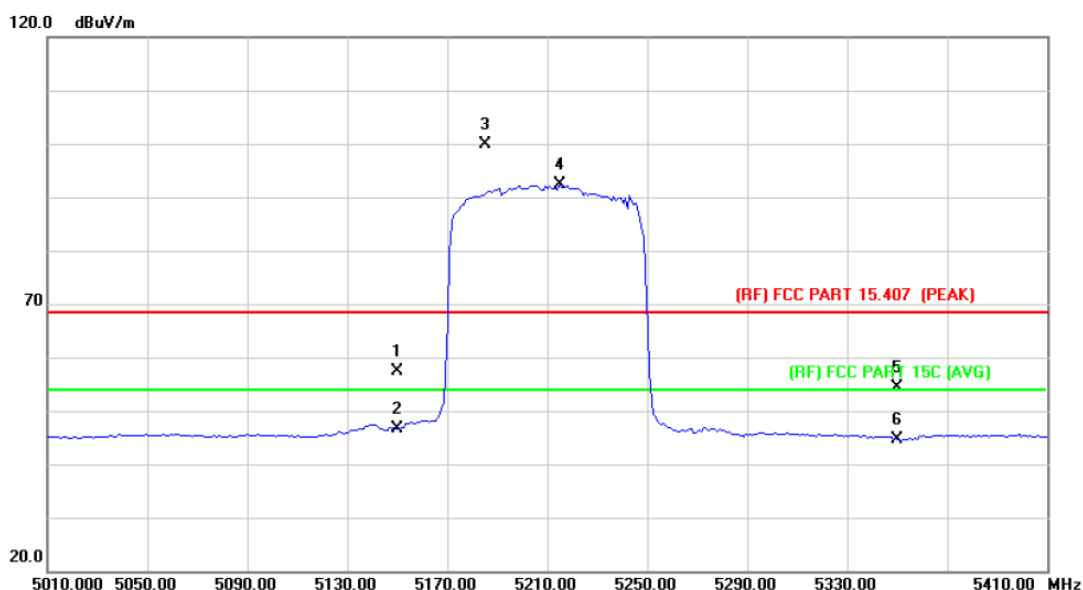

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	40.74	16.61	57.35	68.30	-10.95	peak
2		5150.000	29.96	16.61	46.57	54.00	-7.43	AVG
3	X	5185.200	83.24	16.65	99.89	Fundamental Frequency		peak
4	*	5214.800	75.65	16.68	92.33	Fundamental Frequency		AVG
5		5350.000	37.53	16.83	54.36	68.30	-13.94	peak
6		5350.000	27.72	16.83	44.55	54.00	-9.45	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT80) Mode 5210 MHz (U-NII-1) Antenna 0+1+2		
Remark:			

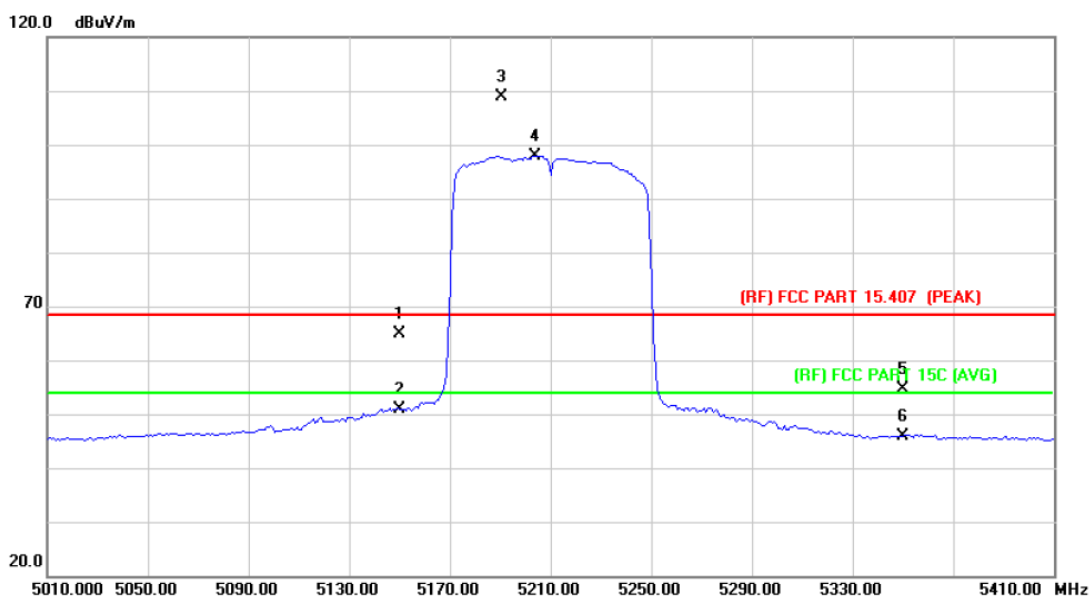

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	48.26	16.61	64.87	68.30	-3.43	peak
2		5150.000	34.17	16.61	50.78	54.00	-3.22	AVG
3	X	5190.500	92.14	16.66	108.80	Fundamental Frequency		peak
4	*	5203.600	81.32	16.67	97.99	Fundamental Frequency		AVG
5		5350.000	37.85	16.83	54.68	68.30	-13.62	peak
6		5350.000	28.97	16.83	45.80	54.00	-8.20	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5745 MHz (U-NII-3) Antenna 0		
Remark:			

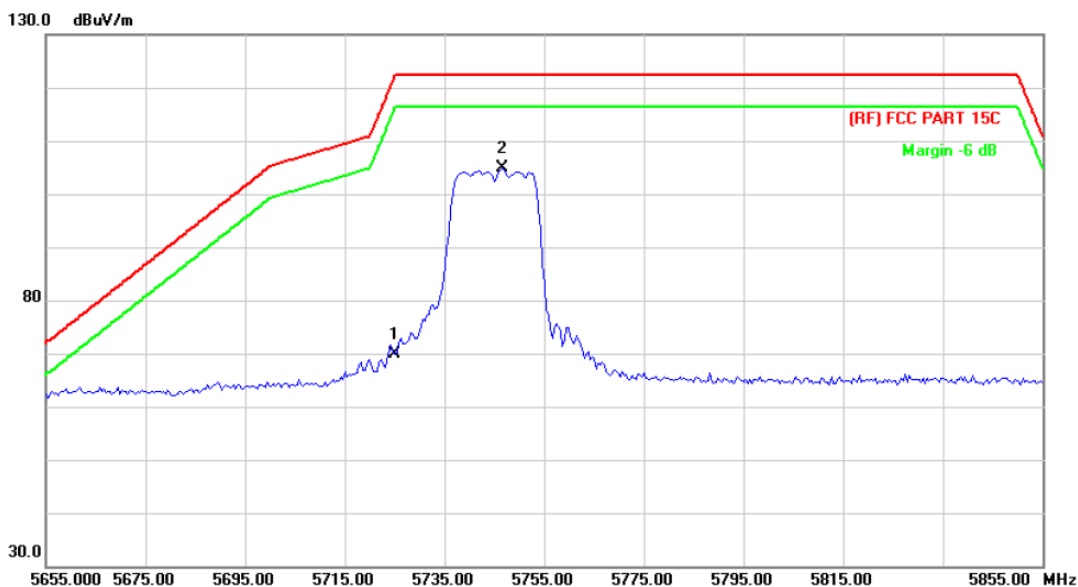

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	52.07	17.82	69.89	122.30	-52.41	peak
2	*	5746.600	86.92	17.90	104.82	122.30	-17.48	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5745 MHz (U-NII-3) Antenna 0		
Remark:			

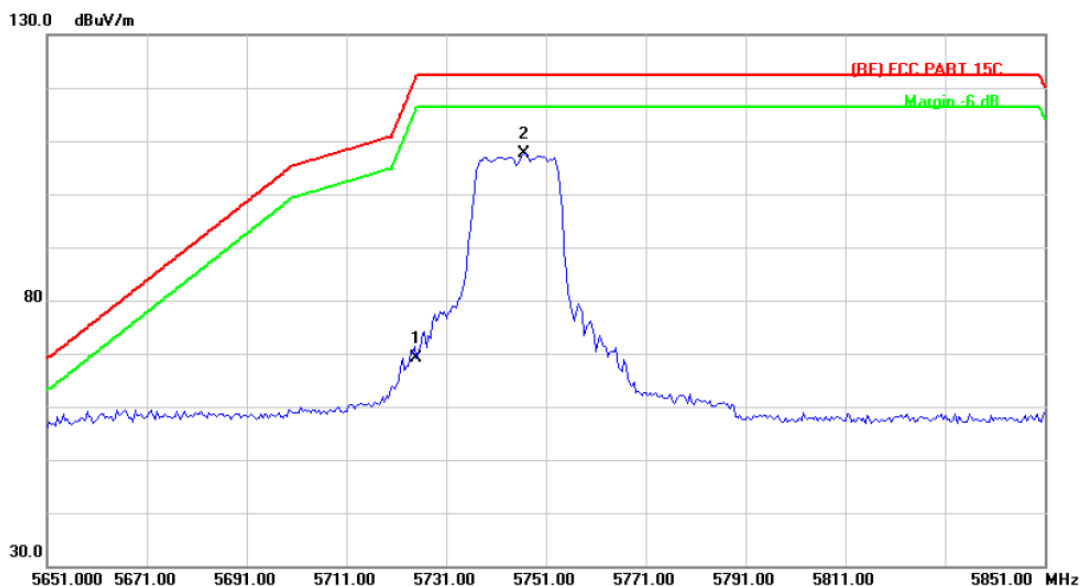

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	51.35	17.82	69.17	122.30	-53.13	peak
2	*	5746.600	89.67	17.90	107.57	122.30	-14.73	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5825 MHz (U-NII-3) Antenna 0		
Remark:			

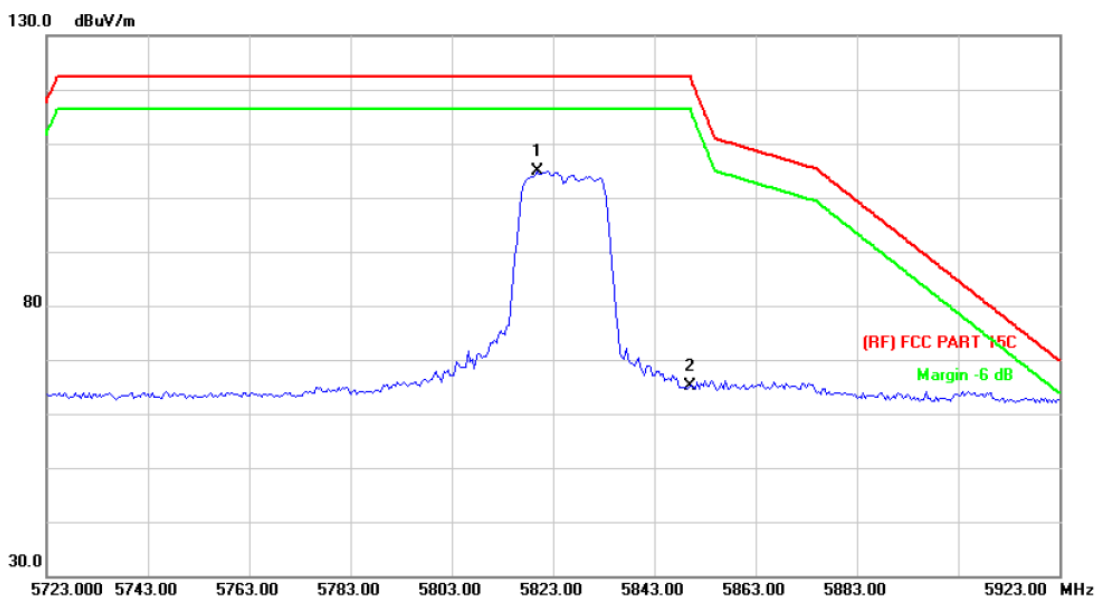

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	5819.800	86.71	18.17	104.88	122.30	-17.42	peak
2		5850.000	46.97	18.28	65.25	122.30	-57.05	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5825 MHz (U-NII-3) Antenna 0		
Remark:			

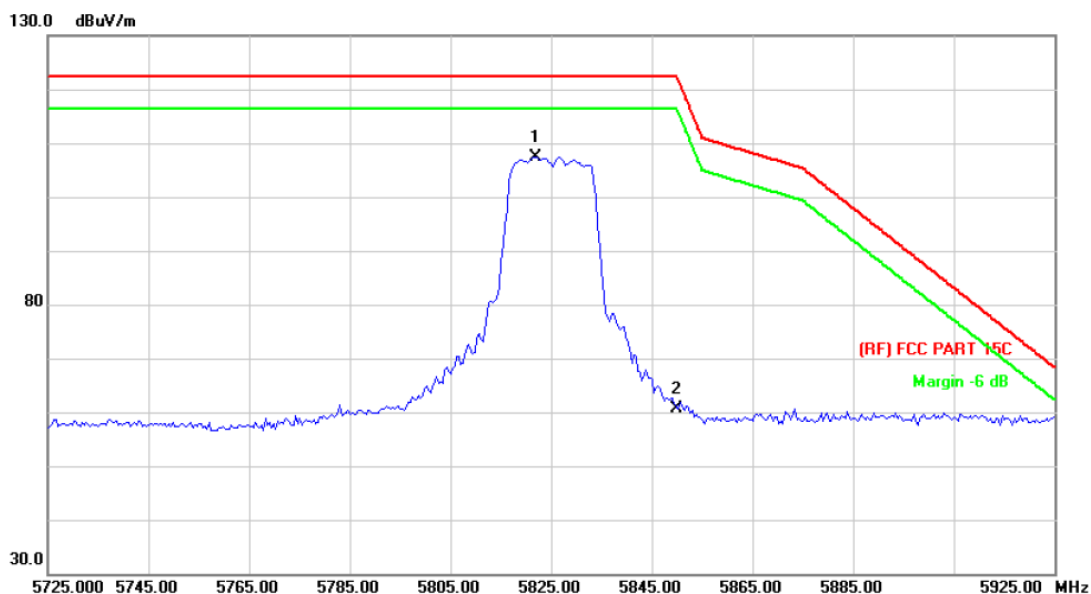

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	5821.800	89.12	18.17	107.29	122.30	-15.01	peak
2		5850.000	42.29	18.28	60.57	122.30	-61.73	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT20) Mode 5745 MHz (U-NII-3) Antenna 0+1+2		
Remark:			

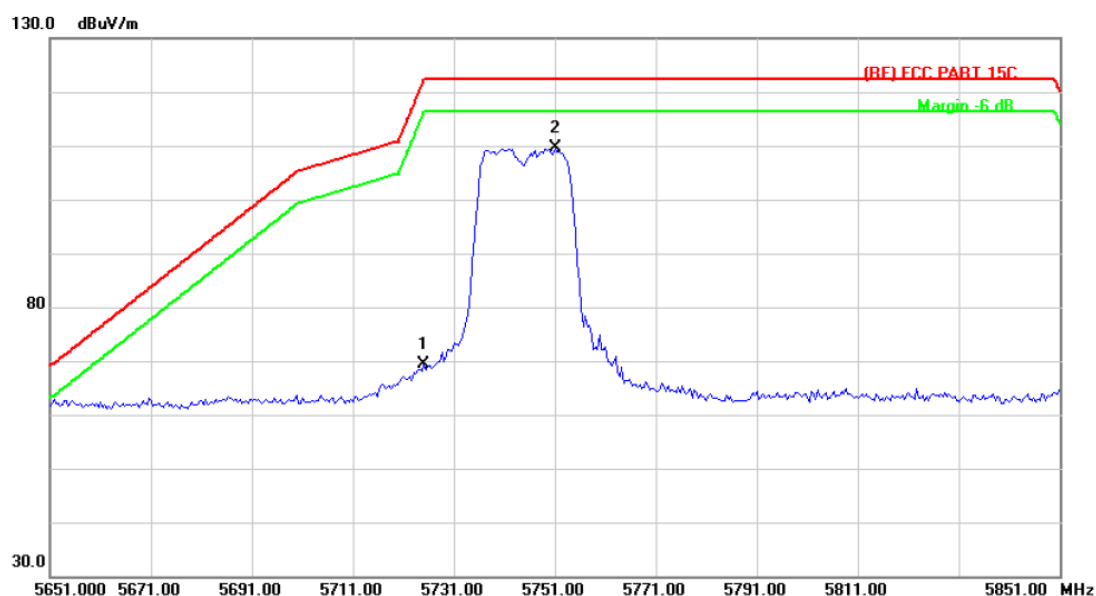

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	54.13	17.82	71.95	122.30	-50.35	peak
2	*	5747.000	93.80	17.90	111.70	122.30	-10.60	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT20) Mode 5745 MHz (U-NII-3) Antenna 0+1+2		
Remark:			

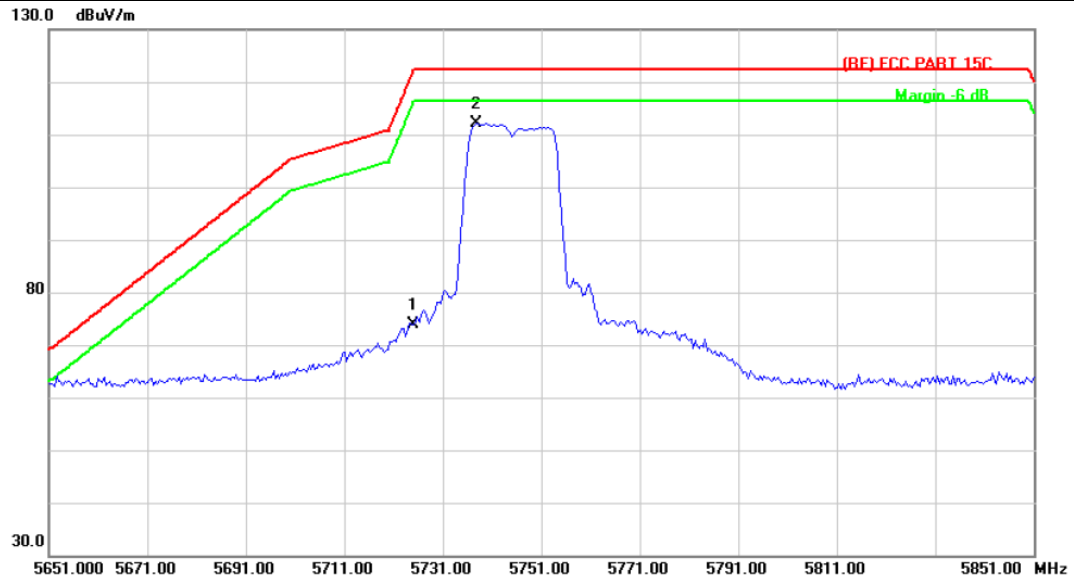

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	55.99	17.82	73.81	122.30	-48.49	peak
2	*	5737.800	94.31	17.87	112.18	122.30	-10.12	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT20) Mode 5825 MHz (U-NII-3) Antenna 0+1+2		
Remark:			

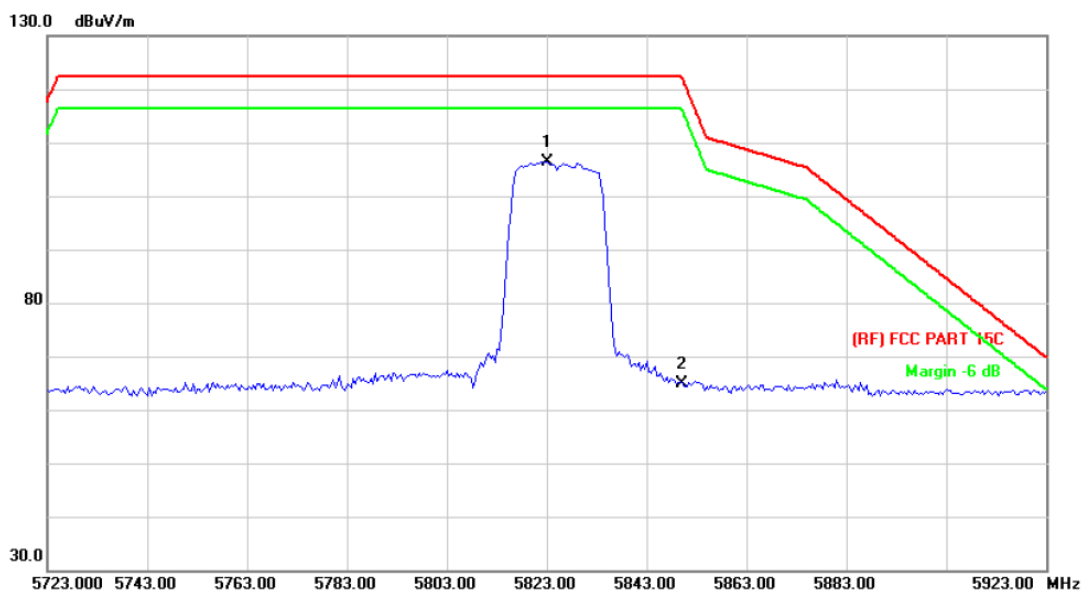

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	5823.000	89.22	18.17	107.39	122.30	-14.91	peak
2		5850.000	49.56	18.28	67.84	122.30	-54.46	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT20) Mode 5825 MHz (U-NII-3) Antenna 0+1+2		
Remark:			

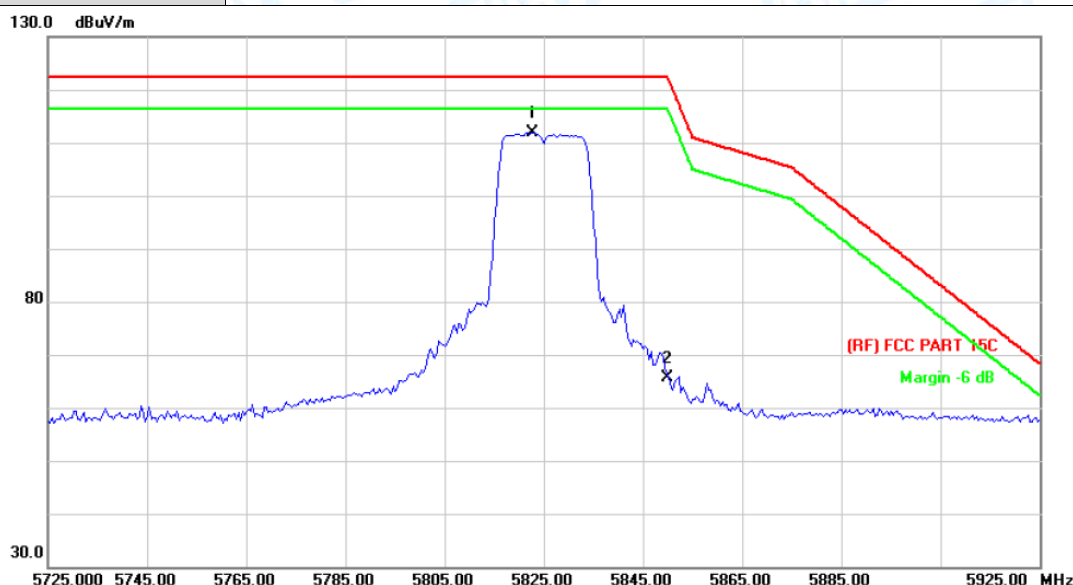

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	5822.600	93.69	18.17	111.86	122.30	-10.44	peak
2		5850.000	47.27	18.28	65.55	122.30	-56.75	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT20) Mode 5745 MHz (U-NII-3) Antenna 0+1+2		
Remark:			

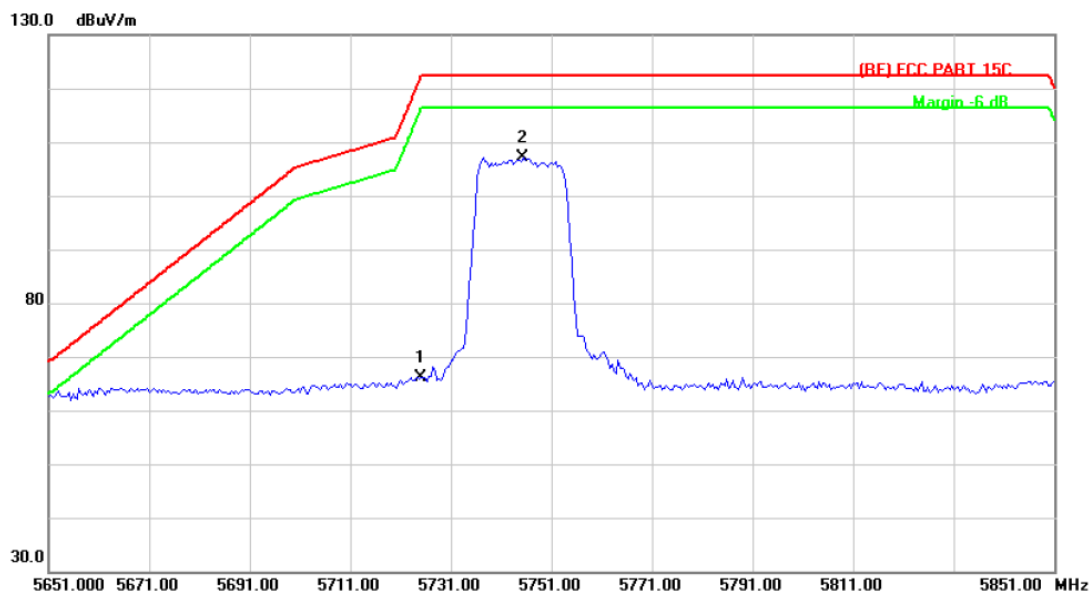

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	48.27	17.82	66.09	122.30	-56.21	peak
2	*	5745.400	89.26	17.90	107.16	122.30	-15.14	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT20) Mode 5745 MHz (U-NII-3) Antenna 0+1+2		
Remark:			

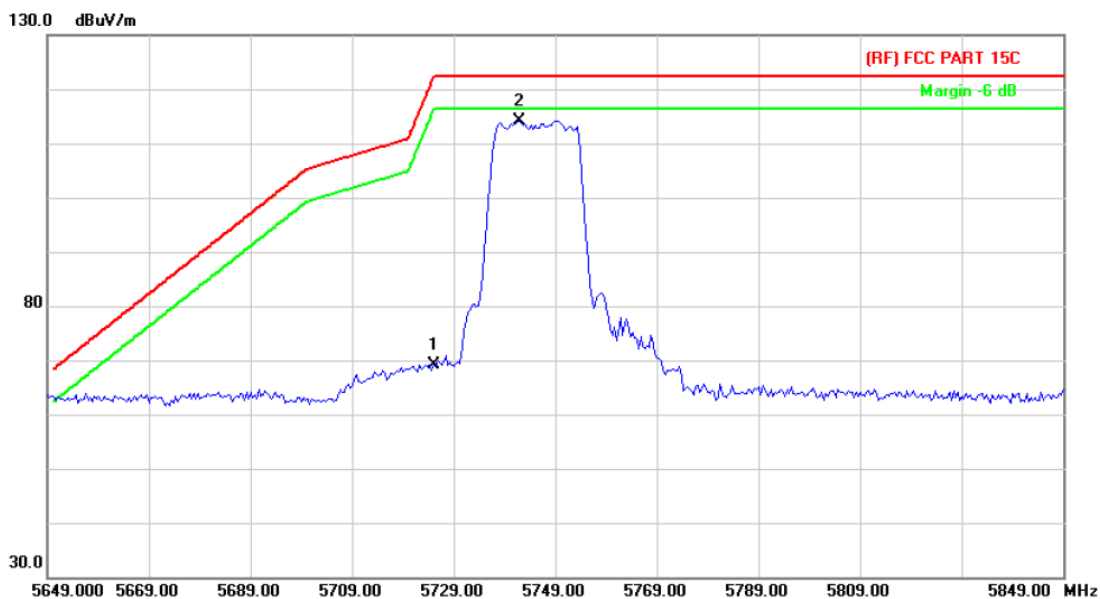

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	51.32	17.82	69.14	122.30	-53.16	peak
2	*	5741.800	96.35	17.89	114.24	122.30	-8.06	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT20) Mode 5825 MHz (U-NII-3) Antenna 0+1+2		
Remark:			

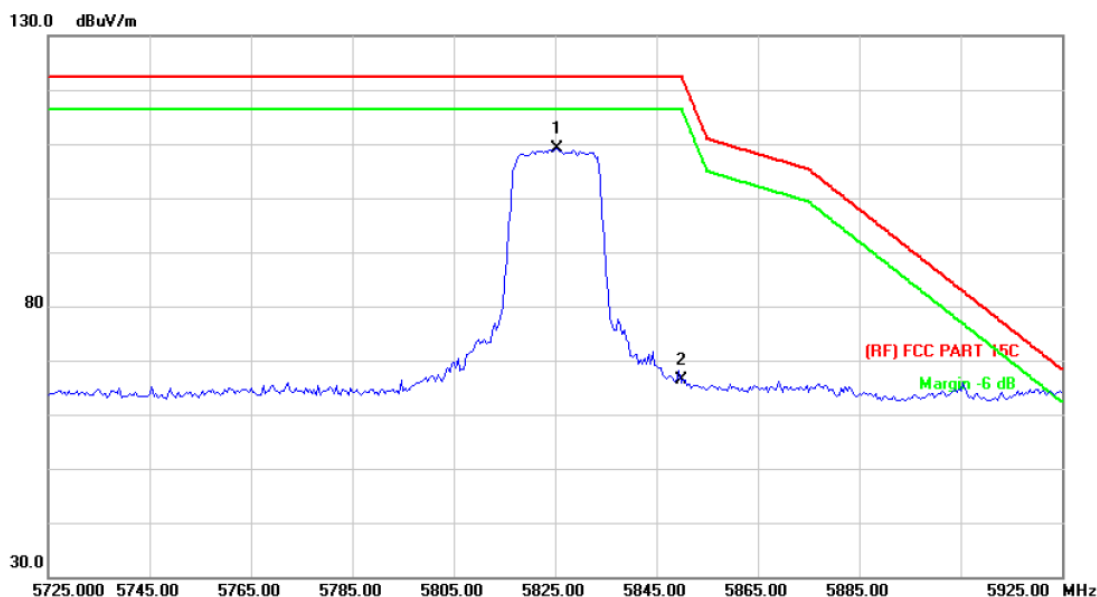

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	5825.400	91.01	18.19	109.20	122.30	-13.10	peak
2		5850.000	48.16	18.28	66.44	122.30	-55.86	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT20) Mode 5825 MHz (U-NII-3) Antenna 0+1+2		
Remark:			

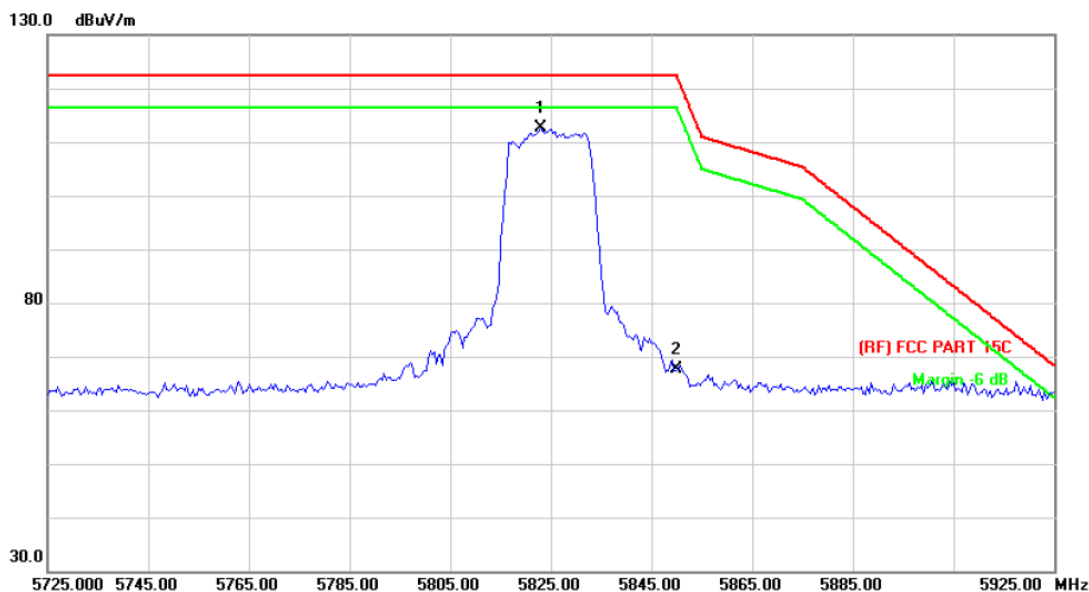

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	5823.000	94.34	18.17	112.51	122.30	-9.79	peak
2		5850.000	49.42	18.28	67.70	122.30	-54.60	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT40) Mode 5755 MHz (U-NII-3) Antenna 0+1+2		
Remark:			

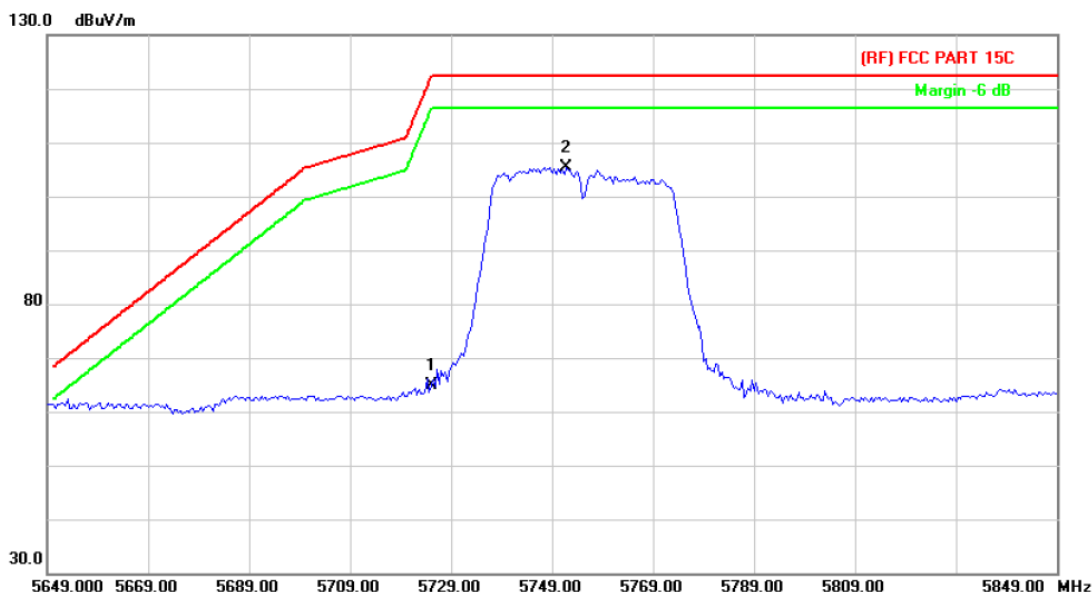

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	47.13	17.82	64.95	122.30	-57.35	peak
2	*	5751.800	87.49	17.91	105.40	122.30	-16.90	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT40) Mode 5755 MHz (U-NII-3) Antenna 0+1+2		
Remark:			

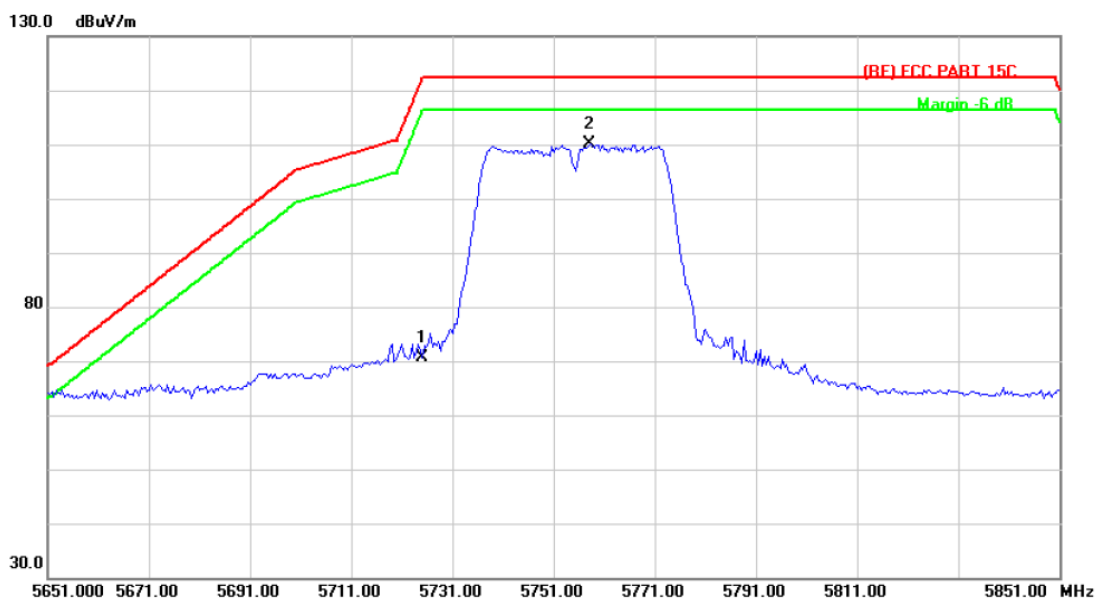

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	52.92	17.82	70.74	122.30	-51.56	peak
2	*	5758.200	92.25	17.93	110.18	122.30	-12.12	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT40) Mode 5795 MHz (U-NII-3) Antenna 0+1+2		
Remark:			

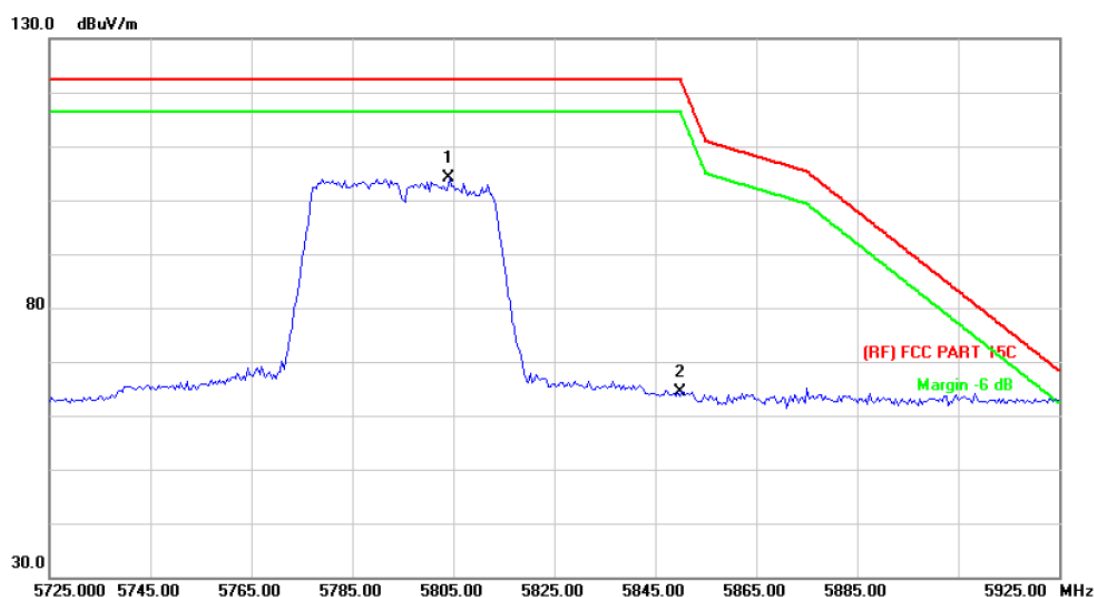

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	5804.200	85.96	18.11	104.07	122.30	-18.23	peak
2		5850.000	45.98	18.28	64.26	122.30	-58.04	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT40) Mode 5795 MHz (U-NII-3) Antenna 0+1+2		
Remark:			

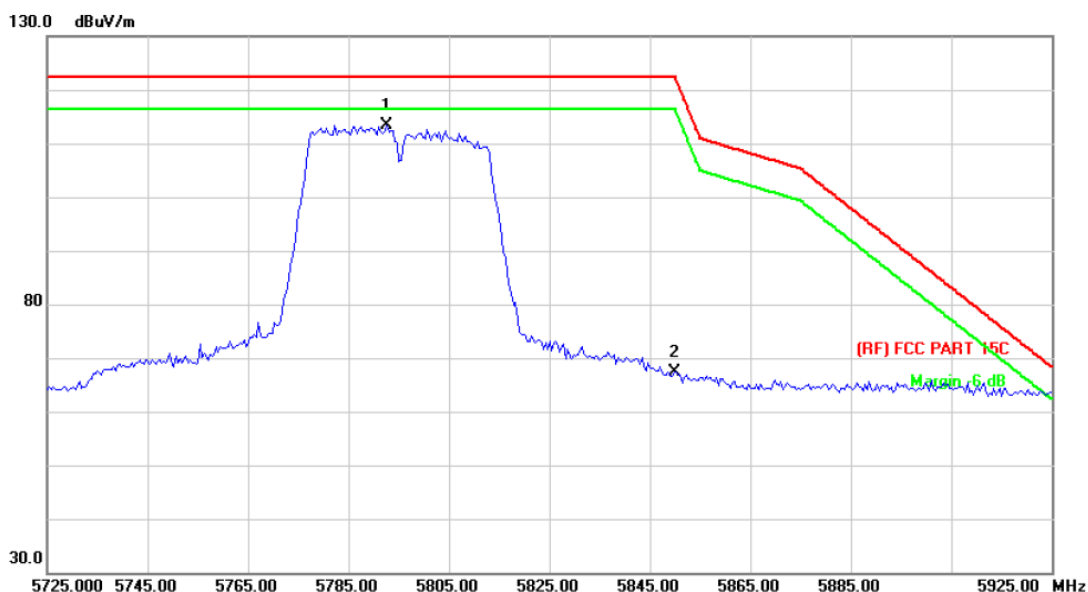

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	5792.600	95.20	18.07	113.27	122.30	-9.03	peak
2		5850.000	49.00	18.28	67.28	122.30	-55.02	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT40) Mode 5755 MHz (U-NII-3) Antenna 0+1+2		
Remark:			

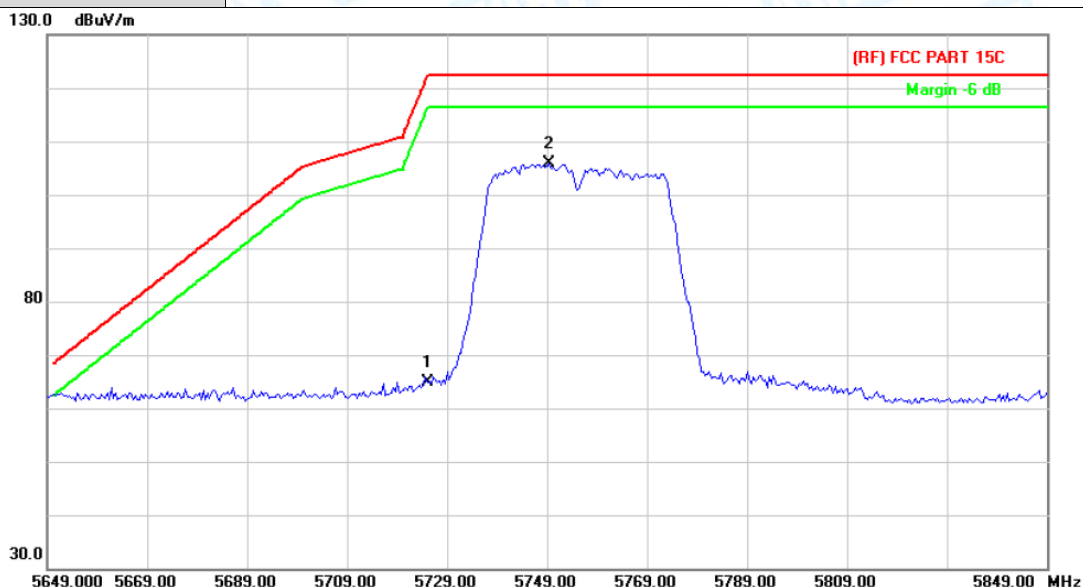

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	46.95	17.82	64.77	122.30	-57.53	peak
2	*	5749.400	87.93	17.91	105.84	122.30	-16.46	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT40) Mode 5755 MHz (U-NII-3) Antenna 0+1+2		
Remark:			

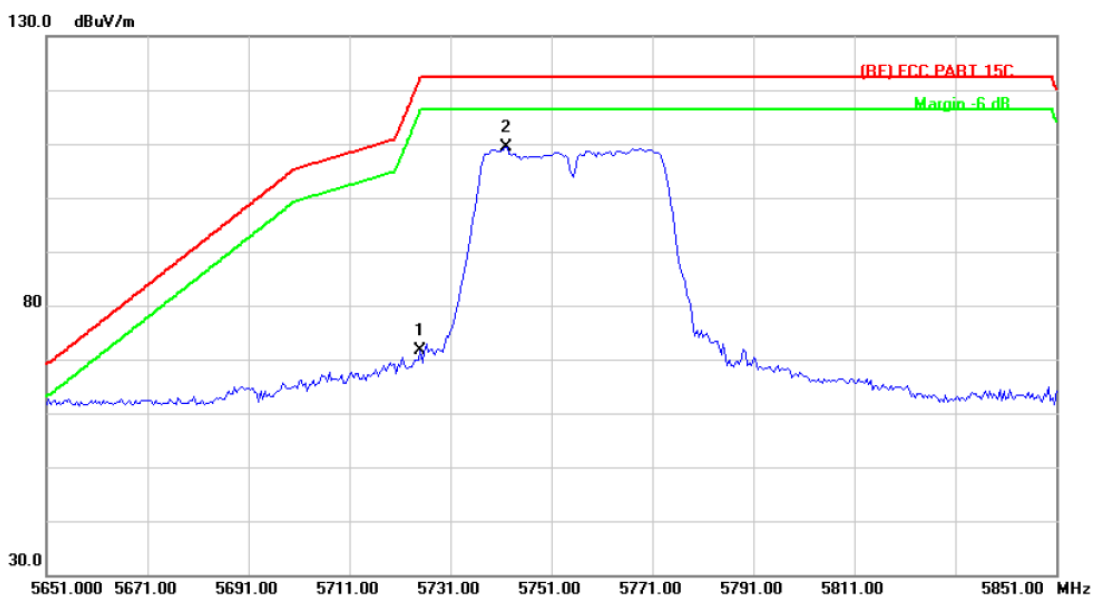

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	53.78	17.82	71.60	122.30	-50.70	peak
2	*	5742.200	91.44	17.89	109.33	122.30	-12.97	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT40) Mode 5795 MHz (U-NII-3) Antenna 0+1+2		
Remark:			

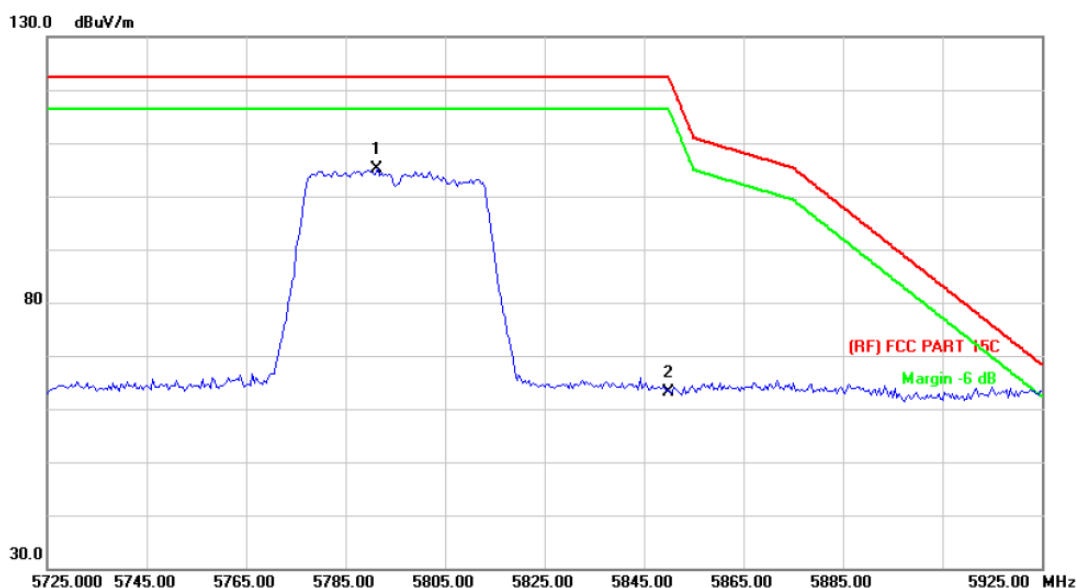

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	5791.400	86.98	18.07	105.05	122.30	-17.25	peak
2		5850.000	44.83	18.28	63.11	122.30	-59.19	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT40) Mode 5795 MHz (U-NII-3) Antenna 0+1+2		
Remark:			

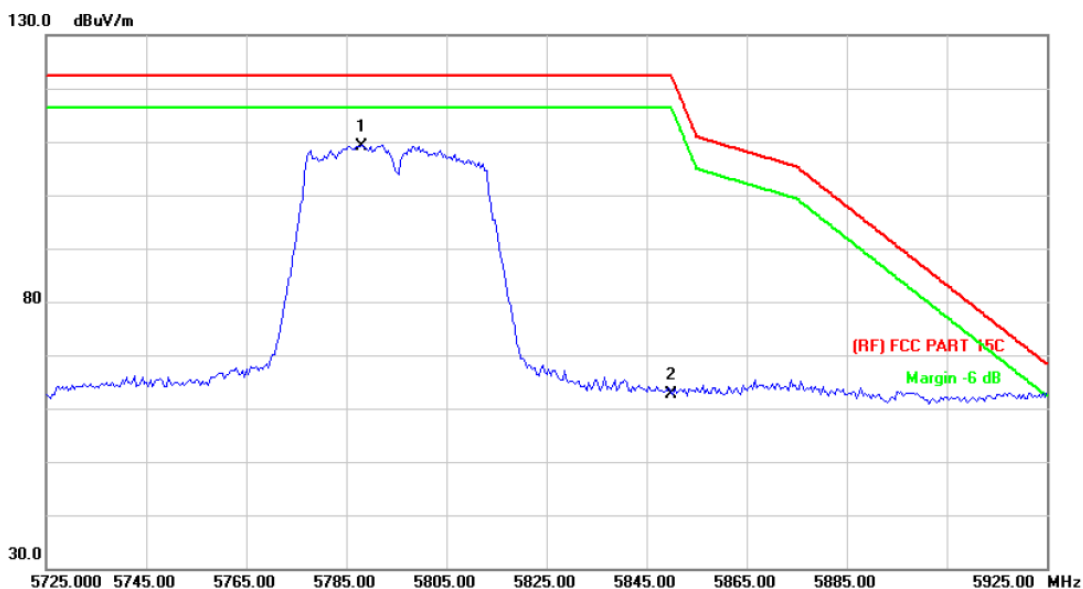

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	5788.200	91.19	18.06	109.25	122.30	-13.05	peak
2		5850.000	44.39	18.28	62.67	122.30	-59.63	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT80) Mode 5775 MHz (U-NII-3) Antenna 0+1+2		
Remark:			

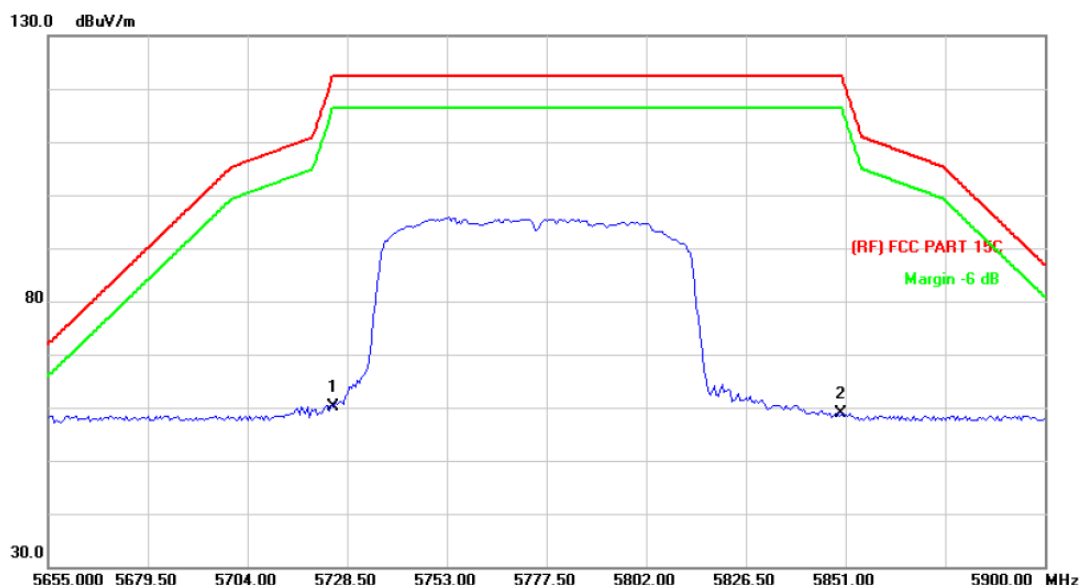

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	5725.000	44.80	15.32	60.12	122.30	-62.18	peak
2		5850.000	43.10	15.74	58.84	122.30	-63.46	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT80) Mode 5775 MHz (U-NII-3) Antenna 0+1+2		
Remark:			

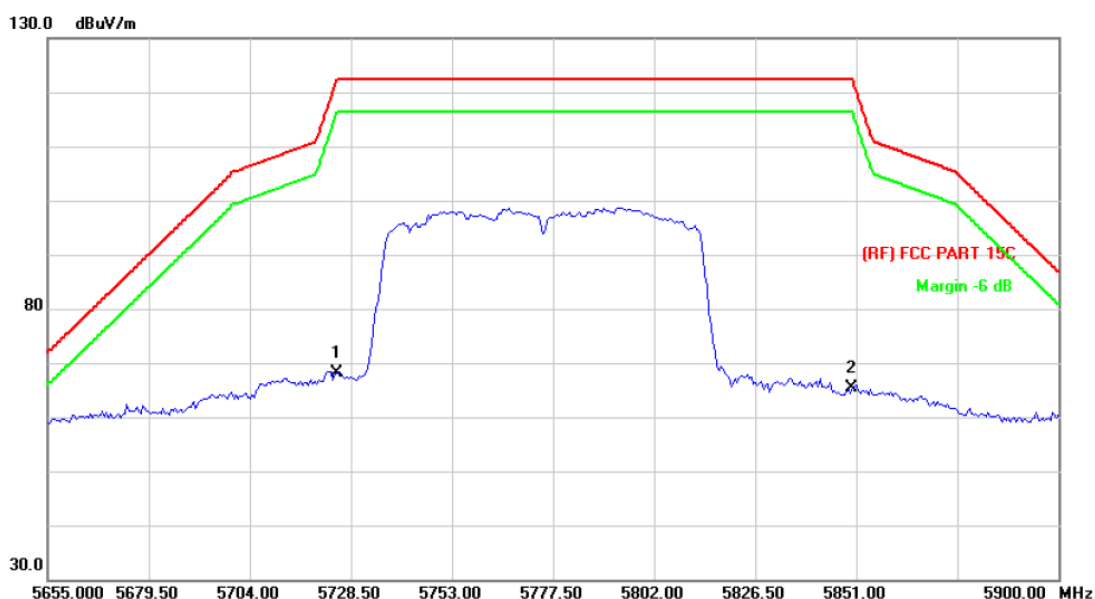



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	5725.000	52.75	15.32	68.07	122.30	-54.23	peak
2		5850.000	49.67	15.74	65.41	122.30	-56.89	peak

Emission Level= Read Level+ Correct Factor



(2) Conducted Test

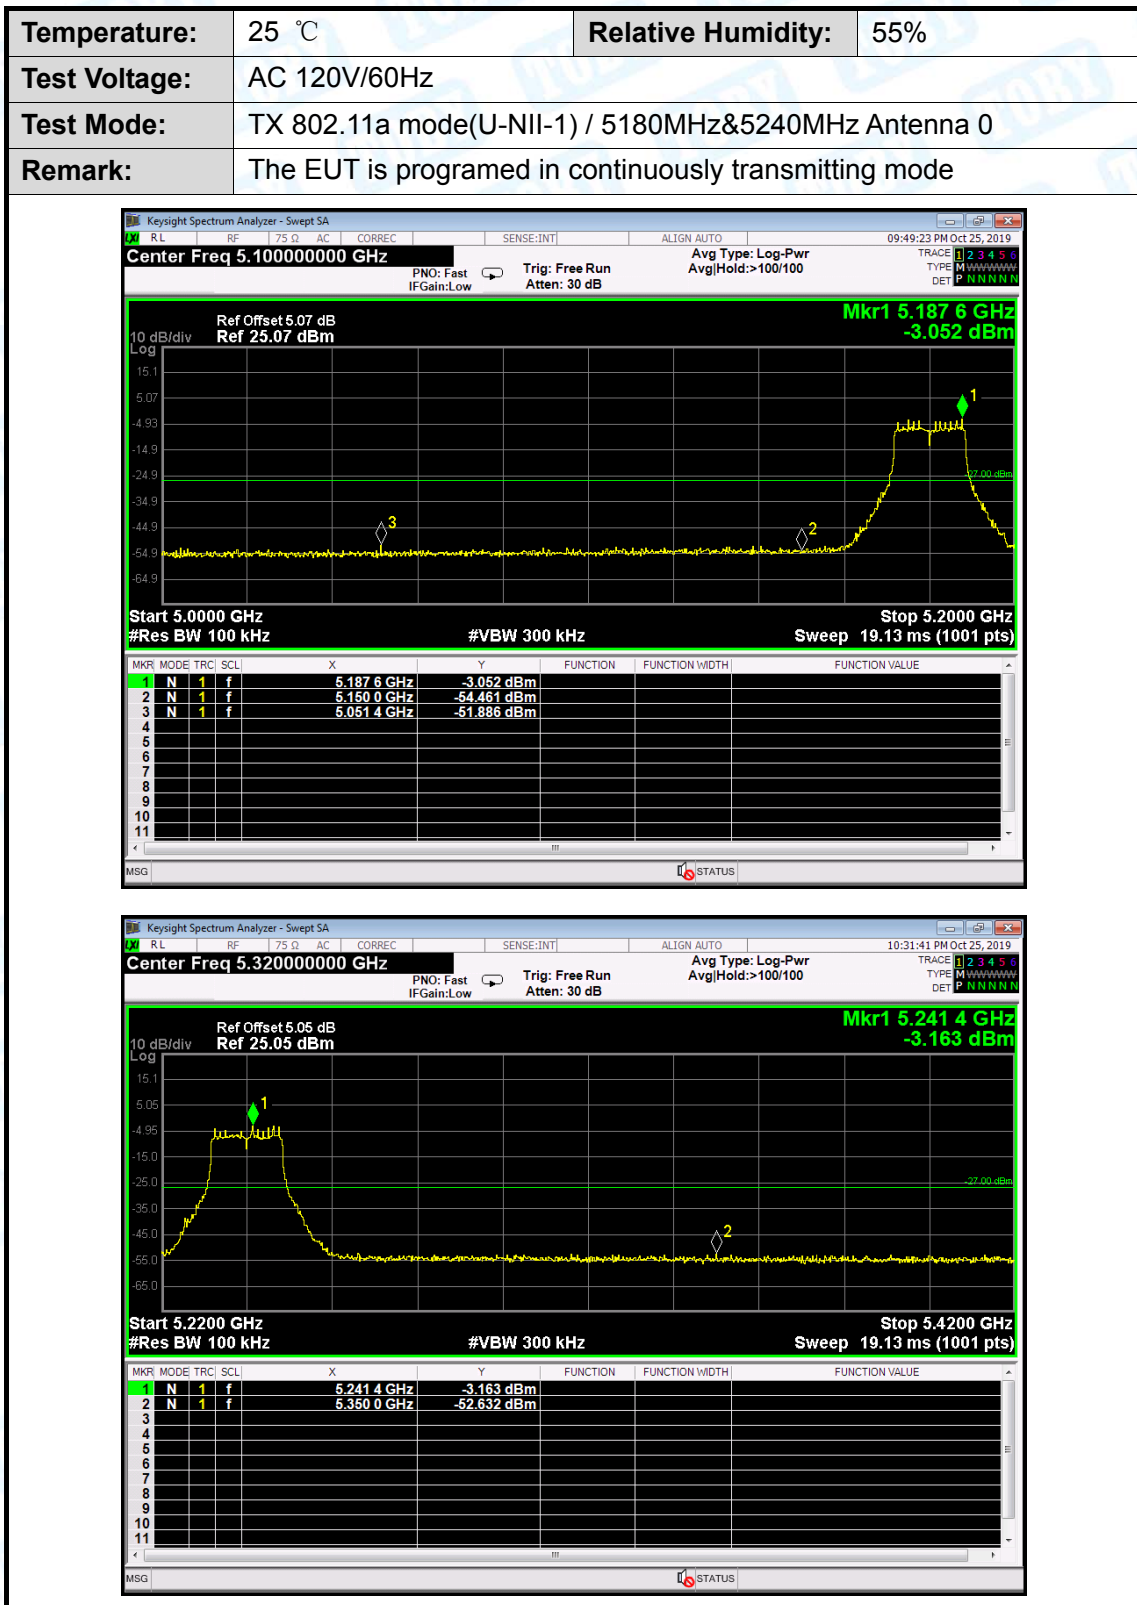



Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11a mode(U-NII-1) / 5180MHz&5240MHz Antenna 1		
Remark:	The EUT is programed in continuously transmitting mode		

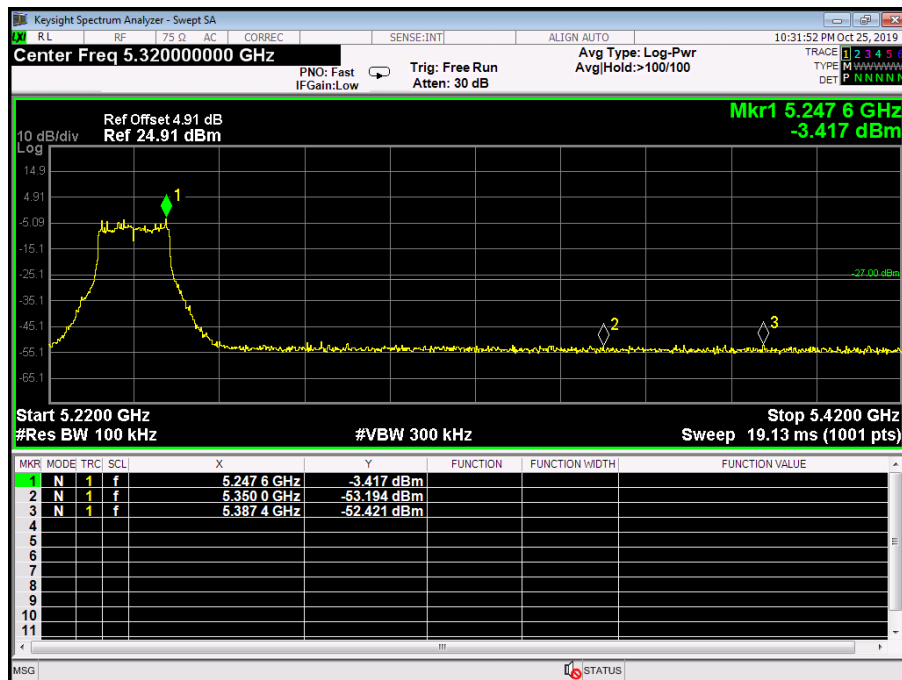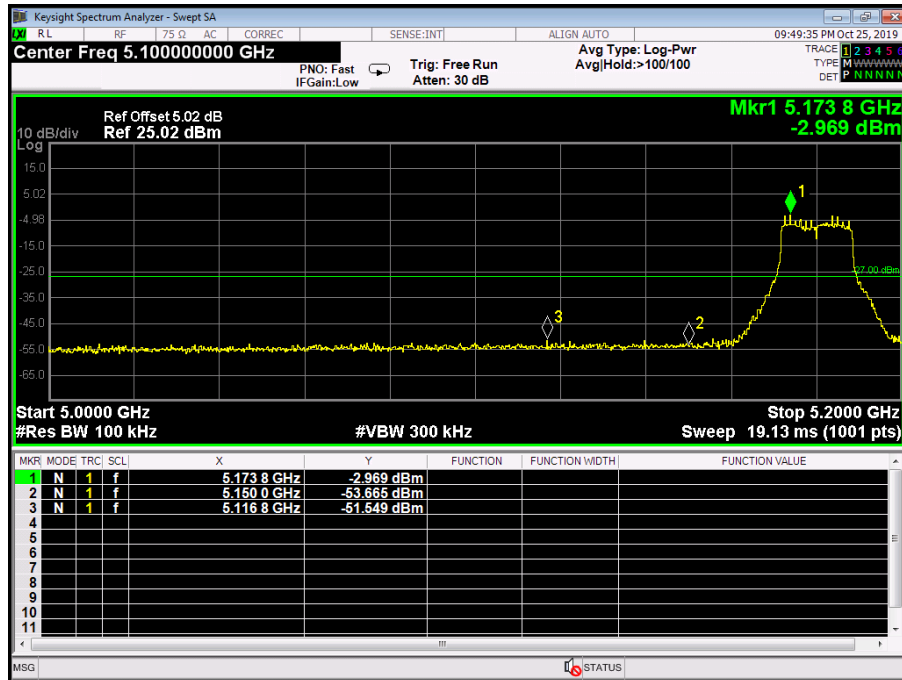



Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11a mode(U-NII-1) / 5180MHz&5240MHz Antenna 2		
Remark:	The EUT is programed in continuously transmitting mode		

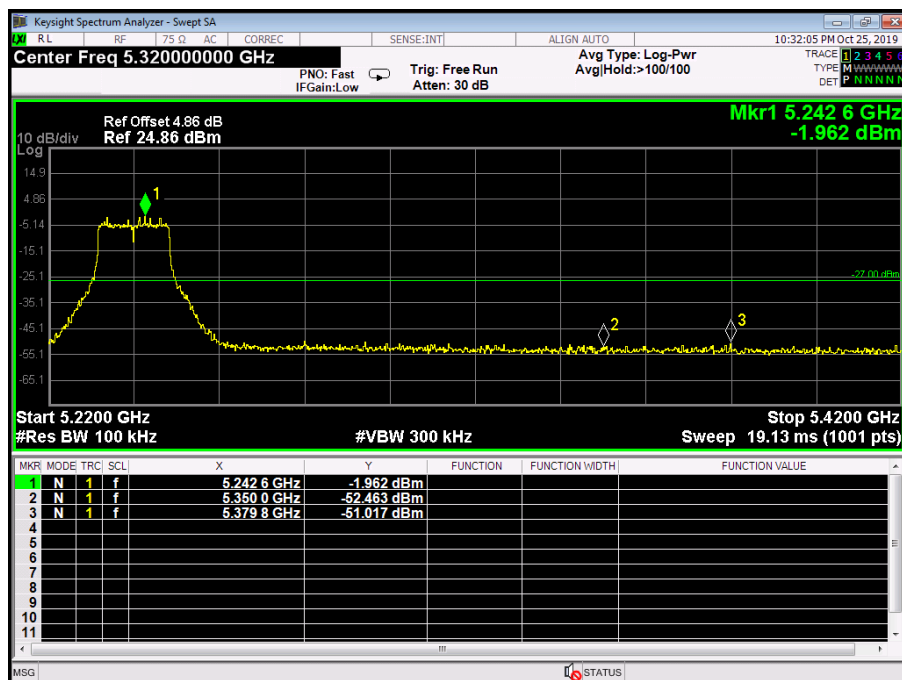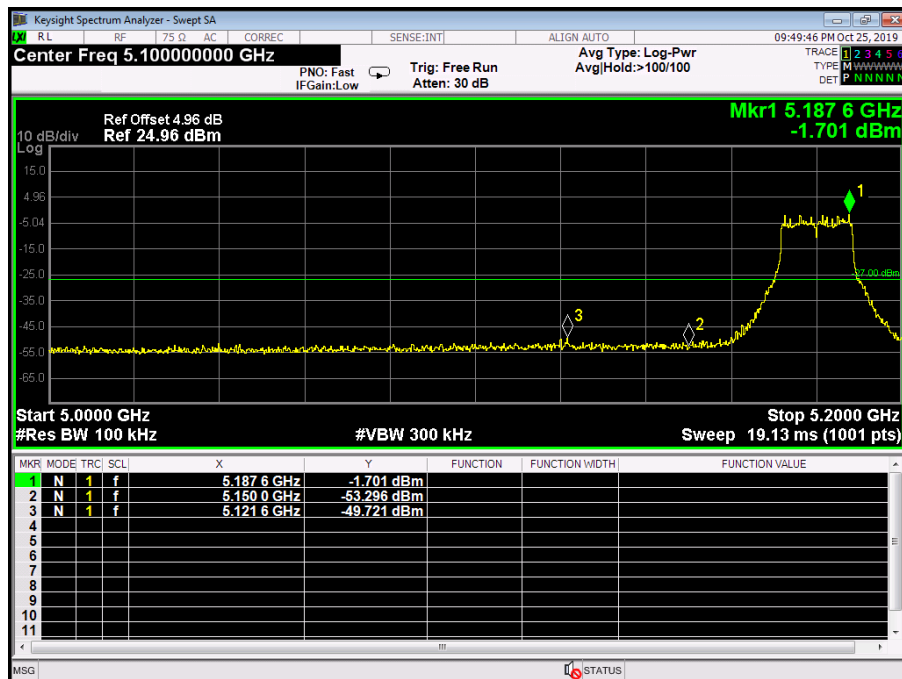



Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11n(HT20) mode(U-NII-1) / 5180MHz&5240MHz Antenna 0		
Remark:	The EUT is programed in continuously transmitting mode		

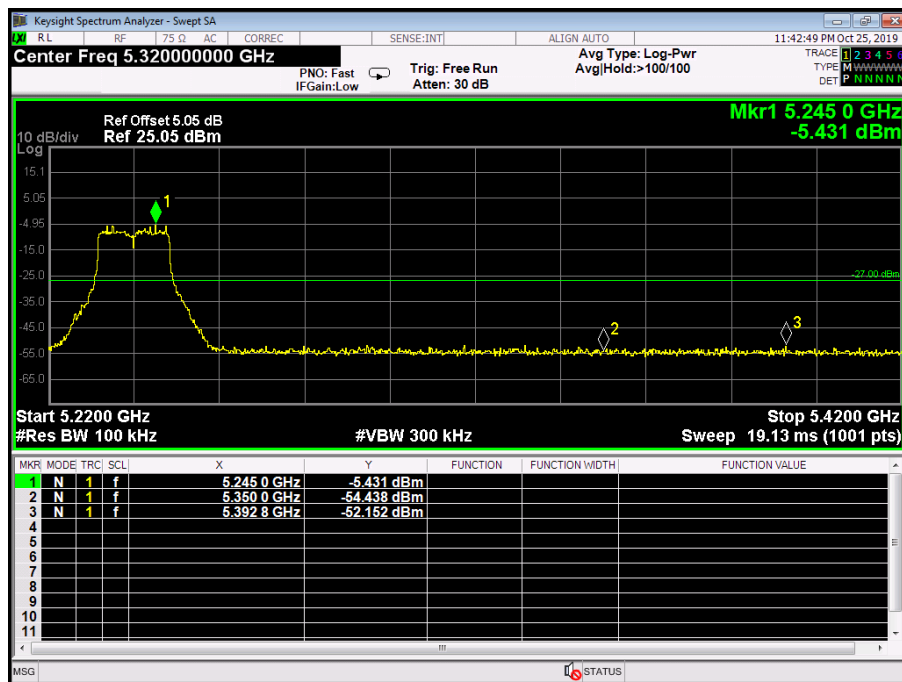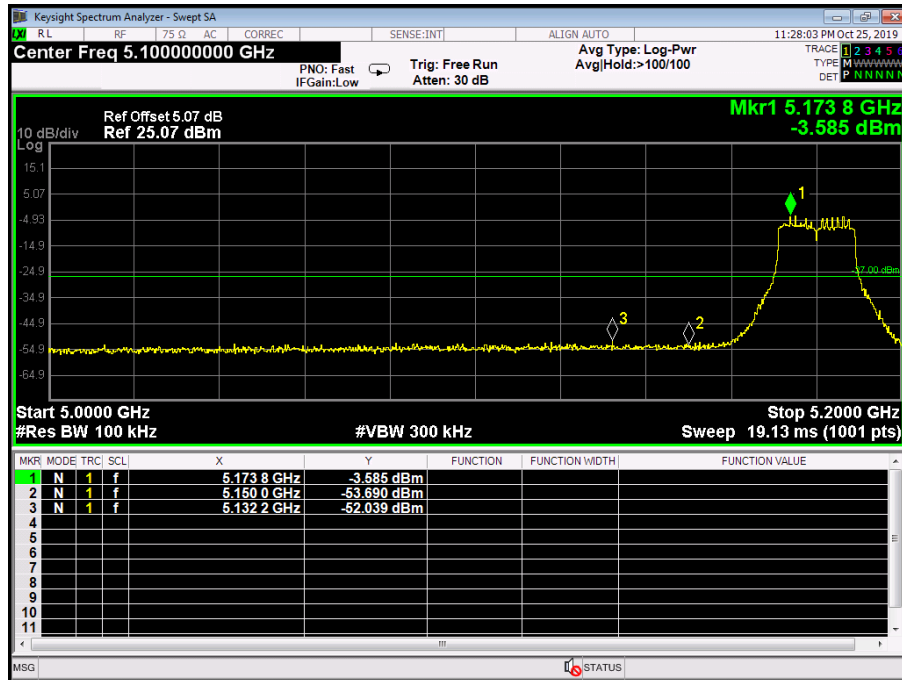



Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11n(HT20) mode(U-NII-1) / 5180MHz&5240MHz Antenna 1		
Remark:	The EUT is programed in continuously transmitting mode		

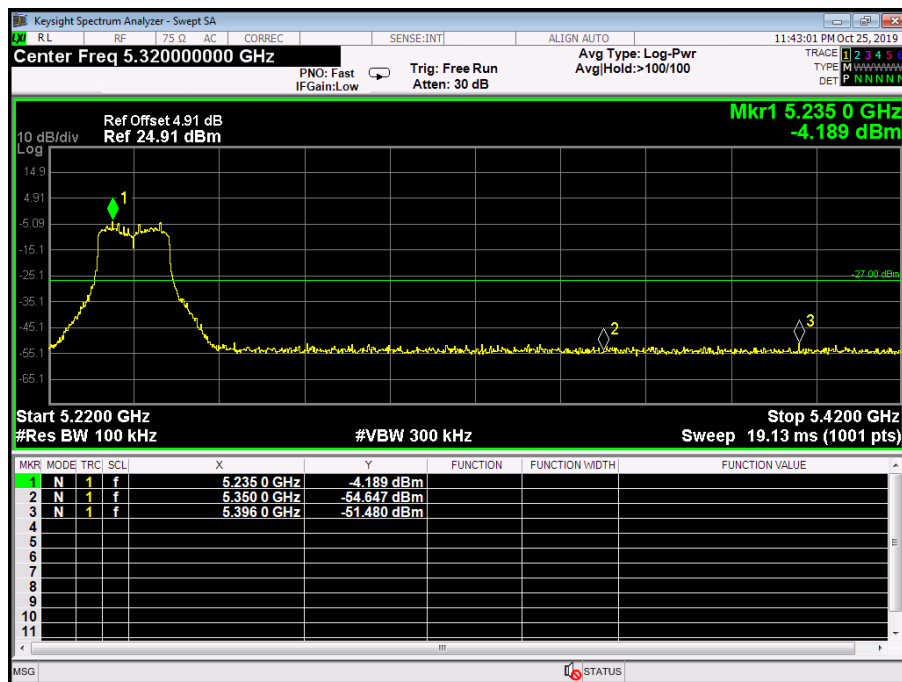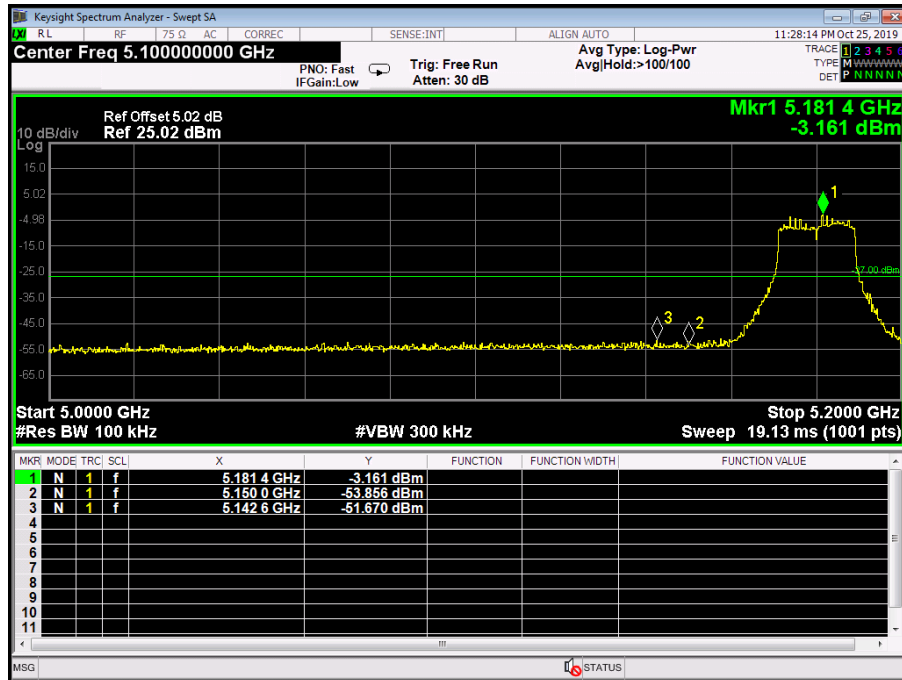



Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11n(HT20) mode(U-NII-1) / 5180MHz&5240MHz Antenna 2		
Remark:	The EUT is programed in continuously transmitting mode		

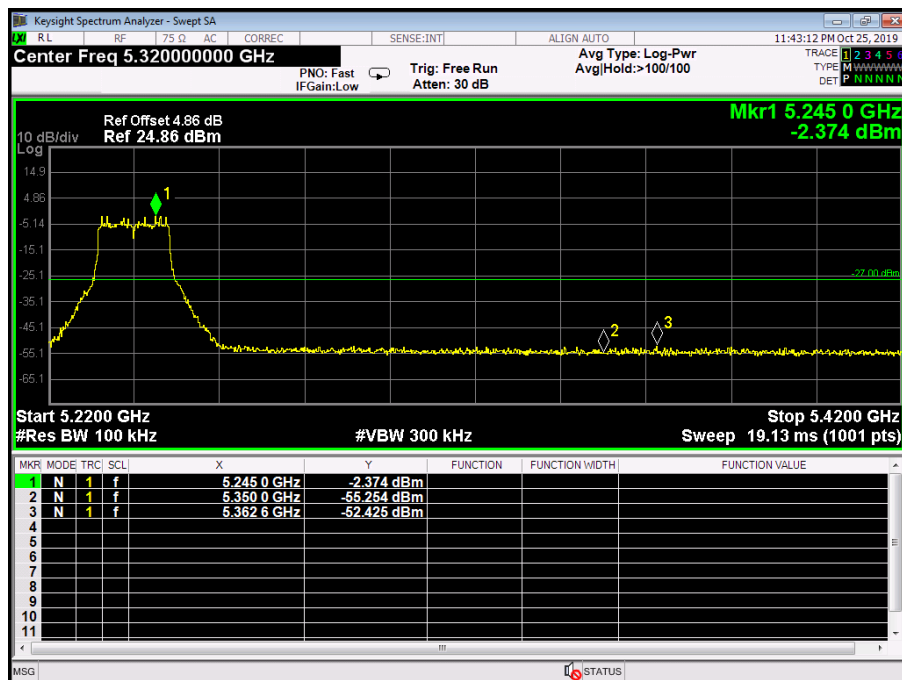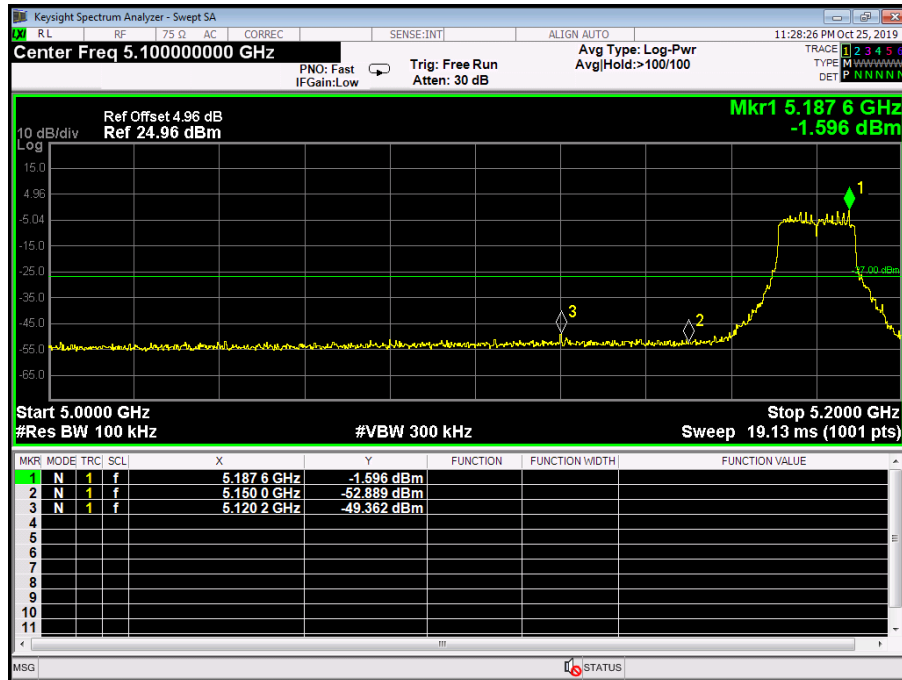



Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11ac(VHT20) mode(U-NII-1) / 5180MHz&5240MHz Antenna 0		
Remark:	The EUT is programed in continuously transmitting mode		

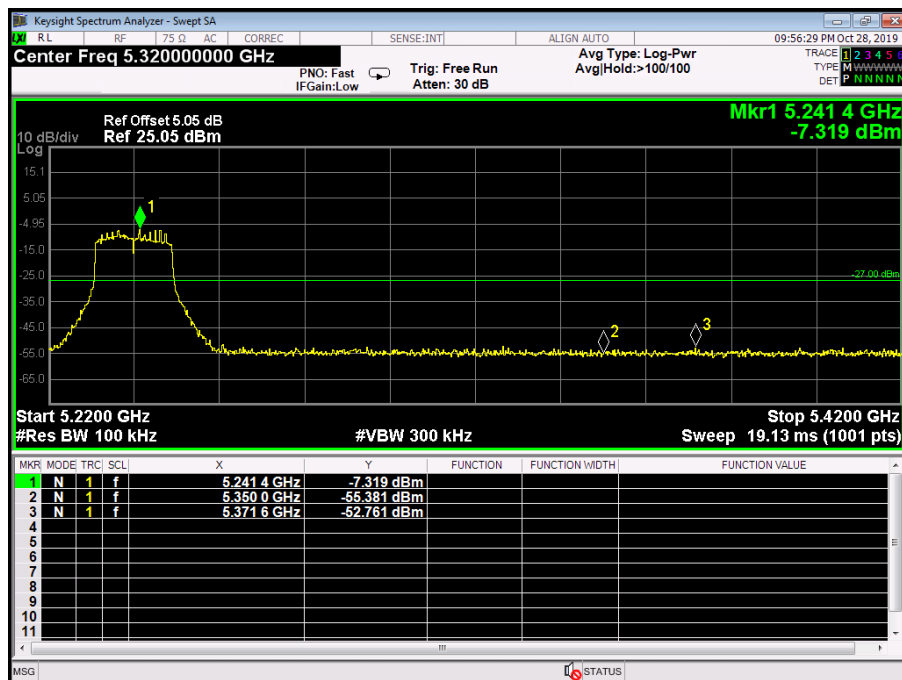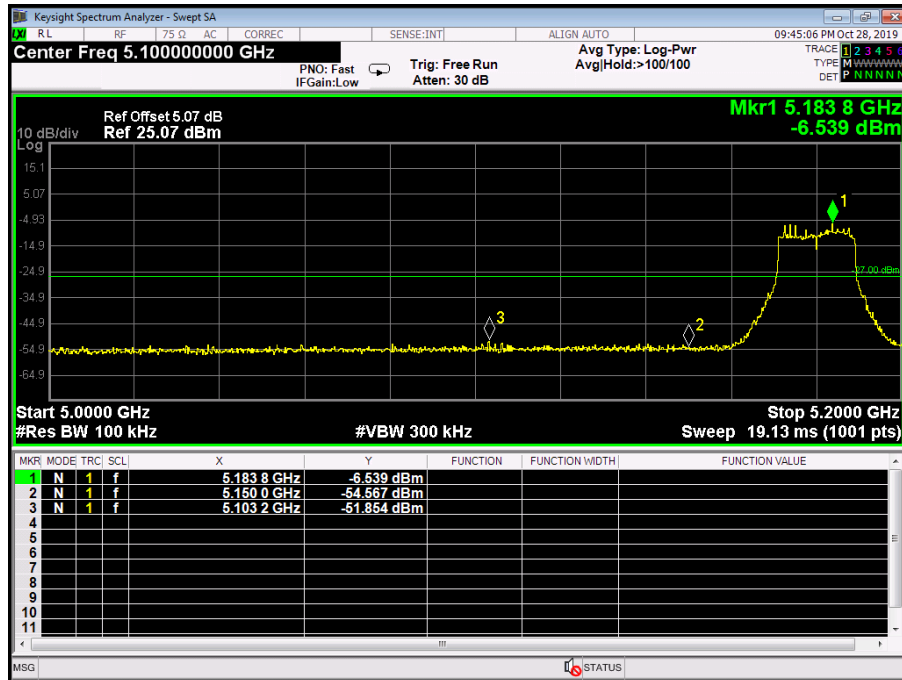



Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11ac(VHT20) mode(U-NII-1) / 5180MHz&5240MHz Antenna 1		
Remark:	The EUT is programed in continuously transmitting mode		

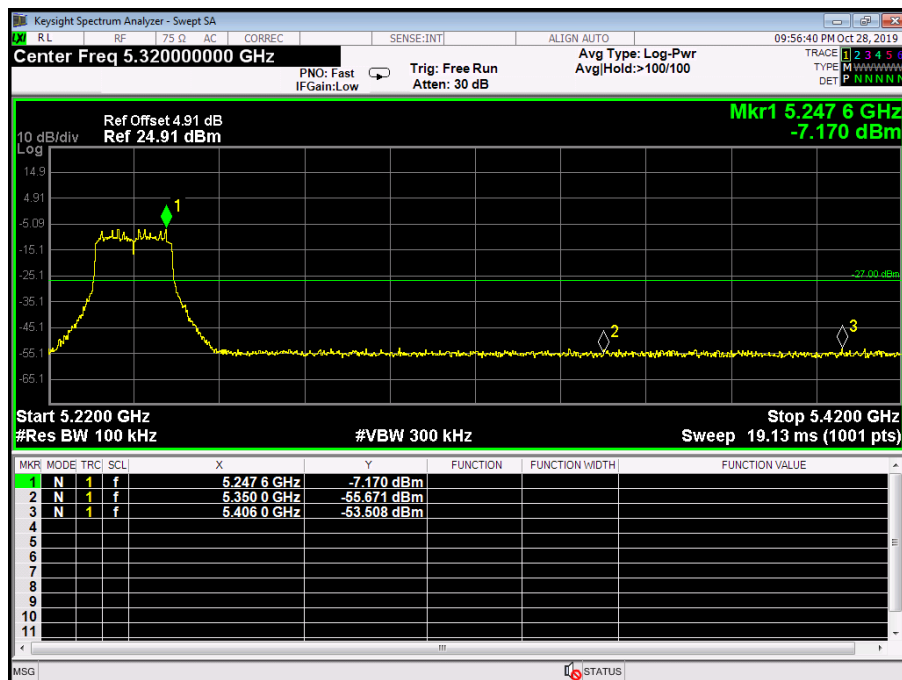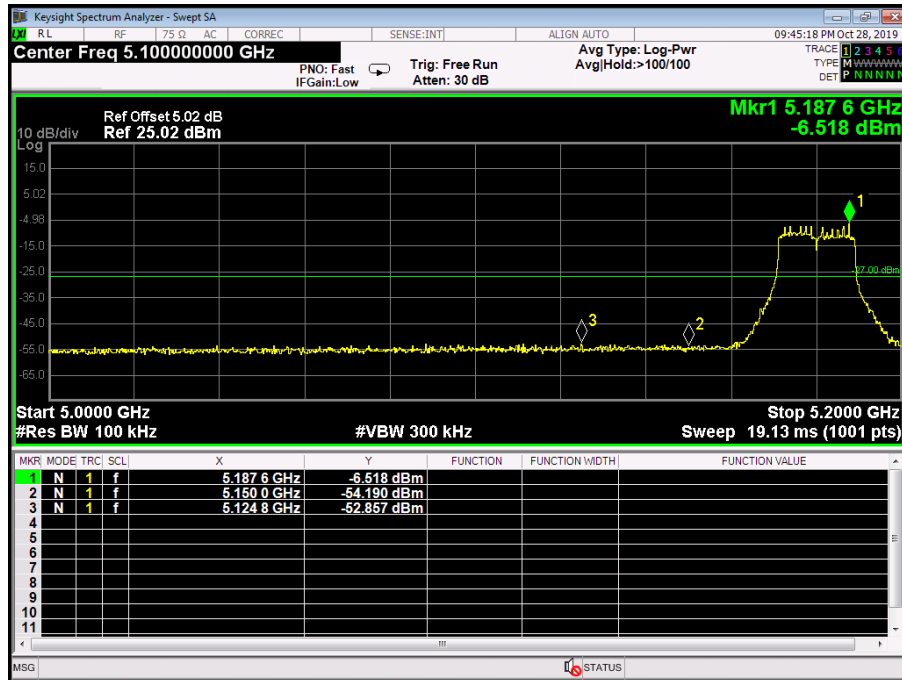



Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11ac(VHT20) mode(U-NII-1) / 5180MHz&5240MHz Antenna 2		
Remark:	The EUT is programed in continuously transmitting mode		

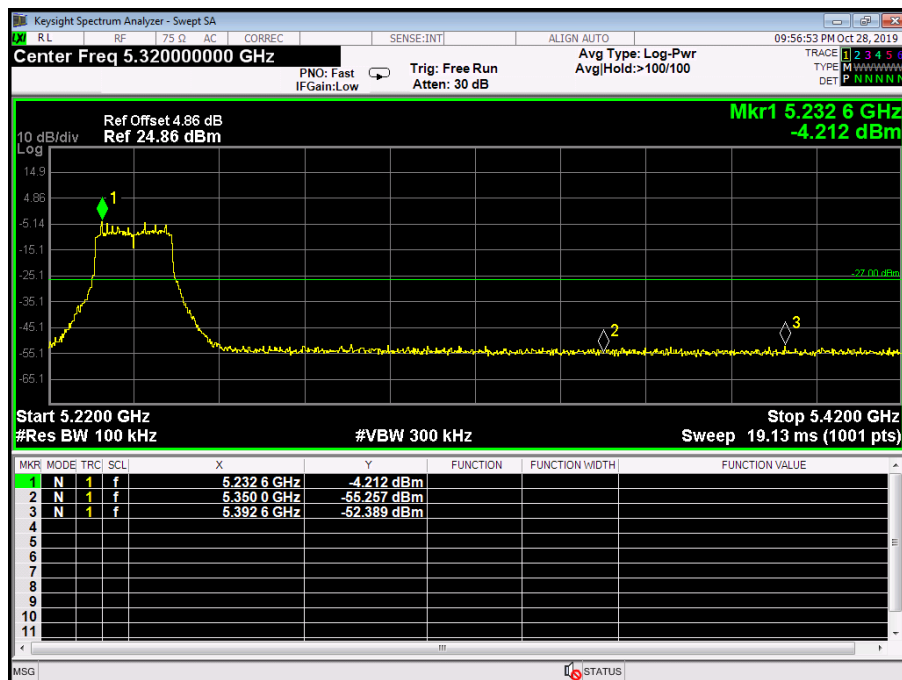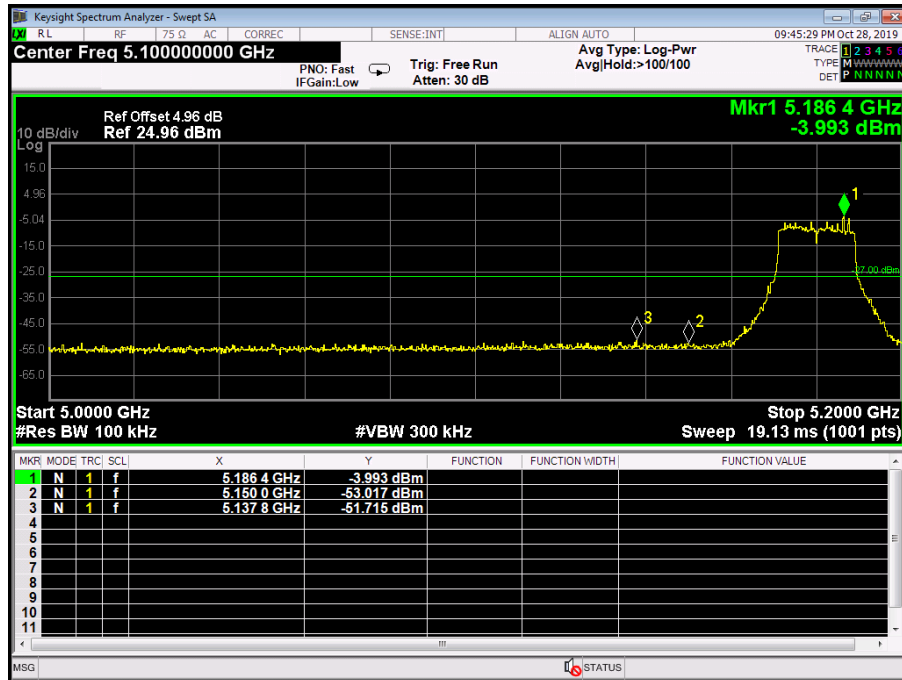



Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11n(HT40) mode(U-NII-1) / 5190MHz&5230MHz Antenna 0		
Remark:	The EUT is programed in continuously transmitting mode		

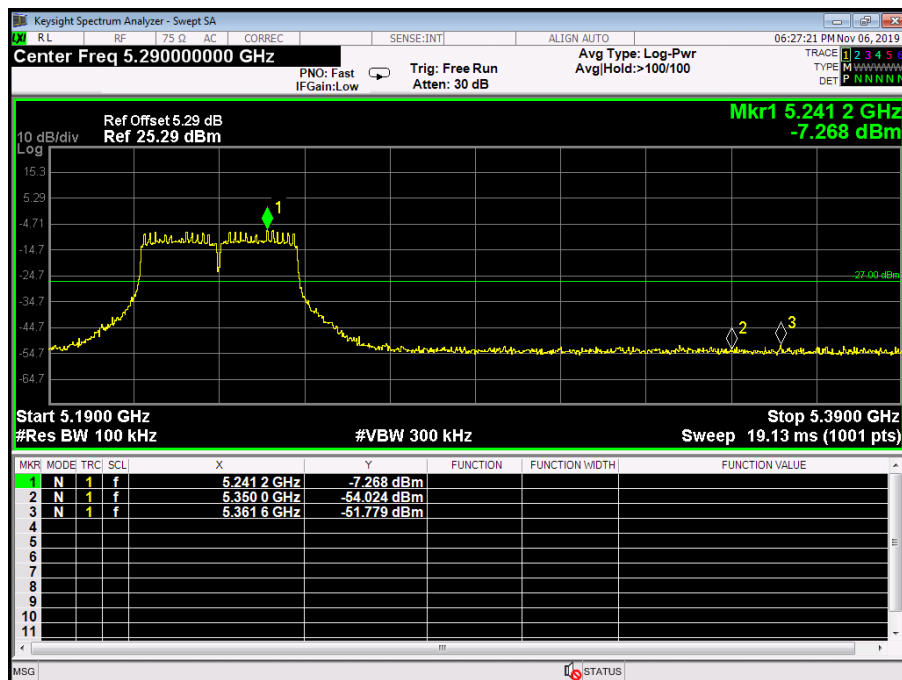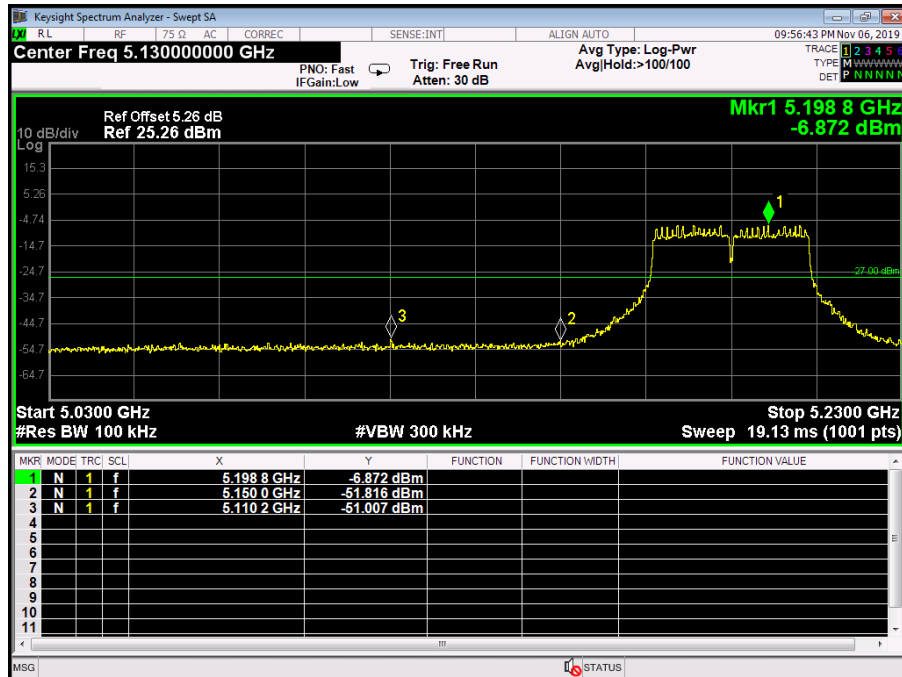



Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11n(HT40) mode(U-NII-1) / 5190MHz&5230MHz Antenna 1		
Remark:	The EUT is programed in continuously transmitting mode		

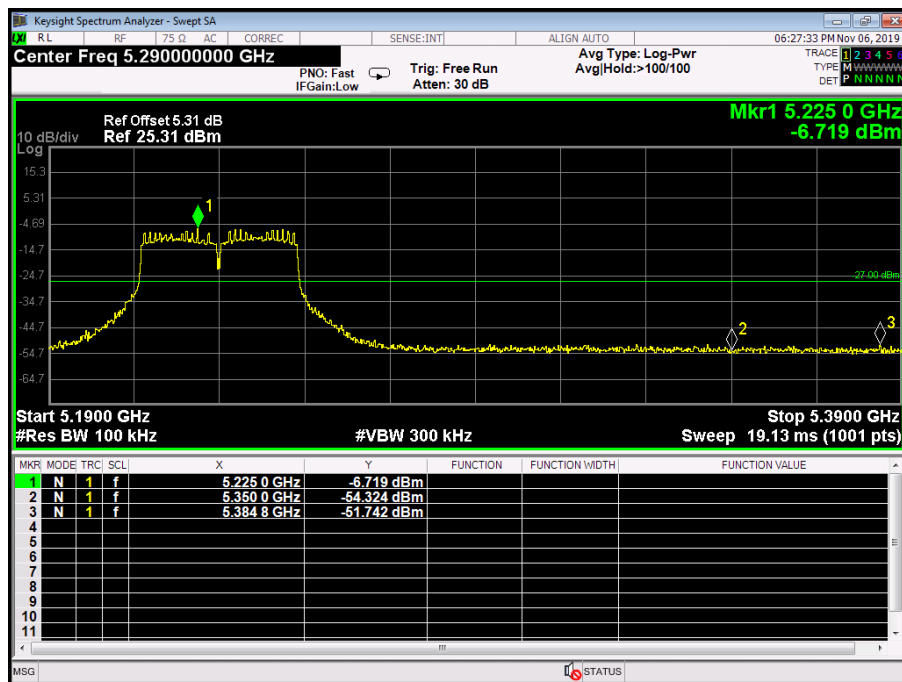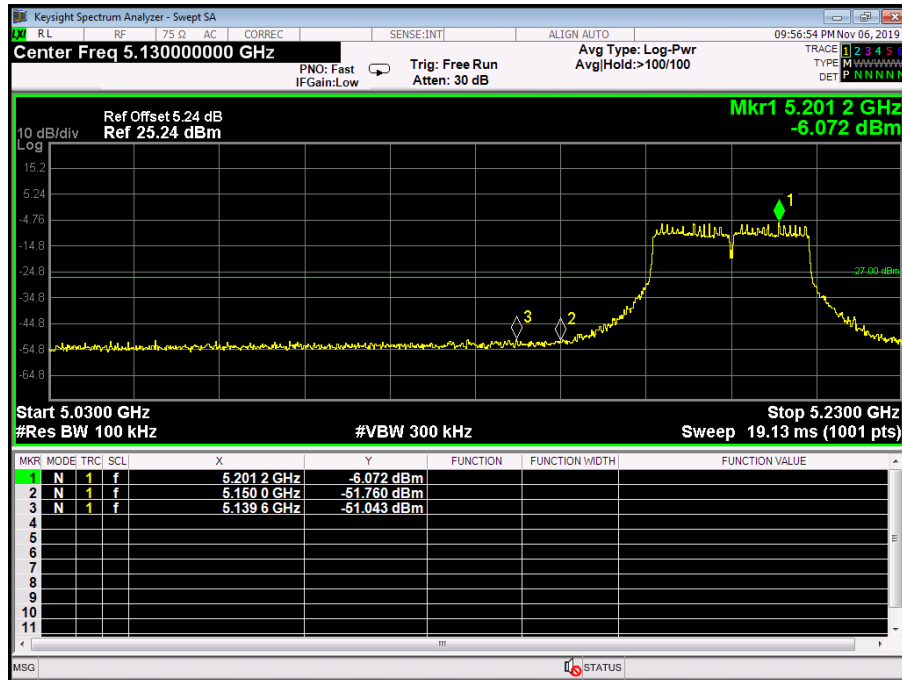



Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11n(HT40) mode(U-NII-1) / 5190MHz&5230MHz Antenna 2		
Remark:	The EUT is programed in continuously transmitting mode		

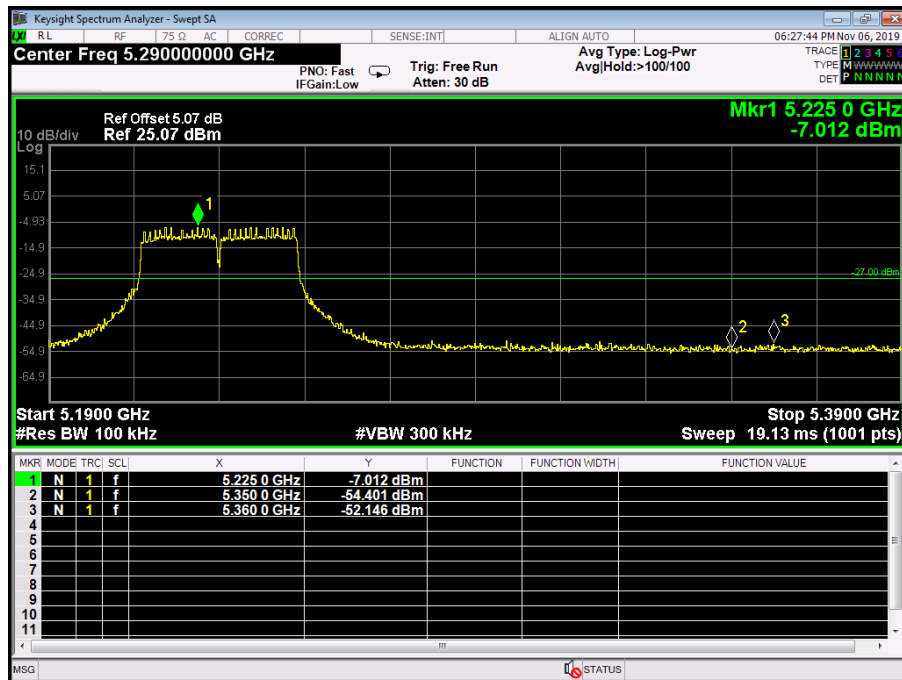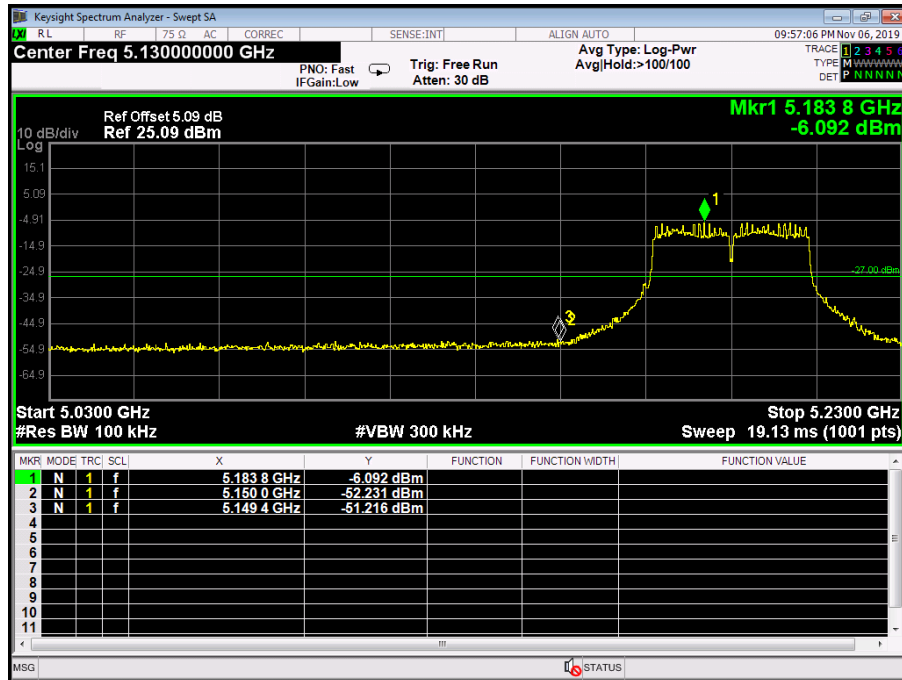



Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11ac(VHT40) mode(U-NII-1) / 5190MHz&5230MHz Antenna 0		
Remark:	The EUT is programed in continuously transmitting mode		

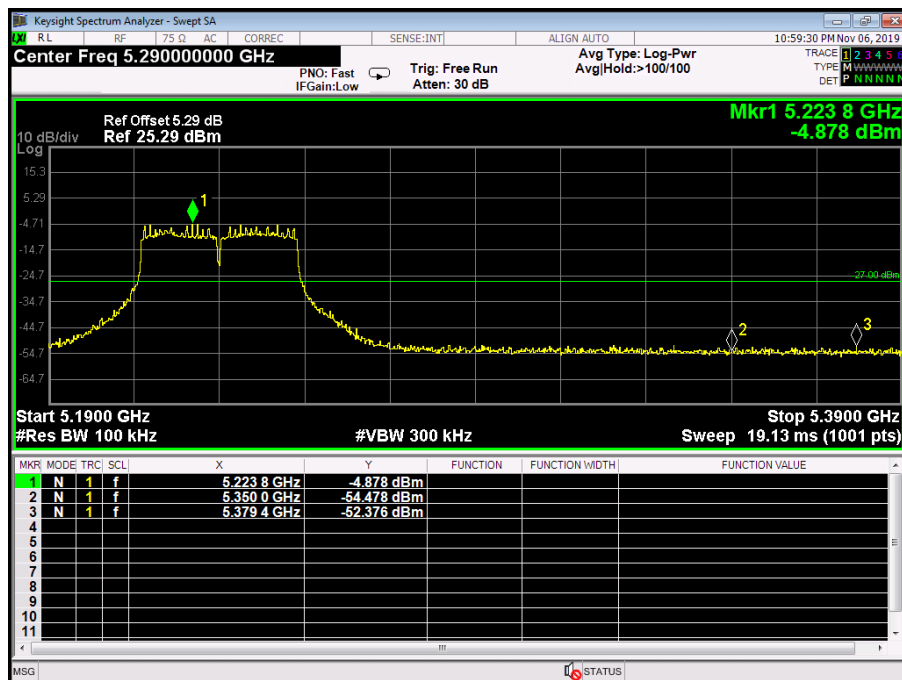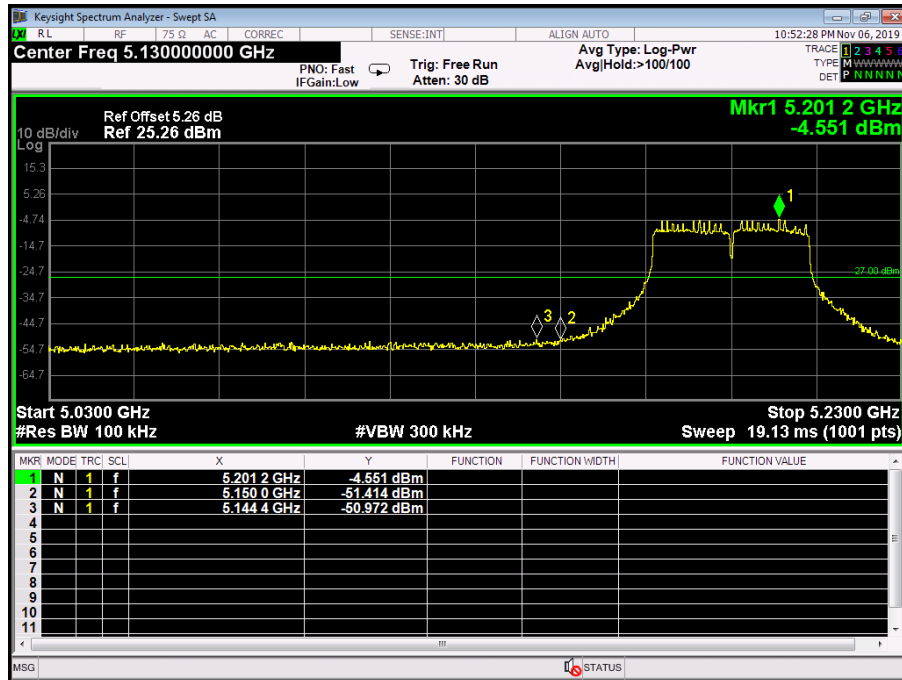



Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11ac(VHT40) mode(U-NII-1) / 5190MHz&5230MHz Antenna 1		
Remark:	The EUT is programed in continuously transmitting mode		

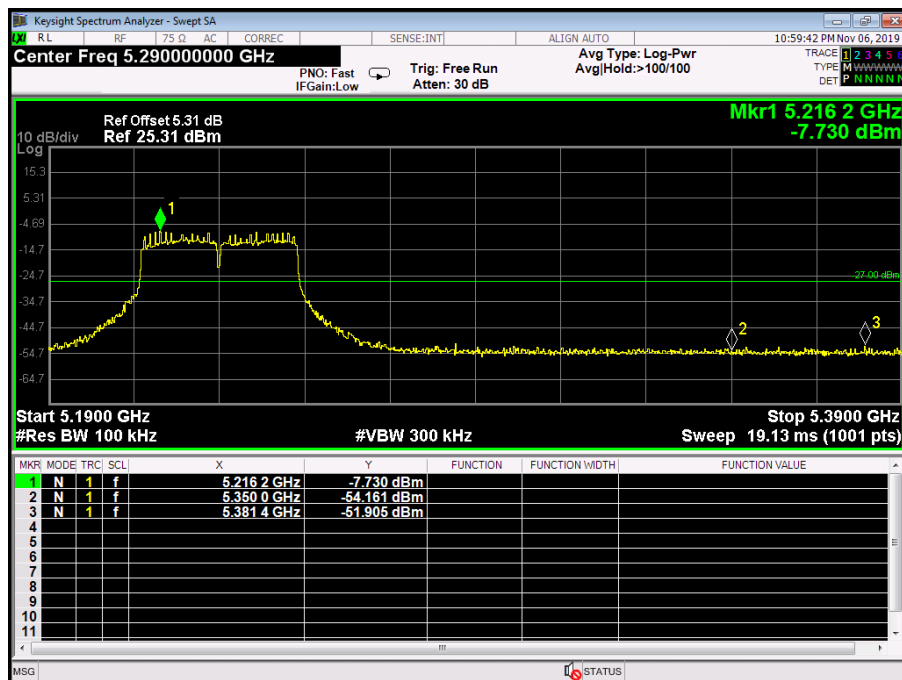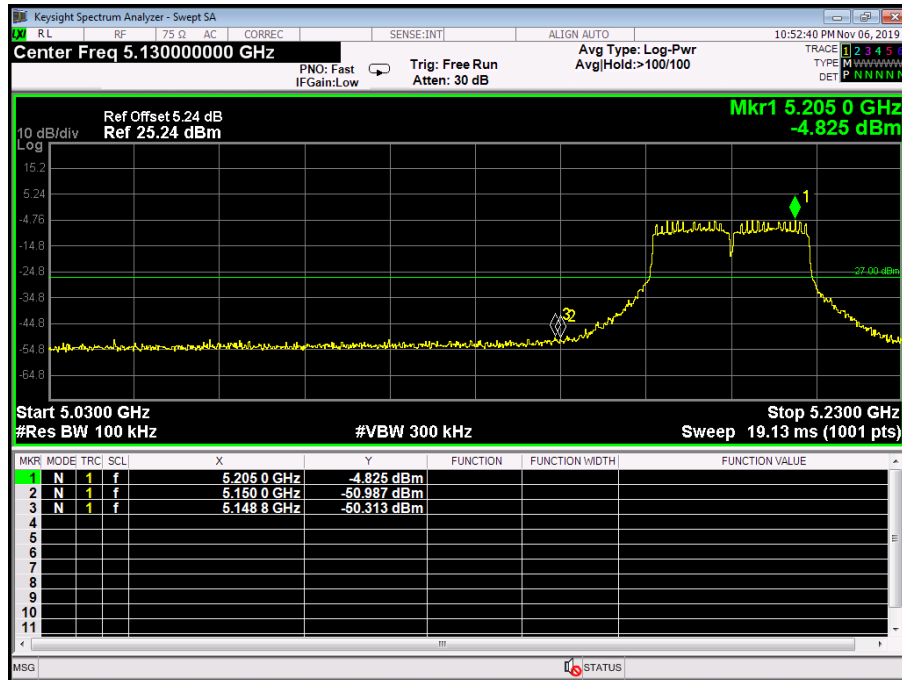



Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11ac(VHT40) mode(U-NII-1) / 5190MHz&5230MHz Antenna 2		
Remark:	The EUT is programed in continuously transmitting mode		

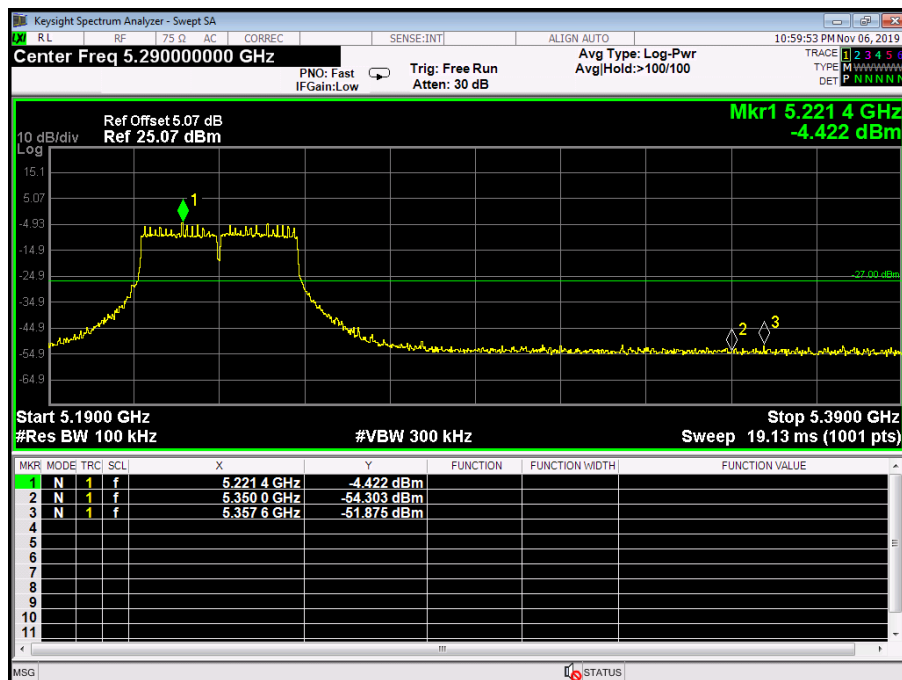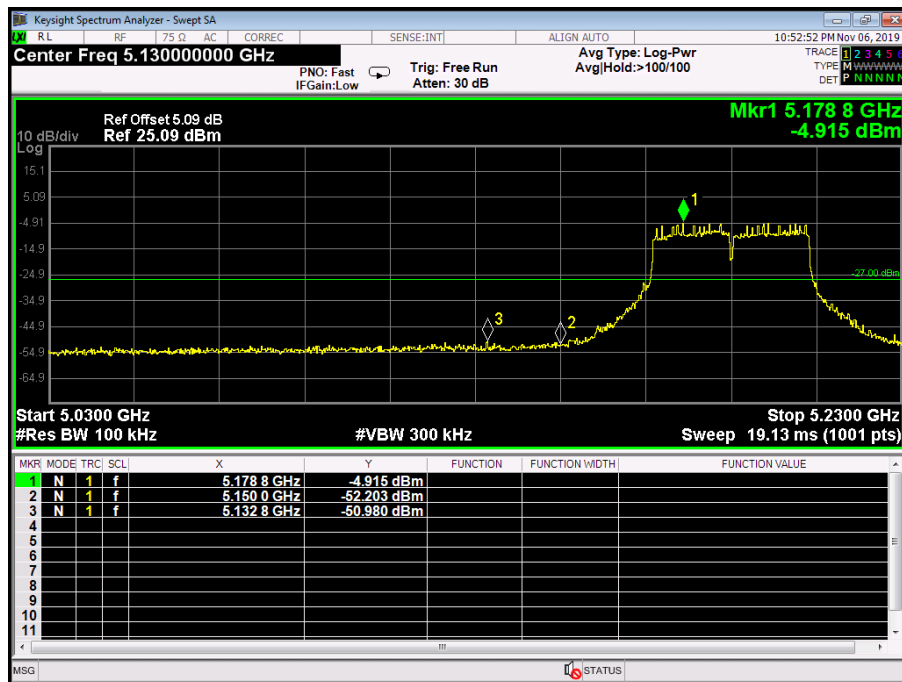



Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11ac(80) mode(U-NII-1) 5210MHz Antenna 0		
Remark:	The EUT is programed in continuously transmitting mode		

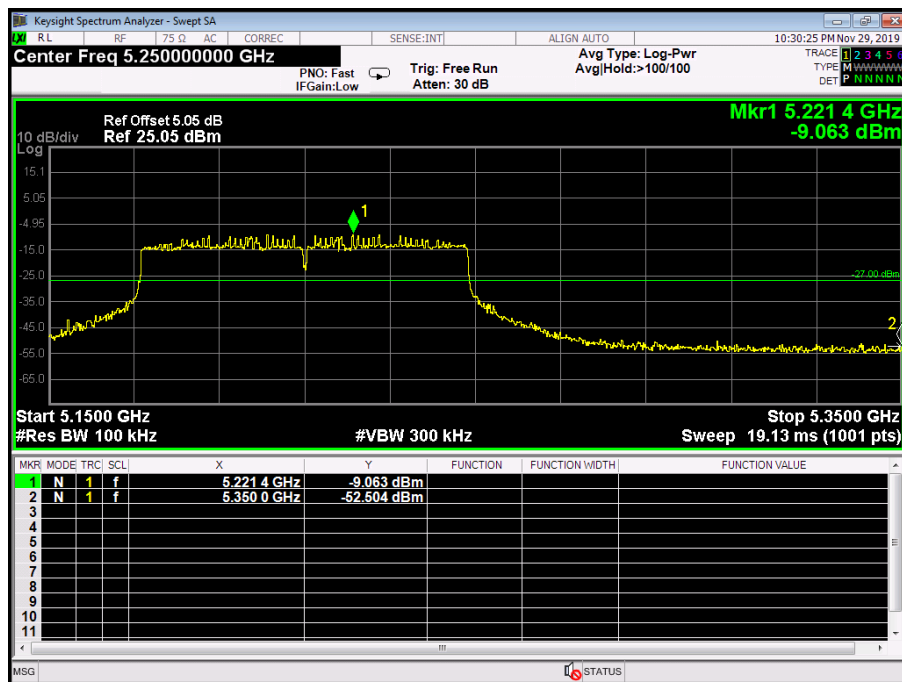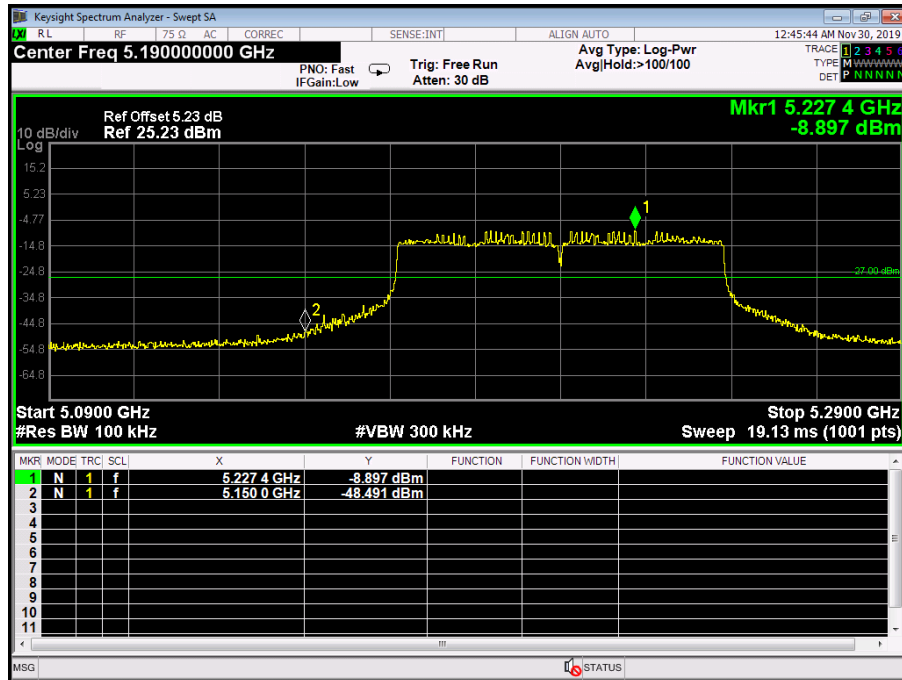



Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11ac(80) mode(U-NII-1) 5210MHz Antenna 1		
Remark:	The EUT is programed in continuously transmitting mode		

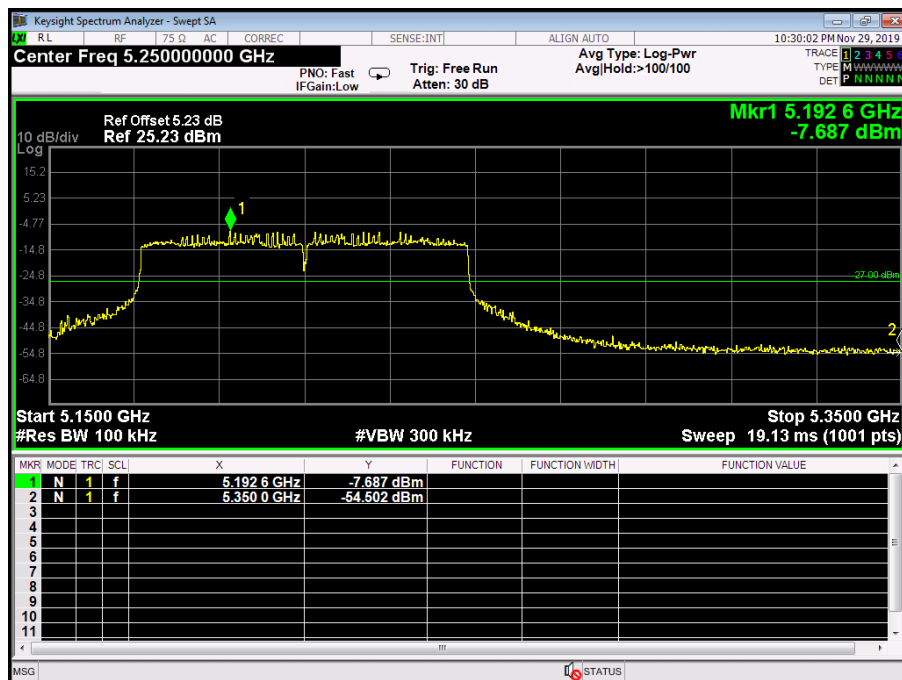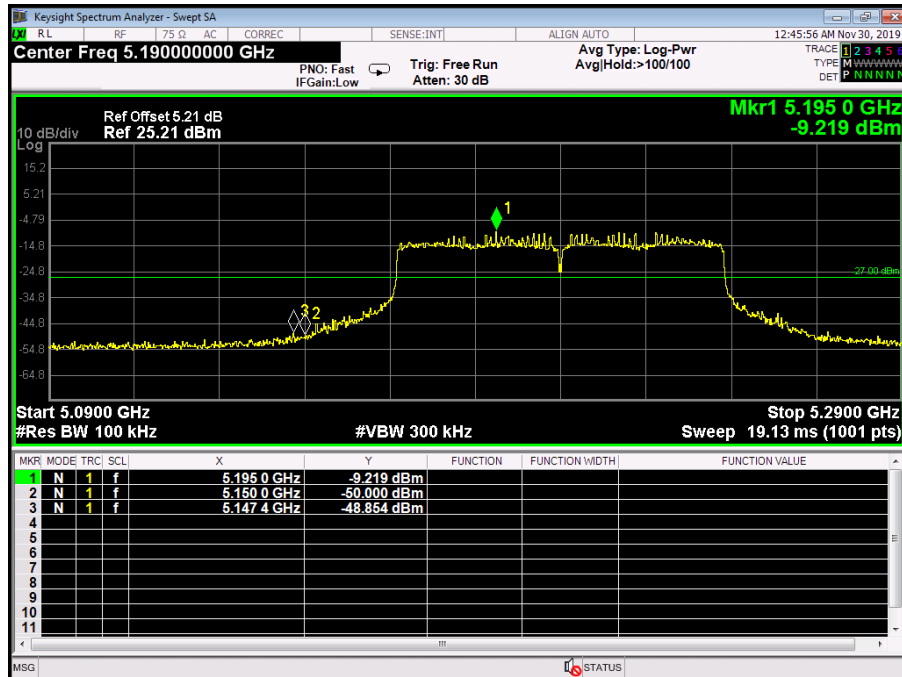



Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11ac(80) mode(U-NII-1) / 5210MHz Antenna 2		
Remark:	The EUT is programed in continuously transmitting mode		

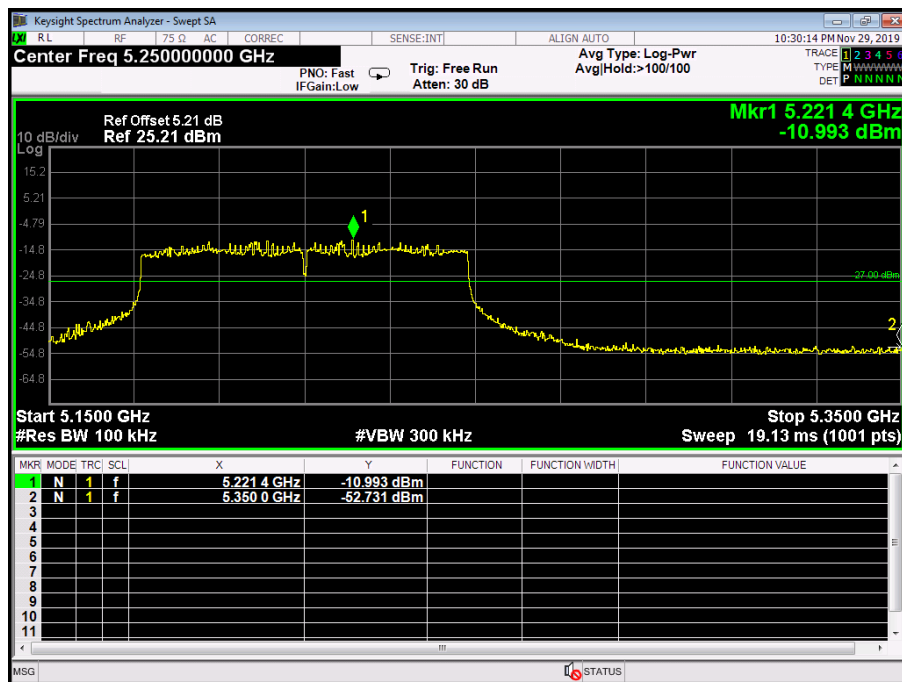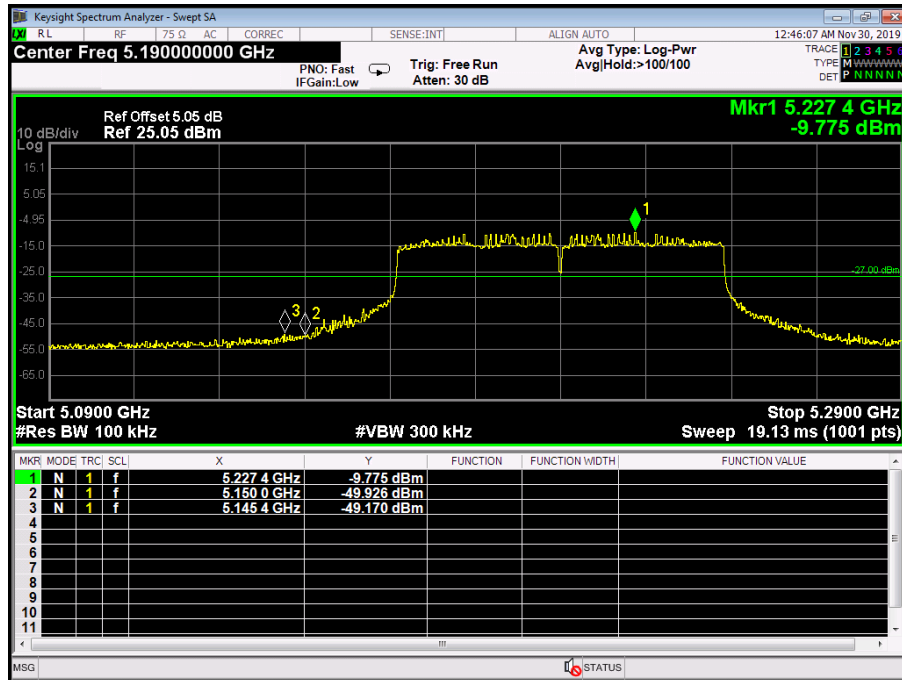



Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11a Mode 5745MHz /5825MHz (U-NII-3) Antenna 0		
Remark:	The EUT is programed in continuously transmitting mode		

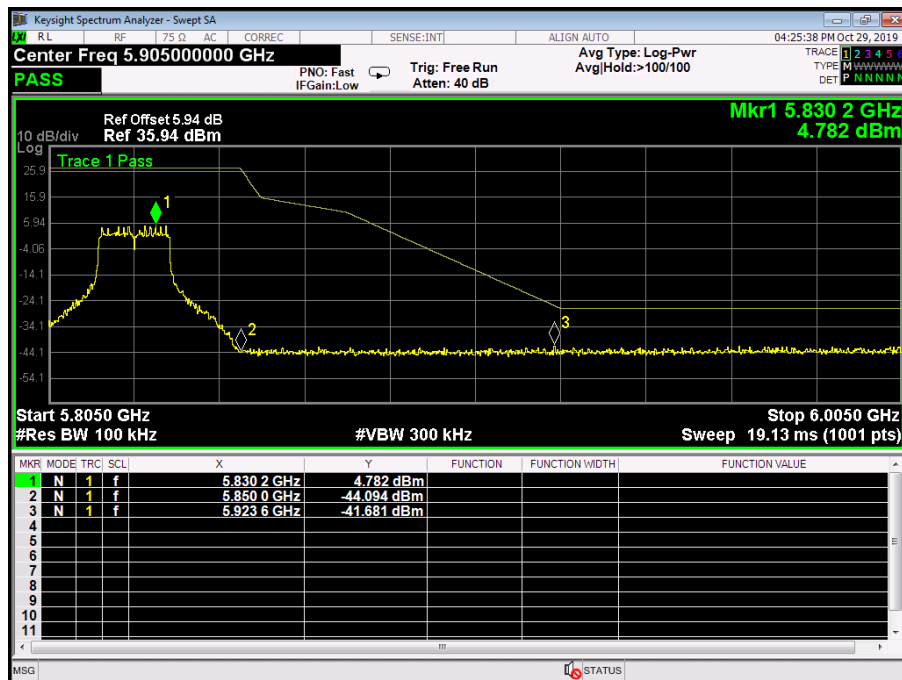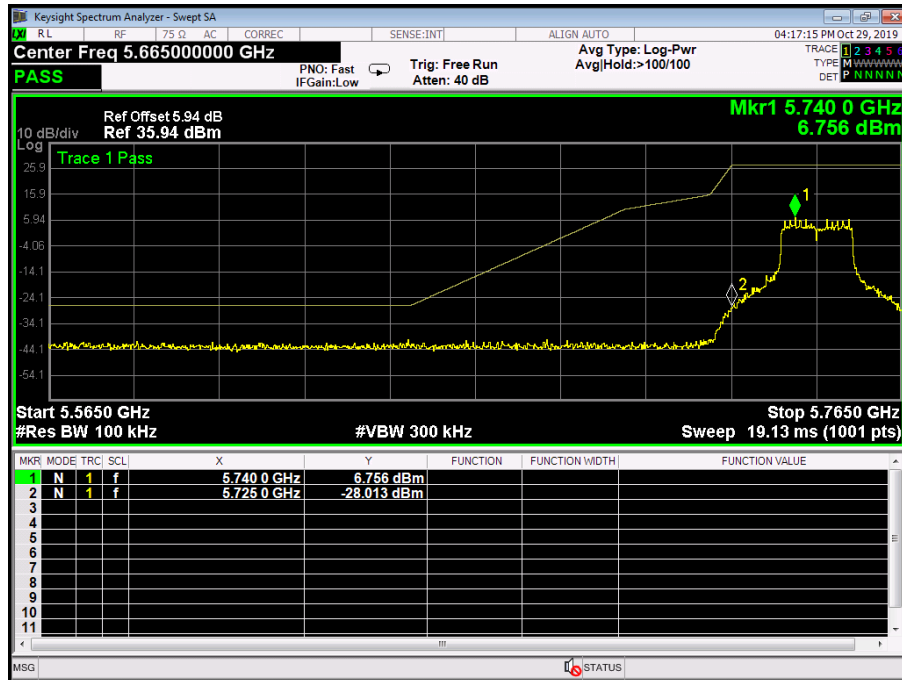



Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11a Mode 5745MHz /5825MHz (U-NII-3) Antenna 1		
Remark:	The EUT is programed in continuously transmitting mode		

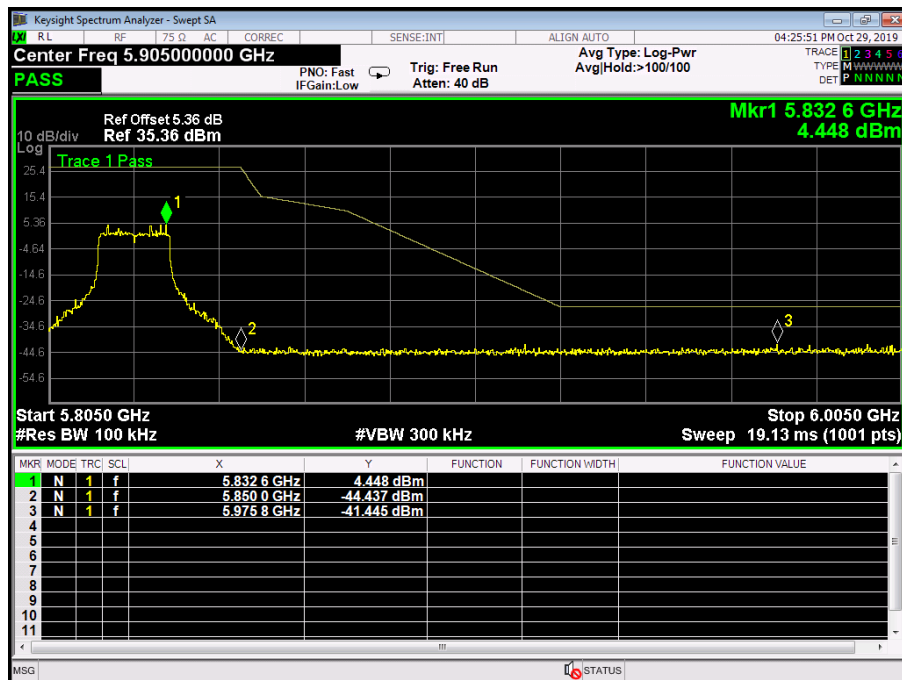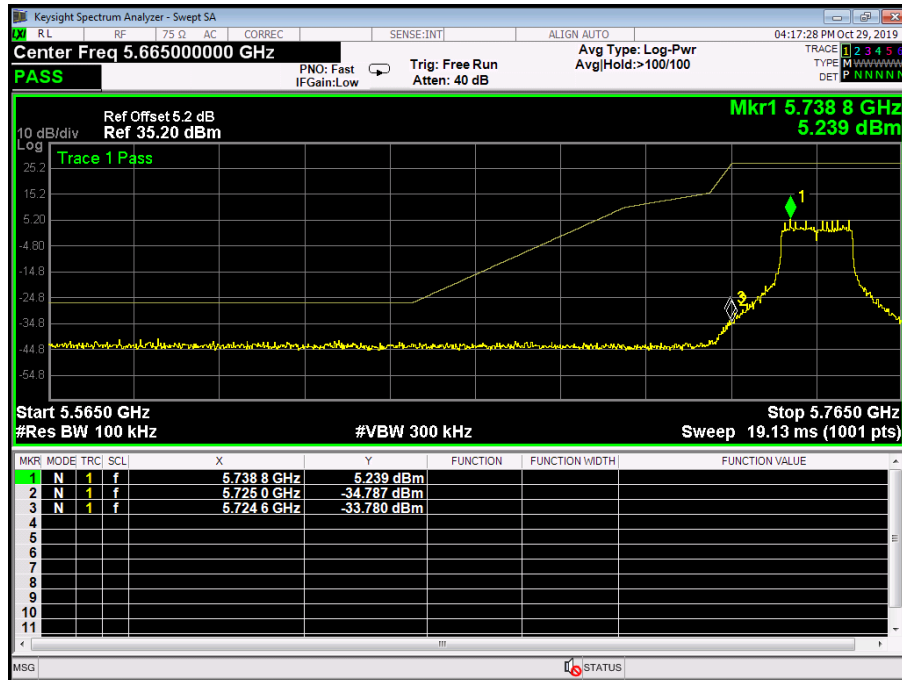



Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11a Mode 5745MHz /5825MHz (U-NII-3) Antenna 2		
Remark:	The EUT is programed in continuously transmitting mode		

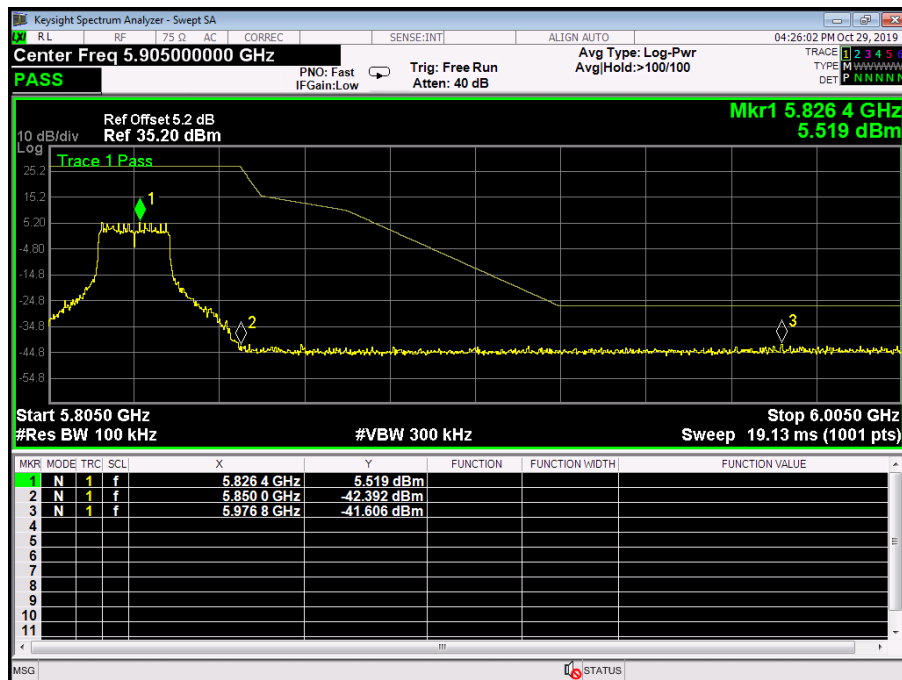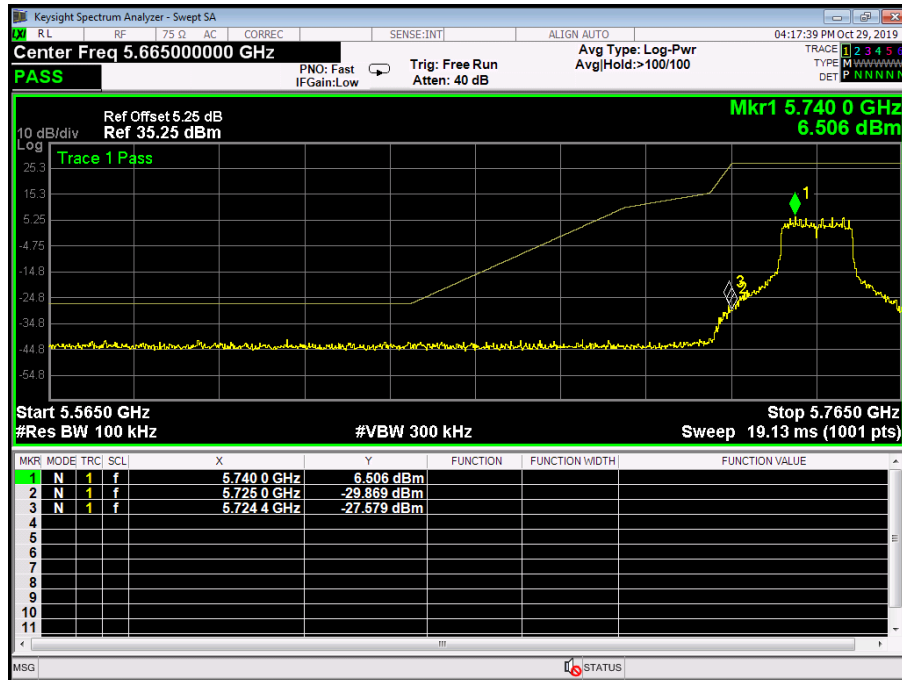



Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11n(HT20) Mode 5745MHz /5825MHz (U-NII-3) Antenna 0		
Remark:	The EUT is programed in continuously transmitting mode		

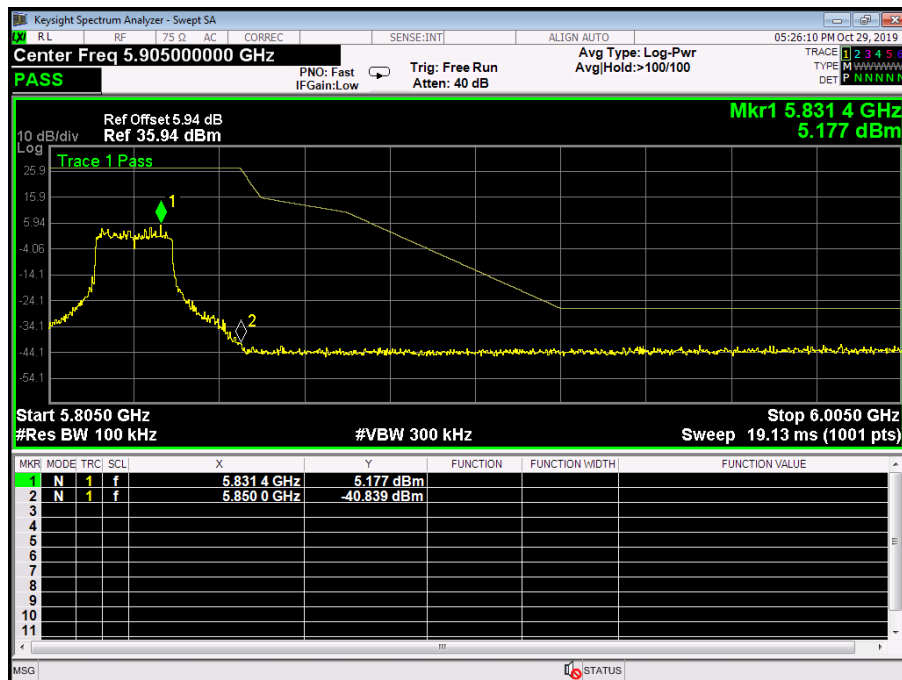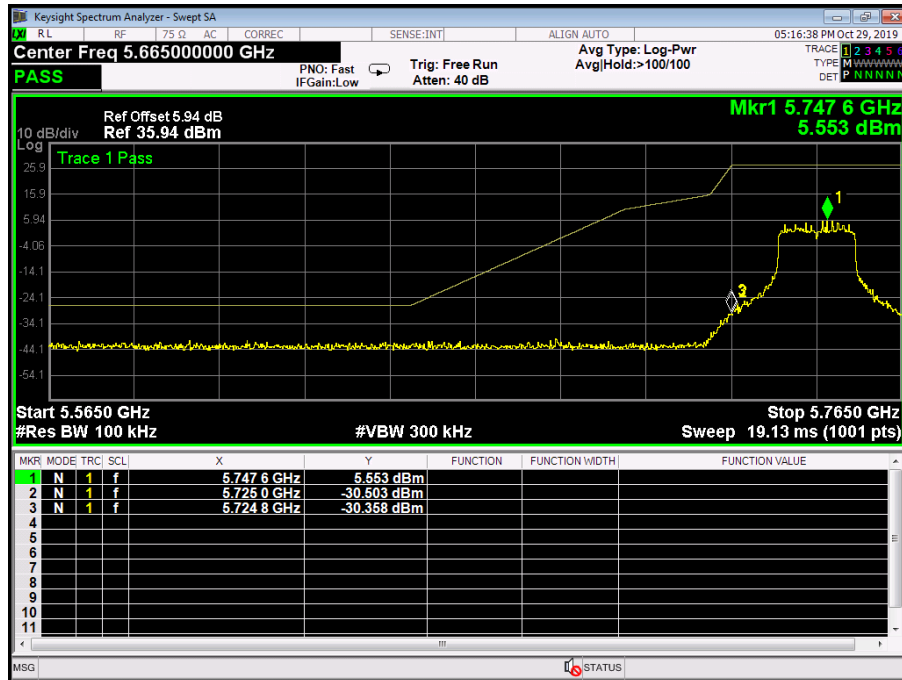



Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11n(HT20) Mode 5745MHz /5825MHz (U-NII-3) Antenna 1		
Remark:	The EUT is programed in continuously transmitting mode		

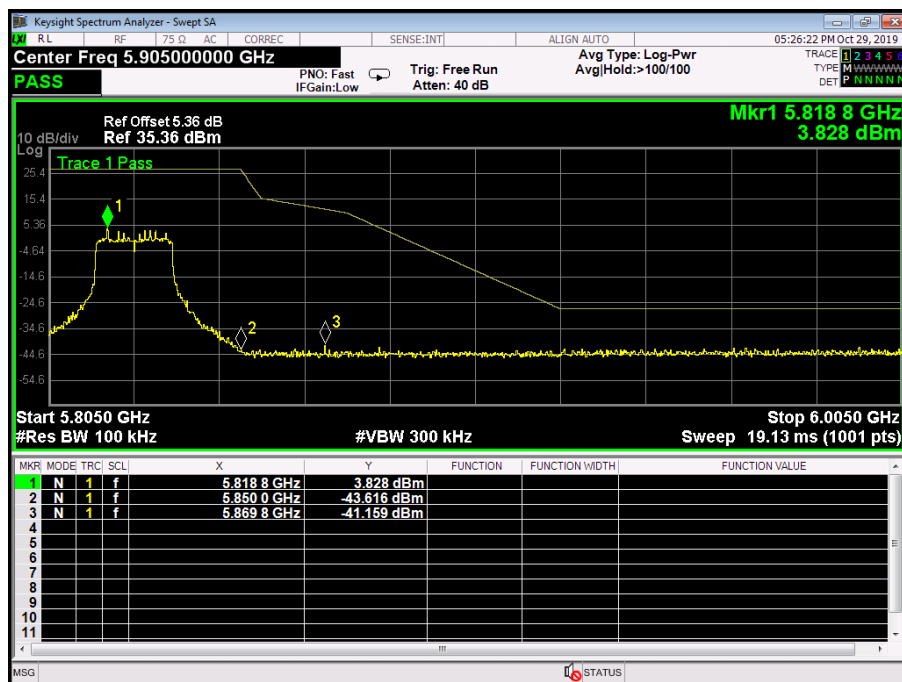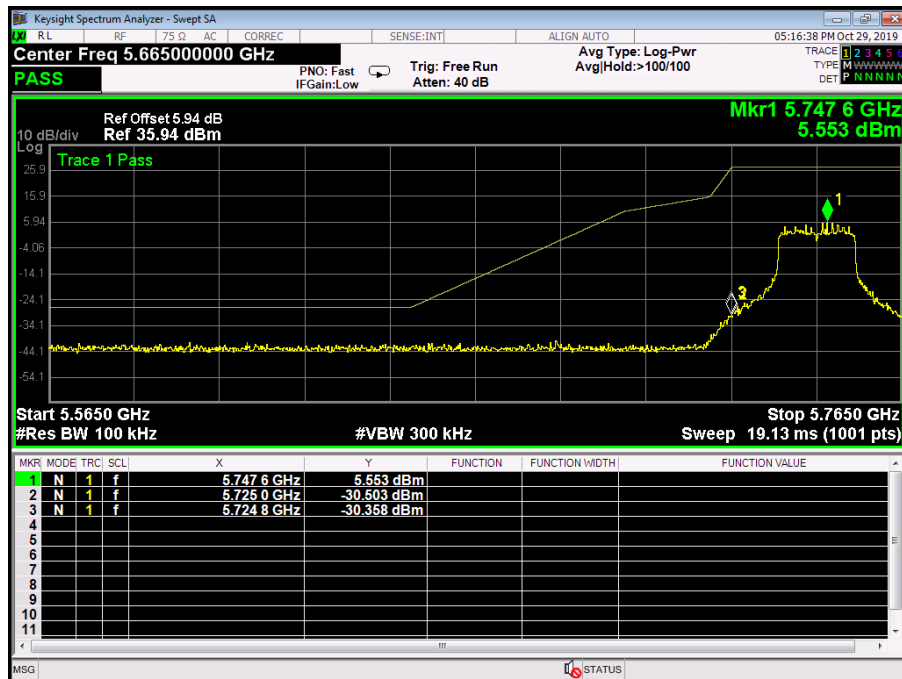



Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11n(HT20) Mode 5745MHz /5825MHz (U-NII-3) Antenna 2		
Remark:	The EUT is programed in continuously transmitting mode		

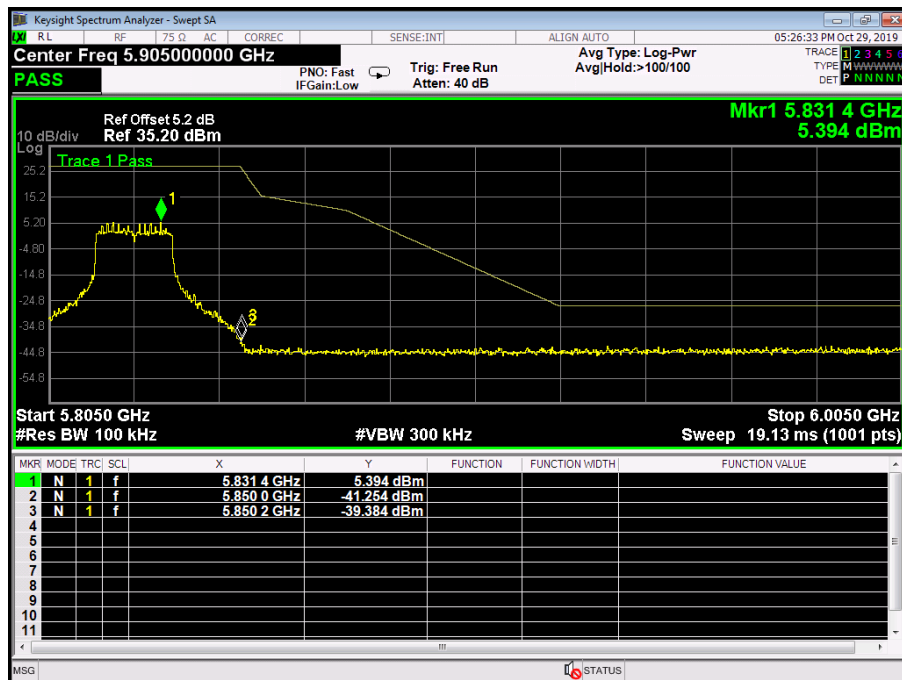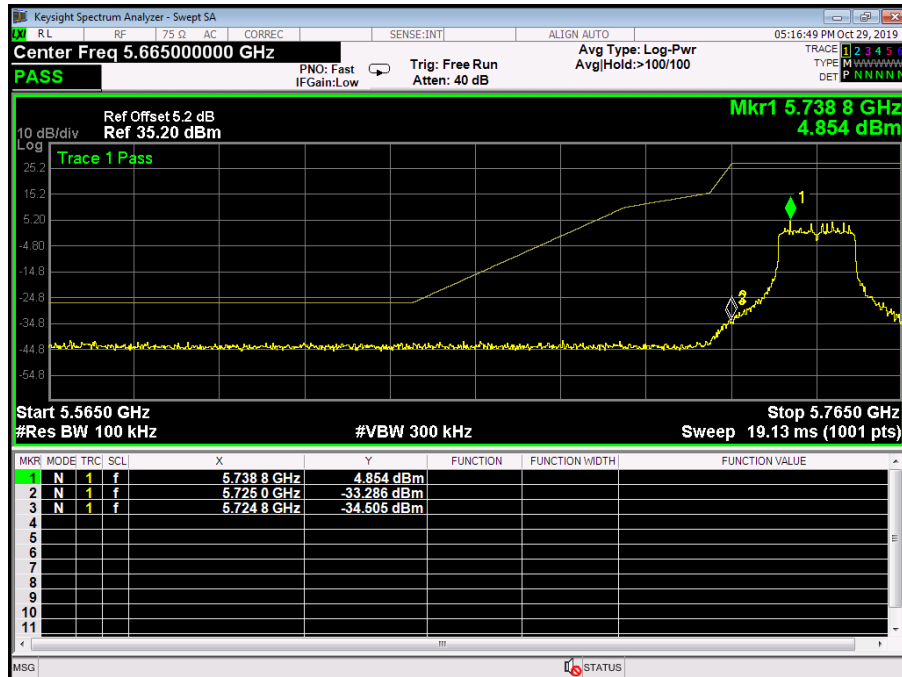



Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11ac(VHT20) Mode 5745MHz /5825MHz (U-NII-3) Antenna 0		
Remark:	The EUT is programed in continuously transmitting mode		

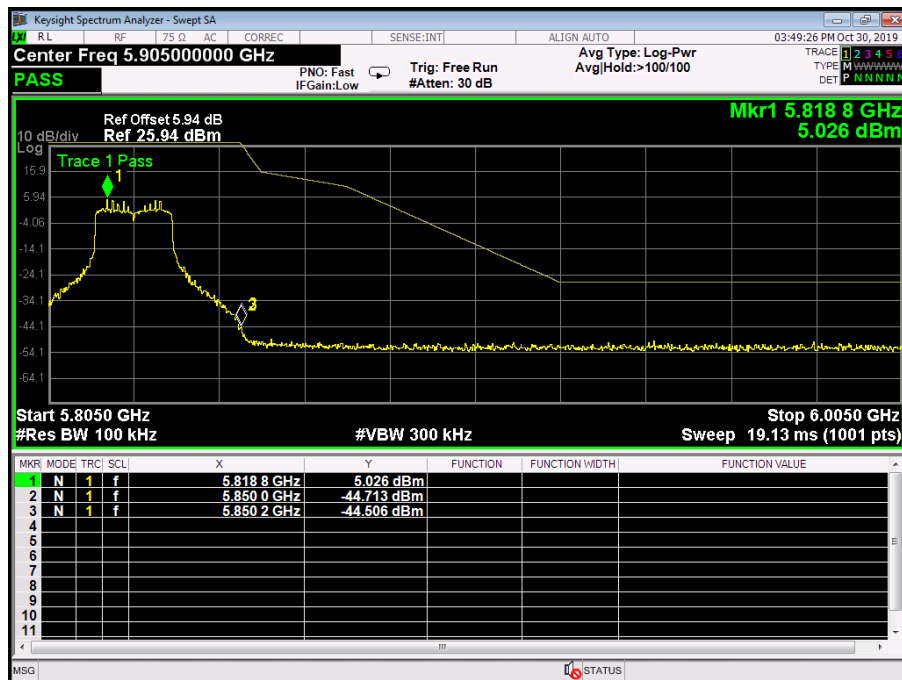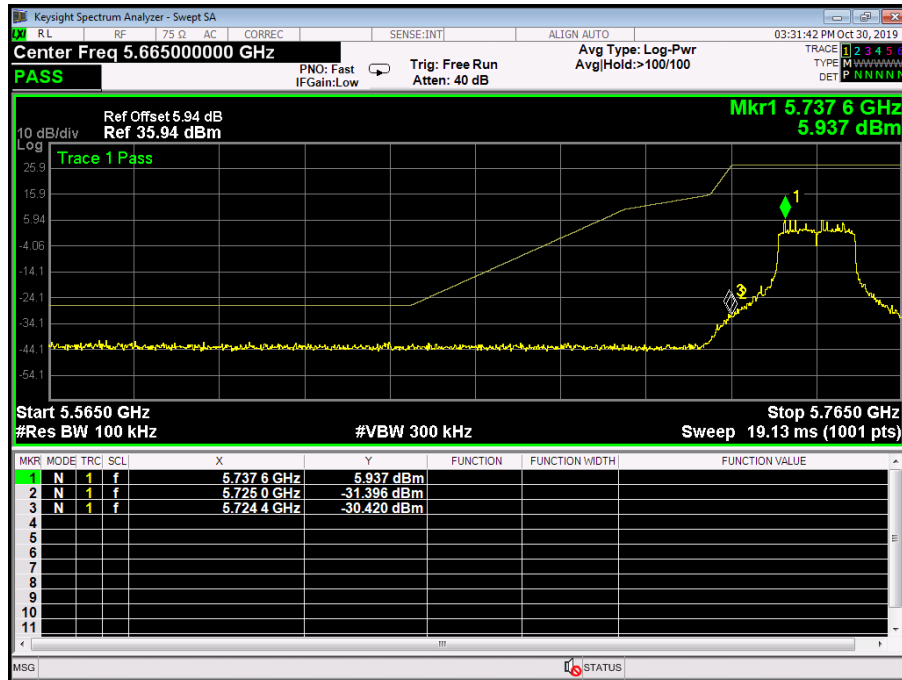


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11ac(VHT20) Mode 5745MHz /5825MHz (U-NII-3) Antenna 1		
Remark:	The EUT is programed in continuously transmitting mode		

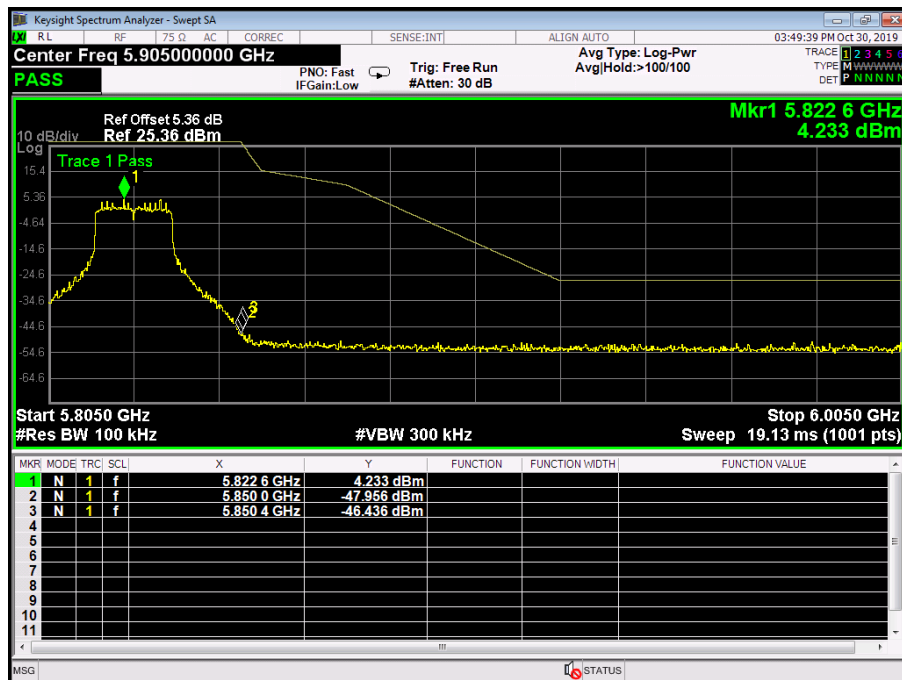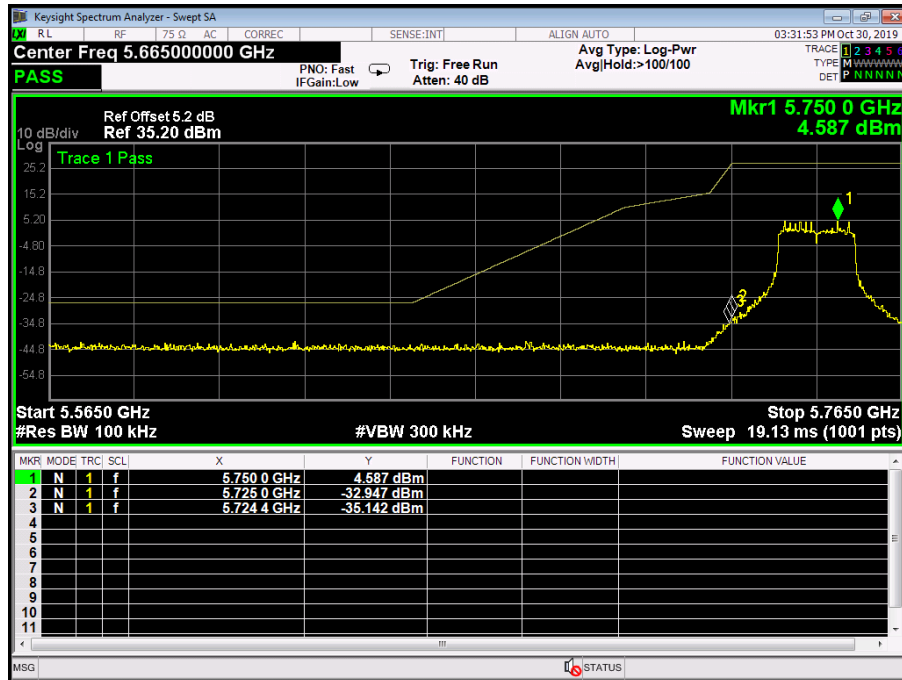


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11ac(VHT20) Mode 5745MHz /5825MHz (U-NII-3) Antenna 2		
Remark:	The EUT is programed in continuously transmitting mode		

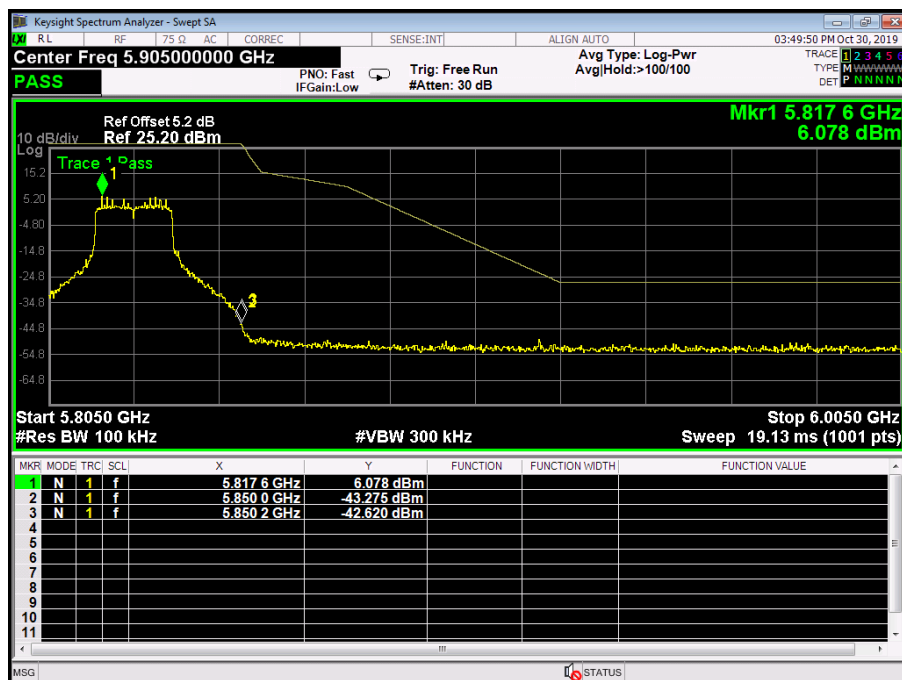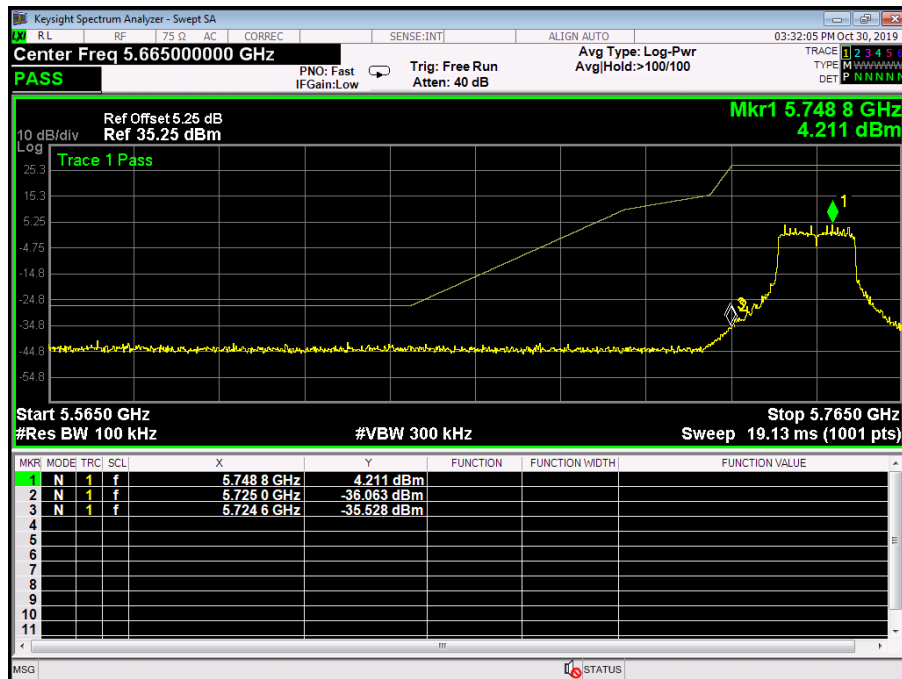


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11 n(HT40) Mode 5755MHz/5795 (U-NII-3) Antenna 0		
Remark:	The EUT is programed in continuously transmitting mode		

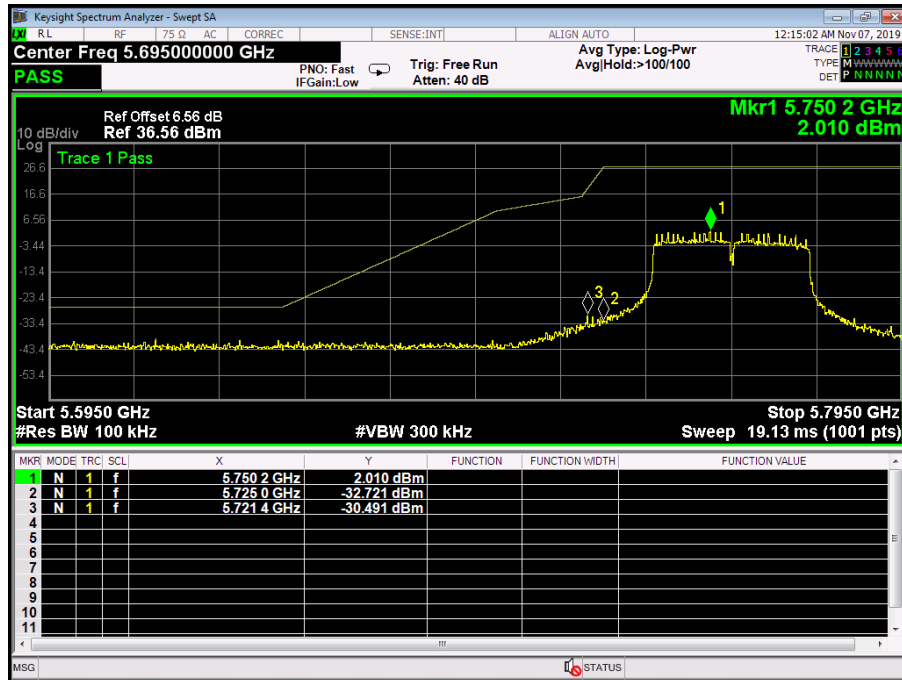


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11 n(HT40) Mode 5755MHz/5795 (U-NII-3) Antenna 1		
Remark:	The EUT is programed in continuously transmitting mode		

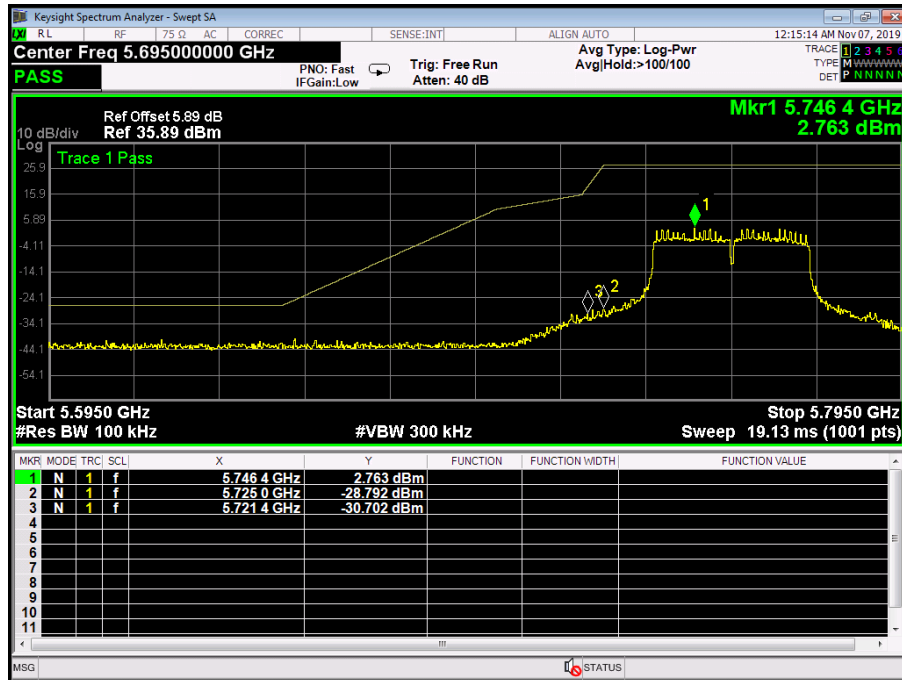


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11 n(HT40) Mode 5755MHz/5795 (U-NII-3) Antenna 2		
Remark:	The EUT is programed in continuously transmitting mode		

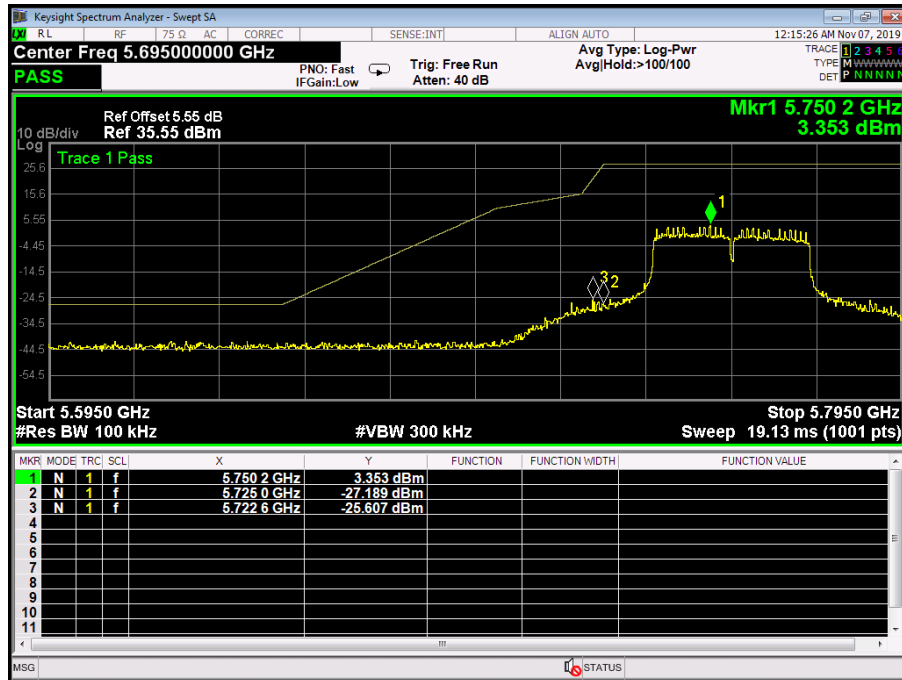


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11 ac(VHT40) Mode 5755MHz/5795 (U-NII-3) Antenna 0		
Remark:	The EUT is programed in continuously transmitting mode		

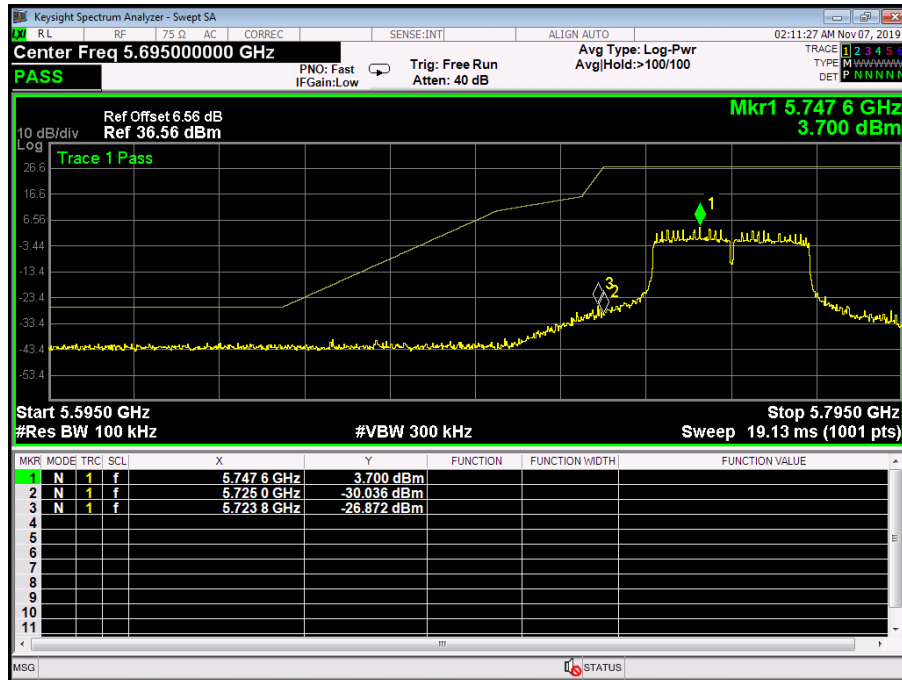



Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11 ac(VHT40) Mode 5755MHz/5795 (U-NII-3) Antenna 1		
Remark:	The EUT is programed in continuously transmitting mode		

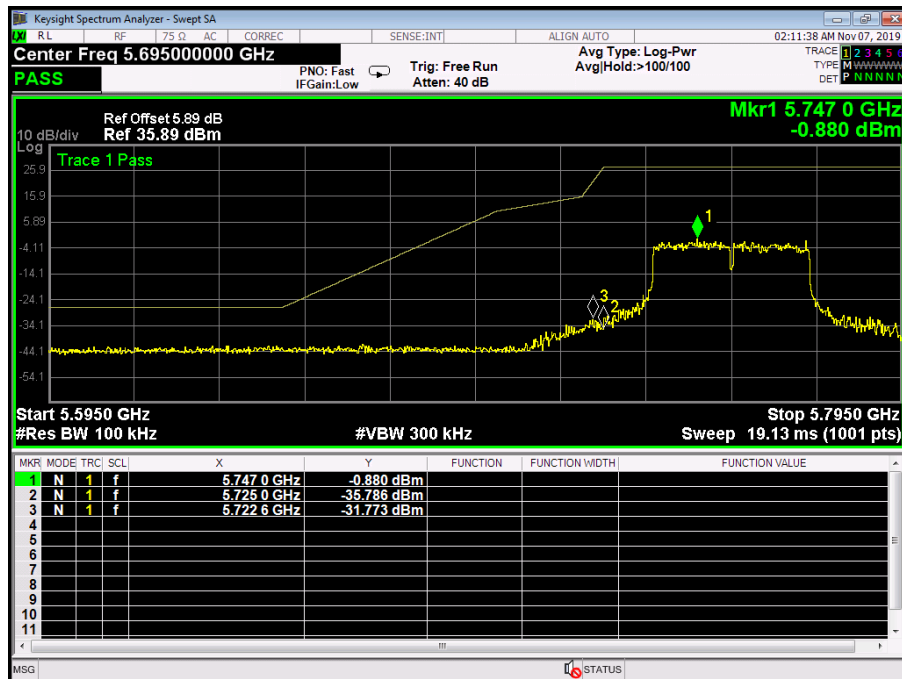



Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11 ac(VHT40) Mode 5755MHz/5795 (U-NII-3) Antenna 2		
Remark:	The EUT is programed in continuously transmitting mode		

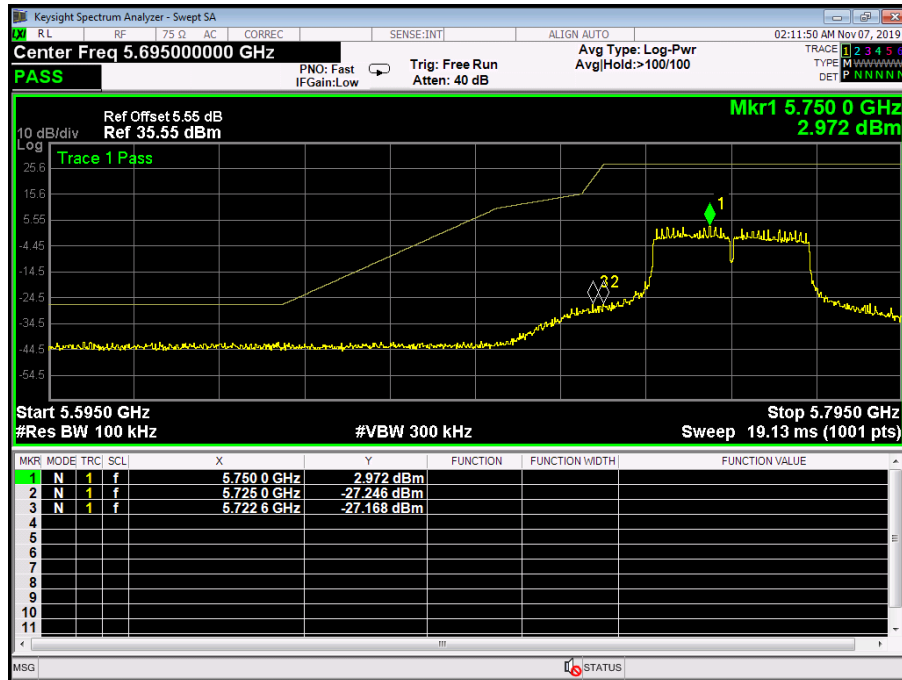



Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11 ac(80) Mode 5775MHz (U-NII-3) Antenna 0		
Remark:	The EUT is programed in continuously transmitting mode		

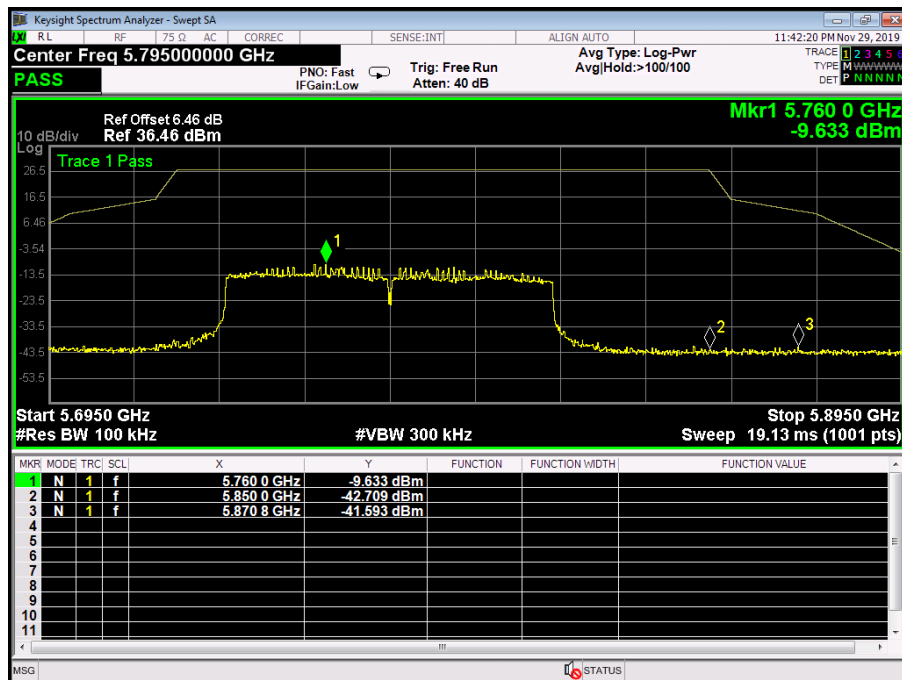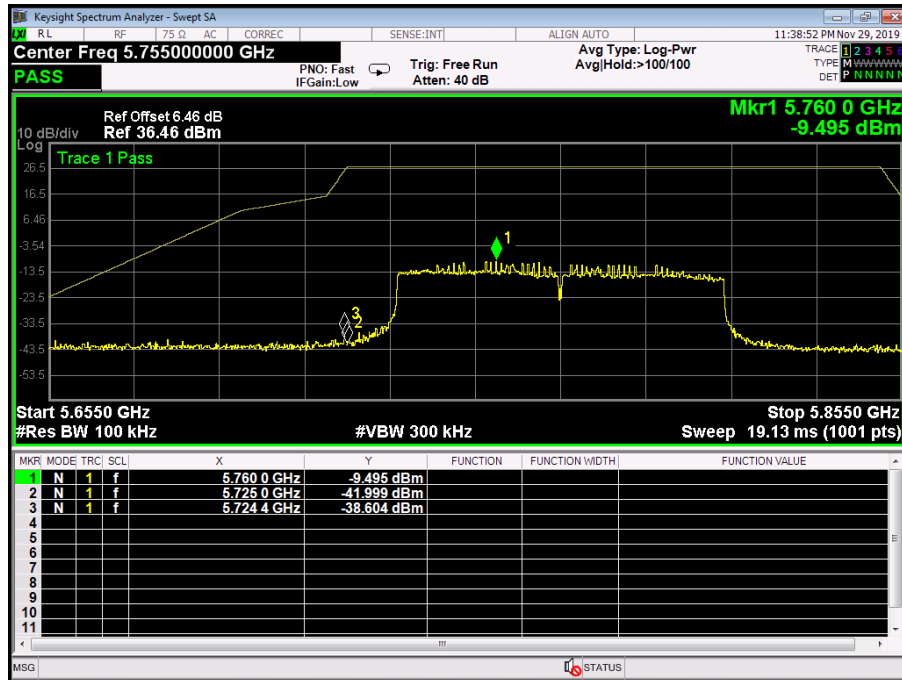


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11 ac(80) Mode 5775MHz (U-NII-3) Antenna 1		
Remark:	The EUT is programed in continuously transmitting mode		

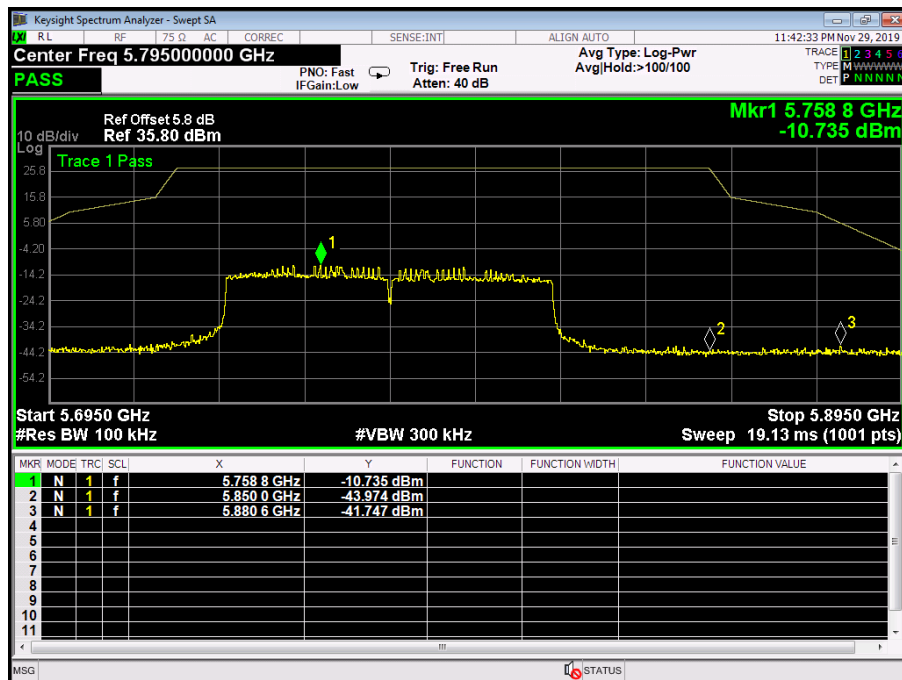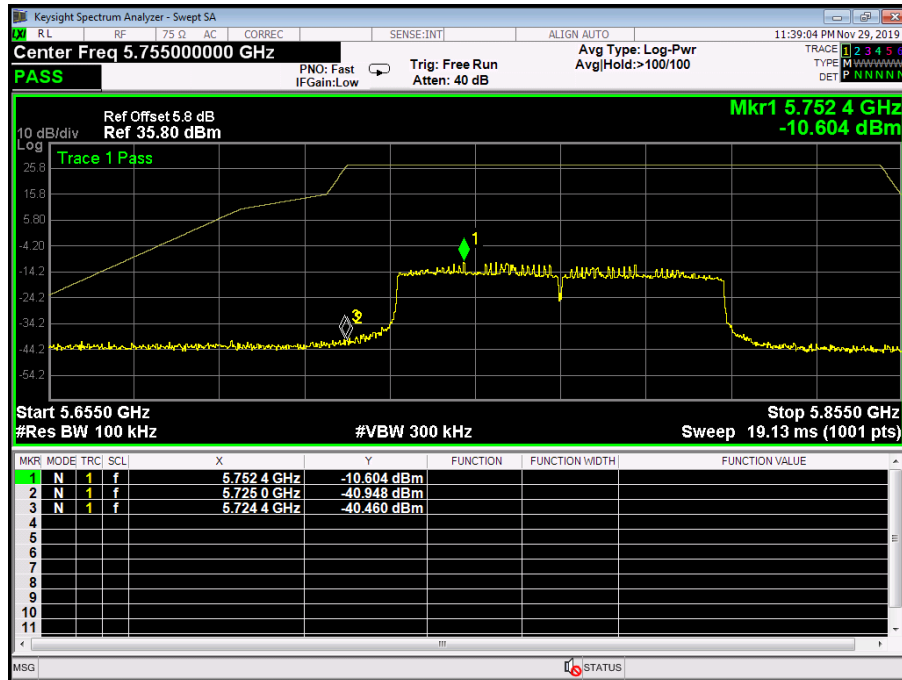

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX 802.11 ac(80) Mode 5775MHz (U-NII-3) Antenna 2		
Remark:	The EUT is programed in continuously transmitting mode		

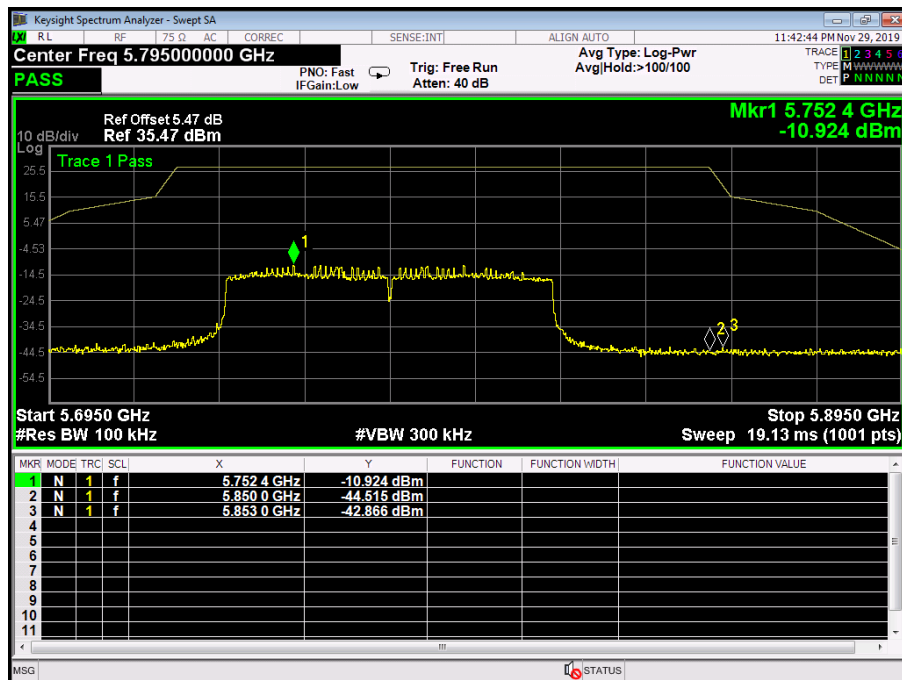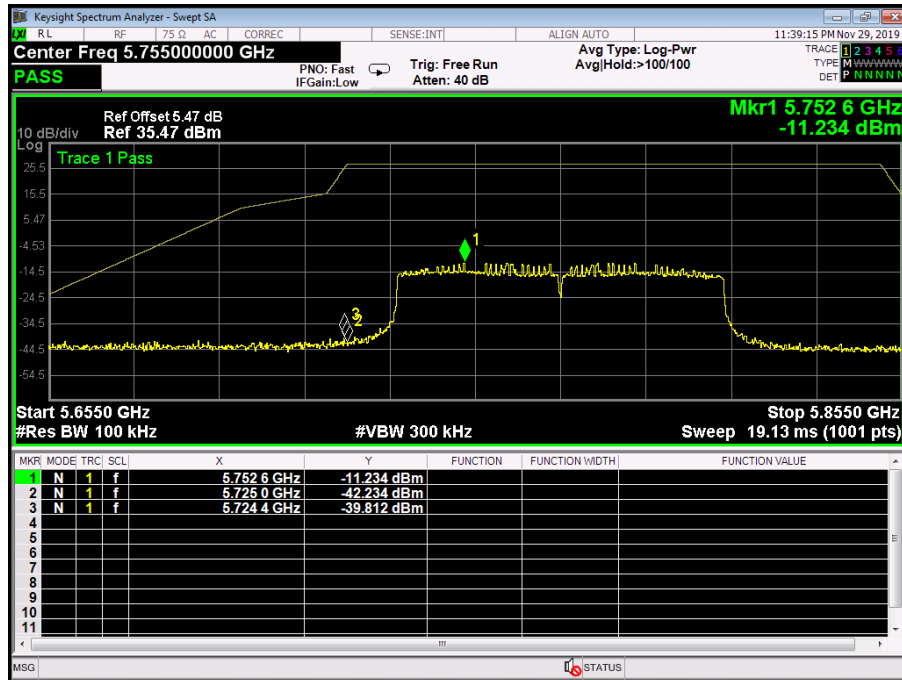


Attachment D--Bandwidth Test Data

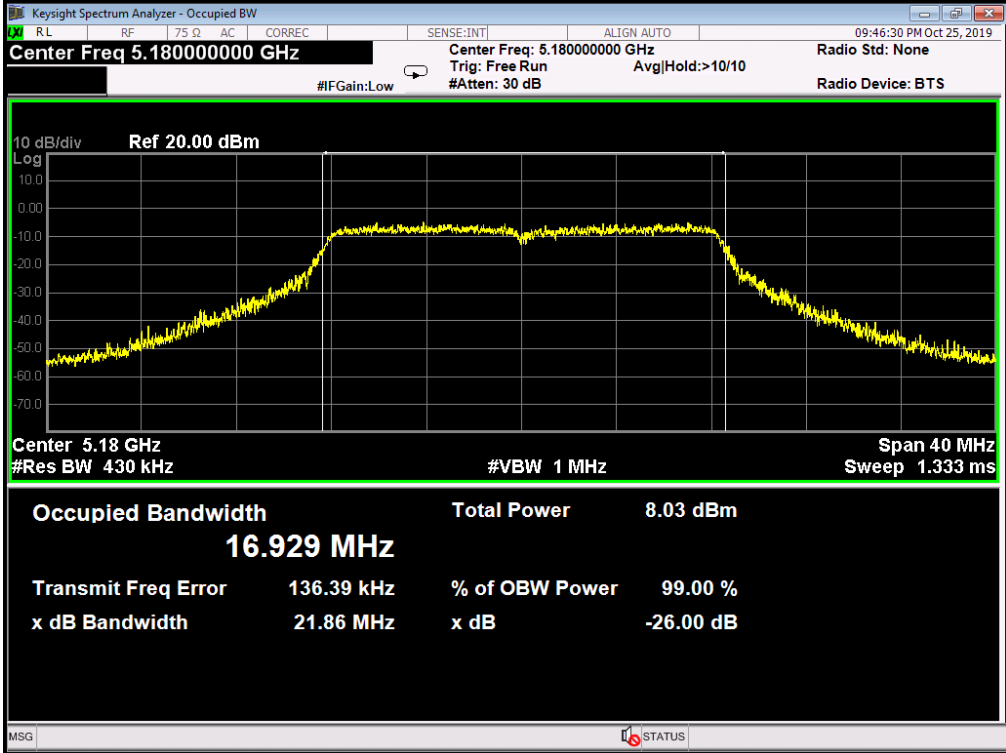Temperature:	25 °C	Relative Humidity:	55%																
Test Voltage:	AC 120V/60Hz																		
Test Mode:	TX 802.11a Mode (U-NII-1) Antenna 0																		
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)																
36	5180	21.56	16.929																
40	5200	22.67	16.960																
48	5240	22.35	16.942																
802.11a Mode																			
5180 MHz																			
 <table border="1"> <thead> <tr> <th colspan="2">Occupied Bandwidth</th> <th colspan="2">Total Power</th> </tr> </thead> <tbody> <tr> <td colspan="2">16.929 MHz</td> <td colspan="2">8.03 dBm</td> </tr> <tr> <td>Transmit Freq Error</td> <td>136.39 kHz</td> <td>% of OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>21.86 MHz</td> <td>x dB</td> <td>-26.00 dB</td> </tr> </tbody> </table>				Occupied Bandwidth		Total Power		16.929 MHz		8.03 dBm		Transmit Freq Error	136.39 kHz	% of OBW Power	99.00 %	x dB Bandwidth	21.86 MHz	x dB	-26.00 dB
Occupied Bandwidth		Total Power																	
16.929 MHz		8.03 dBm																	
Transmit Freq Error	136.39 kHz	% of OBW Power	99.00 %																
x dB Bandwidth	21.86 MHz	x dB	-26.00 dB																

802.11a Mode

5200 MHz

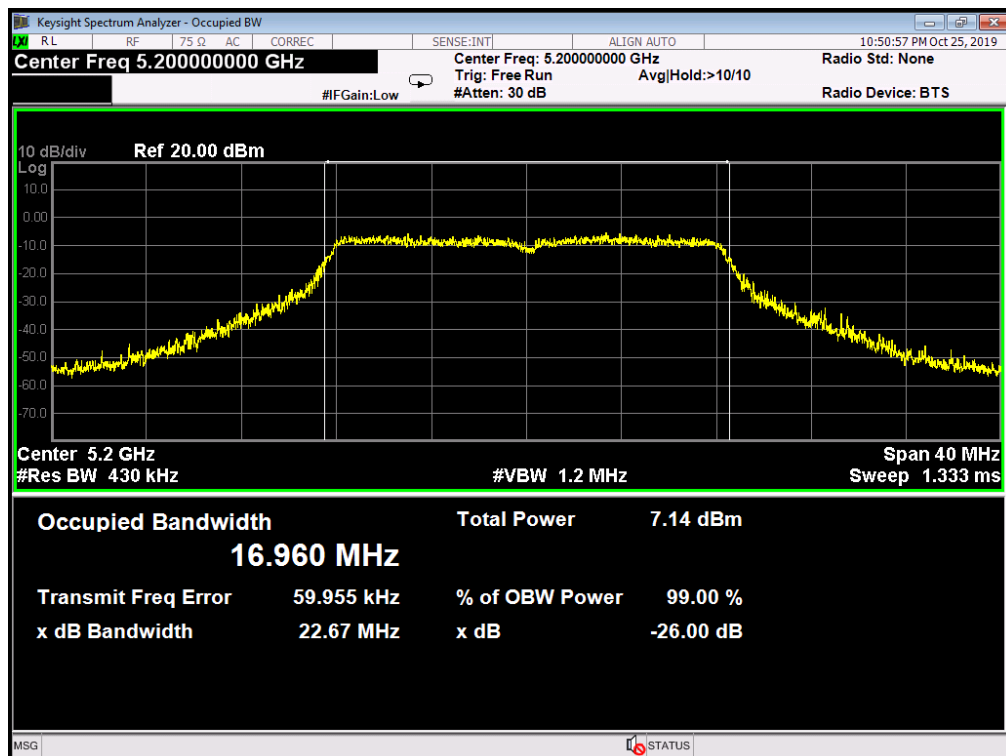

802.11a Mode

5240 MHz

