

test report

Customer:

Guardhat Inc.

1520 Woodward Ave 3rd Floor
Detroit, MI 48226
USA

RF test report

180853-AU01+W01



Guardhat Inc.

UWB Tag

GHP2470

EMV **TESTHAUS** GmbH

Gustav-Hertz-Straße 35
94315 Straubing
Germany
Tel.: +49 9421 56868-0
Fax: +49 9421 56868-100
Email: info@emv-testhaus.com

Accreditation:



Test Firm Type "accredited": Valid until 2019-06-05
MRA US-EU, FCC designation number: DE0010
Bnetza-CAB-02/21-02/5 Valid until 2023-11-26

Industry Canada test site numbers with registration expiry date:
3472A-1, expiring 2019-03-15
3472A-2, expiring 2019-03-15

Test laboratory:

EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

The technical accuracy is guaranteed through the quality management of
EMV **TESTHAUS** GmbH.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Guardhat Inc.
UWB Tag
GHP2470

180853-AU01+W01

Page 2 of 61

Table of contents

1	Summary of test results	5
2	Referenced publications	6
3	Equipment under test (EUT)	7
3.1	General remark	7
3.2	General information	7
3.3	Radio specifications	8
3.4	Photo documentation	8
4	Test configuration and mode of operation	9
4.1	Test configuration	9
4.2	Mode of operation	10
5	Test procedures	12
5.1	General specifications	12
5.2	Antenna-port conducted measurements	13
5.3	AC power-line conducted emissions	13
5.4	Radiated emissions below 30 MHz	15
5.5	Radiated emissions from 30 MHz to 1 GHz	17
5.6	Radiated emissions above 1 GHz	19
5.7	UWB Bandwidth measurement	20
6	Test results	21
6.1	Environmental conditions	21
6.2	Antenna requirement	22
6.3	Signal deactivation	23
6.4	UWB bandwidth	27
6.5	Radiated emissions in GPS bands	31
6.6	Peak emissions in a 50 MHz bandwidth	37
6.7	Radiated emissions 9 kHz to 40 GHz	41
7	Equipment calibration status	59
8	Measurement uncertainties	60
9	Revision history	61



List of figures

Figure 1: Used test software/ settings of channel 1	10
Figure 2: Used test software/ settings of channel 5	10
Figure 3: Used test software for monitoring the distance and the active connection	11
Figure 4: Used test software for monitoring the distance and the active connection	11
Figure 5: Setup for antenna-port conducted measurements	13
Figure 6: Setup for AC power-line conducted emissions test from 150 kHz to 30 MHz	14
Figure 7: Setup for radiated emissions test below 30 MHz	17
Figure 8: Setup for radiated emissions test from 30 MHz to 1 GHz	19
Figure 9: 1 pulse train.....	25
Figure 10: Chart of UWB bandwidth on channel 2	29
Figure 11: Chart of UWB bandwidth on channel 5	30
Figure 12: Chart of measurement 1164 MHz to 1240 MHz on channel 2.....	33
Figure 13: Chart of measurement 1559 MHz to 1610 MHz on channel 2	34
Figure 14: Chart of measurement 1164 MHz to 1240 MHz on channel 5	35
Figure 15: Chart of measurement 1559 MHz to 1610 MHz on channel 5.....	36
Figure 16: Chart of Peak emission measurement on channel 2.....	39
Figure 17: Chart of Peak emission measurement on channel 5.....	40
Figure 18: Chart of emissions test below 30 MHz on channel 2 in position Z.....	43
Figure 19: Chart of emissions test below 30 MHz on channel 5 in position Z.....	44
Figure 20: Chart of emissions test from 30 MHz to 1 GHz on channel 2 in position X.....	47
Figure 21: Chart of emissions test from 30 MHz to 1 GHz on channel 5 in position X.....	48
Figure 22: Chart of emissions test from 960 MHz to 1610 MHz on channel 2	53
Figure 23: Chart of emissions test from 1610 MHz to 16.5 GHz on channel 2	54
Figure 24: Chart of emissions test from 960 MHz to 1610 MHz on channel 5	56
Figure 25: Chart of emissions test from 1610 MHz to 16.5 GHz on channel 5	57
List of tables	
Table 1: Devices used for testing	9
Table 2: Ports of EUT and appropriate cables	9
Table 3: Bandwidth and detector type for AC power-line conducted emissions test.....	14
Table 4: Recalculation factors for extrapolation	15
Table 5: Bandwidth and detector type for radiated emissions test below 30 MHz	16
Table 6: Bandwidth and detector type for radiated emissions test from 30 MHz to 1 GHz	17
Table 7: Bandwidth and trace settings for exploratory radiated emissions test above 1 GHz.....	20
Table 8: Results of UWB bandwidth	30
Table 9: General radiated emission limits up to 30 MHz according to §15.209	42
Table 10: General radiated emission limits \geq 30 MHz to 960 MHz according to §15.209	46
Table 11: Results of emissions test from 30 MHz to 1 GHz on channel 2	48
Table 12: Results of emissions test from 30 MHz to 1 GHz on channel 5	49
Table 13: Radiated emission limits above 960 MHz to 40 GHz according to §15.519.....	51
Table 14: Chart of emissions test from 16.5 GHz to 40 GHz on channel 2	55
Table 15: Chart of emissions test from 16.5 GHz to 40 GHz on channel 5	58

1 Summary of test results

System type: UWB device

47 CFR part and section	Test	Page	Result	Note(s)
15.207a)	AC power line conducted emissions 150 kHz to 30 MHz	---	Not applicable	1,2
15.203 UWB device	Antenna requirement	22	Passed	---
15.519(a)(1)	Signal deactivation	23	Passed	---
15.503(a)(d) 15.519(b)	UWB bandwidth	27	Passed	---
15.519(d)	Radiated emissions in GPS bands	31	Passed	---
15.519(e)	Peak emissions in a 50 MHz bandwidth	37	Passed	---
15.209 15.519(c)	Radiated emissions 9 kHz to 30 MHz 30 MHz to 1 GHz Emissions from 960 MHz to 40 GHz	41 41 45 50	Passed Passed Passed Passed	---

Notes (for information about EUT see clause 3):

- 1 Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.
- 2 EUT is battery-powered.

Straubing, March 1, 2019



Konrad Graßl
Head of radio department
EMV **TESTHAUS** GmbH



Christian Kiermeier
Technical executive
EMV **TESTHAUS** GmbH



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Guardhat Inc.
UWB Tag
GHP2470

2 Referenced publications

Publication	Title
CFR 47 Part 2 October 2018	Code of Federal Regulations, Title 47 (Telecommunication), Part 2 (Frequency allocation and radio treaty matters; General rules and regulations) of the Federal Communication Commission (FCC)
CFR 47 Part 15 October 2018	Code of Federal Regulations, Title 47 (Telecommunication), Part 15 (Radio Frequency Devices) of the Federal Communication Commission (FCC)
ANSI C63.10 June 2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Guardhat Inc.
UWB Tag
GHP2470

3 Equipment under test (EUT)

All Information in this clause is declared by customer.

3.1 General remark

The EUT has a 2.4 GHz technology, GPS and UWB integrated. In this test report only UWB is in consideration.

3.2 General information

Product type:	UWB Tag	
Model name:	GHP2470	
Serial number(s):	Prototype	
Applicant:	Guardhat Inc.	
Manufacturer:	Guardhat Inc.	
Version:	Hardware:	554
	Software:	0.0.11
Additional modifications:	None	
FCC ID:	2AR60GHP2470	
Power supply:	DC supply	
	Nominal voltage:	3.3 V – 4.5 V (Battery powered) Note 1
Device type:	<input checked="" type="checkbox"/> Portable	<input type="checkbox"/> Mobile <input type="checkbox"/> Fixed

Note: In normal use the device is battery powered but during the tests the EUT was powered by a DC power supply.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Guardhat Inc.
UWB Tag
GHP2470

3.3 Radio specifications

System type ¹ :	UWB device		
Application frequency band:	3.1 GHz – 10.6 GHz		
Operating frequencies:	CH 2 : 3993 MHz / CH 5 : 6489 MHz		
Short description:	The EUT is a pcb with integrated GPS, 2.4 GHz technology and UWB		
Antenna:	Type:	Taoglas FXUWB20.07.0100C	
	Gain:	5 dBi (maximum)	
	Connector:	<input type="checkbox"/> external	<input checked="" type="checkbox"/> internal
		<input type="checkbox"/> temporary	<input type="checkbox"/> none (integral antenna)

3.4 Photo documentation

For internal photos of the EUT see annex B. Photos taken during testing including EUT positions can be found in annex A.

¹ “DTS” is the equipment class for digital transmission systems, “DSS” for all other Part 15 spread spectrum transmitters as used for equipment authorization system form 731.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Guardhat Inc.
UWB Tag
GHP2470

4 Test configuration and mode of operation

4.1 Test configuration

Device	Type designation	Serial or inventory no.	Manufacturer
<i>EUT</i>			
UWB Tag	GHP2470	Prototype	Guardhat Inc.
<i>Support equipment</i>			
Notebook	Aspire One TT12134	---	Aspire
Wireless Mesh Gateway	6032502	A45121	Agilion
DC power supply	Statron 3252.1	1201211	Statron Gerätetechnik GmbH

Table 1: Devices used for testing

Port	Classification (see note 1)	Cable type	Fixed	Cable length		Note
				used	maximum	
DC port	DC power	Unshielded	<input type="checkbox"/>	10 cm	---	
Serial port	Signal/control	Unshielded	<input type="checkbox"/>	10 cm	---	2

Table 2: Ports of EUT and appropriate cables²

Notes:

- 1 Ports of EUT are classified as “AC power”, “DC power”, “DC power connected to dedicated AC/DC power supply”, “Signal/control” or “Wired network”.
- 2 The serial port is used for configuration.

² As specified by manufacturer.

4.2 Mode of operation

4.2.1 Test software used for emission tests

The test software is part of the firmware of the EUT. It is controlled via the USB-serial-adapter.



Figure 1: Used test software/ settings of channel 1

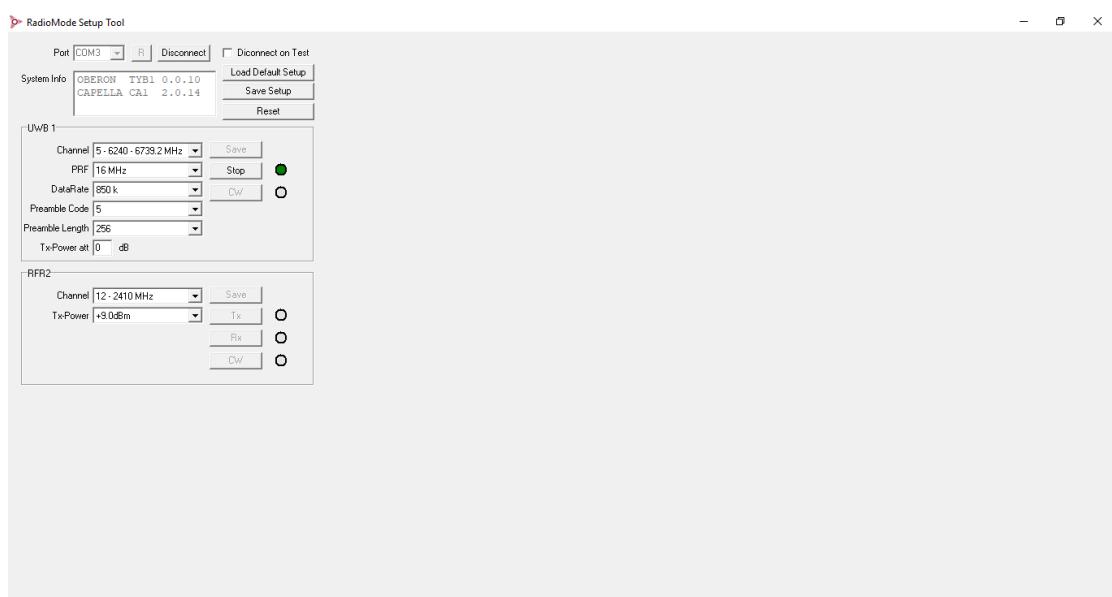


Figure 2: Used test software/ settings of channel 5



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Guardhat Inc.
UWB Tag
GHP2470

4.2.2 Test software used for the signal deactivation test

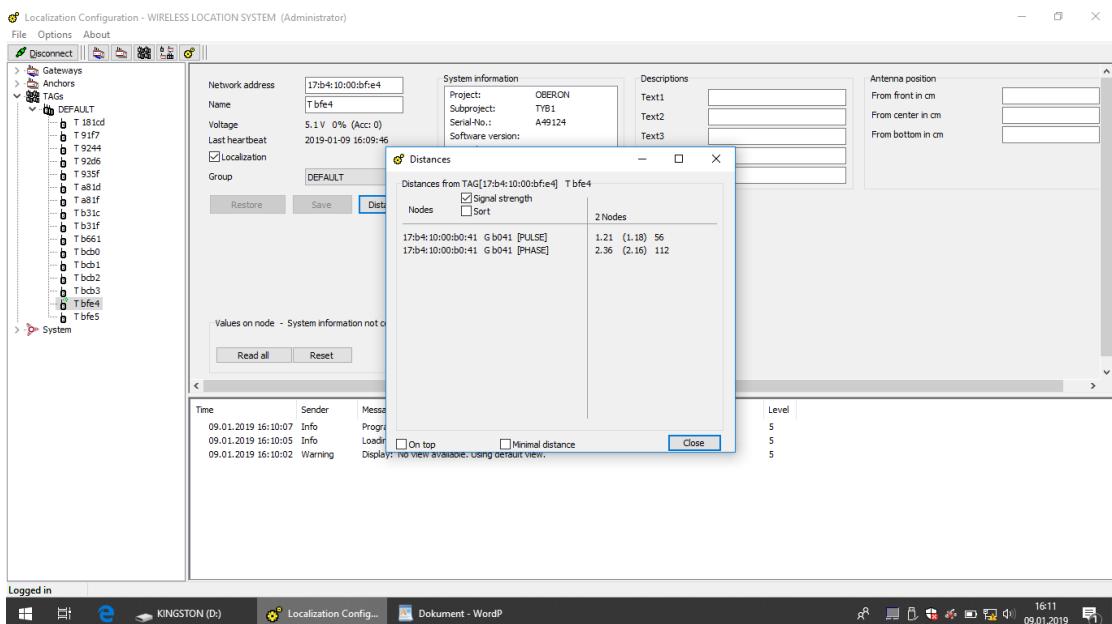


Figure 3: Used test software for monitoring the distance and the active connection

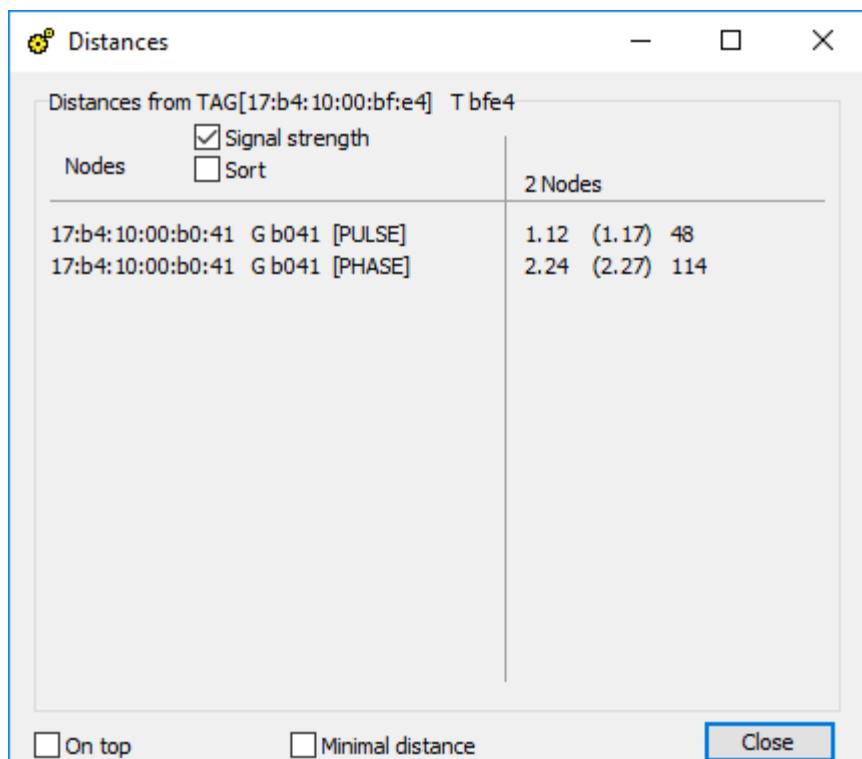


Figure 4: Used test software for monitoring the distance and the active connection



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Guardhat Inc.
UWB Tag
GHP2470

5 Test procedures

5.1 General specifications

5.1.1 Test setups

Tabletop devices are placed on a non-conductive table with a height of 0.8 m. In case of AC power-line conducted emissions test, the rear of the EUT is located 40 cm to the vertical wall of the RF-shielded (screened) room which is used as vertical conducting plane. For radiated emission measurements above 1 GHz, tabletop devices are placed at a height of 1.5 m above the floor using a support made of styrene placed on top of the non-conductive table.

Floor-standing devices are placed either directly on the reference ground-plane or on insulating material (see clause 6.3.3 of ANSI C63.4-2014 for more details).

All other surfaces of tabletop or floor-standing EUTs are at least 80 cm from any other grounded conducting surface. This includes the case or cases of one or more LISNs when performing an AC power-line conducted emissions test.

Radiated emission measurements of equipment that can be used in multiple orientations (e.g. portable or handheld devices) are performed with the EUT in each of three orthogonal axis positions.

5.1.2 Conversion to conducted test results

If test procedures described herein are based on the use of an antenna-port conducted test configuration, but the EUT cannot provide such a configuration (e.g., portable or handheld devices with integral antenna), radiated tests are performed for demonstrating compliance to the conducted requirements.

If a radiated test configuration has to be used, then the measured power or field strength levels are converted to equivalent conducted power levels for comparison to the applicable limit. For this purpose, at first the radiated field strength or power levels are converted to EIRP as described in annex G of ANSI C63.10 and KDB Publication 412172, document D01. The equivalent conducted power is then determined by subtracting the EUT transmit antenna gain from the EIRP (assuming logarithmic representation).

For devices utilizing multiple antenna technologies, KDB Publication 662911 applies.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Guardhat Inc.
UWB Tag
GHP2470

5.2 Antenna-port conducted measurements

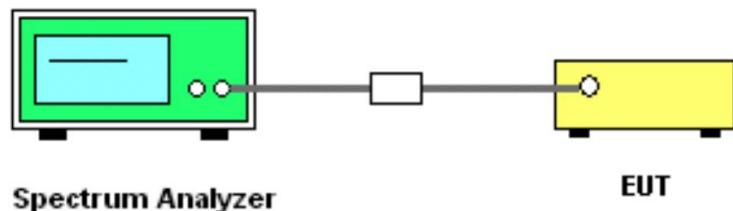


Figure 5: Setup for antenna-port conducted measurements

The RF signal of the EUT is measured conducted at the antenna port. In case of no permanent antenna connector available, a temporary antenna connector should be supplied by the manufacturer. The specific insertion loss of the signal path, which is matched to 50 Ohm, is determined. The test receiver is set to analyzer mode with pre-selector activated. The measurement readings on the test receiver are corrected by the signal path loss.

For frequency hopping systems (FHSS), the test equipment is configured according to Public Notice DA 00-705, for digital transmission systems (DTS) the settings as specified by KDB Publication 558074, document D01, are used.

If a radiated test configuration has to be used, conversion to conducted test results is performed according to clause 5.1.2.

5.3 AC power-line conducted emissions

AC power-line conducted emissions are measured according to clause 6.2 of ANSI C63.10 over the frequency range from 150 kHz to 30 MHz to determine the line-to-ground radio-noise voltage that is conducted from all of the EUT current-carrying power input terminals that are directly (or indirectly via separate transformers or power supplies) connected to a public power network. The tests are performed in a shielded room.

If the EUT normally receives power from another device that in turn connects to the public utility ac power lines, measurements are made on that device with the EUT in operation to demonstrate that the device continues to comply with the appropriate limits while providing the EUT with power. If the EUT is operated only from internal or dedicated batteries, with no provisions for connection to the public utility ac power lines (600 VAC or less) to operate the EUT (such as an adapter), then ac power-line conducted measurements are not required.

For direct current (dc) powered devices where the ac power adapter is not supplied with the device, an “off-the-shelf” unmodified ac power adapter is used. If the device is supposed to be installed in a host (e.g., the device is a module or PC card), then it is tested in a typical compliant host.

Frequency (f)	Measurement receiver bandwidth	Step size	Detector type		
			Prescan	Prescan with FFT	Final scan
150 kHz ≤ f < 30 MHz	9 kHz	≤ 4.5 kHz	Peak, Average	Quasi-peak, Average	Quasi-peak, Average

Table 3: Bandwidth and detector type for AC power-line conducted emissions test

The AC power-line conducted emissions test is performed in the following steps:

- The EUT is arranged as tabletop or floor-standing equipment, as applicable, and connected to a line impedance stabilization network (LISN) with 50 μ H / 50 Ω . If required, a second LISN of the same type and terminated by 50 Ω is used for peripheral devices. The EUT is switched on.
- The measurement equipment is connected to the LISN for the EUT and set-up according to the specifications of the test (see table 3). At the LISN, the neutral line is selected to be tested.
- The prescan is performed with both detectors activated at the same time. If the test receiver is capable of FFT analysis, it is used for prescan, but not for final scan.
- When the prescan is completed, maximum levels with less margin than 10 dB or exceeding the limit are determined and collected in a list.
- With the first frequency of the list selected, a frequency zoom over a range of ten times of the measurement receiver bandwidth around this frequency is performed. If the EUT has no significant drift in frequency, the frequency zoom can be skipped.
- For final scan, the emission level is measured and the maximum is recorded.
- Steps e) to f) are repeated for all other frequencies in the list. At least the six highest EUT emissions relative to the limit have to be recorded.
- Steps c) to g) are repeated for all current-carrying conductors of all of the power cords of EUT, i.e. all phase and (if used) neutral line(s).

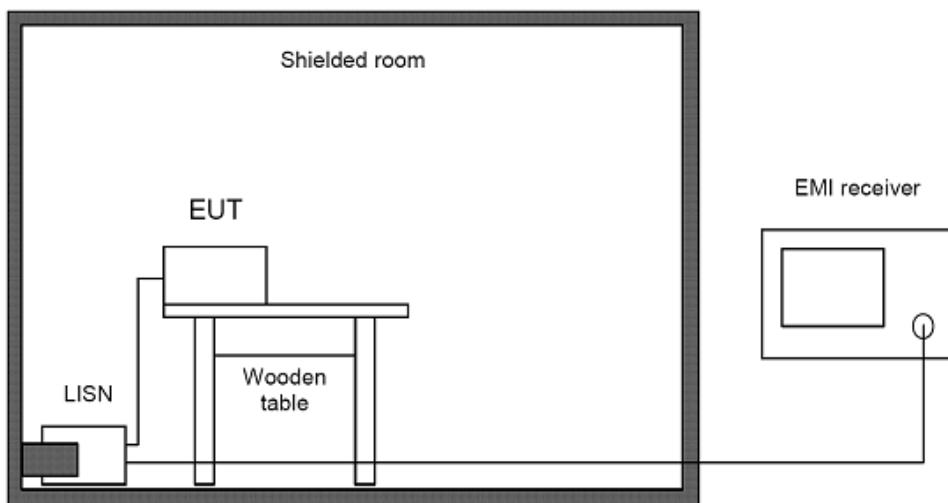


Figure 6: Setup for AC power-line conducted emissions test from 150 kHz to 30 MHz

5.4 Radiated emissions below 30 MHz

Radiated emissions below 30 MHz are measured according to clause 6.4 of ANSI C63.10 using an inductive shielded loop antenna. As this antenna measures the magnetic field only, its antenna factors are converted to electric field strength values assuming a free space impedance of 377Ω as described in clause 4.3.1 of ANSI C63.10. This results in an additional correction of 51.53 dB.

According to clause 6.4.3 of ANSI C63.10, at frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the requirements. In this case, the results are extrapolated to the specified distance by using a recalculation factor determined according to one of the methods described in clause 6.4.4 of ANSI C63.10, provided that the maximum dimension of the device is equal to or less than 0.625 times the wavelength at the frequency being measured. As the minimum wavelength is 10 meters corresponding to the maximum frequency of 30 MHz, this requirement is fulfilled if the maximum dimension of the device is equal to or less than 6.25 meters.

Unless otherwise stated, the recalculation factor is determined according to clause 6.4.4.2 "Extrapolation from the measurement of a single point" of ANSI C63.10:

$$\begin{aligned} d_{\text{near field}} &= 47.77 / f_{\text{MHz}}, \text{ or} \\ f_{\text{MHz}} &= 47.77 / d_{\text{near field}} \end{aligned}$$

The frequency f_{MHz} at which the near field distance is equal to the limit and/or test distance is important for selection of the right formula to determine the recalculation factor:

$$\begin{aligned} f_{\text{MHz}}(300 \text{ m}) &\approx 0.159 \text{ MHz} \\ f_{\text{MHz}}(30 \text{ m}) &\approx 1.592 \text{ MHz} \\ f_{\text{MHz}}(3 \text{ m}) &\approx 15.923 \text{ MHz} \end{aligned}$$

Based on the test distances for the general radiated emission limits as specified in §15.209 of 47 CFR Part 15, the following formulas are used to determine the recalculation factor:

Frequency (f)	d_{limit}	d_{measure}	Formula for recalculation factor
9 kHz \leq f \leq 159 kHz 490 kHz $<$ f \leq 1.592 MHz	300 m 30 m	3 m	$-40 \log(d_{\text{limit}} / d_{\text{measure}})$
159 kHz $<$ f \leq 490 kHz 1.592 MHz $<$ f \leq 15.923 MHz	300 m 30 m	3 m	$-40 \log(d_{\text{near field}} / d_{\text{measure}}) - 20 \log(d_{\text{limit}} / d_{\text{near field}})$
f $>$ 15.923 MHz	30 m	3 m	$-20 \log(d_{\text{limit}} / d_{\text{measure}})$

Table 4: Recalculation factors for extrapolation

Prescans for radiated measurements below 30 MHz are performed in a fully anechoic room (called "CDC"). The measurement distance is 3 meters. The emissions of the EUT are recorded with an EMI test receiver configured as described in table 5.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Guardhat Inc.
UWB Tag
GHP2470

Frequency (f)	Measurement receiver bandwidth	Step size	Detector type		
			Prescan	Prescan with FFT	Final scan
9 kHz ≤ f < 150 kHz	200 Hz	≤ 100 Hz	Peak, Average	Peak Quasi-peak, Average	Peak Quasi-peak, Average
150 kHz ≤ f < 30 MHz	9 kHz	≤ 4.5 kHz	Peak, Average	Peak Quasi-peak, Average	Peak Quasi-peak, Average

Table 5: Bandwidth and detector type for radiated emissions test below 30 MHz

Sample calculation:

Frequency (MHz)	Reading value (dB μ V)	Antenna correction (dB/m)	Cable attenuation (dB)	Correction factor (Corr.) (dB/m)	Level (dB μ V/m)
10	20.00	19.59	0.33	19.92	39.92

Correction factor = Antenna correction + Cable attenuation

Level = Reading value + Correction factor = 20 dB μ V + 19.92 dB/m = 39.92 dB μ V/m

Prescans are performed with all detectors activated at the same time. If the test receiver is capable of FFT analysis, it is used for prescans, but not for final scans. If no limit is specified for certain detectors, final scan measurement with these detectors may be omitted.

The radiated emissions test below 30 MHz is performed in the following steps:

- The loop antenna is positioned with its plane perpendicular to the ground with the lowest height of the antenna 1 m above the ground.
- The EUT is placed in its standard position on a turntable capable of rotation through 360° in the horizontal plane and arranged as tabletop or floor-standing equipment, as applicable. The EUT is switched on.
- The measurement equipment is connected to the loop antenna and set-up according to the specifications of the test (see table 5).
- The EUT is turned to a position likely to get the maximum and the test antenna is rotated to detect the maximum of the fundamental in this EUT position.
- Then the EUT is rotated in a horizontal plane through 360° in steps of 45°. Starting at 0°, at each table position the spectrum for the full frequency range is recorded. If the emission at a certain frequency is higher than the levels already recorded, the current table position is noted as the maximum position.
- After the last prescan, the significant maximum emissions and their table positions are determined and collected in a list.
- With the test receiver set to the first frequency of the list, the EUT is rotated by $\pm 45^\circ$ around the table position found during prescans while measuring the emission level continuously. For final scan, the worst-case table position is set and the maximum emission level is recorded.
- Step g) is repeated for all other frequencies in the list.
- Finally, for frequencies with critical emissions the loop antenna is rotated again to find the maximum of emission. At least, frequency and level of the six highest emissions relative to the limit have to be recorded. However, emissions more than 20 dB below the limit do not need to be reported.



If the EUT may be used in various positions, steps a) to i) are repeated in two other orthogonal positions. If the EUT may be used in one position only, steps a) to i) are repeated in one orthogonal position.

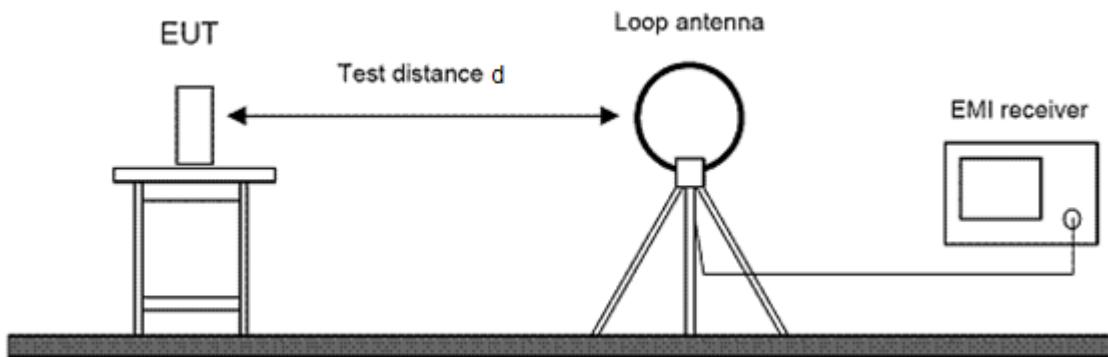


Figure 7: Setup for radiated emissions test below 30 MHz

5.5 Radiated emissions from 30 MHz to 1 GHz

Radiated emissions in the frequency range 30 MHz to 1 GHz are measured according to clause 6.5 of ANSI C63.10 using a semi-anechoic chamber (SAC) with a ground plane on the floor. The measurement distance is 3 meters. The emissions of the EUT are recorded with an EMI test receiver configured as described in table 6.

Frequency (f)	Measurement receiver bandwidth	Step size	Detector type		
			Prescan	Prescan with FFT	Final scan
30 MHz \leq f \leq 1 GHz	120 kHz	\leq 60 kHz	Peak	Quasi-peak	Quasi-peak

Table 6: Bandwidth and detector type for radiated emissions test from 30 MHz to 1 GHz

Sample calculation:

Frequency (MHz)	Reading value (dB μ V)	Antenna correction (dB/m)	Cable attenuation (dB)	Correction factor (Corr.) (dB/m)	Level (dB μ V/m)
100	30.00	11.71	1.06	12.77	42.77

Correction factor = Antenna correction + Cable attenuation

Level = Reading value + Correction factor = 30 dB μ V + 12.77 dB/m = 42.77 dB μ V/m

The measurement antenna is a combination of a biconical antenna and a logarithmic-periodic dipole array antenna. It is mounted on a support capable of allowing the antenna to be used in

either horizontal or vertical polarization and in a height between 1 m and 4 m above the ground plane.

If the test receiver is capable of FFT analysis, it is used for prescans, but not for final scans.

The radiated emissions test from 30 MHz to 1 GHz is performed in the following steps:

- a) The measurement antenna is oriented initially for vertical polarization.
- b) The EUT is placed in its standard position on a turntable capable of rotation through 360° in the horizontal plane and arranged as tabletop or floor-standing equipment, as applicable. The EUT is switched on.
- c) The measurement equipment is connected to the measurement antenna and set-up according to the specifications of the test (see table 6).
- d) The table position is set to 0°.
- e) The antenna height is set to 1 m.
- f) The spectrum for the full frequency range is recorded. If the emission at a certain frequency is higher than the levels already recorded, the polarization and height of the measurement antenna as well as the current table position are noted as the maximum position.
- g) The antenna height is increased to 4 m in steps of 50 cm. At each height, step f) is repeated.
- h) The polarization of the measurement antenna is changed to horizontal.
- i) The antenna height is decreased from 4 m to 1 m in steps of 50 cm. At each height, step f) is repeated.
- j) The EUT is rotated in a horizontal plane through 360° in steps of 60°. At each table position, steps e) to i) are repeated.
- k) After the last prescan, the significant maximum emissions with their polarizations and heights of the measurement antenna as well as their table positions are determined and collected in a list.
- l) With the test receiver set to the first frequency of the list, the measurement antenna is set to the polarization and height and the table is moved to the position as determined during prescans.
- m) The antenna is moved by ± 50 cm around this height and the EUT is rotated by ± 60 ° around this table position while measuring the emission level continuously.
- n) For final scan, the worst-case positions of antenna and table are set and the maximum emission level is recorded.
- o) Steps l) to n) are repeated for all other frequencies in the list. At least, frequency and level of the six highest emissions relative to the limit have to be recorded. However, emissions more than 20 dB below the limit do not need to be reported.

If the EUT may be used in various positions, steps a) to o) are repeated in two other orthogonal positions.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Guardhat Inc.
UWB Tag
GHP2470

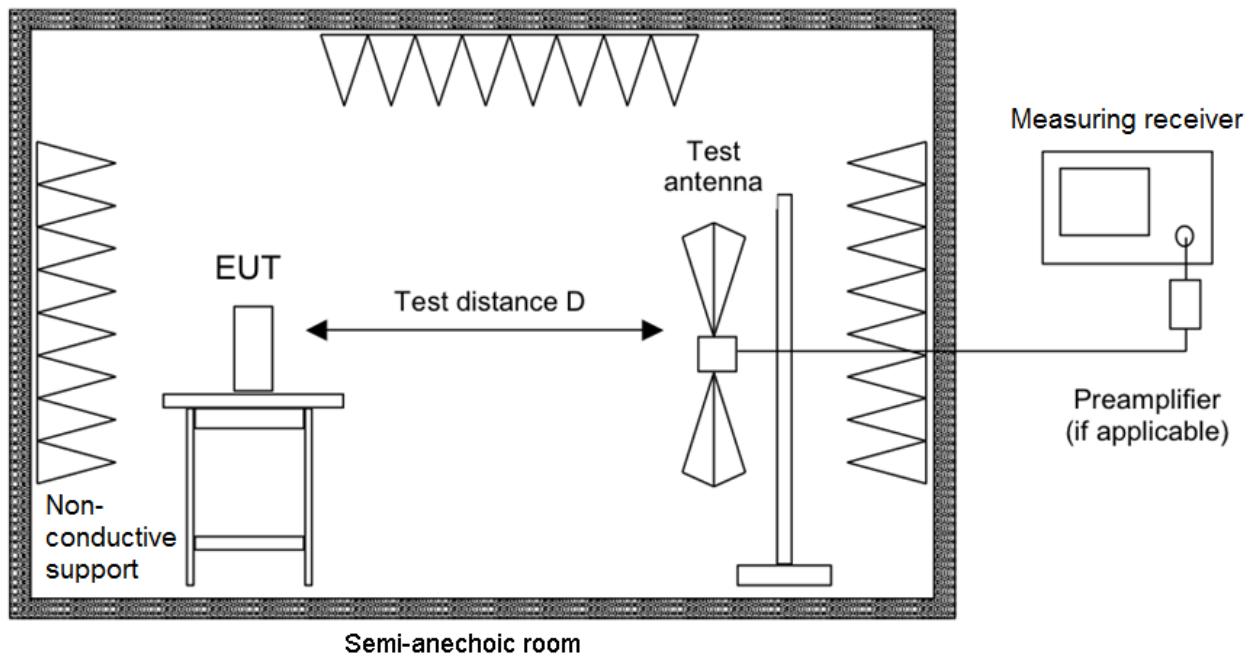


Figure 8: Setup for radiated emissions test from 30 MHz to 1 GHz

5.6 Radiated emissions above 1 GHz

Radiated emissions above 1 GHz are measured according to clause 6.6 of ANSI C63.10 by conducting exploratory and final radiated emission tests. According to clause 6.6.4.1 of ANSI C63.10, measurements may be performed at a distance closer than that specified in the requirements. However, an attempt shall be made to avoid making final measurements in the near field of both the measurement antenna and the EUT.

For measurement of radiated emissions above 1 GHz, horn antennas are used.

Sample calculation:

Frequency (MHz)	Reading value (dB μ V)	Antenna correction (dB/m)	Correction pre- amplifier (dB)	Cable attenuation (dB)	Correction factor (Corr.) (dB/m)	Level (dB μ V/m)
2400	50.00	27.76	-34.57	3.51	-3.30	46.70

Correction factor = Antenna correction + Correction pre-amplifier + Cable attenuation

Level = Reading value + Correction factor = 50.00 dB μ V - 3.30 dB/m = 46.70 dB μ V/m

5.6.1 Exploratory radiated emissions measurements

Exploratory radiated emissions above 1 GHz are measured in a semi-anechoic chamber with RF absorbing material on the floor or a fully anechoic room. They are performed by moving the receiving antenna over all sides of the EUT at a closer distance (e.g. 0.5 or 1 m) while observing the display of the test receiver to find the emissions to be re-tested during final radiated emission measurements.

According to clause 5.3.3 of ANSI C63.10, when performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade of distance (inverse of linear distance for field-strength measurements). To simplify testing and documentation, the limits are increased accordingly instead of decreasing the results.

The emissions of the EUT are displayed and recorded with an EMI test receiver operating in the spectrum analyzer mode using the settings as described in table 7.

Frequency (f)	Resolution bandwidth	Video bandwidth	Sweep time	Trace detector(s)	Trace mode(s)
$f \geq 1 \text{ GHz}$	1 MHz	3 MHz	AUTO	RMS	Max Hold

Table 7: Bandwidth and trace settings for exploratory radiated emissions test above 1 GHz

If during exploratory radiated emissions measurements no levels to be re-tested are found, the final radiated emissions measurement may be omitted. In this case, the chart of the exploratory radiated emissions measurements has to be reported.

5.6.2 Final radiated emissions measurements

Final radiated emissions above 1 GHz are measured in a semi-anechoic chamber (SAC) with RF absorbing material on the floor between measurement antenna and EUT. The measurement distance is shown in the appropriate tests. The emissions of the EUT are recorded with an EMI test receiver.

The horn antenna is mounted on a support capable of allowing the antenna to be used in either horizontal or vertical polarization. For UWB the measurement procedure according clause 6.6.5 of ANSI C63.10-2013 is used, specified in clause 6.6.5.4 of ANSI C63.10-2013.

5.7 UWB Bandwidth measurement

The test is performed according the procedure described in clause 10.1 of ANSI C63.10.2013.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Guardhat Inc.
UWB Tag
GHP2470

6 Test results

This clause gives details about the test results as collected in the summary of test results on page 5.

6.1 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature: 15-35 °C

Humidity: 30-60 %

Atmospheric pressure: 86-106 kPa



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Guardhat Inc.
UWB Tag
GHP2470

6.2 Antenna requirement

Section(s) in 47 CFR Part 15: Requirement(s): 15.203
Reference(s):

Result³: Test passed Test not passed

6.2.1 Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded. Test procedure

6.2.2 Result

Performed by: Konrad Graßl Date(s) of test: January 9, 2019

According to the manufacturer the EUT is integrated in a cabinet in normal use, therefore the antenna can not be changed by the user.

³ For information about measurement uncertainties see page 64.

	EMV TESTHAUS GmbH Gustav-Hertz-Straße 35 94315 Straubing Germany	Guardhat Inc. UWB Tag GHP2470
180853-AU01+W01		Page 22 of 61

6.3 Signal deactivation

Section(s) in 47 CFR Part 15: Requirement(s): 15.519(a)(1)
Reference(s):

Result⁴: Test passed Test not passed

6.3.1 Test equipment

Type	Designation	Manufacturer	Inventory no.
<input checked="" type="checkbox"/> Semi-anechoic chamber (SAC)	SAC3	Albatross Projects	E00716
<input type="checkbox"/> Free space semi-anechoic chamber (FS-SAC)	FS-SAC	EMV TESTHAUS	E00100
<input type="checkbox"/> EMI test receiver (CDC)	ESCI 3	Rohde & Schwarz	E00552
<input type="checkbox"/> EMI test receiver (OATS)	ESCI 3	Rohde & Schwarz	E00001
<input type="checkbox"/> EMI test receiver	ESR 7	Rohde & Schwarz	E00739
<input type="checkbox"/> EMI test receiver	ESU 26	Rohde & Schwarz	W00002
<input checked="" type="checkbox"/> EMI test receiver	ESW 44	Rohde & Schwarz	E00895
<input type="checkbox"/> Preamplifier (1 GHz - 18 GHz)	ALS05749	Aldetec	W01007
<input type="checkbox"/> Preamplifier (1 GHz - 18 GHz)	BBV9718B	Schwarzbeck	W01325
<input type="checkbox"/> Preamplifier (16 GHz - 40 GHz)	BBV9721	Schwarzbeck	W01350
<input checked="" type="checkbox"/> Horn antenna	BBHA 9120D	Schwarzbeck	W00052
<input type="checkbox"/> Horn antenna	BBHA 9170	Schwarzbeck	W00054
<input type="checkbox"/> Cable set SAC	RF cable(s)	Huber + Suhner	E00755 E01033 E01034
<input type="checkbox"/> Cable set FS-SAC	RF cable(s)	EMCO ELEKTRONIK Huber + Suhner	W00096 E01032

⁴ For information about measurement uncertainties see page 64.



6.3.2 Limits

A UWB device operating under the provisions of this section shall transmit only when it is sending information to an associated receiver. The UWB intentional radiator shall cease transmission within 10 seconds unless it receives an acknowledgement from the associated receiver that its transmission is being received. An acknowledgement of reception must continue to be received by the UWB intentional radiator at least every 10 seconds or the UWB device must cease transmitting.

6.3.3 Test procedure

An active connection between the EUT and a companion device (Wireless Mesh Gateway) is established. The emissions are detected by a horn antenna and a spectrum analyser. The companion device will then be powered down and the EUT has to cease transmissions within 10 s.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Guardhat Inc.
UWB Tag
GHP2470

6.3.4 Test results

Performed by:

Konrad Graßl

Date(s) of test:

January 9, 2019

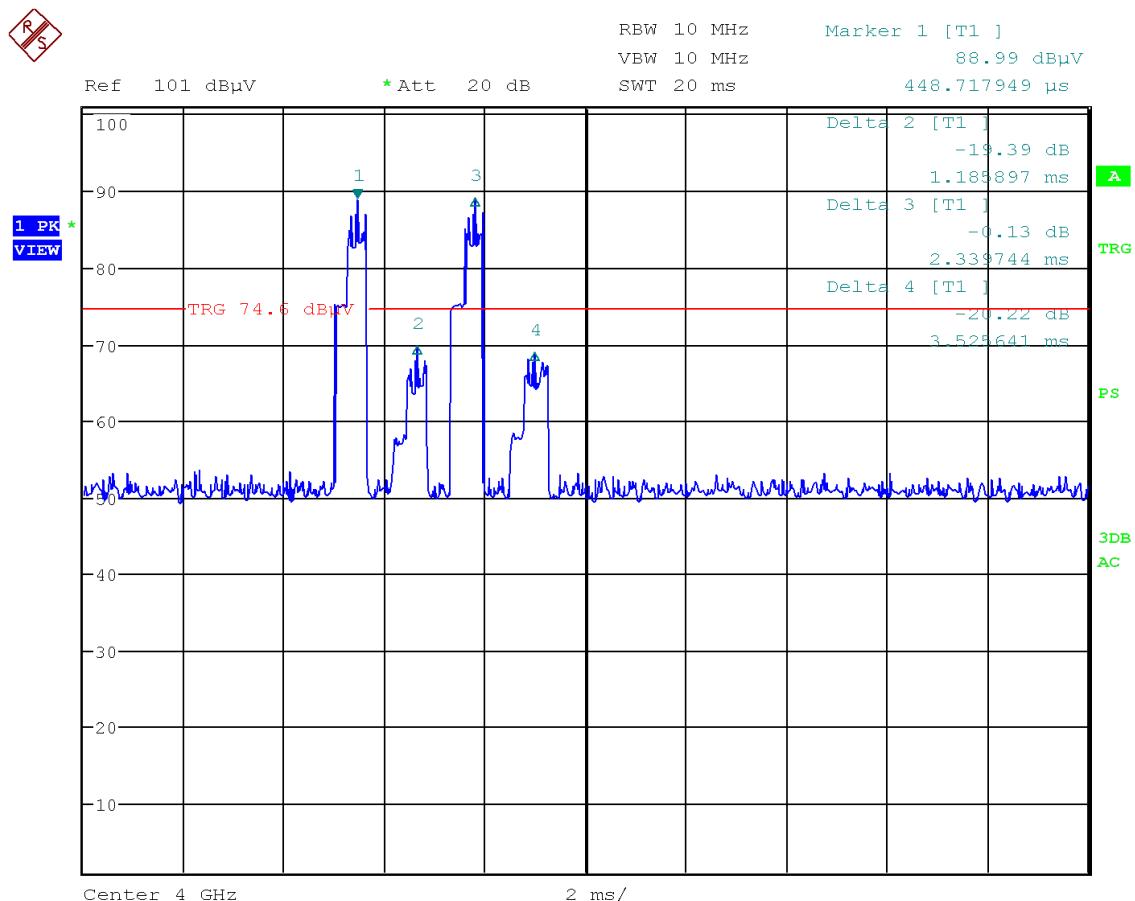


Figure 9: 1 pulse train


Description:

The two emissions with the higher level come from the EUT, the emissions with the lower level come from the companion device.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Guardhat Inc.
UWB Tag
GHP2470

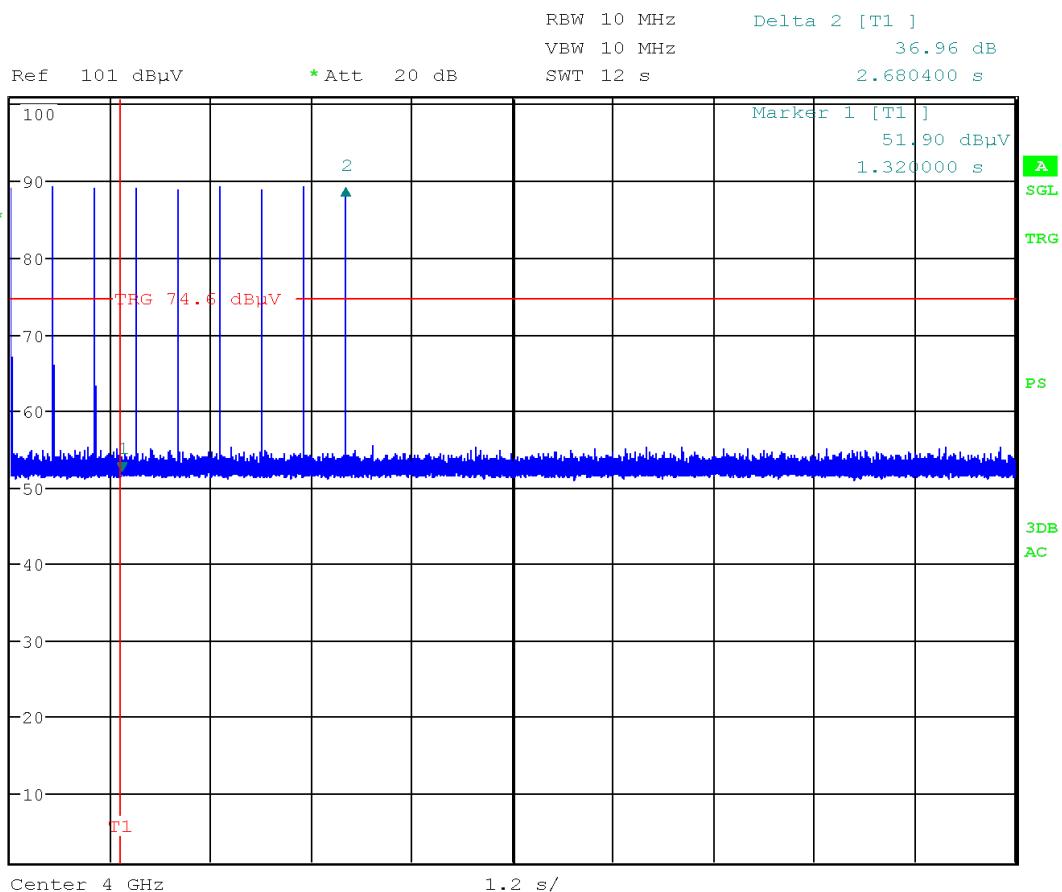R
S**Description:**

At the marker 1 (red vertical time line) the companion device was powered down. The EUT ceased transmissions within 2.68 s (marker 2)



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Guardhat Inc.
UWB Tag
GHP2470

6.4 UWB bandwidth

Result⁵: Test passed Test not passed

6.4.1 Test equipment

Type	Designation	Manufacturer	Inventory no.
<input type="checkbox"/> Semi-anechoic chamber (SAC)	SAC3	Albatross Projects	E00716
<input checked="" type="checkbox"/> Free space semi-anechoic chamber (FS-SAC)	FS-SAC	EMV TESTHAUS	E00100
<input type="checkbox"/> EMI test receiver	ESR 7	Rohde & Schwarz	E00739
<input checked="" type="checkbox"/> EMI test receiver	ESU 26	Rohde & Schwarz	W00002
<input type="checkbox"/> EMI test receiver	ESW 44	Rohde & Schwarz	E00895
<input type="checkbox"/> Preamplifier (1 GHz - 18 GHz)	ALS05749	Aldetec	W01007
<input checked="" type="checkbox"/> Preamplifier (1 GHz - 18 GHz)	BBV9718B	Schwarzbeck	W01325
<input checked="" type="checkbox"/> Horn antenna	BBHA 9120D	Schwarzbeck	W00052
<input type="checkbox"/> Cable set SAC	RF cable(s)	Huber + Suhner	E00755 E01033 E01034
<input checked="" type="checkbox"/> Cable set FS-SAC	RF cable(s)	EMCO ELEKTRONIK Huber + Suhner	W00096 E01032

⁵ For information about measurement uncertainties see page 76.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Guardhat Inc.
UWB Tag
GHP2470

180853-AUJ01+W01

Page 27 of 61

6.4.2 Limits

According 15.519(b):

The UWB bandwidth of a device operating under the provisions of this section must be contained between 3100 MHz and 10,600 MHz.

15.503(a)

UWB bandwidth. For the purpose of this subpart, the UWB bandwidth is the frequency band bounded by the points that are 10 dB below the highest radiated emission, as based on the complete transmission system including the antenna. The upper boundary is designated f_H and the lower boundary is designated f_L . The frequency at which the highest radiated emission occurs is designated f_M .

15.503(d)

Ultra-wideband (UWB) transmitter. An intentional radiator that, at any point in time, has a fractional bandwidth equal to or greater than 0.20 or has a UWB bandwidth equal to or greater than 500 MHz, regardless of the fractional bandwidth.

6.4.3 Test procedure

The UWB bandwidth is measured using the test procedure as described in clause 5.7



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Guardhat Inc.
UWB Tag
GHP2470

6.4.4 Test results

Performed by:	Konrad Graßl	Date(s) of test:	November 26, 2018
Test distance:	<input type="checkbox"/> 3 m	<input type="checkbox"/> 1.5 m	<input checked="" type="checkbox"/> 0.75 m

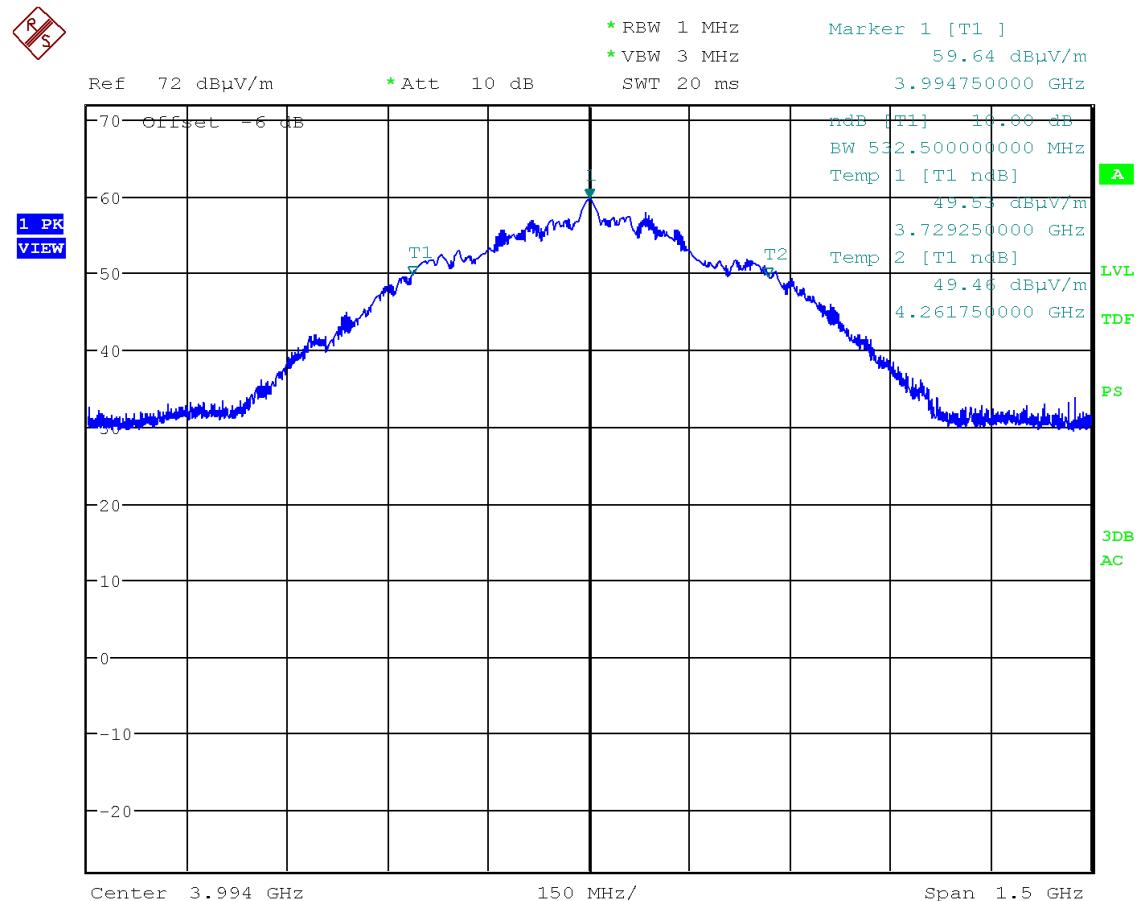


Figure 10: Chart of UWB bandwidth on channel 2

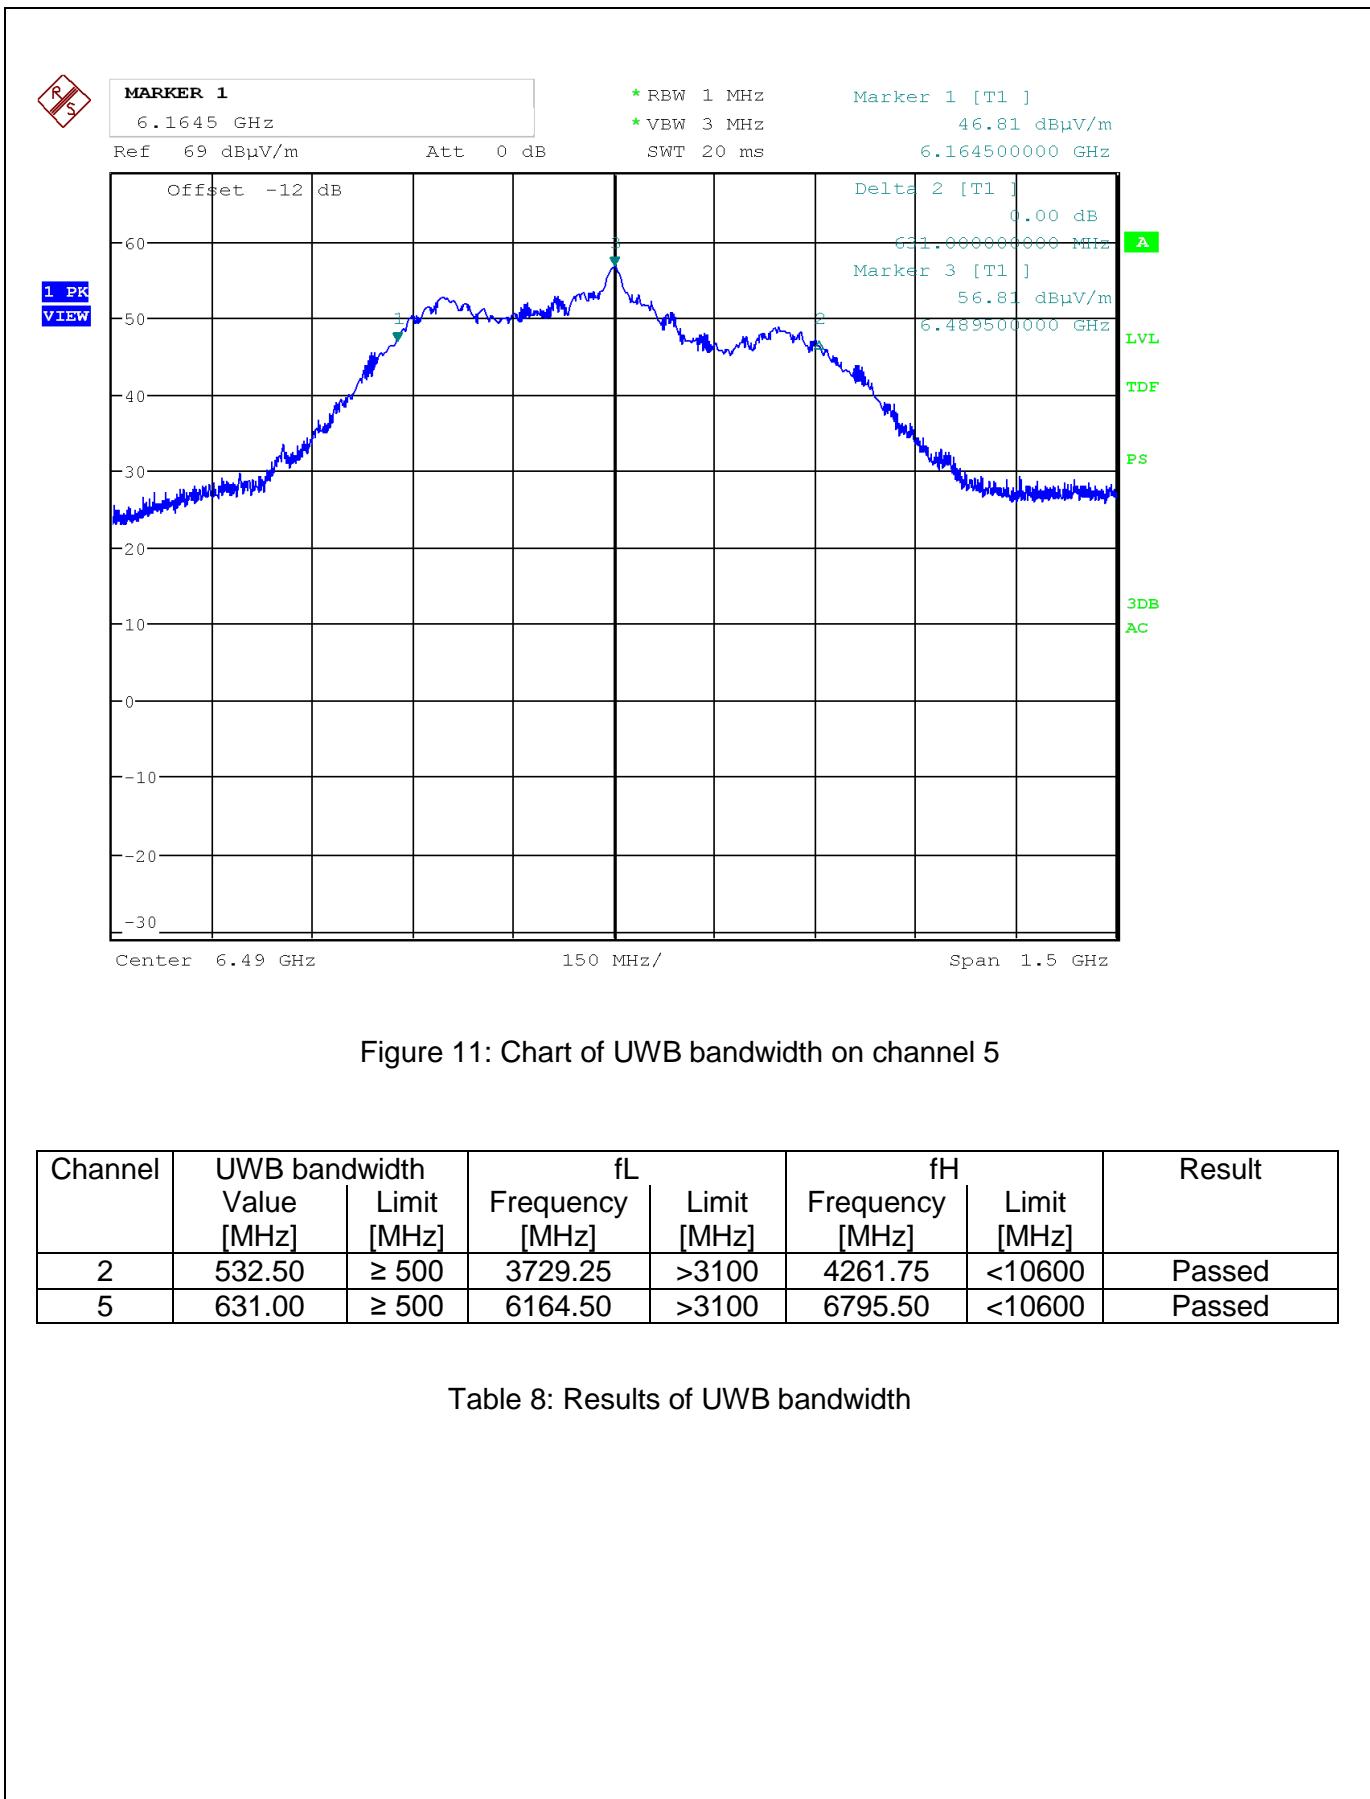


Figure 11: Chart of UWB bandwidth on channel 5

Channel	UWB bandwidth		f _L		f _H		Result
	Value [MHz]	Limit [MHz]	Frequency [MHz]	Limit [MHz]	Frequency [MHz]	Limit [MHz]	
2	532.50	≥ 500	3729.25	>3100	4261.75	<10600	Passed
5	631.00	≥ 500	6164.50	>3100	6795.50	<10600	Passed

Table 8: Results of UWB bandwidth

6.5 Radiated emissions in GPS bands

Section(s) in 47 CFR Part 15: Requirement(s): 15.519(d)
Reference(s):

Result⁶: Test passed Test not passed

6.5.1 Test equipment

Type	Designation	Manufacturer	Inventory no.
<input type="checkbox"/> Semi-anechoic chamber (SAC)	SAC3	Albatross Projects	E00716
<input checked="" type="checkbox"/> Free space semi-anechoic chamber (FS-SAC)	FS-SAC	EMV TESTHAUS	E00100
<input type="checkbox"/> EMI test receiver	ESR 7	Rohde & Schwarz	E00739
<input checked="" type="checkbox"/> EMI test receiver	ESU 26	Rohde & Schwarz	W00002
<input type="checkbox"/> EMI test receiver	ESW 44	Rohde & Schwarz	E00895
<input type="checkbox"/> Preamplifier (1 GHz - 18 GHz)	ALS05749	Aldetec	W01007
<input checked="" type="checkbox"/> Preamplifier (1 GHz - 18 GHz)	BBV9718B	Schwarzbeck	W01325
<input checked="" type="checkbox"/> Horn antenna	BBHA 9120D	Schwarzbeck	W00052
<input type="checkbox"/> Cable set SAC	RF cable(s)	Huber + Suhner	E00755 E01033 E01034
<input checked="" type="checkbox"/> Cable set FS-SAC	RF cable(s)	EMCO ELEKTRONIK Huber + Suhner	W00096 E01032

⁶ For information about measurement uncertainties see page 76.



6.5.2 Limits

According 15.519(d):

In addition to the radiated emission limits specified in the table in paragraph (c) of this section, UWB transmitters operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of no less than 1 kHz:

Frequency in MHz	EIRP in dBm	calculated Fieldstrength at 3 m in dB μ V/m
1164-1240	-85.3	10
1559-1610	-85.3	10

6.5.3 Test procedure

The radiated emissions in GPS bands are measured using the test procedure as described in clause 5.6.2.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Guardhat Inc.
UWB Tag
GHP2470

6.5.4 Test results

Performed by:	Konrad Graßl	Date(s) of test:	November 26, 2018
Test distance:	<input type="checkbox"/> 3 m	<input type="checkbox"/> 1.5 m	<input checked="" type="checkbox"/> 0.75 m
EUT elevation:	See notes		

RBW 10 kHz
 Detector RMS
 Measurement distance 0.75 m

Note: With the reference level offset of -12 dB the measurement is referenced to the calculated limit at 3m.

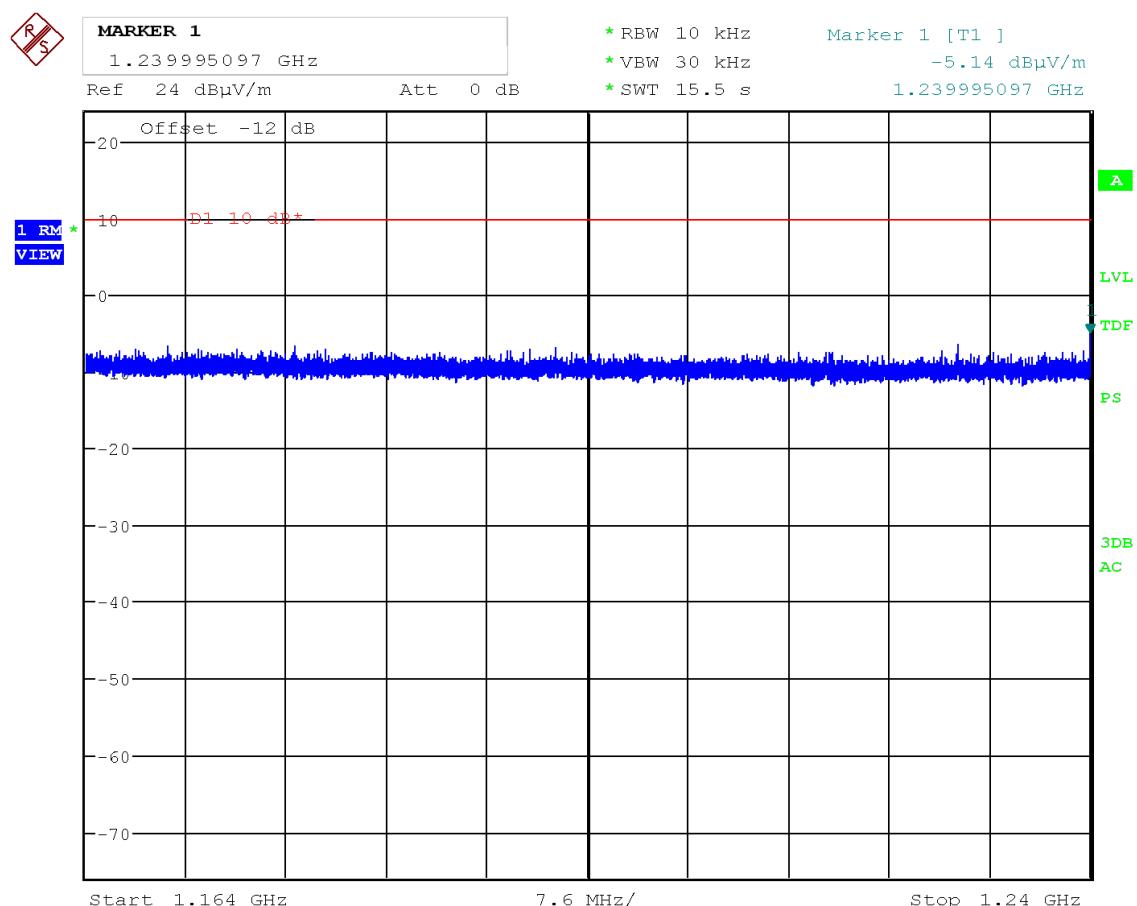


Figure 12: Chart of measurement 1164 MHz to 1240 MHz on channel 2

Note: Worst case elevation: 30 °, measurement antenna



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany

Guardhat Inc.
 UWB Tag
 GHP2470

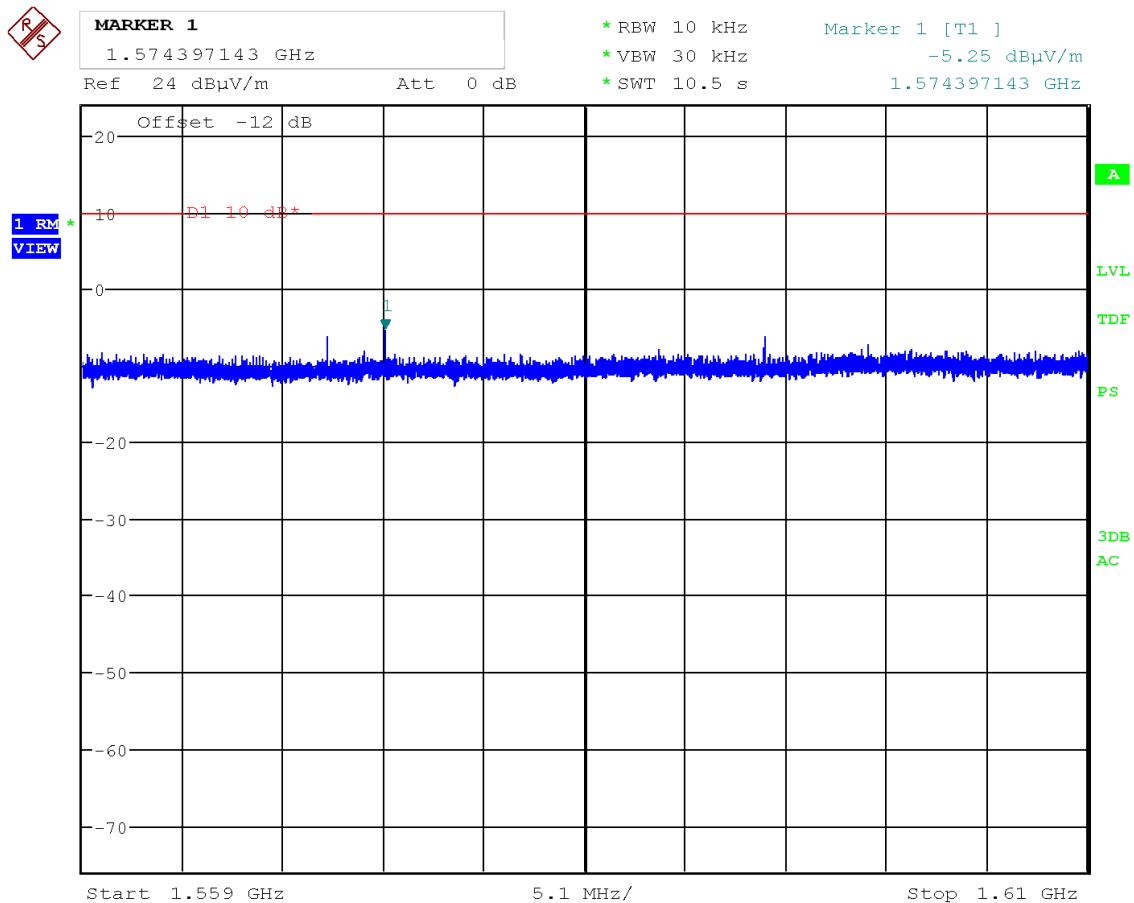


Figure 13: Chart of measurement 1559 MHz to 1610 MHz on channel 2

Note: Worst case elevation: 30 °

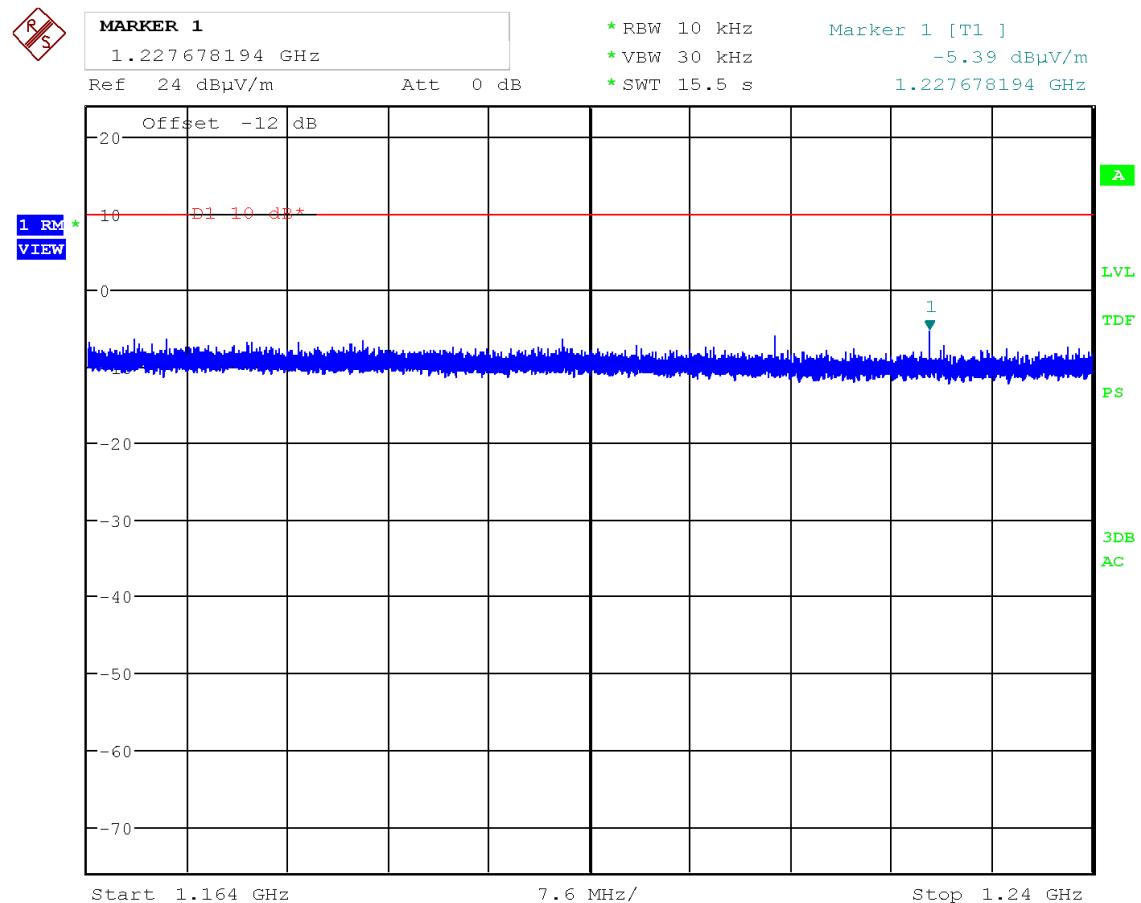


Figure 14: Chart of measurement 1164 MHz to 1240 MHz on channel 5

Note: Worst case elevation: 90 °



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Guardhat Inc.
UWB Tag
GHP2470

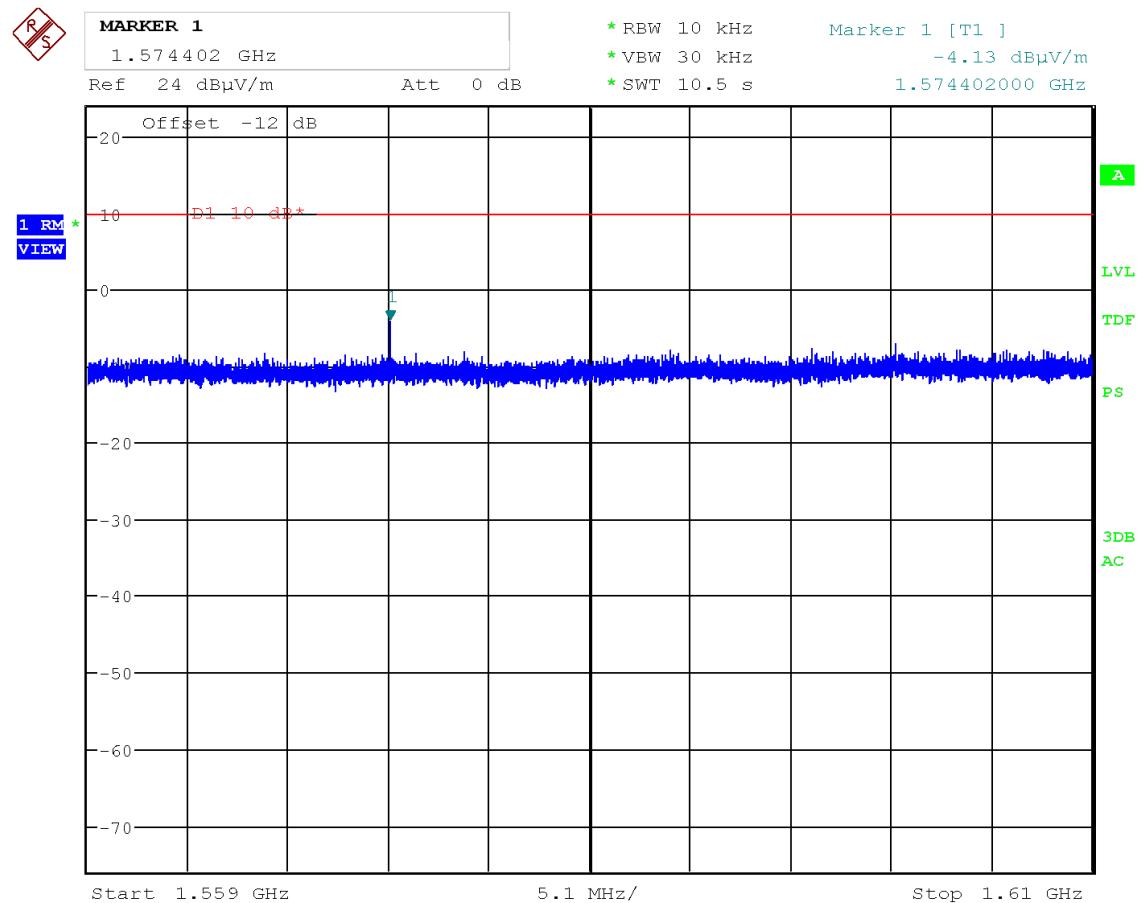


Figure 15: Chart of measurement 1559 MHz to 1610 MHz on channel 5

Note: Worst case elevation: 90 °



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Guardhat Inc.
UWB Tag
GHP2470

6.6 Peak emissions in a 50 MHz bandwidth

Section(s) in 47 CFR Part 15: Requirement(s): 15.519(e)
Reference(s):

Result⁷: Test passed Test not passed

6.6.1 Test equipment

Type	Designation	Manufacturer	Inventory no.
<input type="checkbox"/> Semi-anechoic chamber (SAC)	SAC3	Albatross Projects	E00716
<input checked="" type="checkbox"/> Free space semi-anechoic chamber (FS-SAC)	FS-SAC	EMV TESTHAUS	E00100
<input type="checkbox"/> EMI test receiver	ESR 7	Rohde & Schwarz	E00739
<input type="checkbox"/> EMI test receiver	ESU 26	Rohde & Schwarz	W00002
<input checked="" type="checkbox"/> EMI test receiver	ESW 44	Rohde & Schwarz	E00895
<input type="checkbox"/> Preamplifier (1 GHz - 18 GHz)	ALS05749	Aldetec	W01007
<input checked="" type="checkbox"/> Preamplifier (1 GHz - 18 GHz)	BBV9718B	Schwarzbeck	W01325
<input checked="" type="checkbox"/> Horn antenna	BBHA 9120D	Schwarzbeck	W00052
<input type="checkbox"/> Cable set SAC	RF cable(s)	Huber + Suhner	E00755 E01033 E01034
<input checked="" type="checkbox"/> Cable set FS-SAC	RF cable(s)	EMCO ELEKTRONIK Huber + Suhner	W00096 E01032

⁷ For information about measurement uncertainties see page 76.



6.6.2 Limits

According 15.519(e):

There is a limit on the peak level of the emissions contained within a 50 MHz bandwidth centered on the frequency at which the highest radiated emission occurs, fM. That limit is 0 dBm EIRP. It is acceptable to employ a different resolution bandwidth, and a correspondingly different peak emission limit, following the procedures described in §15.521.

Frequency in MHz	EIRP in dBm (within 50 MHz)	calculated Fieldstrength at 3 m in dB μ V/m
3100-10600	0	95.3

According to §15.521(g)

If a resolution bandwidth other than 50 MHz is employed, the peak EIRP limit shall be $20 \log(RBW/50)$ dBm where RBW is the resolution bandwidth in megahertz that is employed.

Frequency in MHz	EIRP in dBm (within 10 MHz)	calculated Fieldstrength at 3 m in dB μ V/m
3100-10600	-14	81.3

6.6.3 Test procedure

The Peak emissions measurements are performed using the

- test procedure for radiated measurements as described in clause 5.6.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Guardhat Inc.
UWB Tag
GHP2470

6.6.4 Test results

Performed by:	Konrad Graßl	Date(s) of test:	November 26, 2018
Test distance:	<input type="checkbox"/> 3 m	<input type="checkbox"/> 1.5 m	<input checked="" type="checkbox"/> 0.75 m
EUT elevation:	See plots		

RBW 10 MHz
 Detector Peak
 Measurement distance 0.75 m

Note: With the reference level offset of -12 dB the measurement is referenced to the calculated limit at 3m.

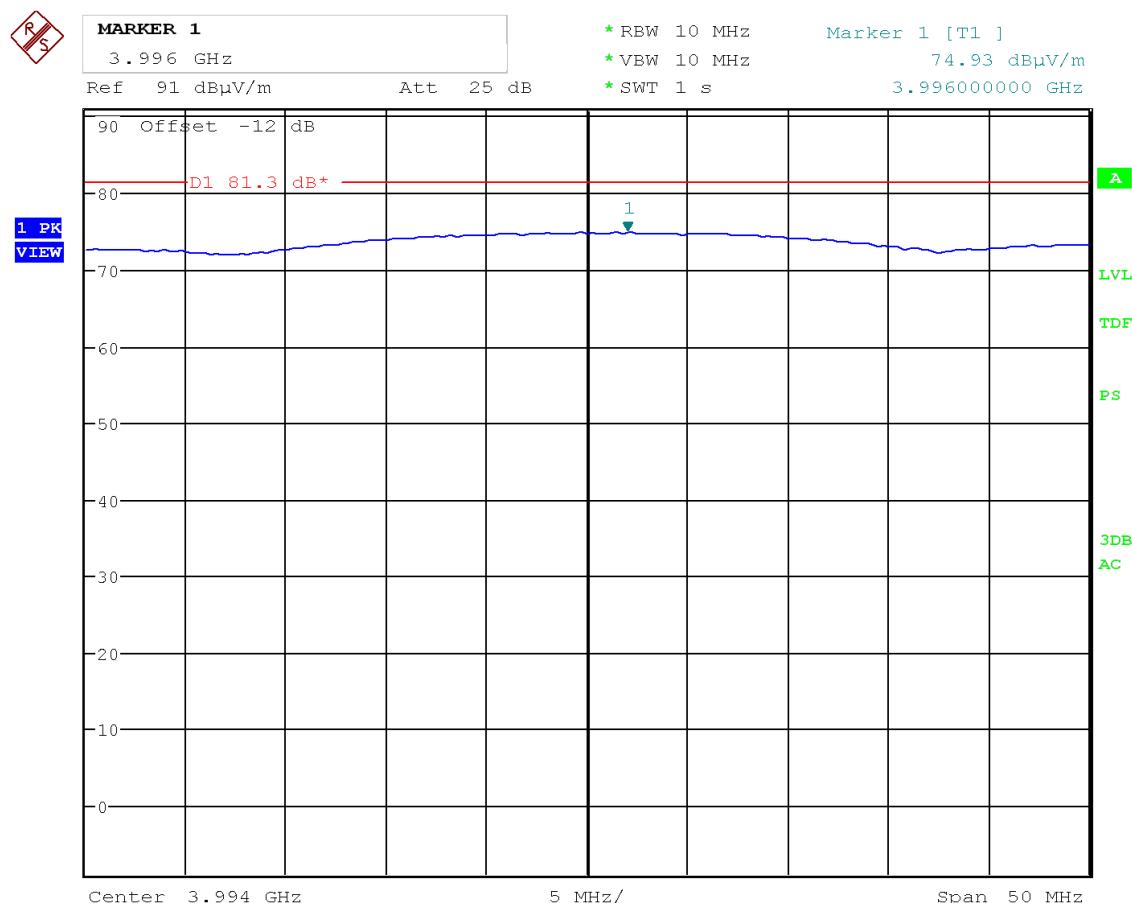


Figure 16: Chart of Peak emission measurement on channel 2

Note: Worst case elevation: 30 °



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany

Guardhat Inc.
 UWB Tag
 GHP2470

REF
S

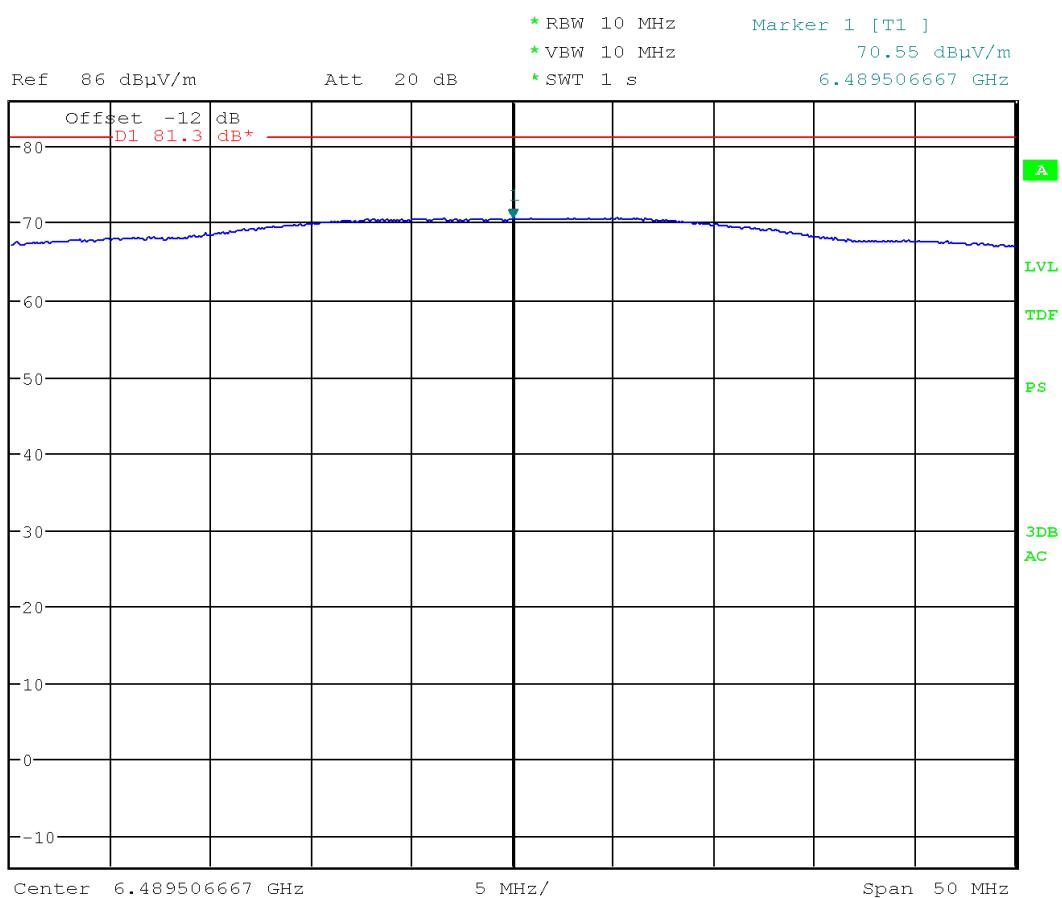


Figure 17: Chart of Peak emission measurement on channel 5

Note: Worst case elevation: 90 °



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Guardhat Inc.
UWB Tag
GHP2470

6.7 Radiated emissions 9 kHz to 40 GHz

6.7.1 Emissions below 30 MHz

Section(s) in 47 CFR Part 15: Requirement(s): 15.209, 15.519(c)
Reference(s):

Result⁸: Test passed Test not passed

6.7.1.1 Test equipment

Type	Designation	Manufacturer	Inventory no.
<input checked="" type="checkbox"/> Compact Diagnostic Chamber (CDC)	VK041.0174	Albatross Projects	E00026
<input type="checkbox"/> Open area test site (OATS)	---	EMV TESTHAUS	E00354
<input type="checkbox"/> EMI test receiver (CDC)	ESCI 3	Rohde & Schwarz	E00552
<input type="checkbox"/> EMI test receiver (OATS)	ESCI 3	Rohde & Schwarz	E00001
<input checked="" type="checkbox"/> EMI test receiver	ESR 7	Rohde & Schwarz	E00739
<input type="checkbox"/> EMI test receiver	ESU 26	Rohde & Schwarz	W00002
<input type="checkbox"/> EMI test receiver	ESW 44	Rohde & Schwarz	E00895
<input type="checkbox"/> Field probe	RF-R 400-1	Langer EMV-Technik	E00270
<input checked="" type="checkbox"/> Loop antenna	HFH2-Z2	Rohde & Schwarz	E00060
<input checked="" type="checkbox"/> Cable set CDC	RF cable(s)	Huber + Suhner AME HF-Technik AME HF-Technik Stabo	E00446 E00920 E00921 E01215
<input type="checkbox"/> Test software	EMC32-EB (V10.35)	Rohde & Schwarz	E00777
<input type="checkbox"/> Test software	EMC32-MEB (V10.35)	Rohde & Schwarz	E00778
<input type="checkbox"/> Test software	EMC32-MEB (V10.35)	Rohde & Schwarz	E01073

⁸ For information about measurement uncertainties see page 76.



6.7.1.2 Limits

According 15.519(c):

The radiated emissions at or below 960 MHz from a device operating under the provisions of this section shall not exceed the emission levels in §15.209. The radiated emissions above 960 MHz from a device operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of 1 MHz:

Frequency [MHz]	Field strength [μ V/m]	Field strength [dB μ V/m]	Measurement distance [m]
0.009 – 0.490	2400/F(kHz) (266.67 – 4.90)	48.52 – 13.80	300
0.490 – 1.705	24000/F(kHz) (48.98 – 14.08)	33.80 – 22.97	30
1.705 – 30	30	29.54	30

Table 9: General radiated emission limits up to 30 MHz according to §15.209

6.7.1.3 Test procedure

The emissions below 30 MHz are measured using the

- test procedure for radiated measurements as described in clause 5.4.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Guardhat Inc.
UWB Tag
GHP2470

6.7.1.4 Test results

Performed by:	Konrad Graßl	Date(s) of test:	December 18, 2018
Test distance:	<input checked="" type="checkbox"/> 3 m	<input type="checkbox"/> 10 m	<input type="checkbox"/> m
Antenna alignment:	<input type="checkbox"/> in parallel	<input checked="" type="checkbox"/> in line	<input type="checkbox"/> angle °
EUT position:	<input checked="" type="checkbox"/> Position X	<input checked="" type="checkbox"/> Position Y	<input checked="" type="checkbox"/> Position Z

Frequency range	Step size	IF Bandwidth	Detector		Measurement Time		Preamplifier
			Prescan	Final scan	Prescan	Final scan	
9 kHz – 150 kHz	70.5 Hz	200 Hz	PK	PK,	2 s	1 s	Off
150 kHz – 30 MHz	7.462 kHz	9 kHz	PK	PK	2 s	1 s	Off

Note: Exploratory measurements are performed in all positions as indicated. However, the figures and result tables within this test report show the worst case position, only.

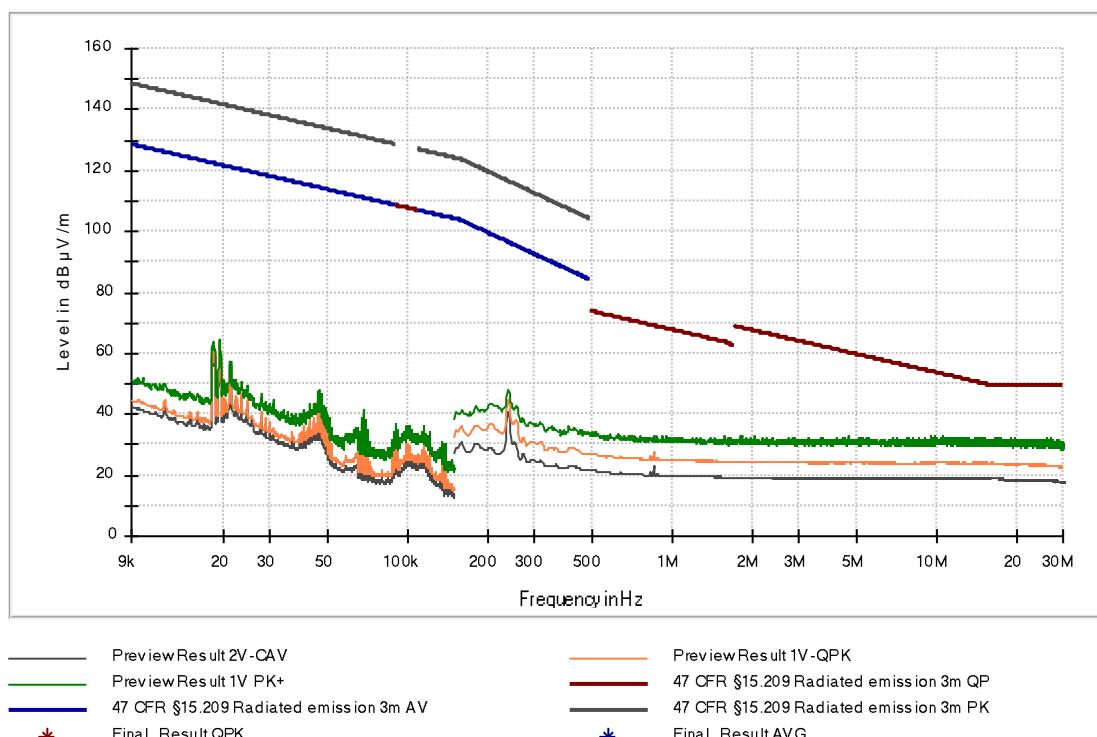


Figure 18: Chart of emissions test below 30 MHz on channel 2 in position Z

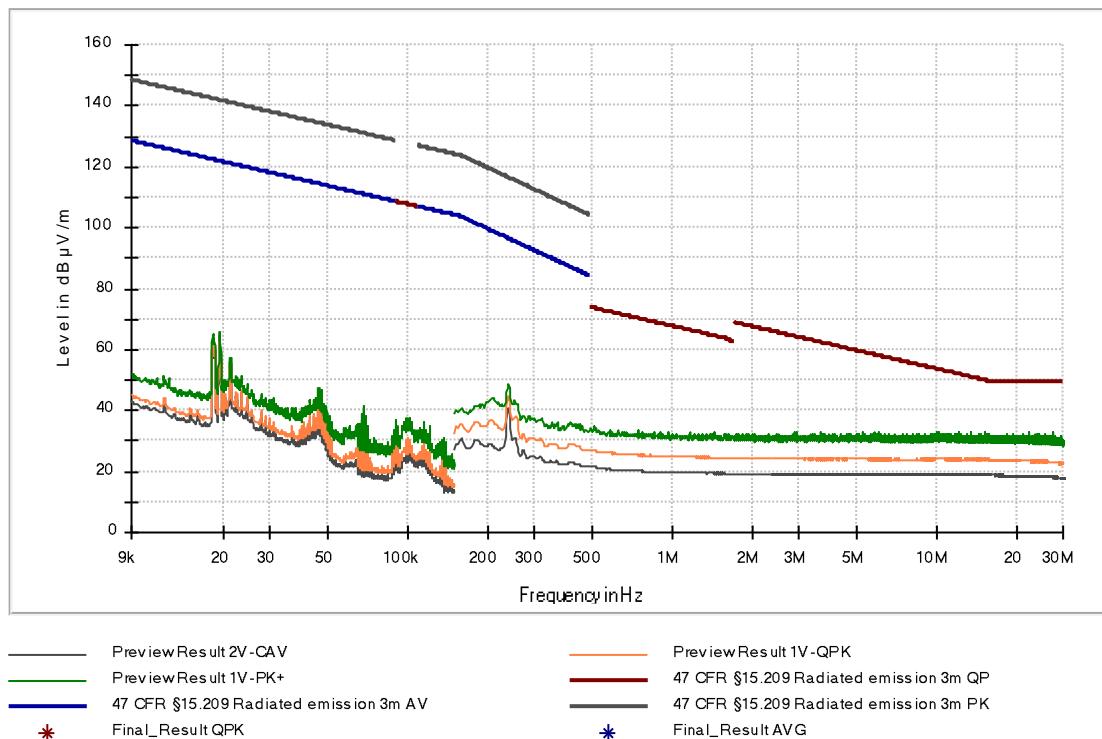


Figure 19: Chart of emissions test below 30 MHz on channel 5 in position Z

6.7.2 Emissions from 30 MHz to 960 MHz

Section(s) in 47 CFR Part 15: Requirement(s): 15.209, 15.519(c)
Reference(s):

Result⁹: Test passed Test not passed

6.7.2.1 Test equipment

Type	Designation	Manufacturer	Inventory no.
<input checked="" type="checkbox"/> Semi-anechoic chamber (SAC)	SAC3	Albatross Projects	E00716
<input type="checkbox"/> Free space semi-anechoic chamber (FS-SAC)	FS-SAC	EMV TESTHAUS	E00100
<input type="checkbox"/> EMI test receiver (CDC)	ESCI 3	Rohde & Schwarz	E00552
<input type="checkbox"/> EMI test receiver (OATS)	ESCI 3	Rohde & Schwarz	E00001
<input checked="" type="checkbox"/> EMI test receiver	ESR 7	Rohde & Schwarz	E00739
<input type="checkbox"/> EMI test receiver	ESU 26	Rohde & Schwarz	W00002
<input type="checkbox"/> EMI test receiver	ESW 44	Rohde & Schwarz	E00895
<input type="checkbox"/> TRILOG broadband antenna (CDC)	VULB 9160	Schwarzbeck	E00011
<input type="checkbox"/> TRILOG broadband antenna (OATS)	VULB 9163	Schwarzbeck	E00013
<input checked="" type="checkbox"/> TRILOG broadband antenna (SAC)	VULB 9162	Schwarzbeck	E00643
<input checked="" type="checkbox"/> Cable set SAC	RF cable(s)	Huber + Suhner	E00755 E01033 E01034
<input type="checkbox"/> Cable set FS-SAC	RF cable(s)	Teledyne Reynolds Huber + Suhner Teledyne Reynolds	E00435 E00307 E00433
<input checked="" type="checkbox"/> Test software	EMC32-EB (V10.35)	Rohde & Schwarz	E00777
<input type="checkbox"/> Test software	EMC32-MEB (V10.35)	Rohde & Schwarz	E00778
<input type="checkbox"/> Test software	EMC32-MEB (V10.35)	Rohde & Schwarz	E01073

⁹ For information about measurement uncertainties see page 76.



6.7.2.2 Limits

According 15.519(c):

The radiated emissions at or below 960 MHz from a device operating under the provisions of this section shall not exceed the emission levels in §15.209. The radiated emissions above 960 MHz from a device operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of 1 MHz:

Frequency [MHz]	[μ V/m]	Field strength [dB μ V/m]	Measurement distance [m]
30 – 88	100	40.00	3
88 – 216	150	43.52	3
216 - 960	200	46.02	3

Table 10: General radiated emission limits \geq 30 MHz to 960 MHz according to §15.209

6.7.2.3 Test procedure

The emissions from 30 MHz to 1 GHz are measured using the

- test procedure for radiated measurements as described in clause 5.5.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Guardhat Inc.
UWB Tag
GHP2470

6.7.2.4 Test results

Performed by:	Konrad Graßl	Date(s) of test:	December 17, 2018
Test distance:	<input checked="" type="checkbox"/> 3 m	<input type="checkbox"/> 10 m	<input type="checkbox"/> m
EUT position ¹⁰ :	<input checked="" type="checkbox"/> Position X	<input checked="" type="checkbox"/> Position Y	<input checked="" type="checkbox"/> Position Z

Frequency range	Step size	IF Bandwidth	Detector		Measurement Time		Preamplifier
			Prescan	Final scan	Prescan	Final scan	
30 MHz – 1 GHz	30 kHz	120 kHz	QP	QP	1 s	1 s	20 dB

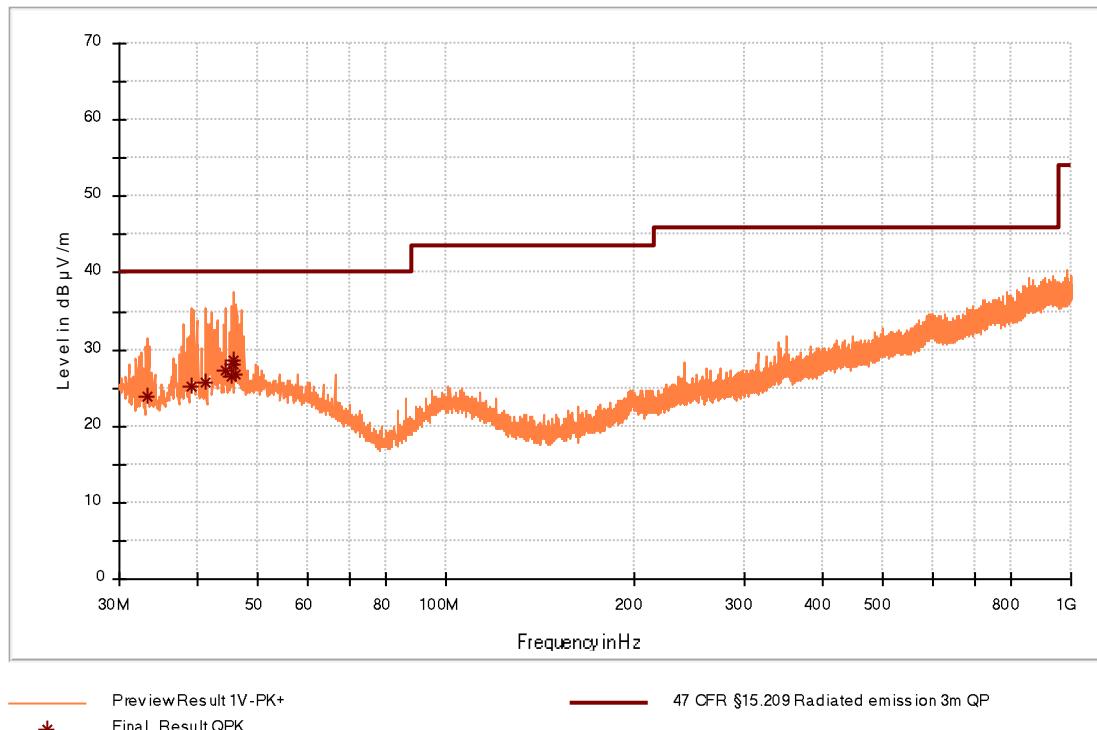


Figure 20: Chart of emissions test from 30 MHz to 1 GHz on channel 2 in position X

¹⁰ Exploratory measurements are performed in all positions as indicated. However, the figures and result tables within this test report show the worst case position, only.

Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
33.201000	23.76	40.00	16.24	1000.0	120.000	106.0	V	126.0	10.9
39.069500	25.28	40.00	14.72	1000.0	120.000	101.0	V	298.0	13.1
41.252000	25.82	40.00	14.18	1000.0	120.000	112.0	V	21.0	13.7
44.259000	27.26	40.00	12.74	1000.0	120.000	112.0	V	1.0	14.3
45.374500	26.45	40.00	13.55	1000.0	120.000	106.0	V	343.0	14.4
45.665500	27.96	40.00	12.04	1000.0	120.000	100.0	V	13.0	14.5
45.714000	28.47	40.00	11.53	1000.0	120.000	100.0	V	1.0	14.5
46.199000	26.68	40.00	13.32	1000.0	120.000	150.0	V	0.0	14.6

Table 11: Results of emissions test from 30 MHz to 1 GHz on channel 2

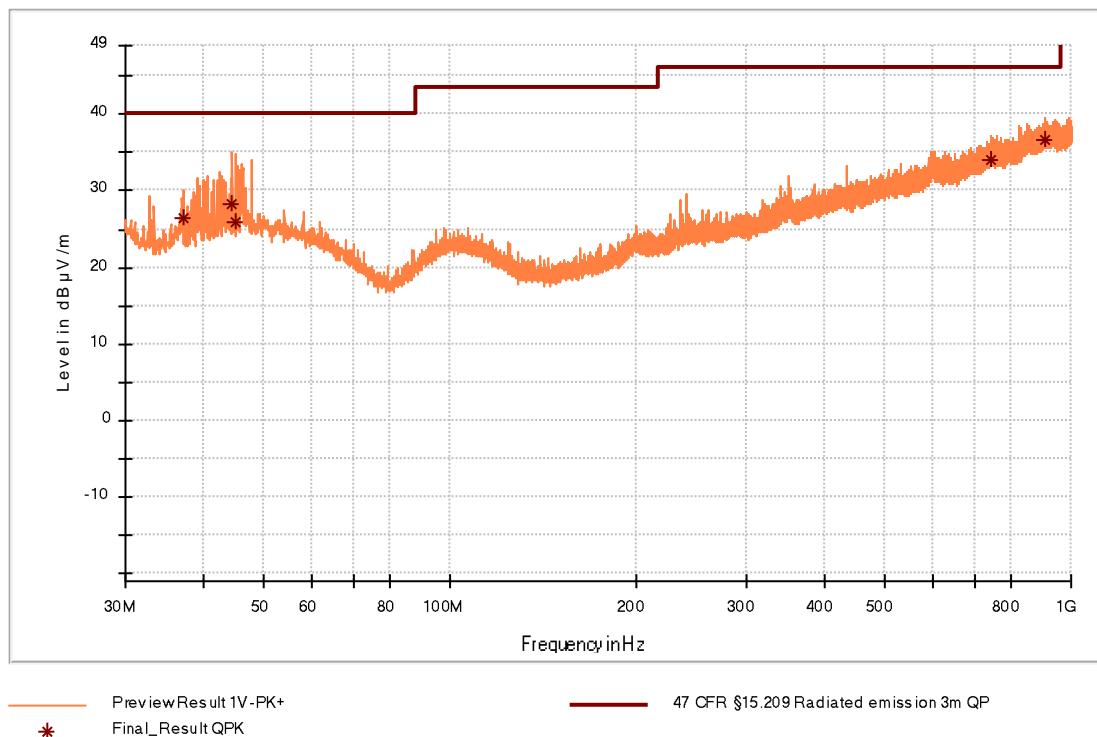


Figure 21: Chart of emissions test from 30 MHz to 1 GHz on channel 5 in position X

Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
37.129500	26.34	40.00	13.66	1000.0	120.000	156.0	V	109.0	12.3
44.598500	28.20	40.00	11.80	1000.0	120.000	100.0	V	345.0	14.3
45.180500	25.97	40.00	14.03	1000.0	120.000	101.0	V	336.0	14.4
743.144000	34.12	46.00	11.88	1000.0	120.000	212.0	V	122.0	23.7
906.492000	36.56	46.00	9.44	1000.0	120.000	145.0	V	185.0	25.7

Table 12: Results of emissions test from 30 MHz to 1 GHz on channel 5



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Guardhat Inc.
UWB Tag
GHP2470

6.7.3 Emissions from 960 MHz to 40 GHz

Section(s) in 47 CFR Part 15: Requirement(s): 15.519(c)
Reference(s):

Result¹¹: Test passed Test not passed

6.7.3.1 Test equipment

Type	Designation	Manufacturer	Inventory no.
<input type="checkbox"/> Semi-anechoic chamber (SAC)	SAC3	Albatross Projects	E00716
<input checked="" type="checkbox"/> Free space semi-anechoic chamber (FS-SAC)	FS-SAC	EMV TESTHAUS	E00100
<input checked="" type="checkbox"/> EMI test receiver	ESU 26	Rohde & Schwarz	W00002
<input checked="" type="checkbox"/> EMI test receiver	ESW 44	Rohde & Schwarz	E00895
<input type="checkbox"/> Preamplifier (1 GHz - 18 GHz)	ALS05749	Aldetec	W01007
<input checked="" type="checkbox"/> Preamplifier (1 GHz - 18 GHz)	BBV9718B	Schwarzbeck	W01325
<input checked="" type="checkbox"/> Preamplifier (16 GHz - 40 GHz)	BBV9721	Schwarzbeck	W01350
<input checked="" type="checkbox"/> Horn antenna	BBHA 9120D	Schwarzbeck	W00052
<input checked="" type="checkbox"/> Horn antenna	BBHA 9170	Schwarzbeck	W00054
<input type="checkbox"/> Cable set SAC	RF cable(s)	Huber + Suhner	E00755 E01033 E01034
<input checked="" type="checkbox"/> Cable set FS-SAC	RF cable(s)	EMCO ELEKTRONIK Huber + Suhner	W00096 E01032

¹¹ For information about measurement uncertainties see page 76.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Guardhat Inc.
UWB Tag
GHP2470

6.7.3.2 Limits

According 15.519(c):

The radiated emissions at or below 960 MHz from a device operating under the provisions of this section shall not exceed the emission levels in §15.209. The radiated emissions above 960 MHz from a device operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of 1 MHz:

Frequency in MHz	EIRP in dBm	calculated Fieldstrength at 3 m in dB μ V/m
960-1610	-75.3	20
1610-1990	-63.3	32
1990-3100	-61.3	34
3100-10600	-41.3	54
Above 10600	-61.3	34

Table 13: Radiated emission limits above 960 MHz to 40 GHz according to §15.519

6.7.3.3 Test procedure

The emissions from 30 MHz to 1 GHz are measured using the

- test procedure for radiated measurements as described in clause 5.6.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Guardhat Inc.
UWB Tag
GHP2470

6.7.3.4 Test results

Performed by:	Konrad Graßl	Date(s) of test:	December 18, 2018
Test distance:	960 MHz to 16.5 GHz: 16.5 GHz to 40 GHz :	<input type="checkbox"/> 1 m <input type="checkbox"/> 3 m	<input checked="" type="checkbox"/> 0.75 m <input checked="" type="checkbox"/> 0.30 m
EUT elevation:	See notes		

Measurement 960 MHz to 16.5 GHz:

RBW 1 MHz
Detector RMS
Measurement distance 0.75 m

Note: With the reference level offset of -12 dB the measurement is referenced to the calculated limit at 3m.

Measurement 16.5 GHz to 40 GHz

RBW 1 MHz
Detector RMS
Measurement distance 0.3 m

Note: With the reference level offset of -20 dB the measurement is referenced to the calculated limit at 3m.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Guardhat Inc.
UWB Tag
GHP2470

RS

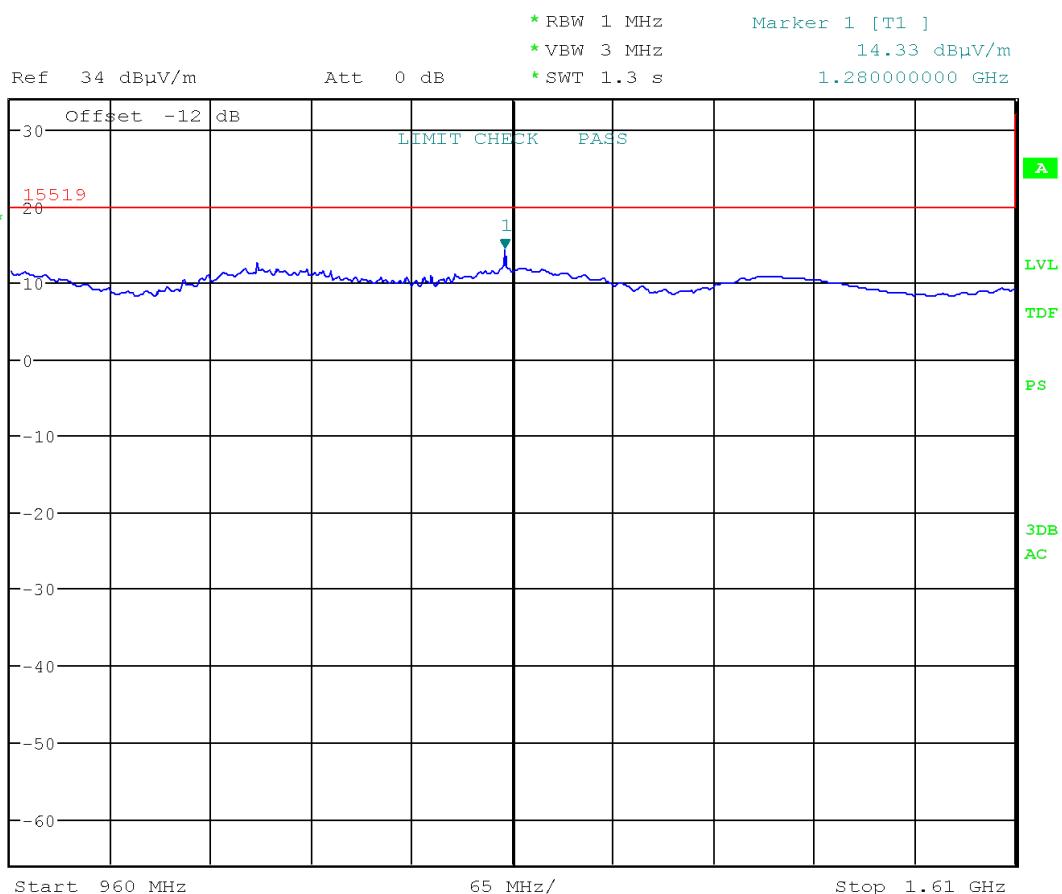


Figure 22: Chart of emissions test from 960 MHz to 1610 MHz on channel 2

Note: Worst case elevation: 30 °, measurement antenna horizontal.



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany

Guardhat Inc.
 UWB Tag
 GHP2470

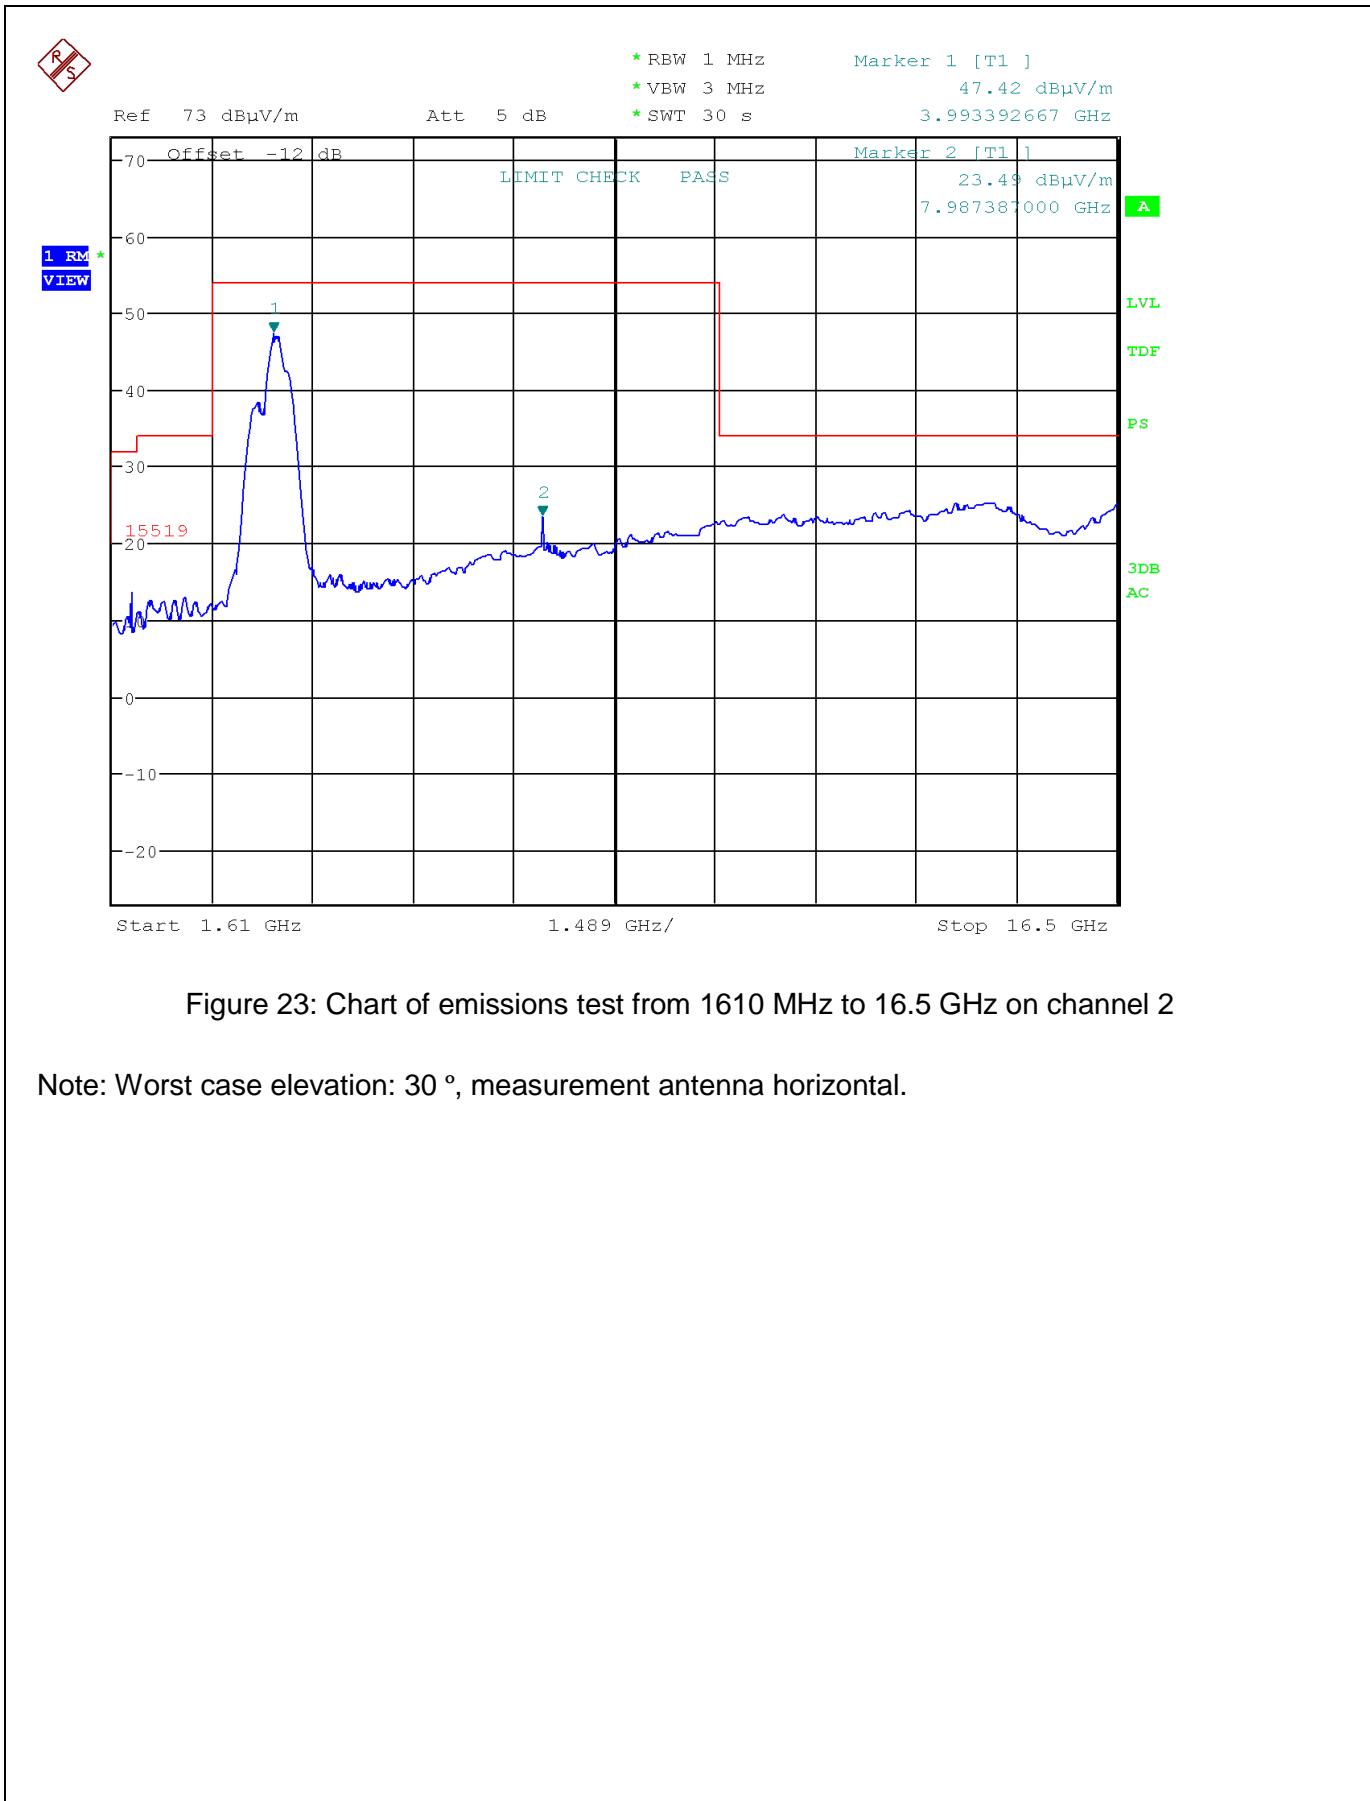


Figure 23: Chart of emissions test from 1610 MHz to 16.5 GHz on channel 2

Note: Worst case elevation: 30 °, measurement antenna horizontal.

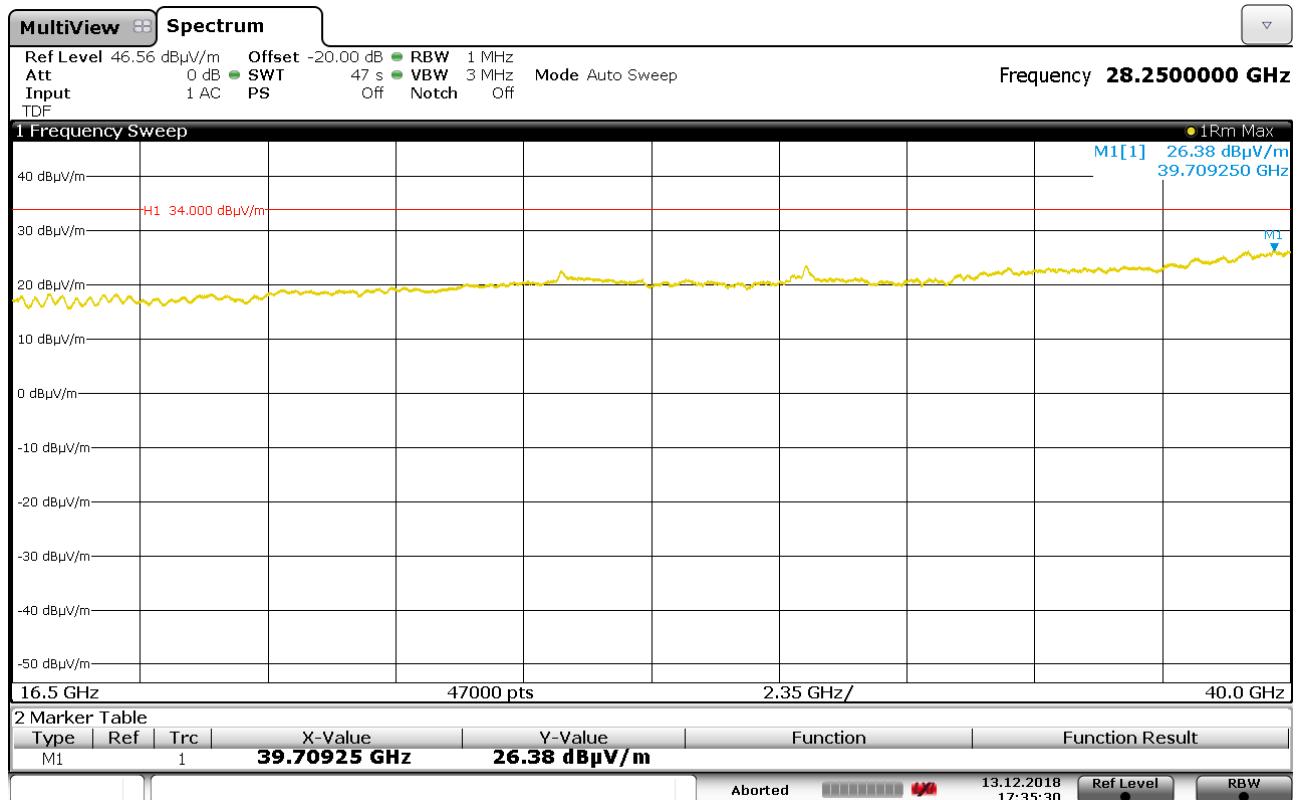


Table 14: Chart of emissions test from 16.5 GHz to 40 GHz on channel 2

Note: Pre-measurements have shown that there is no detectable emission caused by the EUT in this frequency range. Representative the measurement with elevation 0 °, measurement antenna vertical is shown.



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany

Guardhat Inc.
 UWB Tag
 GHP2470

RS

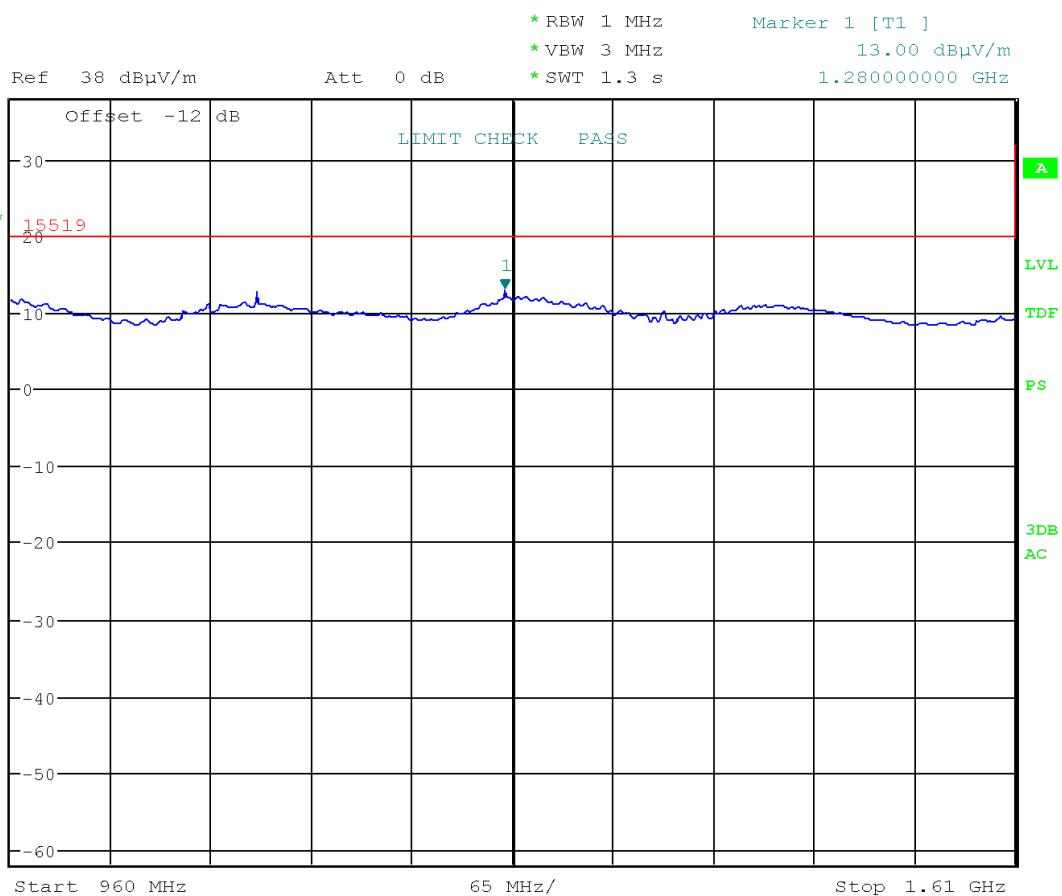


Figure 24: Chart of emissions test from 960 MHz to 1610 MHz on channel 5

Note: Worst case elevation: 90 °, measurement antenna horizontal.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Guardhat Inc.
UWB Tag
GHP2470

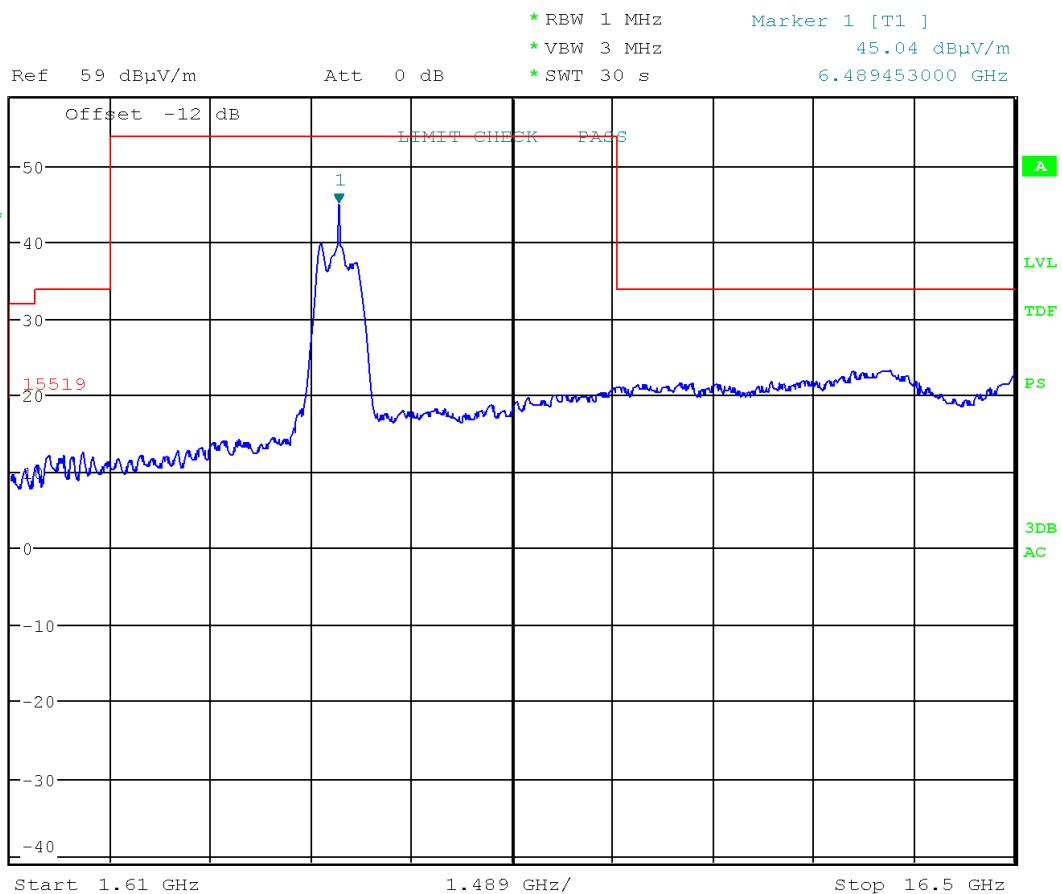
R
S

Figure 25: Chart of emissions test from 1610 MHz to 16.5 GHz on channel 5

Note: Worst case elevation: 90 °, measurement antenna horizontal.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Guardhat Inc.
UWB Tag
GHP2470

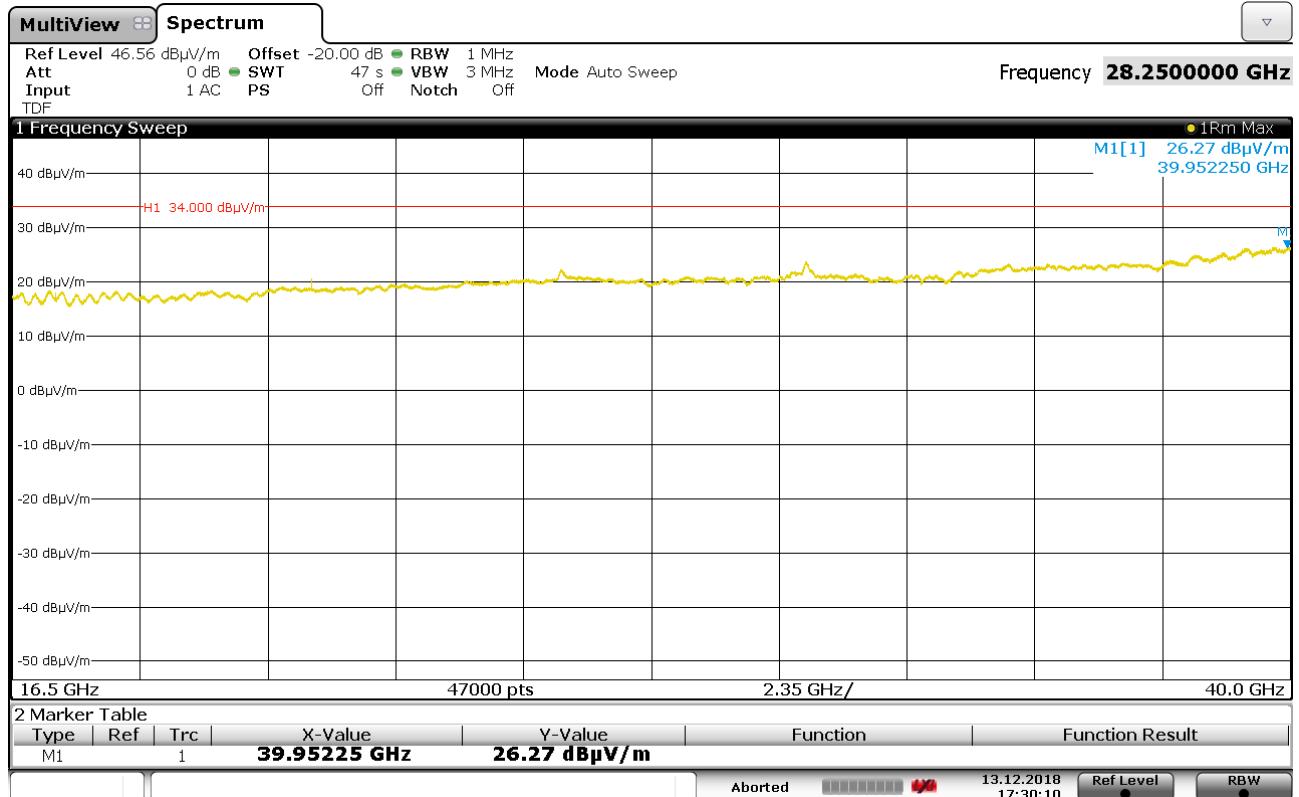


Table 15: Chart of emissions test from 16.5 GHz to 40 GHz on channel 5

Note: Pre-measurements have shown that there is no detectable emission belonging to the EUT in this frequency range. Representative the measurement with elevation 0 °, measurement antenna horizontal is shown.



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany

Guardhat Inc.
 UWB Tag
 GHP2470

7 Equipment calibration status

Description	Modell number	Serial number	Inventory number(s)	Last calibration	Next calibration
EMI test receiver	ESW44	101538	E00895	2018-04	2019-04
EMI test receiver	ESR7	101059	E00739	2018-05	2019-05
EMI test receiver	ESCI 3	100013	E00001	2018-05	2019-05
Preamplifier (1 GHz - 18 GHz)	ALS05749	001	W01007	2019-01	2020-01
Loop antenna	HFH2-Z2	871398/0050	E00060	2018-10	2020-10
TRILOG broadband antenna (SAC3)	VULB 9162	9162-041	E00643	2018-03	2021-03
Horn antenna	BBHA 9120D	9120D-592	W00052	2017-04	2020-04
Horn antenna	BBHA 9170	9170-332	W00054	2017-04	2020-04
Measuring antenna set	---	---	A00088	N/A ³	
Shielded room	P92007	B 83117 C 1109 T 211	E00107	N/A	
Compact diagnostic chamber (CDC)	VK041.0174	D62128-A502-A69-2-0006	E00026	N/A	
Semi-anechoic chamber (SAC) with floor absorbers	FS-SAC	---	E00100	2018-03	2021-03
Semi-anechoic chamber (SAC)	SAC3	C62128-A520-A643-x-0006	E00716	2018-03	2021-03
Cable set CDC	RG214/U	---	E00446	2018-04	2019-04
	LCF12-50J	---	E01215	2018-04	2019-04
	LMR400	1718020006	E00920	2019-01	2020-01
	RG214 Hiflex	171802007	E00921	2019-01	2020-01
Cable set anechoic chamber	262-0942-1500	005	E00435	2018-10	2019-10
	SF104EA/2x11PC 35-42/5m	11144/4EA	E00307	2018-12	2019-12
	262-0942-1500	003	E00433	2018-10	2019-10
Cable set of semi-anechoic chamber SAC3	SF104EA/11PC35 /11PC35/10000MM	501347/4EA	E00755	2018-12	2019-12
	SF104E/11PC35/1 1PC35/2000MM	507410/4E	E01033	2018-12	2019-12
	SF104E/11PC35/1 1PC35/2000MM	507411/4E	E01034	2018-09	2019-09

Note 1: Industry Canada (test sites number 3472A-1 and 3472A-2): 2019-03

Note 2: Expiration date of test firm accreditation for SAC:

FCC test firm type "accredited": 2019-05



8 Measurement uncertainties

Description	Uncertainty	k=
AC power line conducted emission	± 4.1 dB	2
Carrier frequency separation Number of hopping frequencies Time of occupancy (dwell time)	± 5.0 %	2
Bandwidth tests	± 2.0 %	
Maximum conducted output power (conducted)	± 1.5 dB	
Power spectral density (conducted)	± 2.9 dB	
Conducted spurious emissions	± 2.9 dB	
Radiated emissions in semi-anechoic chamber		
9 kHz to 30 MHz	± 4.8 dB	2
30 MHz to 300 MHz	± 5.4 dB	2
300MHz to 1 GHz	± 4.7 dB	2
Radiated emissions in semi-anechoic chamber with RF absorbing material on the floor or fully anechoic room		
1 GHz to 40 GHz	± 4.5 dB	2

Comment: The uncertainty stated is the expanded uncertainty obtained by multiplying the standard uncertainty by the coverage factor k. For a confidence level of 95 % the coverage factor k is 2.

Test related measurement uncertainties have to be taken into consideration when evaluating the test results. All used test instrument as well as the test accessories are calibrated at regular intervals.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Guardhat Inc.
UWB Tag
GHP2470

9 Revision history

<i>Revision</i>	<i>Date</i>	<i>Issued by</i>	<i>Description of modifications</i>
0	2019-03-01	Konrad Graßl	First edition



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

Guardhat Inc.
UWB Tag
GHP2470