



RADIO TEST REPORT

Report No.:STS2112190W03

Issued for

Guangzhou Shikun Electronics Co., Ltd

NO.6 Liankun Road, Huangpu District, Guangzhou, China

Product Name:	IEEE 802.11b/g/n/ax 1T1R USB Wi-Fi Module Integrated Bluetooth 2.1+EDR/3.0/4.x/5.0
Brand Name:	N/A
Model Name:	SKI.WB800D.2
Series Model:	N/A
FCC ID:	2AR82-SKIWB800D21
IC:	24728-SKIWB800D21
Test Standard:	FCC Part 15.247 RSS-247 Issue 2, February 2017 RSS-Gen Issue 5, Amendment 2, February 2021

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS, all test data presented in this report is only applicable to presented test sample.





TEST RESULT CERTIFICATION

Applicant's Name : Guangzhou Shikun Electronics Co., Ltd

Address : NO.6 Liankun Road, Huangpu District, Guangzhou, China

Manufacturer's Name : /

Address : /

Product Description

Product Name : IEEE 802.11b/g/n/ax 1T1R USB Wi-Fi Module Integrated Bluetooth 2.1+EDR/3.0/4.x/5.0

Brand Name : N/A

Model Name : SKI.WB800D.2

Series Model : N/A

FCC Part 15.247

Test Standards : RSS-247 Issue 2, February 2017

RSS-Gen Issue 5, Amendment 2, February 2021

Test Procedure : ANSI C63.10-2013

This device described above has been tested by STS, the test results show that the equipment under test (EUT) is in compliance with the FCC/IC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of STS, this document only be altered or revised by STS, personal only, and shall be noted in the revision of the document.

Date of Test :

Date of receipt of test item : 22 Dec. 2021

Date (s) of performance of tests : 22 Dec. 2021 ~ 30 Dec. 2021

Date of Issue : 30 Dec. 2021

Test Result : **Pass**

Testing Engineer :

(Chris Chen)

Technical Manager :

(Sean she)

Authorized Signatory :

(Vita Li)





Table of Contents	Page
1. SUMMARY OF TEST RESULTS	6
1.1 TEST FACTORY	7
1.2 MEASUREMENT UNCERTAINTY	7
2. GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF THE EUT	8
2.2 DESCRIPTION OF THE TEST MODES	10
2.3 TEST SOFTWARE AND POWER LEVEL	11
2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	12
2.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	12
2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS	13
3. EMC EMISSION TEST	15
3.1 CONDUCTED EMISSION MEASUREMENT	15
3.2 RADIATED EMISSION MEASUREMENT	19
4. CONDUCTED SPURIOUS & BAND EDGE EMISSION	34
4.1 LIMIT	34
4.2 TEST PROCEDURE	34
4.3 DEVIATION FROM STANDARD	34
4.4 TEST SETUP	34
4.5 EUT OPERATION CONDITIONS	34
4.6 TEST RESULTS	35
5. POWER SPECTRAL DENSITY TEST	59
5.1 LIMIT	59
5.2 TEST PROCEDURE	59
5.3 DEVIATION FROM STANDARD	59
5.4 TEST SETUP	59
5.5 EUT OPERATION CONDITIONS	59
5.6 TEST RESULTS	60
6. BANDWIDTH TEST	70
6.1 LIMIT	70
6.2 TEST PROCEDURE	70
6.3 DEVIATION FROM STANDARD	70
6.4 TEST SETUP	70
6.5 EUT OPERATION CONDITIONS	70



Table of Contents	Page
6.6 TEST RESULTS	71
7. PEAK OUTPUT POWER TEST	95
7.1 LIMIT	95
7.2 TEST PROCEDURE	95
7.3 DEVIATION FROM STANDARD	95
7.4 TEST SETUP	95
7.5 EUT OPERATION CONDITIONS	95
7.6 TEST RESULTS	96
8. ANTENNA REQUIREMENT	103
8.1 STANDARD REQUIREMENT	103
8.2 EUT ANTENNA	103
9. FREQUENCY STABILITY	104
9.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT	104
9.2 TEST PROCEDURE	104
9.3 TEST RESULT	104
APPENDIX-PHOTOS OF TEST SETUP	105

**Revision History**

Rev.	Issue Date	Report No.	Effect Page	Contents
00	30 Dec. 2021	STS2112190W03	ALL	Initial Issue





1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:
KDB 558074 D01 15.247 Meas Guidance v05r02.

FCC Part 15.247, Subpart C RSS-247 Issue 2			
Standard Section	Test Item	Judgment	Remark
15.207 RSS-Gen 8.8	Conducted Emission	PASS	--
15.247 (a)(2) RSS-Gen 6.7 RSS-247 5.2 a)	6dB&99% Bandwidth	PASS	--
15.247 (b)(3) RSS-247 5.4 d)	Output Power	PASS	--
15.209 RSS-Gen 8.9/8.10	Radiated Spurious Emission	PASS	--
15.247 (d) RSS-247 5.5 RSS-Gen 8.9/8.10	Conducted Spurious & Band Edge Emission	PASS	--
15.247 (e) RSS-247 5.2 b)	Power Spectral Density	PASS	--
15.205 RSS-Gen 8.9/8.10	Restricted Band Edge Emission	PASS	--
15.203 RSS-Gen 6.8	Antenna Requirement	PASS	--
RSS-Gen 6.11/8.11	Frequency Stability	PASS	--

NOTE:

- (1) 'N/A' denotes test is not applicable in this Test Report.
- (2) All tests are according to ANSI C63.10-2013.



1.1 TEST FACTORY

SHENZHEN STS TEST SERVICES CO., LTD

Add. : A 1/F, Building B, Zhuoke Science Park, No.190 Chongqing Road, HepingShequ, Fuyong Sub-District, Bao'an District, Shenzhen, Guang Dong, China

FCC test Firm Registration Number: 625569

IC test Firm Registration Number: 12108A

A2LA Certificate No.: 4338.01

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	RF output power, conducted	$\pm 0.87\text{dB}$
2	Unwanted Emissions, conducted	$\pm 2.895\text{dB}$
3	All emissions, radiated 9K-30MHz	$\pm 3.80\text{dB}$
4	All emissions, radiated 30M-1GHz	$\pm 4.09\text{dB}$
5	All emissions, radiated 1G-6GHz	$\pm 4.92\text{dB}$
6	All emissions, radiated >6G	$\pm 5.49\text{dB}$
7	Conducted Emission (9KHz-30MHz)	$\pm 2.73\text{dB}$



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name/PMN	IEEE 802.11b/g/n/ax 1T1R USB Wi-Fi Module Integrated Bluetooth 2.1+EDR/3.0/4.x/5.0	
Trade Name	N/A	
Model Name/HVIN	SKI.WB800D.2	
Series Model	N/A	
Model Difference	N/A	
Product Description	The EUT is a IEEE 802.11b/g/n/ax 1T1R USB Wi-Fi Module Integrated Bluetooth 2.1+EDR/3.0/4.x/5.0	
	Operation Frequency:	802.11b/g/n/ax 20: 2412~2462 MHz 802.11n/ax (40MHz):2422~2452MHz
	Modulation Type:	802.11b(DSSS):CCK,DQPSK,DBPSK 802.11g(OFDM):BPSK,QPSK,16-QAM,64-QAM 802.11n(OFDM):BPSK,QPSK,16-QAM,64-QAM 802.11ax(OFDM, OFDMA): BPSK,QPSK,16-QAM,64-QAM,256-QAM, 1024QAM
	Bit Rate of Transmitter:	802.11b:11/5.5/2/1 Mbps 802.11g:54/48/36/24/18/12/9/6Mbps 802.11n/ax (20MHz): 65/58.5/52/39/26/19.5/13/6.5Mbps 802.11n/ax (40MHz): 135/121.5/108/81/54/40.5/37/13.5Mbps
	Number of Channel:	802.11b/g/n/ax 20: 11CH 802.11n/ax 40: 7CH
	Antenna Designation:	Please refer to the Note 3.
	Antenna Gain (dBi):	1.79 dBi
Channel List	Please refer to the Note 2.	
Rating	Input: DC 3.3V 600mA	
Hardware version number	SKI.WB800D.2	
FVIN	/	
Serial Number	ECC1ABC48BEC	
Connecting I/O Port(s)	Please refer to the Note 1.	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User Manual.



2.

Operation Frequency of channel			
802.11b/g/n/ax (20MHz)		Channel List for 802.11n/ax (40MHz)	
Channel	Frequency	Channel	Frequency
01	2412	03	2422
02	2417	04	2427
03	2422	05	2432
04	2427	06	2437
05	2432	07	2442
06	2437	08	2447
07	2442	09	2452
08	2447		
09	2452		
10	2457		
11	2462		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Carrier Frequency Channel

2.4GHz Test Frequency:

For 802.11b/g/n/ax (HT20)		For 802.11n/ax (HT40)	
Channel	Freq.(MHz)	Channel	Freq.(MHz)
01	2412	03	2422
06	2437	06	2437
11	2462	09	2452

3.

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	N/A	SKI.WB800D.2	PIFA	N/A	1.79 dBi	WLAN Antenna

Note: The antenna information refer the manufacturer provide report, applicable only to the tested sample identified in the report.



2.2 DESCRIPTION OF THE TEST MODES

Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Worst Mode	Description	Data Rate
Mode 1	TX IEEE 802.11b CH1	1 Mbps
Mode 2	TX IEEE 802.11b CH6	1 Mbps
Mode 3	TX IEEE 802.11 b CH11	1 Mbps
Mode 4	TX IEEE 802.11g CH1	6 Mbps
Mode 5	TX IEEE 802.11g CH6	6 Mbps
Mode 6	TX IEEE 802.11g CH11	6 Mbps
Mode 7	TX IEEE 802.11n HT20 CH1	MCS 0
Mode 8	TX IEEE 802.11n HT20 CH6	MCS 0
Mode 9	TX IEEE 802.11n HT20 CH11	MCS 0
Mode 10	TX IEEE 802.11n HT40 CH3	MCS 0
Mode 11	TX IEEE 802.11n HT40 CH6	MCS 0
Mode 12	TX IEEE 802.11n HT40 CH9	MCS 0
Mode 13	TX IEEE 802.11ax HE20 CH1	MCS 0
Mode 14	TX IEEE 802.11ax HE20 CH6	MCS 0
Mode 15	TX IEEE 802.11ax HE20 CH11	MCS 0
Mode 16	TX IEEE 802.11ax HT40 CH3	MCS 0
Mode 17	TX IEEE 802.11ax HT40 CH6	MCS 0
Mode 18	TX IEEE 802.11ax HT40 CH9	MCS 0

Note:

- (1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.
- (2) We have be tested for all avaiable U.S. voltage and frequencies(For 120V,50/60Hz and 240V, 50/60Hz) for which the device is capable of operation, and the worst case of 120V /60Hz is shown in the report.
- (3) The battery is fully-charged during the radited and RF conducted test.

AC Conducted Emission

Test Case	
AC Conducted Emission	Mode19: Keeping WIFI TX



2.3 TEST SOFTWARE AND POWER LEVEL

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.


RF Function	Type	Mode Or Modulation type	ANT Gain(dBi)	Power Class	Software For Testing
WIFI(2.4G)	2.4G WIFI	802.11b	1.79	Default	SecureCRTPortable
		802.11g		Default	
		802.11n(HT20)		Default	
		802.11n(HT40)		Default	
		802.11ax(HE20)		Default	
		802.11ax(HE40)		Default	






2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiation Test Set

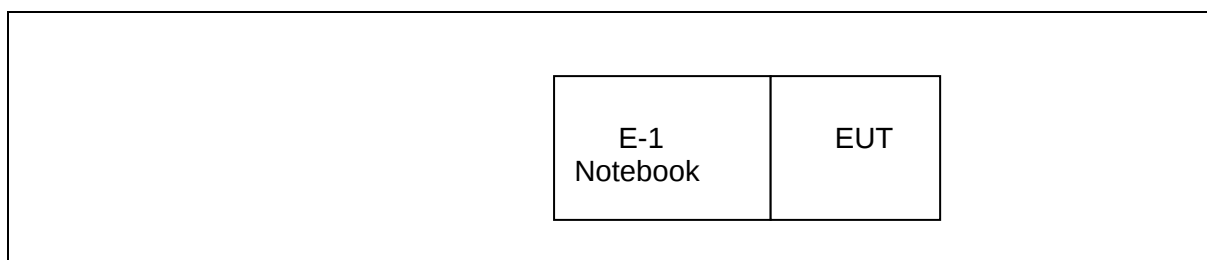

conduction Test Set

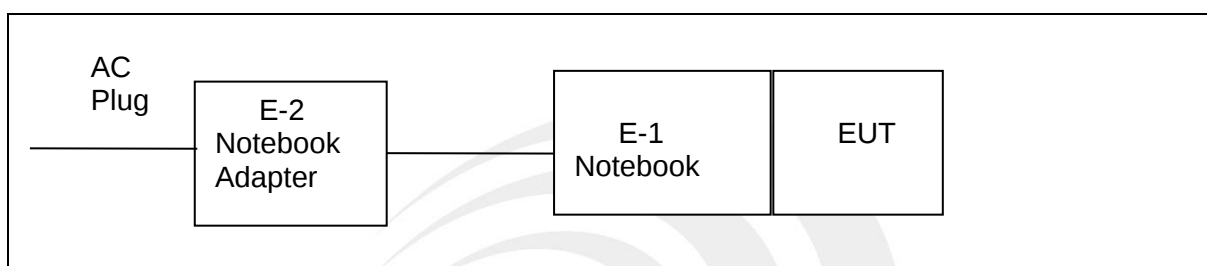

2.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Necessary accessories

Item	Equipment	Mfr/Brand	Model/Type No.	Length	Note
N/A	N/A	N/A	N/A	N/A	N/A

Support units

Item	Equipment	Mfr/Brand	Model/Type No.	Length	Note
E-2	Notebook Adapter	LENOVO	ADLX45DLC3A	N/A	N/A
E-1	Notebook	LENOVO	Think Pad E470	N/A	N/A

Note:

(1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Test Receiver	R&S	ESCI	101427	2021.09.30	2022.09.29
Signal Analyzer	R&S	FSV 40-N	101823	2021.09.30	2022.09.29
Active loop Antenna	ZHINAN	ZN30900C	16035	2021.04.11	2023.04.10
Bilog Antenna	TESEQ	CBL6111D	34678	2020.10.12	2022.10.11
Horn Antenna	SCHWARZBECK	BBHA 9120D	02014	2021.10.11	2023.10.10
SHF-EHF Horn Antenna (18G-40GHz)	A-INFO	LB-180400-KF	J211020657	2020.10.12	2022.10.11
Pre-Amplifier (0.1M-3GHz)	EM	EM330	060665	2021.10.08	2022.10.07
Pre-Amplifier (1G-18GHz)	SKET	LNPA-01018G-45	SK2018080901	2021.09.30	2022.09.29
Pre-Amplifier (18G-40GHz)	SKET	LNPA-1840-50	SK2018101801	2021.09.28	2022.09.27
Temperature & Humidity	HH660	Mieo	N/A	2021.10.09	2022.10.08
Turn table	EM	SC100_1	60531	N/A	N/A
Antenna mast	EM	SC100	N/A	N/A	N/A
Test SW	FARAD	EZ-EMC(Ver.STSLAB-03A1 RE)			

Conduction Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Test Receiver	R&S	ESCI	101427	2021.09.30	2022.09.29
LISN	R&S	ENV216	101242	2021.09.30	2022.09.29
LISN	EMCO	3810/2NM	23625	2021.09.30	2022.09.29
Temperature & Humidity	HH660	Mieo	N/A	2021.10.09	2022.10.08
Test SW	FARAD	EZ-EMC(Ver.STSLAB-03A1 CE)			



RF Connected Test

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Power Sensor	Keysight	U2021XA	MY55520005	2021.09.30	2022.09.29
			MY55520006	2021.09.30	2022.09.29
			MY56120038	2021.09.30	2022.09.29
			MY56280002	2021.09.30	2022.09.29
Signal Analyzer	Agilent	N9020A	MY51110105	2021.03.04	2022.03.03
Temperature & Humidity	HH660	Mieo	N/A	2021.10.09	2022.10.08
Test SW	FARAD	EZ-EMC(Ver.STSLAB-03A1 RE)			





3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION LIMITS

The radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table.

FREQUENCY (MHz)	Conducted Emission limit (dBuV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of “ * ” marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.1.2 TEST PROCEDURE

- The EUT is 0.8 m from the horizontal ground plane and 0.4 m from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments are powered from additional LISN(s). The LISN provides 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN is at least 80 cm from the nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 TEST SETUP

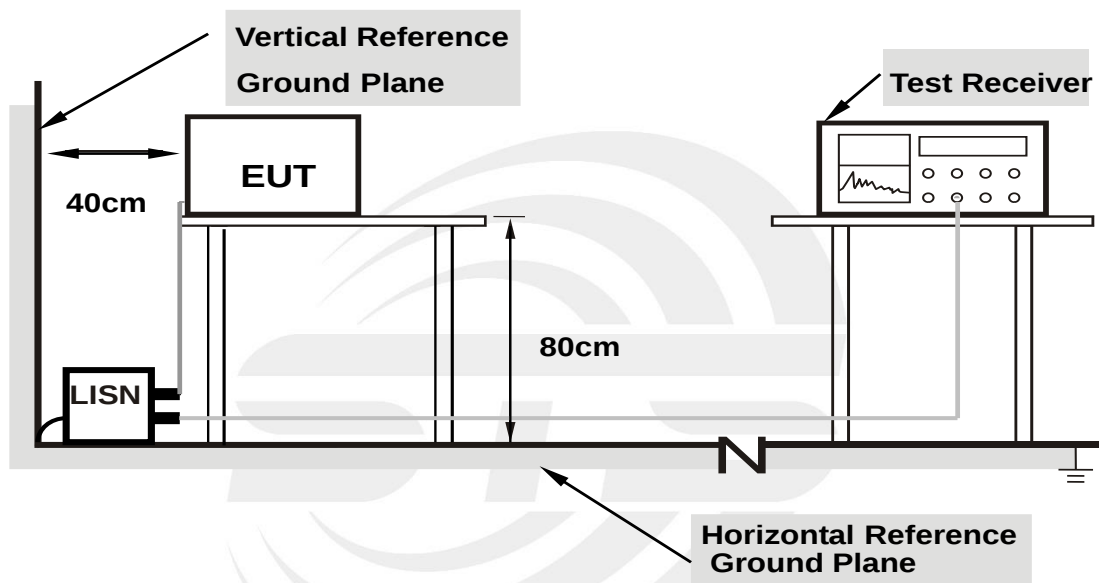

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes support units.

3.1.4 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



3.1.5 TEST RESULT


Temperature:	26.1(C)	Relative Humidity:	60%RH
Test Voltage:	AC 120V/60Hz	Phase:	L
Test Mode:	Mode 19		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(d B)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1660	34.36	20.33	54.69	65.16	-10.47	QP
2	0.1660	13.55	20.33	33.88	55.16	-21.28	AVG
3	1.5020	18.77	20.35	39.12	56.00	-16.88	QP
4	1.5020	11.23	20.35	31.58	46.00	-14.42	AVG
5	1.9660	19.05	20.39	39.44	56.00	-16.56	QP
6	1.9660	8.86	20.39	29.25	46.00	-16.75	AVG
7	5.0780	12.58	20.53	33.11	60.00	-26.89	QP
8	5.0780	0.35	20.53	20.88	50.00	-29.12	AVG
9	13.1380	7.26	21.33	28.59	60.00	-31.41	QP
10	13.1380	-2.20	21.33	19.13	50.00	-30.87	AVG
11	23.1420	7.05	22.79	29.84	60.00	-30.16	QP
12	23.1420	-3.99	22.79	18.80	50.00	-31.20	AVG

Remark:

1. All readings are Quasi-Peak and Average values
2. Margin = Result (Result = Reading + Factor) – Limit
3. Factor=LISN factor+Cable loss+Limiter (10dB)

100.0 dBuV

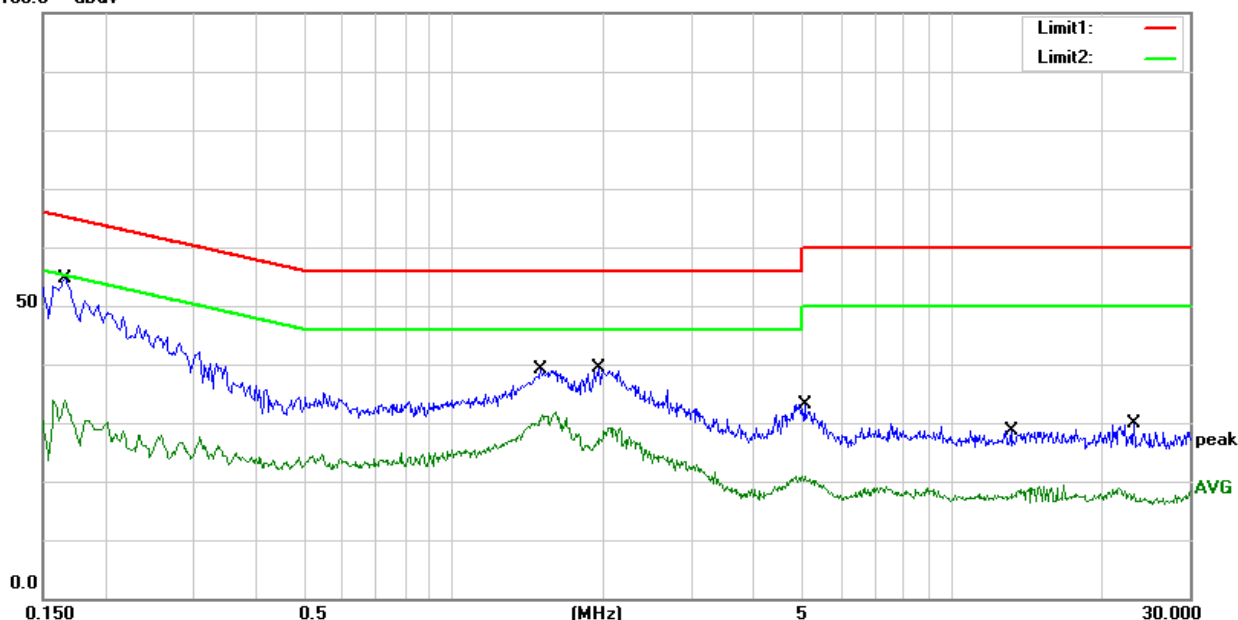




Temperature:	26.1(C)	Relative Humidity:	60%RH
Test Voltage:	AC 120V/60Hz	Phase:	N
Test Mode:	Mode 19		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1580	33.28	20.31	53.59	65.57	-11.98	QP
2	0.1580	14.37	20.31	34.68	55.57	-20.89	AVG
3	0.5780	17.57	20.44	38.01	56.00	-17.99	QP
4	0.5780	8.26	20.44	28.70	46.00	-17.30	AVG
5	1.6700	19.57	20.36	39.93	56.00	-16.07	QP
6	1.6700	12.41	20.36	32.77	46.00	-13.23	AVG
7	2.1300	19.50	20.39	39.89	56.00	-16.11	QP
8	2.1300	11.13	20.39	31.52	46.00	-14.48	AVG
9	4.5060	13.77	20.53	34.30	56.00	-21.70	QP
10	4.5060	1.69	20.53	22.22	46.00	-23.78	AVG
11	9.3580	9.84	20.84	30.68	60.00	-29.32	QP
12	9.3580	1.48	20.84	22.32	50.00	-27.68	AVG

Remark:

1. All readings are Quasi-Peak and Average values
2. Margin = Result (Result = Reading + Factor) – Limit
3. Factor=LISN factor+Cable loss+Limiter (10dB)

100.0 dBuV

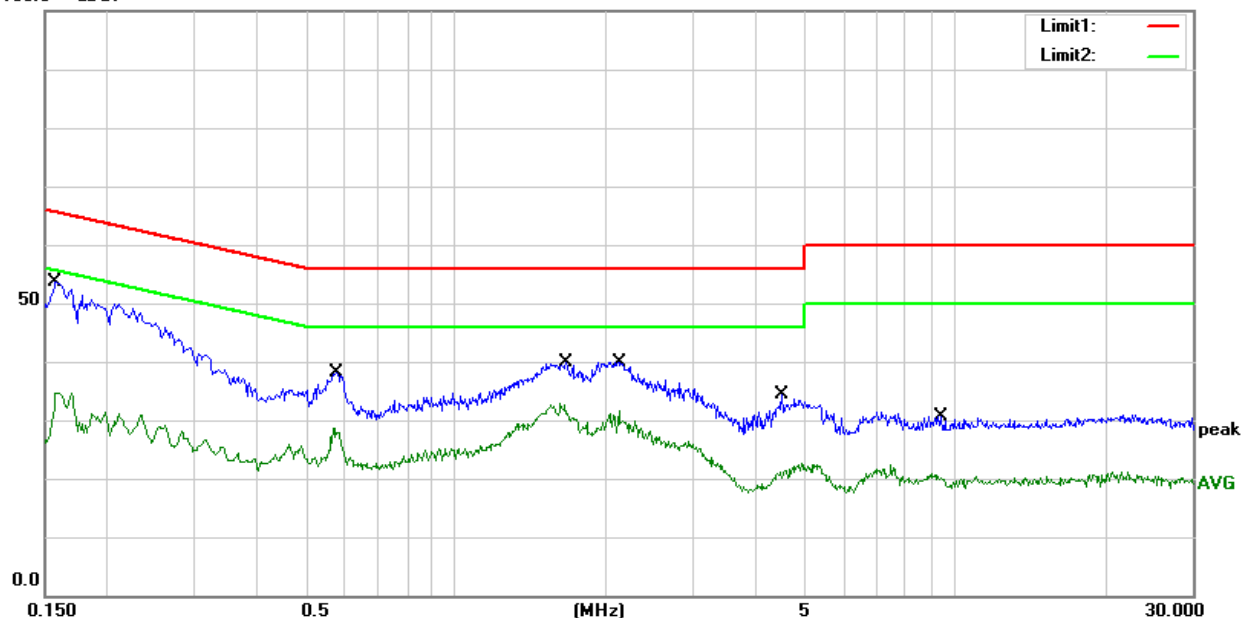



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS

In any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the Restricted band specified on Part15.205(a)&209(a), RSS-Gen Issue 5 and RSS-247 Issue 2, February 2017 (5.5) limit in the table and according to ANSI C63.10-2013 below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (0.009MHz - 1000MHz)

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (1000MHz-25GHz)

FREQUENCY (MHz)	(dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

LIMITS OF RESTRICTED FREQUENCY BANDS

FCC:

FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (GHz)
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			



IC:

FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (GHz)
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 - 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.677 - 5.683	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2655 - 2900	
13.36 - 13.41	3260 - 3267	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 - 8500	
108 - 138		



For Radiated Emission

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/QP/AV
Start Frequency	9 KHz/150KHz(Peak/QP/AV)
Stop Frequency	150KHz/30MHz(Peak/QP/AV)
RB / VB (emission in restricted band)	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz); 200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/QP
Start Frequency	30 MHz(Peak/QP)
Stop Frequency	1000 MHz (Peak/QP)
RB / VB (emission in restricted band)	120 KHz / 300 KHz

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/AV
Start Frequency	1000 MHz(Peak/AV)
Stop Frequency	10th carrier hamonic(Peak/AV)
RB / VB (emission in restricted band)	1 MHz / 3 MHz(Peak) 1 MHz/1/T MHz(AVG)

For Restricted band

Spectrum Parameter	Setting
Detector	Peak/AV
Start/Stop Frequency	Lower Band Edge: 2310 to 2430 MHz Upper Band Edge: 2445 to 2500 MHz
RB / VB	1 MHz / 3 MHz(Peak) 1 MHz/1/T MHz(AVG)



Receiver Parameter	Setting
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	90kHz~110kHz / RB 200Hz for QP
Start ~ Stop Frequency	110kHz~490kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	490kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE


- The measuring distance at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz.
- The EUT was placed on the top of a rotating table 0.8 m (above 1GHz is 1.5 m) above the ground at a 3 m anechoic chamber test site. The table was rotated 360 degree to determine the position of the highest radiation.
- The height of the equipment shall be 0.8 m (above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. Horizontal and vertical polarization of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and QuasiPeak detector mode will be re-measured.
- If the Peak Mode measured value is compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and no additional QP Mode measurement was performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

3.2.3 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

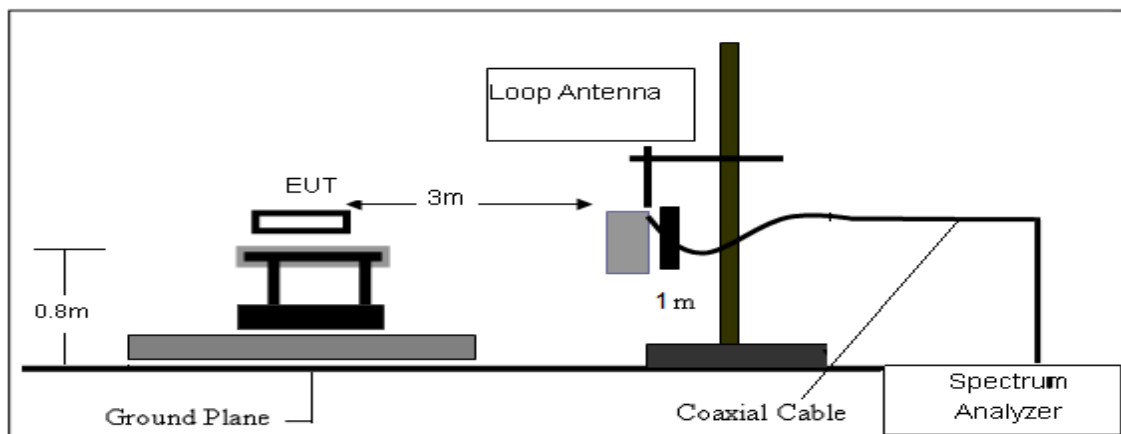

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

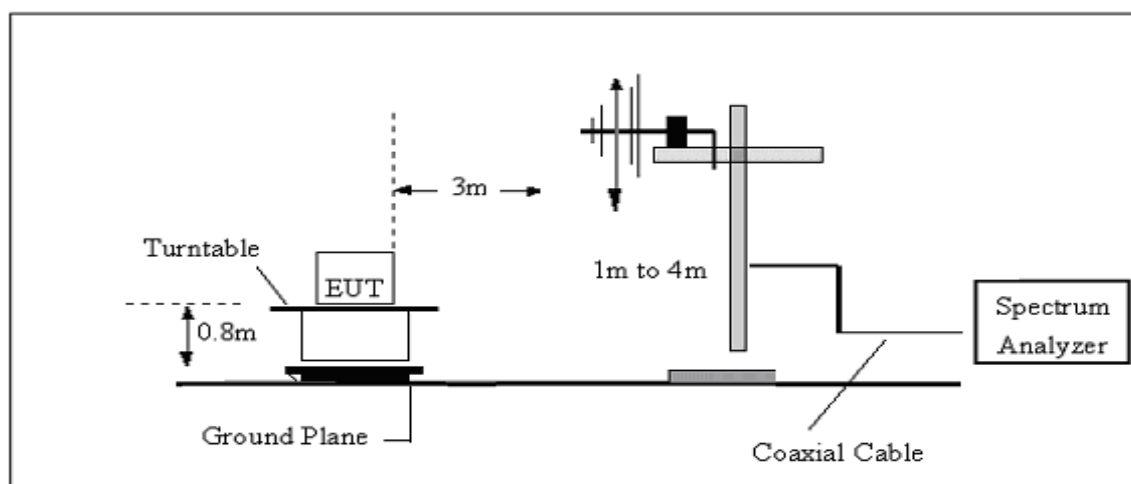

(C) Radiated Emission Test-Up Frequency Above 1GHz

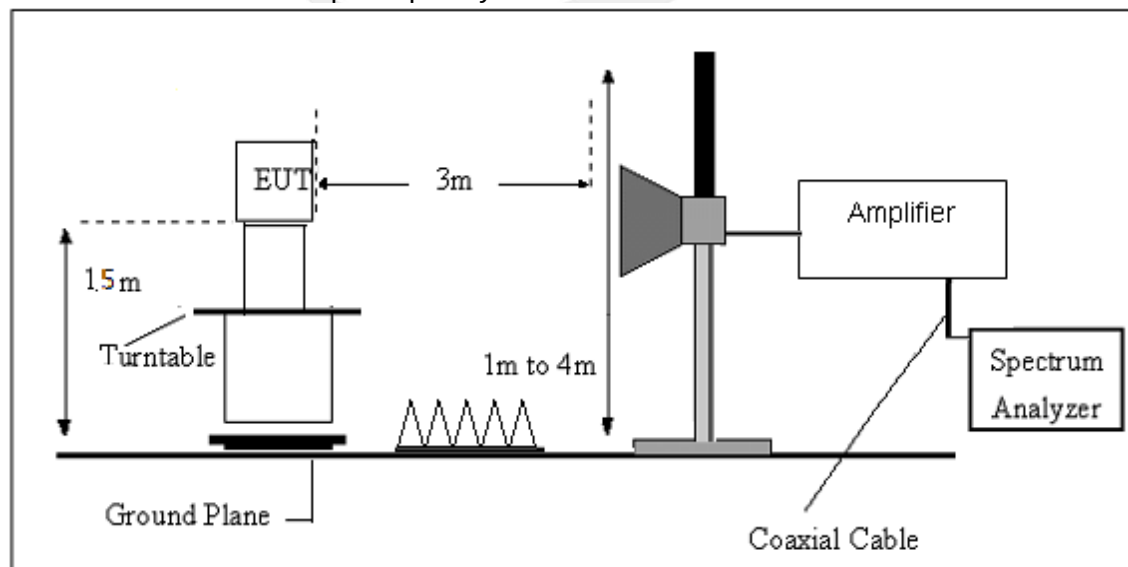

3.2.4 EUT OPERATING CONDITIONS

Please refer to section 3.1.4 of this report.



3.2.5 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where

FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude

AG = Amplifier Gain

AF = Antenna Factor

For example

Frequency	FS	RA	AF	CL	AG	Factor
(MHz)	(dBμV/m)	(dBμV/m)	(dB)	(dB)	(dB)	(dB)
300	40	58.1	12.2	1.6	31.9	-18.1

$$\text{Factor} = \text{AF} + \text{CL} - \text{AG}$$





3.2.6 TEST RESULT

9KHz-30MHz

Temperature:	23.1(C)	Relative Humidity:	60%RH
Test Voltage:	DC 3.3	Polarization:	--
Test Mode:	TX Mode		

Freq.	Reading	Limit	Margin	State	Test Result
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F	
--	--	--	--	--	PASS
--	--	--	--	--	PASS

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits(dBuV) + distance extrapolation factor.



(30MHz - 1000MHz)

Temperature:	23.1(C)	Relative Humidity:	60%RH
Test Voltage:	DC 3.3V	Phase:	Horizontal
Test Mode:	Mode 1/2/3/4/5/6/7/8/9/10/11/12/13/14/15/16/17/18 (Mode 13 worst mode)		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/ m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	56.1900	50.39	-25.30	25.09	40.00	-14.91	QP
2	214.3000	54.25	-20.21	34.04	43.50	-9.46	QP
3	288.0200	46.94	-15.26	31.68	46.00	-14.32	QP
4	499.4800	37.88	-8.02	29.86	46.00	-16.14	QP
5	831.2200	37.52	-0.70	36.82	46.00	-9.18	QP
6	977.6900	30.06	2.52	32.58	54.00	-21.42	QP

Remark:

- Margin = Result (Result = Reading + Factor) - Limit
- Factor = Antenna factor + Cable attenuation factor (cable loss) - Amplifier gain






Temperature:	23.1(C)	Relative Humidity:	60%RH
Test Voltage:	DC 3.3V	Phase:	Vertical
Test Mode:	Mode 1/2/3/4/5/6/7/8/9/10/11/12/13/14/15/16/17/18 (Mode 13 worst mode)		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/ m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	31.9400	49.75	-13.86	35.89	40.00	-4.11	QP
2	218.1800	53.89	-19.81	34.08	46.00	-11.92	QP
3	343.3100	43.86	-13.29	30.57	46.00	-15.43	QP
4	556.7100	34.53	-5.58	28.95	46.00	-17.05	QP
5	833.1600	41.42	-0.62	40.80	46.00	-5.20	QP
6	942.7700	30.94	1.44	32.38	46.00	-13.62	QP

Remark:.

1. Margin = Result (Result = Reading + Factor) – Limit
2. Factor = Antenna factor + Cable attenuation factor (cable loss) - Amplifier gain

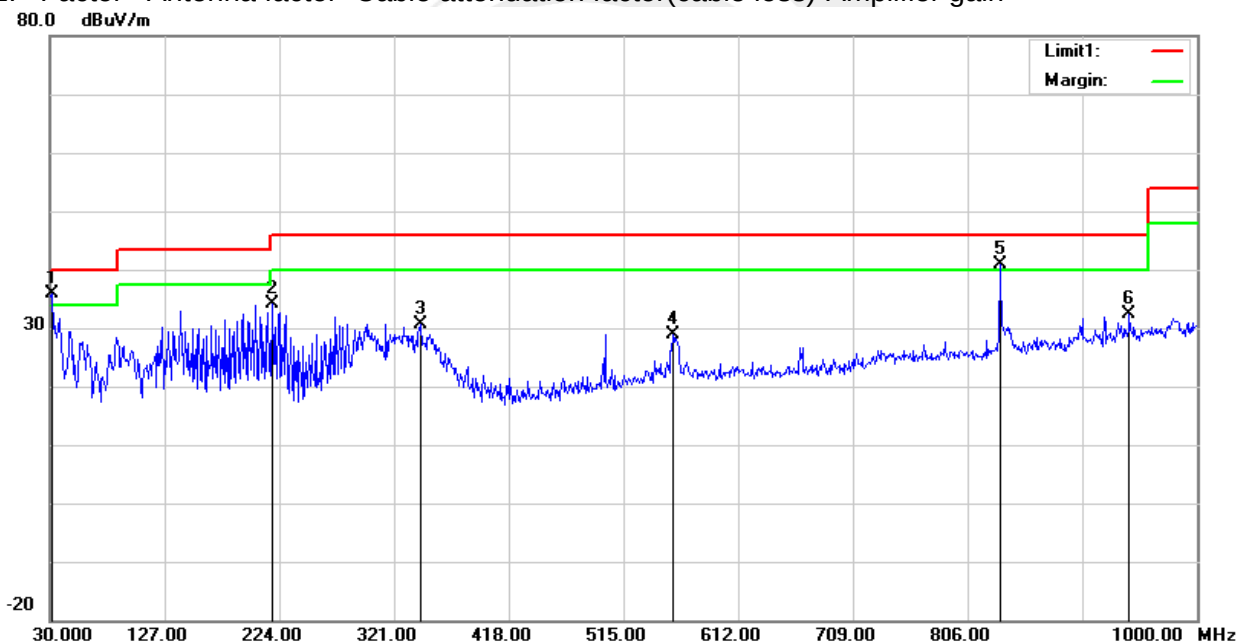



(1000MHz-25GHz) Spurious emission Requirements

802.11 ax(HE20)

Frequency	Meter Reading	Amplifier	Loss	Antenna Factor	Corrected Factor	Emission Level	Limits	Margin	Detector	Comment
(MHz)	(dBμV)	(dB)	(dB)	(dB/m)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	
Low Channel (802.11ax(HE20)/2412 MHz)										
3264.73	62.22	44.70	6.70	28.20	-9.80	52.42	74.00	-21.58	PK	Vertical
3264.73	50.30	44.70	6.70	28.20	-9.80	40.50	54.00	-13.50	AV	Vertical
3264.66	61.41	44.70	6.70	28.20	-9.80	51.61	74.00	-22.39	PK	Horizontal
3264.66	51.11	44.70	6.70	28.20	-9.80	41.31	54.00	-12.69	AV	Horizontal
4824.34	58.29	44.20	9.04	31.60	-3.56	54.73	74.00	-19.27	PK	Vertical
4824.34	49.41	44.20	9.04	31.60	-3.56	45.85	54.00	-8.15	AV	Vertical
4824.38	59.49	44.20	9.04	31.60	-3.56	55.93	74.00	-18.07	PK	Horizontal
4824.38	49.78	44.20	9.04	31.60	-3.56	46.22	54.00	-7.78	AV	Horizontal
5359.68	48.80	44.20	9.86	32.00	-2.34	46.46	74.00	-27.54	PK	Vertical
5359.68	39.71	44.20	9.86	32.00	-2.34	37.37	54.00	-16.63	AV	Vertical
5359.77	47.21	44.20	9.86	32.00	-2.34	44.86	74.00	-29.14	PK	Horizontal
5359.77	38.07	44.20	9.86	32.00	-2.34	35.73	54.00	-18.27	AV	Horizontal
7235.97	54.27	43.50	11.40	35.50	3.40	57.67	74.00	-16.33	PK	Vertical
7235.97	44.60	43.50	11.40	35.50	3.40	48.00	54.00	-6.00	AV	Vertical
7235.96	54.95	43.50	11.40	35.50	3.40	58.35	74.00	-15.65	PK	Horizontal
7235.96	44.88	43.50	11.40	35.50	3.40	48.28	54.00	-5.72	AV	Horizontal
Middle Channel (802.11ax(HE20)/2437 MHz)										
3264.82	61.50	44.70	6.70	28.20	-9.80	51.70	74.00	-22.30	PK	Vertical
3264.82	49.98	44.70	6.70	28.20	-9.80	40.18	54.00	-13.82	AV	Vertical
3264.67	61.92	44.70	6.70	28.20	-9.80	52.12	74.00	-21.88	PK	Horizontal
3264.67	50.70	44.70	6.70	28.20	-9.80	40.90	54.00	-13.10	AV	Horizontal
4874.58	59.39	44.20	9.04	31.60	-3.56	55.83	74.00	-18.17	PK	Vertical
4874.58	49.52	44.20	9.04	31.60	-3.56	45.96	54.00	-8.04	AV	Vertical
4874.49	59.06	44.20	9.04	31.60	-3.56	55.50	74.00	-18.50	PK	Horizontal
4874.49	49.93	44.20	9.04	31.60	-3.56	46.37	54.00	-7.63	AV	Horizontal
5359.74	48.77	44.20	9.86	32.00	-2.34	46.43	74.00	-27.57	PK	Vertical
5359.74	40.17	44.20	9.86	32.00	-2.34	37.82	54.00	-16.18	AV	Vertical
5359.71	47.22	44.20	9.86	32.00	-2.34	44.88	74.00	-29.12	PK	Horizontal
5359.71	38.31	44.20	9.86	32.00	-2.34	35.97	54.00	-18.03	AV	Horizontal
7310.84	54.17	43.50	11.40	35.50	3.40	57.57	74.00	-16.43	PK	Vertical
7310.84	44.54	43.50	11.40	35.50	3.40	47.94	54.00	-6.06	AV	Vertical
7310.92	54.16	43.50	11.40	35.50	3.40	57.56	74.00	-16.44	PK	Horizontal
7310.92	44.49	43.50	11.40	35.50	3.40	47.89	54.00	-6.11	AV	Horizontal



High Channel (802.11ax(HE20)/2462 MHz)										
3264.82	61.92	44.70	6.70	28.20	-9.80	52.12	74.00	-21.88	PK	Vertical
3264.82	50.73	44.70	6.70	28.20	-9.80	40.93	54.00	-13.07	AV	Vertical
3264.84	62.26	44.70	6.70	28.20	-9.80	52.46	74.00	-21.54	PK	Horizontal
3264.84	49.96	44.70	6.70	28.20	-9.80	40.16	54.00	-13.84	AV	Horizontal
4924.48	59.20	44.20	9.04	31.60	-3.56	55.64	74.00	-18.36	PK	Vertical
4924.48	49.59	44.20	9.04	31.60	-3.56	46.03	54.00	-7.97	AV	Vertical
4924.41	58.28	44.20	9.04	31.60	-3.56	54.72	74.00	-19.28	PK	Horizontal
4924.41	49.15	44.20	9.04	31.60	-3.56	45.59	54.00	-8.41	AV	Horizontal
5359.67	49.37	44.20	9.86	32.00	-2.34	47.03	74.00	-26.97	PK	Vertical
5359.67	39.33	44.20	9.86	32.00	-2.34	36.98	54.00	-17.02	AV	Vertical
5359.70	47.91	44.20	9.86	32.00	-2.34	45.57	74.00	-28.43	PK	Horizontal
5359.70	38.80	44.20	9.86	32.00	-2.34	36.46	54.00	-17.54	AV	Horizontal
7385.98	53.73	43.50	11.40	35.50	3.40	57.13	74.00	-16.87	PK	Vertical
7385.98	44.51	43.50	11.40	35.50	3.40	47.91	54.00	-6.09	AV	Vertical
7385.85	53.63	43.50	11.40	35.50	3.40	57.03	74.00	-16.97	PK	Horizontal
7385.85	44.41	43.50	11.40	35.50	3.40	47.81	54.00	-6.19	AV	Horizontal

Remark:


- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- Scan with 802.11b, 802.11g, 802.11n (HT-20), 802.11n (HT-40), 802.11ax (HE-20), 802.11ax (HE-40)
the worst case is 802.11 ax(HE20).
Emission Level = Reading + Factor
Margin = Limit - Emission Level
- The frequency emission of peak points that did not show above the forms are at least 20dB below the limit, the frequency emission is mainly from the environment noise.



3.2.6 TEST RESULTS(Band edge Requirements)

802.11ax (HE20)-Low


Horizontal

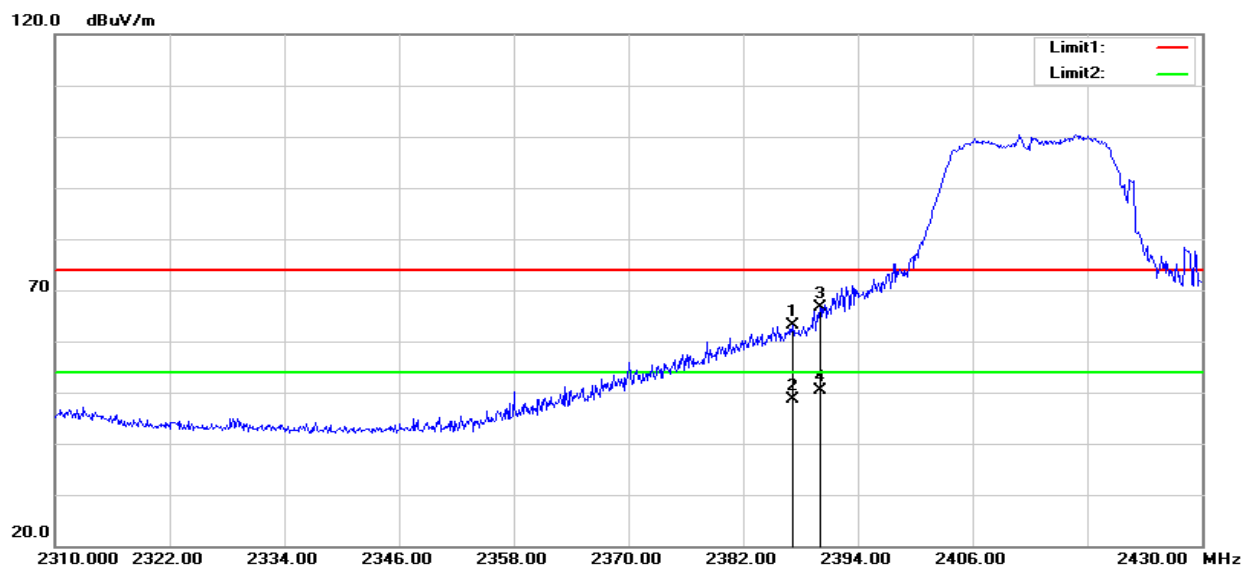

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.160	58.81	4.30	63.11	74.00	-10.89	peak
2	2387.160	44.35	4.30	48.65	54.00	-5.35	AVG
3	2390.000	62.21	4.34	66.55	74.00	-7.45	peak
4	2390.000	46.12	4.34	50.46	54.00	-3.54	AVG




Vertical

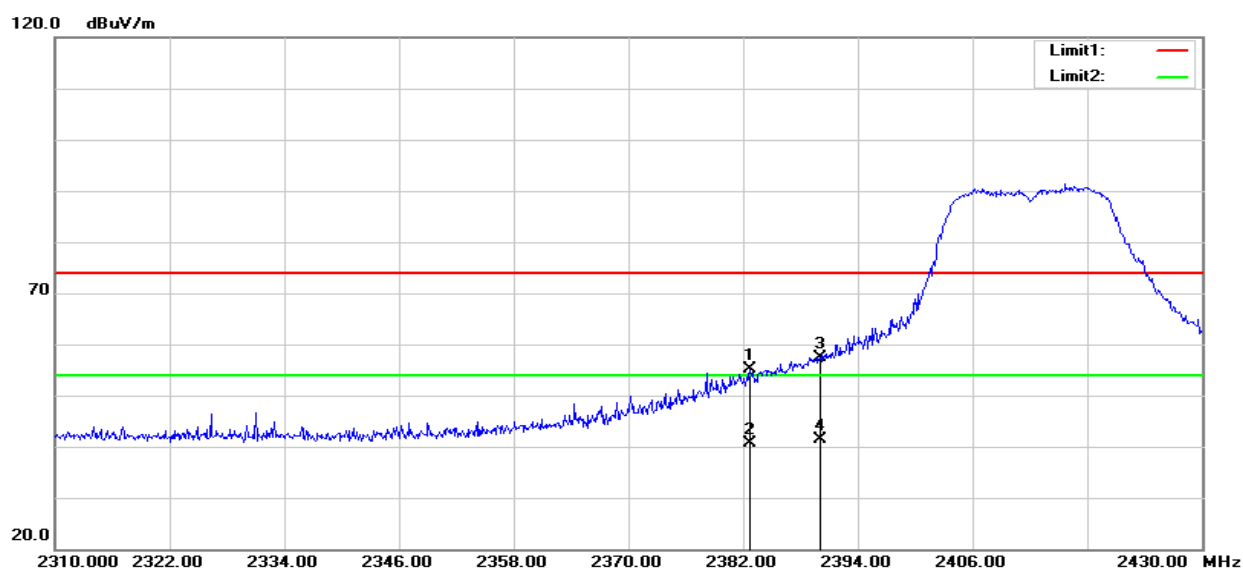

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2382.720	50.95	4.23	55.18	74.00	-18.82	peak
2	2382.720	36.49	4.23	40.72	54.00	-13.28	AVG
3	2390.000	52.95	4.34	57.29	74.00	-16.71	peak
4	2390.000	37.04	4.34	41.38	54.00	-12.62	AVG




802.11ax (HE20)-High
Horizontal

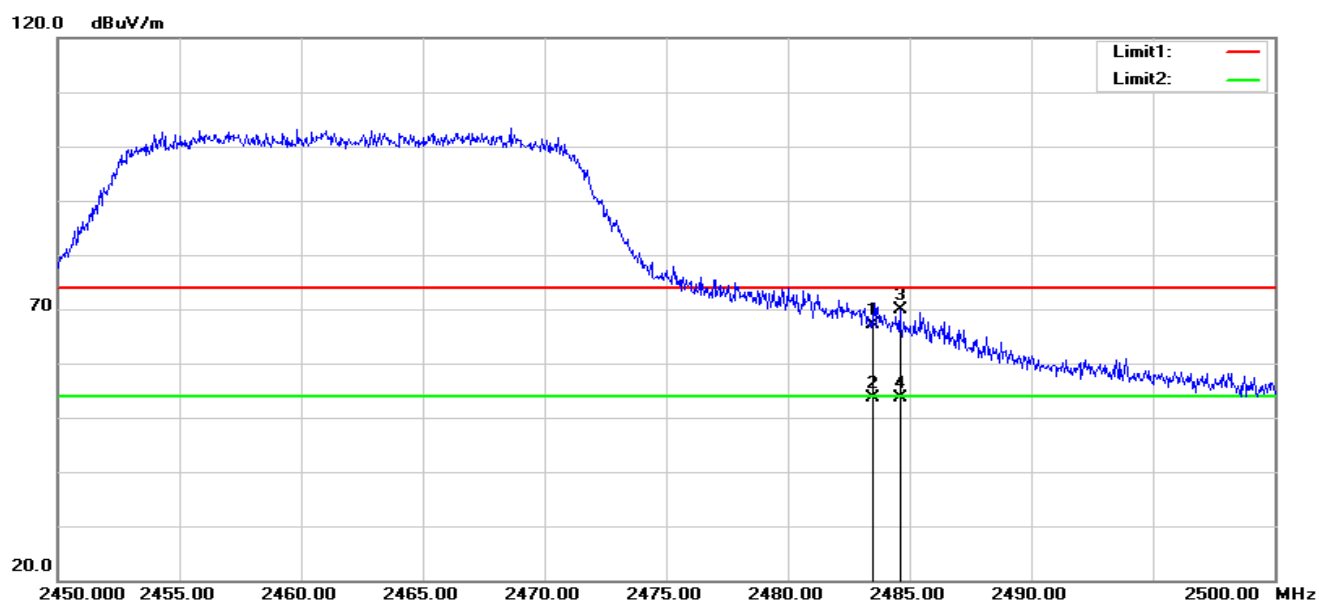

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	62.57	4.60	67.17	74.00	-6.83	peak
2	2483.500	49.06	4.60	53.66	54.00	-0.34	AVG
3	2484.600	65.17	4.61	69.78	74.00	-4.22	peak
4	2484.600	49.08	4.61	53.69	54.00	-0.31	AVG



Vertical

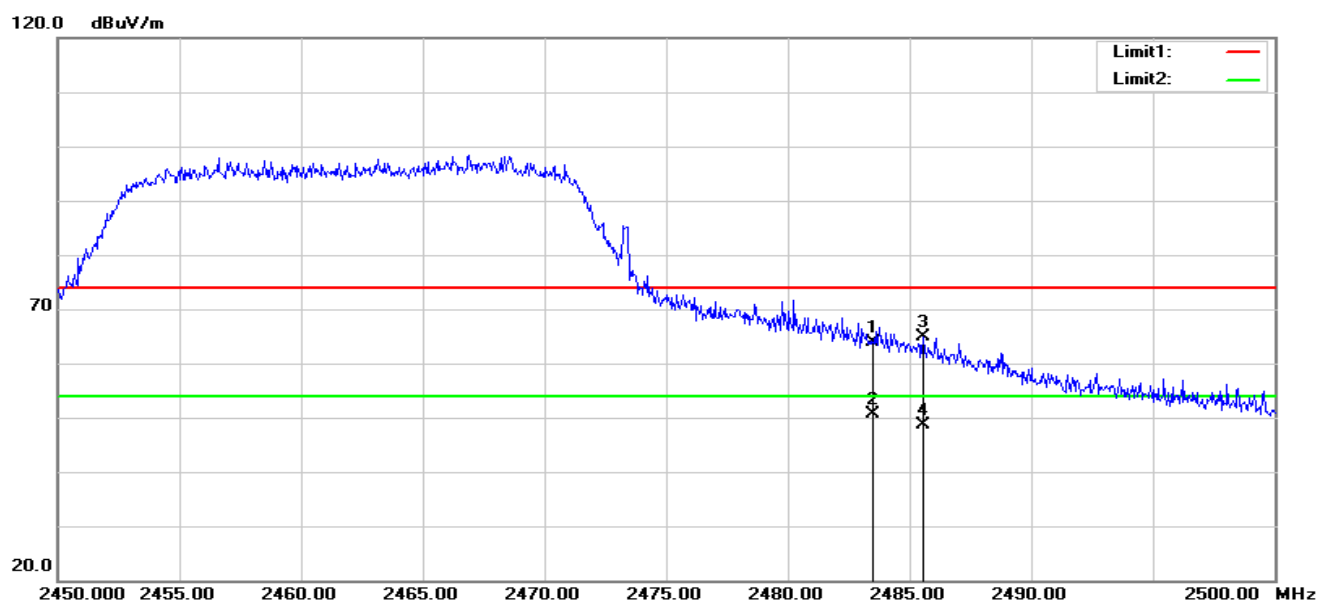

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	59.34	4.60	63.94	74.00	-10.06	peak
2	2483.500	45.95	4.60	50.55	54.00	-3.45	AVG
3	2485.550	60.26	4.61	64.87	74.00	-9.13	peak
4	2485.550	44.06	4.61	48.67	54.00	-5.33	AVG

Note: 802.11b, 802.11g, 802.11n (HT-20), 802.11n (HT-40) , 802.11ax (HE-20), 802.11ax (HE-40) mode all have been tested, the worst case is 802.11ax (HE-20), only show the worst case.

4.CONDUCTED SPURIOUS & BAND EDGE EMISSION

4.1 LIMIT

According to FCC section 15.247(d)&RSS-247 Issue 2, in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

4.2 TEST PROCEDURE

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	30 MHz to 10th carrier harmonic
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

For Band edge

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	Lower Band Edge: 2300 to 2432 MHz Upper Band Edge: 2442 to 2500 MHz
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

4.3DEVIATION FROM STANDARD

No deviation.

4.4 TEST SETUP



The EUT which is powered by the Battery, is connected to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

4.5 EUT OPERATION CONDITIONS


Please refer to section 3.1.4 of this report.




4.6 TEST RESULTS

Temperature:	25°C	Relative Humidity:	60%
Test Voltage:	DC 3.3V	Test Mode:	TX b Mode /CH01, CH06, CH11

CH 01

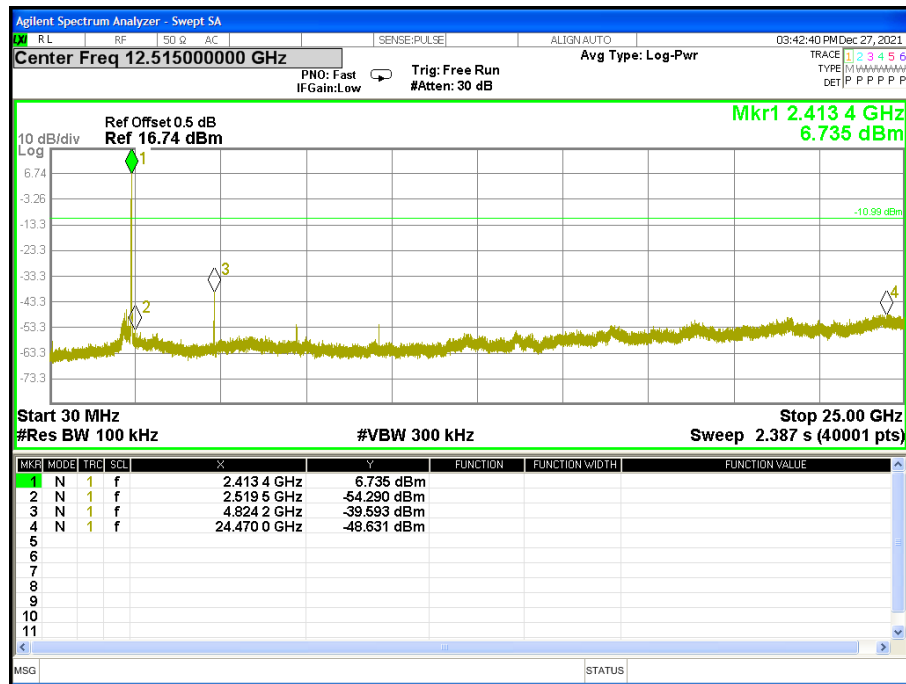


CH 06

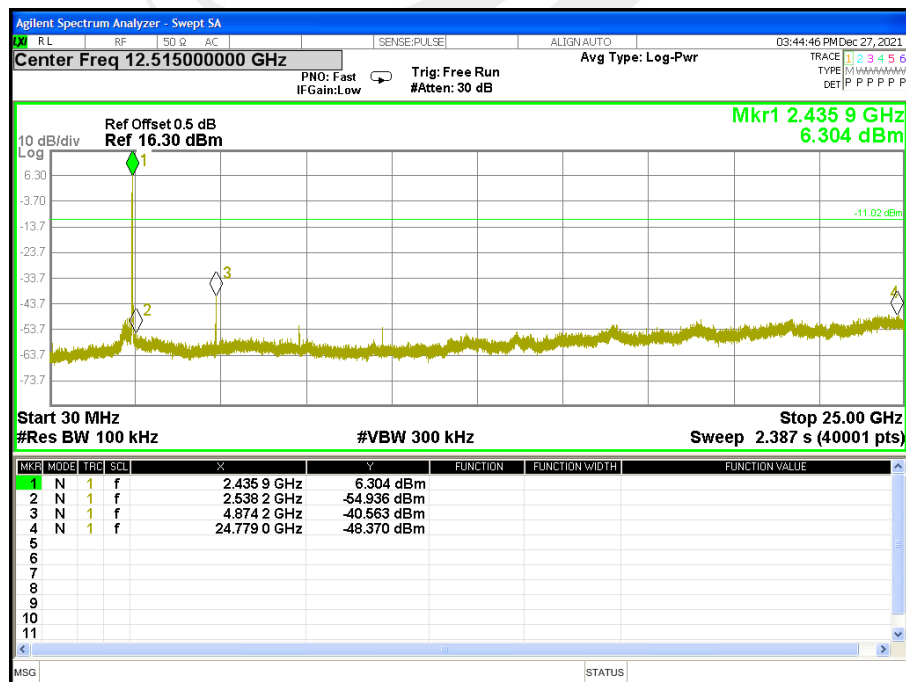




CH 11

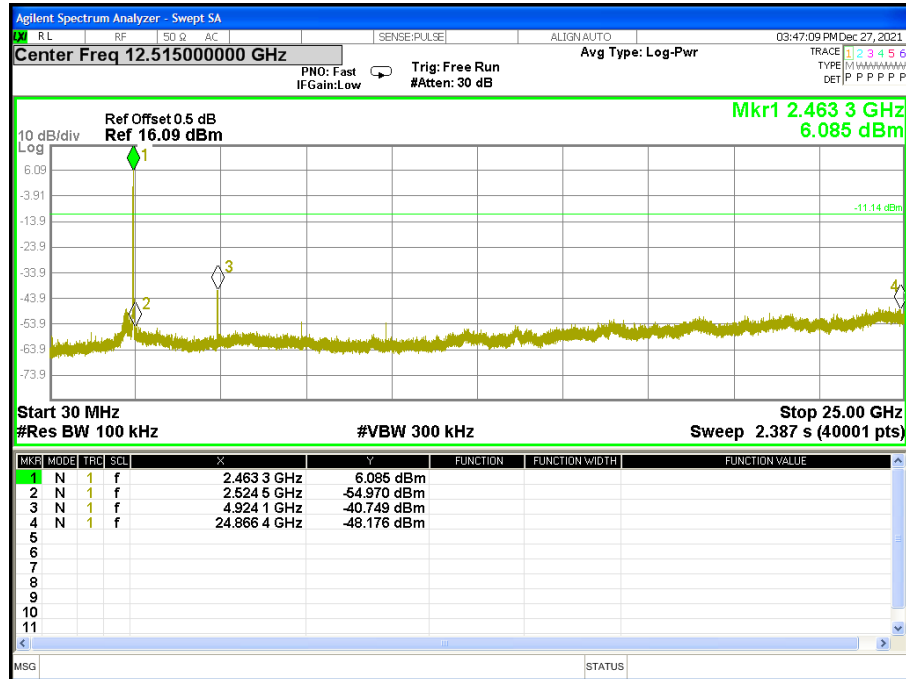




Band edge(it's also the reference level for conducted spurious emission)

CH 01

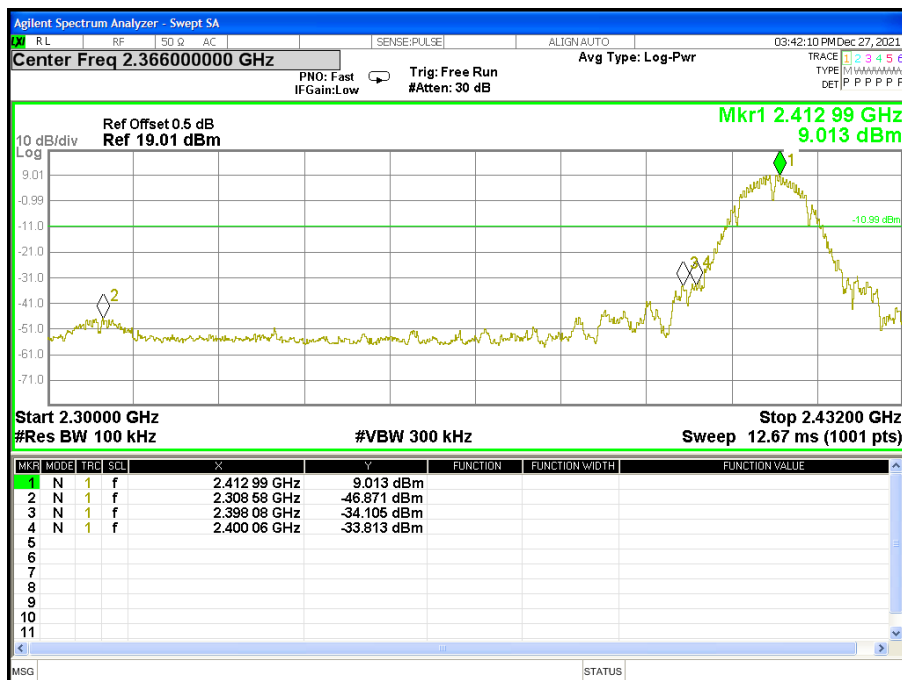


CH 06

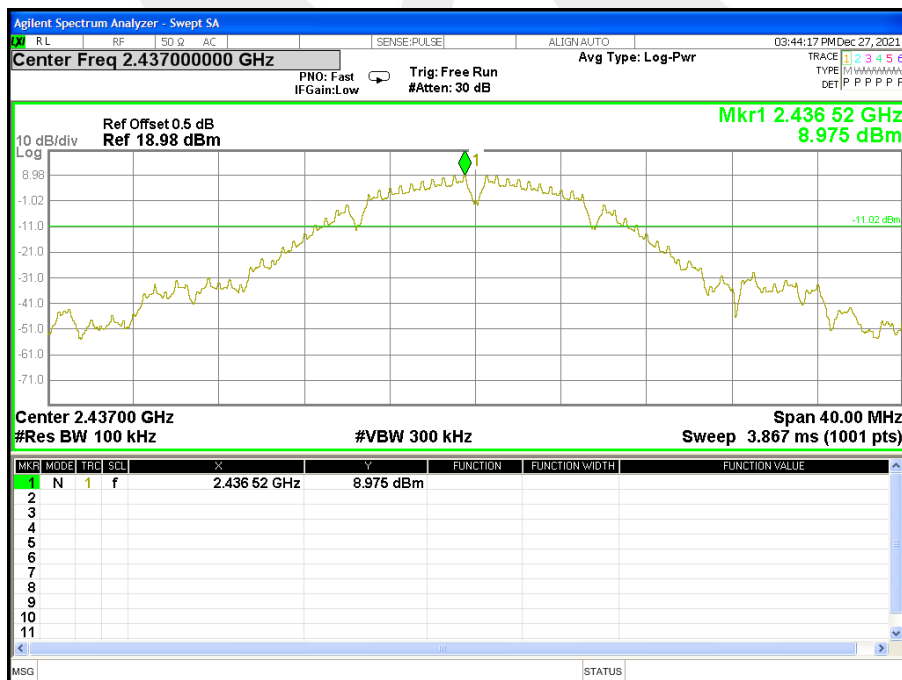




CH 11

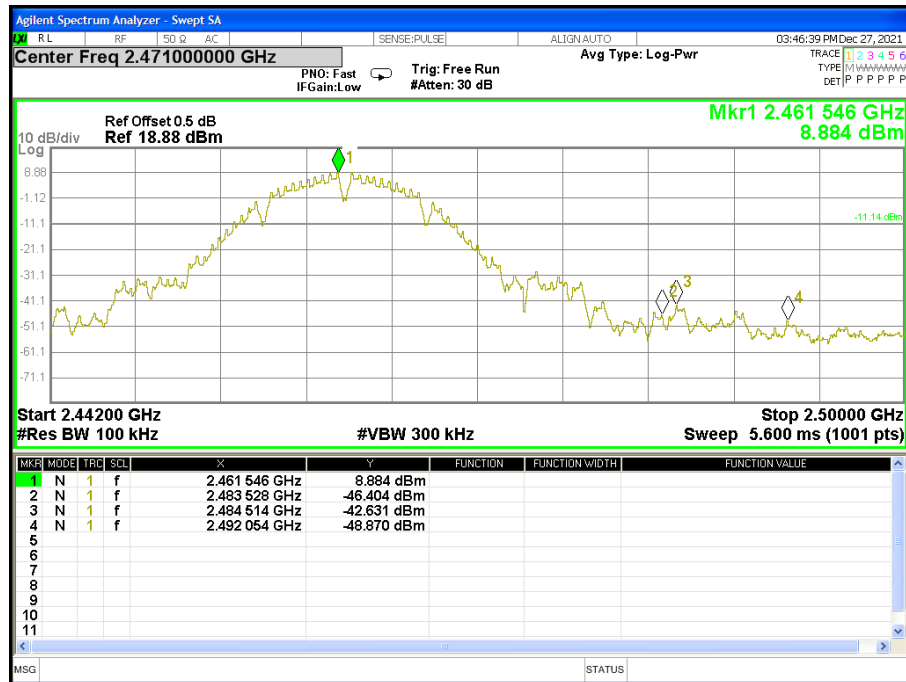




Temperature:	25°C	Relative Humidity:	60%
Test Voltage:	DC 3.3V	Test Mode:	TX g Mode /CH01, CH06, CH11

CH 01

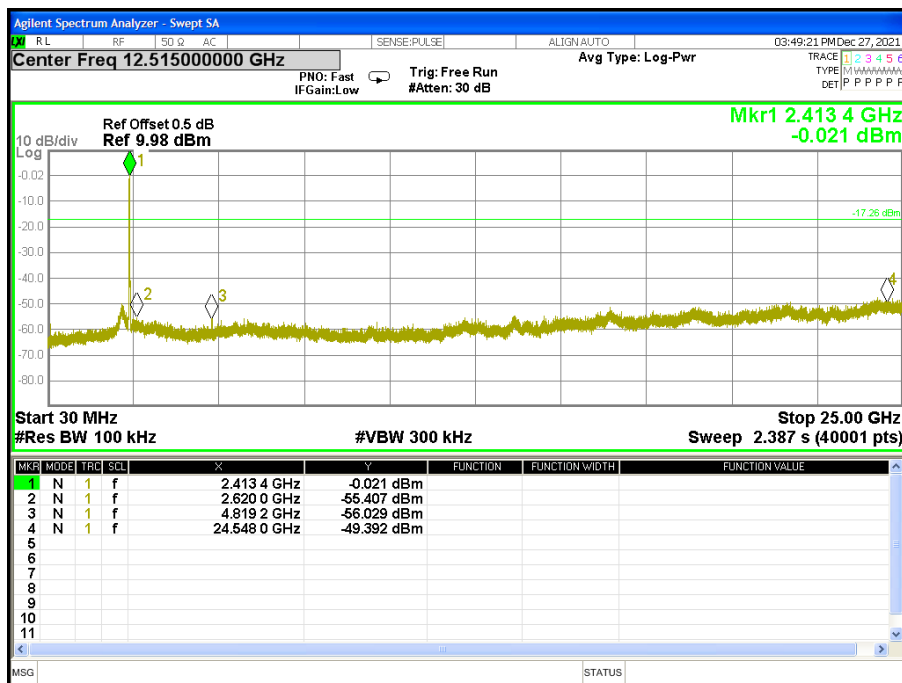


CH06

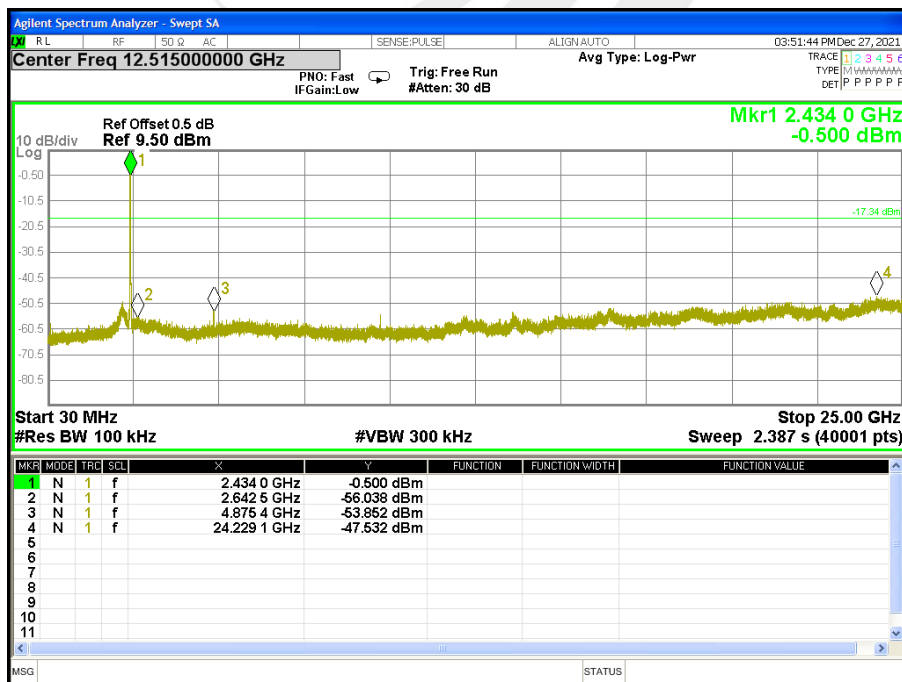




CH 11

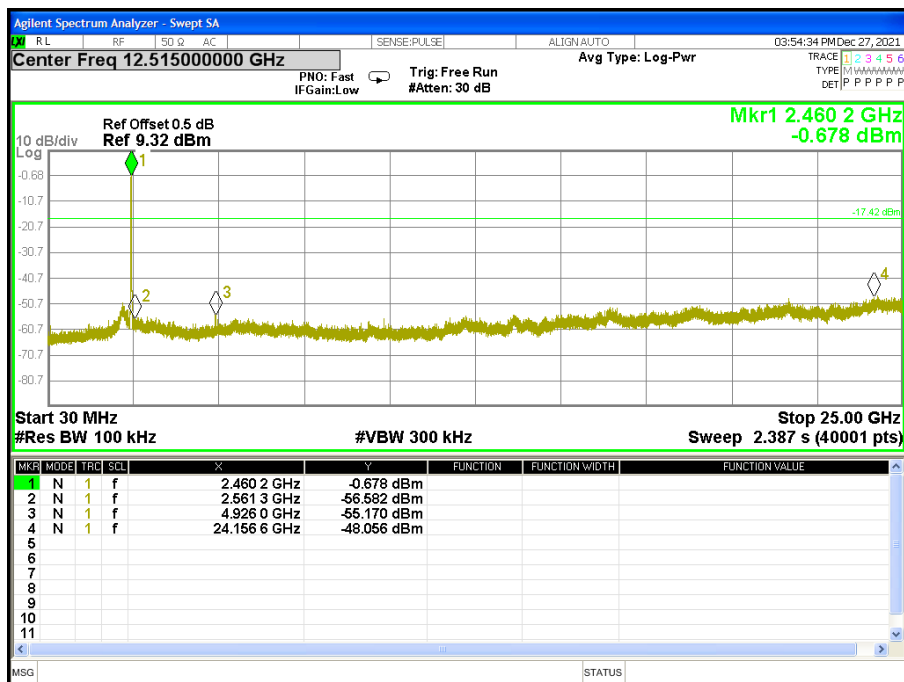




Band edge(it's also the reference level for conducted spurious emission)

CH 01

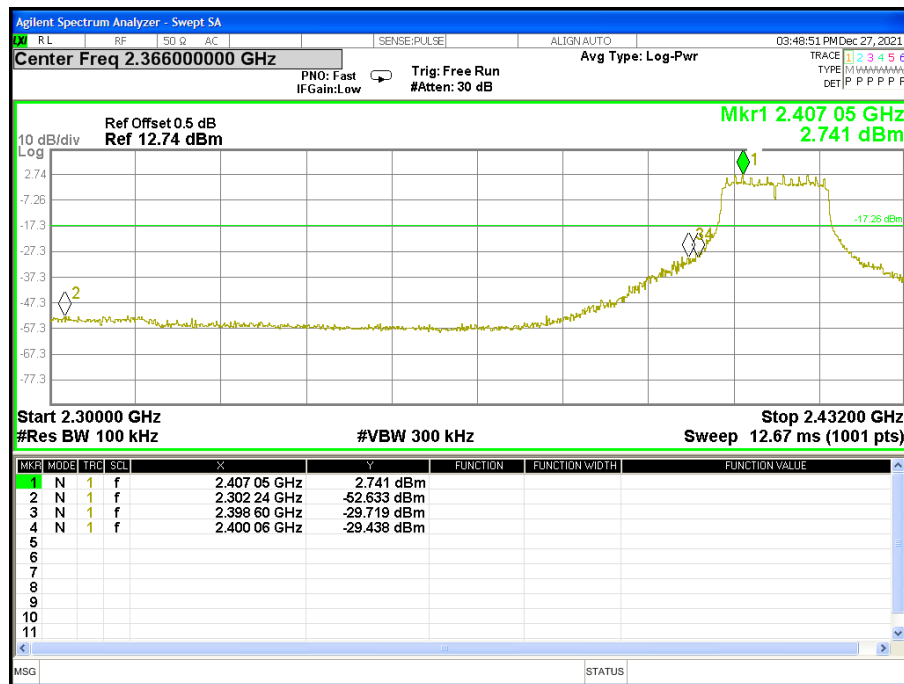


CH06

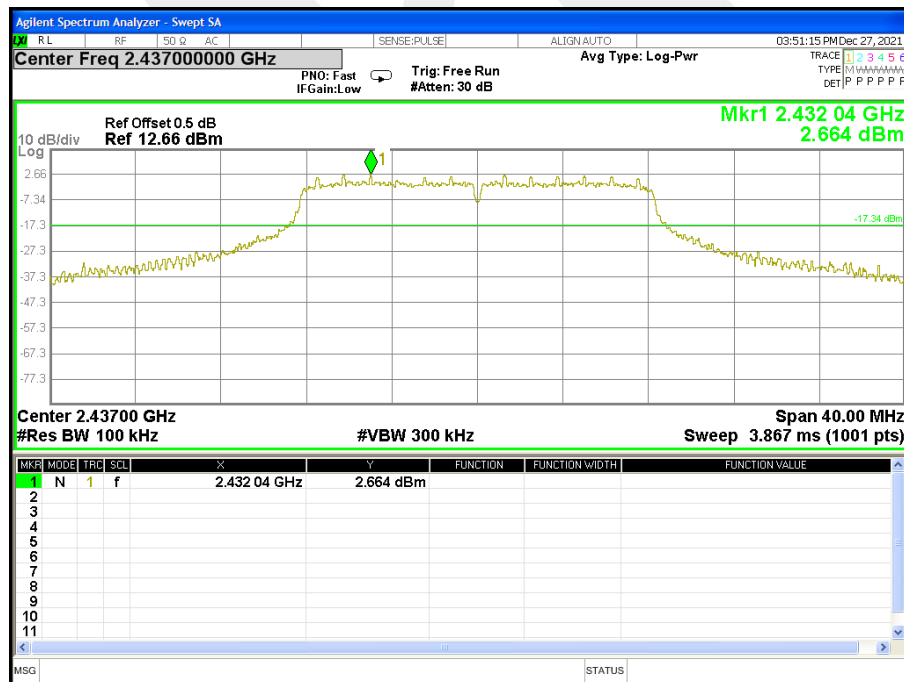




CH11

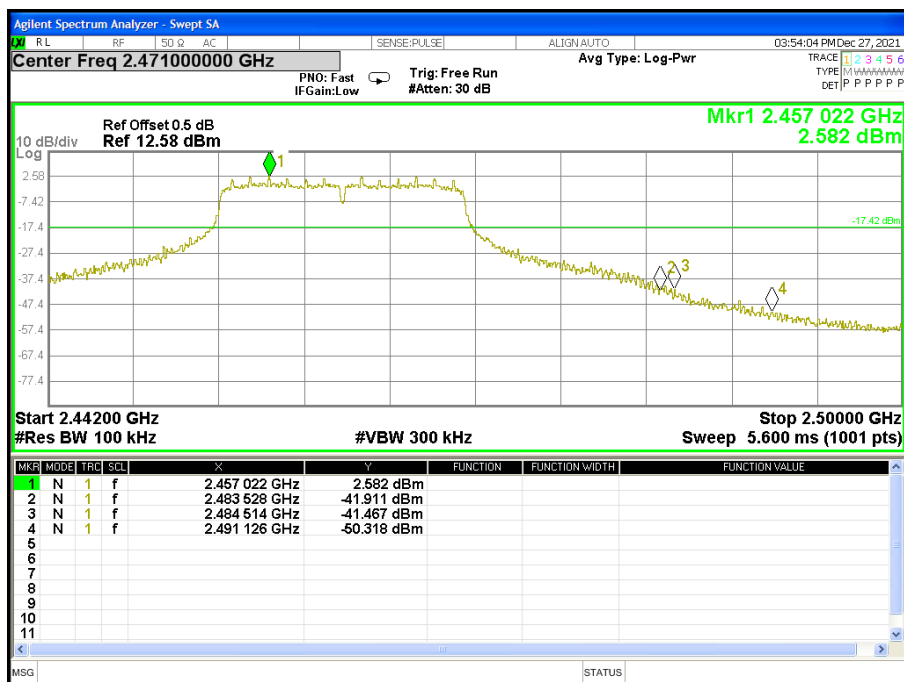




Temperature:	25°C	Relative Humidity:	60%
Test Voltage:	DC 3.3V	Test Mode:	TX n Mode(20M) /CH01, CH06, CH11

CH 01

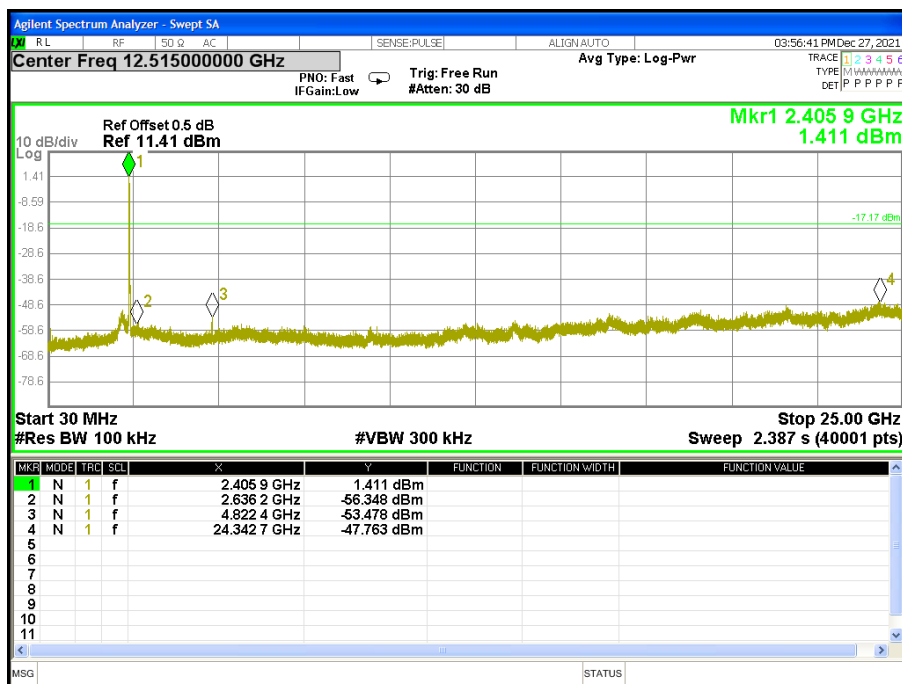


CH 06

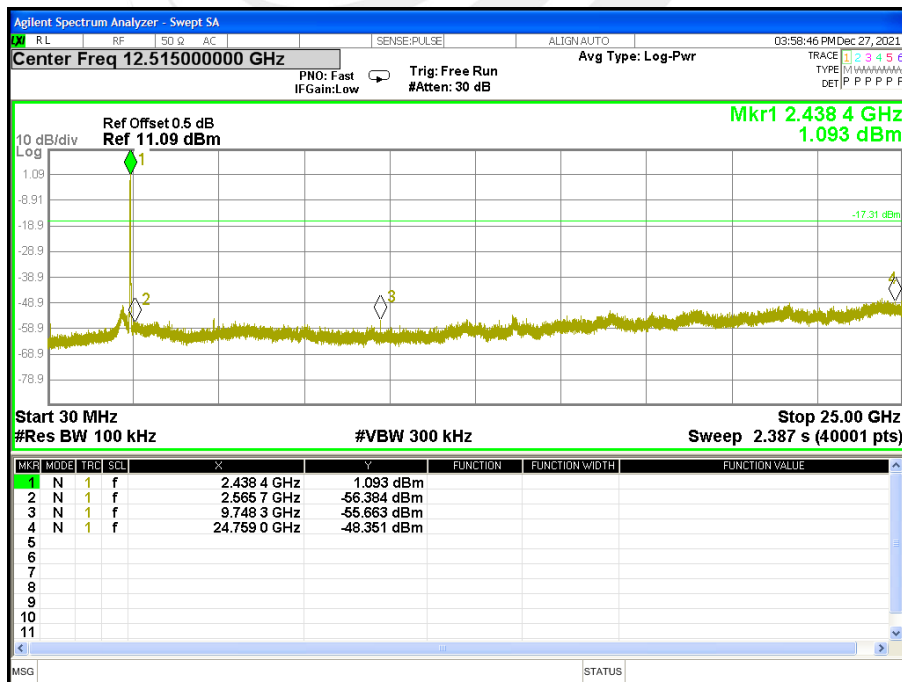




CH 11

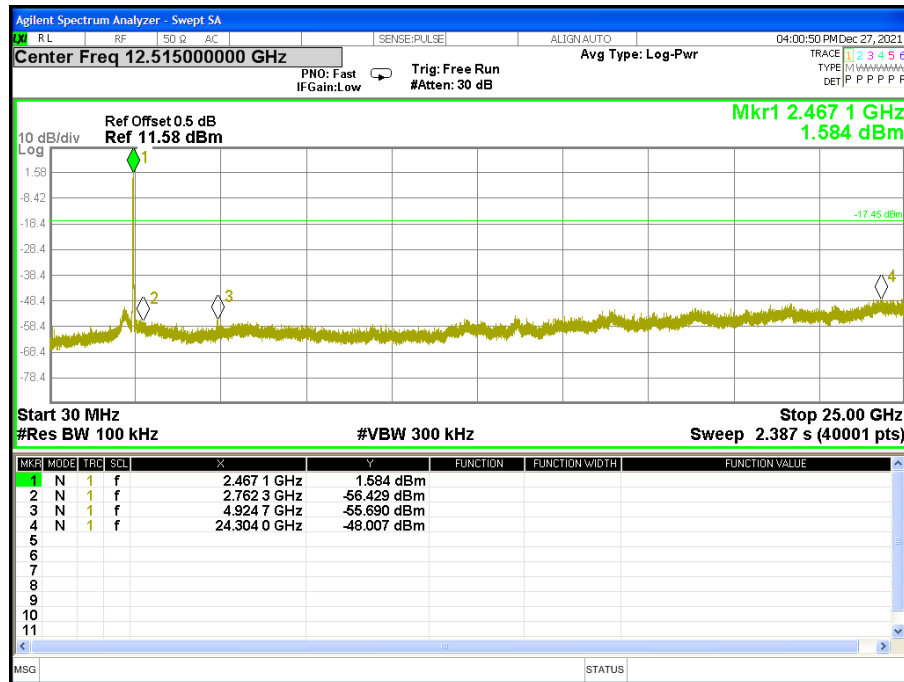




Band edge(it's also the reference level for conducted spurious emission)

CH 01

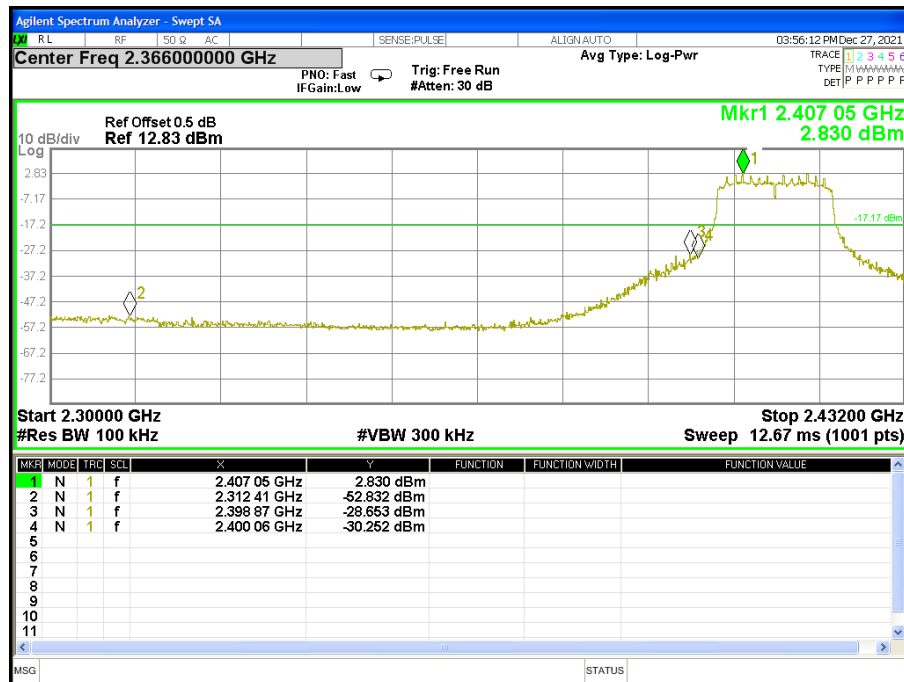


CH 06

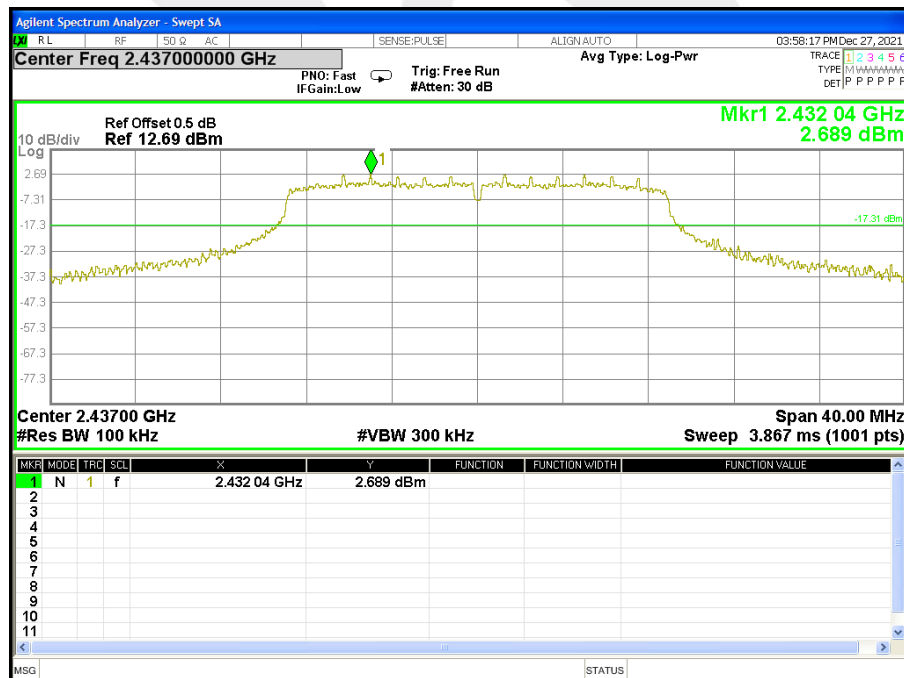




CH 11

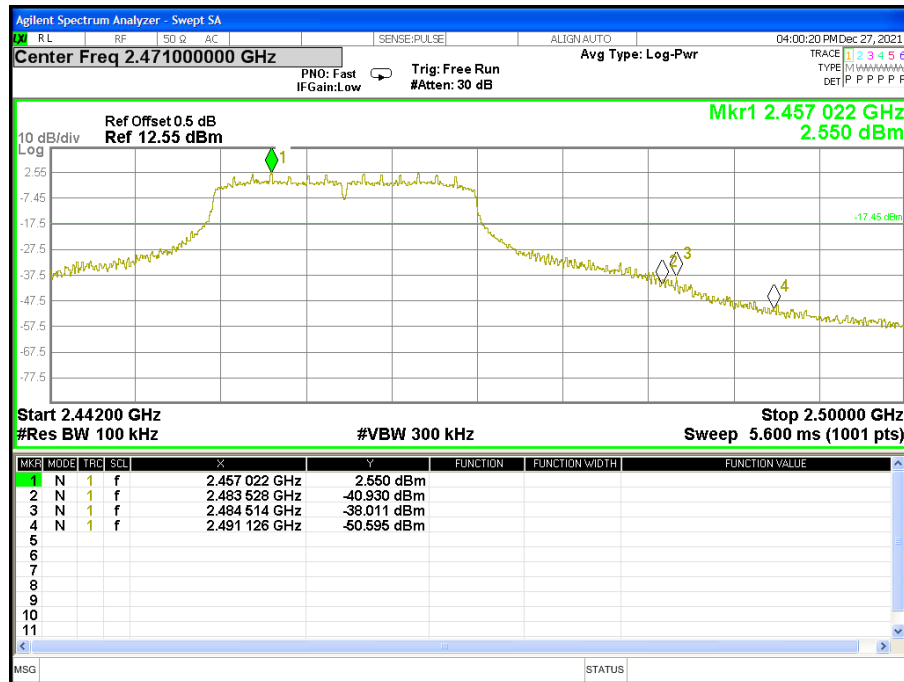




Temperature:	25°C	Relative Humidity:	60%
Test Voltage:	DC 3.3V	Test Mode:	TX n Mode(40M) /CH03, CH06, CH09

CH 03

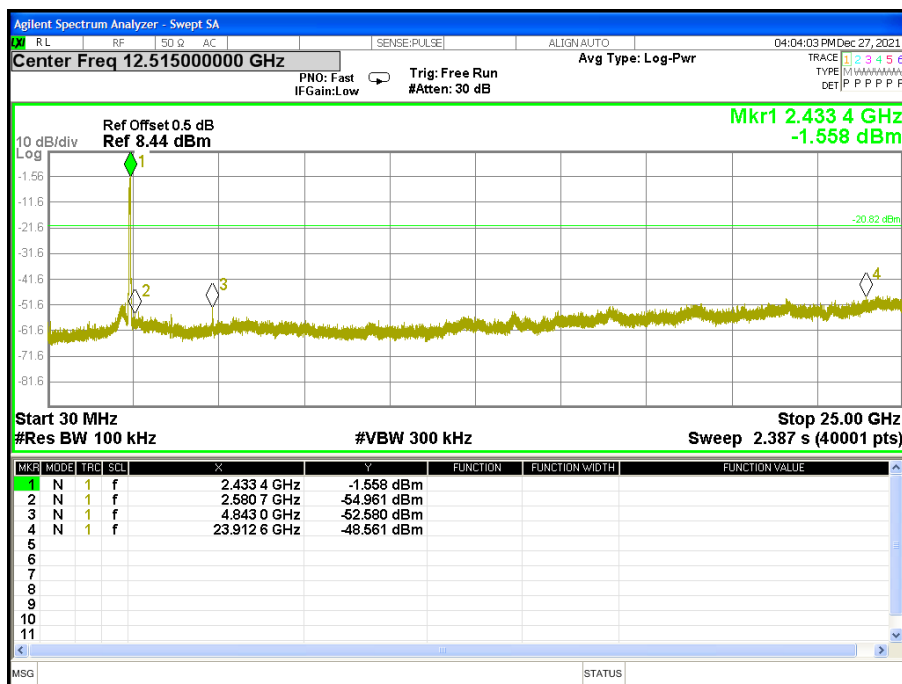




CH06

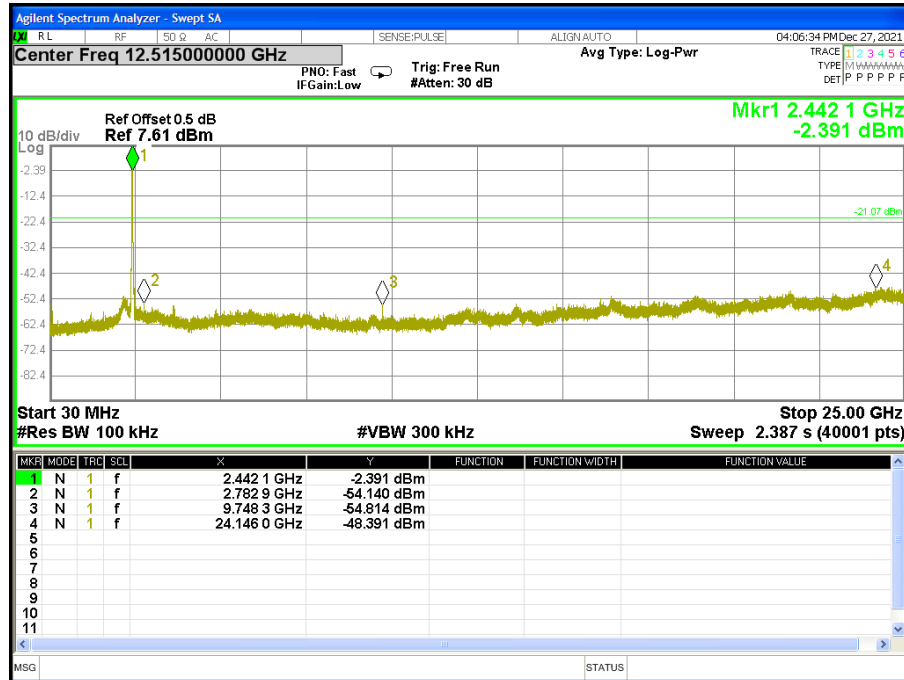


CH09

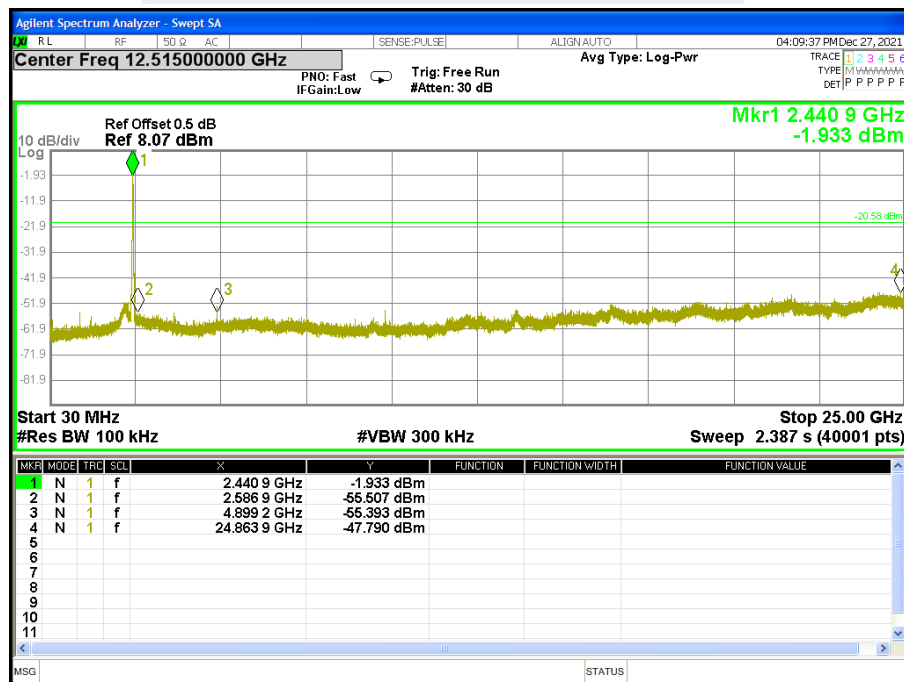




Band edge(it's also the reference level for conducted spurious emission)

CH03

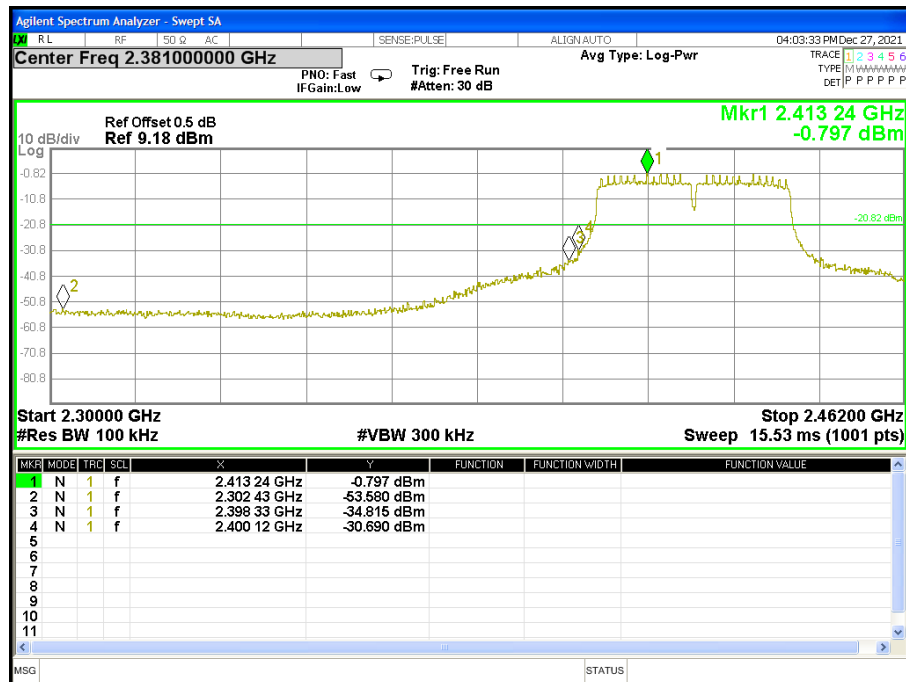


CH 06

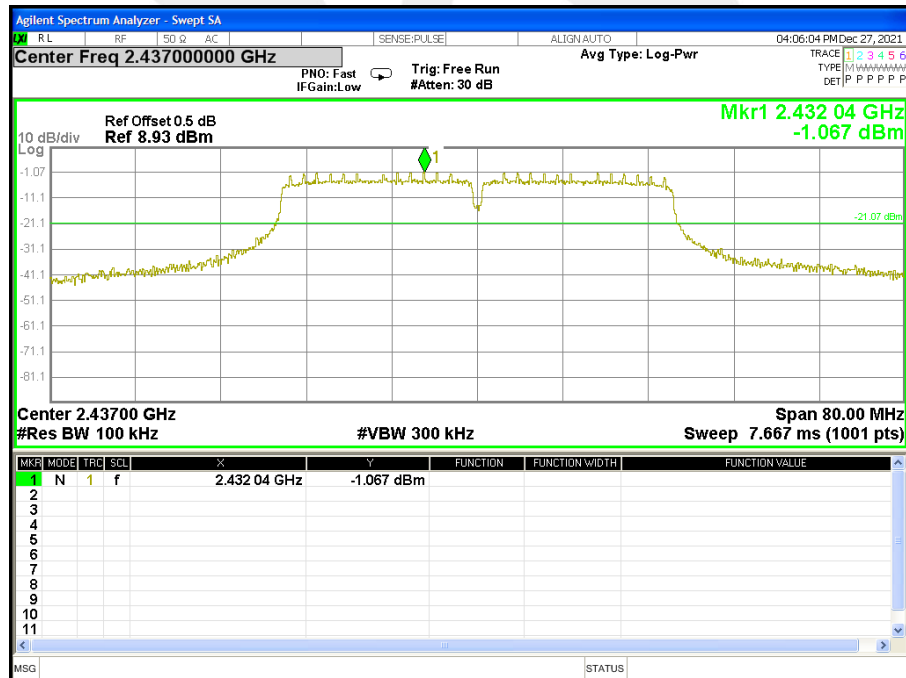




CH 09

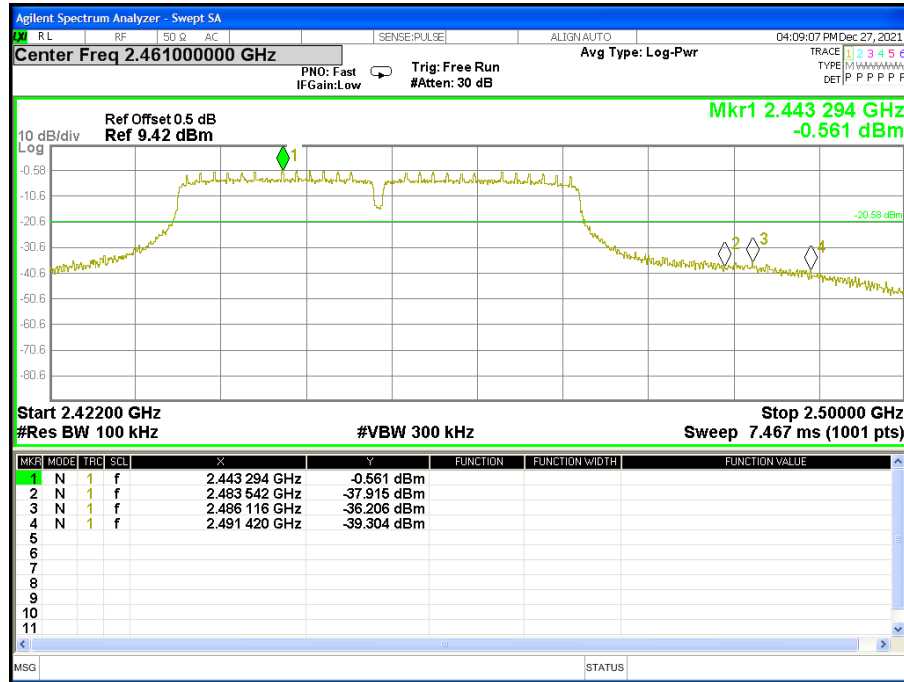




Temperature:	25°C	Relative Humidity:	60%
Test Voltage:	DC 3.3V	Test Mode:	TX ax Mode(20M) /CH01, CH06, CH11

CH 01

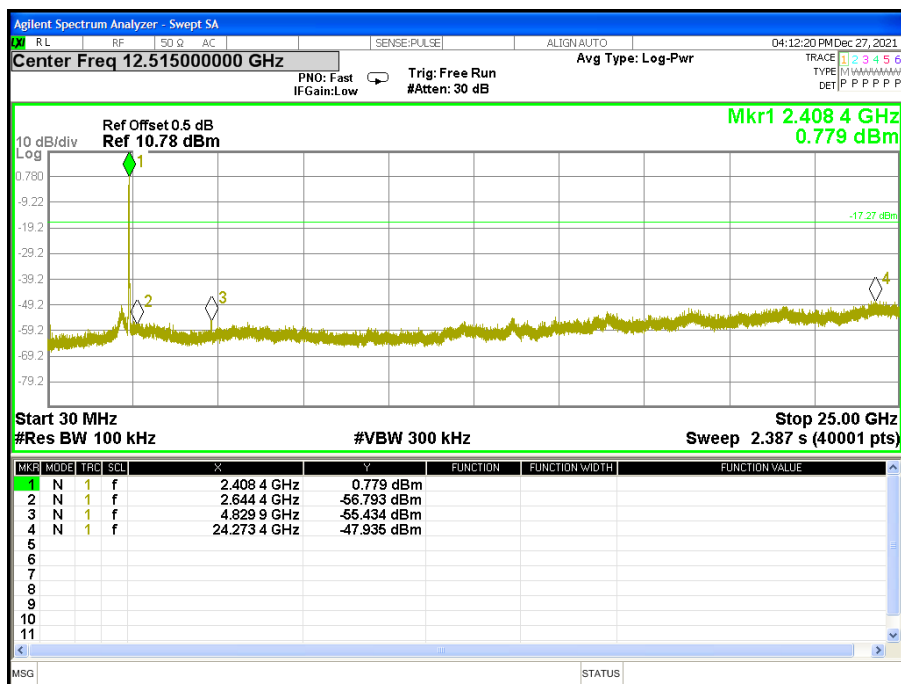


CH 06

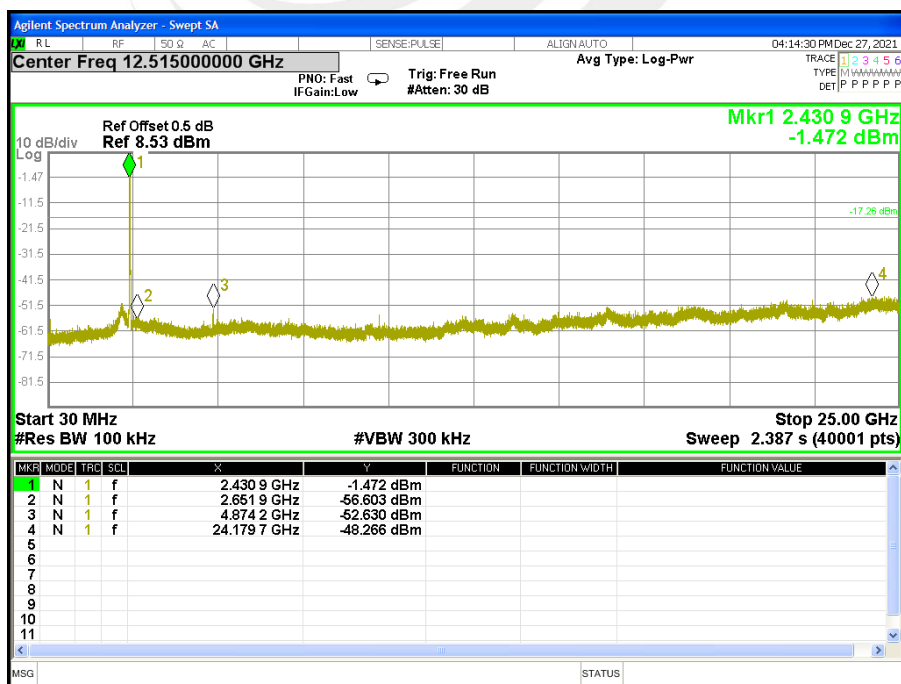




CH 11

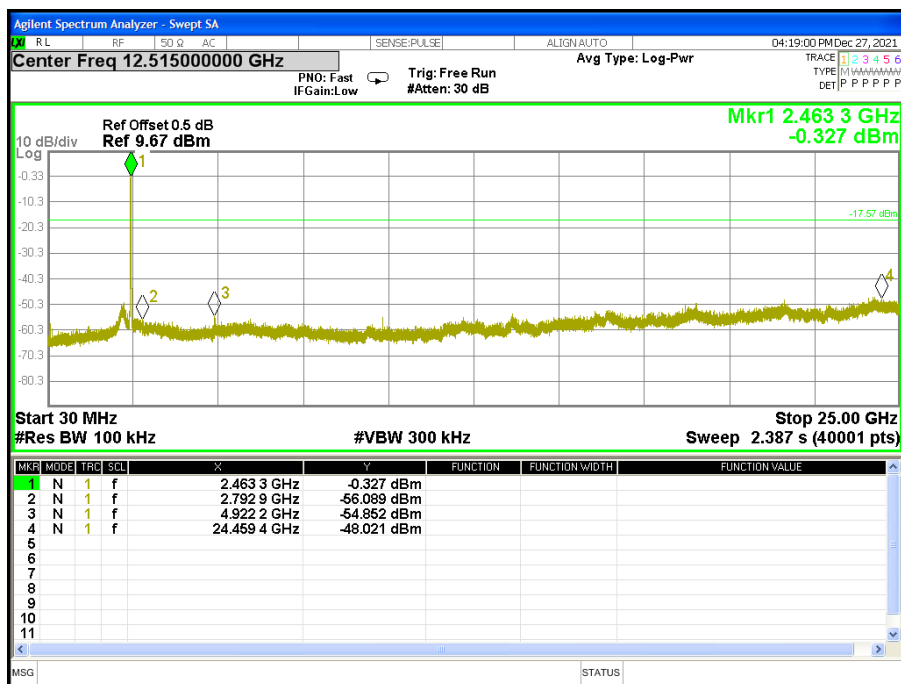




Band edge(it's also the reference level for conducted spurious emission)

CH 01

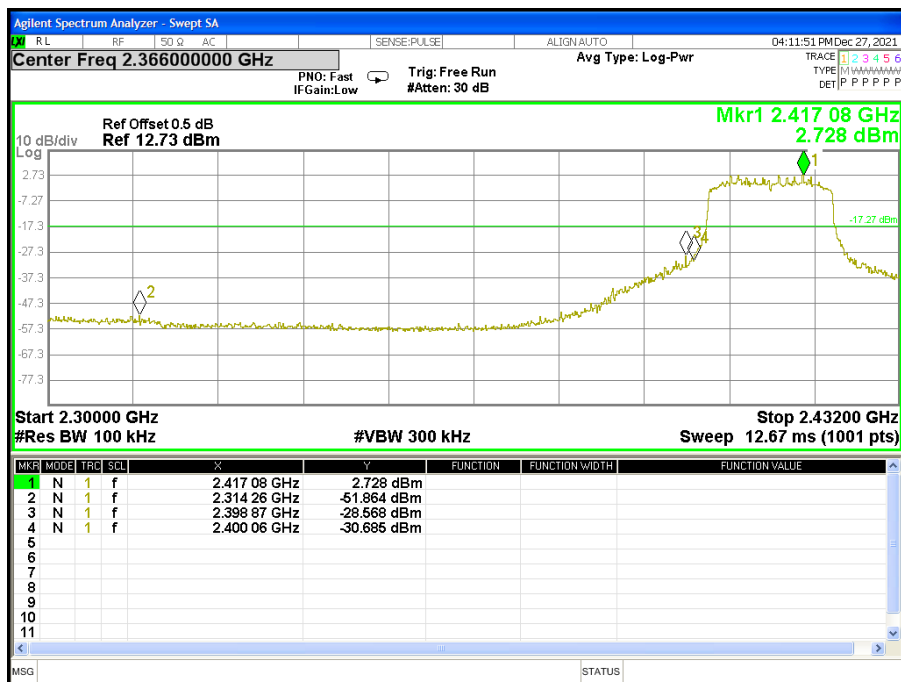


CH 06

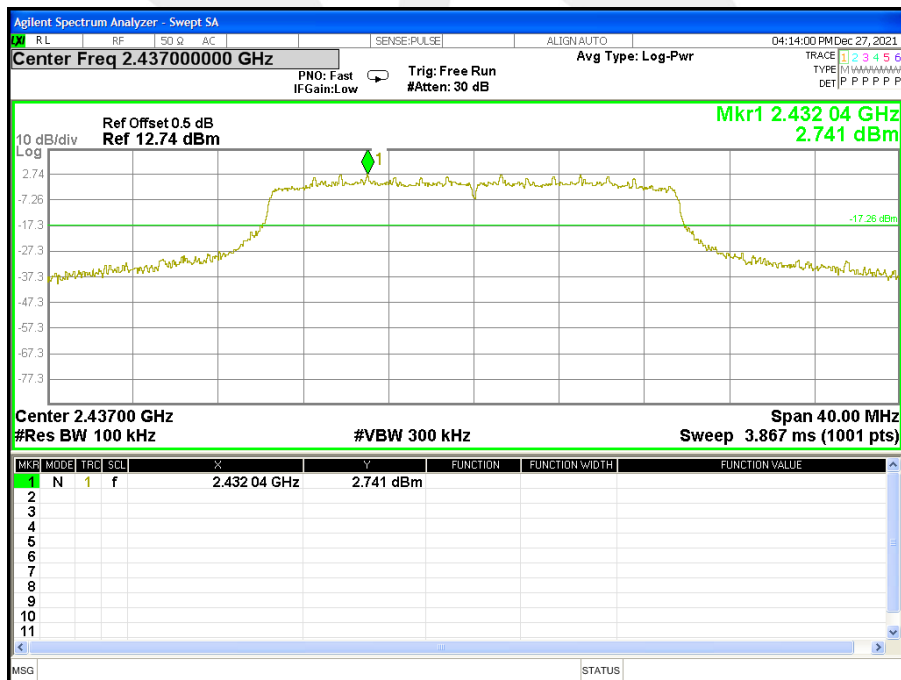




CH 11

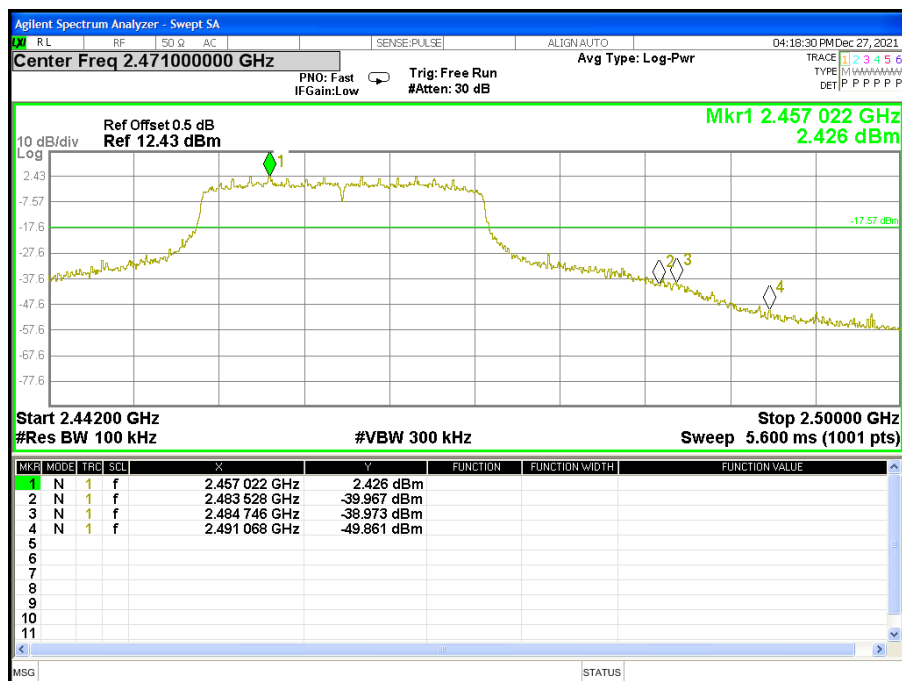




Temperature:	25°C	Relative Humidity:	60%
Test Voltage:	DC 3.3V	Test Mode:	TX ax Mode(40M) /CH03, CH06, CH09

CH 03

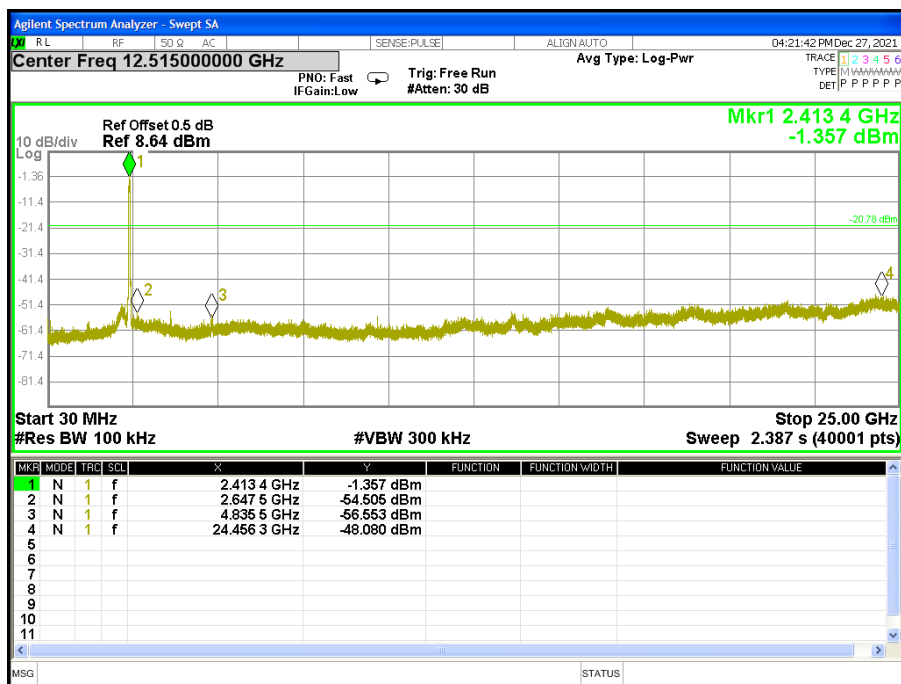




CH06

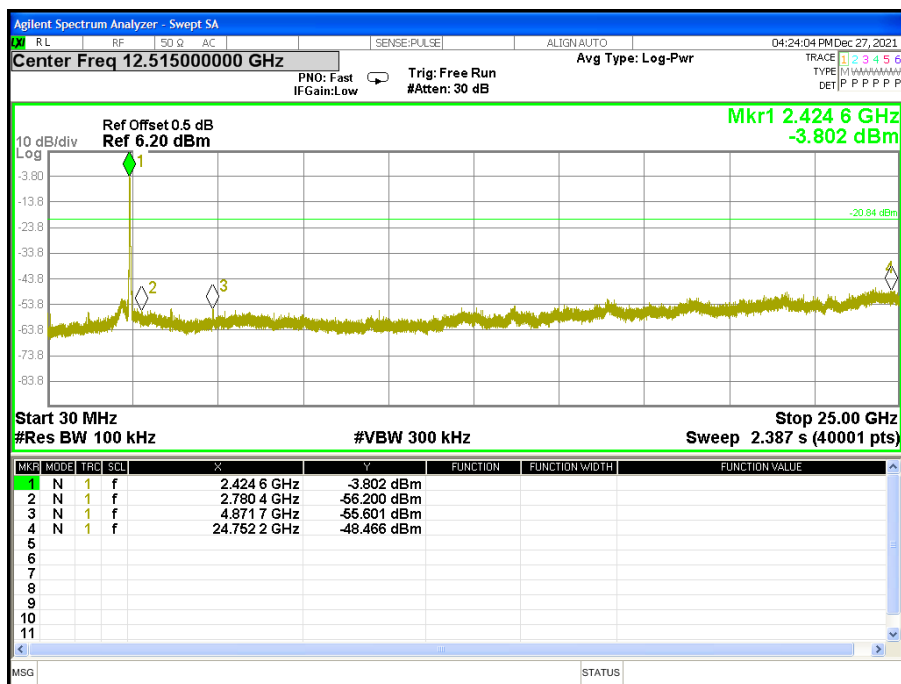


CH09

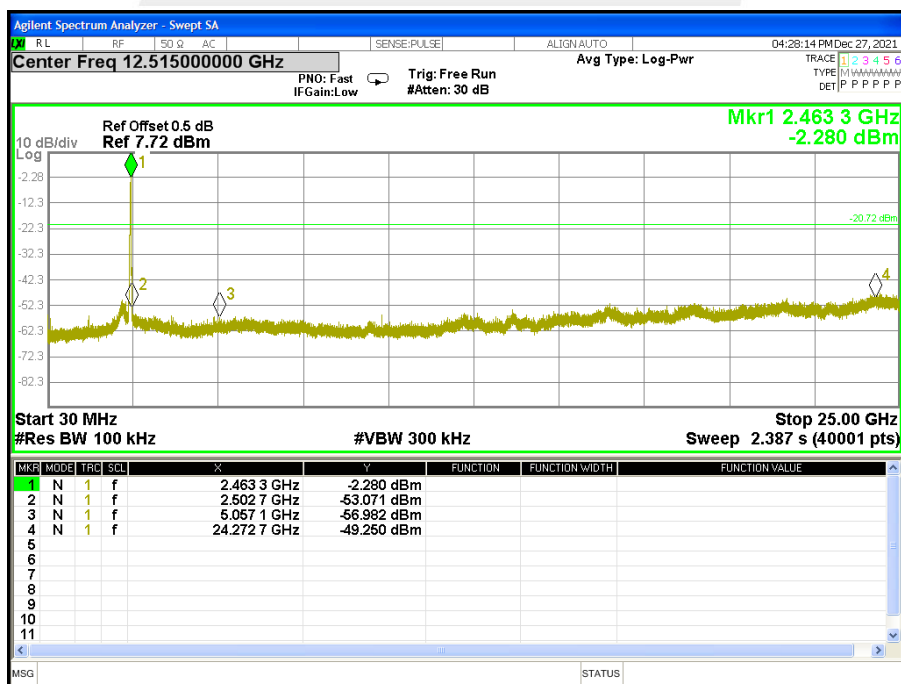




Band edge(it's also the reference level for conducted spurious emission)

CH03

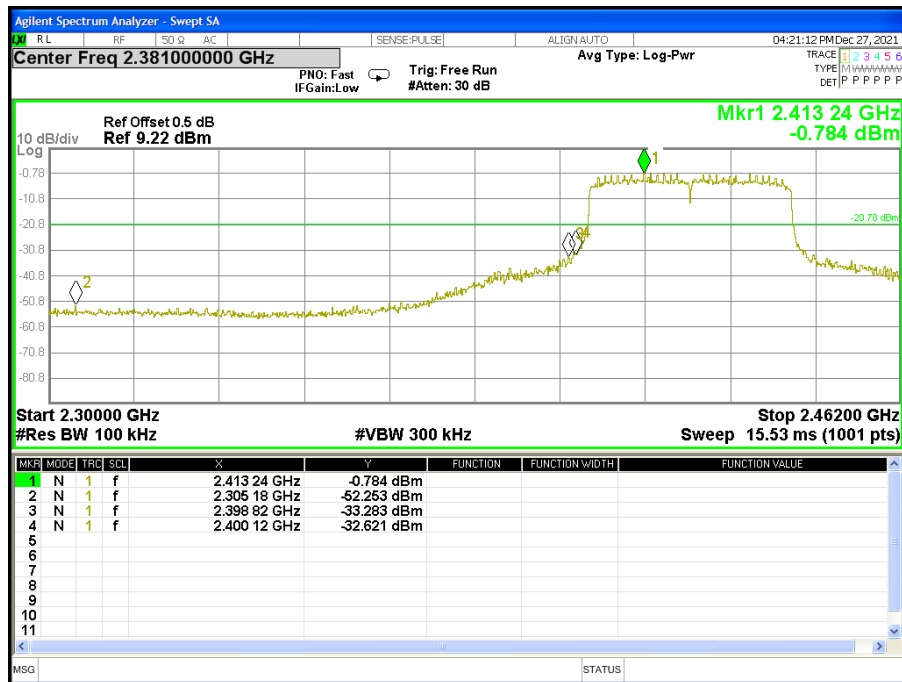


CH 06

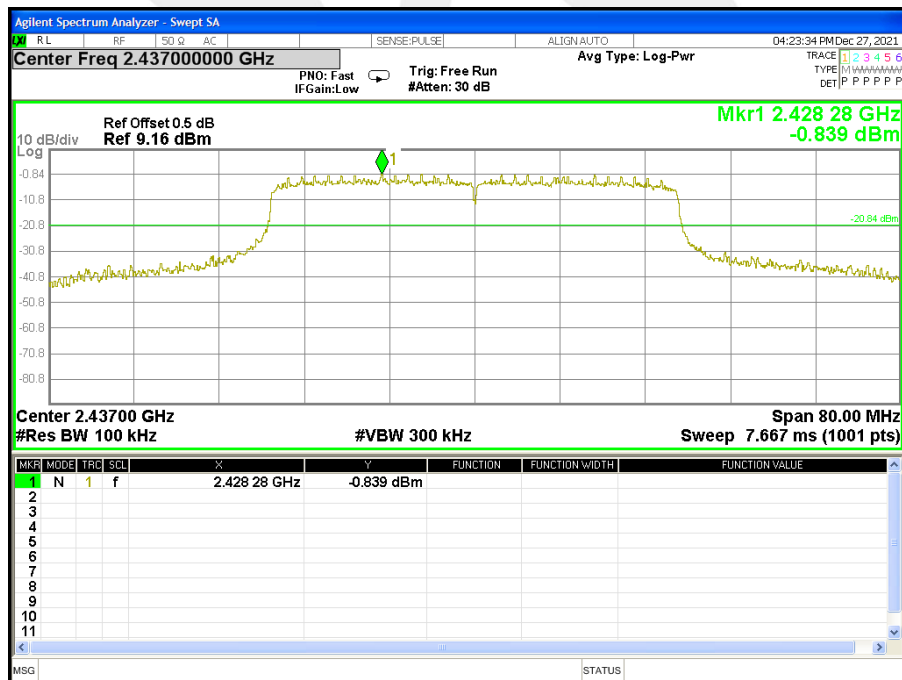



CH 09

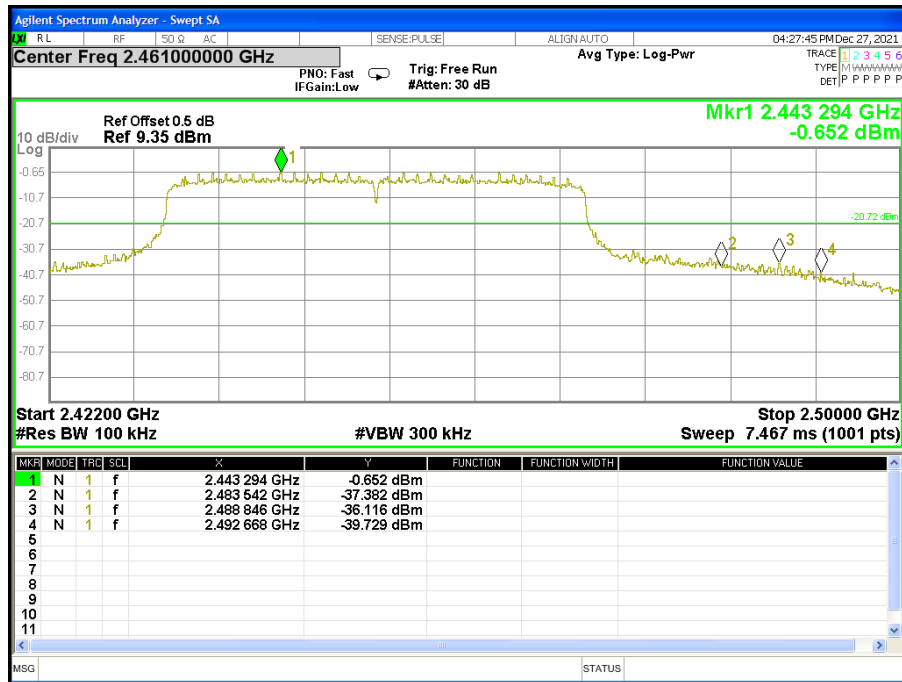



5. POWER SPECTRAL DENSITY TEST

5.1 LIMIT

FCC Part15.247 , Subpart C RSS-247 Issue 2				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(e) RSS-247 Issue 2	Power Spectral Density	≤ 8 dBm (RBW ≥ 3 KHz)	2400-2483.5	PASS

5.2 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the $100 \text{ kHz} \geq \text{RBW} \geq 3 \text{ kHz}$.
4. Set the $\text{VBW} \geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP



5.5 EUT OPERATION CONDITIONS

Please refer to section 3.1.4 of this report.




5.6 TEST RESULTS

Temperature:	25℃	Relative Humidity:	60%
Test Voltage:	DC 3.3V	Test Mode:	TX b/g/n/ax20/n/ax40 Mode


Modulation	Frequency (MHz)	Power Density (dBm/3kHz)	Limit (dBm/3KHz)	Result
802.11b	2412	-5.189	8	Pass
	2437	-5.402	8	Pass
	2462	-5.155	8	Pass
802.11g	2412	-11.562	8	Pass
	2437	-11.871	8	Pass
	2462	-11.507	8	Pass
802.11n(HT20)	2412	-11.385	8	Pass
	2437	-12.023	8	Pass
	2462	-12.487	8	Pass
802.11n(HT40)	2422	-15.761	8	Pass
	2437	-15.137	8	Pass
	2452	-15.235	8	Pass
802.11ax(HE20)	2412	-12.445	8	Pass
	2437	-13.401	8	Pass
	2462	-12.268	8	Pass
802.11ax(HE40)	2422	-16.881	8	Pass
	2437	-15.698	8	Pass
	2452	-14.956	8	Pass



802.11b TX CH01

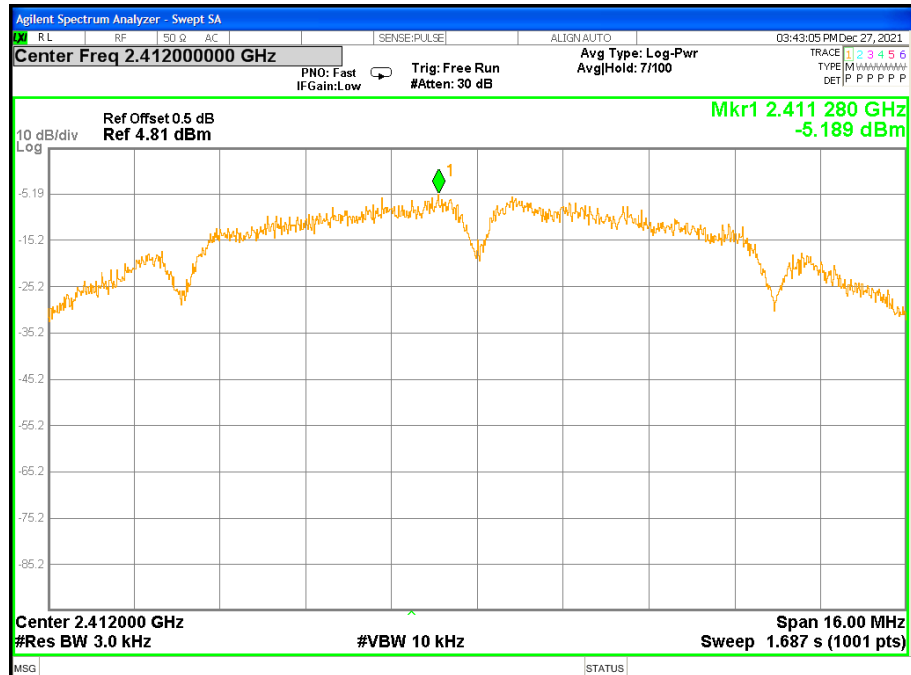


802.11b TX CH06

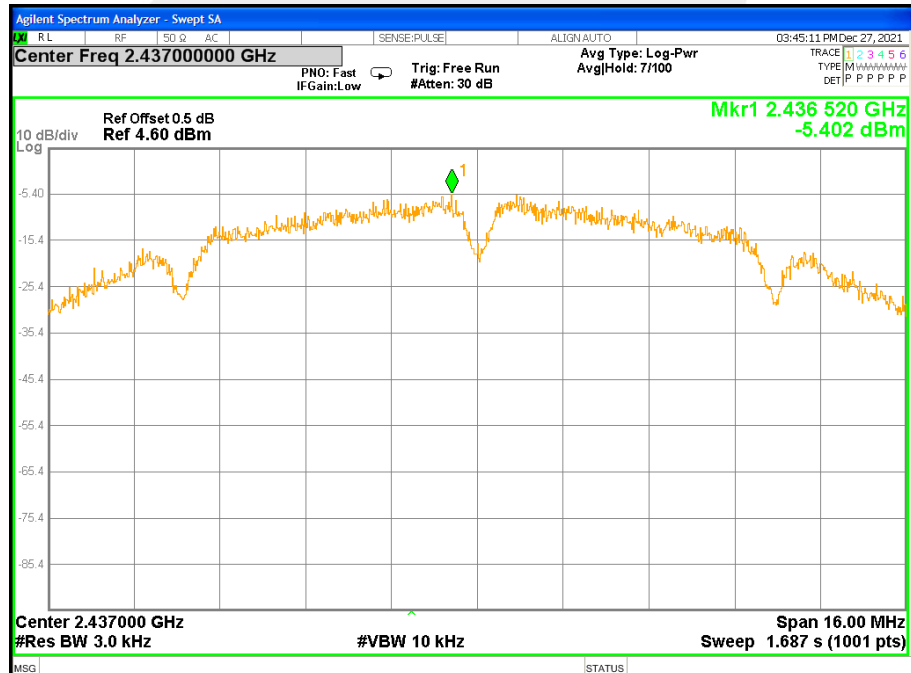




802.11b TX CH11

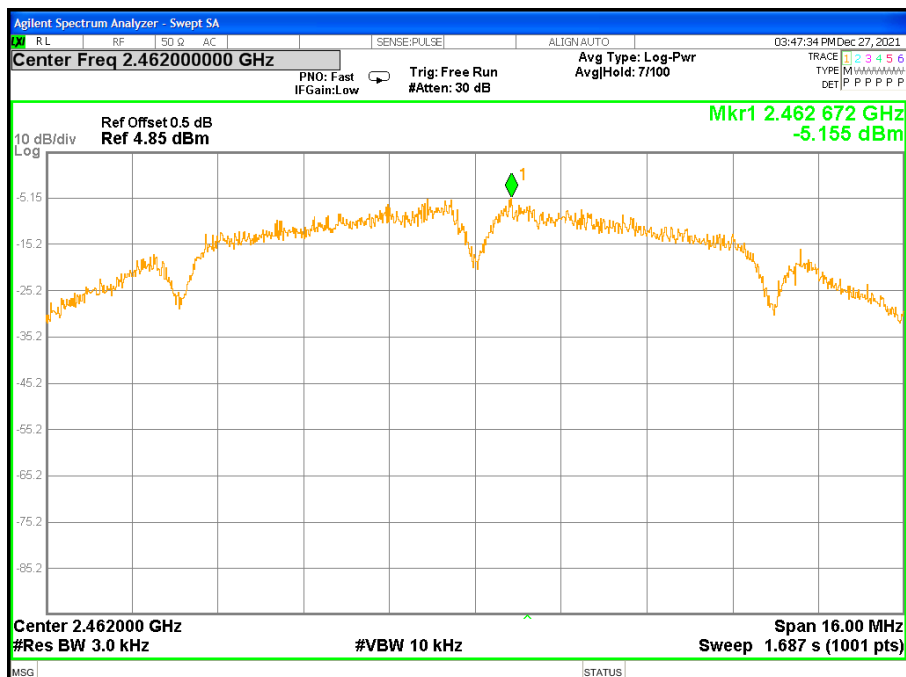


802.11g TX CH01

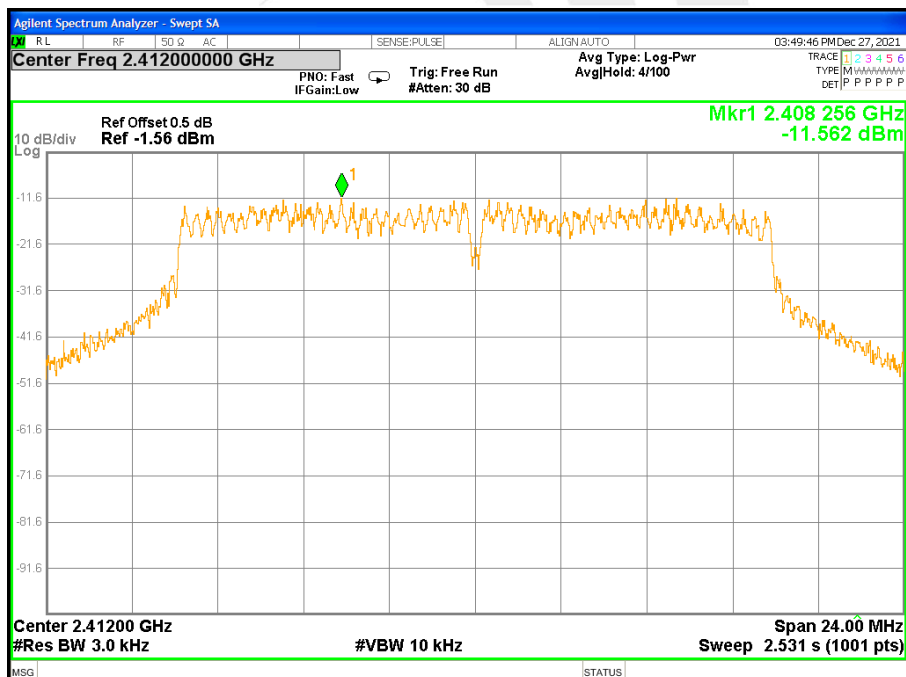




802.11g TX CH06

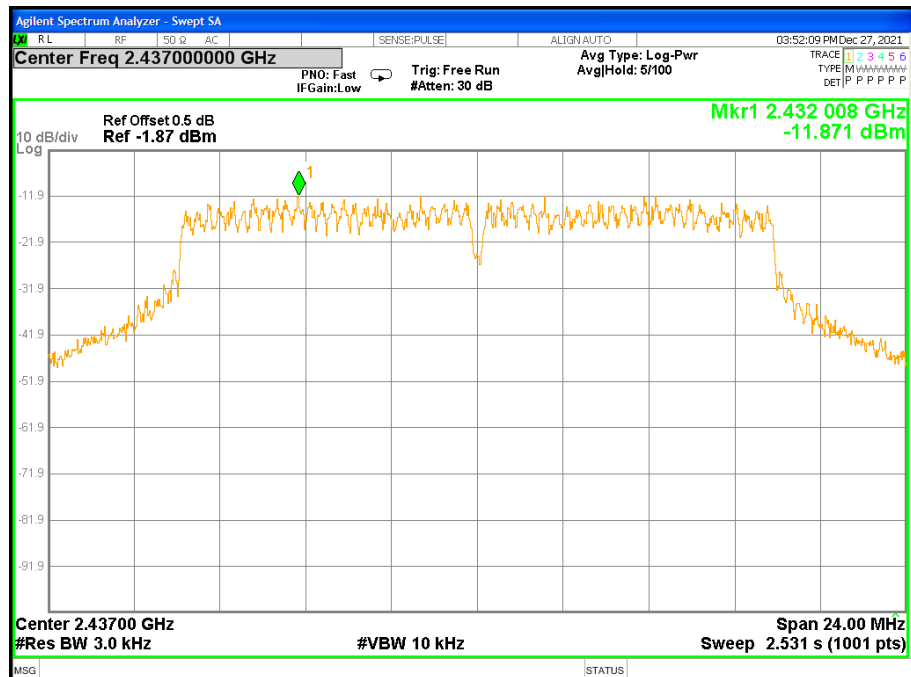


802.11g TX CH11

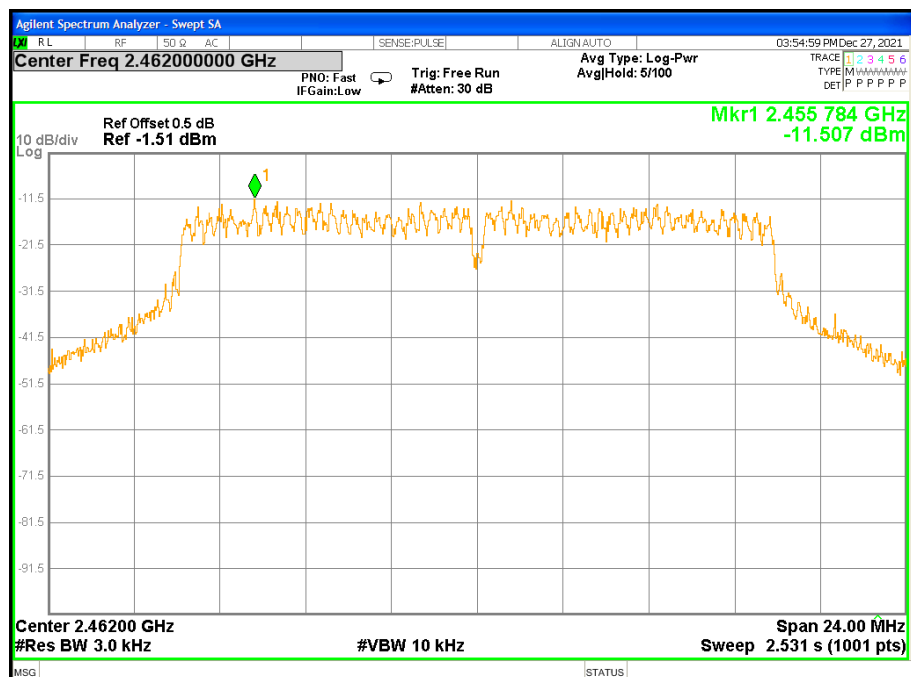




802.11n(HT20) TX CH01

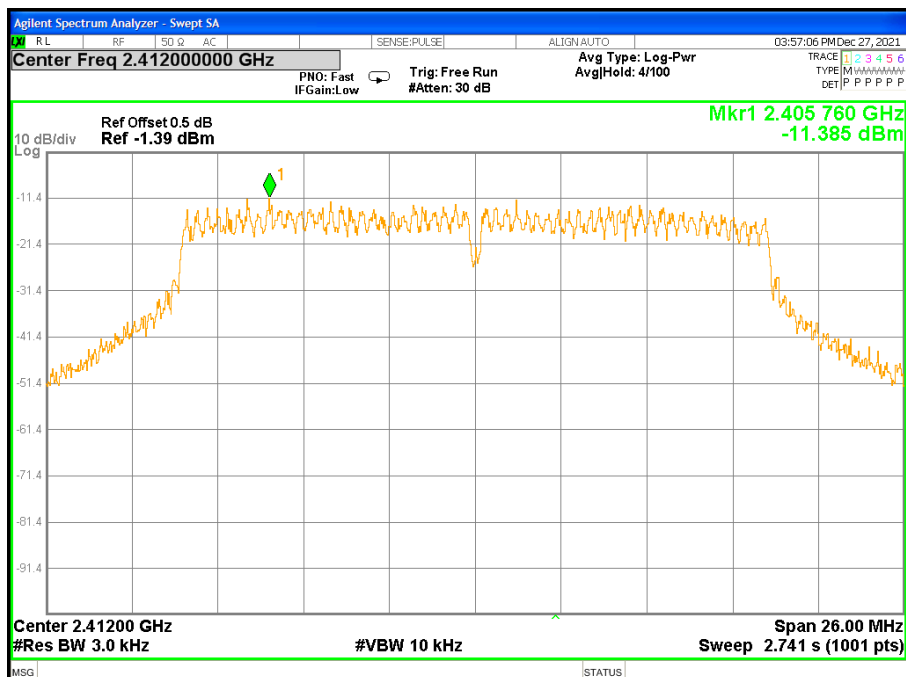


802.11n(HT20) TX CH06

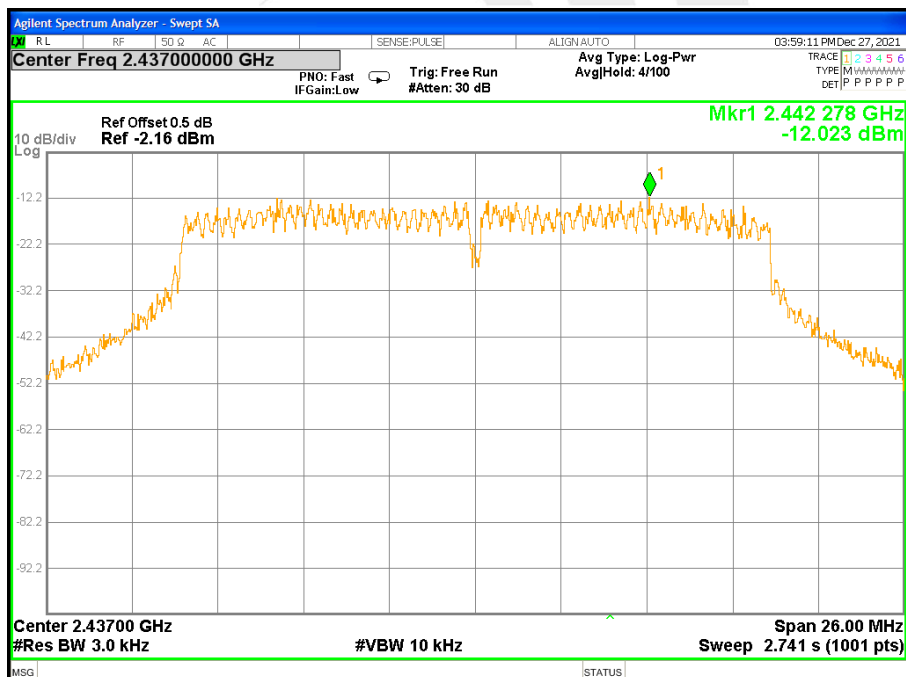




802.11n(HT20) TX CH11

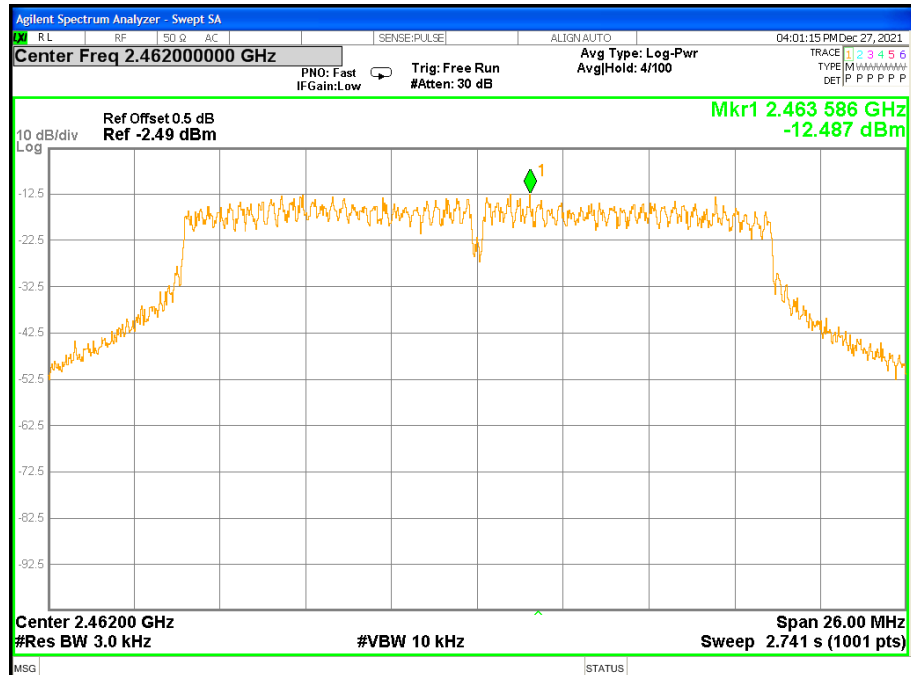


802.11n(HT40) TX CH03

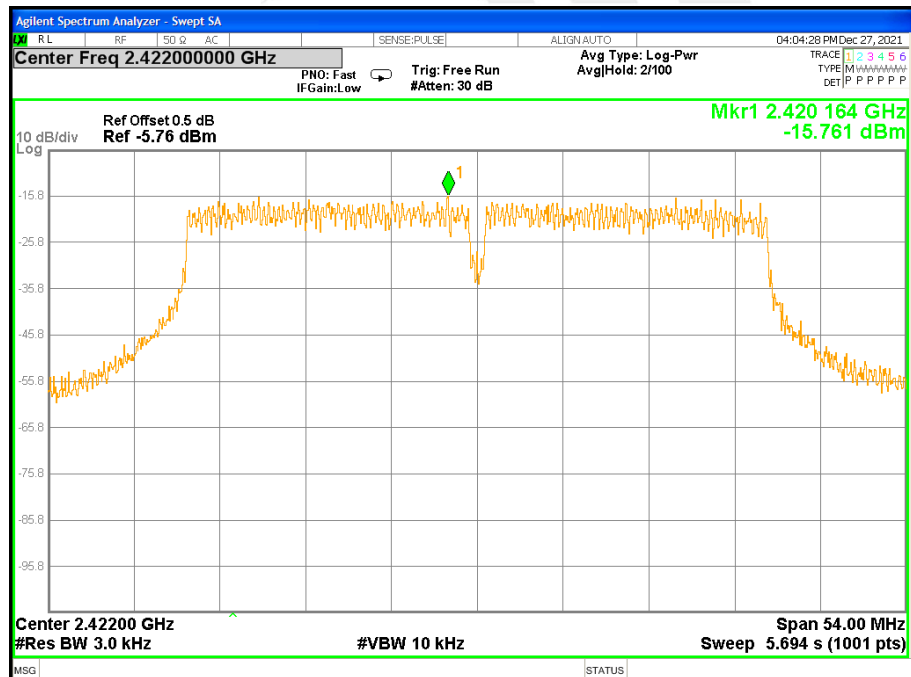




802.11n(HT40) TX CH06

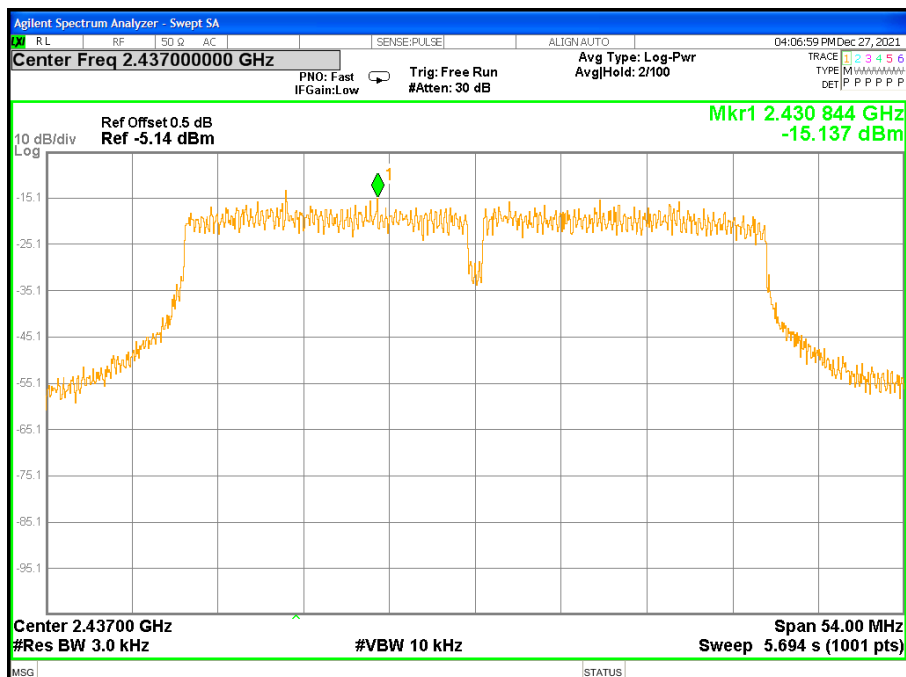


802.11n(HT40) TX CH09

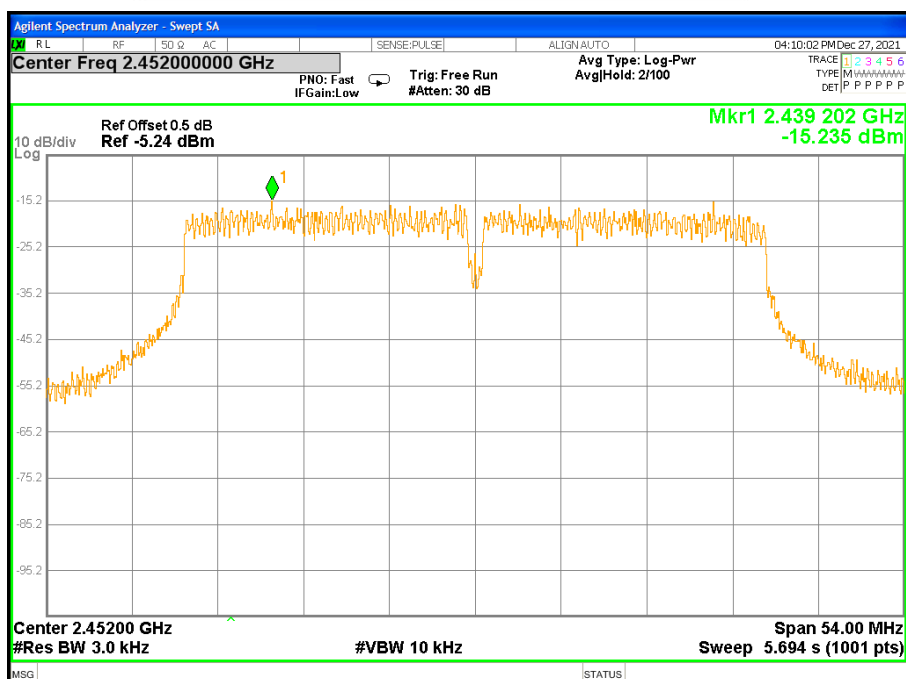




802.11ax(HE20) TX CH01

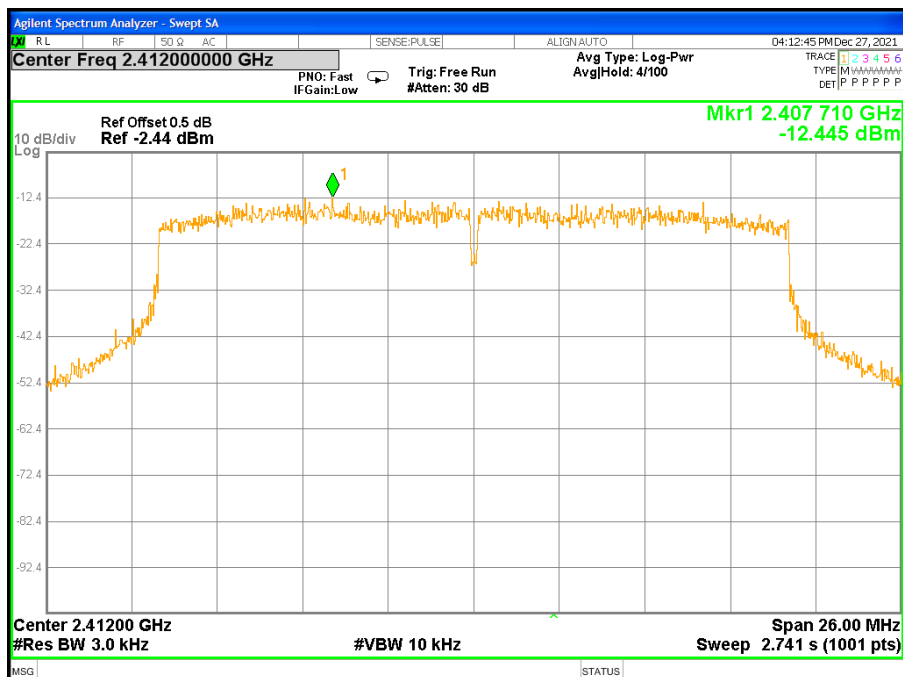


802.11ax(HE20) TX CH06

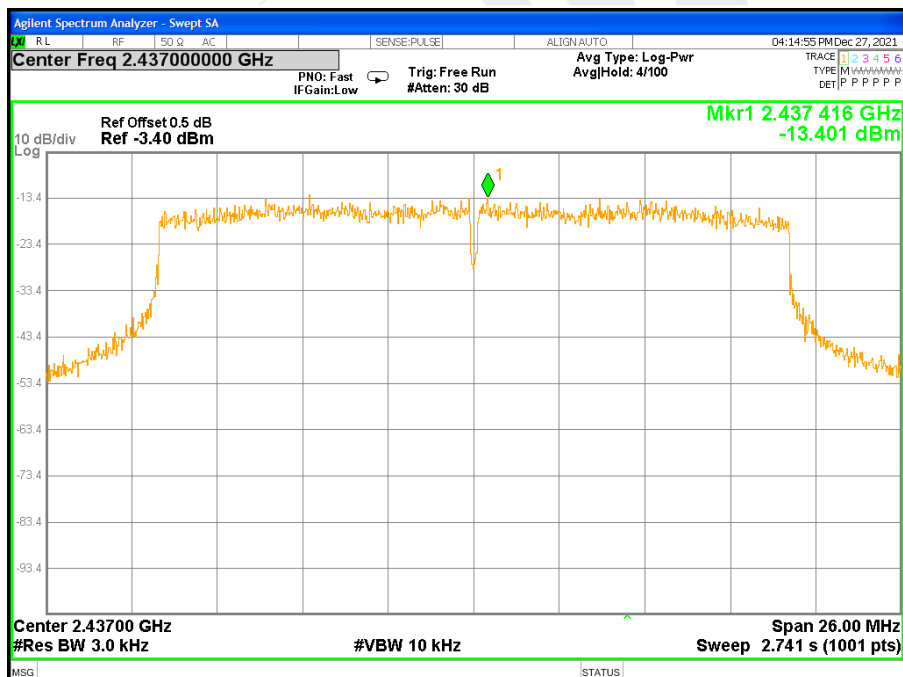




802.11ax(HE20) TX CH11

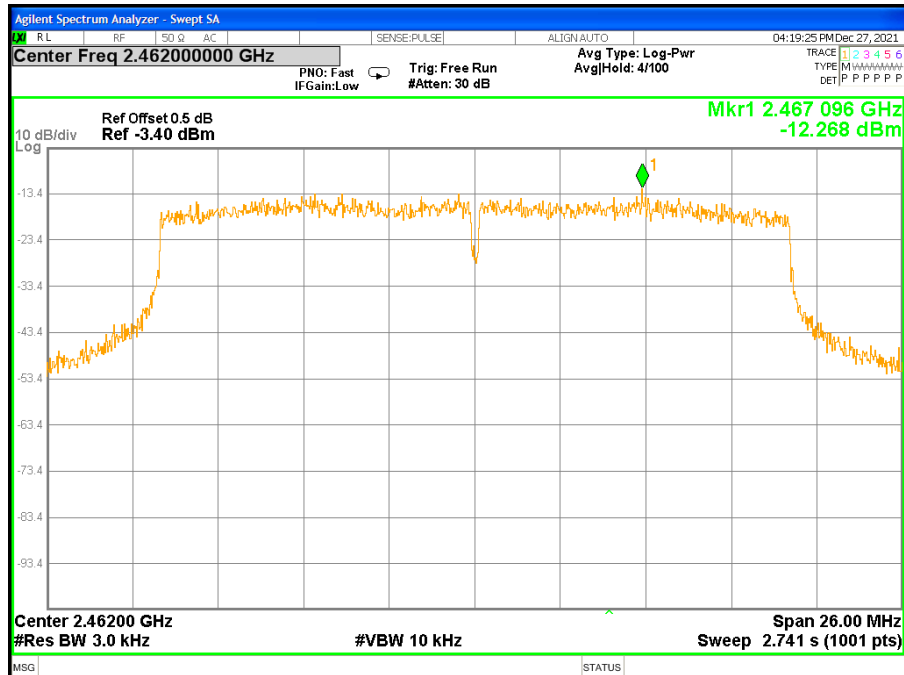


802.11ax(HE40) TX CH03

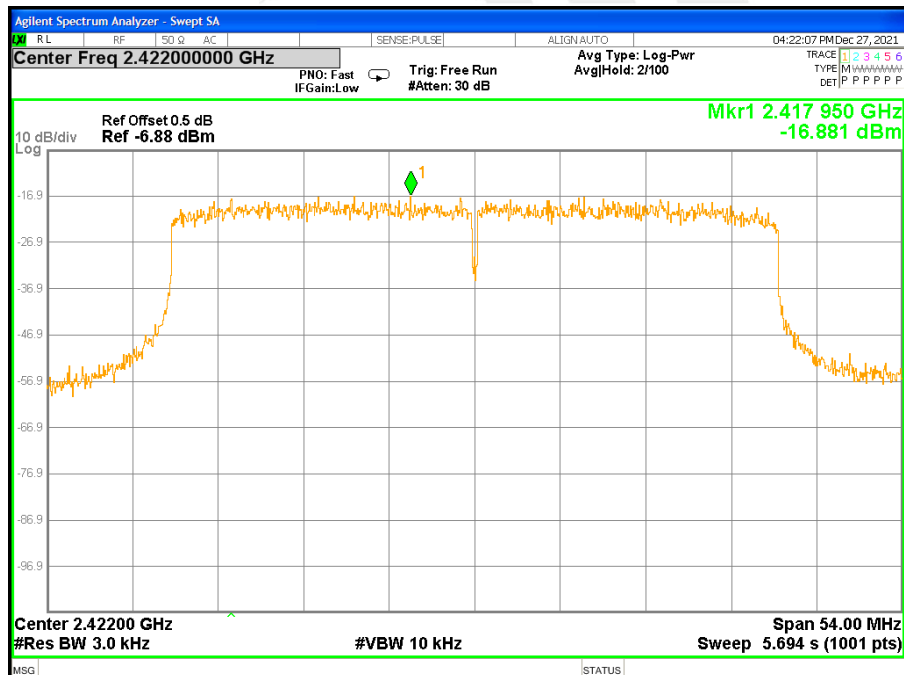




802.11ax(HE40) TX CH06

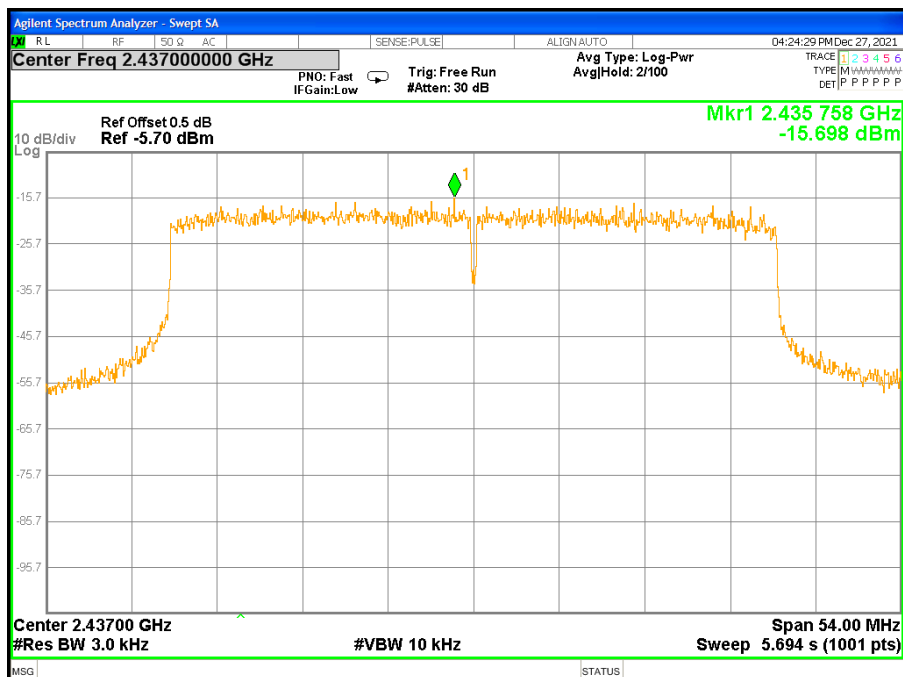

802.11ax(HE40) TX CH09

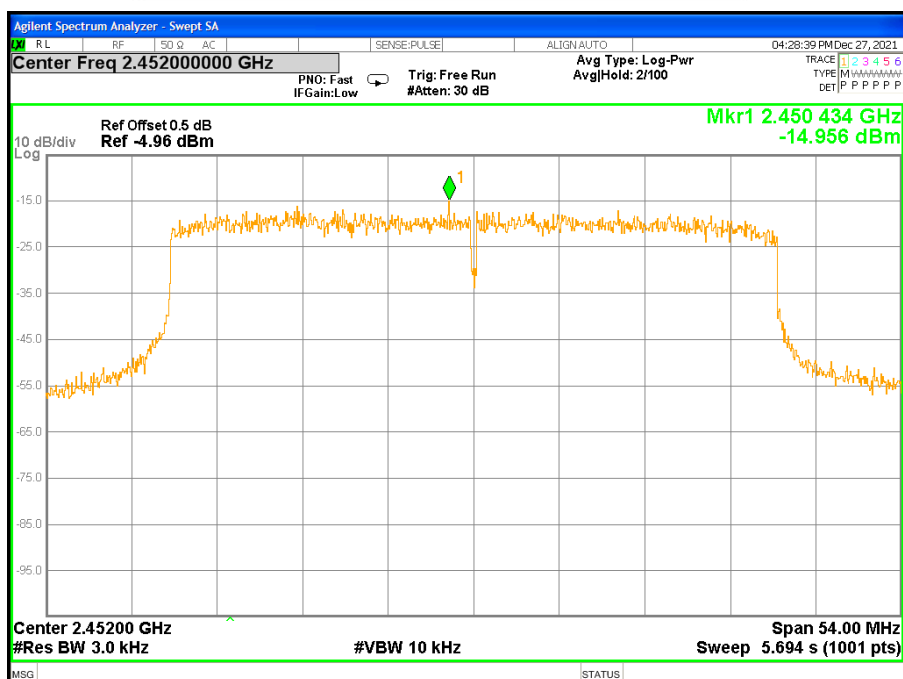



6. BANDWIDTH TEST

6.1 LIMIT

FCC Part15.247,Subpart C RSS-Gen Clause 6.7				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2) RSS-247 5.2 (a)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS
RSS-Gen Clause 6.7	99% Bandwidth	For reporting purposes only.	2400-2483.5	PASS

6.2 TEST PROCEDURE

Connect the UUT to the spectrum analyser and use the following settings:

Center Frequency	The centre frequency of the channel under test
Detector	Peak
RBW	For 6 dB Bandwidth :100KHz For 99% Bandwidth :1% to 5% of the occupied bandwidth
VBW	For 6dB Bandwidth : $\geq 3 \times \text{RBW}$ For 99% Bandwidth : approximately $3 \times \text{RBW}$
Trace	Max hold
Sweep	Auto

Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB and 99% relative to the maximum level measured in the fundamental emission.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP



6.5 EUT OPERATION CONDITIONS

Please refer to section 3.1.4 of this report.




6.6 TEST RESULTS

Temperature:	25°C	Relative Humidity:	60%
Test Voltage:	DC 3.3V	Test Mode:	TX b Mode /CH01, CH06, CH11

Remark: PEAK DETECTOR IS USED


Frequency	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Limit (KHz)	Result
2412 MHz	8.045	12.983	≥500KHz	PASS
2437 MHz	9.011	13.088	≥500KHz	PASS
2462 MHz	8.534	13.090	≥500KHz	PASS

6dB Bandwidth TX CH 01

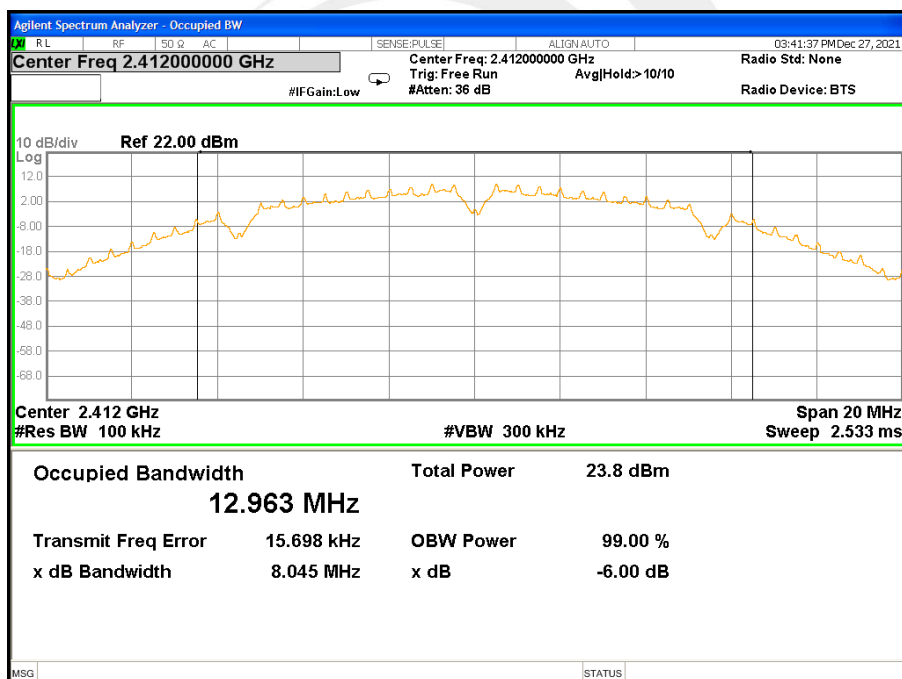




6dB Bandwidth TX CH 06

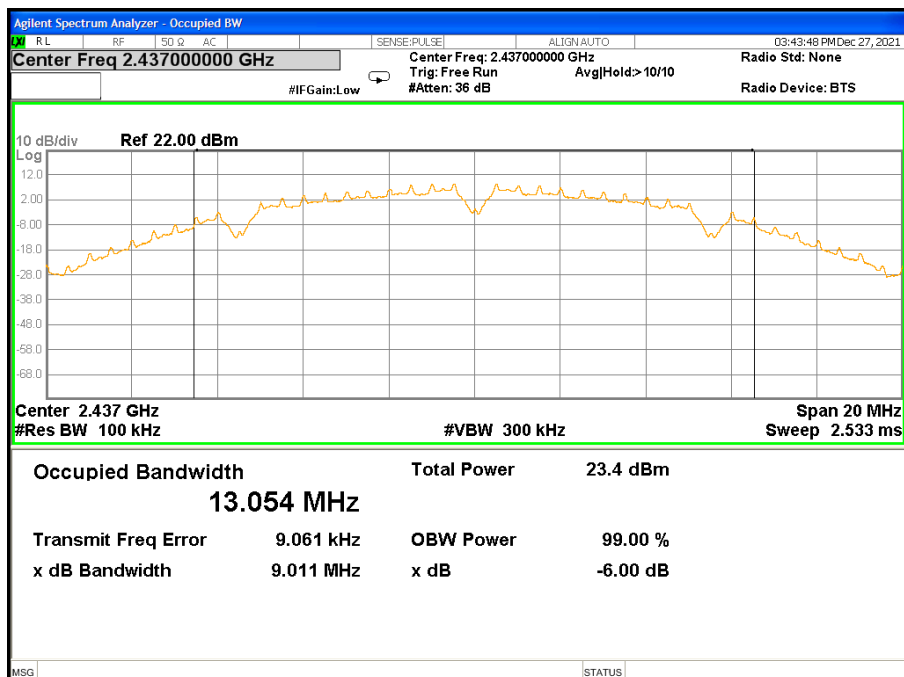


6dB Bandwidth TX CH 11

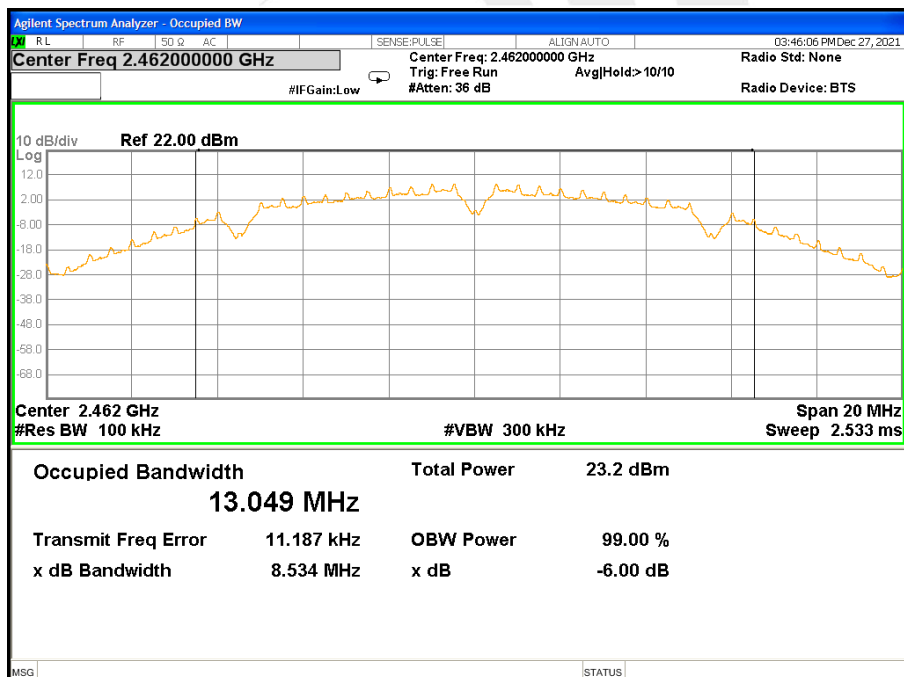




99% Bandwidth TX CH 01

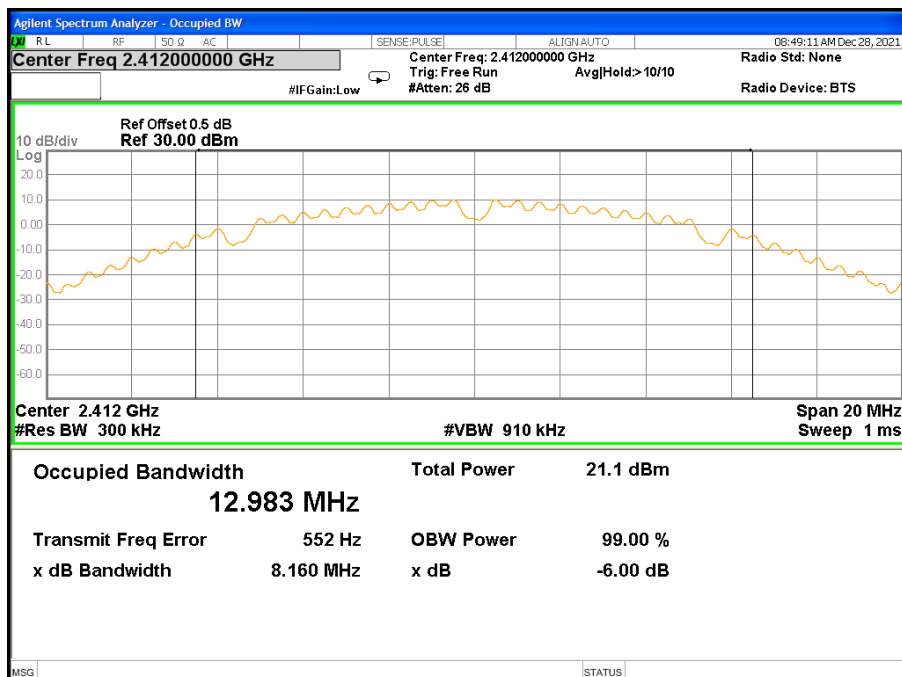


99% Bandwidth TX CH 06

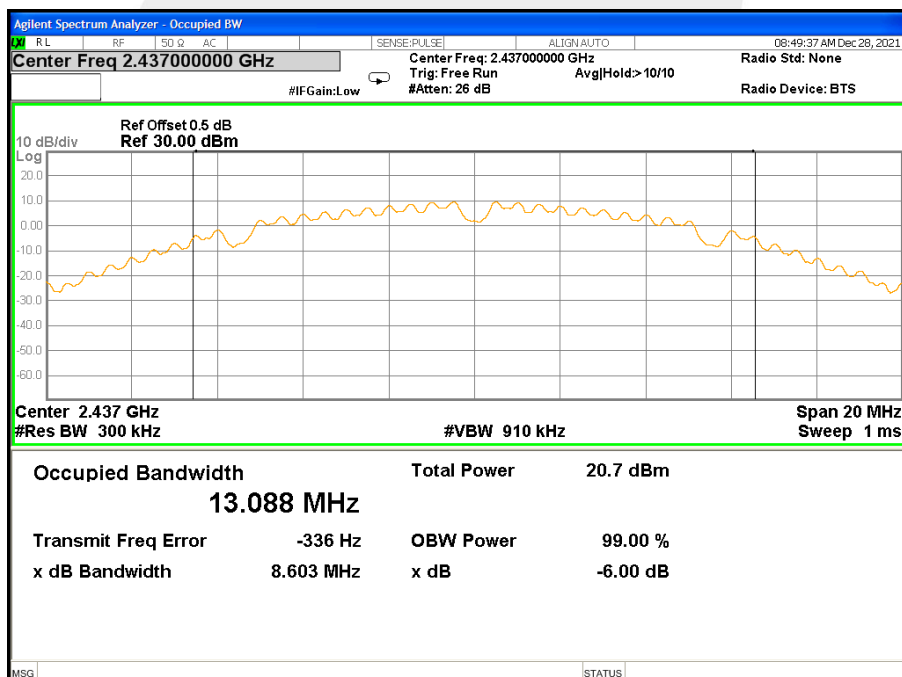



99% Bandwidth TX CH 11

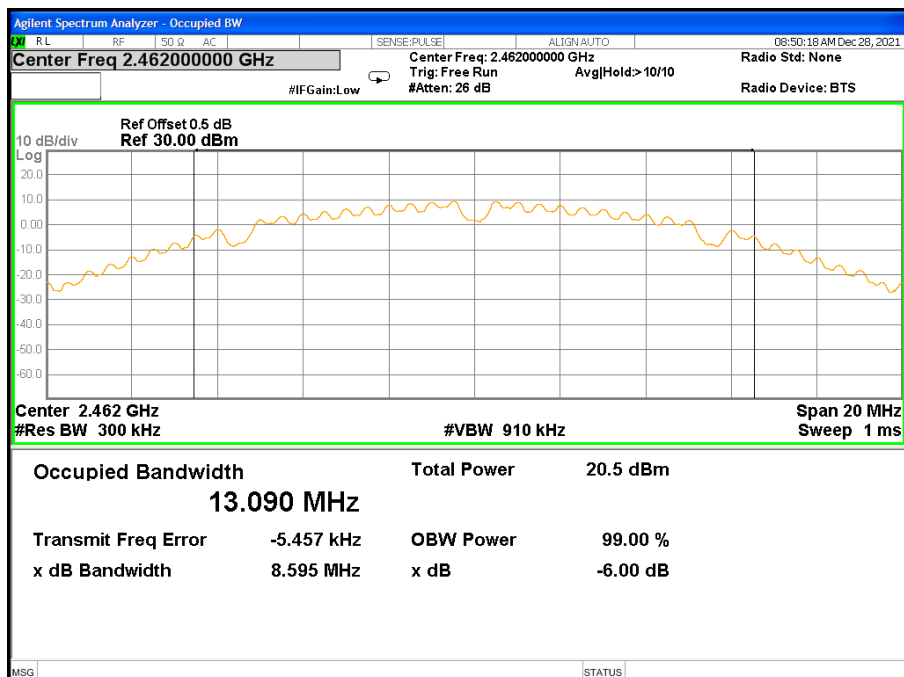




Temperature:	25°C	Relative Humidity:	60%
Test Voltage:	DC 3.3V	Test Mode:	TX g Mode /CH01, CH06, CH11


Frequency	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Limit (KHz)	Result
2412 MHz	16.29	16.709	≥500KHz	PASS
2437 MHz	16.28	16.721	≥500KHz	PASS
2462 MHz	16.29	16.721	≥500KHz	PASS

6dB Bandwidth TX CH 01

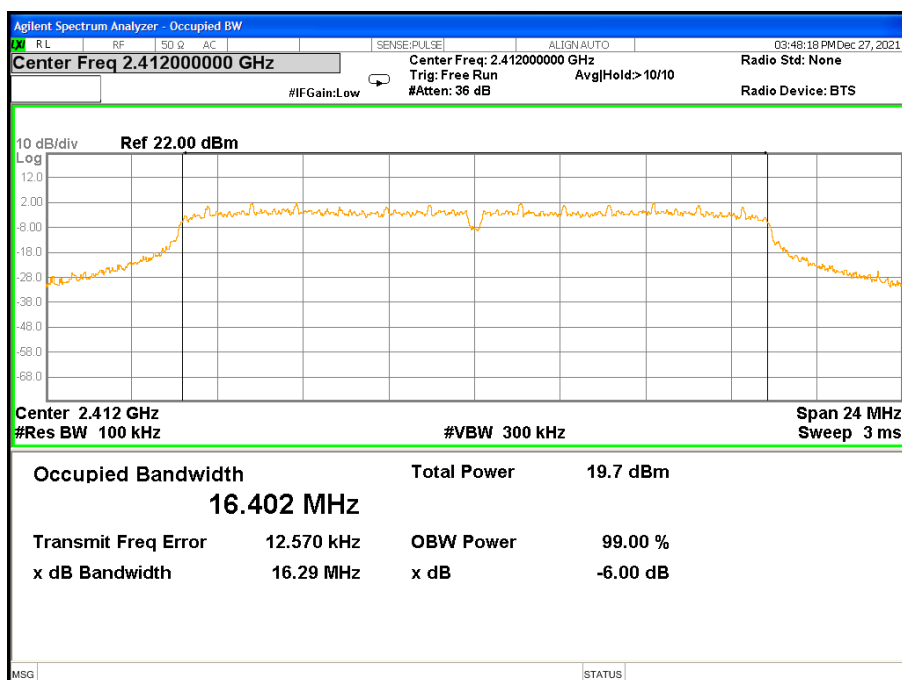




6dB Bandwidth TX CH 06

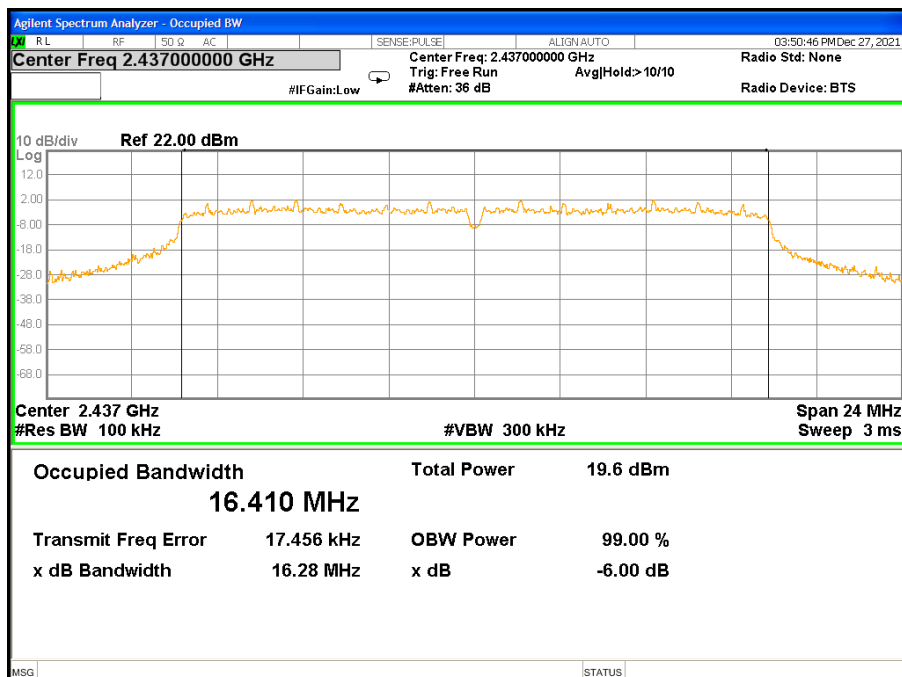


6dB Bandwidth TX CH 11

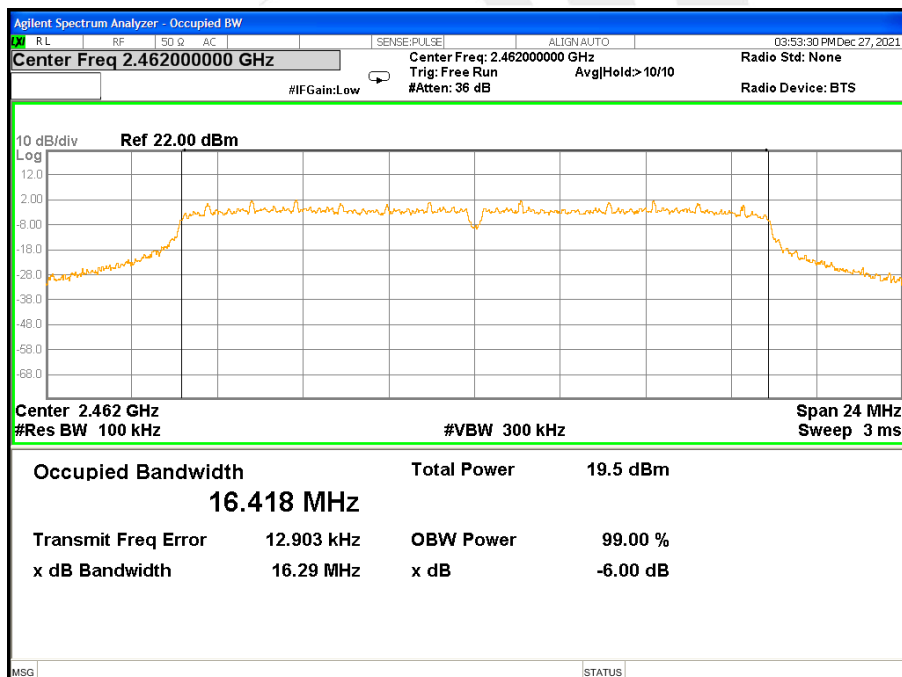




99% Bandwidth TX CH 01

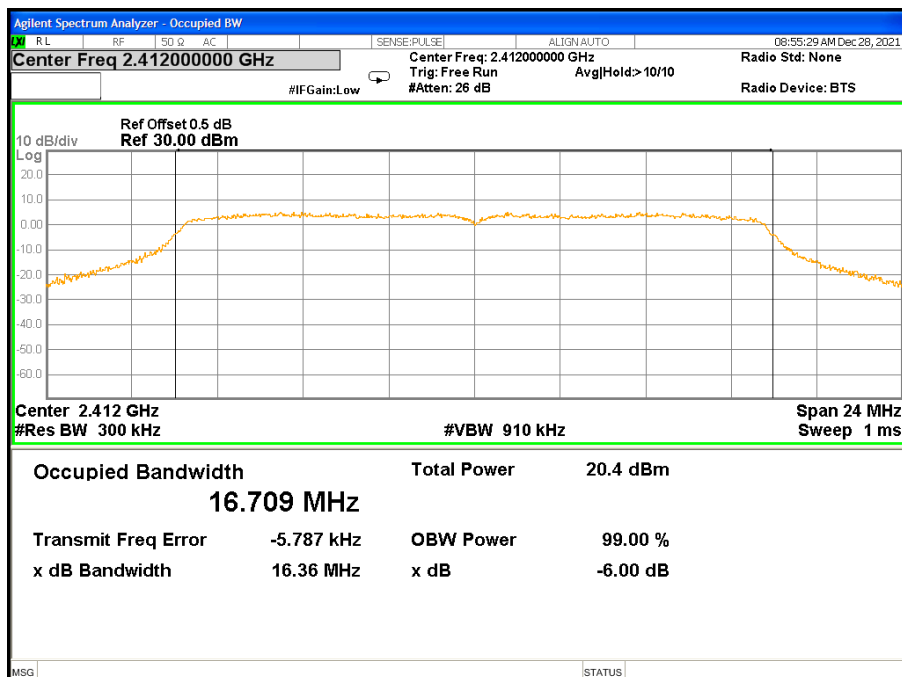


99% Bandwidth TX CH 06

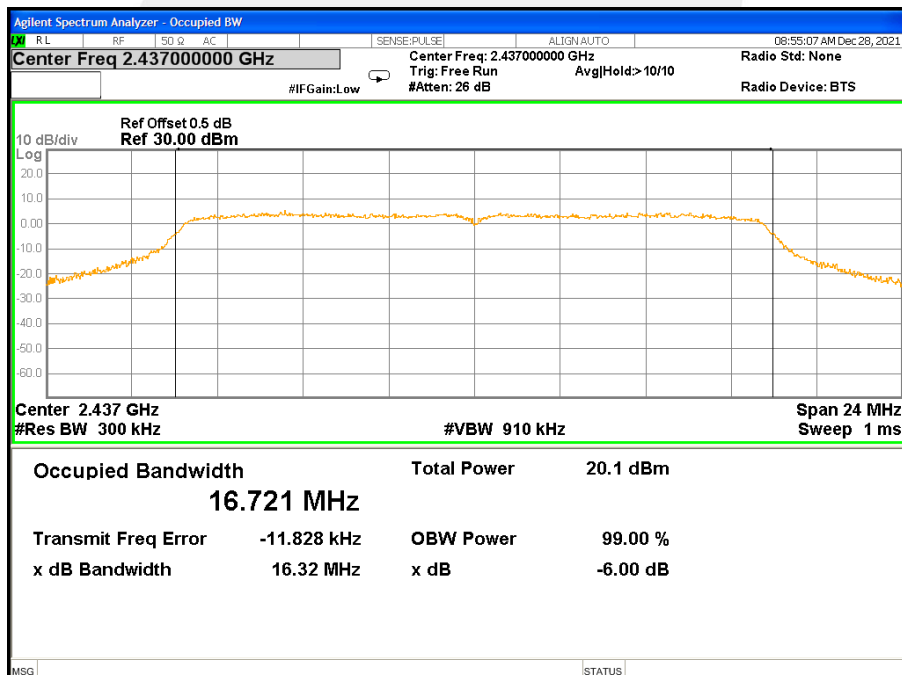



99% Bandwidth TX CH 11

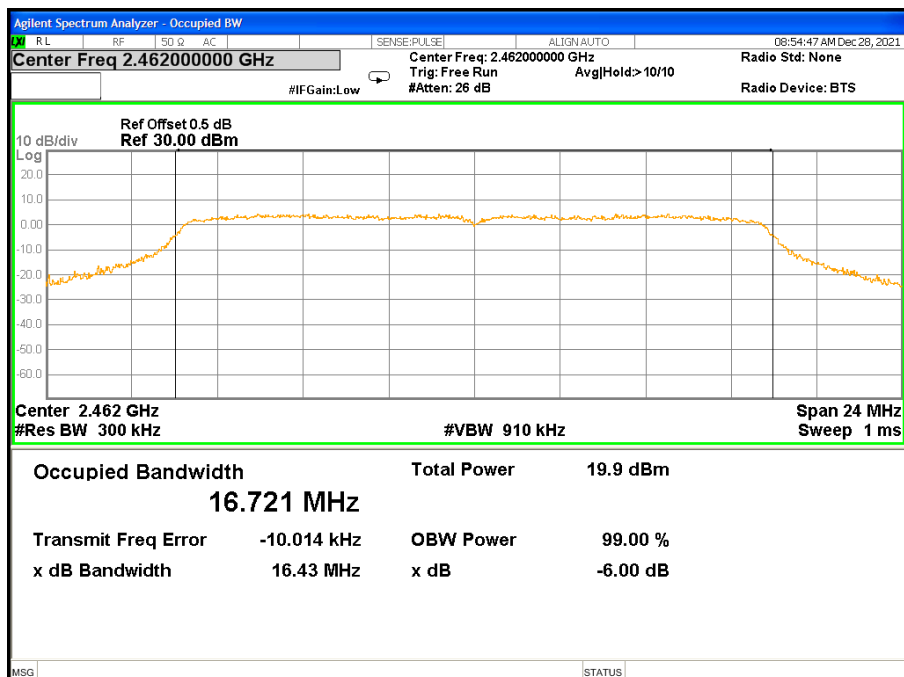




Temperature:	25°C	Relative Humidity:	60%
Test Voltage:	DC 3.3V	Test Mode:	TX n Mode(20M) /CH01, CH06, CH11


Frequency	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Limit (KHz)	Result
2412 MHz	17.26	17.878	≥500KHz	PASS
2437 MHz	17.28	17.848	≥500KHz	PASS
2462 MHz	16.89	17.871	≥500KHz	PASS

6dB Bandwidth TX CH 01

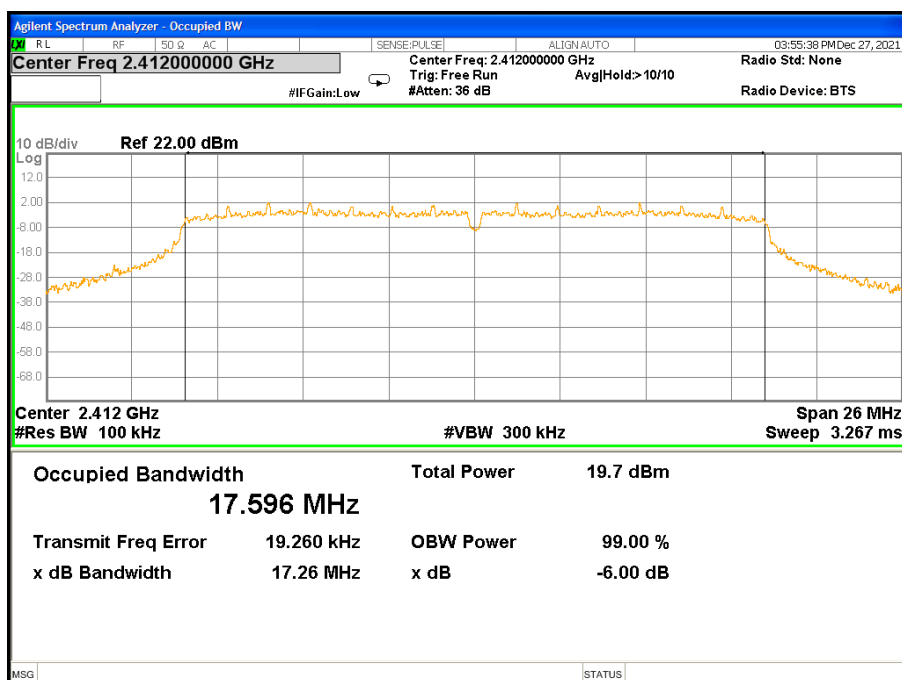




6dB Bandwidth TX CH 06

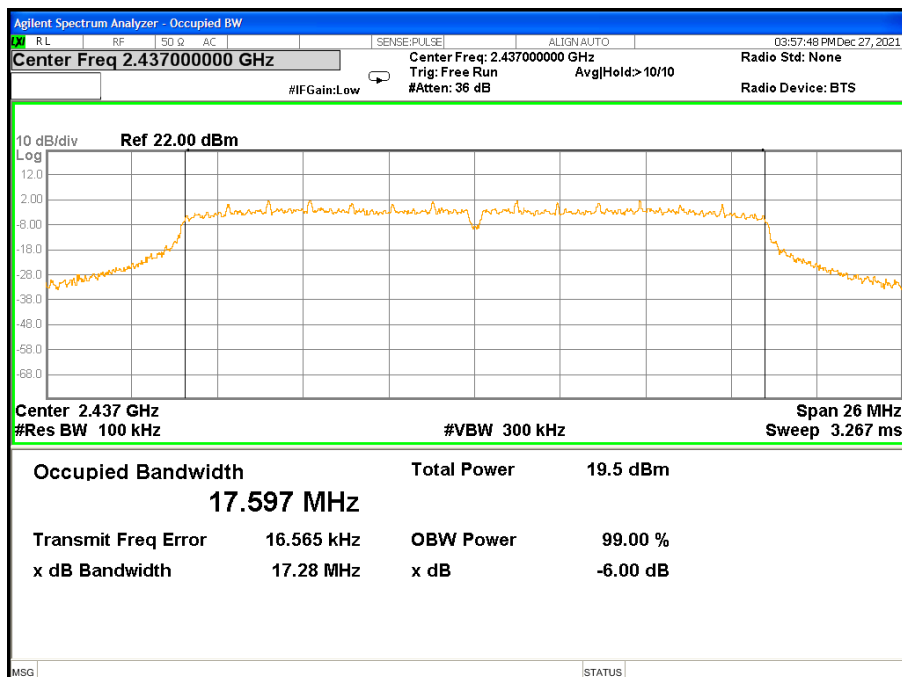


6dB Bandwidth TX CH 11

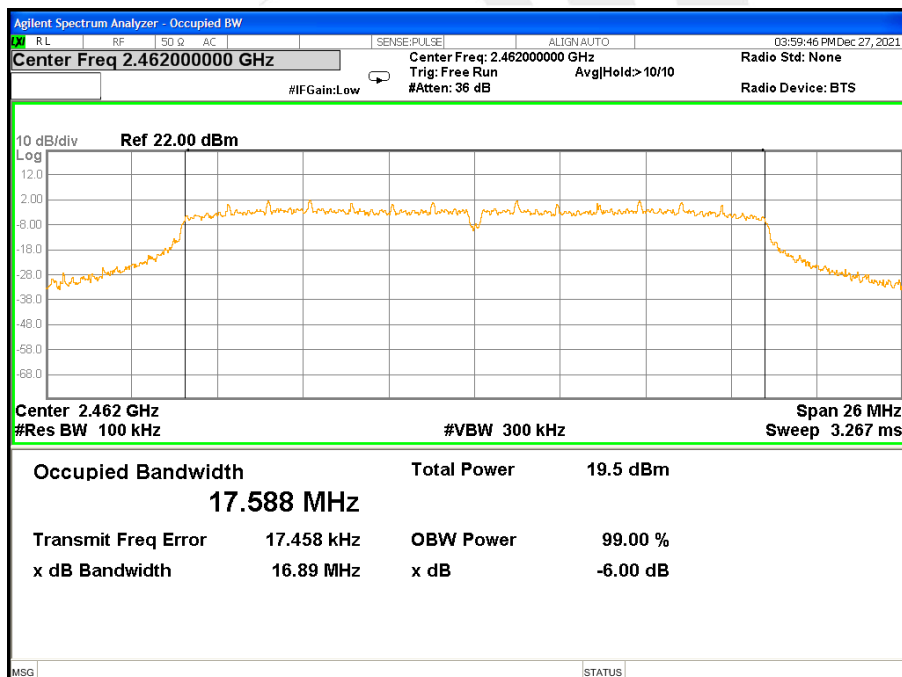




99% Bandwidth TX CH 01

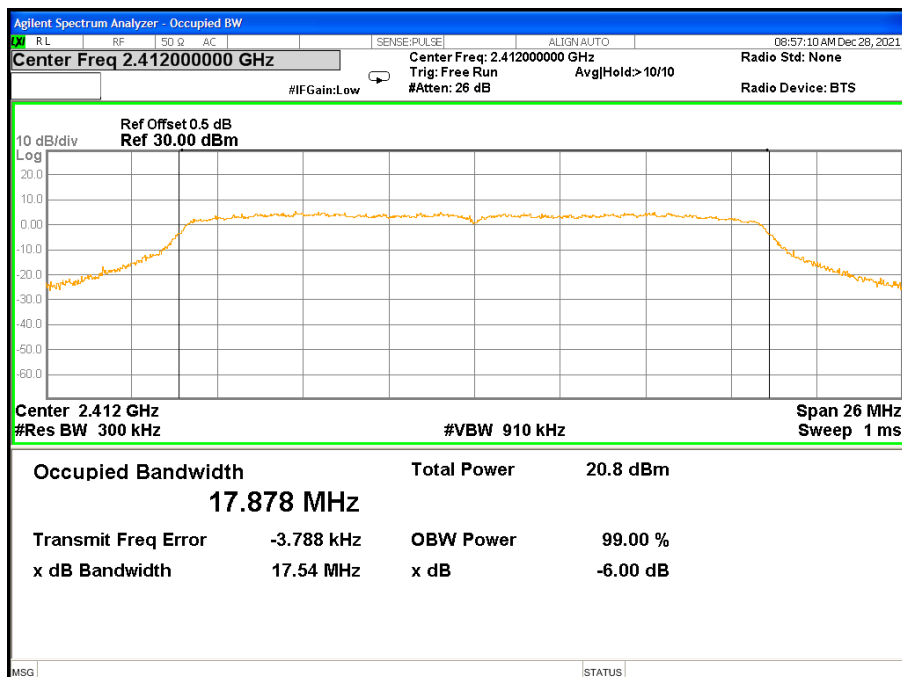


99% Bandwidth TX CH 06

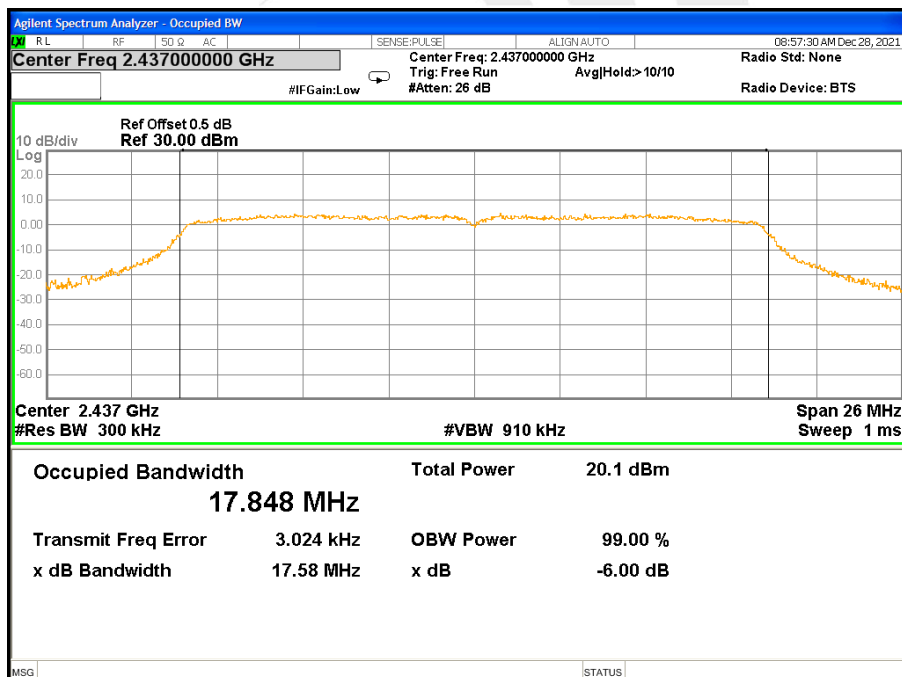



99% Bandwidth TX CH 11

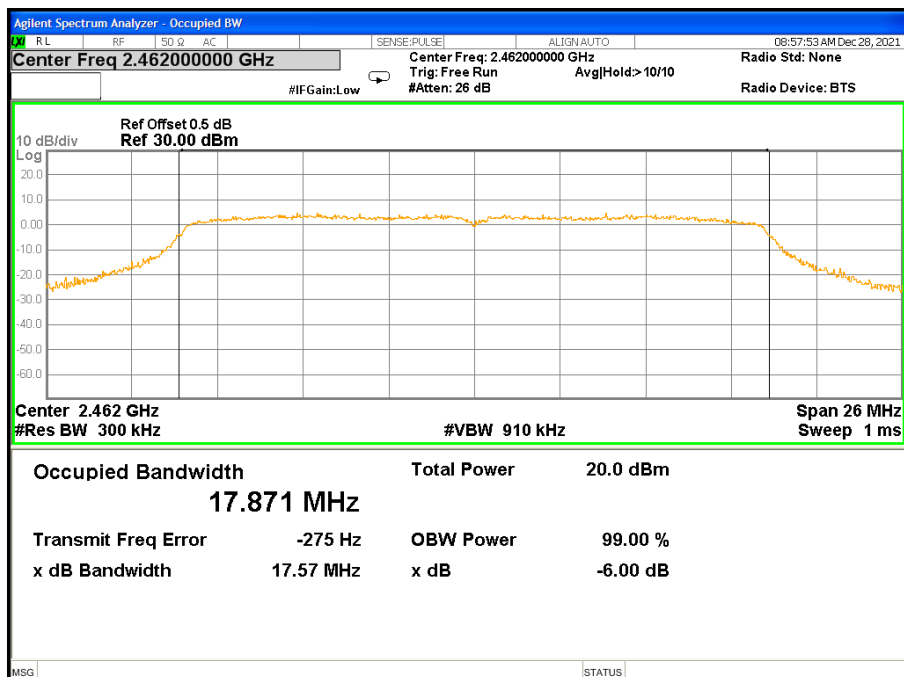




Temperature:	25°C	Relative Humidity:	60%
Test Voltage:	DC 3.3V	Test Mode:	TX n Mode(40M) /CH03, CH06, CH09


Frequency	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Limit (KHz)	Result
2422 MHz	35.93	36.315	≥500KHz	PASS
2437 MHz	35.90	36.360	≥500KHz	PASS
2452 MHz	35.93	36.332	≥500KHz	PASS

6dB Bandwidth TX CH 03

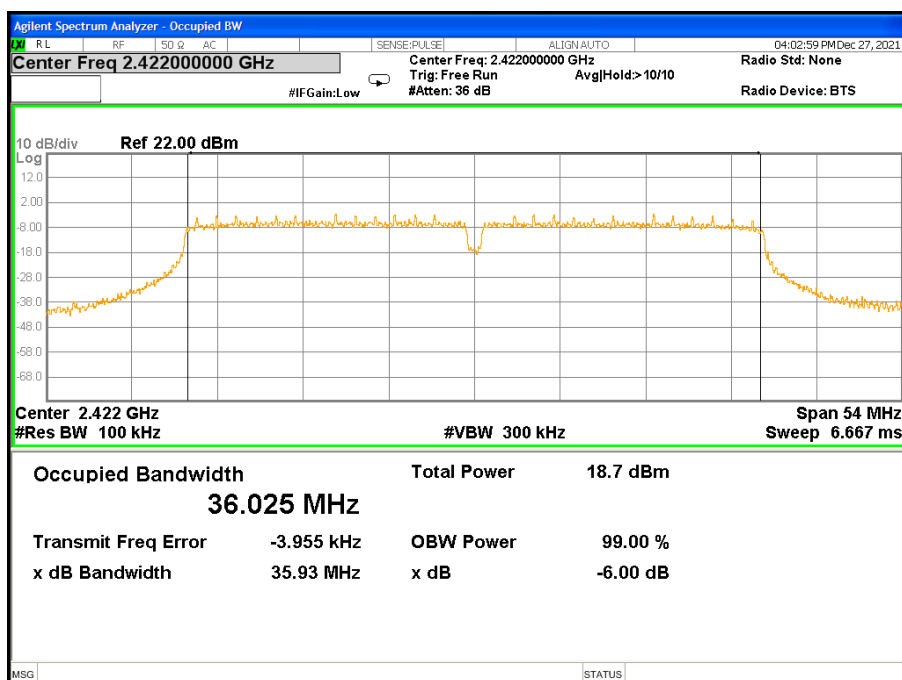




6dB Bandwidth TX CH 06

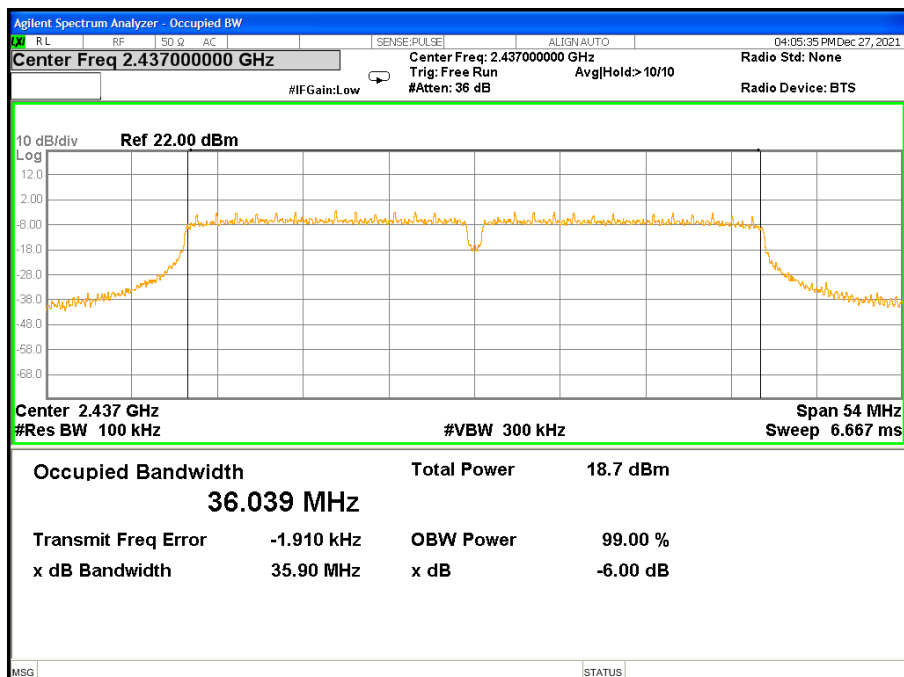


6dB Bandwidth TX CH 09

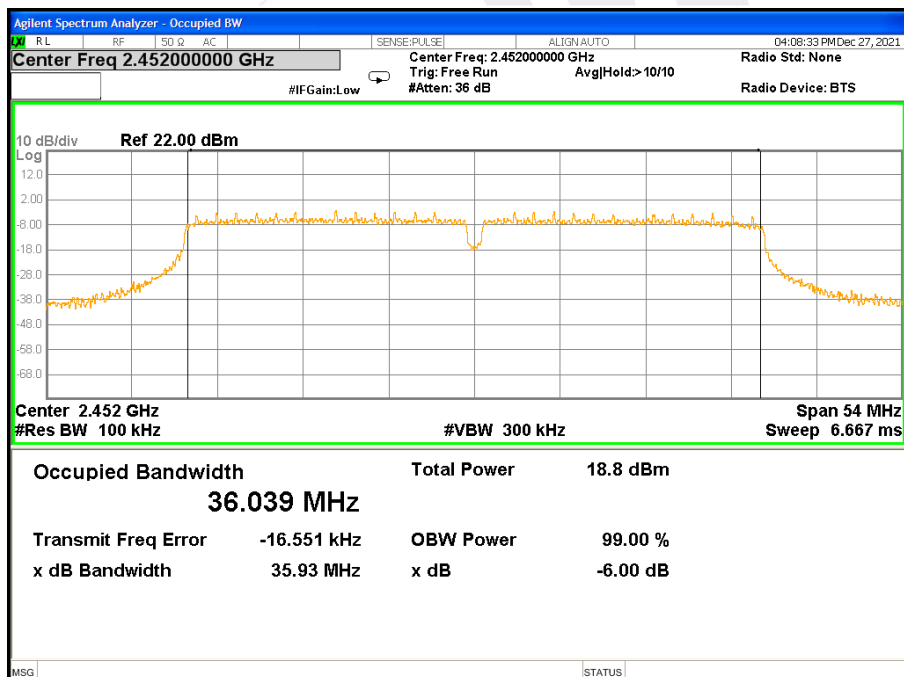




99% Bandwidth TX CH 03

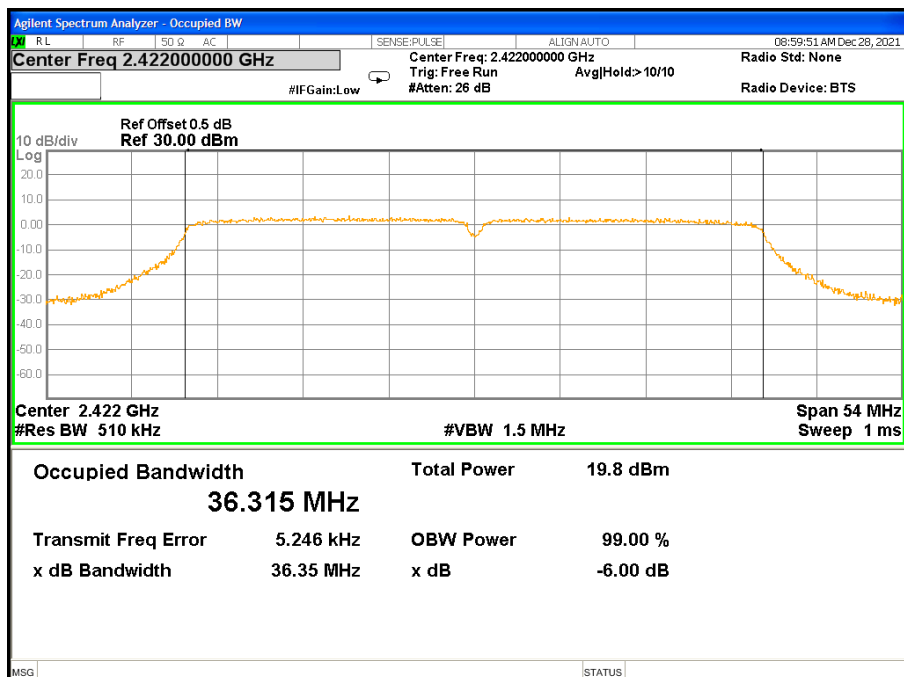


99% Bandwidth TX CH 06

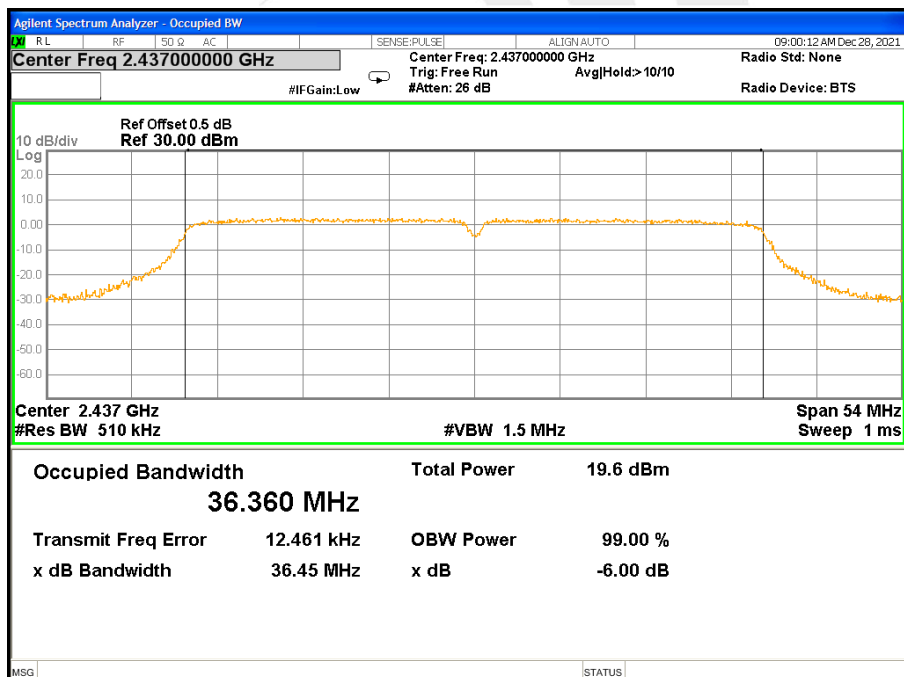



99% Bandwidth TX CH 09

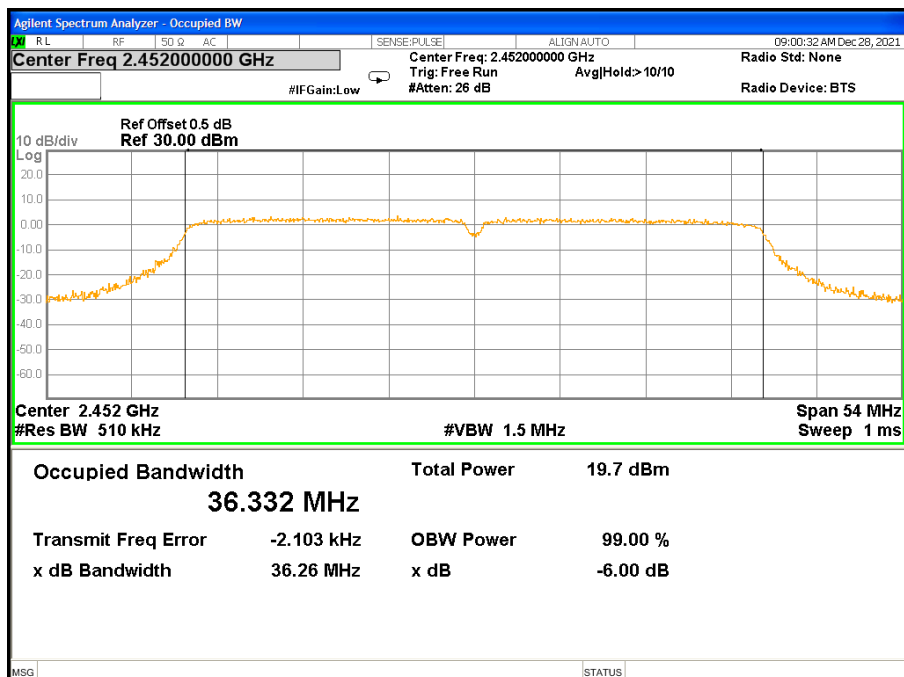




Temperature:	25°C	Relative Humidity:	60%
Test Voltage:	DC 3.3V	Test Mode:	TX ax Mode(20M) /CH01, CH06, CH11


Frequency	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Limit (KHz)	Result
2412 MHz	18.46	19.014	≥500KHz	PASS
2437 MHz	18.35	19.020	≥500KHz	PASS
2462 MHz	18.34	18.995	≥500KHz	PASS

6dB Bandwidth TX CH 01

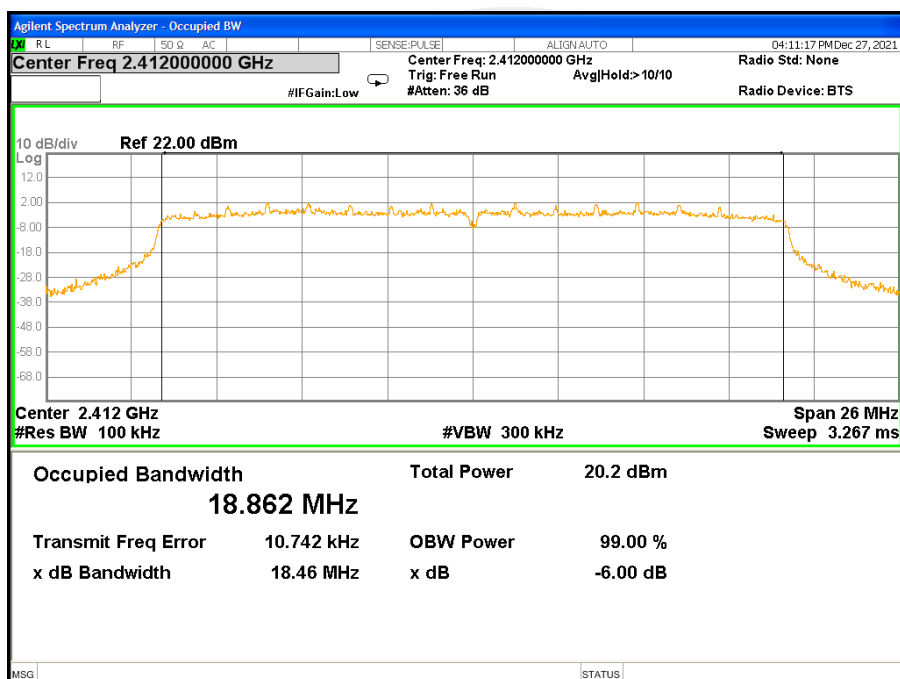




6dB Bandwidth TX CH 06

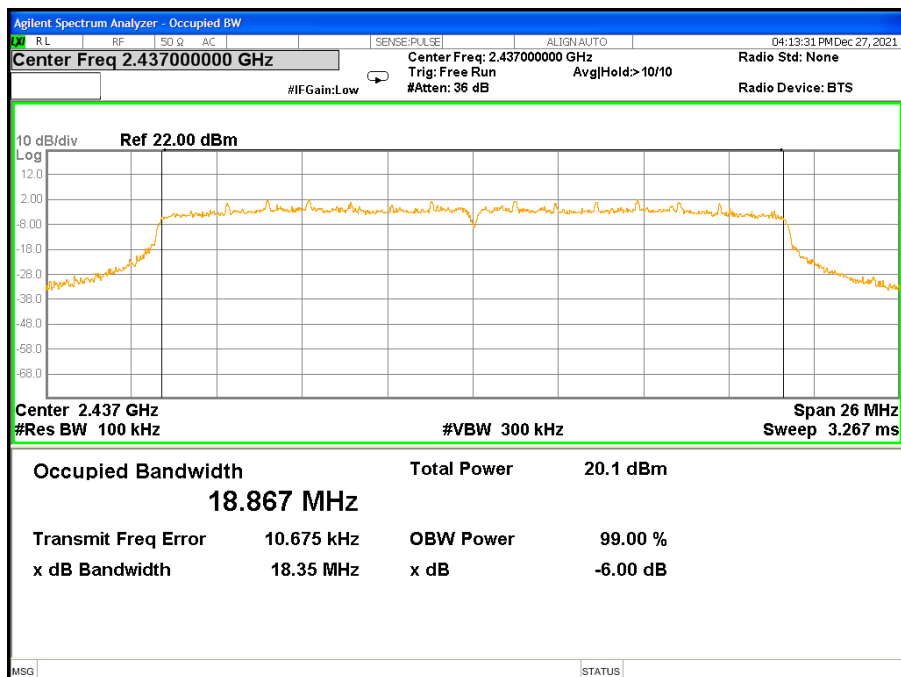


6dB Bandwidth TX CH 11

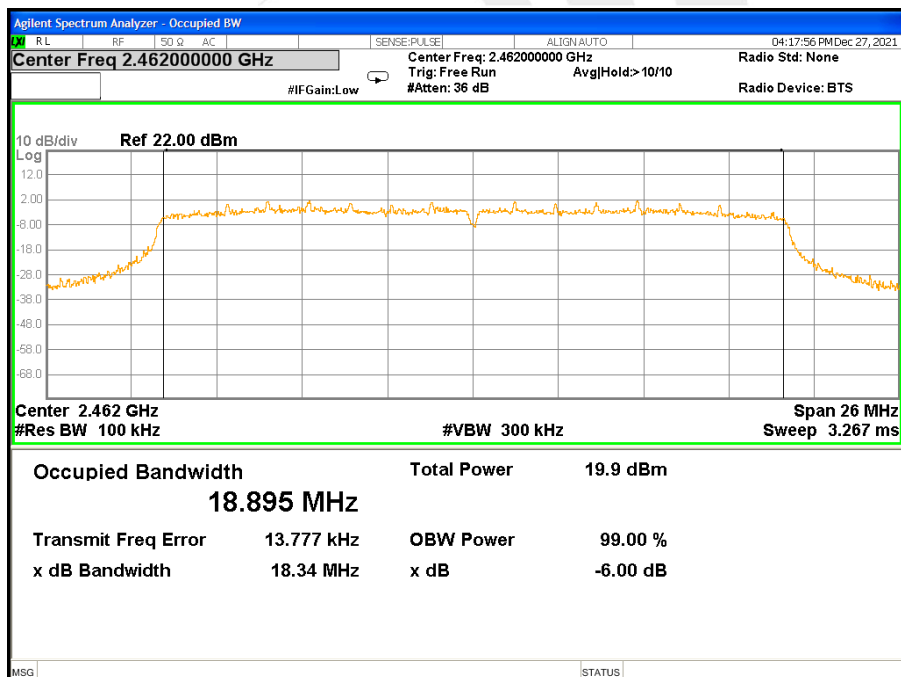




99% Bandwidth TX CH 01

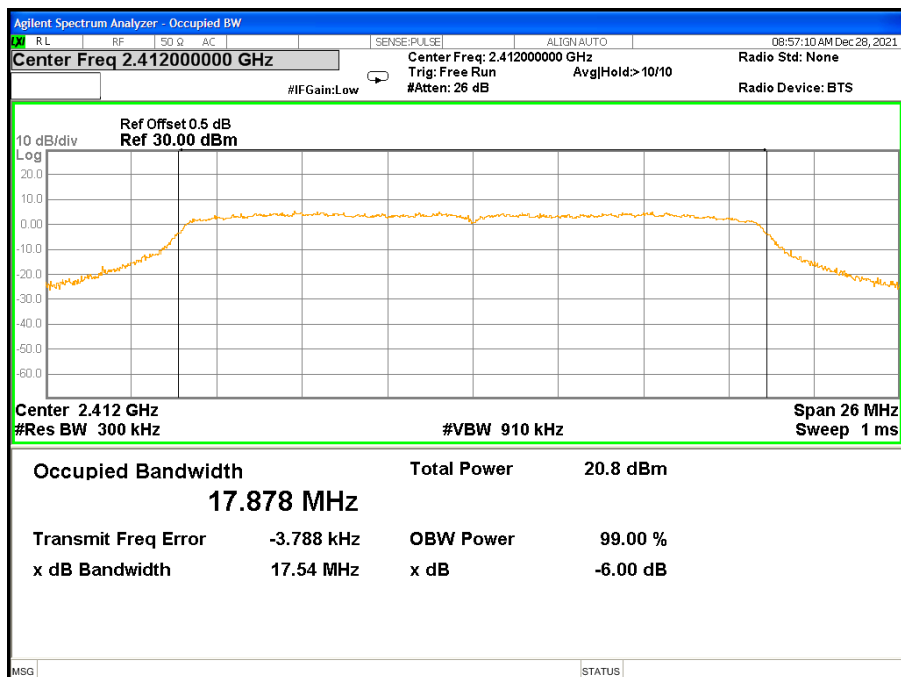


99% Bandwidth TX CH 06

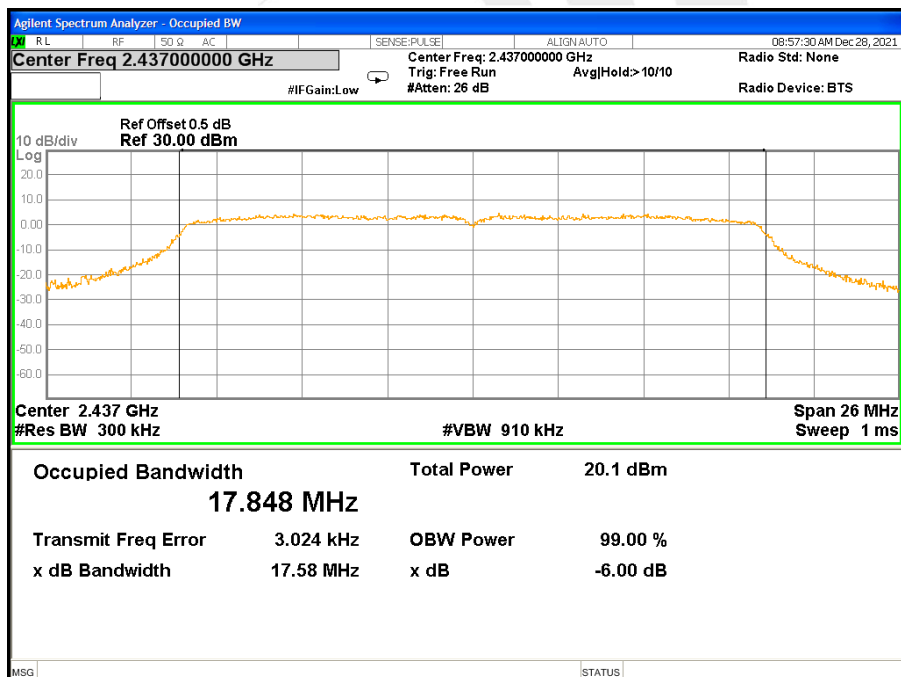



99% Bandwidth TX CH 11

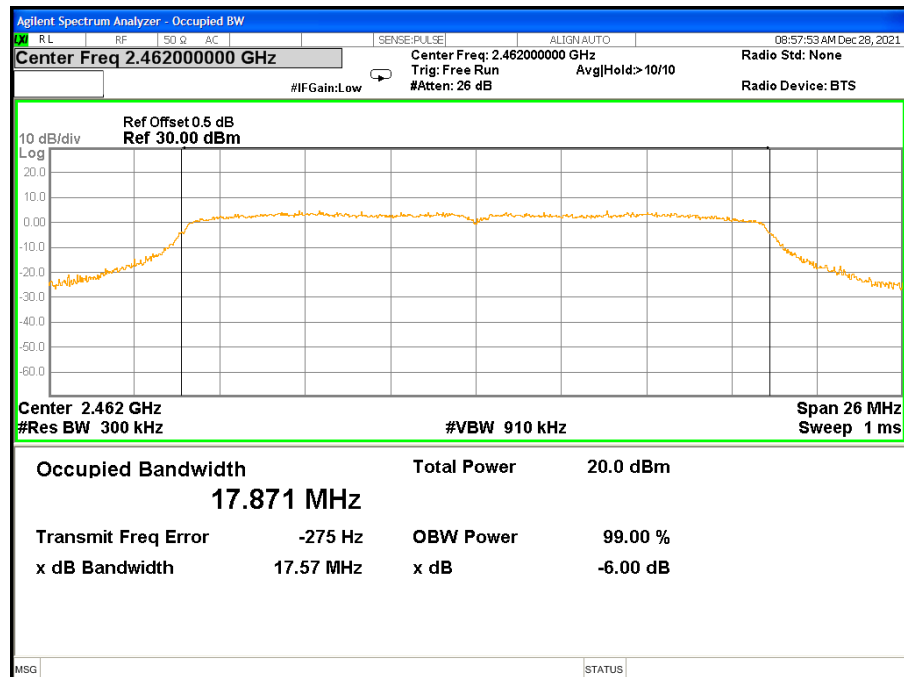




Temperature:	25°C	Relative Humidity:	60%
Test Voltage:	DC 3.3V	Test Mode:	TX ax Mode(40M) /CH03, CH06, CH09


Frequency	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Limit (KHz)	Result
2422 MHz	37.19	37.708	≥500KHz	PASS
2437 MHz	36.96	37.713	≥500KHz	PASS
2452 MHz	36.34	37.713	≥500KHz	PASS

6dB Bandwidth TX CH 03

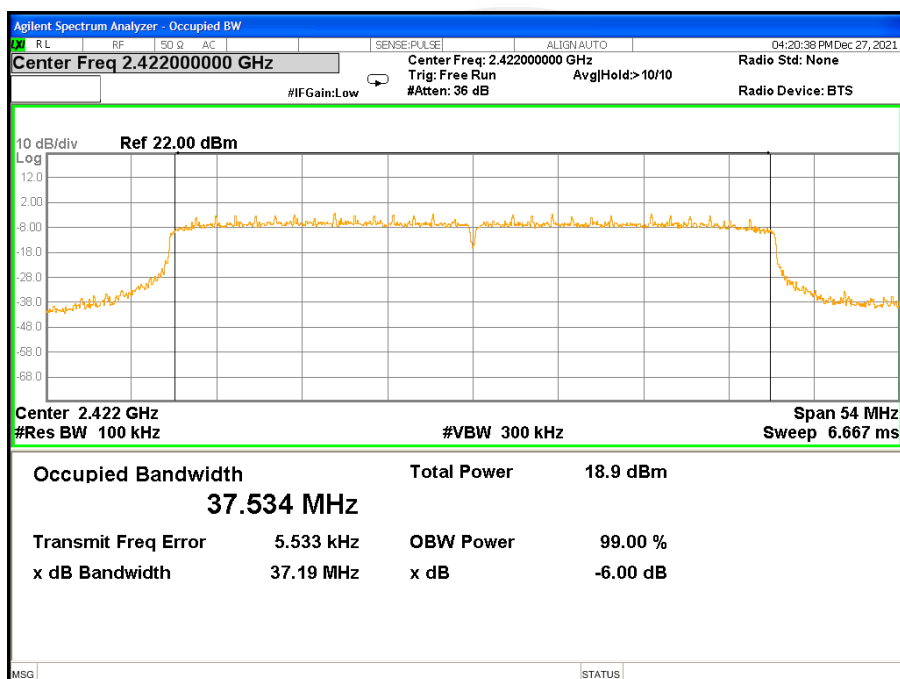




6dB Bandwidth TX CH 06

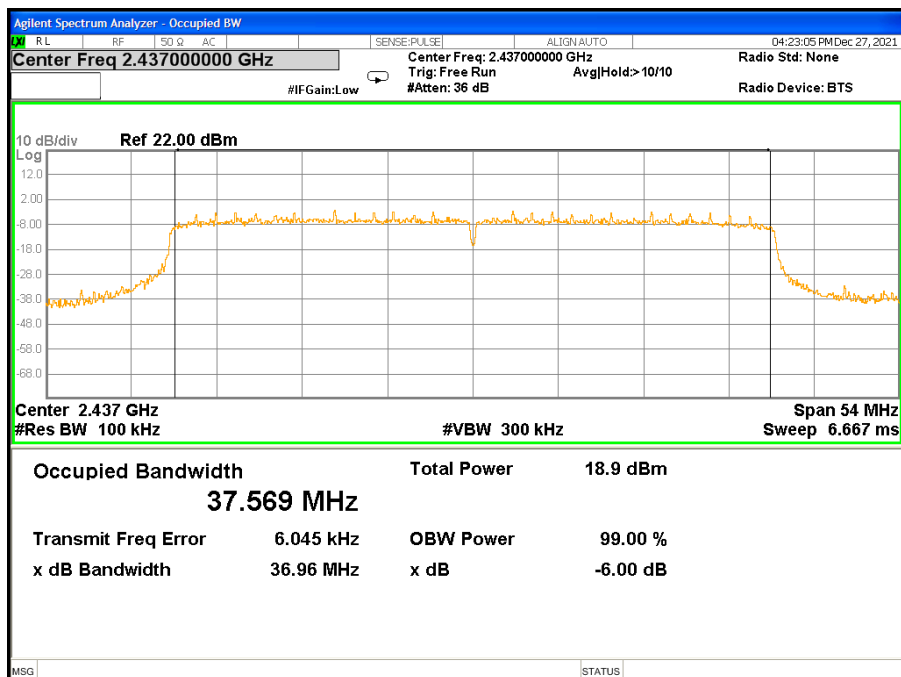


6dB Bandwidth TX CH 09

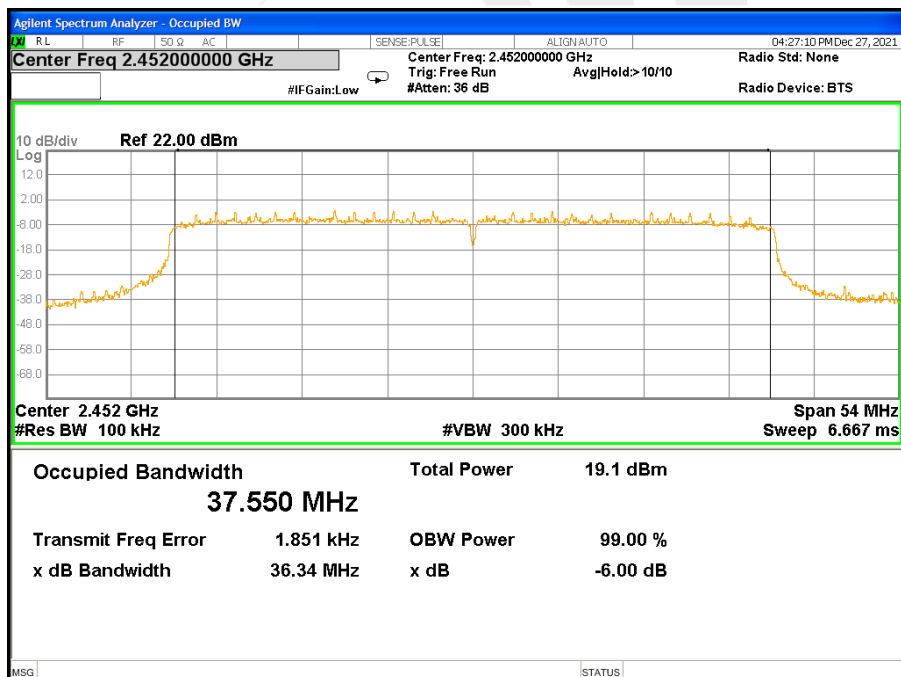




99% Bandwidth TX CH 03

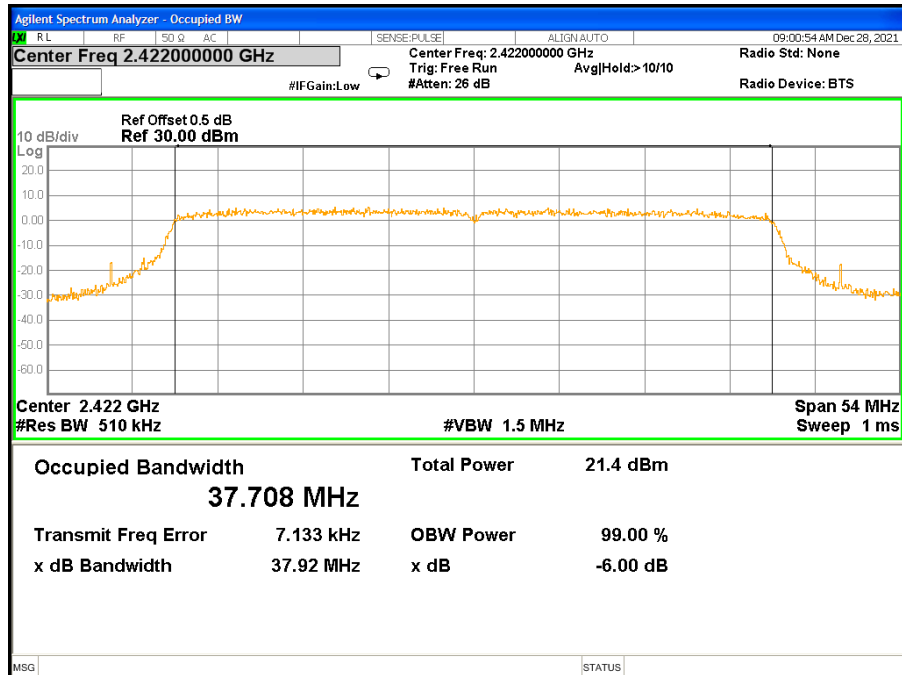


99% Bandwidth TX CH 06

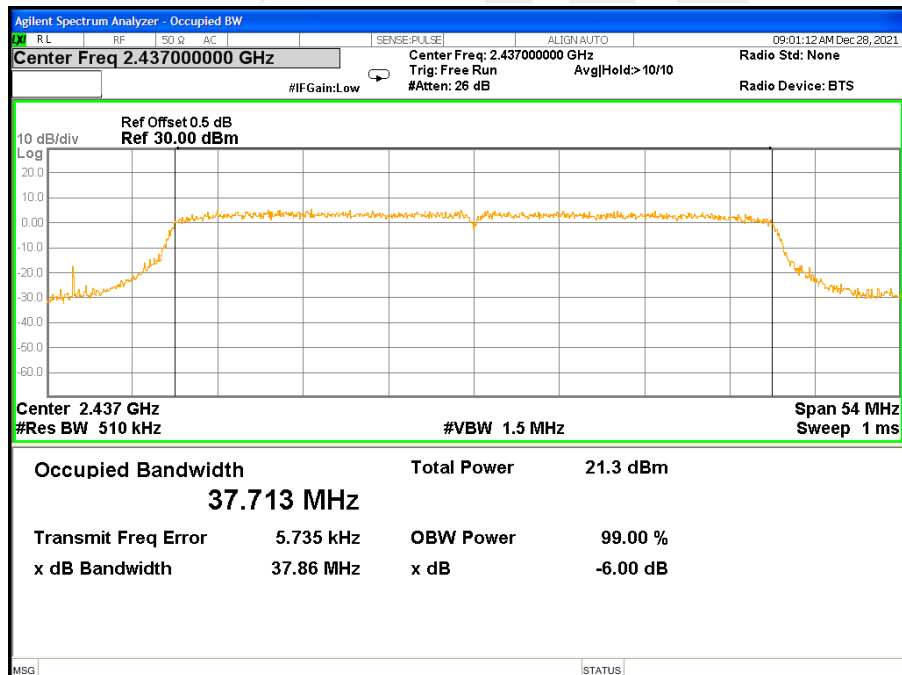



99% Bandwidth TX CH 09

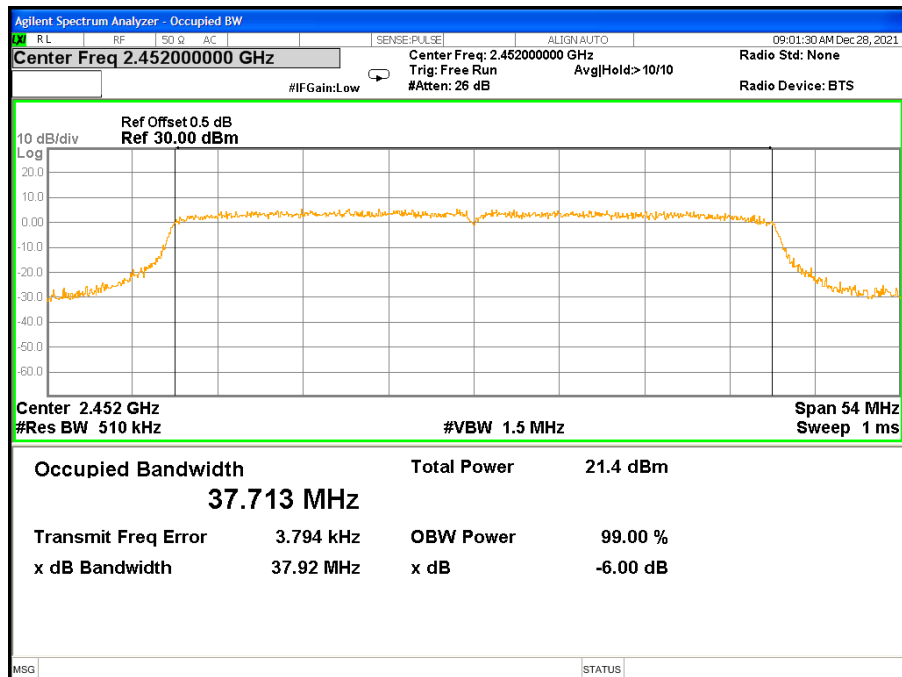



7. PEAK OUTPUT POWER TEST

7.1 LIMIT

FCC Part15.247,Subpart C RSS-247 Issue 2				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3) RSS 247 Issue 2	Output Power	1 watt or 30dBm	2400-2483.5	PASS
RSS-247	EIRP	4W	2400-2483.5	PASS

7.2 TEST PROCEDURE

One of the following procedures may be used to determine the maximum peak conducted output power of a DTS EUT.

RBW $\geq$ DTS bandwidth

The following procedure shall be used when an instrument with a resolution bandwidth that is greater than the DTS bandwidth is available to perform the measurement:

- Set the RBW $\geq$ DTS bandwidth.
- Set VBW $\geq$ [3 $\times$ RBW].
- Set span $\geq$ [3 $\times$ RBW].
- Sweep time = auto couple.
- Detector = peak.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use peak marker function to determine the peak amplitude level.

Integrated band power method:

The following procedure can be used when the maximum available RBW of the instrument is less than the

DTS bandwidth:

- Set the RBW = 1 MHz.
- Set the VBW $\geq$ [3 $\times$ RBW].
- Set the span $\geq$ [1.5 $\times$ DTS bandwidth].
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some instruments, this may require a manual override to select the peak detector). If the instrument does not have a band power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the DTS channel bandwidth.


PKPM1 Peak power meter method:

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP



7.5 EUT OPERATION CONDITIONS

Please refer to section 3.1.4 of this report.



7.6 TEST RESULTS

Temperature:	25℃	Relative Humidity:	60%
Test Voltage:	DC 3.3V		

Modulation	Frequency (MHz)	Peak Output Power (dBm)	Average Reading Power (dBm)	Duty Cycle Factor (dB)	Final Average Output Power (dBm)	Limit (dBm)
802.11b	2412	20.25	17.69	0.00	17.69	30
	2437	19.59	17.17	0.00	17.17	30
	2462	19.40	16.96	0.00	16.96	30
802.11g	2412	21.64	14.00	0.03	14.03	30
	2437	21.16	13.66	0.03	13.69	30
	2462	20.84	13.49	0.03	13.52	30
802.11n(HT20)	2412	21.51	13.90	0.01	13.91	30
	2437	20.98	13.54	0.01	13.55	30
	2462	20.93	13.32	0.01	13.33	30
802.11n(HT40)	2422	20.70	13.02	0.08	13.10	30
	2437	20.54	13.01	0.08	13.09	30
	2452	20.30	13.03	0.08	13.11	30
802.11ax(HE20)	2412	21.77	13.72	0.06	13.78	30
	2437	21.04	13.39	0.06	13.45	30
	2462	20.88	13.20	0.06	13.26	30
802.11ax(HE40)	2422	20.71	12.90	0.09	12.99	30
	2437	20.74	12.85	0.09	12.94	30
	2452	20.38	12.91	0.09	13.00	30



EIRP Power

TX 802.11b Mode					
Test Channel	Frequency	Peak Power	Antenna Gain	EIRP Power	LIMIT
	(MHz)	(dBm)	(dBi)	(dBm)	dBm
CH01	2412	20.25	1.79	22.04	36.02
CH06	2437	19.59	1.79	21.38	36.02
CH11	2462	19.40	1.79	21.19	36.02
TX 802.11g Mode					
Test Channel	Frequency	Peak Power	Antenna Gain	EIRP Power	LIMIT
	(MHz)	(dBm)	(dBi)	(dBm)	dBm
CH01	2412	21.64	1.79	23.43	36.02
CH06	2437	21.16	1.79	22.95	36.02
CH11	2462	20.84	1.79	22.63	36.02
TX 802.11n20 Mode					
Test Channel	Frequency	Peak Power	Antenna Gain	EIRP Power	LIMIT
	(MHz)	(dBm)	(dBi)	(dBm)	dBm
CH01	2412	21.51	1.79	23.30	36.02
CH06	2437	20.98	1.79	22.77	36.02
CH11	2462	20.93	1.79	22.72	36.02
TX 802.11n40 Mode					
Test Channel	Frequency	Peak Power	Antenna Gain	EIRP Power	LIMIT
	(MHz)	(dBm)	(dBi)	(dBm)	dBm
CH03	2422	20.70	1.79	22.49	36.02
CH06	2437	20.54	1.79	22.33	36.02
CH09	2452	20.30	1.79	22.09	36.02




TX 802.11ax20 Mode					
Test Channel	Frequency	Peak Power	Antenna Gain	EIRP Power	LIMIT
	(MHz)	(dBm)	(dBi)	(dBm)	dBm
CH01	2412	21.77	1.79	23.56	36.02
CH06	2437	21.04	1.79	22.83	36.02
CH11	2462	20.88	1.79	22.67	36.02
TX 802.11ax40 Mode					
Test Channel	Frequency	Peak Power	Antenna Gain	EIRP Power	LIMIT
	(MHz)	(dBm)	(dBi)	(dBm)	dBm
CH03	2422	20.71	1.79	22.50	36.02
CH06	2437	20.74	1.79	22.53	36.02
CH09	2452	20.38	1.79	22.17	36.02



Duty cycle


Modulation	Frequency (MHz)	TOn (ms)	TP (ms)	Duty cycle (%)	Duty Cycle Factor (dB)
802.11b	2437	100.0000	100.0000	100.00%	0.00
802.11g	2437	2.7120	2.7280	99.41%	0.03
802.11n(HT20)	2437	2.5340	2.5390	99.80%	0.01
802.11n(HT40)	2437	1.2360	1.2600	98.10%	0.08
802.11ax(HE20)	2437	1.9300	1.9550	98.72%	0.06
802.11ax(HE40)	2437	0.9900	1.0110	97.92%	0.09

802.11b

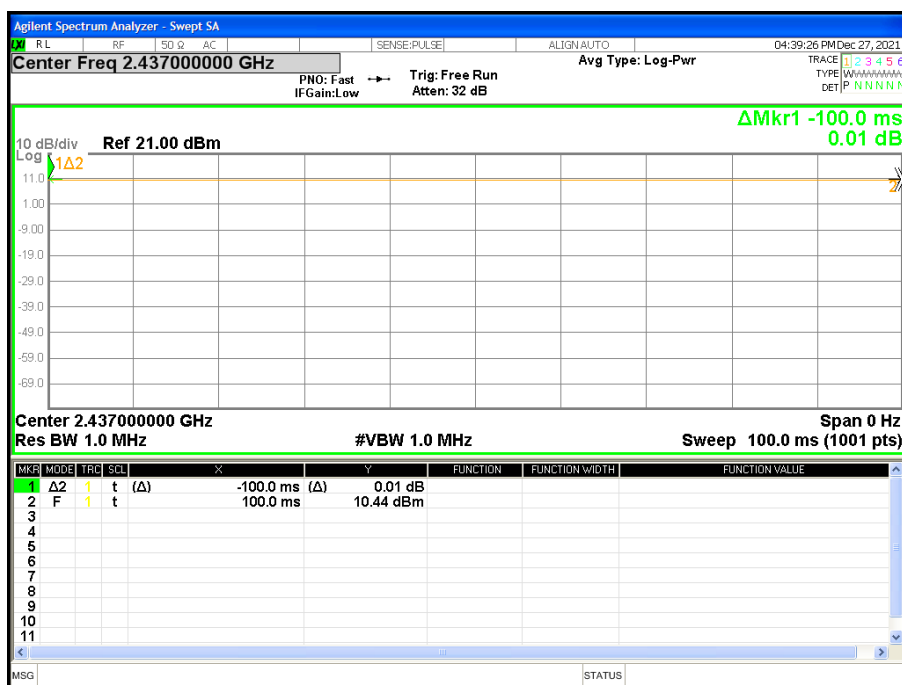




802.11g

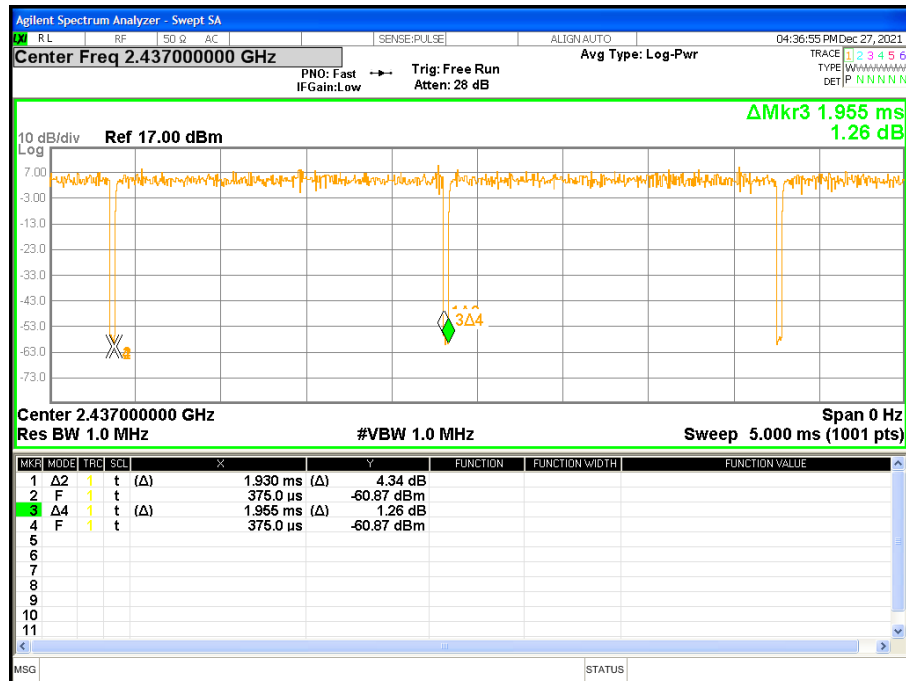


802.11n(HT20)

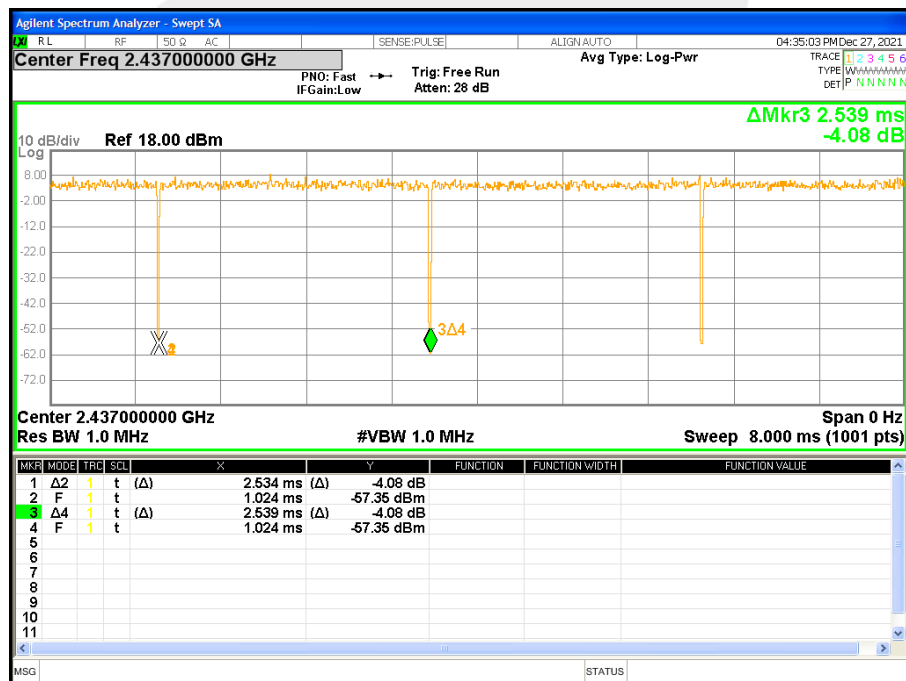




802.11n(HT40)

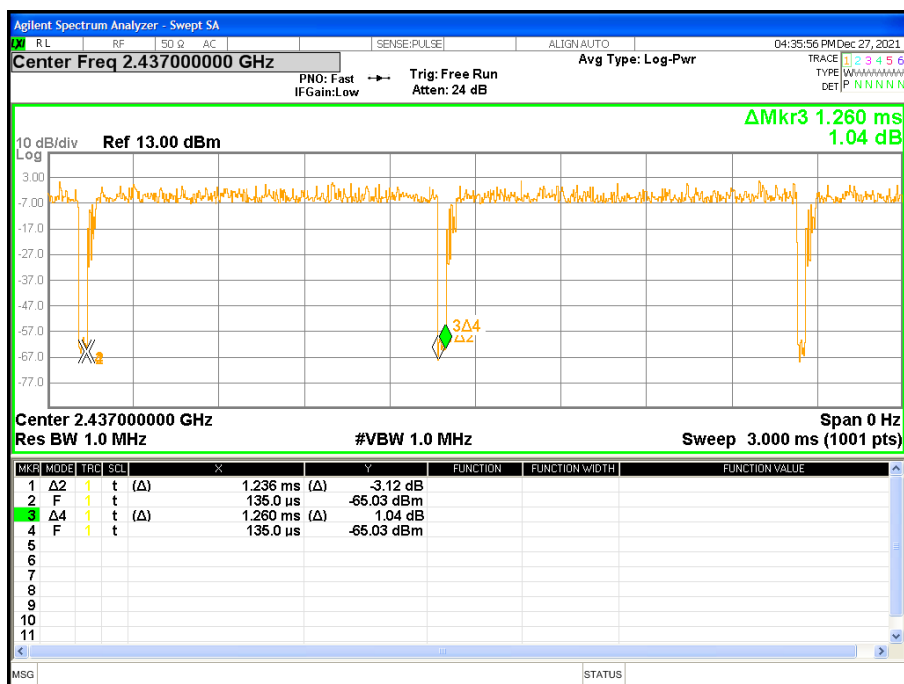


802.11ax(HE20)

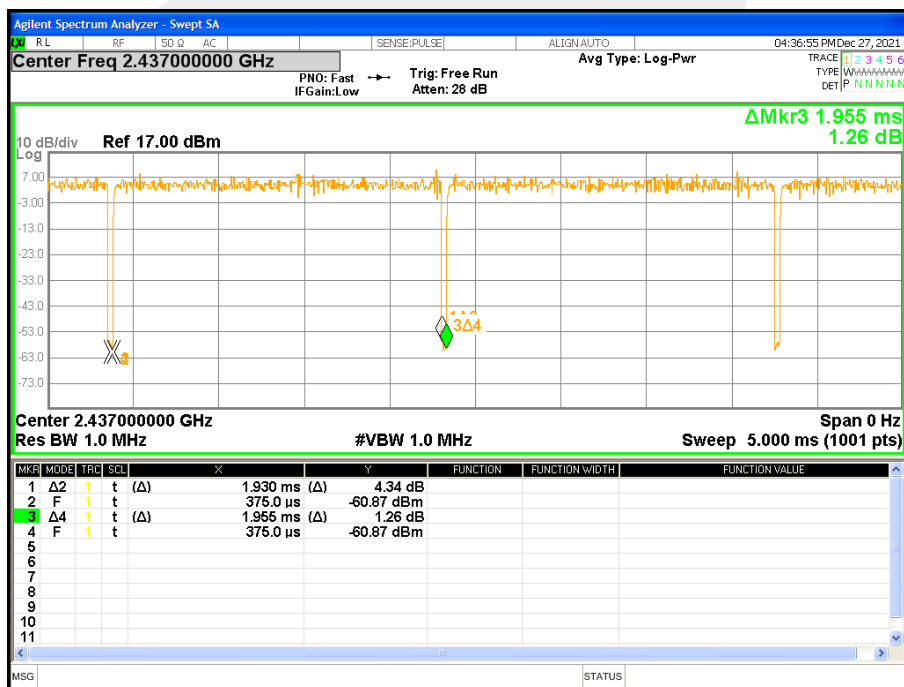



802.11ax(HE40)

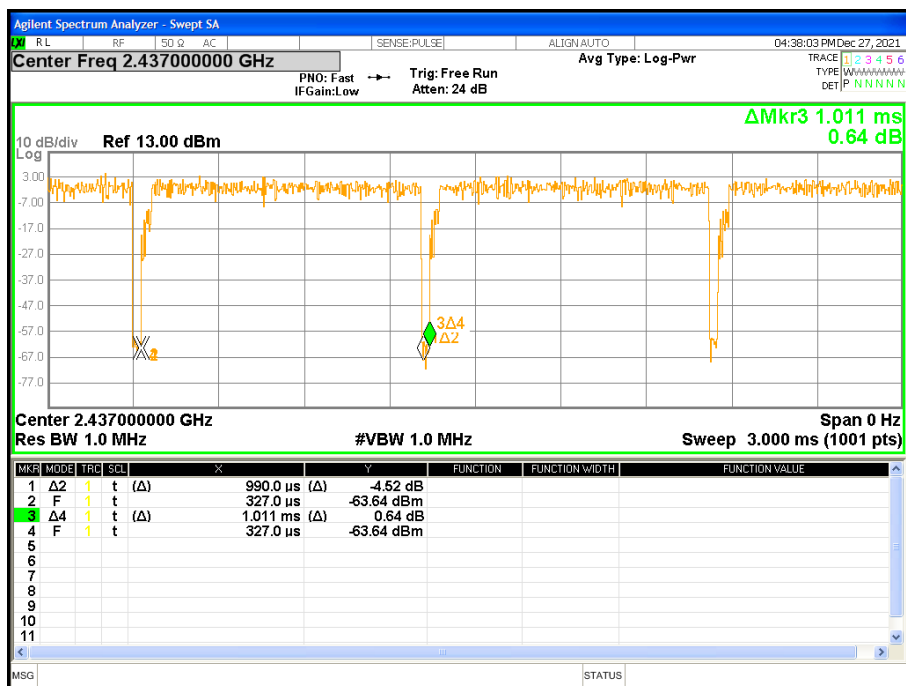



8. ANTENNA REQUIREMENT

8.1 STANDARD REQUIREMENT

15.203&RSS Gen requirement: For intentional device, according to 15.203&RSS Gen: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

8.2 EUT ANTENNA

The EUT antenna is PIFA Antenna. It comply with the standard requirement.





9. FREQUENCY STABILITY

9.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.02\%$ of the operating frequency over a temperature variation of -30 degrees to 50 degrees C at normal supply voltage, and for a variation in primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees.

9.2 TEST PROCEDURE

1. The EUT was placed inside the environmental test chamber and powered by nominal DC voltage.
2. Turn the EUT on and couple its output to spectrum analyzer.
3. Turn the EUT off and set the chamber to the highest temperature specified.
4. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
5. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
6. The test chamber was allowed to stabilize at $+20$ degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

9.3 TEST RESULT

Channel 06 (2437MHz)

Voltage vs. Frequency Stability

Voltage(V)	Measurement Frequency(MHz)
3.795	2437.0035
3.3	2437.0025
2.805	2437.0030
Max.Deviation(MHz)	0.0035
Max.Deviation(ppm)	1.44

Rated working voltage: DC 3.3V

Temperature vs. Frequency Stability

Temperature($^{\circ}$ C)	Measurement Frequency(MHz)
-30	2437.0042
-20	2437.0041
-10	2437.0037
0	2437.0040
10	2437.0040
20	2437.0035
30	2437.0036
40	2437.0032
50	2437.0032
Max.Deviation(MHz)	0.0042
Max.Deviation(ppm)	1.72



APPENDIX-PHOTOS OF TEST SETUP

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

XXXXXXXXEND OF THE REPORTXXXXXXXX

