


FCC AND ISCED CERTIFICATION TEST REPORT

Applicant:	Guangzhou Shikun Electronics Co., Ltd
Address:	NO.6 Liankun Road, Huangpu District, Guangzhou, China
Manufacturer:	Guangzhou Shikun Electronics Co., Ltd
Address:	NO.6 Liankun Road, Huangpu District, Guangzhou, China
Product Description:	IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2
Brand Name:	NA
Tested Model:	SKI.WB921AU.1
FCC ID:	2AR82-SKIWB921AU1
IC:	24728-SKIWB921AU1
Report No.:	JCF250705021-003
Received Date:	Jul. 05, 2025
Tested Date:	Jul. 05, 2025 ~ Aug. 04, 2025
Issued Date:	Aug. 04, 2025
Test Standards:	FCC Rules and Regulations Part 15 Subpart C, RSS-247 Issue 3 August 2023
Test Procedure:	ANSI C63.10:2013, 558074 D01 15.247 Meas Guidance v05r02, 662911 D01 Multiple Transmitter Output v02r01, RSS-Gen Issue 5 A2, Feb. 2021
Test Result:	Pass

Prepared By:




Roger Li/Engineer **Date:** Aug. 04, 2025

Reviewed By:



Kennys Zhang/Engineer **Date:** Aug. 04, 2025

Approved By:



Talent Zhang/Engineer **Date:** Aug. 04, 2025

Note: The test results in this report apply exclusively to the tested model / sample. Without written approval of Guangzhou Jingce Testing Technology Co., Ltd. the test report shall not be reproduced except in full.

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Aug. 04, 2025	Original Report	/

Reference Report	Differences between the statement
FCC2021-0003-2(XG2)	Based on the original report "FCC2021-0003-2(XG2)" add new antenna and modify the power setting to decrease power.

Table of Contents

1. Test Report Declare	4
2. Summary of Test Results	5
3. Test Laboratory	5
4. Equipment Under Test	6
4.1. Description of EUT	6
4.2. Channel List	6
4.3. Test Channel Configuration	6
4.4. Test environment conditions	7
4.5. Description of Available Antennas	7
4.6. Description of Available Antennas	8
5. Description of Test Setup	8
5.1. Accessory	8
5.2. Support Equipment	8
5.3. Test Setup	8
5.4. Setup Diagram for Tests	8
6. Measurement Uncertainty	9
7. Measuring Instrument and Software Used	9
8. Conducted Output Power	11
8.1. Block diagram of test setup	11
8.2. Limits	11
8.3. Test Procedure	11
8.4. Results	11
9. Radiated Emission	13
9.1. Block diagram of test setup	13
9.2. Limit	14
9.3. Test Procedure	15
9.4. Results	17
9.5. Original test data	17
10. Antenna Requirements	18
10.1. Applicable Requirements	18
10.2. Result	18
APPENDIX A – Radiated Emission Below 1GHz Test Data	19
APPENDIX B – Radiated Emission Above 1GHz Test Data	21

1. Test Report Declare

Applicant:	Guangzhou Shikun Electronics Co., Ltd
Address:	NO.6 Liankun Road, Huangpu District, Guangzhou, China
Manufacturer:	Guangzhou Shikun Electronics Co., Ltd
Address:	NO.6 Liankun Road, Huangpu District, Guangzhou, China
Product Name:	IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2
Brand Name:	NA
Model Name:	SKI.WB921AU.1
Difference Description:	NA

We Declare:

The equipment described above is tested by Guangzhou Jingce Testing Technology Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Guangzhou Jingce Testing Technology Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests except as provided information by clients.

2. Summary of Test Results

Summary of Test Results			
Clause	Test Items	FCC/ISED Rules	Test Results
1	6dB Bandwidth and 99 % Occupied Bandwidth	FCC Part 15.247 (a) (2) RSS-247 Clause 5.2 (a) ISED RSS-Gen Clause 6.7	NA
2	Peak Conducted Output Power	FCC Part 15.247 (b) (3) RSS-247 Clause 5.4 (d)	Pass
3	Power Spectral Density	FCC Part 15.247 (e) RSS-247 Clause 5.2 (b)	NA
4	Conducted Bandedge and Spurious Emission	FCC Part 15.247 (d) RSS-247 Clause 5.5	NA
5	Radiated Bandedge and Spurious Emission	FCC Part 15.247 (d) FCC Part 15.209 FCC Part 15.205 RSS-247 Clause 5.5 RSS-GEN Clause 8.9	Pass
6	Conducted Emission Test For AC Power Port	FCC Part 15.207 RSS-GEN Clause 8.8	NA
7	Antenna Requirement	FCC Part 15.203 RSS-GEN Clause 6.8	Pass

Note: The original report has already been certified. Only add new antenna, So above test data should refer to the original report "FCC2021-0003-2(XG2)", only Radiated emission and Conducted Output Power need be retest.

3. Test Laboratory

Guangzhou Jingce Testing Technology Co., Ltd.

Add.: No.10, Hefeng No.1 street, Huangpu District, Guangzhou, Guangdong, People's Republic of China

Association for Laboratory Accreditation(A2LA). Certificate Number: 6594.03

FCC Designation Number: CN1381. Test Firm Registration Number: 486550

IC Test Firm Registration Number: 31808

Conformity Assessment Body identifier: CN0173

4. Equipment Under Test

4.1. Description of EUT

EUT Name:	IEEE 802.11b/g/n/a/ac/ax 2T2R USB WiFi Module Integrated BT 2.1+EDR/4.2/5.2
Model Number:	SKI.WB921AU.1
EUT Function Description:	Refer to user manual
Power Supply:	DC 3.3V
Sample No.:	250705021-01-01
Hardware Version:	NA
Software Version:	NA
Radio Specification:	IEEE802.11b/g/n/ax
Operation Frequency:	IEEE 802.11b: 2412MHz—2462MHz IEEE 802.11g: 2412MHz—2462MHz IEEE 802.11n HT20: 2412MHz—2462MHz IEEE 802.11n HT40: 2422MHz—2452MHz IEEE 802.11ax HE20: 2412MHz—2462MHz IEEE 802.11ax HE40: 2422MHz—2452MHz
Modulation:	IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n (HT20/40): OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ax (HE20/40): OFDMA (1024QAM, 256QAM, 64QAM, 16QAM, QPSK, BPSK)
Antenna Type:	FPC Antenna, MAX. Gain: 2.42 dBi

Note 1: EUT is the ab. of equipment under test.

Note 2: The antenna gain is declared by the customer and the laboratory is not responsible for the accuracy of the antenna gain.

4.2. Channel List

Channel List for 802.11b/g/n/ax (20 MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	4	2427	7	2442	10	2457
2	2417	5	2432	8	2447	11	2462
3	2422	6	2437	9	2452	/	/

Channel List for 802.11n/ax (40 MHz)					
Channel	Frequency (MHz)	Channel	Frequency(MHz)	Channel	Frequency (MHz)
3	2422	6	2437	9	2452
4	2427	7	2442	/	/
5	2432	8	2447	/	/

4.3. Test Channel Configuration

Tested mode, channel and rand data rate information			
Mode	Data rate (Mbps) (see Note)	Channel	Frequency (MHz)
802.11b	1	Low: CH1	2412

	1	Middle: CH6	2437
	1	High: CH11	2462
	6	Low: CH1	2412
802.11g	6	Middle: CH6	2437
	6	High: CH11	2462
802.11n HT20	MCS 8	Low: CH1	2412
	MCS 8	Middle: CH6	2437
	MCS 8	High: CH11	2462
802.11n HT40	MCS 8	Low: CH3	2422
	MCS 8	Middle: CH6	2437
	MCS 8	High: CH9	2452
802.11ax HE20	MCS 0	Low: CH1	2412
	MCS 0	Middle: CH6	2437
	MCS 0	High: CH11	2462
802.11ax HE40	MCS 0	Low: CH3	2422
	MCS 0	Middle: CH6	2437
	MCS 0	High: CH9	2452
Note: According exploratory test, EUT will have maximum output power in those data rate, so those data rate were used for all test.			

4.4. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	21-25 °C
Humidity range:	40-75%
Pressure range:	86-106 kPa

4.5. Description of Available Antennas

The Worse Case Power Setting Parameter under 2400 ~ 2483.5MHz Band				
Test Software		QATool_Dbg		
Modulation Mode	Transmit Antenna Number	Test Software Setting Value		
		Channel	ANT1	ANT2
802.11b	2	CH1	13	12.5
		CH6	13	12.5
		CH11	13	12.5
802.11g	2	CH1	10	9
		CH6	9.5	9
		CH11	9.5	9
802.11HT20	2	CH1	10	10
		CH6	7	7
		CH11	7	7
802.11n HT40	2	CH3	8	8
		CH6	8	8
		CH9	8	8

802.11ax HE20	2	CH1	8	8
		CH6	7.5	7.5
		CH11	7.5	7.5
802.11ax HE40	2	CH3	7.5	7.5
		CH6	7.5	7.5
		CH9	7.5	7.5

4.6. Description of Available Antennas

Test Mode	Transmit and Receive Mode	Description
802.11b	☒ 2TX, 2RX	ANT 1 and ANT2 can be used as transmitting/receiving antenna.
802.11g	☒ 2TX, 2RX	ANT 1 and ANT2 can be used as transmitting/receiving antenna.
802.11n HT20	☒ 2TX, 2RX	ANT 1 and ANT2 can be used as transmitting/receiving antenna.
802.11n HT40	☒ 2TX, 2RX	ANT 1 and ANT2 can be used as transmitting/receiving antenna.
802.11ax HE20	☒ 2TX, 2RX	ANT 1 and ANT2 can be used as transmitting/receiving antenna.
802.11ax HE40	☒ 2TX, 2RX	ANT 1 and ANT2 can be used as transmitting/receiving antenna.
Note: 1. Only 802.11n HT20/HT40 and 802.11ax HE20/HE40 support MIMO mode 2. WLAN 2.4 GHz & WLAN 5G can't transmit simultaneously. (declared by client)		

5. Description of Test Setup

5.1. Accessory

Description of Accessories	Manufacturer	Model Number	Description	Remark
/	/	/	/	/


5.2. Support Equipment

Equipment	Brand Name	Model Name	P/N
PC	Lenovo	T480	/

5.3. Test Setup

The EUT can work in Fixed Frequency mode.

5.4. Setup Diagram for Tests



6. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
AC Power Conduction emission	1.37 dB
All Radiated emissions	5.4dB
Conducted emissions	3.09 dB
Occupied Channel Bandwidth	1.1%
Conducted Output power	0.82dB
Power Spectral Density	0.82dB
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level using a coverage factor of k = 2.	


7. Measuring Instrument and Software Used

TS Test System						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
☒	Spectrum Analyzer	Keysight	N9030B	MY56320512	Aug. 22, 2024	Aug. 21, 2025
☒	Vector Signal Generator	Keysight	N5182B	MY57300334	Aug. 22, 2024	Aug. 21, 2025
☒	Signal Generator	Keysight	N5171B	MY57280639	Aug. 22, 2024	Aug. 21, 2025
☒	DC POWER	Keysight	E342A	MY59020356	Aug. 29, 2024	Aug. 28, 2025
☒	Incubator thermometer	GWS	EL-02JA	21107288	Aug. 15, 2024	Aug. 14, 2025
☒	Control unit(Power sensor)	Tonscend	JS0806-2	/	Aug. 23, 2024	Aug. 22, 2025
☒	Spectrum Analyzer	Keysight	N9020B	MY60112206	Sep. 11, 2024	Sep. 10, 2025
☒	Control unit(Power sensor)	Tonscend	JS0806-2	21H8060465	Aug. 22, 2024	Aug. 21, 2025
☒	Spectrum Analyzer	Keysight	N9020B	MY60112811	Aug. 23, 2024	Aug. 22, 2025
☒	Signal Generator	Keysight	N5173B	MY62220145	Aug. 23, 2024	Aug. 22, 2025
☒	Vector Signal Generator	Keysight	N5182B	MY61252859	Aug. 22, 2024	Aug. 21, 2025
☒	DC POWER	Keysight	E3642A	MY40005294	Aug. 30, 2024	Aug. 29, 2025
☒	Control unit(Power sensor)	Tonscend	JS0806-2	24F80620865	Aug. 23, 2024	Aug. 22, 2025
Software						
Used	Description	Manufacturer	Name		Version	
☒	Test software	Tonscend	JS1120-3		V3.3.10	
RSE Test System						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
☒	EMI Receiver	R&S	ESR26	101424	Sep. 14, 2024	Sep. 13, 2025

☒	Hybrid Antenna	Schwarzbeck	VULB9163	01361	Sep. 25, 2024	Sep. 24, 2025
☒	Horn Antenna 1	Schwarzbeck	BBHA 9120 D	02910	Sep. 11, 2024	Sep. 10, 2025
☒	Horn Antenna 2	ETS	BBHA 9170	1090	Sep. 11, 2024	Sep. 10, 2025
☒	loop-antenna	Schwarzbeck	FMZB 1513-60	00030	Jan. 12, 2025	Jan. 11, 2026
☒	Test path	/	Path2: WIFI-2.4G 1-3GHz	/	Aug. 23, 2024	Aug. 22, 2025
☒	Test path	/	Path7: ALL PASS 1-18GHz	/	Aug. 23, 2024	Aug. 22, 2025
☒	Test path	/	Path9: 3GHz High PASS 3-18GHz	/	Aug. 23, 2024	Aug. 22, 2025
☒	Test path	/	Path16: 30MHz-1GHz ALL PASS NO AMP	/	Aug. 23, 2024	Aug. 22, 2025
☒	Signal Pre-Amplifier	ETS	3116C-PA	00217677	Sep. 06, 2024	Sep. 05, 2025
☒	3m Fully-anechoic Chamber	YIHENG	9m*6m*6m	001	Sep. 05, 2023	Sep. 04, 2026
Software						
Used	Description	Manufacturer	Name		Version	
☒	Test software	Tonscend	TS+		V5.0.0.0	
Conducted Emission Test For AC Power Port						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
☒	LISN	R&S	ENV216	102509	Aug. 22, 2024	Aug. 21, 2025
☒	EMI Receiver	R&S	ESR	102154	Aug. 22, 2024	Aug. 21, 2025
Software						
Used	Description	Manufacturer	Name		Version	
☒	Test software	EZ	EZ-EMC		EMEC-3A1	
Other Instrument						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
☒	Temperature & Humidity	Temperature	HTC-1	/	Sep. 04, 2024	Sep. 03, 2025

8. Conducted Output Power

8.1. Block diagram of test setup

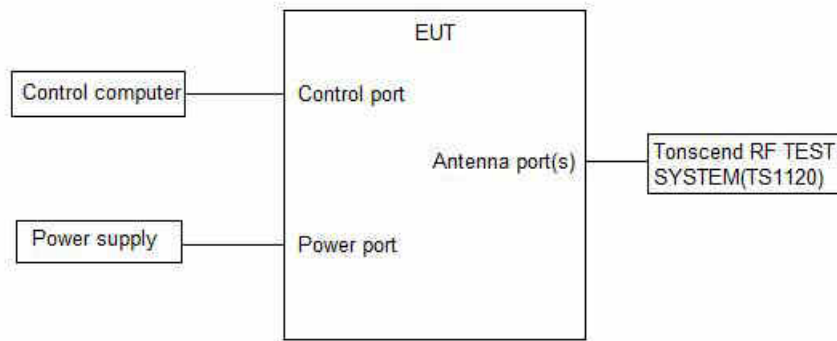

8.2. Limits

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 3			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(b)(3) ISED RSS-247 5.4 (d)	Peak Output Power	1 watt or 30 dBm	2400-2483.5

Note: For 802.11n, the EUT incorporates a MIMO function. The Antenna directional gain is 5.42 dBi.

8.3. Test Procedure

Place the EUT on the table and set it in the transmitting mode.

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Power sensor.

Measure peak power each channel.

Peak Detector use for Peak result.

AVG Detector use for AVG result.

8.4. Results


Test Mode	Ant.	Freq. (MHz)	Peak Power (dBm)	Conducted Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)	Verdict
11B	Ant1	2412	16.98	≤30.00	19.40	≤36.00	PASS
	Ant2	2412	16.96	≤30.00	19.38	≤36.00	PASS
	Ant1	2437	17.38	≤30.00	19.80	≤36.00	PASS
	Ant2	2437	16.59	≤30.00	19.01	≤36.00	PASS
	Ant1	2462	17.12	≤30.00	19.54	≤36.00	PASS
	Ant2	2462	16.61	≤30.00	19.03	≤36.00	PASS
11G	Ant1	2412	16.93	≤30.00	19.35	≤36.00	PASS
	Ant2	2412	16.50	≤30.00	18.92	≤36.00	PASS
	Ant1	2437	17.50	≤30.00	19.92	≤36.00	PASS
	Ant2	2437	16.18	≤30.00	18.60	≤36.00	PASS
	Ant1	2462	16.90	≤30.00	19.32	≤36.00	PASS
	Ant2	2462	16.34	≤30.00	18.76	≤36.00	PASS
11N20MIMO	Ant1	2412	16.73	≤30.00	19.15	≤36.00	PASS
	Ant2	2412	17.01	≤30.00	19.43	≤36.00	PASS
	total	2412	19.88	≤30.00	22.30	≤36.00	PASS
	Ant1	2437	14.33	≤30.00	16.75	≤36.00	PASS
	Ant2	2437	14.57	≤30.00	16.99	≤36.00	PASS

	total	2437	17.46	≤ 30.00	19.88	≤ 36.00	PASS
	Ant1	2462	14.80	≤ 30.00	17.22	≤ 36.00	PASS
	Ant2	2462	14.36	≤ 30.00	16.78	≤ 36.00	PASS
	total	2462	17.60	≤ 30.00	20.02	≤ 36.00	PASS
11N40MIMO	Ant1	2422	14.84	≤ 30.00	17.26	≤ 36.00	PASS
	Ant2	2422	15.45	≤ 30.00	17.87	≤ 36.00	PASS
	total	2422	18.17	≤ 30.00	20.59	≤ 36.00	PASS
	Ant1	2437	14.75	≤ 30.00	17.17	≤ 36.00	PASS
	Ant2	2437	15.17	≤ 30.00	17.59	≤ 36.00	PASS
	total	2437	17.98	≤ 30.00	20.40	≤ 36.00	PASS
	Ant1	2452	15.96	≤ 30.00	18.38	≤ 36.00	PASS
	Ant2	2452	15.37	≤ 30.00	17.79	≤ 36.00	PASS
	total	2452	18.69	≤ 30.00	21.11	≤ 36.00	PASS
11AX20MIMO	Ant1	2412	17.16	≤ 30.00	19.58	≤ 36.00	PASS
	Ant2	2412	17.56	≤ 30.00	19.98	≤ 36.00	PASS
	total	2412	20.37	≤ 30.00	22.79	≤ 36.00	PASS
	Ant1	2437	16.88	≤ 30.00	19.30	≤ 36.00	PASS
	Ant2	2437	16.89	≤ 30.00	19.31	≤ 36.00	PASS
	total	2437	19.90	≤ 30.00	22.32	≤ 36.00	PASS
	Ant1	2462	17.56	≤ 30.00	19.98	≤ 36.00	PASS
	Ant2	2462	16.89	≤ 30.00	19.31	≤ 36.00	PASS
	total	2462	20.25	≤ 30.00	22.67	≤ 36.00	PASS
11AX40MIMO	Ant1	2422	16.69	≤ 30.00	19.11	≤ 36.00	PASS
	Ant2	2422	16.59	≤ 30.00	19.01	≤ 36.00	PASS
	total	2422	19.65	≤ 30.00	22.07	≤ 36.00	PASS
	Ant1	2437	17.05	≤ 30.00	19.47	≤ 36.00	PASS
	Ant2	2437	16.61	≤ 30.00	19.03	≤ 36.00	PASS
	total	2437	19.85	≤ 30.00	22.27	≤ 36.00	PASS
	Ant1	2452	16.82	≤ 30.00	19.24	≤ 36.00	PASS
	Ant2	2452	16.66	≤ 30.00	19.08	≤ 36.00	PASS
	total	2452	19.75	≤ 30.00	22.17	≤ 36.00	PASS


9. Radiated Emission

9.1. Block diagram of test setup


In 3 m Anechoic Chamber, test setup diagram for 9 kHz - 30 MHz:

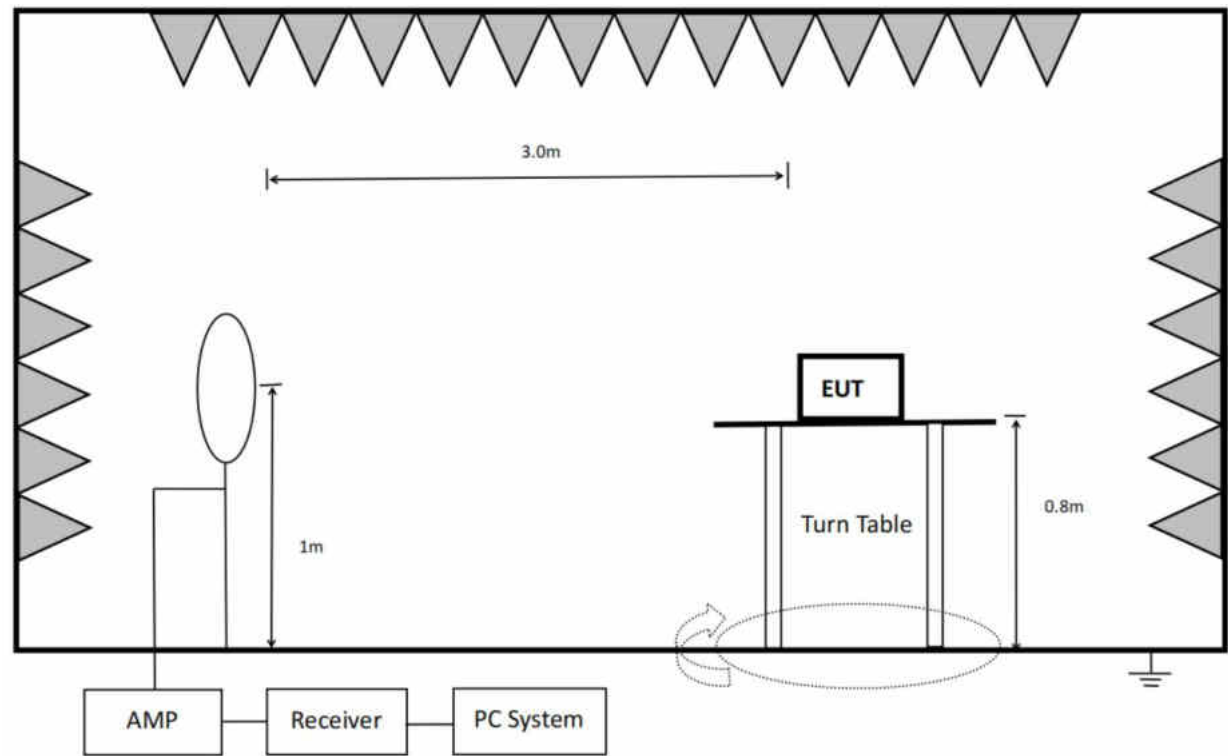

In 3 m Anechoic Chamber, test setup diagram for 30 MHz - 1 GHz:

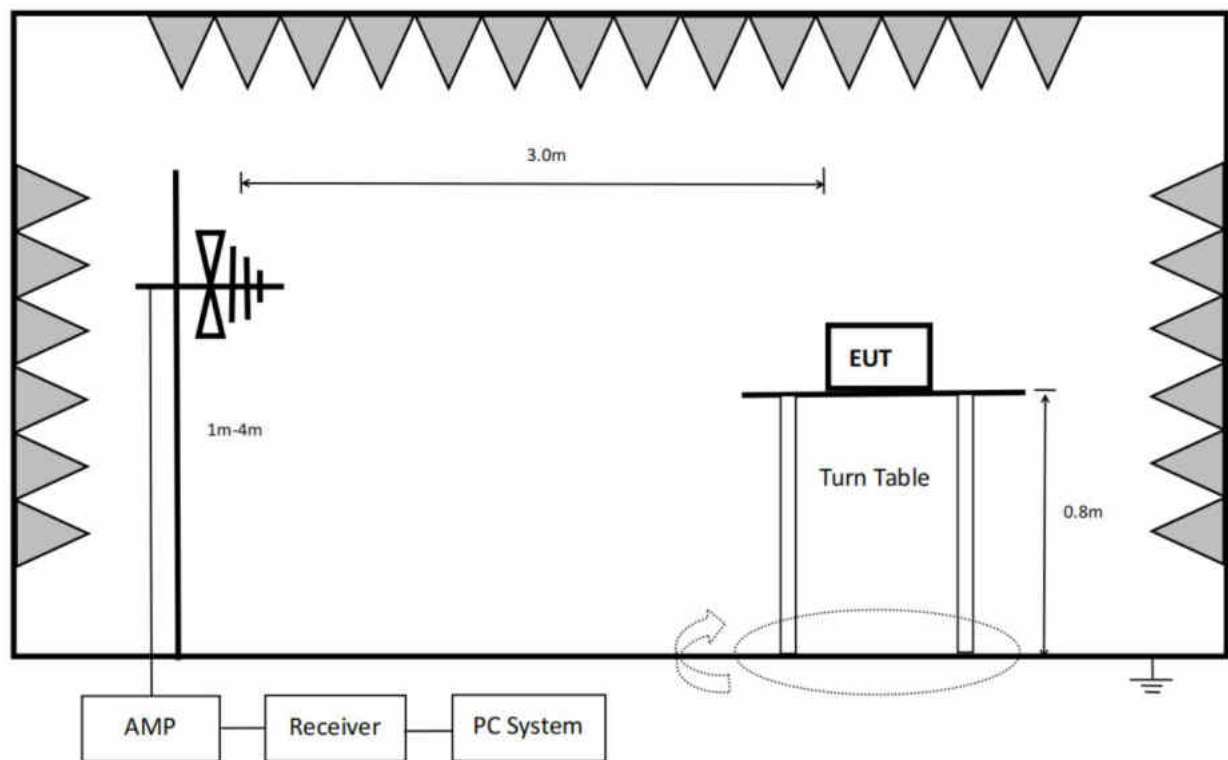

In 3 m Anechoic Chamber, test setup diagram for frequency above 1 GHz:

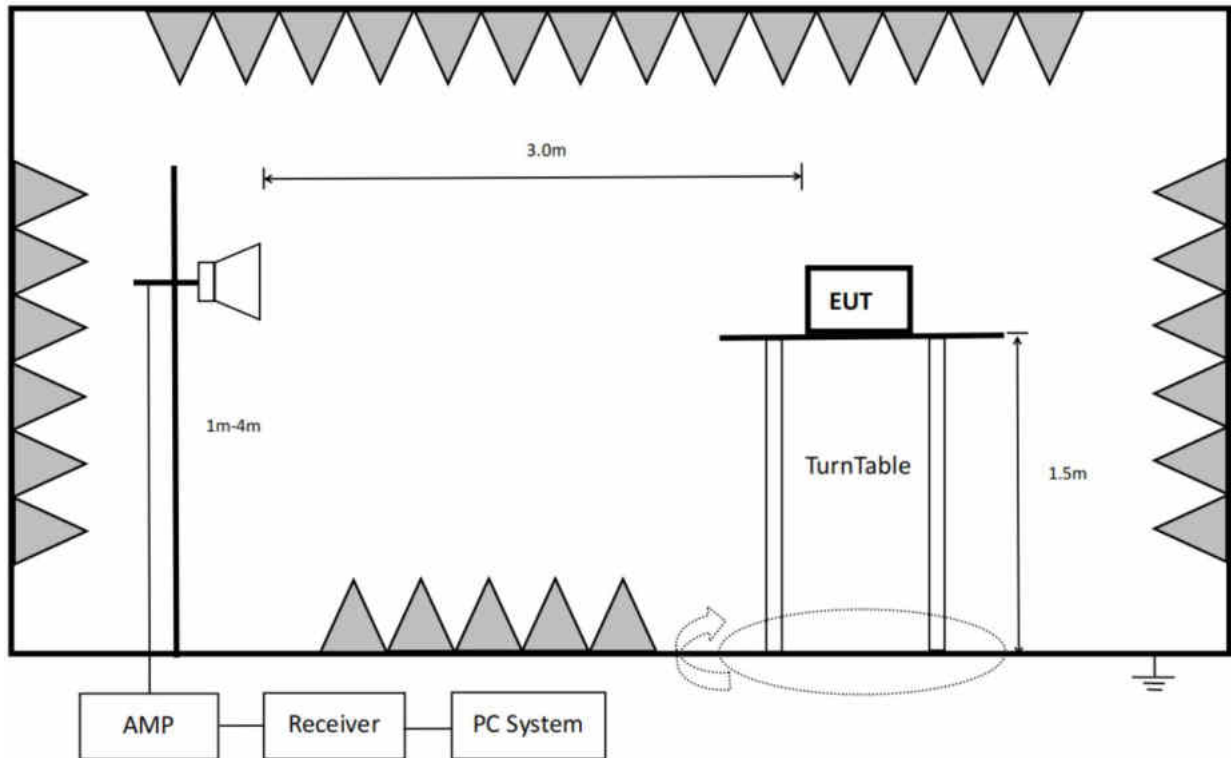

Note: For harmonic emissions test an appropriate high pass filter was inserted in the input port of AMP.

9.2. Limit

(1) FCC 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.1772&4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.2072&4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6

(2) FCC 15.209 Limit.

Frequency MHz	Distance Meters	Field Strengths Limit	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
0.009 ~ 0.490	300	2400/F(kHz)	67.6-20log(F)
0.490 ~ 1.705	30	24000/F(kHz)	87.6-20log(F)
1.705 ~ 30.0	30	30	29.54
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216~960	3	200	46.0
960~1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	

Note: (1) At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

(2) At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). This paragraph (f) shall not apply to Access BPL devices operating below 30 MHz.

About Restricted bands of operation please refer to RSS-Gen section 8.10 and FCC § 15.205(a).

9.3. Test Procedure

Below 30 MHz:

The setting of the spectrum Analyzer

RBW	300 Hz (From 9 kHz to 0.15 MHz)/ 10 kHz (From 0.15 MHz to 30 MHz)
VBW	1 kHz (From 9 kHz to 0.15 MHz)/ 30 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013

2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.

3. The EUT was placed on a turntable with 80 cm meter above ground.

4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of 1 meter height antenna tower.

5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT

measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore, sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.

Below 1 GHz and above 30 MHz:

The setting of the spectrum Analyzer

RBW	100 kHz
VBW	300 kHz
Sweep	Auto
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.

2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

3. The EUT was placed on a turntable with 80 cm above ground.

4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.

5. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

Above 1 GHz:

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.

2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

3. The EUT was placed on a turntable with 1.5m above ground.

4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.

5. For measurement above 1GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.

6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for AVG measurements. For the Duty Cycle please refer to clause 8.1.ON TIME AND DUTY CYCLE.

7. Restriction band: Investigated frequency range from 2310 MHz to 2430 MHz and 2445 MHz to 2500 MHz, 2310 MHz to 2450 MHz and 2425 MHz to 2500MHz.

All restriction band should comply with 15.209, other emission should be at least 20 dB below the fundamental.

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

Note 2: The EUT does not support simultaneous transmission.

Note 3: The EUT was fully exercised with external accessories during the test. In the case of multiple accessory external ports, an external accessory shall be connected to one of each type of port.

9.4. Results

Pass. (See below detailed test result)

All the emissions except fundamental emission from 9 kHz to 25 GHz were comply with 15.209 limits.

Note1: According exploratory test, the emission levels are 20 dB below the limit detected from 9 kHz to 30 MHz, so the final test was performed with frequency range from 30 MHz to 26 GHz and recorded in below.

Note2: For emissions below 1 GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1 GHz, the final test was only performed with EUT working in 802.11 AX20 mode.

Note3: For emissions above 1 GHz. If peak results comply with AV limit, AV Result is deemed to comply with AV limit.

9.5. Original test data

Below 1 GHz and above 30 MHz test data Refer to appendix A

Above 1 GHz test data Refer to appendix B

10. Antenna Requirements

10.1. Applicable Requirements

Please refer to FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC §15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

10.2. Result

The antenna used for this product is FPC antenna and that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is 2.42 dBi


APPENDIX A – Radiated Emission Below 1GHz Test Data

Test Report

Project Information			
EUT:			
Customer:			
Model:	SKI.WB921AU.1	SN:	
Mode:	11AX20_2412	Voltage:	DC 3.3V
Environment:	23.1℃ 54%	Engineer:	Soho Liu
Remark:			

Start of Test:2025-07-20 09:59:04

Test Graph

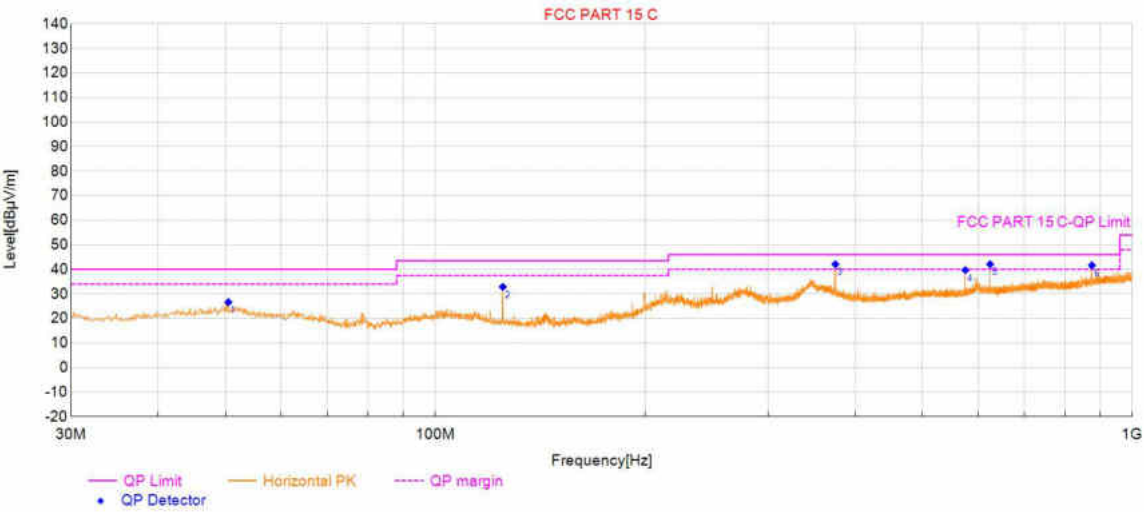


Final Data List									
NO.	Freq. (MHz)	Factor (dB)	QP Value (dBµV/m)	QP Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	50.47	21.52	26.62	40.00	13.38	100	357	Horizontal	PASS
2	124.97	17.42	32.88	43.50	10.62	100	243	Horizontal	PASS
3	374.97	25.07	42.09	46.00	3.91	100	336	Horizontal	PASS
4	575.97	29.10	39.71	46.00	6.29	100	151	Horizontal	PASS
5	625.06	30.08	42.09	46.00	3.91	100	29	Horizontal	PASS
6	875.05	33.65	41.65	46.00	4.35	100	42	Horizontal	PASS

Test Report

Project Information			
EUT:			
Customer:			
Model:	SKI.WB921AU.1	SN:	
Mode:	11AX20_2412	Voltage:	DC 3.3V
Environment:	23.1℃ 54%	Engineer:	Soho Liu
Remark:			

Start of Test:2025-07-20 09:59:39

Test Graph

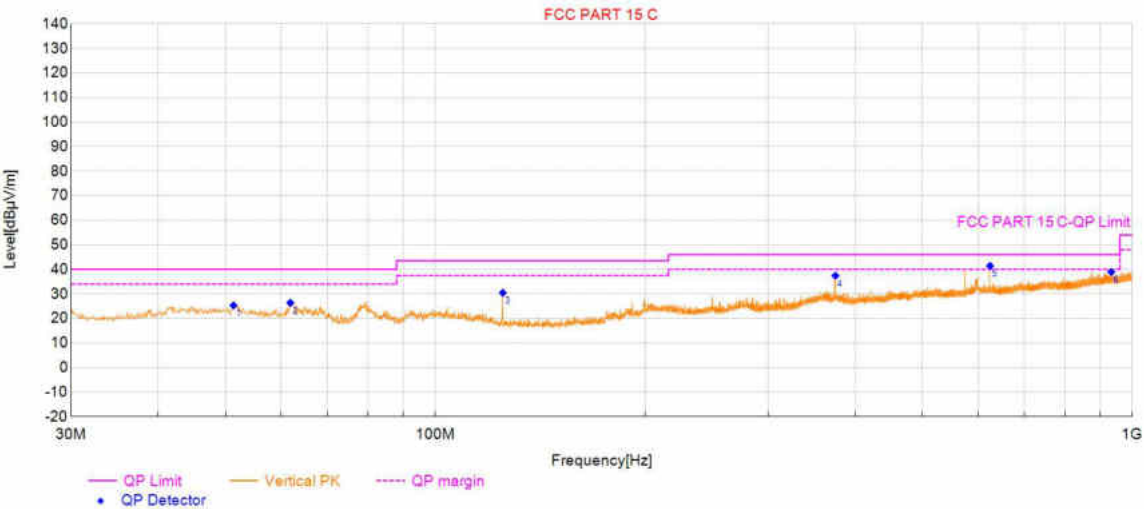

Final Data List									
NO.	Freq. (MHz)	Factor (dB)	QP Value (dBµV/m)	QP Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity	Verdict
1	51.34	21.39	25.35	40.00	14.65	100	302	Vertical	PASS
2	61.92	19.53	26.39	40.00	13.61	100	256	Vertical	PASS
3	124.97	17.42	30.45	43.50	13.05	100	160	Vertical	PASS
4	374.97	25.07	37.42	46.00	8.58	100	142	Vertical	PASS
5	624.96	30.07	41.43	46.00	4.57	100	58	Vertical	PASS
6	932.68	34.42	38.96	46.00	7.04	100	109	Vertical	PASS


APPENDIX B – Radiated Emission Above 1GHz Test Data

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB921AU.1	SN:	
Mode:	11AX20_2412	Voltage:	DC 3.3V
Environment:	24.3℃;52%	Engineer:	Orion chen
Remark:			

Start of Test:2025-07-14 14:20:55

Test Graph

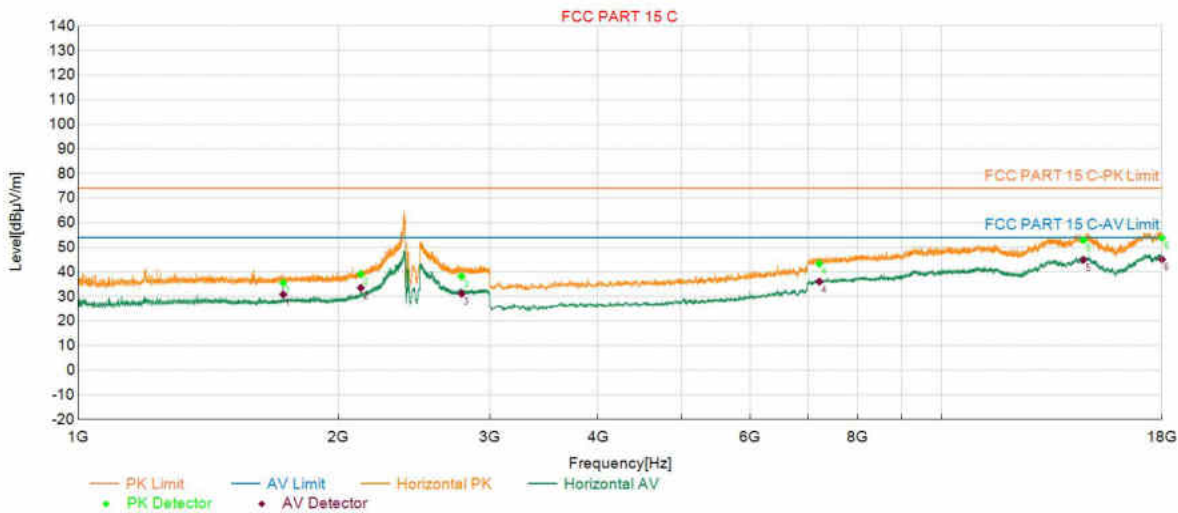

PK Final Data List							
NO.	Freq. (MHz)	PK Value (dBµV/m)	PK Limit (dBµV/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1728.146	35.54	74.00	38.46	150	359	Horizontal
2	2125.025	39.16	74.00	34.84	150	128	Horizontal
3	2779.956	38.20	74.00	35.80	150	100	Horizontal
4	7215.843	43.38	74.00	30.62	150	259	Horizontal
5	14597.319	52.91	74.00	21.09	150	117	Horizontal
6	17996.999	53.79	74.00	20.21	150	357	Horizontal


AV Final Data List							
NO.	Freq. (MHz)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1728.146	30.83	54.00	23.17	150	359	Horizontal
2	2125.025	33.52	54.00	20.48	150	128	Horizontal
3	2779.956	31.13	54.00	22.87	150	100	Horizontal
4	7215.843	36.04	54.00	17.96	150	259	Horizontal
5	14597.319	44.88	54.00	9.12	150	117	Horizontal
6	17996.999	45.08	54.00	8.92	150	357	Horizontal

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB921AU.1	SN:	
Mode:	11AX20_2412	Voltage:	DC 3.3V
Environment:	24.3℃;52%	Engineer:	Orion chen
Remark:			

Start of Test:2025-07-14 14:22:36

Test Graph

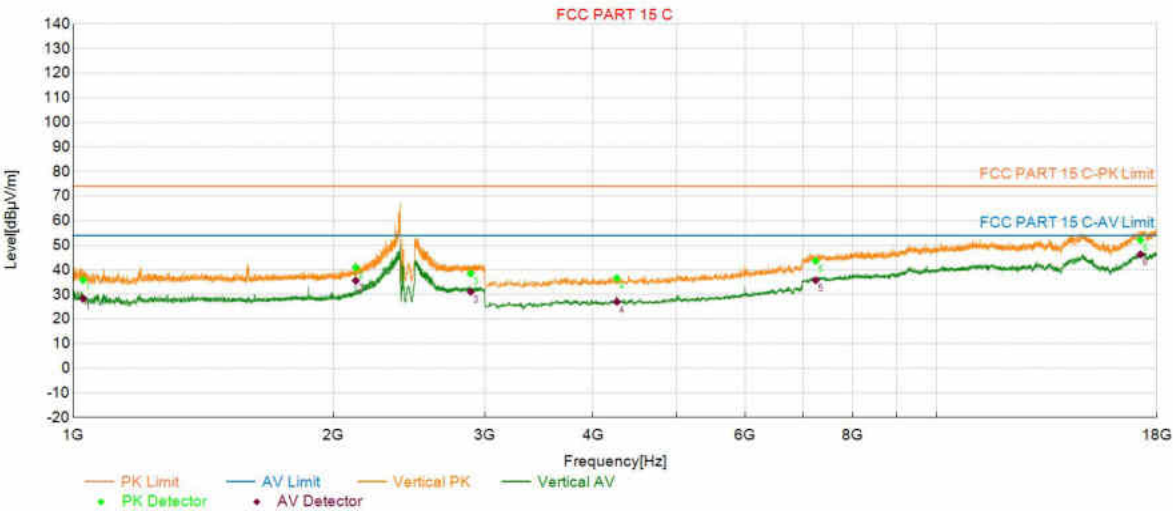

PK Final Data List

NO.	Freq. (MHz)	PK Value (dBµV/m)	PK Limit (dBµV/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1026.805	35.93	74.00	38.07	150	68	Vertical
2	2125.025	41.02	74.00	32.98	150	322	Vertical
3	2887.177	38.52	74.00	35.48	150	17	Vertical
4	4263.253	36.67	74.00	37.33	150	2	Vertical
5	7242.849	43.63	74.00	30.37	150	67	Vertical
6	17222.845	52.19	74.00	21.81	150	0	Vertical

AV Final Data List


NO.	Freq. (MHz)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1026.805	28.24	54.00	25.76	150	68	Vertical
2	2125.025	35.64	54.00	18.36	150	322	Vertical
3	2887.177	31.11	54.00	22.89	150	17	Vertical
4	4263.253	27.06	54.00	26.94	150	2	Vertical
5	7242.849	35.79	54.00	18.21	150	67	Vertical
6	17222.845	46.31	54.00	7.69	150	0	Vertical

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB921AU.1	SN:	
Mode:	11AX20_2437	Voltage:	DC 3.3V
Environment:	24.3℃;52%	Engineer:	Orion chen
Remark:			

Start of Test:2025-07-14 14:26:47

Test Graph

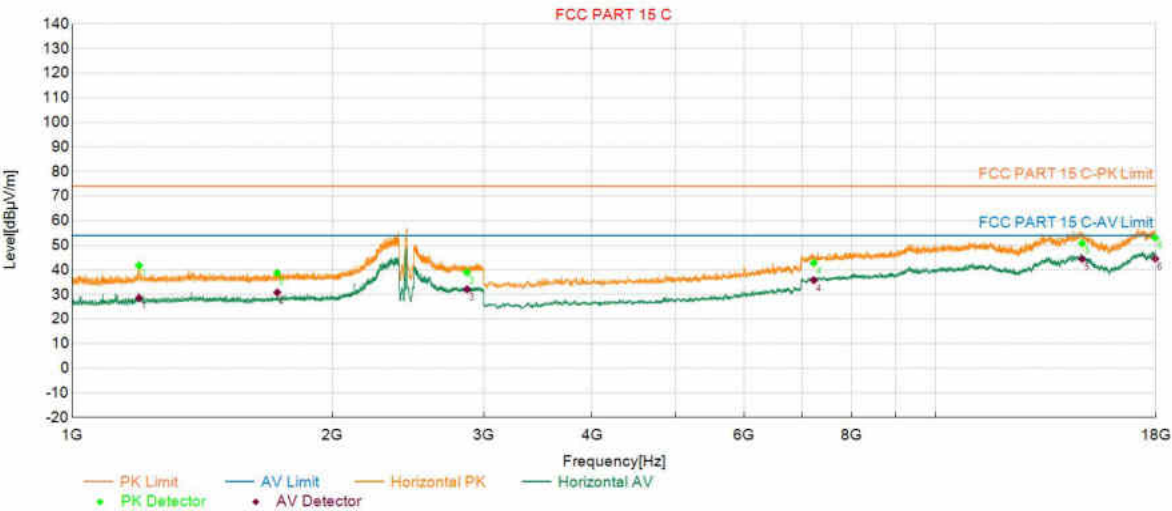

PK Final Data List							
NO.	Freq. (MHz)	PK Value (dBμV/m)	PK Limit (dBμV/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1195.239	41.75	74.00	32.25	150	182	Horizontal
2	1728.146	38.76	74.00	35.24	150	360	Horizontal
3	2865.573	39.00	74.00	35.00	150	342	Horizontal
4	7227.846	42.83	74.00	31.17	150	1	Horizontal
5	14780.356	50.78	74.00	23.22	150	92	Horizontal
6	17966.993	53.12	74.00	20.88	150	56	Horizontal


AV Final Data List							
NO.	Freq. (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1195.239	28.58	54.00	25.42	150	182	Horizontal
2	1728.146	30.83	54.00	23.17	150	360	Horizontal
3	2865.573	32.10	54.00	21.90	150	342	Horizontal
4	7227.846	35.80	54.00	18.20	150	1	Horizontal
5	14780.356	44.45	54.00	9.55	150	92	Horizontal
6	17966.993	44.54	54.00	9.46	150	56	Horizontal

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB921AU.1	SN:	
Mode:	11AX20_2437	Voltage:	DC 3.3V
Environment:	24.3℃;52%	Engineer:	Orion chen
Remark:			

Start of Test:2025-07-14 14:28:16

Test Graph

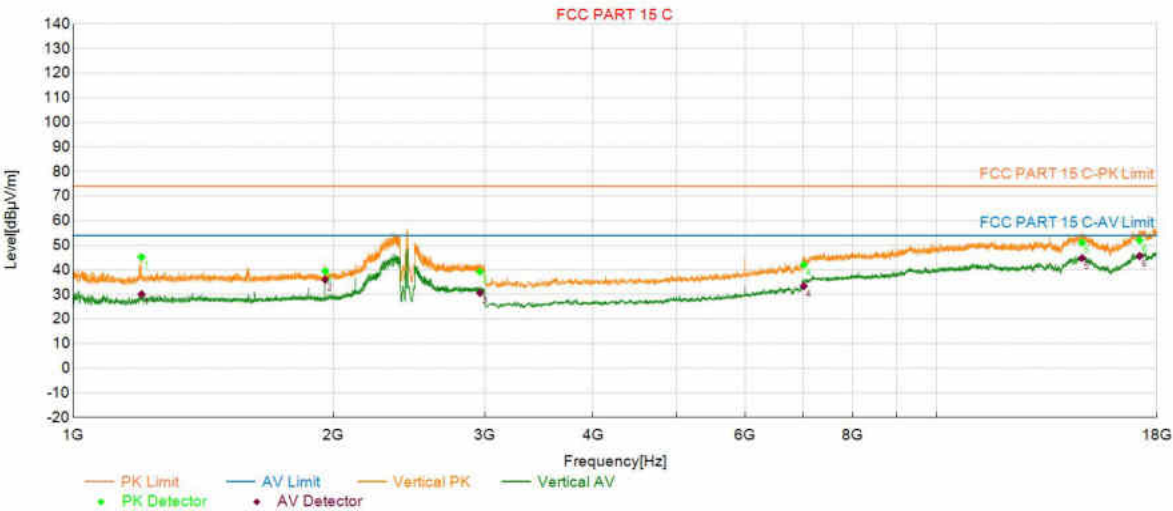

PK Final Data List							
NO.	Freq. (MHz)	PK Value (dBμV/m)	PK Limit (dBμV/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1200.040	45.22	74.00	28.78	150	50	Vertical
2	1959.392	39.52	74.00	34.48	150	193	Vertical
3	2959.192	39.29	74.00	34.71	150	232	Vertical
4	7017.804	42.05	74.00	31.95	150	0	Vertical
5	14741.348	51.15	74.00	22.85	150	0	Vertical
6	17180.836	52.03	74.00	21.97	150	24	Vertical


AV Final Data List							
NO.	Freq. (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1200.040	30.14	54.00	23.86	150	50	Vertical
2	1959.392	35.98	54.00	18.02	150	193	Vertical
3	2959.192	30.66	54.00	23.34	150	232	Vertical
4	7017.804	33.41	54.00	20.59	150	0	Vertical
5	14741.348	44.81	54.00	9.19	150	0	Vertical
6	17180.836	45.61	54.00	8.39	150	24	Vertical

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB921AU.1	SN:	
Mode:	11AX20_2467	Voltage:	DC 3.3V
Environment:	24.3℃;52%	Engineer:	Orion chen
Remark:			

Start of Test:2025-07-14 14:30:19

Test Graph

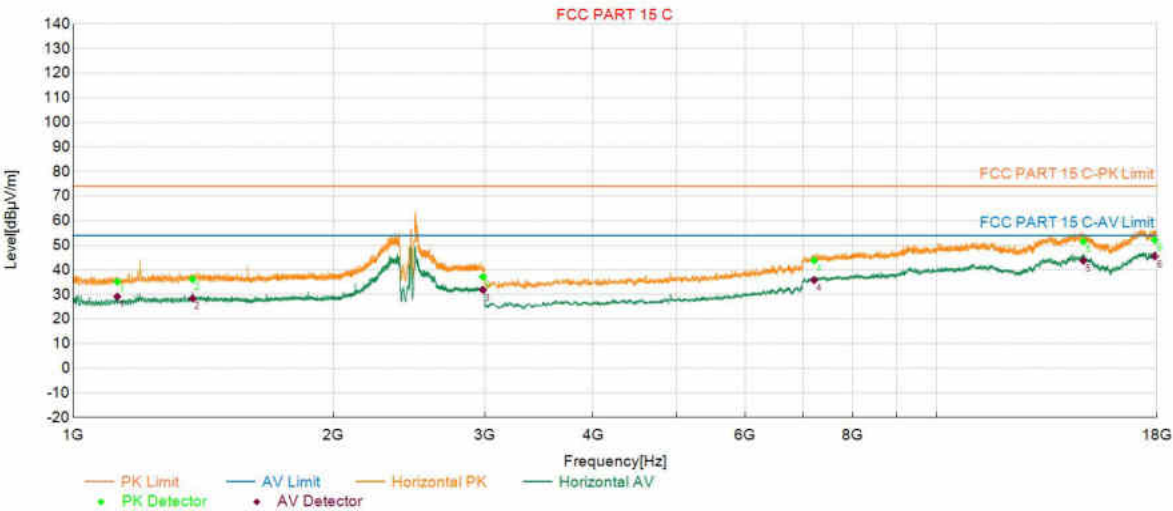

PK Final Data List							
NO.	Freq. (MHz)	PK Value (dBμV/m)	PK Limit (dBμV/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1124.825	35.26	74.00	38.74	150	201	Horizontal
2	1374.875	36.27	74.00	37.73	150	118	Horizontal
3	2982.396	37.17	74.00	36.83	150	18	Horizontal
4	7212.843	43.84	74.00	30.16	150	0	Horizontal
5	14789.358	51.62	74.00	22.38	150	306	Horizontal
6	17894.979	52.13	74.00	21.87	150	32	Horizontal


AV Final Data List							
NO.	Freq. (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1124.825	29.16	54.00	24.84	150	201	Horizontal
2	1374.875	28.40	54.00	25.60	150	118	Horizontal
3	2982.396	31.89	54.00	22.11	150	18	Horizontal
4	7212.843	35.86	54.00	18.14	150	0	Horizontal
5	14789.358	43.73	54.00	10.27	150	306	Horizontal
6	17894.979	45.52	54.00	8.48	150	32	Horizontal

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB921AU.1	SN:	
Mode:	11AX20_2462	Voltage:	DC 3.3V
Environment:	24.3℃;52%	Engineer:	Orion chen
Remark:			

Start of Test:2025-07-14 14:31:49

Test Graph

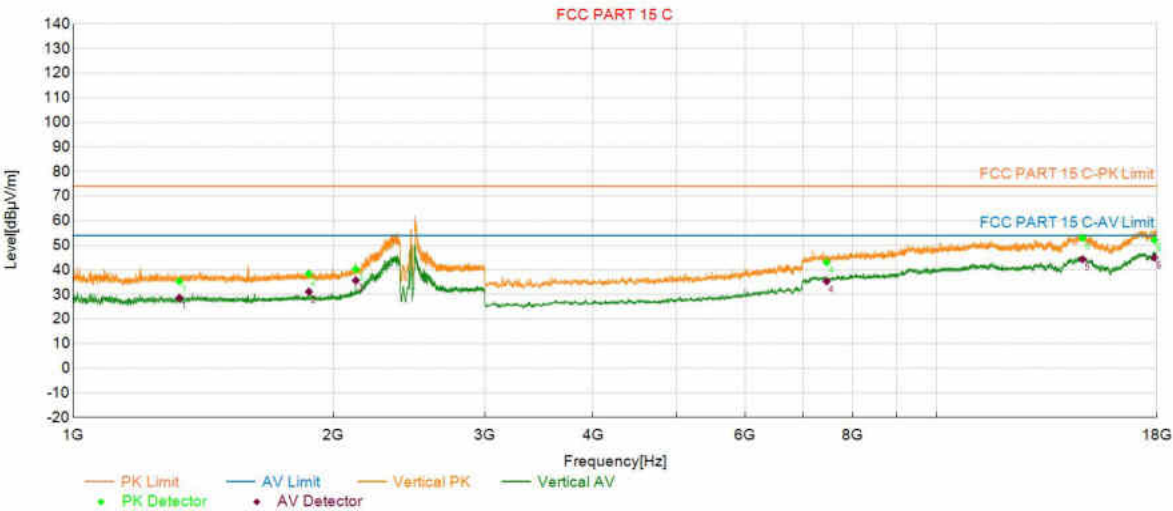

PK Final Data List							
NO.	Freq. (MHz)	PK Value (dBµV/m)	PK Limit (dBµV/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1327.265	35.38	74.00	38.62	150	162	Vertical
2	1874.975	38.43	74.00	35.57	150	181	Vertical
3	2125.025	40.31	74.00	33.69	150	323	Vertical
4	7458.892	43.08	74.00	30.92	150	95	Vertical
5	14756.351	52.98	74.00	21.02	150	126	Vertical
6	17879.976	52.12	74.00	21.88	150	229	Vertical


AV Final Data List							
NO.	Freq. (MHz)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1327.265	28.63	54.00	25.37	150	162	Vertical
2	1874.975	31.13	54.00	22.87	150	181	Vertical
3	2125.025	35.72	54.00	18.28	150	323	Vertical
4	7458.892	35.33	54.00	18.67	150	95	Vertical
5	14756.351	44.31	54.00	9.69	150	126	Vertical
6	17879.976	44.96	54.00	9.04	150	229	Vertical

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB921AU.1	SN:	
Mode:	11B_2412	Voltage:	DC 3.3V
Environment:	24.3℃;52%	Engineer:	Orion chen
Remark:			

Start of Test:2025-07-14 10:14:41

Test Graph

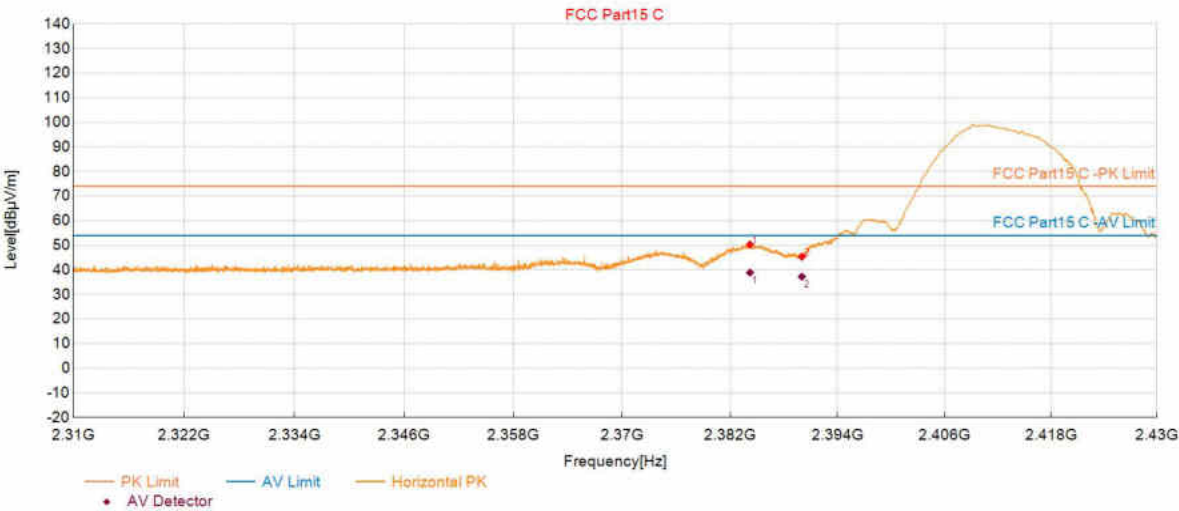

Suspected Data List							
NO.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2384.223	50.31	74.00	23.69	150	112	Horizontal
2	2390.008	45.38	74.00	28.62	150	227	Horizontal


AV Final Data List							
NO.	Freq. (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2384.223	38.89	54.00	15.11	150	112	Horizontal
2	2390.008	37.28	54.00	16.72	150	227	Horizontal

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB921AU.1	SN:	
Mode:	11B_2412	Voltage:	DC 3.3V
Environment:	24.3℃;52%	Engineer:	Orion chen
Remark:			

Start of Test:2025-07-14 10:15:39

Test Graph

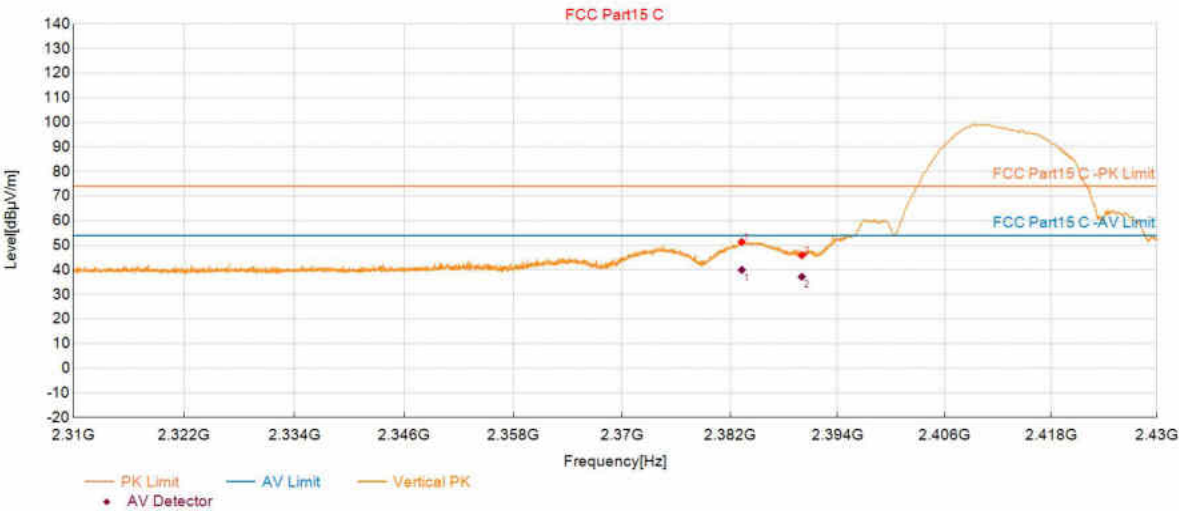

Suspected Data List							
NO.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2383.311	51.38	74.00	22.62	150	126	Vertical
2	2390.008	45.96	74.00	28.04	150	117	Vertical


AV Final Data List							
NO.	Freq. (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2383.311	40.01	54.00	13.99	150	126	Vertical
2	2390.008	37.22	54.00	16.78	150	117	Vertical

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB921AU.1	SN:	
Mode:	11B_2462	Voltage:	DC 3.3V
Environment:	24.3℃;52%	Engineer:	Orion chen
Remark:			

Start of Test:2025-07-14 10:18:53

Test Graph

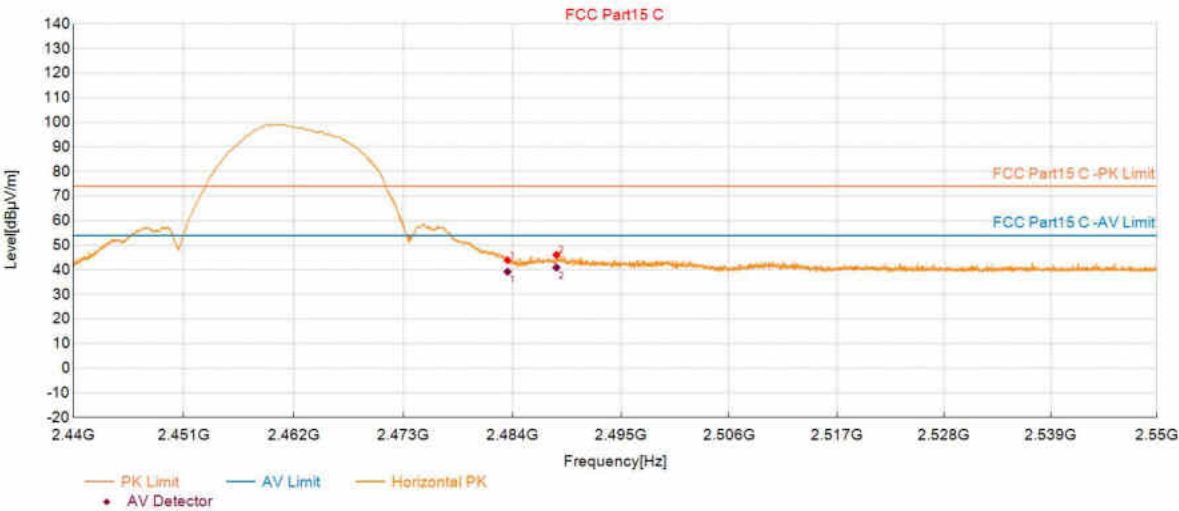

Suspected Data List							
NO.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.503	43.96	74.00	30.04	150	217	Horizontal
2	2488.454	46.11	74.00	27.89	150	270	Horizontal


AV Final Data List							
NO.	Freq. (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.503	39.26	54.00	14.74	150	217	Horizontal
2	2488.454	40.97	54.00	13.03	150	270	Horizontal

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB921AU.1	SN:	
Mode:	11B_2462	Voltage:	DC 3.3V
Environment:	24.3℃;52%	Engineer:	Orion chen
Remark:			

Start of Test:2025-07-14 10:19:51

Test Graph

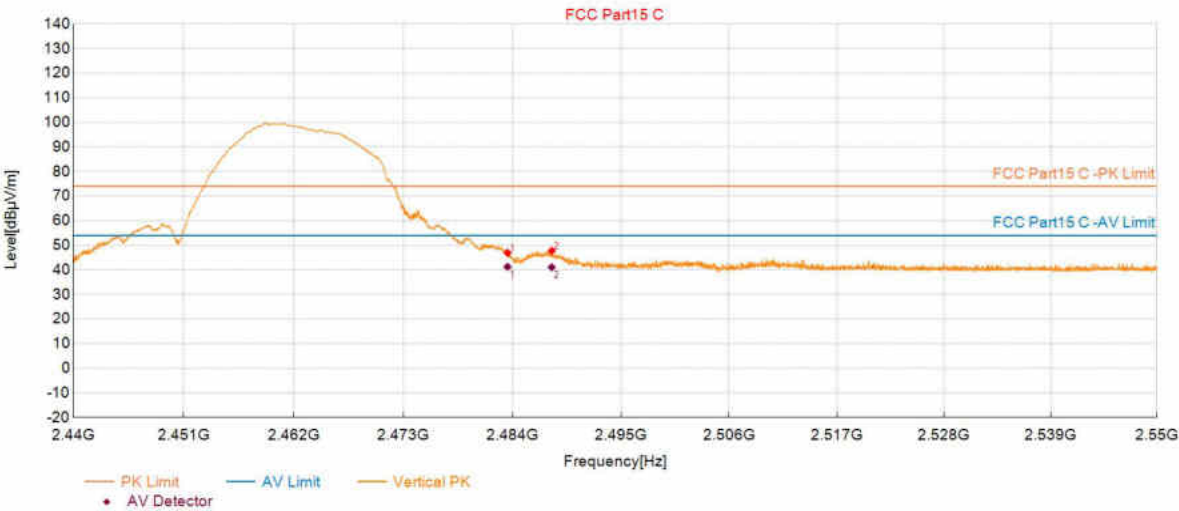

Suspected Data List							
NO.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.503	46.96	74.00	27.04	150	126	Vertical
2	2487.970	47.79	74.00	26.21	150	126	Vertical


AV Final Data List							
NO.	Freq. (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.503	41.26	54.00	12.74	150	126	Vertical
2	2487.970	41.09	54.00	12.91	150	126	Vertical

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB921AU.1	SN:	
Mode:	11G_2412	Voltage:	DC 3.3V
Environment:	24.3℃;52%	Engineer:	Orion chen
Remark:			

Start of Test:2025-07-14 10:23:32

Test Graph

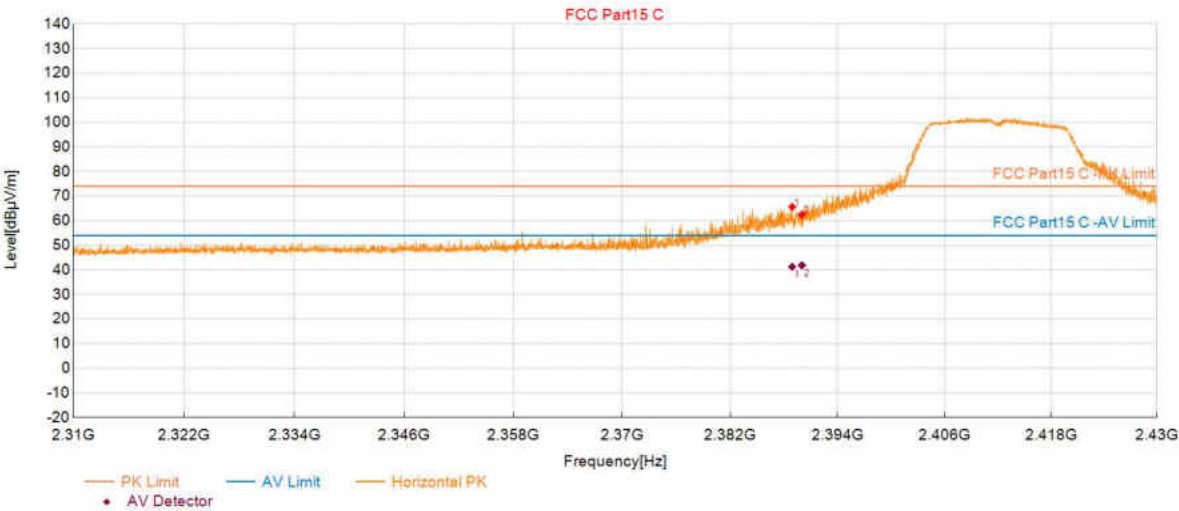

Suspected Data List							
NO.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2388.928	65.58	74.00	8.42	150	311	Horizontal
2	2390.008	62.39	74.00	11.61	150	16	Horizontal


AV Final Data List							
NO.	Freq. (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2388.926	41.27	54.00	12.73	155.3	112	Horizontal
2	2390.008	41.86	54.00	12.14	150	16	Horizontal

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB921AU.1	SN:	
Mode:	11G_2412	Voltage:	DC 3.3V
Environment:	24.3℃;52%	Engineer:	Orion chen
Remark:			

Start of Test:2025-07-14 10:24:30

Test Graph

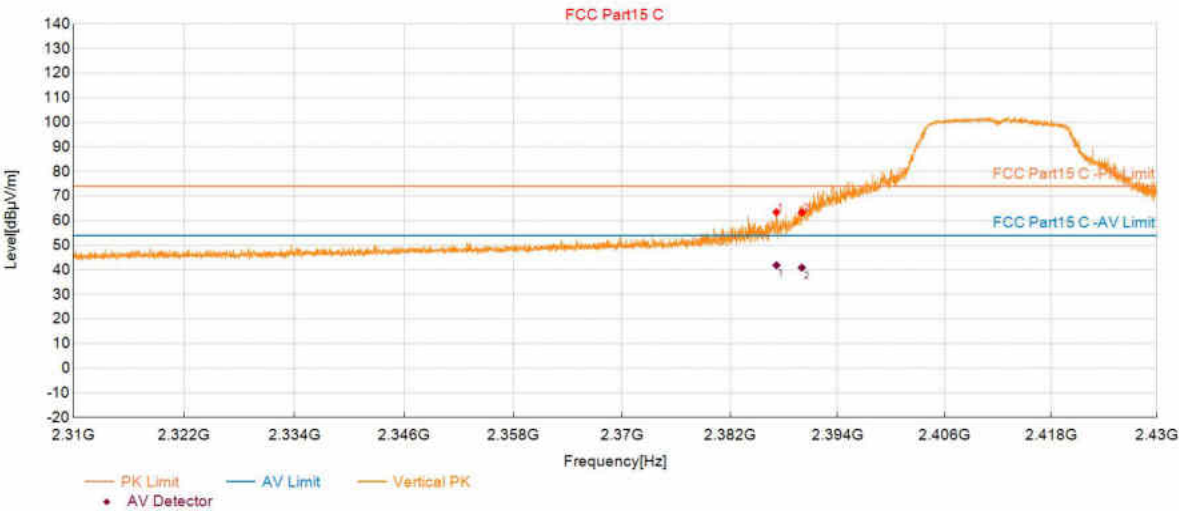

Suspected Data List							
NO.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2387.175	63.47	74.00	10.53	150	351	Vertical
2	2390.008	63.42	74.00	10.58	150	124	Vertical


AV Final Data List							
NO.	Freq. (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2387.175	41.88	54.00	12.12	150	351	Vertical
2	2390.008	40.92	54.00	13.08	150	124	Vertical

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB921AU.1	SN:	
Mode:	11G_2462	Voltage:	DC 3.3V
Environment:	24.3℃;52%	Engineer:	Orion chen
Remark:			

Start of Test:2025-07-14 10:32:46

Test Graph

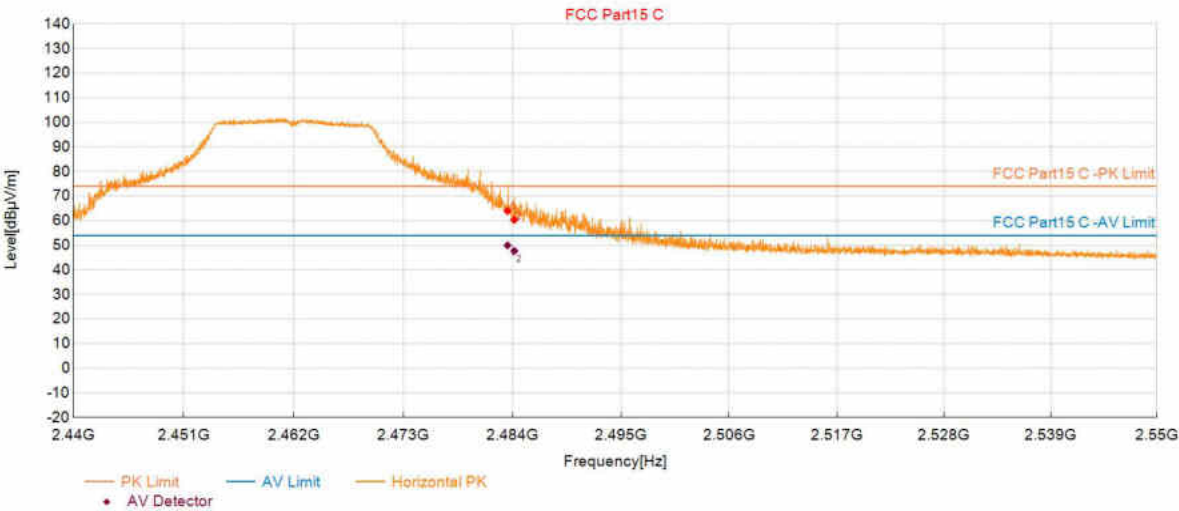

Suspected Data List							
NO.	Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.503	63.97	74.00	7.77	150	121	Horizontal
2	2484.185	60.37	74.00	4.38	150	210	Horizontal


AV Final Data List							
NO.	Freq. (MHz)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.503	50.00	54.00	4.00	150	121	Horizontal
2	2484.185	47.78	54.00	6.22	136.8	148	Horizontal

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB921AU.1	SN:	
Mode:	11G_2462	Voltage:	DC 3.3V
Environment:	24.3℃;52%	Engineer:	Orion chen
Remark:			

Start of Test:2025-07-14 10:33:43

Test Graph

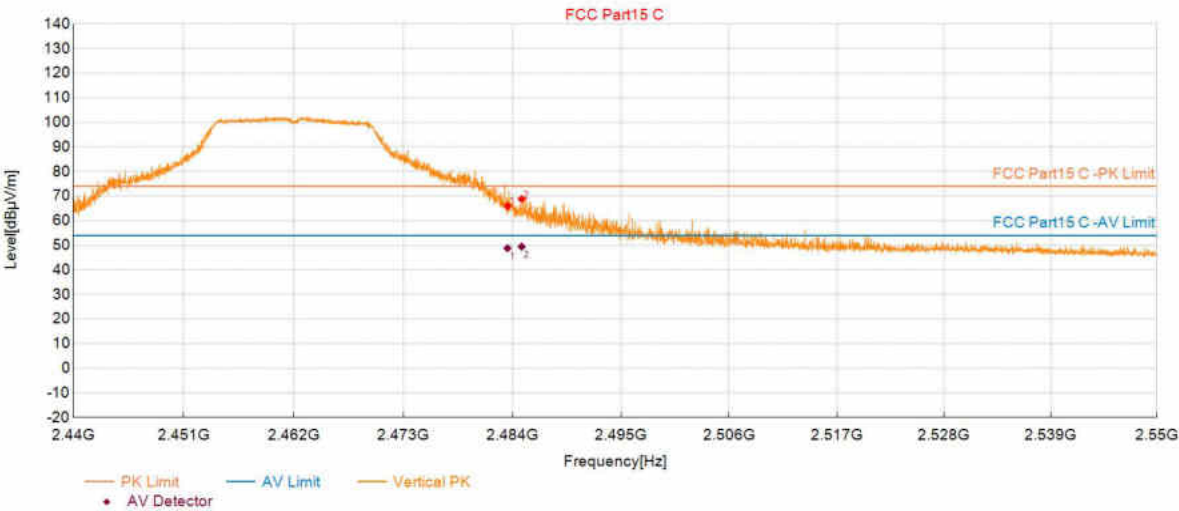

Suspected Data List							
NO.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.503	65.98	74.00	8.02	150	133	Vertical
2	2484.933	68.80	74.00	5.20	150	124	Vertical


AV Final Data List							
NO.	Freq. (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.503	48.81	54.00	5.19	150	133	Vertical
2	2484.933	49.47	54.00	4.53	150	124	Vertical

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB921AU.1	SN:	
Mode:	11N20_2412	Voltage:	DC 3.3V
Environment:	24.3℃;52%	Engineer:	Orion chen
Remark:			

Start of Test:2025-07-14 10:52:56

Test Graph

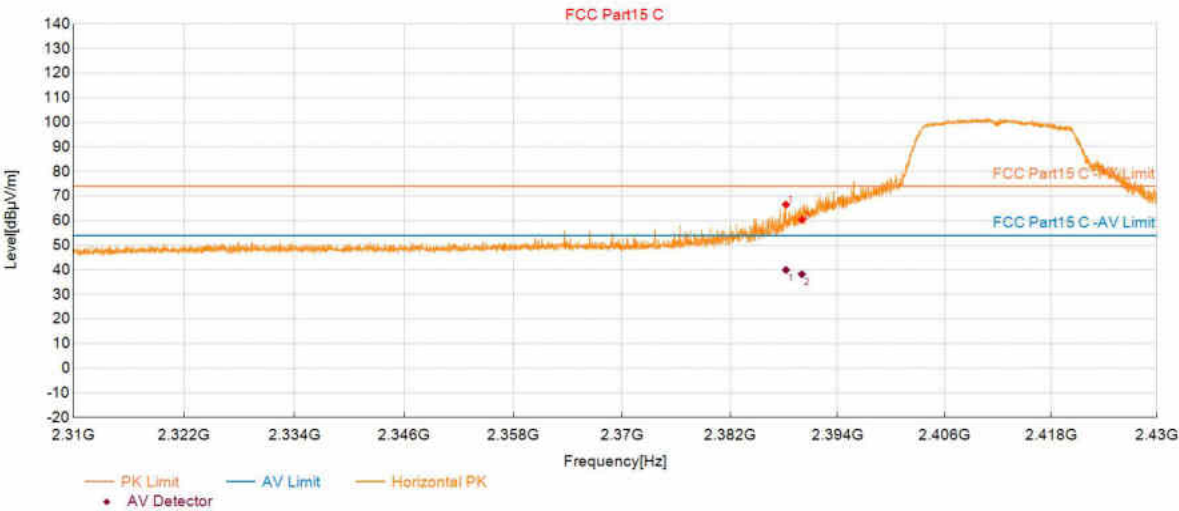

Suspected Data List							
NO.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2388.232	66.57	74.00	7.43	150	229	Horizontal
2	2390.008	60.35	74.00	13.65	150	212	Horizontal


AV Final Data List							
NO.	Freq. (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2388.232	39.98	54.00	14.02	150	229	Horizontal
2	2390.008	38.23	54.00	15.77	150	212	Horizontal

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB921AU.1	SN:	
Mode:	11N20_2412	Voltage:	DC 3.3V
Environment:	24.3℃;52%	Engineer:	Orion chen
Remark:			

Start of Test:2025-07-14 10:53:53

Test Graph

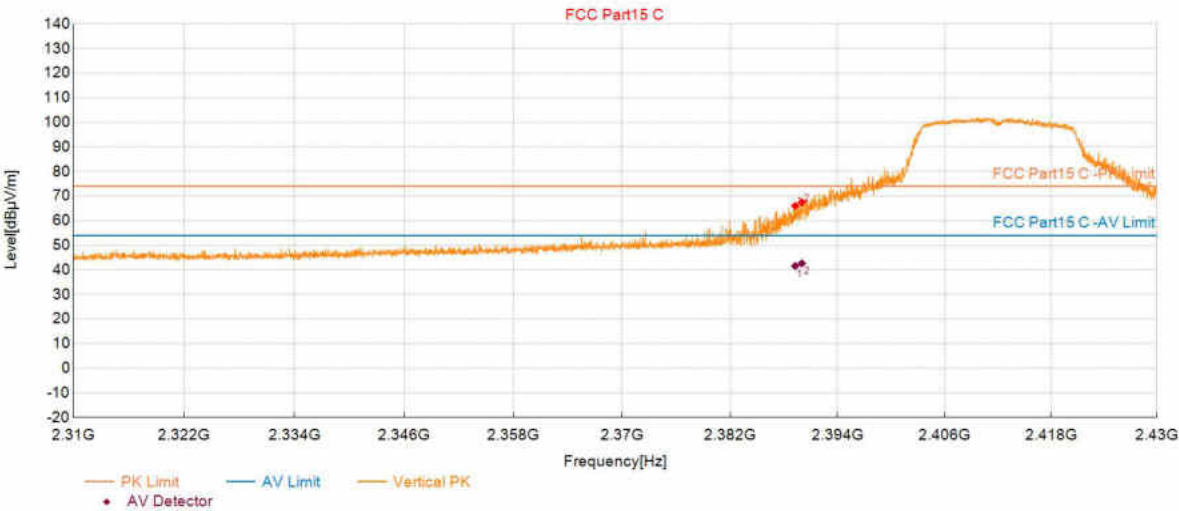

Suspected Data List							
NO.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2389.264	66.06	74.00	7.94	150	121	Vertical
2	2390.008	67.52	74.00	6.48	150	121	Vertical


AV Final Data List							
NO.	Freq. (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2389.264	41.60	54.00	12.40	150	121	Vertical
2	2390.008	42.67	54.00	11.33	138.5	135	Vertical

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB921AU.1	SN:	
Mode:	11N20_2462	Voltage:	DC 3.3V
Environment:	24.3℃;52%	Engineer:	Orion chen
Remark:			

Start of Test:2025-07-14 11:03:50

Test Graph

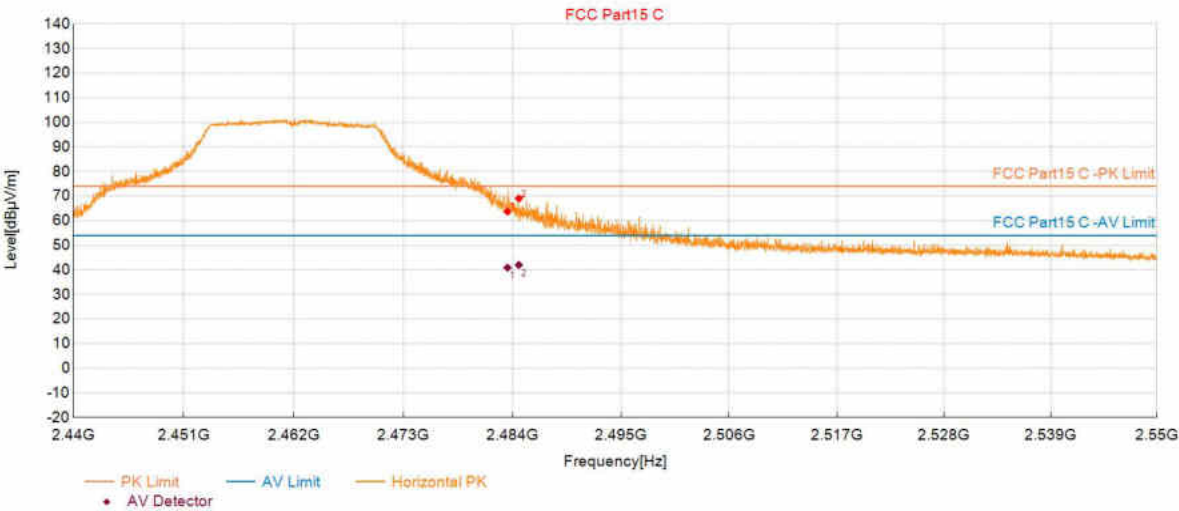

Suspected Data List							
NO.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.503	63.74	74.00	10.26	150	229	Horizontal
2	2484.647	69.06	74.00	4.94	150	96	Horizontal


AV Final Data List							
NO.	Freq. (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.503	40.91	54.00	13.09	150	229	Horizontal
2	2484.647	42.01	54.00	11.99	150	96	Horizontal

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB921AU.1	SN:	
Mode:	11N20_2462	Voltage:	DC 3.3V
Environment:	24.3℃;52%	Engineer:	Orion chen
Remark:			

Start of Test:2025-07-14 11:04:36

Test Graph

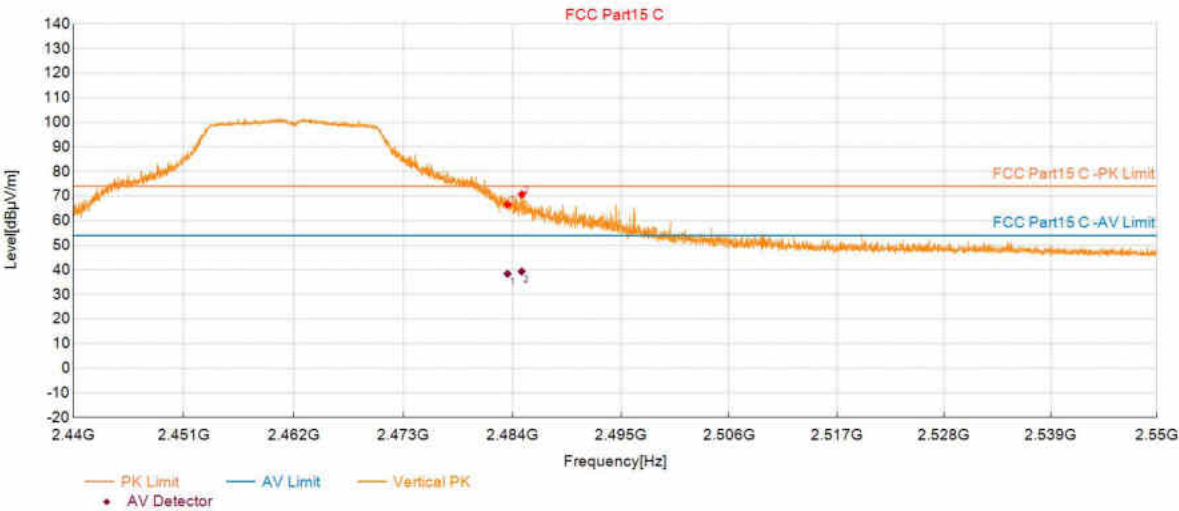

Suspected Data List							
NO.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.503	66.57	74.00	9.13	150	124	Vertical
2	2484.933	70.69	74.00	3.31	150	143	Vertical


AV Final Data List							
NO.	Freq. (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.503	38.39	54.00	15.61	150	124	Vertical
2	2484.935	39.39	54.00	14.61	156.1	143	Vertical

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB921AU.1	SN:	
Mode:	11N40_2422	Voltage:	DC 3.3V
Environment:	24.3℃;52%	Engineer:	Orion chen
Remark:			

Start of Test:2025-07-14 11:22:53

Test Graph

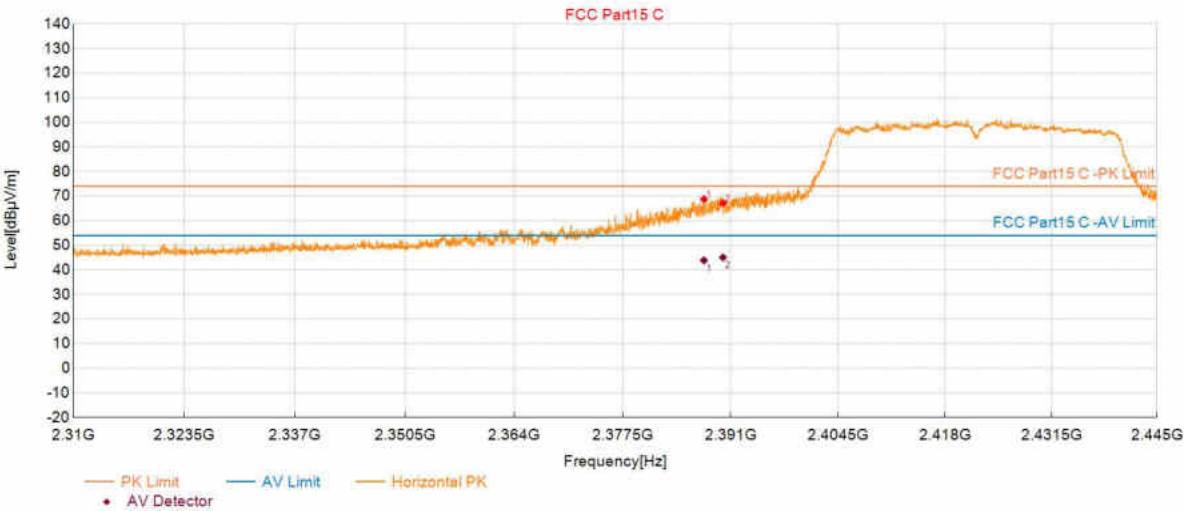

Suspected Data List							
NO.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2387.641	68.76	74.00	5.24	150	76	Horizontal
2	2390.017	67.13	74.00	6.87	150	91	Horizontal


AV Final Data List							
NO.	Freq. (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2387.641	43.89	54.00	10.11	150	76	Horizontal
2	2390.017	45.09	54.00	8.91	150	91	Horizontal

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB921AU.1	SN:	
Mode:	11N40_2422	Voltage:	DC 3.3V
Environment:	24.3℃;52%	Engineer:	Orion chen
Remark:			

Start of Test:2025-07-14 11:23:55

Test Graph

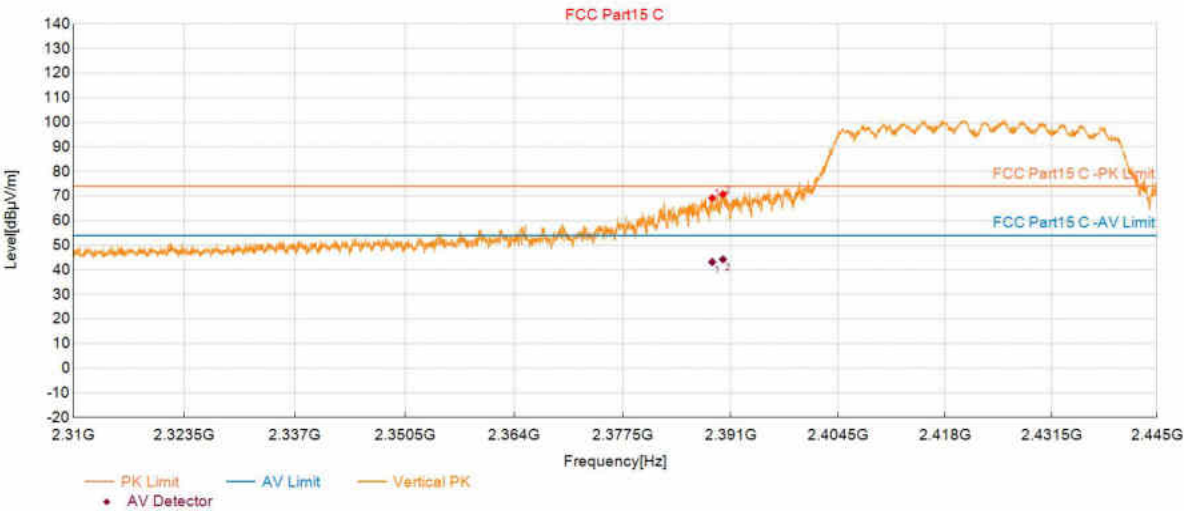

Suspected Data List							
NO.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2388.667	69.21	74.00	4.79	150	124	Vertical
2	2390.017	70.72	74.00	3.28	150	117	Vertical


AV Final Data List							
NO.	Freq. (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2388.667	43.20	54.00	10.80	150	124	Vertical
2	2390.016	44.28	54.00	9.72	137.9	121	Vertical

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB921AU.1	SN:	
Mode:	11N40_2452	Voltage:	DC 3.3V
Environment:	24.3℃;52%	Engineer:	Orion chen
Remark:			

Start of Test:2025-07-14 11:32:39

Test Graph

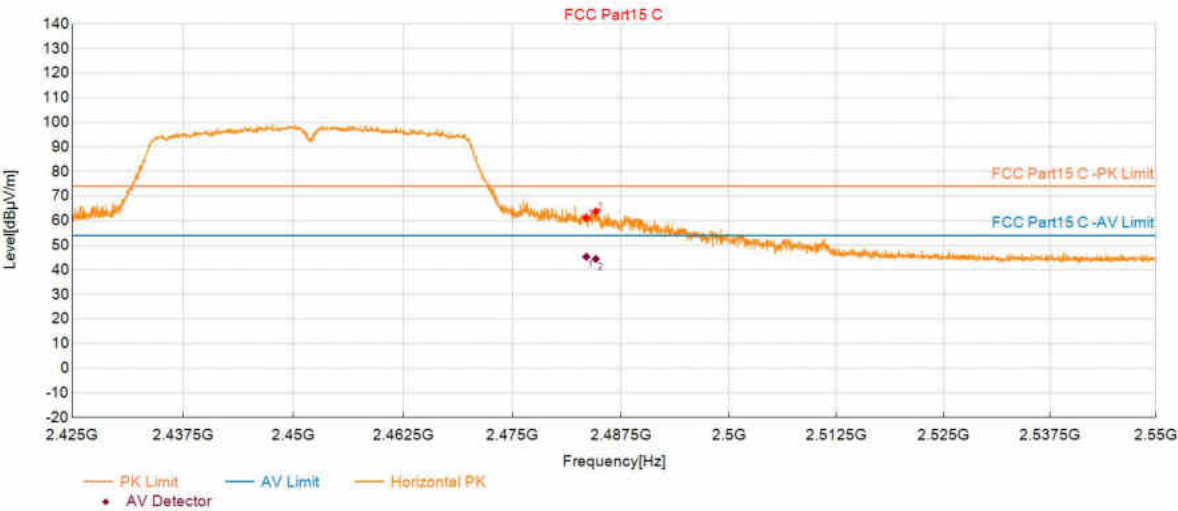

Suspected Data List							
NO.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.512	61.16	74.00	12.84	150	346	Horizontal
2	2484.612	63.72	74.00	10.28	150	352	Horizontal


AV Final Data List							
NO.	Freq. (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.512	45.36	54.00	8.64	150	346	Horizontal
2	2484.612	44.46	54.00	9.54	150	352	Horizontal

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB921AU.1	SN:	
Mode:	11N40_2452	Voltage:	DC 3.3V
Environment:	24.3℃;52%	Engineer:	Orion chen
Remark:			

Start of Test:2025-07-14 11:33:41

Test Graph

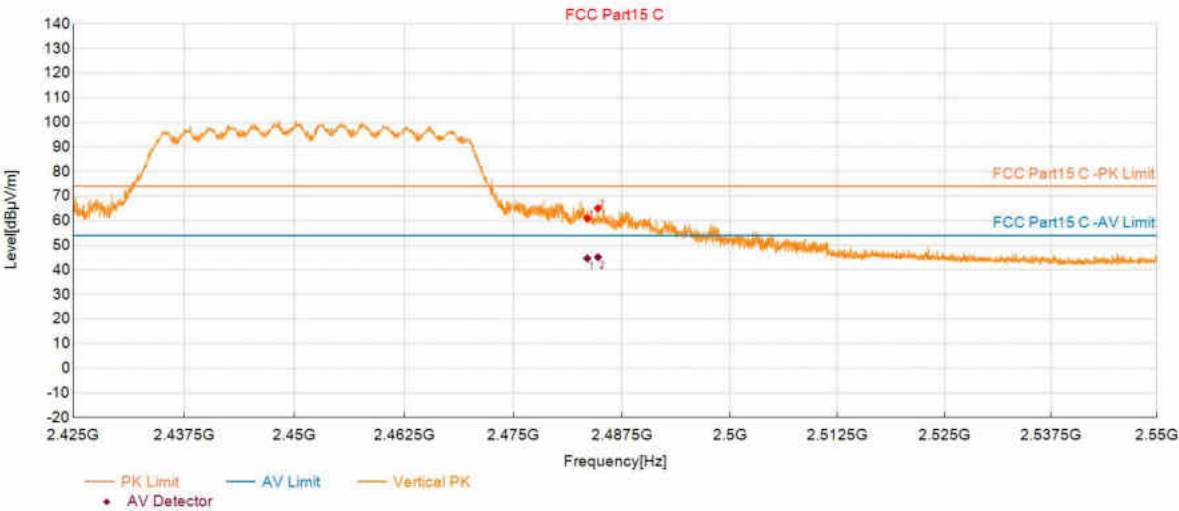

Suspected Data List							
NO.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.512	60.98	74.00	13.02	150	117	Vertical
2	2484.737	65.03	74.00	8.97	150	117	Vertical


AV Final Data List							
NO.	Freq. (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.512	44.69	54.00	9.31	150	117	Vertical
2	2484.737	45.16	54.00	8.84	150	117	Vertical

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB921AU.1	SN:	
Mode:	11AX20_2412	Voltage:	DC 3.3V
Environment:	24.3℃;52%	Engineer:	Orion chen
Remark:			

Start of Test:2025-07-14 11:36:31

Test Graph

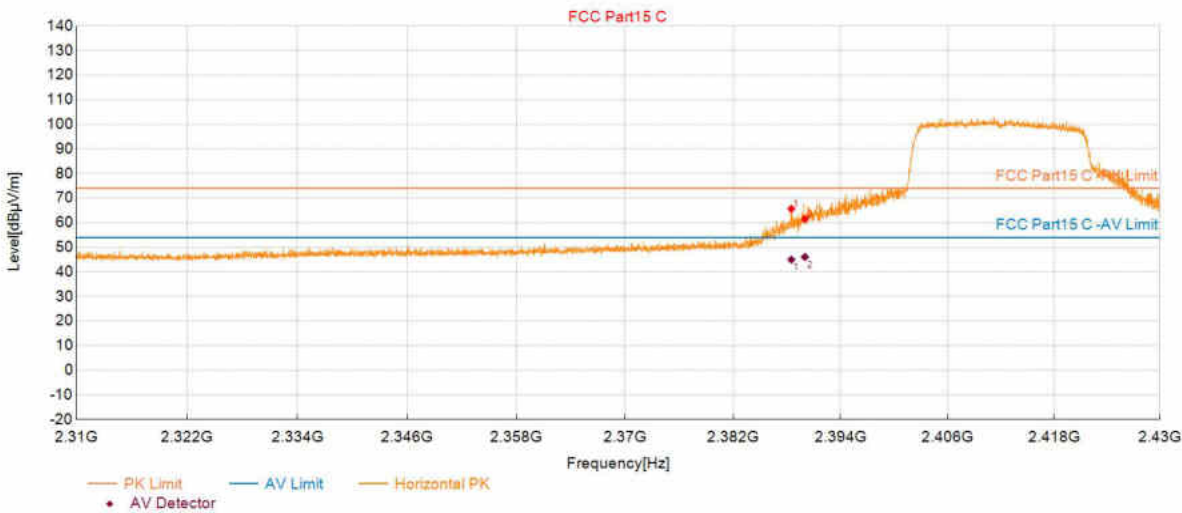

Suspected Data List							
NO.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2388.496	65.67	74.00	8.33	150	71	Horizontal
2	2390.008	61.53	74.00	12.47	150	88	Horizontal


AV Final Data List							
NO.	Freq. (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2388.496	45.00	54.00	9.00	150	71	Horizontal
2	2390.008	46.09	54.00	7.91	150	88	Horizontal

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB921AU.1	SN:	
Mode:	11AX20_2412	Voltage:	DC 3.3V
Environment:	24.3℃;52%	Engineer:	Orion chen
Remark:			

Start of Test:2025-07-14 11:37:29

Test Graph

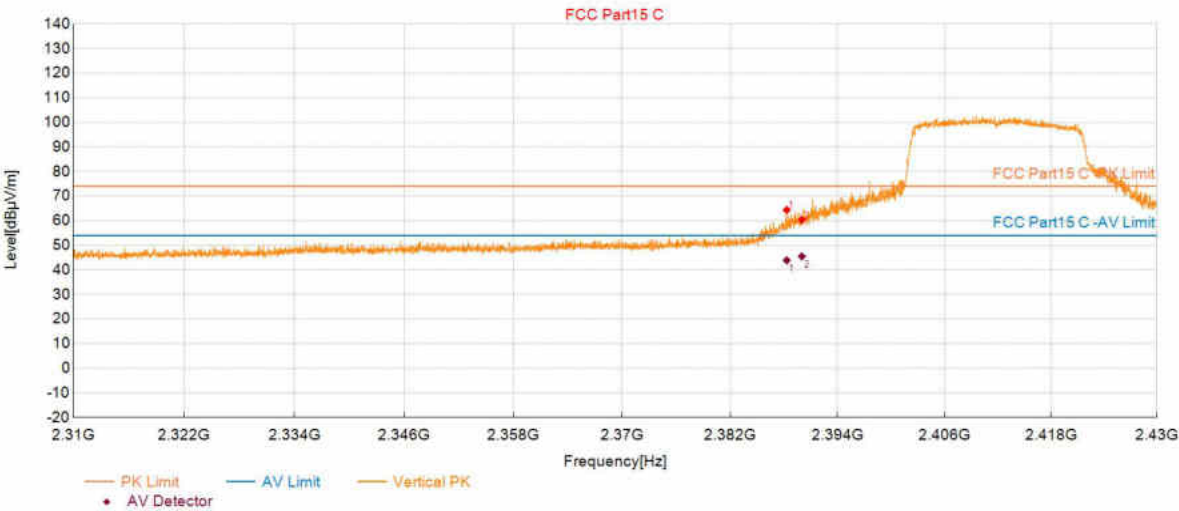

Suspected Data List							
NO.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2388.328	64.39	74.00	9.61	150	114	Vertical
2	2390.008	60.34	74.00	13.66	150	122	Vertical


AV Final Data List							
NO.	Freq. (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2388.328	43.90	54.00	10.10	150	114	Vertical
2	2390.008	45.50	54.00	8.50	150	122	Vertical

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB921AU.1	SN:	
Mode:	11AX20_2462	Voltage:	DC 3.3V
Environment:	24.3℃;52%	Engineer:	Orion chen
Remark:			

Start of Test:2025-07-14 11:39:18

Test Graph

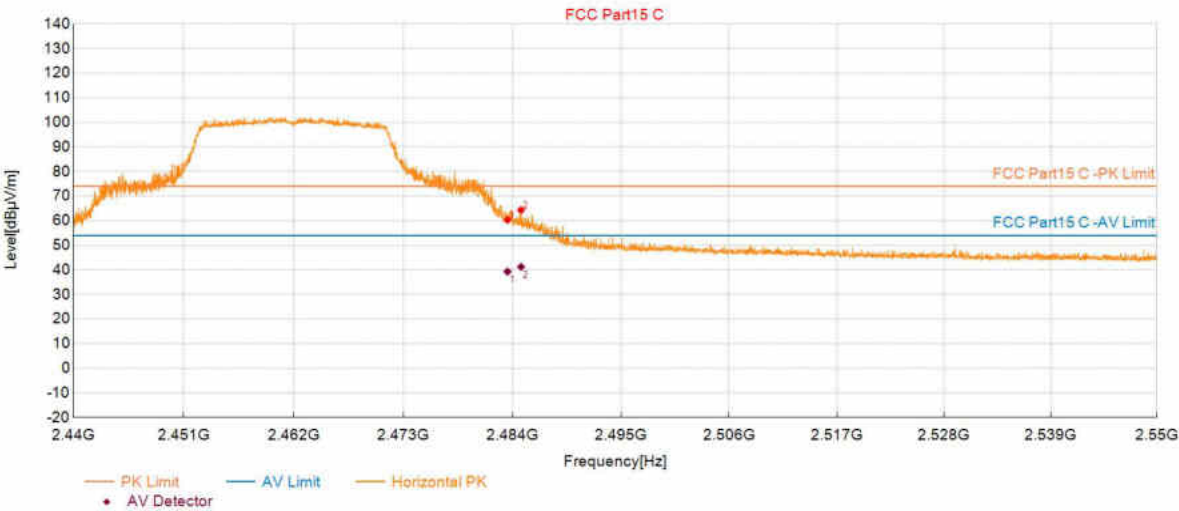

Suspected Data List

NO.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.503	60.35	74.00	13.65	150	71	Horizontal
2	2484.867	64.31	74.00	9.69	150	71	Horizontal

AV Final Data List


NO.	Freq. (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.503	39.31	54.00	14.69	150	71	Horizontal
2	2484.867	41.26	54.00	12.74	150	71	Horizontal

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB921AU.1	SN:	
Mode:	11AX20_2462	Voltage:	DC 3.3V
Environment:	24.3℃;52%	Engineer:	Orion chen
Remark:			

Start of Test:2025-07-14 11:40:15

Test Graph

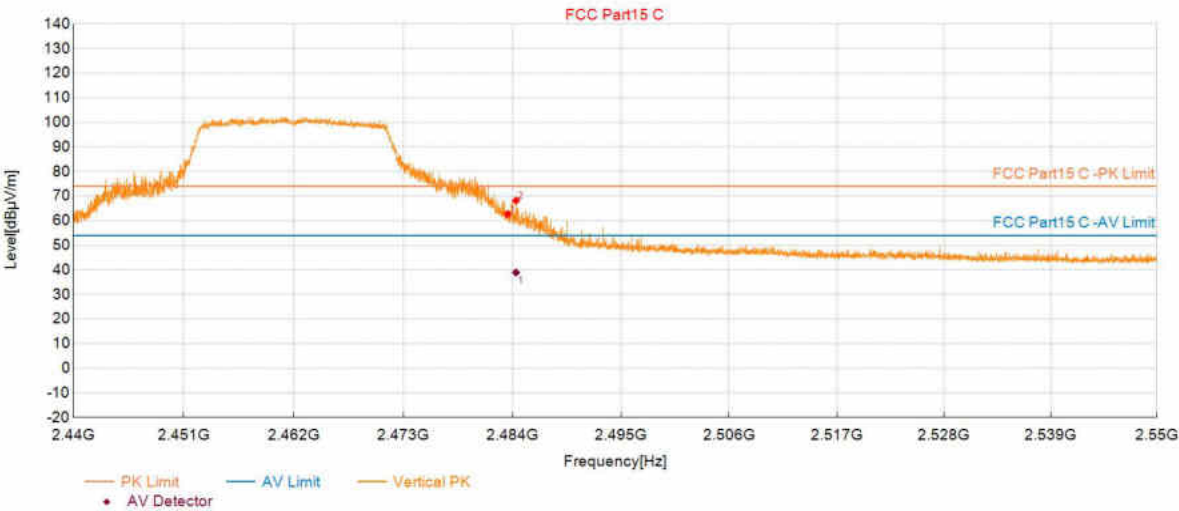

Suspected Data List							
NO.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.503	62.74	74.00	11.26	150	116	Vertical
2	2484.361	68.20	74.00	5.80	150	116	Vertical


AV Final Data List							
NO.	Freq. (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2484.362	38.93	54.00	15.07	143.1	121	Vertical

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB921AU.1	SN:	
Mode:	11AX20_2422	Voltage:	DC 3.3V
Environment:	24.3℃;52%	Engineer:	Orion chen
Remark:			

Start of Test:2025-07-14 11:47:25

Test Graph

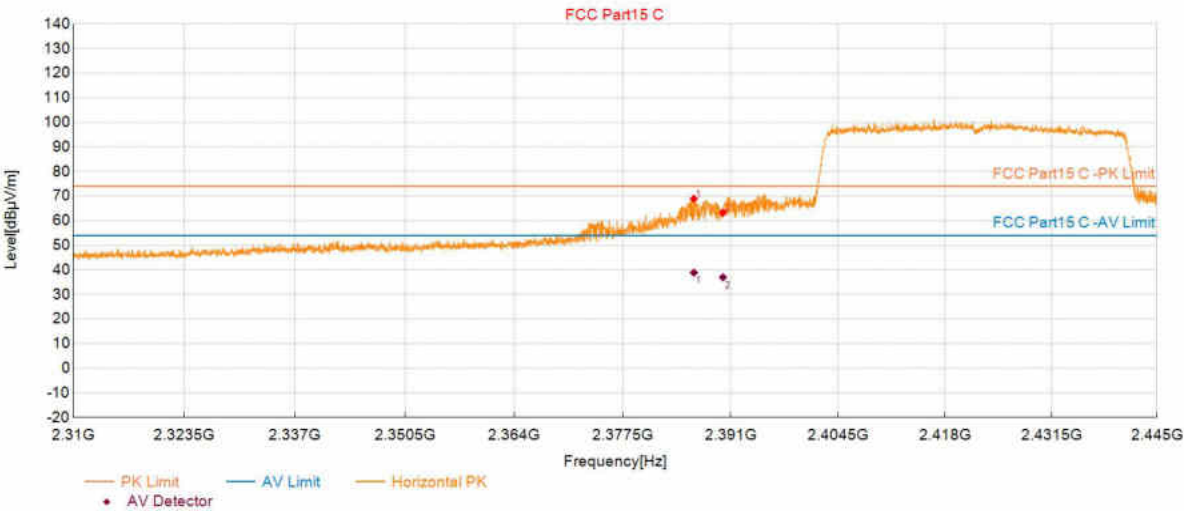

Suspected Data List							
NO.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2386.371	68.94	74.00	5.06	150	83	Horizontal
2	2390.017	63.28	74.00	10.72	150	83	Horizontal


AV Final Data List							
NO.	Freq. (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2386.371	38.88	54.00	15.12	150	83	Horizontal
2	2390.017	37.00	54.00	17.00	150	83	Horizontal

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB921AU.1	SN:	
Mode:	11AX40_2422	Voltage:	DC 3.3V
Environment:	24.3℃;52%	Engineer:	Orion chen
Remark:			

Start of Test:2025-07-14 11:48:27

Test Graph

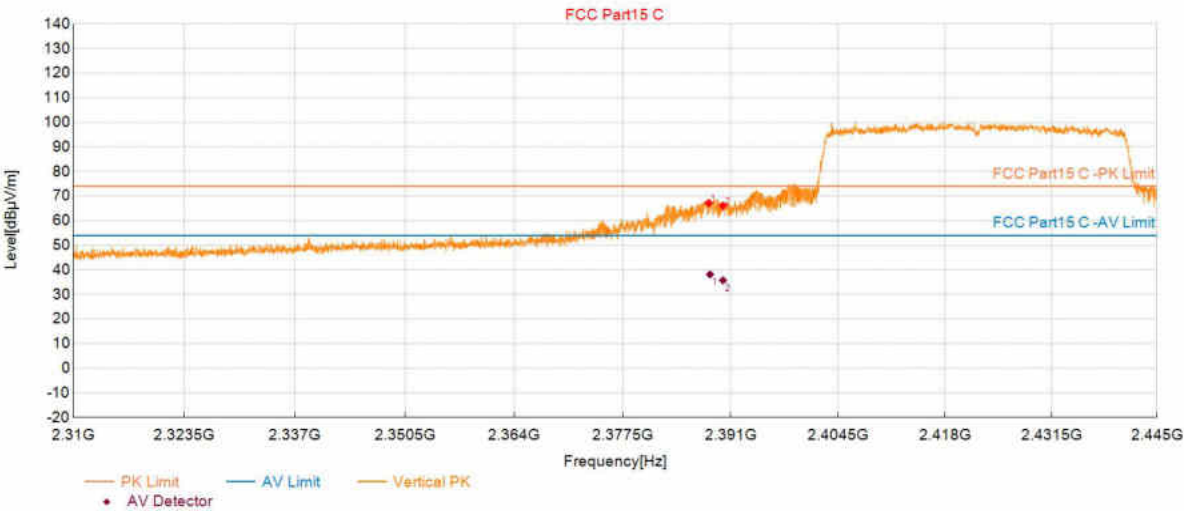

Suspected Data List							
NO.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2388.235	67.17	74.00	5.22	150	117	Vertical
2	2390.017	66.13	74.00	8.90	150	124	Vertical


AV Final Data List							
NO.	Freq. (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2388.397	38.16	54.00	15.84	150	117	Vertical
2	2390.015	35.77	54.00	18.23	113.1	127	Vertical

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB921AU.1	SN:	
Mode:	11AX40_2452	Voltage:	DC 3.3V
Environment:	24.3℃;52%	Engineer:	Orion chen
Remark:			

Start of Test:2025-07-14 11:58:56

Test Graph

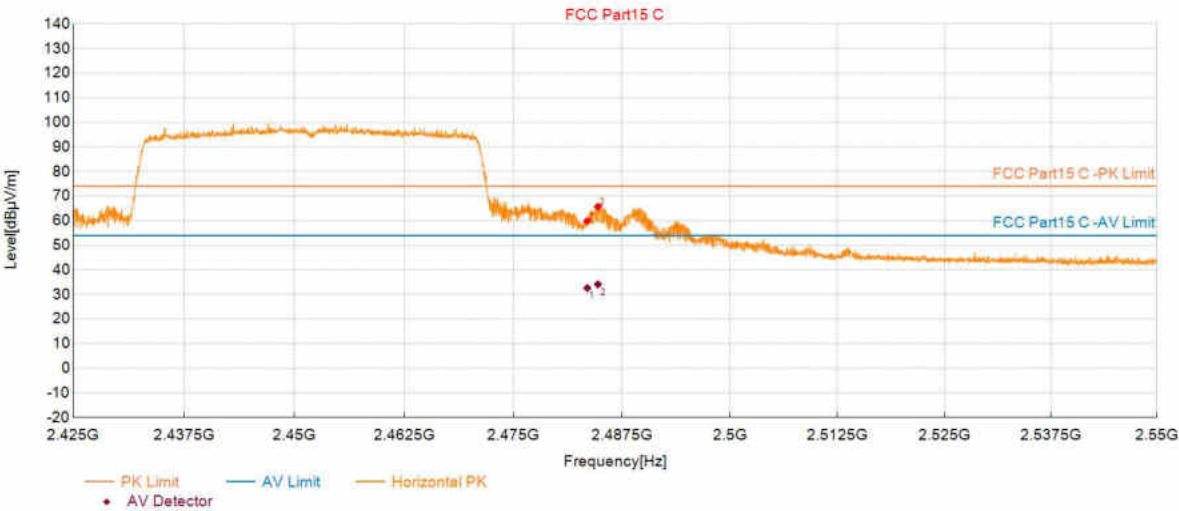

Suspected Data List							
NO.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.512	59.89	74.00	14.11	150	274	Horizontal
2	2484.737	65.69	74.00	8.31	150	274	Horizontal


AV Final Data List							
NO.	Freq. (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.512	32.65	54.00	21.35	150	274	Horizontal
2	2484.738	34.15	54.00	19.85	118.8	271	Horizontal

Test Report

Project Information			
Customer:			
EUT:			
Model:	SKI.WB921AU.1	SN:	
Mode:	11AX40_2452	Voltage:	DC 3.3V
Environment:	24.3℃;52%	Engineer:	Orion chen
Remark:			

Start of Test:2025-07-14 11:59:58

Test Graph

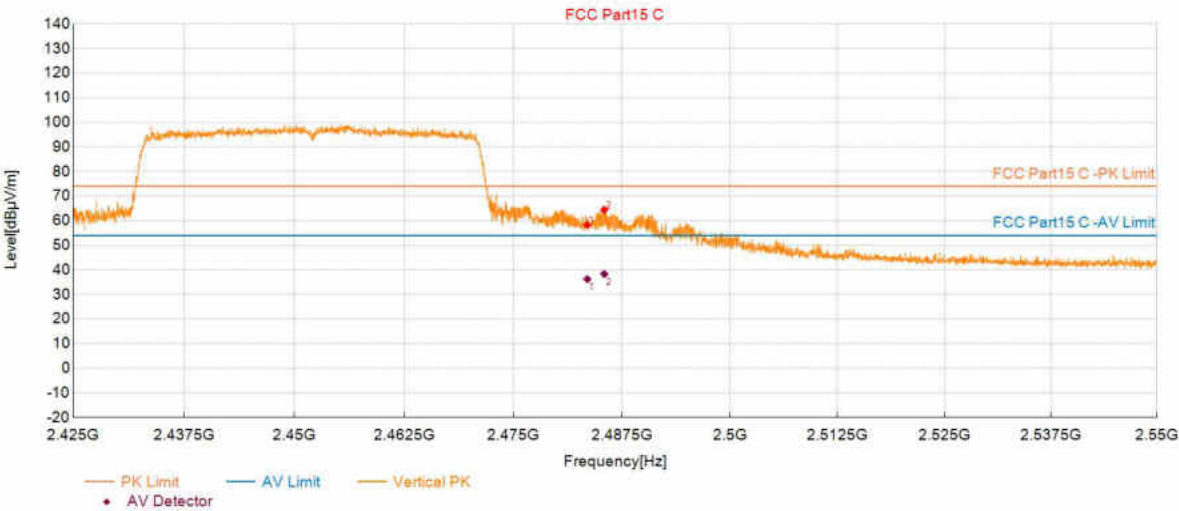

Suspected Data List							
NO.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.512	58.28	74.00	15.72	150	118	Vertical
2	2485.462	64.42	74.00	9.58	150	118	Vertical

AV Final Data List							
NO.	Freq. (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	2483.512	36.25	54.00	17.75	150	118	Vertical
2	2485.462	38.33	54.00	15.67	150	118	Vertical

END OF REPORT