




802.11 n40 CH06 (2437MHz) Ant 0

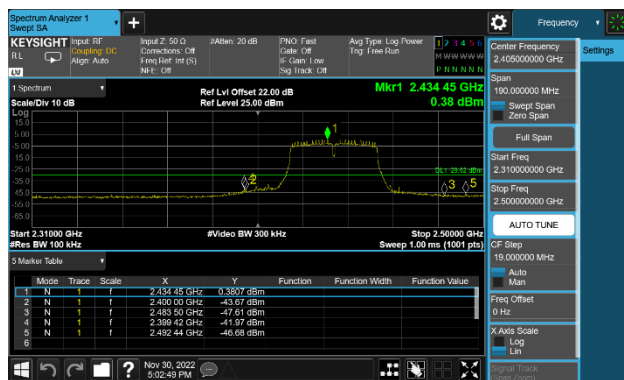


802.11 n40 CH06 (2437MHz) Ant 0

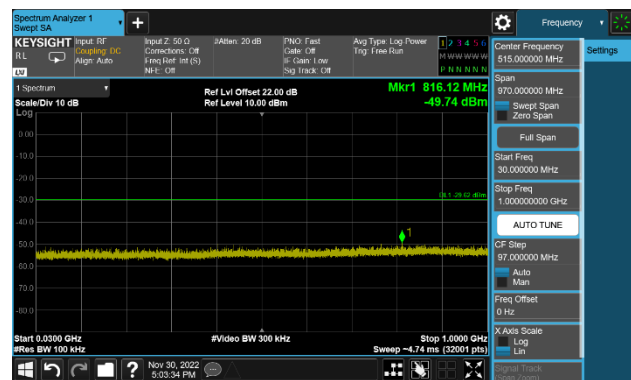


802.11 n40 CH06 (2437MHz) Ant 0

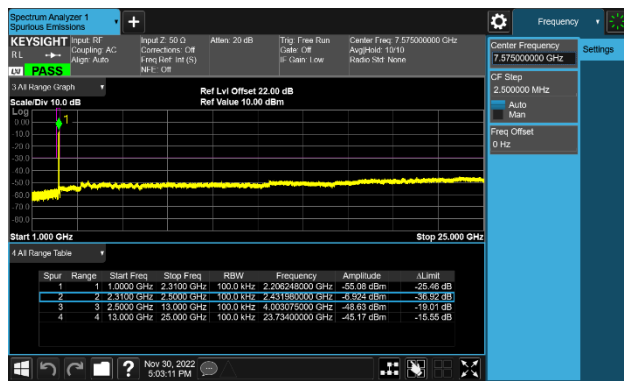


802.11 n40 CH09 (2452MHz) Ant 0

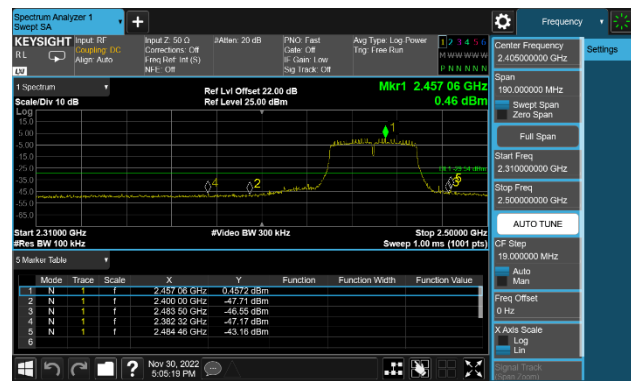


802.11 n40 CH09 (2452MHz) Ant 0

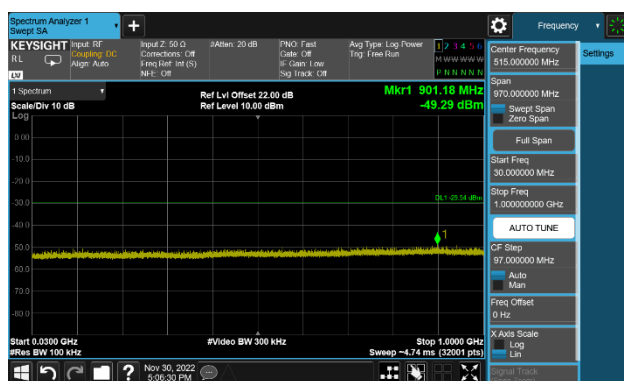


802.11 n40 CH09 (2452MHz) Ant 0

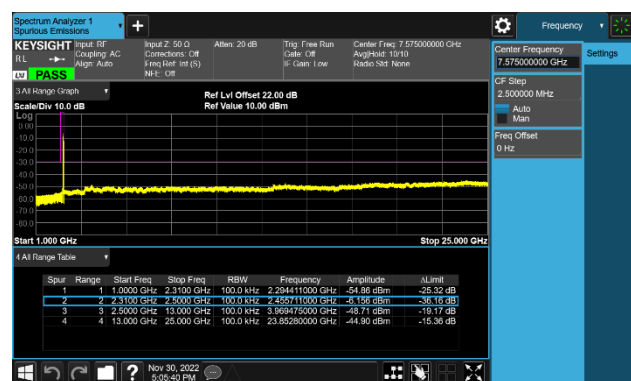


802.11 b CH01 (2412MHz) Ant 1

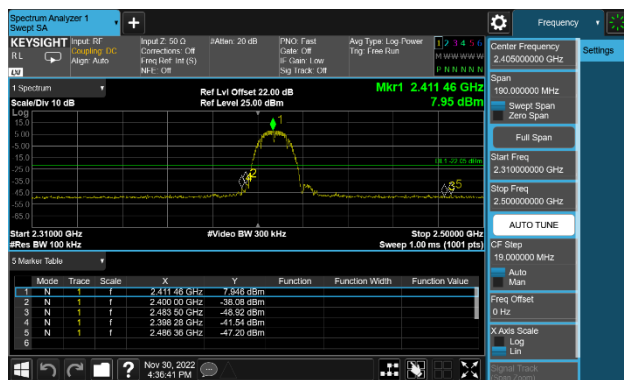


802.11 b CH01 (2412MHz) Ant 1

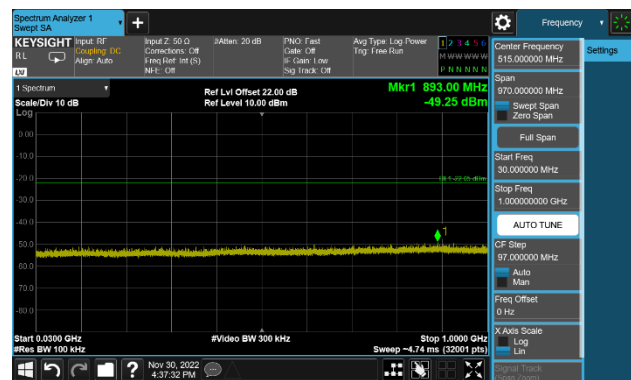


802.11 b CH01 (2412MHz) Ant 1

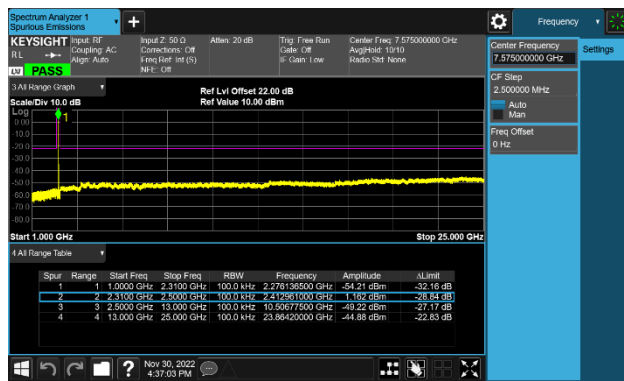


802.11 b CH06 (2437MHz) Ant 1

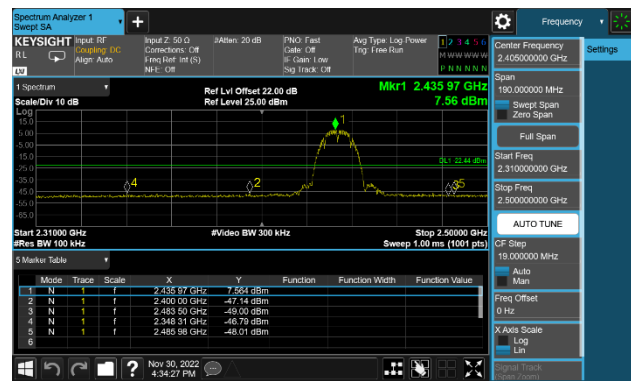


802.11 b CH06 (2437MHz) Ant 1

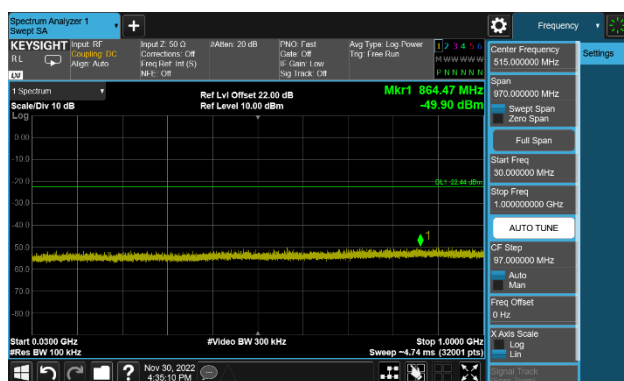


802.11 b CH06 (2437MHz) Ant 1

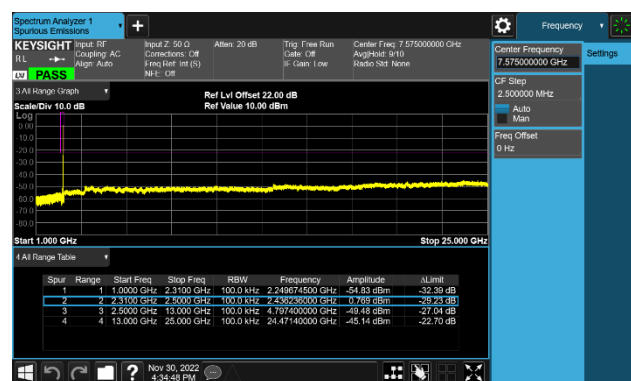


802.11 b CH11 (2462MHz) Ant 1

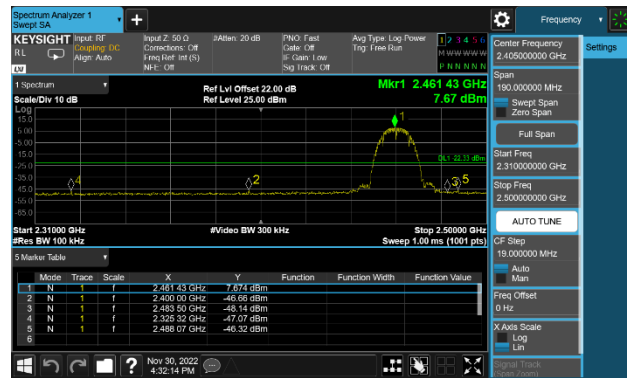


802.11 b CH11 (2462MHz) Ant 1

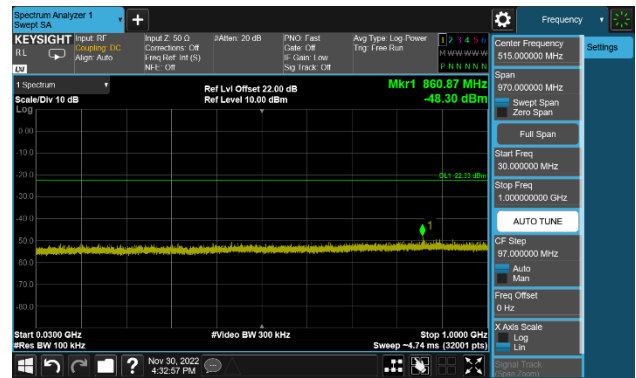


802.11 b CH11 (2462MHz) Ant 1

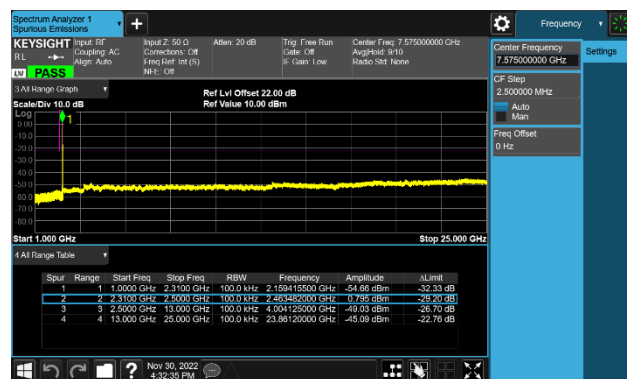


802.11 g CH01 (2412MHz) Ant 1

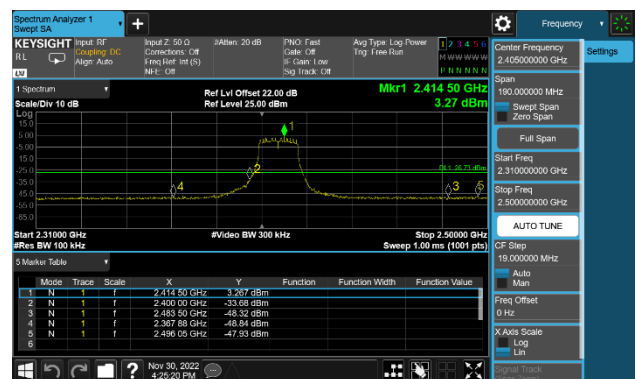


802.11 g CH01 (2412MHz) Ant 1

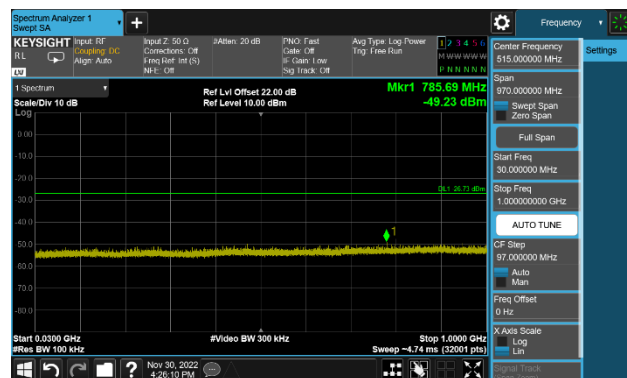


802.11 g CH01 (2412MHz) Ant 1

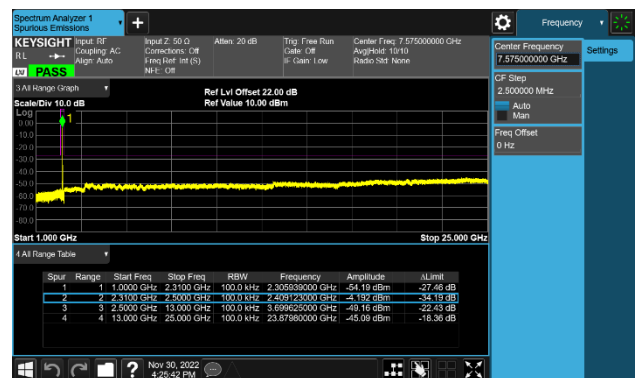


802.11 g CH06 (2437MHz) Ant 1

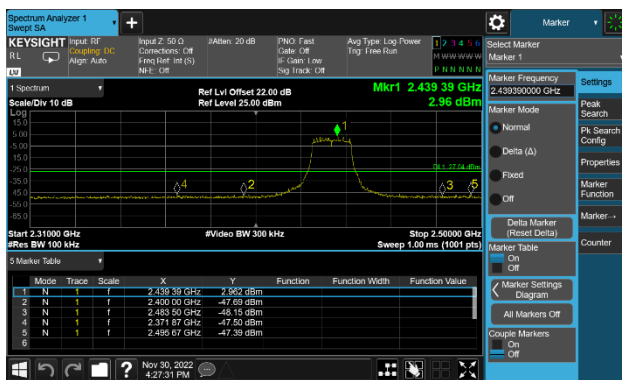


802.11 g CH06 (2437MHz) Ant 1

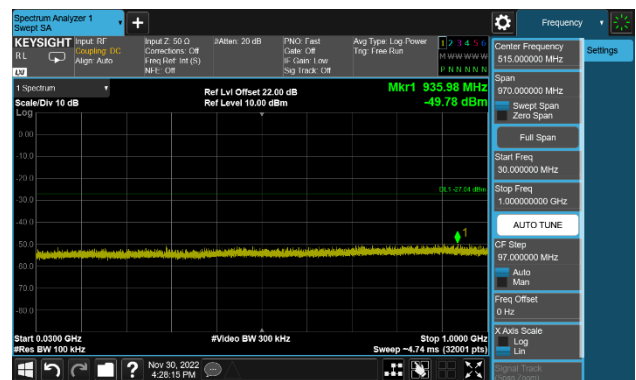


802.11 g CH06 (2437MHz) Ant 1

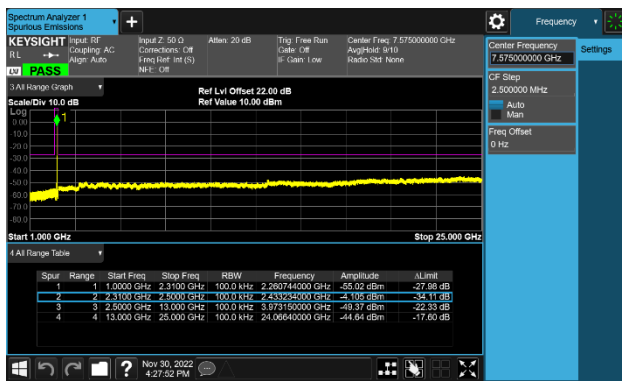


802.11 g CH11 (2462MHz) Ant 1

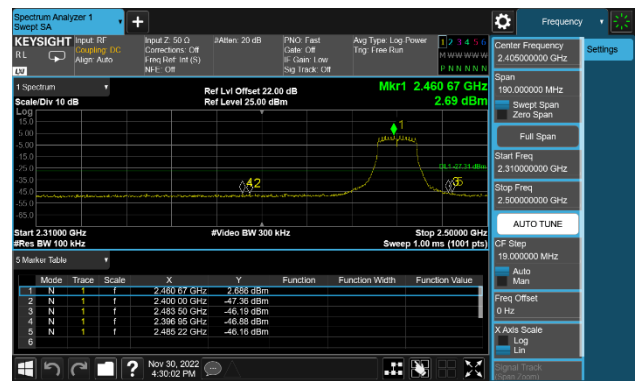


802.11 g CH11 (2462MHz) Ant 1

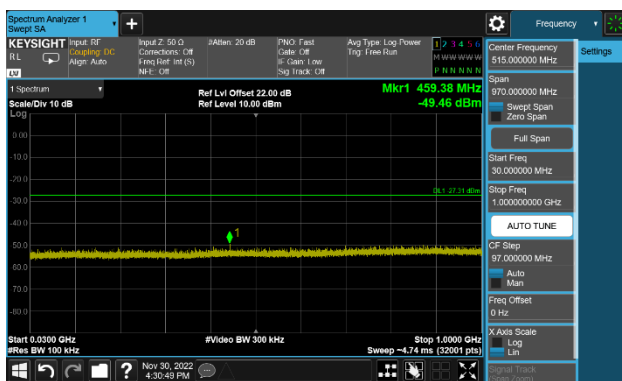


802.11 g CH11 (2462MHz) Ant 1

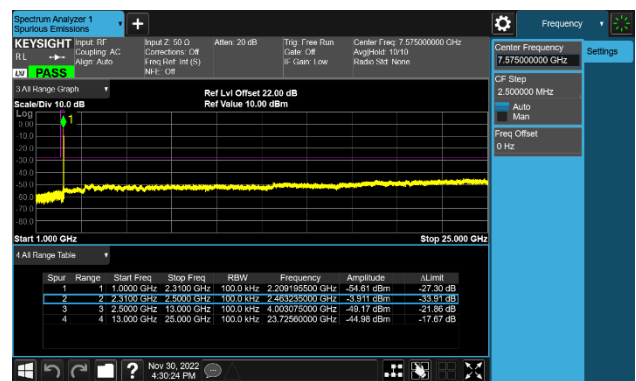


802.11 n20 CH01 (2412MHz) Ant 1

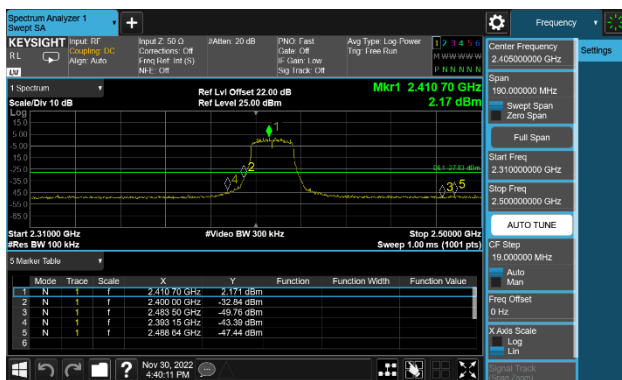


802.11 n20 CH01 (2412MHz) Ant 1

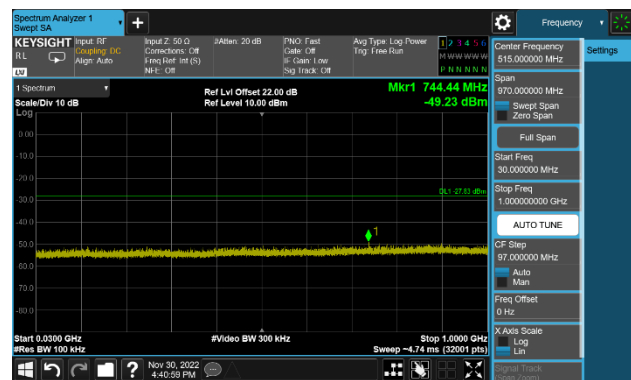


802.11 n20 CH01 (2412MHz) Ant 1

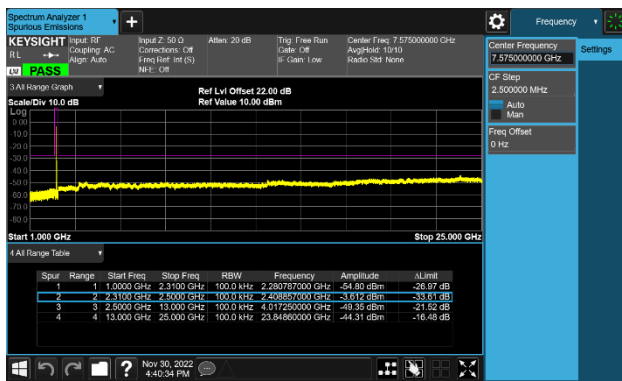


802.11 n20 CH06 (2437MHz) Ant 1

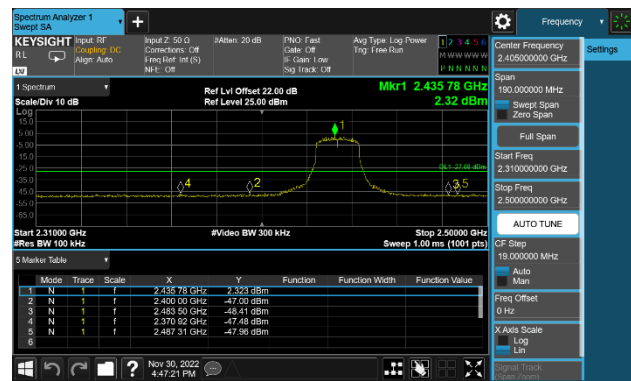


802.11 n20 CH06 (2437MHz) Ant 1

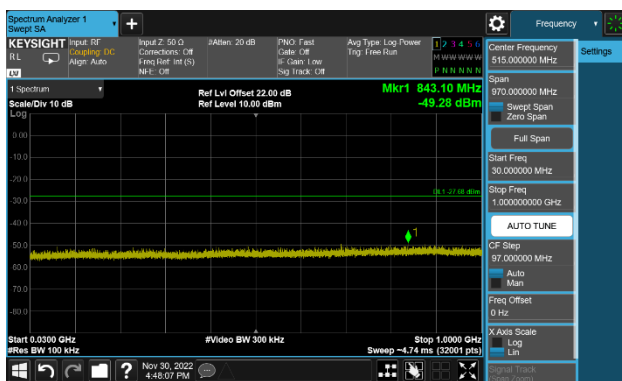


802.11 n20 CH06 (2437MHz) Ant 1

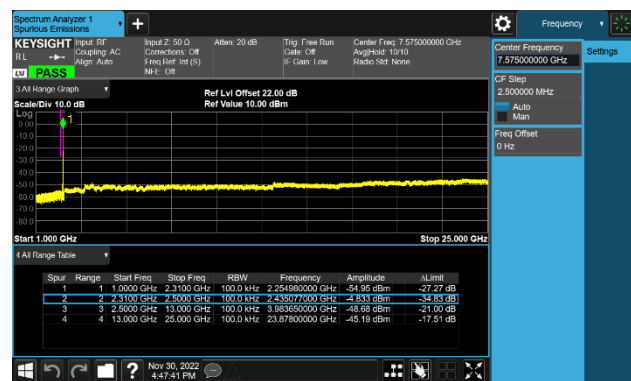


802.11 n20 CH11 (2462MHz) Ant 1

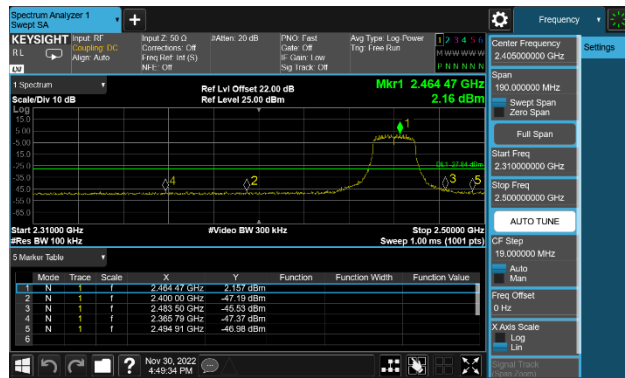

802.11 n20 CH11 (2462MHz) Ant 1

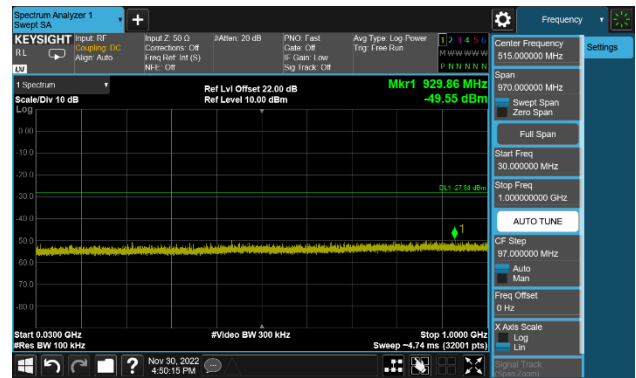


802.11 n20 CH11 (2462MHz) Ant 1

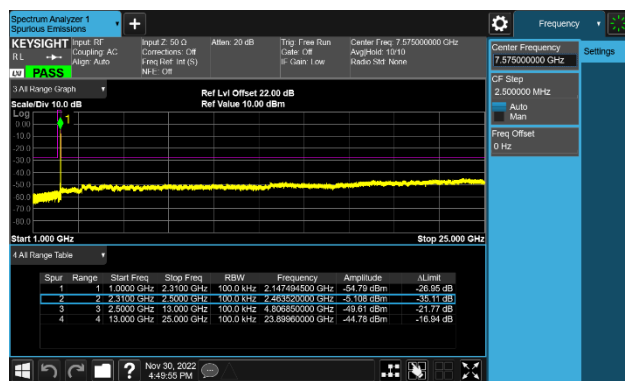


802.11 n40 CH03 (2422MHz) Ant 1




802.11 n40 CH03 (2422MHz) Ant 1

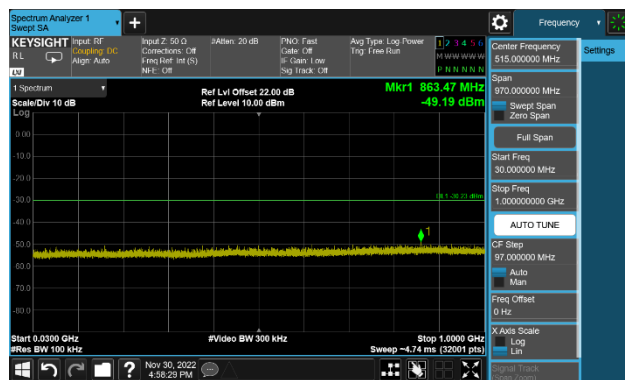


802.11 n40 CH03 (2422MHz) Ant 1

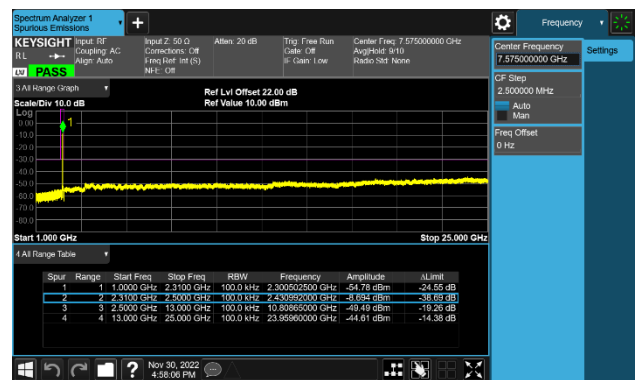


802.11 n40 CH06 (2437MHz) Ant 1

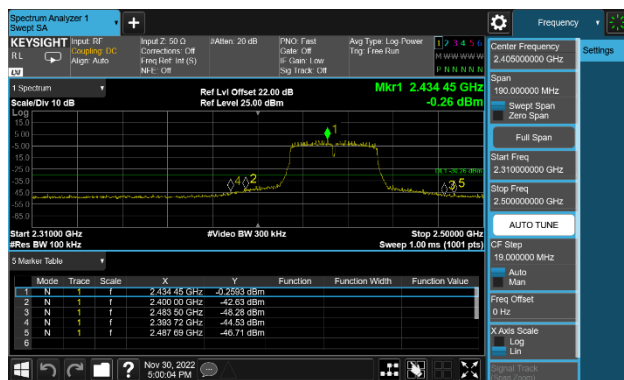


802.11 n40 CH06 (2437MHz) Ant 1

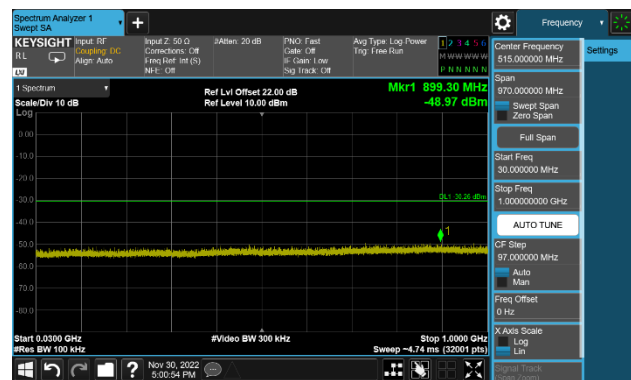


802.11 n40 CH06 (2437MHz) Ant 1

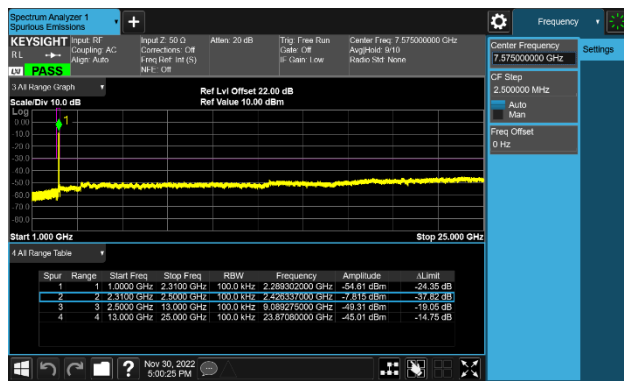


802.11 n40 CH09 (2452MHz) Ant 1

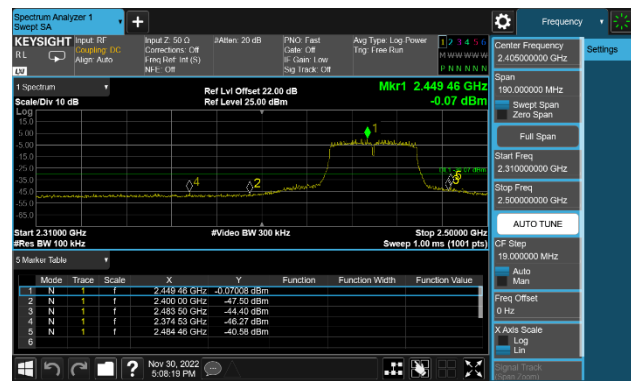

802.11 n40 CH09 (2452MHz) Ant 1

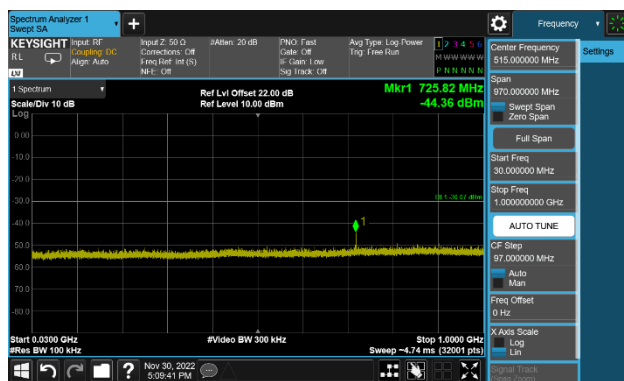

802.11 n40 CH09 (2452MHz) Ant 1

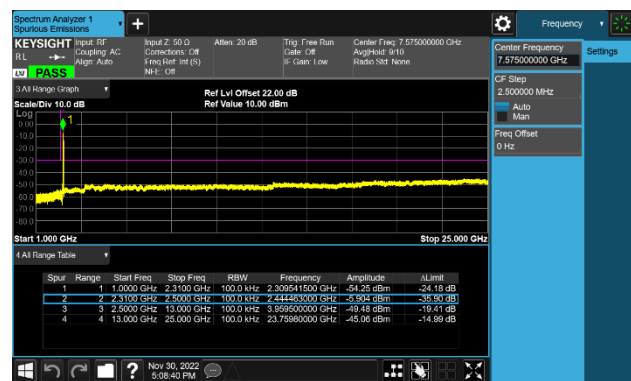

7.6. Radiated Spurious Emission Measurement

7.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [V/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.6.2. Test Procedure Used

ANSI C63.10 - 2013 - Section 11.11 & 11.12

ANSI C63.10 - 2013 - Section 6.3 (General Requirements)

ANSI C63.10 - 2013 - Section 6.4 (Standard test method below 30MHz)

ANSI C63.10 - 2013 - Section 6.5 (Standard test method above 30MHz to 1GHz)

ANSI C63.10 - 2013 - Section 6.6 (Standard test method above 1GHz)

7.6.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000MHz	1MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

7.6.4. Test Setup


9kHz ~ 30MHz Test Setup:

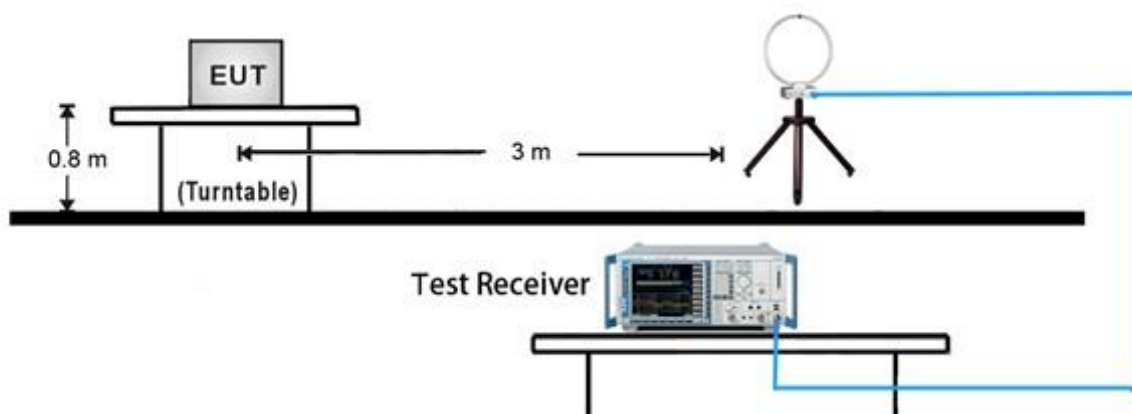


30MHz ~ 1GHz Test Setup:

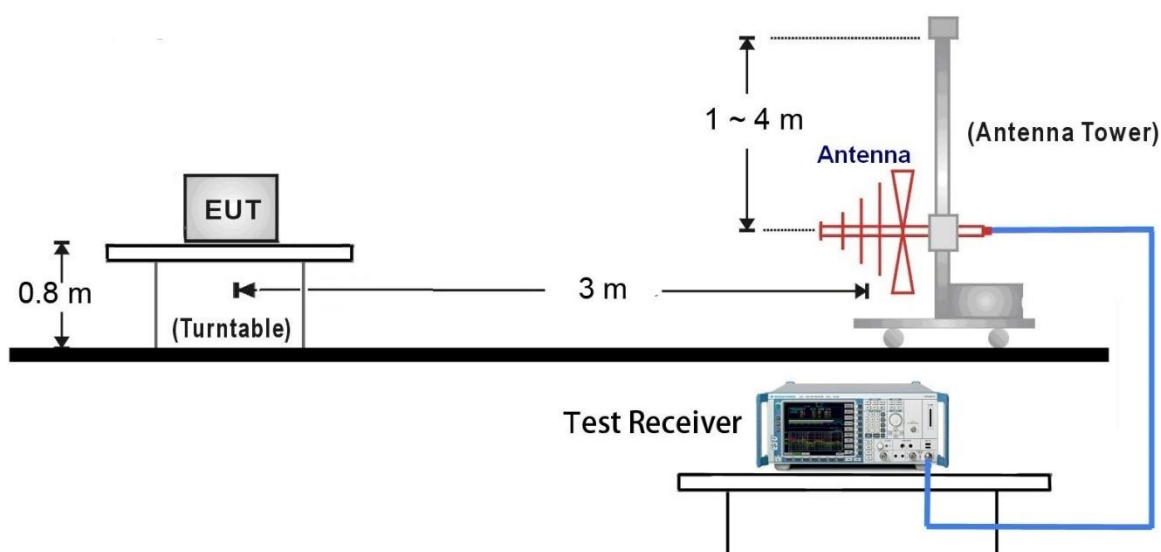

1GHz ~ 18GHz Test Setup:

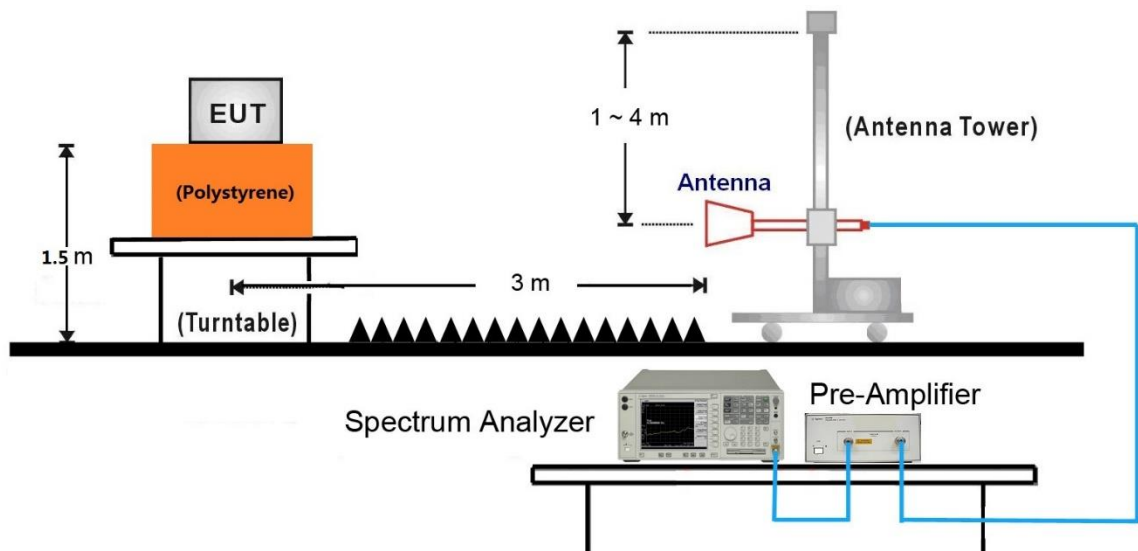


18GHz ~25GHz Test Setup:

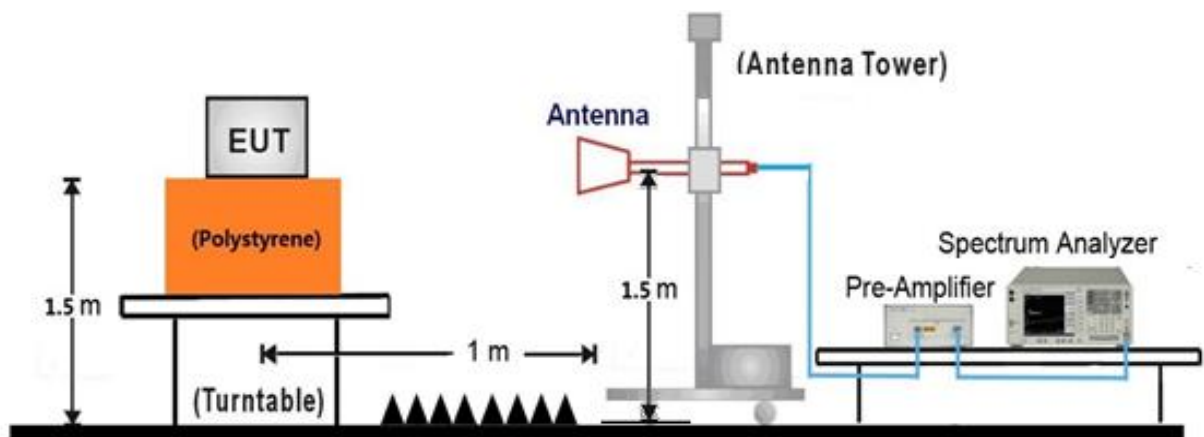

7.6.5. Test Result

EUT	SKO.WB822CU.3	Date of Test	2022-11-25
Factor	VULB 9162	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

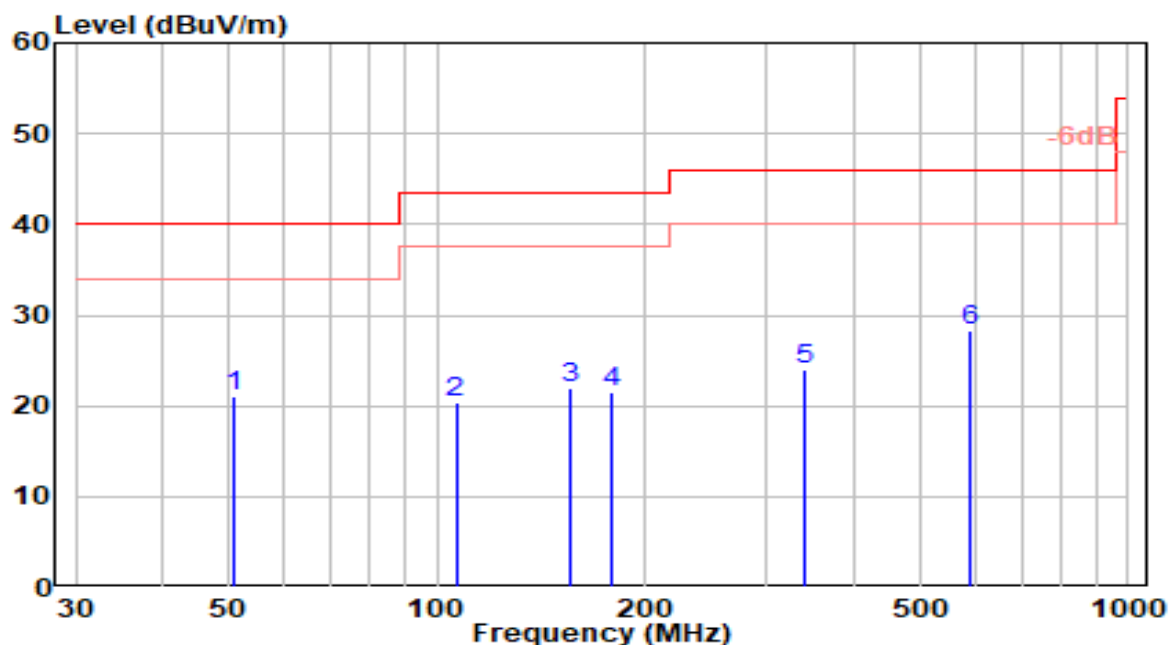


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	50.840	-0.49	21.47	20.98	-19.02	40.00	100	300	QP
2	106.470	1.37	19.02	20.38	-23.12	43.50	150	110	QP
3	155.390	5.84	16.06	21.90	-21.60	43.50	100	150	QP
4	178.370	4.36	17.07	21.43	-22.07	43.50	100	145	QP
5	340.150	1.45	22.64	24.08	-21.92	46.00	150	120	QP
6	* 587.980	0.98	27.39	28.37	-17.63	46.00	100	120	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise ,which also are attenuated more than 20dB below the permissible value. Therefore, the data is not presented in the report.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-25
Factor	VULB 9162	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

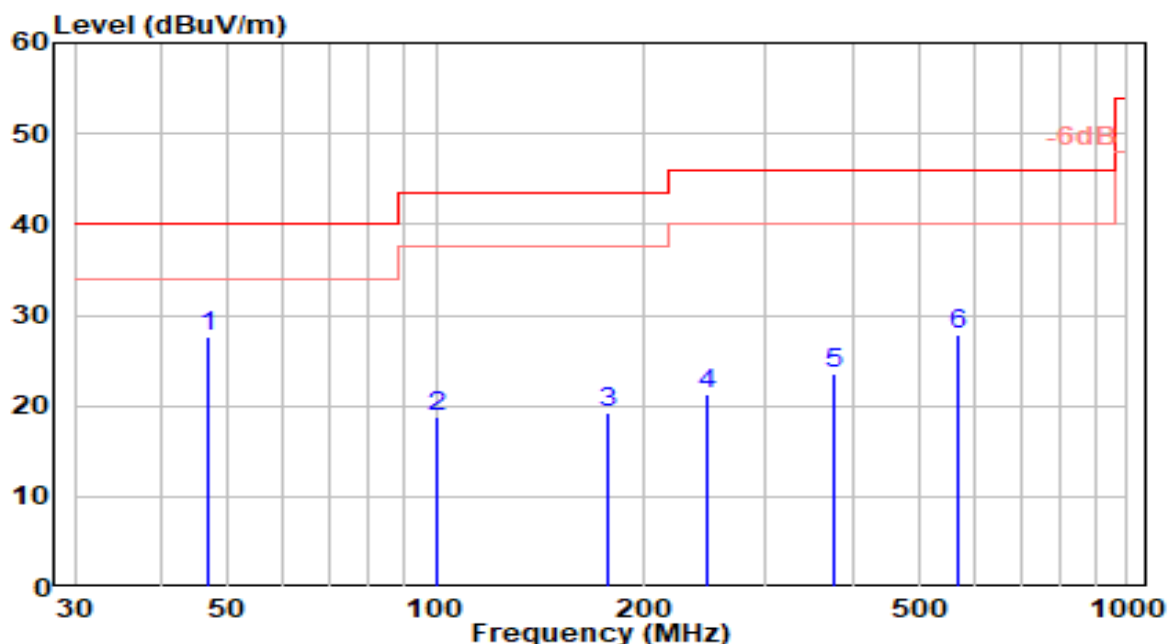


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	46.600	6.12	21.52	27.63	-12.37	40.00	200	255	QP
2		100.690	-0.47	19.29	18.82	-24.68	43.50	100	315	QP
3		177.150	2.26	17.01	19.27	-24.23	43.50	100	45	QP
4		247.250	0.70	20.69	21.39	-24.61	46.00	150	140	QP
5		374.890	0.00	23.49	23.49	-22.51	46.00	100	95	QP
6		570.220	0.94	26.93	27.87	-18.13	46.00	100	255	QP

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The amplitude of radiated emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise ,which also are attenuated more than 20dB below the permissible value. Therefore, the data is not presented in the report.
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-25
Factor	VULB 9162	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_RX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

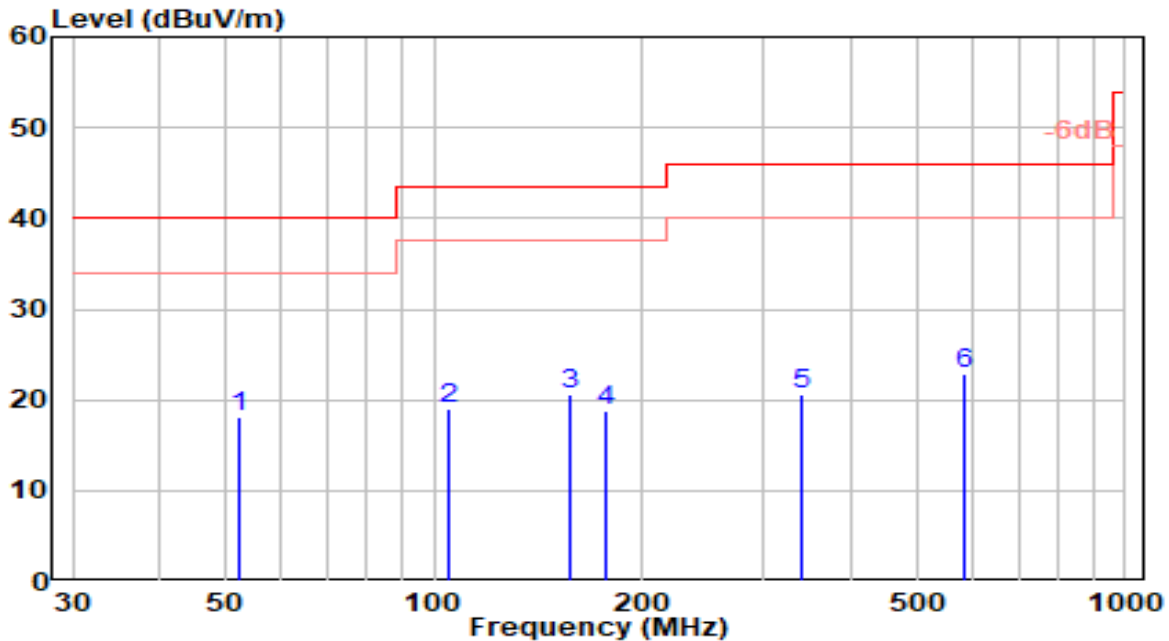


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	52.170	-3.19	21.26	18.07	-21.93	40.00	100	315	QP
2		105.460	0.01	19.06	19.07	-24.43	43.50	150	30	QP
3		156.910	4.45	16.14	20.59	-22.91	43.50	150	215	QP
4		177.390	1.70	17.02	18.72	-24.78	43.50	200	15	QP
5		341.300	-2.10	22.67	20.57	-25.43	46.00	200	130	QP
6		587.310	-4.62	27.37	22.76	-23.24	46.00	100	190	QP

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The amplitude of radiated emissions (frequency range from9kHz to 30MHz) is that proximity to ambient noise ,which also are attenuated more than 20dB below the permissible value. Therefore, the data is not presented in the report.
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-25
Factor	VULB 9162	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11n-20MHz_RX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

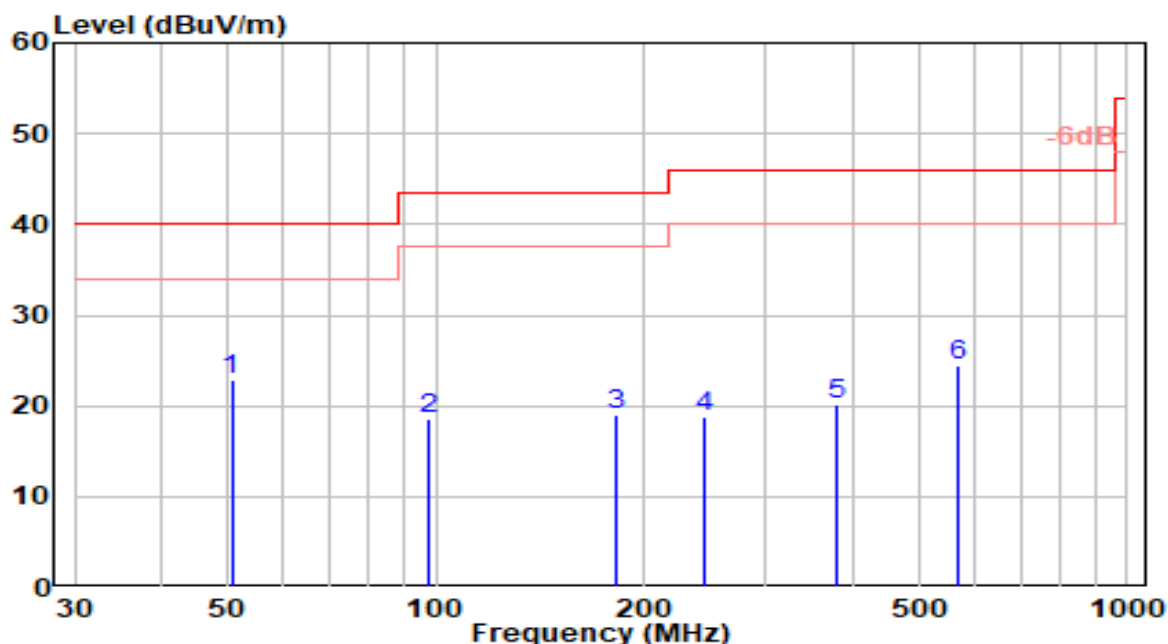


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	50.590	1.46	21.51	22.96	-17.04	40.00	100	180	QP
2		97.660	-0.36	18.91	18.55	-24.95	43.50	150	55	QP
3		181.710	1.63	17.37	19.00	-24.50	43.50	150	75	QP
4		244.310	-1.71	20.53	18.82	-27.18	46.00	200	20	QP
5		378.340	-3.44	23.57	20.12	-25.88	46.00	200	35	QP
6		568.210	-2.48	26.88	24.40	-21.60	46.00	100	130	QP

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The amplitude of radiated emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise ,which also are attenuated more than 20dB below the permissible value. Therefore, the data is not presented in the report.
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-24
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11b_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

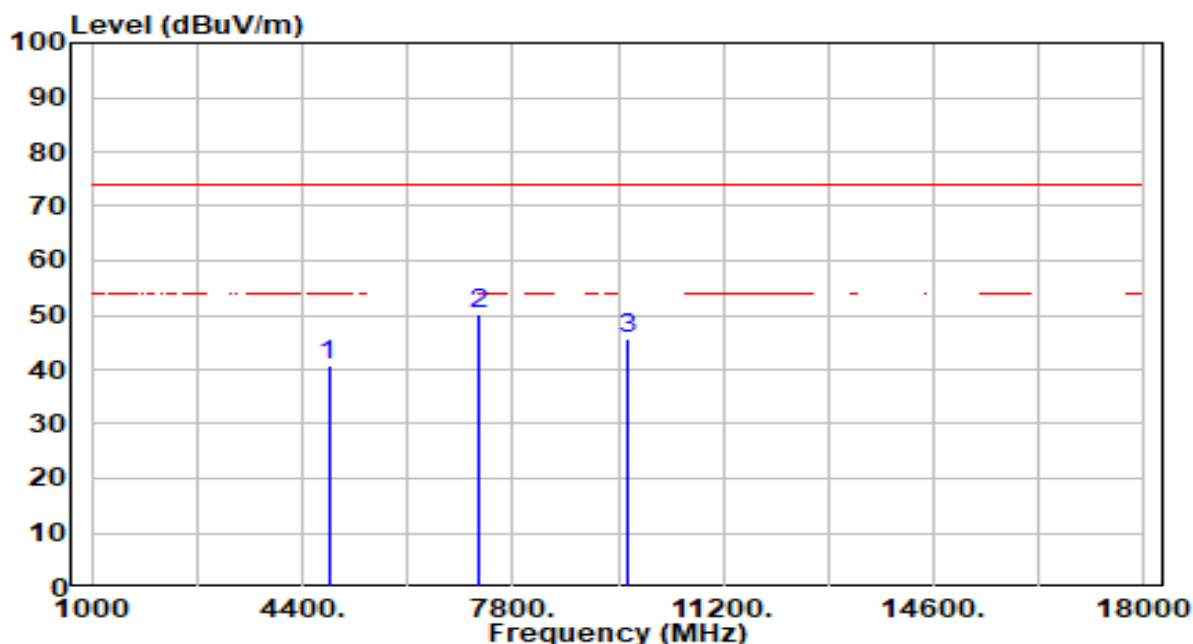


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	40.54	0.25	40.80	-33.20	74.00	150	30	Peak
2	* 7236.000	44.51	5.81	50.33	-23.67	74.00	150	149	Peak
3	9648.000	40.20	5.32	45.53	-28.47	74.00	150	288	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- The magnitude of the radiated emission (frequency range from 18GHz to 25GHz) is close to the magnitude of the ambient noise, which is also attenuated by more than 20 dB than the allowable value. Therefore, this data is not presented in the report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-24
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11b_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

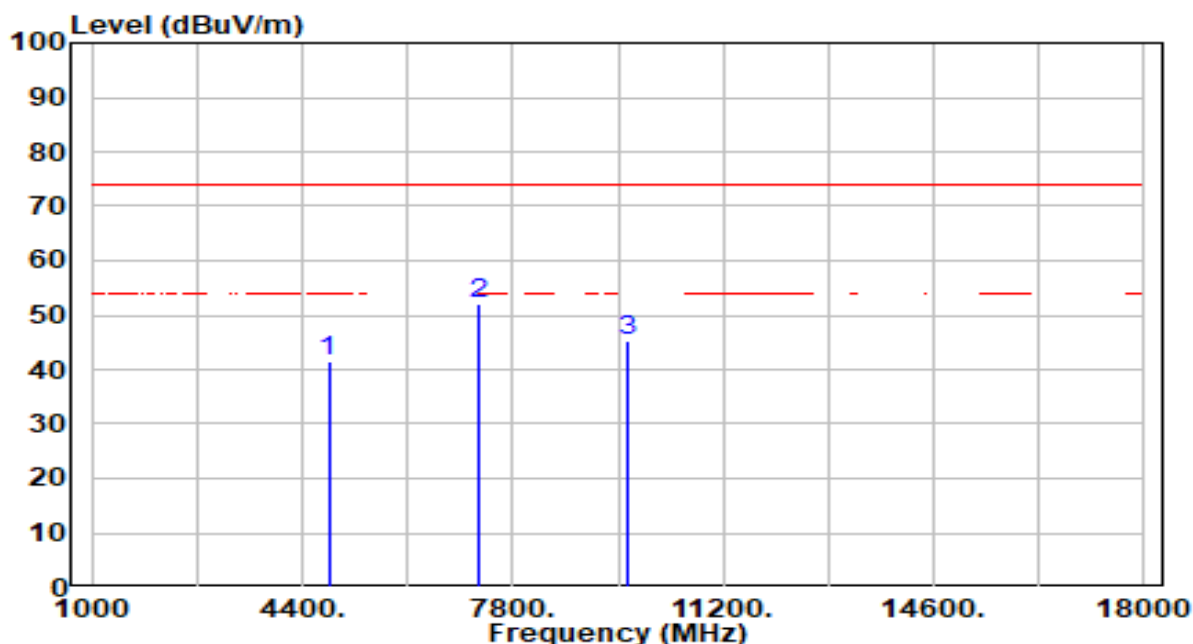


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	41.42	0.25	41.67	-32.33	74.00	150	259	Peak
2	* 7236.000	46.36	5.81	52.18	-21.82	74.00	150	39	Peak
3	9648.000	39.82	5.32	45.14	-28.86	74.00	150	137	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- The magnitude of the radiated emission (frequency range from 18GHz to 25GHz) is close to the magnitude of the ambient noise, which is also attenuated by more than 20 dB than the allowable value. Therefore, this data is not presented in the report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-24
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11b_TX_CH 6_ANT 0	Test Voltage	AC 120V/60Hz

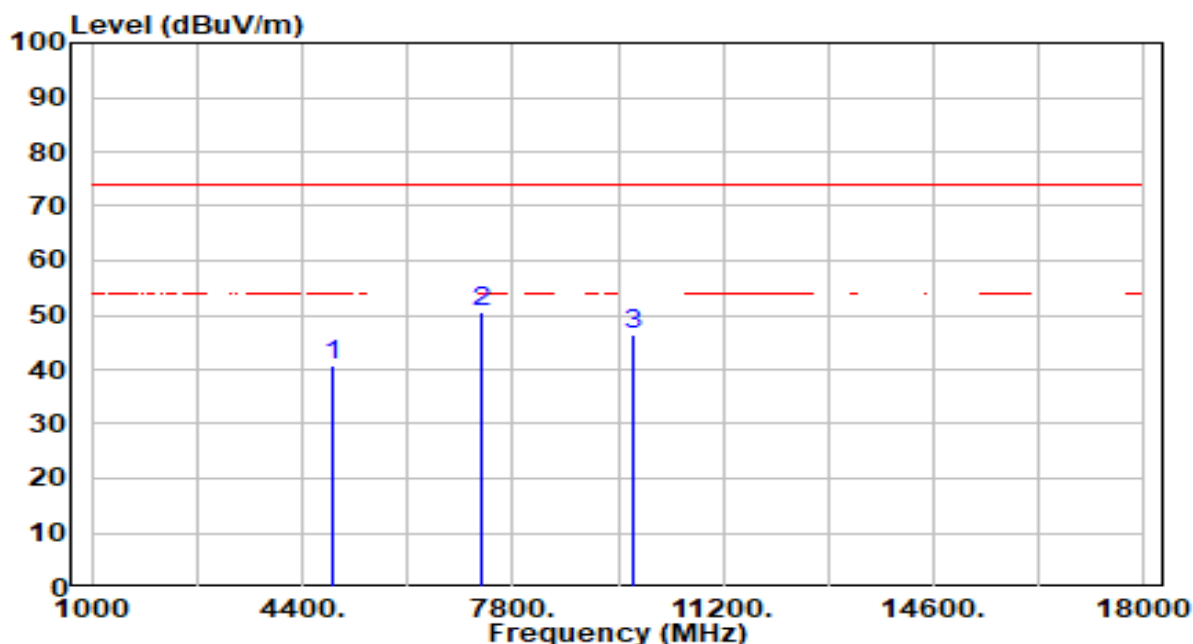


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	40.55	0.35	40.90	-33.10	74.00	150	244	Peak
2	* 7311.000	44.86	5.79	50.66	-23.34	74.00	150	140	Peak
3	9748.000	41.15	5.34	46.49	-27.51	74.00	150	301	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- The magnitude of the radiated emission (frequency range from 18GHz to 25GHz) is close to the magnitude of the ambient noise, which is also attenuated by more than 20 dB than the allowable value. Therefore, this data is not presented in the report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-24
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11b_TX_CH 6_ANT 0	Test Voltage	AC 120V/60Hz

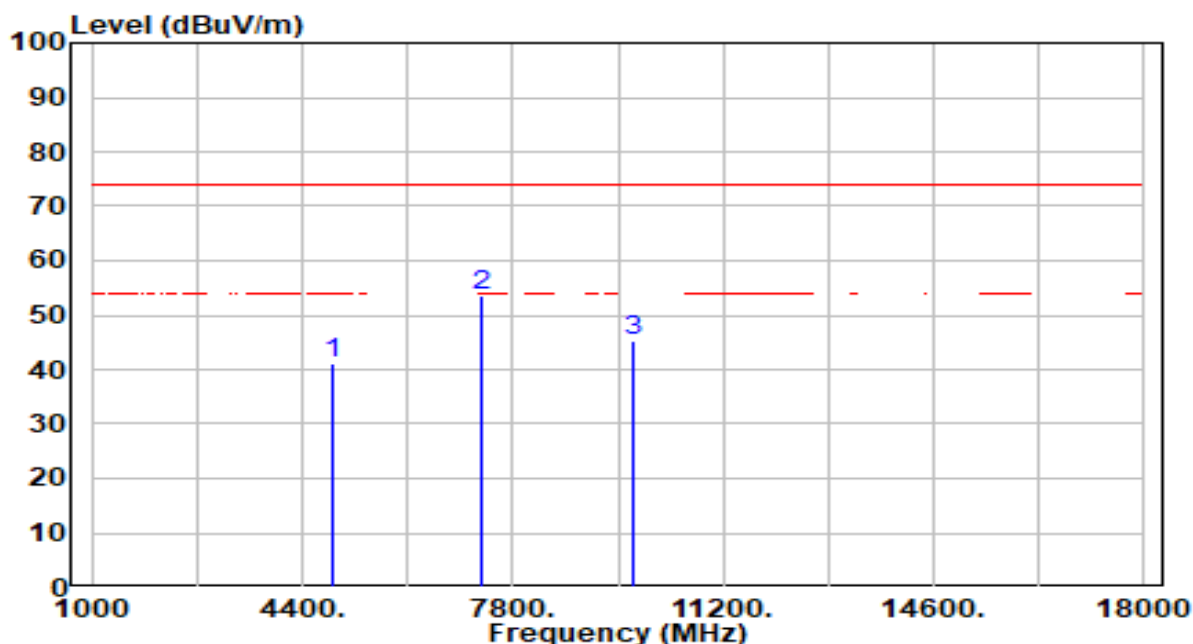


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	40.72	0.35	41.07	-32.93	74.00	150	134	Peak
2	* 7311.000	47.90	5.79	53.70	-20.30	74.00	150	107	Peak
3	9748.000	40.04	5.34	45.38	-28.62	74.00	150	12	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- The magnitude of the radiated emission (frequency range from 18GHz to 25GHz) is close to the magnitude of the ambient noise, which is also attenuated by more than 20 dB than the allowable value. Therefore, this data is not presented in the report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-24
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11b_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

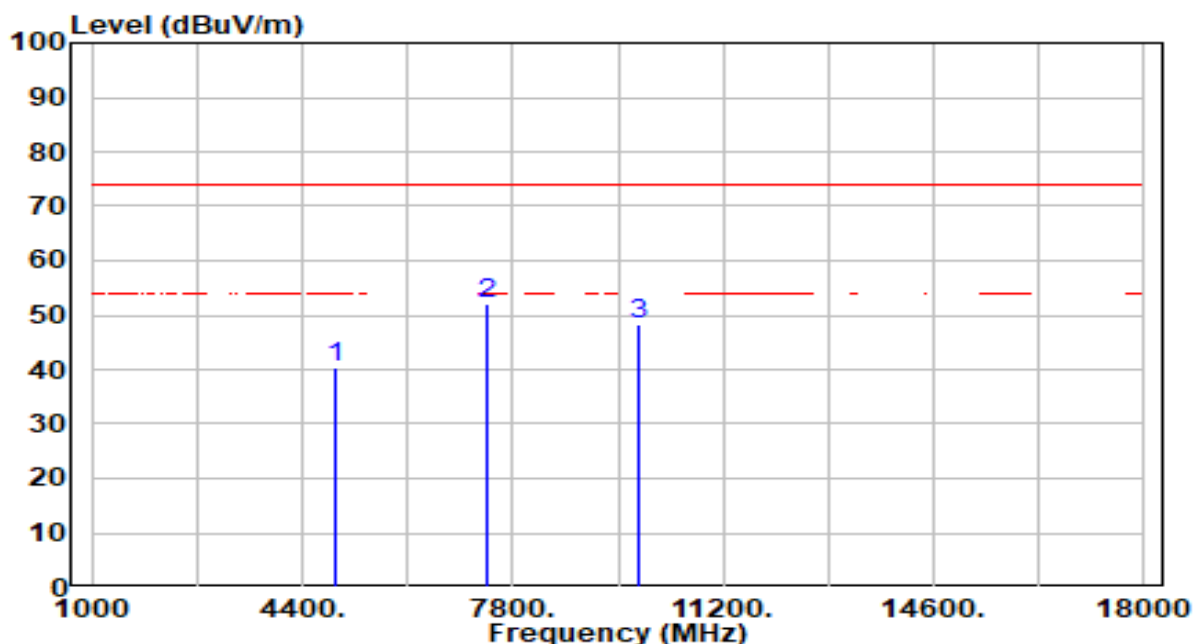


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	39.96	0.45	40.42	-33.58	74.00	150	336	Peak
2	* 7386.000	46.13	5.77	51.90	-22.10	74.00	150	139	Peak
3	9848.000	42.78	5.38	48.16	-25.84	74.00	150	342	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- The magnitude of the radiated emission (frequency range from 18GHz to 25GHz) is close to the magnitude of the ambient noise, which is also attenuated by more than 20 dB than the allowable value. Therefore, this data is not presented in the report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-24
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11b_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

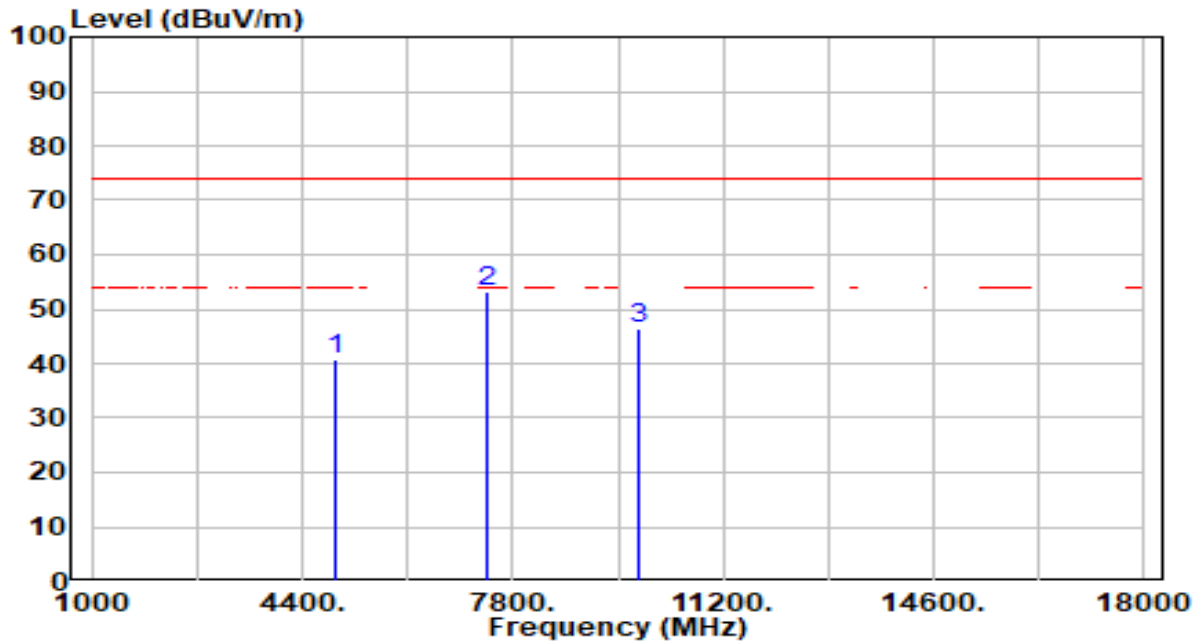


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	40.47	0.45	40.93	-33.07	74.00	150	214	Peak
2	* 7386.000	47.36	5.77	53.14	-20.86	74.00	150	101	Peak
3	9848.000	40.93	5.38	46.31	-27.69	74.00	150	294	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- The magnitude of the radiated emission (frequency range from 18GHz to 25GHz) is close to the magnitude of the ambient noise, which is also attenuated by more than 20 dB than the allowable value. Therefore, this data is not presented in the report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-24
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11b_TX_CH 1_ANT 1	Test Voltage	AC 120V/60Hz

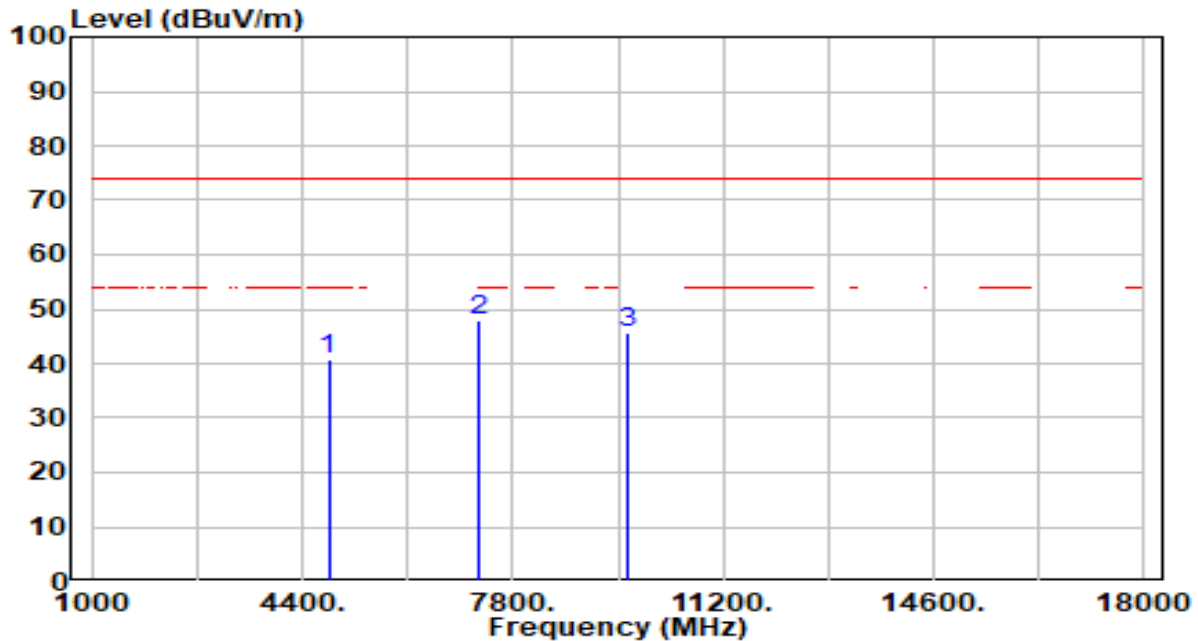


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	40.65	0.25	40.90	-33.10	74.00	150	244	Peak
2	* 7236.000	41.97	5.81	47.78	-26.22	74.00	150	182	Peak
3	9648.000	40.18	5.32	45.50	-28.50	74.00	150	3	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- The magnitude of the radiated emission (frequency range from 18GHz to 25GHz) is close to the magnitude of the ambient noise, which is also attenuated by more than 20 dB than the allowable value. Therefore, this data is not presented in the report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-24
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11b_TX_CH 1_ANT 1	Test Voltage	AC 120V/60Hz

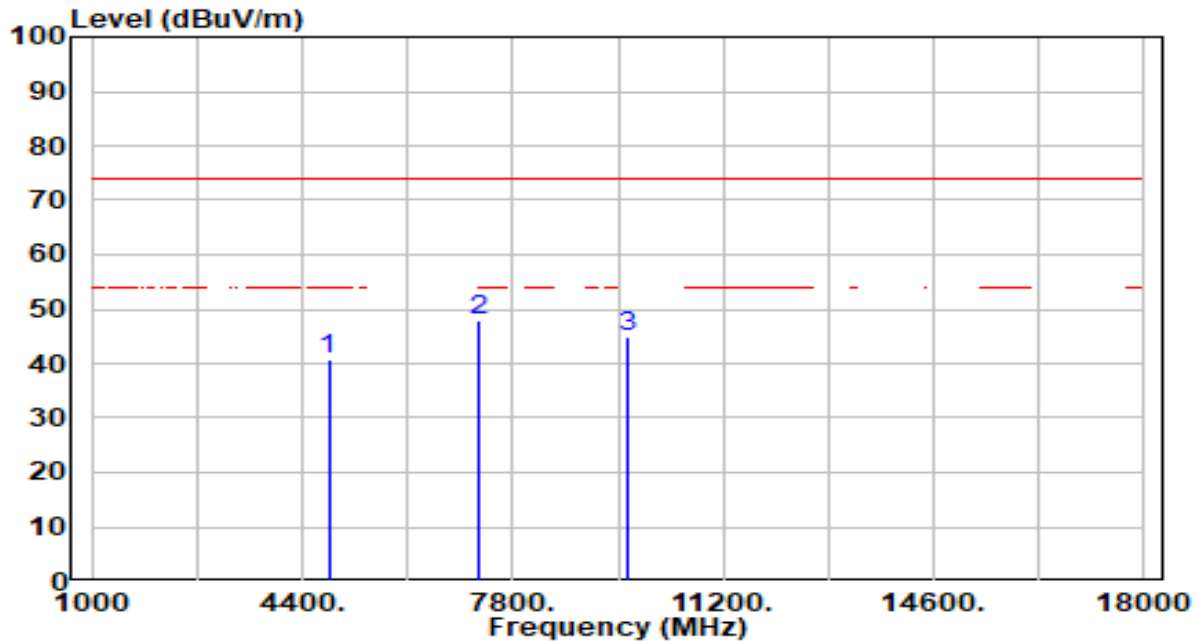


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	40.56	0.25	40.81	-33.19	74.00	150	336	Peak
2	* 7236.000	42.08	5.81	47.89	-26.11	74.00	150	285	Peak
3	9648.000	39.50	5.32	44.83	-29.17	74.00	150	300	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- The magnitude of the radiated emission (frequency range from 18GHz to 25GHz) is close to the magnitude of the ambient noise, which is also attenuated by more than 20 dB than the allowable value. Therefore, this data is not presented in the report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-24
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11b_TX_CH 6_ANT 1	Test Voltage	AC 120V/60Hz

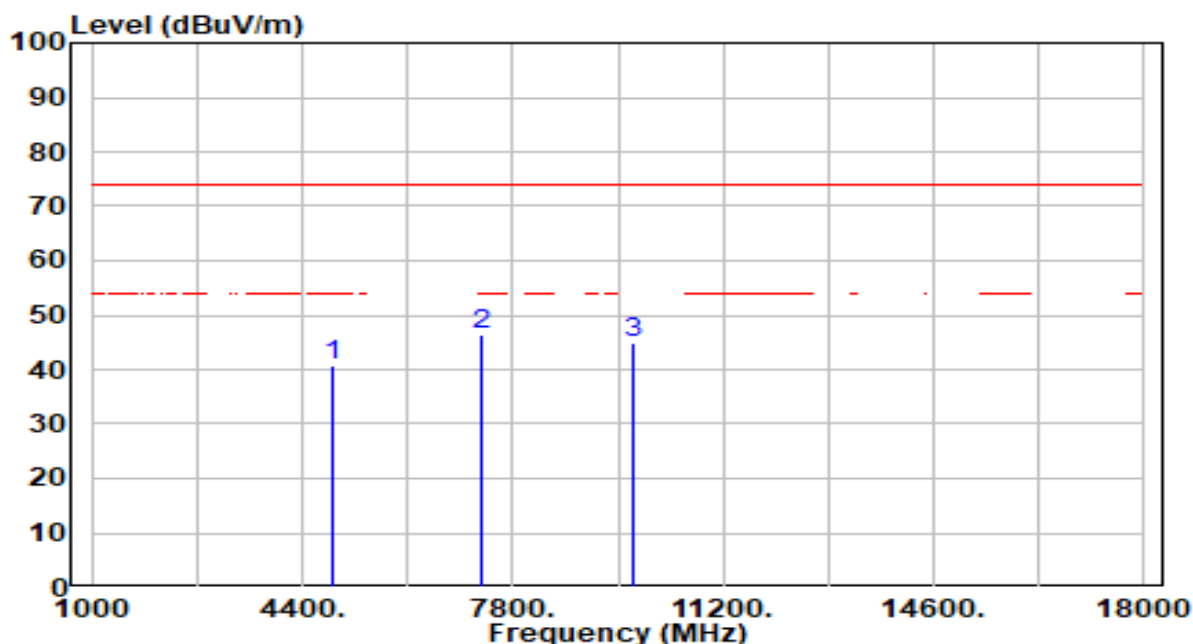


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	40.33	0.35	40.68	-33.32	74.00	150	60	Peak
2	* 7311.000	40.80	5.79	46.59	-27.41	74.00	150	25	Peak
3	9748.000	39.47	5.34	44.81	-29.19	74.00	150	307	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- The magnitude of the radiated emission (frequency range from 18GHz to 25GHz) is close to the magnitude of the ambient noise, which is also attenuated by more than 20 dB than the allowable value. Therefore, this data is not presented in the report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-24
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11b_TX_CH 6_ANT 1	Test Voltage	AC 120V/60Hz

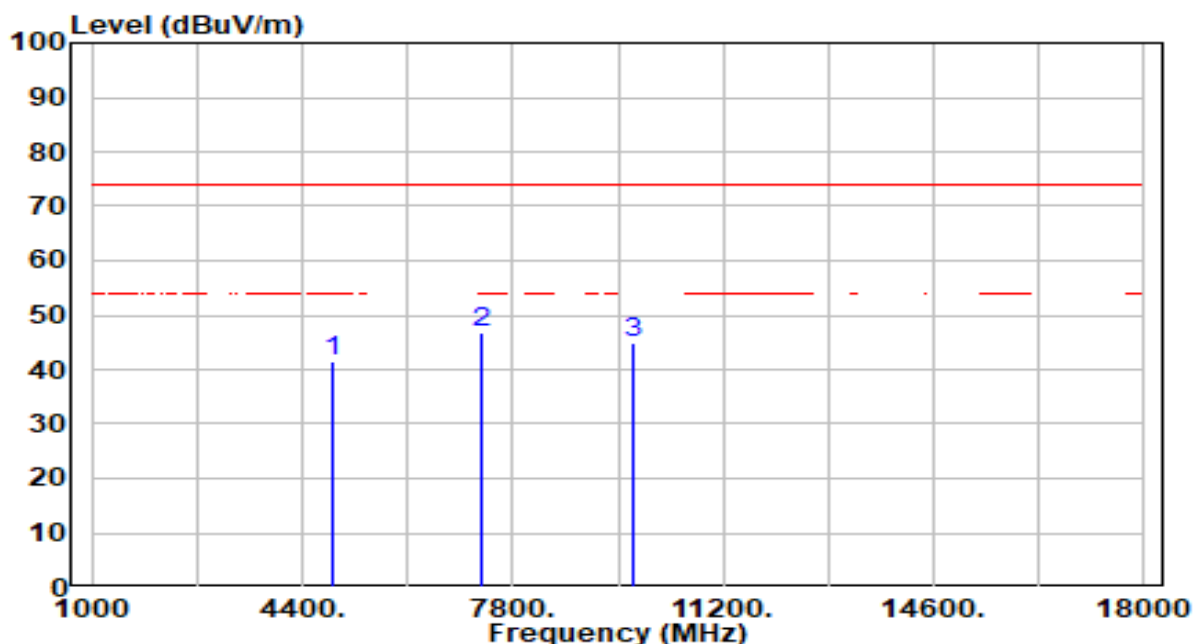


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	41.13	0.35	41.48	-32.52	74.00	150	245	Peak
2	* 7311.000	41.11	5.79	46.90	-27.10	74.00	150	42	Peak
3	9748.000	39.66	5.34	45.00	-29.00	74.00	150	45	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- The magnitude of the radiated emission (frequency range from 18GHz to 25GHz) is close to the magnitude of the ambient noise, which is also attenuated by more than 20 dB than the allowable value. Therefore, this data is not presented in the report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-24
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11b_TX_CH 11_ANT 1	Test Voltage	AC 120V/60Hz

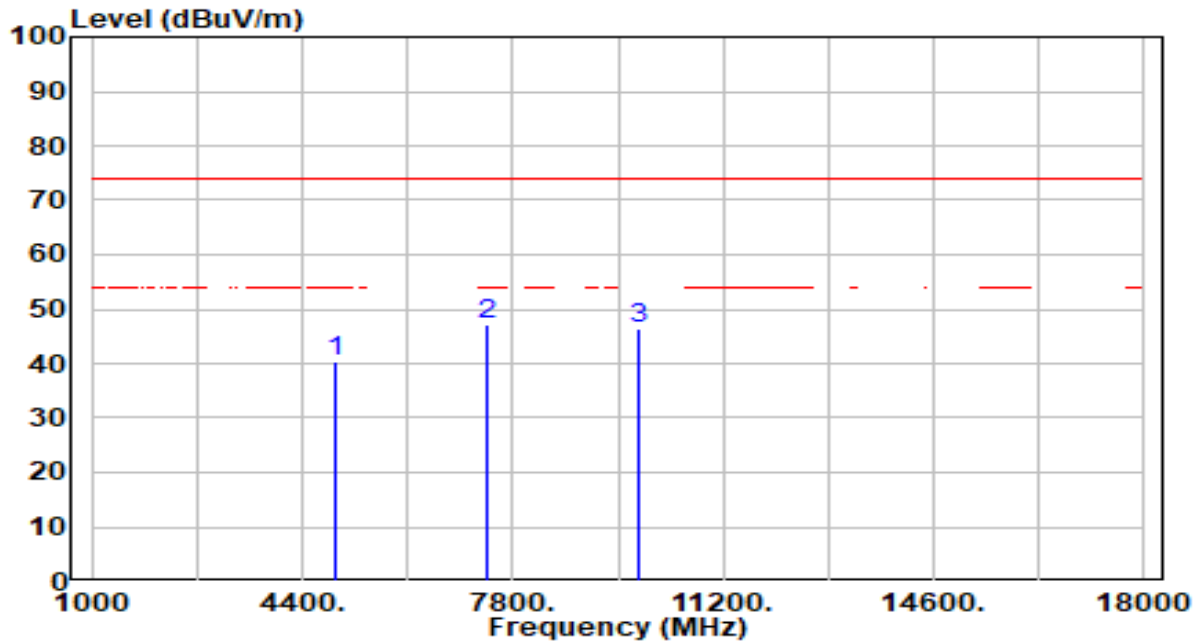


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	40.01	0.45	40.47	-33.53	74.00	150	319	Peak
2	* 7386.000	41.27	5.77	47.05	-26.95	74.00	150	197	Peak
3	9848.000	41.17	5.38	46.55	-27.45	74.00	150	352	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- The magnitude of the radiated emission (frequency range from 18GHz to 25GHz) is close to the magnitude of the ambient noise, which is also attenuated by more than 20 dB than the allowable value. Therefore, this data is not presented in the report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-24
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11b_TX_CH 11_ANT 1	Test Voltage	AC 120V/60Hz

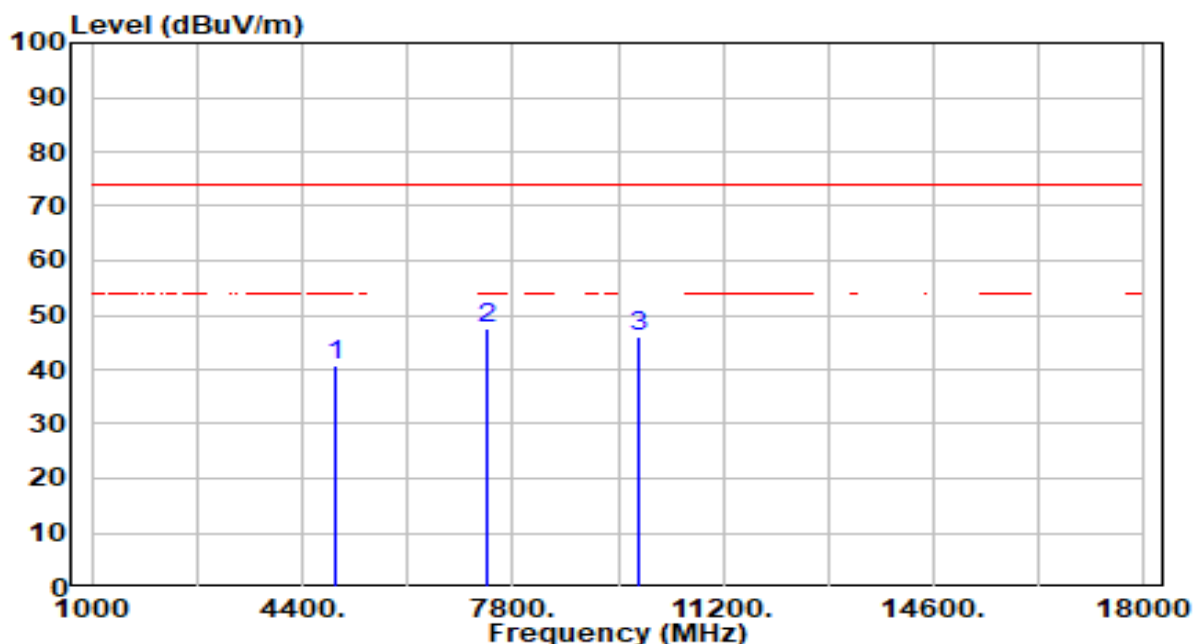


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	40.44	0.45	40.90	-33.10	74.00	150	273	Peak
2	* 7386.000	41.69	5.77	47.46	-26.54	74.00	150	47	Peak
3	9848.000	40.77	5.38	46.15	-27.85	74.00	150	47	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- The magnitude of the radiated emission (frequency range from 18GHz to 25GHz) is close to the magnitude of the ambient noise, which is also attenuated by more than 20 dB than the allowable value. Therefore, this data is not presented in the report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-24
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11g_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

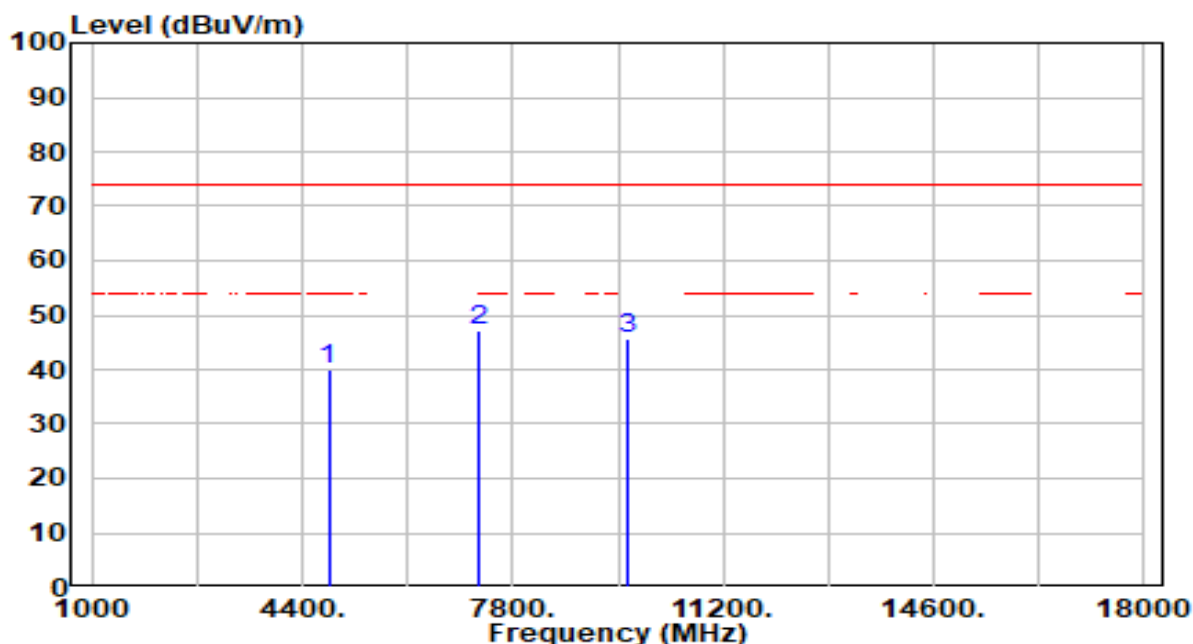


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	39.87	0.25	40.12	-33.88	74.00	150	223	Peak
2	* 7236.000	41.52	5.81	47.33	-26.67	74.00	150	142	Peak
3	9648.000	40.35	5.32	45.67	-28.33	74.00	150	110	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- The magnitude of the radiated emission (frequency range from 18GHz to 25GHz) is close to the magnitude of the ambient noise, which is also attenuated by more than 20 dB than the allowable value. Therefore, this data is not presented in the report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-24
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11g_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

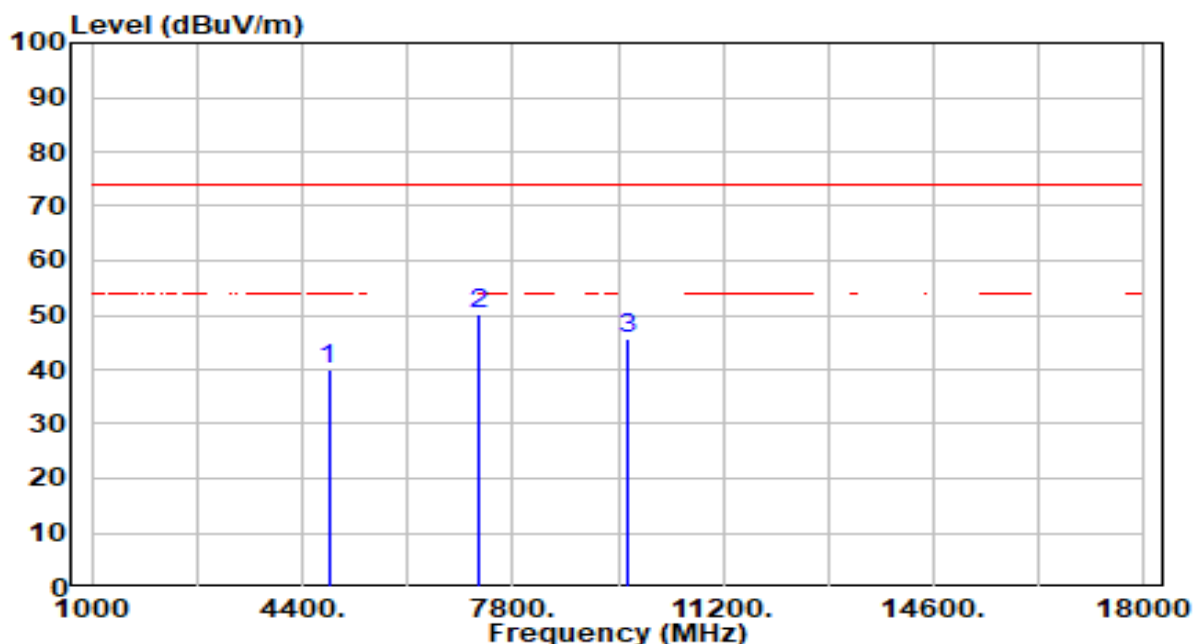


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	39.81	0.25	40.07	-33.93	74.00	150	9	Peak
2	* 7236.000	44.35	5.81	50.16	-23.84	74.00	150	104	Peak
3	9648.000	40.46	5.32	45.78	-28.22	74.00	150	250	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- The magnitude of the radiated emission (frequency range from 18GHz to 25GHz) is close to the magnitude of the ambient noise, which is also attenuated by more than 20 dB than the allowable value. Therefore, this data is not presented in the report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-24
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11g_TX_CH 6_ANT 0	Test Voltage	AC 120V/60Hz

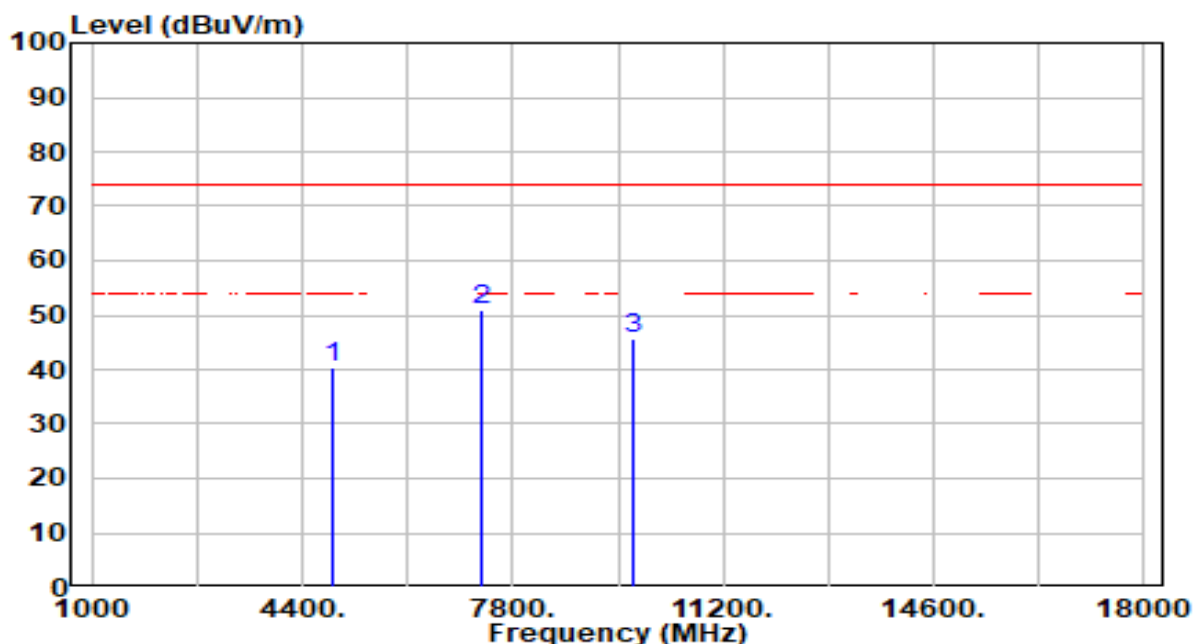


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	39.89	0.35	40.24	-33.76	74.00	150	208	Peak
2	* 7311.000	45.02	5.79	50.81	-23.19	74.00	150	43	Peak
3	9748.000	40.23	5.34	45.57	-28.43	74.00	150	315	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- The magnitude of the radiated emission (frequency range from 18GHz to 25GHz) is close to the magnitude of the ambient noise, which is also attenuated by more than 20 dB than the allowable value. Therefore, this data is not presented in the report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-24
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11g_TX_CH 6_ANT 0	Test Voltage	AC 120V/60Hz

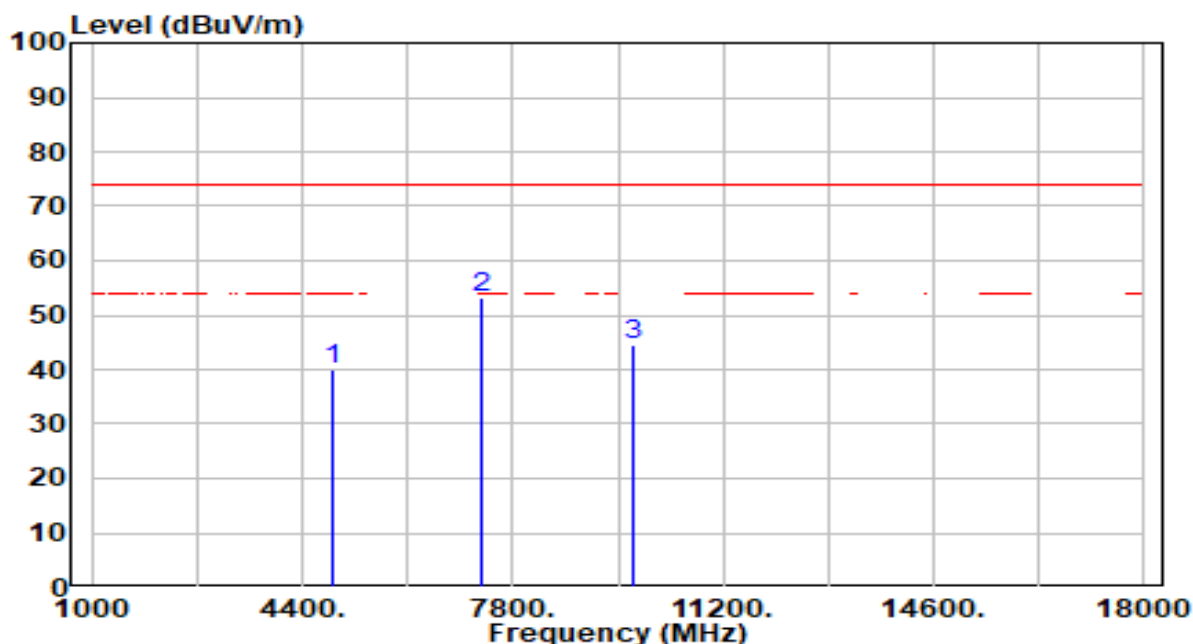


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	39.61	0.35	39.96	-34.04	74.00	150	32	Peak
2	* 7311.000	47.29	5.79	53.08	-20.92	74.00	150	104	Peak
3	9748.000	39.10	5.34	44.44	-29.56	74.00	150	266	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- The magnitude of the radiated emission (frequency range from 18GHz to 25GHz) is close to the magnitude of the ambient noise, which is also attenuated by more than 20 dB than the allowable value. Therefore, this data is not presented in the report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-24
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11g_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

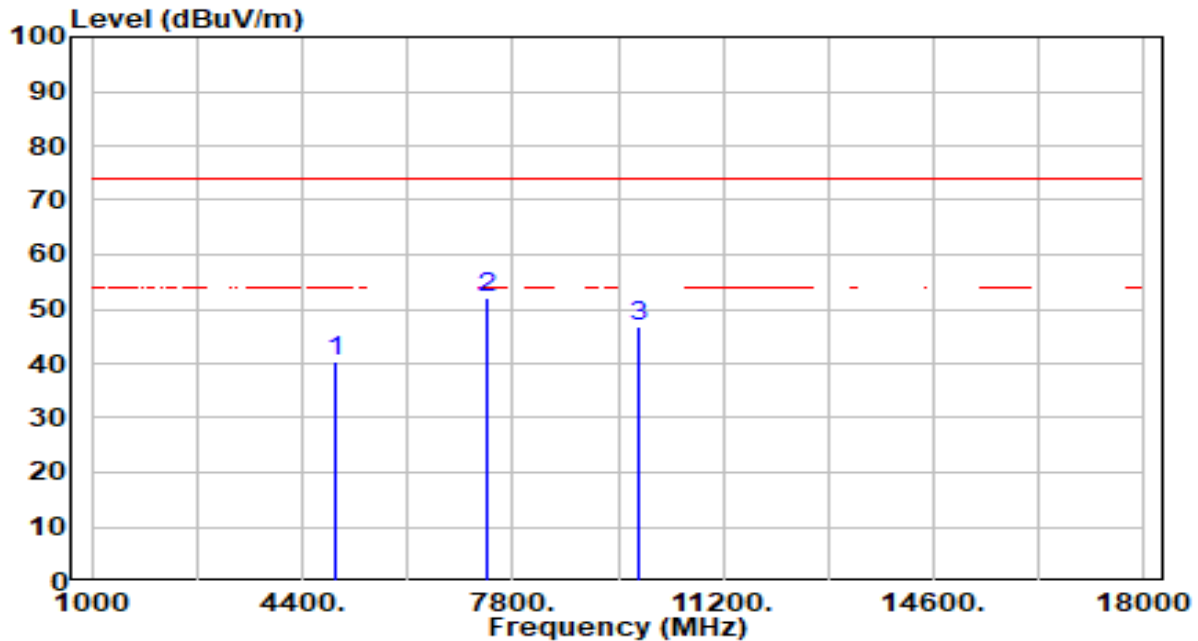


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	39.74	0.45	40.19	-33.81	74.00	150	216	Peak
2	* 7386.000	46.41	5.77	52.18	-21.82	74.00	150	132	Peak
3	9848.000	41.48	5.38	46.86	-27.14	74.00	150	22	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- The magnitude of the radiated emission (frequency range from 18GHz to 25GHz) is close to the magnitude of the ambient noise, which is also attenuated by more than 20 dB than the allowable value. Therefore, this data is not presented in the report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-24
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11g_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

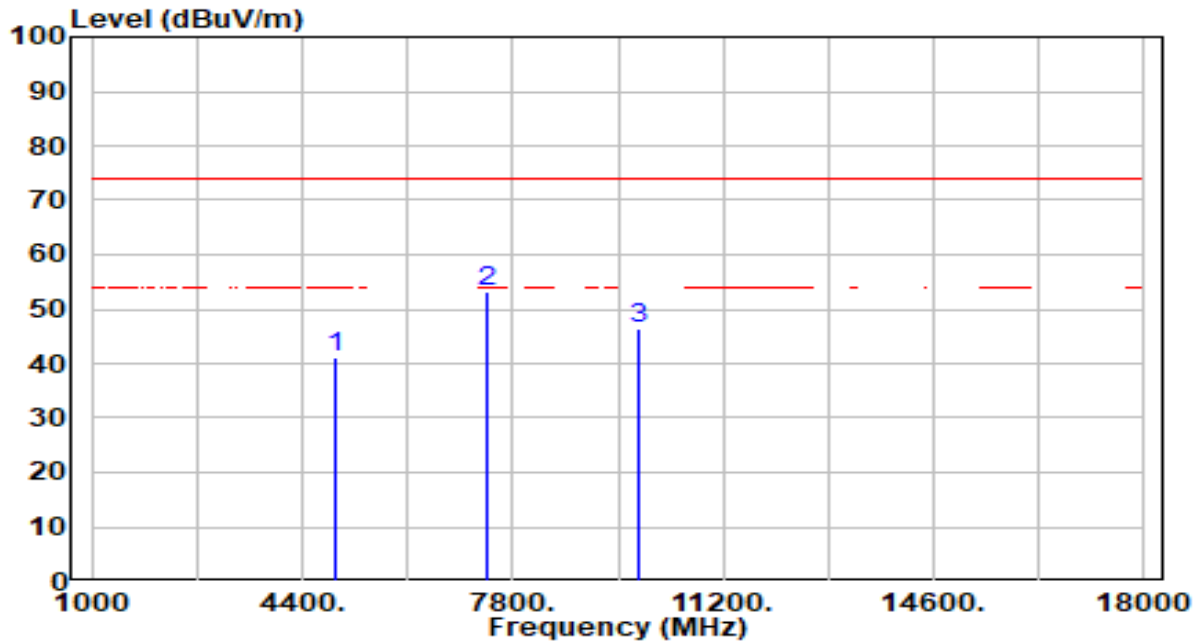


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	40.81	0.45	41.26	-32.74	74.00	150	159	Peak
2	* 7386.000	47.53	5.77	53.30	-20.70	74.00	150	79	Peak
3	9848.000	41.15	5.38	46.53	-27.47	74.00	150	317	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- The magnitude of the radiated emission (frequency range from 18GHz to 25GHz) is close to the magnitude of the ambient noise, which is also attenuated by more than 20 dB than the allowable value. Therefore, this data is not presented in the report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-24
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11g_TX_CH 1_ANT 1	Test Voltage	AC 120V/60Hz

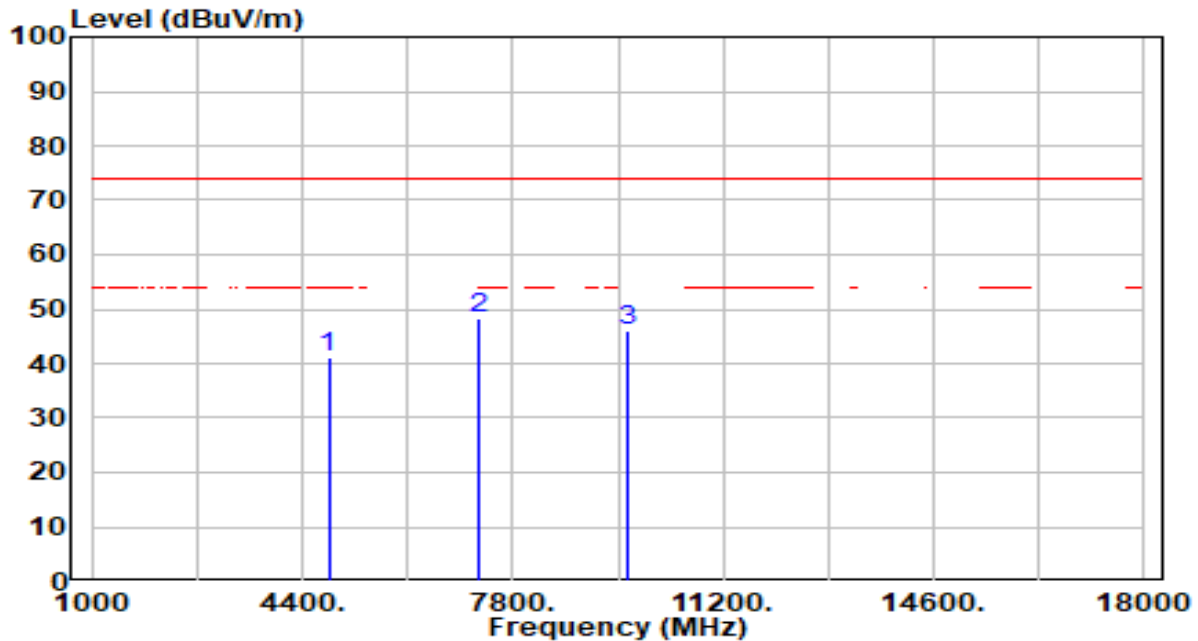


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	40.90	0.25	41.15	-32.85	74.00	150	174	Peak
2	* 7236.000	42.62	5.81	48.43	-25.57	74.00	150	171	Peak
3	9648.000	40.72	5.32	46.05	-27.95	74.00	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- The magnitude of the radiated emission (frequency range from 18GHz to 25GHz) is close to the magnitude of the ambient noise, which is also attenuated by more than 20 dB than the allowable value. Therefore, this data is not presented in the report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-24
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11g_TX_CH 1_ANT 1	Test Voltage	AC 120V/60Hz

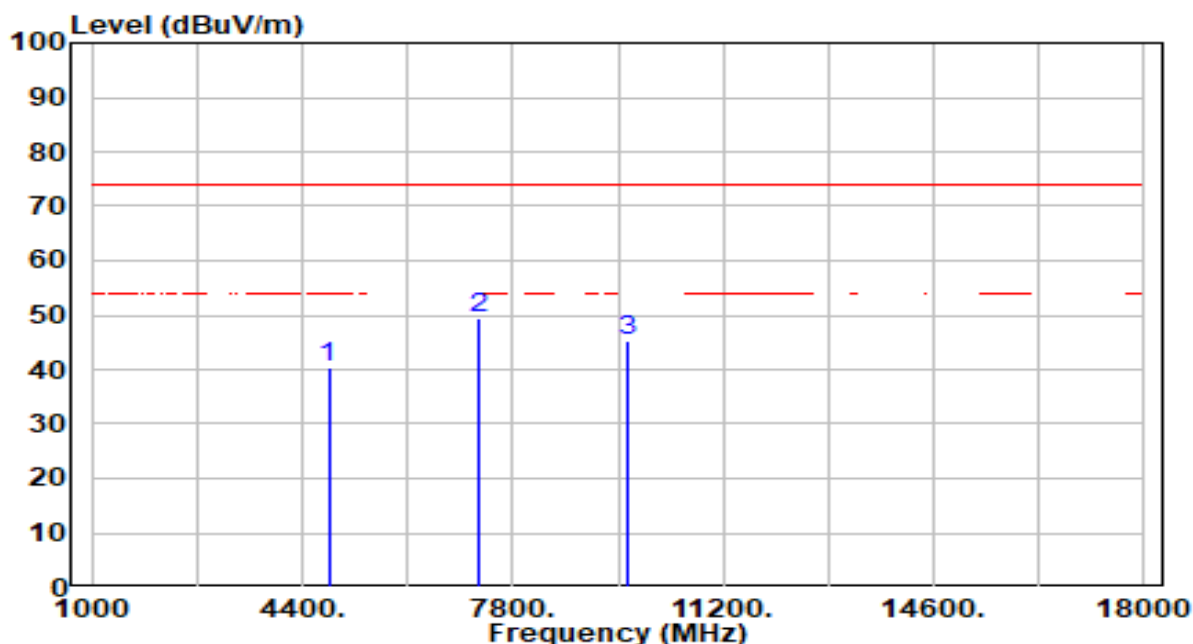


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	39.98	0.25	40.23	-33.77	74.00	150	86	Peak
2	* 7236.000	43.60	5.81	49.42	-24.58	74.00	150	297	Peak
3	9648.000	39.96	5.32	45.28	-28.72	74.00	150	358	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- The magnitude of the radiated emission (frequency range from 18GHz to 25GHz) is close to the magnitude of the ambient noise, which is also attenuated by more than 20 dB than the allowable value. Therefore, this data is not presented in the report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-24
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11g_TX_CH 6_ANT 1	Test Voltage	AC 120V/60Hz

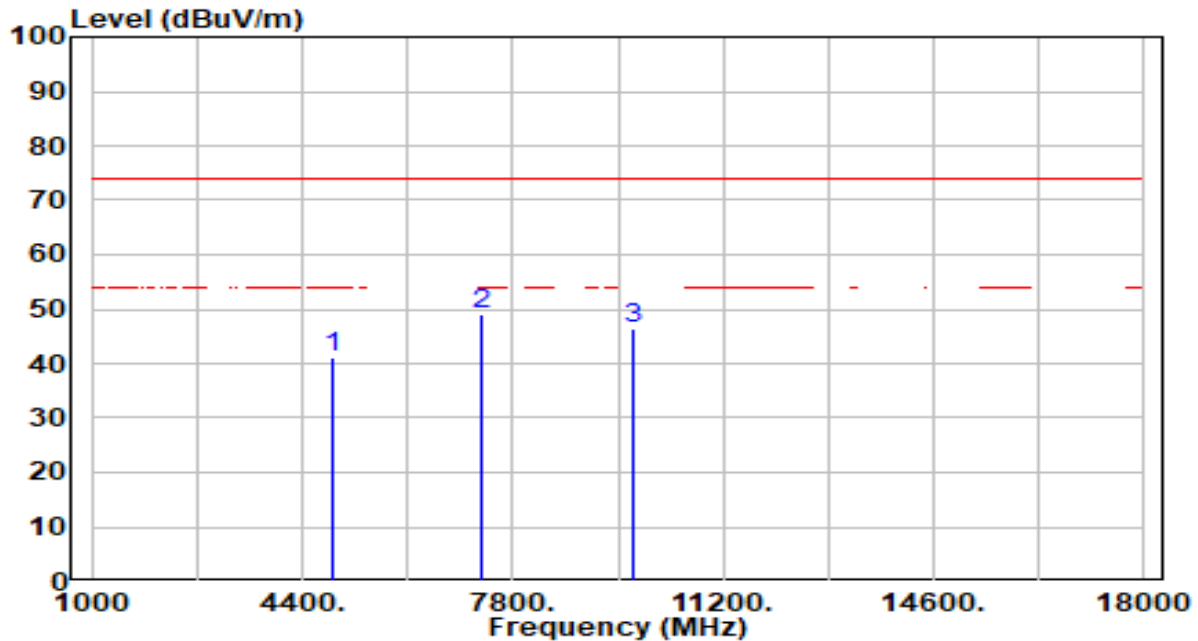


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	40.63	0.35	40.99	-33.01	74.00	150	61	Peak
2	* 7311.000	43.24	5.79	49.03	-24.97	74.00	150	168	Peak
3	9748.000	41.20	5.34	46.54	-27.46	74.00	150	5	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- The magnitude of the radiated emission (frequency range from 18GHz to 25GHz) is close to the magnitude of the ambient noise, which is also attenuated by more than 20 dB than the allowable value. Therefore, this data is not presented in the report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-24
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11g_TX_CH 6_ANT 1	Test Voltage	AC 120V/60Hz

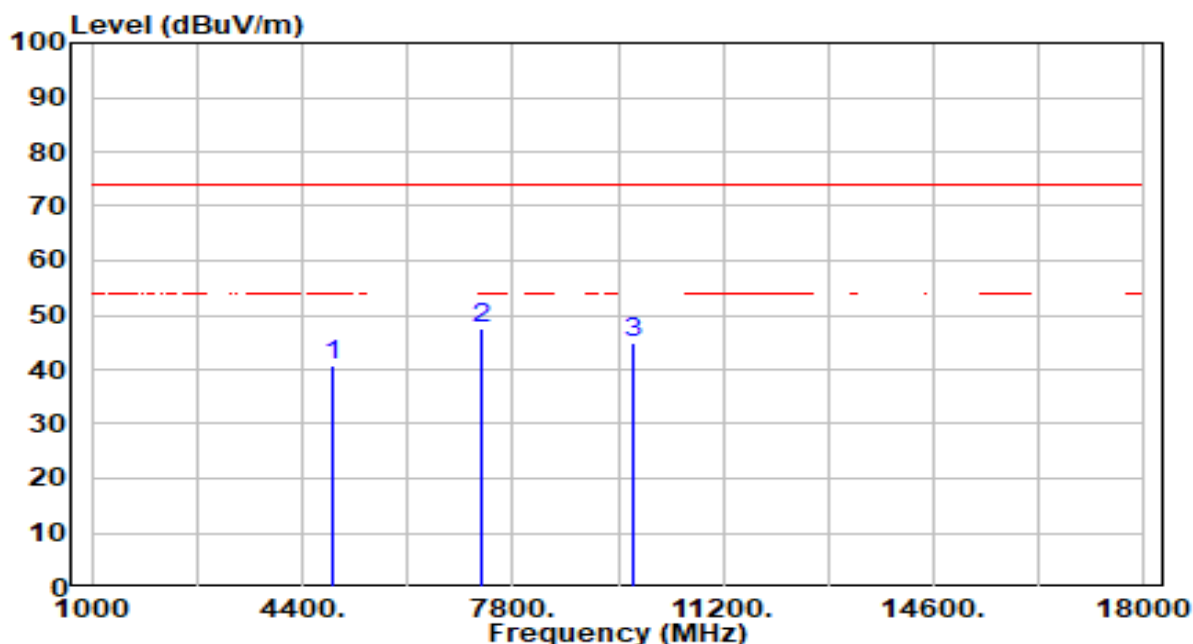


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	40.48	0.35	40.83	-33.17	74.00	150	252	Peak
2	* 7311.000	41.89	5.79	47.68	-26.32	74.00	150	305	Peak
3	9748.000	39.69	5.34	45.03	-28.97	74.00	150	334	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- The magnitude of the radiated emission (frequency range from 18GHz to 25GHz) is close to the magnitude of the ambient noise, which is also attenuated by more than 20 dB than the allowable value. Therefore, this data is not presented in the report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-24
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11g_TX_CH 11_ANT 1	Test Voltage	AC 120V/60Hz

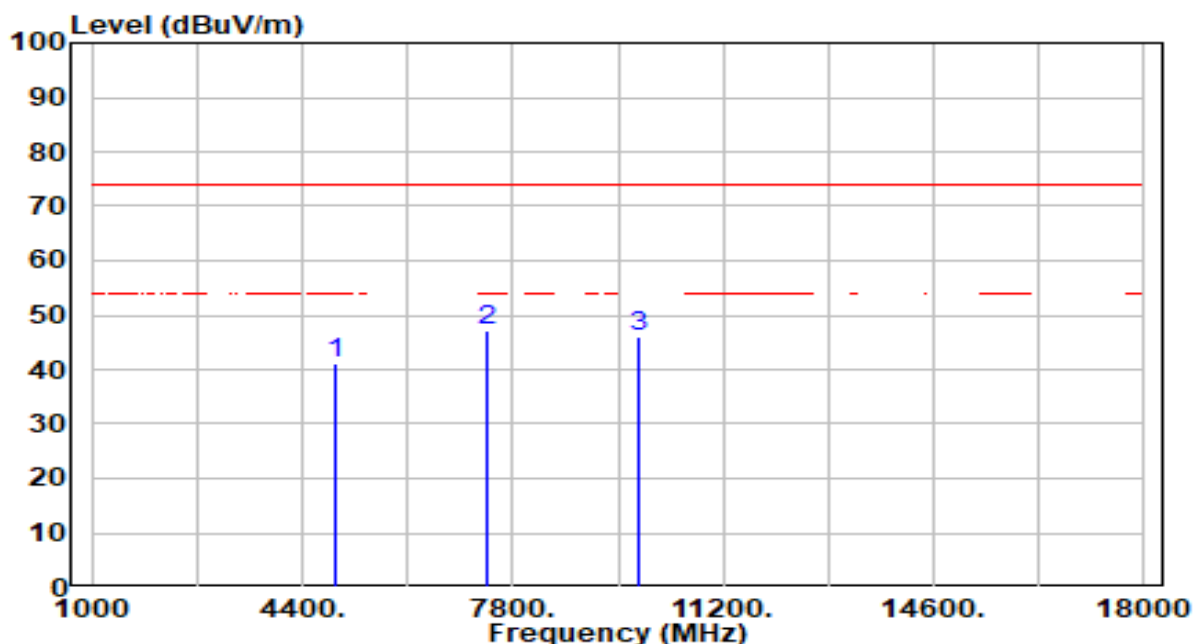


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	40.75	0.45	41.21	-32.79	74.00	150	3	Peak
2	* 7386.000	41.50	5.77	47.27	-26.73	74.00	150	207	Peak
3	9848.000	40.63	5.38	46.01	-27.99	74.00	150	260	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- The magnitude of the radiated emission (frequency range from 18GHz to 25GHz) is close to the magnitude of the ambient noise, which is also attenuated by more than 20 dB than the allowable value. Therefore, this data is not presented in the report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-24
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11g_TX_CH 11_ANT 1	Test Voltage	AC 120V/60Hz

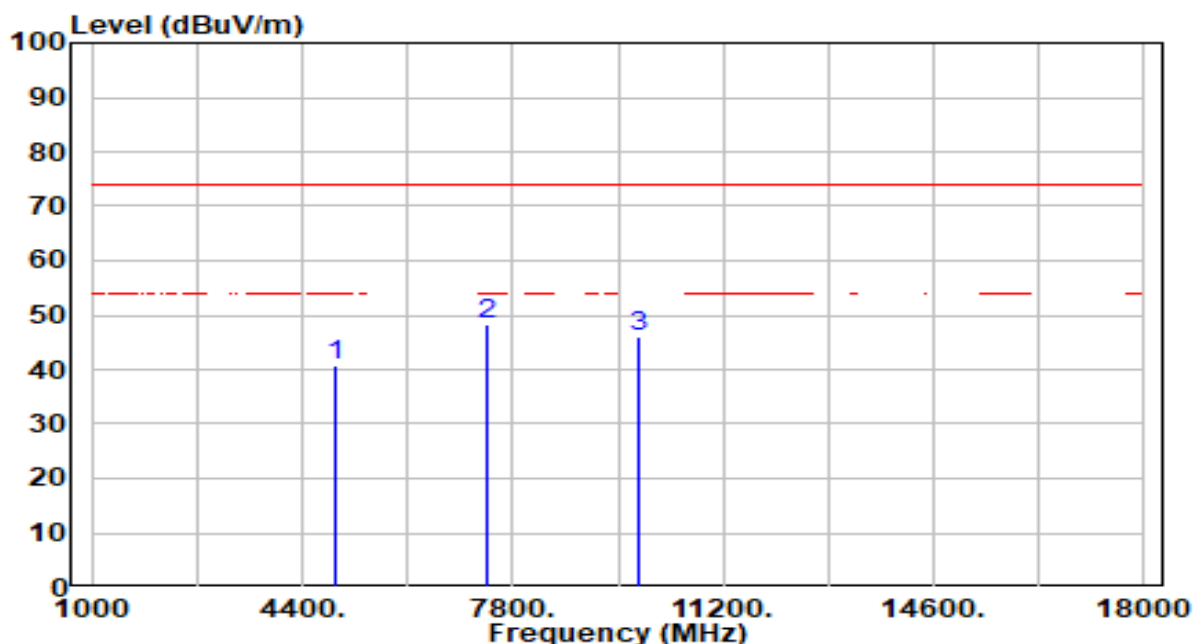


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	40.22	0.45	40.67	-33.33	74.00	150	360	Peak
2	* 7386.000	42.70	5.77	48.47	-25.53	74.00	150	47	Peak
3	9848.000	40.57	5.38	45.95	-28.05	74.00	150	328	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- The magnitude of the radiated emission (frequency range from 18GHz to 25GHz) is close to the magnitude of the ambient noise, which is also attenuated by more than 20 dB than the allowable value. Therefore, this data is not presented in the report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-24
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

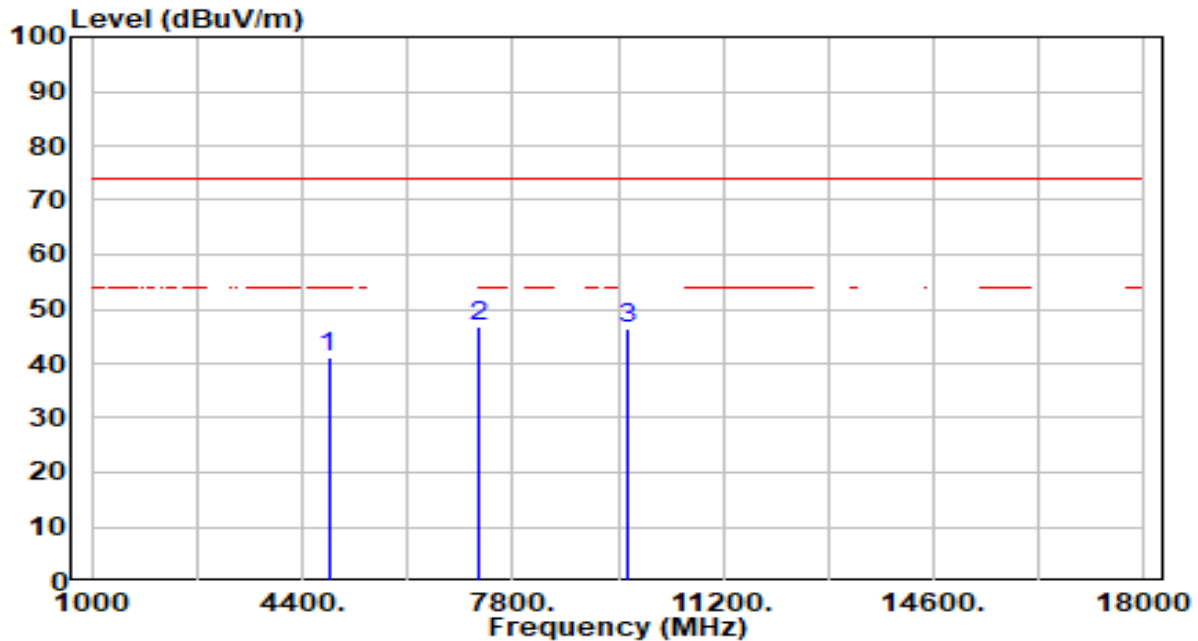


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	40.85	0.25	41.10	-32.90	74.00	150	14	Peak
2	* 7236.000	40.97	5.81	46.79	-27.21	74.00	150	141	Peak
3	9648.000	40.96	5.32	46.28	-27.72	74.00	150	94	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- The magnitude of the radiated emission (frequency range from 18GHz to 25GHz) is close to the magnitude of the ambient noise, which is also attenuated by more than 20 dB than the allowable value. Therefore, this data is not presented in the report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-24
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

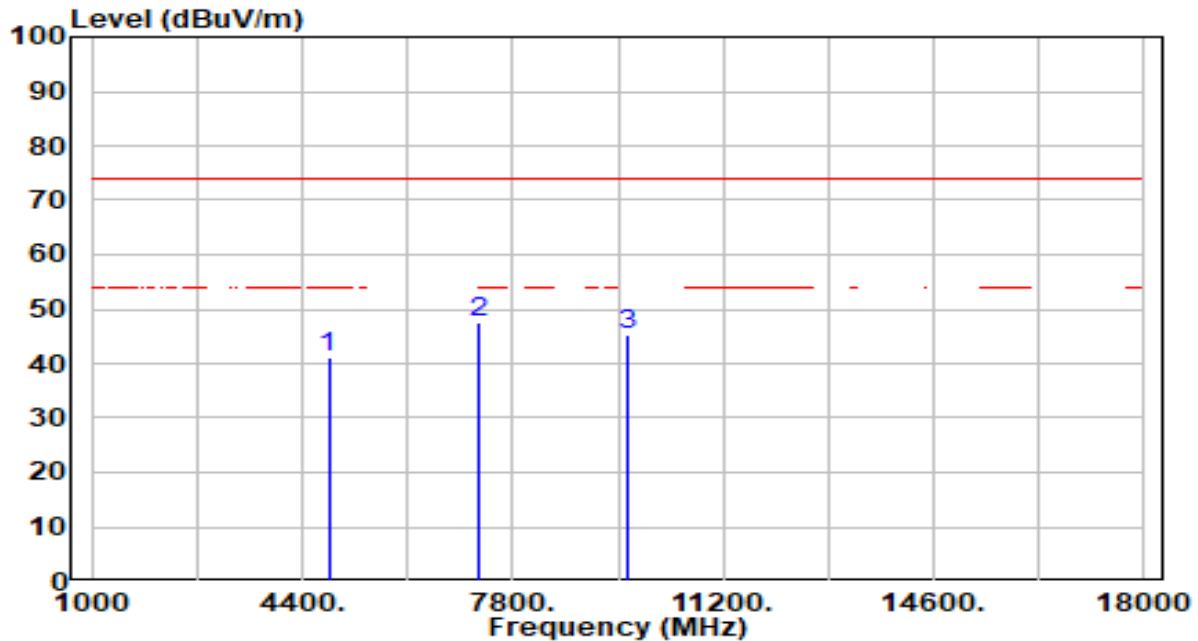


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	40.78	0.25	41.03	-32.97	74.00	150	6	Peak
2	* 7236.000	41.83	5.81	47.64	-26.36	74.00	150	41	Peak
3	9648.000	40.13	5.32	45.45	-28.55	74.00	150	21	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- The magnitude of the radiated emission (frequency range from 18GHz to 25GHz) is close to the magnitude of the ambient noise, which is also attenuated by more than 20 dB than the allowable value. Therefore, this data is not presented in the report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-24
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

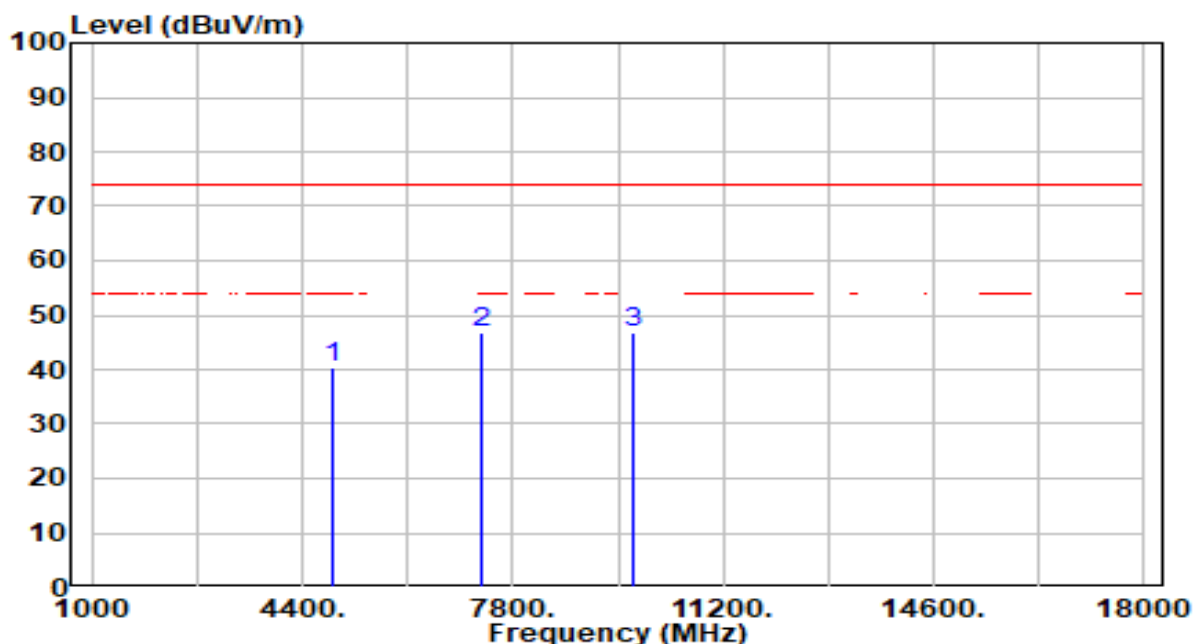


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	40.19	0.35	40.54	-33.46	74.00	150	31	Peak
2	7311.000	40.81	5.79	46.61	-27.39	74.00	150	55	Peak
3	* 9748.000	41.35	5.34	46.69	-27.31	74.00	150	318	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- The magnitude of the radiated emission (frequency range from 18GHz to 25GHz) is close to the magnitude of the ambient noise, which is also attenuated by more than 20 dB than the allowable value. Therefore, this data is not presented in the report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-24
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

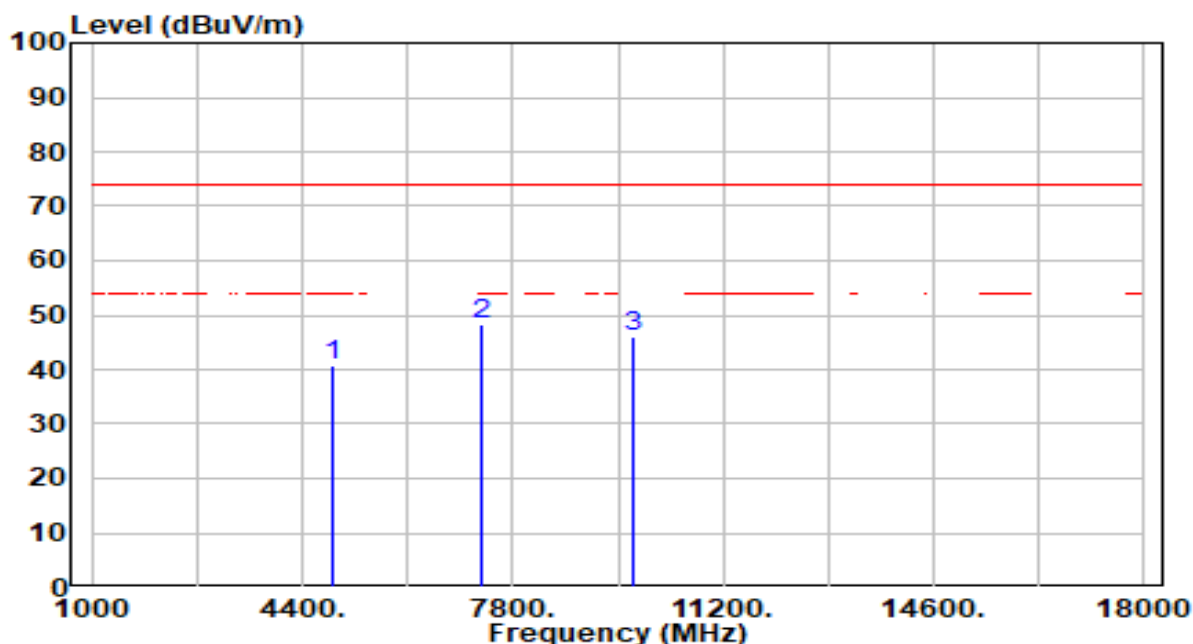


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	40.31	0.35	40.66	-33.34	74.00	150	0	Peak
2	* 7311.000	42.44	5.79	48.23	-25.77	74.00	150	74	Peak
3	9748.000	40.76	5.34	46.10	-27.90	74.00	150	6	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- The magnitude of the radiated emission (frequency range from 18GHz to 25GHz) is close to the magnitude of the ambient noise, which is also attenuated by more than 20 dB than the allowable value. Therefore, this data is not presented in the report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-24
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

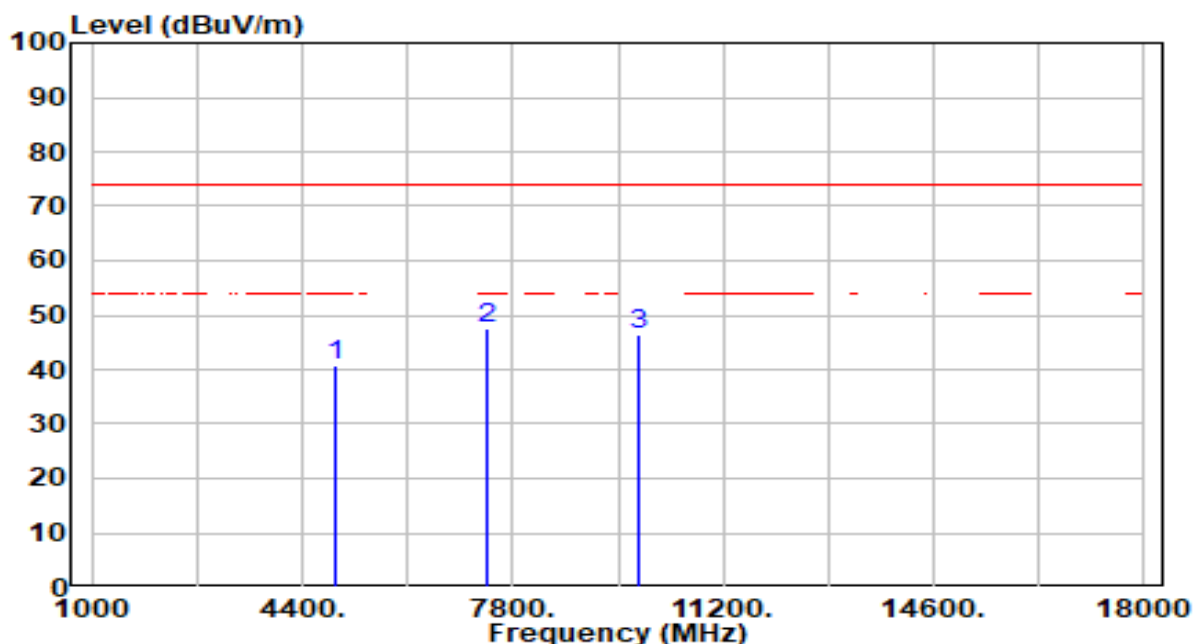


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	40.44	0.45	40.89	-33.11	74.00	150	252	Peak
2	* 7386.000	41.94	5.77	47.71	-26.29	74.00	150	40	Peak
3	9848.000	41.04	5.38	46.42	-27.58	74.00	150	169	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- The magnitude of the radiated emission (frequency range from 18GHz to 25GHz) is close to the magnitude of the ambient noise, which is also attenuated by more than 20 dB than the allowable value. Therefore, this data is not presented in the report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-24
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

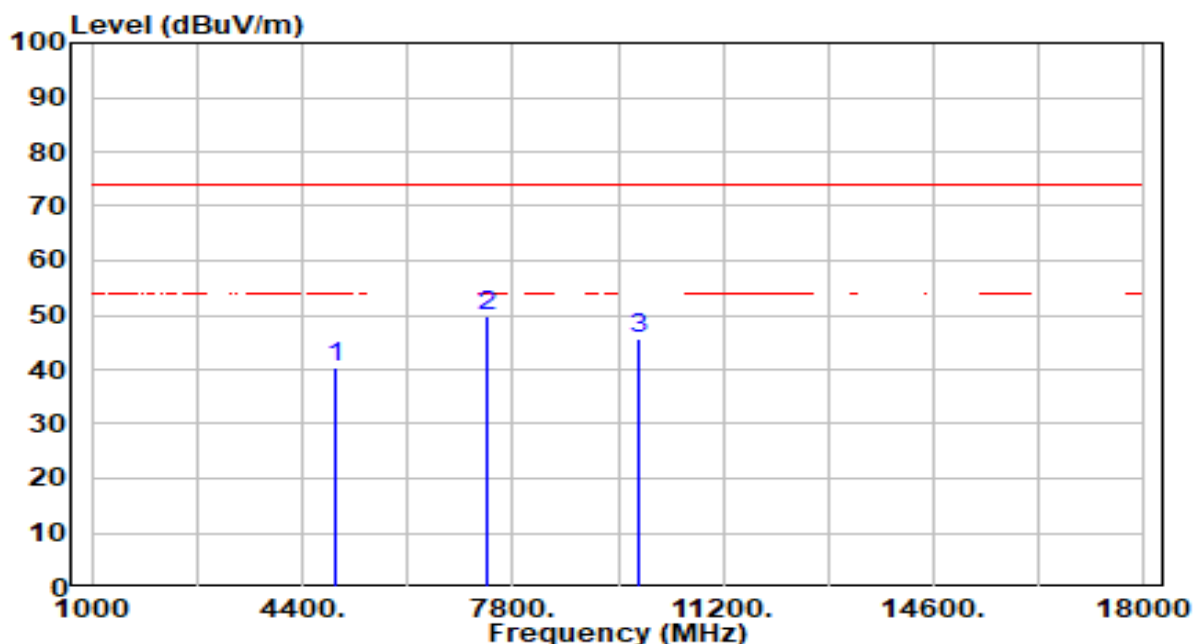


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	39.80	0.45	40.26	-33.74	74.00	150	248	Peak
2	* 7386.000	44.01	5.77	49.78	-24.22	74.00	150	47	Peak
3	9848.000	40.20	5.38	45.58	-28.42	74.00	150	216	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- The magnitude of the radiated emission (frequency range from 18GHz to 25GHz) is close to the magnitude of the ambient noise, which is also attenuated by more than 20 dB than the allowable value. Therefore, this data is not presented in the report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-24
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

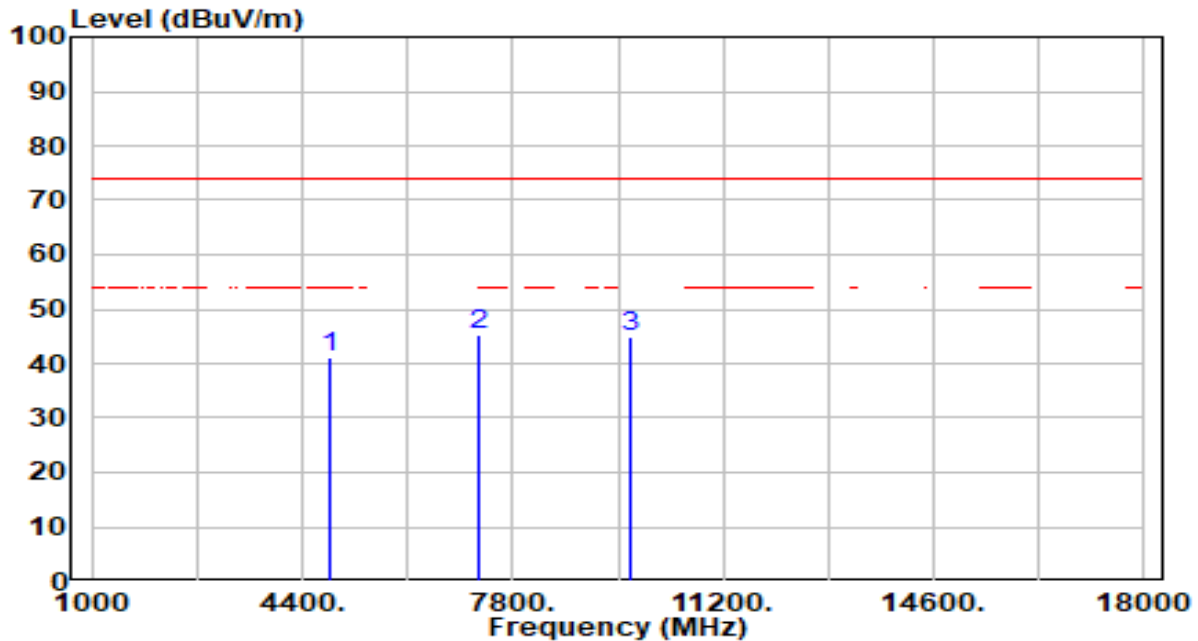


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	40.75	0.29	41.04	-32.96	74.00	150	18	Peak
2	* 7266.000	39.53	5.81	45.33	-28.67	74.00	150	337	Peak
3	9688.000	39.44	5.33	44.77	-29.23	74.00	150	139	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- The magnitude of the radiated emission (frequency range from 18GHz to 25GHz) is close to the magnitude of the ambient noise, which is also attenuated by more than 20 dB than the allowable value. Therefore, this data is not presented in the report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-24
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

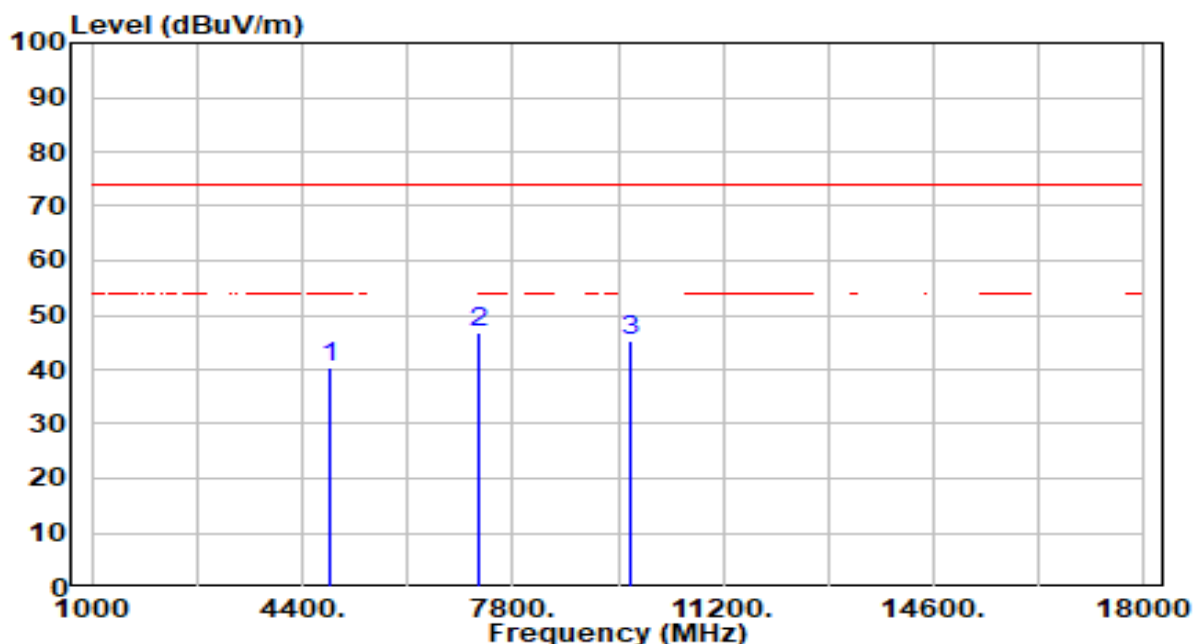


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	39.95	0.29	40.24	-33.76	74.00	150	286	Peak
2	* 7266.000	40.93	5.81	46.74	-27.26	74.00	150	44	Peak
3	9688.000	39.84	5.33	45.17	-28.83	74.00	150	132	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- The magnitude of the radiated emission (frequency range from 18GHz to 25GHz) is close to the magnitude of the ambient noise, which is also attenuated by more than 20 dB than the allowable value. Therefore, this data is not presented in the report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-24
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

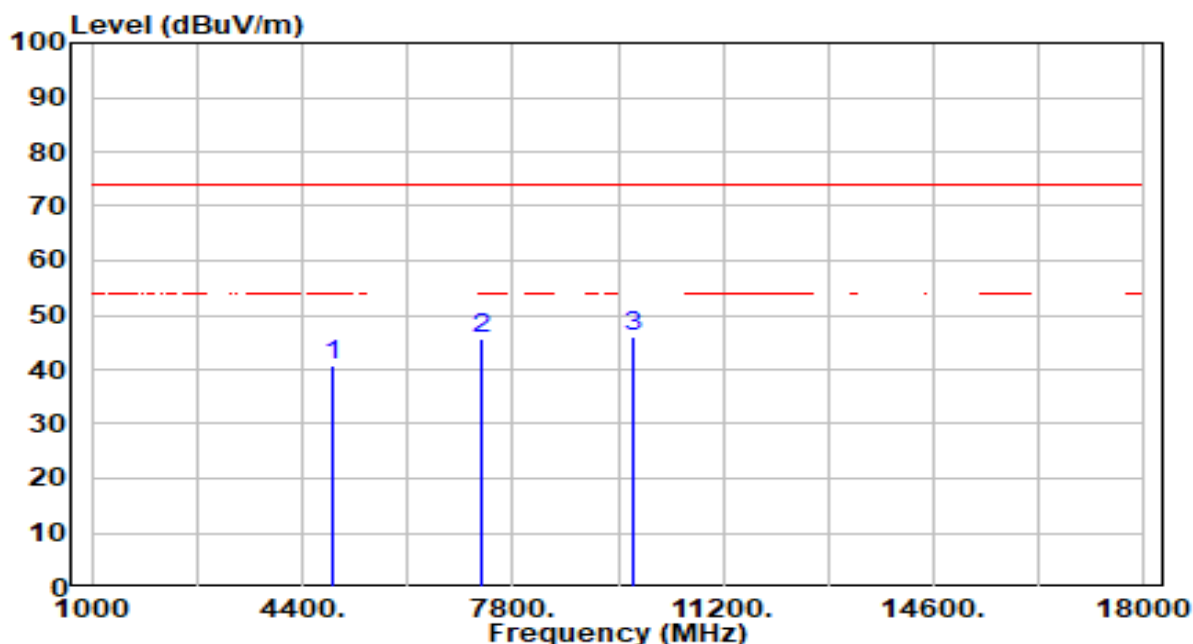


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	40.53	0.35	40.88	-33.12	74.00	150	0	Peak
2	7311.000	39.91	5.79	45.70	-28.30	74.00	150	68	Peak
3	* 9748.000	40.73	5.34	46.07	-27.93	74.00	150	234	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- The magnitude of the radiated emission (frequency range from 18GHz to 25GHz) is close to the magnitude of the ambient noise, which is also attenuated by more than 20 dB than the allowable value. Therefore, this data is not presented in the report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-24
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

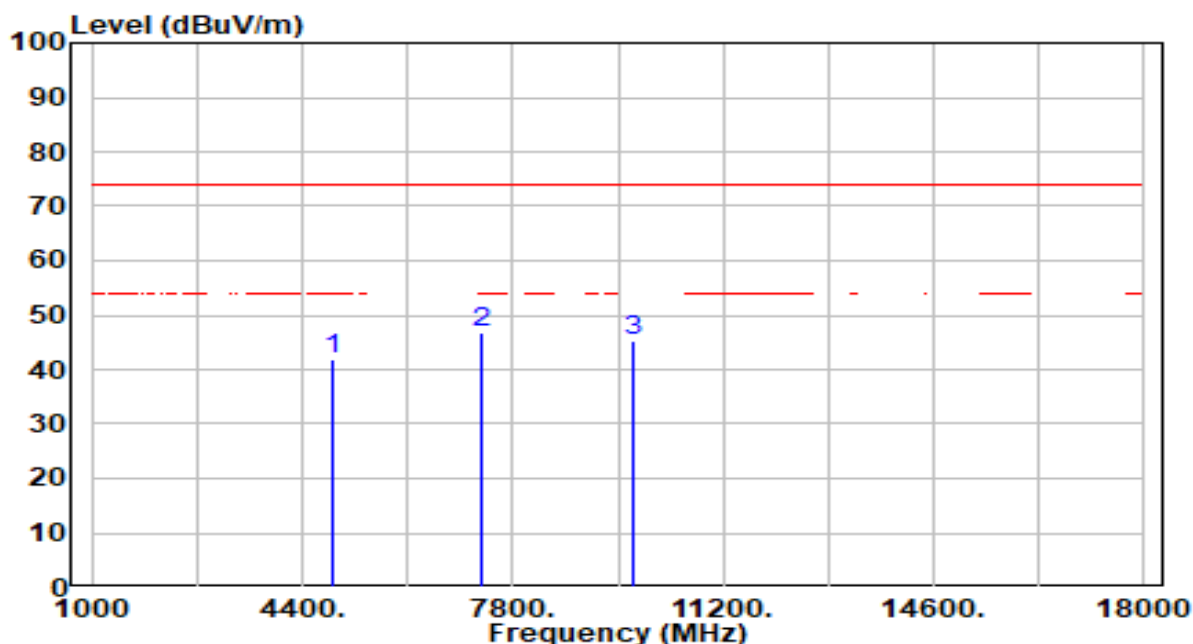


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	41.36	0.35	41.71	-32.29	74.00	150	176	Peak
2	* 7311.000	40.96	5.79	46.75	-27.25	74.00	150	82	Peak
3	9748.000	39.92	5.34	45.25	-28.75	74.00	150	310	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- The magnitude of the radiated emission (frequency range from 18GHz to 25GHz) is close to the magnitude of the ambient noise, which is also attenuated by more than 20 dB than the allowable value. Therefore, this data is not presented in the report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-24
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

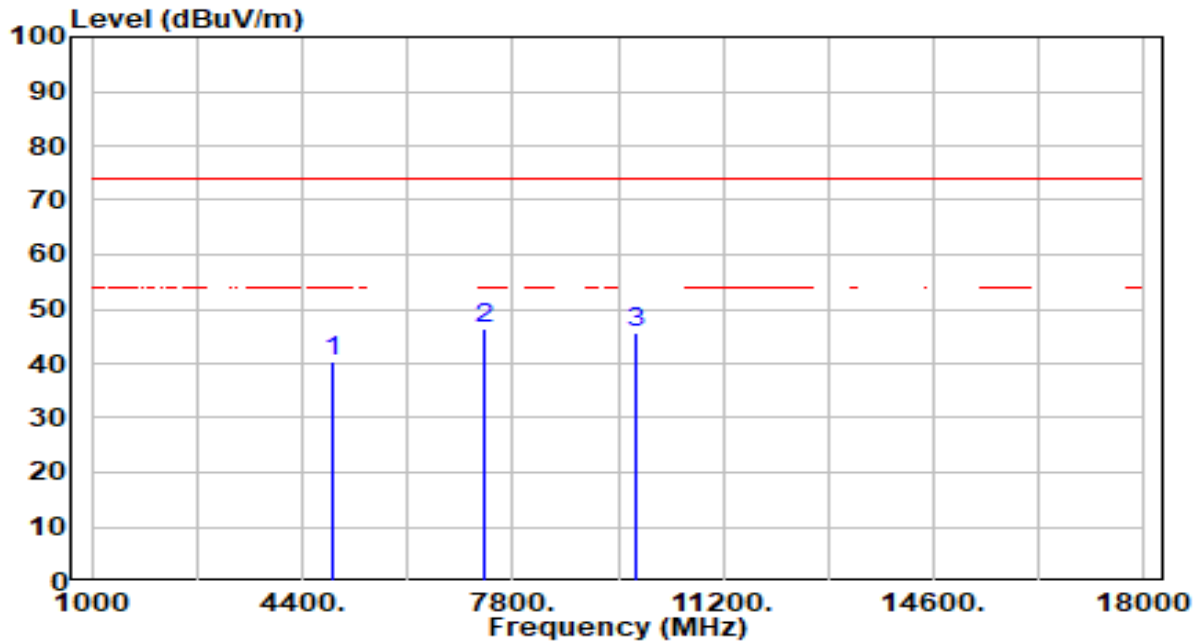


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	39.97	0.41	40.38	-33.62	74.00	150	257	Peak
2	* 7356.000	40.55	5.78	46.33	-27.67	74.00	150	204	Peak
3	9808.000	40.40	5.35	45.75	-28.25	74.00	150	331	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- The magnitude of the radiated emission (frequency range from 18GHz to 25GHz) is close to the magnitude of the ambient noise, which is also attenuated by more than 20 dB than the allowable value. Therefore, this data is not presented in the report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-24
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

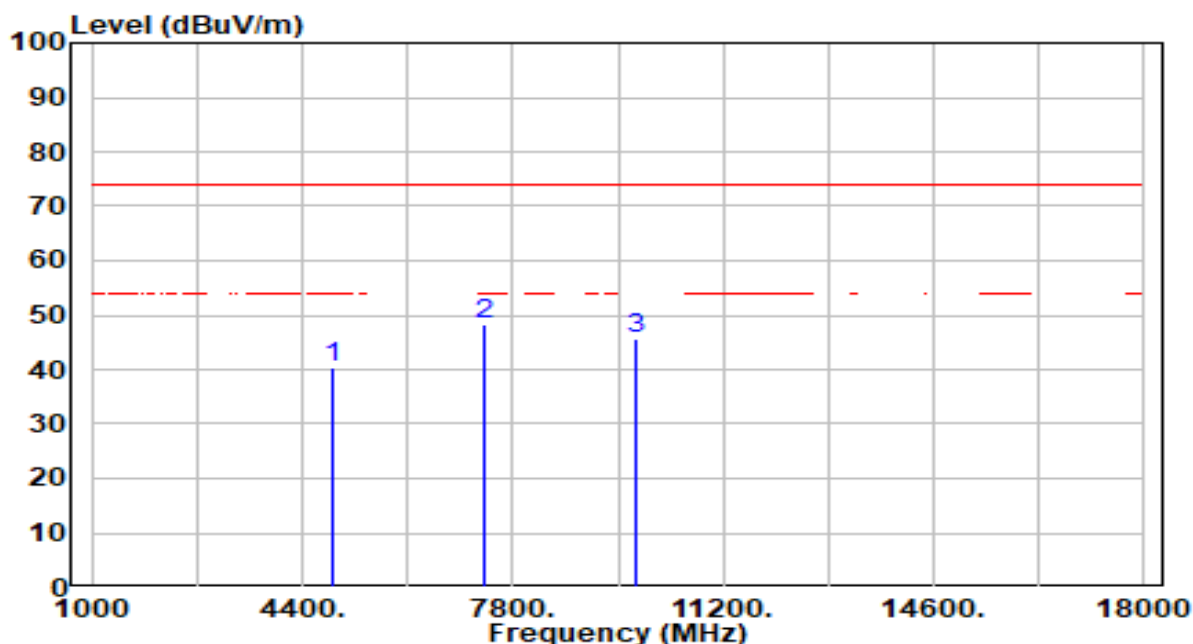


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	40.02	0.41	40.44	-33.56	74.00	150	242	Peak
2	* 7356.000	42.66	5.78	48.44	-25.56	74.00	150	121	Peak
3	9808.000	40.48	5.35	45.83	-28.17	74.00	150	310	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- The magnitude of the radiated emission (frequency range from 18GHz to 25GHz) is close to the magnitude of the ambient noise, which is also attenuated by more than 20 dB than the allowable value. Therefore, this data is not presented in the report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-24
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-20MHz_RX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

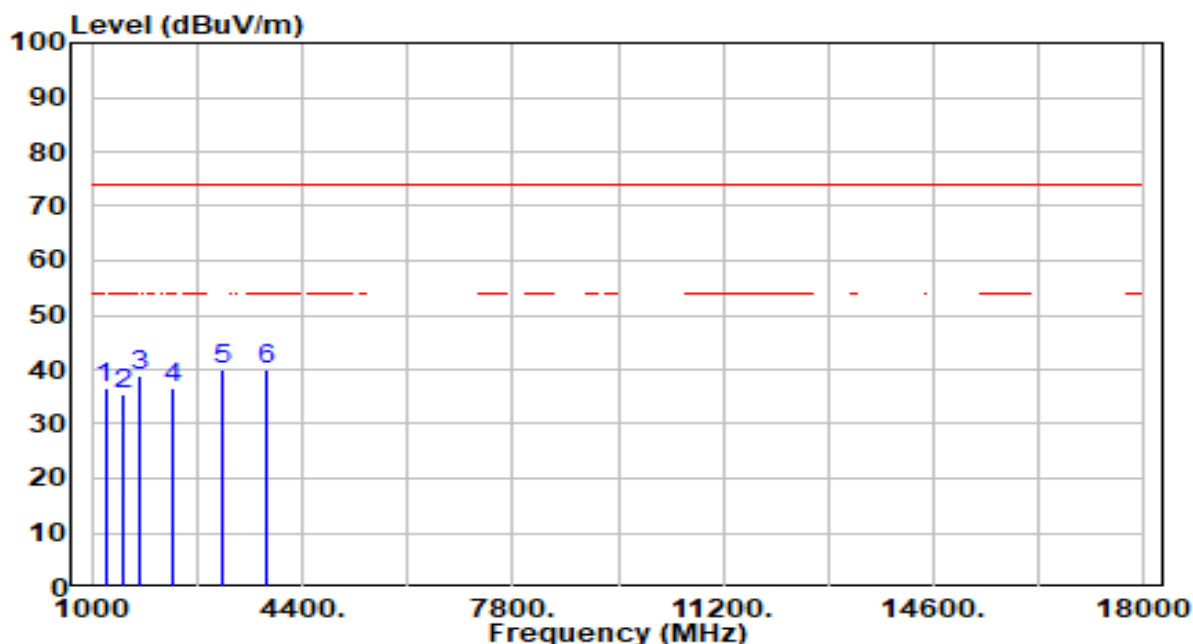


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1217.000	43.95	-7.45	36.50	-37.50	74.00	150	250	Peak
2	1522.000	42.45	-7.04	35.42	-38.58	74.00	150	173	Peak
3	1791.000	45.65	-6.93	38.72	-35.28	74.00	150	244	Peak
4	2326.000	41.60	-5.02	36.58	-37.42	74.00	150	117	Peak
5	3101.000	43.00	-3.07	39.93	-34.07	74.00	150	129	Peak
6	* 3831.000	41.15	-1.20	39.95	-34.05	74.00	150	203	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
- 5 The magnitude of the radiated emission (frequency range from 18GHz to 25GHz) is close to the magnitude of the ambient noise, which is also attenuated by more than 20 dB than the allowable value. Therefore, this data is not presented in the report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-24
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-20MHz_RX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

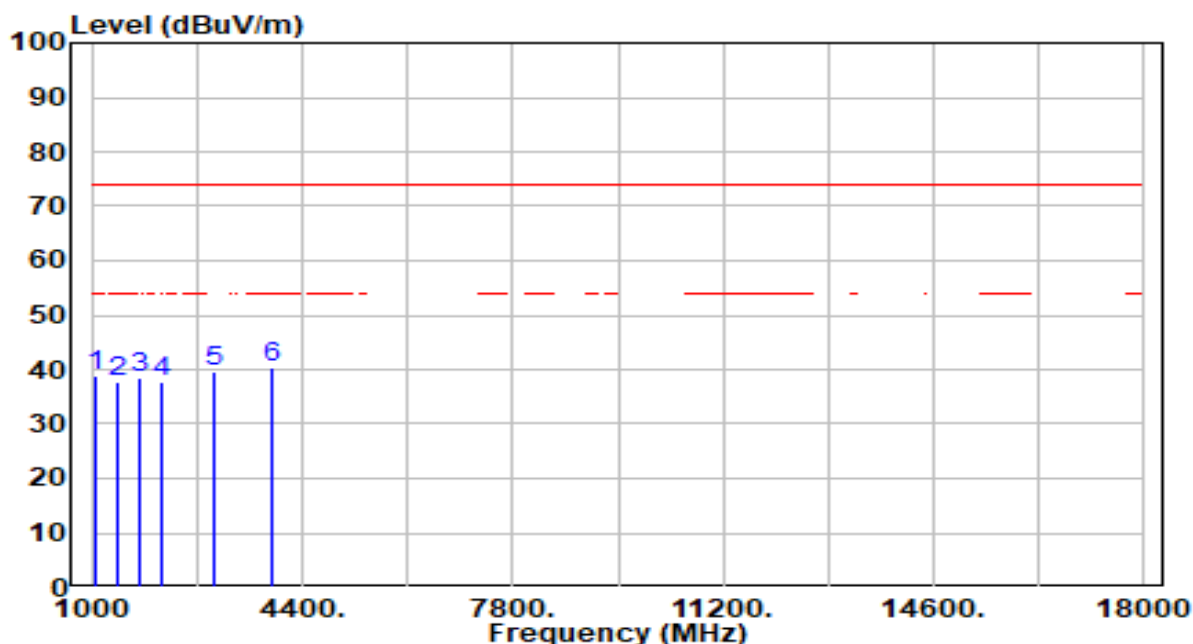

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1056.000	46.08	-7.39	38.70	-35.30	74.00	150	328	Peak
2	1397.000	44.79	-6.88	37.91	-36.09	74.00	150	211	Peak
3	1794.000	45.47	-6.92	38.54	-35.46	74.00	150	190	Peak
4	2119.000	42.99	-5.31	37.68	-36.32	74.00	150	17	Peak
5	2963.000	42.61	-3.16	39.46	-34.54	74.00	150	40	Peak
6	* 3906.000	41.36	-0.99	40.37	-33.63	74.00	150	64	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
- 5 The magnitude of the radiated emission (frequency range from 18GHz to 25GHz) is close to the magnitude of the ambient noise, which is also attenuated by more than 20 dB than the allowable value. Therefore, this data is not presented in the report.

7.7. Radiated Restricted Band Edge Measurement

7.7.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [V/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 – 30	30	30
30 – 88	100	3
88 – 216	150	3
216 – 960	200	3
Above 960	500	3

7.7.2. Test Procedure Used

ANSI C63.10-2013 Section 6.3 & 6.6 & 11.13

7.7.3. Test Setting

Peak Field Strength Measurements


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW $\geq 1/T$
4. As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = auto
7. Trace mode = max hold
8. Allow max hold to run for at least 50 times (1/duty cycle) traces


7.7.4. Test Setup

1GHz ~ 18GHz Test Setup:

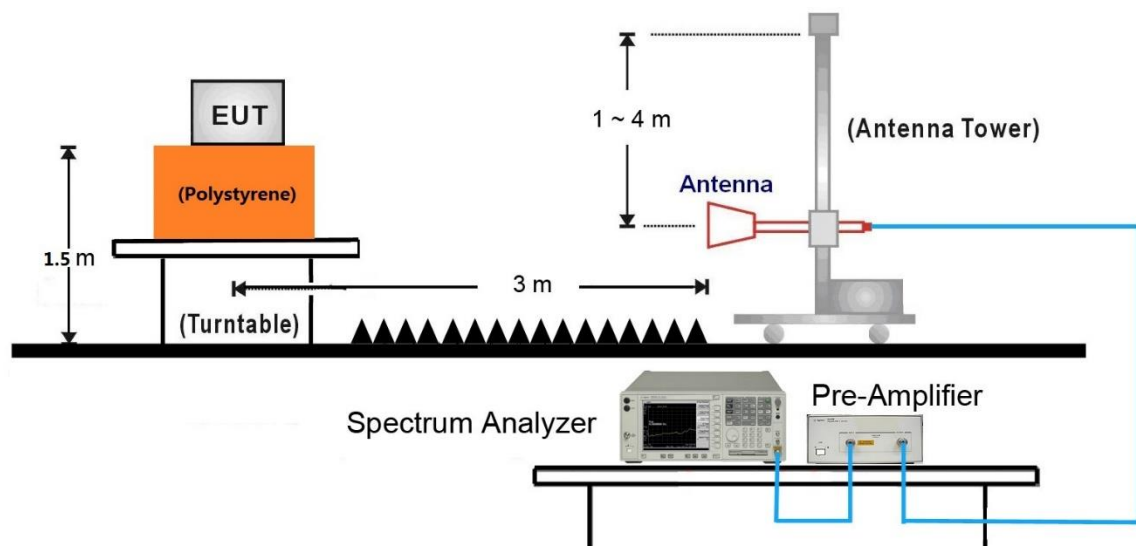

7.7.5. Test Result

EUT	SKO.WB822CU.3	Date of Test	2022-11-24
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11b_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

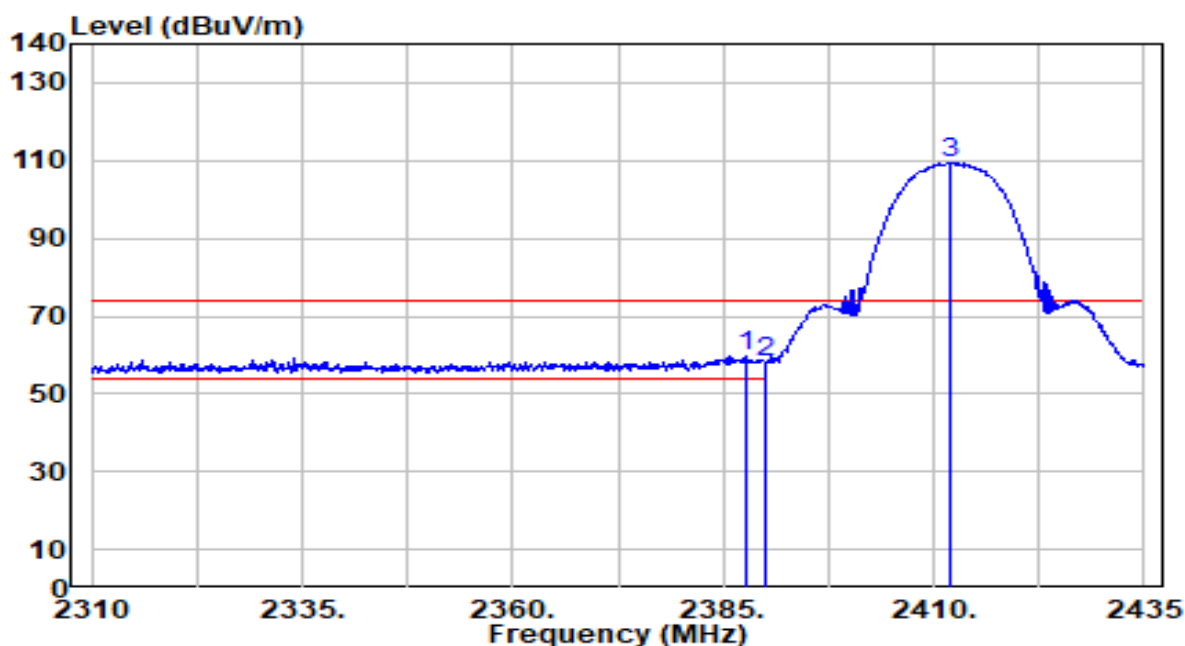


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.750	29.19	30.61	59.80	-14.20	74.00	175	165	Peak
2		2390.000	27.46	30.61	58.07	-15.93	74.00	175	165	Peak
3		2412.000	78.72	30.67	109.39	N/A	N/A	175	165	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-24
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11b_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

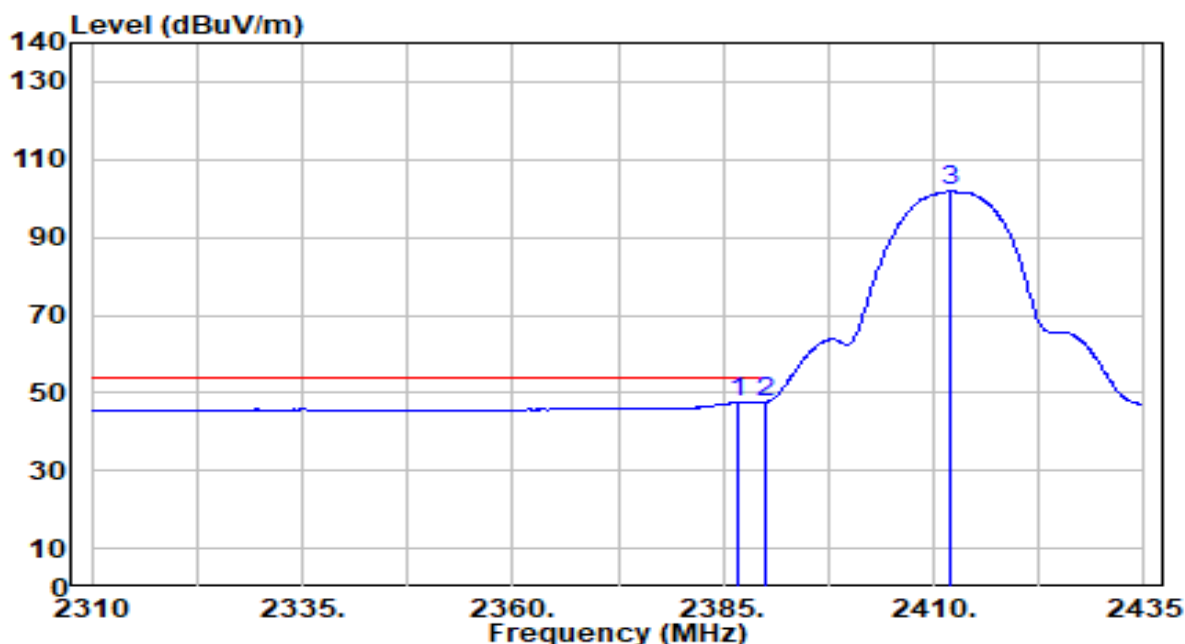


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2386.625	16.84	30.61	47.45	-6.55	54.00	175	165	Average
2	* 2390.000	16.93	30.61	47.54	-6.46	54.00	175	165	Average
3	2411.875	71.13	30.67	101.80	N/A	N/A	175	165	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-24
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11b_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

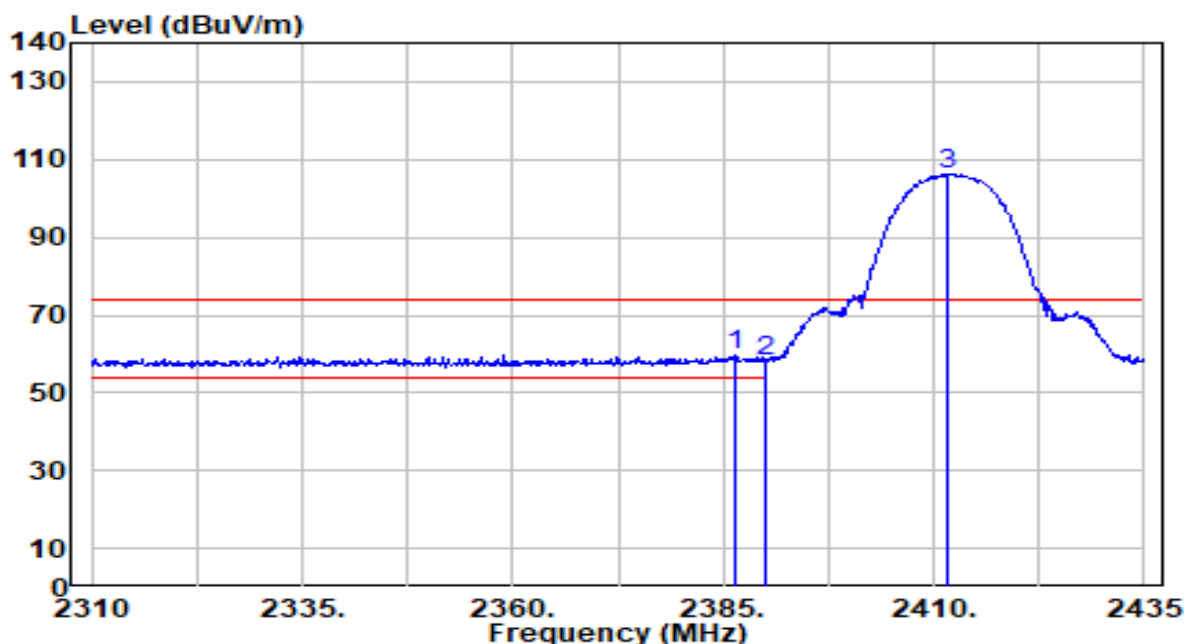


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.375	29.30	30.61	59.91	-14.09	74.00	100	85	Peak
2		2390.000	27.59	30.61	58.20	-15.80	74.00	100	85	Peak
3		2411.625	75.61	30.67	106.27	N/A	N/A	100	85	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-24
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11b_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

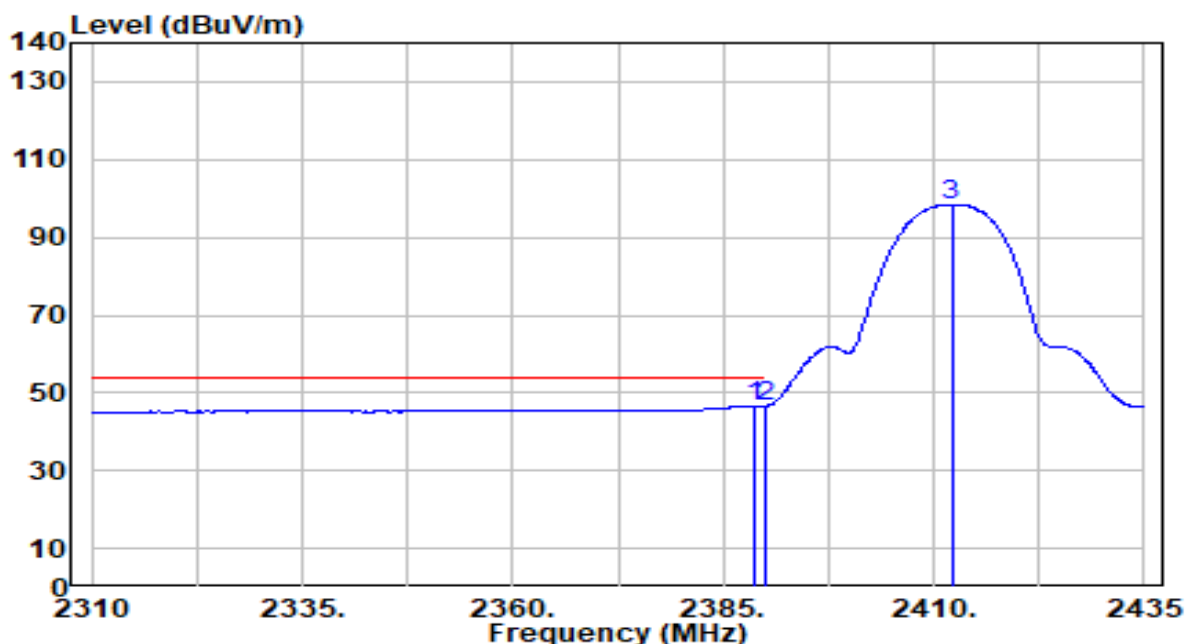


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.750	15.88	30.61	46.50	-7.50	54.00	100	85	Average
2	* 2390.000	15.99	30.61	46.60	-7.40	54.00	100	85	Average
3	2412.125	67.81	30.67	98.48	N/A	N/A	100	85	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-24
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11b_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

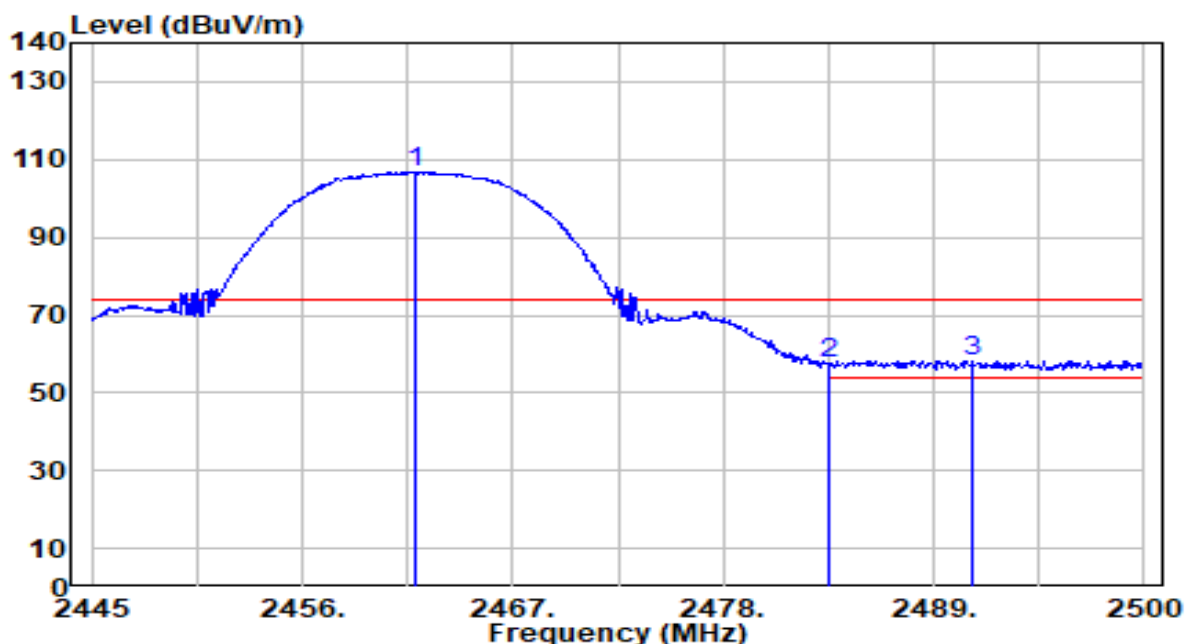


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.940	75.87	30.84	106.71	N/A	N/A	160	170	Peak
2	2483.500	26.65	30.91	57.57	-16.43	74.00	160	170	Peak
3	* 2491.035	27.40	30.94	58.34	-15.66	74.00	160	170	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-24
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11b_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

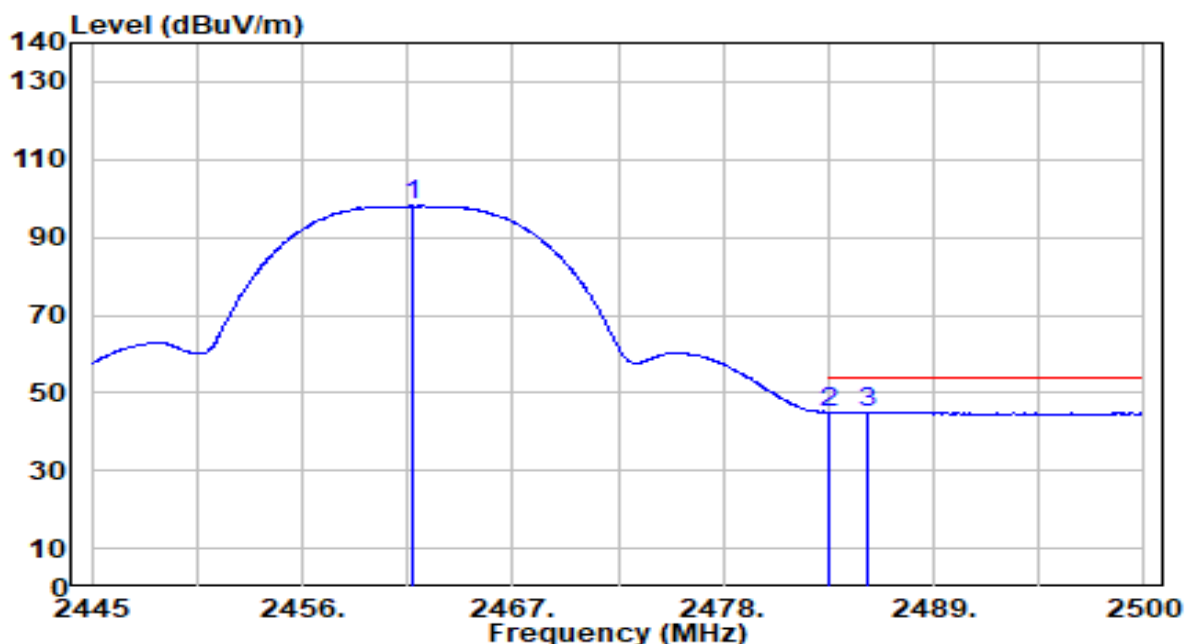


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.830	67.27	30.84	98.11	N/A	N/A	160	170	Average
2	2483.500	14.15	30.91	45.07	-8.93	54.00	160	170	Average
3	* 2485.535	14.22	30.92	45.15	-8.85	54.00	160	170	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-24
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11b_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

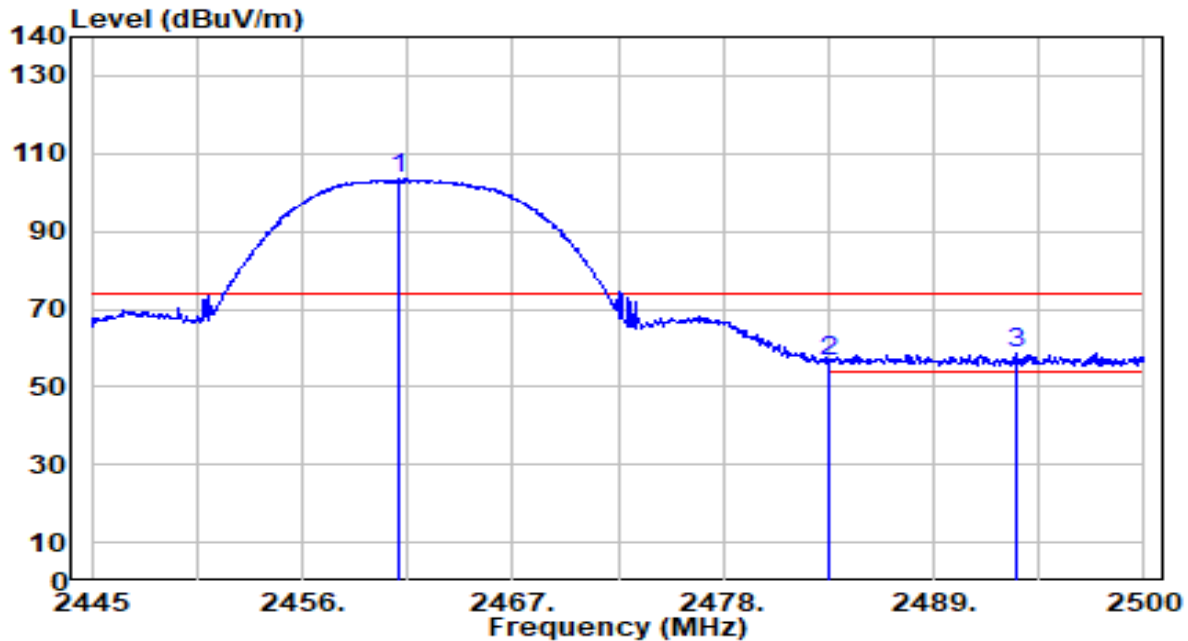


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.005	72.51	30.84	103.34	N/A	N/A	110	85	Peak
2	2483.500	25.45	30.91	56.36	-17.64	74.00	110	85	Peak
3	* 2493.345	27.58	30.95	58.53	-15.47	74.00	110	85	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-24
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11b_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

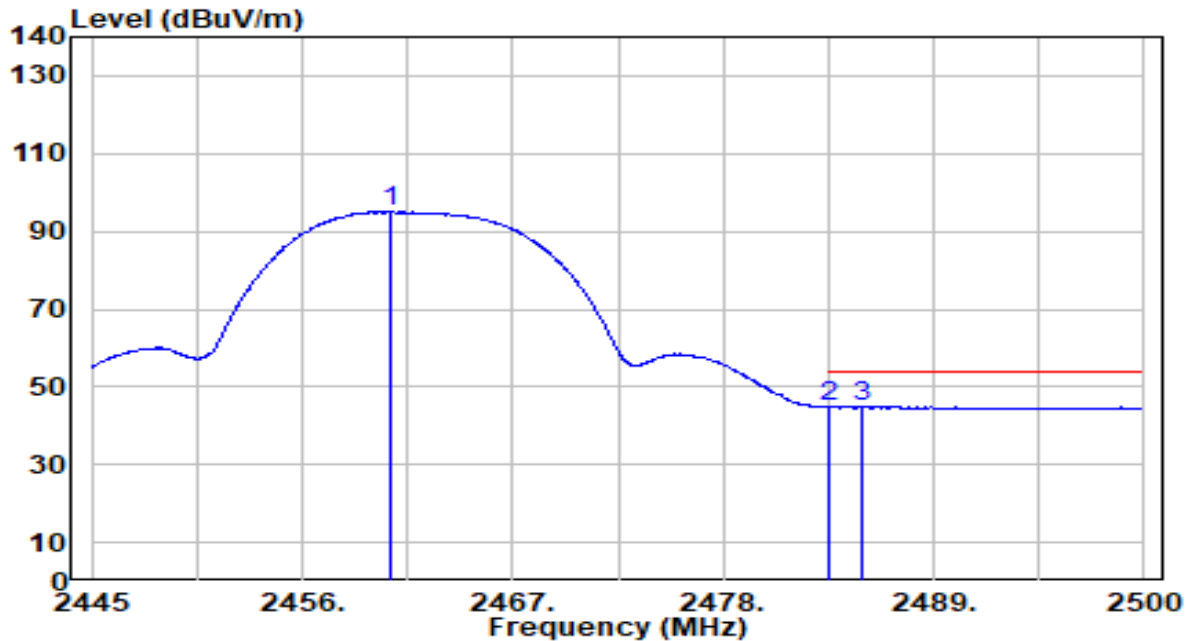


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.565	64.16	30.84	95.00	N/A	N/A	110	85	Average
2	2483.500	13.90	30.91	44.81	-9.19	54.00	110	85	Average
3	* 2485.260	13.94	30.92	44.86	-9.14	54.00	110	85	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-24
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11b_TX_CH 1_ANT 1	Test Voltage	AC 120V/60Hz

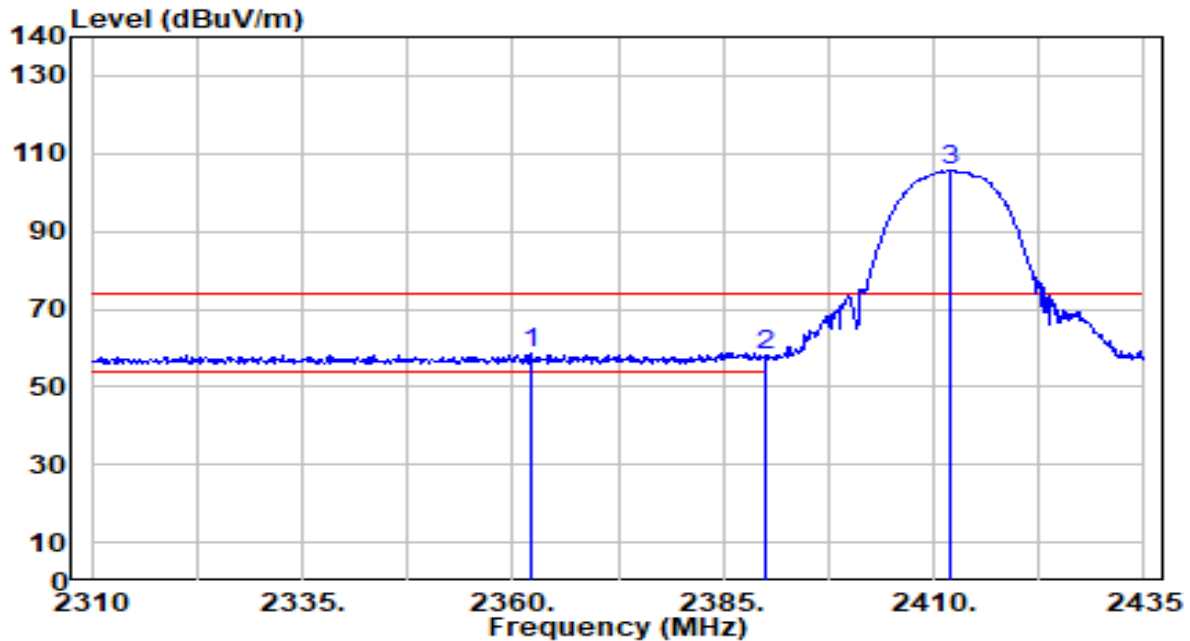


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2362.125	28.24	30.57	58.81	-15.19	74.00	100	5	Peak
2	2390.000	27.35	30.61	57.96	-16.04	74.00	100	5	Peak
3	2412.000	75.04	30.67	105.71	N/A	N/A	100	5	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-24
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11b_TX_CH 1_ANT 1	Test Voltage	AC 120V/60Hz

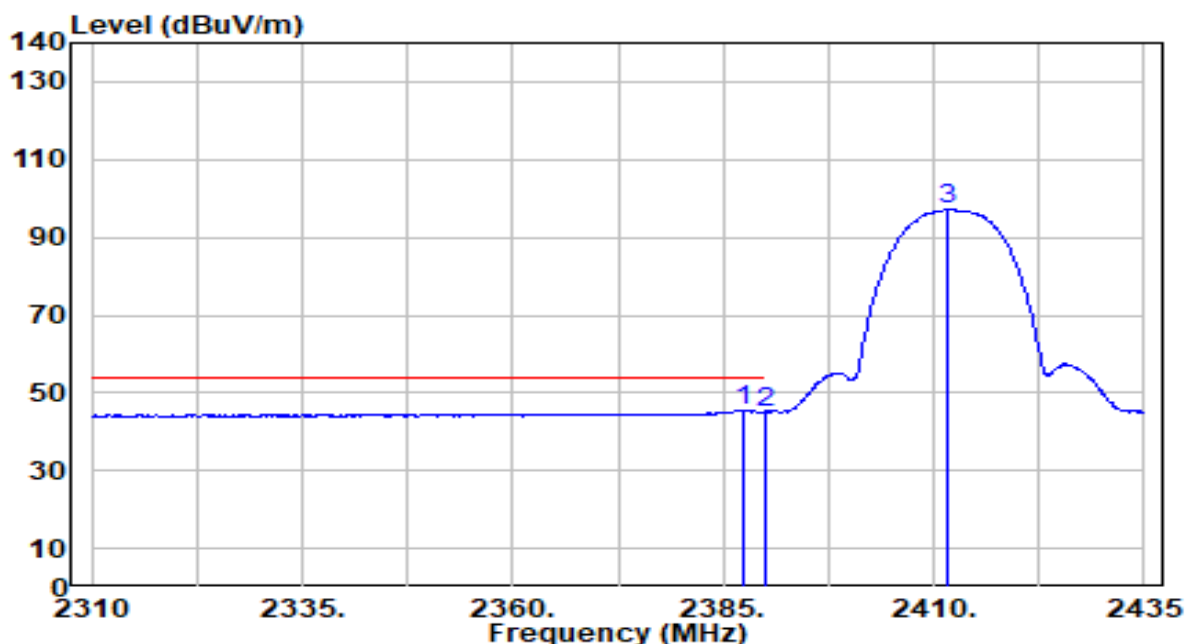


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.375	14.83	30.61	45.44	-8.56	54.00	100	5	Average
2		2390.000	14.55	30.61	45.17	-8.83	54.00	100	5	Average
3		2411.625	66.58	30.67	97.25	N/A	N/A	100	5	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-24
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11b_TX_CH 1_ANT 1	Test Voltage	AC 120V/60Hz

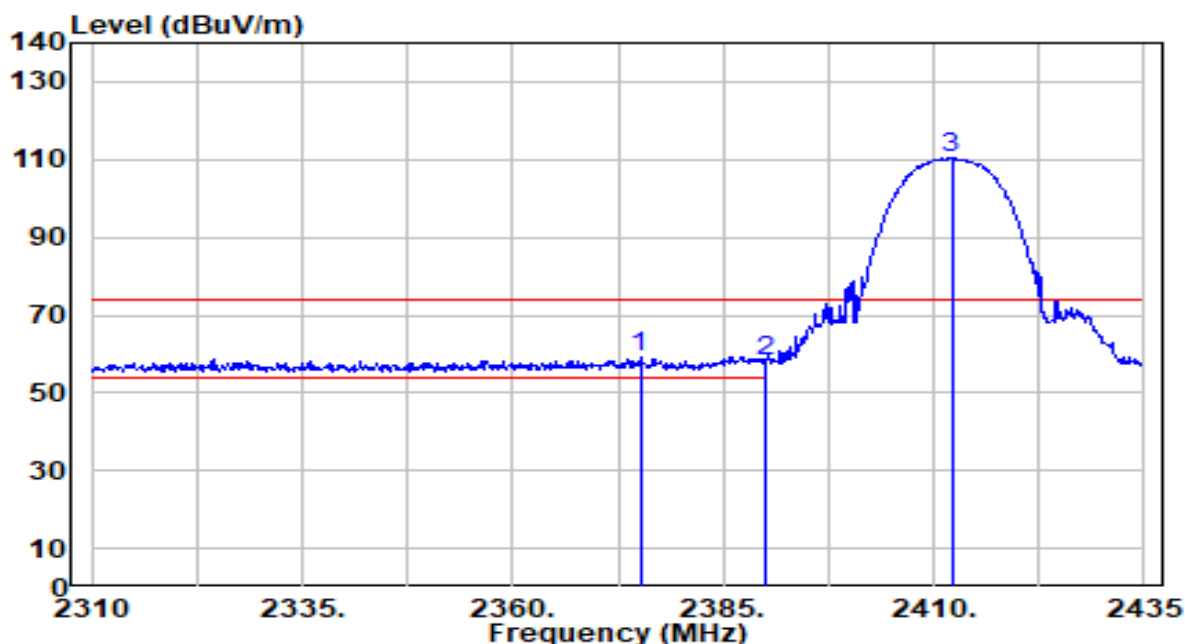


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2375.125	28.66	30.59	59.26	-14.74	74.00	120	330	Peak
2	2390.000	27.44	30.61	58.05	-15.95	74.00	120	330	Peak
3	2412.125	79.96	30.67	110.63	N/A	N/A	120	330	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-24
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11b_TX_CH 1_ANT 1	Test Voltage	AC 120V/60Hz

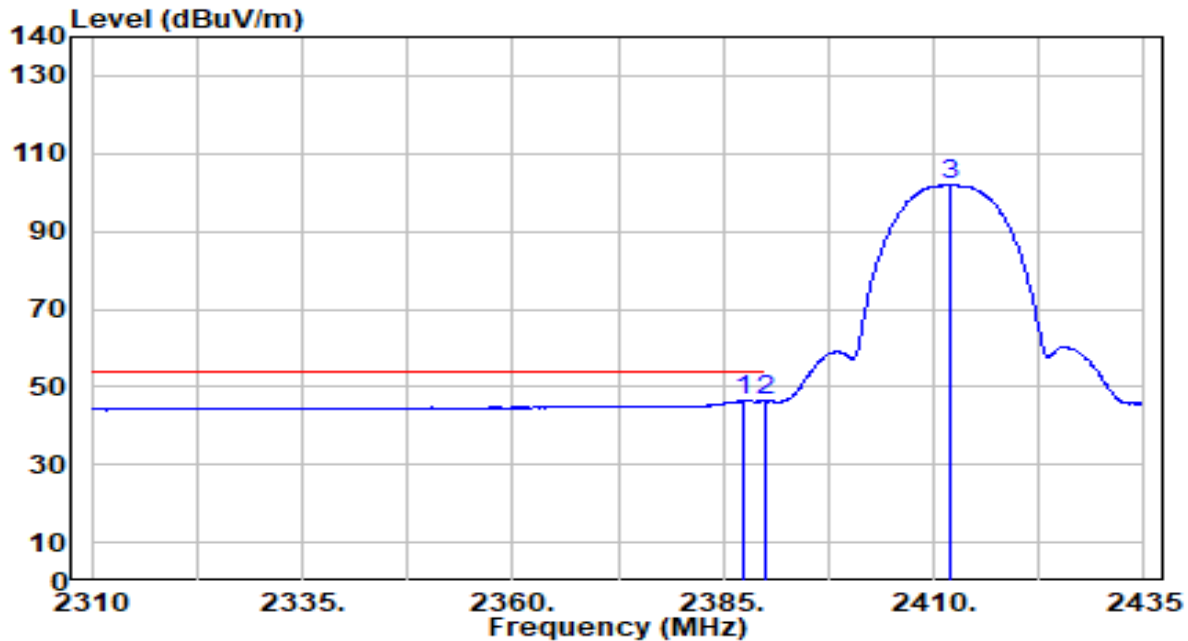


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.500	15.92	30.61	46.53	-7.47	54.00	120	330	Average
2		2390.000	15.78	30.61	46.40	-7.60	54.00	120	330	Average
3		2412.000	71.44	30.67	102.11	N/A	N/A	120	330	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-24
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11b_TX_CH 11_ANT 1	Test Voltage	AC 120V/60Hz

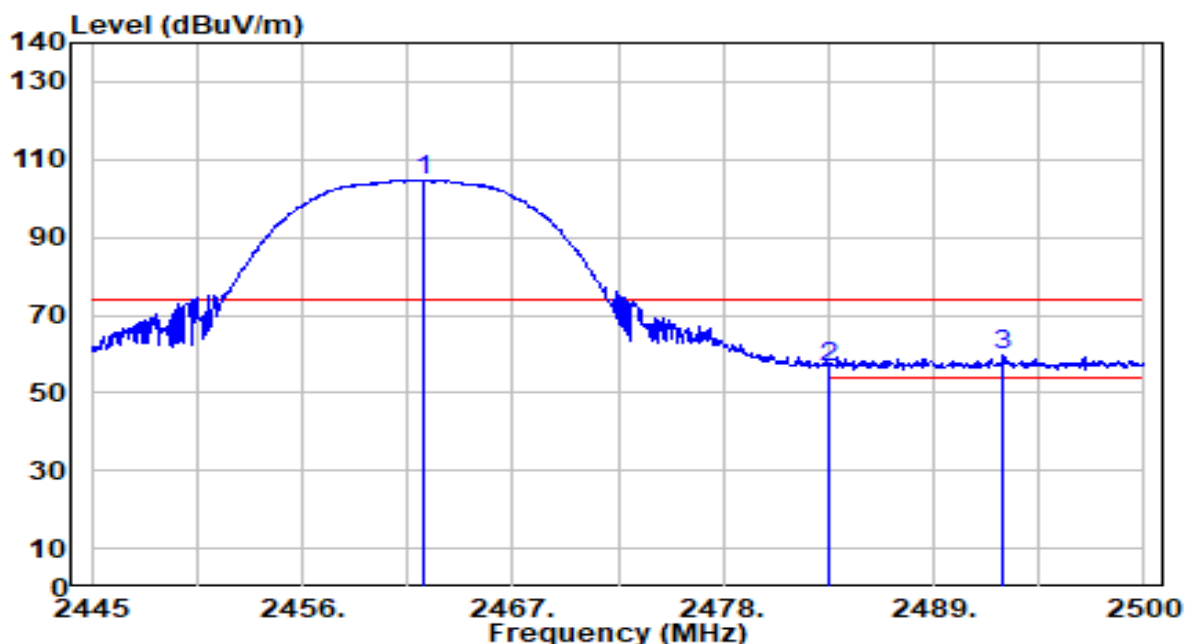


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.325	73.99	30.84	104.83	N/A	N/A	100	0	Peak
2	2483.500	25.71	30.91	56.62	-17.38	74.00	100	0	Peak
3	* 2492.630	28.56	30.94	59.50	-14.50	74.00	100	0	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-24
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11b_TX_CH 11_ANT 1	Test Voltage	AC 120V/60Hz

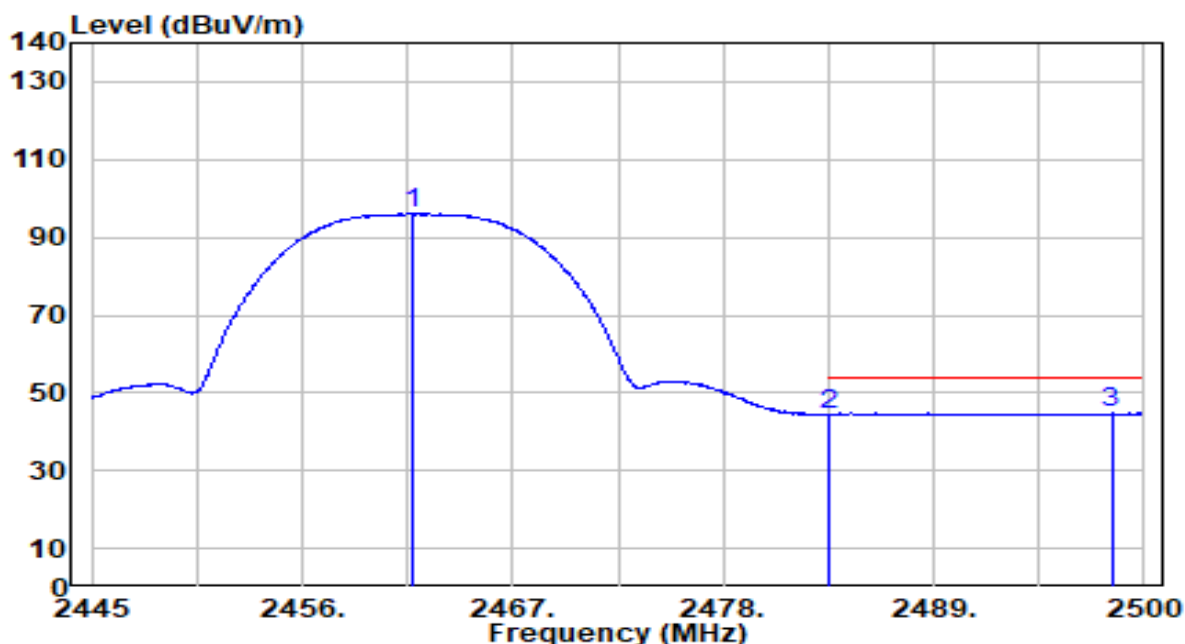


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.775	65.35	30.84	96.19	N/A	N/A	100	0	Average
2	2483.500	13.64	30.91	44.55	-9.45	54.00	100	0	Average
3	* 2498.295	13.74	30.96	44.70	-9.30	54.00	100	0	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-24
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11b_TX_CH 11_ANT 1	Test Voltage	AC 120V/60Hz

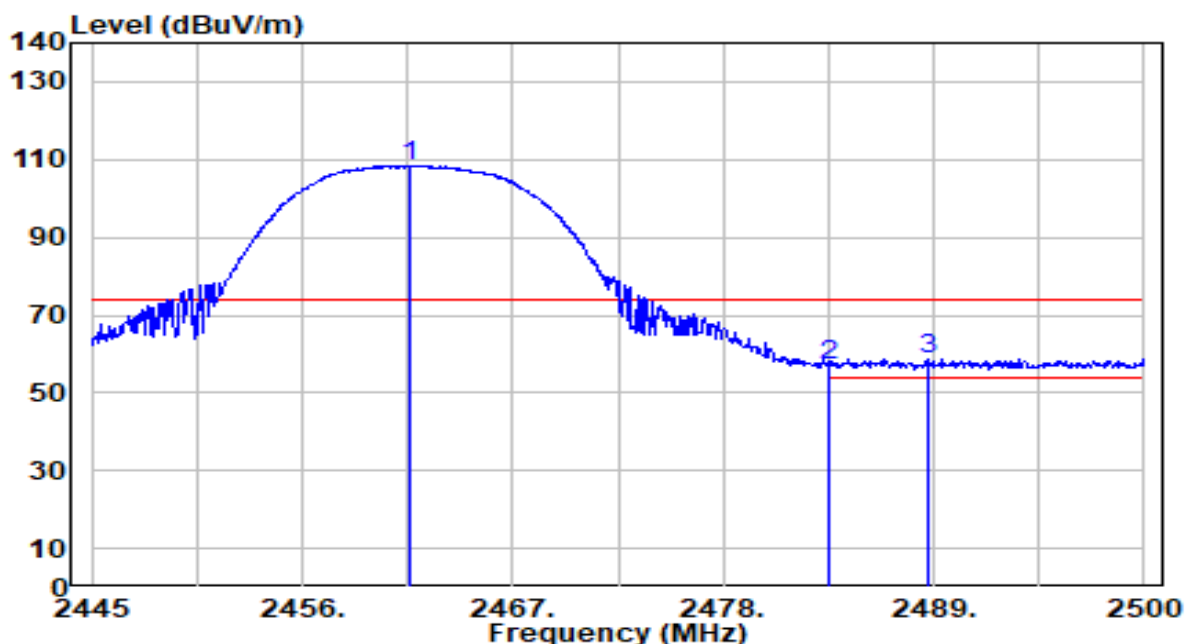


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.665	77.70	30.84	108.54	N/A	N/A	105	335	Peak
2	2483.500	26.38	30.91	57.29	-16.71	74.00	105	335	Peak
3	* 2488.780	27.77	30.93	58.71	-15.29	74.00	105	335	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-24
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11b_TX_CH 11_ANT 1	Test Voltage	AC 120V/60Hz

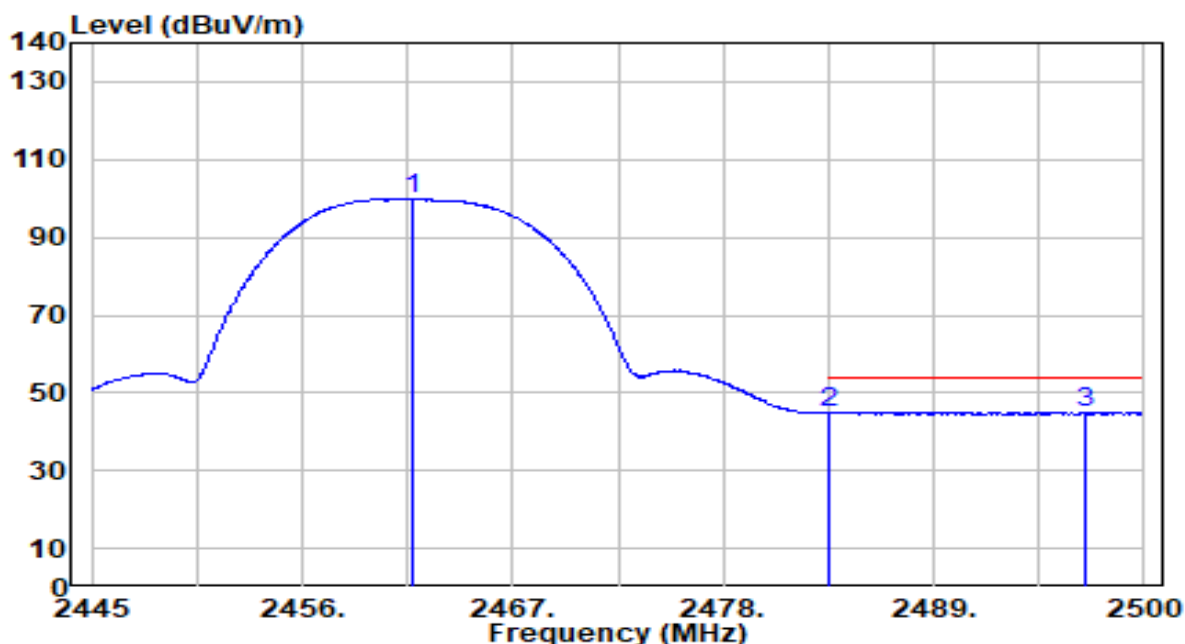


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.830	69.12	30.84	99.96	N/A	N/A	105	335	Average
2	2483.500	13.92	30.91	44.83	-9.17	54.00	105	335	Average
3	* 2496.920	13.96	30.96	44.92	-9.08	54.00	105	335	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-24
Factor	DRH18-E	Temp. / Humidity	25°C / 65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11g_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

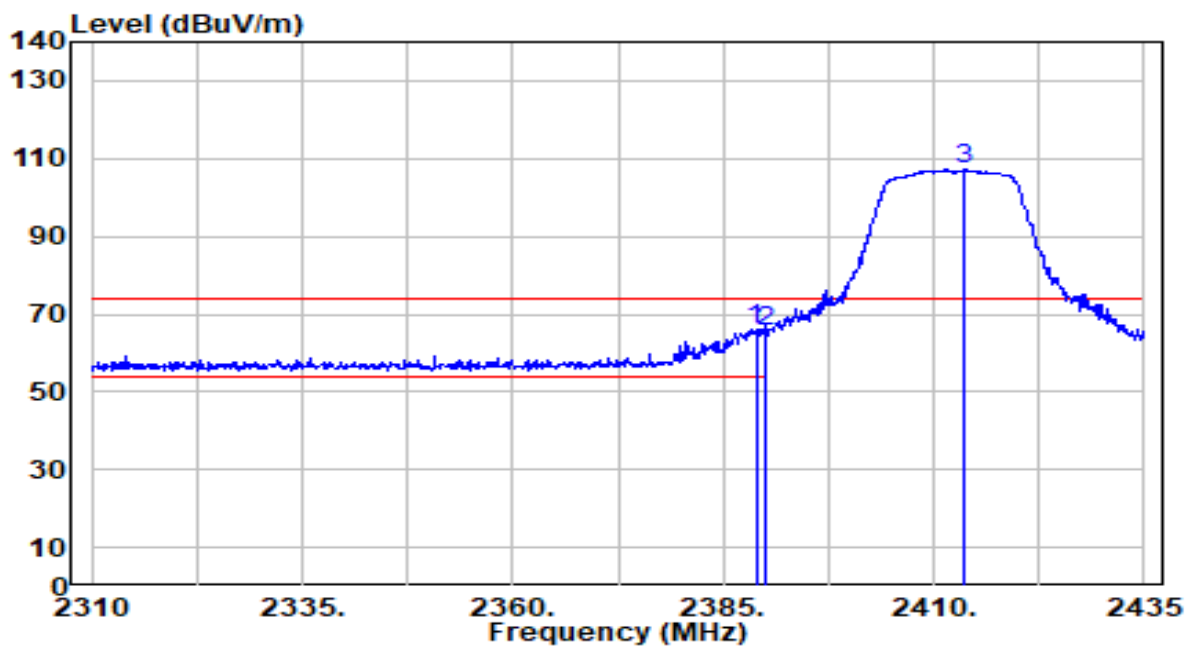


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2388.875	35.68	30.61	66.29	-7.71	74.00	175	165	Peak
2	2390.000	35.14	30.61	65.75	-8.25	74.00	175	165	Peak
3	2413.625	76.43	30.67	107.10	N/A	N/A	175	165	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-24
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11g_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

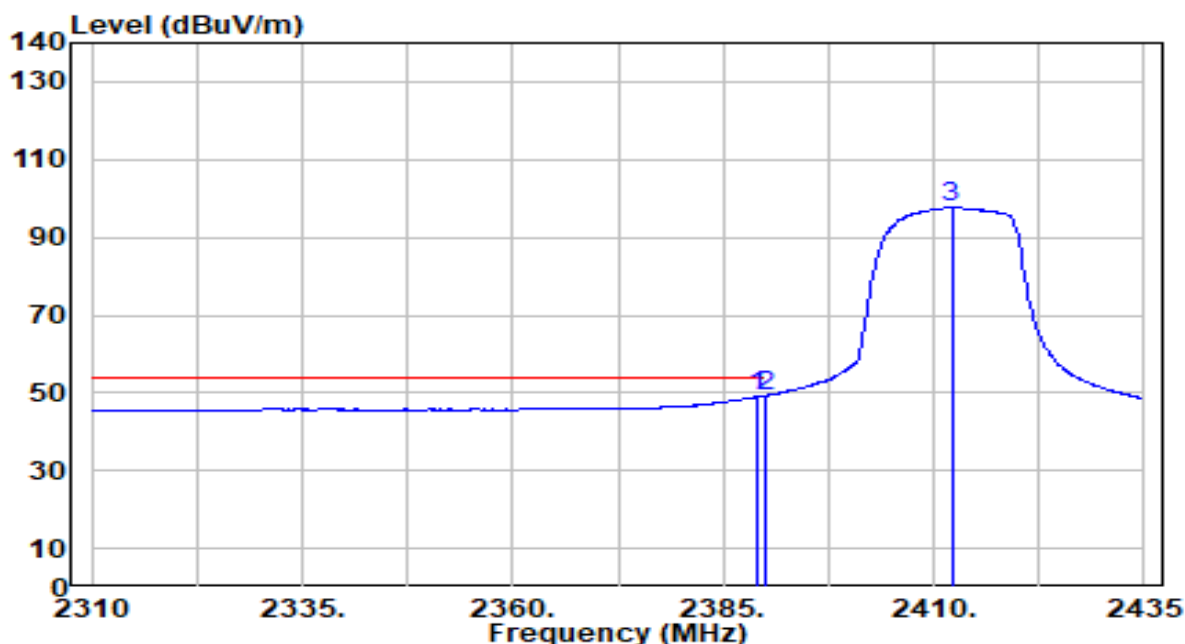


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.000	18.38	30.61	48.99	-5.01	54.00	175	165	Average
2	* 2390.000	18.59	30.61	49.21	-4.79	54.00	175	165	Average
3	2412.125	66.93	30.67	97.60	N/A	N/A	175	165	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-24
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11g_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

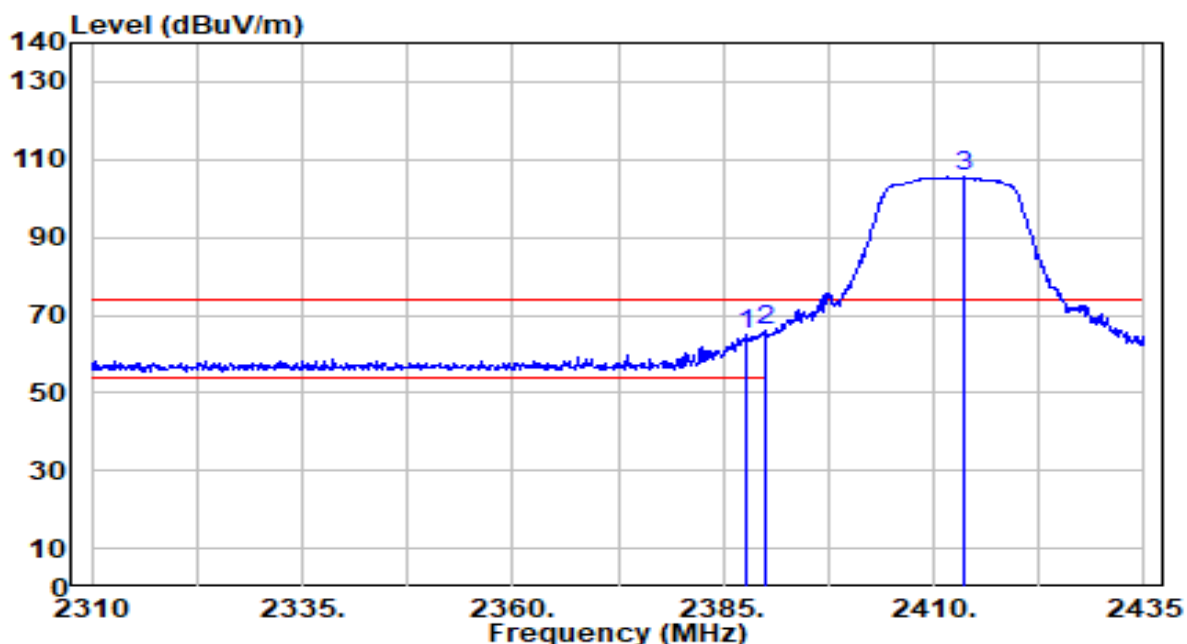


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.875	34.12	30.61	64.73	-9.27	74.00	100	85	Peak
2	* 2390.000	35.34	30.61	65.96	-8.04	74.00	100	85	Peak
3	2413.625	74.81	30.67	105.49	N/A	N/A	100	85	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-24
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11g_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

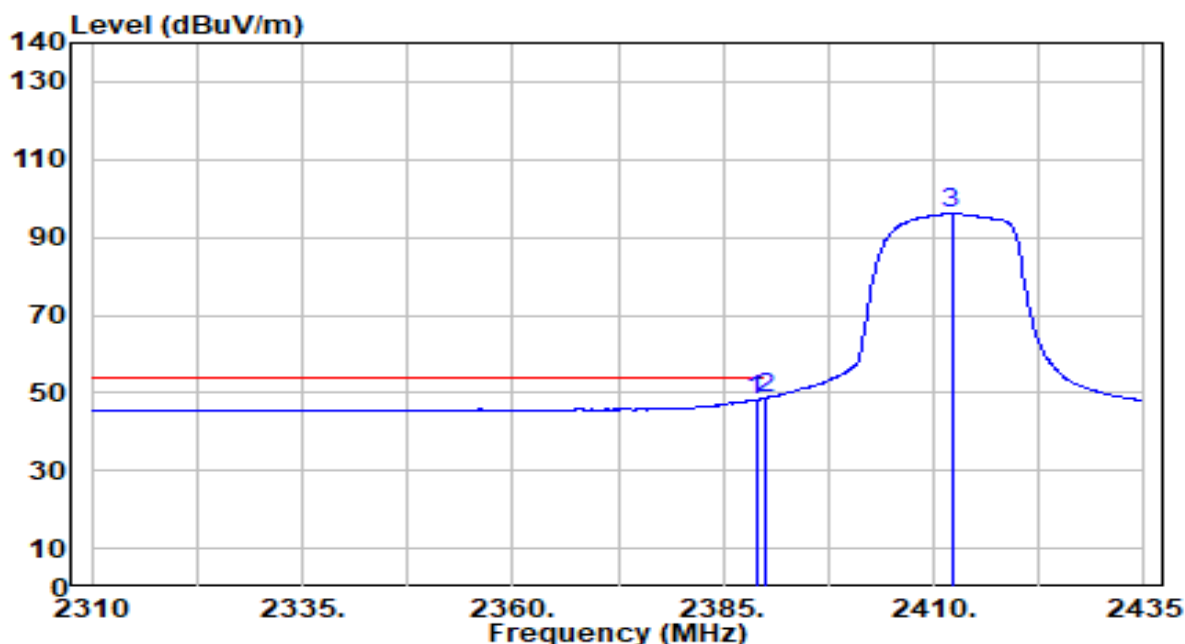


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.875	17.65	30.61	48.26	-5.74	54.00	100	85	Average
2	* 2390.000	18.05	30.61	48.67	-5.33	54.00	100	85	Average
3	2412.125	65.36	30.67	96.03	N/A	N/A	100	85	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-24
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11g_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

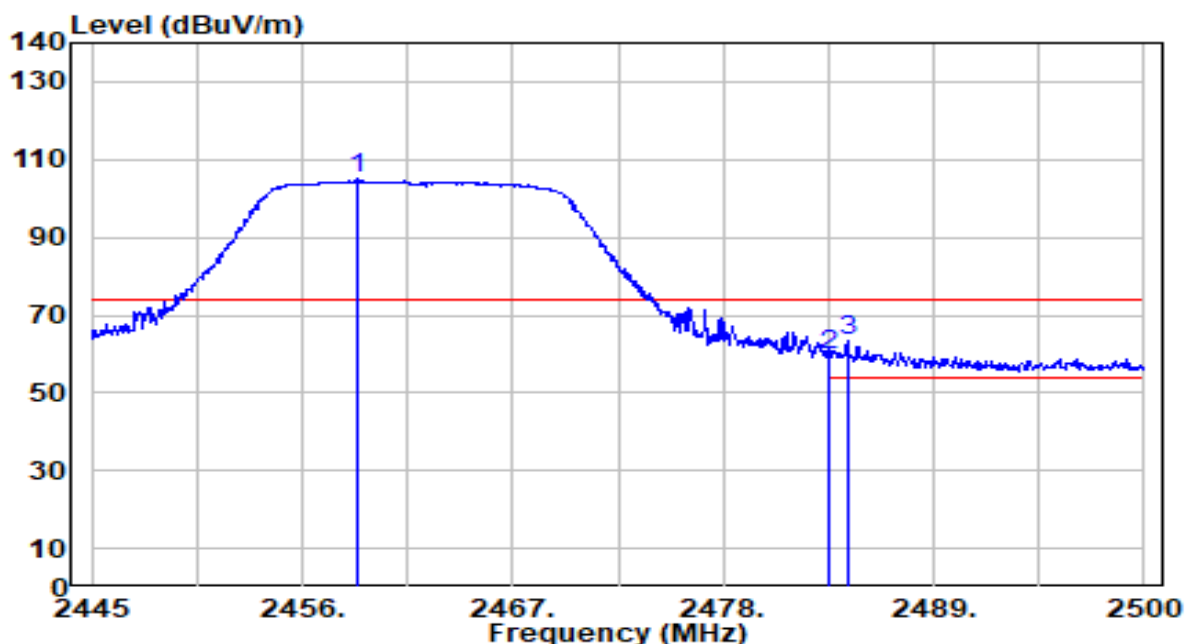


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2458.860	74.04	30.83	104.87	N/A	N/A	160	170	Peak
2	2483.500	28.67	30.91	59.58	-14.42	74.00	160	170	Peak
3	* 2484.490	32.49	30.92	63.41	-10.59	74.00	160	170	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-24
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11g_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

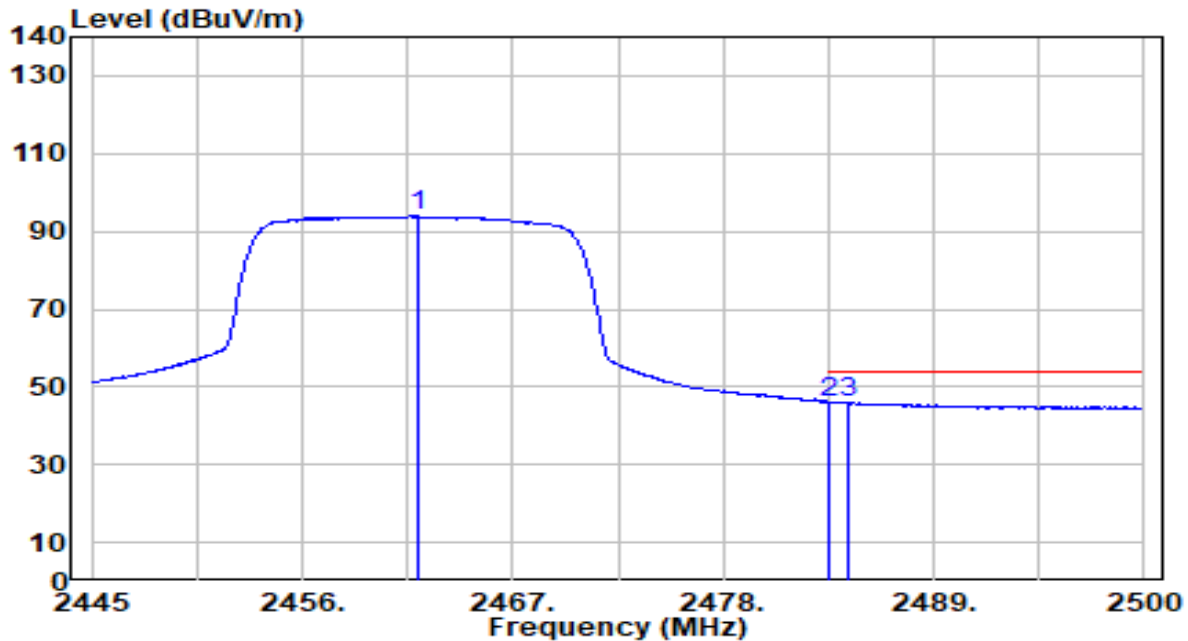


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.995	62.99	30.84	93.83	N/A	N/A	160	170	Average
2	* 2483.500	15.17	30.91	46.08	-7.92	54.00	160	170	Average
3	2484.545	14.95	30.92	45.86	-8.14	54.00	160	170	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-24
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11g_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

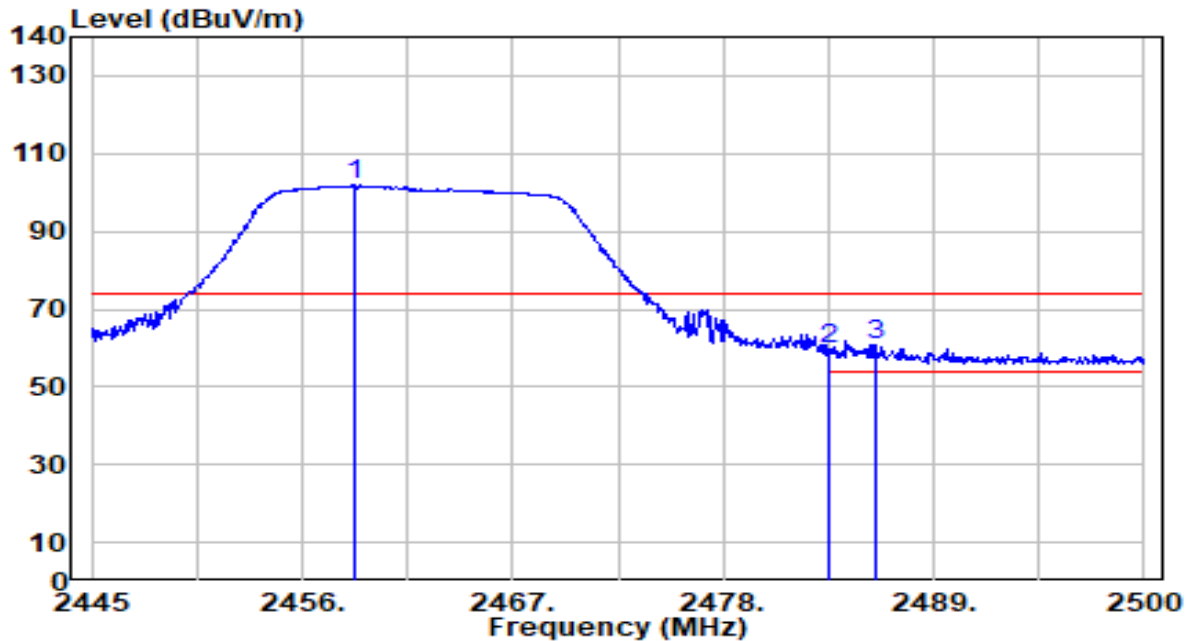


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2458.805	71.13	30.83	101.96	N/A	N/A	110	85	Peak
2	2483.500	28.60	30.91	59.52	-14.48	74.00	110	85	Peak
3	* 2485.920	30.09	30.92	61.01	-12.99	74.00	110	85	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-24
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11g_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

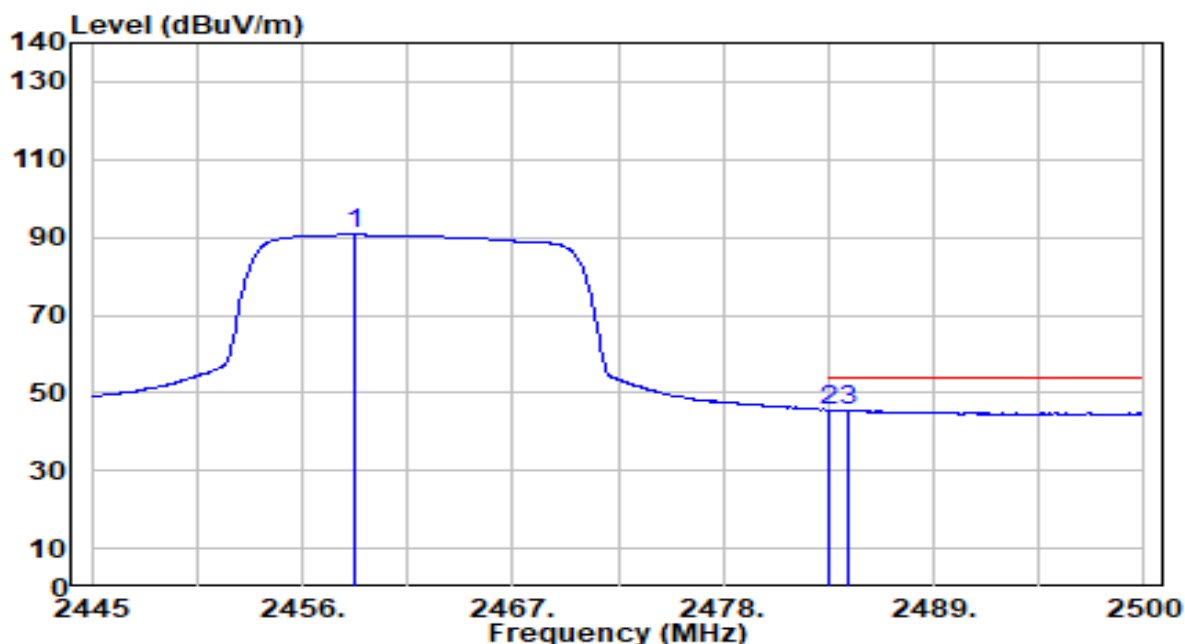


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2458.805	60.01	30.83	90.84	N/A	N/A	110	85	Average
2	* 2483.500	14.67	30.91	45.59	-8.41	54.00	110	85	Average
3	2484.600	14.53	30.92	45.45	-8.55	54.00	110	85	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-24
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11g_TX_CH 1_ANT 1	Test Voltage	AC 120V/60Hz

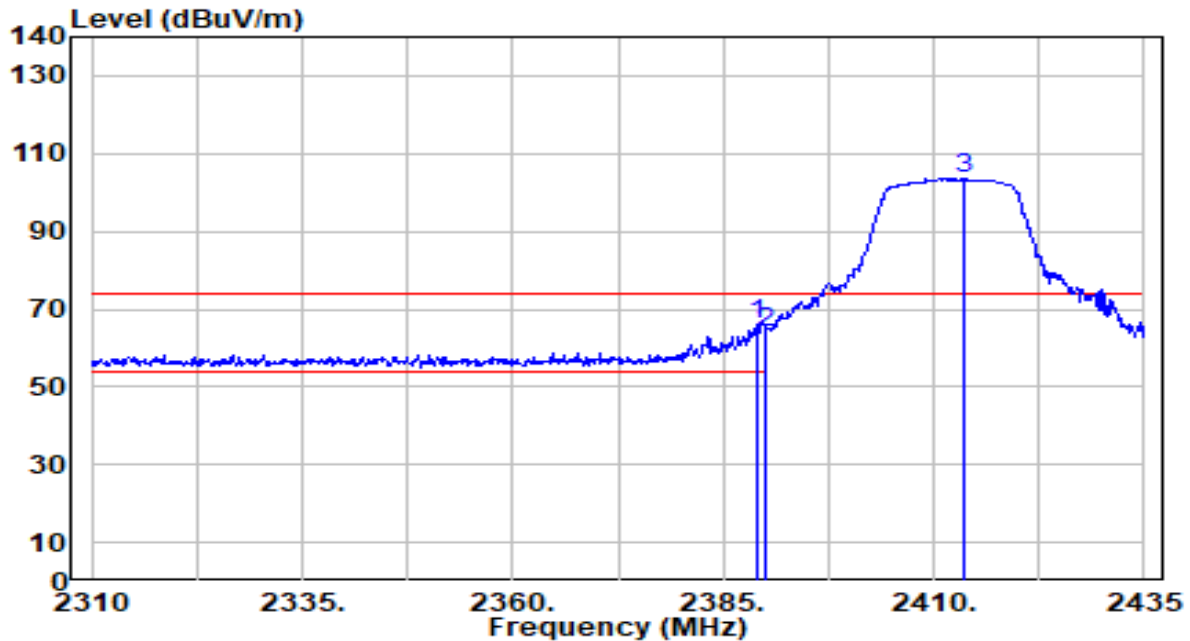


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2389.000	35.47	30.61	66.08	-7.92	74.00	100	5	Peak
2	2390.000	33.36	30.61	63.98	-10.02	74.00	100	5	Peak
3	2413.750	73.02	30.68	103.70	N/A	N/A	100	5	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-24
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11g_TX_CH 1_ANT 1	Test Voltage	AC 120V/60Hz

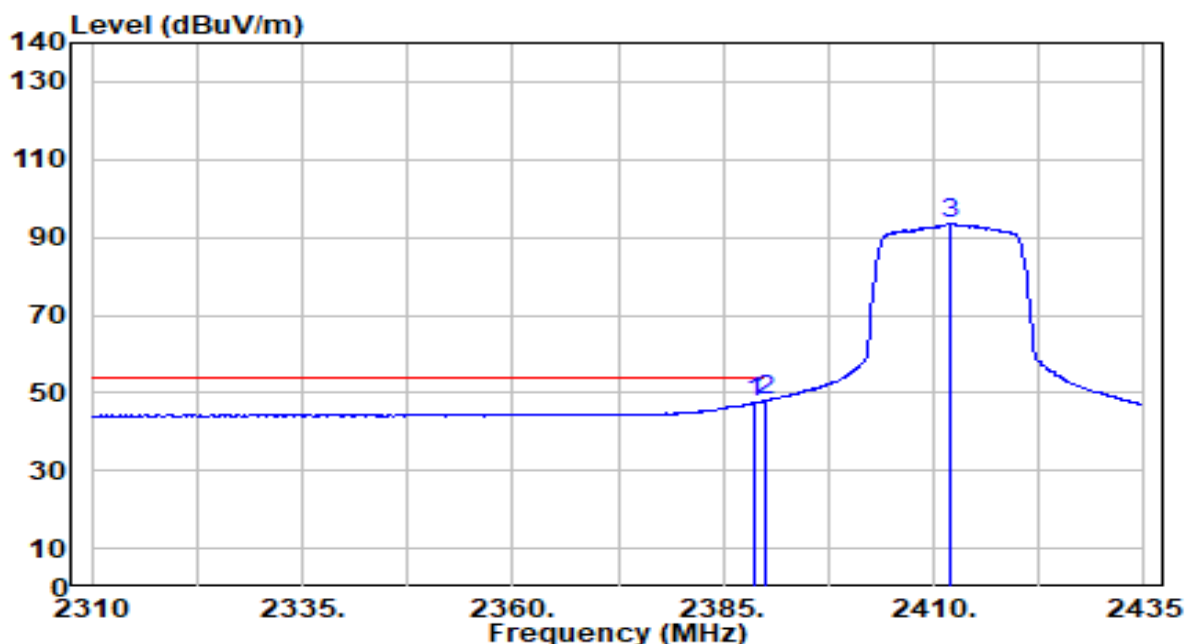


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.750	16.76	30.61	47.37	-6.63	54.00	100	5	Average
2	* 2390.000	17.33	30.61	47.94	-6.06	54.00	100	5	Average
3	2412.000	63.01	30.67	93.68	N/A	N/A	100	5	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-24
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11g_TX_CH 1_ANT 1	Test Voltage	AC 120V/60Hz

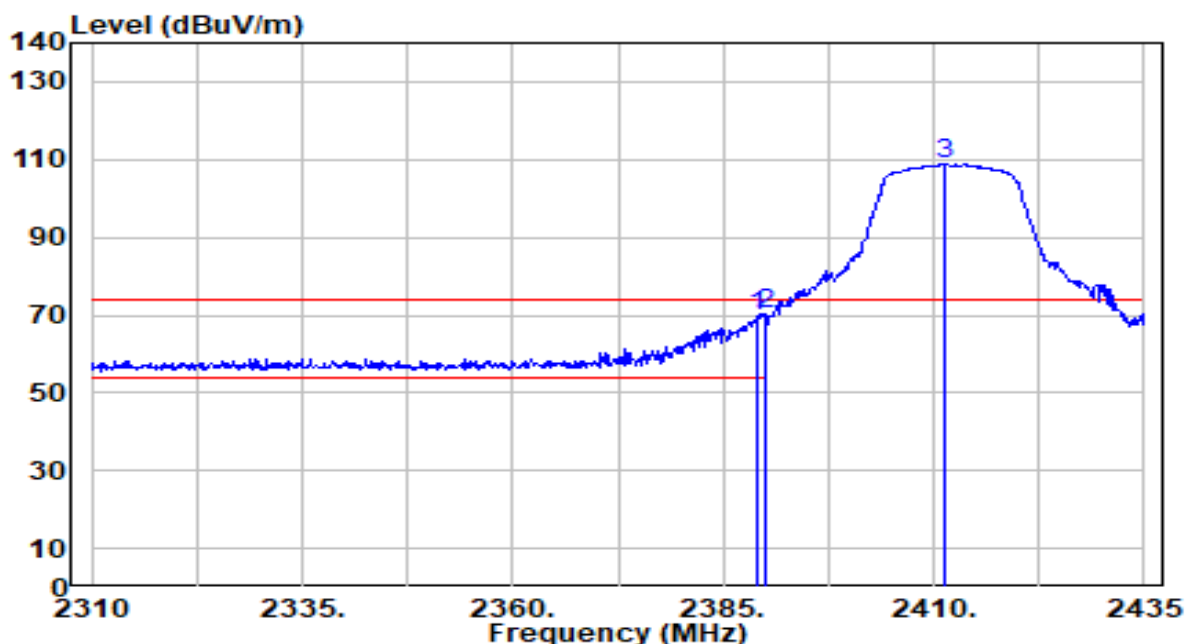


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.000	39.09	30.61	69.70	-4.30	74.00	120	330	Peak
2	* 2390.000	39.64	30.61	70.26	-3.74	74.00	120	330	Peak
3	2411.375	78.14	30.67	108.81	N/A	N/A	120	330	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-24
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11g_TX_CH 1_ANT 1	Test Voltage	AC 120V/60Hz

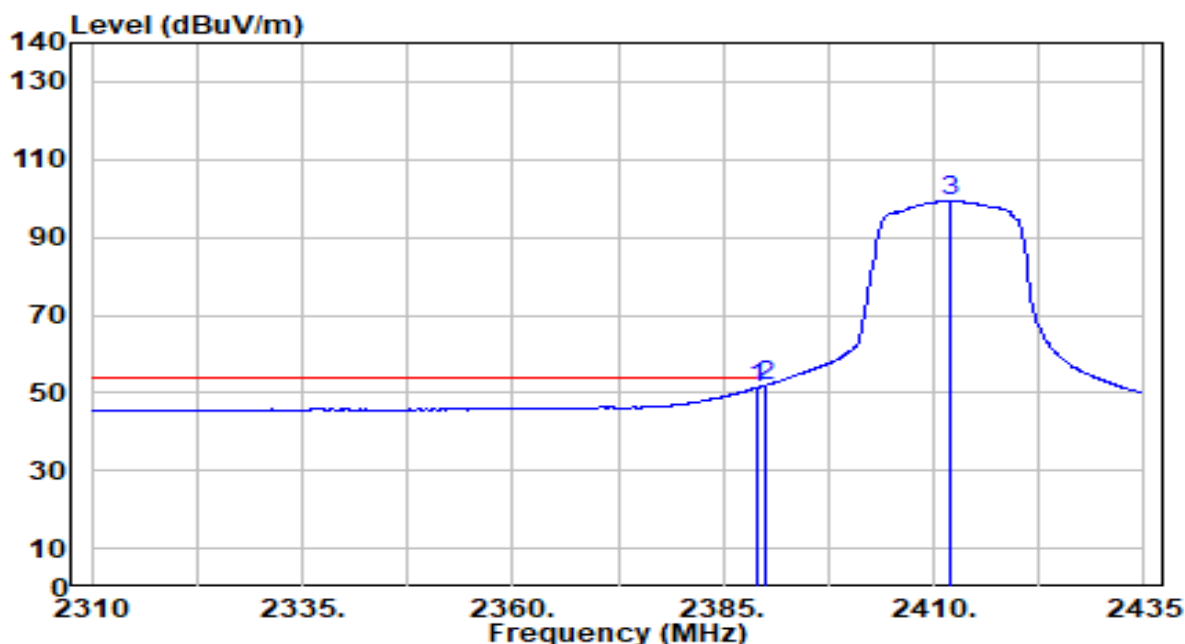


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.000	20.66	30.61	51.27	-2.73	54.00	120	330	Average
2	* 2390.000	21.29	30.61	51.90	-2.10	54.00	120	330	Average
3	2412.000	68.77	30.67	99.44	N/A	N/A	120	330	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-24
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11g_TX_CH 1_ANT 1	Test Voltage	AC 120V/60Hz

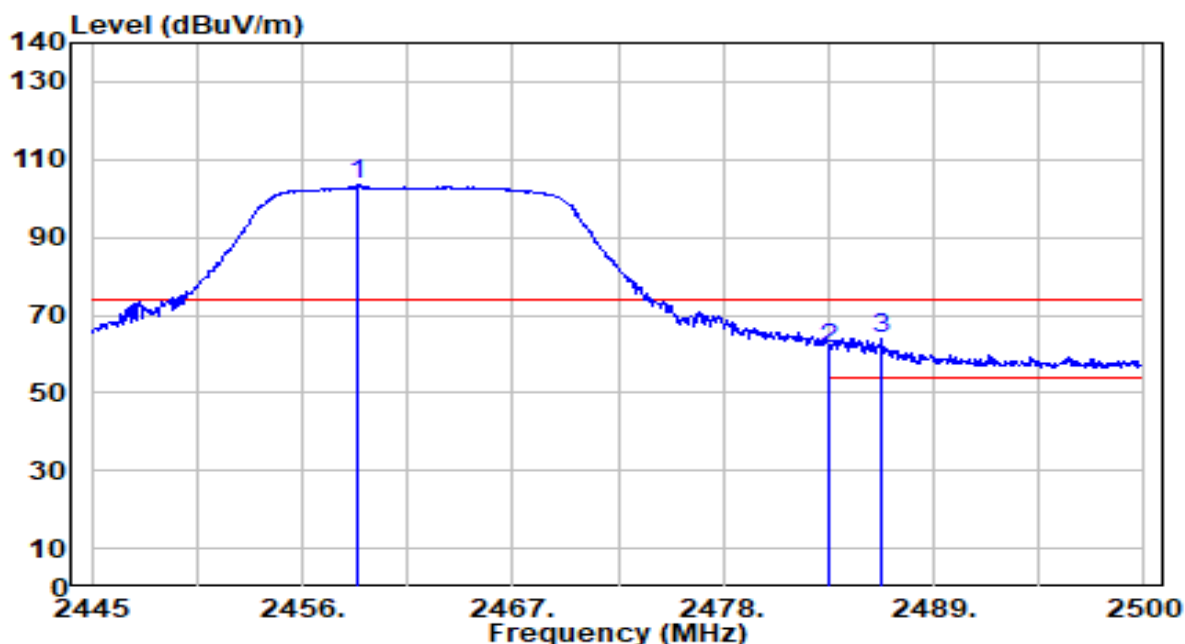


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2458.915	72.52	30.83	103.35	N/A	N/A	100	0	Peak
2	2483.500	30.37	30.91	61.28	-12.72	74.00	100	0	Peak
3	* 2486.305	33.10	30.92	64.03	-9.97	74.00	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-24
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11g_TX_CH 1_ANT 1	Test Voltage	AC 120V/60Hz

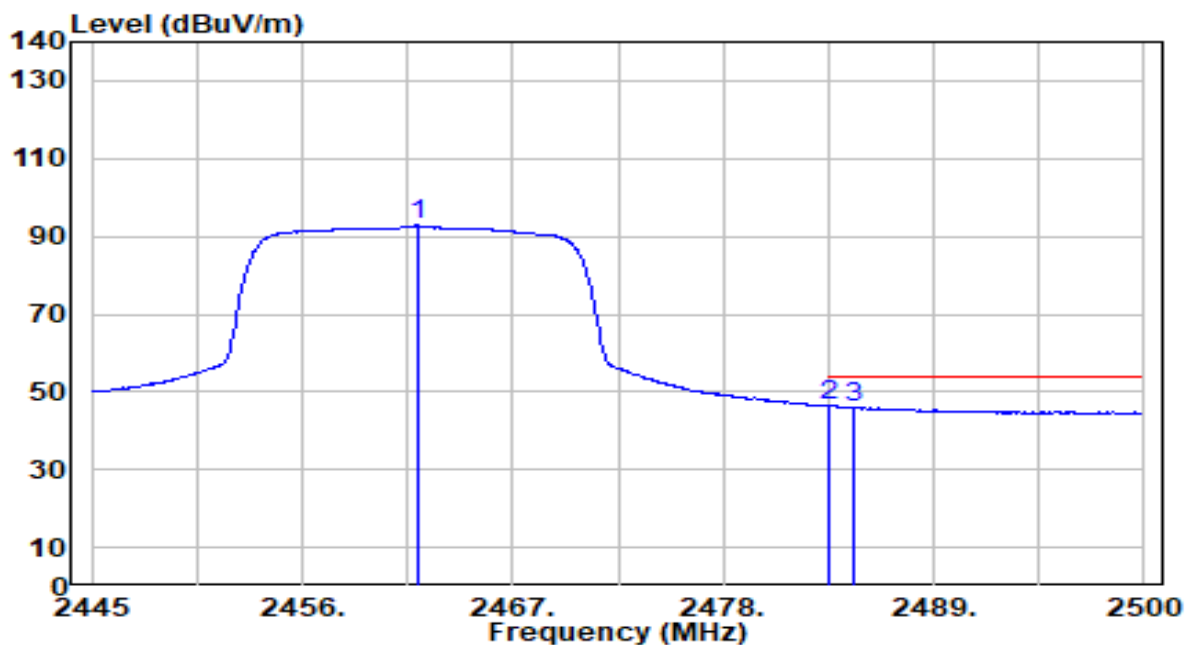


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.995	61.91	30.84	92.75	N/A	N/A	100	0	Average
2	* 2483.500	15.34	30.91	46.25	-7.75	54.00	100	0	Average
3	2484.765	15.13	30.92	46.05	-7.95	54.00	100	0	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-24
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11g_TX_CH 1_ANT 1	Test Voltage	AC 120V/60Hz

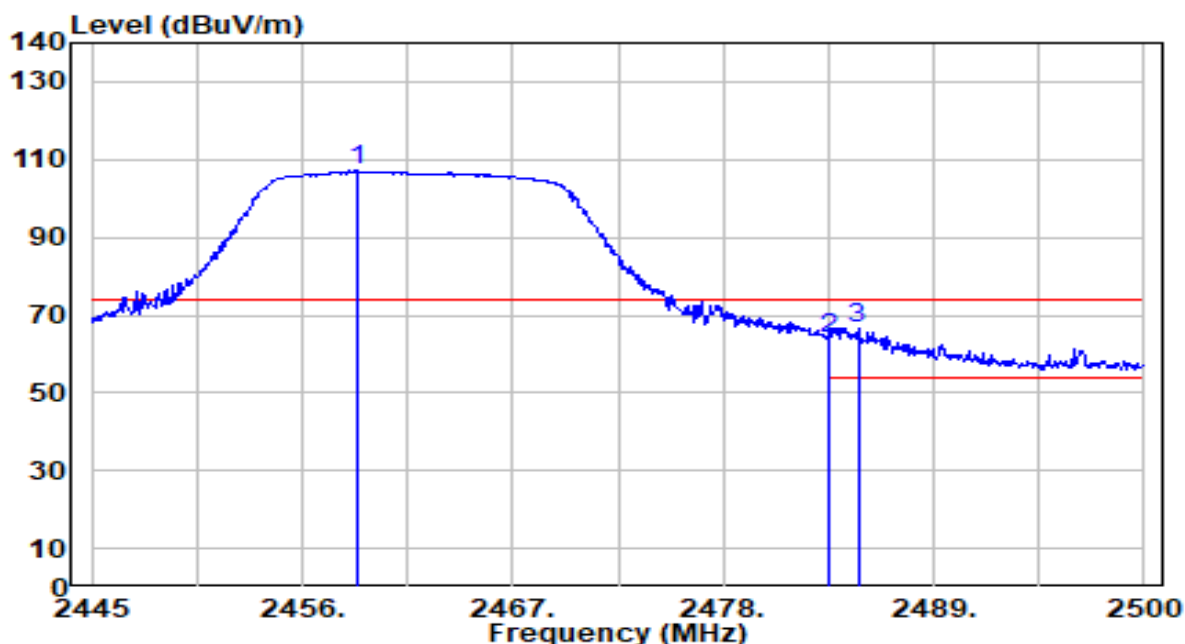


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2458.915	76.62	30.83	107.45	N/A	N/A	105	335	Peak
2	2483.500	33.11	30.91	64.03	-9.97	74.00	105	335	Peak
3	* 2485.040	35.70	30.92	66.62	-7.38	74.00	105	335	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-24
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11g_TX_CH 1_ANT 1	Test Voltage	AC 120V/60Hz

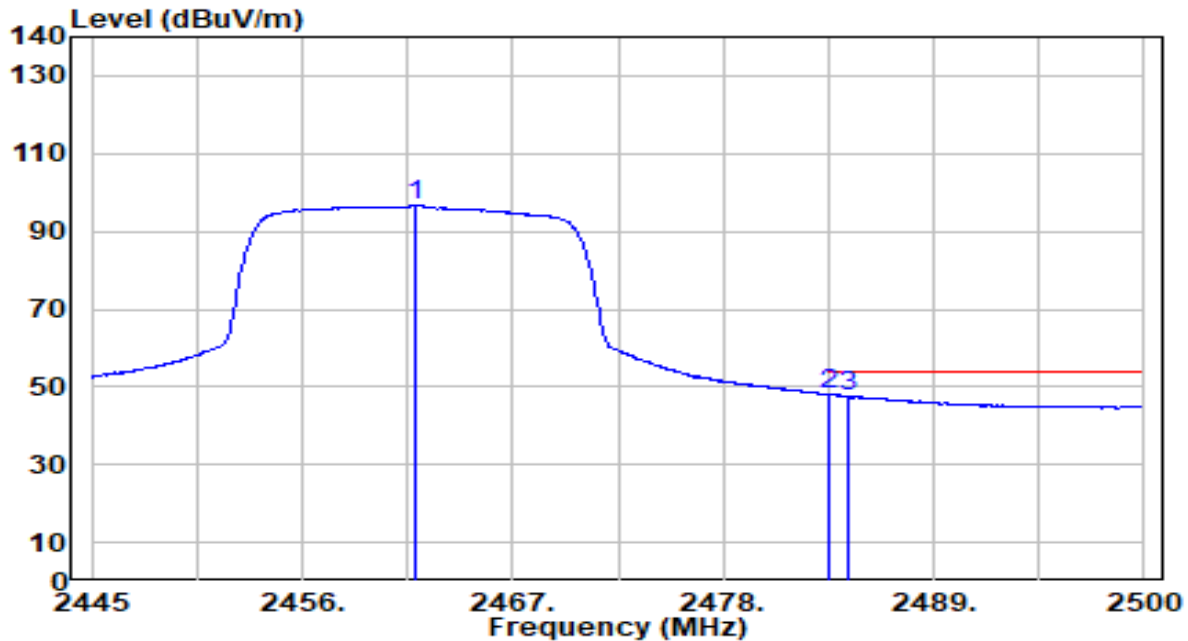


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.885	65.83	30.84	96.67	N/A	N/A	105	335	Average
2	* 2483.500	17.29	30.91	48.21	-5.79	54.00	105	335	Average
3	2484.545	16.81	30.92	47.73	-6.27	54.00	105	335	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-24
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

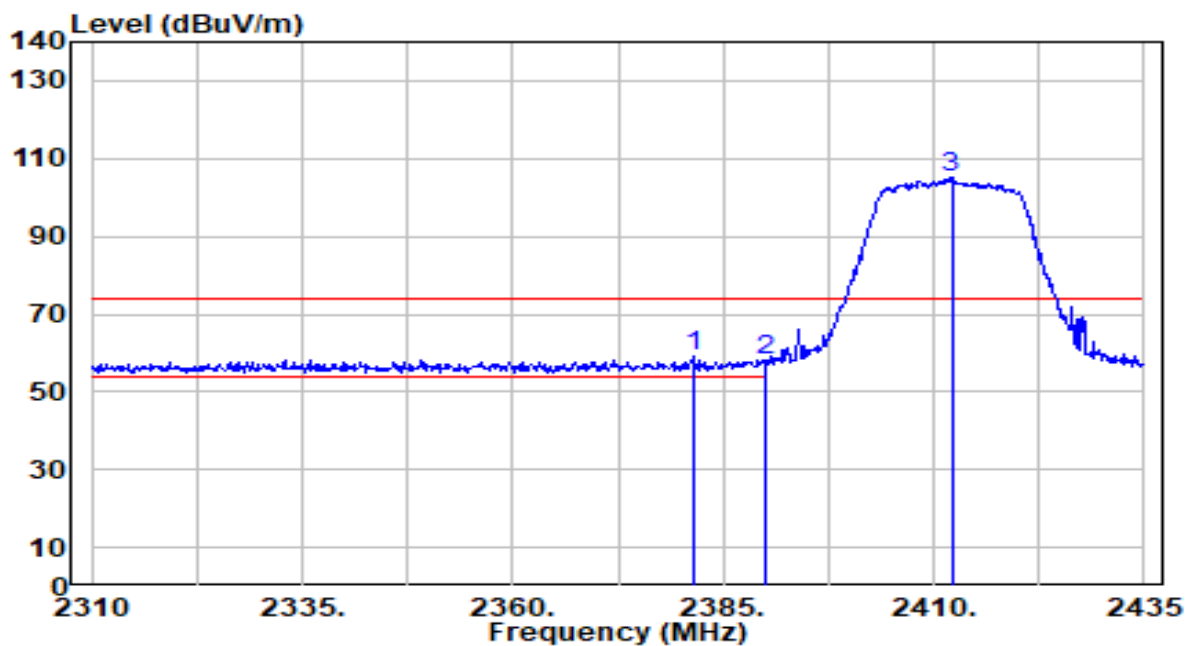


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2381.375	28.63	30.60	59.23	-14.77	74.00	140	170	Peak
2		2390.000	27.53	30.61	58.14	-15.86	74.00	140	170	Peak
3		2412.125	74.72	30.67	105.39	N/A	N/A	140	170	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-24
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

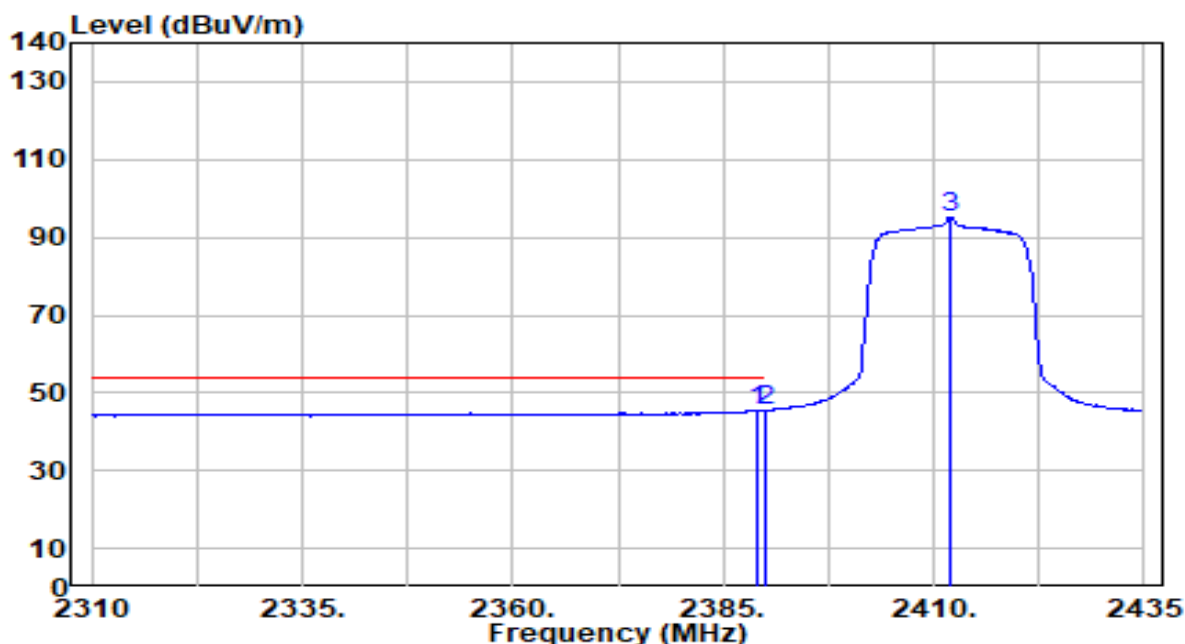


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.000	14.80	30.61	45.41	-8.59	54.00	140	170	Average
2	* 2390.000	14.85	30.61	45.47	-8.53	54.00	140	170	Average
3	2412.000	64.57	30.67	95.24	N/A	N/A	140	170	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	SKO.WB822CU.3	Date of Test	2022-11-24
Factor	DRH18-E	Temp. / Humidity	25°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

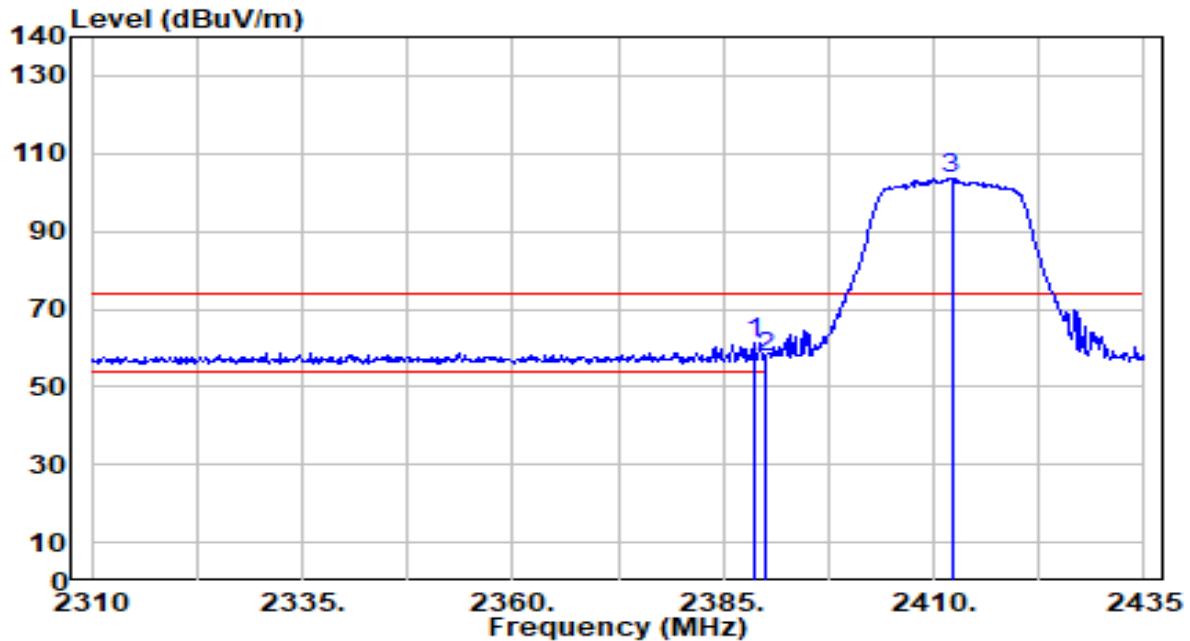

No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.625	30.52	30.61	61.13	-12.87	74.00	140	325	Peak
2		2390.000	27.02	30.61	57.64	-16.36	74.00	140	325	Peak
3		2412.125	73.10	30.67	103.77	N/A	N/A	140	325	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.