



TESTING LABORATORY
CERTIFICATE #4820.01



FCC PART 15.247

TEST REPORT

For

Beijing Beebox Technology Co., Ltd.

#2207, 22nd Floor, No.1-2 Building, ShangDi 10th street, Haidian District, Beijing, China

FCC ID: 2AR80-BSD01ST

Report Type: Original Report	Product Name: Biometric Recognition Device (Microcomputer)
Report Number: RBJ181108054-00B	
Report Date: 2019-03-14	
Jerry Zhang	
Reviewed By:	EMC Manager
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA* or any agency of the Federal Government. * This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “*”.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	7
EQUIPMENT MODIFICATIONS	10
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS	10
SUPPORT CABLE LIST AND DETAILS	11
BLOCK DIAGRAM OF TEST SETUP	11
SUMMARY OF TEST RESULTS	13
FCC §15.247 (i) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	14
APPLICABLE STANDARD	14
FCC §15.203 - ANTENNA REQUIREMENT.....	15
APPLICABLE STANDARD	15
ANTENNA CONNECTOR CONSTRUCTION	15
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	16
APPLICABLE STANDARD	16
EUT SETUP	16
EMI TEST RECEIVER SETUP.....	16
TEST PROCEDURE	16
CORRECTED AMPLITUDE & MARGIN CALCULATION	17
TEST EQUIPMENT LIST AND DETAILS.....	17
TEST DATA	17
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	22
APPLICABLE STANDARD	22
EUT SETUP	22
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	23
TEST PROCEDURE	23
CORRECTED AMPLITUDE & MARGIN CALCULATION	23
TEST EQUIPMENT LIST AND DETAILS.....	24
TEST DATA	24
FCC §15.247(a) (2)–EMISSION BANDWIDTH TEST	34
APPLICABLE STANDARD	34
TEST PROCEDURE	34
TEST EQUIPMENT LIST AND DETAILS.....	34
TEST DATA	34
FCC §15.247(b) (3) - MAXIMUM PEAK CONDUCTED OUTPUT POWER.....	51
APPLICABLE STANDARD	51
TEST PROCEDURE	51
TEST EQUIPMENT LIST AND DETAILS.....	51

TEST DATA	51
FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	53
APPLICABLE STANDARD	53
TEST PROCEDURE	53
TEST EQUIPMENT LIST AND DETAILS.....	53
TEST DATA	54
FCC §15.247(e) - POWER SPECTRAL DENSITY	60
APPLICABLE STANDARD	60
TEST PROCEDURE	60
TEST EQUIPMENT LIST AND DETAILS.....	60
TEST DATA	60

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

EUT Name:	Biometric Recognition Device (Microcomputer)
EUT Model:	BRD-ST-SD1
Multiple Model:	BRD-ST-SD2, BRD-ST-SD3, BRD-ST-SD* (* = 1-9, only for different model name)
Operation Frequency:	2412-2462 MHz(802.11b/g/n ht20), 2422-2452 MHz(802.11n ht40) 2402-2480 MHz(BLE)
Maximum Output Power (Peak Conducted):	802.11b/g/n: 20.98 dBm BLE:3.58 dBm
Modulation Type:	DSSS, OFDM(802.11b/g/n) GFSK(BLE)
Rated Input Voltage:	AC120V or DC12V from adapter
External Dimension:	305mm(L)*170mm(W)*1270mm(H)
Serial Number:	181108054
EUT Received Date:	2018.11.12

Note: The series product model BRD-ST-SD2, BRD-ST-SD3, BRD-ST-SD (* = 1-9, only for different model name) is electrically identical with model BRD-ST-SD1, we selected BRD-ST-SD1 for fully testing, the differences details was explained in the declaration letter.*

Objective

This report is prepared on behalf of **Beijing Beebox Technology Co., Ltd.** in accordance with Part 2, Subpart J, Part 15, Subparts A and C of the Federal Communications Commission's rules.

The tests were performed in order to determine the compliance of the EUT with FCC Rules Part 15-Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 15C DSS submissions with FCC ID: 2AR8O-BSD01ST.
FCC Part 15E NII submissions with FCC ID: 2AR8O-BSD01ST.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices. And 558074 D01 15.247 Meas Guidance v05r01.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.55 dB, 200M~1GHz: 5.92 dB, 1G~6GHz: 4.98 dB, 6G~18GHz: 5.89 dB, 18G~26.5G: 5.47 dB, 26.5G~40G: 5.63 dB
Unwanted Emissions, conducted	±1.5 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in Engineering Mode, which was provided by the manufacturer.

For 2.4GHz band, total 11 channels are provided:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

For 802.11b, 802.11g, and 802.11n ht20 modes were test with channel 1,6,11.

For 802.11n ht40 modes were test with channel 3,6,9.

The worst-case data rates are determined to be as follows for each mode based upon investigations by measuring the average power and PSD across all data rates, bandwidths, and modulations.

For Bluetooth LE mode, 40 channels are provided for testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	21	2444
...	2406	...	...
...	...	...	...
..	...	38	2478
19	2440	39	2480

EUT was tested with channel 0, 19 and 39.

EUT Exercise Software

The software “Engineering Mode” was used for testing, which was provided by manufacturer. The maximum power was configured as below table, that provided by the manufacturer:

Mode	Channel	Frequency (MHz)	Data rate	Power level
802.11b	Low	2412	1 Mbps	18
	Middle	2437	1 Mbps	17
	High	2462	1 Mbps	20
802.11g	Low	2412	6 Mbps	18
	Middle	2437	6 Mbps	20
	High	2462	6 Mbps	20
802.11n ht20	Low	2412	MCS0	17.5
	Middle	2437	MCS0	15
	High	2462	MCS0	20.5
802.11n ht40	Low	2422	MCS0	14
	Middle	2437	MCS0	14
	High	2452	MCS0	16

Bluetooth LE mode was configured by the system default setting

The maximum duty cycle as following table:


Test mode	T _{on} (ms)	T _{on+off} (ms)	Duty Cycle (%)
802.11b	100	100	100
802.11g	100	100	100
802.11n ht20	100	100	100
802.11n ht40	100	100	100
BLE	0.413	0.629	65.66

802.11b




Date: 21.NOV.2018 18:34:22

802.11g

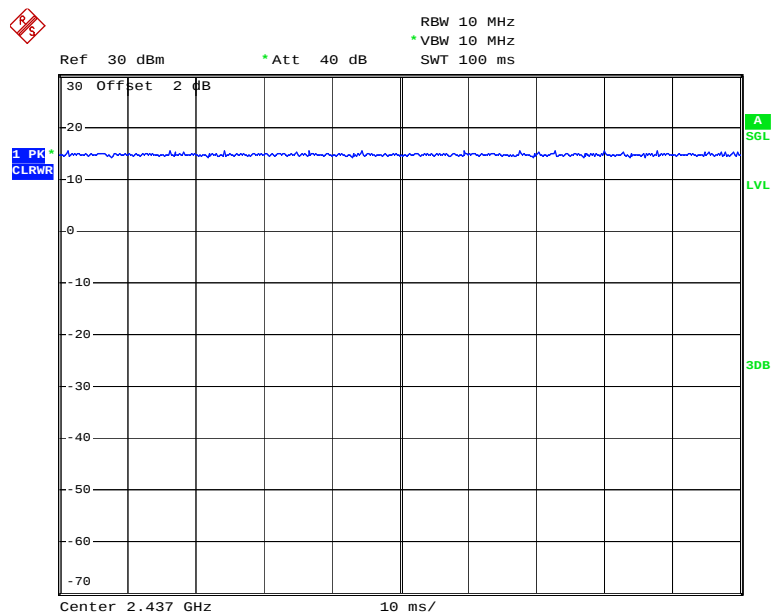


Date: 21.NOV.2018 18:33:45

802.11n ht20

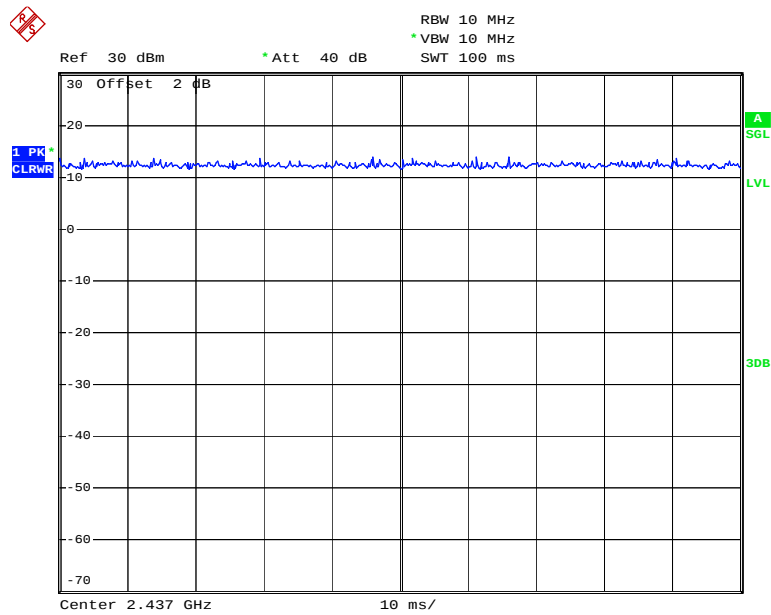


Date: 21.NOV.2018 18:33:13

802.11n ht40

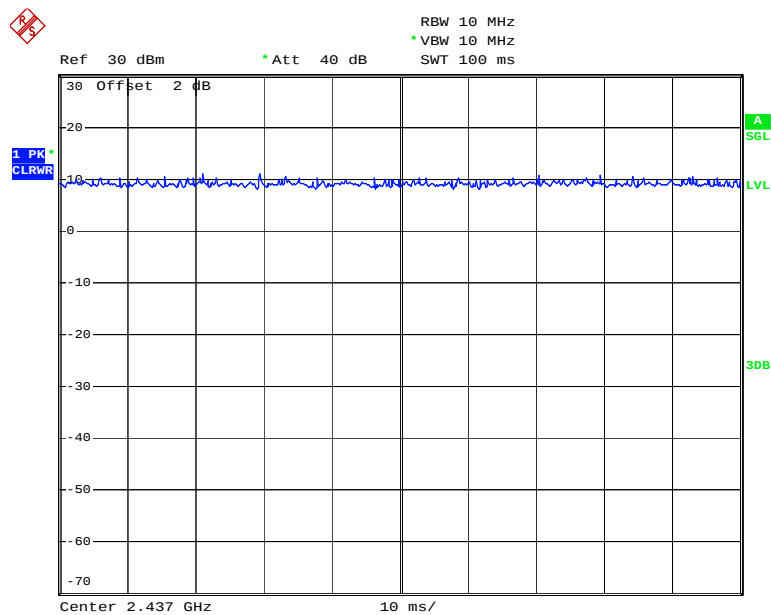

Date: 21.NOV.2018 18:32:06

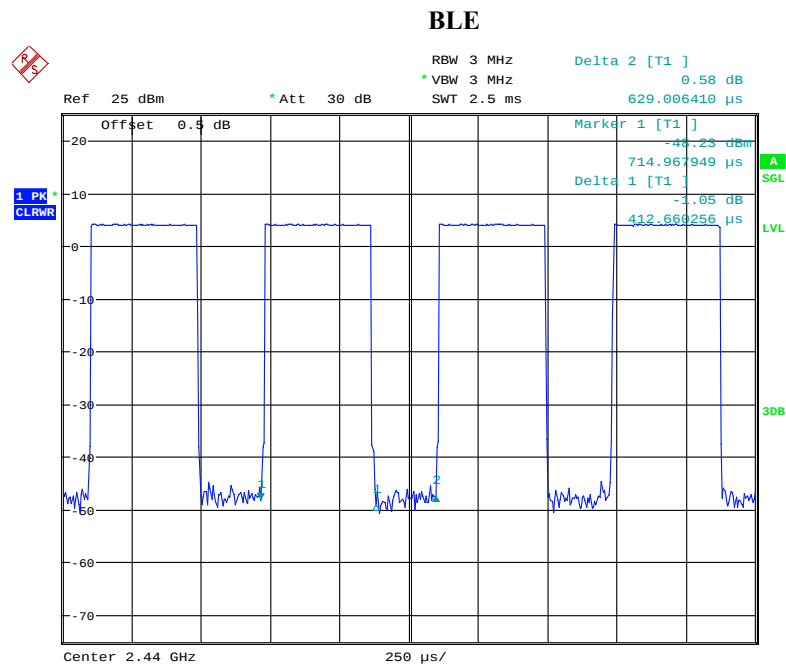

Date: 4.JAN.2019 21:09:22

Equipment Modifications

No modification was made to the EUT.

Local Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Huawei	Earphone	/	/
Sandisk	U-DISK	/	/
TP-LINK	Router	TL-SF1008P	114A297001782
Lotus	Entrance guard	L8MF-W	/
Schneider	Relay	RXM2LB2BD	/
ScanHome	Scanning Gun	ZD2200	/

Support Cable List and Details


Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
RJ45 Cable	No	No	5.00	RJ45 Port of EUT	Router
Adapter Cable	No	No	1.20	Adapter	EUT
Signal Cable	No	No	10.0	EUT	Entrance guard
Signal Cable	No	No	5.00	EUT	Relay
Signal Cable	No	No	5.00	EUT	Scanning Gun

Block Diagram of Test Setup

AC/DC Adapter:

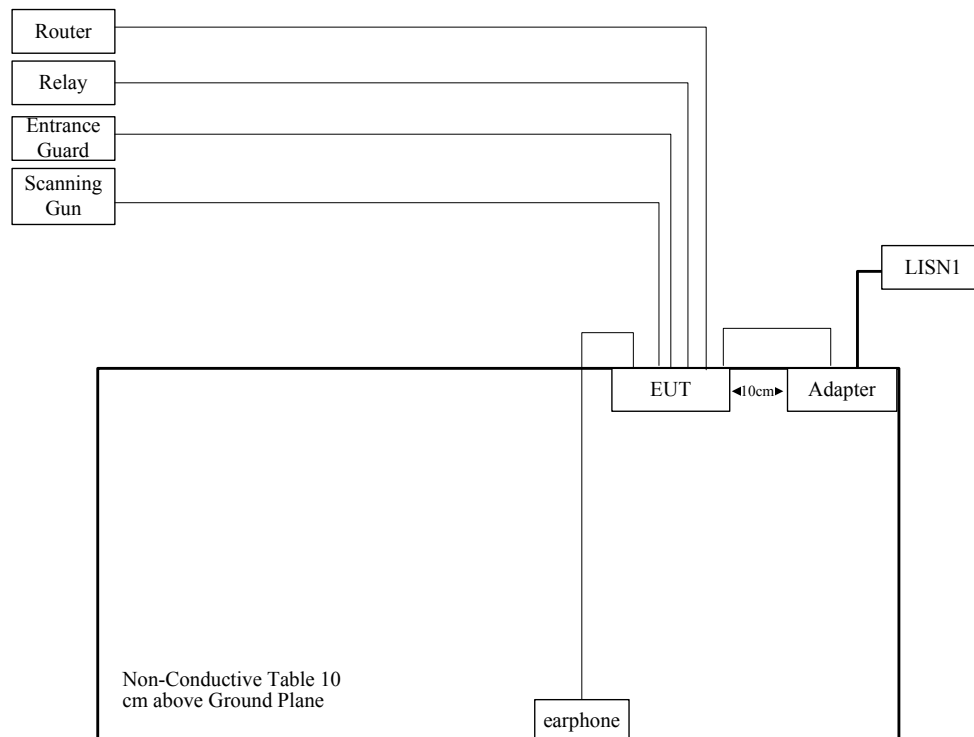

AC Power:

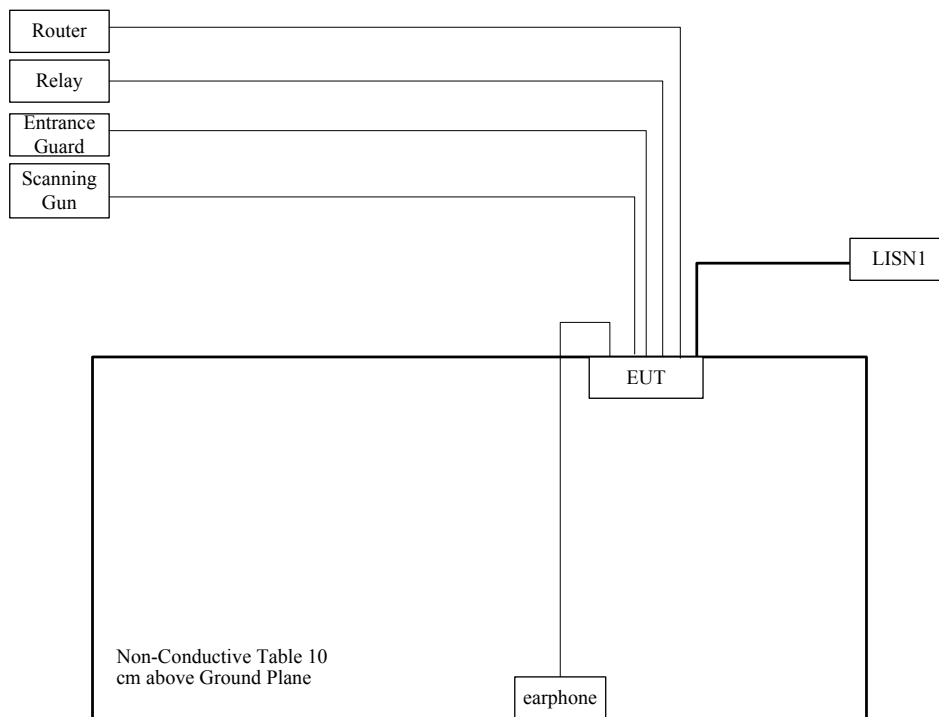

SUMMARY OF TEST RESULTS

Rules	Description of Test	Result
FCC §15.247 (i) & §1.1310 & §2.1091	Maximum Permissible Exposure(MPE)	Compliance
FCC §15.203	Antenna Requirement	Compliance
FCC §15.207 (a)	AC Line Conducted Emissions	Compliance
FCC §15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
FCC §15.247 (a)(2)	6 dB Bandwidth and 99% Occupied Bandwidth	Compliance
FCC §15.247(b)(3);	Maximum Conducted Output Power	Compliance
FCC §15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
FCC §15.247(e)	Power Spectral Density	Compliance

FCC §15.247 (i) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to §15.247(i) and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculated Formulary:

Predication of MPE limit at a given distance

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

Operation modes	Frequency Range (MHz)	Antenna Gain		Max. Target Power including Tolerance		Evaluation Distance (cm)	Power Density (W/m ²)	MPE Limit (W/m ²)
		(dBi)	(numeric)	(dBm)	(mW)			
BLE	2402-2480	3	2.00	4	2.51	20.00	0.001	1.0
Wifi	2412-2462	3	2.00	21	125.89	20.00	0.050	1.0

Note 1: the Max. Target Power including Tolerance was declared by manufacturer.

Note 2: Wifi 2.4GHz can't transmit simultaneously with Bluetooth or 5G wifi.

Result: Compliance, The device meets MPE requirement for Devices Used by the General Public (Uncontrolled Environment) at distance ≥ 20 cm.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

Antenna Connector Construction

The EUT has one internal antenna arrangement for BT and 2.4GHz wifi, the antenna gain is 3 dBi, one internal antenna for 5G wifi, the antenna gain is 3 dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207(a).

EUT Setup

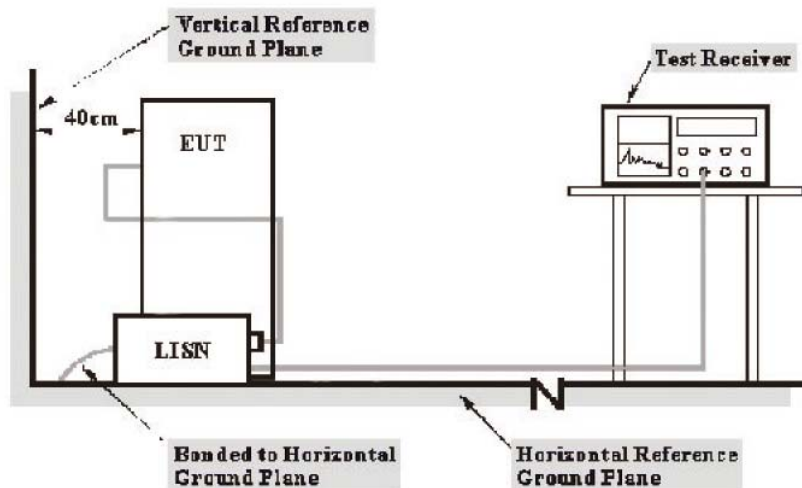

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to the main lisn with a 120 V/60 Hz AC power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

$$C_f = A_C + VDF$$

Herein,

V_C (cord. Reading): corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF : voltage division factor of AMN

C_f : Correction Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2018-12-10	2019-12-10
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-01	2018-09-05	2019-09-05
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A
R&S	Two-line V-network	ENV 216	101614	2018-12-10	2019-12-10

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions


Temperature:	24.4 °C
Relative Humidity:	39 %
ATM Pressure:	100.3 kPa

The testing was performed by Ade Xiao on 2019-01-16.

Test Mode: Transmitting (Wi-Fi mode 802.11b middle channel was the worst)


AC/DC Adapter:

AC120 V, 60 Hz, Line:

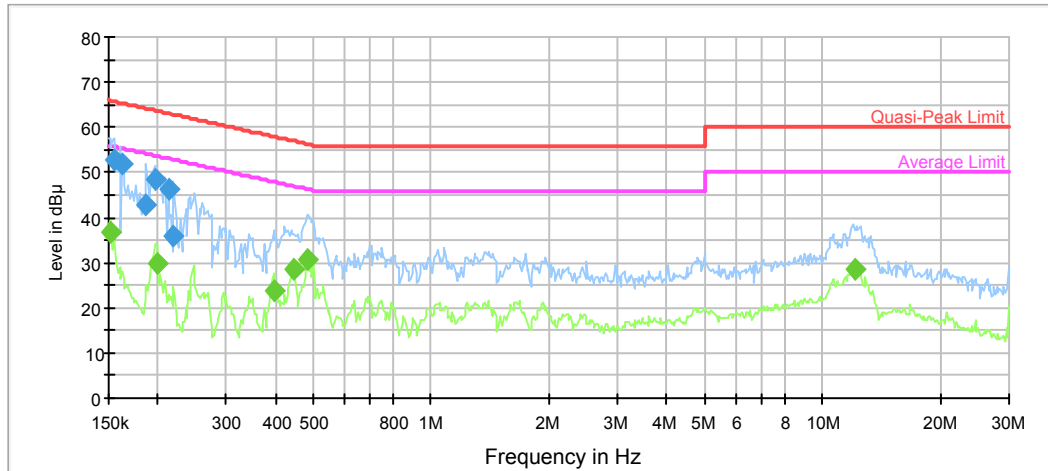

Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.154858	52.9	9.000	L1	11.1	12.8	65.7
0.162441	51.9	9.000	L1	11.0	13.4	65.3
0.187494	42.8	9.000	L1	10.7	21.3	64.1
0.196675	48.5	9.000	L1	10.6	15.2	63.7
0.212988	46.4	9.000	L1	10.5	16.7	63.1
0.219886	36.0	9.000	L1	10.5	26.8	62.8

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.151200	36.6	9.000	L1	11.2	19.3	55.9
0.199835	29.9	9.000	L1	10.6	23.7	53.6
0.396530	23.7	9.000	L1	10.0	24.2	47.9
0.446873	28.7	9.000	L1	9.9	18.2	46.9
0.483938	30.9	9.000	L1	9.9	15.4	46.3
12.101654	28.7	9.000	L1	9.9	21.3	50.0

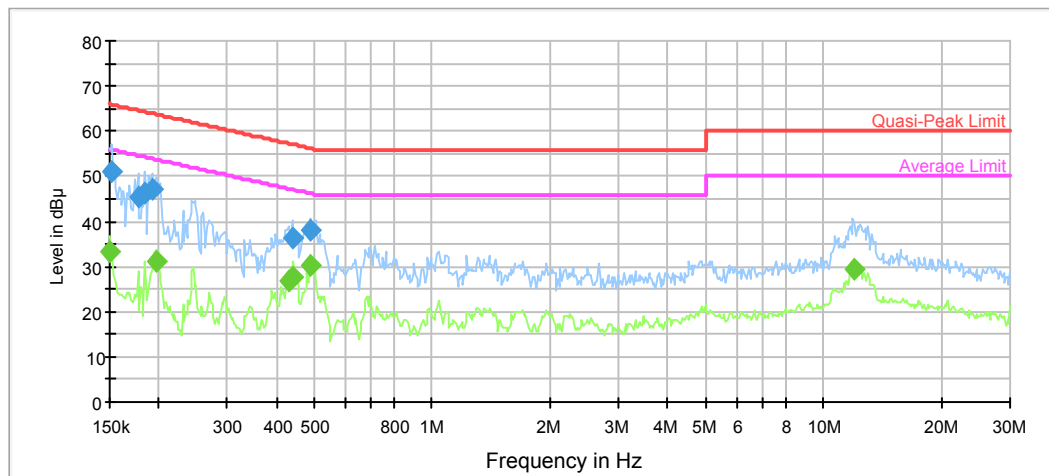
AC120 V, 60 Hz, Neutral:

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.152410	51.1	9.000	N	11.1	14.8	65.9
0.177322	45.6	9.000	N	10.8	19.0	64.6
0.184529	46.4	9.000	N	10.7	17.9	64.3
0.192030	47.2	9.000	N	10.7	16.7	63.9
0.439808	36.3	9.000	N	9.9	20.8	57.1
0.487810	37.9	9.000	N	9.9	18.3	56.2

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	33.5	9.000	N	11.2	22.5	56.0
0.198249	31.2	9.000	N	10.6	22.5	53.7
0.429420	27.0	9.000	N	9.9	20.3	47.3
0.443327	27.5	9.000	N	9.9	19.5	47.0
0.487810	30.3	9.000	N	9.9	15.9	46.2
12.005609	29.6	9.000	N	9.9	20.4	50.0


AC power:

AC120 V, 60 Hz, Line:

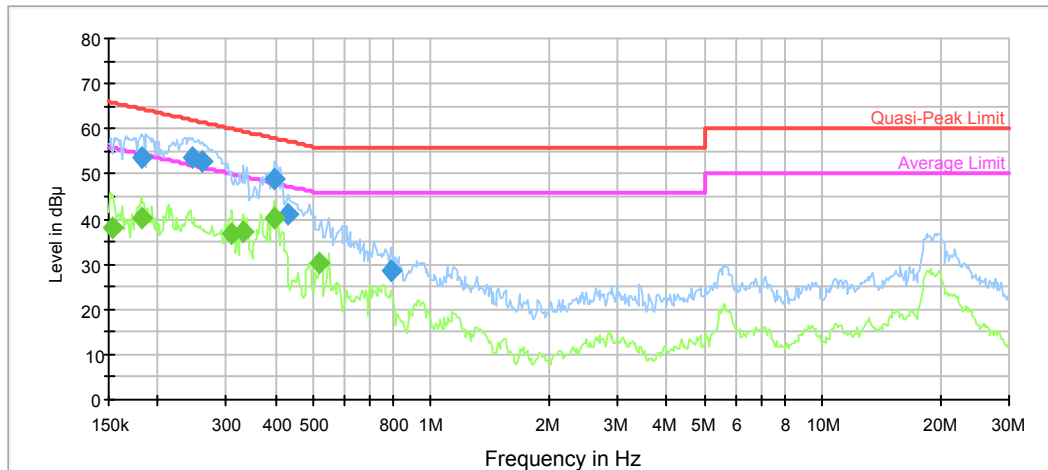

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.181612	53.7	9.000	L1	10.8	10.7	64.4
0.245835	53.5	9.000	L1	10.3	8.4	61.9
0.259937	52.7	9.000	L1	10.3	8.7	61.4
0.399703	48.8	9.000	L1	10.0	9.1	57.9
0.432855	41.1	9.000	L1	9.9	16.1	57.2
0.786832	28.6	9.000	L1	9.8	27.4	56.0

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.153629	38.1	9.000	L1	11.1	17.7	55.8
0.181612	40.3	9.000	L1	10.8	14.1	54.4
0.309742	36.7	9.000	L1	10.1	13.3	50.0
0.332770	37.1	9.000	L1	10.1	12.3	49.4
0.396530	40.1	9.000	L1	10.0	7.8	47.9
0.519918	30.1	9.000	L1	9.9	15.9	46.0


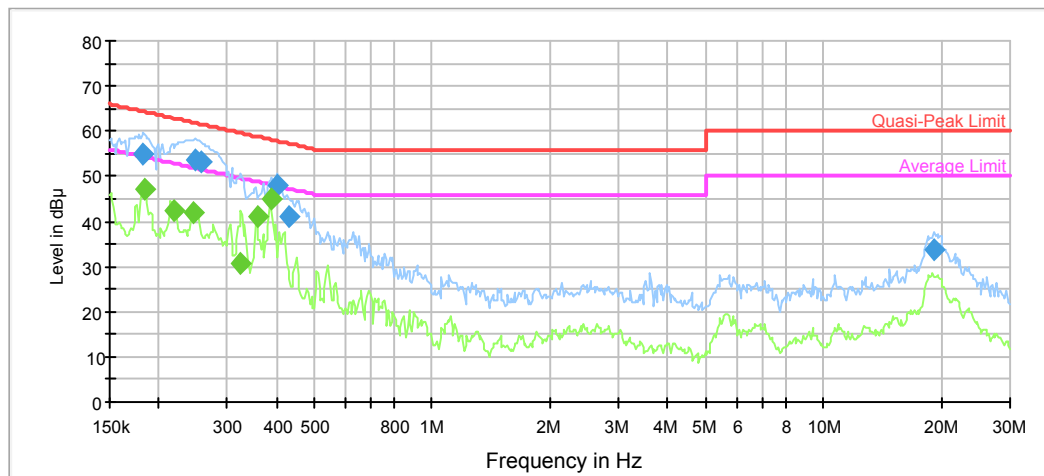
AC120 V, 60 Hz, Neutral:

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.183065	54.7	9.000	N	10.8	9.6	64.3
0.249785	53.8	9.000	N	10.3	8.0	61.8
0.257874	53.2	9.000	N	10.3	8.3	61.5
0.402900	47.8	9.000	N	10.0	10.0	57.8
0.432855	41.0	9.000	N	9.9	16.2	57.2
19.211249	33.7	9.000	N	10.0	26.3	60.0

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.184529	47.0	9.000	N	10.7	7.3	54.3
0.218141	42.3	9.000	N	10.5	10.6	52.9
0.245835	41.8	9.000	N	10.3	10.1	51.9
0.324910	30.9	9.000	N	10.1	18.7	49.6
0.357511	41.1	9.000	N	10.0	7.7	48.8
0.387164	44.9	9.000	N	10.0	3.2	48.1

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS**Applicable Standard**

FCC §15.247 (d); §15.209; §15.205.

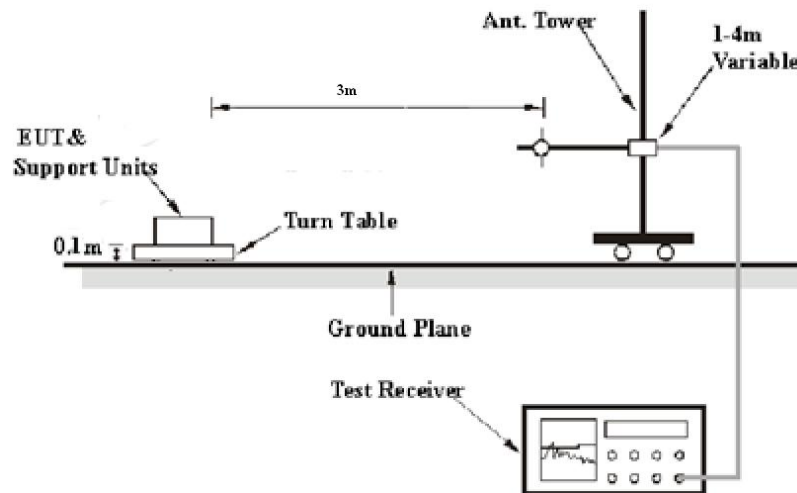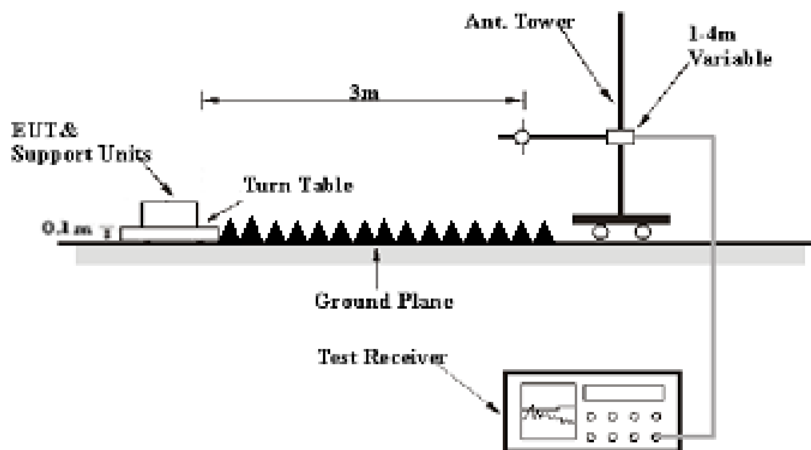EUT Setup**Below 1GHz:****Above 1GHz:**

The radiated emission Below 1GHz tests were performed in the 3 meters chamber test site A, above 1GHz tests were performed in the 3 meters chamber test site B, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

30MHz-1000MHz:

Measurement	RBW	Video B/W	IF B/W
QP	120 kHz	300 kHz	120kHz

1GHz- 25GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
AV	>98%	1MHz	10 Hz
	<98%	1MHz	1/T

Note: T is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2018-12-10	2019-12-10
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
Sunol Sciences	Antenna	JB3	A060611-1	2017-11-10	2020-11-10
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-1400-01	2018-05-06	2019-05-06
HP	Amplifier	8447D	2727A05902	2018-09-05	2019-09-05
Agilent	Spectrum Analyzer	E4440A	SG43360054	2019-01-04	2020-01-04
ETS-Lindgren	Horn Antenna	3115	000 527 35	2018-10-12	2021-10-12
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2016-11-18	2019-11-18
Unknown	Coaxial Cable	C-SJSJ-50	C-0800-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-2.4J2.4J-50	C-0700-02	2018-06-27	2019-06-27
MITEQ	Amplifier	AFS42-00101800-25-S-42	2001271	2018-09-05	2019-09-05
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2018-06-27	2019-06-27
E-Microwave	Band-stop Filters	OBSF-2400-2483.5-S	OE01601525	2018-06-16	2019-06-16
Micro-tronics	High Pass Filter	HPM50111	S/N-G217	2018-06-16	2019-06-16

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	24.6~26.6°C
Relative Humidity:	47~50 %
ATM Pressure:	100.8kPa


* The testing was performed by Neil Liao, Tyler Pan on 2019-01-19

Test Result: Compliance, please Refer to the following data


Test Mode: Transmitting(AC power was the worst and reported)

1) 30MHz-1GHz(802.11b mode low channel was the worst)

Horizontal:

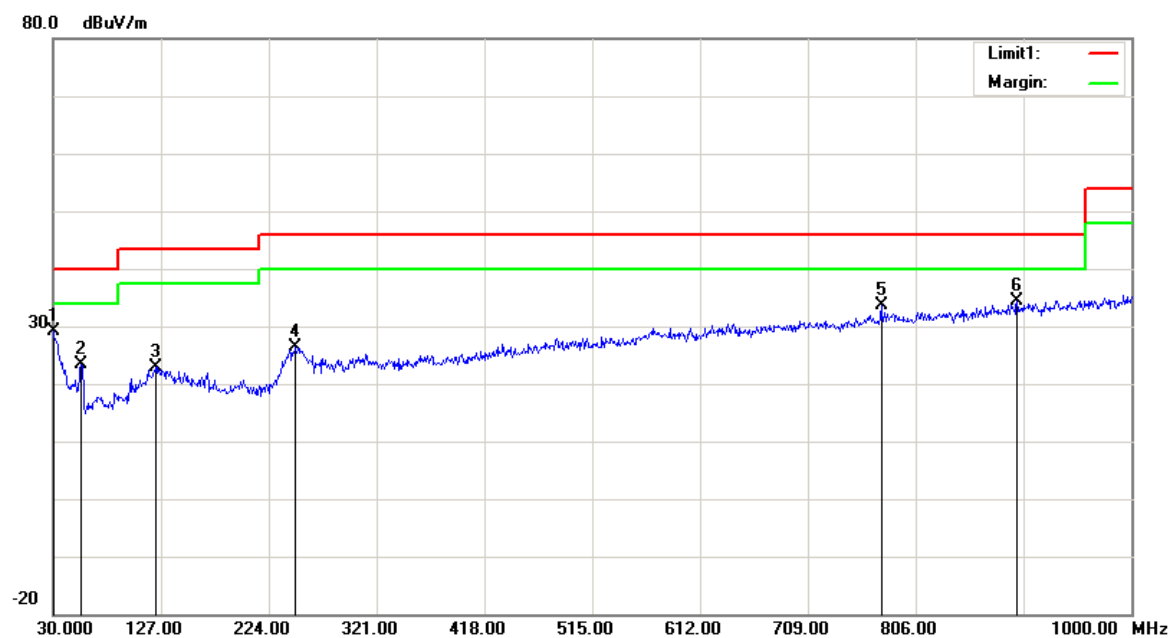

Frequency (MHz)	Receiver Reading (dBuV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
30.0000	27.25	peak	1.76	29.01	40.00	10.99
55.2200	35.39	peak	-12.08	23.31	40.00	16.69
122.1500	27.45	peak	-4.55	22.90	43.50	20.60
248.2500	32.30	peak	-5.90	26.40	46.00	19.60
774.9600	29.13	peak	4.39	33.52	46.00	12.48
897.1800	38.20	peak	-3.90	34.30	46.00	11.70

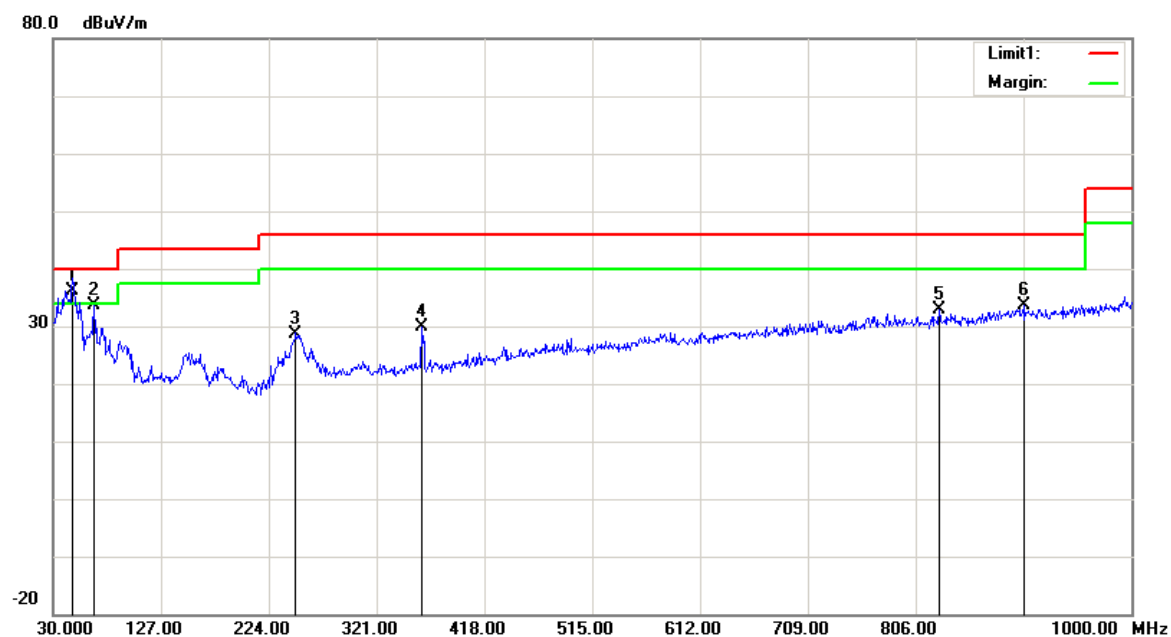Vertical:

Frequency (MHz)	Receiver Reading (dBuV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
47.4600	46.56	QP	-10.35	36.21	40.00	3.79
66.8600	44.96	peak	-11.44	33.52	40.00	6.48
248.2500	34.65	peak	-5.90	28.75	46.00	17.25
361.7400	32.58	peak	-2.79	29.79	46.00	16.21
827.3400	27.72	peak	5.14	32.86	46.00	13.14
903.0000	37.39	peak	-3.80	33.59	46.00	12.41

**2) 1-25GHz:
802.11b Mode:**

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2412 MHz									
2412.00	68.79	PK	H	28.12	1.81	0.00	98.72	N/A	N/A
2412.00	65.17	AV	H	28.12	1.81	0.00	95.10	N/A	N/A
2412.00	72.22	PK	V	28.12	1.81	0.00	102.15	N/A	N/A
2412.00	69.40	AV	V	28.12	1.81	0.00	99.33	N/A	N/A
2390.00	26.94	PK	V	28.08	1.80	0.00	56.82	74.00	17.18
2390.00	15.27	AV	V	28.08	1.80	0.00	45.15	54.00	8.85
4824.00	55.38	PK	V	32.95	3.19	37.20	54.32	74.00	19.68
4824.00	51.94	AV	V	32.95	3.19	37.20	50.88	54.00	3.12
7236.00	45.23	PK	V	35.81	4.77	37.27	48.54	74.00	25.46
7236.00	32.48	AV	V	35.81	4.77	37.27	35.79	54.00	18.21
Middle Channel: 2437 MHz									
2437.00	71.53	PK	H	28.17	1.82	0.00	101.52	N/A	N/A
2437.00	68.02	AV	H	28.17	1.82	0.00	98.01	N/A	N/A
2437.00	75.25	PK	V	28.17	1.82	0.00	105.24	N/A	N/A
2437.00	72.14	AV	V	28.17	1.82	0.00	102.13	N/A	N/A
4874.00	52.86	PK	V	33.05	3.26	37.21	51.96	74.00	22.04
4874.00	48.52	AV	V	33.05	3.26	37.21	47.62	54.00	6.38
7311.00	44.82	PK	V	36.01	4.64	37.36	48.11	74.00	25.89
7311.00	32.14	AV	V	36.01	4.64	37.36	35.43	54.00	18.57
High Channel: 2462 MHz									
2462.00	64.25	PK	H	28.22	1.83	0.00	94.30	N/A	N/A
2462.00	61.47	AV	H	28.22	1.83	0.00	91.52	N/A	N/A
2462.00	68.56	PK	V	28.22	1.83	0.00	98.61	N/A	N/A
2462.00	65.29	AV	V	28.22	1.83	0.00	95.34	N/A	N/A
2483.50	25.75	PK	V	28.27	1.84	0.00	55.86	74.00	18.14
2483.50	14.17	AV	V	28.27	1.84	0.00	44.28	54.00	9.72
4924.00	54.98	PK	V	33.15	3.27	37.22	54.18	74.00	19.82
4924.00	51.25	AV	V	33.15	3.27	37.22	50.45	54.00	3.55
7386.00	44.74	PK	V	36.20	4.51	37.46	47.99	74.00	26.01
7386.00	32.50	AV	V	36.20	4.51	37.46	35.75	54.00	18.25

802.11g Mode:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2412 MHz									
2412.00	66.78	PK	H	28.12	1.81	0.00	96.71	N/A	N/A
2412.00	57.84	AV	H	28.12	1.81	0.00	87.77	N/A	N/A
2412.00	70.08	PK	V	28.12	1.81	0.00	100.01	N/A	N/A
2412.00	61.07	AV	V	28.12	1.81	0.00	91.00	N/A	N/A
2390.00	35.03	PK	V	28.08	1.80	0.00	64.91	74.00	9.09
2390.00	17.01	AV	V	28.08	1.80	0.00	46.89	54.00	7.11
4824.00	47.15	PK	V	32.95	3.19	37.20	46.09	74.00	27.91
4824.00	35.71	AV	V	32.95	3.19	37.20	34.65	54.00	19.35
7236.00	45.39	PK	V	35.81	4.77	37.27	48.70	74.00	25.30
7236.00	34.28	AV	V	35.81	4.77	37.27	37.59	54.00	16.41
Middle Channel: 2437 MHz									
2437.00	71.41	PK	H	28.17	1.82	0.00	101.40	N/A	N/A
2437.00	62.73	AV	H	28.17	1.82	0.00	92.72	N/A	N/A
2437.00	75.24	PK	V	28.17	1.82	0.00	105.23	N/A	N/A
2437.00	66.29	AV	V	28.17	1.82	0.00	96.28	N/A	N/A
4874.00	47.69	PK	V	33.05	3.26	37.21	46.79	74.00	27.21
4874.00	35.98	AV	V	33.05	3.26	37.21	35.08	54.00	18.92
7311.00	45.71	PK	V	36.01	4.64	37.36	49.00	74.00	25.00
7311.00	34.19	AV	V	36.01	4.64	37.36	37.48	54.00	16.52
High Channel: 2462 MHz									
2462.00	64.25	PK	H	28.22	1.83	0.00	94.30	N/A	N/A
2462.00	55.47	AV	H	28.22	1.83	0.00	85.52	N/A	N/A
2462.00	68.32	PK	V	28.22	1.83	0.00	98.37	N/A	N/A
2462.00	59.20	AV	V	28.22	1.83	0.00	89.25	N/A	N/A
2483.50	34.06	PK	V	28.27	1.84	0.00	64.17	74.00	9.83
2483.50	17.71	AV	V	28.27	1.84	0.00	47.82	54.00	6.18
4924.00	47.43	PK	V	33.15	3.27	37.22	46.63	74.00	27.37
4924.00	35.13	AV	V	33.15	3.27	37.22	34.33	54.00	19.67
7386.00	45.77	PK	V	36.20	4.51	37.46	49.02	74.00	24.98
7386.00	33.96	AV	V	36.20	4.51	37.46	37.21	54.00	16.79

802.11n ht20 Mode:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2412 MHz									
2412.00	66.74	PK	H	28.12	1.81	0.00	96.67	N/A	N/A
2412.00	56.92	AV	H	28.12	1.81	0.00	86.85	N/A	N/A
2412.00	70.52	PK	V	28.12	1.81	0.00	100.45	N/A	N/A
2412.00	60.68	AV	V	28.12	1.81	0.00	90.61	N/A	N/A
2390.00	39.67	PK	V	28.08	1.80	0.00	69.55	74.00	4.45
2390.00	19.05	AV	V	28.08	1.80	0.00	48.93	54.00	5.07
4824.00	47.54	PK	V	32.95	3.19	37.20	46.48	74.00	27.52
4824.00	34.65	AV	V	32.95	3.19	37.20	33.59	54.00	20.41
7236.00	45.88	PK	V	35.81	4.77	37.27	49.19	74.00	24.81
7236.00	34.20	AV	V	35.81	4.77	37.27	37.51	54.00	16.49
Middle Channel: 2437 MHz									
2437.00	68.47	PK	H	28.17	1.82	0.00	98.46	N/A	N/A
2437.00	58.15	AV	H	28.17	1.82	0.00	88.14	N/A	N/A
2437.00	71.59	PK	V	28.17	1.82	0.00	101.58	N/A	N/A
2437.00	61.71	AV	V	28.17	1.82	0.00	91.70	N/A	N/A
4874.00	47.22	PK	V	33.05	3.26	37.21	46.32	74.00	27.68
4874.00	34.96	AV	V	33.05	3.26	37.21	34.06	54.00	19.94
7311.00	45.14	PK	V	36.01	4.64	37.36	48.43	74.00	25.57
7311.00	32.97	AV	V	36.01	4.64	37.36	36.26	54.00	17.74
High Channel: 2462 MHz									
2462.00	62.39	PK	H	28.22	1.83	0.00	92.44	N/A	N/A
2462.00	53.75	AV	H	28.22	1.83	0.00	83.80	N/A	N/A
2462.00	67.77	PK	V	28.22	1.83	0.00	97.82	N/A	N/A
2462.00	58.59	AV	V	28.22	1.83	0.00	88.64	N/A	N/A
2483.50	37.51	PK	V	28.27	1.84	0.00	67.62	74.00	6.38
2483.50	19.04	AV	V	28.27	1.84	0.00	49.15	54.00	4.85
4924.00	50.62	PK	V	33.15	3.27	37.22	49.82	74.00	24.18
4924.00	36.46	AV	V	33.15	3.27	37.22	35.66	54.00	18.34
7386.00	35.42	PK	V	36.20	4.51	37.46	38.67	74.00	35.33
7386.00	32.89	AV	V	36.20	4.51	37.46	36.14	54.00	17.86




802.11n ht40 Mode:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2422 MHz									
2422.00	62.41	PK	H	28.14	1.81	0.00	92.36	N/A	N/A
2422.00	53.72	AV	H	28.14	1.81	0.00	83.67	N/A	N/A
2422.00	66.71	PK	V	28.14	1.81	0.00	96.66	N/A	N/A
2422.00	57.74	AV	V	28.14	1.81	0.00	87.69	N/A	N/A
2390.00	33.33	PK	V	28.08	1.80	0.00	63.21	74.00	10.79
2390.00	15.30	AV	V	28.08	1.80	0.00	45.18	54.00	8.82
4844.00	47.25	PK	V	32.99	3.22	37.20	46.26	74.00	27.74
4844.00	34.37	AV	V	32.99	3.22	37.20	33.38	54.00	20.62
7266.00	45.91	PK	V	35.89	4.72	37.31	49.21	74.00	24.79
7266.00	33.29	AV	V	35.89	4.72	37.31	36.59	54.00	17.41
Middle Channel: 2437 MHz									
2437.00	65.03	PK	H	28.17	1.82	0.00	95.02	N/A	N/A
2437.00	55.47	AV	H	28.17	1.82	0.00	85.46	N/A	N/A
2437.00	68.90	PK	V	28.17	1.82	0.00	98.89	N/A	N/A
2437.00	59.24	AV	V	28.17	1.82	0.00	89.23	N/A	N/A
4874.00	47.48	PK	V	33.05	3.26	37.21	46.58	74.00	27.42
4874.00	35.41	AV	V	33.05	3.26	37.21	34.51	54.00	19.49
7311.00	45.44	PK	V	36.01	4.64	37.36	48.73	74.00	25.27
7311.00	33.69	AV	V	36.01	4.64	37.36	36.98	54.00	17.02
High Channel: 2452 MHz									
2452.00	63.58	PK	H	28.20	1.83	0.00	93.61	N/A	N/A
2452.00	53.93	AV	H	28.20	1.83	0.00	83.96	N/A	N/A
2452.00	67.21	PK	V	28.20	1.83	0.00	97.24	N/A	N/A
2452.00	57.91	AV	V	28.20	1.83	0.00	87.94	N/A	N/A
2483.50	32.07	PK	V	28.27	1.84	0.00	62.18	74.00	11.82
2483.50	14.87	AV	V	28.27	1.84	0.00	44.98	54.00	9.02
4904.00	47.02	PK	V	33.11	3.30	37.21	46.22	74.00	27.78
4904.00	34.55	AV	V	33.11	3.30	37.21	33.75	54.00	20.25
7356.00	45.96	PK	V	36.13	4.56	37.42	49.23	74.00	24.77
7356.00	33.51	AV	V	36.13	4.56	37.42	36.78	54.00	17.22




BLE Mode:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2402 MHz									
2402.00	59.50	PK	H	28.10	1.80	0.00	89.40	N/A	N/A
2402.00	58.41	AV	H	28.10	1.80	0.00	88.31	N/A	N/A
2402.00	63.84	PK	V	28.10	1.80	0.00	93.74	N/A	N/A
2402.00	62.72	AV	V	28.10	1.80	0.00	92.62	N/A	N/A
2390.00	26.17	PK	V	28.08	1.80	0.00	56.05	74.00	17.95
2390.00	14.05	AV	V	28.08	1.80	0.00	43.93	54.00	10.07
4804.00	47.00	PK	V	32.91	3.17	37.20	45.88	74.00	28.12
4804.00	33.89	AV	V	32.91	3.17	37.20	32.77	54.00	21.23
7206.00	45.76	PK	V	35.74	4.82	37.23	49.09	74.00	24.91
7206.00	32.24	AV	V	35.74	4.82	37.23	35.57	54.00	18.43
Middle Channel: 2440 MHz									
2440.00	60.37	PK	H	28.18	1.82	0.00	90.37	N/A	N/A
2440.00	59.23	AV	H	28.18	1.82	0.00	89.23	N/A	N/A
2440.00	64.58	PK	V	28.18	1.82	0.00	94.58	N/A	N/A
2440.00	63.74	AV	V	28.18	1.82	0.00	93.74	N/A	N/A
4880.00	47.22	PK	V	33.06	3.27	37.21	46.34	74.00	27.66
4880.00	34.12	AV	V	33.06	3.27	37.21	33.24	54.00	20.76
7320.00	45.68	PK	V	36.03	4.62	37.37	48.96	74.00	25.04
7320.00	32.47	AV	V	36.03	4.62	37.37	35.75	54.00	18.25
High Channel: 2480 MHz									
2480.00	58.64	PK	H	28.26	1.84	0.00	88.74	N/A	N/A
2480.00	57.46	AV	H	28.26	1.84	0.00	87.56	N/A	N/A
2480.00	62.87	PK	V	28.26	1.84	0.00	92.97	N/A	N/A
2480.00	61.76	AV	V	28.26	1.84	0.00	91.86	N/A	N/A
2483.50	25.28	PK	V	28.27	1.84	0.00	55.39	74.00	18.61
2483.50	15.16	AV	V	28.27	1.84	0.00	45.27	54.00	8.73
4960.00	46.59	PK	V	33.22	3.23	37.25	45.79	74.00	28.21
4960.00	33.28	AV	V	33.22	3.23	37.25	32.48	54.00	21.52
7440.00	45.31	PK	V	36.34	4.41	37.52	48.54	74.00	25.46
7440.00	32.47	AV	V	36.34	4.41	37.52	35.70	54.00	18.30

Test plots(802.11b Low channel was the worst)
Horizontal:

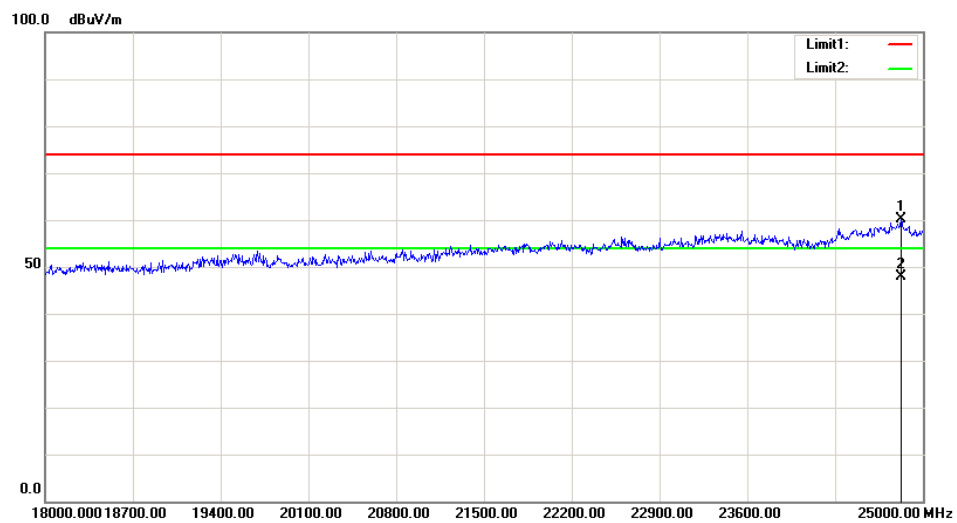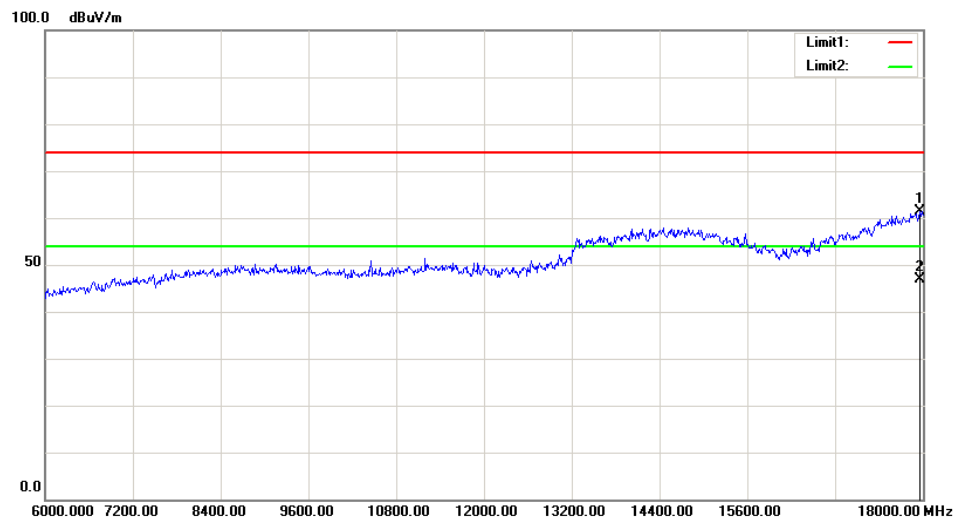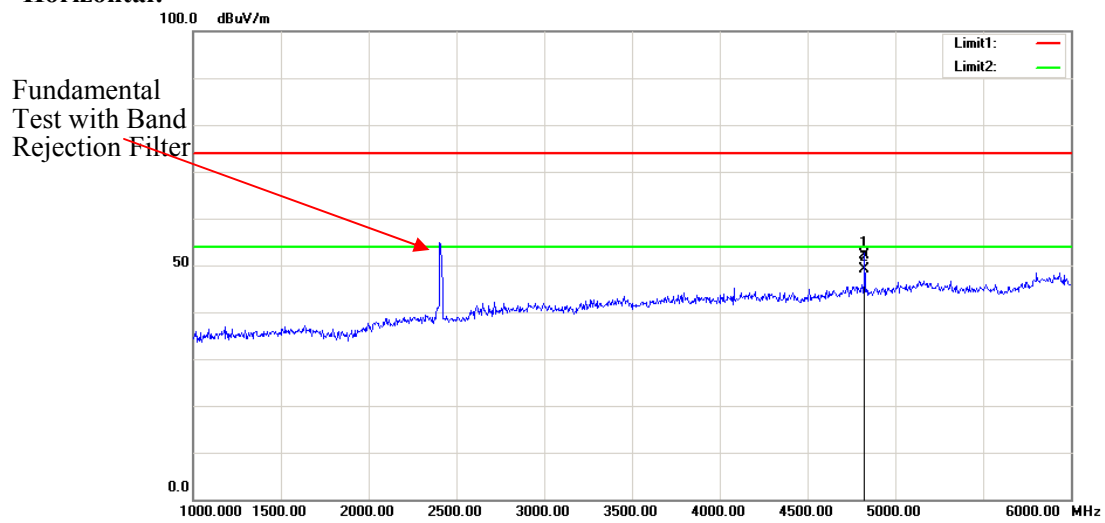

Vertical:

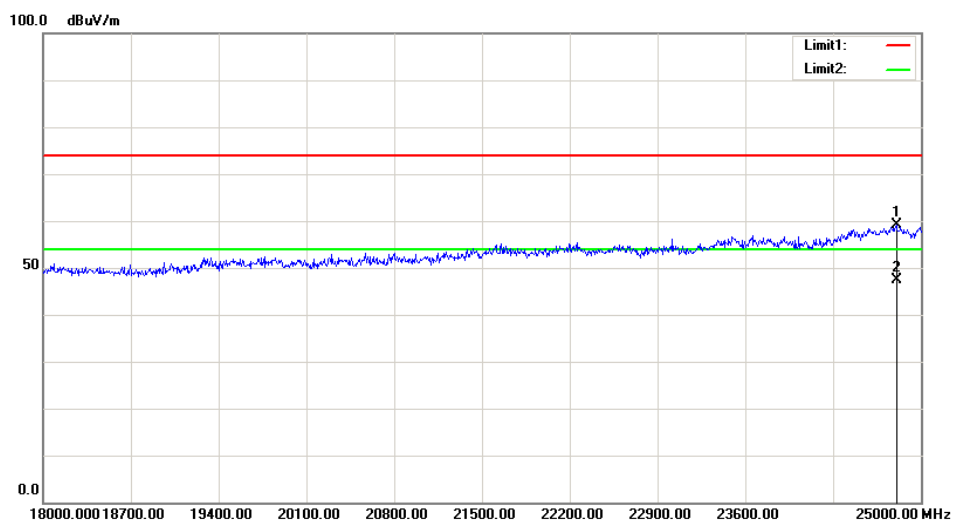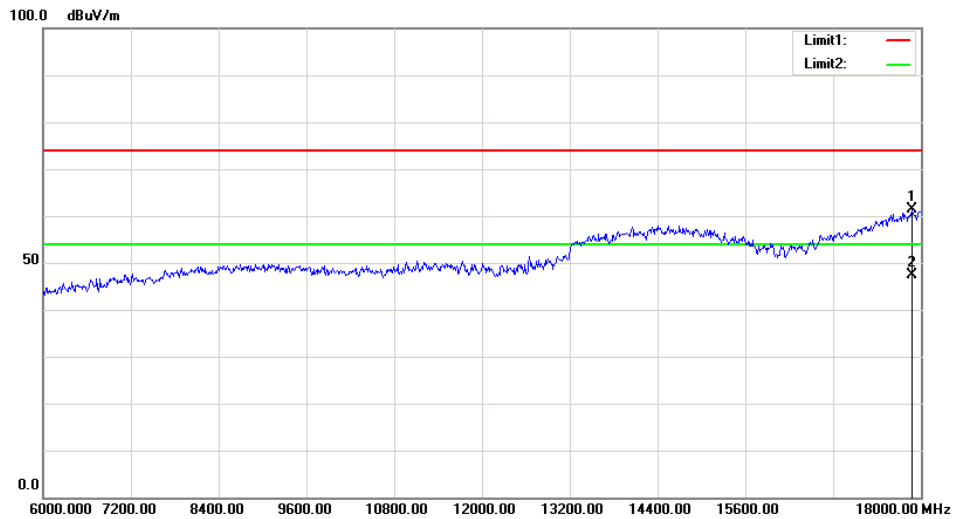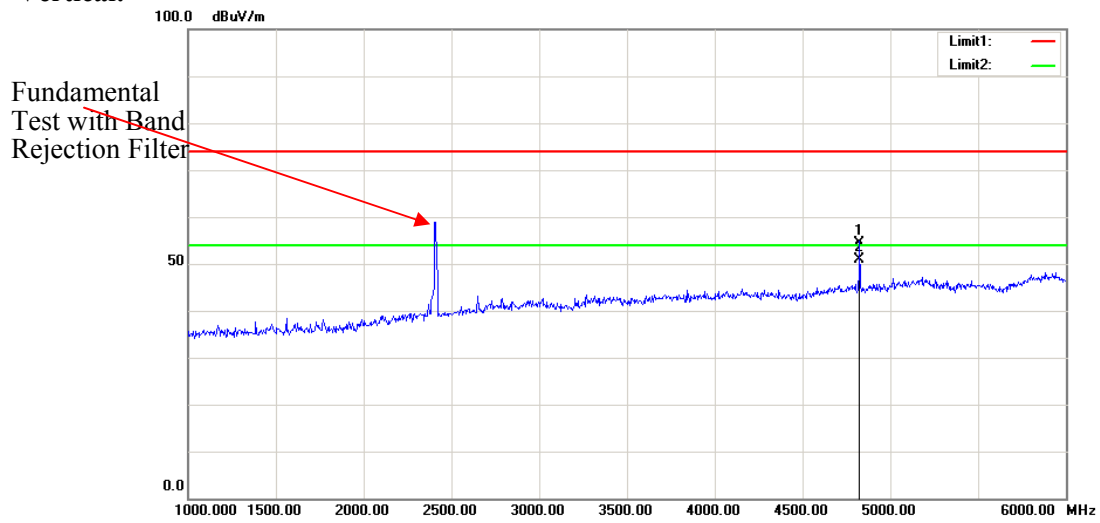

FCC §15.247(a) (2) – EMISSION BANDWIDTH TEST


Applicable Standard

According to FCC §15.247(a) (2)

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

- Set RBW = 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2017-12-08	2018-12-08
R&S	Spectrum Analyzer	FSP 38	100478	2018-12-08	2019-12-08
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	23.9~26.9 °C
Relative Humidity:	31~55 %
ATM Pressure:	99.5~102.3 kPa

* The testing was performed by Carrie He from 2018-11-21 to 2019-01-04.


Test Mode: Transmitting

Test Result: Compliant. Please refer to the following table and plots.

Test mode	Frequency (MHz)	6 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (MHz)
802.11b	2412	10.000	15.280	≥ 0.5
	2437	9.440	14.800	≥ 0.5
	2462	9.600	15.680	≥ 0.5
802.11g	2412	16.640	19.040	≥ 0.5
	2437	16.400	22.000	≥ 0.5
	2462	16.640	19.280	≥ 0.5
802.11n ht20	2412	17.840	18.880	≥ 0.5
	2437	17.040	18.080	≥ 0.5
	2462	17.840	20.160	≥ 0.5
802.11n ht40	2422	36.480	36.960	≥ 0.5
	2437	29.120	36.160	≥ 0.5
	2452	30.560	38.080	≥ 0.5
BLE	2402	0.689	1.028	≥ 0.5
	2440	0.697	1.028	≥ 0.5
	2480	0.689	1.032	≥ 0.5


6 dB Bandwidth:

802.11b Low Channel

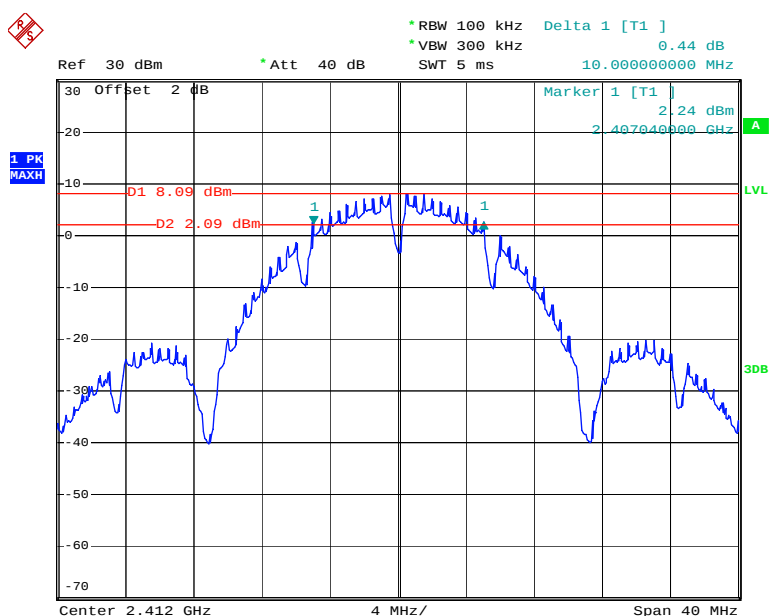


Date: 21.NOV.2018 16:22:21

802.11b Middle Channel

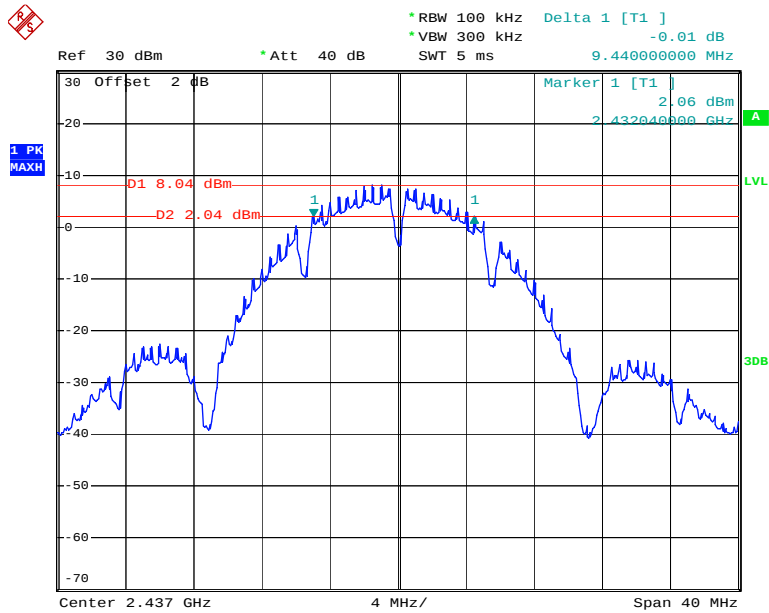


Date: 21.NOV.2018 16:25:13

802.11b High Channel

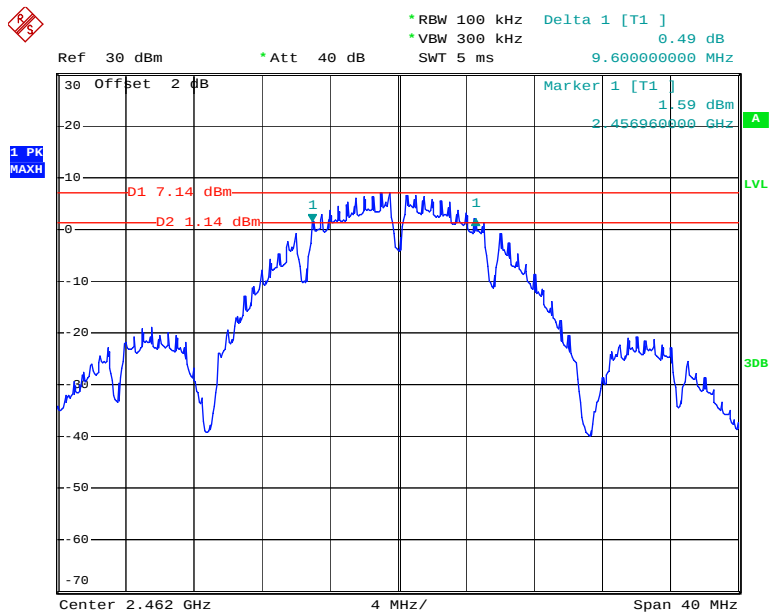


Date: 21.NOV.2018 17:31:53

802.11g Low Channel

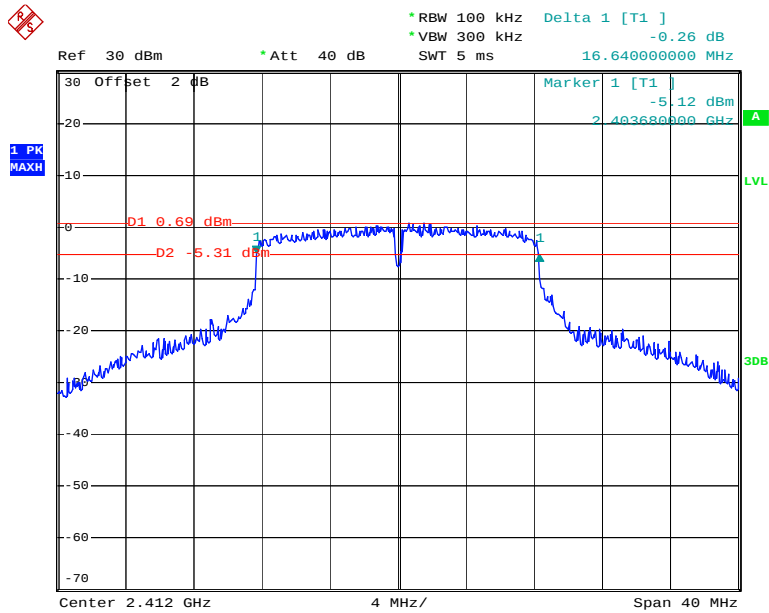


Date: 21.NOV.2018 16:36:50


802.11g Middle Channel

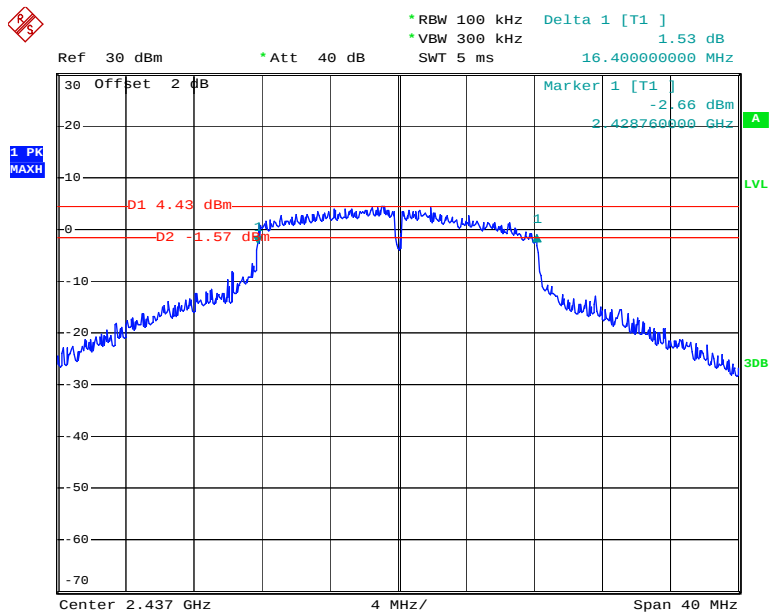

Date: 21.NOV.2018 16:40:35

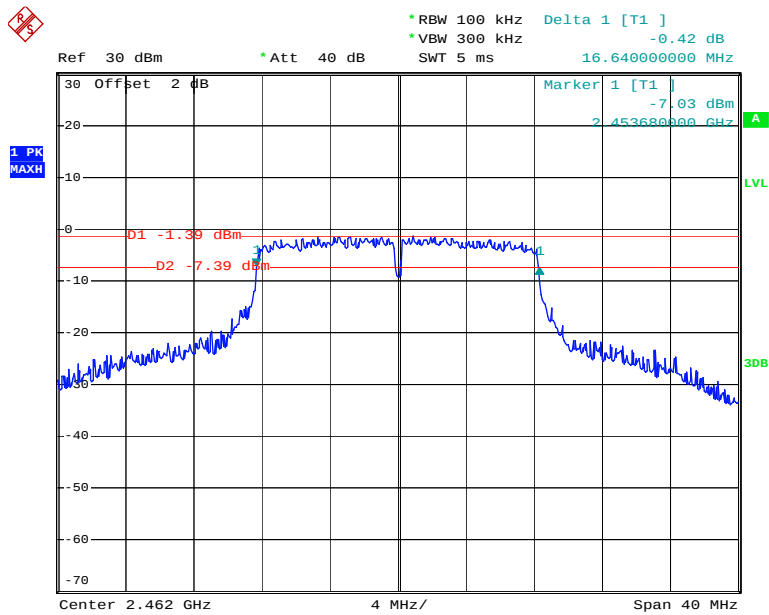
802.11g High Channel

Date: 21.NOV.2018 17:37:07

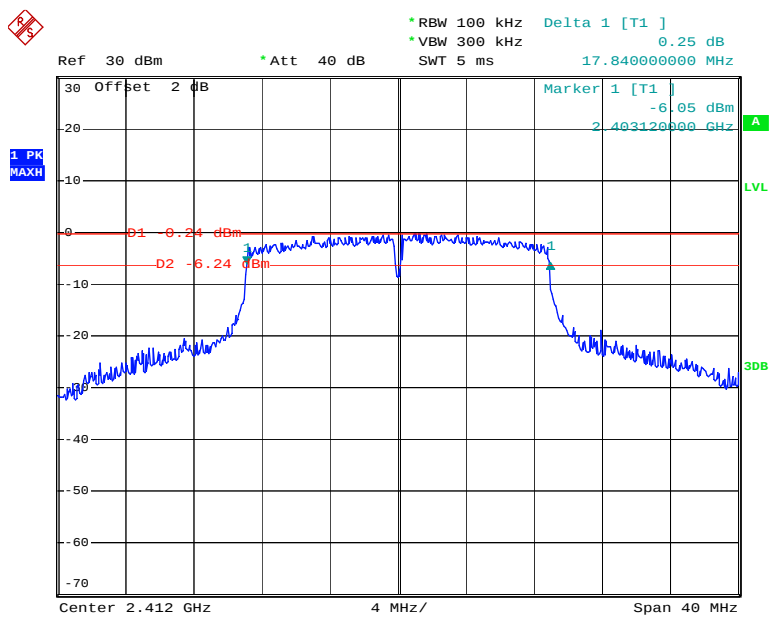802.11n ht20 Low Channel


Date: 21.NOV.2018 16:45:31

802.11n ht20 Middle Channel

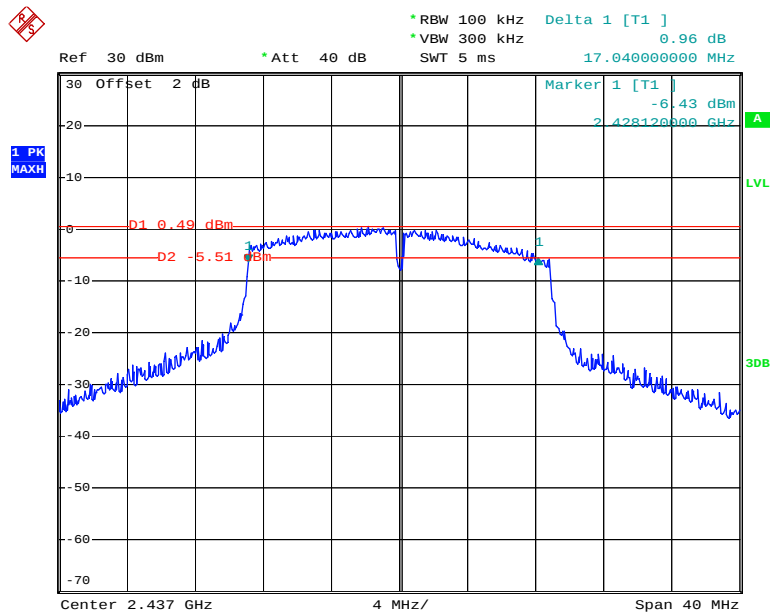


Date: 21.NOV.2018 16:47:49

802.11n ht20 High Channel

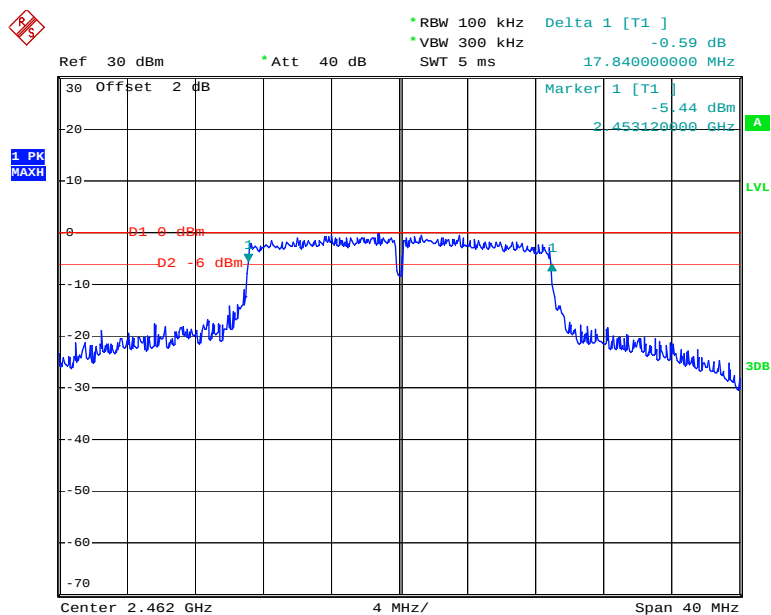


Date: 21.NOV.2018 16:49:54

802.11n ht40 Low Channel

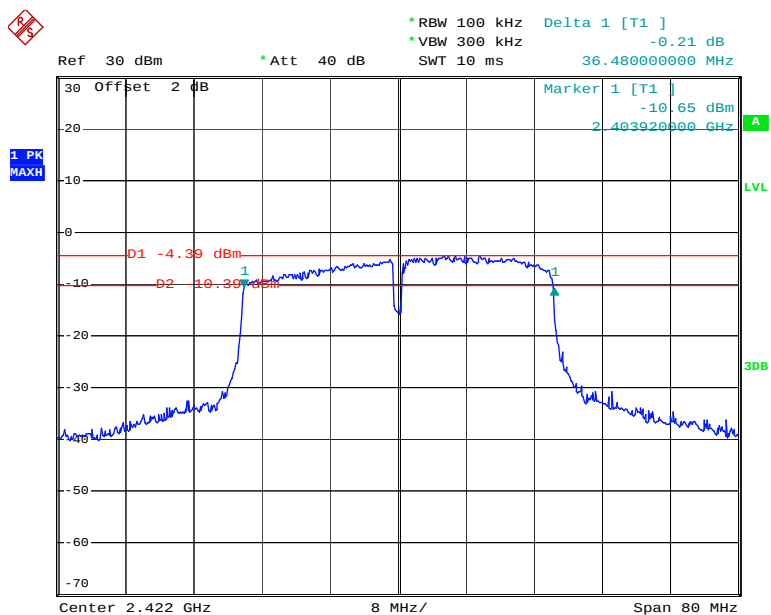


Date: 21.NOV.2018 17:45:39


802.11n ht40 Middle Channel

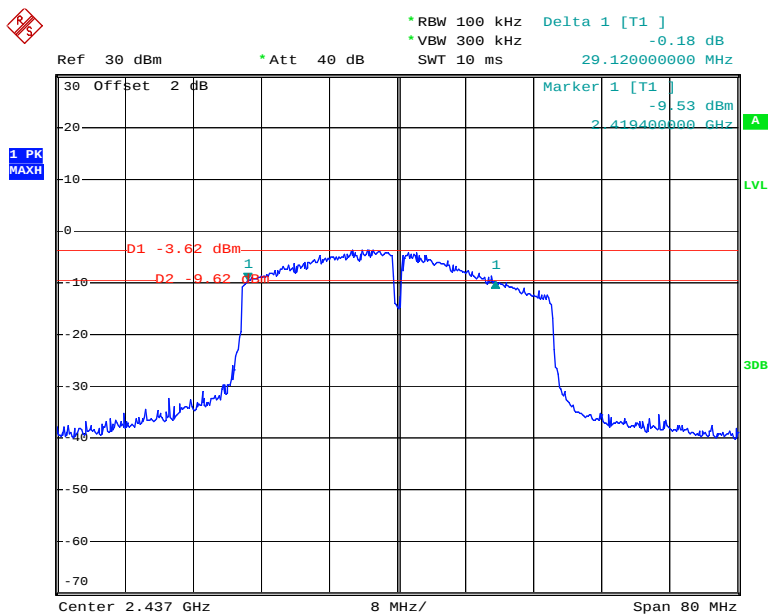

Date: 21.NOV.2018 17:02:29

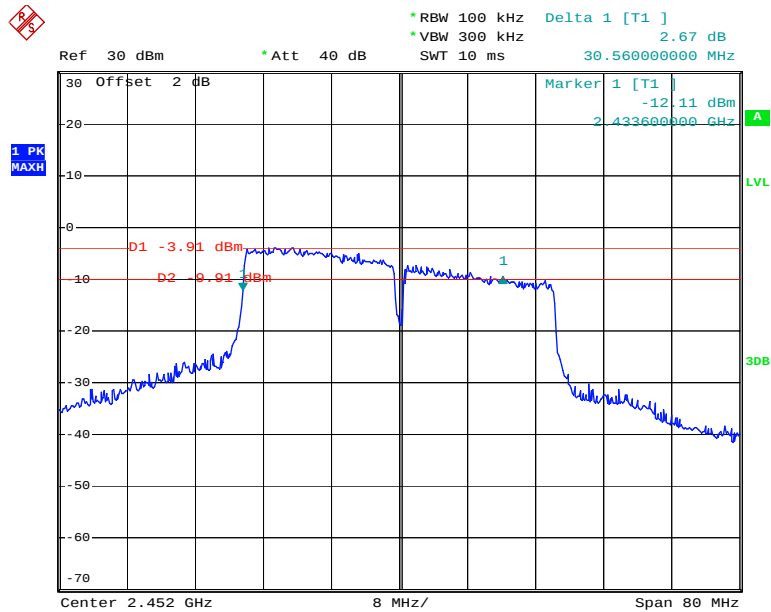
802.11n ht40 High Channel

Date: 21.NOV.2018 17:07:52

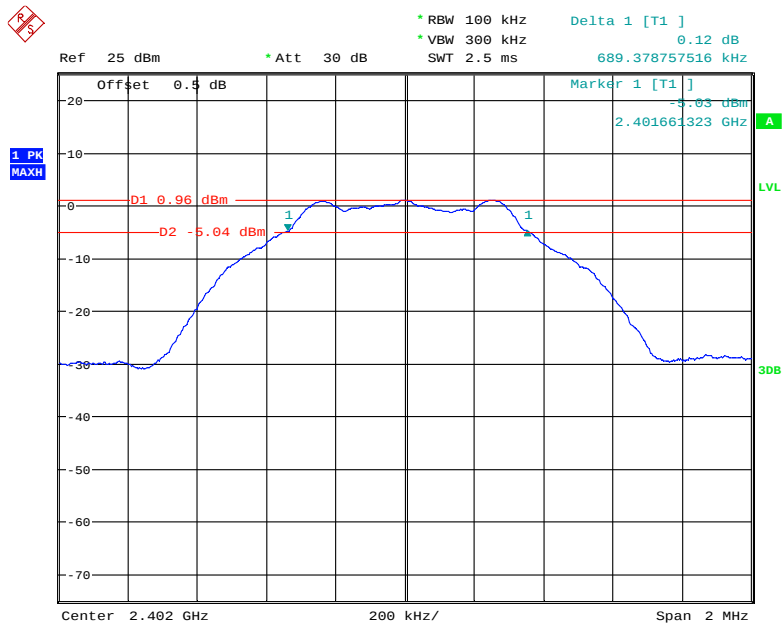BLE Low Channel


Date: 4.JAN.2019 21:01:02

BLE Middle Channel

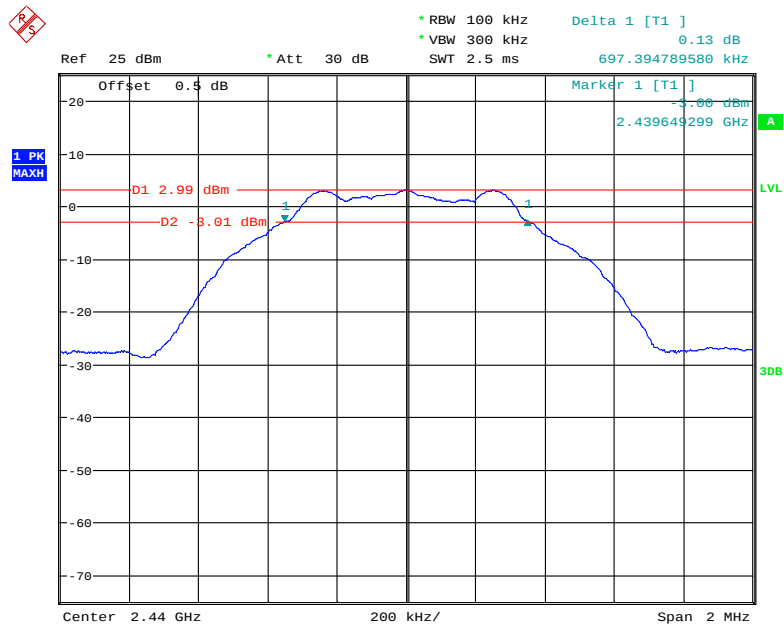

Date: 4.JAN.2019 21:03:26


BLE High Channel

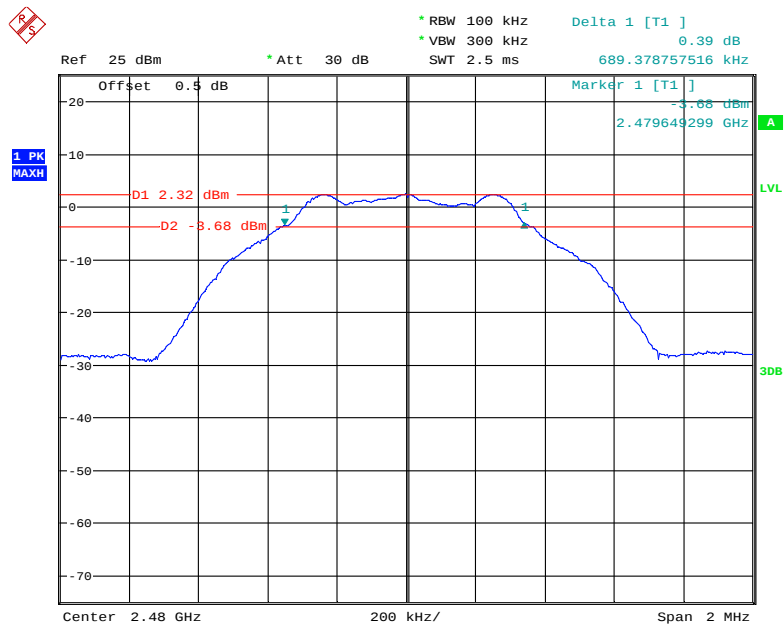

Date: 4.JAN.2019 21:01:56


99% Occupied Bandwidth:

802.11b Low Channel

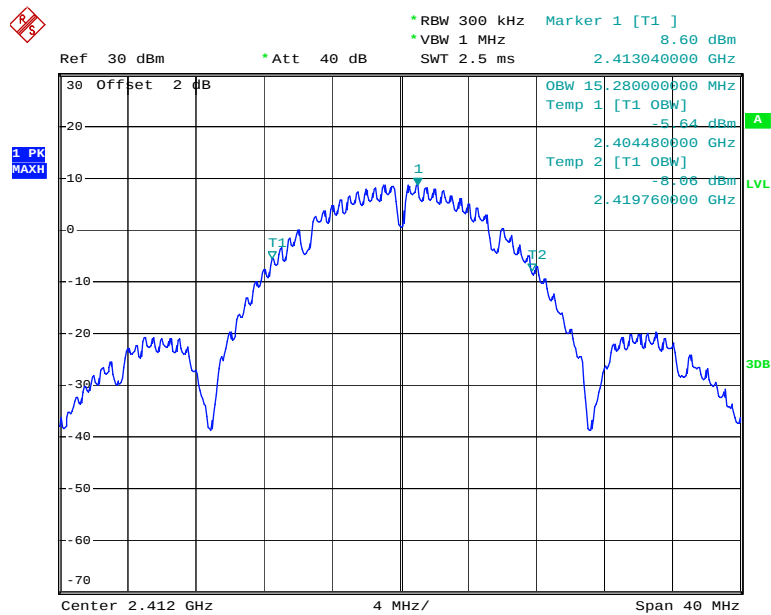


Date: 21.NOV.2018 16:22:34


802.11b Middle Channel

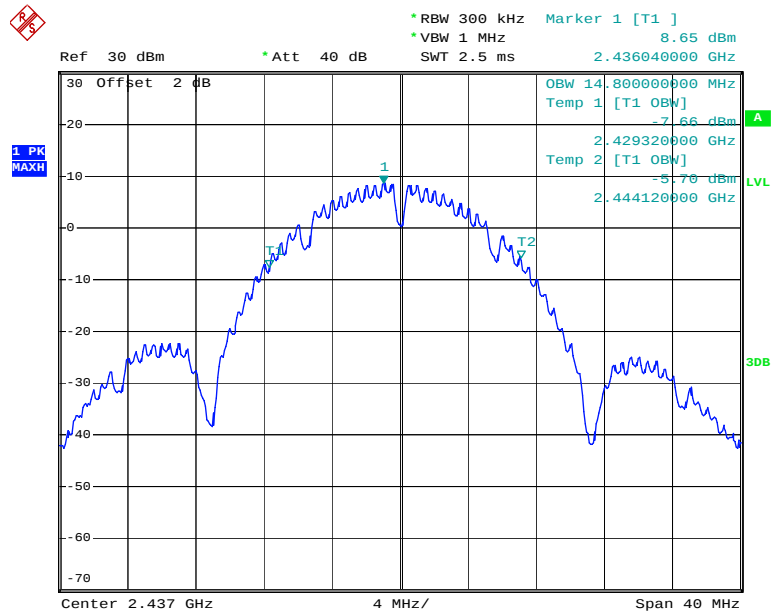


Date: 21.NOV.2018 16:25:24

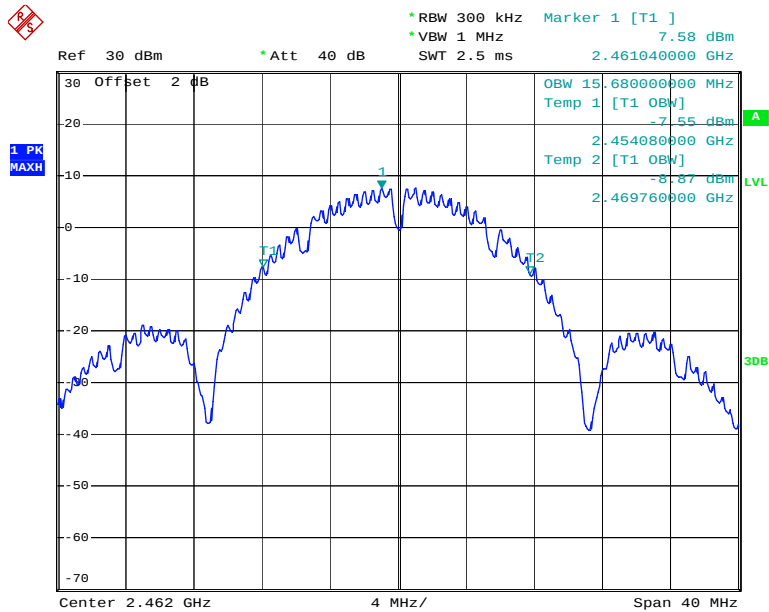802.11b High Channel


Date: 21.NOV.2018 17:32:06

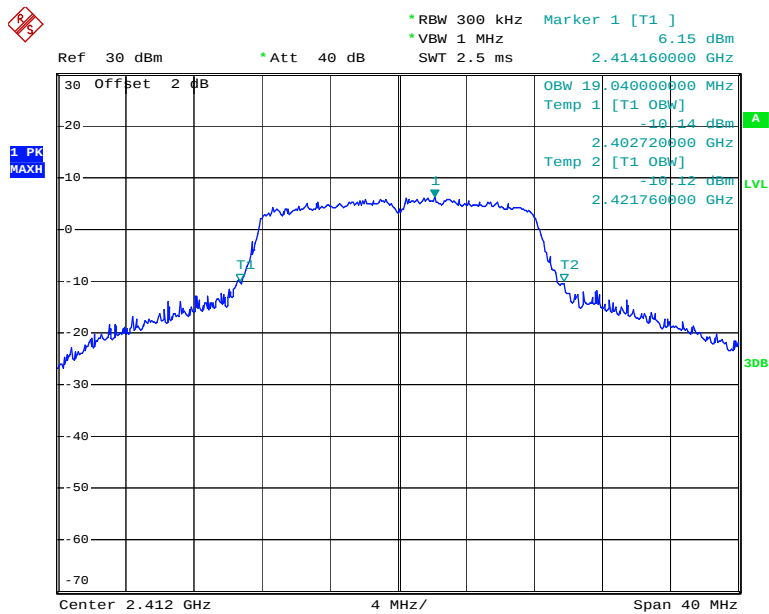802.11g Low Channel

Date: 21.NOV.2018 16:37:19

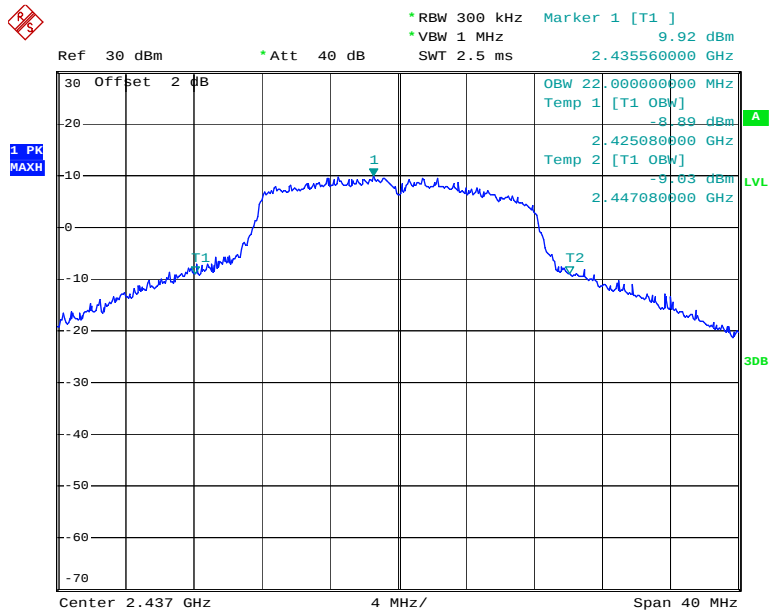
802.11g Middle Channel

Date: 21.NOV.2018 16:41:02

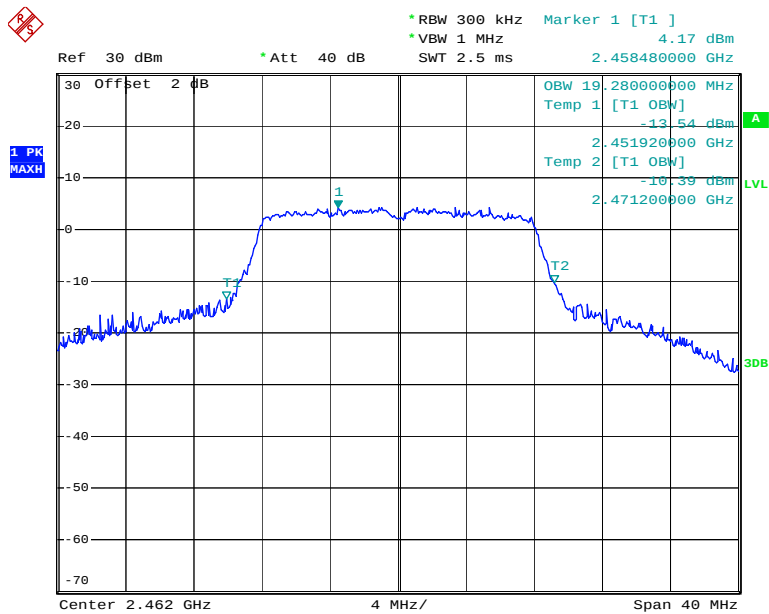802.11g High Channel


Date: 21.NOV.2018 17:36:18

802.11n ht20 Low Channel

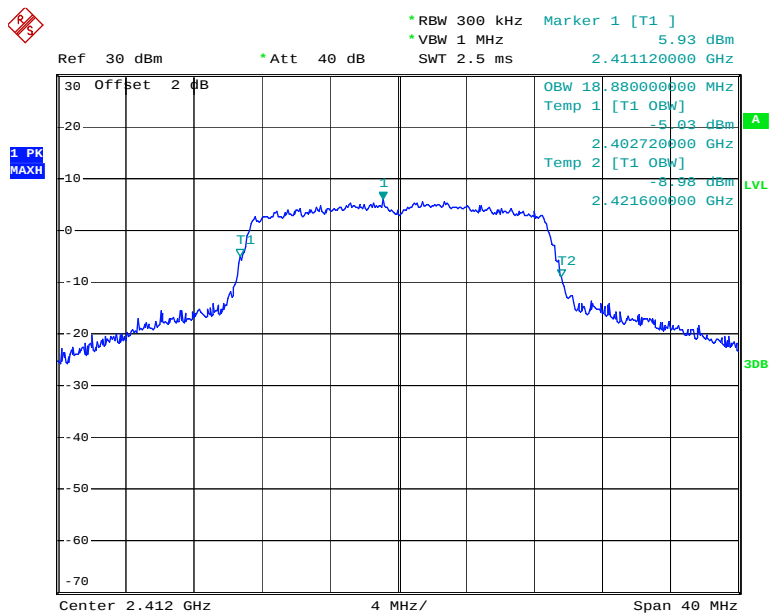


Date: 21.NOV.2018 16:46:04

802.11n ht20 Middle Channel

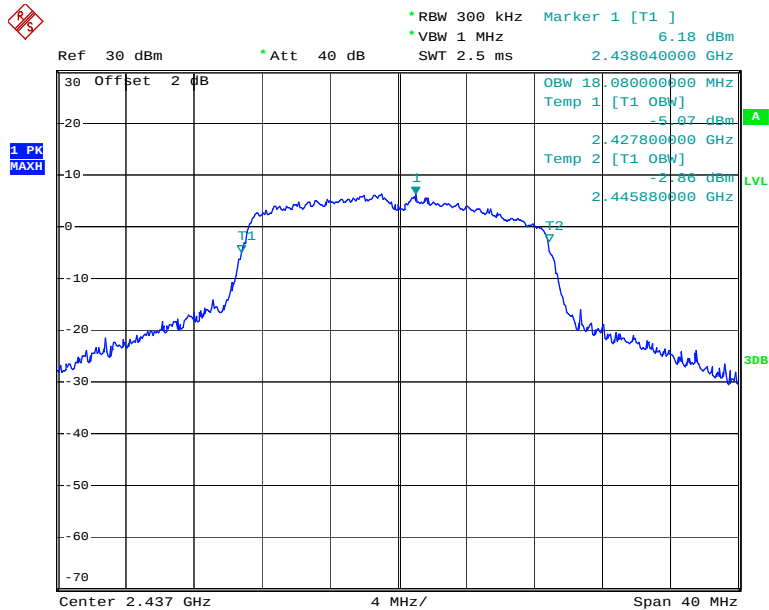


Date: 21.NOV.2018 16:48:25

802.11n ht20 High Channel

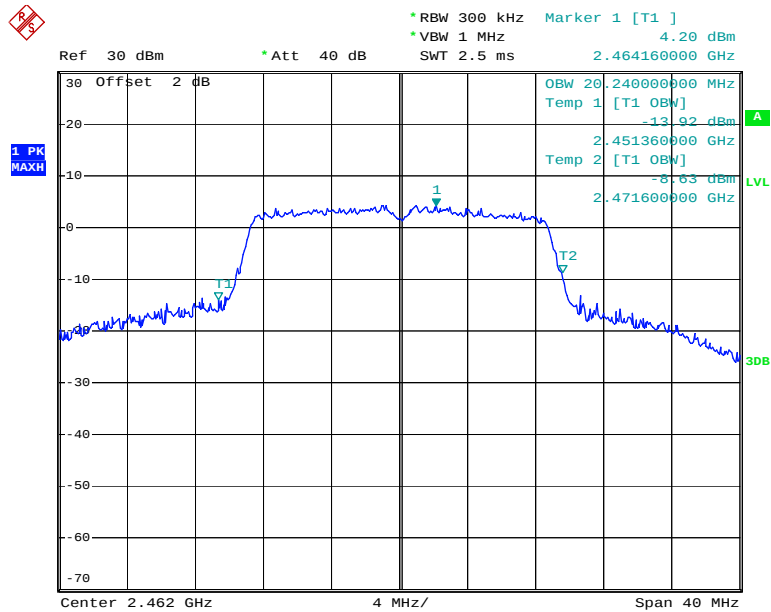


Date: 21.NOV.2018 16:53:28

802.11n ht40 Low Channel

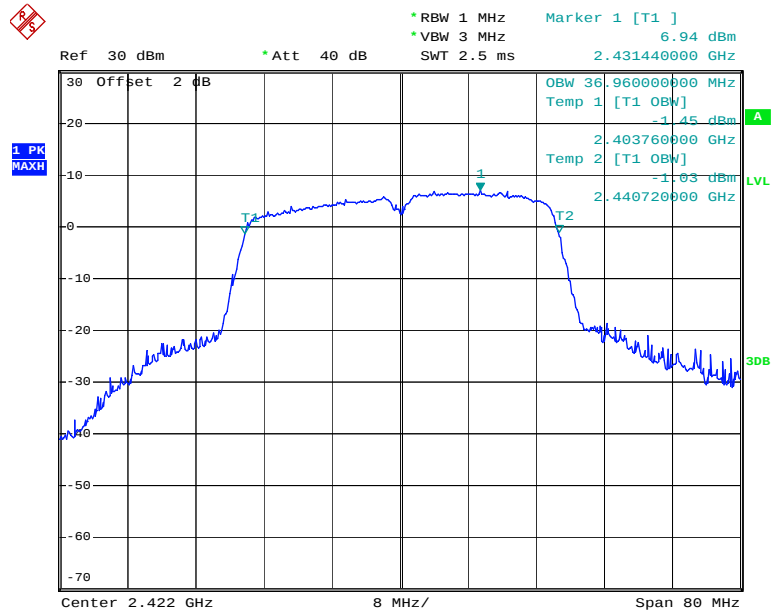


Date: 21.NOV.2018 17:46:02

802.11n ht40 Middle Channel

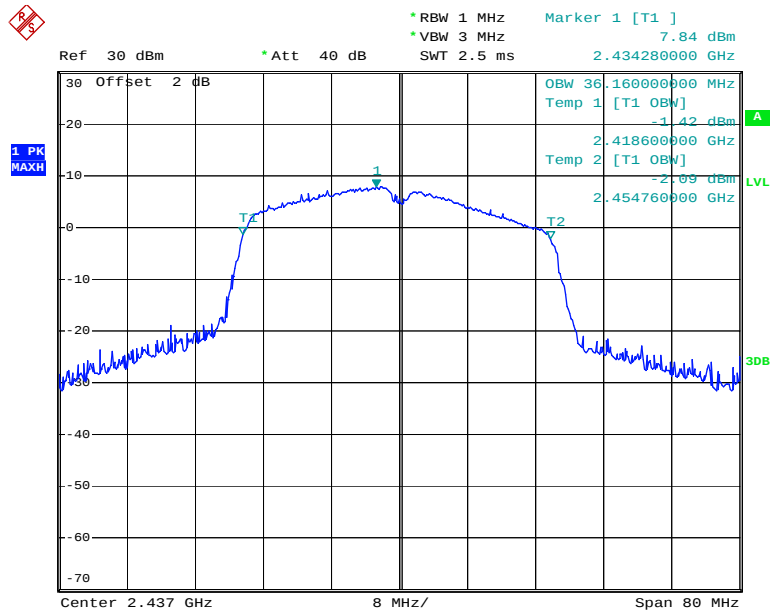


Date: 21.NOV.2018 17:02:56

802.11n ht40 High Channel

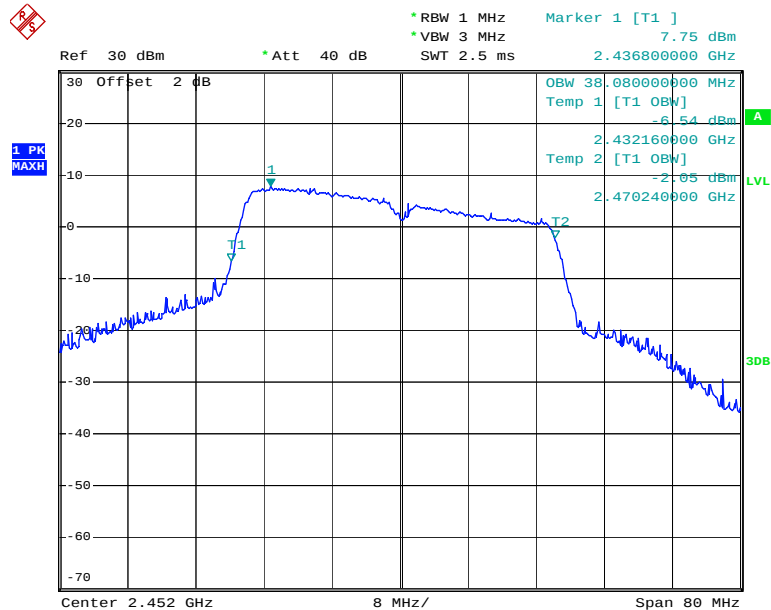


Date: 21.NOV.2018 17:05:56

BLE Low Channel

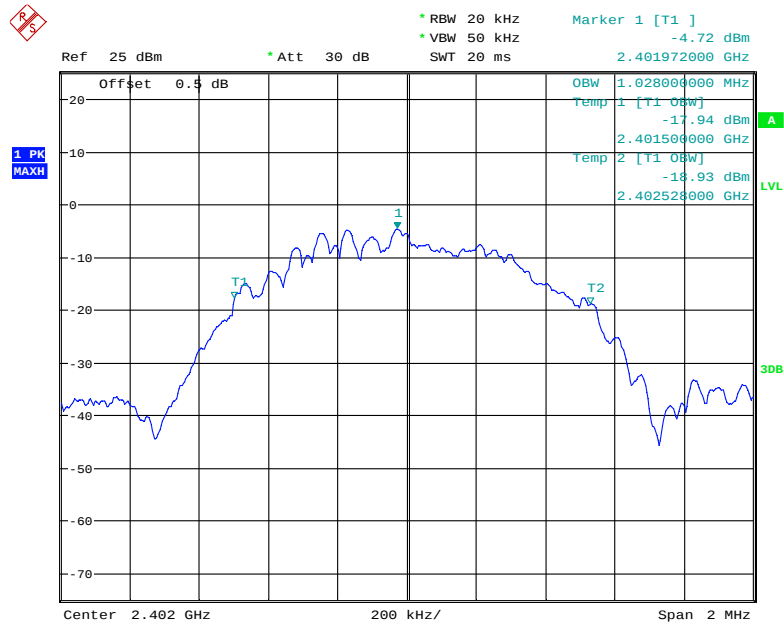


Date: 4.JAN.2019 20:59:51

BLE Middle Channel

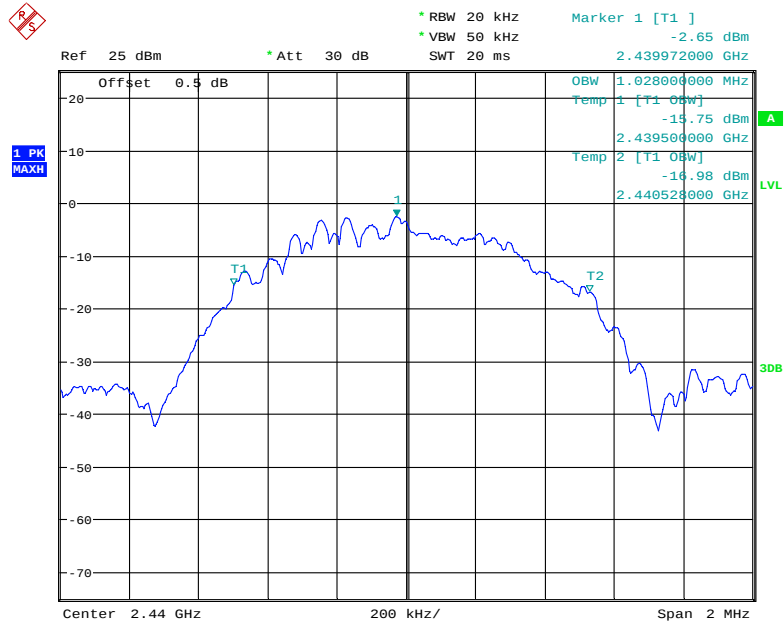

Date: 4.JAN.2019 21:03:37

BLE High Channel

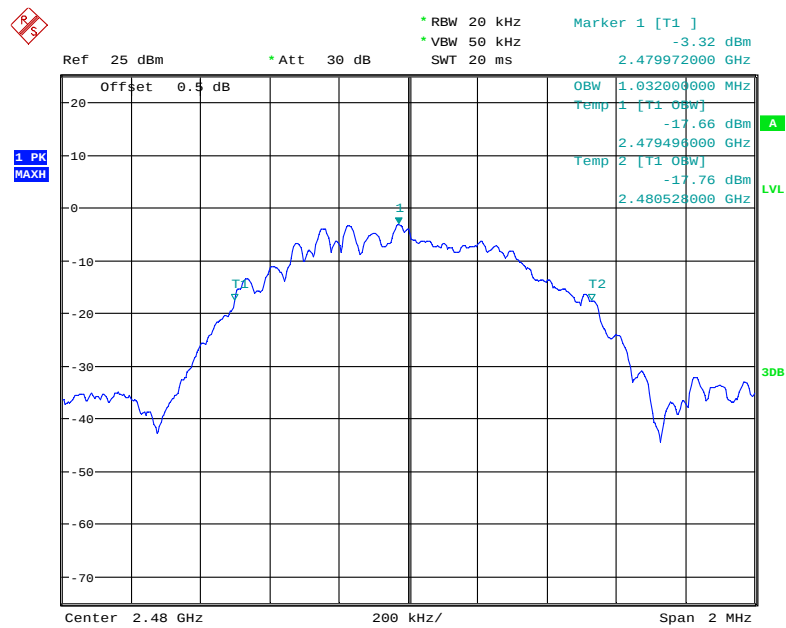

Date: 4.JAN.2019 21:02:08


FCC §15.247(b) (3) - MAXIMUM PEAK CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to test equipment.
3. Add a correction factor to the display.
4. Set the power Meter to test Peak output power, record the result as peak power.
5. Set the power meter to test average output power, record the result as average power.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	USB Wideband Power Sensor	U2022XA	MY5417006	2018-12-10	2019-12-10
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	26.9 °C
Relative Humidity:	55 %
ATM Pressure:	102.3 kPa

* The testing was performed by Carrie He on 2019-01-04.

Test Mode: Transmitting

Test Result: Compliant. Please refer to the following table.

Test mode	Channel	Frequency (MHz)	Max Peak Conducted Output Power (dBm)	Max Conducted Average Output Power (dBm)	Limit (dBm)
802.11b	Low	2412	17.62	15.83	30
	Middle	2437	18.37	16.68	30
	High	2462	16.11	14.44	30
802.11g	Low	2412	20.90	14.84	30
	Middle	2437	20.98	16.67	30
	High	2462	19.43	13.22	30
802.11n ht20	Low	2412	20.17	13.77	30
	Middle	2437	19.81	13.54	30
	High	2462	19.65	13.58	30
802.11n ht40	Low	2422	19.53	11.78	30
	Middle	2437	19.59	11.88	30
	High	2452	19.00	11.72	30
BLE	Low	2402	1.46	/	30
	Middle	2440	3.58	/	30
	High	2480	2.82	/	30

Note: The data above was tested in conducted mode and the antenna gain is 3.0dBi

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE**Applicable Standard**

According to FCC§15.247(d):In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2017-12-08	2018-12-08
R&S	Spectrum Analyzer	FSP 38	100478	2018-12-08	2019-12-08
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


Test Data**Environmental Conditions**

Temperature:	23.9~26.9 °C
Relative Humidity:	31~55 %
ATM Pressure:	99.5~102.3 kPa


** The testing was performed by Carrie He from 2018-11-21 to 2019-01-04.*

Test mode: Transmitting


Test Result: Compliant. Please refer to following plots.

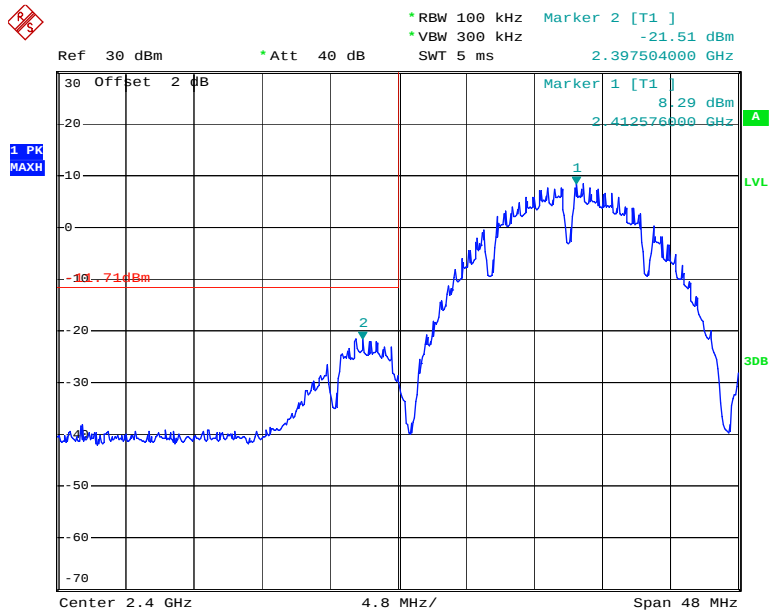802.11b: Band Edge, Left Side


Date: 21.NOV.2018 16:24:05

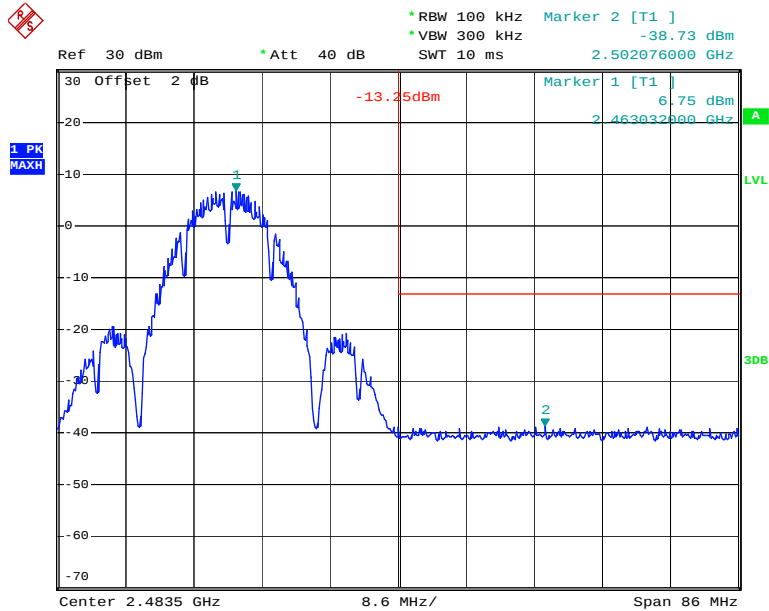802.11b: Band Edge, Right Side

Date: 21.NOV.2018 17:33:28

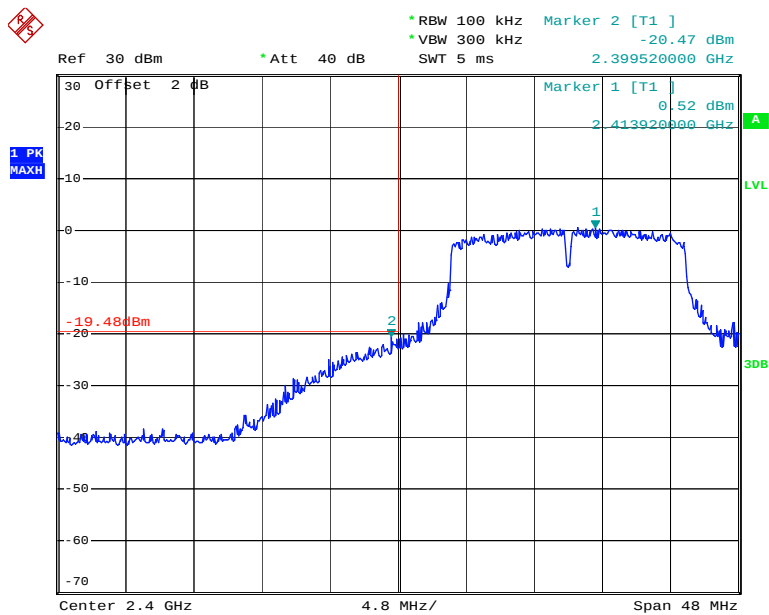
802.11g: Band Edge, Left Side

Date: 21.NOV.2018 16:35:51

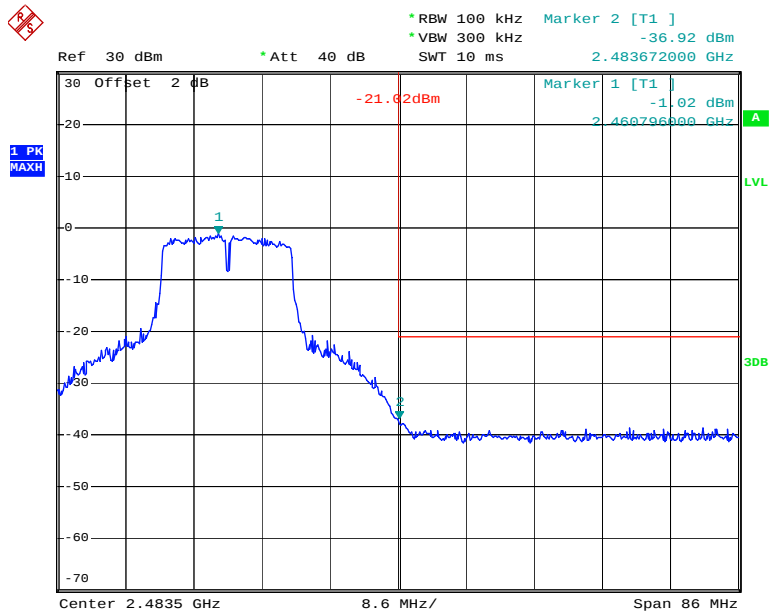802.11g: Band Edge, Right Side


Date: 21.NOV.2018 17:38:19

802.11n ht20 Band Edge, Left Side

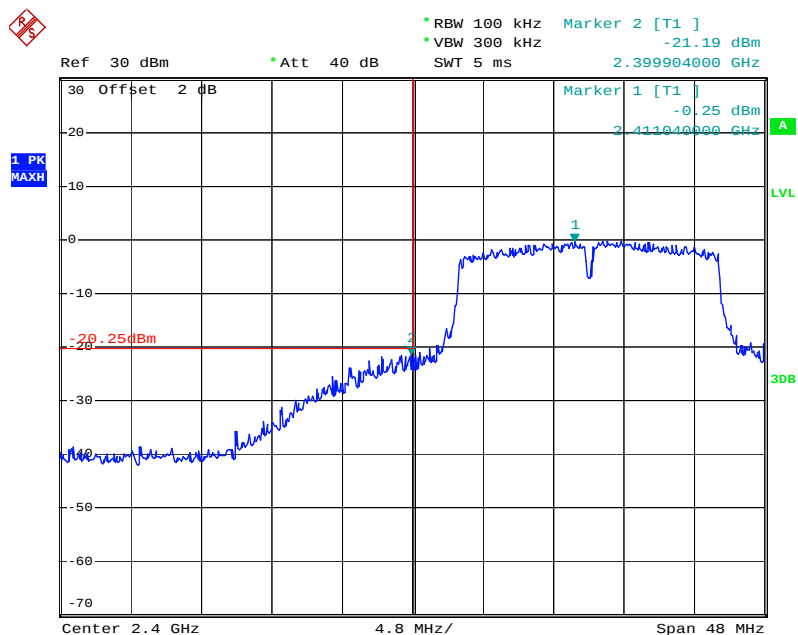


Date: 21.NOV.2018 16:47:02

802.11n ht20 Band Edge, Right Side

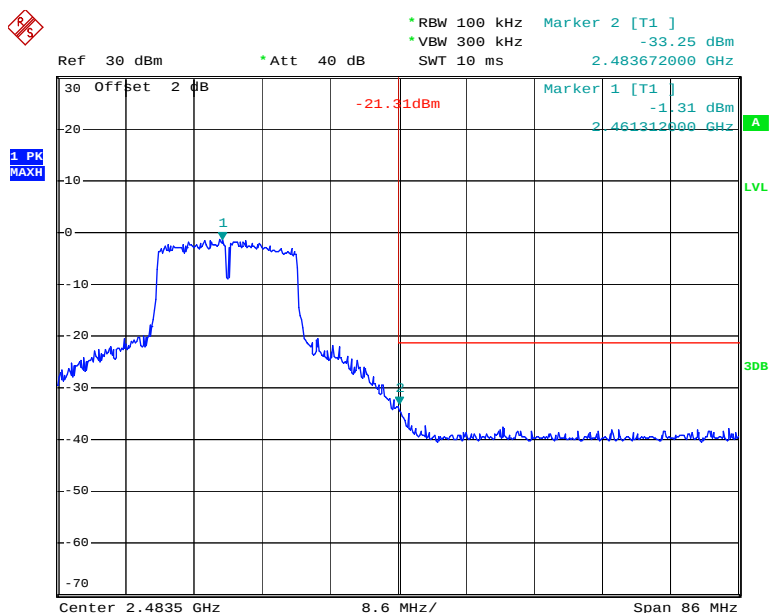


Date: 21.NOV.2018 16:52:55

802.11n ht40 Band Edge, Left Side

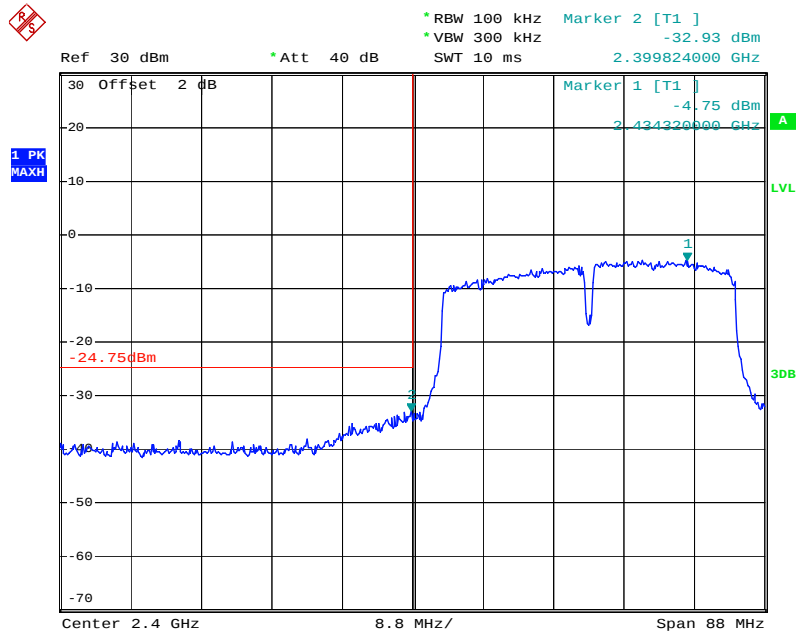


Date: 21.NOV.2018 17:49:11

802.11n ht40 Band Edge, Right Side

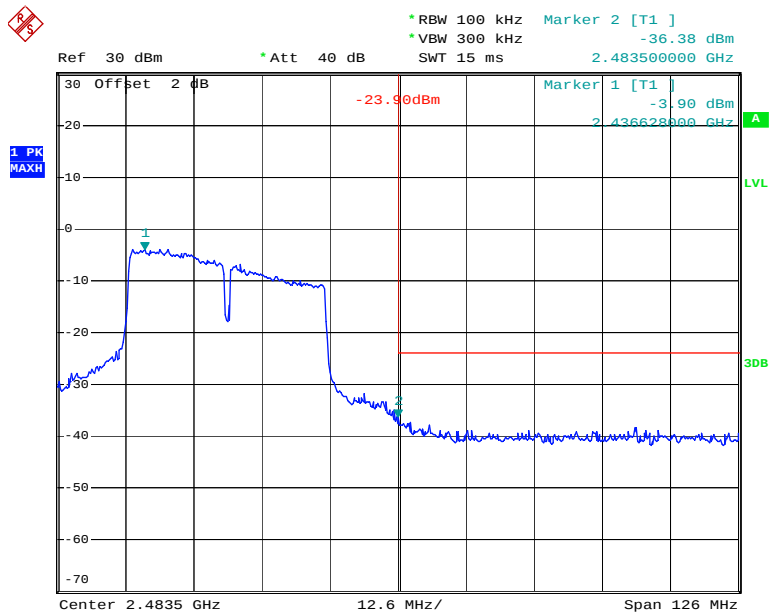


Date: 21.NOV.2018 17:07:11

BLE: Band Edge, Left Side

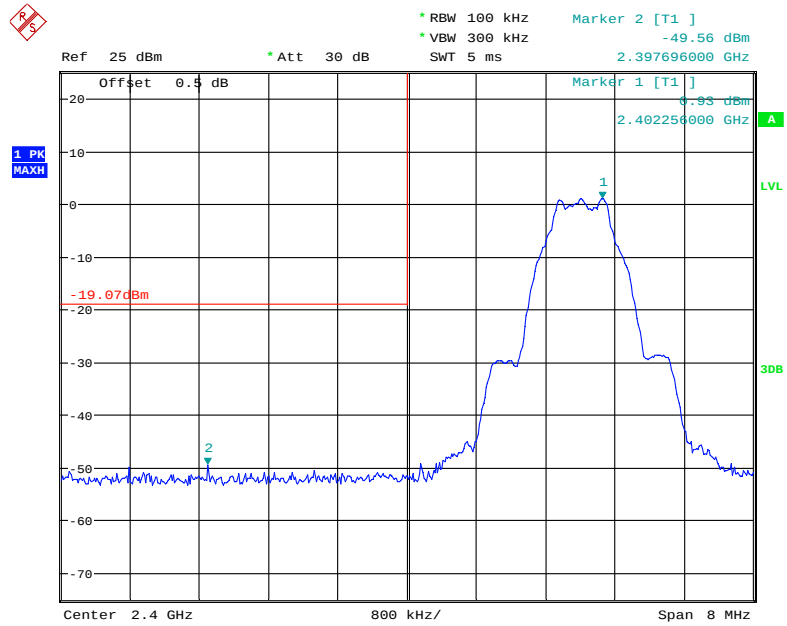

Date: 4.JAN.2019 21:00:31

BLE Band Edge, Right Side

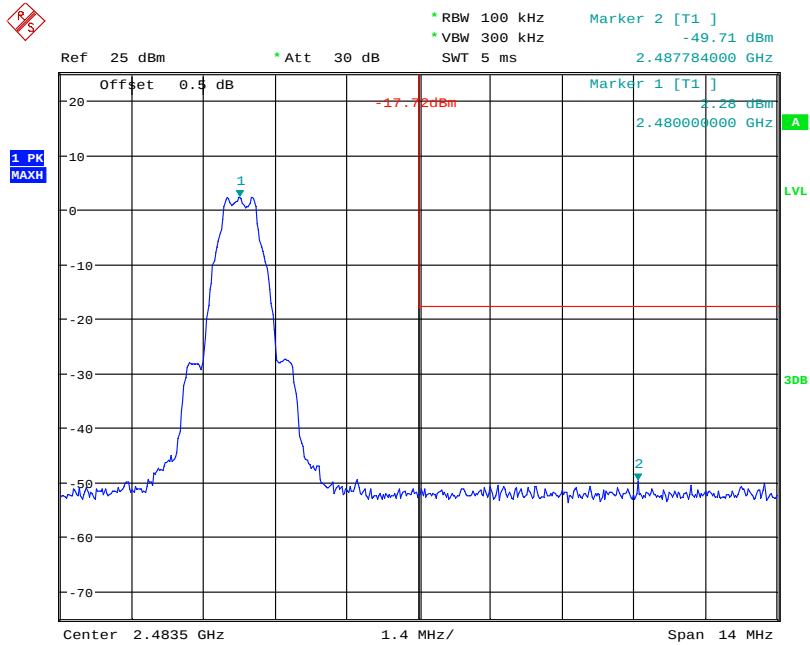

Date: 4.JAN.2019 21:02:52

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set the RBW = 3 kHz, VBW = 10 kHz, Set the span to 1.5 times the DTS bandwidth.
4. Use the peak marker function to determine the maximum amplitude level.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2017-12-08	2018-12-08
R&S	Spectrum Analyzer	FSP 38	100478	2018-12-08	2019-12-08
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	25.1~25.4 °C
Relative Humidity:	40 %
ATM Pressure:	100.5 ~ 100.6 kPa

* The testing was performed by Carrie He from 2018-11-21 to 2019-01-04.


Test Result: Compliance

Test Mode: Transmitting

Test Result: Compliant. Please refer to the following table and plots


Test mode	Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)
802.11b	Low	2412	-5.48	≤ 8
	Middle	2437	-5.43	≤ 8
	High	2462	-6.68	≤ 8
802.11g	Low	2412	-10.47	≤ 8
	Middle	2437	-7.66	≤ 8
	High	2462	-12.62	≤ 8
802.11n ht20	Low	2412	-11.73	≤ 8
	Middle	2437	-11.37	≤ 8
	High	2462	-12.24	≤ 8
802.11n ht40	Low	2422	-15.41	≤ 8
	Middle	2437	-21.43	≤ 8
	High	2452	-18.01	≤ 8
BLE	Low	2402	-13.82	≤ 8
	Middle	2440	-11.74	≤ 8
	High	2480	-12.39	≤ 8

Power Spectral Density, 802.11b Low Channel

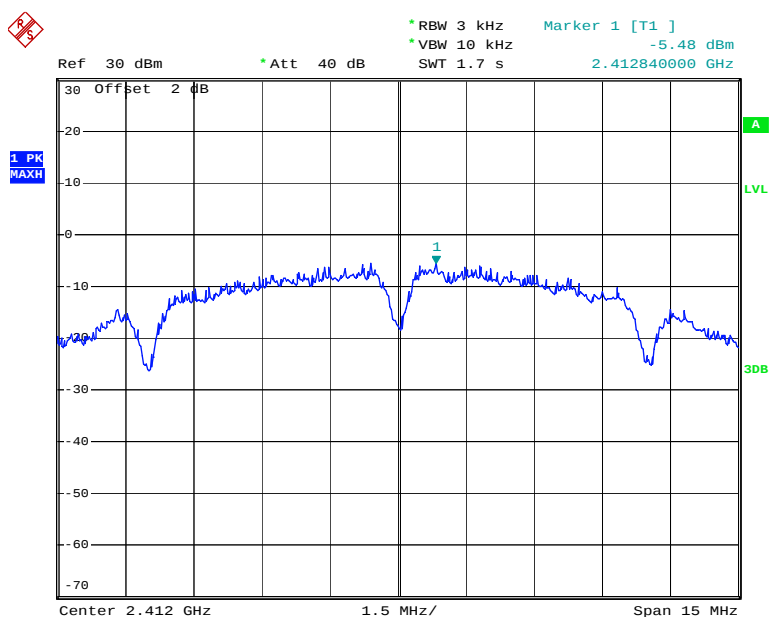


Date: 21.NOV.2018 16:23:45

Power Spectral Density, 802.11b Middle Channel

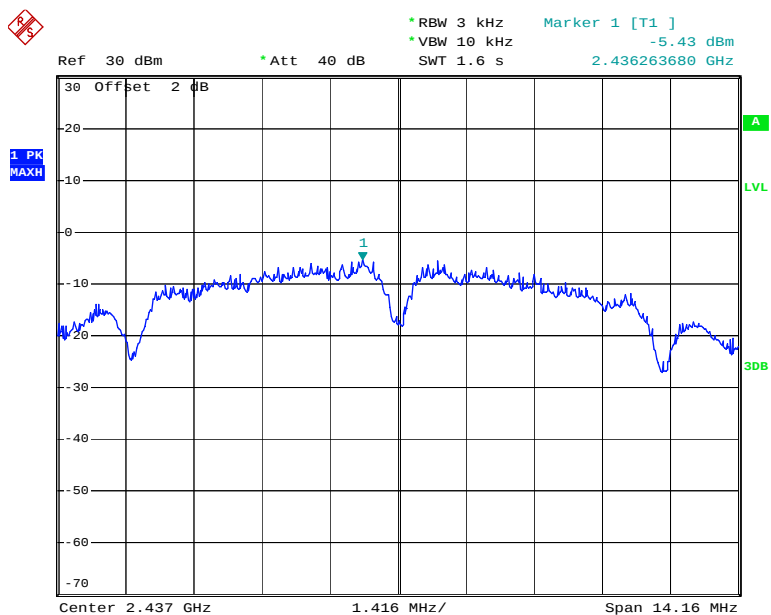


Date: 21.NOV.2018 16:26:32

Power Spectral Density, 802.11b High Channel

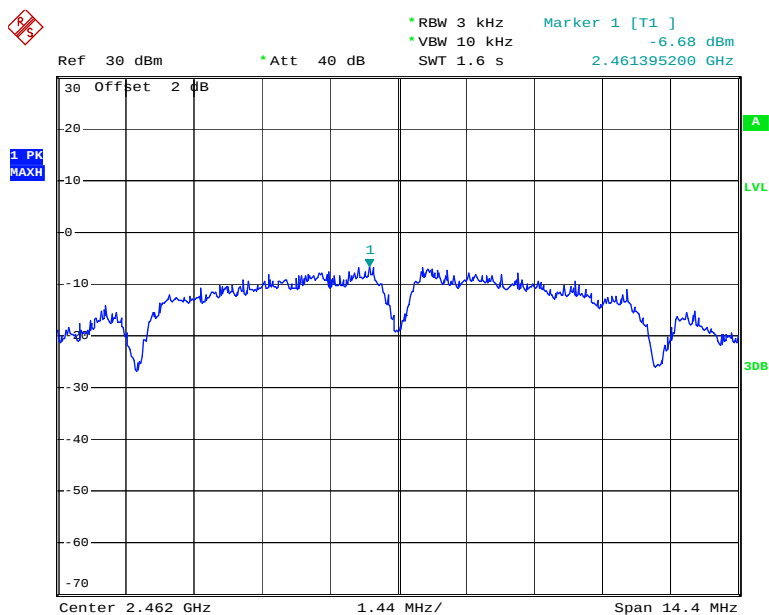


Date: 21.NOV.2018 17:33:08

Power Spectral Density, 802.11g Low Channel

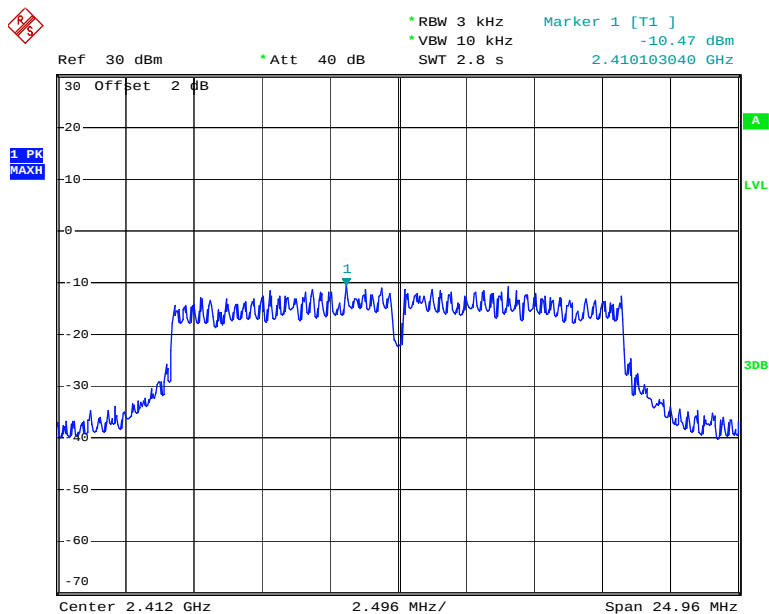


Date: 21.NOV.2018 16:39:03

Power Spectral Density, 802.11g Middle Channel

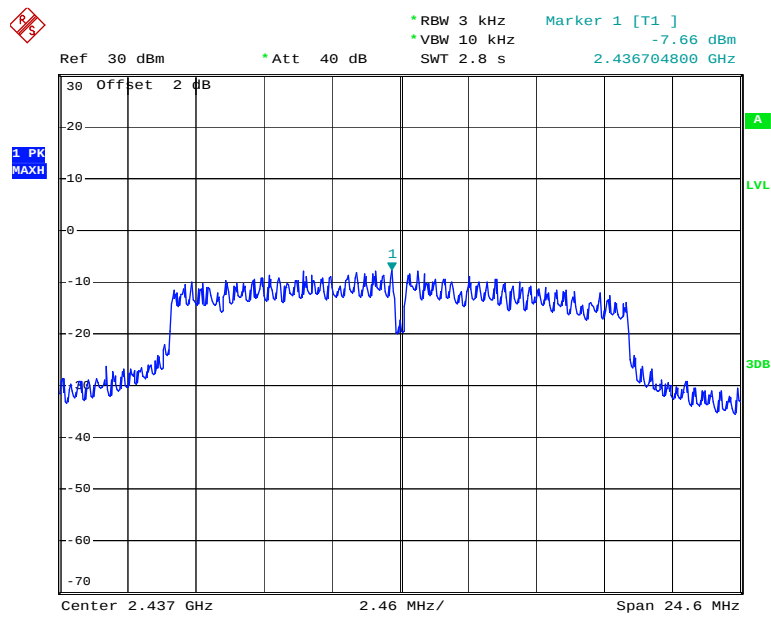


Date: 21.NOV.2018 16:42:18

Power Spectral Density, 802.11g High Channel

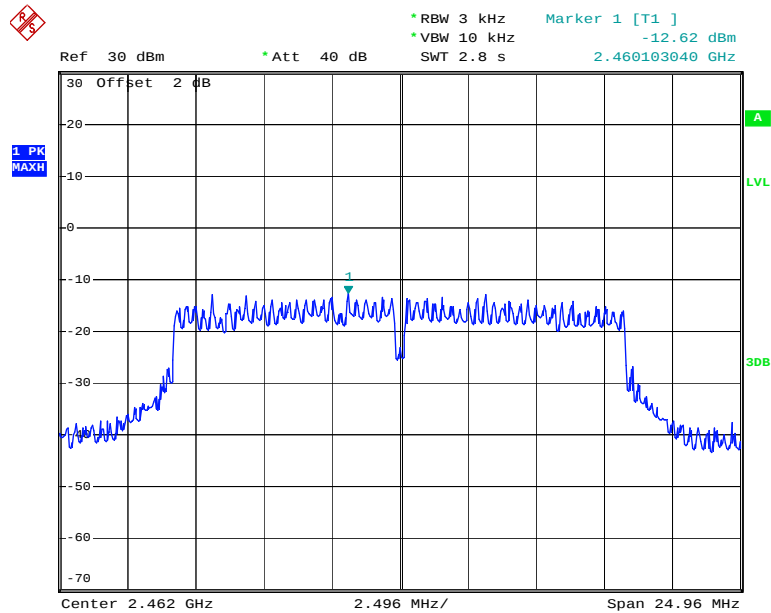


Date: 21.NOV.2018 17:37:56

Power Spectral Density, 802.11n ht20 Low Channel

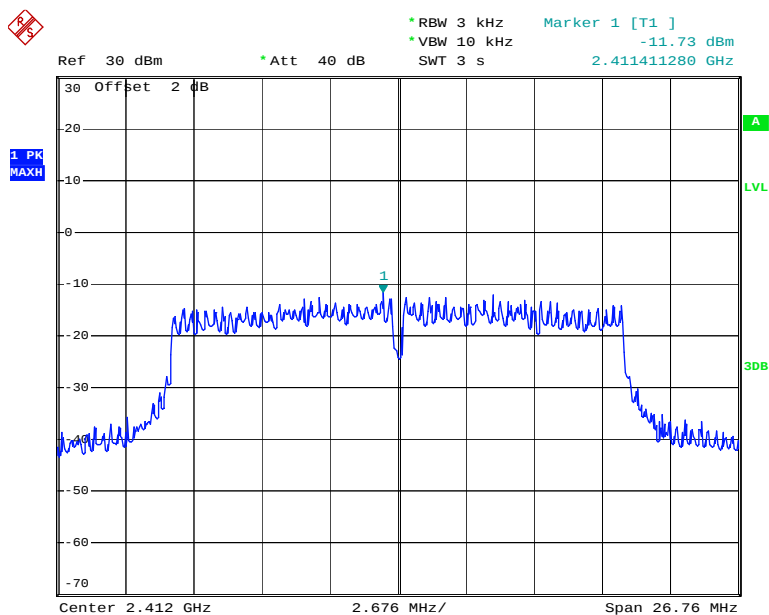


Date: 21.NOV.2018 16:46:36

Power Spectral Density, 802.11n ht20 Middle Channel

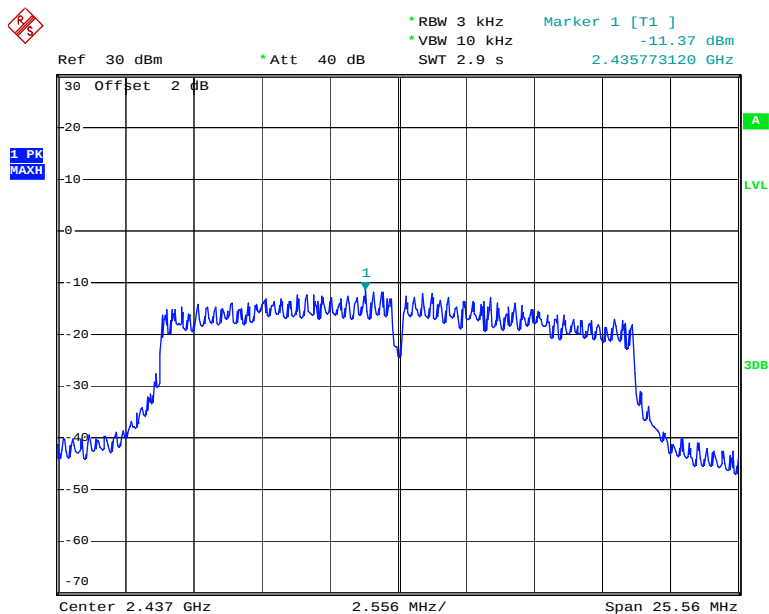


Date: 21.NOV.2018 16:49:05

Power Spectral Density, 802.11n ht20 High Channel

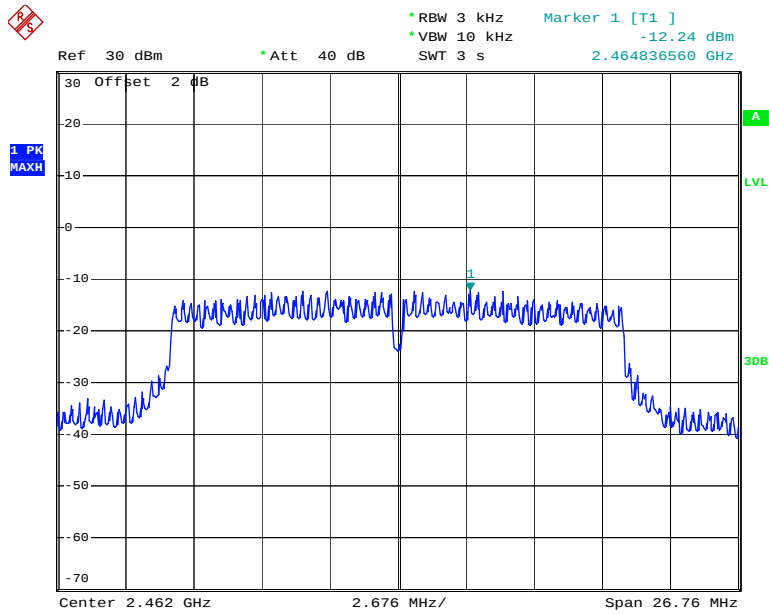


Date: 21.NOV.2018 16:50:59

Power Spectral Density, 802.11n ht40 Low Channel

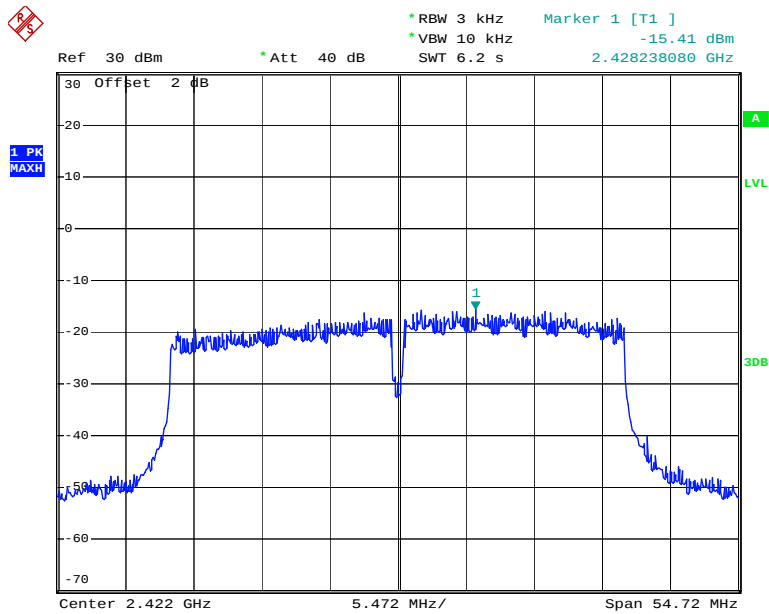


Date: 21.NOV.2018 17:48:45

Power Spectral Density, 802.11n ht40 Middle Channel

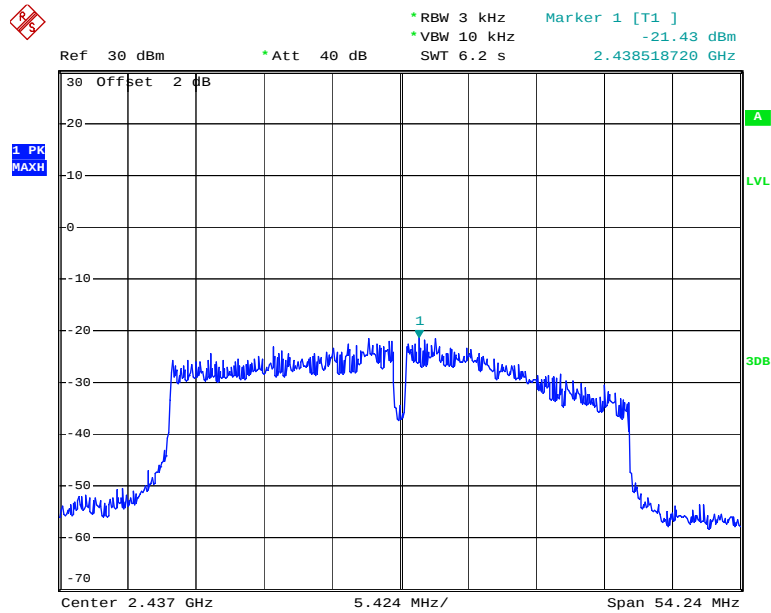


Date: 21.NOV.2018 18:26:18

Power Spectral Density, 802.11n ht40 High Channel

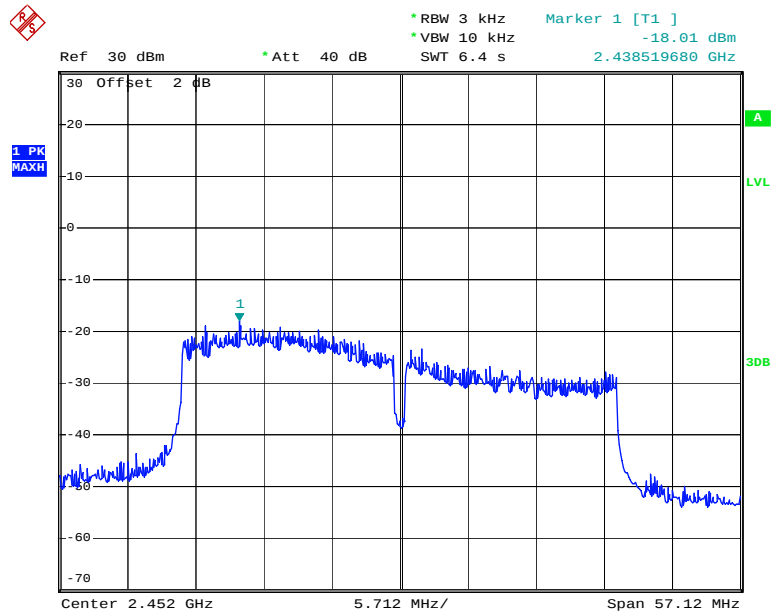


Date: 21.NOV.2018 18:24:10

Power Spectral Density, BLE Low Channel

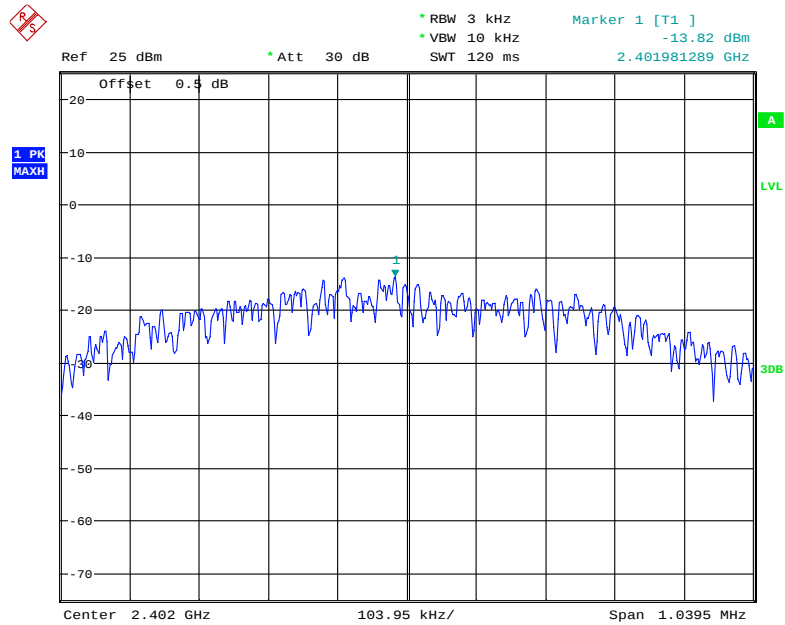


Date: 4.JAN.2019 21:00:01

Power Spectral Density, BLE Middle Channel

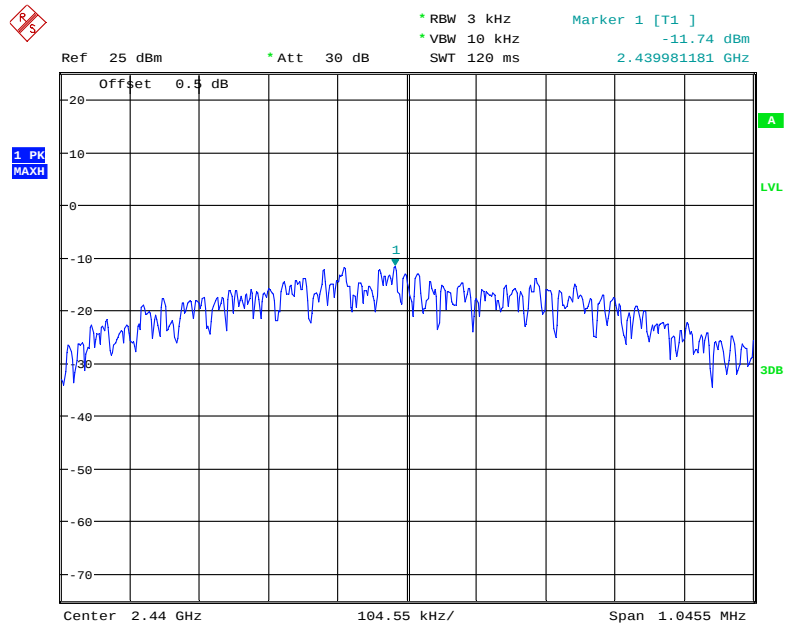

Date: 4.JAN.2019 21:03:47

Power Spectral Density, BLE High Channel

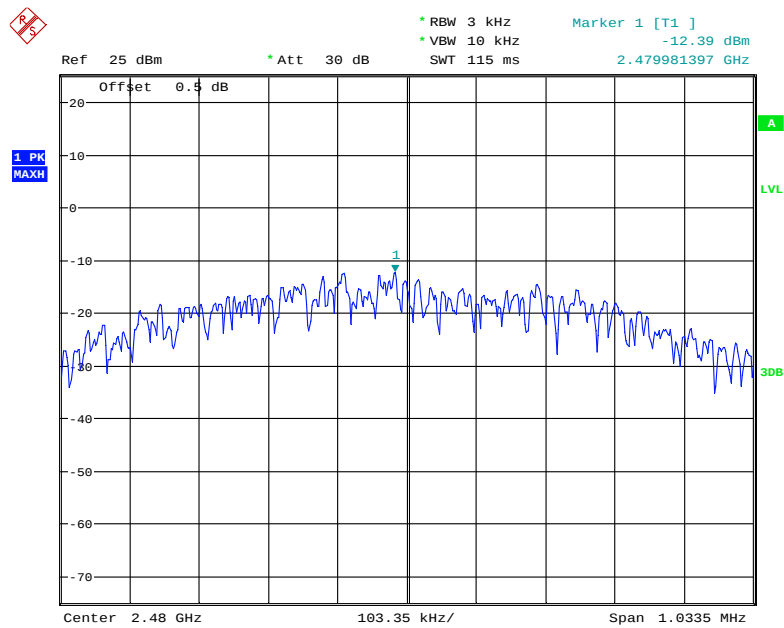

Date: 4.JAN.2019 21:02:19

***** END OF REPORT *****