

FCC RADIO TEST REPORT

FCC ID: 2AR92-ARIA

Product: Bluetooth earphone

Trade Name: xFyro

Model Name: Aria

Serial Model: N/A

Report No.: UNIA19010414FR-01

Prepared for

Goredpin LLC

1647 Veteran Ave, unit E, Los Angeles, CA 90024

Prepared by

Shenzhen United Testing Technology Co., Ltd.

2F, Annex Bldg, Jiahuangyuan Tech Park, #365 Baotian 1 Rd, Tiegang
Community, Xixiang Str, Bao'an District, Shenzhen, China

TEST RESULT CERTIFICATION

Applicant's name: Goredpin LLC

Address: 1647 Veteran Ave, unit E, Los Angeles, CA 90024

Manufacture's Name: Goredpin LLC

Address: 1647 Veteran Ave, unit E, Los Angeles, CA 90024

Product description

Product name: Bluetooth earphone

Trade Mark: xFyro

Model and/or type reference ..: Aria

Standards: FCC Rules and Regulations Part 15 Subpart C Section 15.247

ANSI C63.10: 2013

KDB558074 D01 V05: Guidance for Performing Compliance

This device described above has been tested by Shenzhen United Testing Technology Co., Ltd., and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of UNI, this document may be altered or revised by Shenzhen United Testing Technology Co., Ltd., personnel only, and shall be noted in the revision of the document.

Date of Test: Jan. 03, 2019

Date (s) of performance of tests: Jan. 03, 2019 -- Jan. 23, 2019

Date of Issue: Jan. 23, 2019


Test Result: Pass

Prepared by:

Kann Yang

Kann Yang/Editor

Reviewer:

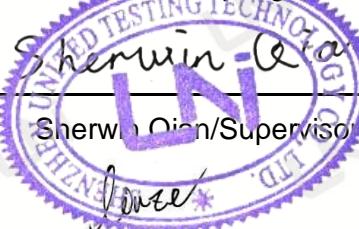

Sherwin Qian/Supervisor

Approved & Authorized Signer:

Liuze

Liuze/Manager

Table of Contents

1	TEST SUMMARY	4
2	GENERAL INFORMATION	6
2.1	ENVIRONMENTAL CONDITIONS	4
2.2	GENERAL DESCRIPTION OF EUT	6
2.3	CARRIER FREQUENCY OF CHANNELS	6
2.4	OPARATION OF EUT DURING TESTING	7
2.5	DESCRIPTION OF TEST SETUP	7
2.6	MEASUREMENT INSTRUMENTS LIST	8
3	TEST CONDITIONS AND RESULTS	10
3.1	CONDUCTED EMISSIONS TEST	10
3.2	RADIATED EMISSION TEST	11
3.3	BAND EDGE	19
3.4	CONDUCTED OUTPUT POWER	21
3.5	OCCUPIED BANDWIDTH MEASUREMENT	25
3.6	Frequency Separation	29
3.7	Number of hopping frequency	31
3.8	Time of Occupancy (Dwell Time)	33
3.9	OUT-OF BAND EMISSIONS	37
3.10	Pseudorandom Frequency Hopping Sequence	47
3.11	ANTENNA REQUIREMENT	49
4	PHOTOGRAPH OF TEST	50
5	PHOTOGRAPH OF EUT	51

1 TEST SUMMARY

1.1 ENVIRONMENTAL CONDITIONS

During the measurement the environmental conditions were within the listed ranges:

Temperature	Normal Temperature:	25°C
Voltage	Normal Voltage	DC 3.70V
Other	Relative Humidity	55 %
	Air Pressure	101 kPa

1.2 TEST PROCEDURES AND RESULTS

FCC PART 15.247		
FCC Part 15.207	AC Power Conducted Emission	N/A
FCC Part 15.247(a)(1)	20dB Bandwidth	PASS
FCC Part 15.247(d)	Spurious RF Conducted Emission	PASS
FCC Part 15.247(a)(1) , (b) (1)	Maximum Peak Output Power	PASS
FCC Part 15.247(a)(1)	Pseudorandom Frequency Hopping Sequence	PASS
FCC Part 15.247(a)(1)(iii)	Number of hopping frequency& Time of Occupancy	PASS
FCC Part 15.247(a)(1)	Frequency Separation	PASS
FCC Part 15.205/15.209	Radiated Emissions	PASS
FCC Part 15.247(d)	Band Edge Compliance of RF Emission	PASS
FCC Part 15.247(g)(h)	Pseudorandom Frequency Hopping Sequence	PASS
FCC Part 15.203	Antenna Requirement	PASS

1.3 TEST FACILITY

Test Firm : Shenzhen United Testing Technology Co., Ltd.

Address : 2F, Annex Bldg, Jiahuangyuan Tech Park, #365 Baotian 1 Rd, Tiegang Community, Xixiang Str, Bao'an District, Shenzhen, China

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19. The testing quality system of our laboratory meets with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L6494

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2017 General Requirements) for the Competence of testing Laboratories.

Designation Number: CN1227

Test Firm Registration Number: 674885

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files.

1.4 MEASUREMENT UNCERTAINTY

Measurement Uncertainty

Conducted Emission Expanded Uncertainty	= 2.23dB, k=2
Radiated emission expanded uncertainty(9kHz-30MHz)	= 3.08dB, k=2
Radiated emission expanded uncertainty(30MHz-1000MHz)	= 4.42dB, k=2
Radiated emission expanded uncertainty(Above 1GHz)	= 4.06dB, k=2

2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Bluetooth earphone
Trade Mark	xFyro
Model Name	Aria
Serial No.	N/A
Model Difference	N/A
FCC ID	2AR92-ARIA
Antenna Type	Internal antenna
Antenna Gain	0.0 dBi
Frequency Range	2402MHz - 2480MHz
Number of Channels	79
Modulation Type	GFSK, pi/4DQPSK, 8DPSK
Battery	3.7V 55mAh
Power Source	3.7V from battery
Adapter Model	N/A

2.2 CARRIER FREQUENCY OF CHANNELS

Channel	Frequency(MHz)
00	2402
01	2403
⋮	⋮
⋮	⋮
77	2479
78	2480

2.3 OPERATION OF EUT DURING TESTING

Operating Mode

The mode is used: Transmitting mode

Low Channel	2402MHz
Middle Channel	2441MHz
High Channel	2480MHz

2.4 DESCRIPTION OF TEST SETUP

Operation of EUT during Conducted testing:

N/A

Operation of EUT during Radiation and Above1GHz Radiation testing:



2.5 MEASUREMENT INSTRUMENTS LIST

Item	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
CONDUCTED EMISSIONS TEST					
1	AMN	Schwarzbeck	NNLK8121	8121370	2019.09.09
2	AMN	ETS	3810/2	00020199	2019.09.09
3	EMI TEST RECEIVER	Rohde&Schwarz	ESCI	101210	2019.09.09
4	AAN	TESEQ	T8-Cat6	38888	2019.09.09
RADIATED EMISSION TEST					
1	Horn Antenna	Sunol	DRH-118	A101415	2019.09.29
2	BicoNILog Antenna	Sunol	JB1 Antenna	A090215	2019.09.29
3	PREAMP	HP	8449B	3008A00160	2019.09.09
4	PREAMP	HP	8447D	2944A07999	2019.09.09
5	EMI TEST RECEIVER	Rohde&Schwarz	ESR3	101891	2019.09.09
6	VECTOR Signal Generator	Rohde&Schwarz	SMU200A	101521	2019.09.28
7	Signal Generator	Agilent	E4421B	MY4335105	2019.09.28
8	Spectrum Analyzer	Agilent	E4407B	MY41440676	2019.09.28
9	MXA Signal Analyzer	Agilent	N9020A	MY50510140	2019.09.28
10	MXA Signal Analyzer	Agilent	N9020A	MY51110104	2019.09.09
11	ANT Tower&Turn table Controller	Champro	EM 1000	60764	2019.09.28
12	Anechoic Chamber	Taihe Maorui	9m*6m*6m	966A0001	2019.09.09
13	Shielding Room	Taihe Maorui	6.4m*4m*3m	643A0001	2019.09.09
14	RF Power sensor	DARE	RPR3006W	15I00041SNO88	2019.03.14
15	RF Power sensor	DARE	RPR3006W	15I00041SNO89	2019.03.14
16	RF power divider	Anritsu	K241B	992289	2019.09.28

17	Wideband radio communication tester	Rohde&Schwarz	CMW500	154987	2019.09.28
18	Biconical antenna	Schwarzbeck	VHA 9103	91032360	2019.09.08
19	Biconical antenna	Schwarzbeck	VHA 9103	91032361	2019.09.08
20	Broadband Hybrid Antennas	Schwarzbeck	VULB9163	VULB9163#958	2019.09.08
21	Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1680	2020.01.12
22	Active Receive Loop Antenna	Schwarzbeck	FMZB 1919B	00023	2019.11.02
23	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170651	2019.03.14
24	Microwave Broadband Preamplifier	Schwarzbeck	BBV 9721	100472	2019.10.24
25	Active Loop Antenna	Com-Power	AL-130R	10160009	2019.05.10
26	Power Meter	KEYSIGHT	N1911A	MY50520168	2019.05.10
27	EMI Test Software	FALA	EZ-EMC	FA-03A	2019.05.10

2.6 Special Accessories

Manufacturer	Description	Model	Serial Number	Certificate
HP	notebook	HP-CQ45	CNU1254XFC	SDOC
---	---	---	---	---

3 TEST CONDITIONS AND RESULTS

3.1 CONDUCTED EMISSIONS TEST

Limit


According to FCC CFR Title 47 Part 15 Subpart C Section 15.207, AC Power Line Conducted Emissions Limits for Licence-Exempt Radio Apparatus as below:

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreasing linearly with the logarithm of the frequency

For intentional device, according to §15.207(a) Line Conducted Emission Limit is same as above table.

Test Setup

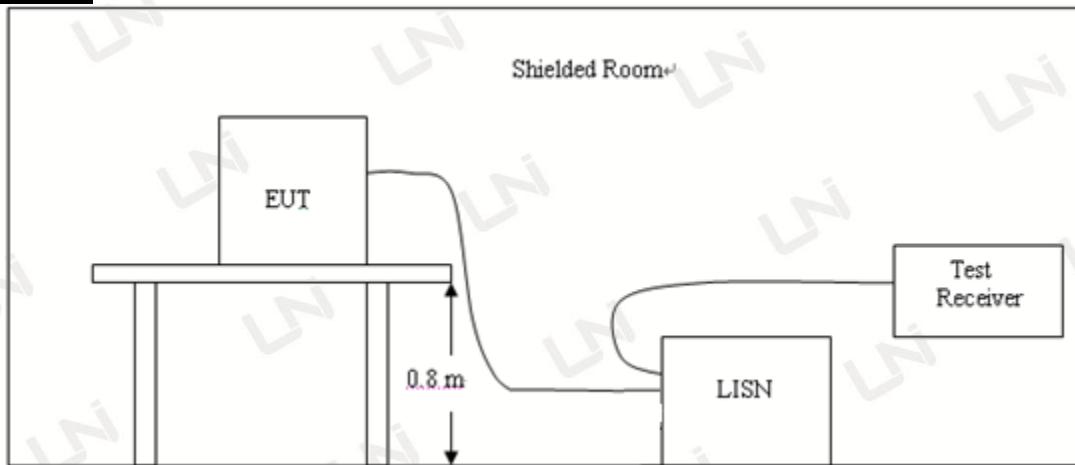

Test Procedure

- 1, The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. A wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10.
- 2, Support equipment, if needed, was placed as per ANSI C63.10.
- 3, All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4, If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5, All support equipments received AC power from a second LISN, if any.
- 6, The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7, Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.

Test Result

When Charging , earphone can not transmit

3.2 RADIATED EMISSION TEST

Radiation Limit

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission out of authorized band shall not exceed the following table at a 3 meters measurement distance.

In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a)


Except when the requirements applicable to a given device state otherwise, emissions from licence-exempt transmitters shall comply with the field strength limits shown in table below. Additionally, the level of any transmitter emission shall not exceed the level of the transmitter's fundamental emission

Radiated emission limits


Frequency (MHz)	Distance (Meters)	Radiated (dB μ V/m)	Radiated (μ V/m)
0.009-0.49	3	20log(2400/F(KHz))+40log(300/3)	2400/F(KHz)
0.49-1.705	3	20log(24000/F(KHz))+ 40log(30/3)	24000/F(KHz)
1.705-30	3	20log(30)+ 40log(30/3)	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

Test Setup


1. Radiated Emission Test-Up Frequency Below 30MHz

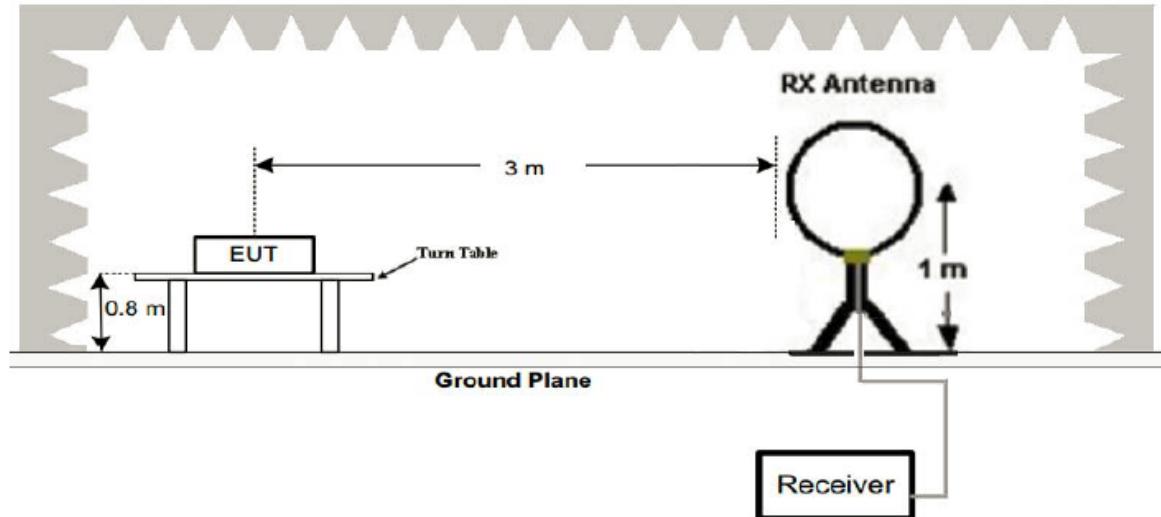

2. Radiated Emission Test-Up Frequency 30MHz~1GHz

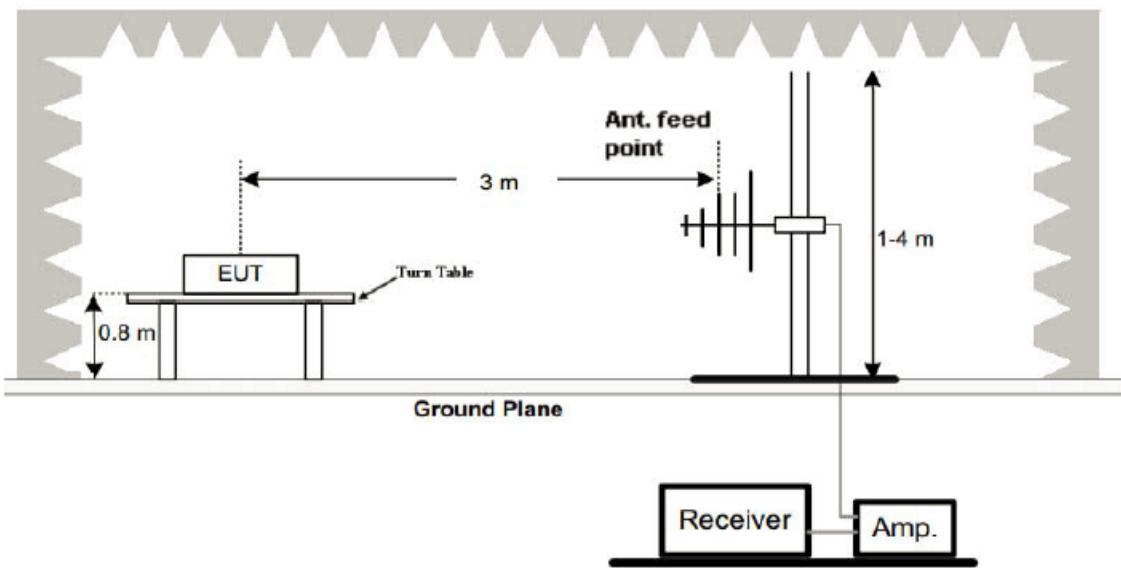

3. Radiated Emission Test-Up Frequency Above 1GHz

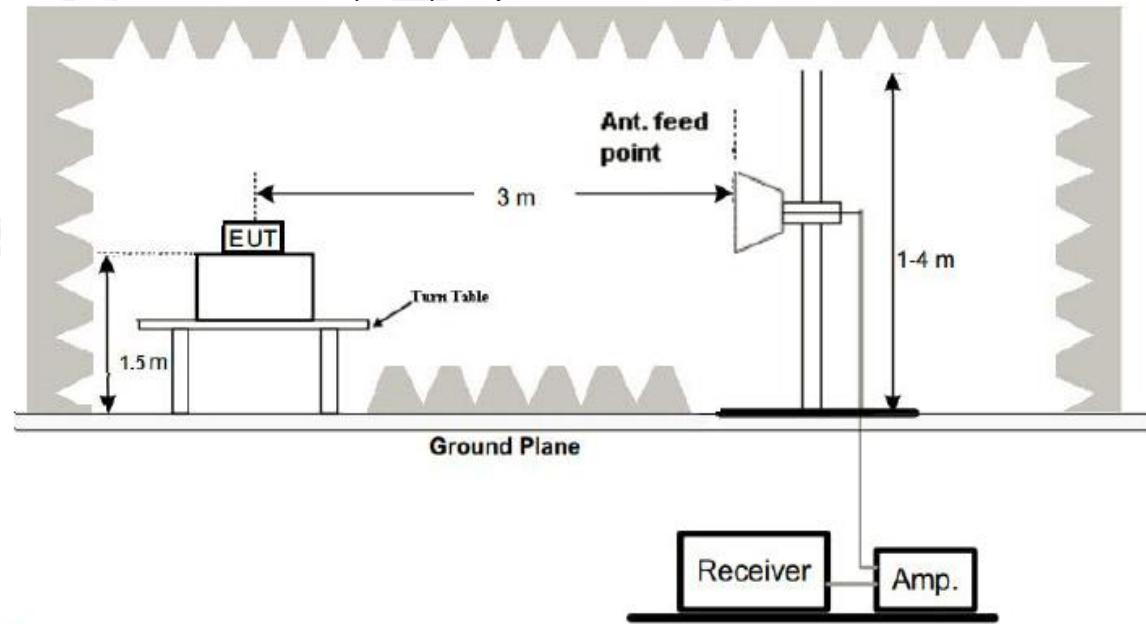

Test Procedure

1. Below 1GHz measurement the EUT is placed on a turntable which is 0.8m above ground plane, and above 1GHz measurement EUT was placed on a low permittivity and low loss tangent turn table which is 1.5m above ground plane.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0°C to 360°C to acquire the highest emissions from EUT
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. Radiated emission test frequency band from 9KHz to 25GHz.

6. The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Bilog Antenna	3
1GHz-18GHz	Horn Antenna	3
18GHz-25GHz	Horn Anternna	1

7. Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz,Sweep time=Auto	PK/AV/QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz,Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz,Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

Test Result


---PASS---

Remark:

1. All the test modes completed for test. The worst case of Radiated Emission is Middle channel, the test data of this mode was reported.
2. By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "Z axis" position was the worst, and test data recorded in this report.
3. Radiated emission test from 9KHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9KHz to 30MHz and not recorded in this report.

Below 1GHz Test Results:


Temperature:	25°C	Relative Humidity:	48%
Test Date:	Jan .04, 2019	Pressure:	1030hPa
Test Voltage:	DC 3.7V from battery	Polarization:	Horizontal / Vertical
Test mode	TX mode		

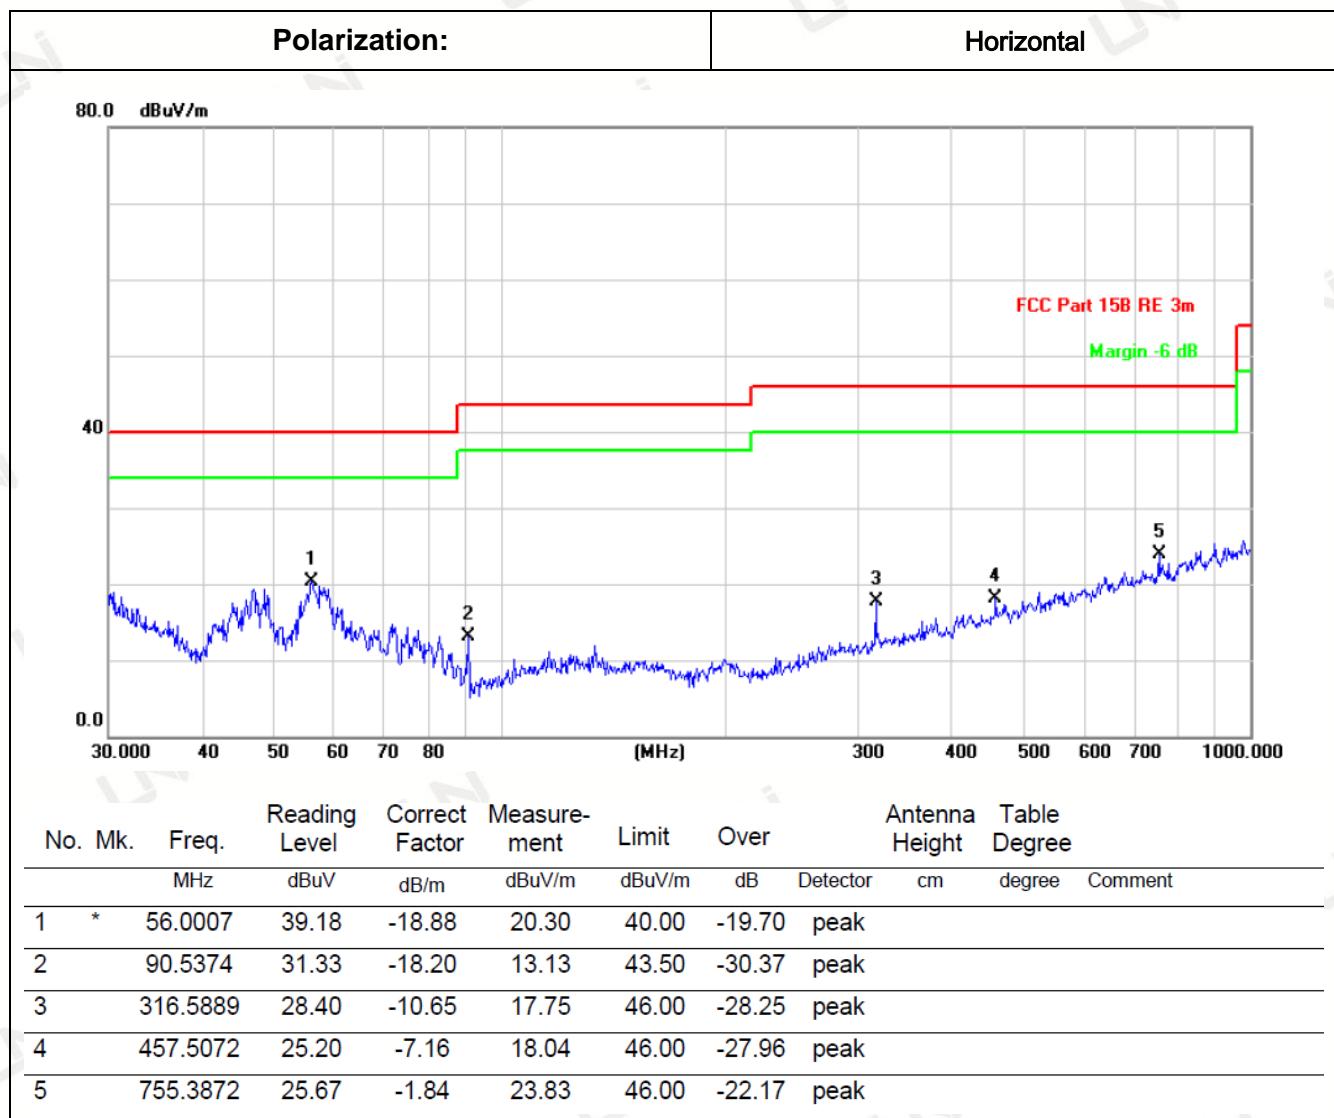

Remark:1. Absolute Level= Reading Level+ Factor, Margin= Absolute Level – Limit

Factor=Ant. Factor + Cable Loss – Pre-amplifier

2.GFSK, pi/4DQPSK, 8DPSK all have been tested

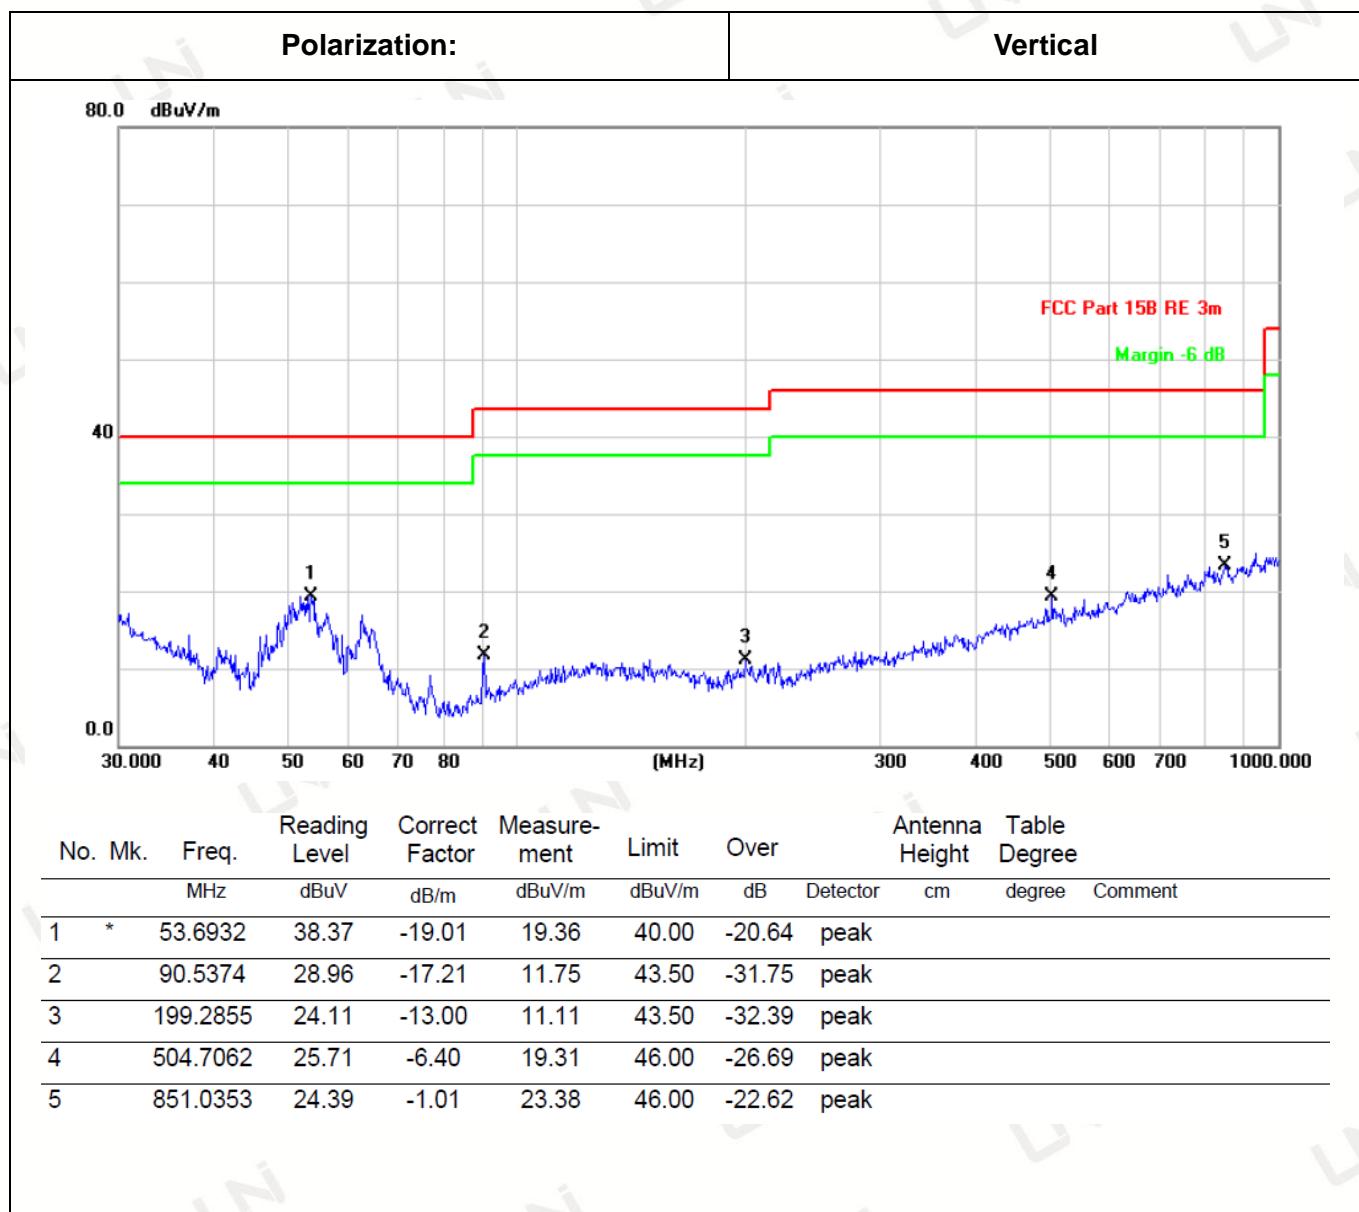

Remark:1. Absolute Level= Reading Level+ Factor, Margin= Absolute Level – Limit

Factor=Ant. Factor + Cable Loss – Pre-amplifier

2.GFSK, pi/4DQPSK, 8DPSK all have been tested

Remark:

- (1) Measuring frequencies from 9 kHz to the 1 GHz, Radiated emission test from 9kHz to 30MHz was verified, and no any emission was found except system noise floor.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.

Above 1 GHz Test Results:

Note: GFSK, Pi/4 DQPSK, 8DPSK all have been tested, only worse case GFSK is reported.

GFSK: CH Low (2402MHz)**Horizontal:**

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4804	57.49	-3.64	53.85	74	20.15	PK
4804	45.62	-3.64	41.98	54	12.02	AV
7206	54.62	-0.95	53.67	74	20.33	PK
7206	42.47	-0.95	41.52	54	12.48	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin= Absolute Level – Limit

Vertical:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4804	58.54	-3.64	54.90	74	19.10	PK
4804	45.01	-3.64	41.37	54	12.63	AV
7206	54.62	-0.95	53.67	74	20.33	PK
7206	42.02	-0.95	41.07	54	12.93	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin= Absolute Level – Limit

Note: GFSK, Pi/4 DQPSK, 8DPSK all have been tested, only worse case GFSK is reported.

GFSK: CH Middle (2441MHz)

Horizontal:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4882.00	56.99	-3.51	53.48	74	20.52	PK
4882.00	45.25	-3.51	41.74	54	12.26	AV
7323.00	55.18	-0.82	54.36	74	19.64	PK
7323.00	42.98	-0.82	42.16	54	11.84	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin= Absolute Level – Limit

Vertical:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4882.00	58.46	-3.51	54.95	74	19.05	PK
4882.00	43.96	-3.51	40.45	54	13.55	AV
7323.00	54.78	-0.82	53.96	74	20.04	PK
7323.00	44.24	-0.82	43.42	54	10.58	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin= Absolute Level – Limit

Note: GFSK, Pi/4 DQPSK, 8DPSK all have been tested, only worse case GFSK is reported.

GFSK: CH High (2480MHz)

Horizontal:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4960.00	57.08	-3.43	53.65	74	20.35	PK
4960.00	43.42	-3.43	39.99	54	14.01	AV
7440.00	55.15	-0.75	54.40	74	19.60	PK
7440.00	40.92	-0.75	40.17	54	13.83	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin= Absolute Level – Limit

Vertical:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4960.00	57.07	-3.43	53.64	74	20.36	PK
4960.00	43.29	-3.43	39.86	54	14.14	AV
7440.00	55.09	-0.75	54.34	74	19.66	PK
7440.00	44.05	-0.75	43.30	54	10.70	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin= Absolute Level – Limit

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- (3) Margin= Limits –Emission Level
- (4) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dB μ V/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dB μ V/m(PK Value) <54 dB μ V/m(AV Limit), the Average Detected not need to completed.
- (6) All modes of operation were investigated and the worst-case emissions are reported.

3.3 BAND EDGE

Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

The band edge compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. RBW 1MHz VBW 3MHz peak detector is for PK value; RBW 1MHz VBW 10Hz peak detector is for AV value .

Test Result

---PASS---

Note: GFSK, Pi/4 DQPSK, 8DPSK all have been tested, only worse case GFSK is reported.

Radiated Band Edge Test:

Operation Mode: TX CH Low (2402MHz)

Horizontal (Worst case):

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2331.2	58.97	-5.80	53.17	74	20.83	PK
2331.2	37.31	-5.80	31.51	54	22.49	AV
2390	59.31	-5.84	53.47	74	20.53	PK
2390	39.51	-5.84	33.67	54	20.33	AV
2400	67.69	-5.84	61.85	74	12.15	PK
2400	43.92	-5.84	38.08	54	15.92	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2331.2	59.61	-5.8	53.81	74	20.19	PK
2331.2	38.21	-5.8	32.41	54	21.59	AV
2390	57.47	-5.84	51.63	74	22.37	PK
2390	40.51	-5.84	34.67	54	19.33	AV
2400	68.76	-5.84	62.92	74	11.08	PK
2400	45.28	-5.84	39.44	54	14.56	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Operation Mode: TX CH High (2480MHz)

Horizontal (Worst case):

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2483.5	58.90	-5.65	53.25	74	20.75	PK
2483.5	37.08	-5.65	31.43	54	22.57	AV
2500	59.03	-5.72	53.31	74	20.69	PK
2500	40.63	-5.72	34.91	54	19.09	AV
2539.48	67.28	-5.75	61.53	74	12.47	PK
2539.48	45.74	-5.75	39.99	54	14.01	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2483.5	61.90	-5.65	56.25	74	17.75	PK
2483.5	37.86	-5.65	32.21	54	21.79	AV
2500	57.54	-5.72	51.82	74	22.18	PK
2500	41.45	-5.72	35.73	54	18.27	AV
2539.48	66.16	-5.75	60.41	74	13.59	PK
2539.48	44.63	-5.75	38.88	54	15.12	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

3.4 CONDUCTED OUTPUT POWER

Limit

The Maximum Peak Output Power Measurement is 30dBm.

Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power sensor.




Test Result

Type	Channel	Output power (dBm)	Limit (dBm)	Result
GFSK	00	0.070	30	Pass
	39	0.819		
	78	0.927		
pi/4DQPSK	00	2.381	30	Pass
	39	2.382		
	78	3.335		
8DPSK	00	2.915	30	Pass
	39	3.639		
	78	3.750		


Note: 1.The test results including the cable loss.

GFSK Modulation


CH00

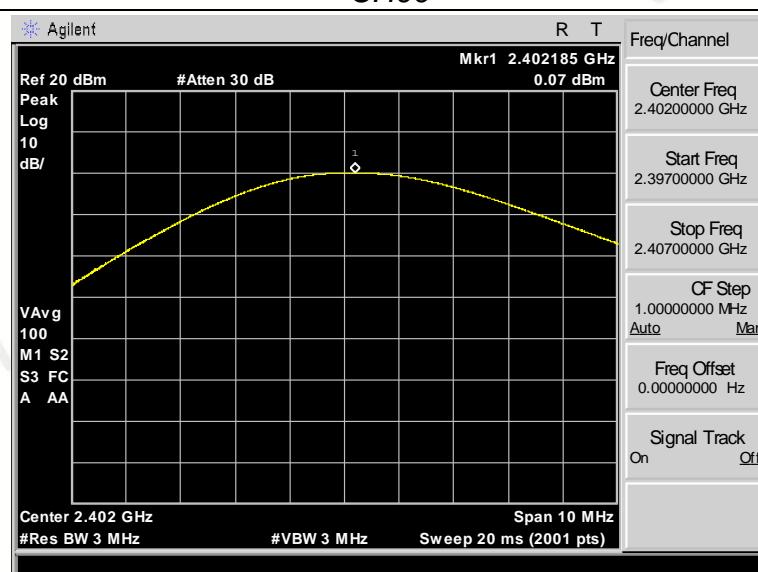

CH39

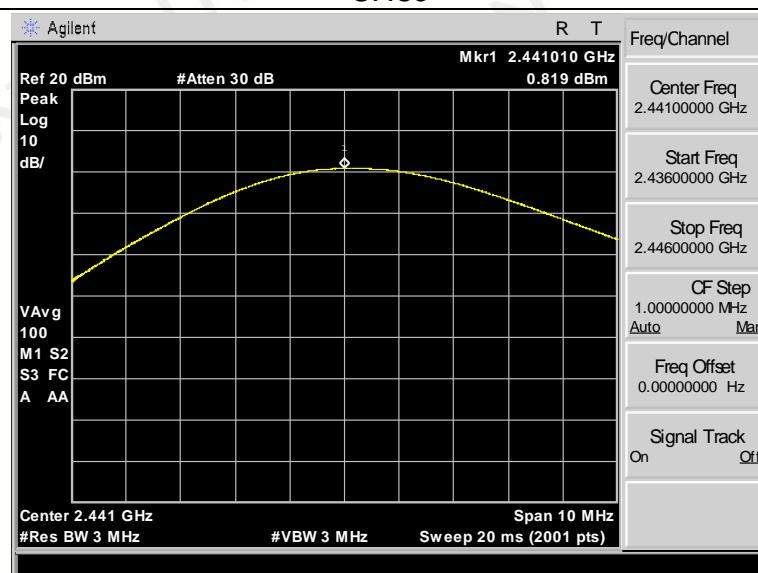


CH78

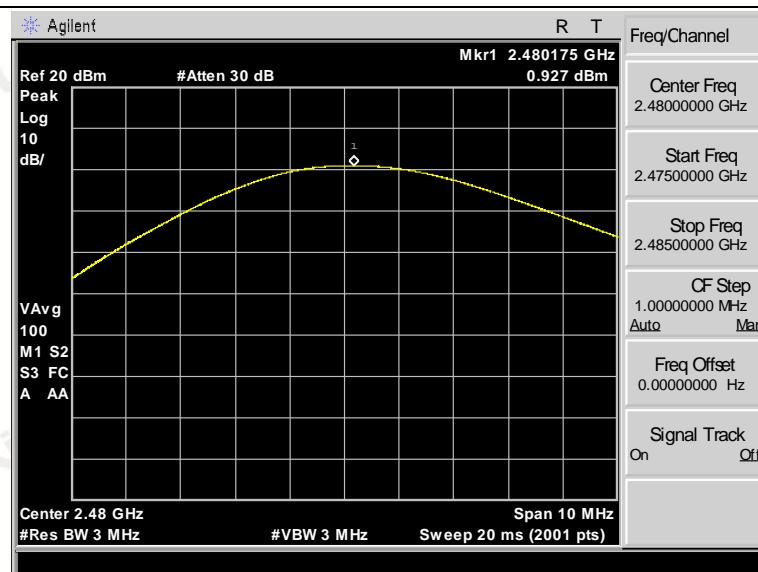


pi/4DQPSK Modulation


CH00

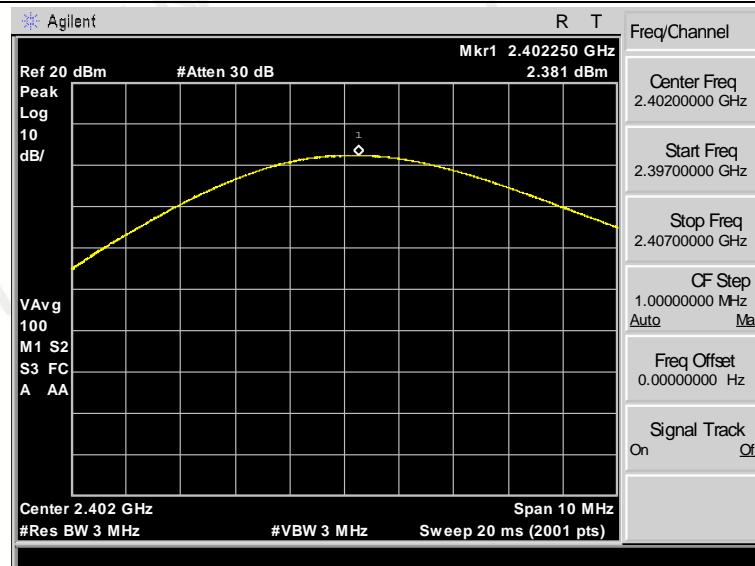

CH39

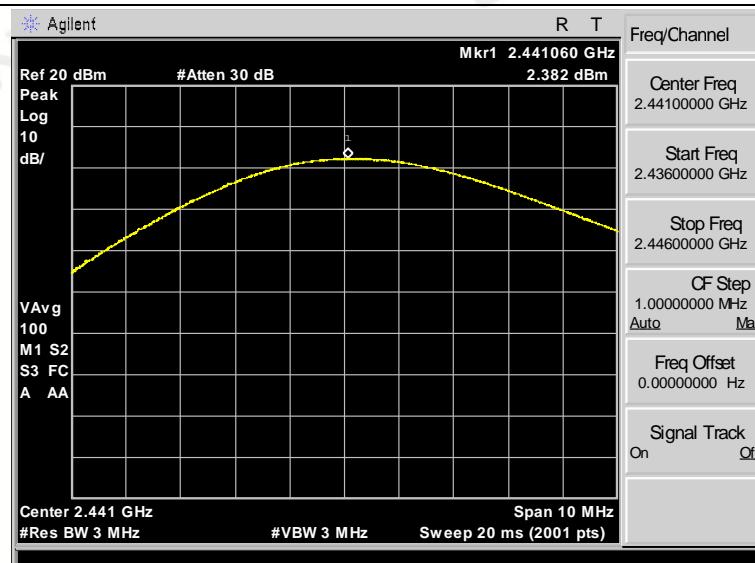


CH78

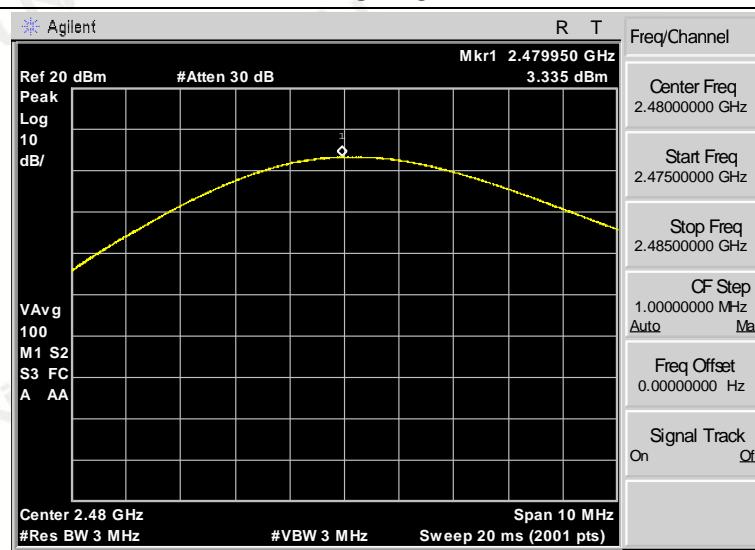


8DPSK Modulation


CH00

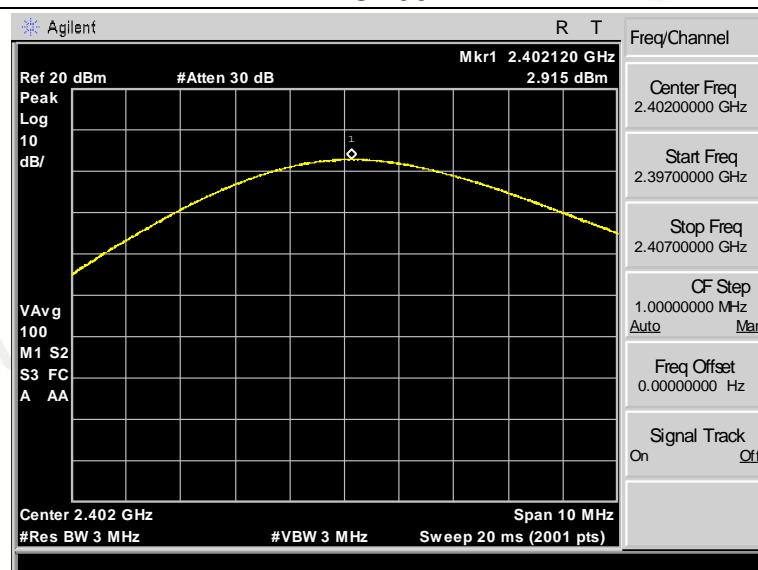

CH39

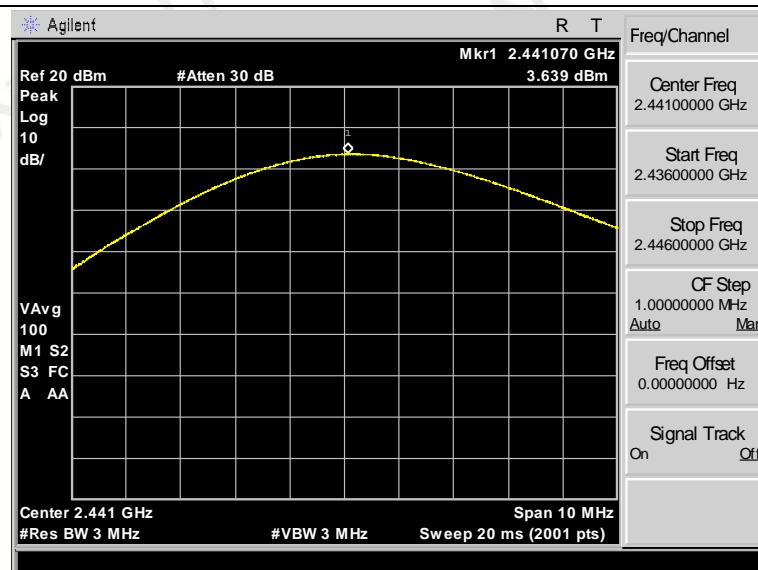

CH78

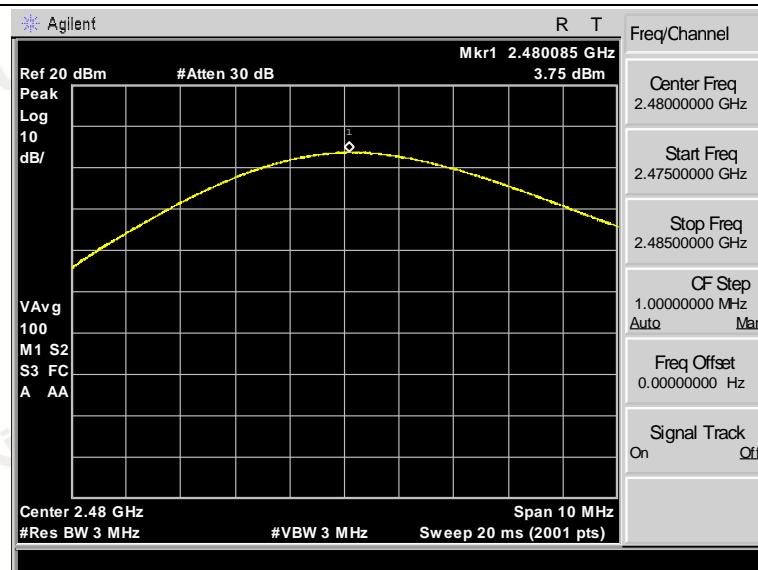

3.5 OCCUPIED BANDWIDTH MEASUREMENT

Limit

FCC Part15(15.247), Subpart C			
Section	Test Item	Frequency Range (MHz)	Result
15.247(a)(2)	20dB BW	2400-2483.5	PASS

Test Procedure

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Set EUT as normal operation.
3. RBW=100KHz, VBW=300KHz, Span=3MHz.
4. The useful radiated emission from the EUT was detected by the spectrum analyzer with peak detector.


Test Result

---PASS---


Modulation	Channel	-20dB bandwidth (MHz)	Result
GFSK	00	0.949	Pass
	39	0.945	
	78	0.954	
pi/4DQPSK	00	1.318	Pass
	39	1.352	
	78	1.337	
8DPSK	00	1.285	Pass
	39	1.300	
	78	1.293	

GFSK Modulation


CH00



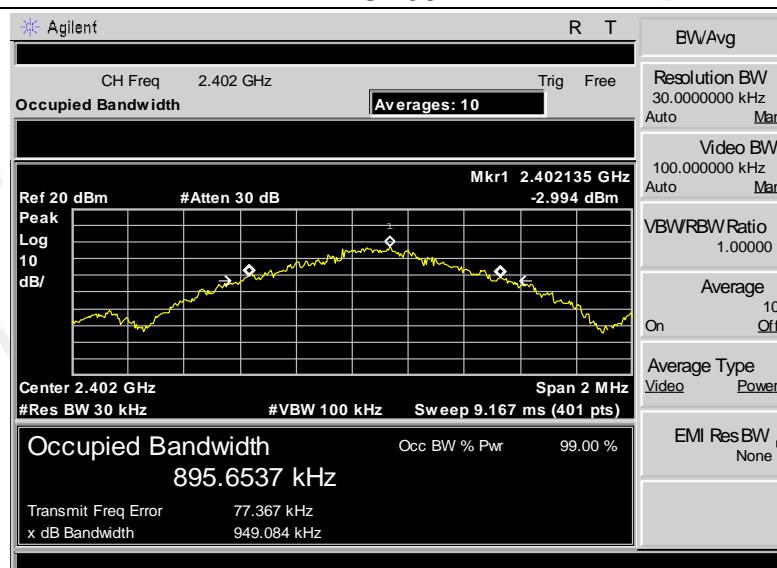


CH39

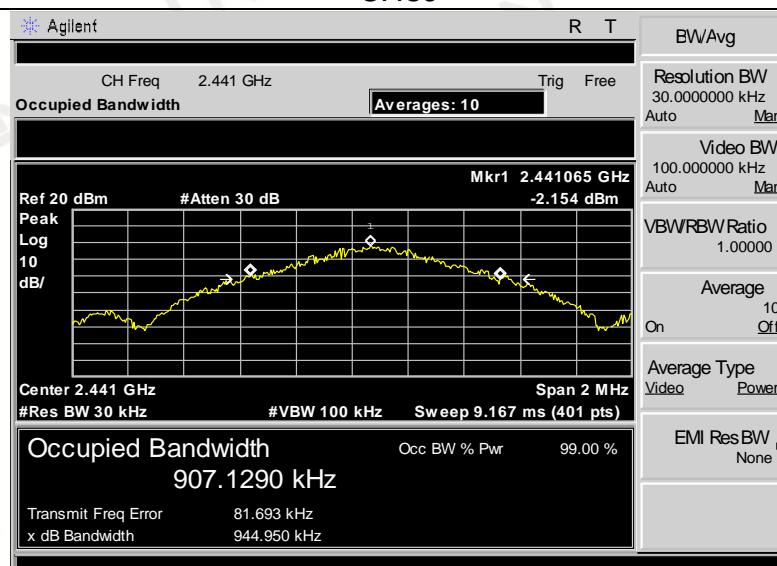


CH78

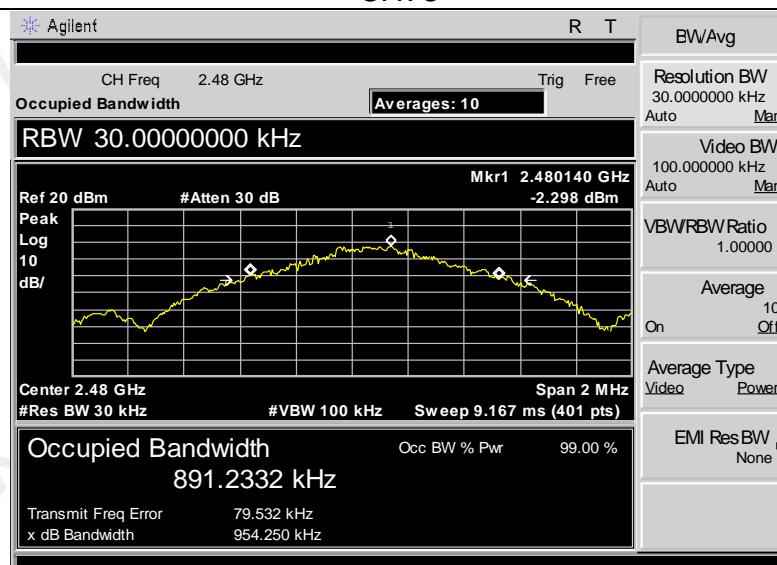

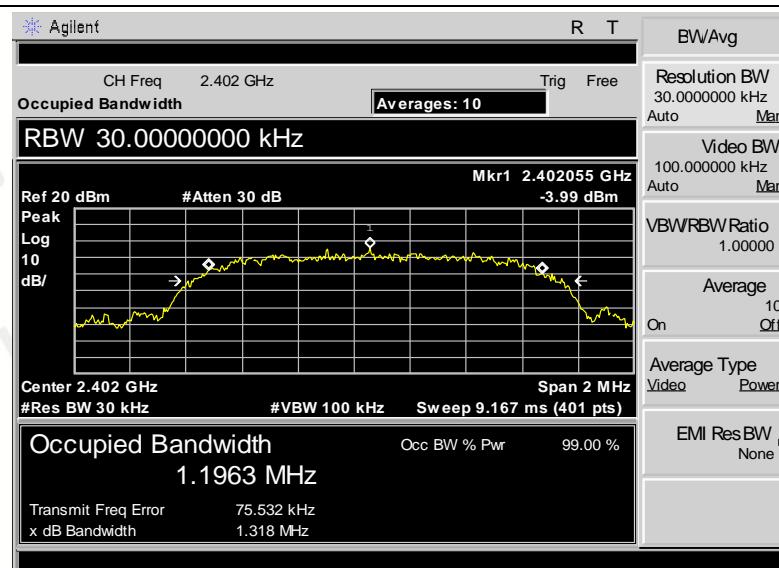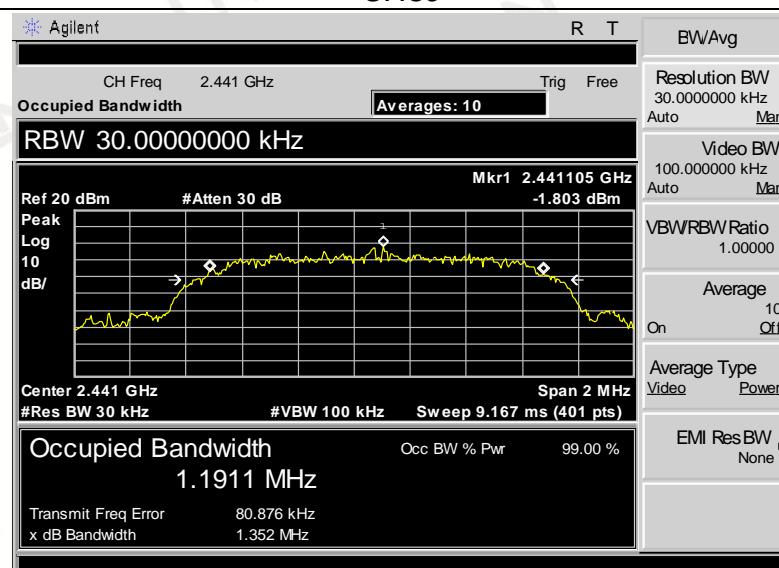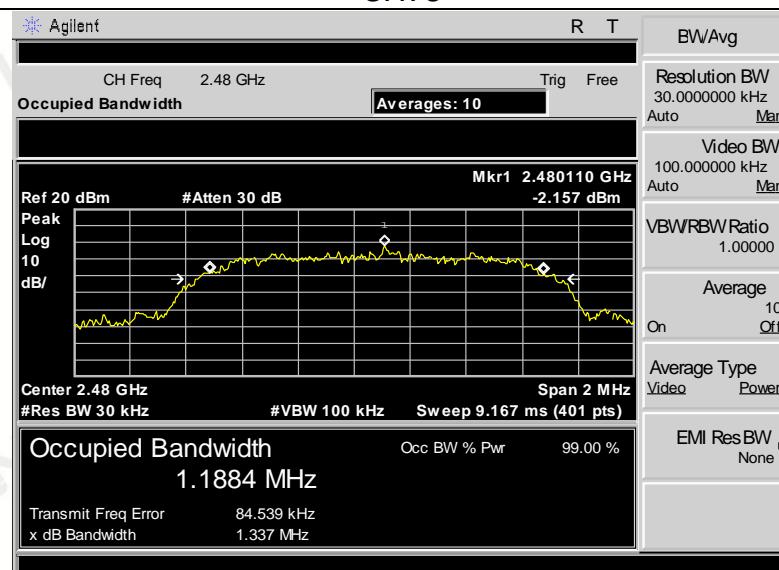
*pi/4DQPSK Modulation**CH00**CH39**CH78*

8DPSK Modulation


CH00

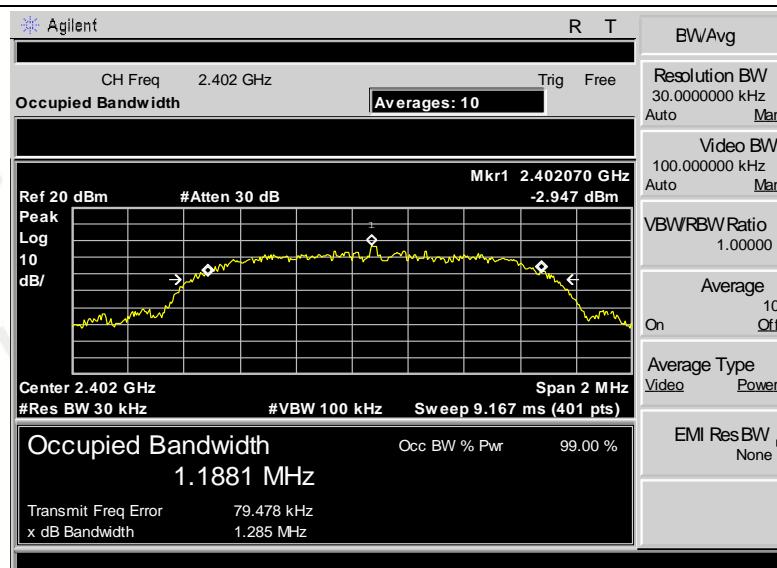

CH39

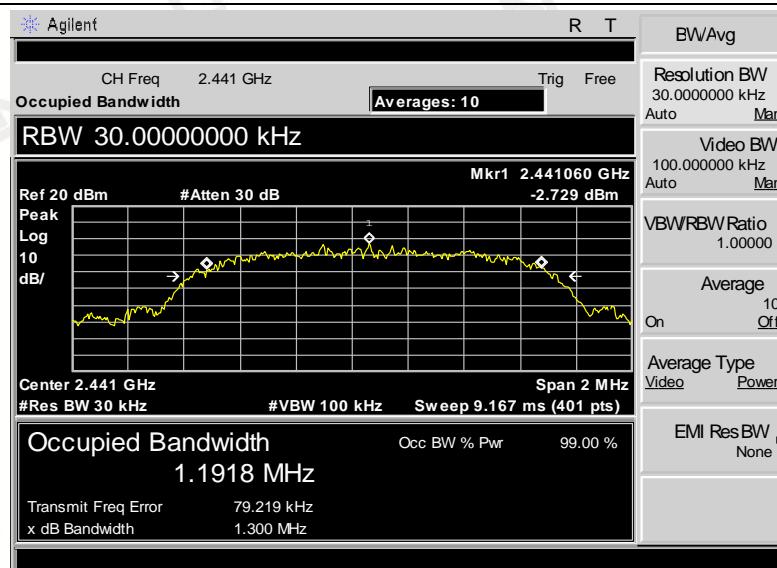

CH78

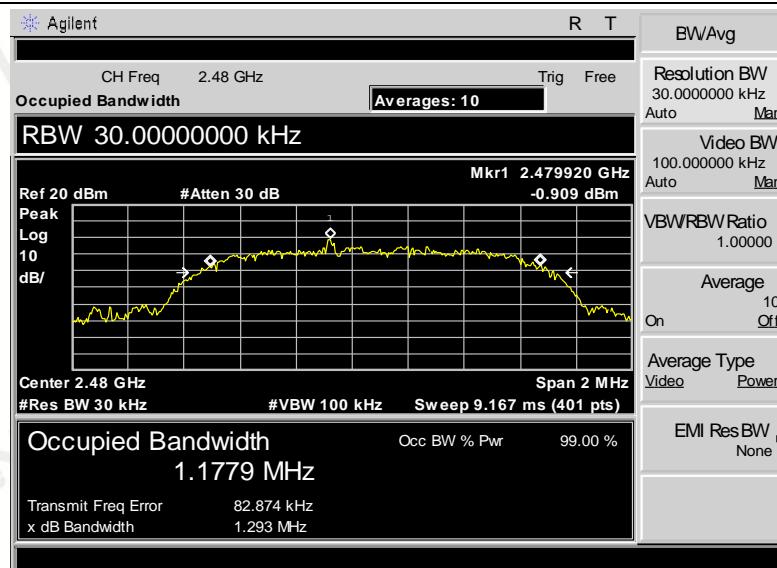

3.6 Frequency Separation

LIMIT

According to 15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25KHz or the 2/3*20dB bandwidth of the hopping channel, whichever is greater.

TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 300 KHz VBW.

Test Configuration




TEST RESULTS


Modulation	Channel	Channel Separation (MHz)	Limit(MHz)	Result
GFSK	CH39	0.991	25KHz or 2/3*20dB bandwidth	Pass
	CH40			
pi/4DQPSK	CH39	1.003	25KHz or 2/3*20dB bandwidth	Pass
	CH40			
8DPSK	CH39	0.999	25KHz or 2/3*20dB bandwidth	Pass
	CH40			

Note: We have tested all mode at high, middle and low channel, and recorded worst case at middle


GFSK Modulation

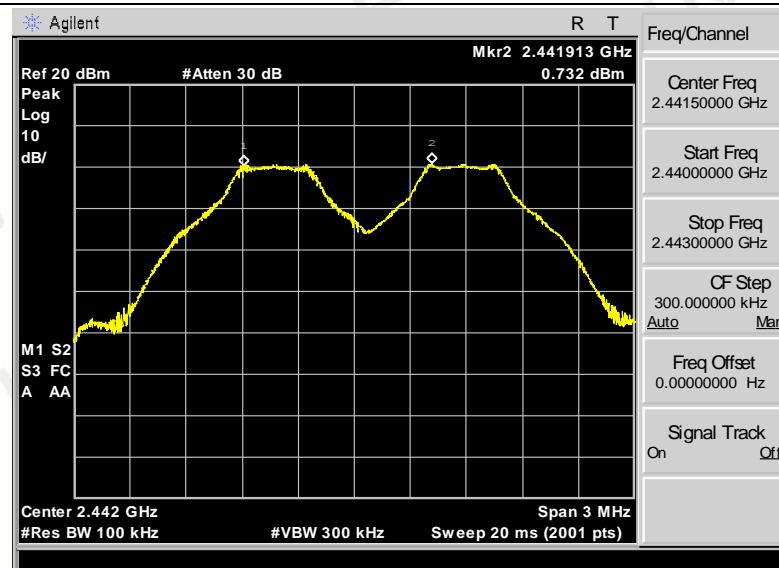

pi/4DQPSK Modulation

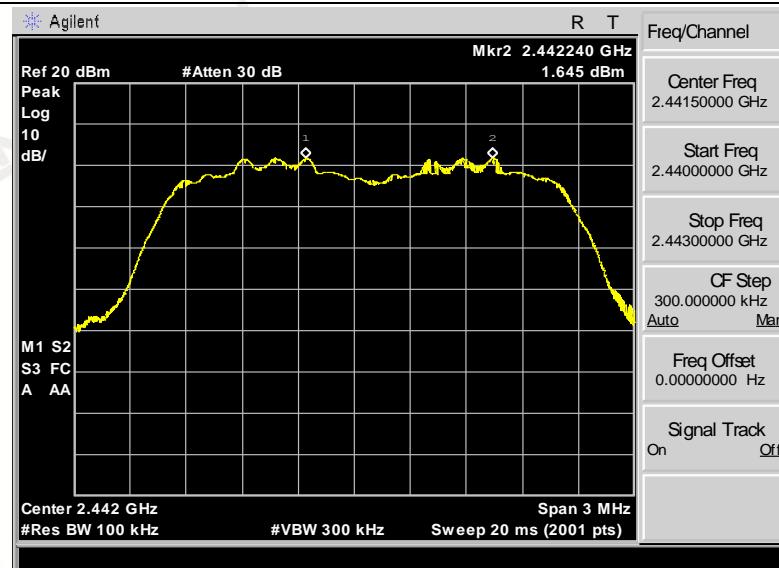

8DPSK Modulation

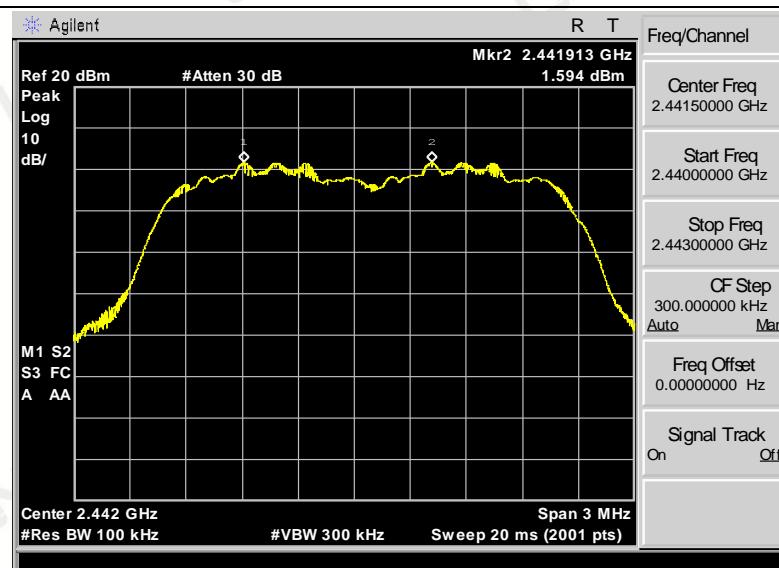

3.7 Number of hopping frequency

Limit

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

Test Procedure


The transmitter output was connected to the spectrum analyzer through an attenuator. Set spectrum analyzer start 2400MHz to 2483.5MHz with 100 KHz RBW and 300 KHz VBW.



Test Configuration



Test Results

Modulation	Number of Hopping Channel	Limit	Result
GFSK	79	≥15	Pass
pi/4DQPSK	79		
8DPSK	79		

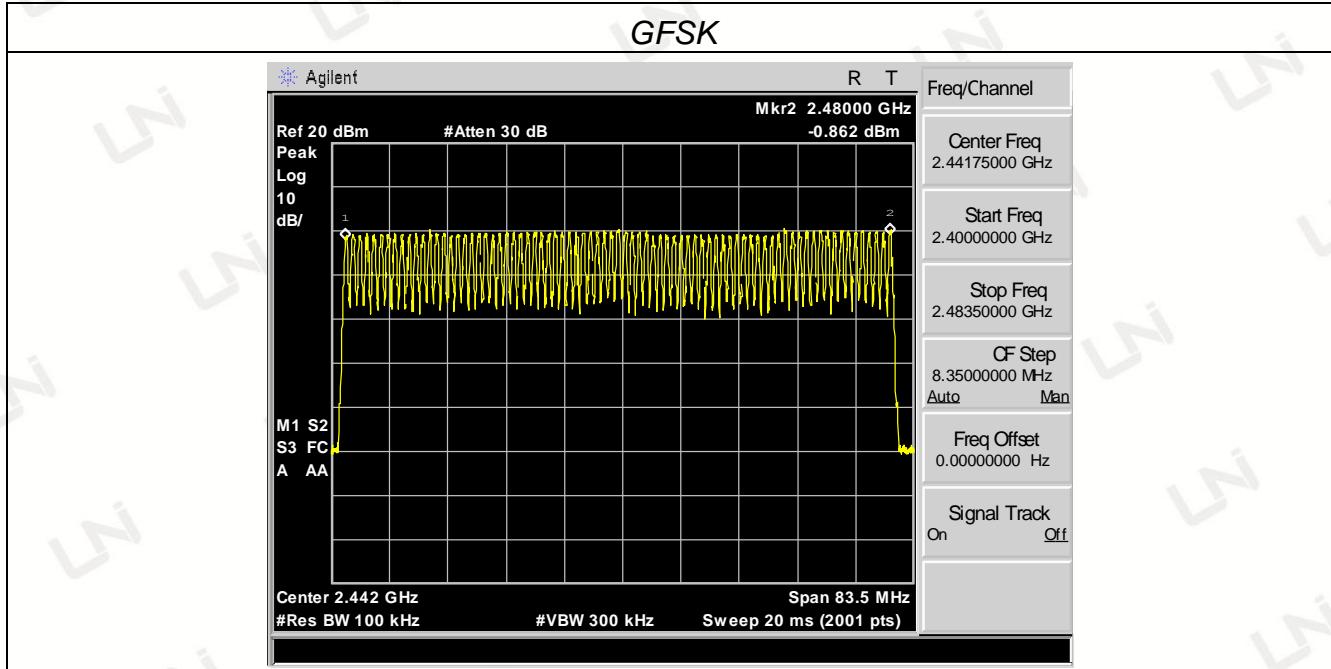

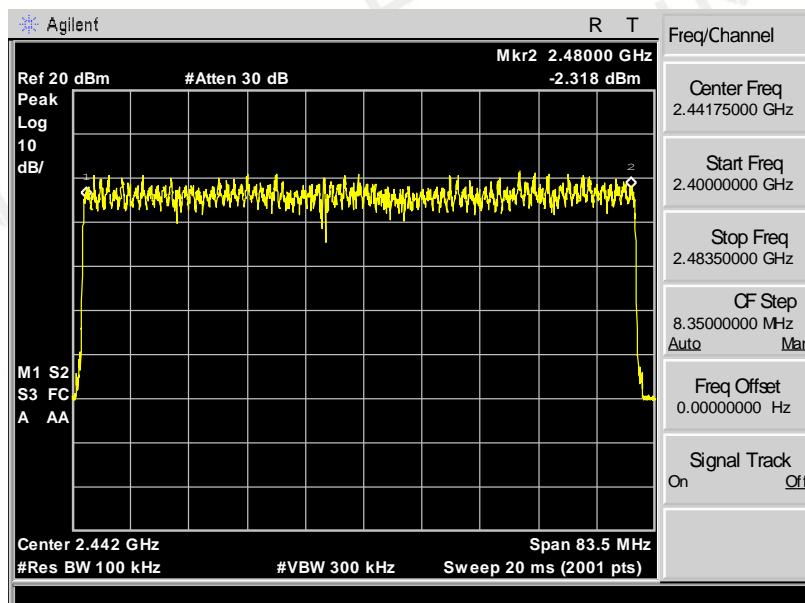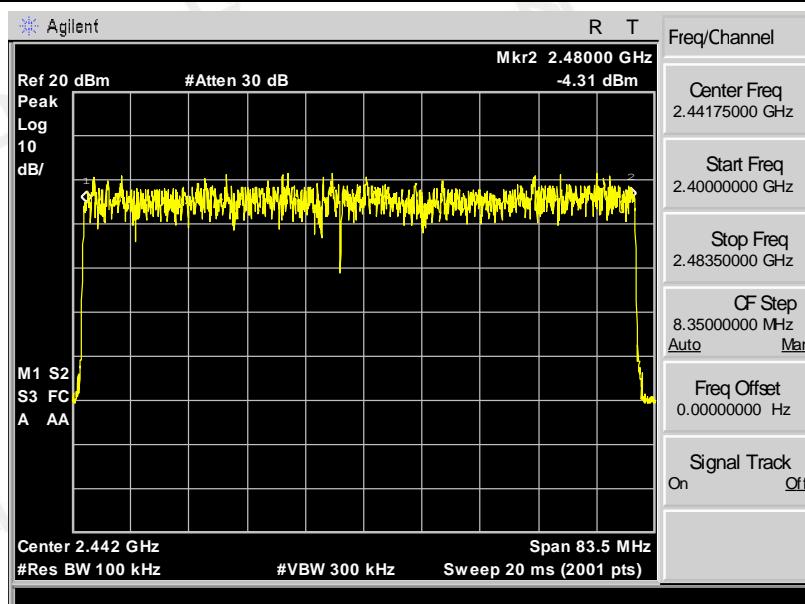pi/4DQPSK*8DPSK Modulation*

3.8 Time of Occupancy (Dwell Time)

Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. Set center frequency of spectrum analyzer=operating frequency with 1MHz RBW and 1MHz VBW, Span 0Hz.

Test Configuration



Test Results

Modulation	Packet	Pulse time (ms)	Dwell time (ms)	Limit (s)	Result
GFSK	DH1	0.416	133.056	0.40	Pass
	DH3	1.642	262.720		
	DH5	2.916	311.040		
pi/4DQPSK	2-DH1	0.416	133.120	0.40	Pass
	2-DH3	1.662	265.920		
	2-DH5	2.923	311.787		
8DPSK	3-DH1	0.416	133.120	0.40	Pass
	3-DH3	1.662	265.936		
	3-DH5	2.903	309.653		

Note:

1. We have tested all mode at high,middle and low channel, and recorded worst case at middle channel.


2. Dwell time=Pulse time (ms) \times (1600 \div 2 \div 79) \times 31.6 Second for DH1, 2-DH1, 3-DH1

Dwell time=Pulse time (ms) \times (1600 \div 4 \div 79) \times 31.6 Second for DH3, 2-DH3, 3-DH3


Dwell time=Pulse time (ms) \times (1600 \div 6 \div 79) \times 31.6 Second for DH5, 2-DH5, 3-DH5

GFSK


DH5

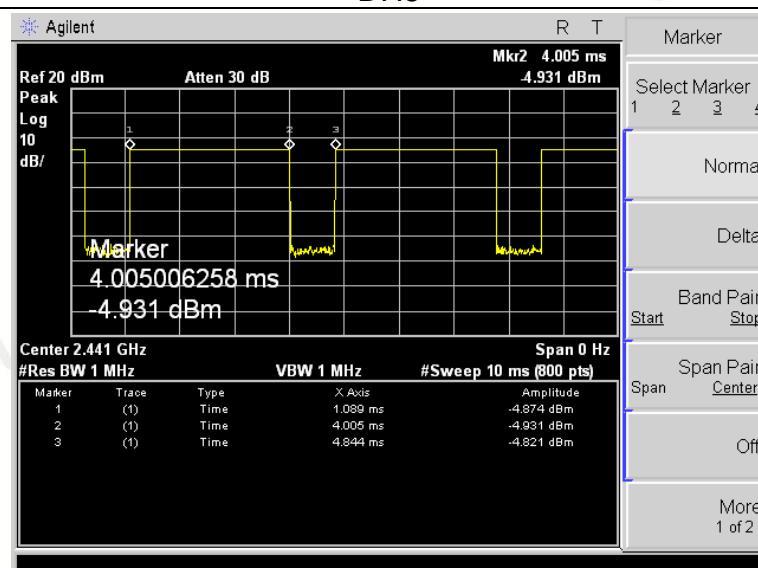

DH3

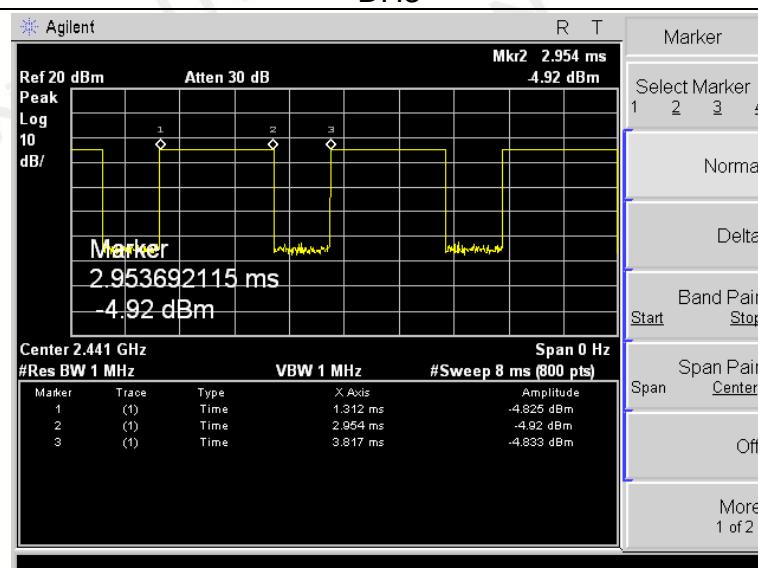


DH1

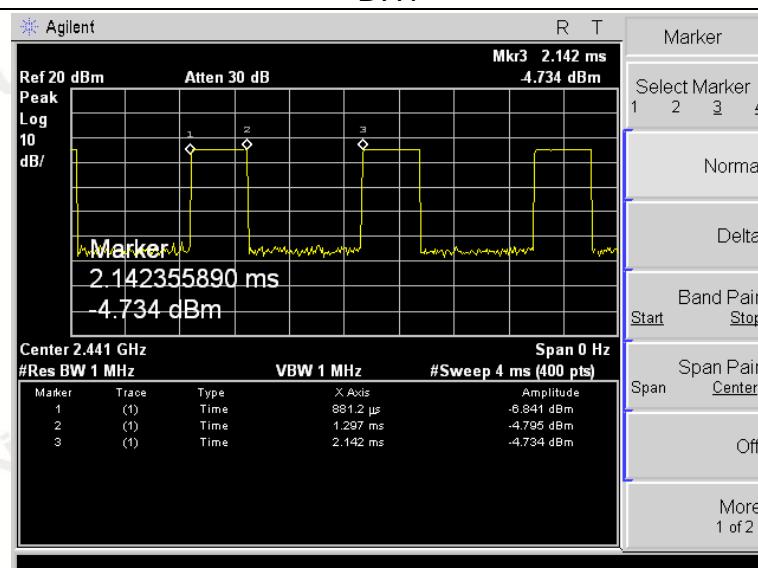


pi/4DQPSK


2-DH5

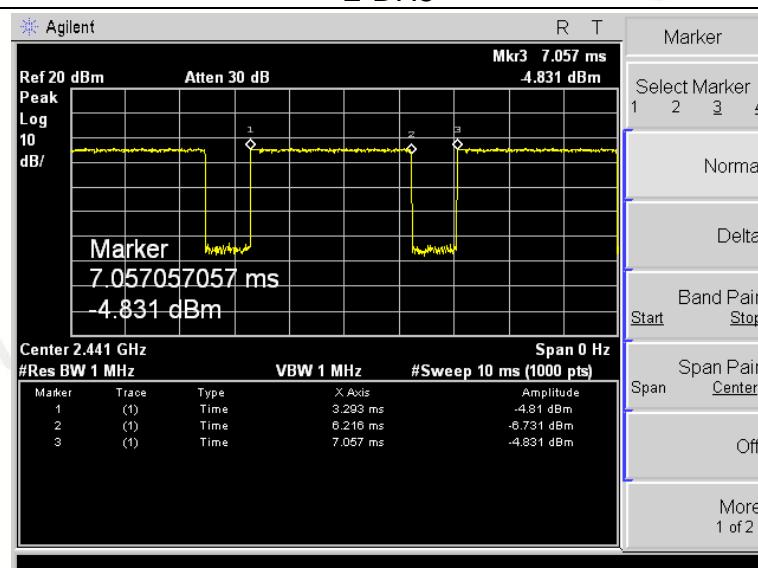

2-DH3

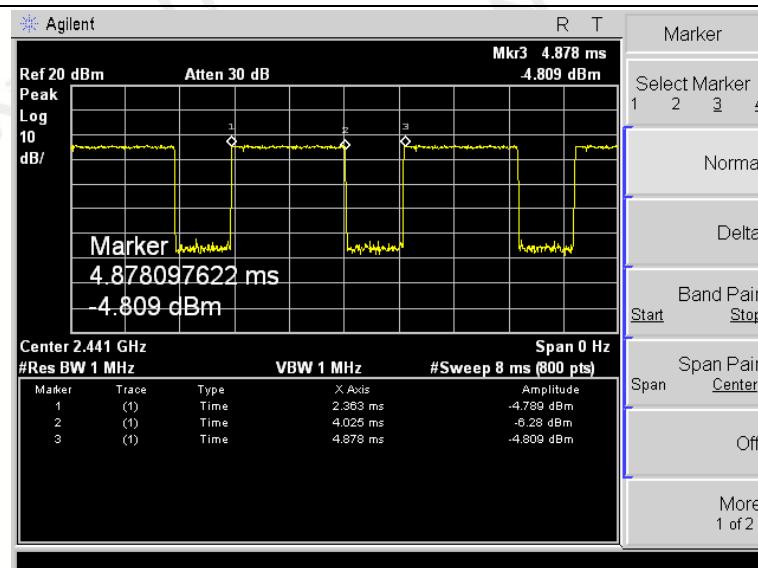


2-DH1

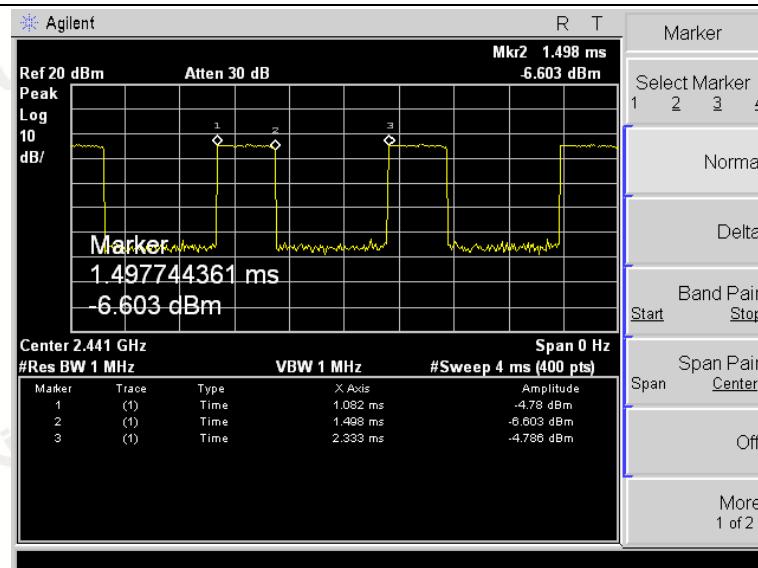


8DPSK


3-DH5

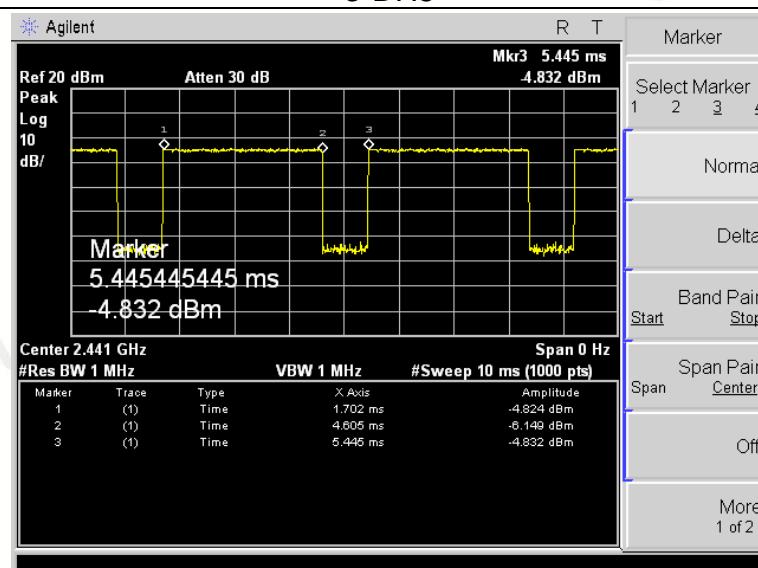

3-DH3

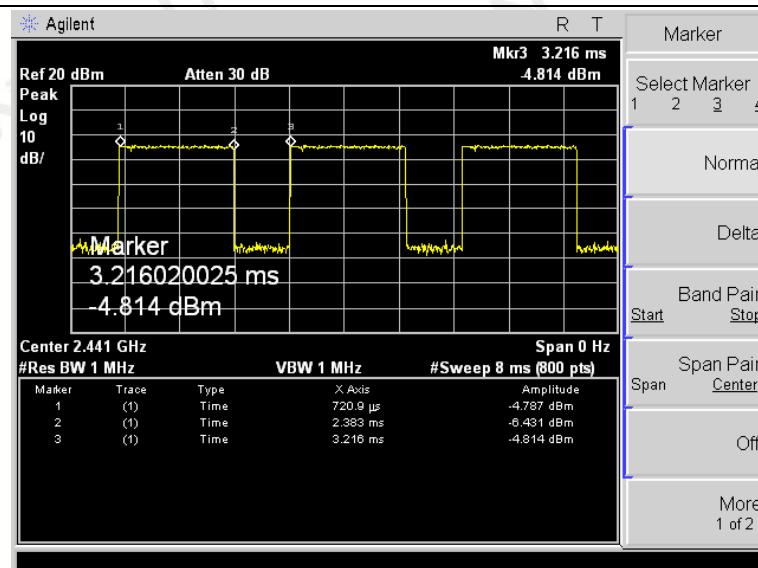

3-DH1

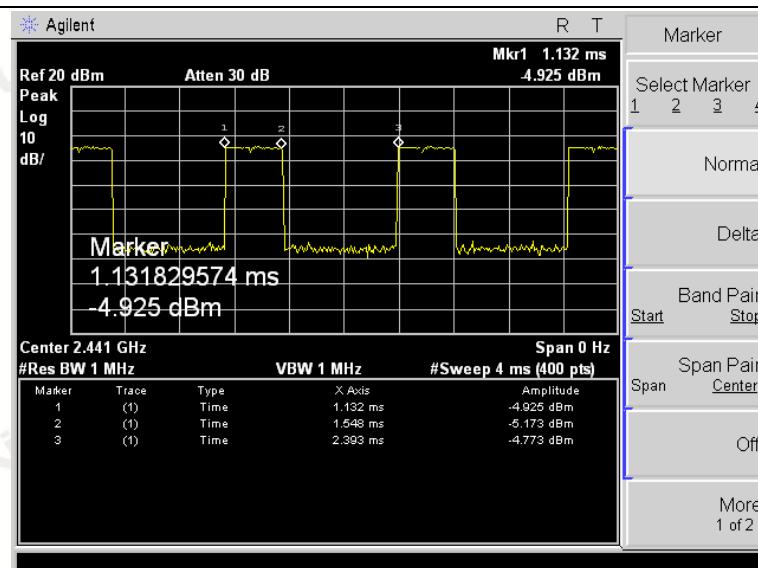

3.9 OUT-OF BAND EMISSIONS


Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

Test Procedure




Connect the transmitter output to spectrum analyzer using a low loss RF cable, and set the spectrum analyzer to RBW=100 kHz, VBW= 300 kHz, peak detector , and max hold. Measurements utilizing these setting are made of the in-band reference level, bandedge and out-of-band emissions.



Test Configuration




Test Results


Remark: The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and bandage measurement data.

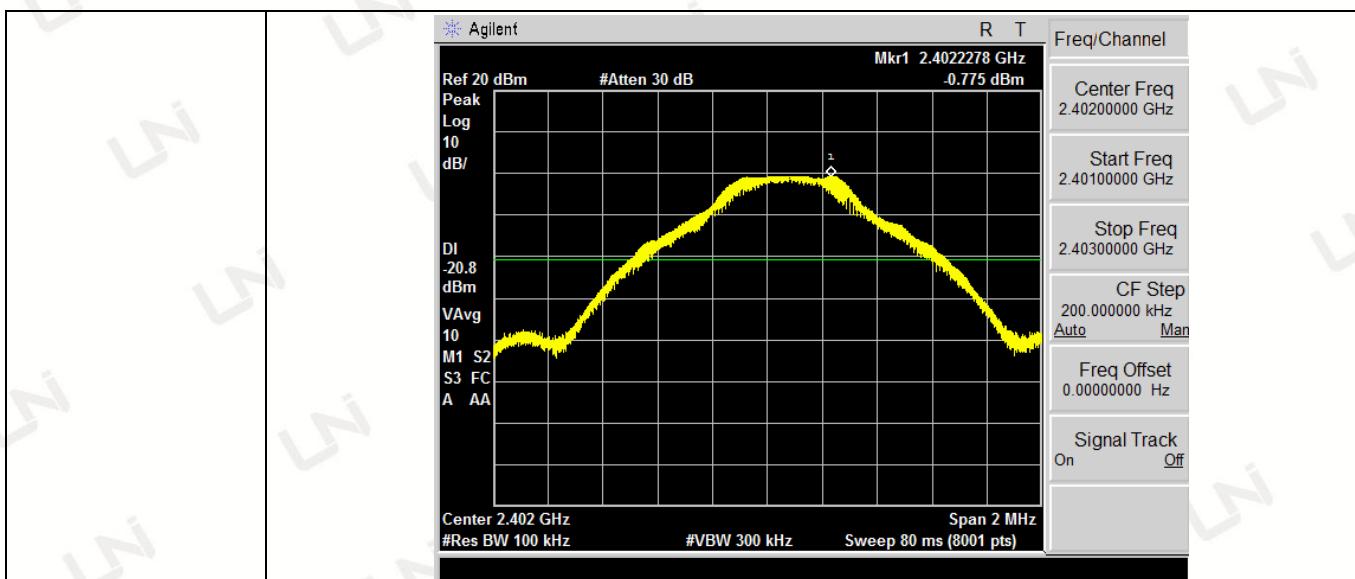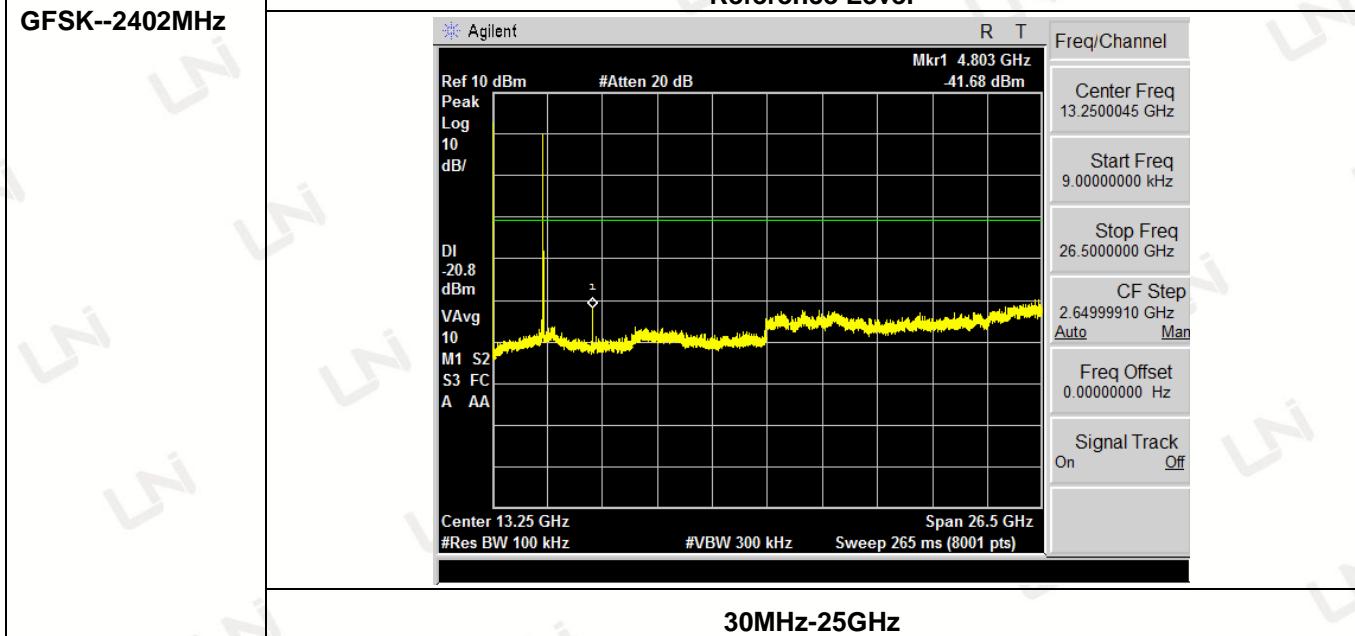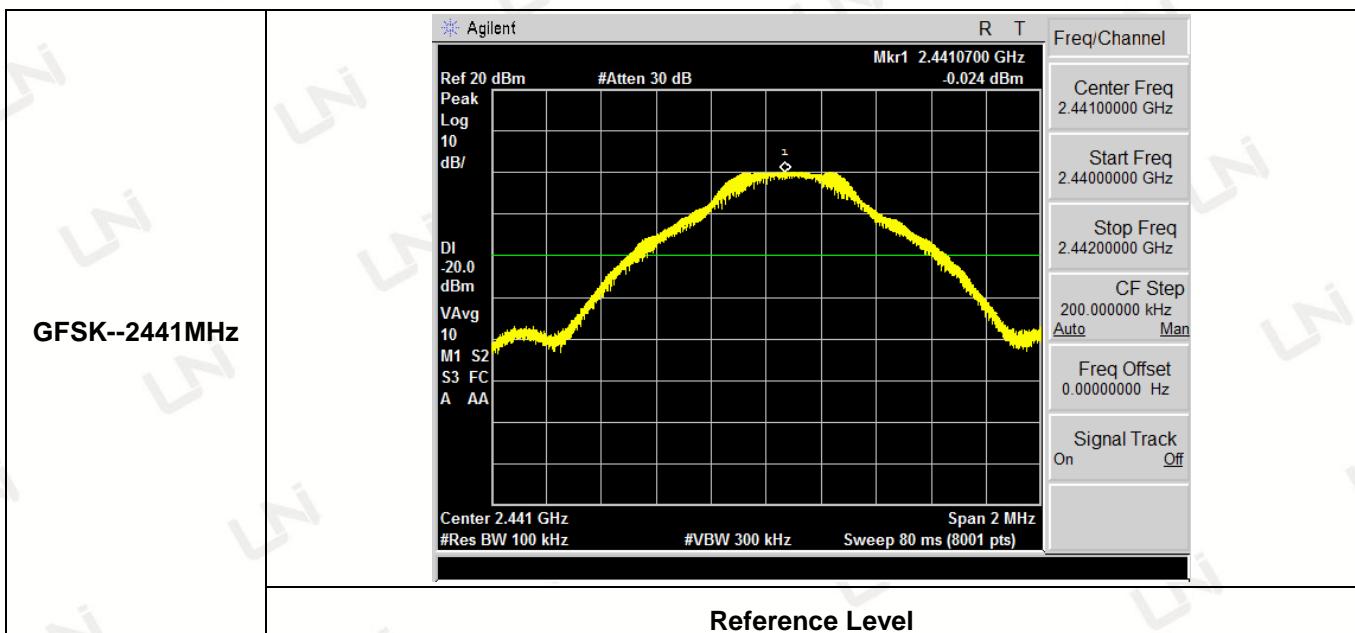**Reference Level****30MHz-25GHz****Reference Level**

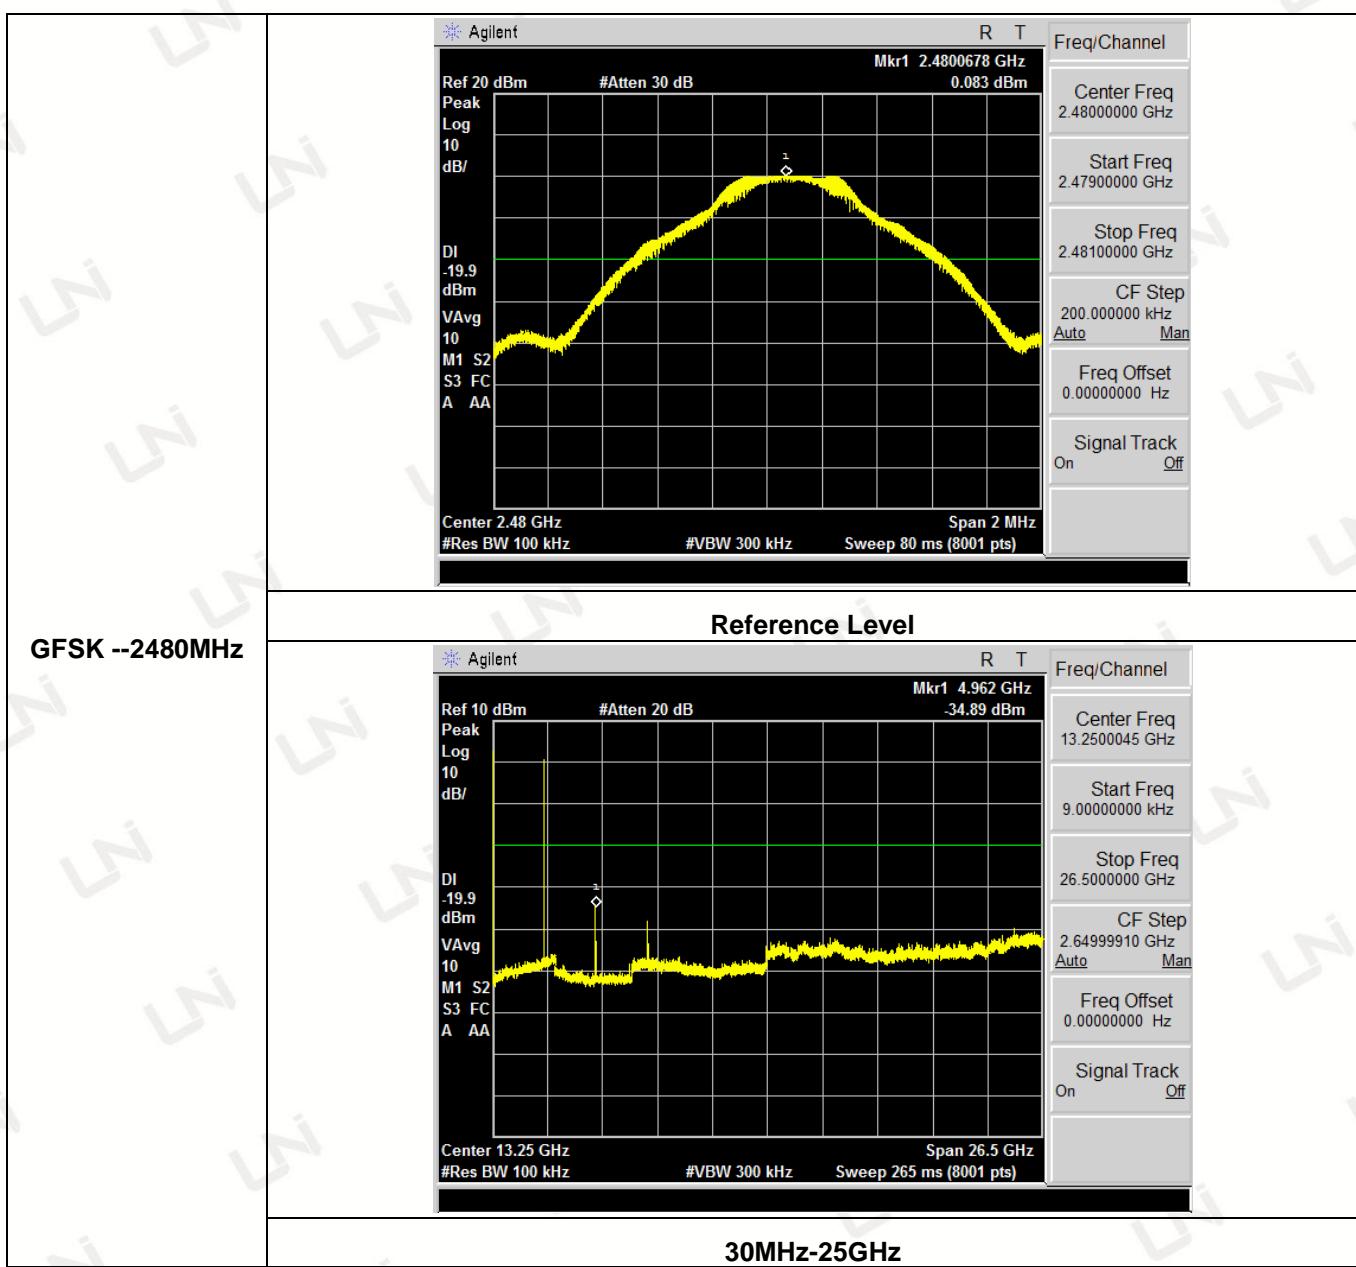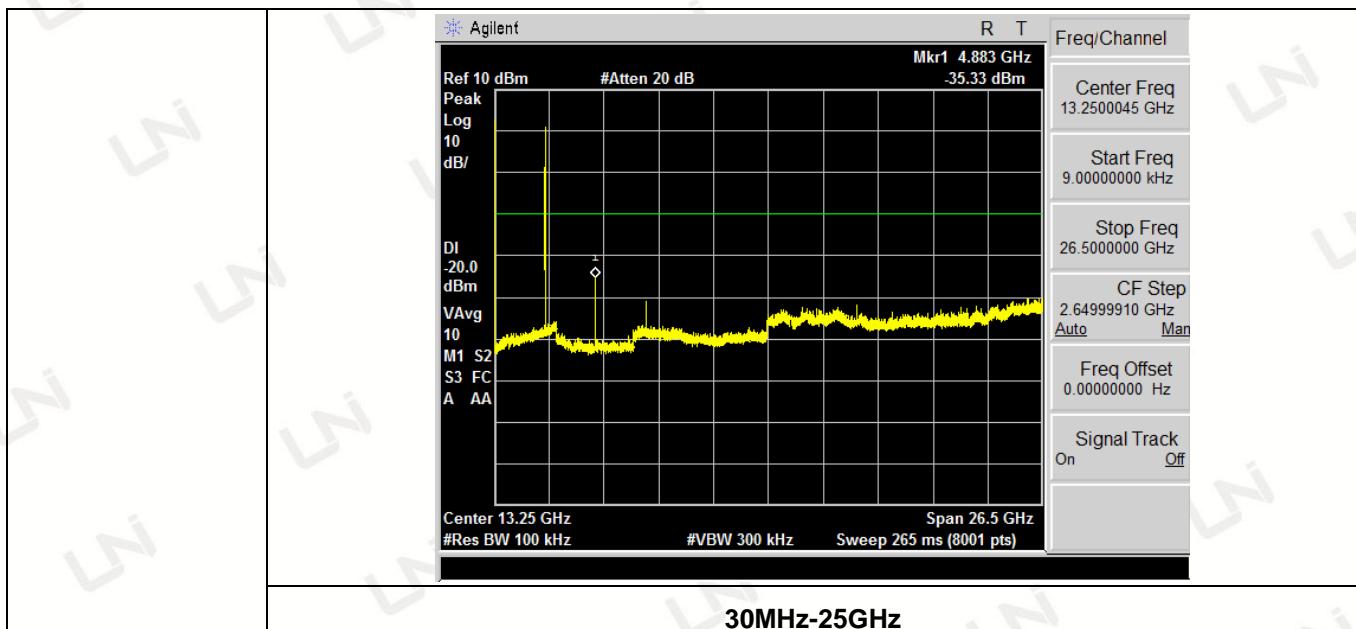


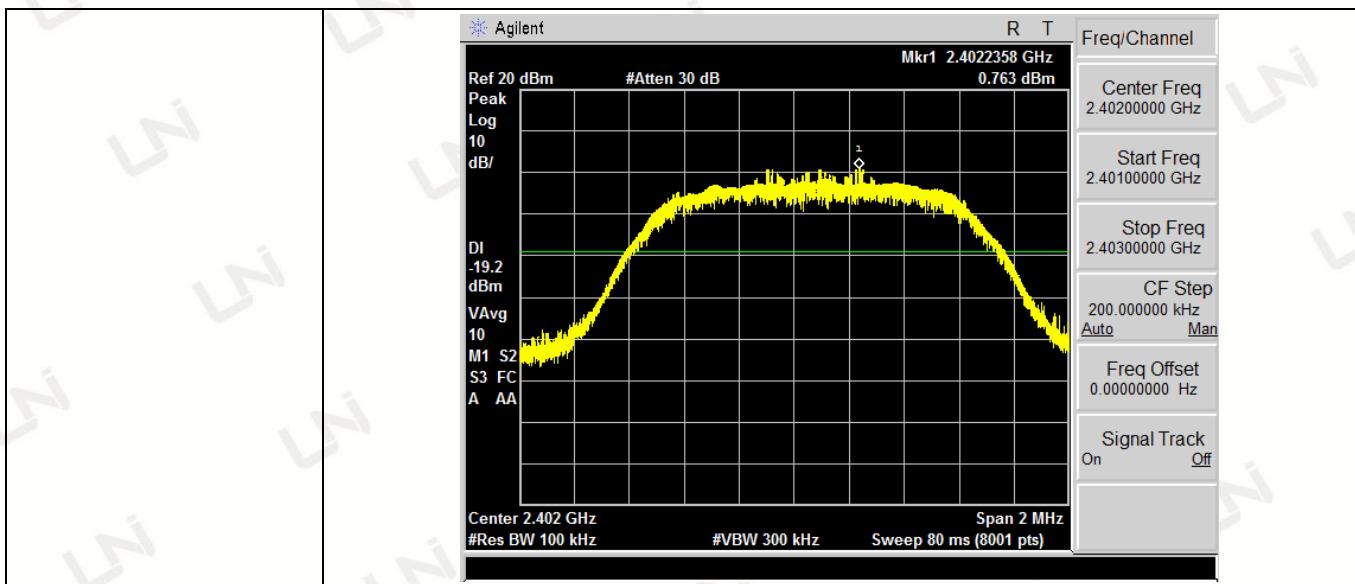



Reference Level

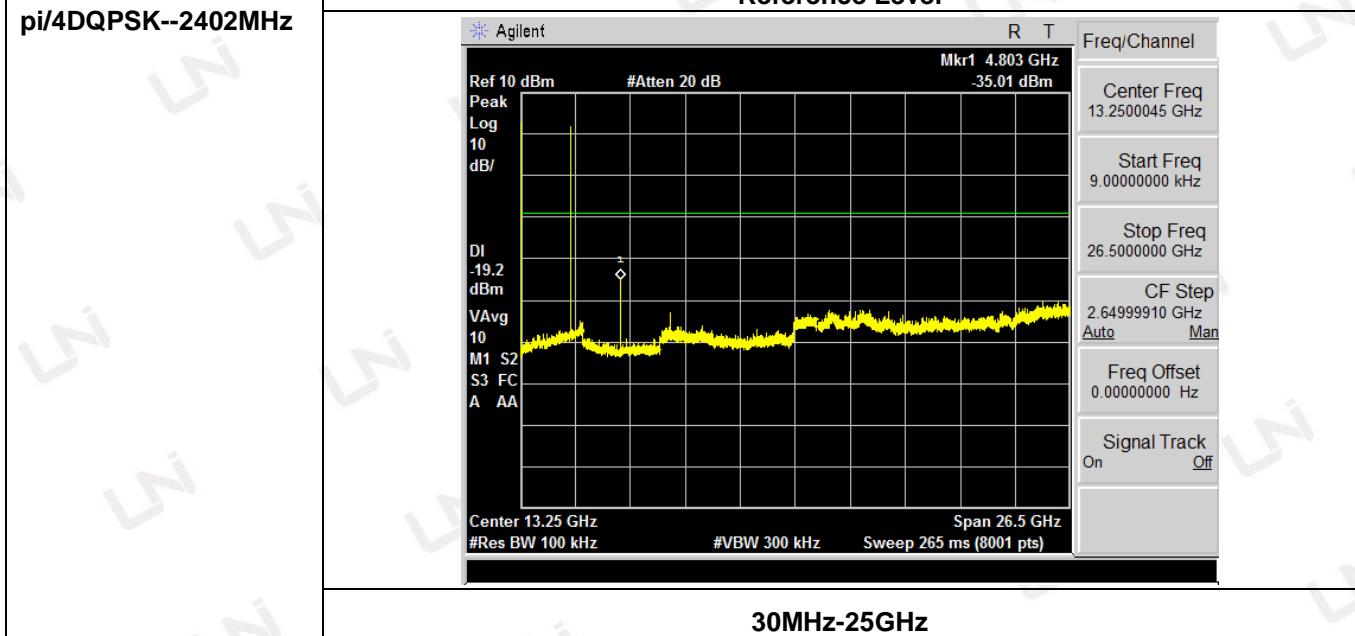


30MHz-25GHz



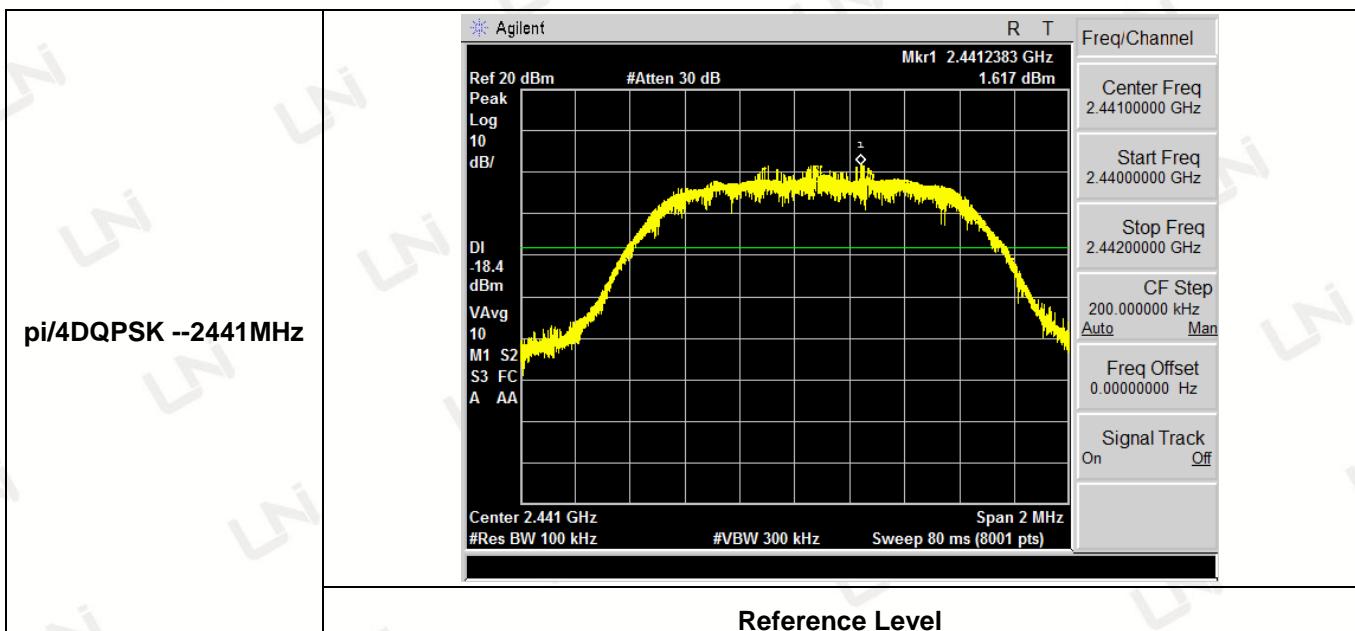




Reference Level

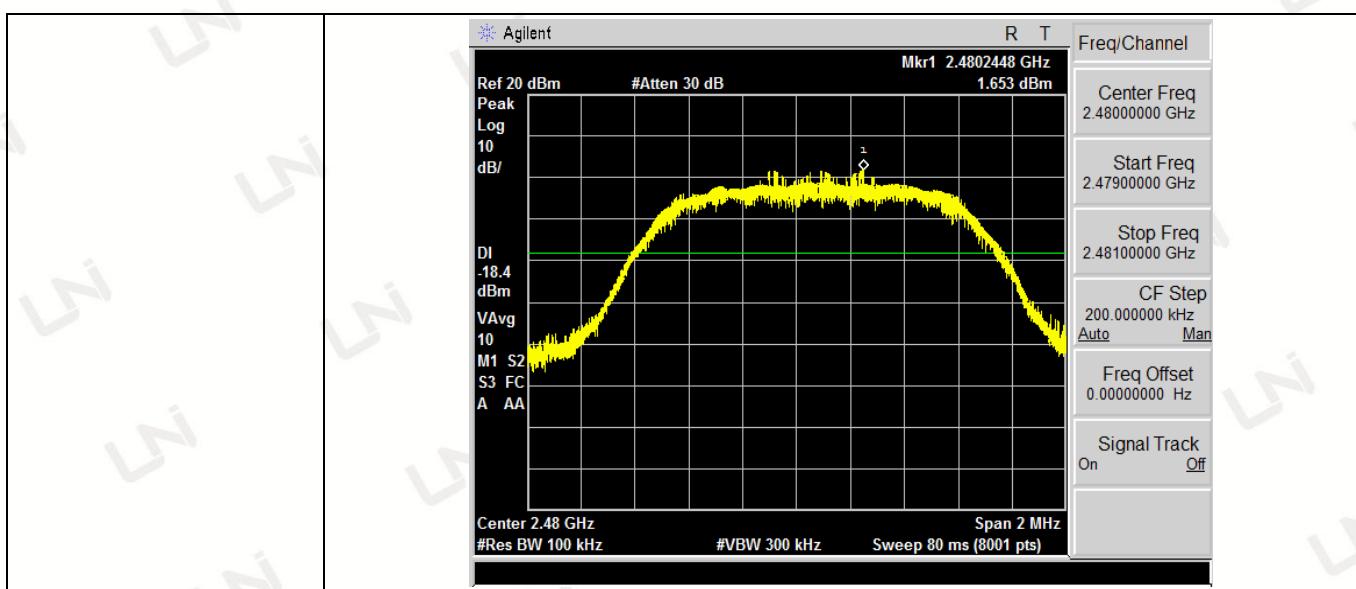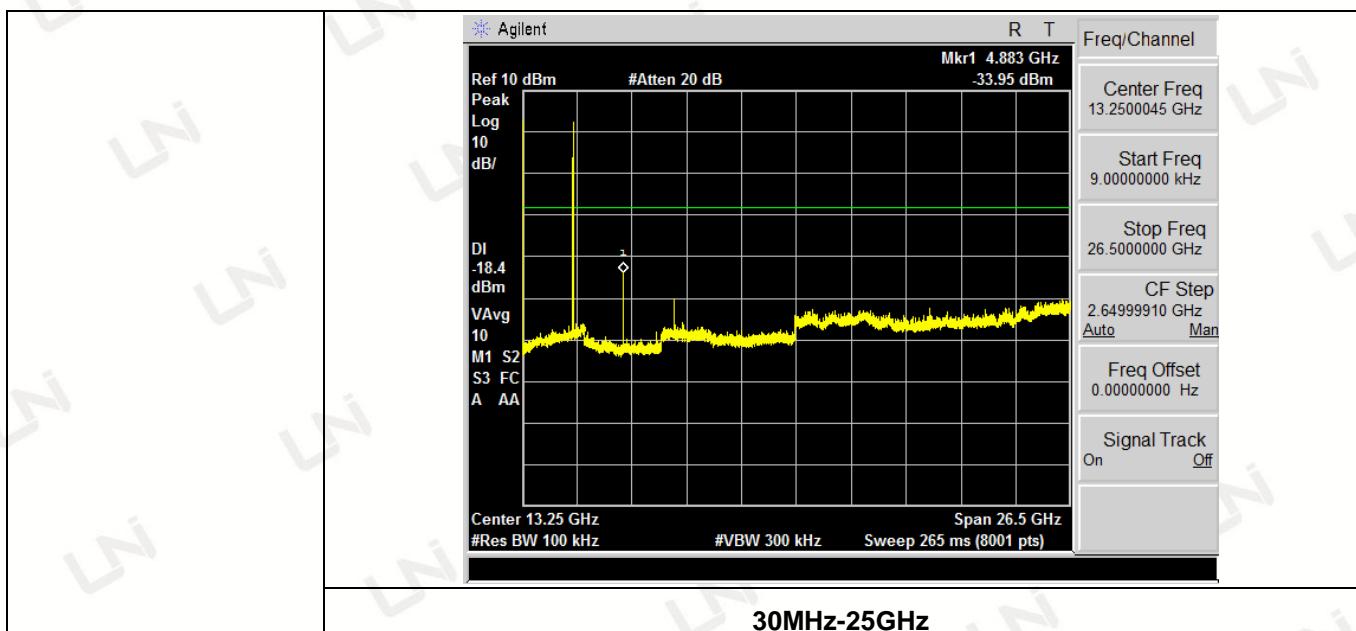


pi/4DQPSK --2480MHz

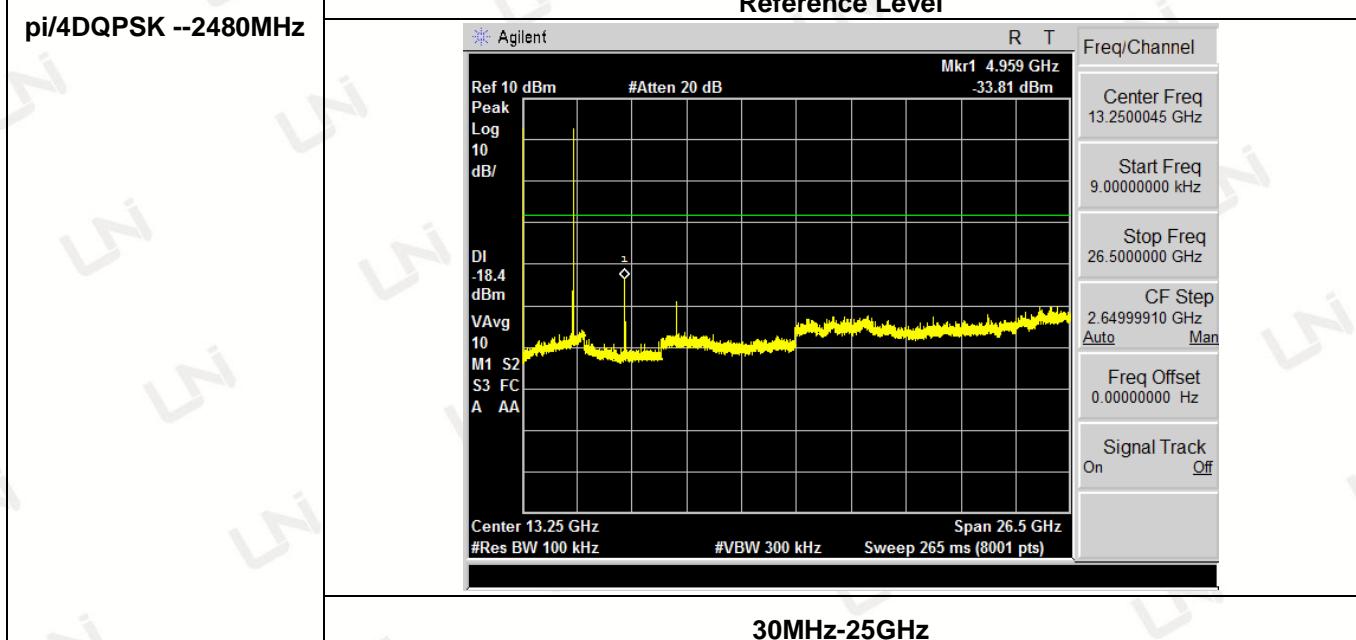


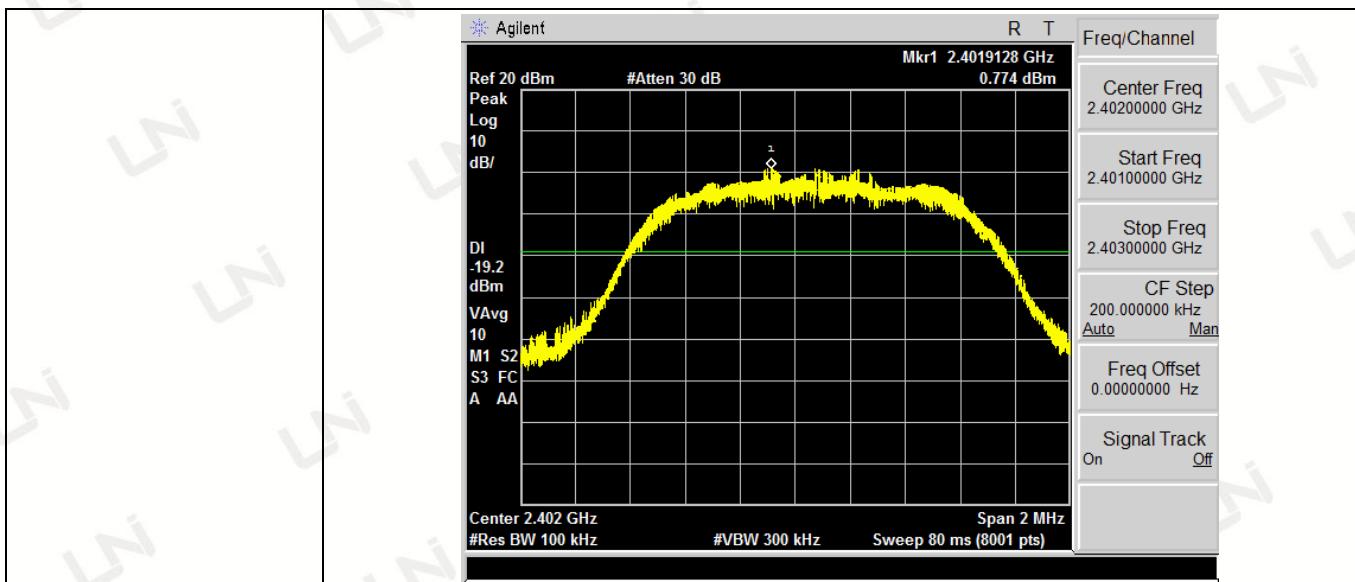
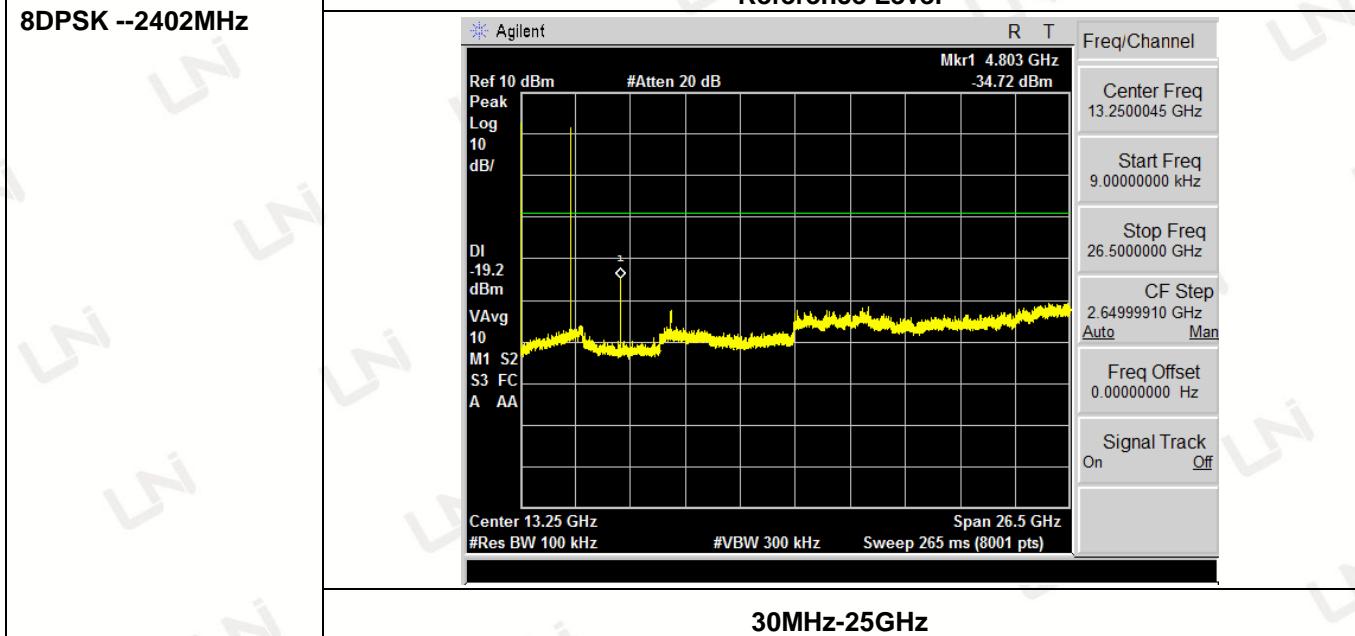
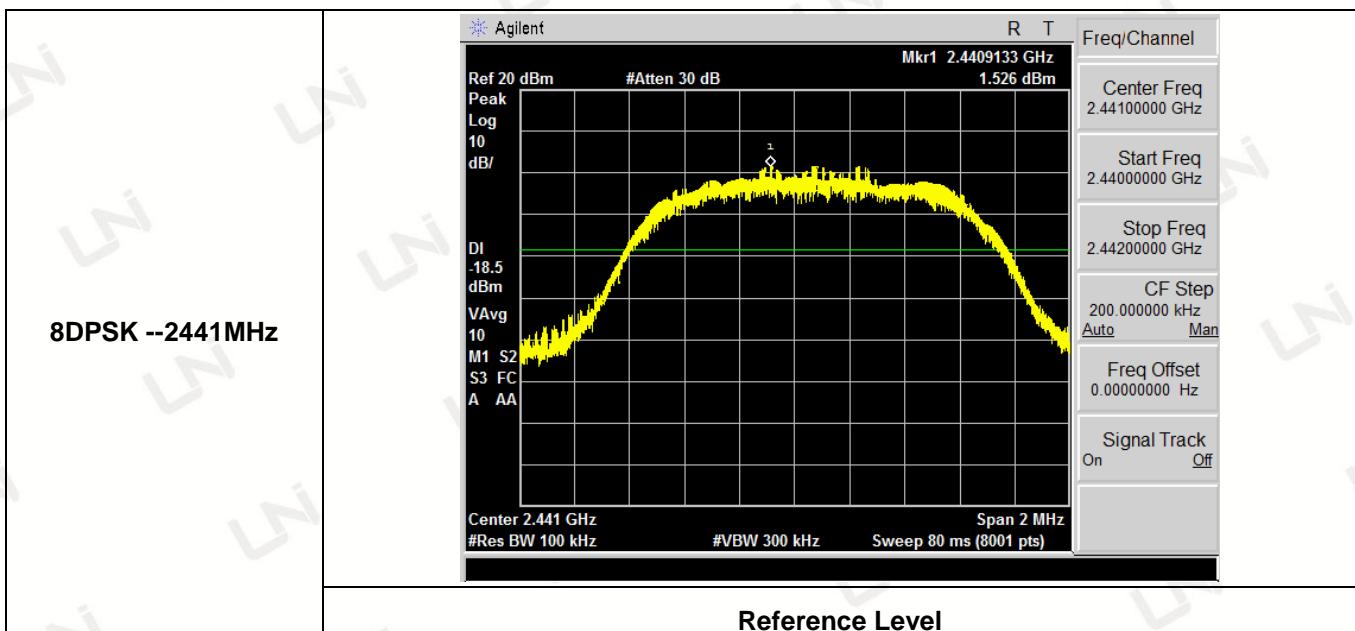
**Reference Level****30MHz-25GHz****Reference Level**

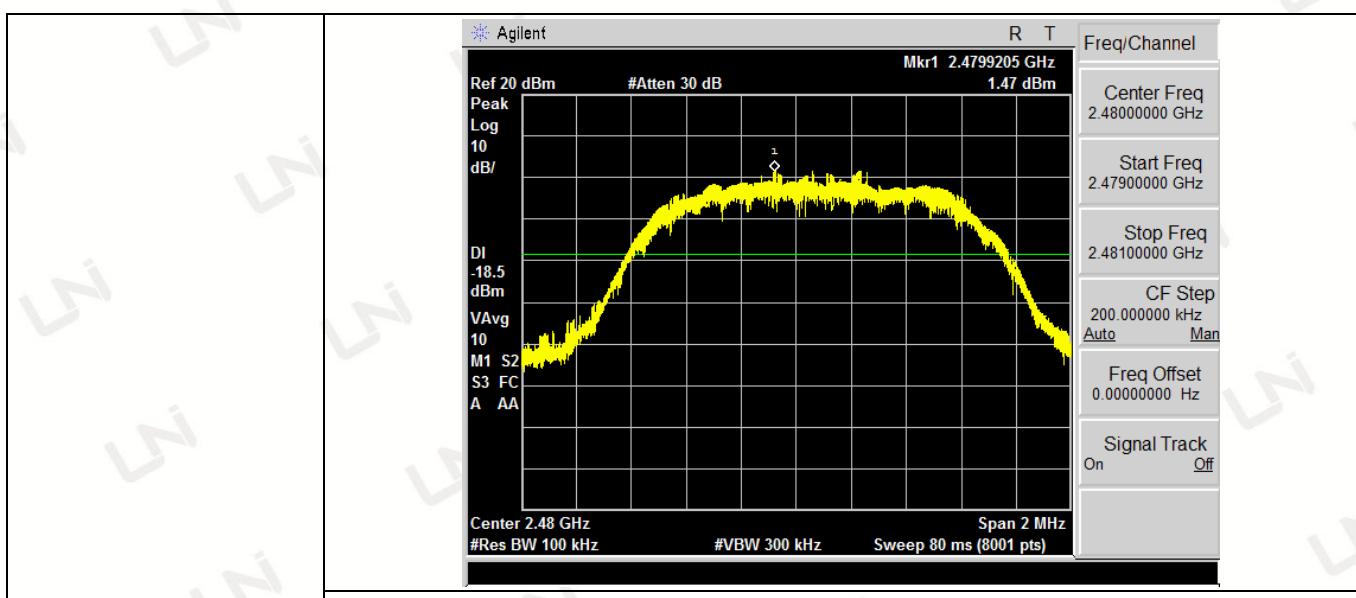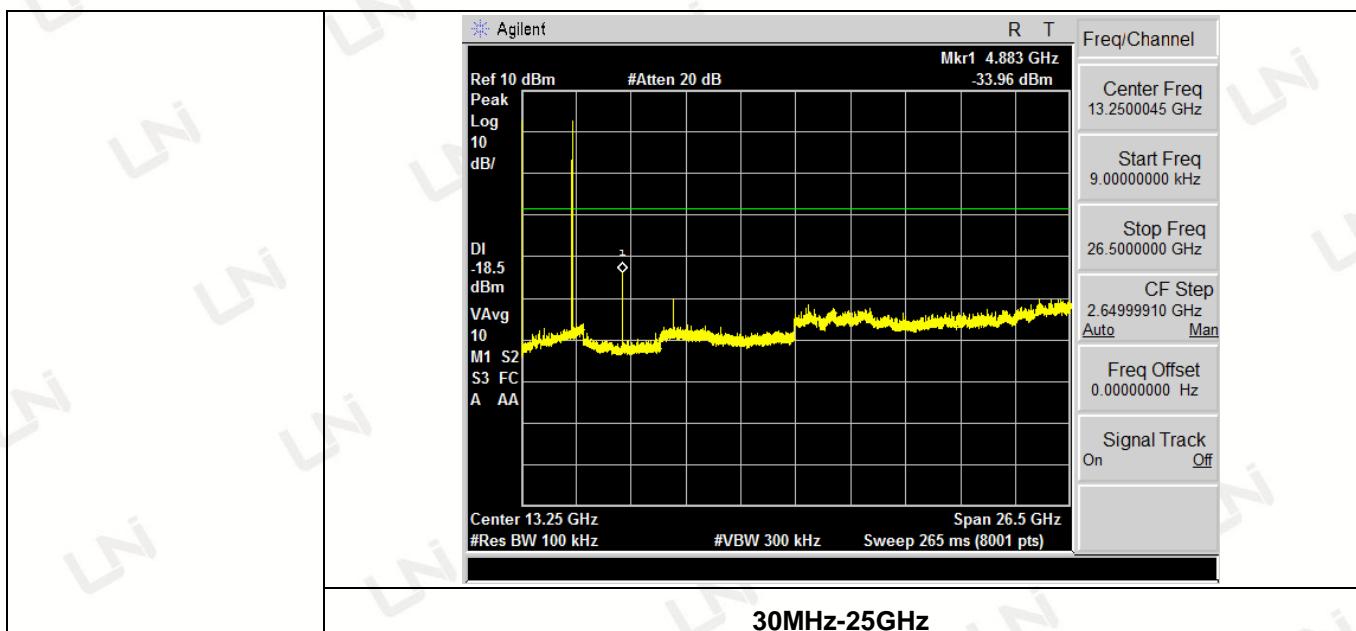

8DPSK --2480MHz

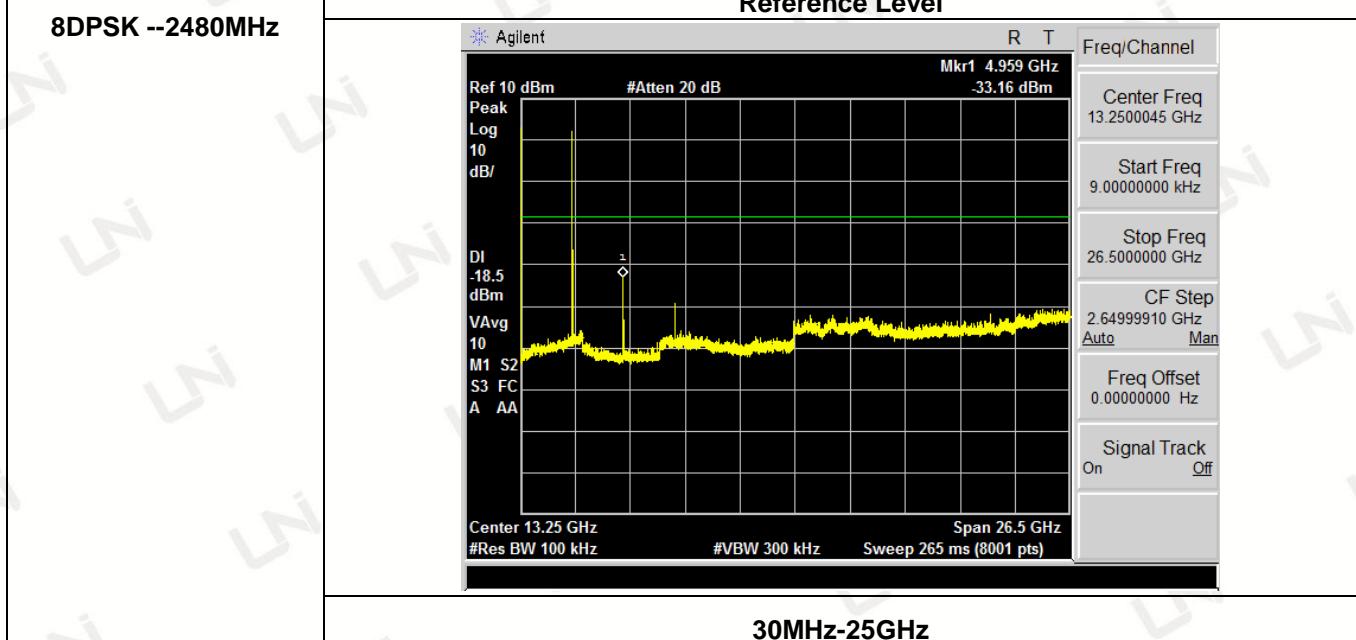

GFSK

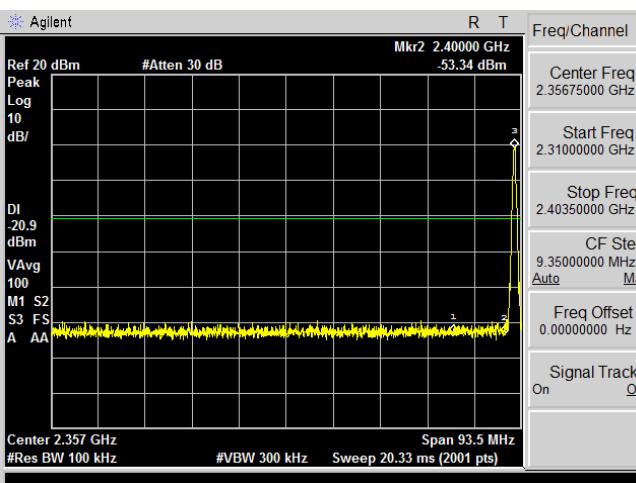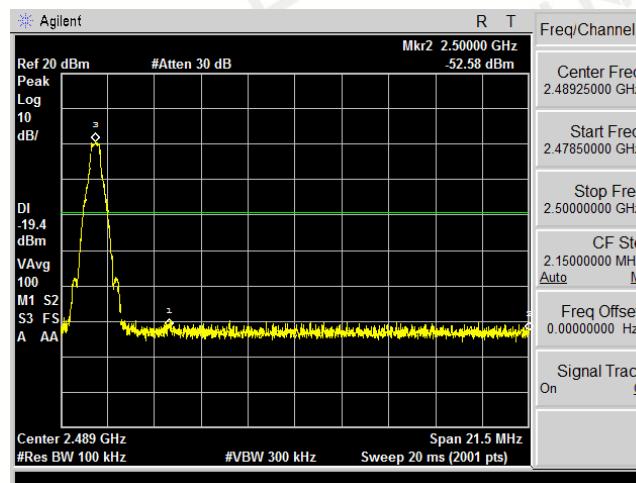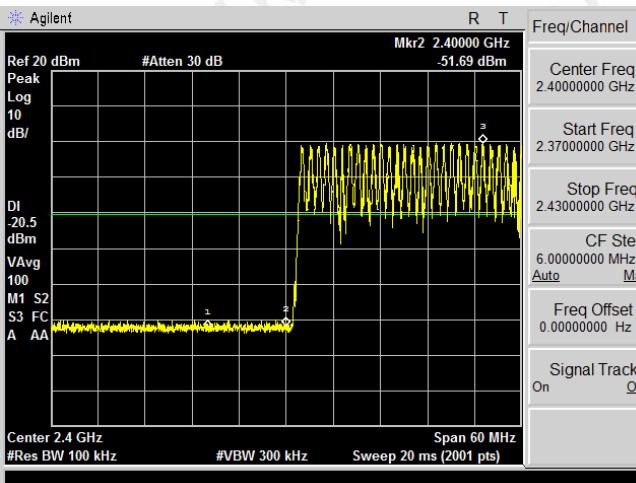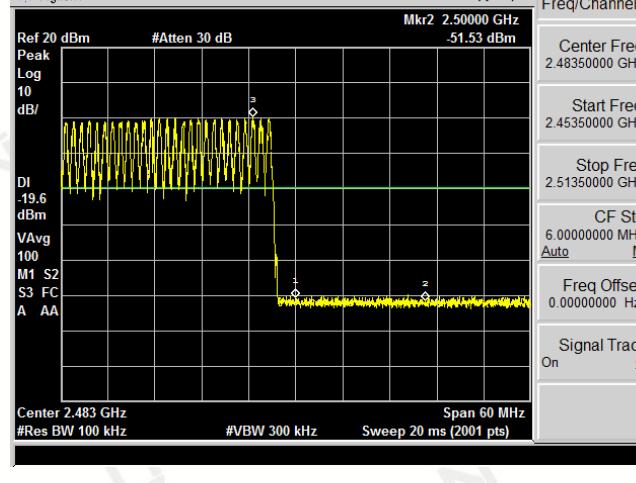GFSK					
 <p>Ref 20 dBm #Atten 30 dB Mkr2 2.40000 GHz -53.34 dBm Peak Log 10 dB/ DI -20.9 dBm VAvg 100 M1 S2 S3 FS A AA Center 2.357 GHz Span 93.5 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 20.33 ms (2001 pts)</p>		 <p>Ref 20 dBm #Atten 30 dB Mkr2 2.50000 GHz -52.58 dBm Peak Log 10 dB/ DI -19.4 dBm VAvg 100 M1 S2 S3 FS A AA Center 2.489 GHz Span 21.5 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 20 ms (2001 pts)</p>			
Frequency(MHz)	Bandedge(dBm)	limit(dBm)	Results		
2390	-53.09	-20.9	Pass		
2400	-53.34	-20.9	Pass		
Left Band edge hoping off		Right Band edge hoping off			
 <p>Ref 20 dBm #Atten 30 dB Mkr2 2.40000 GHz -51.69 dBm Peak Log 10 dB/ DI -20.5 dBm VAvg 100 M1 S2 S3 FC A AA Center 2.4 GHz Span 60 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 20 ms (2001 pts)</p>					
 <p>Ref 20 dBm #Atten 30 dB Mkr2 2.50000 GHz -51.53 dBm Peak Log 10 dB/ DI -19.6 dBm VAvg 100 M1 S2 S3 FC A AA Center 2.483 GHz Span 60 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 20 ms (2001 pts)</p>					
Frequency(MHz)	Bandedge(dBm)	limit(dBm)	Results		
2390	-52.61	-20.5	Pass		
2400	-51.69	-20.5	Pass		
Left Band edge hoping on		Right Band edge hoping on			

pi/4DQPSK

<table border="1"> <thead> <tr> <th>Frequency(MHz)</th><th>Bandedge(dBm)</th><th>limit(dBm)</th><th>Results</th></tr> </thead> <tbody> <tr> <td>2390</td><td>-53.11</td><td>-19.5</td><td>Pass</td></tr> <tr> <td>2400</td><td>-53.52</td><td>-19.5</td><td>Pass</td></tr> </tbody> </table>				Frequency(MHz)	Bandedge(dBm)	limit(dBm)	Results	2390	-53.11	-19.5	Pass	2400	-53.52	-19.5	Pass	<table border="1"> <thead> <tr> <th>Frequency(MHz)</th><th>Bandedge(dBm)</th><th>limit(dBm)</th><th>Results</th></tr> </thead> <tbody> <tr> <td>2483.5</td><td>-51.24</td><td>-18.3</td><td>Pass</td></tr> <tr> <td>2500</td><td>-52.16</td><td>-18.3</td><td>Pass</td></tr> </tbody> </table>				Frequency(MHz)	Bandedge(dBm)	limit(dBm)	Results	2483.5	-51.24	-18.3	Pass	2500	-52.16	-18.3	Pass
Frequency(MHz)	Bandedge(dBm)	limit(dBm)	Results																												
2390	-53.11	-19.5	Pass																												
2400	-53.52	-19.5	Pass																												
Frequency(MHz)	Bandedge(dBm)	limit(dBm)	Results																												
2483.5	-51.24	-18.3	Pass																												
2500	-52.16	-18.3	Pass																												
Left Band edge hoping off				Right Band edge hoping off																											
<table border="1"> <thead> <tr> <th>Frequency(MHz)</th><th>Bandedge(dBm)</th><th>limit(dBm)</th><th>Results</th></tr> </thead> <tbody> <tr> <td>2390</td><td>-52.5</td><td>-20.1</td><td>Pass</td></tr> <tr> <td>2400</td><td>-52.63</td><td>-20.1</td><td>Pass</td></tr> </tbody> </table>				Frequency(MHz)	Bandedge(dBm)	limit(dBm)	Results	2390	-52.5	-20.1	Pass	2400	-52.63	-20.1	Pass	<table border="1"> <thead> <tr> <th>Frequency(MHz)</th><th>Bandedge(dBm)</th><th>limit(dBm)</th><th>Results</th></tr> </thead> <tbody> <tr> <td>2483.5</td><td>-51.32</td><td>-19.1</td><td>Pass</td></tr> <tr> <td>2500</td><td>-51.58</td><td>-19.1</td><td>Pass</td></tr> </tbody> </table>				Frequency(MHz)	Bandedge(dBm)	limit(dBm)	Results	2483.5	-51.32	-19.1	Pass	2500	-51.58	-19.1	Pass
Frequency(MHz)	Bandedge(dBm)	limit(dBm)	Results																												
2390	-52.5	-20.1	Pass																												
2400	-52.63	-20.1	Pass																												
Frequency(MHz)	Bandedge(dBm)	limit(dBm)	Results																												
2483.5	-51.32	-19.1	Pass																												
2500	-51.58	-19.1	Pass																												
Left Band edge hoping on				Right Band edge hoping on																											

8DPSK

<table border="1"> <thead> <tr> <th>Frequency(MHz)</th><th>Bandedge(dBm)</th><th>limit(dBm)</th><th>Results</th></tr> </thead> <tbody> <tr> <td>2390</td><td>-54.16</td><td>-19.70</td><td>Pass</td></tr> <tr> <td>2400</td><td>-52.03</td><td>-19.70</td><td>Pass</td></tr> </tbody> </table>				Frequency(MHz)	Bandedge(dBm)	limit(dBm)	Results	2390	-54.16	-19.70	Pass	2400	-52.03	-19.70	Pass	<table border="1"> <thead> <tr> <th>Frequency(MHz)</th><th>Bandedge(dBm)</th><th>limit(dBm)</th><th>Results</th></tr> </thead> <tbody> <tr> <td>2483.5</td><td>-52.39</td><td>-18.6</td><td>Pass</td></tr> <tr> <td>2500</td><td>-53.22</td><td>-18.6</td><td>Pass</td></tr> </tbody> </table>				Frequency(MHz)	Bandedge(dBm)	limit(dBm)	Results	2483.5	-52.39	-18.6	Pass	2500	-53.22	-18.6	Pass
Frequency(MHz)	Bandedge(dBm)	limit(dBm)	Results																												
2390	-54.16	-19.70	Pass																												
2400	-52.03	-19.70	Pass																												
Frequency(MHz)	Bandedge(dBm)	limit(dBm)	Results																												
2483.5	-52.39	-18.6	Pass																												
2500	-53.22	-18.6	Pass																												
Left Band edge hoping off				Right Band edge hoping off																											
<table border="1"> <thead> <tr> <th>Frequency(MHz)</th><th>Bandedge(dBm)</th><th>limit(dBm)</th><th>Results</th></tr> </thead> <tbody> <tr> <td>2390</td><td>-52.67</td><td>-18.70</td><td>Pass</td></tr> <tr> <td>2400</td><td>-51.48</td><td>-18.70</td><td>Pass</td></tr> </tbody> </table>				Frequency(MHz)	Bandedge(dBm)	limit(dBm)	Results	2390	-52.67	-18.70	Pass	2400	-51.48	-18.70	Pass	<table border="1"> <thead> <tr> <th>Frequency(MHz)</th><th>Bandedge(dBm)</th><th>limit(dBm)</th><th>Results</th></tr> </thead> <tbody> <tr> <td>2483.5</td><td>-52.46</td><td>-19.40</td><td>Pass</td></tr> <tr> <td>2500</td><td>-51.27</td><td>-19.40</td><td>Pass</td></tr> </tbody> </table>				Frequency(MHz)	Bandedge(dBm)	limit(dBm)	Results	2483.5	-52.46	-19.40	Pass	2500	-51.27	-19.40	Pass
Frequency(MHz)	Bandedge(dBm)	limit(dBm)	Results																												
2390	-52.67	-18.70	Pass																												
2400	-51.48	-18.70	Pass																												
Frequency(MHz)	Bandedge(dBm)	limit(dBm)	Results																												
2483.5	-52.46	-19.40	Pass																												
2500	-51.27	-19.40	Pass																												
Left Band edge hoping on				Right Band edge hoping on																											

3.10 Pseudorandom Frequency Hopping Sequence

TEST APPLICABLE


For 47 CFR Part 15C section 15.247 (g) (h) requirement:

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hop-ping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hop-ping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

EUT Pseudorandom Frequency Hopping Sequence Requirement


The pseudorandom frequency hopping sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first one of 9 consecutive ones, for example: the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)

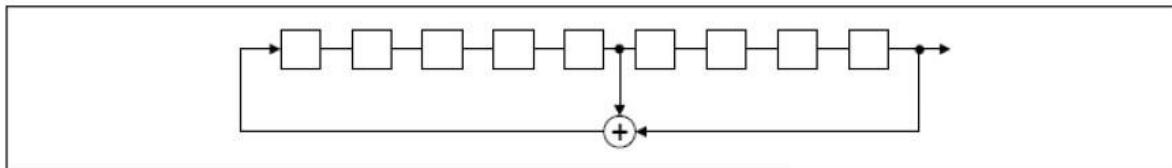

Linear Feedback Shift Register for Generation of the PRBS sequence

An example of pseudorandom frequency hopping sequence as follows:

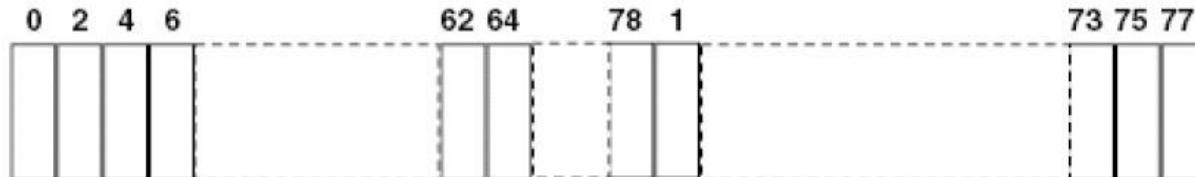

Each frequency used equally on the average by each transmitter.

According to Bluetooth Core Specification, Bluetooth receivers are designed to have input and IF bandwidths that match the hopping channel bandwidths of any Bluetooth transmitters and shift frequencies in synchronization with the transmitted signals.

Compliance for section 15.247(g)

According to Bluetooth Core Specification, the Bluetooth system transmits the packet with the pseudorandom hopping frequency with a continuous data and the short burst transmission from the Bluetooth system is also transmitted under the frequency hopping system with the pseudorandom hopping frequency system.

Compliance for section 15.247(h)

According to Bluetooth Core specification, the Bluetooth system incorporates with an adaptive system to detect other user within the spectrum band so that it individually and independently to avoid hopping on the occupied channels.

According to the Bluetooth Core specification, the Bluetooth system is designed not have the ability to coordinate with other FHSS System in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitter.


3.11 ANTENNA REQUIREMENT

Standard Applicable:

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Connected Construction


The antenna used in this product is an Integral Antenna, the directional gains of antenna used for transmitting is 0.0dbi.

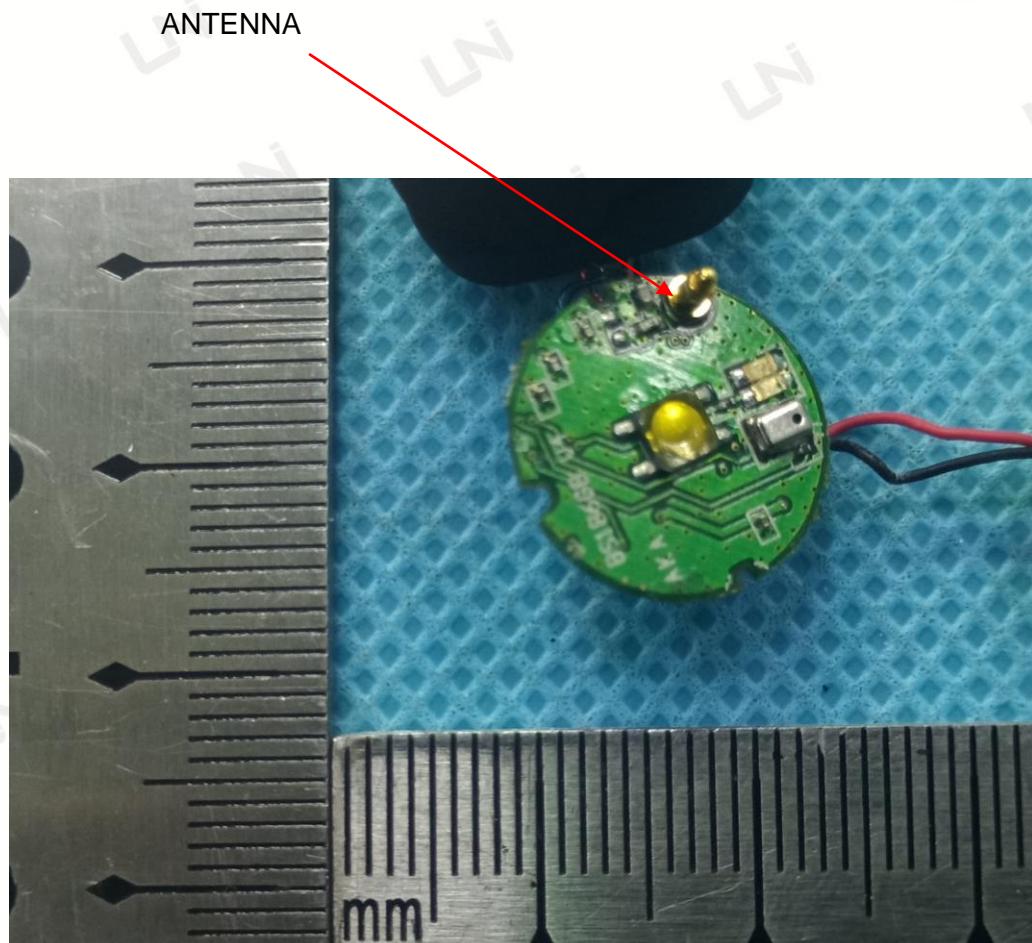


4 PHOTOGRAPH OF TEST

5 PHOTOGRAPH OF EUT**External Photos**

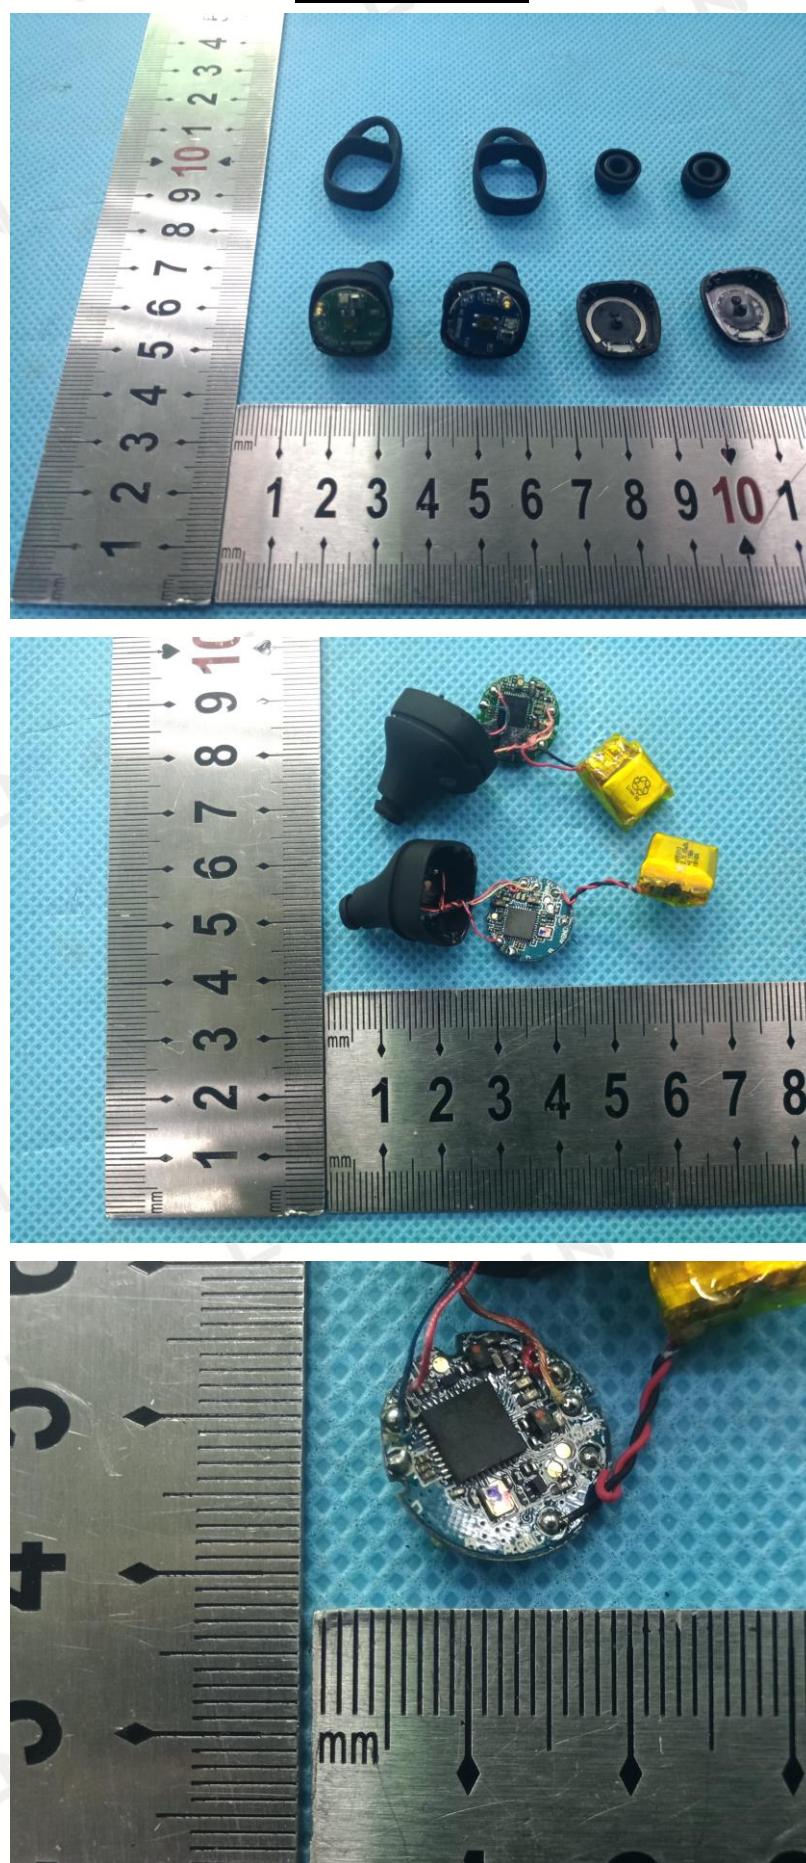

Internal Photos

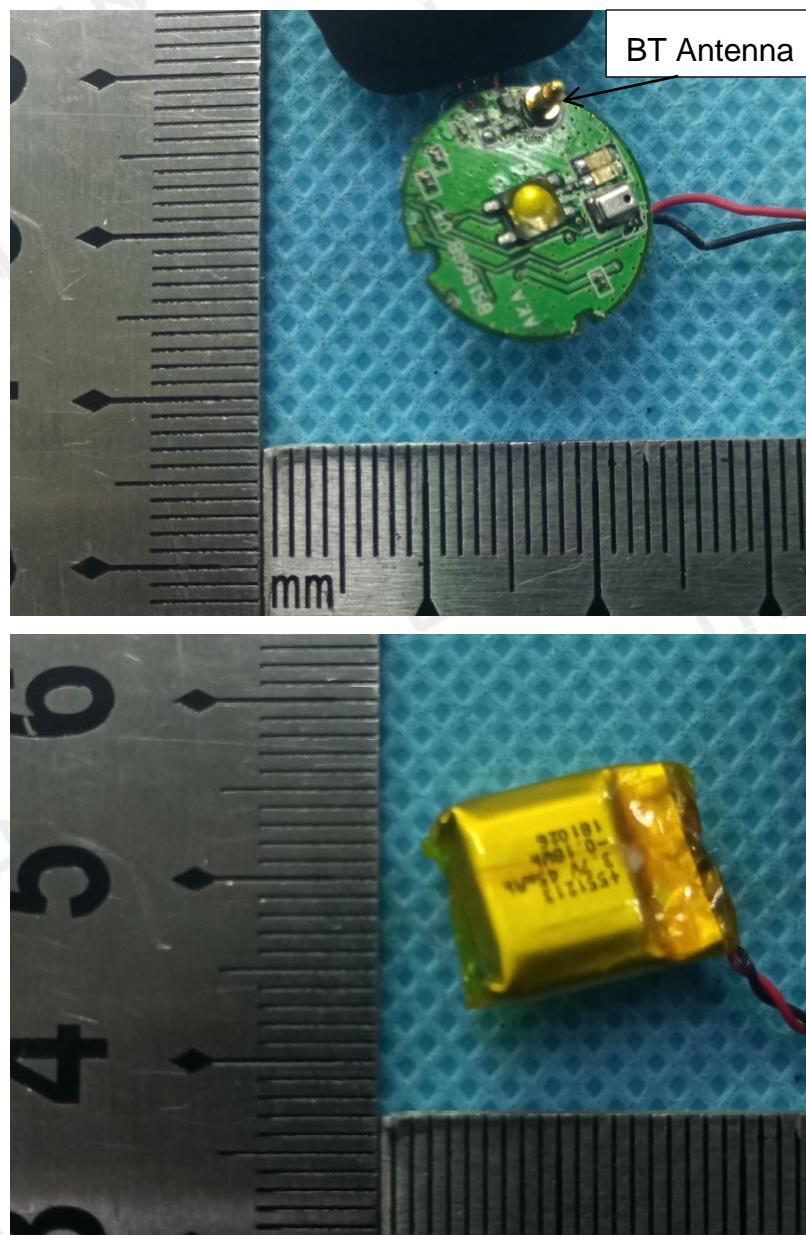

***** End of Report *****