

# TEST REPORT

**Product Name** : Wireless Headset

**Model Number** : HS BT4

**FCC ID** : 2ARB3TALKBT4

Prepared for : Wing Cheong Electrical Company Limited  
Address : Rm.1313-1314, Block A, Hoi Luen Industrial Centre, 55 Hoi  
Yuen Road, Kwun Tong, Kowloon, Hong Kong

Prepared by : EMTEK (SHENZHEN) CO., LTD.  
Address : Bldg 69, Majialong Industry Zone, Nanshan District,  
Shenzhen, Guangdong, China

Tel: (0755) 26954280  
Fax: (0755) 26954282

Report Number : ENS2204130077W00201R  
Date(s) of Tests : April 16, 2022 to May 5, 2022  
Date of issue : May 5, 2022

## Table of Contents

<b>1</b>	<b>TEST RESULT CERTIFICATION .....</b>	<b>3</b>
<b>2</b>	<b>EUT TECHNICAL DESCRIPTION .....</b>	<b>5</b>
<b>3</b>	<b>SUMMARY OF TEST RESULT .....</b>	<b>6</b>
<b>4</b>	<b>TEST METHODOLOGY .....</b>	<b>7</b>
4.1	GENERAL DESCRIPTION OF APPLIED STANDARDS .....	7
4.2	MEASUREMENT EQUIPMENT USED .....	7
4.3	DESCRIPTION OF TEST MODES .....	8
<b>5</b>	<b>FACILITIES AND ACCREDITATIONS .....</b>	<b>8</b>
5.1	FACILITIES.....	8
5.2	LABORATORY ACCREDITATIONS AND LISTINGS.....	8
<b>6</b>	<b>TEST SYSTEM UNCERTAINTY .....</b>	<b>9</b>
<b>7</b>	<b>SETUP OF EQUIPMENT UNDER TEST.....</b>	<b>10</b>
7.1	RADIO FREQUENCY TEST SETUP 1 .....	10
7.2	RADIO FREQUENCY TEST SETUP 2 .....	10
7.3	CONDUCTED EMISSION TEST SETUP .....	12
7.4	SUPPORT EQUIPMENT .....	12
<b>8</b>	<b>TEST REQUIREMENTS.....</b>	<b>13</b>
8.1	BANDWIDTH TEST.....	13
8.2	RADIATED SPURIOUS EMISSION .....	16
8.3	CONDUCTED EMISSIONS TEST.....	28
8.4	ANTENNA APPLICATION .....	31

## 1 TEST RESULT CERTIFICATION

Applicant : Wing Cheong Electrical Company Limited  
Address : Rm.1313-1314, Block A, Hoi Luen Industrial Centre, 55 Hoi Yuen Road, Kwun Tong, Kowloon, Hong Kong  
Manufacturer : Wing Cheong Electrical Company Limited  
Address : Rm.1313-1314, Block A, Hoi Luen Industrial Centre, 55 Hoi Yuen Road, Kwun Tong, Kowloon, Hong Kong  
EUT : Wireless Headset  
Model Name : HS BT4  
Trademark : N/A

Measurement Procedure Used:

<b>APPLICABLE STANDARDS</b>	
<b>STANDARD</b>	<b>TEST RESULT</b>
FCC 47 CFR Part 2, Subpart J	PASS
FCC 47 CFR Part 15, Subpart C	

The above equipment was tested by EMTEK(SHENZHEN) CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 2 and Part 15.249

This report applies to above tested sample only and shall not be reproduced in part without written approval of EMTEK (SHENZHEN) CO., LTD.

Date of Test :

April 16, 2022 to May 5, 2022

Prepared by :

  
Luo Peiye

Luo peiye/Editor

Reviewer :

  
Joe Xia/Supervisor  
  
TESTING

Approve & Authorized Signer :

  
Lisa Wang/Manager

## Modified Information

Version	Report No.	Revision Data	Summary
Ver.1.0	ENS2204130077W00201R	/	Original Version



## 2 EUT TECHNICAL DESCRIPTION

<b>Product</b>	Wireless Headset
<b>Modulation:</b>	HS BT4,
<b>Operating Frequency Range:</b>	5729MHz-5820MHz
<b>Transmit Power Max</b>	87.78dBuV/m
<b>Channel number</b>	47 channels
<b>Modulation:</b>	FSK
<b>Antenna Type:</b>	PCB Antenna
<b>Antenna Gain:</b>	1.46dBi
<b>Power supply</b>	AC 120V/60Hz( DC 5V from adapter) DC 3.7V from Internal Battery)
<b>Temperature Range</b>	-5°C ~ +40°C

*Note: for more details, please refer to the User's manual of the EUT.*

### 3 SUMMARY OF TEST RESULT

FCC Part Clause	Test Parameter	Verdict	Remark
15.207	Conducted Emission	PASS	
15.209	Radiated Emission	PASS	
15.249	Radiated Spurious Emission	PASS	
15.249	Band edge test	PASS	
15.249	20dB Bandwidth	PASS	
15.203	Antenna Requirement	PASS	

NOTE1: N/A (Not Applicable)

NOTE2: The report use radiated measurements in the restricted frequency bands. In addition, the radiated test is also performed to ensure the emissions emanating from the device cabinet also comply with the applicable limits.

### RELATED SUBMITTAL(S) / GRANT(S):

This submittal(s) (test report) is intended for FCC ID:2ARB3TALKBT4 filing to comply with Section 15.249 of the FCC Part 15, Subpart C Rules.

## 4 TEST METHODOLOGY

### 4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to its specifications, the EUT must comply with the requirements of the following standards:

FCC 47 CFR Part 2, Subpart J

FCC 47 CFR Part 15, Subpart C

### 4.2 MEASUREMENT EQUIPMENT USED

#### 4.2.1 Conducted Emission Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	DUE CAL.
EMI Test Receiver	Rohde & Schwarz	ESCI	101045	2021/5/15	1Year
PULSE LIMTER	Rohde & Schwarz	ESH3-Z2	100107	2021/5/15	1Year
AMN	Rohde & Schwarz	ESH3-Z5	100191	2021/5/15	1Year

#### 4.2.2 For 3m Radiated Emission Measurement (3m chamber 1#)

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
Pre-Amplifier	HP	8447F	2944A07999	2021/5/15	1Year
EMI Test Receiver	Rohde & Schwarz	ESCI	101414	2021/5/15	1Year
Bilog Antenna	Schwarzbeck	VULB9163	712	2021/7/5	2 Year
Horn antenna	Schwarzbeck	BBHA9120D	9120D-1178	2020/7/4	2 Year
Pre-Amplifie	Lunar EM	LNA1G18-48	J101113101000 1	2021/5/15	1Year
Spectrum Analyzer	Rohde & Schwarz	FSV40	100967	2021/5/15	1Year
Horn antenna	Schwarzbeck	BBHA9170	9170-399	2021/6/12	2 Year

#### 4.2.3 Radio Frequency Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	DUE CAL.
Signal Analyzer	Agilent	N9010A	MY53470879	May 15, 2021	1Year
Vector Signal Generater	Agilent	N5182B	MY53050878	May 15, 2021	1Year
Analog Signal Generator	Agilent	N5171B	MY53050553	May 15, 2021	1Year
Power Meter	Agilent	PS-X10-100	\	May 15, 2021	1Year
Blocking Box	THEDA	AD211	TW5451140	May 15, 2021	1Year
Switchgroup	THEDA	ETF-025(VAS C6)	TW5451008	N/A	N/A
MIMO Matrix Switch	THEDA	4P5TM18	TW5451009	N/A	N/A
Temperature&Humidity Chamber	ESPEC	EL-02KA	12107166	Jul. 03, 2021	1 Year

**Remark:** Each piece of equipment is scheduled for calibration once a year.

#### 4.3 DESCRIPTION OF TEST MODES

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

### 5 FACILITIES AND ACCREDITATIONS

#### 5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

Bldg 69, Majialong Industry Zone District, Nanshan District, Shenzhen, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

#### 5.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

EMC Lab.

: Accredited by CNAS, 2018.11.30

The certificate is valid until 2022.10.28

The Laboratory has been assessed and proved to be in compliance with CNAS-CL01:2006 (identical to ISO/IEC 17025:2017)

The Certificate Registration Number is L2291

Accredited by FCC, August 09, 2018

Designation Number: CN1204

Test Firm Registration Number: 882943

Accredited by A2LA, August 08, 2018

The Certificate Registration Number is 4321.01

Accredited by Industry Canada, November 09, 2018

The Conformity Assessment Body Identifier is CN0008

Name of Firm

Site Location

: EMTEK(SHENZHEN) CO., LTD.

: Bldg 69, Majialong Industry Zone,

Nanshan District, Shenzhen, Guangdong, China

## 6 TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-5}$
Maximum Peak Output Power Test	$\pm 1.0 \text{dB}$
Conducted Emissions Test	$\pm 2.0 \text{dB}$
Radiated Emission Test	$\pm 2.0 \text{dB}$
Occupied Bandwidth Test	$\pm 1.0 \text{dB}$
Band Edge Test	$\pm 3 \text{dB}$
All emission, radiated	$\pm 3 \text{dB}$
Antenna Port Emission	$\pm 3 \text{dB}$
Temperature	$\pm 0.5 \text{ }^{\circ}\text{C}$
Humidity	$\pm 3\%$


Measurement Uncertainty for a level of Confidence of 95%



## 7 SETUP OF EQUIPMENT UNDER TEST

### 7.1 RADIO FREQUENCY TEST SETUP 1

The EUT wireless component's antenna port(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.



### 7.2 RADIO FREQUENCY TEST SETUP 2

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013

Below 30MHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna (loop antenna). The Antenna should be positioned with its plane vertical at the specified distance from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. The center of the loop shall be 1 m above the ground. For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT.


30MHz-1GHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).


Above 1GHz:

The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).


#### (a) Radiated Emission Test Set-Up, Frequency Below 30MHz

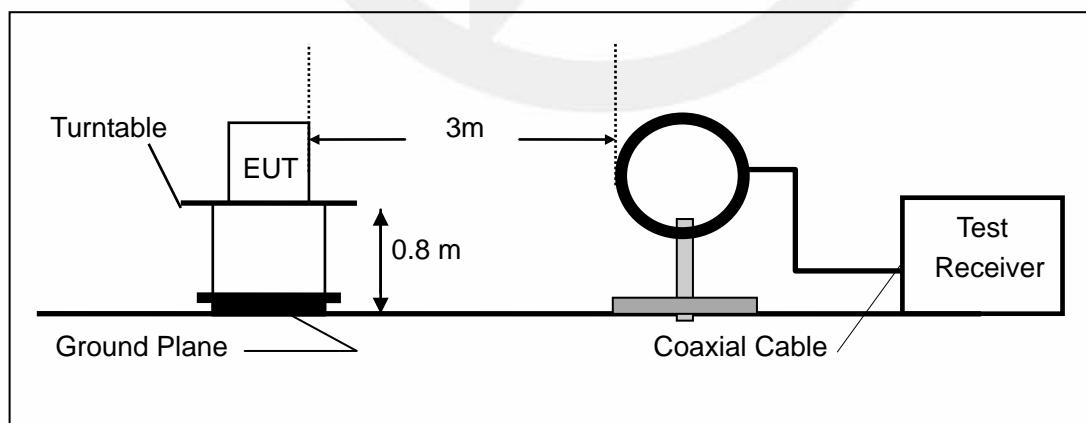

(b) Radiated Emission Test Set-Up, Frequency Below 1000MHz

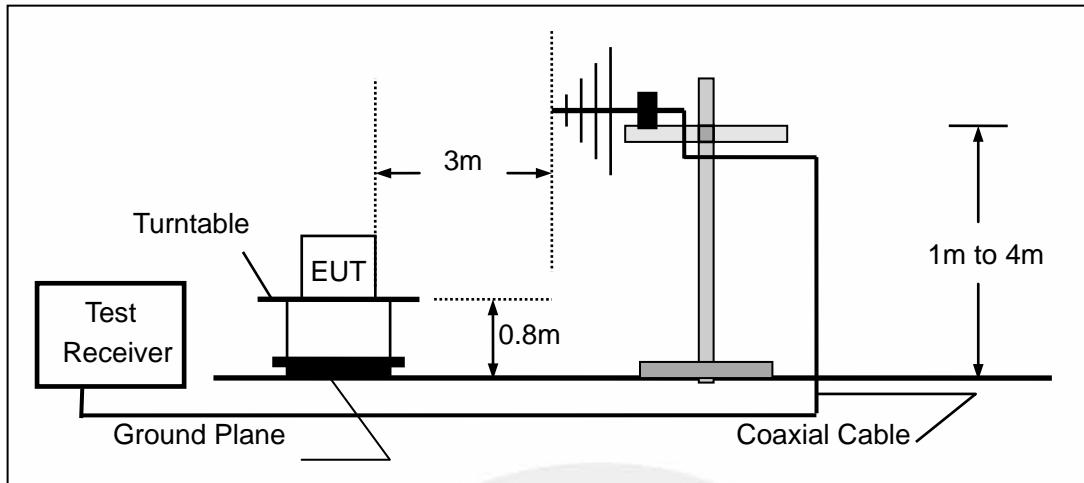

(c) Radiated Emission Test Set-Up, Frequency above 1000MHz

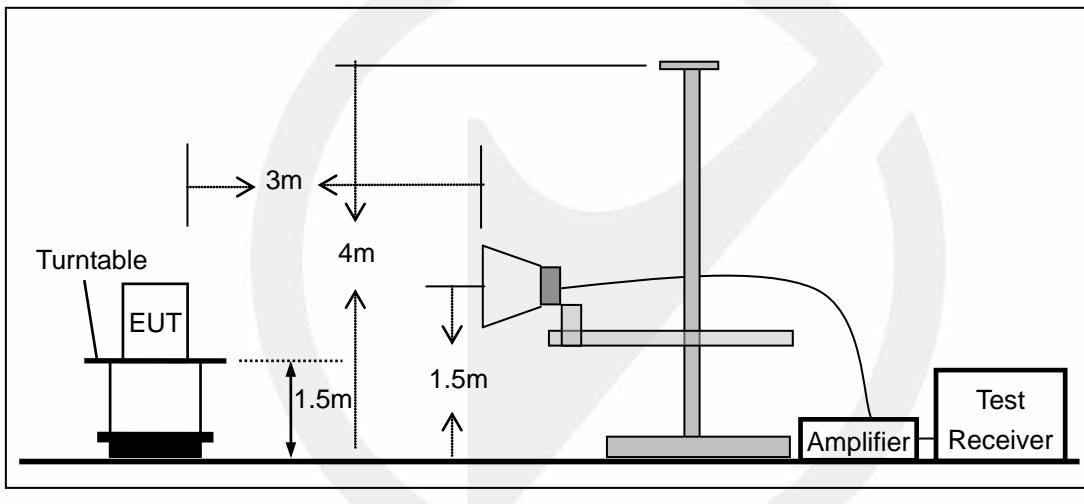


### 7.3 CONDUCTED EMISSION TEST SETUP

The mains cable of the EUT (maybe per AC/DC Adapter) must be connected to LISN. The LISN shall be placed 0.8 m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8m from the LISN.

Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.1 m.

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

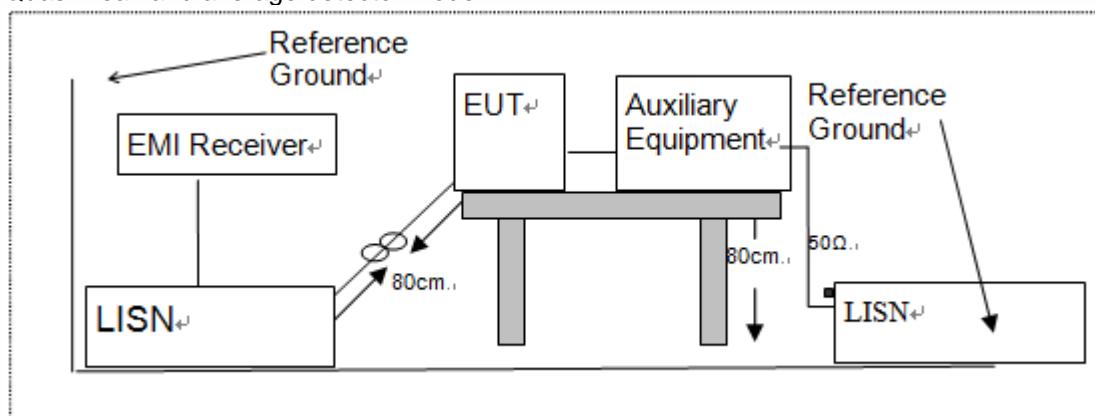

### 7.4 SUPPORT EQUIPMENT

Description	Manufacturer	Model	Serial Number
/	/	/	/

#### Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

## 8 TEST REQUIREMENTS

### 8.1 BANDWIDTH TEST

#### 8.1.1 Applicable Standard

According to FCC Part 15.249

#### 8.1.2 Conformance Limit

N/A

#### 8.1.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

#### 8.1.4 Test Procedure

The EUT was operating in controlled its channel. Printed out the test result from the spectrum by hard copy function.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously

Set RBW  $\geq$  1% of the 20 dB bandwidth.

Set the video bandwidth (VBW)  $\geq$  RBW.

Set Span= approximately 2 to 3 times the 20 dB bandwidth.

Set Detector = Peak.

Set Trace mode = max hold.

Set Sweep = auto couple.


Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

Measure and record the results in the test report.

### Test Results

Temperature:	25° C
Relative Humidity:	54.6%
ATM Pressure:	1009 mbar

Operation Mode	Channel Number	Channel Frequency (MHz)	20db Measurement Bandwidth (MHz)	Limit (kHz)	Verdict
GFSK	1	5729	4.071	N/A	PASS
	24	5775	4.065	N/A	PASS
	47	5820	4.176	N/A	PASS

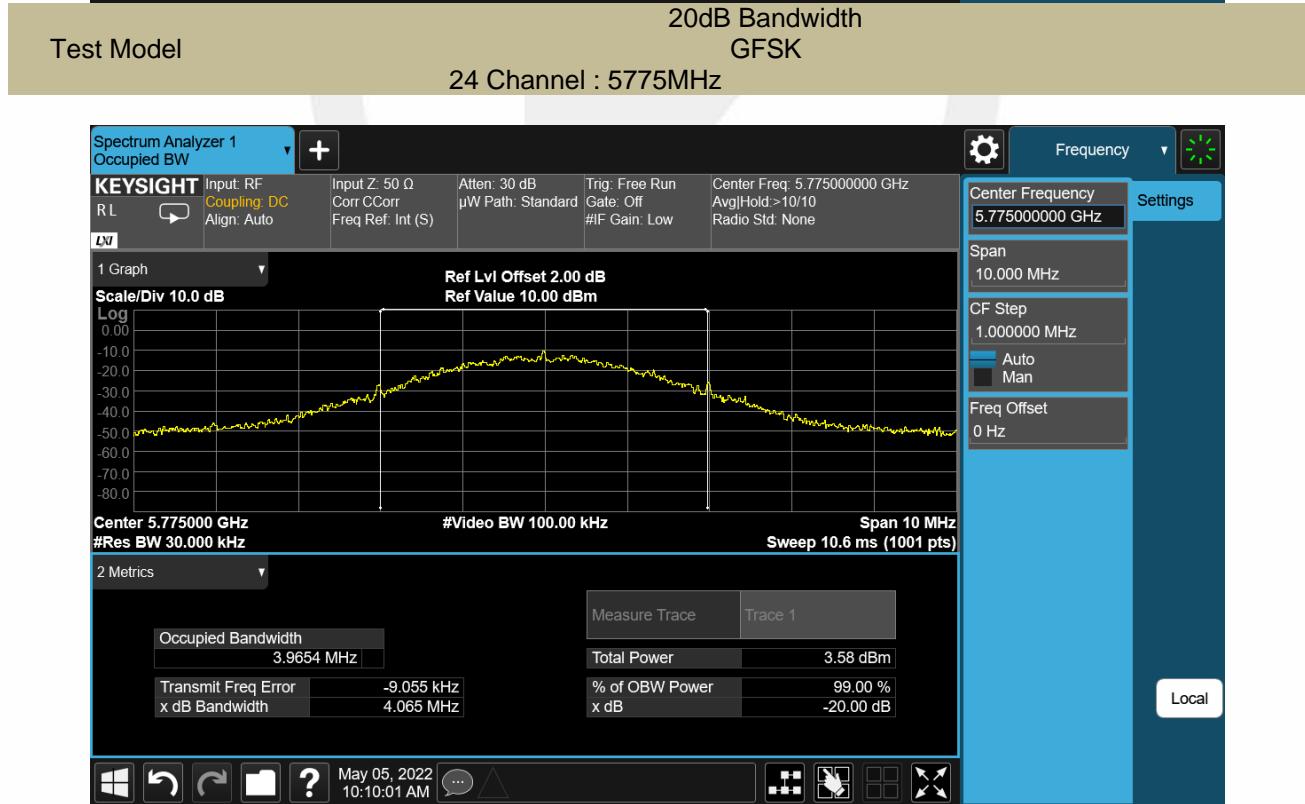



## 8.2 RADIATED SPURIOUS EMISSION

### 8.2.1 Applicable Standard

According to FCC Part 15.249 and 15.209

### 8.2.2 Conformance Limit

According to FCC Part 15.249: radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC Part15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

According to FCC Part15.205, the level of any transmitter spurious emission in Restricted bands shall not exceed the level of the emission specified in the following table

Restricted Frequency(MHz)	Field Strength ( $\mu$ V/m)	Field Strength (dB $\mu$ V/m)	Measurement Distance
0.009-0.490	2400/F(KHz)	20 log ( $\mu$ V/m)	300
0.490-1.705	2400/F(KHz)	20 log ( $\mu$ V/m)	30
1.705-30	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Remark :1. Emission level in dB $\mu$ V/m=20 log ( $\mu$ V/m)

2. Measurement was performed at an antenna to the closed point of EUT distance of meters.

3. Distance extrapolation factor =40log(Specific distance/ test distance)( dB);

Limit line=Specific limits(dBuV) + distance extrapolation factor.

for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where RBWCF [dB] =10\*lg(100 [kHz]/narrower RBW [kHz]). , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

## Field strength of fundamental and Field strength of harmonics Limit:

Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902-928 MHz	50(94 dBV/m)	500(54 dBV/m)
2400-2483.5 MHz	50(94 dBV/m)	500(54 dBV/m)
5725-5875 MHz	50(94 dBV/m)	500(54 dBV/m)
24.0-24.25 GHz	250(108 dBV/m)	2500(68 dBV/m)

As shown in §15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation

For this report

Fundamental Frequency	Field Strength Of Fundamental	Field Strength of Spurious Emissions
5725-5875 MHz	AV:94 dBuV/m at 3m distance	AV:54 dBuV/m at 3m distance
	PK:114 dBuV/m at 3m distance	PK:74 dBuV/m at 3m distance

### 8.2.3 Test Configuration

Test according to clause 7.2 radio frequency test setup 2

### 8.2.4 Test Procedure

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for  $f \geq 1$  GHz(1GHz to 25GHz), 100 kHz for  $f < 1$  GHz(30MHz to 1GHz)

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

Follow the guidelines in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b). Submit this data.

Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from  $20\log(\text{dwell time}/100 \text{ ms})$ , in an effort to demonstrate compliance with the 15.209 limit. Submit this data.

Repeat above procedures until all frequency measured was complete.

- Calculation of Average factor

The output field strengths of specification in accordance with the FCC rules specify measurements with an average detector. During the test, a spectrum analyzer incorporating a peak detector was used. Therefore, a reduction factor can be applied to the resultant peak signal level and compared to the limit for measurement instrumentation incorporating an average detector.

The duty cycle is measured in 20ms or the repetition cycle period, whichever is a shorter time frame, the duty cycle is measured by placing the spectrum analyzer to set zero span at 1MHz resolution bandwidth.

### 8.2.5 Test Results

Temperature:	24° C
Relative Humidity:	58%
ATM Pressure:	1010 mbar

- Spurious Emission below 30MHz (9KHz to 30MHz)

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
--	--	--	--	--	--	--	--

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor = $40\log(\text{Specific distance}/\text{test distance})(\text{dB})$ ;

Limit line=Specific limits(dBuV) + distance extrapolation factor

- Field Strength of the fundamental signal

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)			Limit 3m(dBuV/m)		Over(dB)	
		PK	AV factory	AV	PK	AV	PK	AV
5729.0	V	87.78	-17.76	70.02	114	94	-26.22	-23.98
5729.0	H	83.57	-12.33	71.24	114	94	-30.43	-22.76
5775.0	V	85.26	-18.39	66.87	114	94	-28.74	-27.13
5775.0	H	82.46	-12.51	69.95	114	94	-31.54	-24.05
5820.0	V	84.62	-15.71	68.91	114	94	-29.38	-25.09
5820.0	H	81.18	-12.41	68.77	114	94	-32.82	-25.23

Note: (1) Correct Factor= Antenna Factor +Cable Loss- Amplifier Gain


(2) Emission Level= Reading Level+Probe Factor +Cable Loss



(3)Averaging factor in dB=20log(duty cycle)

(4)Duty cycle=0.074 (It's been tested)

- Out of Band Emissions

Test mode	Frequency MHz	Limit		Result
		dBuV	dBc	
Lowest	5725	<54	dBuV	Pass
Highest	5875	<54	dBuV	Pass

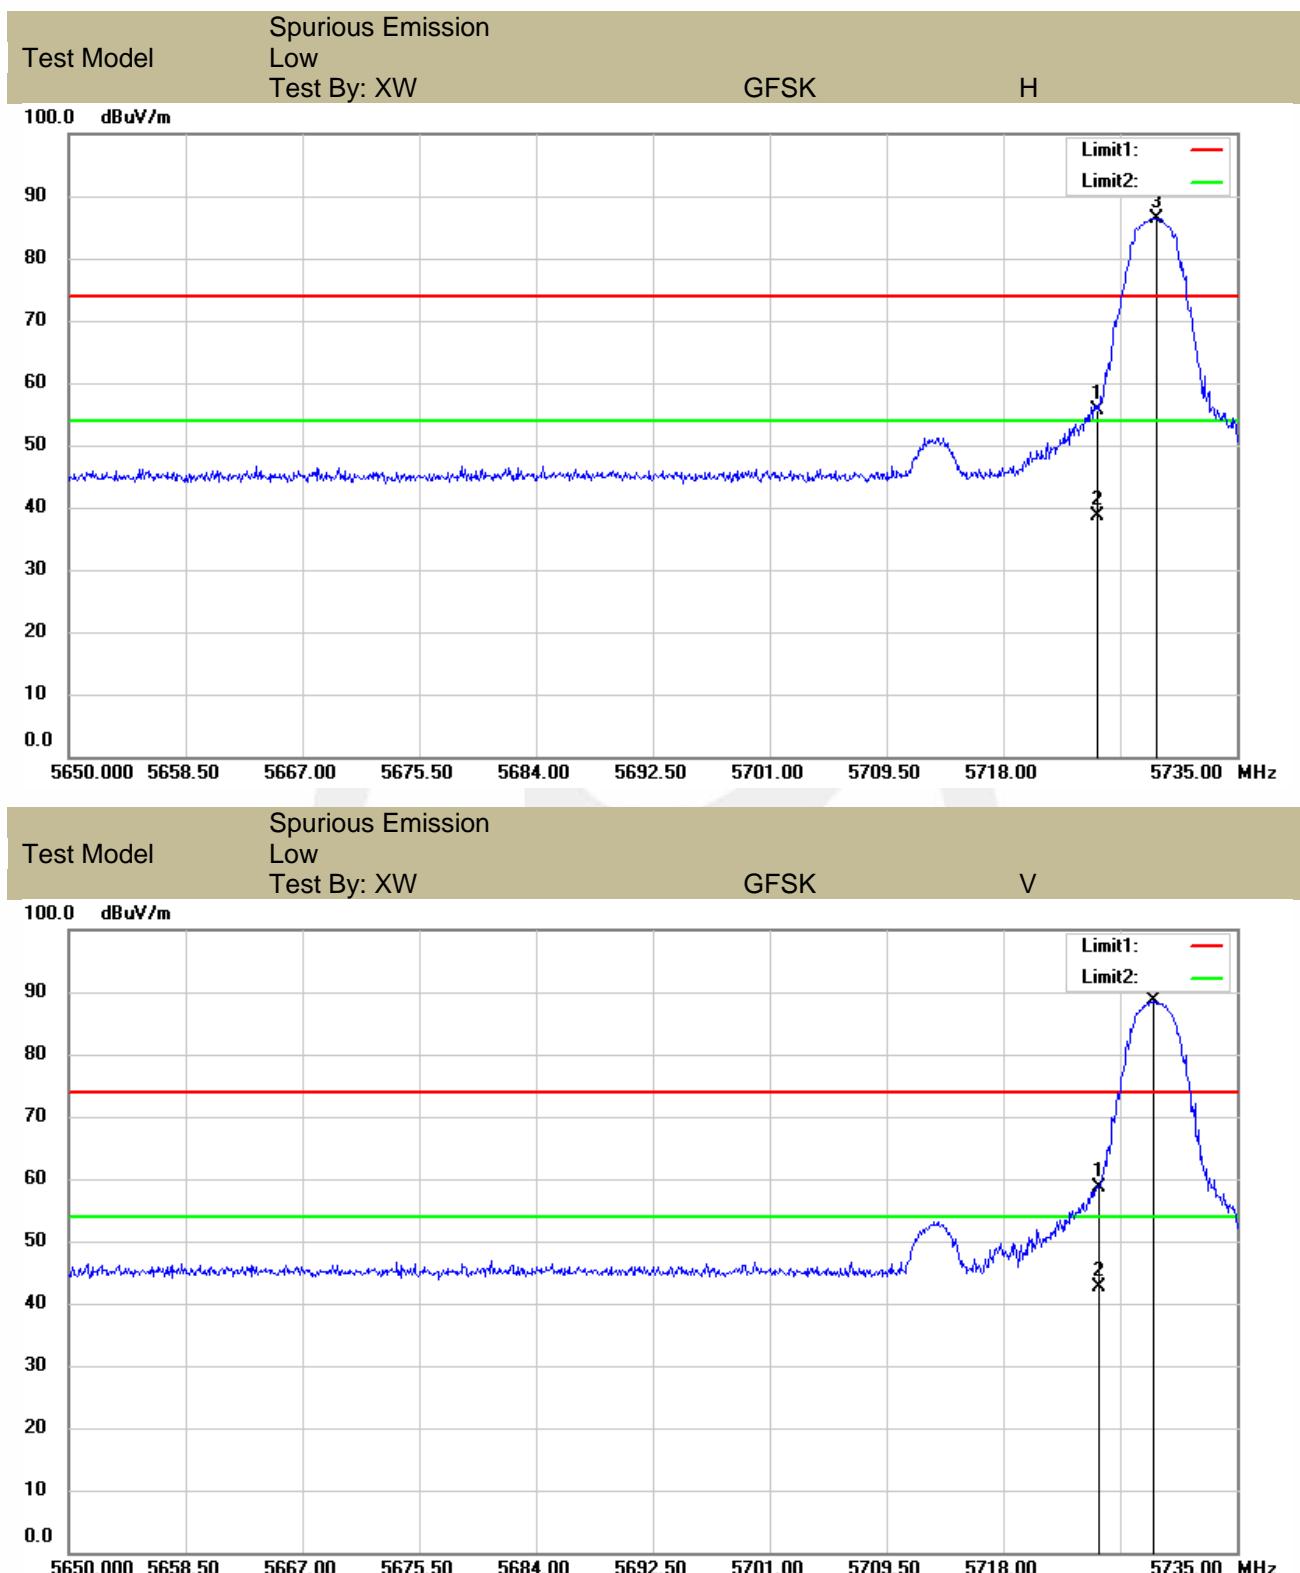

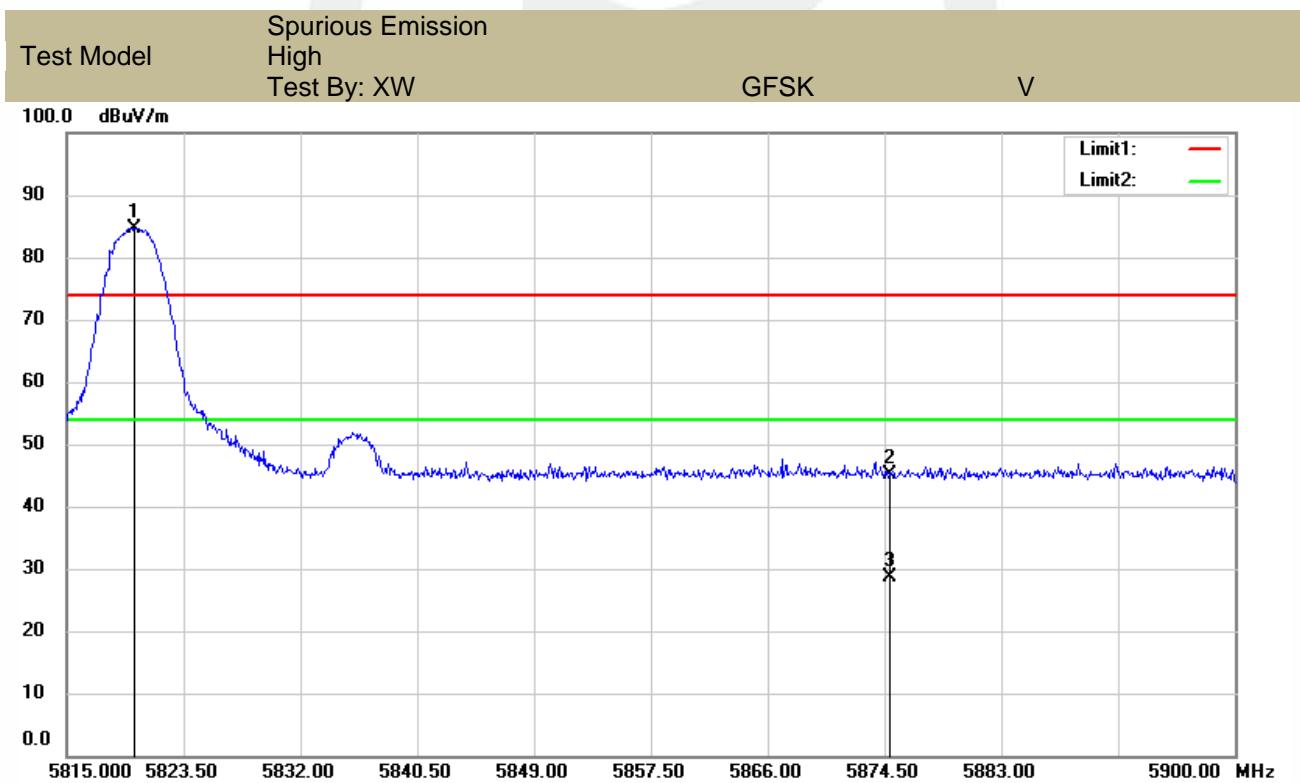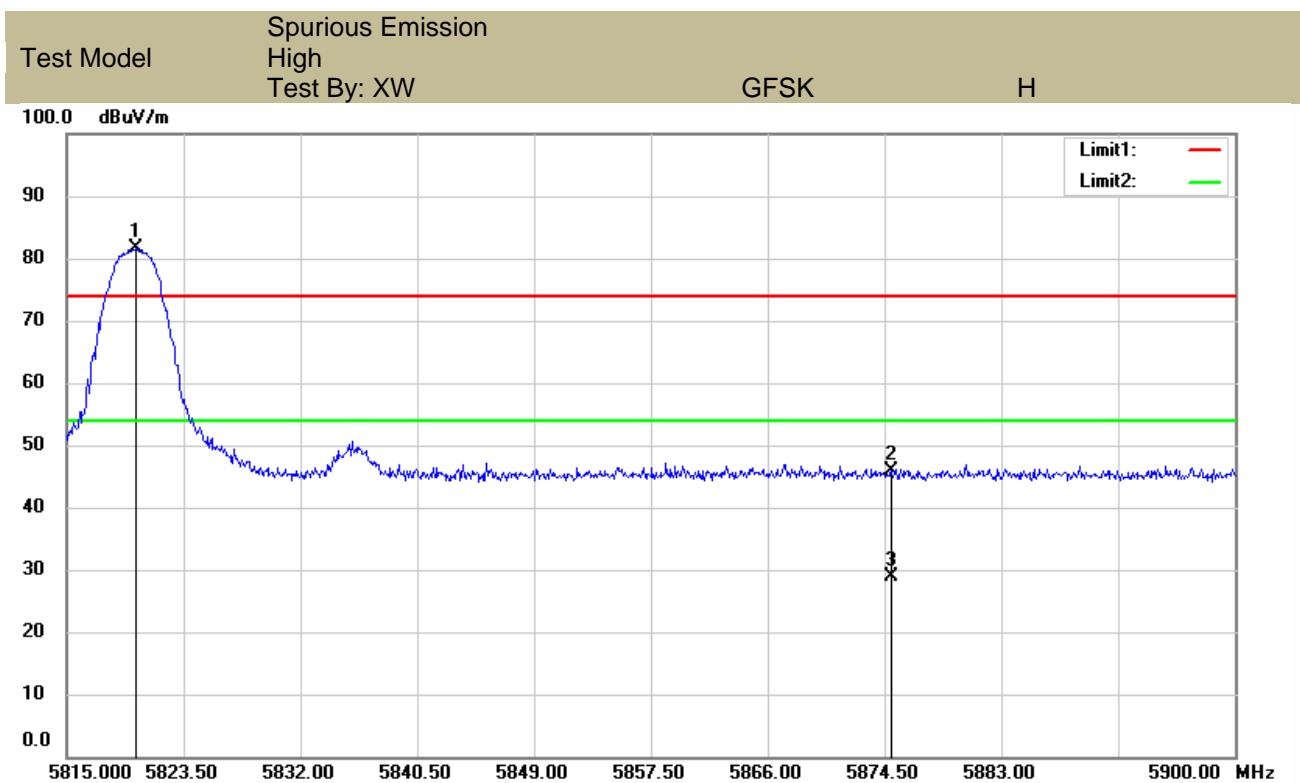

## Spurious Emission Above 1GHz (1GHz to 10GHz)

Test mode: GFSK Frequency: Low Channel : 5729MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
5495.195	V	45.88	28.96	74	54	-28.12	-25.04
10557.21	V	57.12	40.34	74	54	-16.88	-13.66
17888.48	V	67.71	50.27	74	54	-6.29	-3.73
5508.713	H	45.86	28.44	74	54	-28.14	-25.56
9676.153	H	54.02	36.94	74	54	-19.98	-17.06
17865.23	H	68.44	51.69	74	54	-5.56	-2.31

Test mode: GFSK Frequency: Low Channel: 5775MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
5366.485	V	45.61	28.99	74	54	-28.39	-25.01
10259.40	V	54.75	36.97	74	54	-19.25	-17.03
17875.56	V	68.57	51.22	74	54	-5.43	-2.78
5389.802	H	45.57	27.49	74	54	-28.43	-26.51
10119.50	H	56.31	38.66	74	54	-17.69	-15.34
17929.90	H	68.51	50.47	74	54	-5.49	-3.53

Test mode: GFSK Frequency: Low Channel: 5820MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4737.919	V	44.87	26.78	74	54	-29.13	-27.22
11211.37	V	57.54	40.71	74	54	-16.46	-13.29
17885.90	V	67.74	50.22	74	54	-6.26	-3.78
5412.438	H	45.63	28.54	74	54	-28.32	-25.46
10281.66	H	55.04	38.79	74	54	-18.96	-15.21
17885.90	H	68.71	52.63	74	54	-5.29	-1.37


**Note:** ((1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).


(2) Emission Level= Reading Level+Correct Factor +Cable Loss.

(3) Correct Factor= Ant\_F + Cab\_L - Preamp

(4)The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

■ Spurious Emission below 1GHz (30MHz to 1GHz)

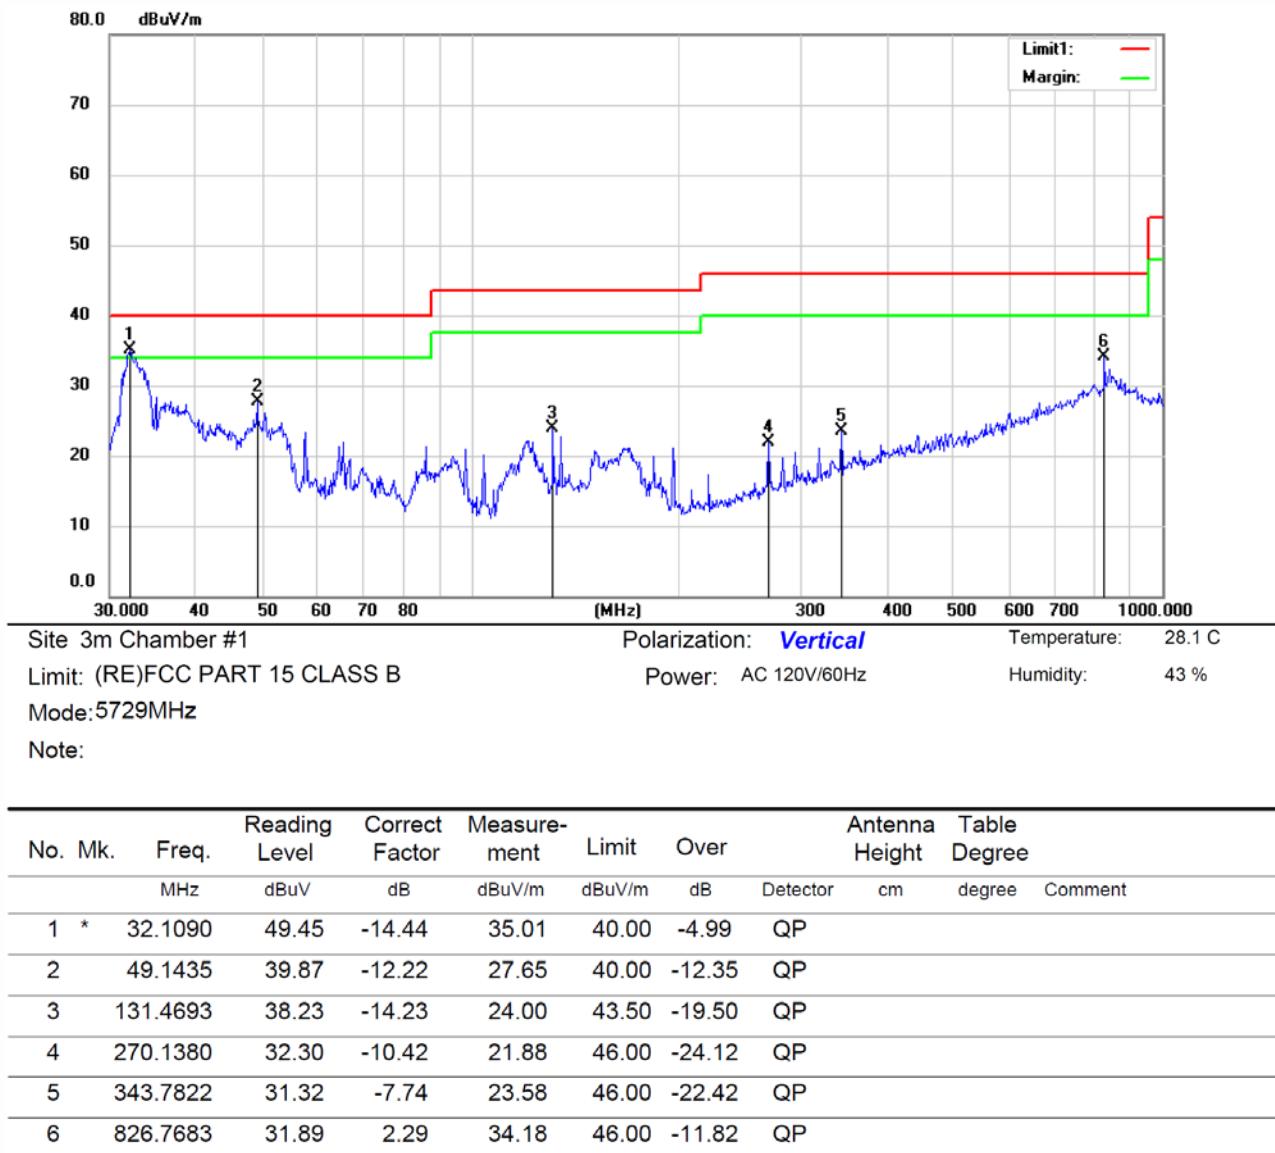

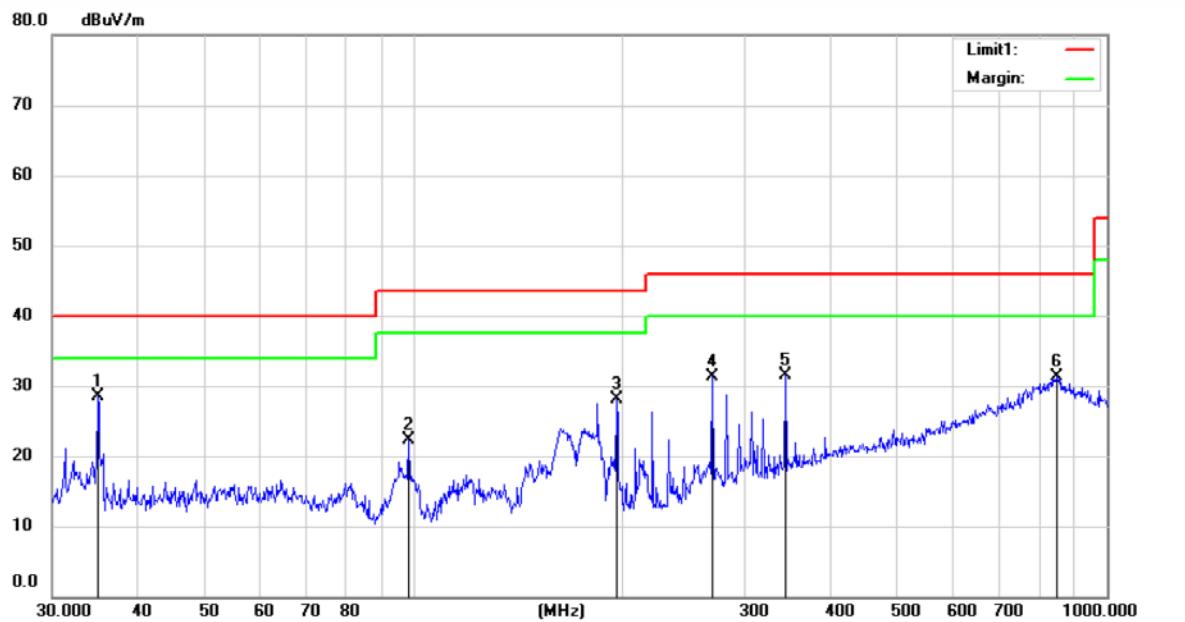

Site 3m Chamber #1

 Polarization: **Horizontal**

Temperature: 28.1 C

Limit: (RE)FCC PART 15 CLASS B


Power: AC 120V/60Hz

Humidity: 43 %

Mode: 5729MHz

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment					Degree	Comment
			MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	
1	*	34.9895	42.25	-13.84	28.41	40.00	-11.59	QP			
2		98.1850	37.03	-14.72	22.31	43.50	-21.19	QP			
3		196.4236	41.66	-13.51	28.15	43.50	-15.35	QP			
4		270.1380	41.71	-10.42	31.29	46.00	-14.71	QP			
5		343.7822	39.15	-7.74	31.41	46.00	-14.59	QP			
6		846.9420	28.33	2.91	31.24	46.00	-14.76	QP			

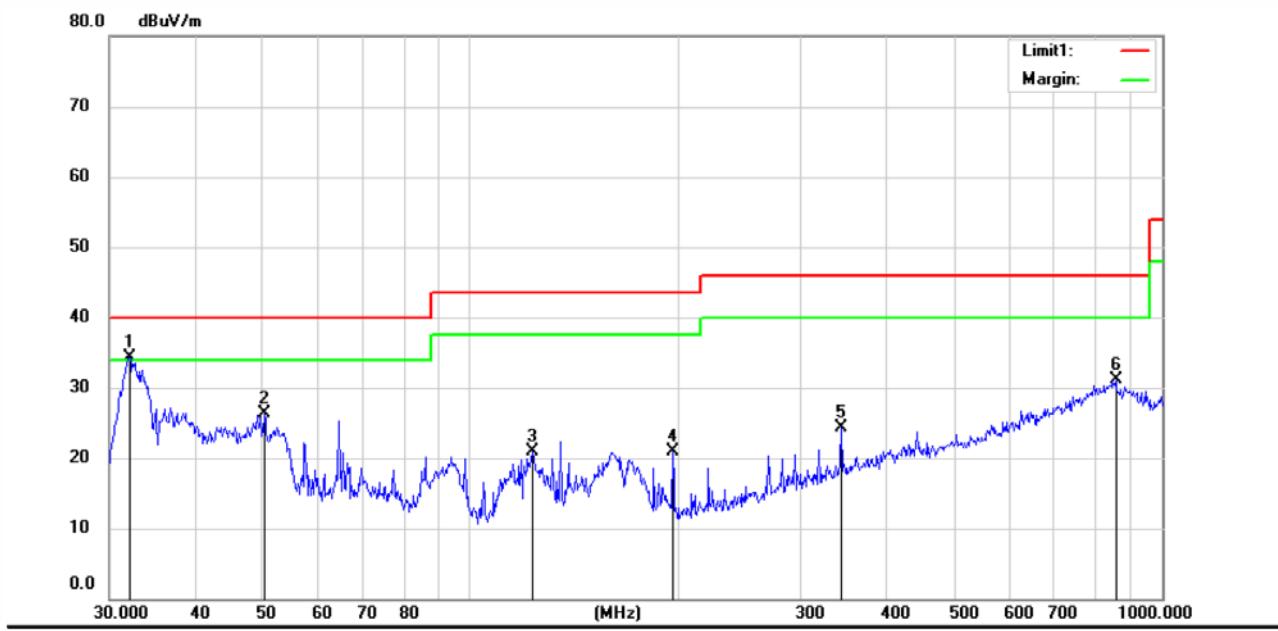

Site 3m Chamber #1

 Polarization: **Vertical**

Temperature: 28.1 C

Limit: (RE)FCC PART 15 CLASS B


Power: AC 120V/60Hz

Humidity: 43 %

Mode: 5775MHz

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table			
			Level	Factor	ment							
			MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	32.1231	48.81	-14.44	34.37	40.00	-5.63	QP				
2		50.3206	38.27	-11.97	26.30	40.00	-13.70	QP				
3		122.8878	35.20	-14.38	20.82	43.50	-22.68	QP				
4		196.4236	34.38	-13.51	20.87	43.50	-22.63	QP				
5		343.7822	32.05	-7.74	24.31	46.00	-21.69	QP				
6		857.0247	28.62	2.41	31.03	46.00	-14.97	QP				

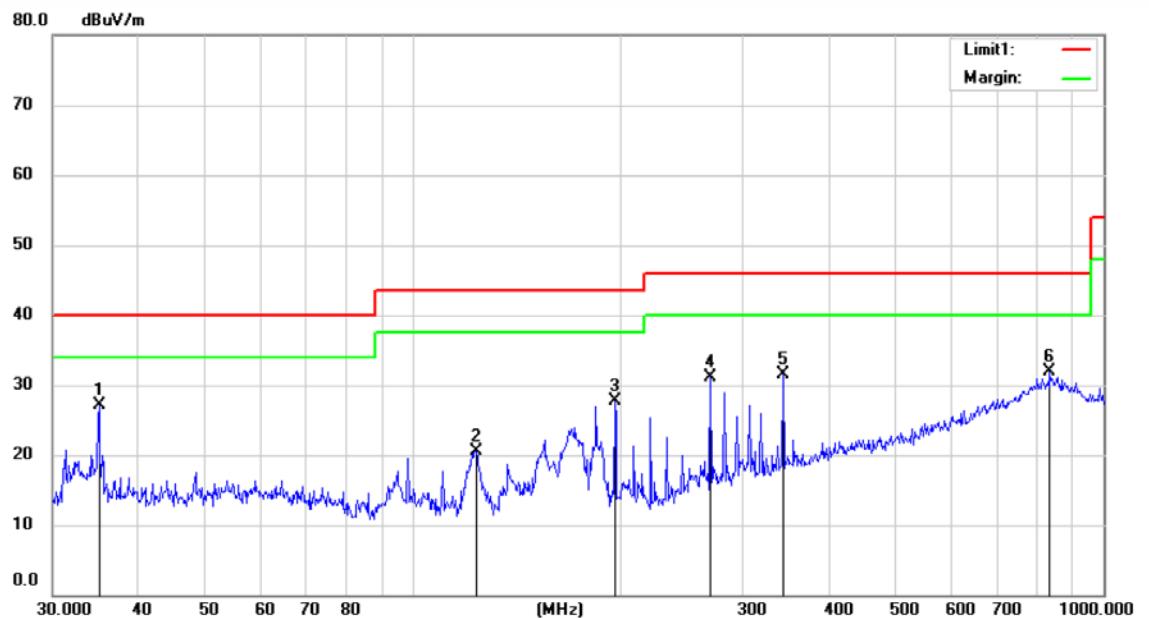

Site 3m Chamber #1

 Polarization: **Horizontal**

Temperature: 28.1 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 43 %


Mode: 5775MHz

Note:

No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	Antenna Height	Table Degree								
								MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	Comment
1 *	35.0355	40.87	-13.82	27.05	40.00	-12.95	QP									
2	123.3736	34.96	-14.39	20.57	43.50	-22.93	QP									
3	196.4236	41.29	-13.51	27.78	43.50	-15.72	QP									
4	270.1380	41.46	-10.42	31.04	46.00	-14.96	QP									
5	343.7822	39.33	-7.74	31.59	46.00	-14.41	QP									
6	838.4465	29.10	2.80	31.90	46.00	-14.10	QP									



No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	Antenna Height		Table Degree							
								MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	34.9588	41.26	-13.85	27.41	40.00	-12.59	QP									
2		98.1850	34.75	-14.72	20.03	43.50	-23.47	QP									
3		196.4236	40.96	-13.51	27.45	43.50	-16.05	QP									
4		270.1380	41.45	-10.42	31.03	46.00	-14.97	QP									
5		343.7822	38.94	-7.74	31.20	46.00	-14.80	QP									
6		838.0790	29.36	2.78	32.14	46.00	-13.86	QP									

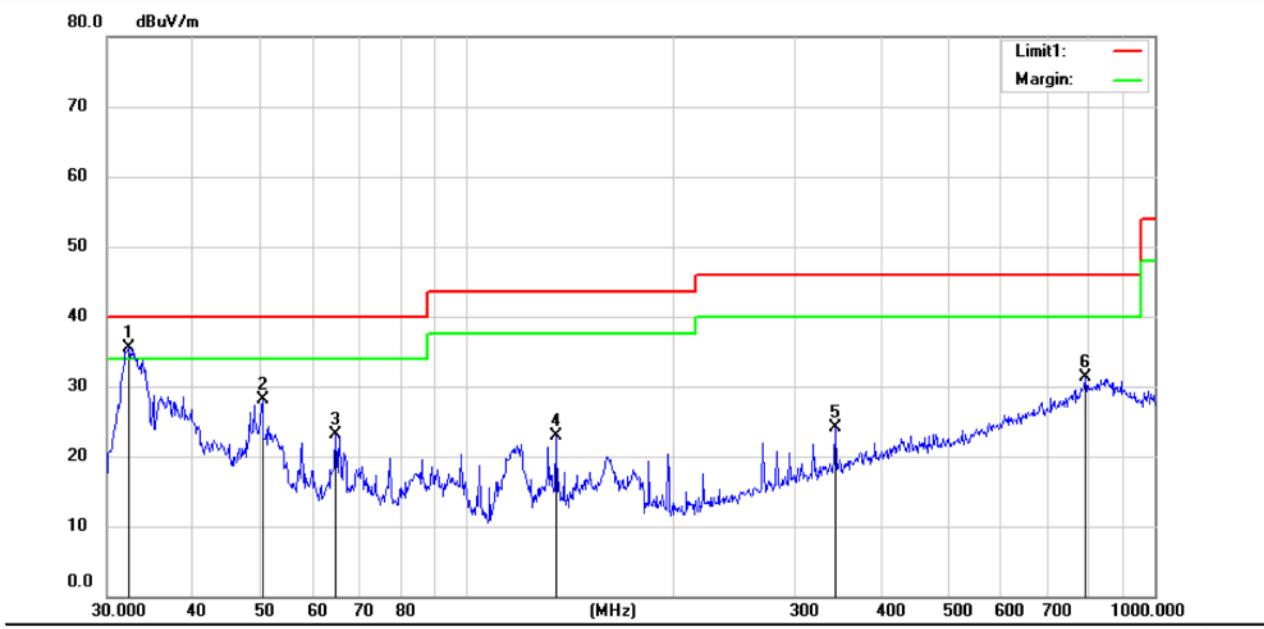

Site 3m Chamber #1

 Polarization: **Vertical**

Temperature: 28.1 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 43 %

Mode: 5820MHz

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	Degree
			Level	Factor	ment					
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	32.2925	49.98	-14.42	35.56	40.00	-4.44	QP		
2		50.4310	40.16	-11.96	28.20	40.00	-11.80	QP		
3		64.5461	35.26	-12.10	23.16	40.00	-16.84	QP		
4		134.9727	37.17	-14.20	22.97	43.50	-20.53	QP		
5		343.7822	31.87	-7.74	24.13	46.00	-21.87	QP		
6		794.7883	29.42	1.82	31.24	46.00	-14.76	QP		

### 8.3 CONDUCTED EMISSIONS TEST

#### 8.3.1 Applicable Standard

According to FCC Part 15.207(a)

#### 8.3.2 Conformance Limit

Conducted Emission Limit		
Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies  
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

#### 8.3.3 Test Configuration

Test according to clause 7.3 conducted emission test setup


#### 8.3.4 Test Procedure

The EUT was placed on a table which is 0.8m above ground plane.  
Maximum procedure was performed on the highest emissions to ensure EUT compliance.  
Repeat above procedures until all frequency measured were complete.

#### 8.3.5 Test Results

Pass

The 120V &240V voltagehave been tested, and the worst result recorded was report as below:

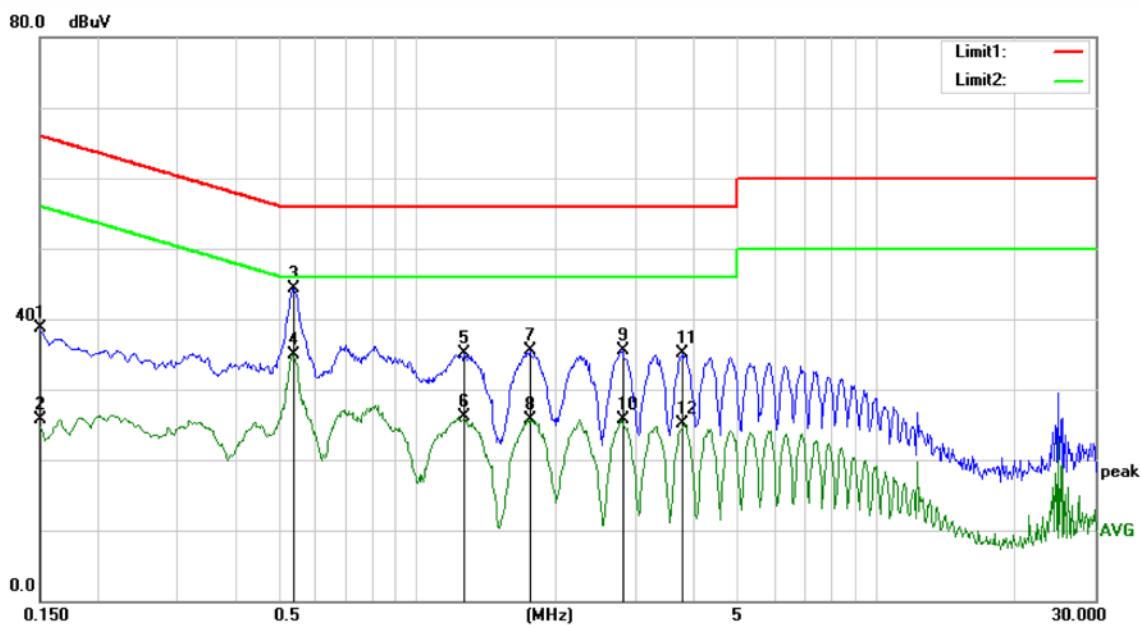

Site Conduction #2

 Phase: **N**

Temperature: 25.1

Limit: (CE)FCC PART 15 class B\_QP


Power: AC 120V/60Hz

Humidity: 45 %

Mode: 5.8G mode

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV				
1	0.1500	28.22	10.48	38.70	66.00	-27.30	QP		
2	0.1500	15.23	10.48	25.71	56.00	-30.29	AVG		
3	0.5380	33.97	10.35	44.32	56.00	-11.68	QP		
4 *	0.5380	24.57	10.35	34.92	46.00	-11.08	AVG		
5	1.2660	24.63	10.39	35.02	56.00	-20.98	QP		
6	1.2660	15.66	10.39	26.05	46.00	-19.95	AVG		
7	1.7580	25.13	10.34	35.47	56.00	-20.53	QP		
8	1.7580	15.45	10.34	25.79	46.00	-20.21	AVG		
9	2.8060	25.11	10.37	35.48	56.00	-20.52	QP		
10	2.8060	15.31	10.37	25.68	46.00	-20.32	AVG		
11	3.7900	24.57	10.44	35.01	56.00	-20.99	QP		
12	3.7900	14.59	10.44	25.03	46.00	-20.97	AVG		

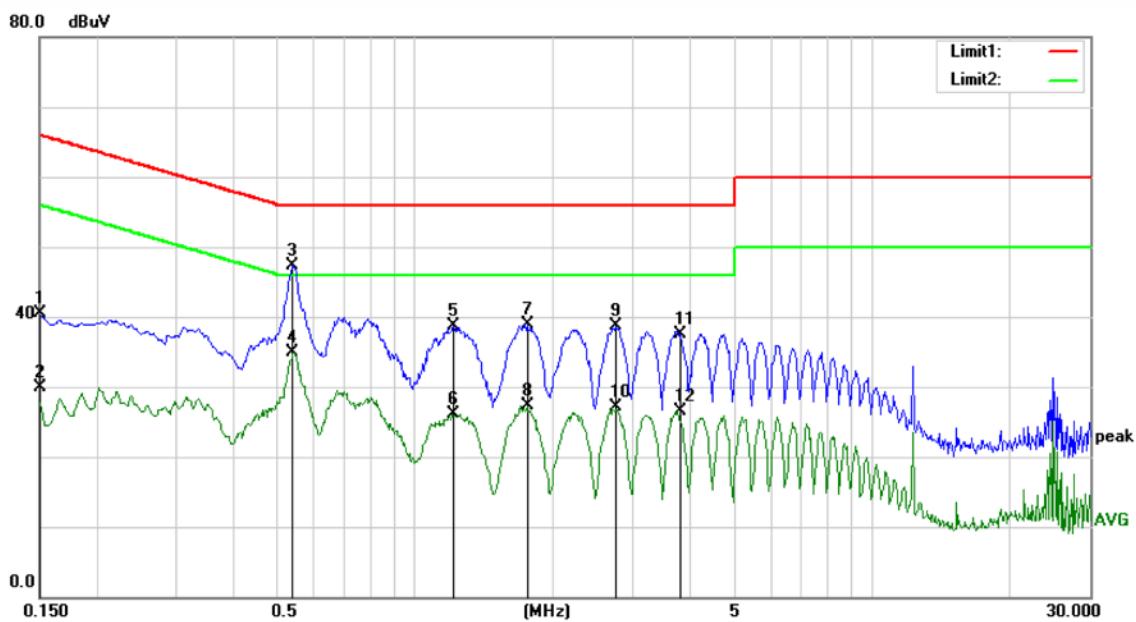

Site Conduction #2

 Phase: **L1**

Temperature: 25.1

Limit: (CE)FCC PART 15 class B\_QP

Power: AC 120V/60Hz

Humidity: 45 %

Mode: 5.8G mode

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV				
1	0.1500	29.96	10.48	40.44	66.00	-25.56		QP	
2	0.1500	19.36	10.48	29.84	56.00	-26.16		AVG	
3 *	0.5380	36.91	10.35	47.26	56.00	-8.74		QP	
4	0.5380	24.60	10.35	34.95	46.00	-11.05		AVG	
5	1.2140	28.25	10.40	38.65	56.00	-17.35		QP	
6	1.2140	15.71	10.40	26.11	46.00	-19.89		AVG	
7	1.7580	28.65	10.34	38.99	56.00	-17.01		QP	
8	1.7580	16.92	10.34	27.26	46.00	-18.74		AVG	
9	2.7500	28.24	10.37	38.61	56.00	-17.39		QP	
10	2.7500	16.76	10.37	27.13	46.00	-18.87		AVG	
11	3.8060	27.13	10.44	37.57	56.00	-18.43		QP	
12	3.8060	16.05	10.44	26.49	46.00	-19.51		AVG	

## 8.4 ANTENNA APPLICATION

### 8.4.1 Antenna Requirement

Standard	Requirement
FCC CRF Part 15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 8.4.2 Result

PASS.

- The EUT is PCB Antenna for 5.8G WiFi, The gain is 1.46 dBi.

Note:  Antenna use a permanently attached antenna which is not replaceable.  
 Not using a standard antenna jack or electrical connector for antenna replacement  
 The antenna has to be professionally installed (please provide method of installation)

which in accordance to section 15.203, please refer to the internal photos.

----- END OF REPORT -----