

FCC - TEST REPORT

Report Number : **68.950.19.2659.01** Date of Issue: Oct 25, 2019

Model : **NFC7YWW01161024, NFC5YWW018512**

Product Type : Notebook

Applicant : Zhangzhou Wanlida Technology Co., Ltd.

Address : Nanjing Wanlida Industrial Zone, Zhang Zhou, Fujian, China

Manufacturer : Zhangzhou Wanlida Technology Co., Ltd.

Address : Nanjing Wanlida Industrial Zone, Zhang Zhou, Fujian, China

Test Result : ☒ **Positive** ☐ **Negative**

Total pages including Appendices : 56

TÜV SÜD CERTIFICATION AND TESTING (CHINA) CO., LTD. SHENZHEN BRANCH is a subcontractor to TÜV SÜD Product Service GmbH according to the principles outlined in ISO 17025. TÜV SÜD CERTIFICATION AND TESTING (CHINA) CO., LTD. SHENZHEN BRANCH reports apply only to the specific samples tested under stated test conditions. Construction of the actual test samples has been documented. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. The manufacturer/importer is responsible to the Competent Authorities in Europe for any modifications made to the production units which result in non-compliance to the relevant regulations TÜV SÜD CERTIFICATION AND TESTING (CHINA) CO., LTD. SHENZHEN BRANCH shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD CERTIFICATION AND TESTING (CHINA) CO., LTD. SHENZHEN BRANCH issued reports. This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval.

1 Table of Contents

1	Table of Contents	2
2	Details about the Test Laboratory.....	3
3	Description of the Equipment Under Test.....	4
4	Summary of Test Standards	5
5	Summary of Test Results	6
6	General Remarks	7
7	Test Setups.....	8
8	Systems test configuration	9
9	Technical Requirement.....	10
9.1	Conducted Emission	10
9.2	Conducted peak output power.....	13
9.3	20 dB bandwidth	18
9.4	Carrier Frequency Separation	25
9.5	Number of hopping frequencies.....	28
9.6	Dwell Time.....	31
9.7	Conducted Spurious Emission	35
9.8	Band edge testing.....	46
9.9	Spurious radiated emissions for transmitter	51
10	Test Equipment List.....	55
11	System Measurement Uncertainty	56

2 Details about the Test Laboratory

Details about the Test Laboratory

Test Site1

Company name: TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch
Building 12&13, Zhiheng Wisdomland Business Park,
Nantou Checkpoint Road 2, Nanshan District,
Shenzhen City, 518052,
P. R. China

FCC Designation Number: CN5009

FCC Registration No.: 514049

Telephone: 86 755 8828 6998
Fax: 86 755 8828 5299

3 Description of the Equipment Under Test

Product:	Notebook
Model no.:	NFC7YWW01161024, NFC5YWW018512
FCC ID:	2ARB5-ULTRAONE
Rating:	7.6VDC, 6000mAh, (Rechargeable Lithium-ion Battery) or 20VDC (Supplied by external adapter for Charging rechargeable battery) Adapter Model: FSP060-A1UR Input:100-240VAC 50/60Hz, 1.5A, Output:5VDC,2A or 9V 2A or 12V 2A or 15V 3A or 20V 3A Manufacturer: FSP GROUP INC
RF Transmission Frequency:	2402MHz-2480MHz
No. of Operated Channel:	79
Modulation:	GFSK, $\pi/4$ -DQPSK, 8DPSK
Antenna Type:	Integrated antenna
Antenna Gain:	0.9dBi max for 2.4GHz
Description of the EUT:	The Equipment Under Test (EUT) is a Notebook supports 2.4GHz Bluetooth/WIFI, 5GHz WIFI functions.

4 Summary of Test Standards

Test Standards	
FCC Part 15 Subpart C 10-1-2018 Edition	PART 15 - RADIO FREQUENCY DEVICES Subpart C - Intentional Radiators

All the test methods were according to KDB558074 D01 15.247 Meas Guidance v05r02 and ANSI C63.10 (2013).

5 Summary of Test Results

Technical Requirements			
FCC Part 15 Subpart C			
Test Condition		Test Result	Test Site
§15.207	Conducted emission AC power port	Pass	Site 1
§15.247(b)(1)	Conducted peak output power	Pass	Site 1
§15.247(e)	Power spectral density*	N/A	--
§15.247(a)(2)	6dB bandwidth	N/A	--
§15.247(a)(1)	20dB bandwidth	Pass	Site 1
§15.247(a)(1)	Min. of Hopping Channel Carrier Frequency Separation	Pass	Site 1
§15.247(a)(1)(iii)	Min number of hopping frequencies	Pass	Site 1
§15.247(a)(1)(iii)	Dwell Time - Average Time of Occupancy	Pass	Site 1
§15.247(d)	Spurious RF conducted emissions	Pass	Site 1
§15.247(d)	Band edge	Pass	Site 1
§15.247(d) & §15.209 &	Spurious radiated emissions for transmitter and receiver	Pass	Site 1
§15.203	Antenna requirement	See Note 2	--

Note 1: N/A=Not Applicable.

Note 2: The EUT uses an Integrated antenna, which gain is 0.9dBi. In accordance to §15.203, it is considered sufficiently to comply with the provisions of this section.

6 General Remarks

Remarks

This submittal(s) (test report) is intended for FCC ID: 2ARB5-ULTRAONE, complies with Section 15.207, 15.209, 15.205, 15.247 of the FCC Part 15, Subpart C.

The Model: NFC7YWW01161024 supports 2.4GHz Bluetooth/WIFI, 5GHz WIFI function. The TX and RX range is 2402MHz-2480MHz for Bluetooth, 2412MHz – 2462MHz for 2.4GHzWIFI, 5180MHz – 5320MHz, 5500MHz – 5700MHz, 5745MHz – 5825MHz for 5GHzWIFI.

NFC5YWW018512 is identical with model: NFC7YWW01161024 except model name, CPU, internal storage and SSD, unless otherwise Specification the model NFC7YWW01161024 was choose as representative model to perform all test items, and model: NFC5YWW018512 was deemed to fulfil relevant requirements without further testing.

Model	CPU	internal storage	SSD
NFC5YWW018512	i5-8200Y	8G	512GB
NFC7YWW01161024	i7-8500Y	16G	1024GB

This report is for the Bluetooth BDR +EDR part.

SUMMARY:

All tests according to the regulations cited on page 5 were

■ - Performed

□ - **Not** Performed

The Equipment Under Test

■ - **Fulfills** the general approval requirements.

□ - **Does not** fulfill the general approval requirements.

Sample Received Date: June 26, 2019

Testing Start Date: June 26, 2019

Testing End Date: October 22, 2019

Reviewed by:

Prepared by:

Tested by:






John Zhi

Joe Gu

Tree Zhan


Section Manager

Project Engineer

Test Engineer


7 Test Setups

7.1 AC Power Line Conducted Emission test setups

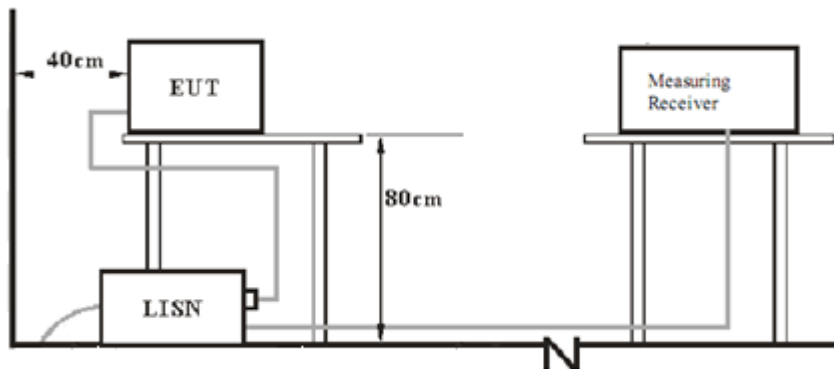


7.2 Radiated test setups


Below 1GHz

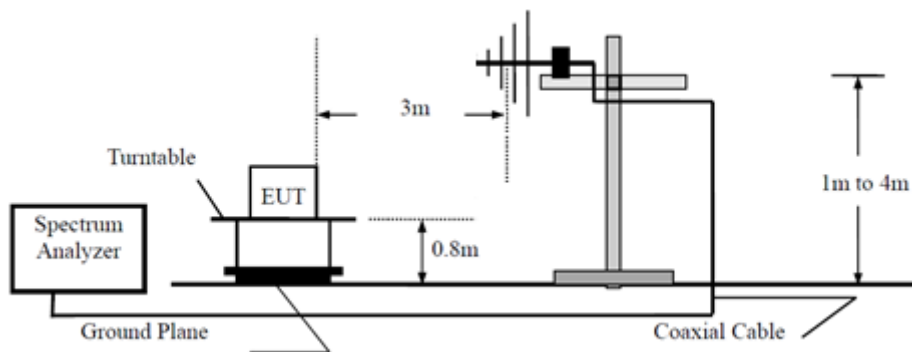

Above 1GHz

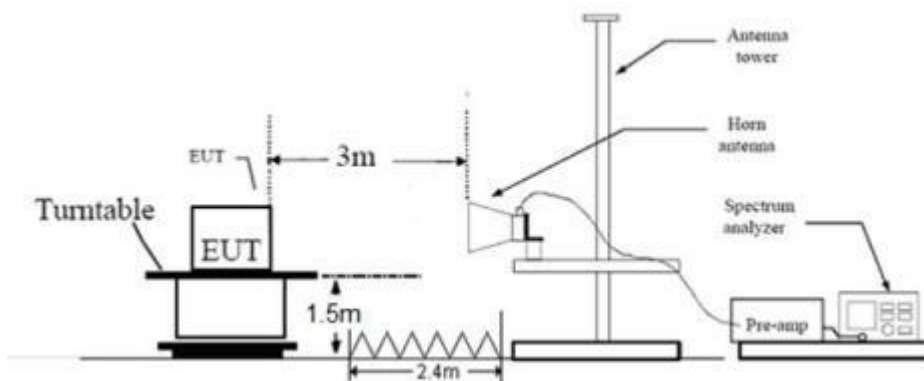

7.3 Conducted RF test setups



8 Systems test configuration

Auxiliary Equipment Used during Test:

DESCRIPTION	MANUFACTURER	MODEL NO.	S/N
---	---	---	---

Test software information:

Test Software Version	Windows 10 Home 64-bit	
Modulation	Setting TX Power	Packet Type
GFSK	6	DH5
$\pi/4$ -DQPSK	5	2DH5
8DPSK	5	3DH5

The system was configured to hopping mode and non-hopping mode.

Hopping mode: typical working mode (normal hopping status)

Non-hopping mode: The system was configured to operate at a signal channel transmitting.

The test software allows the configuration and operation at the worst-case duty

9 Technical Requirement

9.1 Conducted Emission

Test Method

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. Both sides of AC line were checked for maximum conducted interference.
6. The frequency range from 150 kHz to 30 MHz was searched.
7. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

Limit


According to §15.207, conducted emissions limit as below:

Frequency MHz	QP Limit dB μ V	AV Limit dB μ V
0.150-0.500	66-56*	56-46*
0.500-5	56	46
5-30	60	50

*Decreasing linearly with logarithm of the frequency

Conducted Emission

Product Type : Notebook
 M/N : NFC7YWW01161024
 Operating Condition : Charging + TX
 Test Specification : Power Line, Live
 Comment : AC 120V/60Hz

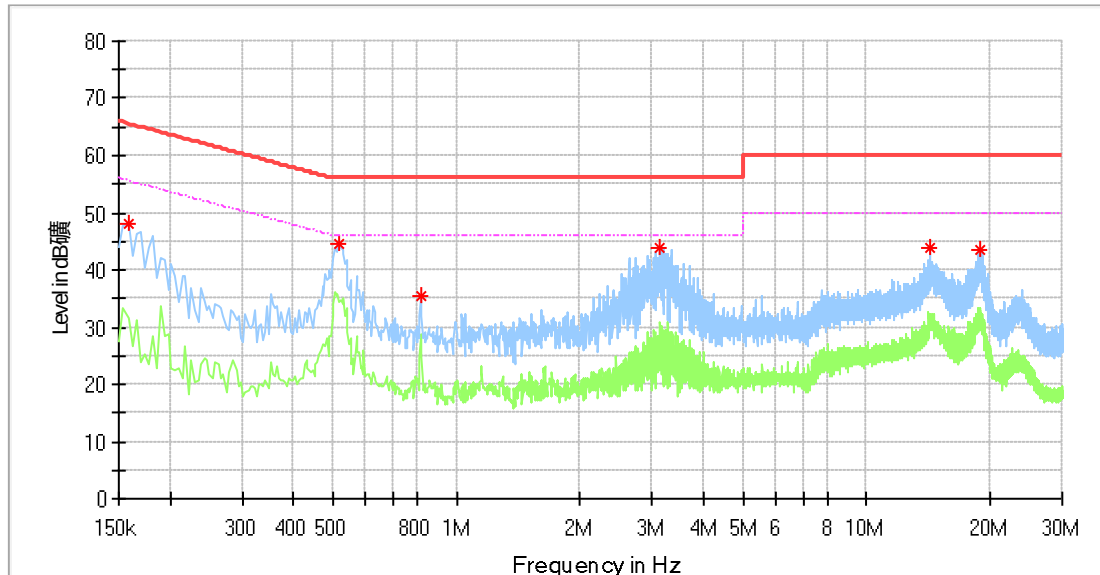

Frequency (MHz)	MaxPeak* (dBμV)	Average* (dBμV)	Limit (dBμV)	Margin	Line	Corr.** (dB)
0.158000	47.92	---	65.57	17.65	L1	10.2
0.518000	44.58	---	56.00	11.42	L1	10.3
0.818000	35.48	---	56.00	20.52	L1	10.3
3.142000	43.99	---	56.00	12.01	L1	10.4
14.226000	43.77	---	60.00	16.23	L1	10.7
18.890000	43.36	---	60.00	16.64	L1	11.0

Remark :


*Level=Reading Level + Correction Factor

**Correction Factor=Cable Loss + LISN Factor

(The Reading Level is recorded by software which is not shown in the sheet)

Conducted Emission

Product Type : Notebook
 M/N : NFC7YWW01161024
 Operating Condition : Charging + TX
 Test Specification : Power Line, Neutral
 Comment : AC 120V/60Hz

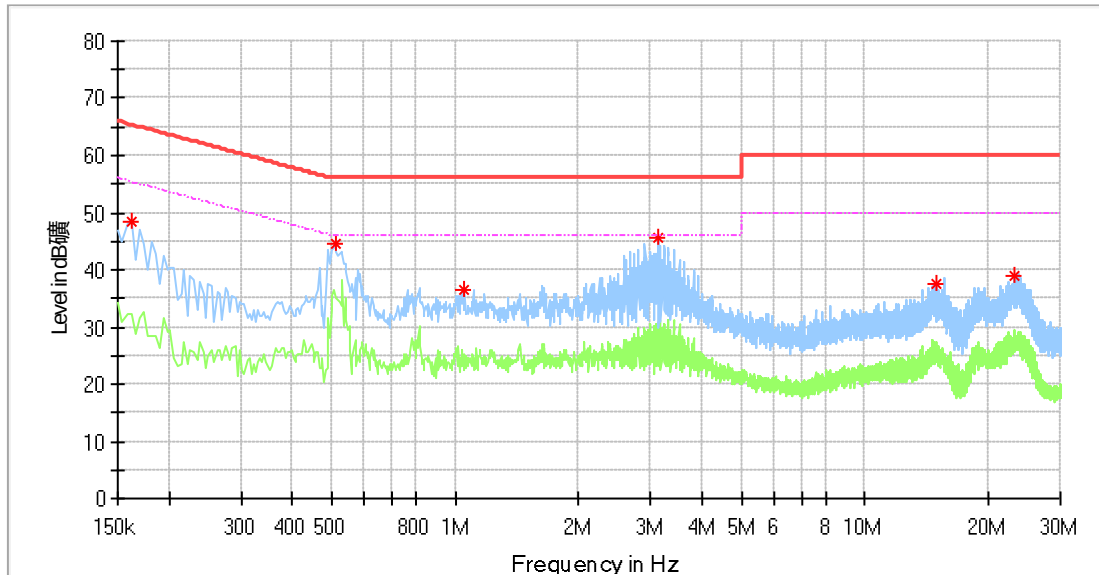

Frequency (MHz)	MaxPeak* (dBμV)	Average* (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr.** (dB)
0.162000	48.50	---	65.36	16.86	N	10.2
0.510000	44.66	---	56.00	11.34	N	10.3
1.054000	36.37	---	56.00	19.63	N	10.3
3.118000	45.61	---	56.00	10.39	N	10.4
14.930000	37.47	---	60.00	22.53	N	10.8
23.286000	38.91	---	60.00	21.09	N	11.2

Remark :

*Level=Reading Level + Correction Factor

**Correction Factor=Cable Loss + LISN Factor

(The Reading Level is recorded by software which is not shown in the sheet)

9.2 Conducted peak output power

Test Method

1. The RF output of EUT was connected to the test receiver by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following test receiver settings:
Span = approximately 5 times the 20dB bandwidth, centered on a hopping channel
RBW > the 20dB bandwidth of the emission being measured, VBW $\geq$ RBW,
Sweep = auto, Detector function = peak, Trace = max hold
4. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power and record the results in the test report.
5. Repeat above procedures until all frequencies measured were complete.

Limits

Frequency Range MHz	Limit W	Limit dBm
2400-2483.5	≤ 1	≤ 30

Conducted peak output power

Bluetooth Mode GFSK modulation Test Result

Frequency MHz	Conducted Peak Output Power dBm	Result
Low channel 2402MHz	2.2	Pass
Middle channel 2441MHz	2.8	Pass
High channel 2480MHz	2.2	Pass


Bluetooth Mode $\pi/4$ -DQPSK modulation Test Result

Frequency MHz	Conducted Peak Output Power dBm	Result
Low channel 2402MHz	4.1	Pass
Middle channel 2441MHz	4.8	Pass
High channel 2480MHz	4.1	Pass


Bluetooth Mode 8DPSK modulation Test Result

Frequency MHz	Conducted Peak Output Power dBm	Result
Low channel 2402MHz	3.4	Pass
Middle channel 2441MHz	4.2	Pass
High channel 2480MHz	3.5	Pass


GFSK modulation Low channel 2402MHz

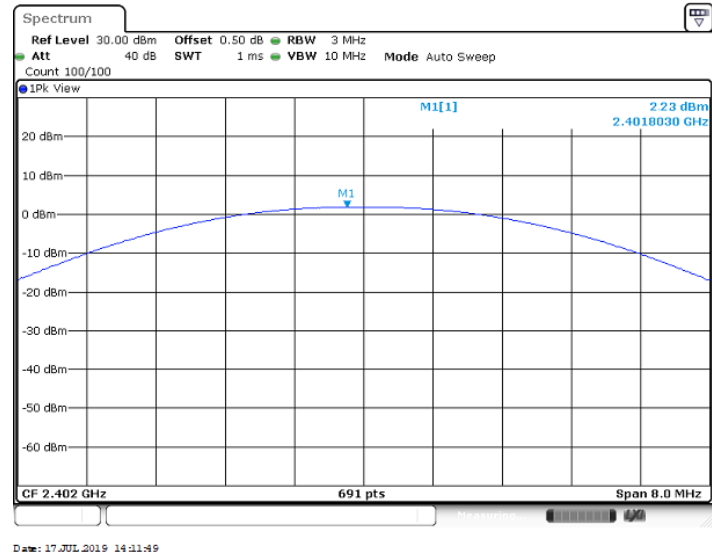


GFSK modulation Middle channel 2441MHz

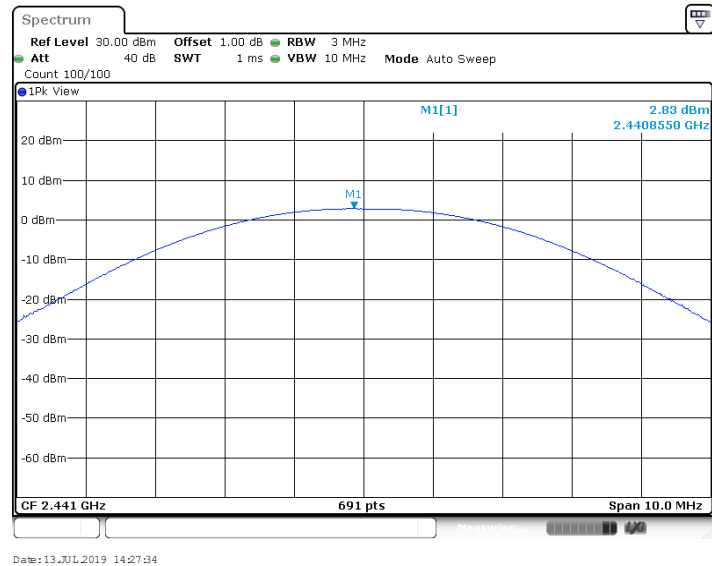


GFSK modulation High channel 2480MHz

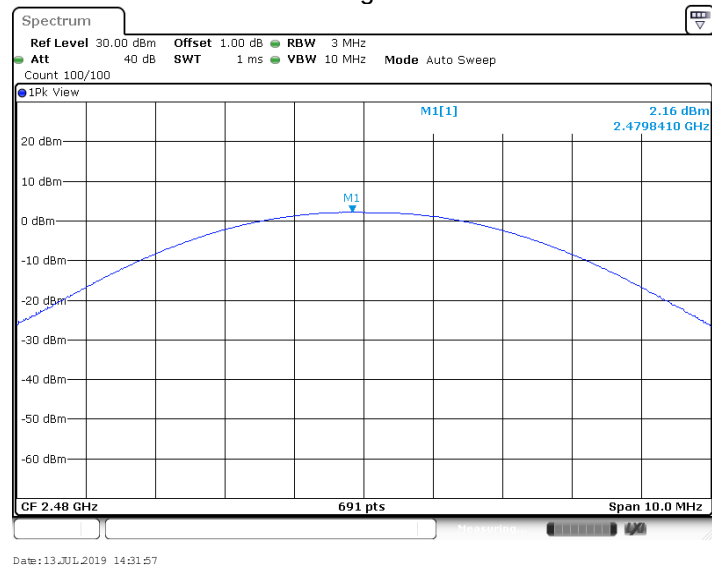


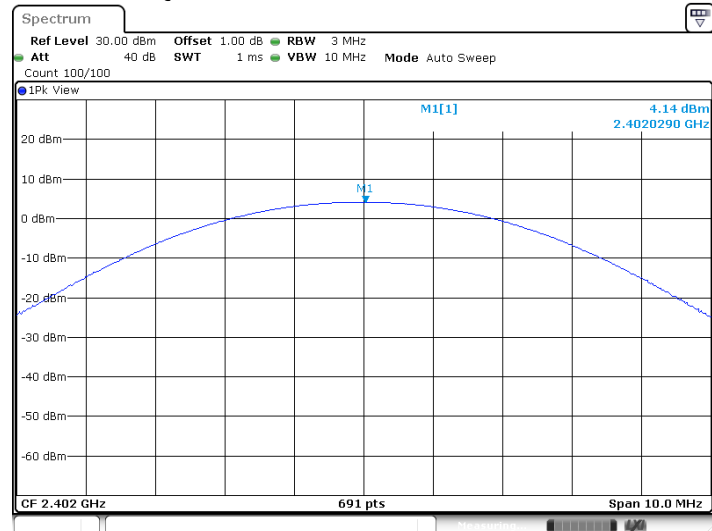$\pi/4$ -DQPSK modulation Low channel 2402MHz

Date: 13 JUL 2019 14:35:02

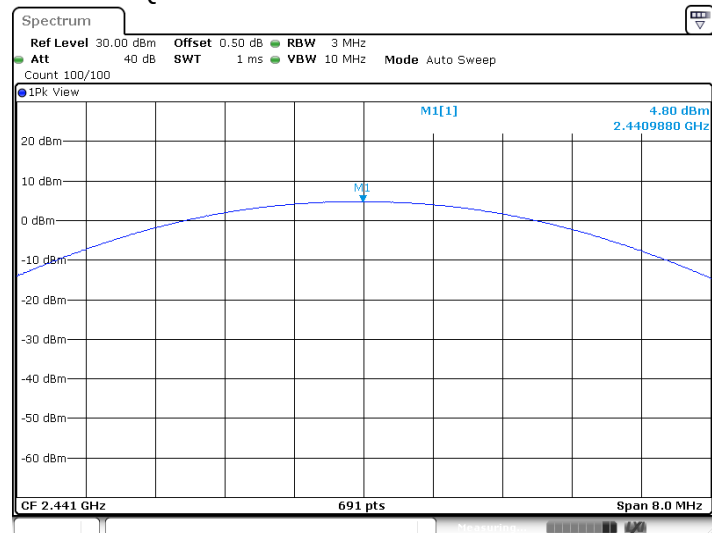
 $\pi/4$ -DQPSK modulation Middle channel 2441MHz

Date: 17 JUL 2019 14:13:15

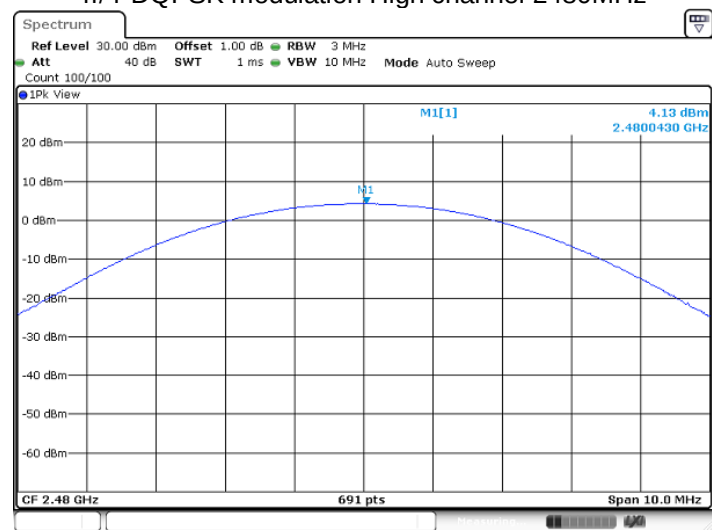
 $\pi/4$ -DQPSK modulation High channel 2480MHz

Date: 13 JUL 2019 14:29:19


8DPSK modulation Low channel 2402MHz

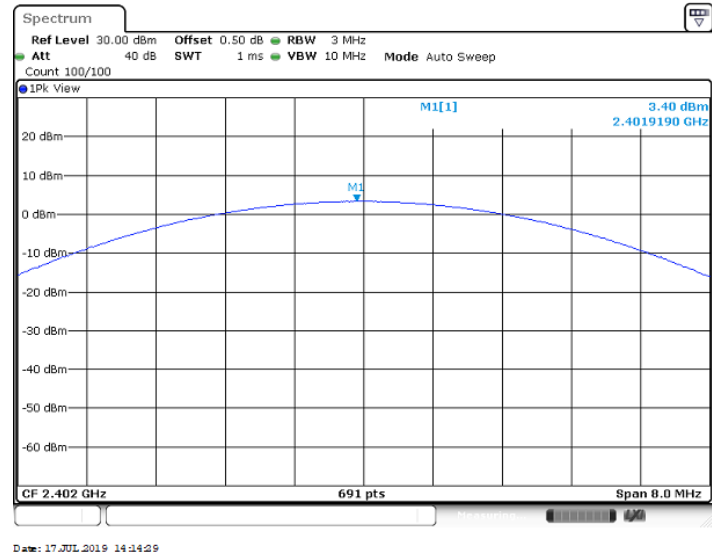

8DPSK modulation Middle channel 2441MHz

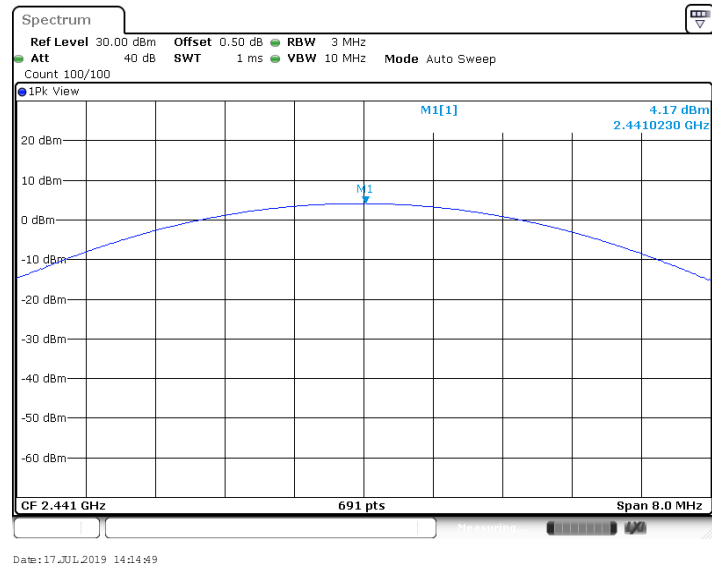

8DPSK modulation High channel 2480MHz

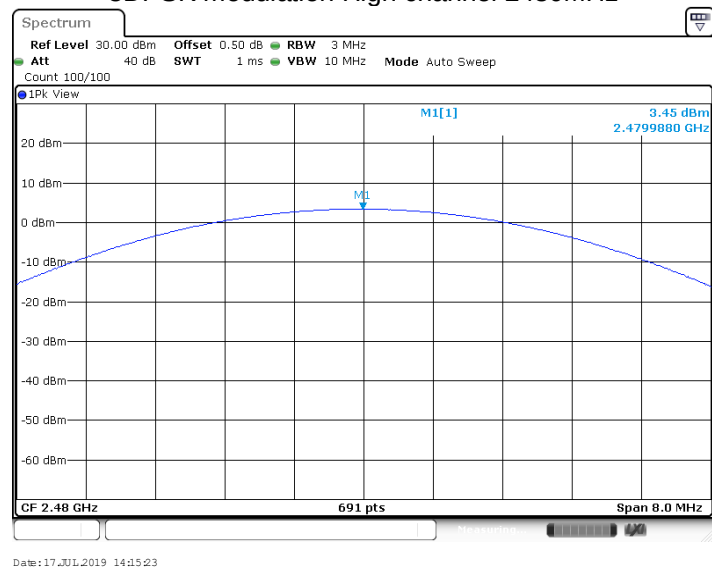

9.3 20 dB bandwidth

Test Method

1. The RF output of EUT was connected to the test receiver by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Use the following test receiver settings:
Span = approximately 5 times the 20dB bandwidth, centered on a hopping channel
RBW > the 20dB bandwidth of the emission being measured, VBW ≥ RBW,
Sweep = auto, Detector function = peak, Trace = max hold
4. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth. Record the results.
5. Repeat above procedures until all frequencies measured were complete.

Limit

Limit [kHz]


N/A

20 dB bandwidth

Bluetooth Mode GFSK Modulation test result

Frequency MHz	20 dB Bandwidth kHz	Limit kHz	Result
2402	1125	--	Pass
2441	1122	--	Pass
2480	1125	--	Pass


Low channel 2402MHz

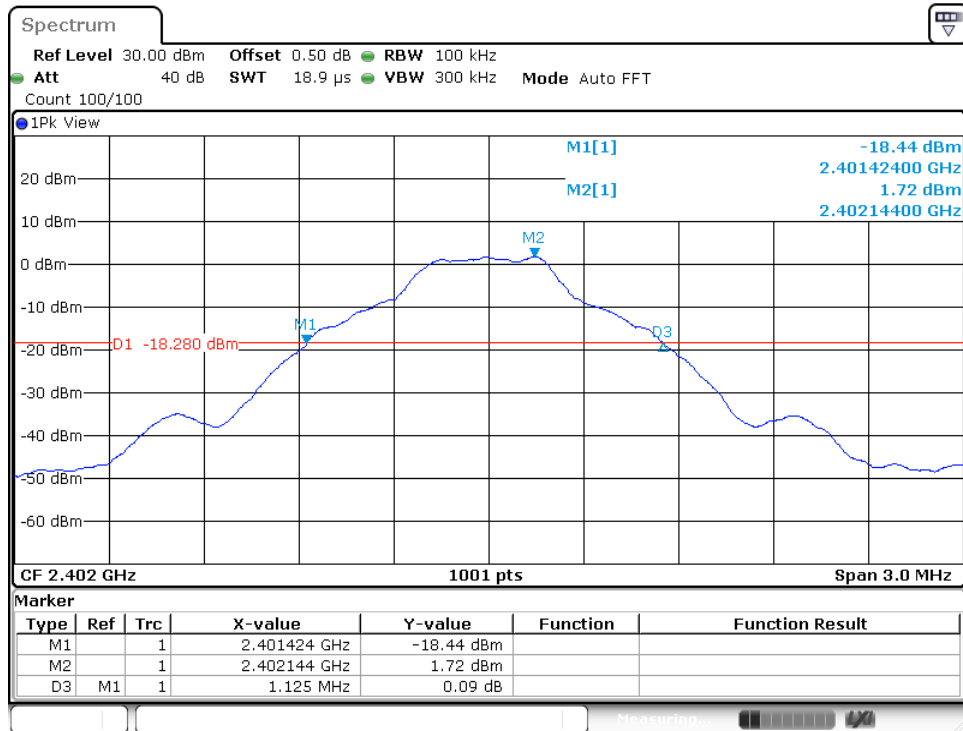

Date: 17 JUL 2019 14:20:30




Middle channel 2441MHz

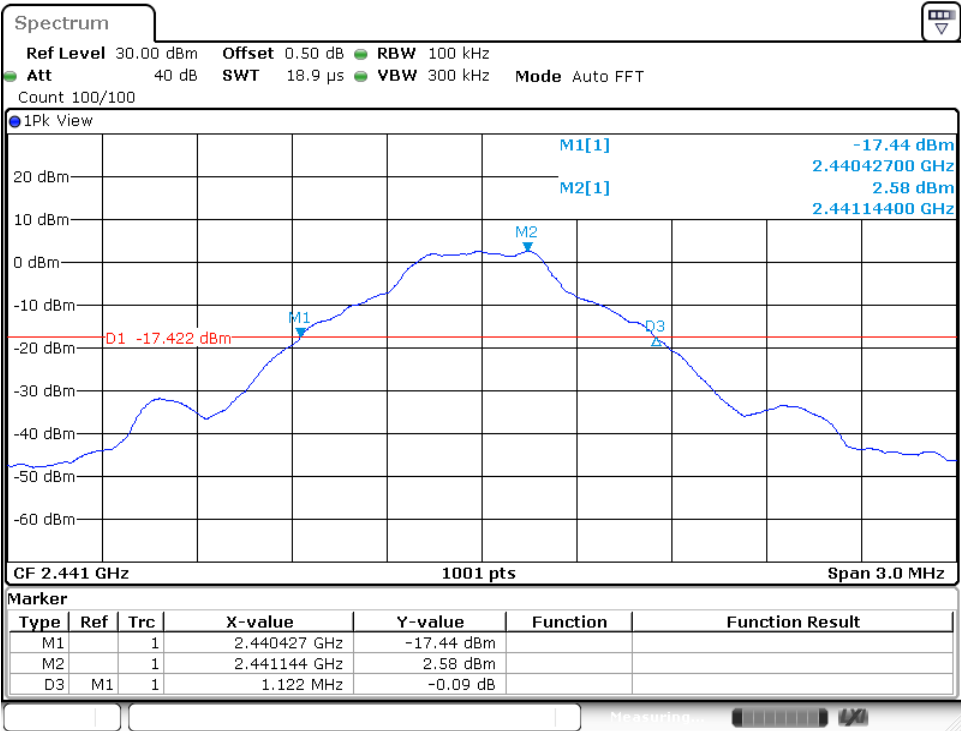

Date:17 JUL 2019 14:24:35

High channel 2480MHz

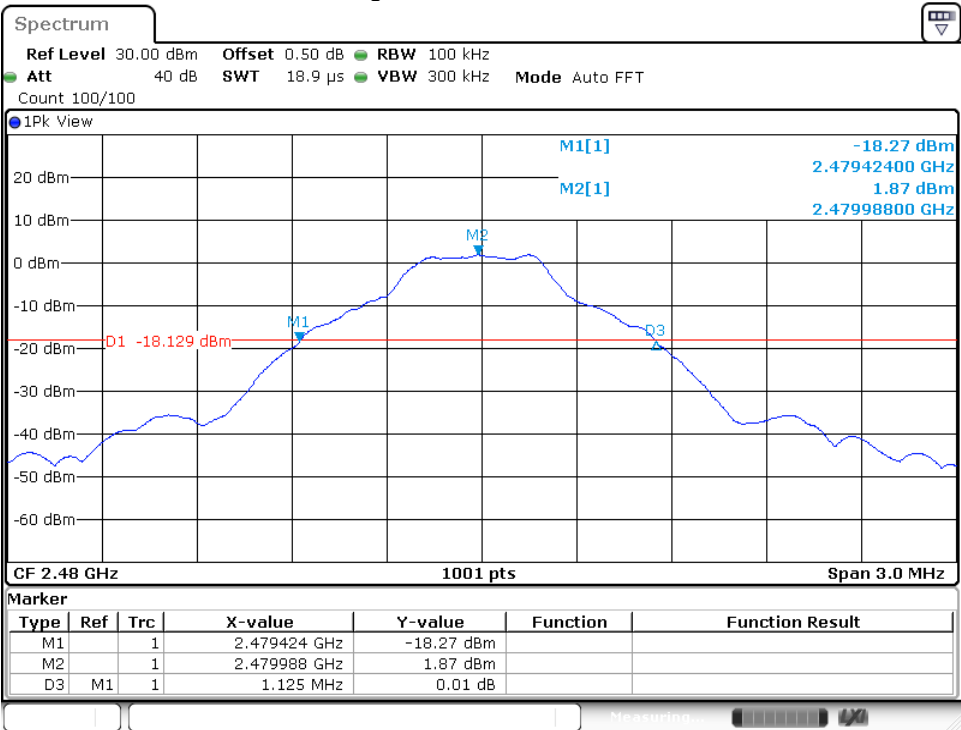


Date:17 JUL 2019 14:26:36

20 dB bandwidth

Bluetooth Mode $\pi/4$ -DQPSK Modulation test result

Frequency MHz	20 dB Bandwidth kHz	Limit kHz	Result
2402	1602	--	Pass
2441	1605	--	Pass
2480	1605	--	Pass


Low channel 2402MHz

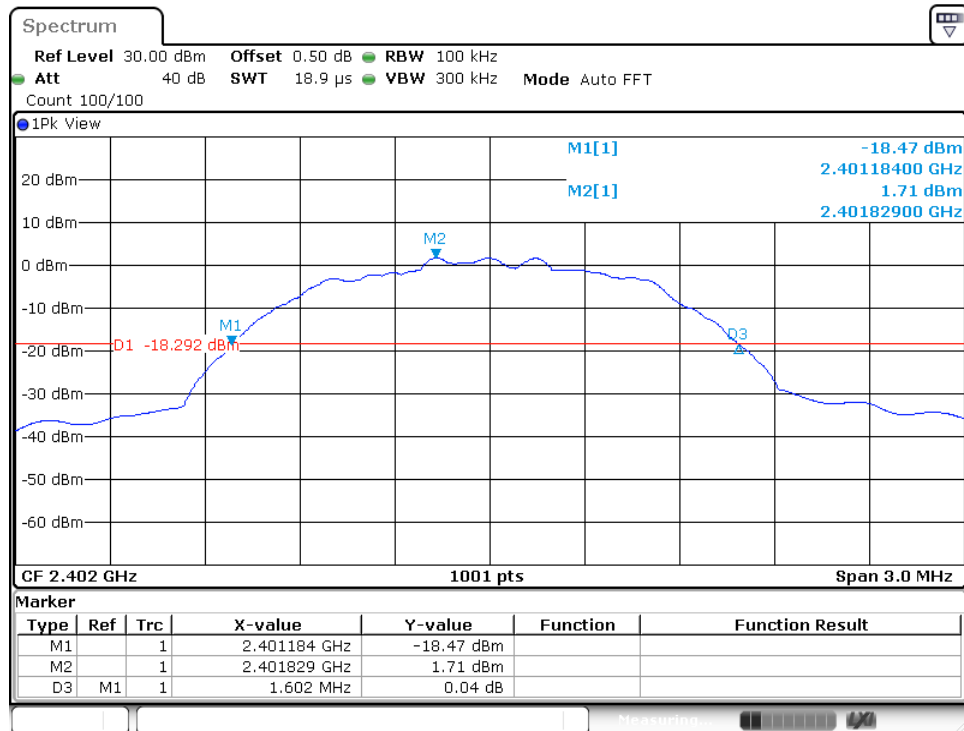

Date: 17 JUL 2019 14:30:11




Middle channel 2441MHz

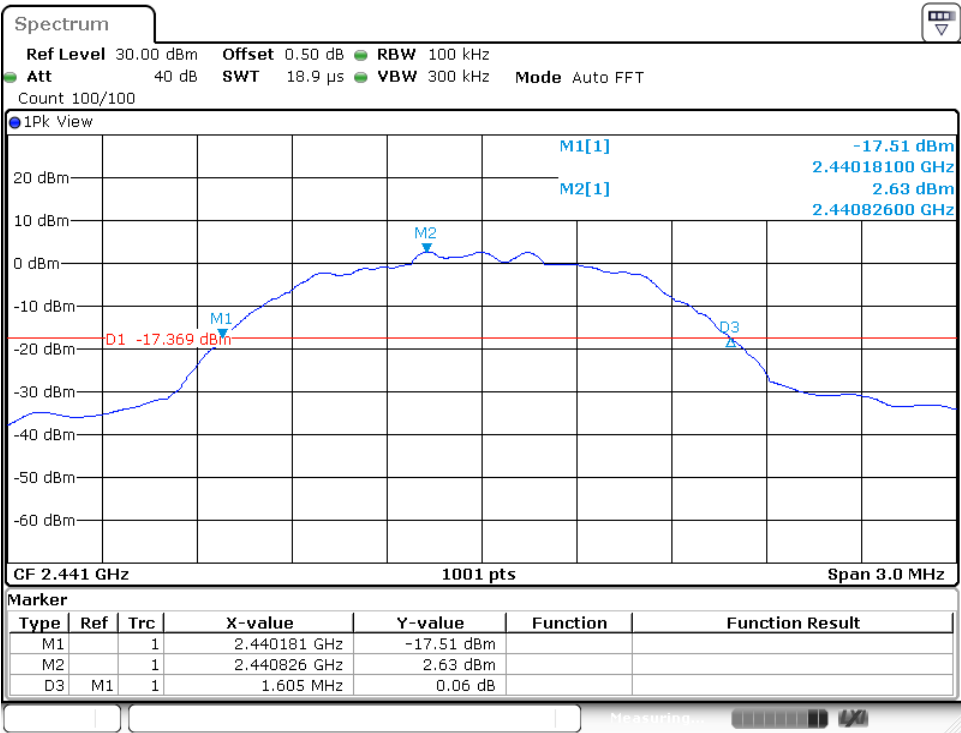

Date: 17 JUL 2019 14:50:26

High channel 2480MHz

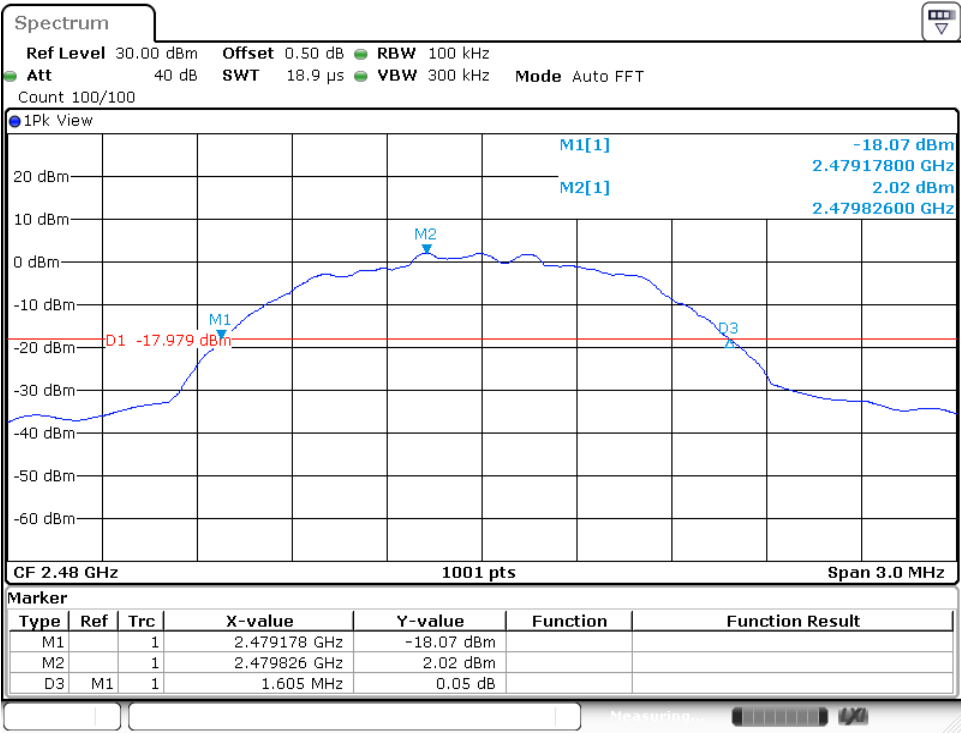


Date: 17 JUL 2019 14:52:07

20 dB bandwidth

Bluetooth Mode 8DPSK Modulation test result

Frequency MHz	20 dB Bandwidth kHz	Limit kHz	Result
2402	1608	--	Pass
2441	1608	--	Pass
2480	1614	--	Pass


Low channel 2402MHz

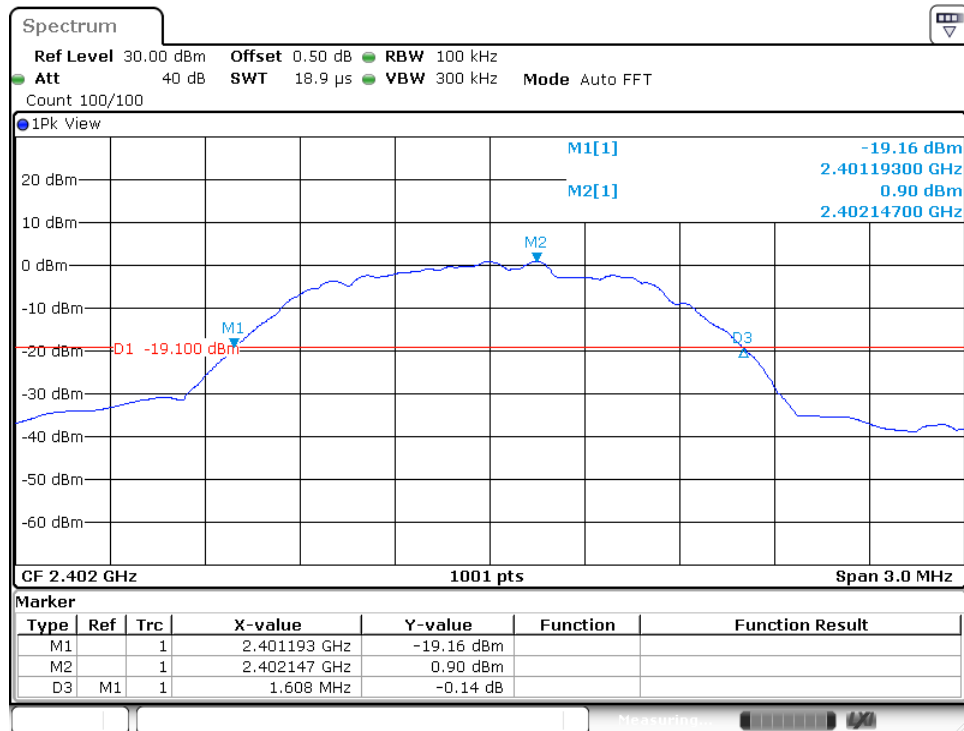

Date: 17 JUL 2019 14:57:16




Middle channel 2441MHz

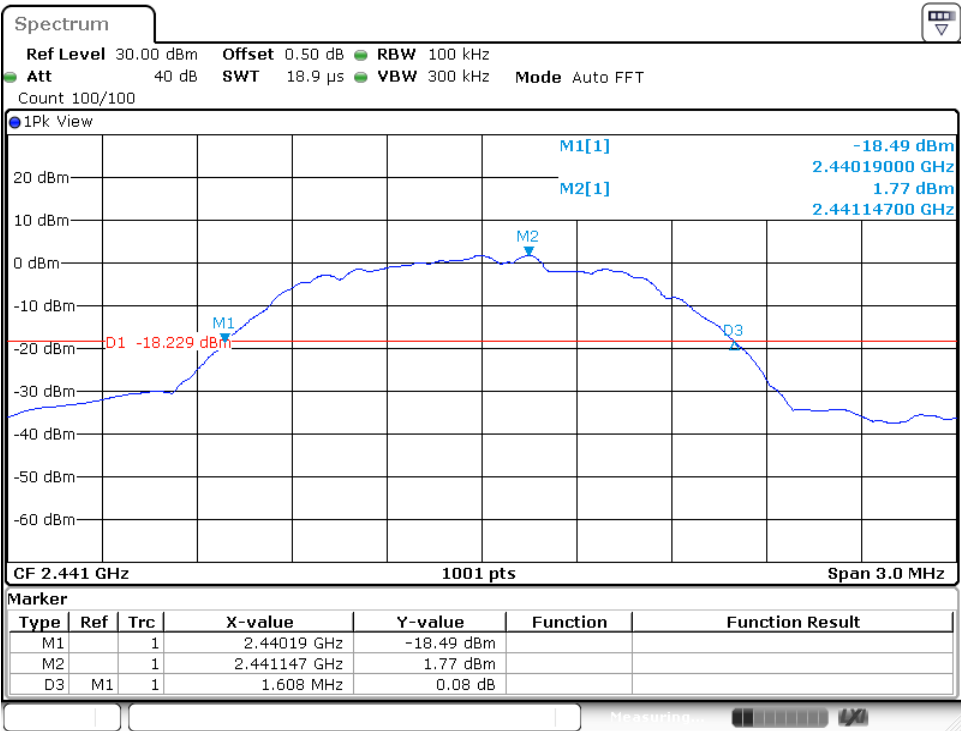

Date:17.JUL.2019 15:00:00

High channel 2480MHz

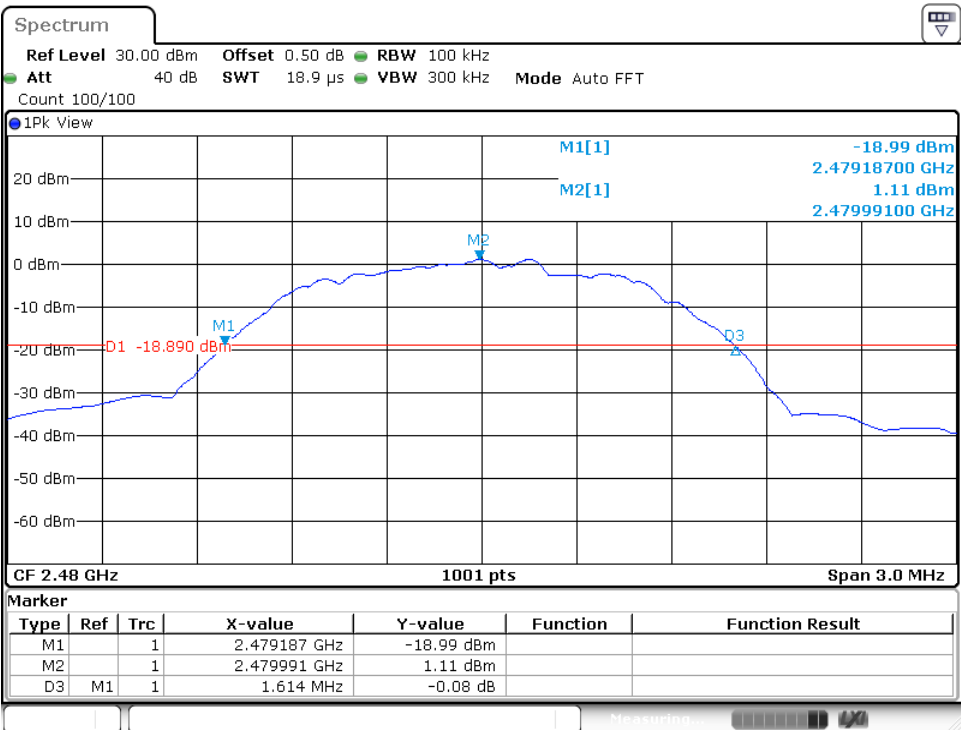

Date:17.JUL.2019 15:01:41

9.4 Carrier Frequency Separation

Test Method

1. The RF output of EUT was connected to the test receiver by RF cable The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit to hopping mode.
3. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels, $RBW \geq 1\%$ of the span, $VBW \geq RBW$, Sweep = auto, Detector function = peak
4. By using the Max-Hold function record the separation of two adjacent channels.
5. Measure the frequency difference of these two adjacent channels by spectrum analyzer marker function. Record the results.
6. Repeat above procedures until all frequencies measured were complete.

Limit


Limit
kHz

$\geq 25\text{kHz}$ or $2/3$ of the 20 dB bandwidth which is greater

Carrier Frequency Separation


TestMode	Channel	Result [MHz]	Limit [MHz]	Verdict
DH5	Hop	1.055	≥ 0.750	PASS
2DH5	Hop	1.139	≥ 1.070	PASS
3DH5	Hop	1.151	≥ 1.076	PASS

DH5

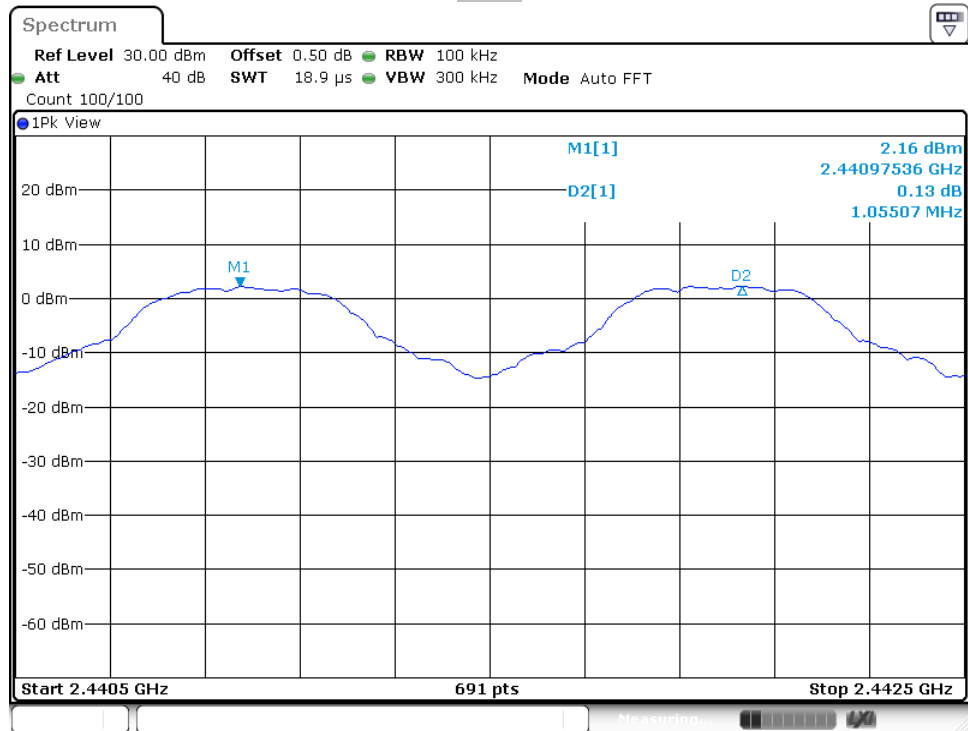


Date: 17 JUL 2019 15:15:39

2DH5

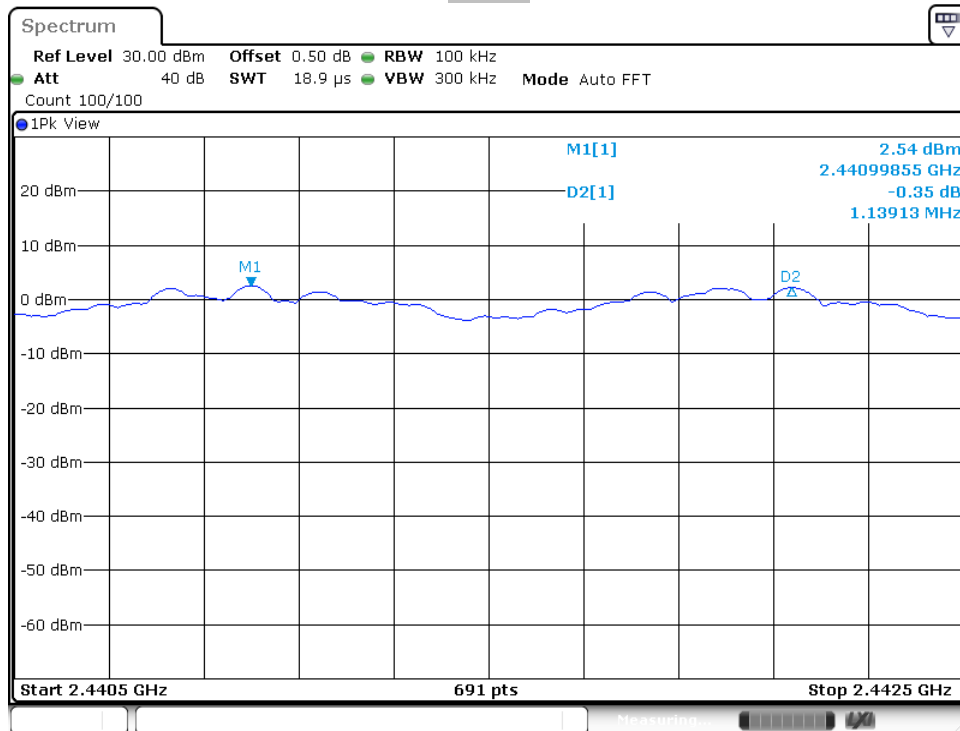

Date: 17 JUL 2019 15:24:31

3DH5

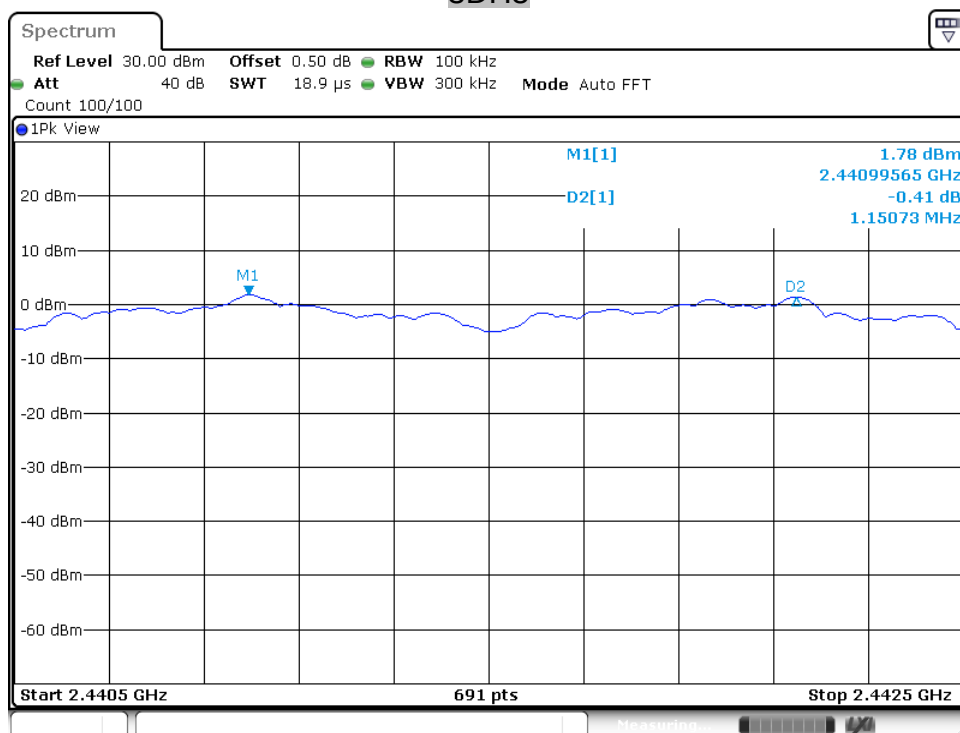

Date: 17 JUL 2019 15:34:30

9.5 Number of hopping frequencies

Test Method

1. The RF output of EUT was connected to the test receiver by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit to hopping mode.
3. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels, $RBW \geq 1\%$ of the span, $VBW \geq RBW$, Sweep = auto, Detector function = peak
4. Set the spectrum analyzer on Max-Hold Mode,
5. Record all the signals from each channel until each one has been recorded.

Repeat above procedures until all frequencies measured were complete.

Limit

Limit
number

 ≥ 15




Number of hopping frequencies


Test result: The measurement was performed with the typical configuration (normal hopping status), and the total hopping channels is constant for the all modulation mode according with the Bluetooth Core Specification. Here GFSK modulation mode was used to show compliance.

Number of hopping frequencies	Result
79	Pass

GFSK Mode

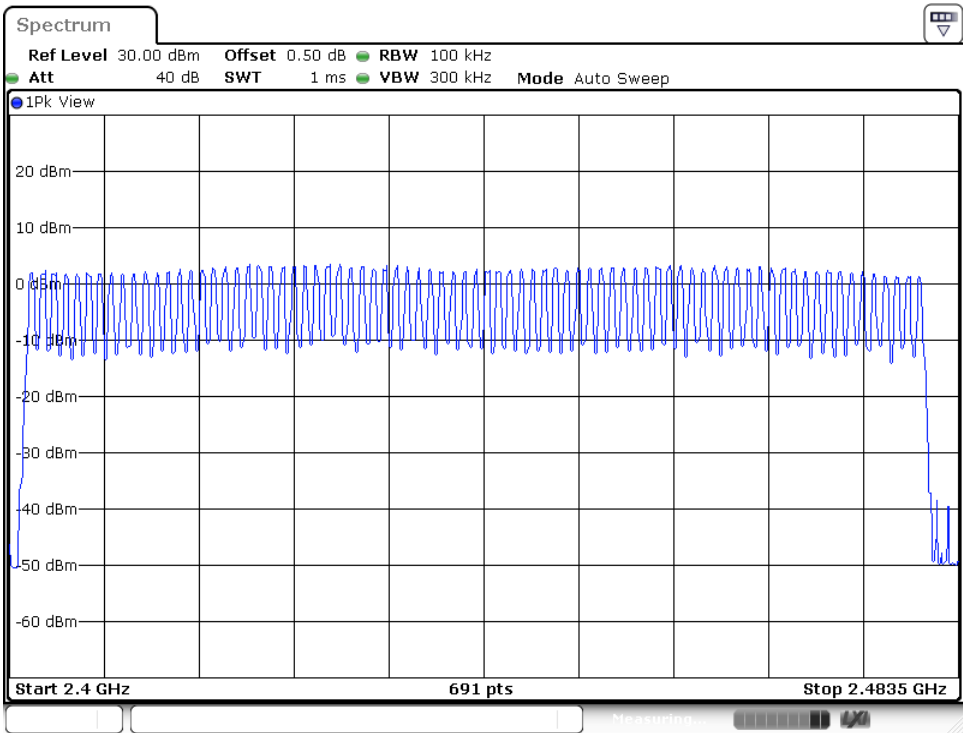


Date: 17 JUL 2019 15:15:54

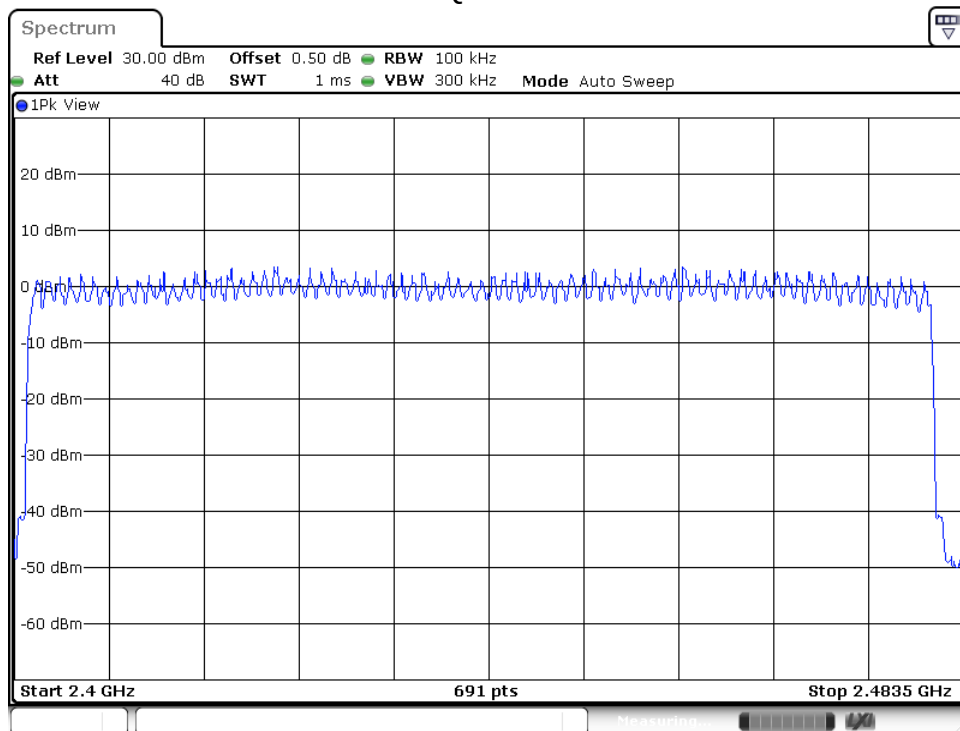$\pi/4$ -DQPSK Mode

Date: 17 JUL 2019 15:24:49

8DPSK Mode

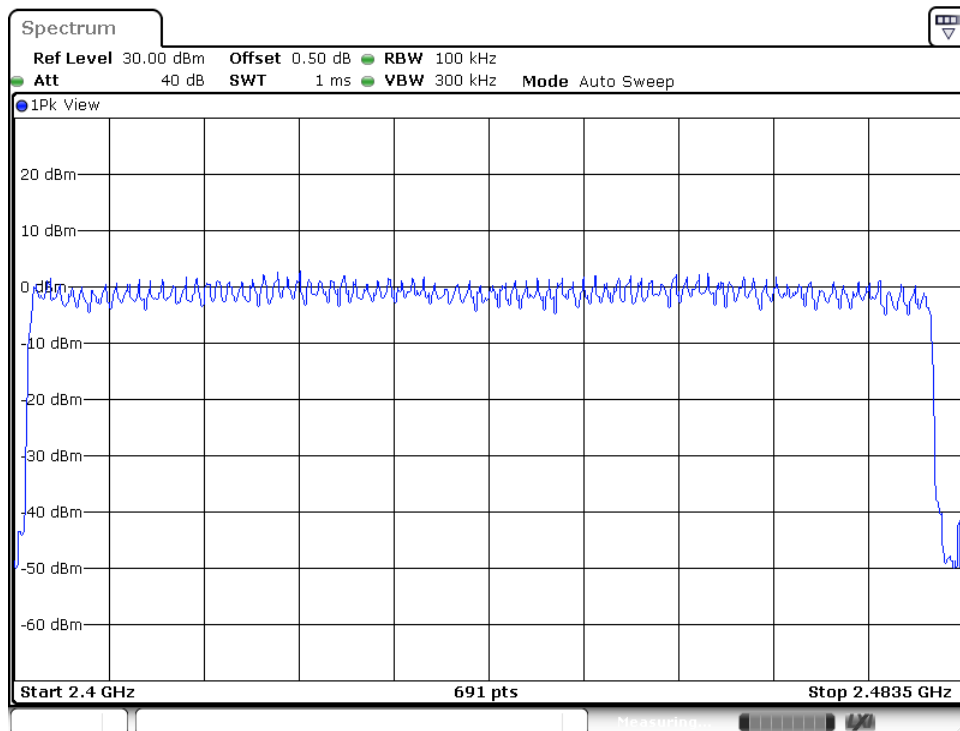

Date: 17 JUL 2019 15:34:47

9.6 Dwell Time

Test Method

1. The RF output of EUT was connected to the test receiver by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit to hopping mode.
3. Use the following spectrum analyzer settings:
RBW: 1MHz; VBW: 1MHz; SPAN: Zero Span
Set the spectrum analyzer on Max-Hold Mode,
4. Adjust the center frequency of spectrum analyzer on any frequency be measured.
5. Measure the Dwell Time by spectrum analyzer Marker function. Record the results.
 $\text{Dwell Time} = \text{Burst Width} * \text{Total Hops}$
6. Repeat above procedures until all frequencies measured were complete.

Limit

The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

Dwell Time

Dwell time

The maximum dwell time shall be 0.4 s.



The Dwell Time = Burst Width * Total Hops. The detailed calculations are showed as follows:

The duration for dwell time calculation: 0.4 [s] * hopping number = 0.4 [s] * 79 [ch] = 31.6 [s*ch];



Test Result

TestMode	Channel	BurstWidth[ms]	TotalHops	Result[s]	Limit[s]	Verdict
DH5	Hop	2.87	130	0.373	<=0.4	PASS
2DH5	Hop	2.87	100	0.287	<=0.4	PASS
3DH5	Hop	2.87	70	0.201	<=0.4	PASS


DH5_Ant1_Hop

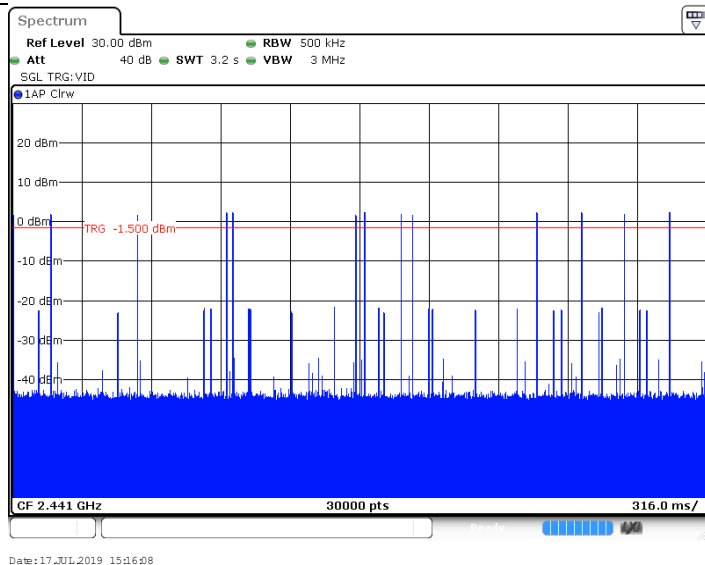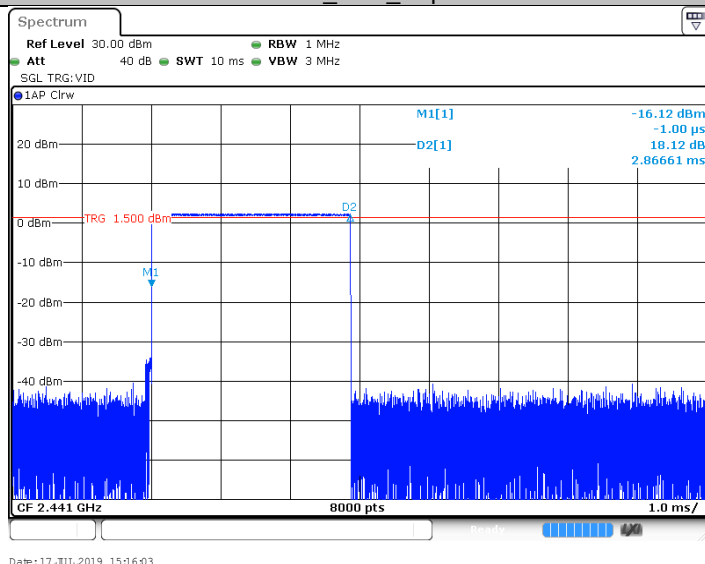


2DH5_Ant1_Hop

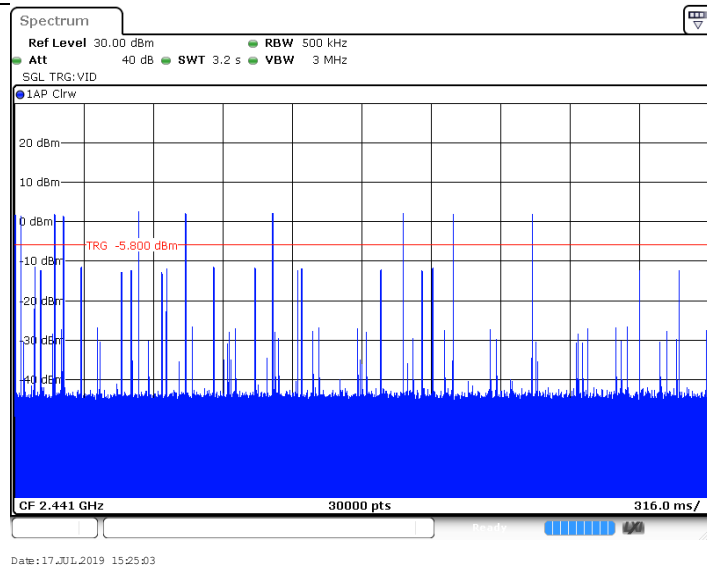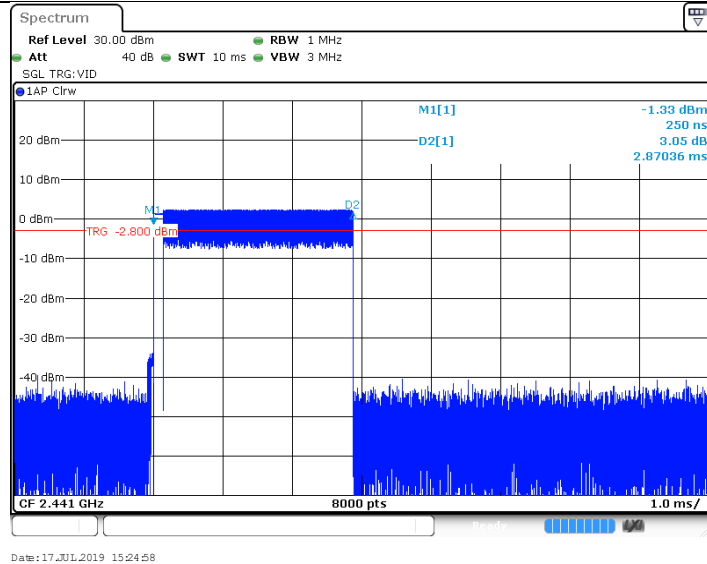

3DH5_Ant1_Hop

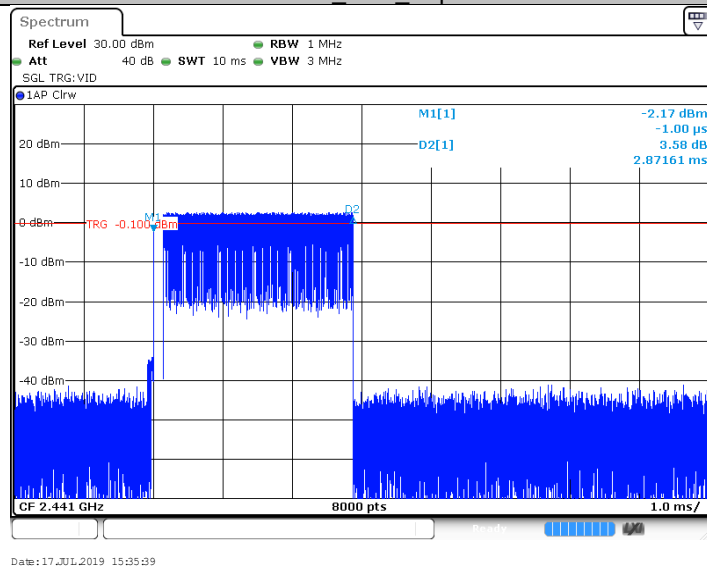

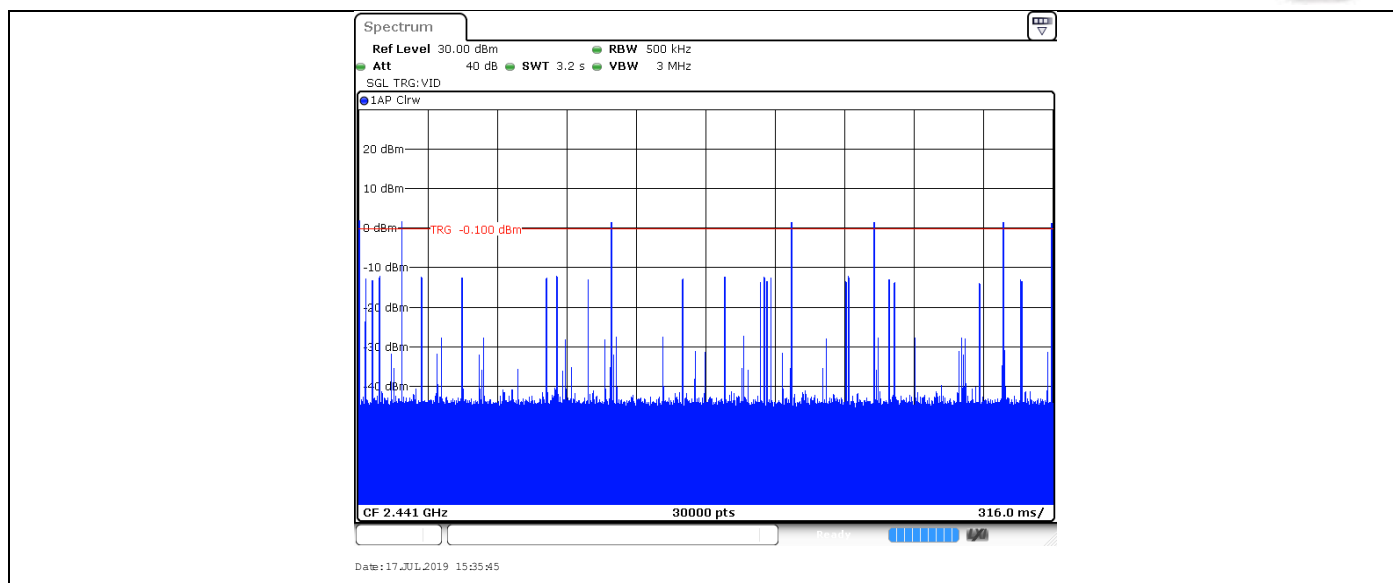

9.7 Conducted Spurious Emission

Test Method

1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
4. Measure and record the results in the test report.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency


Limit

Frequency Range MHz	Limit (dBc)
30-25000	-20


Test result:

TestMode	Channel[MHz]	FreqRange[MHz]	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
DH5	2402	Reference	1.72	1.72	---	PASS
	2402	30~1000	30~1000	-68.6	<=-18.28	PASS
	2402	1000~26500	1000~26500	-52.9	<=-18.28	PASS
	2441	Reference	2.64	2.64	---	PASS
	2441	30~1000	30~1000	-68.62	<=-17.36	PASS
	2441	1000~26500	1000~26500	-52.64	<=-17.36	PASS
	2480	Reference	1.85	1.85	---	PASS
	2480	30~1000	30~1000	-68.65	<=-18.15	PASS
2DH5	2402	Reference	1.69	1.69	---	PASS
	2402	30~1000	30~1000	-68.6	<=-18.31	PASS
	2402	1000~26500	1000~26500	-52.72	<=-18.31	PASS
	2441	Reference	2.68	2.68	---	PASS
	2441	30~1000	30~1000	-68.33	<=-17.32	PASS
	2441	1000~26500	1000~26500	-53.23	<=-17.32	PASS
	2480	Reference	2.01	2.01	---	PASS
	2480	30~1000	30~1000	-68.4	<=-17.99	PASS
3DH5	2402	Reference	0.89	0.89	---	PASS
	2402	30~1000	30~1000	-68.86	<=-19.11	PASS
	2402	1000~26500	1000~26500	-52.7	<=-19.11	PASS
	2441	Reference	1.81	1.81	---	PASS
	2441	30~1000	30~1000	-67.93	<=-18.19	PASS
	2441	1000~26500	1000~26500	-52.32	<=-18.19	PASS
	2480	Reference	1.09	1.09	---	PASS
	2480	30~1000	30~1000	-68.04	<=-18.91	PASS
	2480	1000~26500	1000~26500	-53.02	<=-18.91	PASS


DH5_Ant1_2402_0~Reference

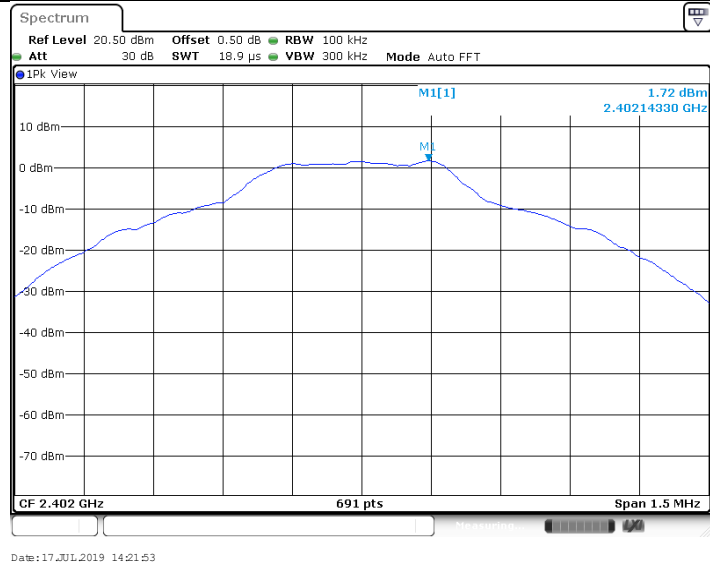


DH5_Ant1_2402_30~1000

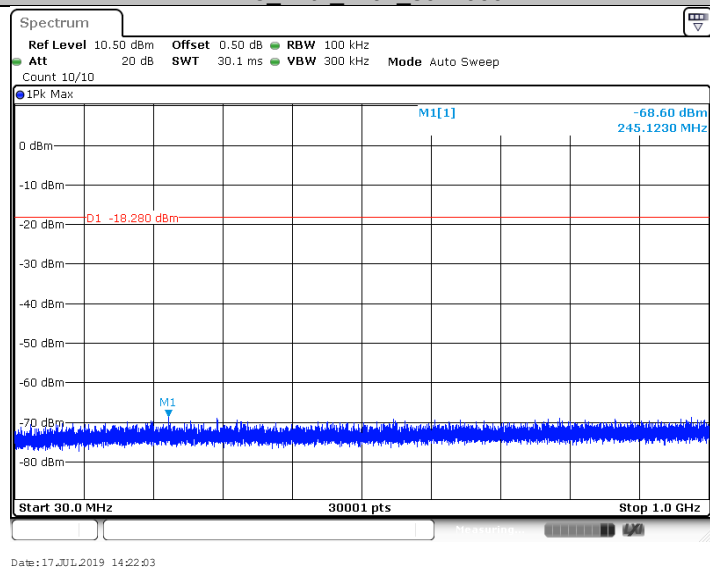


DH5_Ant1_2402_1000~26500

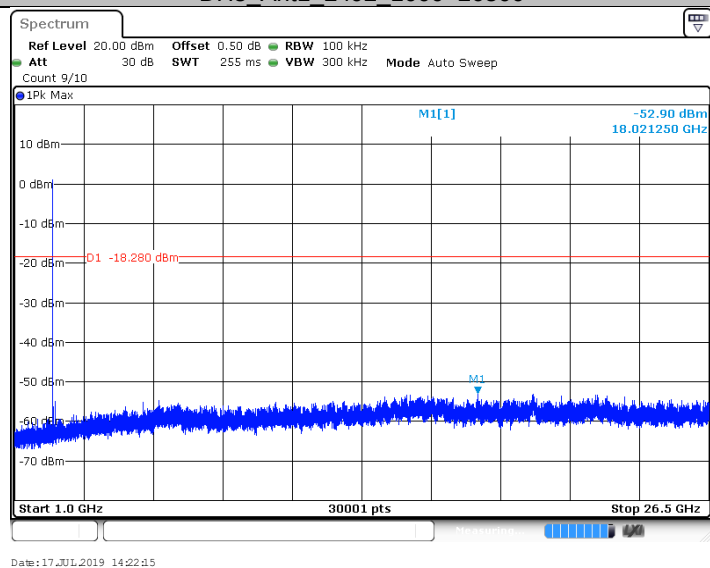


DH5_Ant1_2441_0~Reference

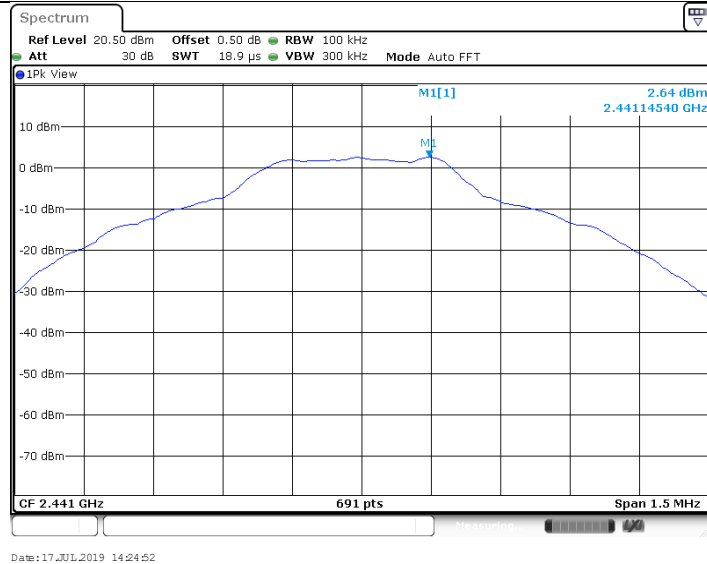


DH5_Ant1_2441_30-1000

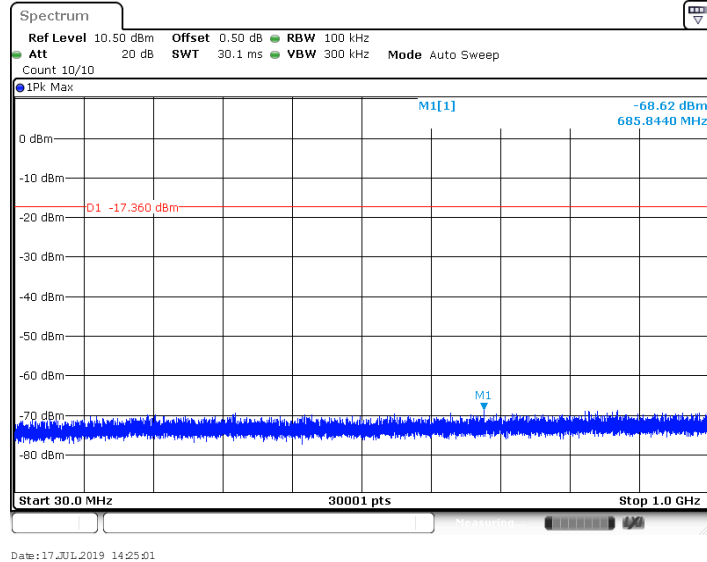


DH5_Ant1_2441_1000-26500

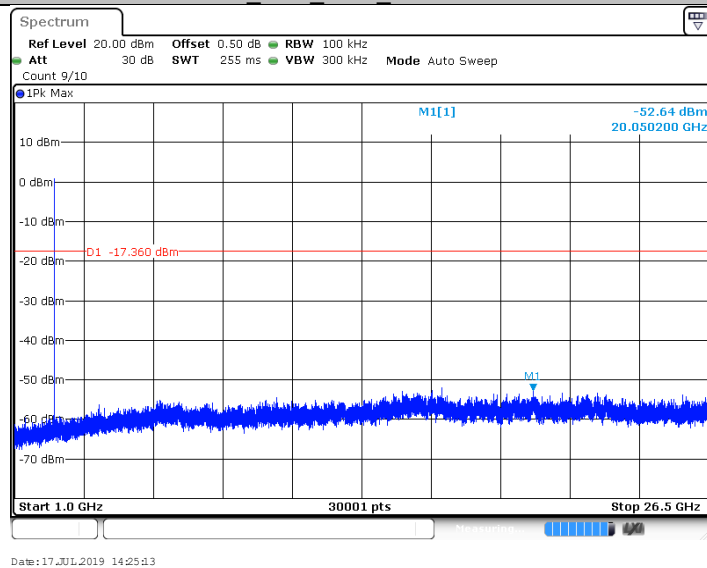


DH5_Ant1_2480_0-Reference

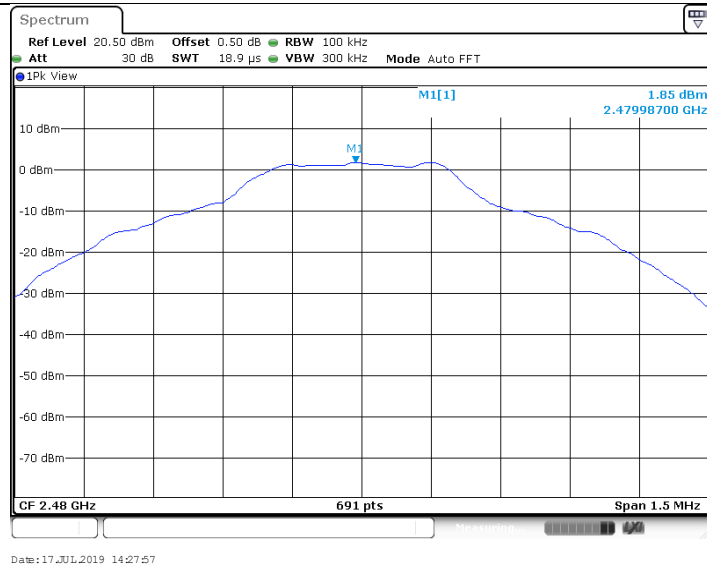


DH5_Ant1_2480_30~1000

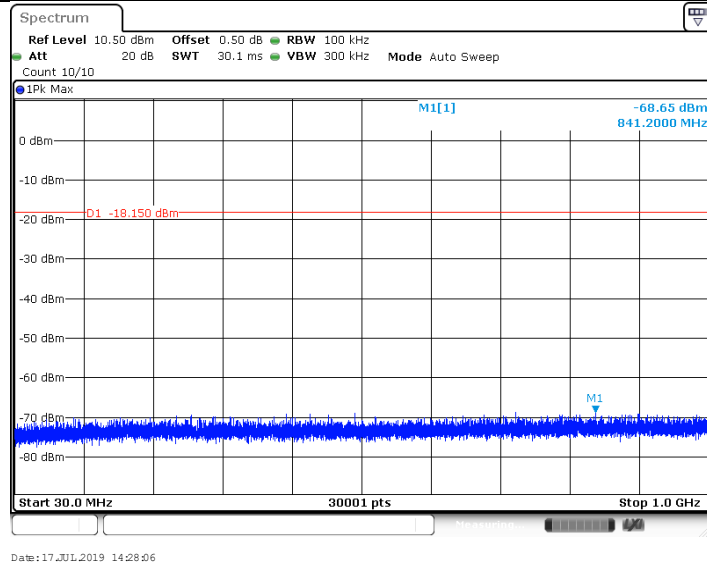


DH5_Ant1_2480_1000~26500

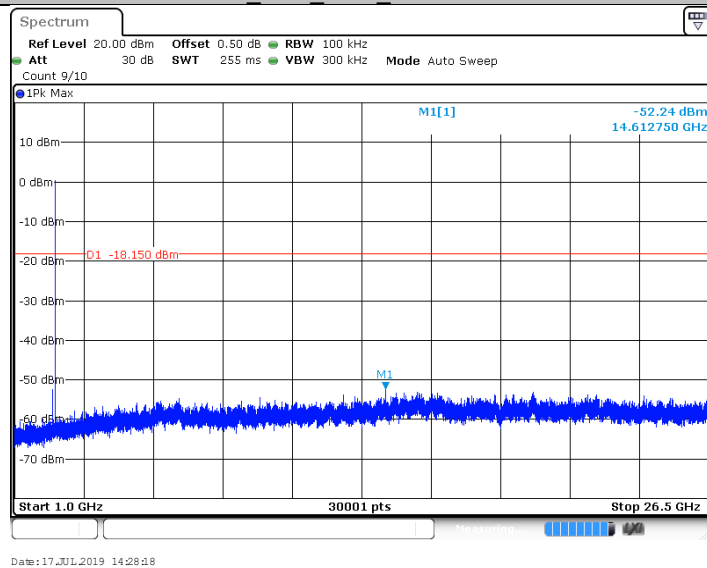


2DH5_Ant1_2402_0~Reference

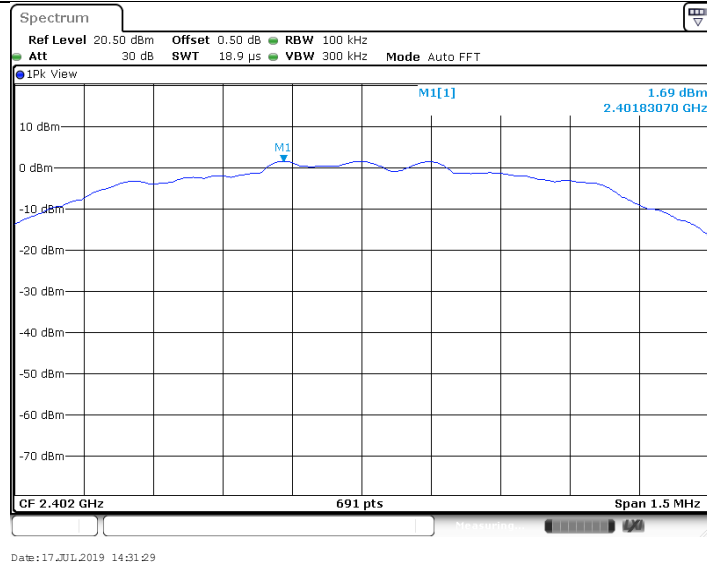


2DH5 Ant1 2402 30~1000

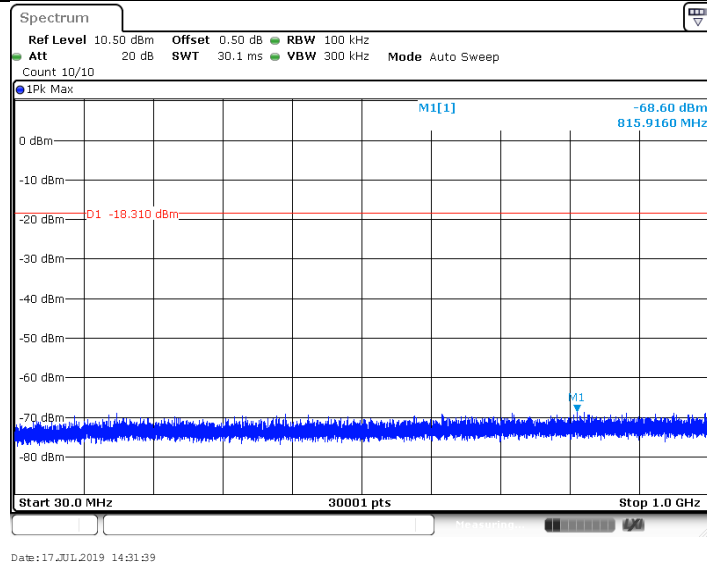


2DH5 Ant1 2402 1000~26500

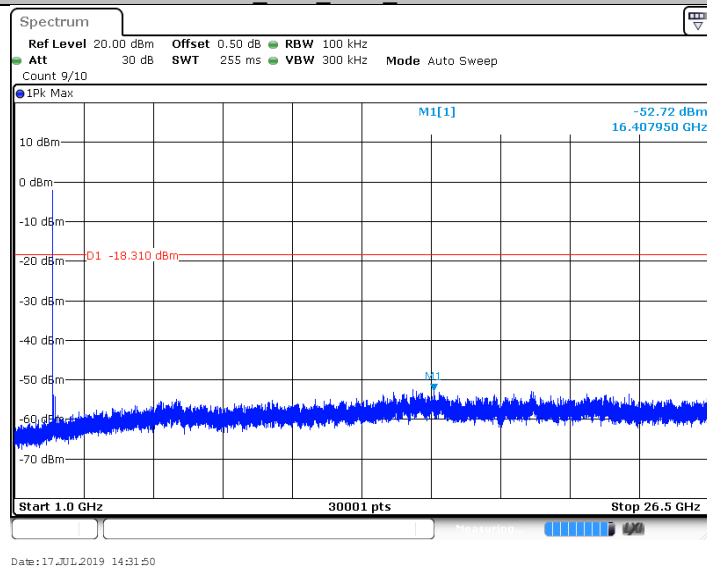


2DH5 Ant1 2441 0~Reference

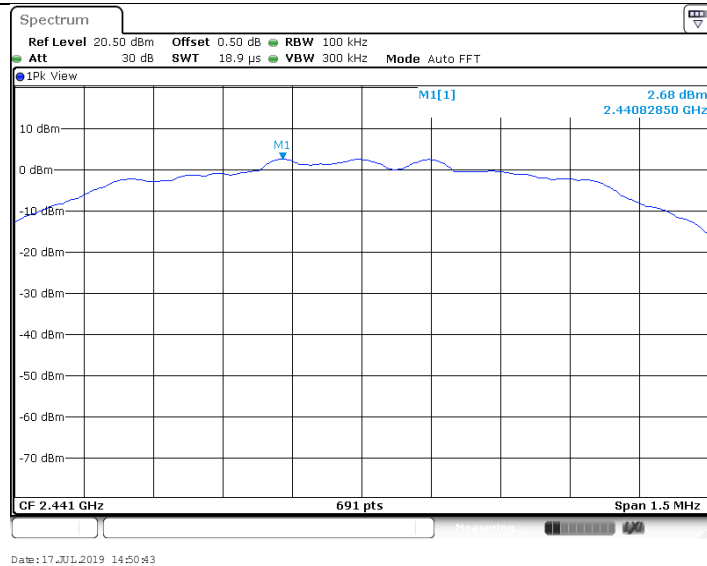


2DH5_Ant1_2441_30~1000

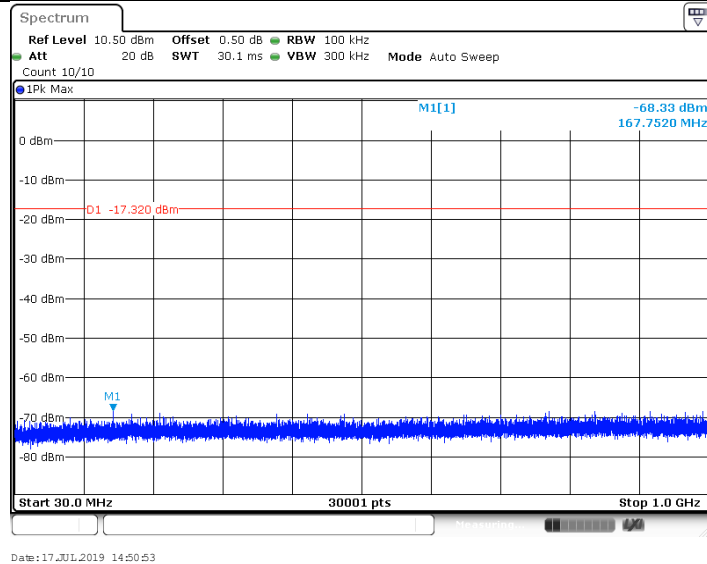


2DH5_Ant1_2441_1000~26500

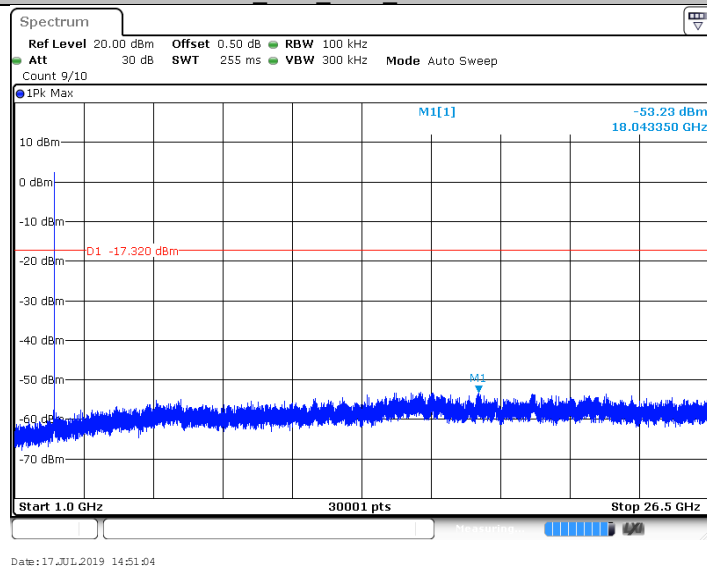


2DH5_Ant1_2480_0~Reference

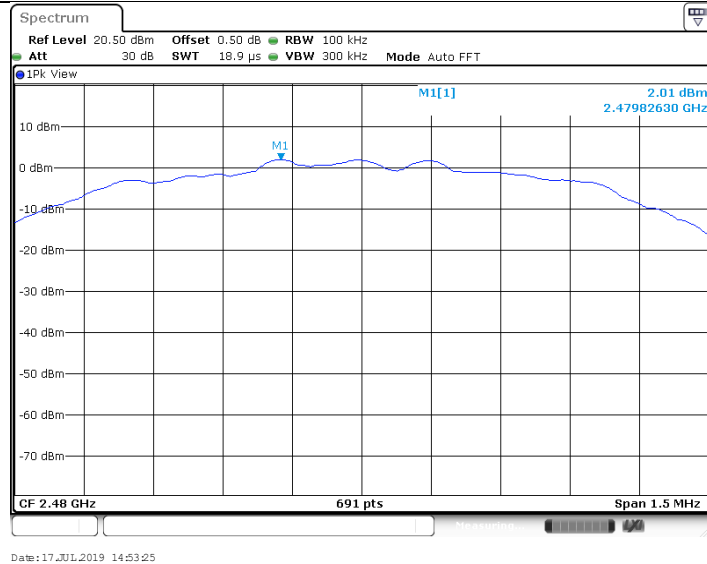


2DH5_Ant1_2480_30~1000

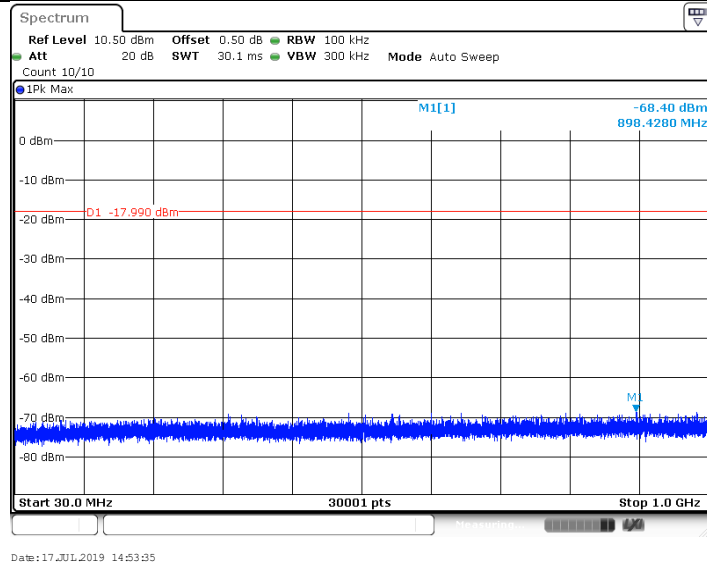


2DH5_Ant1_2480_1000~26500

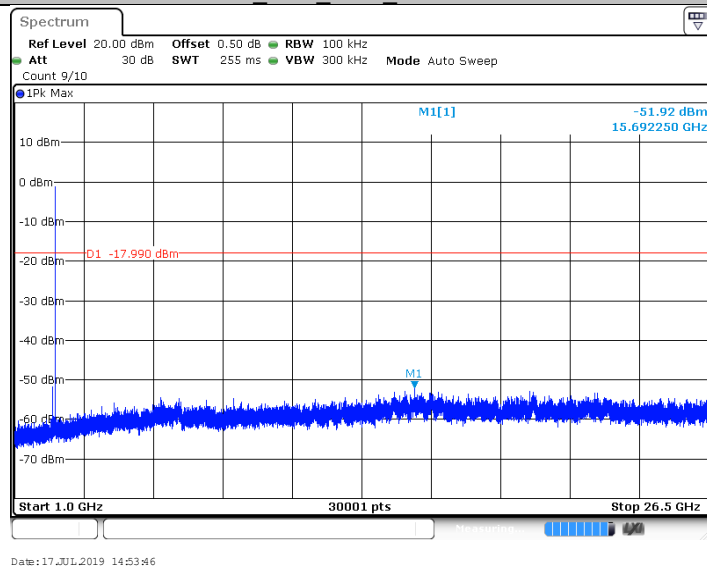


3DH5_Ant1_2402_0~Reference

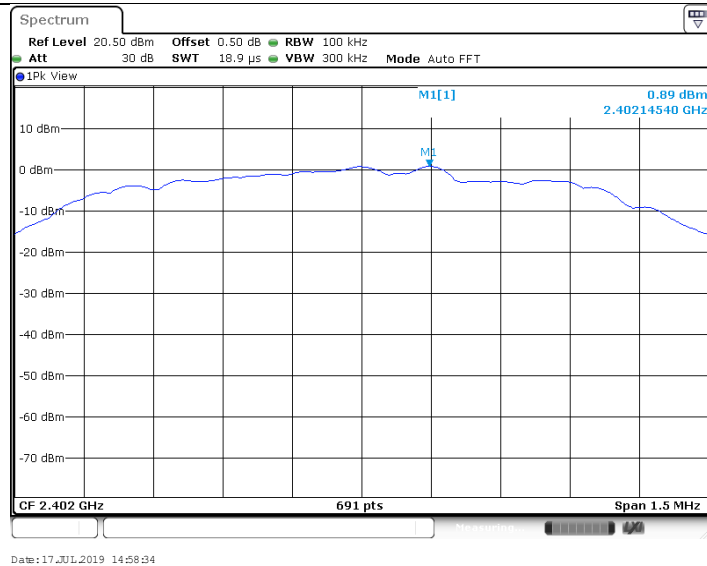


3DH5_Ant1_2402_30~1000

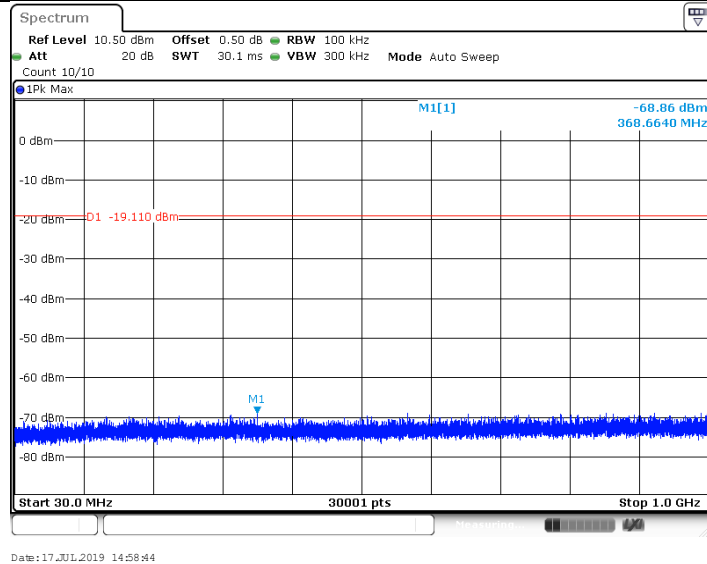


3DH5_Ant1_2402_1000~26500

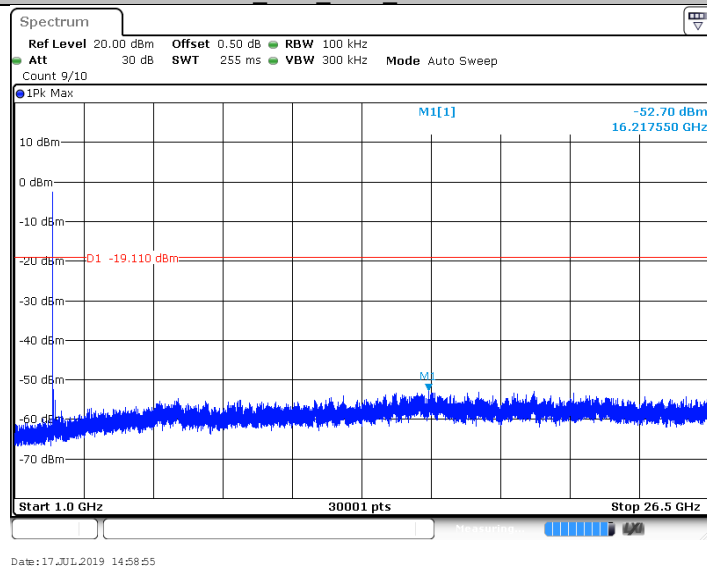


3DH5_Ant1_2441_0~Reference

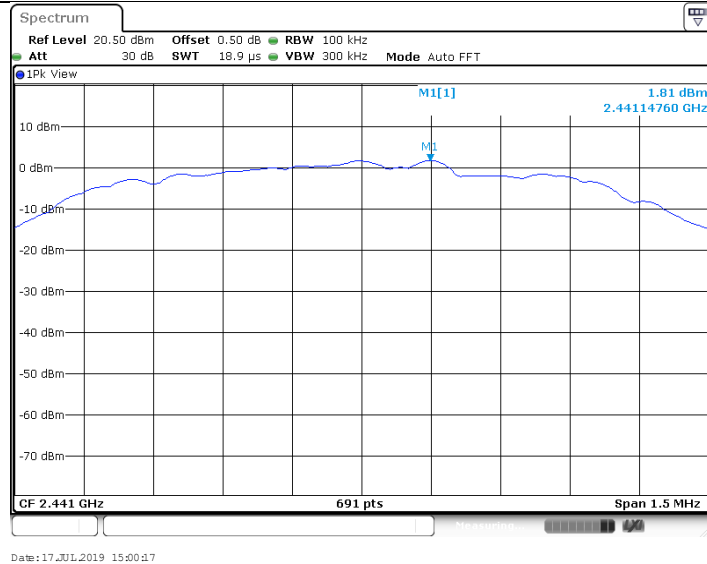


3DH5 Ant1 2441 30~1000

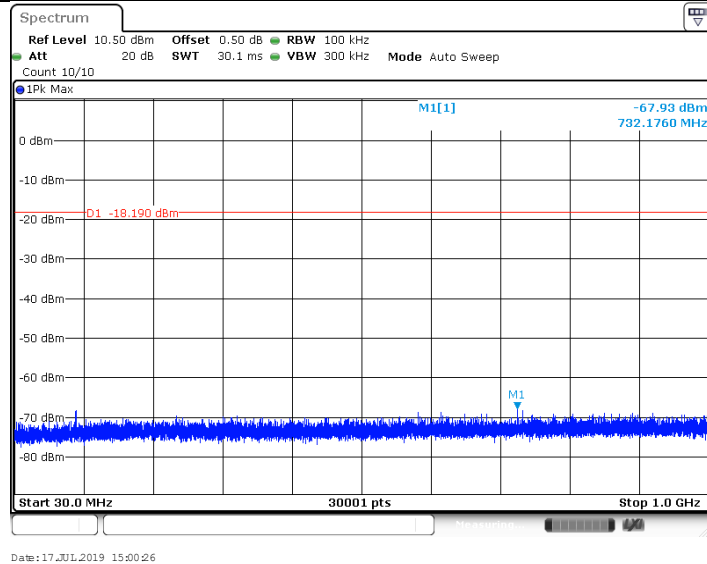


3DH5 Ant1 2441 1000~26500

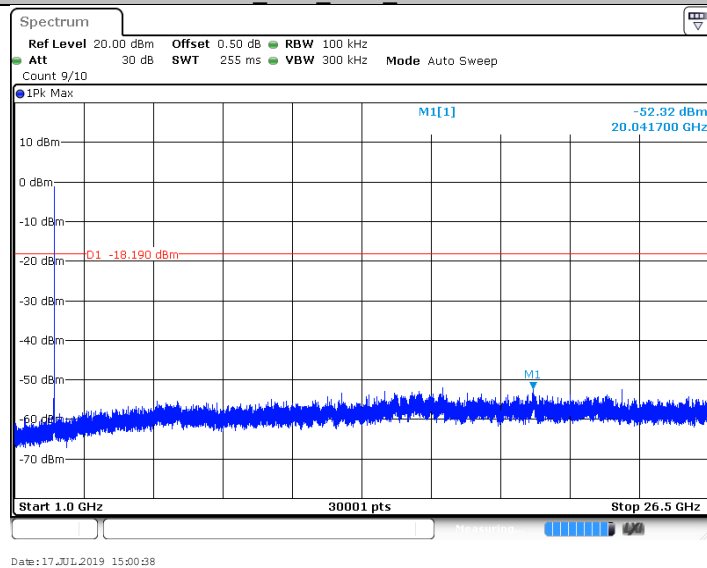


3DH5 Ant1 2480 0~Reference

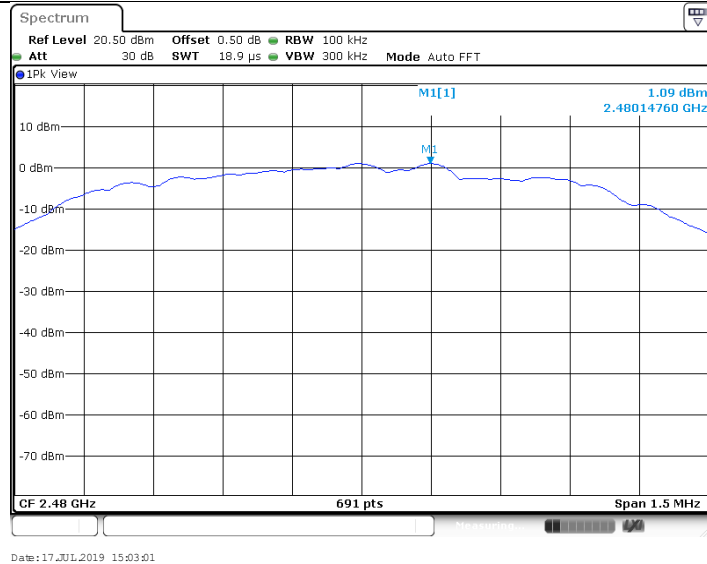

3DH5_Ant1_2480_30~1000

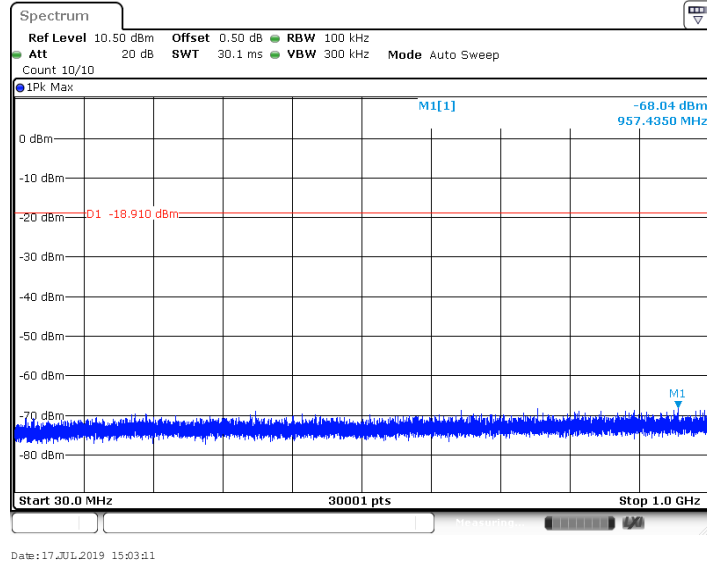

3DH5_Ant1_2480_1000~26500

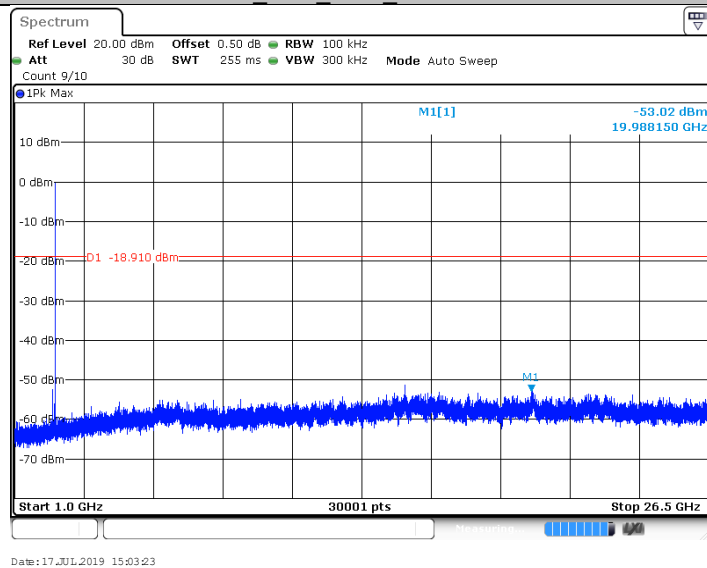

9.8 Band edge testing

Test Method

1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
4. Measure and record the results in the test report.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency

Set to the maximum power setting and enable the EUT hopping mode, repeat the test.


Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits.


Test result:

TestMode	ChName	Channel[MHz]	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
DH5	Low	2402	1.66	-45.22	<=-18.34	PASS
	High	2480	1.83	-48.14	<=-18.17	PASS
	Low	Hop_2402	-10.74	-57.56	-30.74	PASS
	High	Hop_2480	2.03	-43.78	-17.97	PASS
2DH5	Low	2402	1.67	-47.45	<=-18.33	PASS
	High	2480	2.01	-47.29	<=-17.99	PASS
	Low	Hop_2402	-0.69	-49.36	-20.69	PASS
	High	Hop_2480	2.16	-54.09	-17.84	PASS
3DH5	Low	2402	0.37	-48.73	<=-19.63	PASS
	High	2480	1.06	-47.35	<=-18.94	PASS
	Low	Hop_2402	-0.29	-51.01	-20.29	PASS
	High	Hop_2480	0.93	-45.43	-19.07	PASS


DH5 Ant1 Low 2402

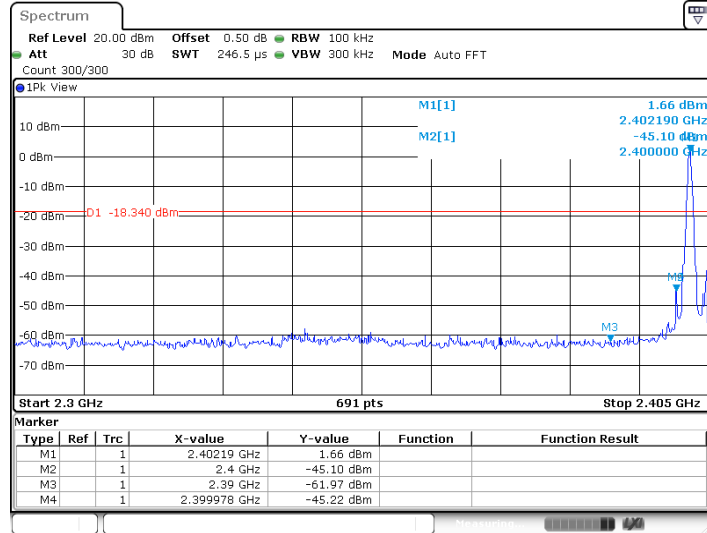


DH5 Ant1_High 2480

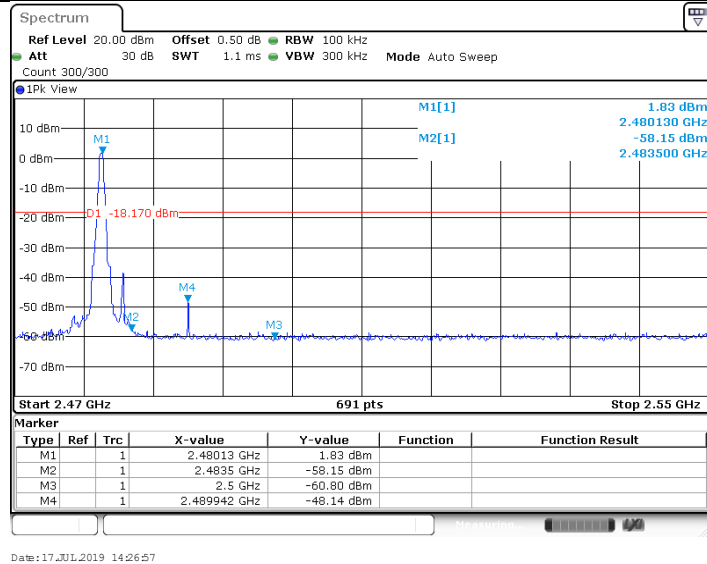


DH5 Ant1 Low Hop 2402

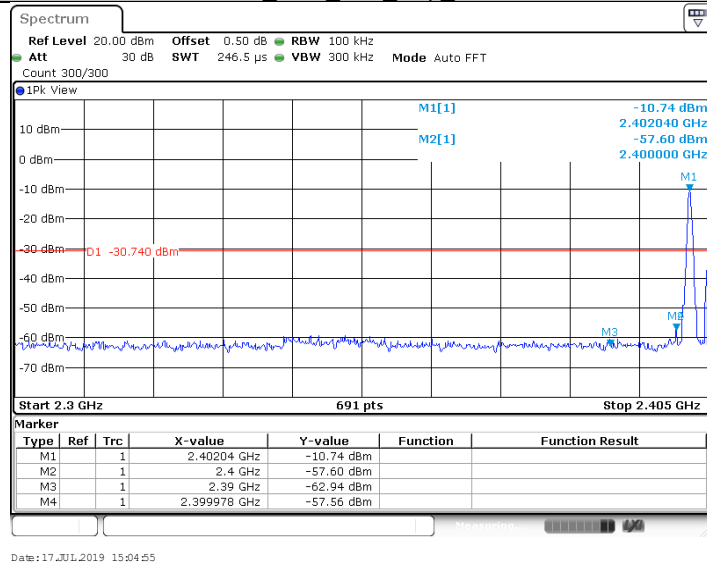


DH5 Ant1 High Hop 2480

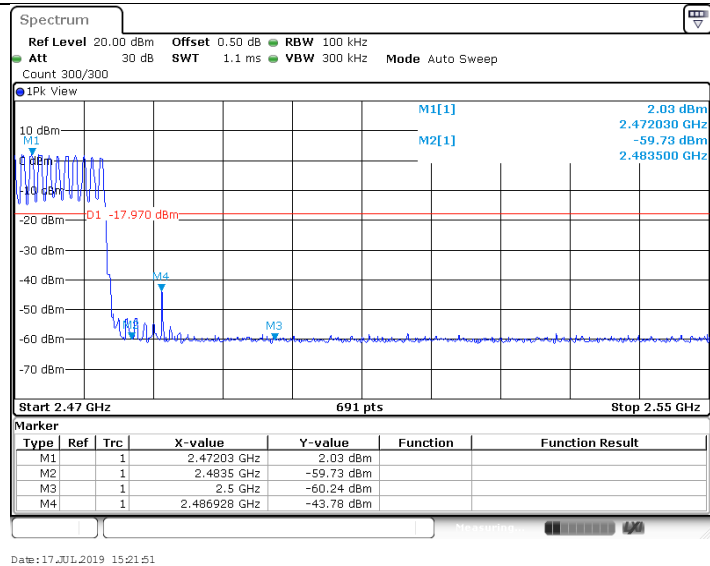


2DH5_Ant1_Low_2402

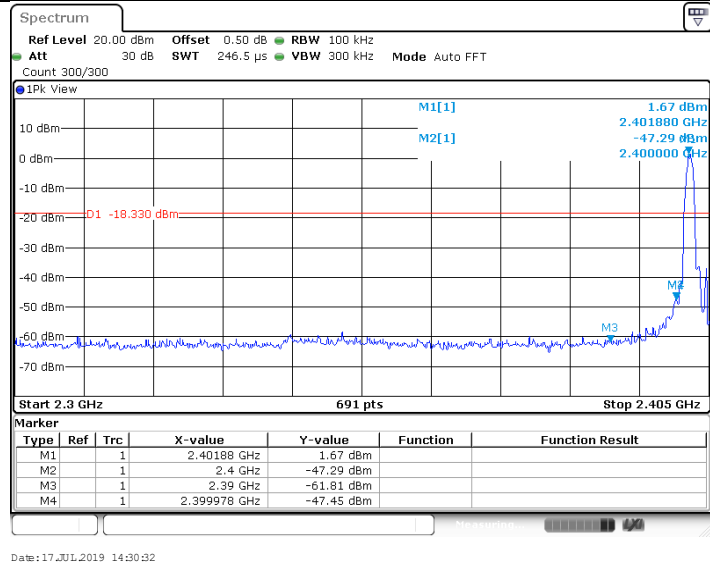


2DH5_Ant1_High_2480

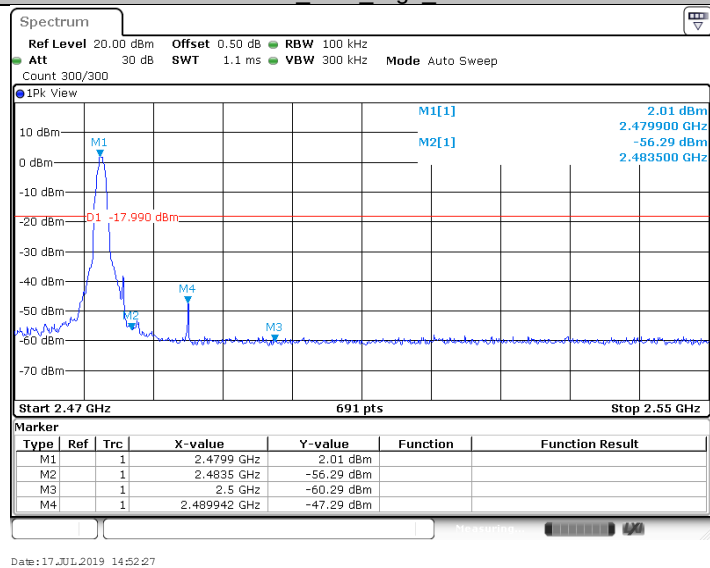


2DH5_Ant1_Low_Hop_2402

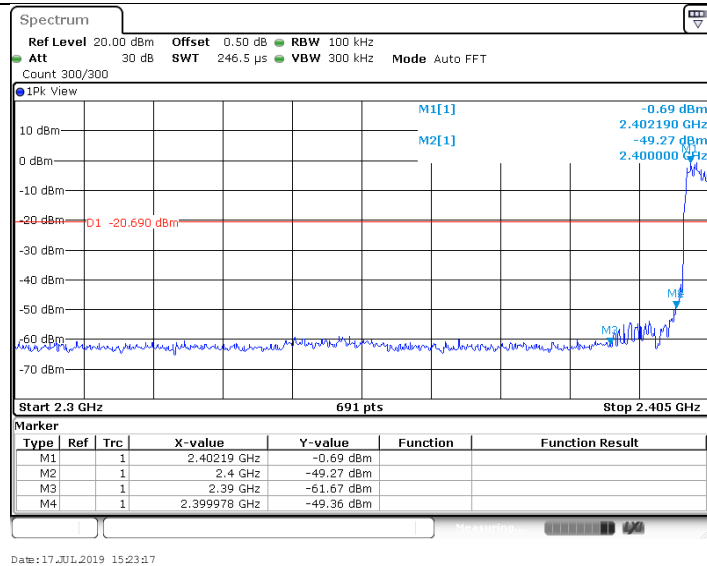


2DH5 Ant1 High Hop 2480

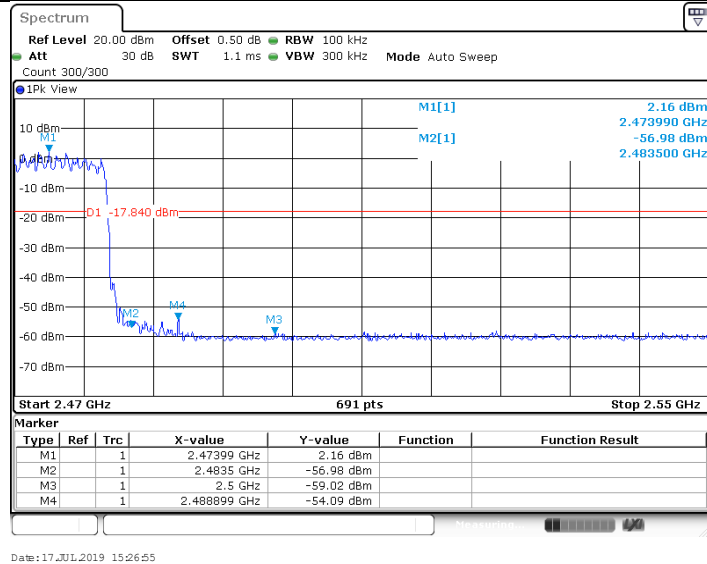


3DH5 Ant1 Low 2402

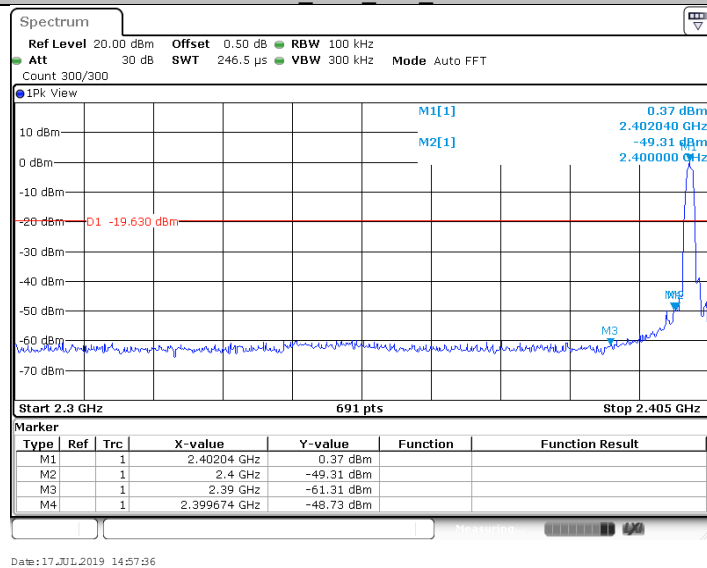


3DH5 Ant1 High 2480

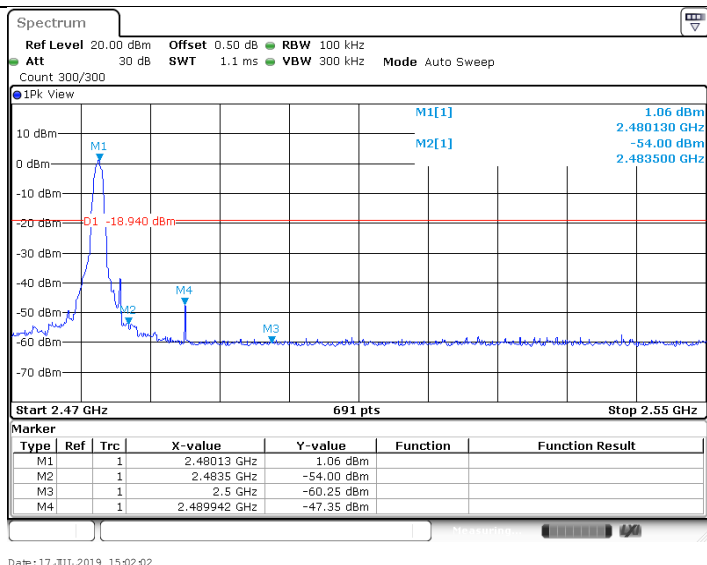

3DH5 Ant1 Low Hop_2402

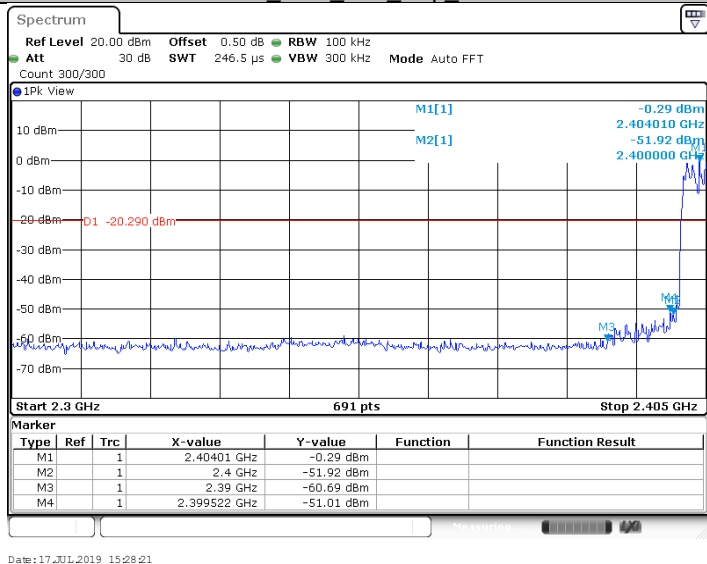

3DH5 Ant1 High Hop_2480

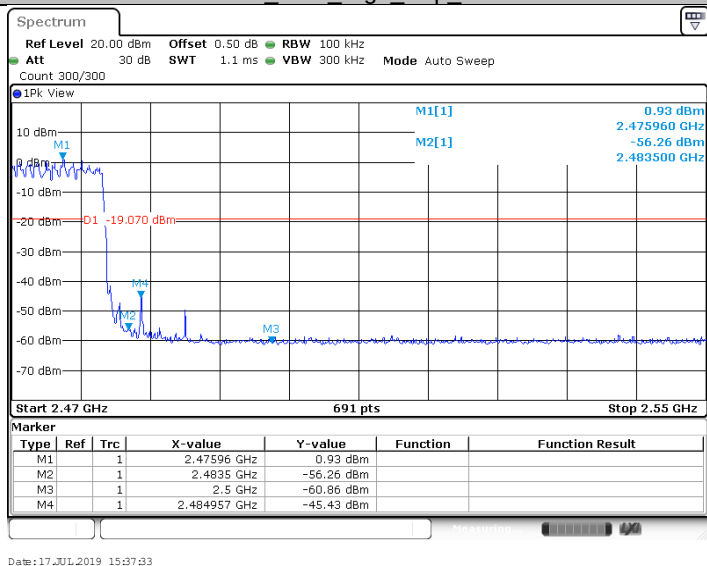

9.9 Spurious radiated emissions for transmitter

Test Method

- 1: The EUT was placed on a turn table which is 1.5m above ground plane for above 1GHz and 0.8m above ground for below 1GHz at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- 2: The EUT was set 3 meters away from the interference – receiving antenna, which was mounted on the top of a variable – height antenna tower.
- 3: The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- 4: For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- 5: Use the following spectrum analyzer settings According to C63.10:

For Below 1GHz

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious
RBW = 100 KHz to 120KHz, VBW $\geq$ RBW for peak measurement, Sweep = auto,
Detector function = peak, Trace = max hold.

For Peak unwanted emissions Above 1GHz:

Span = wide enough to capture the peak level of the in-band emission and all spurious
RBW = 1MHz, VBW $\geq$ RBW for peak measurement, Sweep = auto,
Detector function = peak, Trace = max hold.

Procedures for average unwanted emissions measurements above 1000 MHz:

Span = wide enough to capture the peak level of the in-band emission and all spurious
RBW = 1MHz, VBW=10Hz, Sweep = auto, Detector function = peak, Trace = max hold.
If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a “duty cycle correction factor”, derived from $20\log(\text{dwell time}/100 \text{ ms})$, in an effort to demonstrate compliance with the 15.209 limit.

If the emission is pulsed, modify the unit for continuous operation; use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation.

The setting method can refer to DA00-705.

Limit

The radio emission outside the operating frequency band shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Radiated emissions which fall in the restricted bands, as defined in section 15.205, must comply with the radiated emission limits specified in section 15.209.

Frequency MHz	Field Strength uV/m	Field Strength dBμV/m	Detector
30-88	100	40	QP
88-216	150	43.5	QP
216-960	200	46	QP
960-1000	500	54	QP
Above 1000	500	54	AV
Above 1000	5000	74	PK

Spurious radiated emissions for transmitter

According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in below table if the peak value complies with average limit.

The only worse case (GFSK mode) test result is listed in the report.

Transmitting spurious emission test result as below:

GFSK Modulation 2402MHz Test Result

Frequency Band	Frequency	Emission level	Polarization	Limit	Detector	Margin	Corr.	Result
	MHz	dBuV/m		dBμV/m		dBuV/m	dB/m	
30-1000MHz	869.59	33.43	H	46	QP	12.57	-16.1	Pass
	943.26	34.87	V	46	QP	11.13	-15.3	Pass
1000-25000MHz	*12033.28	41.99	H	74	PK	32.01	10.4	Pass
	*10732.03	40.53	V	74	PK	24.32	8.4	Pass

GFSK Modulation 2441MHz Test Result

Frequency Band	Frequency	Emission level	Polarization	Limit	Detector	Margin	Corr.	Result
	MHz	dBuV/m		dBμV/m		dBuV/m	dB/m	
30-1000MHz	--	--	H	40	QP	--		Pass
	--	--	V	40	QP	--		Pass
1000-25000MHz	13068.75	43.55	H	74	PK	30.45	13.7	Pass
	17092.97	48.98	V	74	PK	25.02	20.4	Pass

GFSK Modulation 2480MHz Test Result

Frequency Band	Frequency MHz	Emission level dBuV/m	Polarization	Limit dBuV/m	Detector	Margin dBuV/m	Corr. dB/m	Result
30-1000MHz	--	--	H	40	QP	--		Pass
	--	--	V	40	QP	--		Pass
1000-25000MHz	17308.59	48.78	H	74	PK	25.22	20.5	Pass
	*12510.00	41.46	V	74	PK	32.54	12.0	Pass

Remark:

- (1) “**” means the emission(s) appear within the restrict bands shall follow the requirement of section 15.205.
- (2) Data of measurement within this frequency range shown “--” in the table above means the reading of emissions are the noise floor or attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Corrected Amplitude= Read level + Corrector factor
 Above 1GHz: Corrector factor = Antenna Factor + Cable Loss- Pre-amplifier
 Below 1GHz: Corrector factor = Antenna Factor + Cable Loss
 (The Reading Level is recorded by software which is not shown in the sheet)

10 Test Equipment List

List of Test Instruments

Conducted Emission Test

Description	Manufacturer	Model no.	Serial no.	cal. due date
EMI Test Receiver	Rohde & Schwarz	ESR 3	101782	2020-6-28
LISN	Rohde & Schwarz	ENV4200	100249	2020-6-28
Attenuator	Shanghai Huaxiang	TS2-26-3	080928189	2020-6-28
Test software	Rohde & Schwarz	EMC32	Version9.15.00	N/A

Radiated Emission Test

DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	CAL. DUE DATE
EMI Test Receiver	Rohde & Schwarz	ESR 26	101269	2020-6-28
Trilog Super Broadband Test Antenna	Schwarzbeck	VULB 9163	707	2020-6-29
Horn Antenna	Rohde & Schwarz	HF907	102295	2020-6-22
Wideband Horn Antenna	Q-PAR	QWH-SL-18-40-K-SG	12827	2020-7-12
Pre-amplifier	Rohde & Schwarz	SCU 18	102230	2020-6-28
Attenuator	Agilent	8491A	MY39264334	2020-6-28
3m Semi-anechoic chamber	TDK	9X6X6	----	2020-7-7
Test software	Rohde & Schwarz	EMC32	Version 9.15.00	N/A

RF conducted test

DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	CAL. DUE DATE
Signal Analyzer	Rohde & Schwarz	FSV40	101030	2020-6-28
RF Switch Module	Rohde & Schwarz	OSP120/OSP-B157	101226/100851	2020-6-28
Power Splitter	Weinschel	1580	SC319	2020-7-7
Test software	Tonscend	System for BT/WIFI	Version 2.6	N/A

11 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

System Measurement Uncertainty	
Test Items	Extended Uncertainty
Uncertainty for Radiated Spurious Emission 30MHz-1000MHz	Horizontal: 4.81dB; Vertical: 4.89dB;
Uncertainty for Radiated Spurious Emission 1000MHz-18000MHz	Horizontal: 4.69dB; Vertical: 4.68dB;
Uncertainty for Radiated Spurious Emission 18000MHz-40000MHz	Horizontal: 4.89dB; Vertical: 4.87dB;
Uncertainty for Conducted RF test with TS 8997	RF Power Conducted: 1.16dB Frequency test involved: 0.6×10^{-7} or 1%

---THE END OF REPORT---