


EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE1-CH149_Ant A	Test Voltage	AC 120V/60Hz

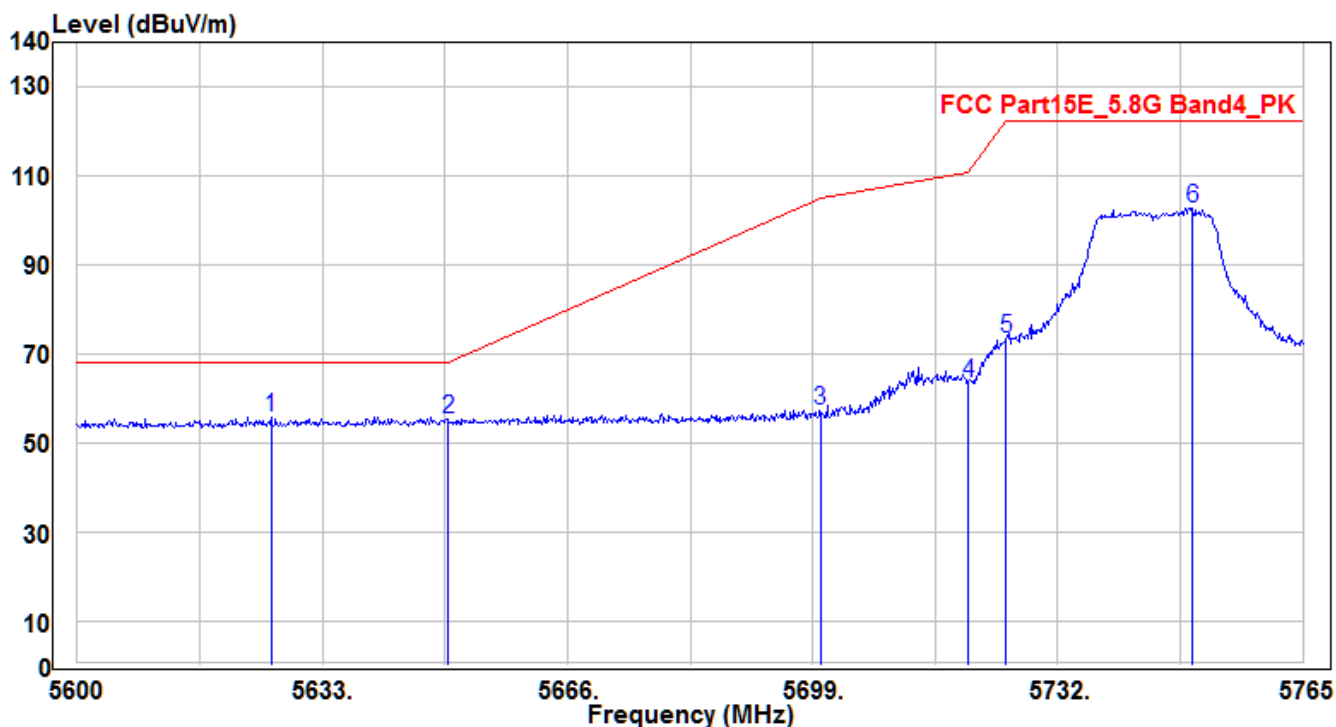


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5626.07	51.31	4.66	55.97	-12.23	68.2	150	350	Peak
2		5650	50.5	4.75	55.25	-12.95	68.2	150	350	Peak
3		5700	52.51	4.94	57.45	-47.75	105.2	150	350	Peak
4		5720	58.55	5.01	63.56	-47.24	110.8	150	350	Peak
5		5725	68.29	5.03	73.32	-48.88	122.2	150	350	Peak
6		5750.15	97.66	5.13	102.79	-19.41	122.2	150	350	Peak

Note :

- "*" means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor) °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE1-CH149_Ant A	Test Voltage	AC 120V/60Hz

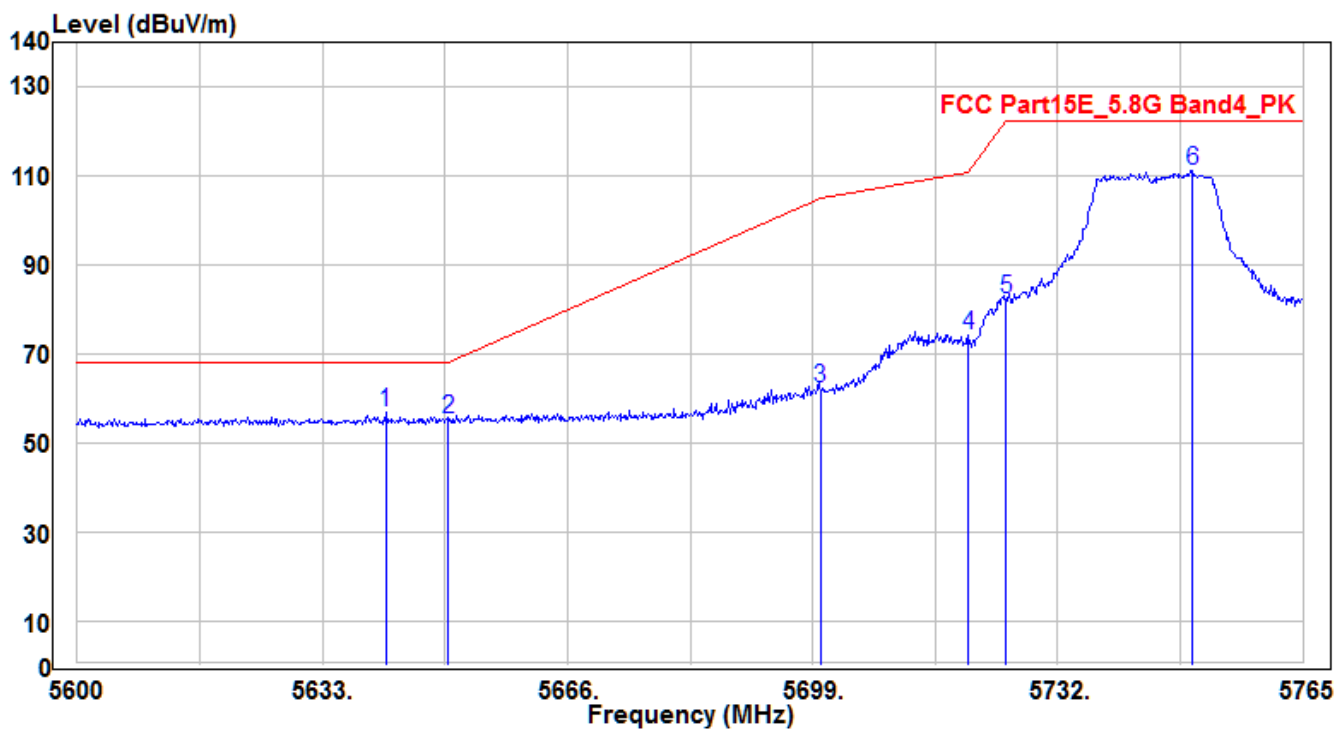


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5641.58	52.2	4.71	56.91	-11.29	68.2	205	370	Peak
2		5650	50.5	4.75	55.25	-12.95	68.2	205	370	Peak
3		5700	57.25	4.94	62.19	-43.01	105.2	205	370	Peak
4		5720	69.22	5.01	74.23	-36.57	110.8	205	370	Peak
5		5725	77.47	5.03	82.5	-39.7	122.2	205	370	Peak
6		5750.15	106.02	5.13	111.15	-11.05	122.2	205	370	Peak

Note :

- "*" means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor) °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE1-CH149_Ant B	Test Voltage	AC 120V/60Hz

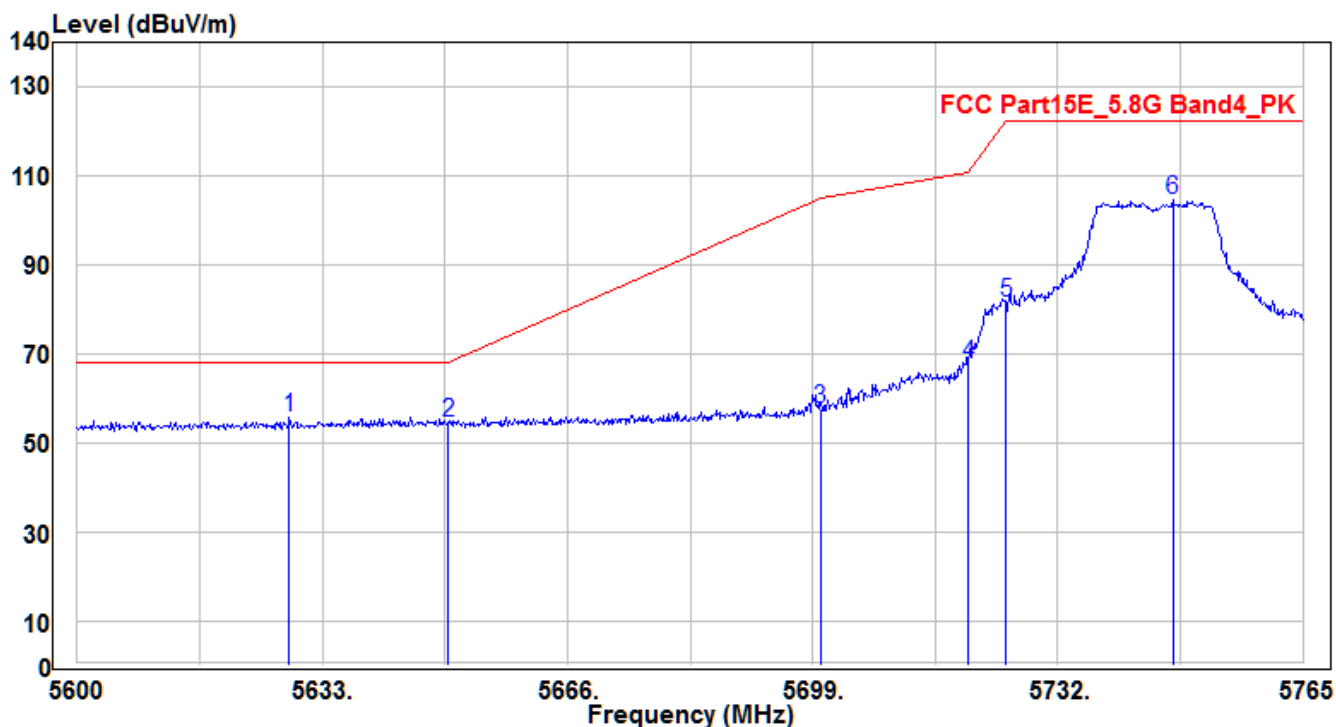


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5628.545	51.27	4.66	55.93	-12.27	68.2	150	165	Peak
2		5650	50.04	4.75	54.79	-13.41	68.2	150	165	Peak
3		5700	52.82	4.94	57.76	-47.44	105.2	150	165	Peak
4		5720	62.61	5.01	67.62	-43.18	110.8	150	165	Peak
5		5725	76.4	5.03	81.43	-40.77	122.2	150	165	Peak
6		5747.51	99.5	5.13	104.63	-17.57	122.2	150	165	Peak

Note :

- "*" means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor) °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE1-CH149_Ant B	Test Voltage	AC 120V/60Hz

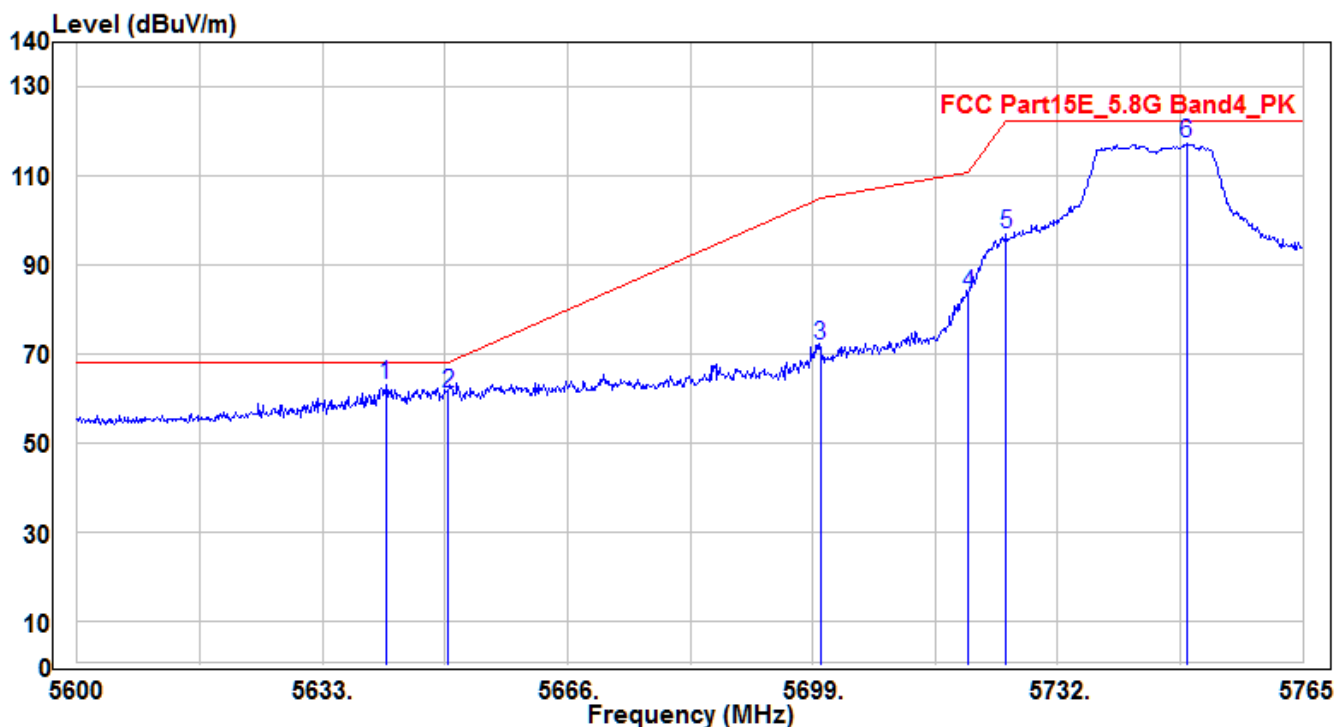


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5641.58	58.2	4.71	62.91	-5.29	68.2	150	145	Peak
2		5649.995	56.48	4.75	61.23	-6.97	68.2	150	145	Peak
3		5700	66.87	4.94	71.81	-33.39	105.2	150	145	Peak
4		5720	78.47	5.01	83.48	-27.32	110.8	150	145	Peak
5		5725	91.84	5.03	96.87	-25.33	122.2	150	145	Peak
6		5749.325	112.14	5.13	117.27	-4.93	122.2	150	145	Peak

Note :

- "*" means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor) °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE1-CH165_Ant A	Test Voltage	AC 120V/60Hz

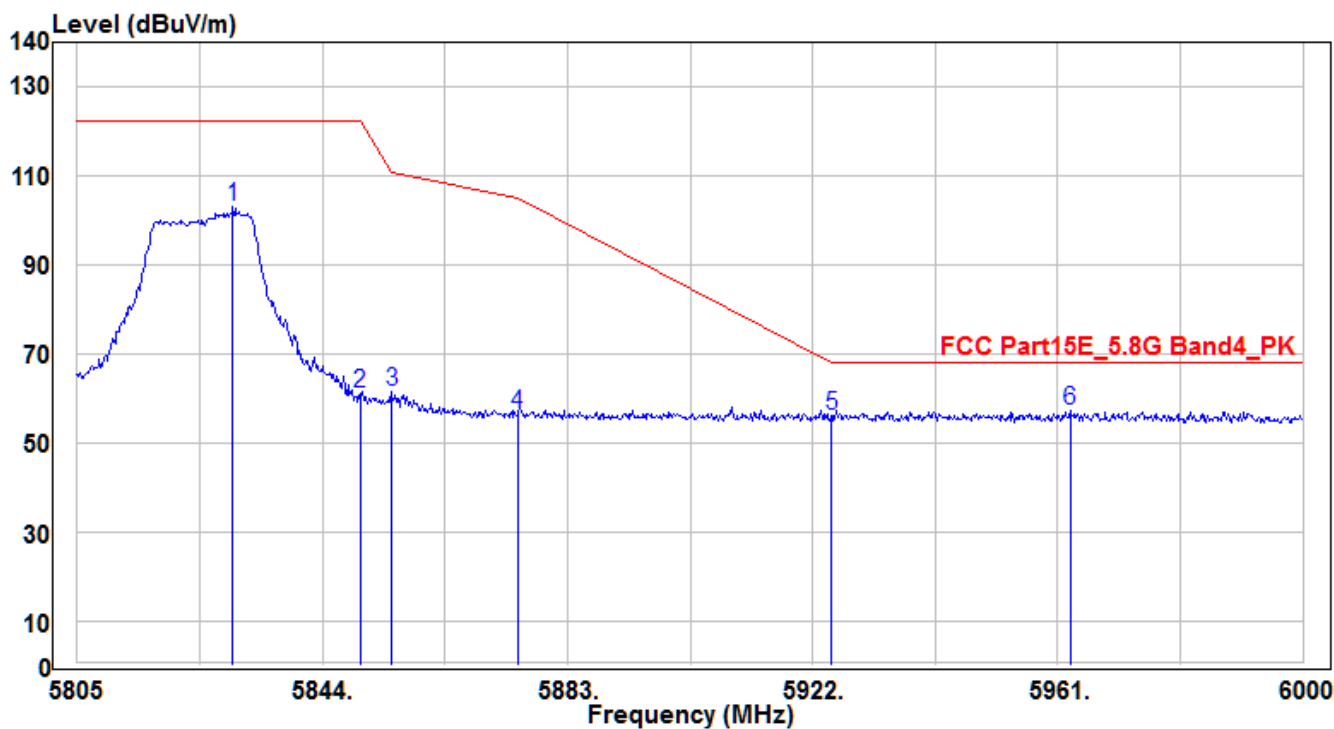


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5829.765	97.57	5.44	103.01	-19.19	122.2	150	-10	Peak
2	5850	55.67	5.51	61.18	-61.02	122.2	150	-10	Peak
3	5855	55.95	5.54	61.49	-49.31	110.8	150	-10	Peak
4	5875	51.05	5.62	56.67	-48.53	105.2	150	-10	Peak
5	5925	50.52	5.8	56.32	-11.88	68.2	150	-10	Peak
6	* 5962.95	51.32	5.95	57.27	-10.93	68.2	150	-10	Peak

Note :

1. " * " means the worst value in this measurement data .
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) .
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor) .

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE1-CH165_Ant A	Test Voltage	AC 120V/60Hz

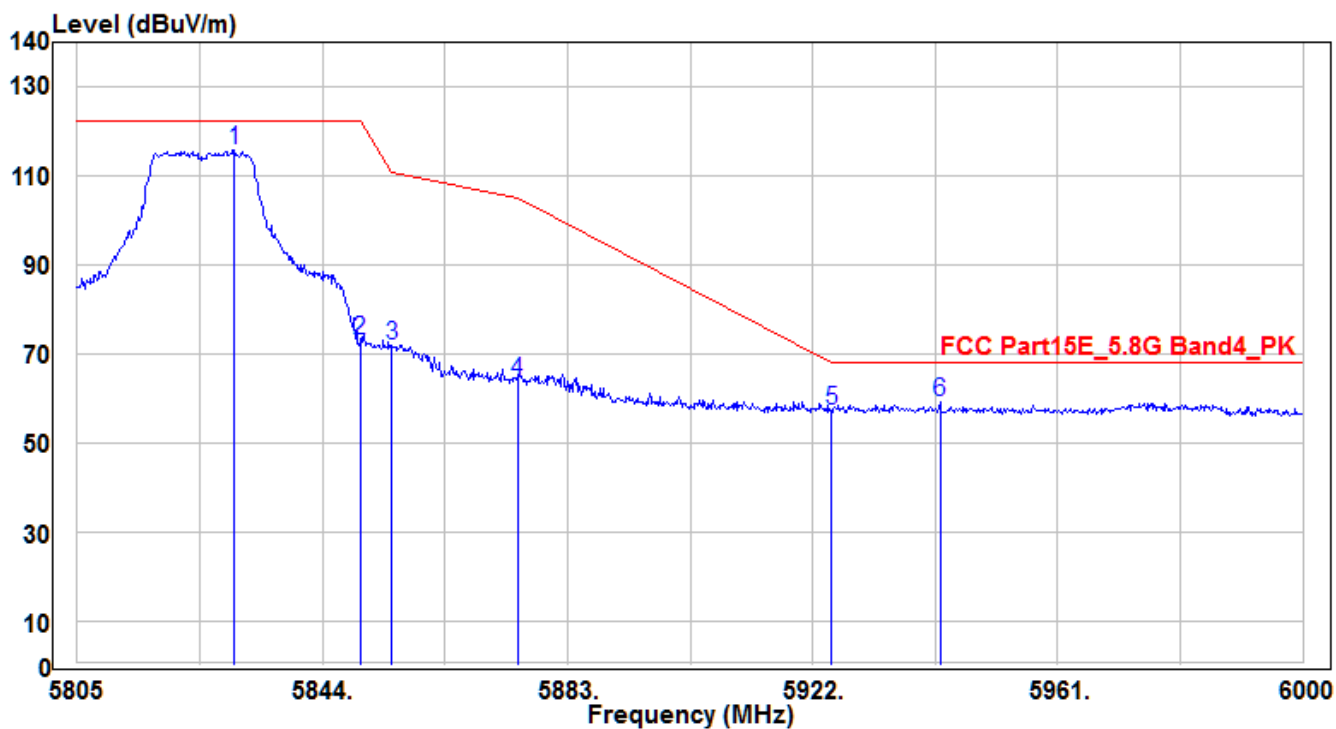


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5829.96	110.39	5.44	115.83	-6.37	122.2	230	215	Peak
2	5850	67.67	5.51	73.18	-49.02	122.2	230	215	Peak
3	5855	66.28	5.54	71.82	-38.98	110.8	230	215	Peak
4	5875	58.38	5.62	64	-41.2	105.2	230	215	Peak
5	5925	51.63	5.8	57.43	-10.77	68.2	230	215	Peak
6	* 5942.28	53.24	5.87	59.11	-9.09	68.2	230	215	Peak

Note :

- "*" means the worst value in this measurement data .
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) .
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor) .

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE1-CH165_Ant B	Test Voltage	AC 120V/60Hz

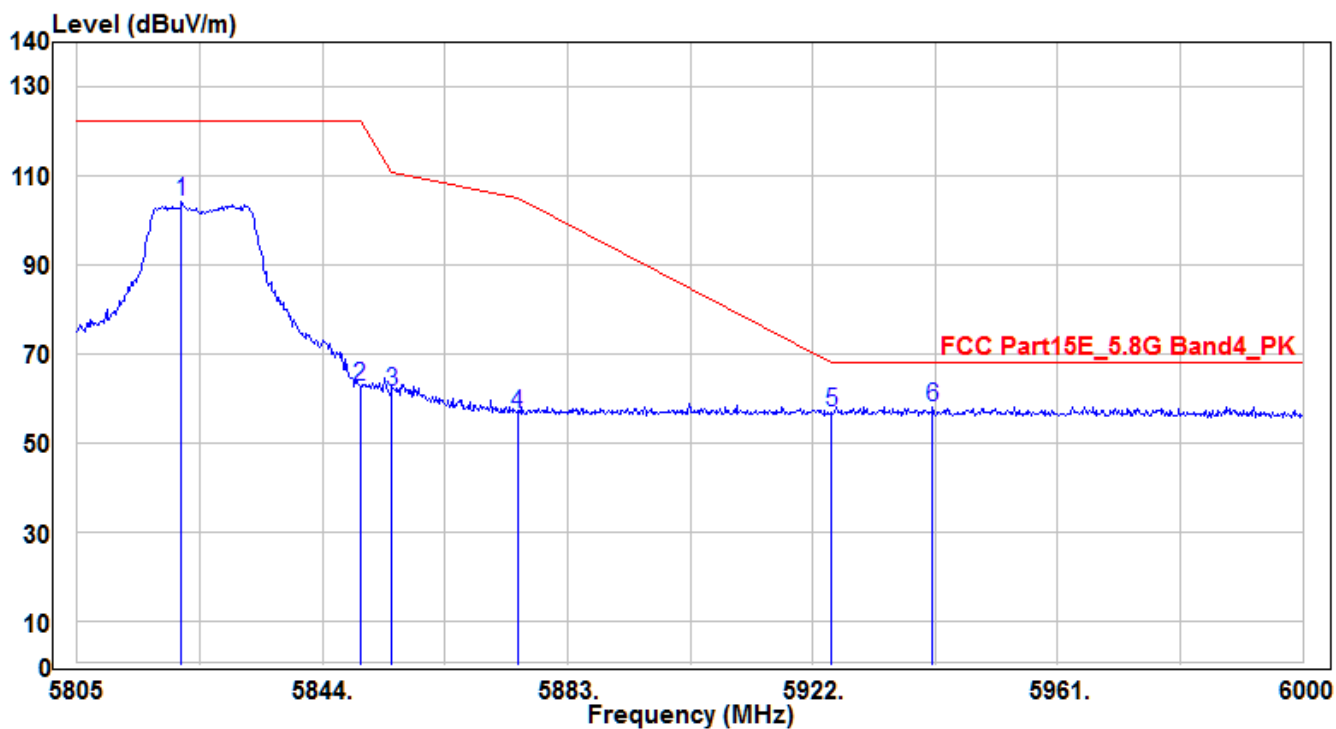


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5821.575	98.72	5.41	104.13	-18.07	122.2	150	165	Peak
2	5850	57.31	5.51	62.82	-59.38	122.2	150	165	Peak
3	5855	56.03	5.54	61.57	-49.23	110.8	150	165	Peak
4	5875	50.96	5.62	56.58	-48.62	105.2	150	165	Peak
5	5925	51.12	5.8	56.92	-11.28	68.2	150	165	Peak
6	* 5941.11	52.31	5.86	58.17	-10.03	68.2	150	165	Peak

Note :

- "*" means the worst value in this measurement data .
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) .
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor) .

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE1-CH165_Ant B	Test Voltage	AC 120V/60Hz

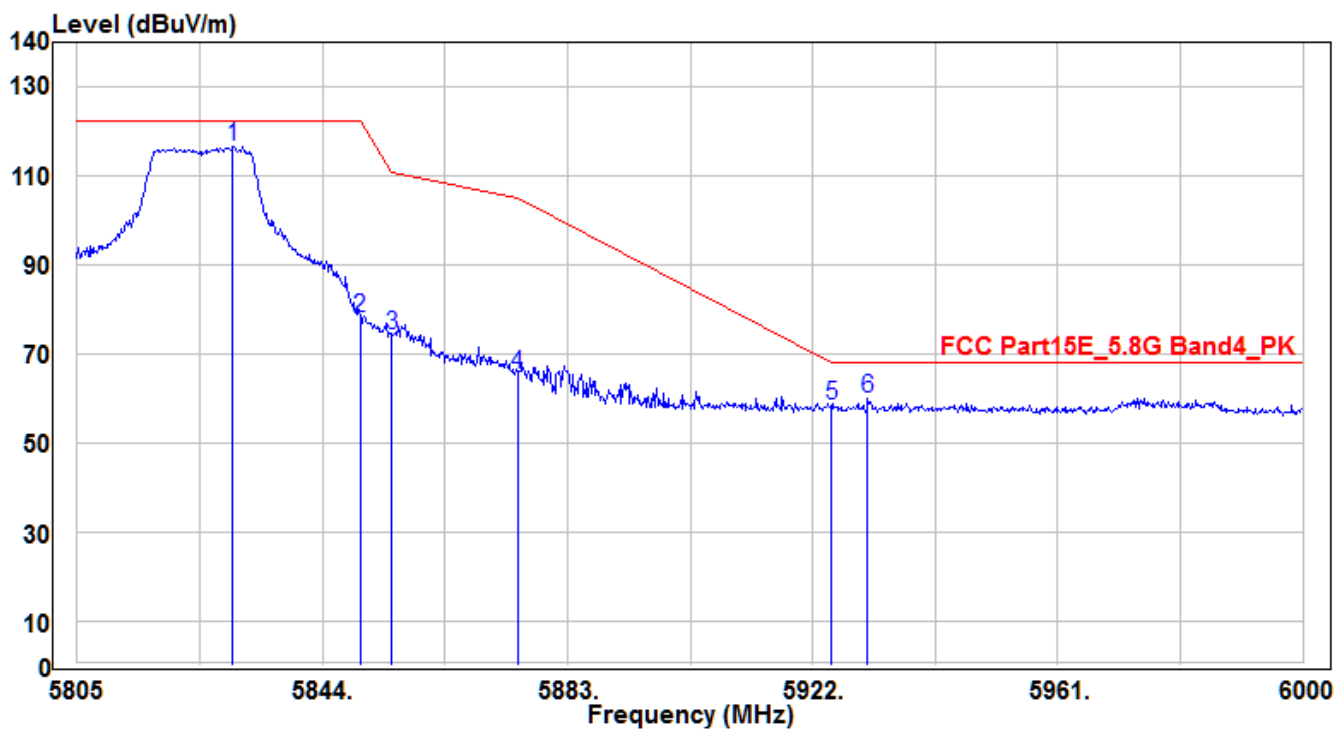


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5829.765	111.3	5.44	116.74	-5.46	122.2	170	150	Peak
2	5850	72.65	5.51	78.16	-44.04	122.2	170	150	Peak
3	5855	68.67	5.54	74.21	-36.59	110.8	170	150	Peak
4	5875	59.67	5.62	65.29	-39.91	105.2	170	150	Peak
5	5925	52.52	5.8	58.32	-9.88	68.2	170	150	Peak
6	* 5930.775	54.29	5.83	60.12	-8.08	68.2	170	150	Peak

Note :

- "*" means the worst value in this measurement data .
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) .
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor) .

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE2-CH36_Ant A+B	Test Voltage	AC 120V/60Hz

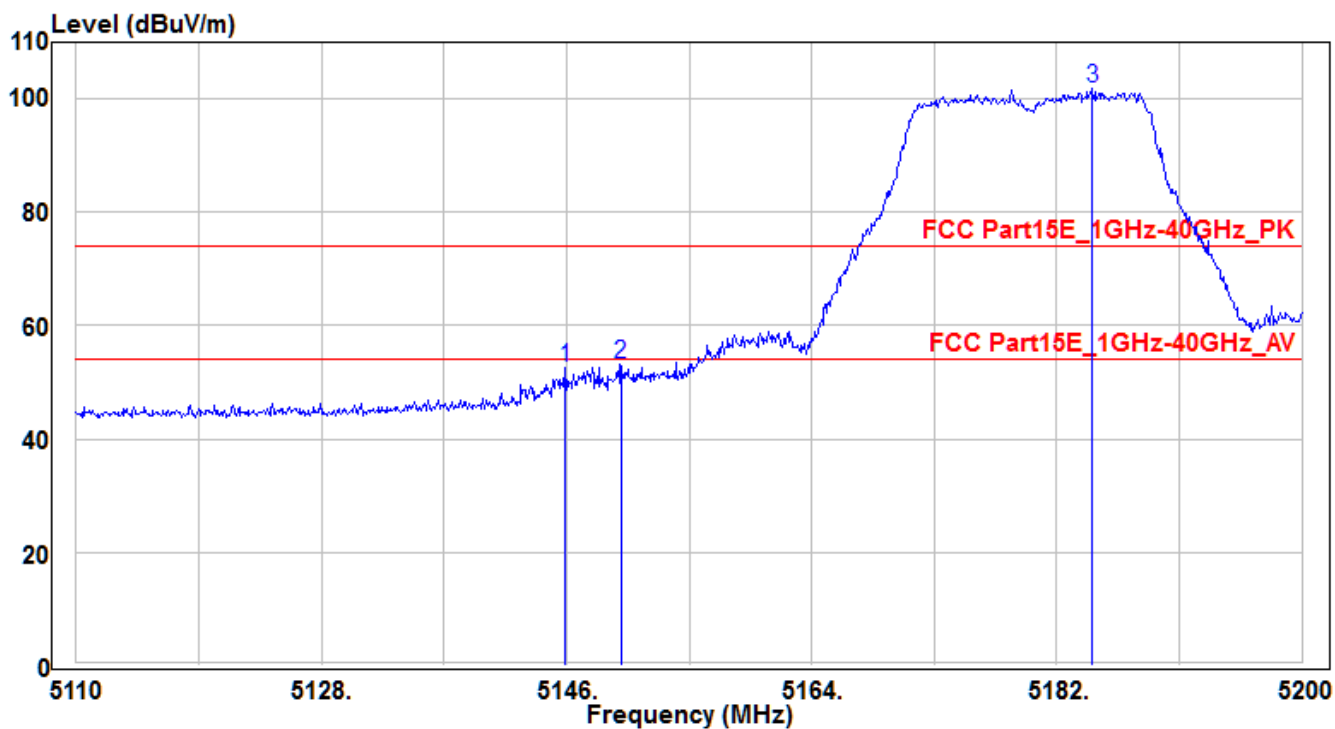


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5145.91	48.86	3.87	52.73	-21.27	74	150	240	Peak
2	* 5150	49.3	3.88	53.18	-20.82	74	150	240	Peak
3	5184.61	97.83	3.91	101.74	27.74	74	150	240	Peak

Note :

- "*" means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor) °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE2-CH36_Ant A+B	Test Voltage	AC 120V/60Hz

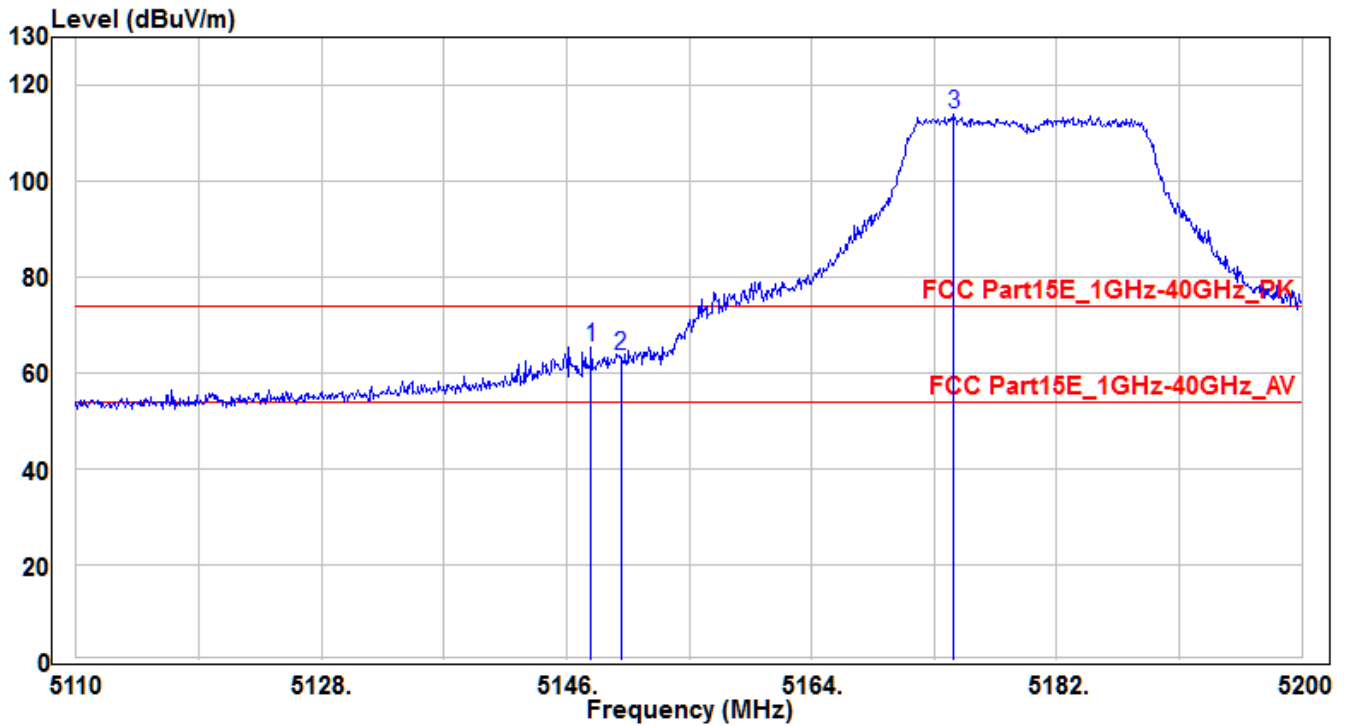


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.8	61.57	3.87	65.44	-8.56	74	235	40	Peak
2		5150	59.71	3.88	63.59	-10.41	74	235	40	Peak
3		5174.44	110.01	3.9	113.91	39.91	74	235	40	Peak

Note :

- "*" means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor) °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE2-CH36_Ant A+B	Test Voltage	AC 120V/60Hz

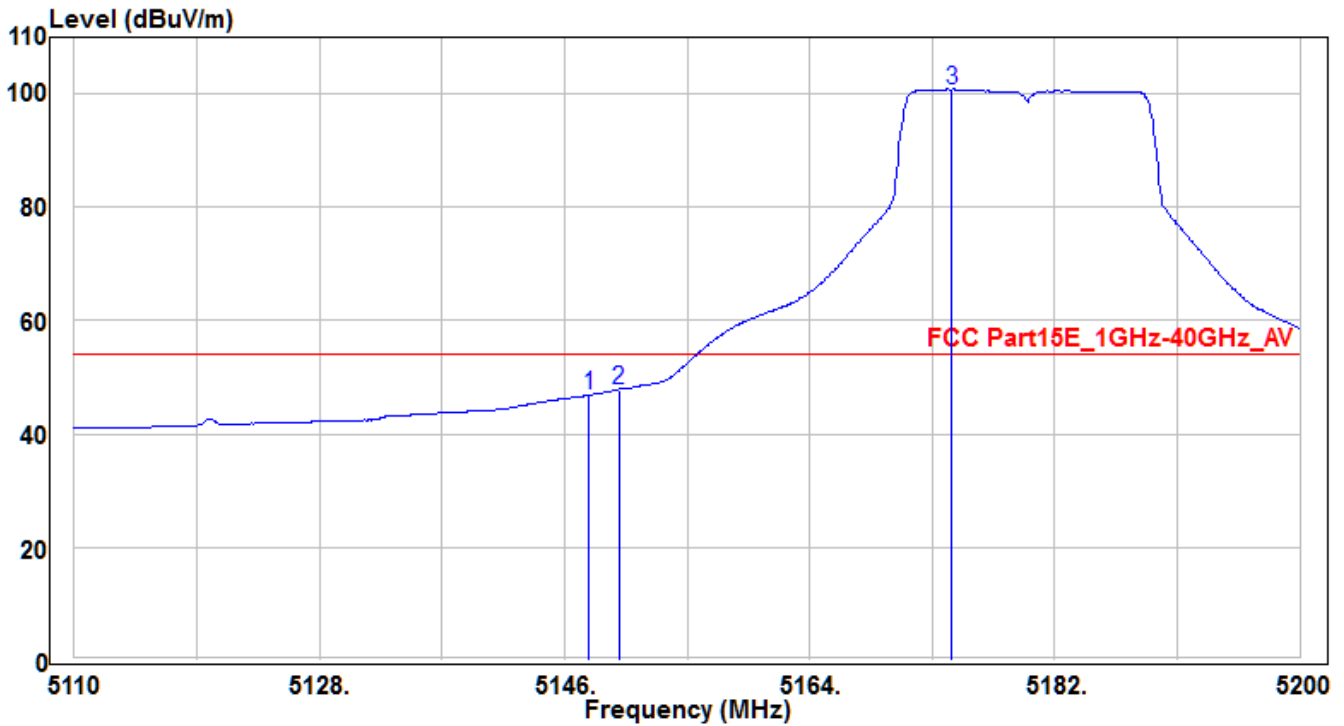


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5147.8	43.06	3.87	46.93	-7.07	54	235	40	Average
2	* 5150	44.01	3.88	47.89	-6.11	54	235	40	Average
3	5174.44	96.87	3.9	100.77	46.77	54	235	40	Average

Note :

- "*" means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor) °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE2-CH64_Ant A+B	Test Voltage	AC 120V/60Hz

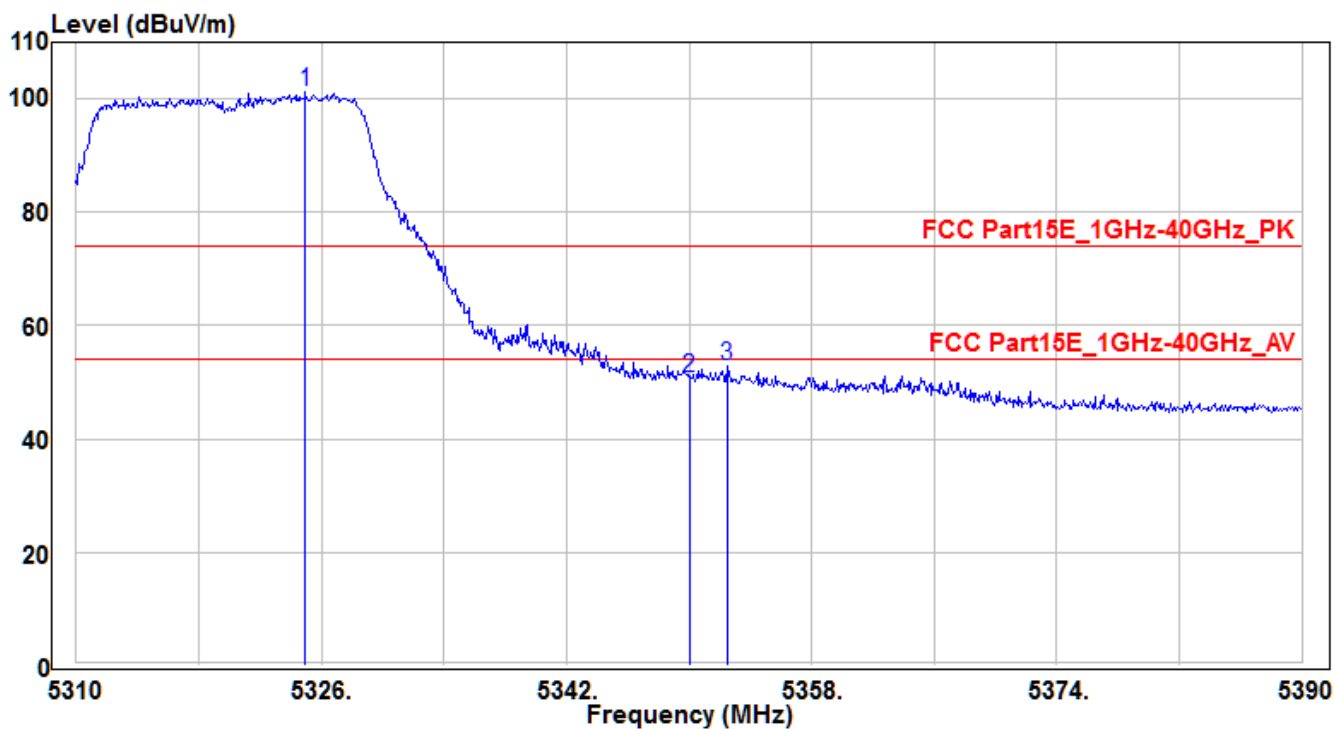


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5324.96	97.18	4.02	101.2	27.2	74	150	245	Peak
2	5350	46.77	4.04	50.81	-23.19	74	150	245	Peak
3	* 5352.48	48.96	4.05	53.01	-20.99	74	150	245	Peak

Note :

- "*" means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor) °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE2-CH64_Ant A+B	Test Voltage	AC 120V/60Hz

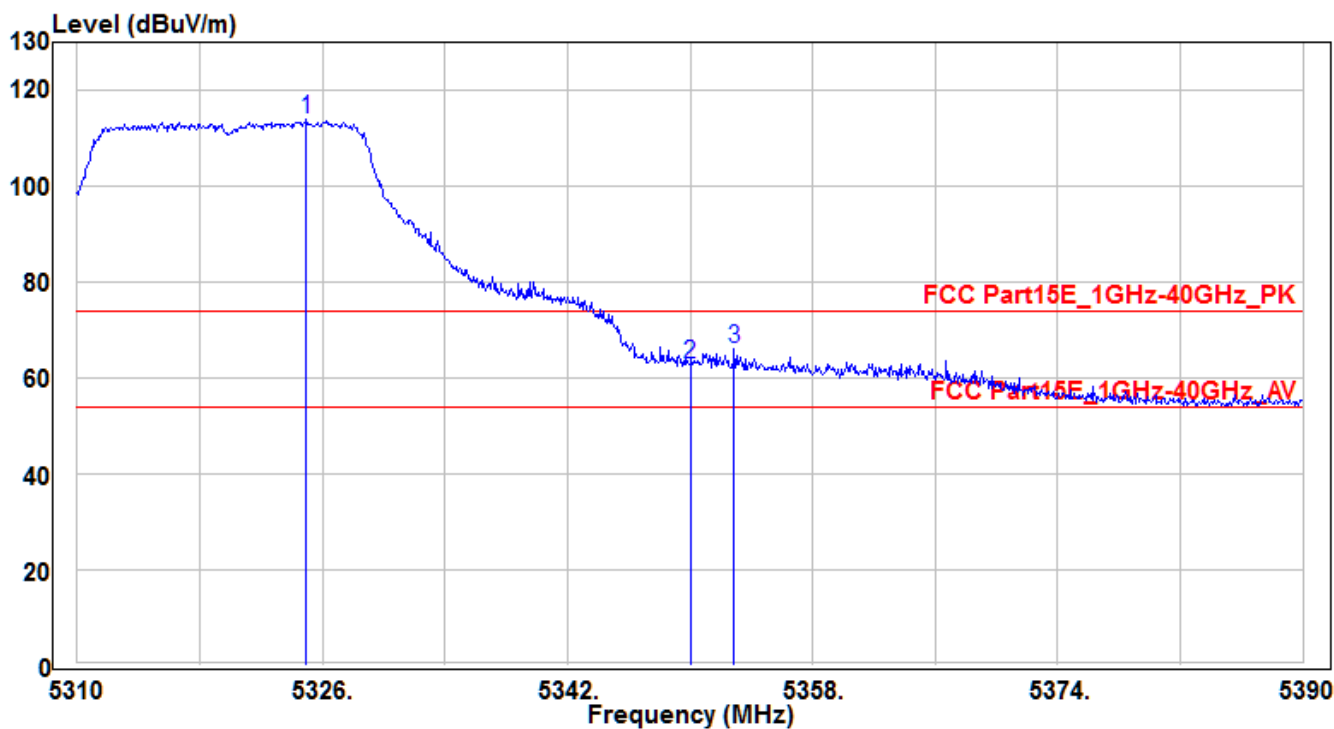


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5324.96	109.84	4.02	113.86	39.86	74	150	155	Peak
2	5350	58.71	4.04	62.75	-11.25	74	150	155	Peak
3	* 5352.88	62.06	4.05	66.11	-7.89	74	150	155	Peak

Note :

1. " * " means the worst value in this measurement data °
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor) °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE2-CH64_Ant A+B	Test Voltage	AC 120V/60Hz

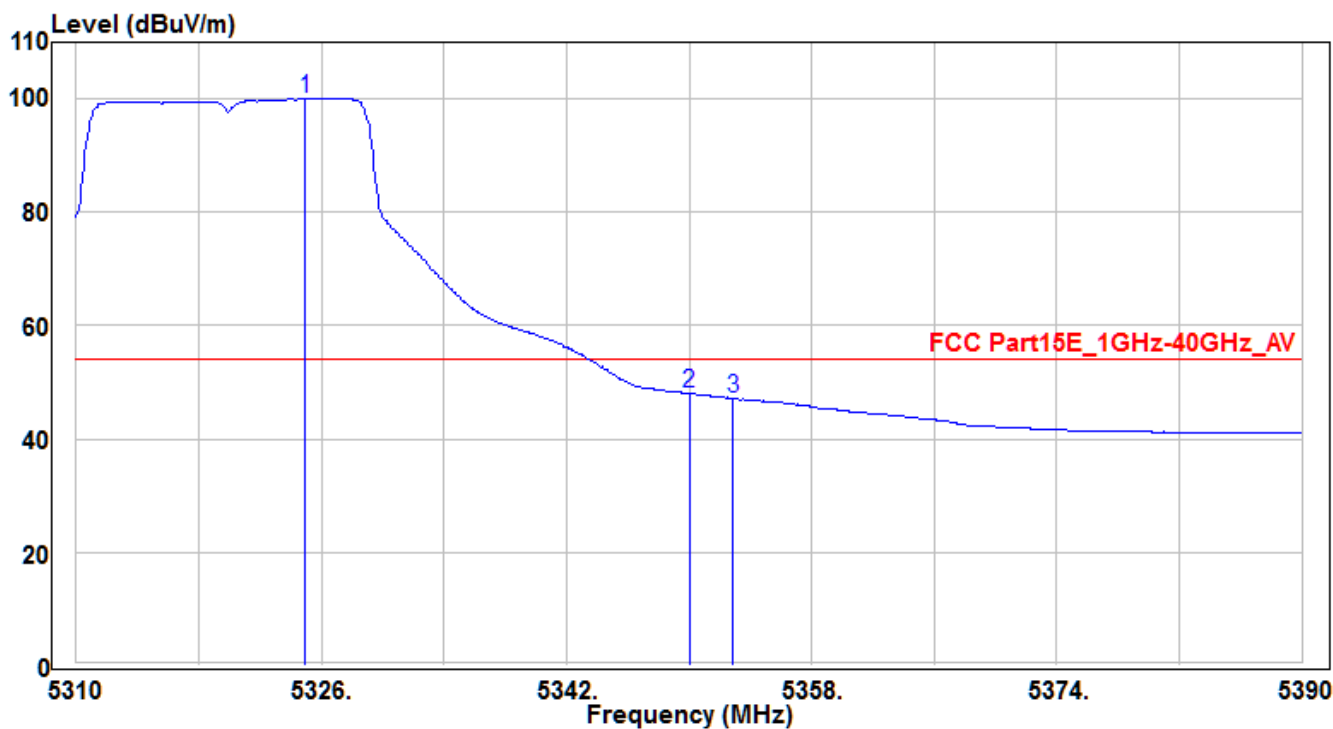


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5324.96	96.05	4.02	100.07	46.07	54	150	155	Average
2	*	5350	44.05	4.04	48.09	-5.91	54	150	155	Average
3		5352.88	43.13	4.05	47.18	-6.82	54	150	155	Average

Note :

1. " * " means the worst value in this measurement data °
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor) °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE2-CH100_Ant A+B	Test Voltage	AC 120V/60Hz

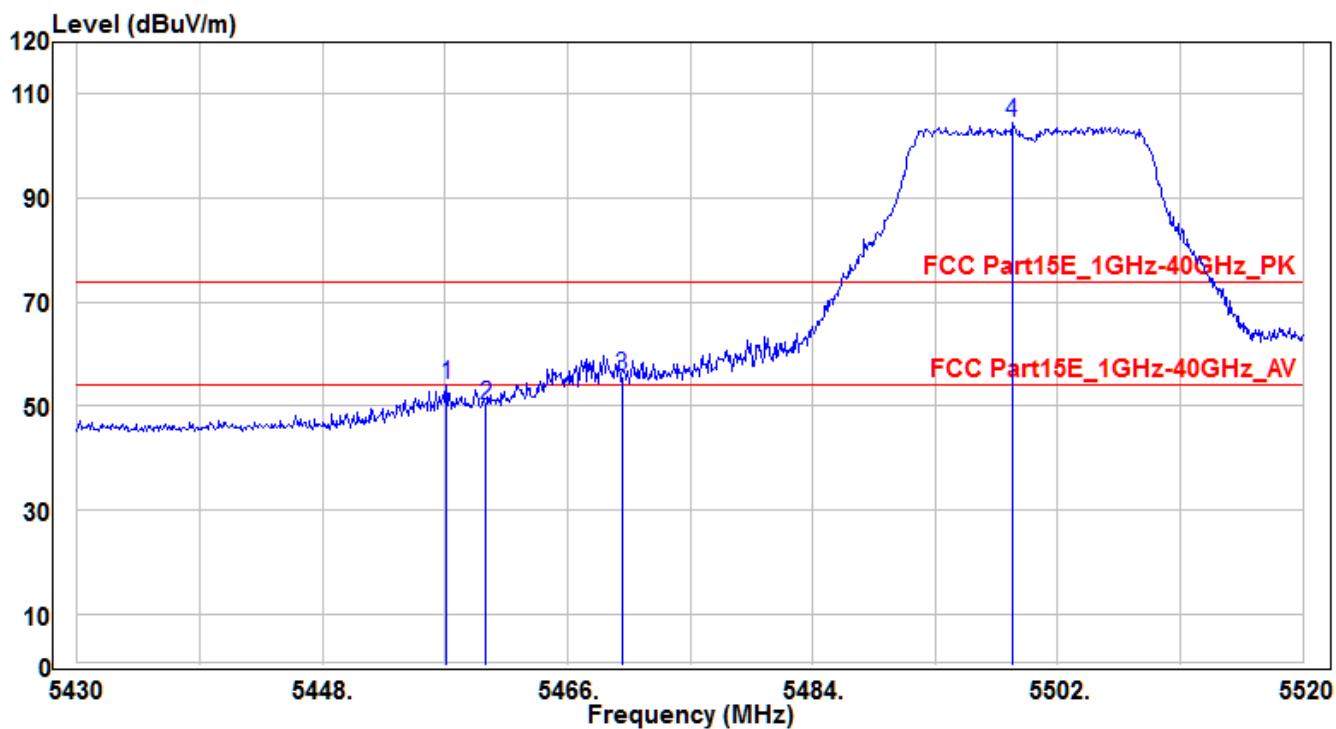


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5457.09	49.8	4.13	53.93	-20.07	74	150	140	Peak
2	5460	45.96	4.14	50.1	-23.9	74	150	140	Peak
3	* 5470	51.71	4.14	55.85	-18.15	74	150	140	Peak
4	5498.67	100.31	4.17	104.48	30.48	74	150	140	Peak

Note :

- "*" means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor) °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE2-CH100_Ant A+B	Test Voltage	AC 120V/60Hz

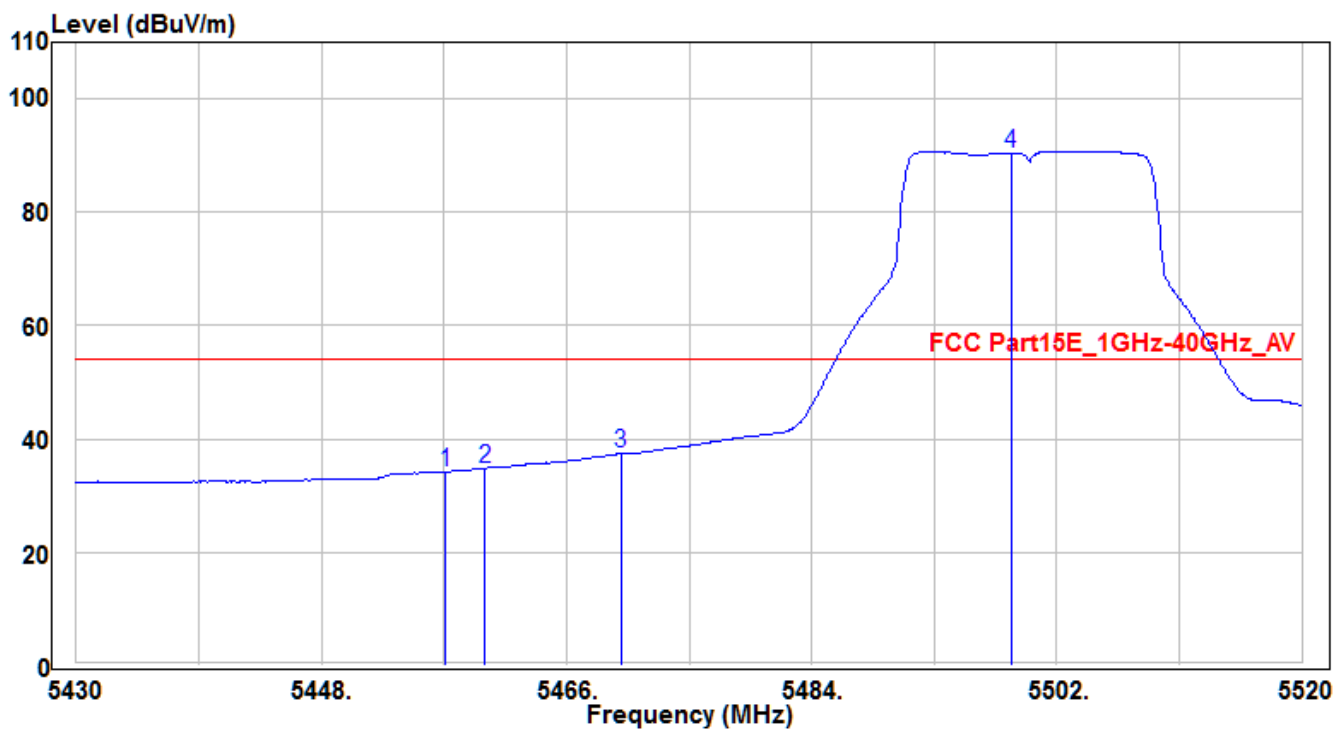


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5457.09	30.12	4.13	34.25	-19.75	54	150	140	Average
2	5460	30.71	4.14	34.85	-19.15	54	150	140	Average
3	* 5470	33.28	4.14	37.42	-16.58	54	150	140	Average
4	5498.67	86.24	4.17	90.41	36.41	54	150	140	Average

Note :

- "*" means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor) °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE2-CH100_Ant A+B	Test Voltage	AC 120V/60Hz

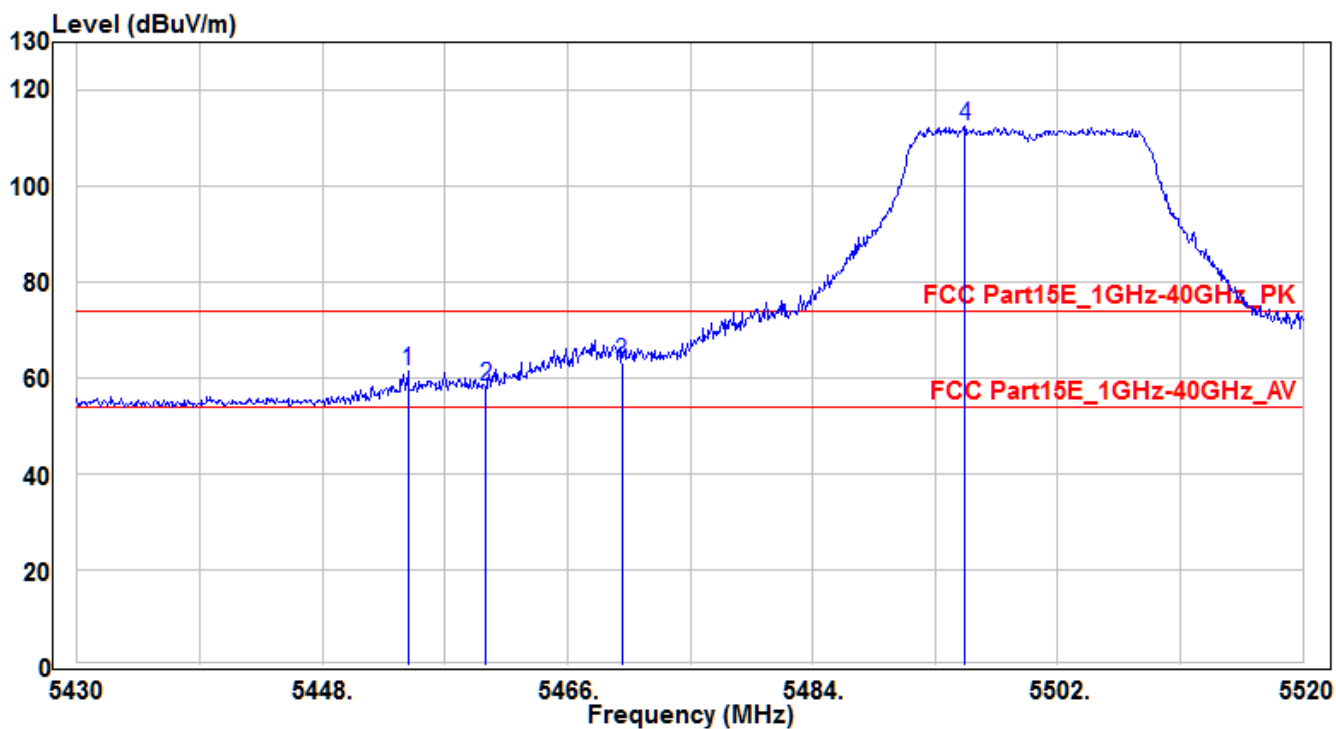


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5454.3	57.27	4.13	61.4	-12.6	74	150	150	Peak
2	5460	53.98	4.14	58.12	-15.88	74	150	150	Peak
3	* 5470	59.18	4.14	63.32	-10.68	74	150	150	Peak
4	5495.16	108.23	4.17	112.4	38.4	74	150	150	Peak

Note :

- " * " means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor) °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE2-CH100_Ant A+B	Test Voltage	AC 120V/60Hz

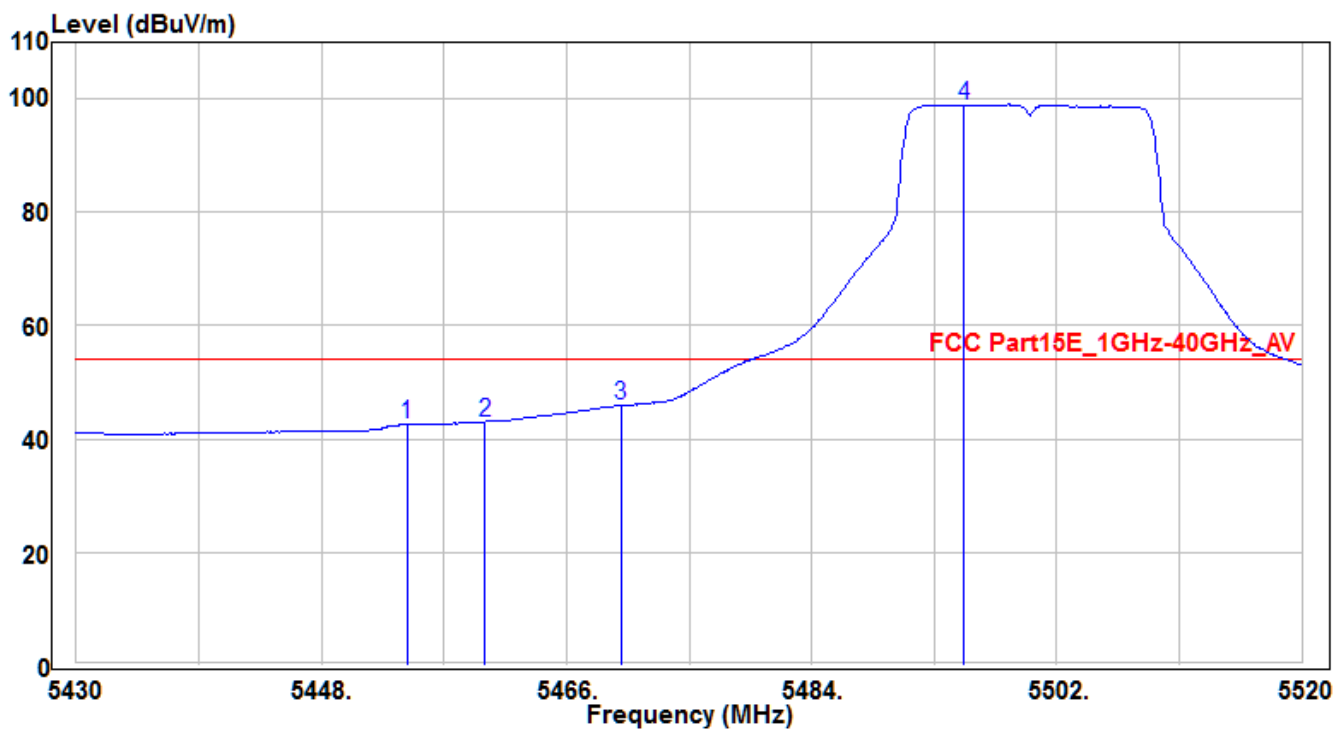


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5454.3	38.37	4.13	42.5	-11.5	54	150	150	Average
2	5460	38.93	4.14	43.07	-10.93	54	150	150	Average
3	* 5470	41.82	4.14	45.96	-8.04	54	150	150	Average
4	5495.16	94.64	4.17	98.81	44.81	54	150	150	Average

Note :

- "*" means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor) °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE2-CH140_Ant A+B	Test Voltage	AC 120V/60Hz

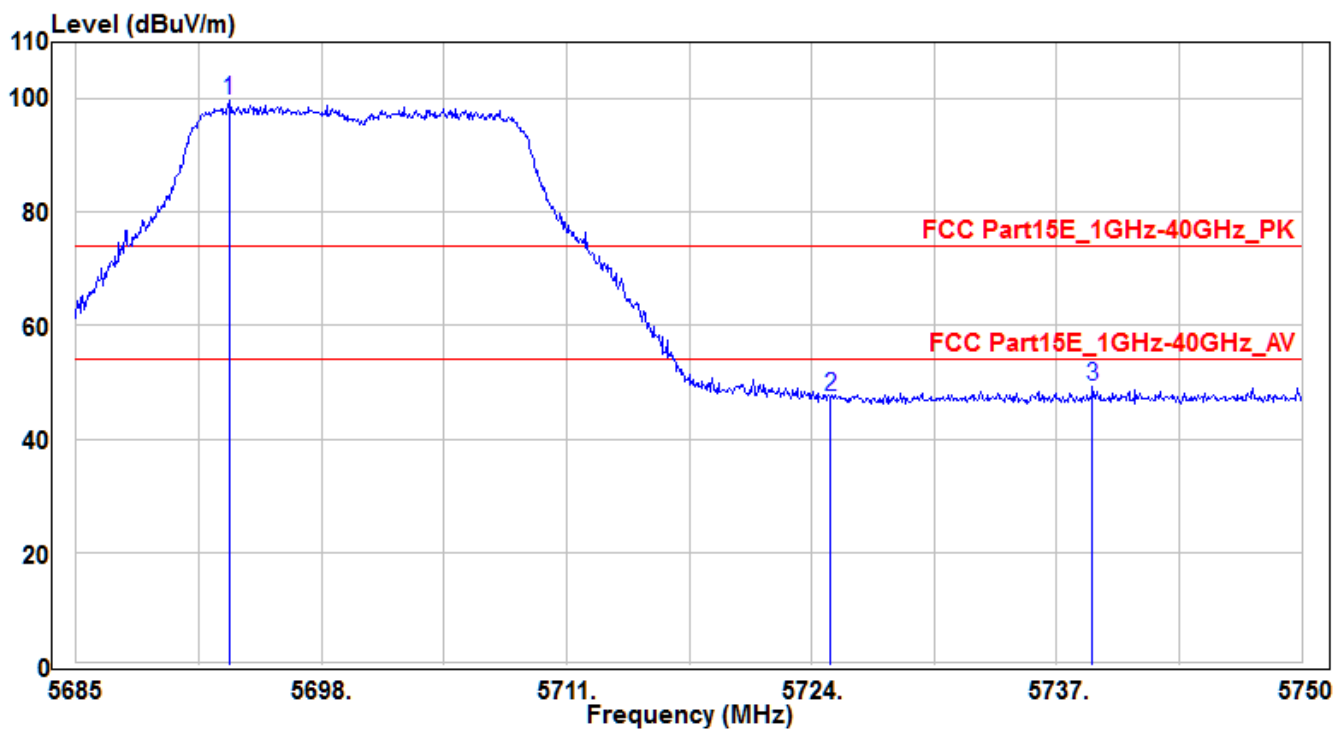


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5693.125	94.84	4.91	99.75	25.75	74	150	140	Peak
2	5725	42.31	5.03	47.34	-26.66	74	150	140	Peak
3	* 5738.885	44.08	5.09	49.17	-24.83	74	150	140	Peak

Note :

- "*" means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor) °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE2-CH140_Ant A+B	Test Voltage	AC 120V/60Hz

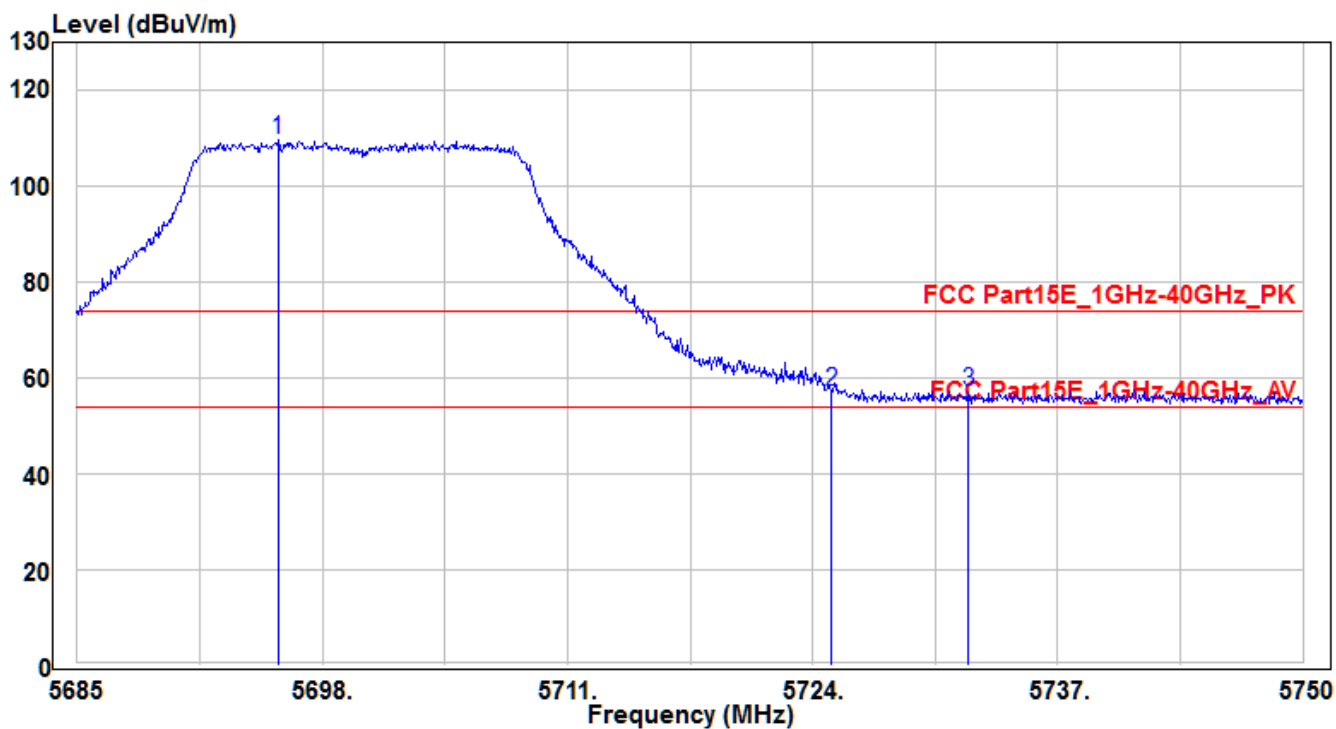


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5695.66	104.77	4.91	109.68	35.68	74	150	155	Peak
2	5725	52.07	5.03	57.1	-16.9	74	150	155	Peak
3	* 5732.255	52.07	5.07	57.14	-16.86	74	150	155	Peak

Note :

1. " * " means the worst value in this measurement data °
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor) °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE2-CH140_Ant A+B	Test Voltage	AC 120V/60Hz

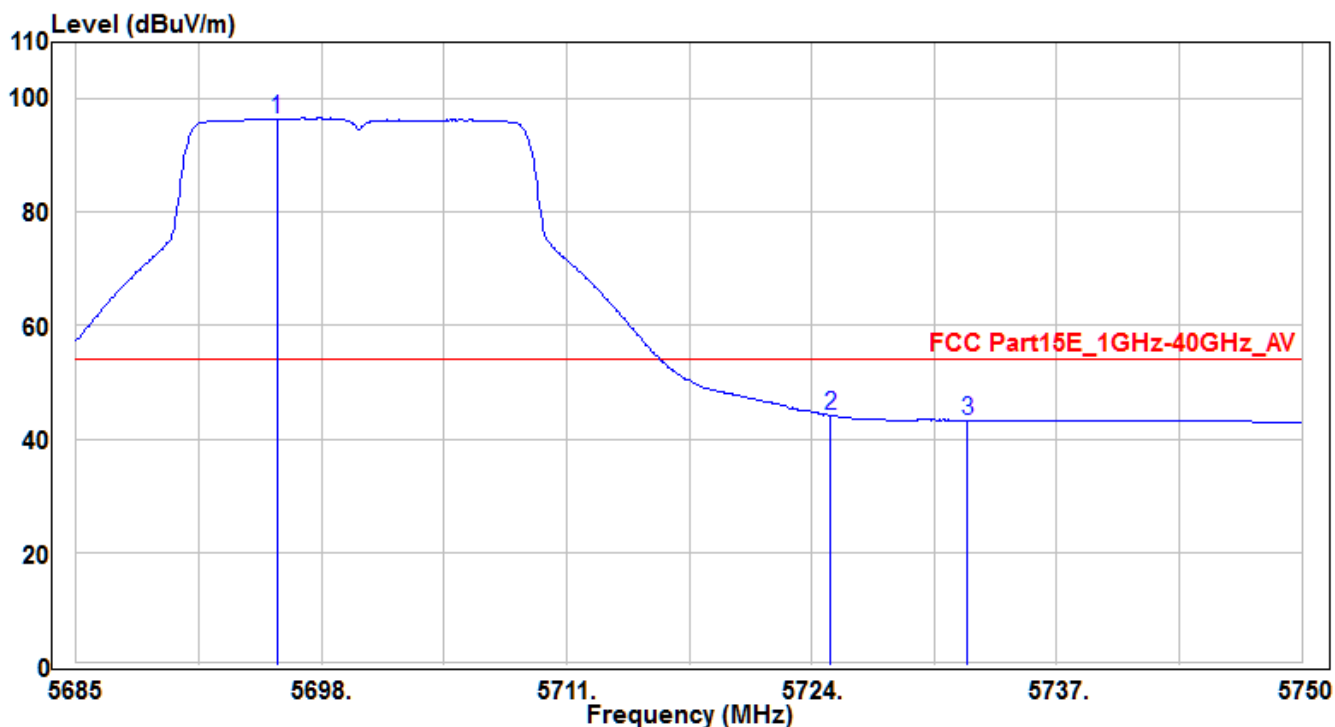


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5695.66	91.55	4.91	96.46	42.46	54	150	155	Average
2	* 5725	39.2	5.03	44.23	-9.77	54	150	155	Average
3	5732.255	38.27	5.07	43.34	-10.66	54	150	155	Average

Note :

- "*" means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor) °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE2-CH149_Ant A+B	Test Voltage	AC 120V/60Hz

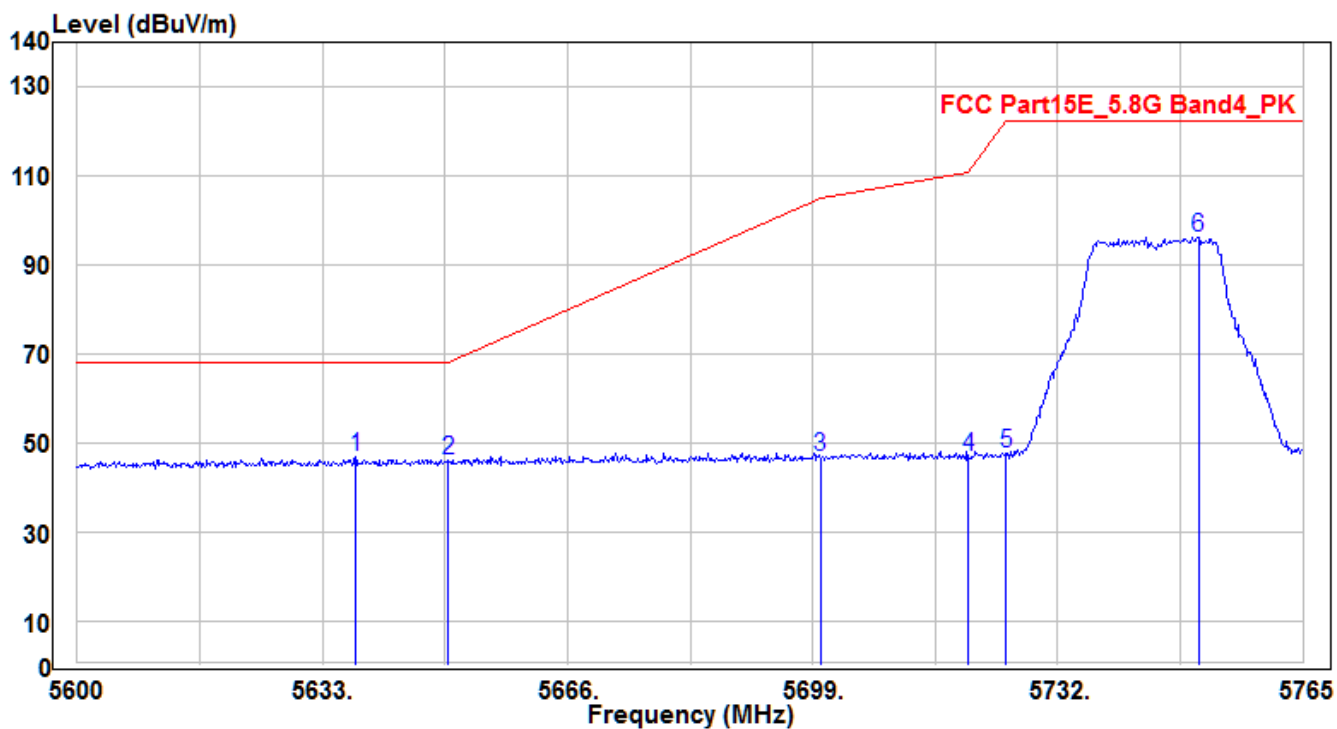


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5637.455	42.29	4.7	46.99	-21.21	68.2	150	170	Peak
2		5650	41.55	4.75	46.3	-21.9	68.2	150	170	Peak
3		5700	41.82	4.94	46.76	-58.44	105.2	150	170	Peak
4		5720	41.99	5.01	47	-63.8	110.8	150	170	Peak
5		5725	42.72	5.03	47.75	-74.45	122.2	150	170	Peak
6		5750.975	91.21	5.13	96.34	-25.86	122.2	150	170	Peak

Note :

1. " * " means the worst value in this measurement data .
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) .
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor) .

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE2-CH149_Ant A+B	Test Voltage	AC 120V/60Hz

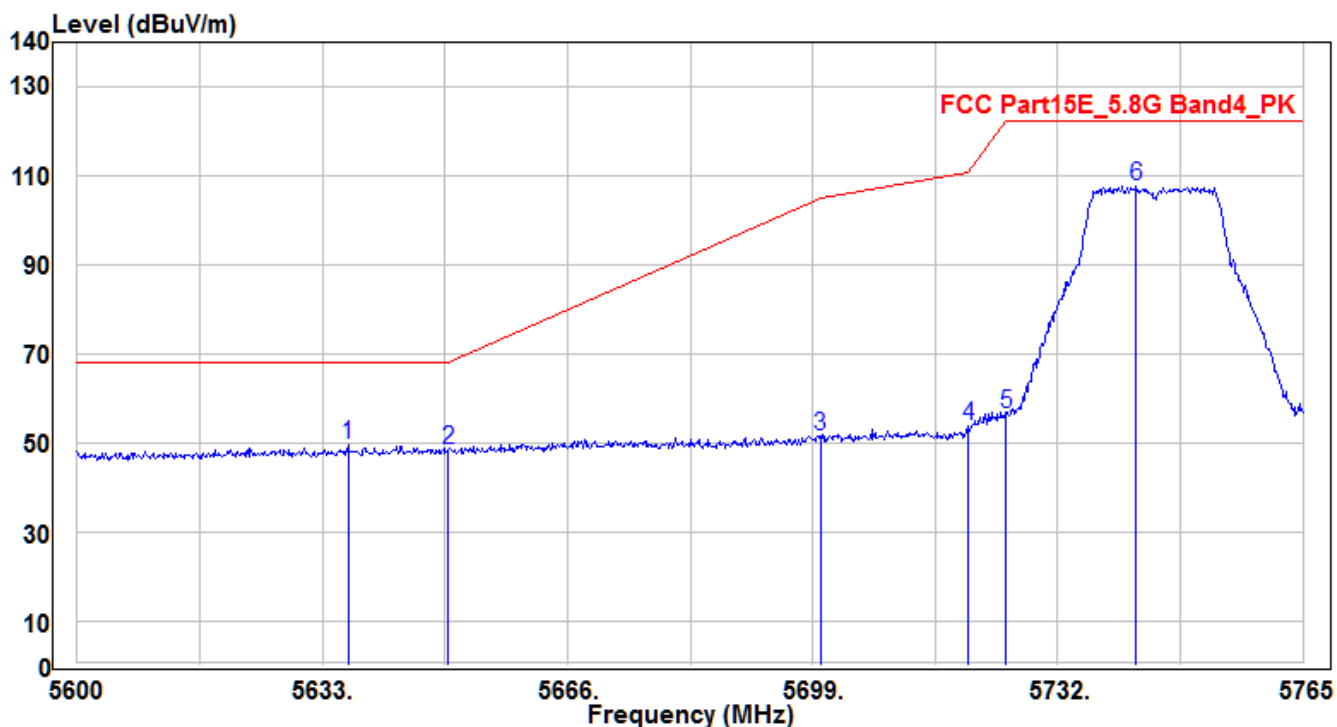


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5636.465	44.97	4.69	49.66	-18.54	68.2	150	150	Peak
2		5650	43.77	4.75	48.52	-19.68	68.2	150	150	Peak
3		5700	46.68	4.94	51.62	-53.58	105.2	150	150	Peak
4		5720	48.67	5.01	53.68	-57.12	110.8	150	150	Peak
5		5725	51.38	5.03	56.41	-65.79	122.2	150	150	Peak
6		5742.56	102.62	5.1	107.72	-14.48	122.2	150	150	Peak

Note :

- "*" means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor) °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE2-CH165_Ant A+B	Test Voltage	AC 120V/60Hz

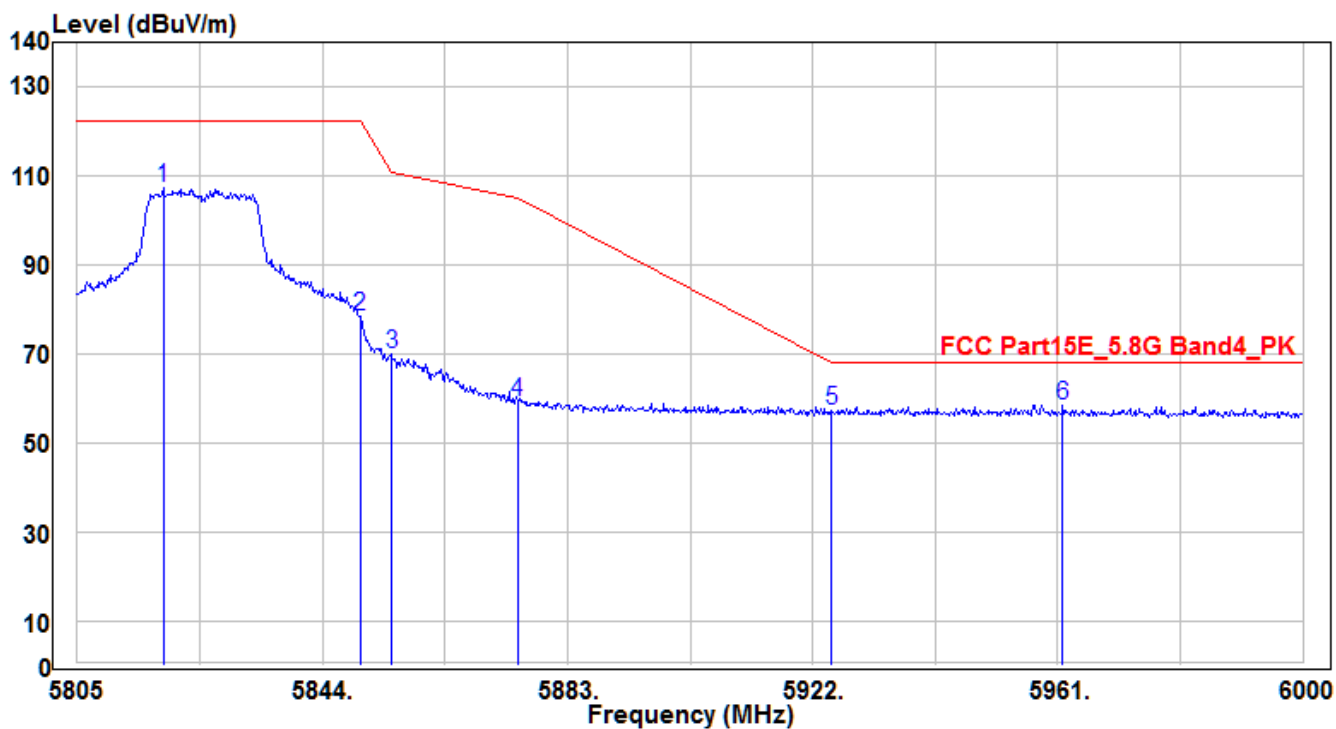


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5818.65	101.78	5.39	107.17	-15.03	122.2	100	180	Peak
2	5850	72.86	5.51	78.37	-43.83	122.2	100	180	Peak
3	5855	64.38	5.54	69.92	-40.88	110.8	100	180	Peak
4	5875	53.61	5.62	59.23	-45.97	105.2	100	180	Peak
5	5925	51.39	5.8	57.19	-11.01	68.2	100	180	Peak
6	* 5961.78	52.69	5.94	58.63	-9.57	68.2	100	180	Peak

Note :

- " * " means the worst value in this measurement data .
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) .
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor) .

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE2-CH165_Ant A+B	Test Voltage	AC 120V/60Hz

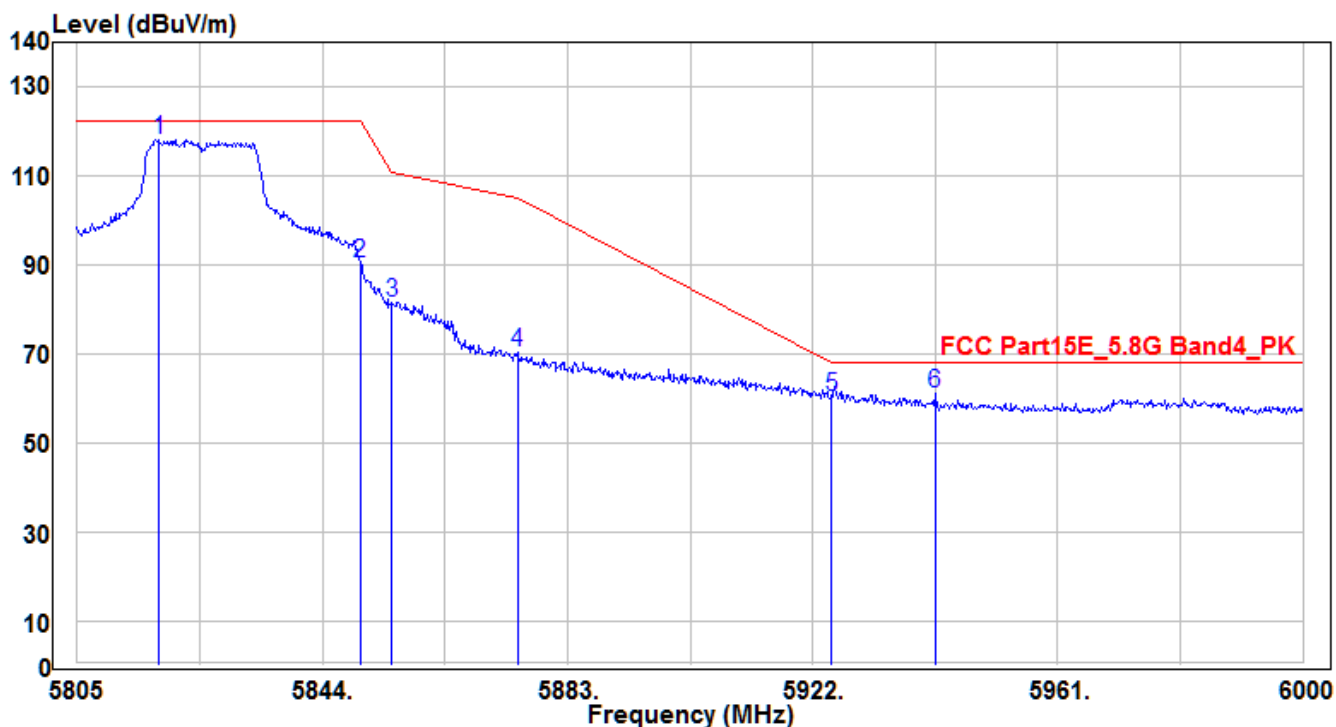


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5818.065	112.74	5.39	118.13	-4.07	122.2	170	150	Peak
2	5850	84.95	5.51	90.46	-31.74	122.2	170	150	Peak
3	5855	76.14	5.54	81.68	-29.12	110.8	170	150	Peak
4	5875	64.74	5.62	70.36	-34.84	105.2	170	150	Peak
5	5925	54.53	5.8	60.33	-7.87	68.2	170	150	Peak
6	* 5941.5	55.42	5.86	61.28	-6.92	68.2	170	150	Peak

Note :

- "*" means the worst value in this measurement data .
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) .
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor) .

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE3-CH38_Ant A+B	Test Voltage	AC 120V/60Hz

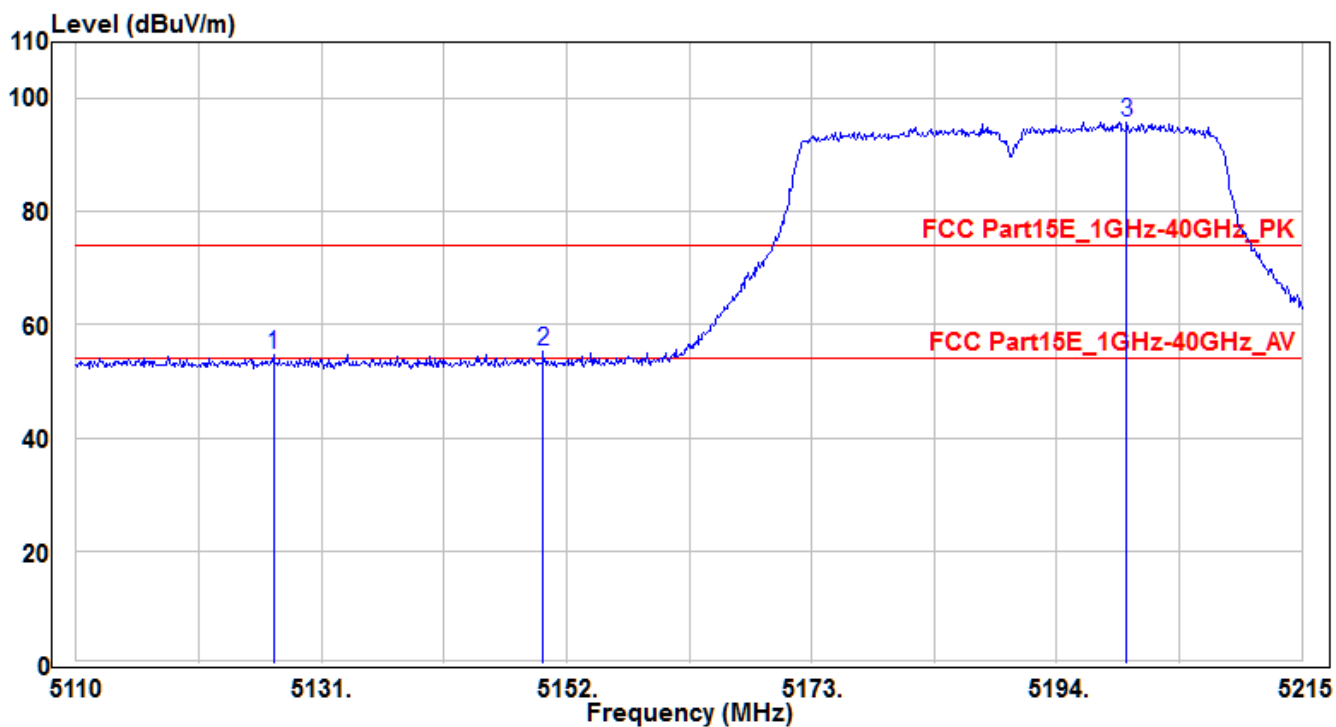


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5126.905	50.97	3.86	54.83	-19.17	74	150	240	Peak
2	* 5150	51.29	3.88	55.17	-18.83	74	150	240	Peak
3	5199.985	92.02	3.92	95.94	21.94	74	150	240	Peak

Note :

- "*" means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor) °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE3-CH38_Ant A+B	Test Voltage	AC 120V/60Hz

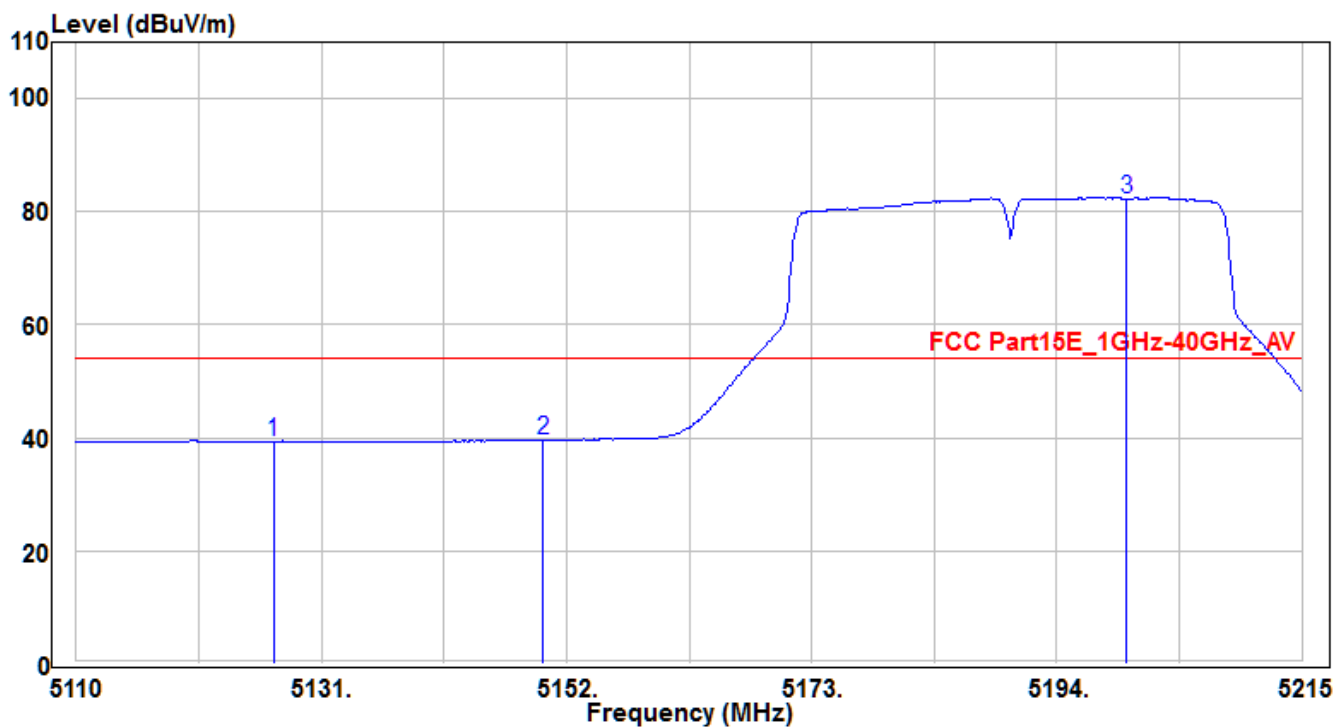


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5126.905	35.58	3.86	39.44	-14.56	54	150	240	Average
2	* 5150	35.7	3.88	39.58	-14.42	54	150	240	Average
3	5199.985	78.29	3.92	82.21	28.21	54	150	240	Average

Note :

1. " * " means the worst value in this measurement data .
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) .
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor) .

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE3-CH38_Ant A+B	Test Voltage	AC 120V/60Hz

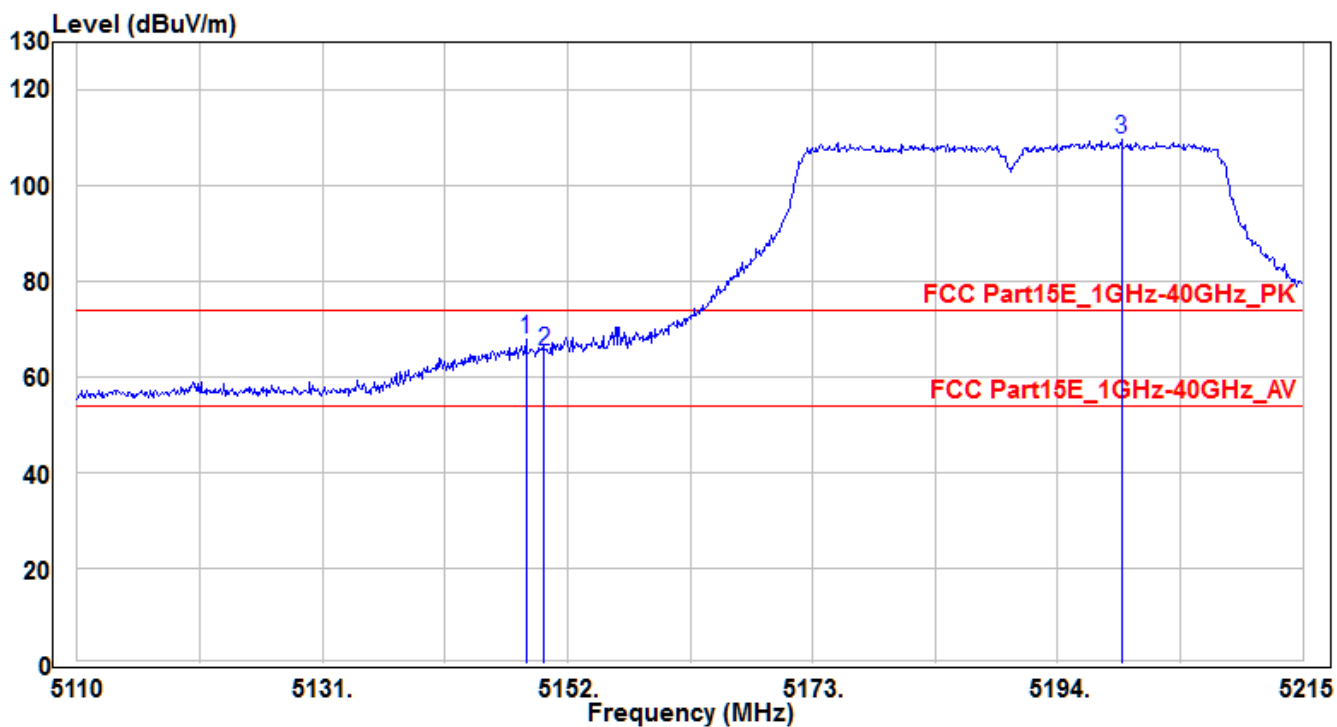


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.43	63.87	3.87	67.74	-6.26	74	100	45	Peak
2		5150	61.67	3.88	65.55	-8.45	74	100	45	Peak
3		5199.46	105.68	3.92	109.6	35.6	74	100	45	Peak

Note :

- "*" means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor) °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE3-CH38_Ant A+B	Test Voltage	AC 120V/60Hz

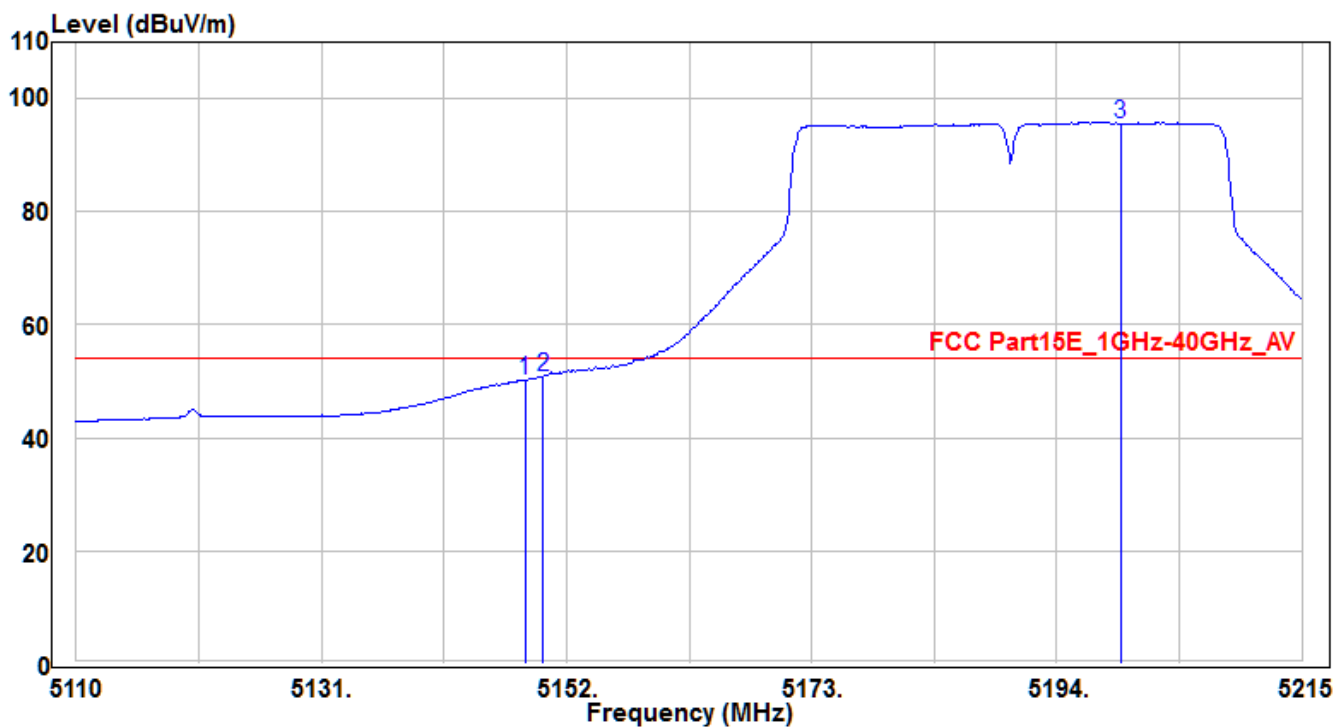


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5148.43	46.38	3.87	50.25	-3.75	54	100	45	Average
2	* 5150	47.01	3.88	50.89	-3.11	54	100	45	Average
3	5199.46	91.63	3.92	95.55	41.55	54	100	45	Average

Note :

1. " * " means the worst value in this measurement data .
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) .
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor) .

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE3-CH62_Ant A+B	Test Voltage	AC 120V/60Hz

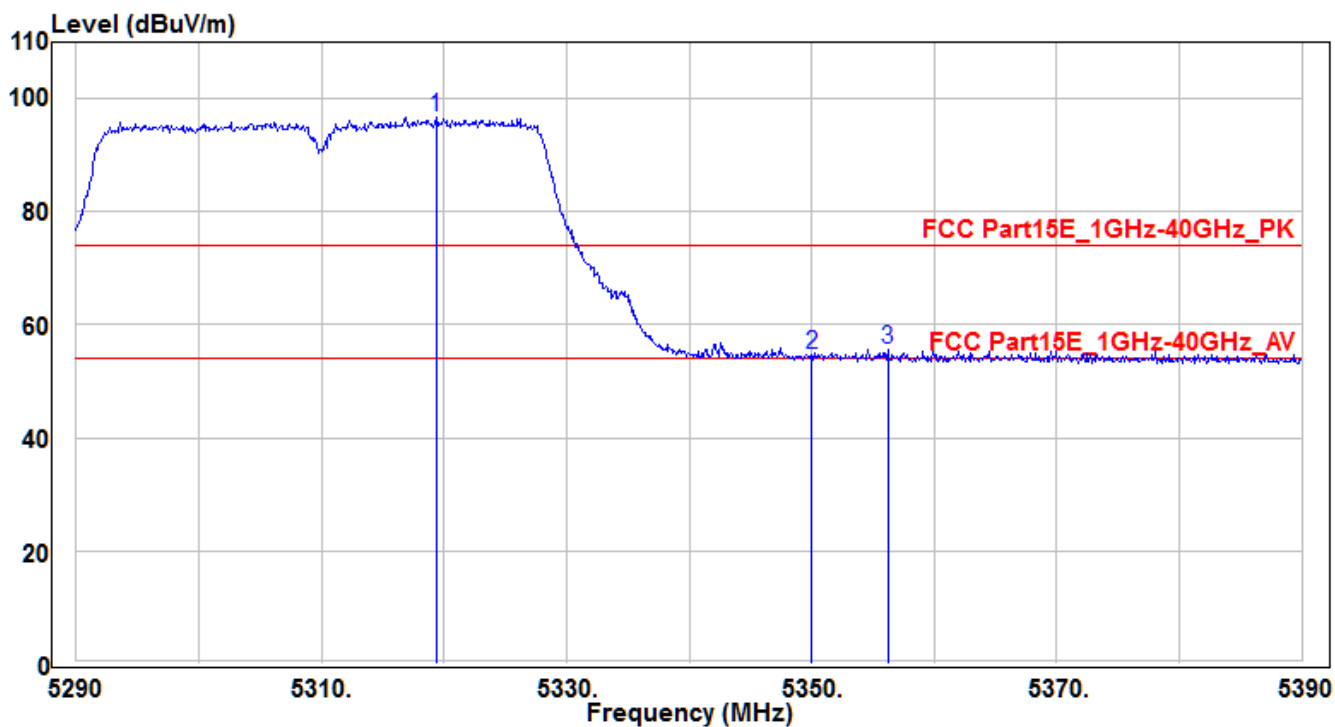


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5319.4	92.81	4.02	96.83	22.83	74	150	180	Peak
2	5350	50.64	4.04	54.68	-19.32	74	150	180	Peak
3	* 5356.2	51.67	4.05	55.72	-18.28	74	150	180	Peak

Note :

1. " * " means the worst value in this measurement data °
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor) °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE3-CH62_Ant A+B	Test Voltage	AC 120V/60Hz

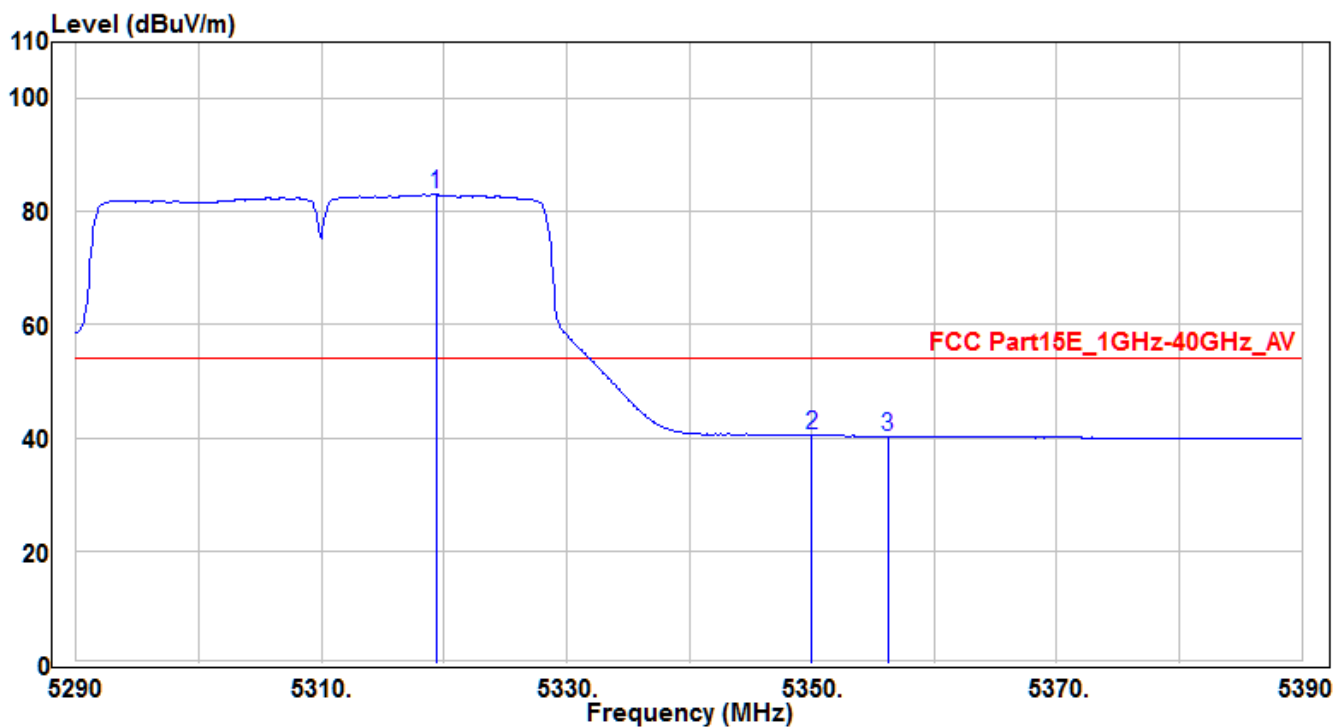


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5319.4	79.03	4.02	83.05	29.05	54	150	180	Average
2	*	5350	36.48	4.04	40.52	-13.48	54	150	180	Average
3		5356.2	36.22	4.05	40.27	-13.73	54	150	180	Average

Note :

1. " * " means the worst value in this measurement data .
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) .
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor) .

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE3-CH62_Ant A+B	Test Voltage	AC 120V/60Hz

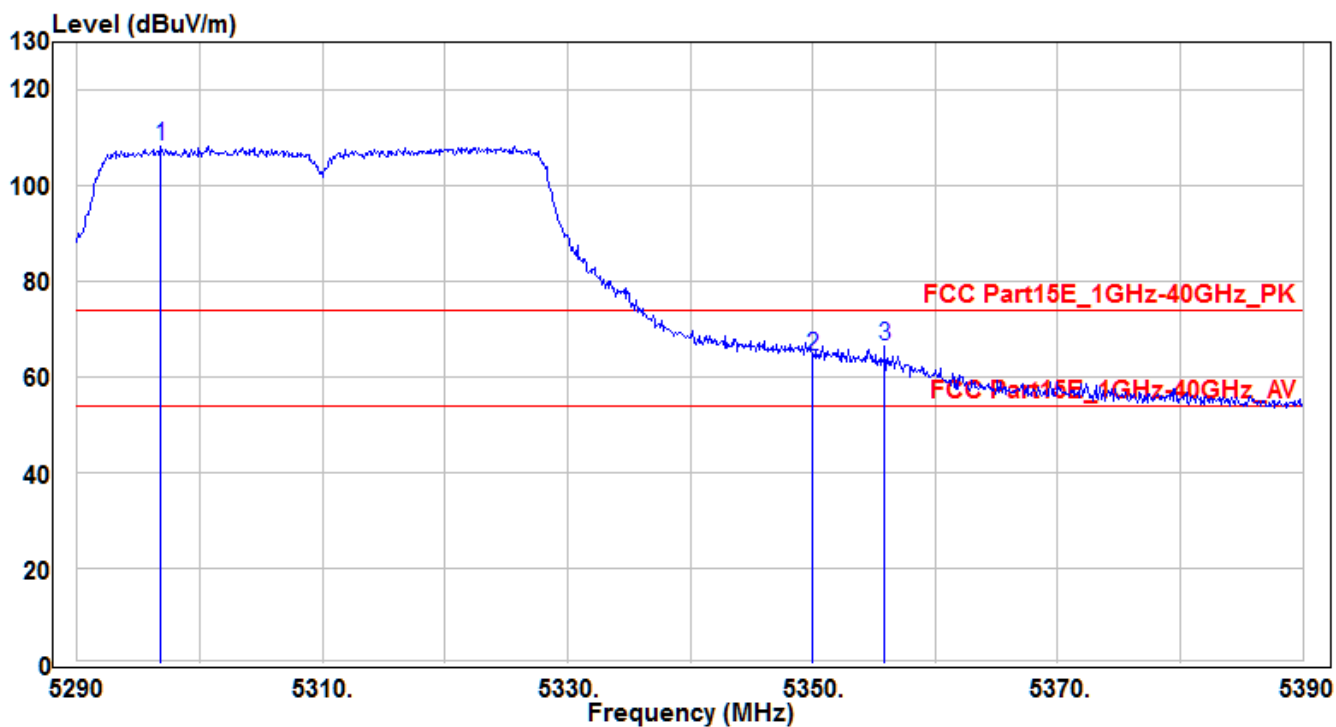


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5296.8	104.18	4	108.18	34.18	74	100	150	Peak
2	5350	60.18	4.04	64.22	-9.78	74	100	150	Peak
3	* 5355.9	62.39	4.05	66.44	-7.56	74	100	150	Peak

Note :

- "*" means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor) °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE3-CH62_Ant A+B	Test Voltage	AC 120V/60Hz

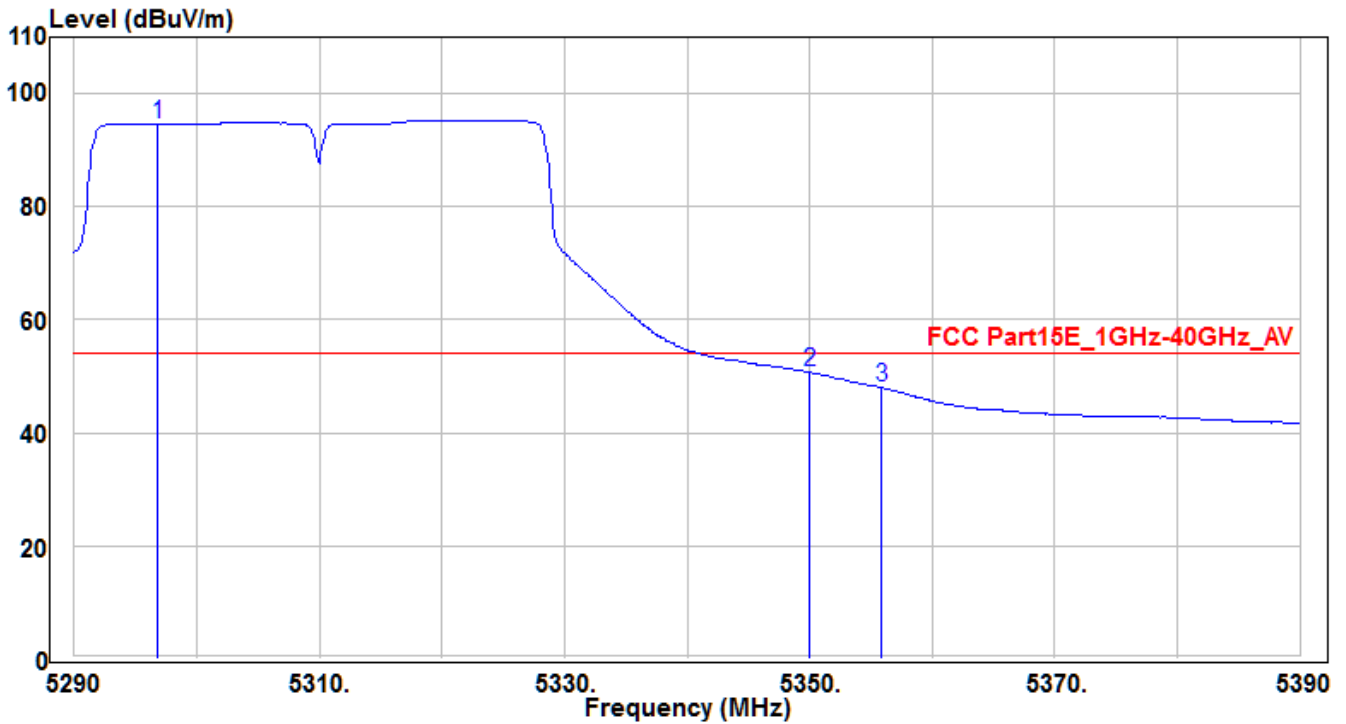


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5296.8	90.58	4	94.58	40.58	54	100	150	Average
2	*	5350	46.62	4.04	50.66	-3.34	54	100	150	Average
3		5355.9	43.96	4.05	48.01	-5.99	54	100	150	Average

Note :

- "*" means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor) °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE3-CH102_Ant A+B	Test Voltage	AC 120V/60Hz

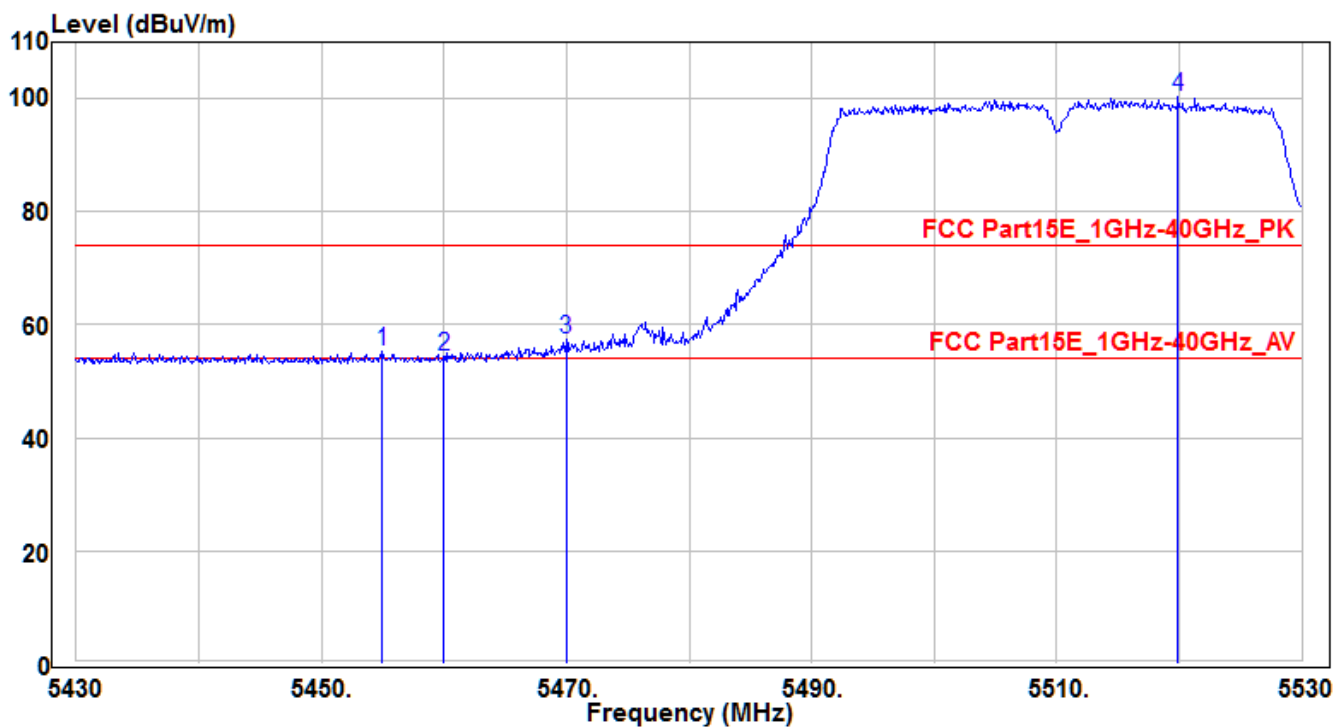


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5455	51.05	4.13	55.18	-18.82	74	190	250	Peak
2	5460	50.13	4.14	54.27	-19.73	74	190	250	Peak
3	* 5470	53.33	4.14	57.47	-16.53	74	190	250	Peak
4	5519.9	96.03	4.25	100.28	26.28	74	190	250	Peak

Note :

- "*" means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor) °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE3-CH102_Ant A+B	Test Voltage	AC 120V/60Hz

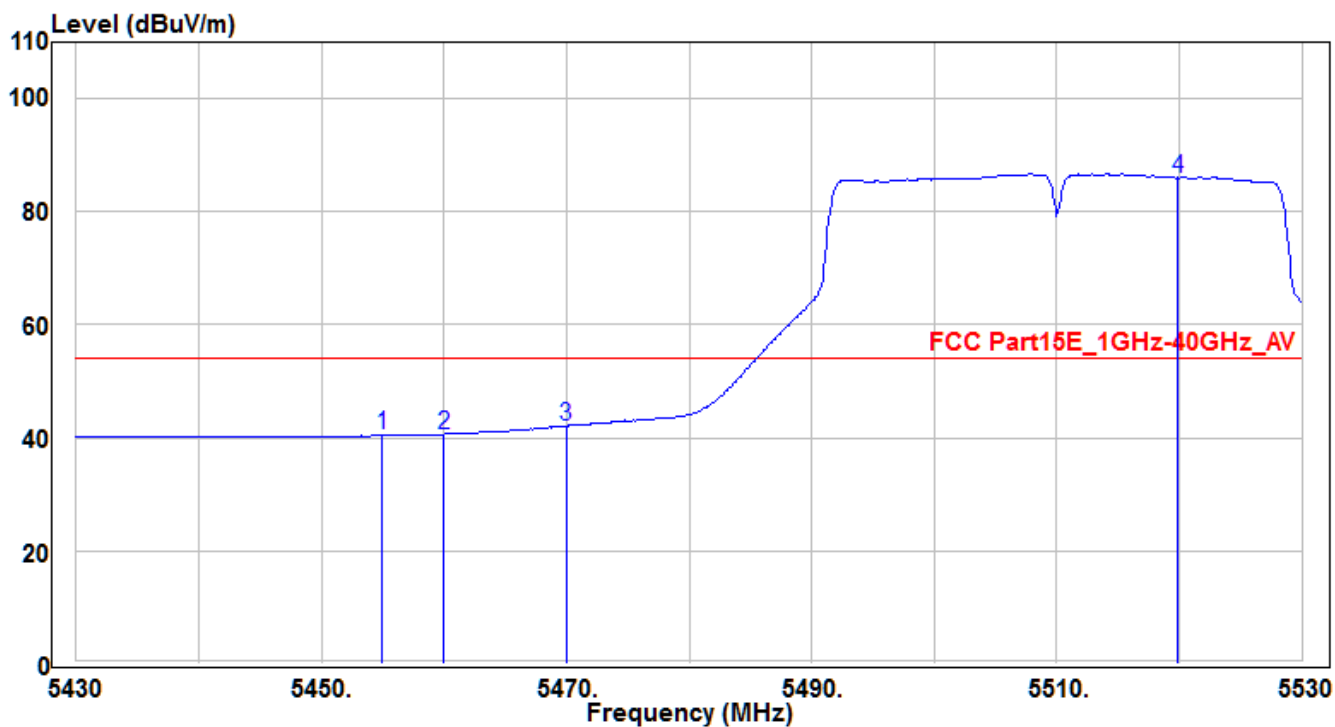


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5455	36.26	4.13	40.39	-13.61	54	190	250	Average
2	5460	36.52	4.14	40.66	-13.34	54	190	250	Average
3	* 5470	38	4.14	42.14	-11.86	54	190	250	Average
4	5519.9	81.72	4.25	85.97	31.97	54	190	250	Average

Note :

- "*" means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor) °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE3-CH102_Ant A+B	Test Voltage	AC 120V/60Hz

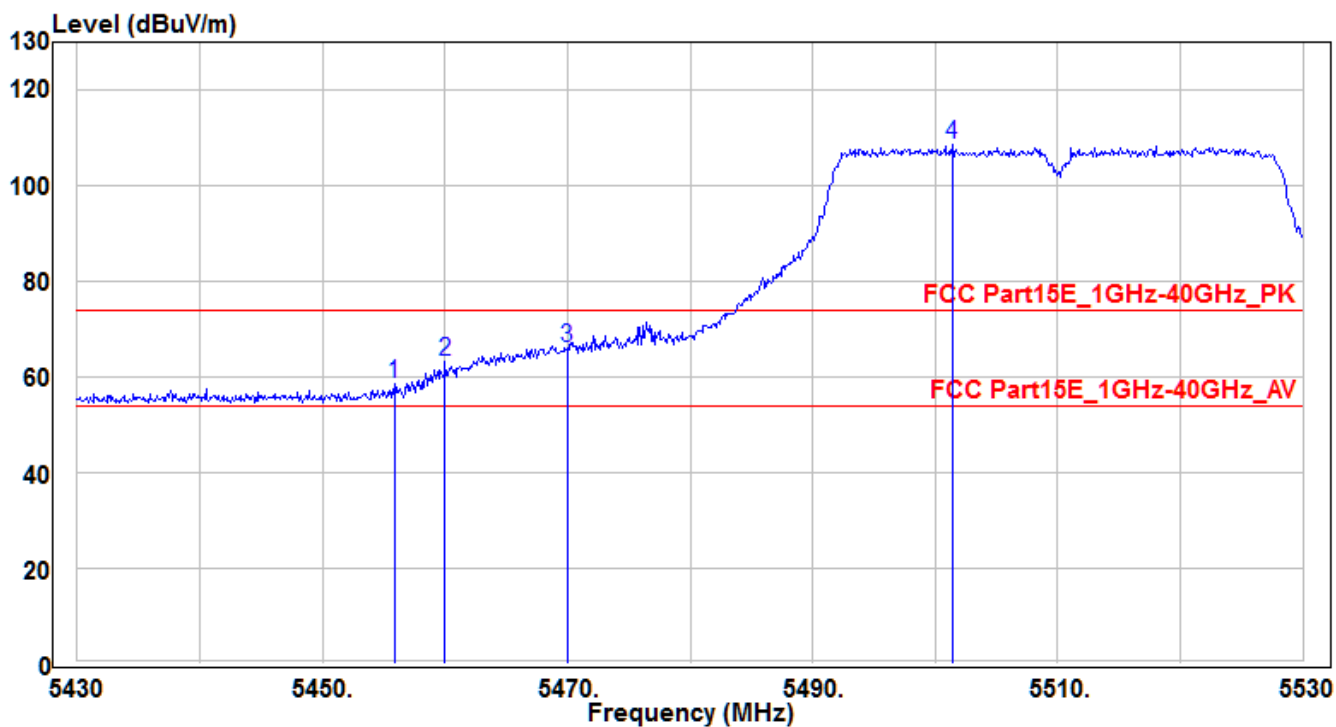


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5455.9	54.29	4.13	58.42	-15.58	74	150	155	Peak
2	5460	59.1	4.14	63.24	-10.76	74	150	155	Peak
3	* 5470	61.96	4.14	66.1	-7.9	74	150	155	Peak
4	5501.4	104.42	4.17	108.59	34.59	74	150	155	Peak

Note :

- " * " means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor) °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE3-CH102_Ant A+B	Test Voltage	AC 120V/60Hz

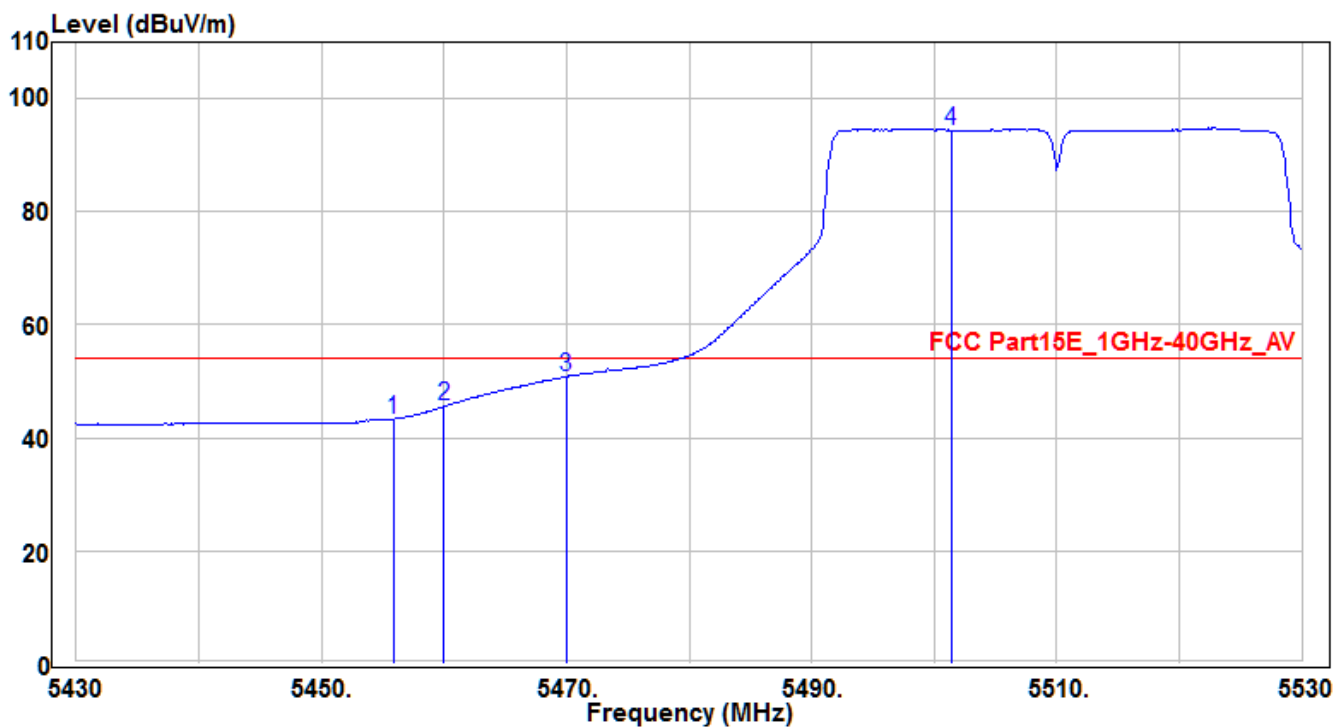


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5455.9	39.22	4.13	43.35	-10.65	54	150	155	Average
2	5460	41.38	4.14	45.52	-8.48	54	150	155	Average
3	* 5470	46.69	4.14	50.83	-3.17	54	150	155	Average
4	5501.4	90.24	4.17	94.41	40.41	54	150	155	Average

Note :

- "*" means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor) °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE3-CH134_Ant A+B	Test Voltage	AC 120V/60Hz

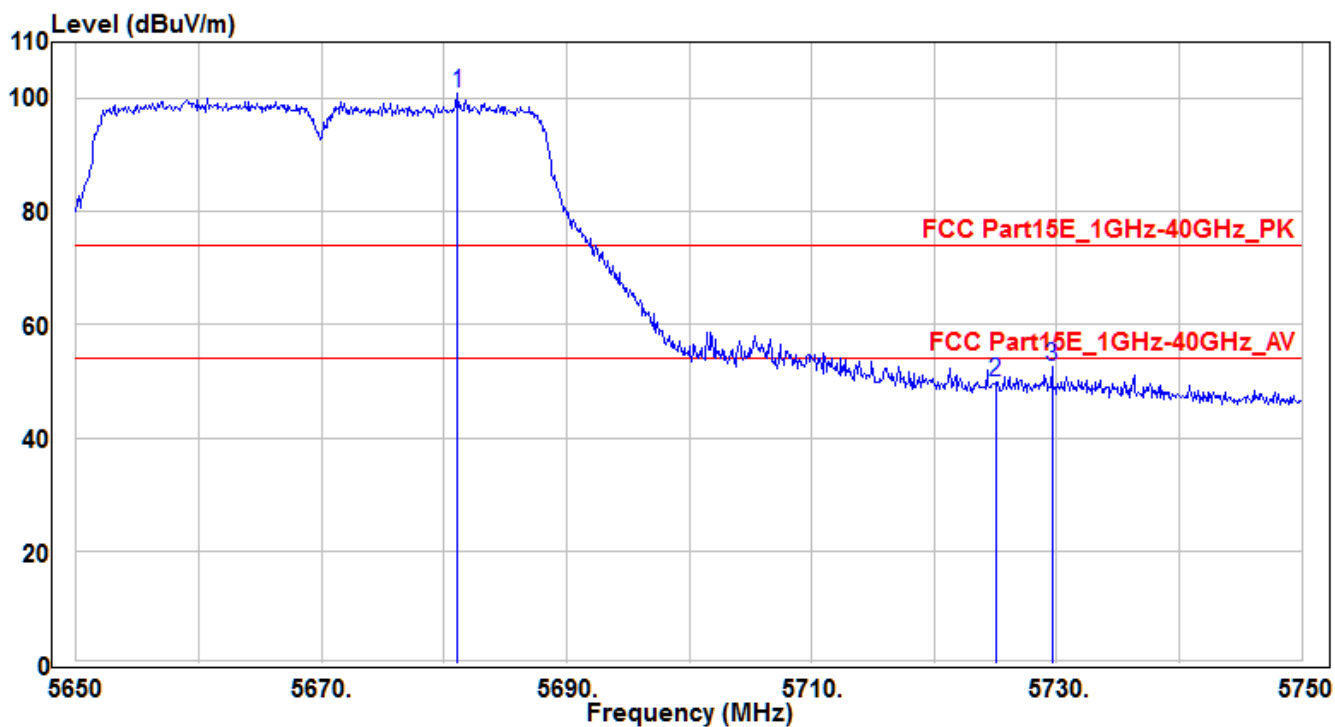


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5681.1	96.11	4.87	100.98	26.98	74	170	140	Peak
2	5725	44.83	5.03	49.86	-24.14	74	170	140	Peak
3	* 5729.6	47.63	5.05	52.68	-21.32	74	170	140	Peak

Note :

1. " * " means the worst value in this measurement data °
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor) °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE3-CH134_Ant A+B	Test Voltage	AC 120V/60Hz

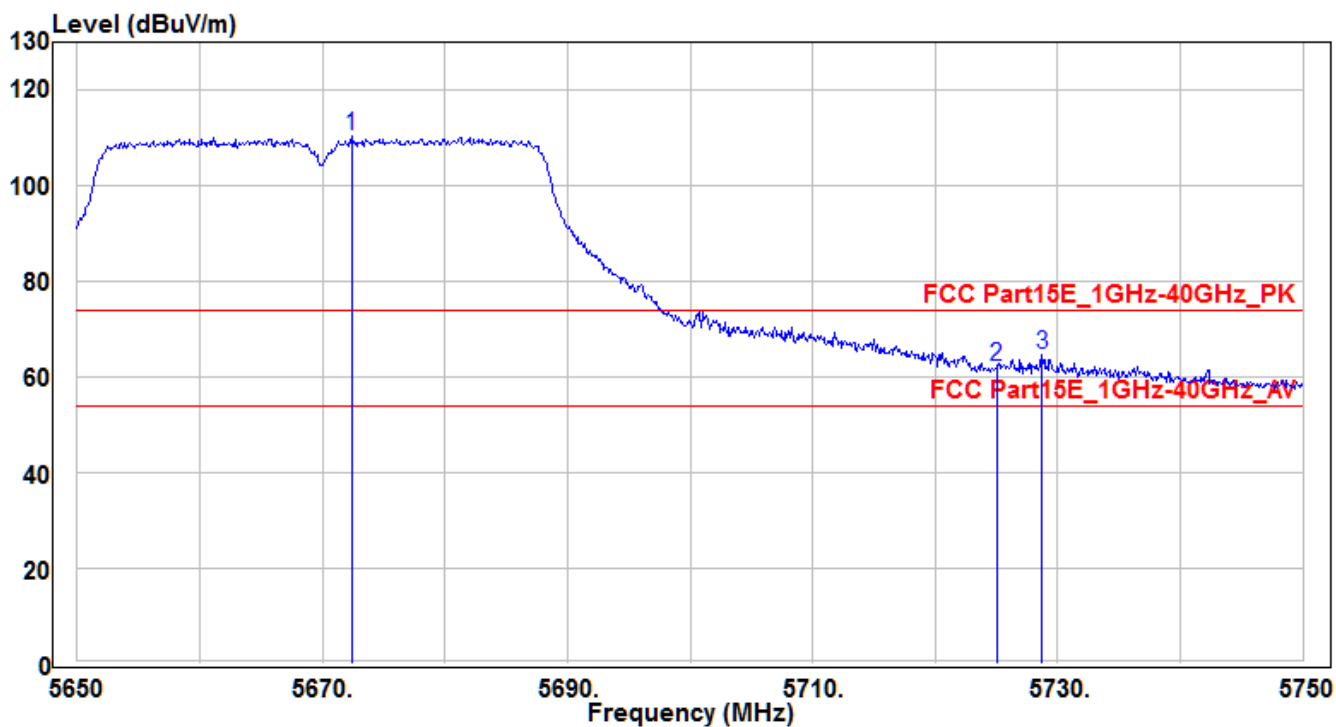


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5672.4	105.62	4.83	110.45	36.45	74	150	150	Peak
2	5725	57.09	5.03	62.12	-11.88	74	150	150	Peak
3	* 5728.7	59.52	5.04	64.56	-9.44	74	150	150	Peak

Note :

- "*" means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor) °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE3-CH134_Ant A+B	Test Voltage	AC 120V/60Hz

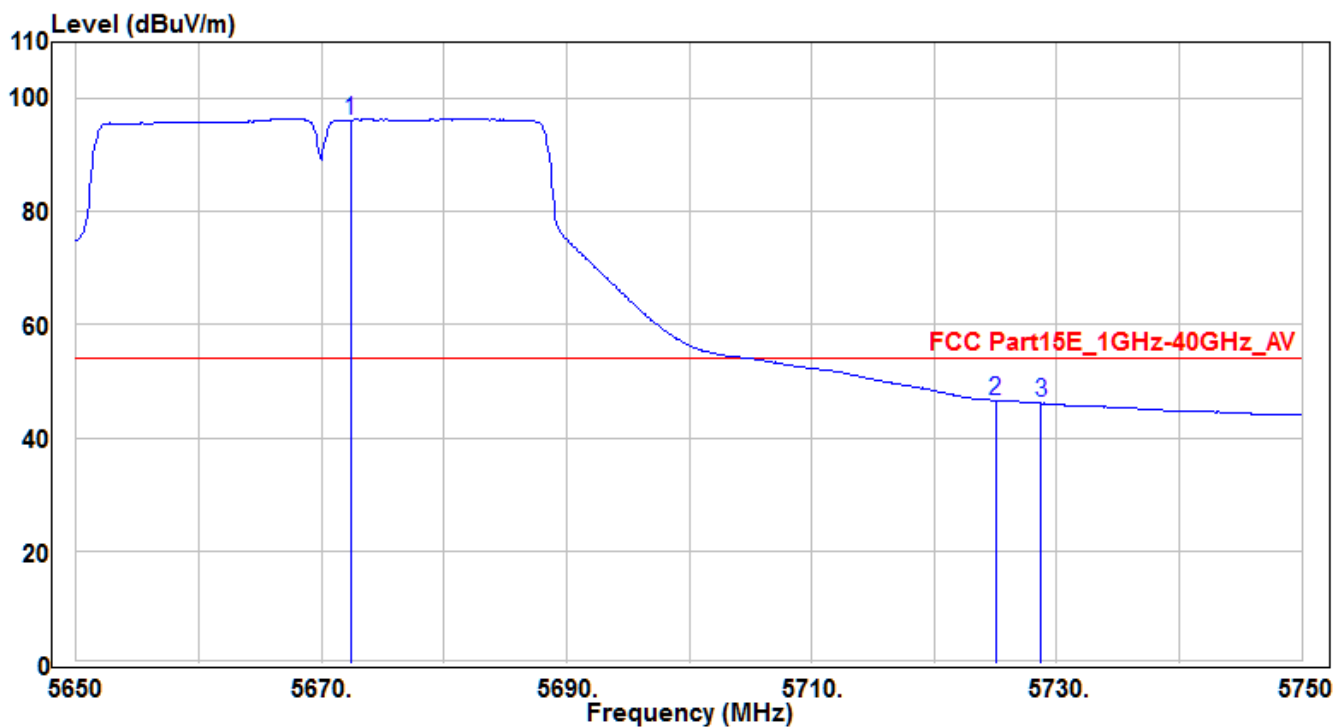


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5672.4	91.4	4.83	96.23	42.23	54	150	150	Average
2	* 5725	41.65	5.03	46.68	-7.32	54	150	150	Average
3	5728.7	41.13	5.04	46.17	-7.83	54	150	150	Average

Note :

- "*" means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor) °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE3-CH151_Ant A+B	Test Voltage	AC 120V/60Hz

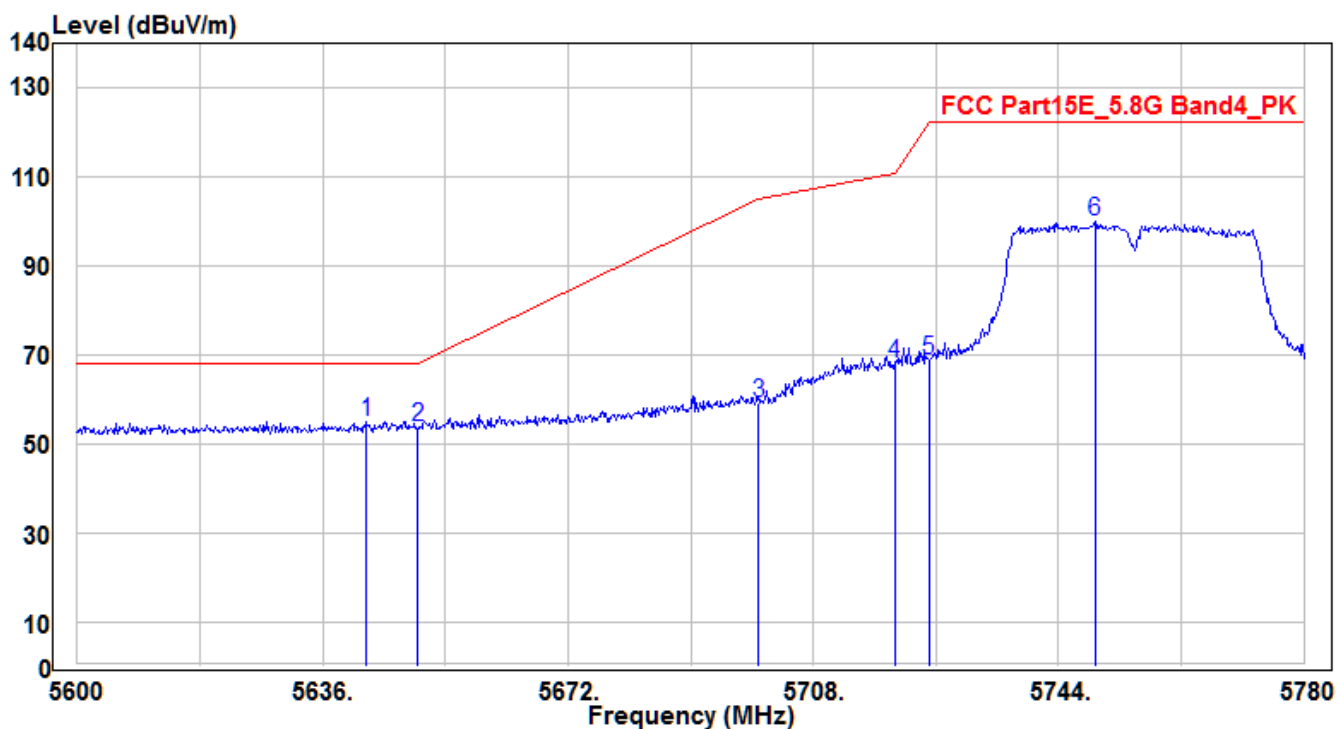


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5642.48	50.45	4.72	55.17	-13.03	68.2	150	170	Peak
2		5650	49.18	4.75	53.93	-14.27	68.2	150	170	Peak
3		5700	54.26	4.94	59.2	-46	105.2	150	170	Peak
4		5720	63.02	5.01	68.03	-42.77	110.8	150	170	Peak
5		5725	63.76	5.03	68.79	-53.41	122.2	150	170	Peak
6		5749.4	94.76	5.13	99.89	-22.31	122.2	150	170	Peak

Note :

- "*" means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor) °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE3-CH151_Ant A+B	Test Voltage	AC 120V/60Hz

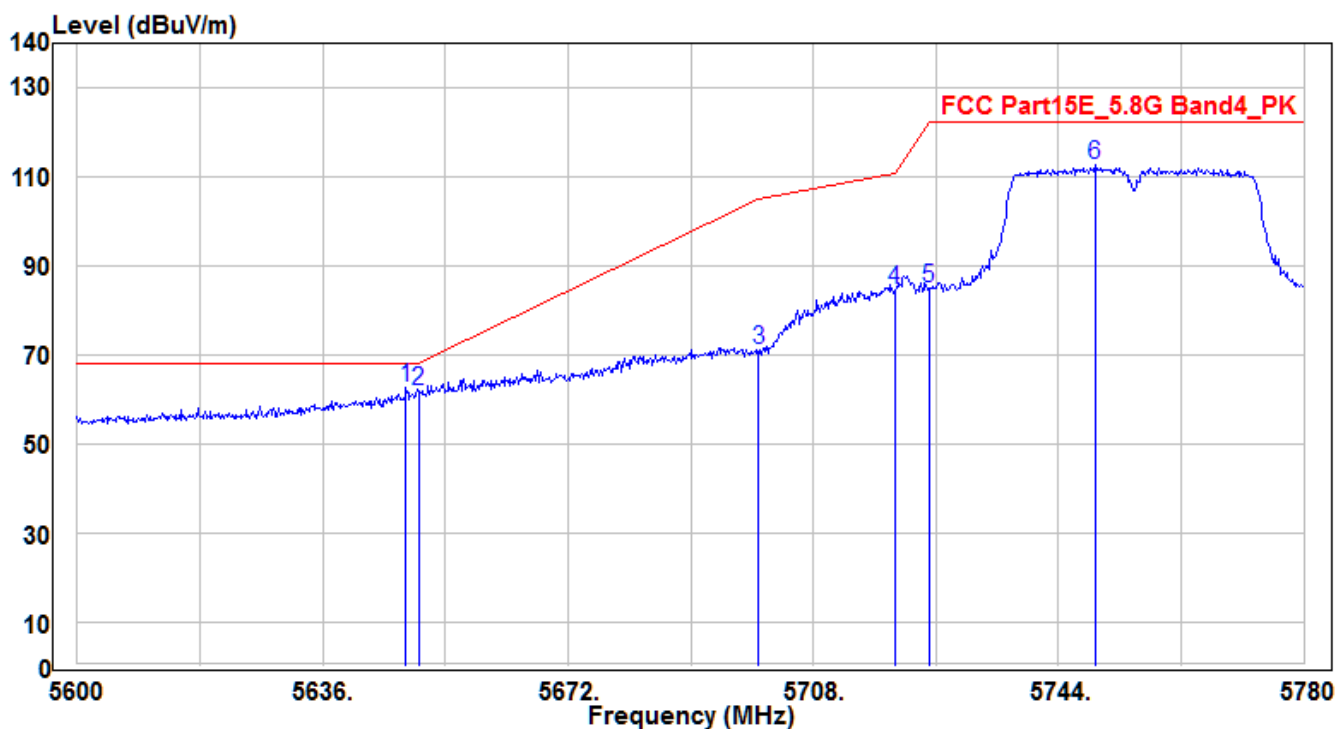


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5648.24	58.06	4.74	62.8	-5.4	68.2	175	150	Peak
2		5650.04	57.3	4.75	62.05	-6.18	68.23	175	150	Peak
3		5700	66.17	4.94	71.11	-34.09	105.2	175	150	Peak
4		5720	79.57	5.01	84.58	-26.22	110.8	175	150	Peak
5		5725	80.16	5.03	85.19	-37.01	122.2	175	150	Peak
6		5749.4	107.4	5.13	112.53	-9.67	122.2	175	150	Peak

Note :

- "*" means the worst value in this measurement data .
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) .
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor) .

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE3-CH159_Ant A+B	Test Voltage	AC 120V/60Hz

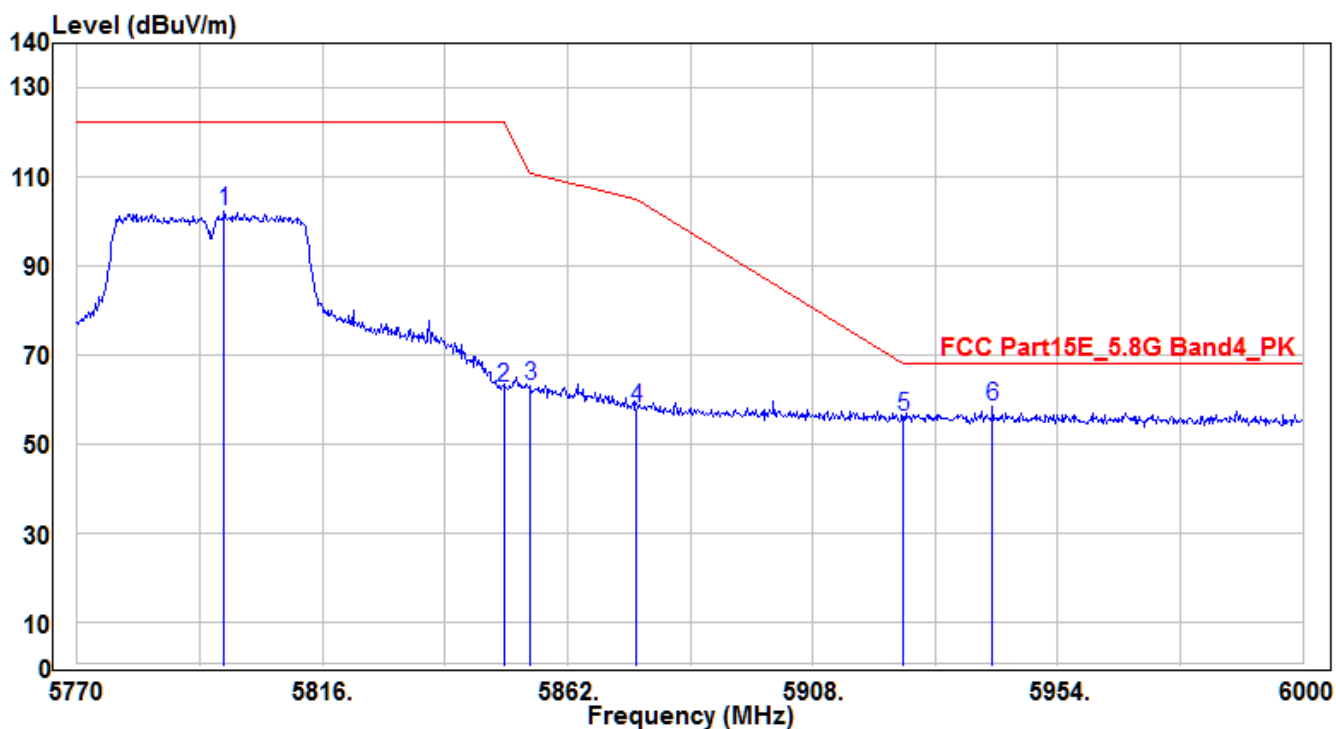


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5797.6	97.16	5.32	102.48	-19.72	122.2	100	180	Peak
2	5850	57.19	5.51	62.7	-59.5	122.2	100	180	Peak
3	5855	57.5	5.54	63.04	-47.76	110.8	100	180	Peak
4	5875	52.53	5.62	58.15	-47.05	105.2	100	180	Peak
5	5925	50.26	5.8	56.06	-12.14	68.2	100	180	Peak
6	* 5941.81	52.54	5.87	58.41	-9.79	68.2	100	180	Peak

Note :

- "*" means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor) °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE3-CH159_Ant A+B	Test Voltage	AC 120V/60Hz

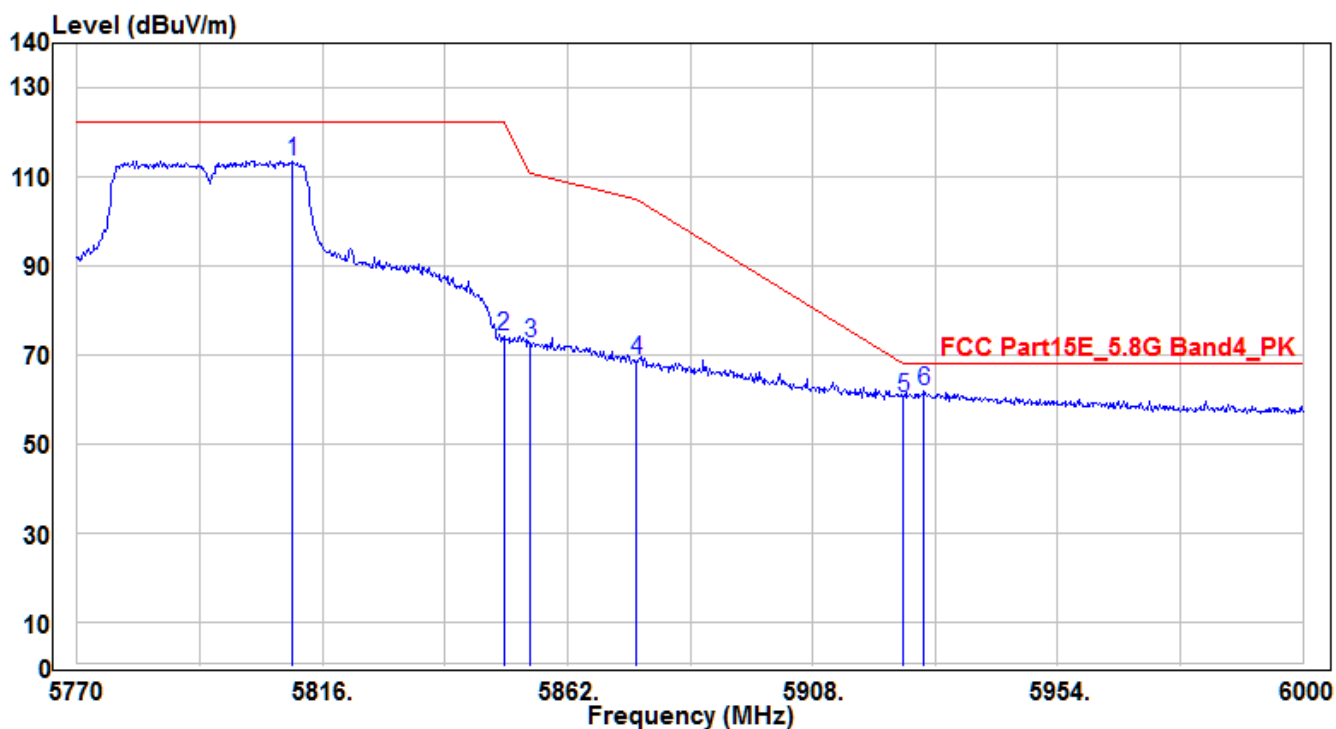


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5810.48	108.15	5.36	113.51	-8.69	122.2	150	150	Peak
2	5850	68.79	5.51	74.3	-47.9	122.2	150	150	Peak
3	5855	67.15	5.54	72.69	-38.11	110.8	150	150	Peak
4	5875	63.11	5.62	68.73	-36.47	105.2	150	150	Peak
5	5925	54.75	5.8	60.55	-7.65	68.2	150	150	Peak
6	* 5928.93	56.17	5.81	61.98	-6.22	68.2	150	150	Peak

Note :

- "*" means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor) °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE4-CH42_Ant A+B	Test Voltage	AC 120V/60Hz

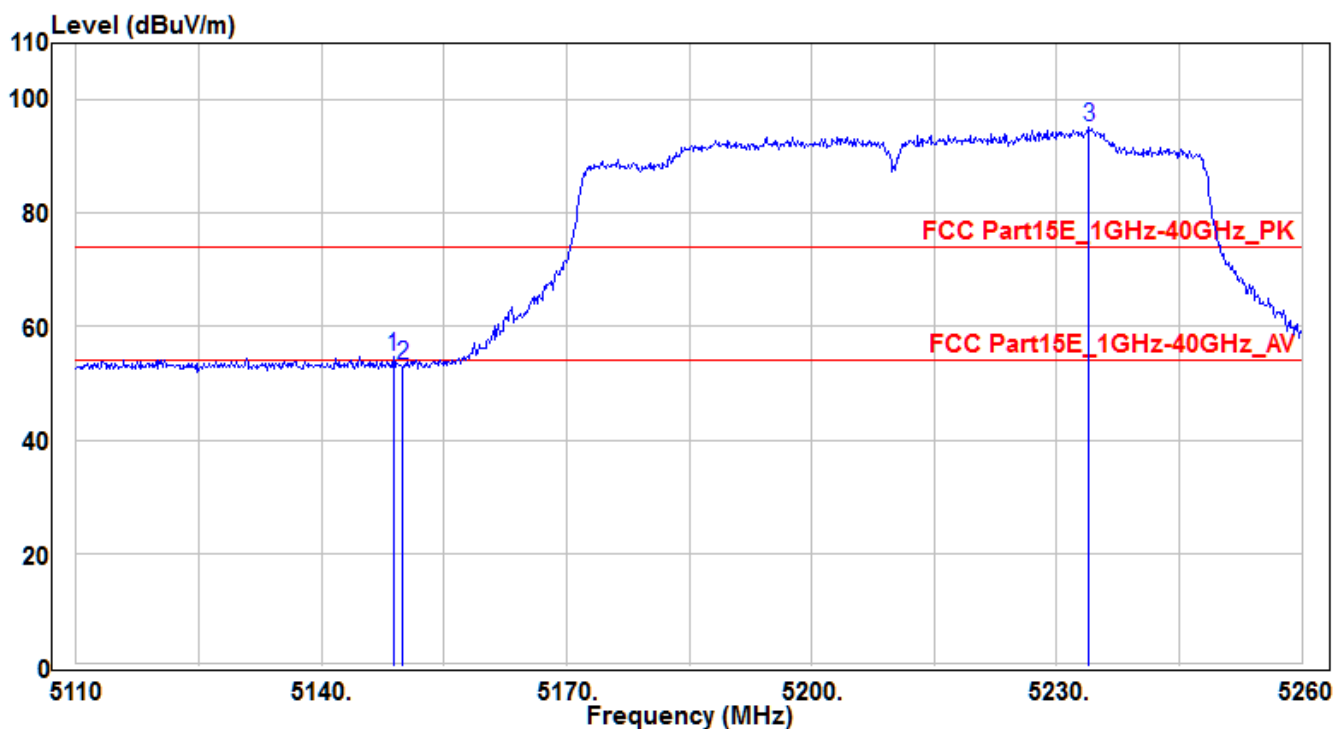


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.85	50.94	3.88	54.82	-19.18	74	245	375	Peak
2		5150	49.21	3.88	53.09	-20.91	74	245	375	Peak
3		5233.9	91.17	3.95	95.12	21.12	74	245	375	Peak

Note :

1. " * " means the worst value in this measurement data °
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor) °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE4-CH42_Ant A+B	Test Voltage	AC 120V/60Hz

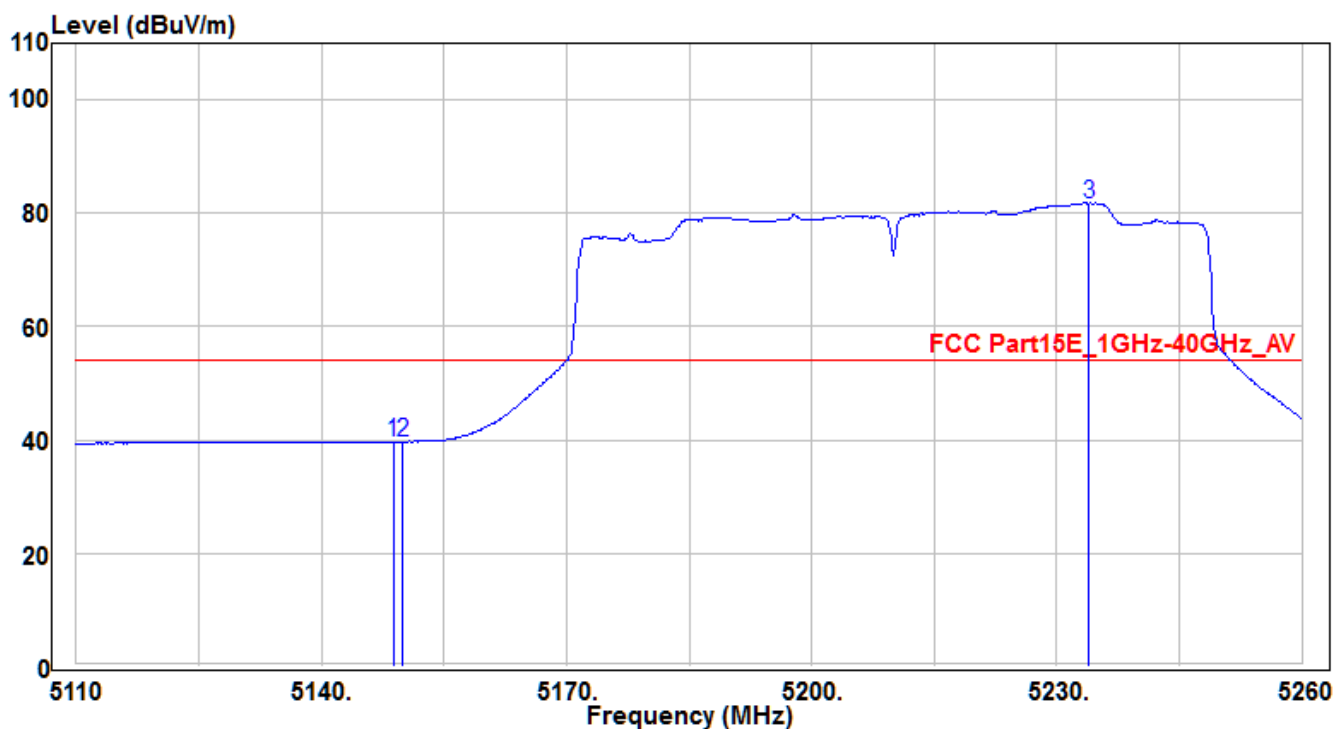


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5148.85	35.79	3.88	39.67	-14.33	54	245	375	Average
2	*	5150	35.82	3.88	39.7	-14.3	54	245	375	Average
3		5233.9	77.77	3.95	81.72	27.72	54	245	375	Average

Note :

1. " * " means the worst value in this measurement data .
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) .
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor) .

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE4-CH42_Ant A+B	Test Voltage	AC 120V/60Hz

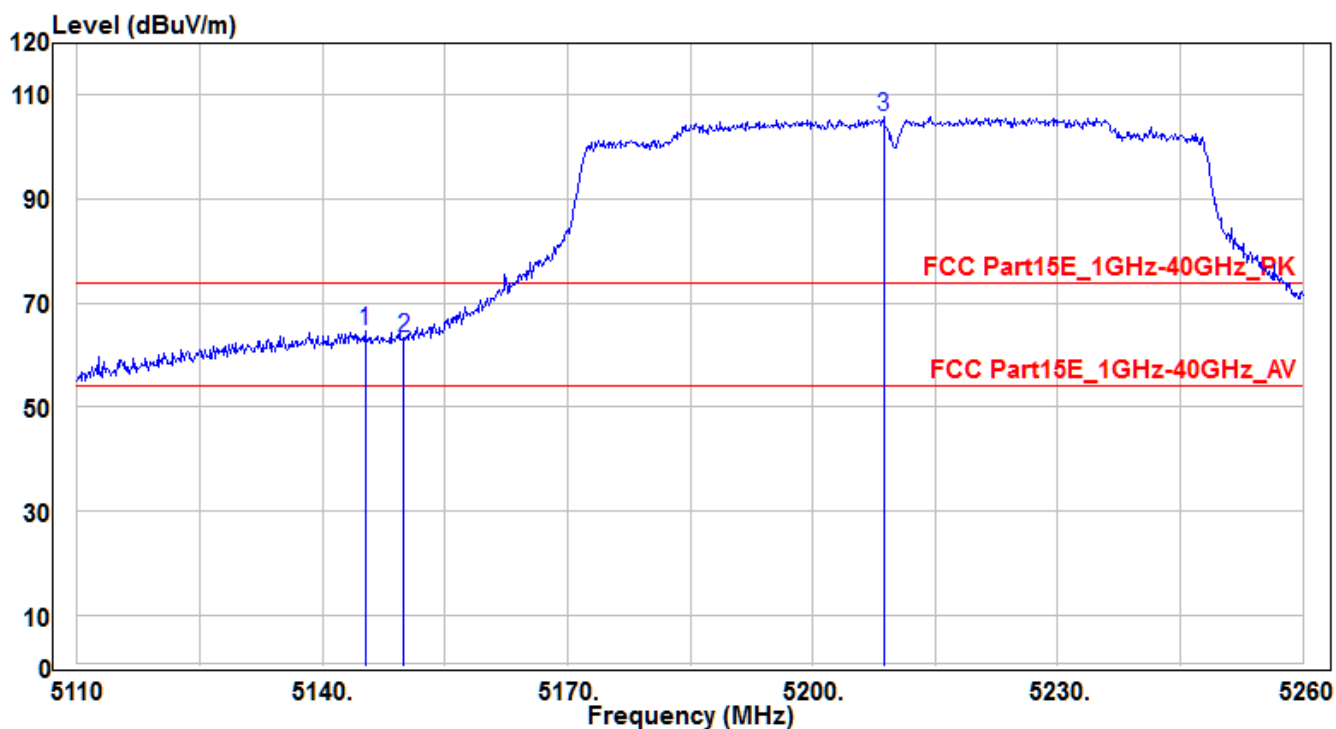


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5145.25	60.67	3.87	64.54	-9.46	74	100	160	Peak
2		5150	59.45	3.88	63.33	-10.67	74	100	160	Peak
3		5208.7	101.99	3.93	105.92	31.92	74	100	160	Peak

Note :

1. " * " means the worst value in this measurement data °
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor) °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE4-CH42_Ant A+B	Test Voltage	AC 120V/60Hz

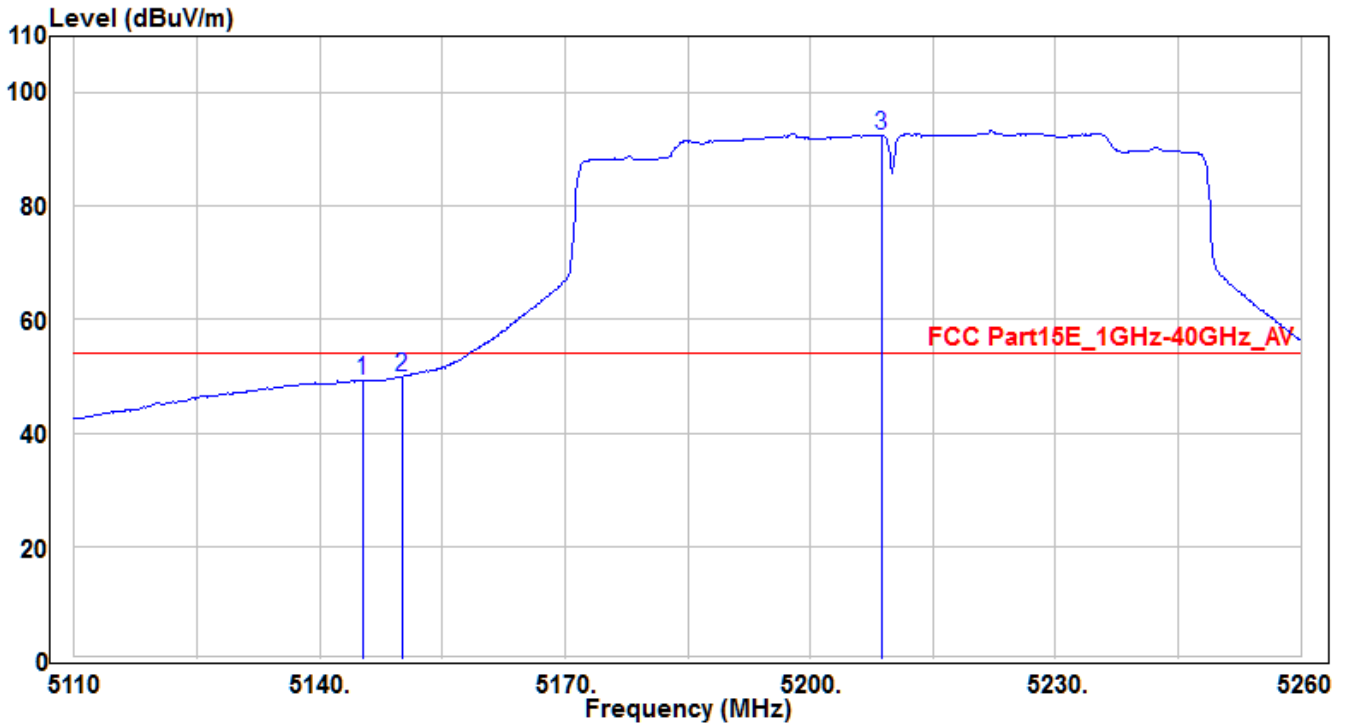


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5145.25	45.46	3.87	49.33	-4.67	54	100	160	Average
2	*	5150.05	45.91	3.88	49.79	-4.21	54	100	160	Average
3		5208.7	88.53	3.93	92.46	38.46	54	100	160	Average

Note :

1. " * " means the worst value in this measurement data °
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor) °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE4-CH58_Ant A+B	Test Voltage	AC 120V/60Hz

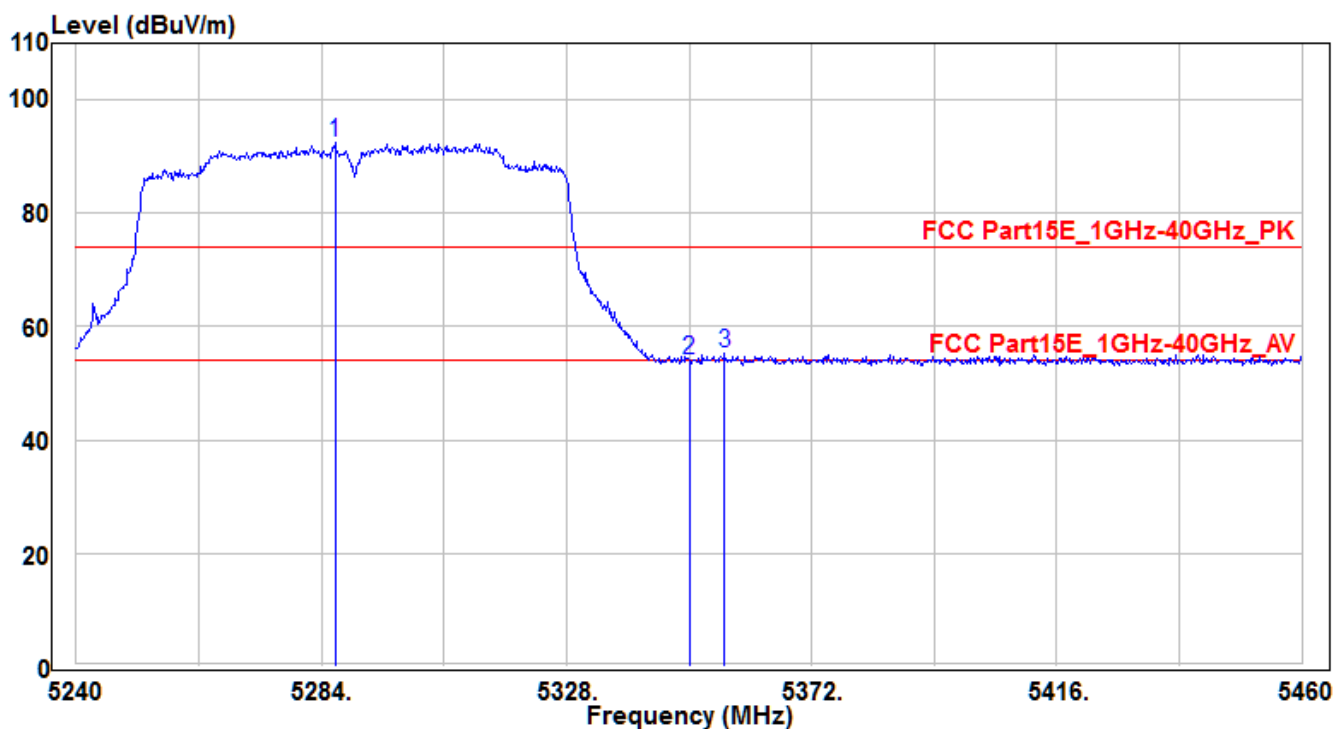


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5286.42	88.39	3.99	92.38	18.38	74	240	170	Peak
2	5350	49.99	4.04	54.03	-19.97	74	240	170	Peak
3	* 5356.38	51.2	4.05	55.25	-18.75	74	240	170	Peak

Note :

- "*" means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor) °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE4-CH58_Ant A+B	Test Voltage	AC 120V/60Hz

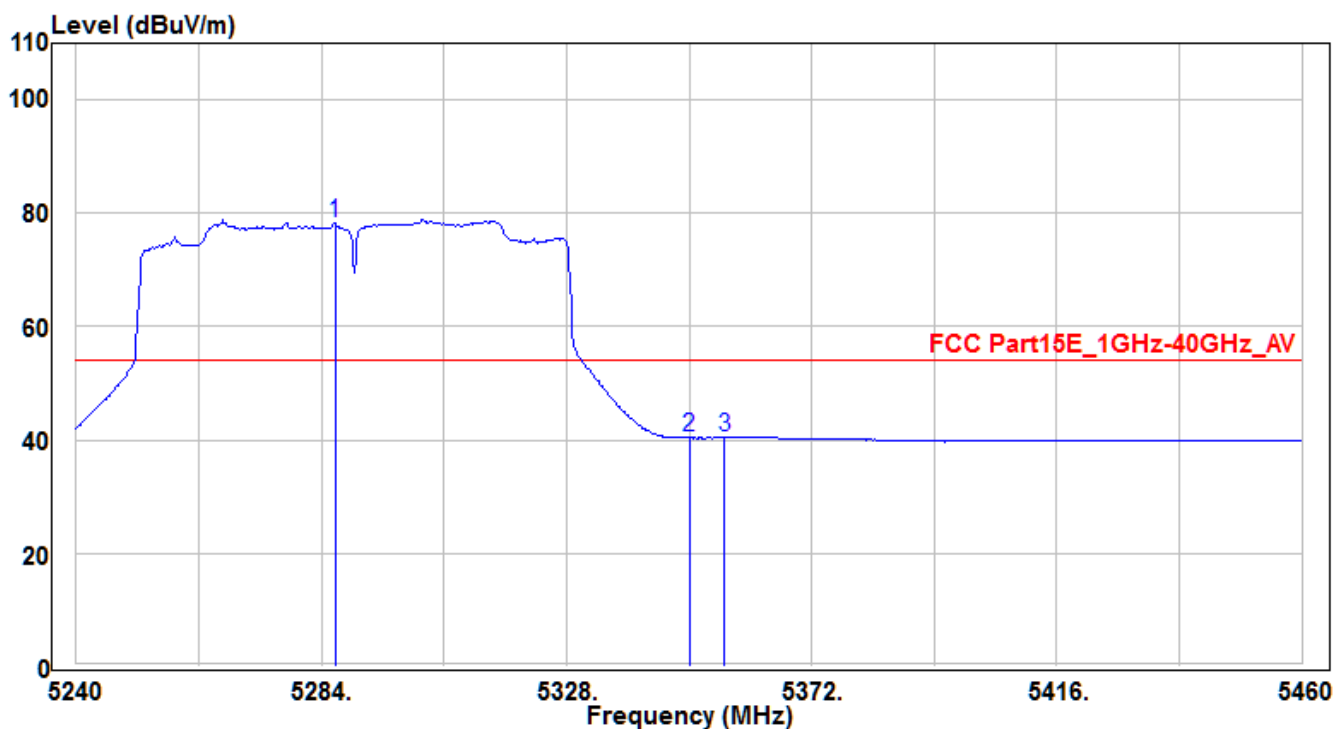


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5286.42	74.31	3.99	78.3	24.3	54	240	170	Average
2	5350	36.48	4.04	40.52	-13.48	54	240	170	Average
3	* 5356.38	36.49	4.05	40.54	-13.46	54	240	170	Average

Note :

- "*" means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor) °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE4-CH58_Ant A+B	Test Voltage	AC 120V/60Hz

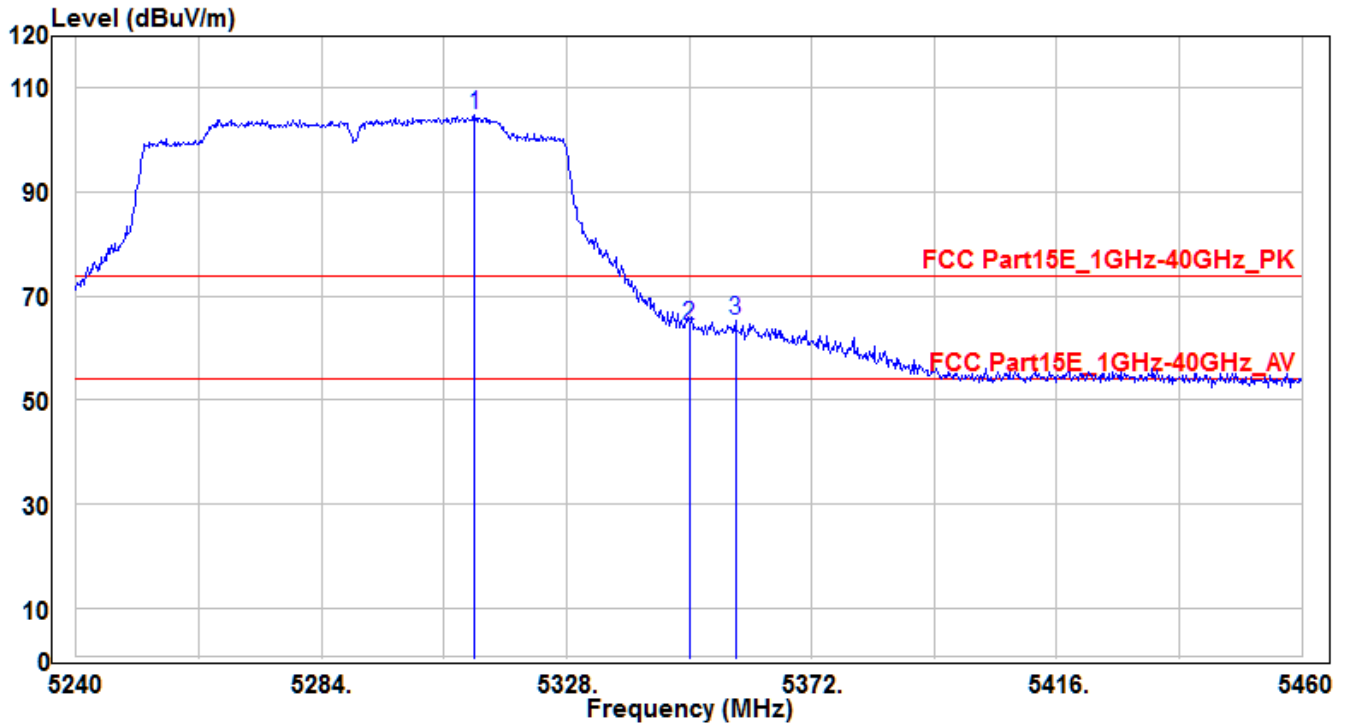


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5311.5	100.84	4.01	104.85	30.85	74	235	220	Peak
2		5350	60.23	4.04	64.27	-9.73	74	235	220	Peak
3	*	5358.36	61.08	4.05	65.13	-8.87	74	235	220	Peak

Note :

1. " * " means the worst value in this measurement data °
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor) °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE4-CH58_Ant A+B	Test Voltage	AC 120V/60Hz

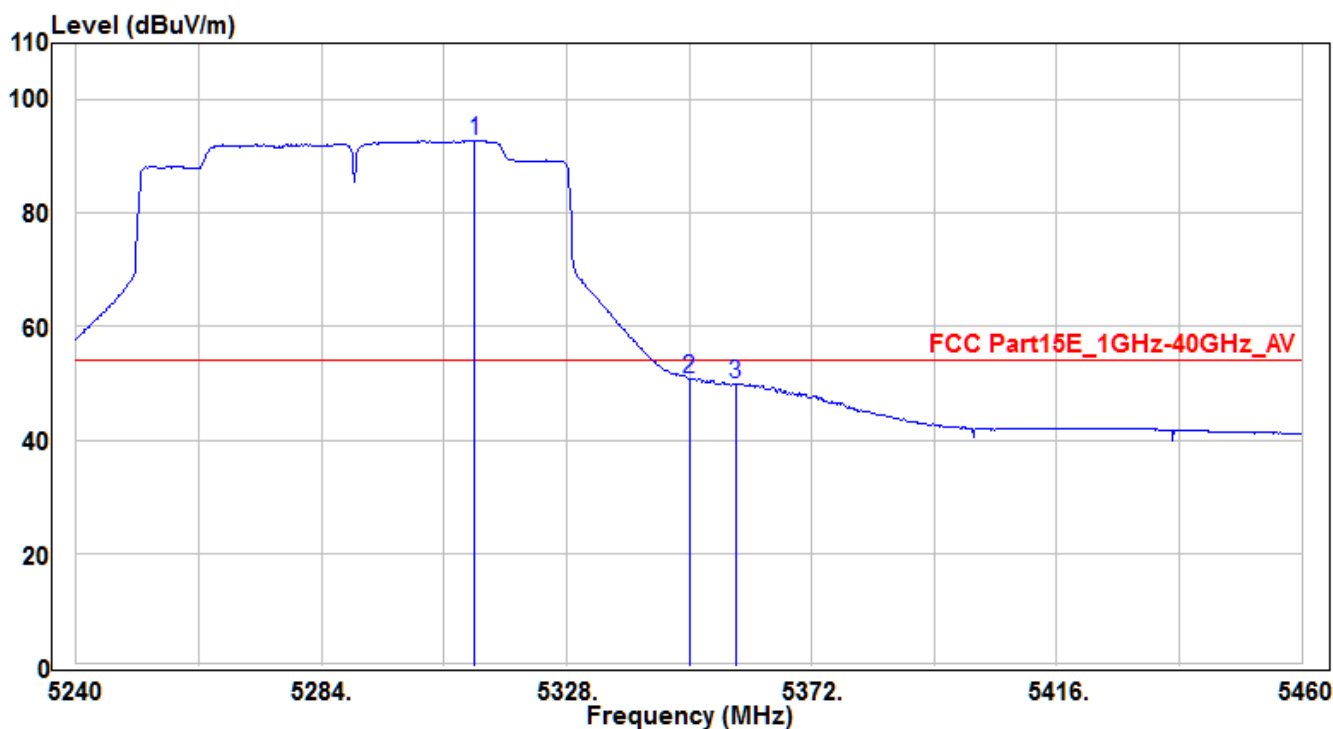


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5311.5	88.7	4.01	92.71	38.71	54	235	220	Average
2	*	5350	46.72	4.04	50.76	-3.24	54	235	220	Average
3		5358.36	45.93	4.05	49.98	-4.02	54	235	220	Average

Note :

1. " * " means the worst value in this measurement data °
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor) °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE4-CH106_Ant A+B	Test Voltage	AC 120V/60Hz

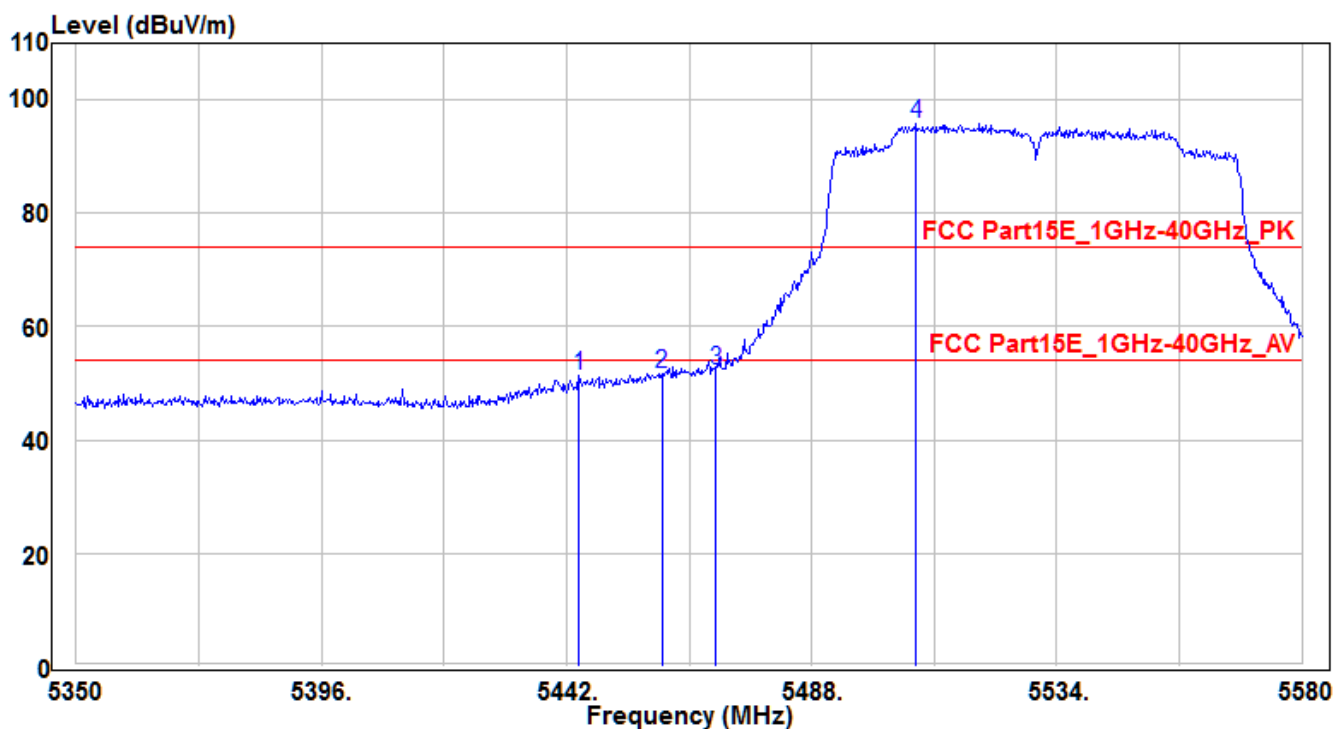


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5444.3	47.4	4.12	51.52	-22.48	74	170	140	Peak
2	5460	47.44	4.14	51.58	-22.42	74	170	140	Peak
3	* 5470	48.22	4.14	52.36	-21.64	74	170	140	Peak
4	5507.55	91.66	4.2	95.86	21.86	74	170	140	Peak

Note :

- " * " means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor) °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE4-CH106_Ant A+B	Test Voltage	AC 120V/60Hz

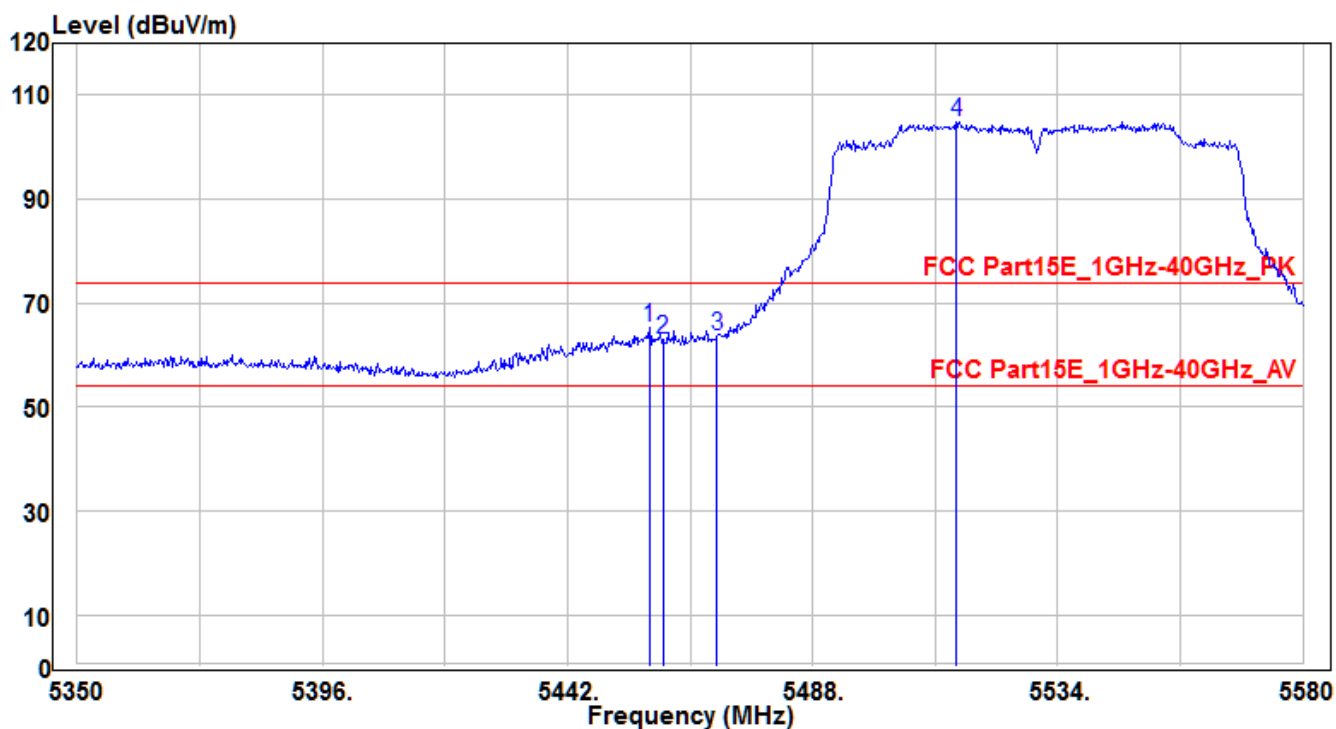


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5457.41	61.01	4.13	65.14	-8.86	74	100	155	Peak
2		5460	58.83	4.14	62.97	-11.03	74	100	155	Peak
3		5470	59.44	4.14	63.58	-10.42	74	100	155	Peak
4		5514.91	100.5	4.23	104.73	30.73	74	100	155	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB)
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor)

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE4-CH106_Ant A+B	Test Voltage	AC 120V/60Hz

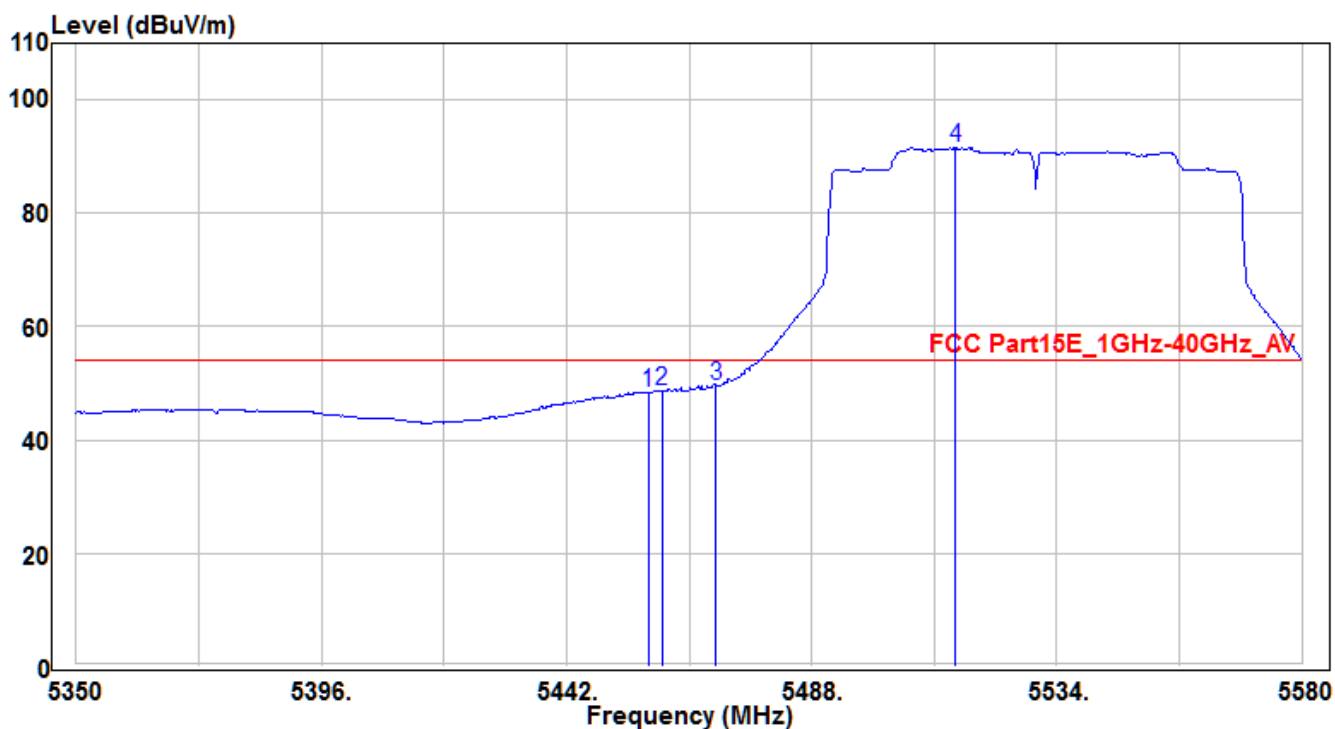


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5457.41	44.3	4.13	48.43	-5.57	54	100	155	Average
2	5460	44.49	4.14	48.63	-5.37	54	100	155	Average
3	* 5470	45.31	4.14	49.45	-4.55	54	100	155	Average
4	5514.91	87.28	4.23	91.51	37.51	54	100	155	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB)
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor)

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE4-CH155_Ant A+B	Test Voltage	AC 120V/60Hz

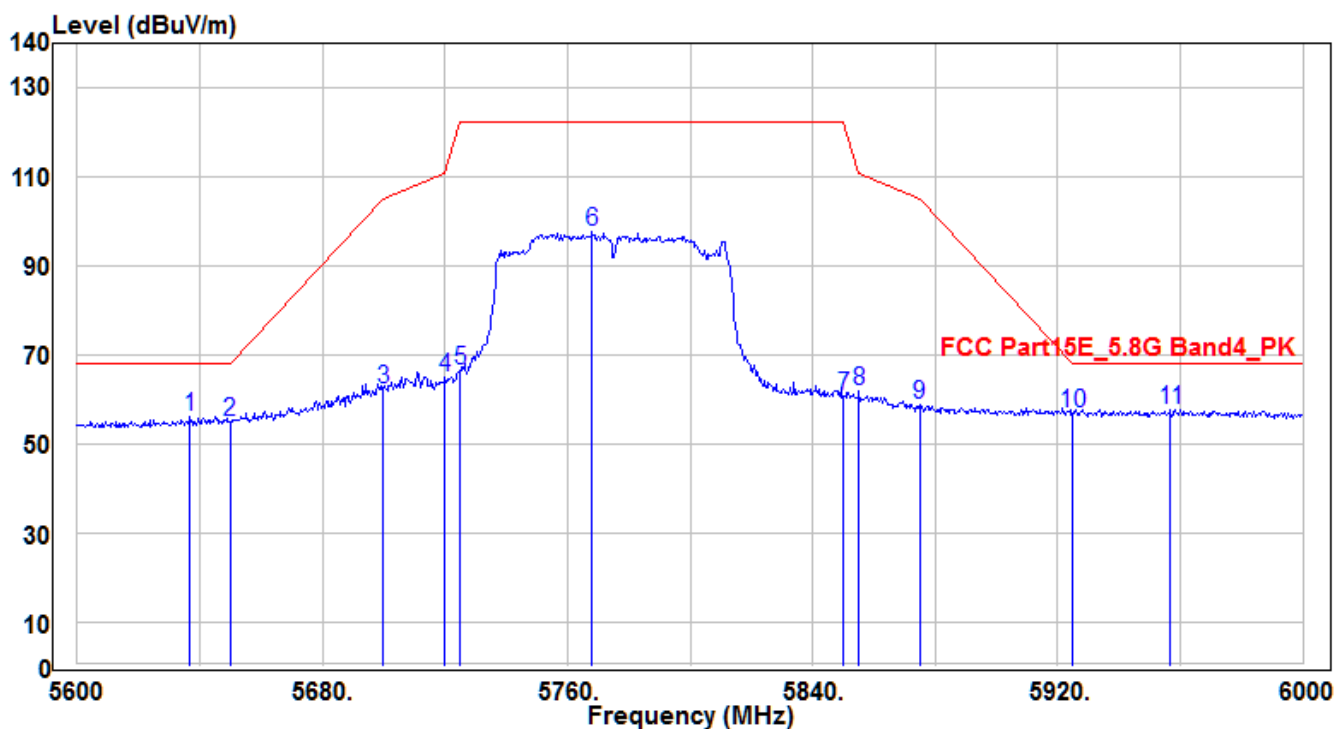


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5636.8	51.6	4.69	56.29	-11.91	68.2	125	170	Peak
2	5650	50.41	4.75	55.16	-13.04	68.2	125	170	Peak
3	5700	57.36	4.94	62.3	-42.9	105.2	125	170	Peak
4	5720	59.84	5.01	64.85	-45.95	110.8	125	170	Peak
5	5725	61.59	5.03	66.62	-55.58	122.2	125	170	Peak
6	5768	92.32	5.2	97.52	-24.68	122.2	125	170	Peak
7	5850	55.43	5.51	60.94	-61.26	122.2	125	170	Peak
8	5855	56.33	5.54	61.87	-48.93	110.8	125	170	Peak
9	5875	53.37	5.62	58.99	-46.21	105.2	125	170	Peak
10	5925	50.97	5.8	56.77	-11.43	68.2	125	170	Peak
11	* 5956.8	51.92	5.92	57.84	-10.36	68.2	125	170	Peak

Note:

- " * " means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB)
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor)

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE4-CH155_Ant A+B	Test Voltage	AC 120V/60Hz

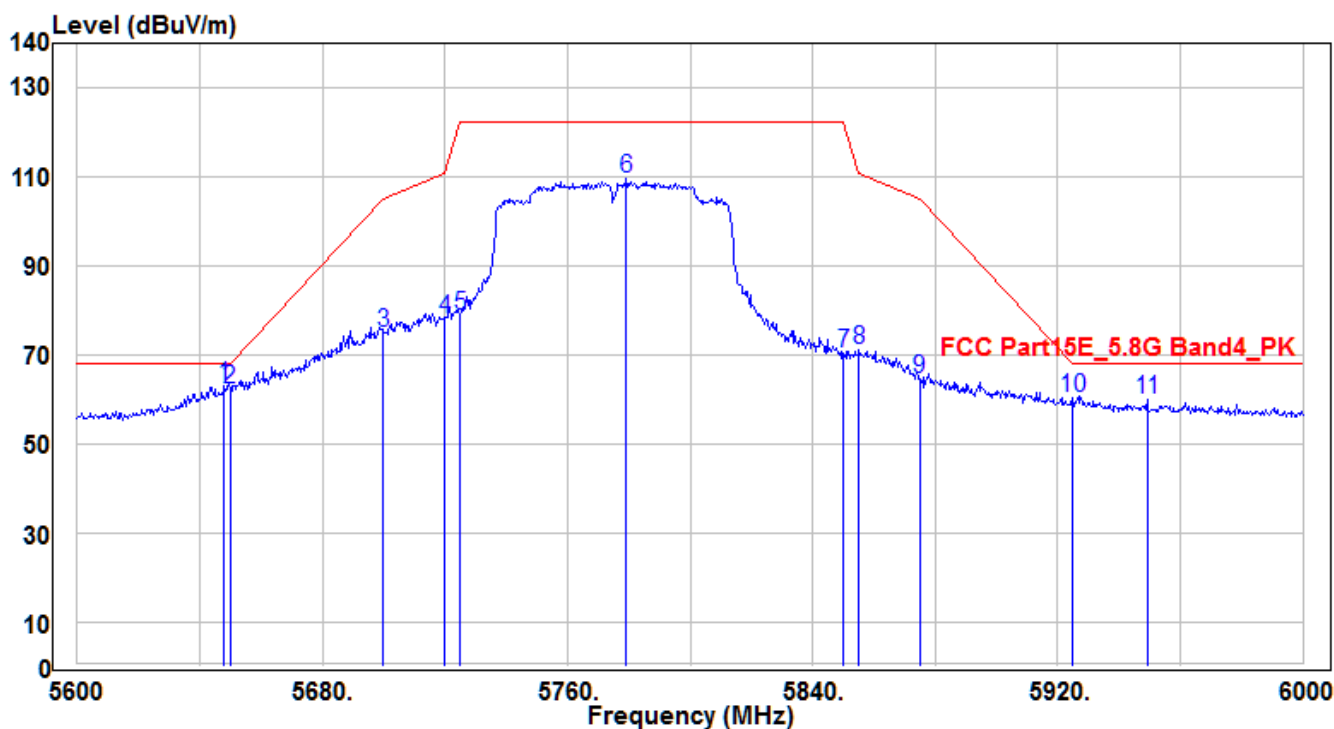


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5648	58.25	4.74	62.99	-5.21	68.2	195	155	Peak
2		5650	57.46	4.75	62.21	-5.99	68.2	195	155	Peak
3		5700	69.93	4.94	74.87	-30.33	105.2	195	155	Peak
4		5720	72.97	5.01	77.98	-32.82	110.8	195	155	Peak
5		5725	73.87	5.03	78.9	-43.3	122.2	195	155	Peak
6		5779.2	104.21	5.24	109.45	-12.75	122.2	195	155	Peak
7		5850	64.77	5.51	70.28	-51.92	122.2	195	155	Peak
8		5855	65.44	5.54	70.98	-39.82	110.8	195	155	Peak
9		5875	58.88	5.62	64.5	-40.7	105.2	195	155	Peak
10		5925	54.7	5.8	60.5	-7.7	68.2	195	155	Peak
11		5949.2	54.21	5.9	60.11	-8.09	68.2	195	155	Peak

Note:

1. " * " means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB)
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor)

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE5-CH50_Ant A+B (5110MHz-5350MHz)	Test Voltage	AC 120V/60Hz

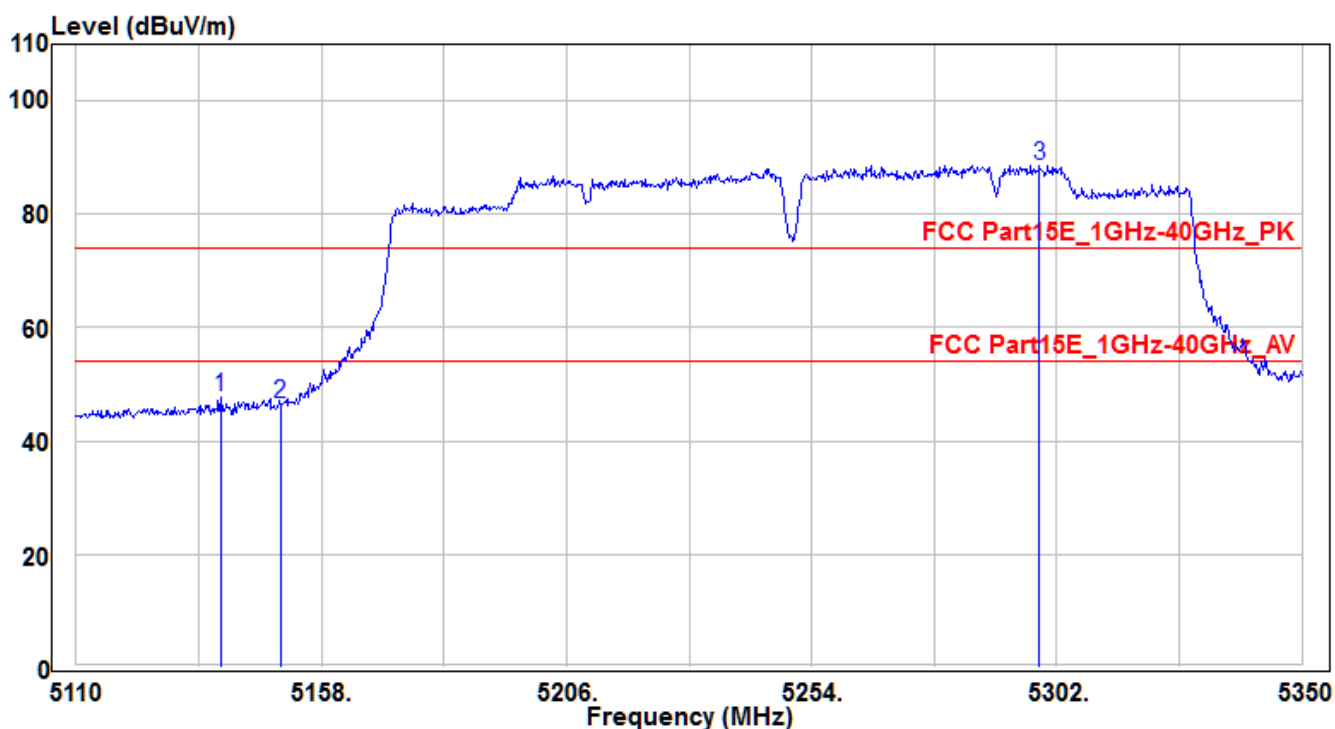


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5138.32	43.81	3.87	47.68	-26.32	74	255	180	Peak
2		5150	42.63	3.88	46.51	-27.49	74	255	180	Peak
3		5298.64	84.57	4	88.57	14.57	74	255	180	Peak

Note :

- "*" means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor) °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE5-CH50_Ant A+B (5110MHz-5350MHz)	Test Voltage	AC 120V/60Hz

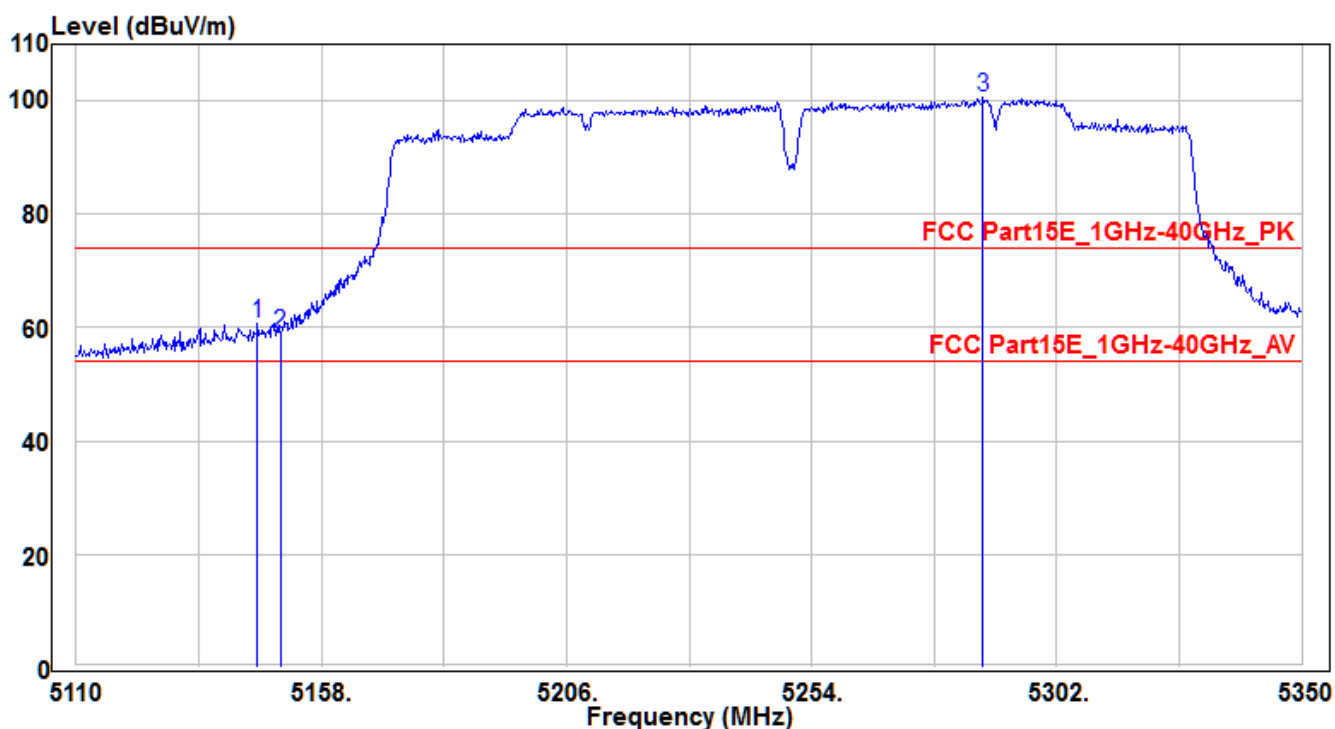


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5145.52	56.76	3.87	60.63	-13.37	74	160	160	Peak
2		5150	55.17	3.88	59.05	-14.95	74	160	160	Peak
3		5287.6	96.51	3.99	100.5	26.5	74	160	160	Peak

Note :

- "*" means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor) °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE5-CH50_Ant A+B (5110MHz-5350MHz)	Test Voltage	AC 120V/60Hz

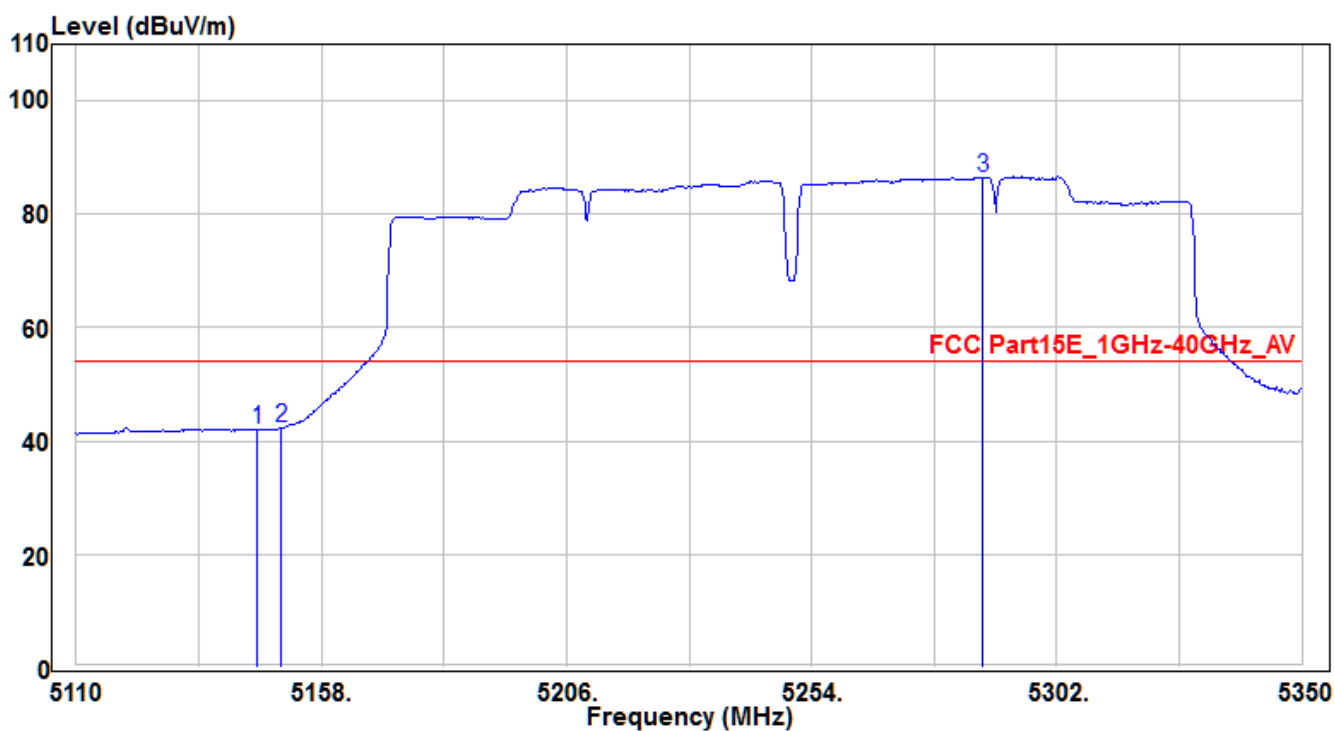


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5145.52	38.19	3.87	42.06	-11.94	54	160	160	Average
2	*	5150.08	38.39	3.88	42.27	-11.73	54	160	160	Average
3		5287.6	82.5	3.99	86.49	32.49	54	160	160	Average

Note :

- " * " means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor) °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE5-CH50_Ant A+B (5160MHz-5460MHz)	Test Voltage	AC 120V/60Hz

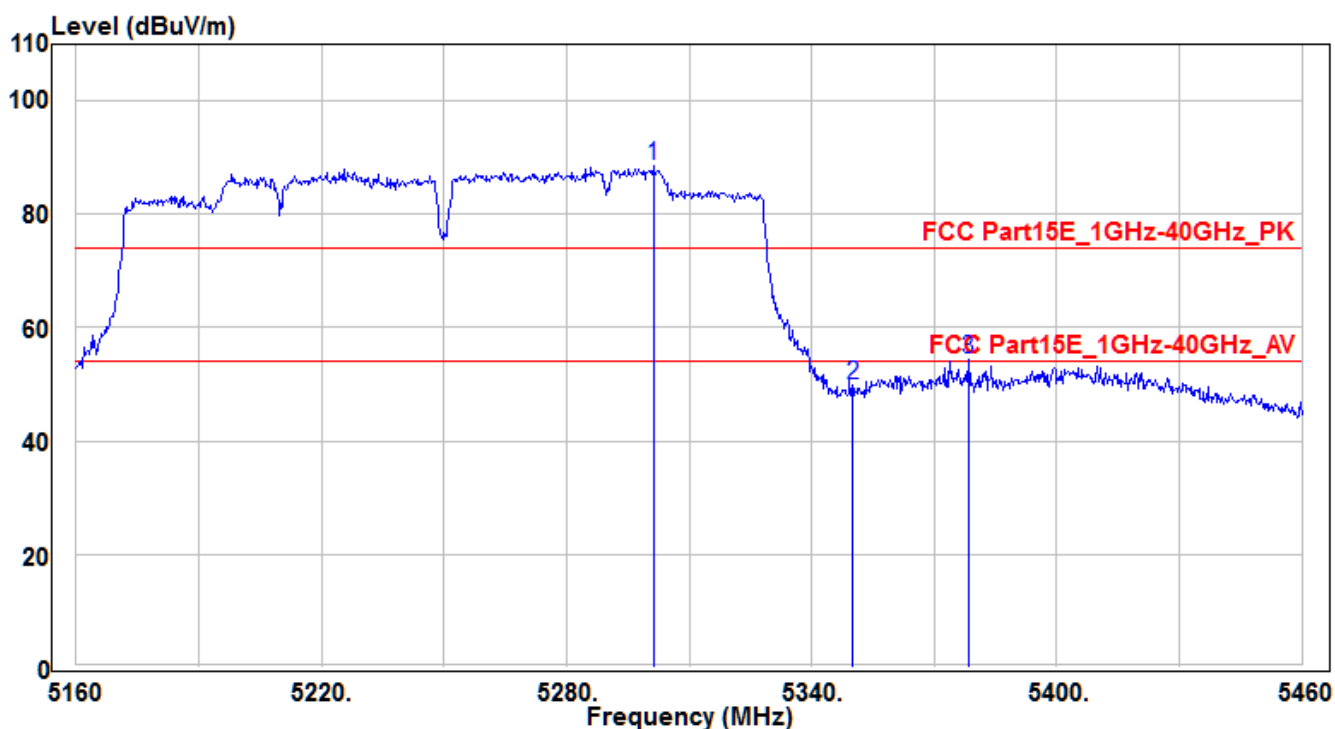


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5301.3	84.69	4	88.69	14.69	74	255	180	Peak
2	5350	45.79	4.04	49.83	-24.17	74	255	180	Peak
3	* 5378.4	50.48	4.07	54.55	-19.45	74	255	180	Peak

Note :

- "*" means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor) °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE5-CH50_Ant A+B (5160MHz-5460MHz)	Test Voltage	AC 120V/60Hz

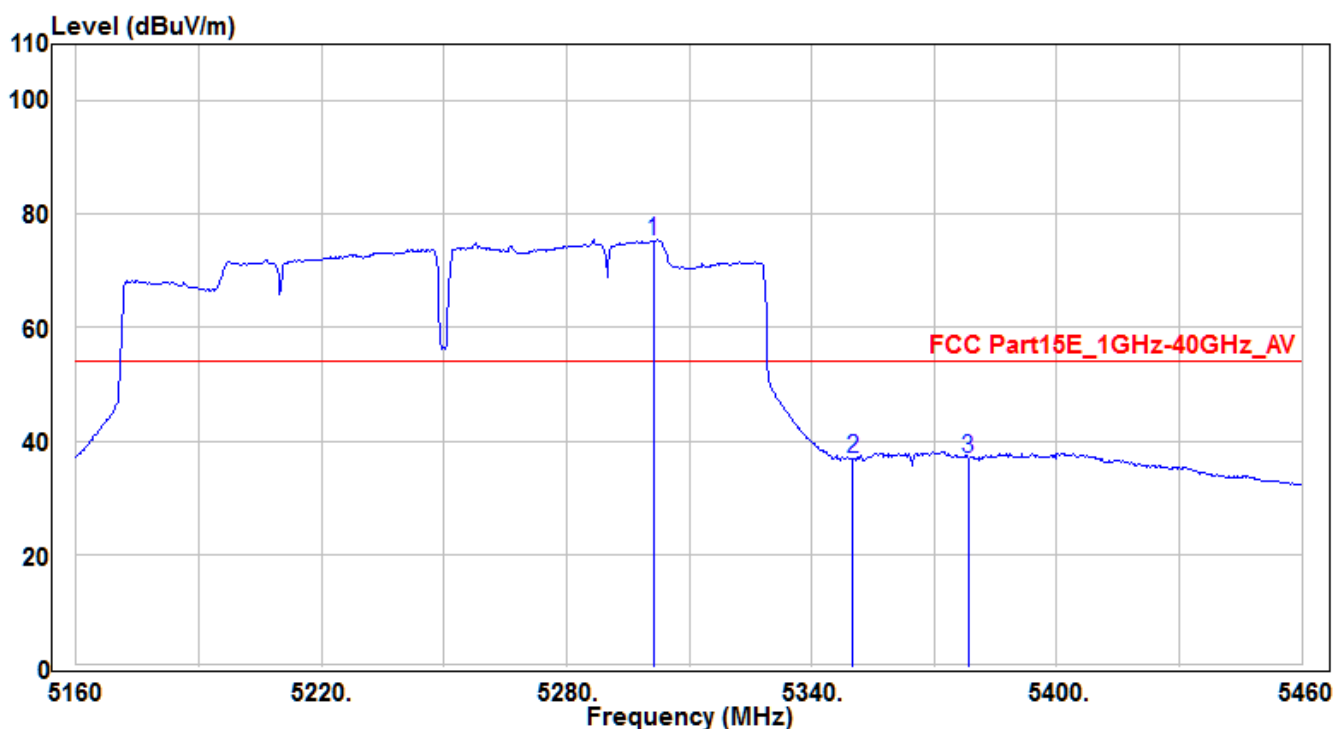


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5301.3	71.19	4	75.19	21.19	54	255	180	Average
2	5350	32.86	4.04	36.9	-17.1	54	255	180	Average
3	* 5378.4	32.86	4.07	36.93	-17.07	54	255	180	Average

Note :

- " * " means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor) °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE5-CH50_Ant A+B (5160MHz-5460MHz)	Test Voltage	AC 120V/60Hz

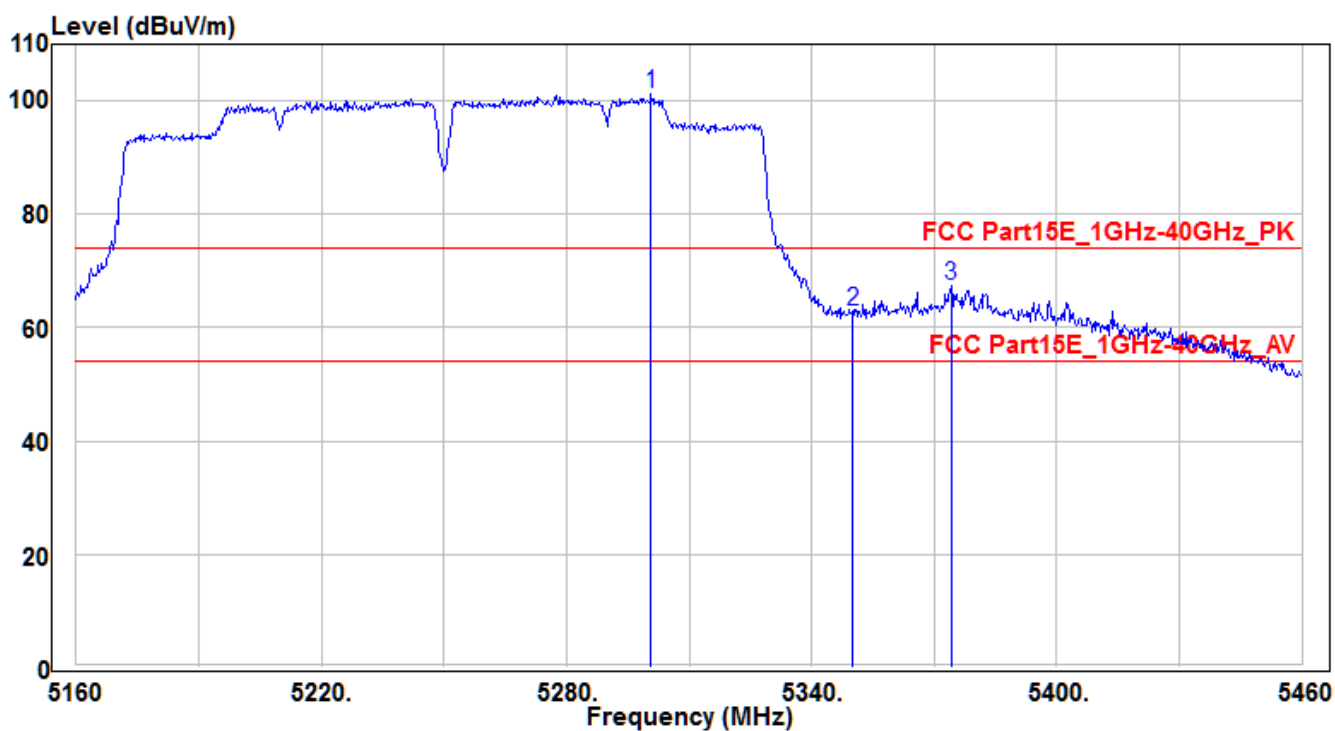


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5300.7	97.36	4	101.36	27.36	74	160	160	Peak
2	5350	58.9	4.04	62.94	-11.06	74	160	160	Peak
3	* 5374.2	63.24	4.06	67.3	-6.7	74	160	160	Peak

Note :

- "*" means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor) °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE5-CH50_Ant A+B (5160MHz-5460MHz)	Test Voltage	AC 120V/60Hz

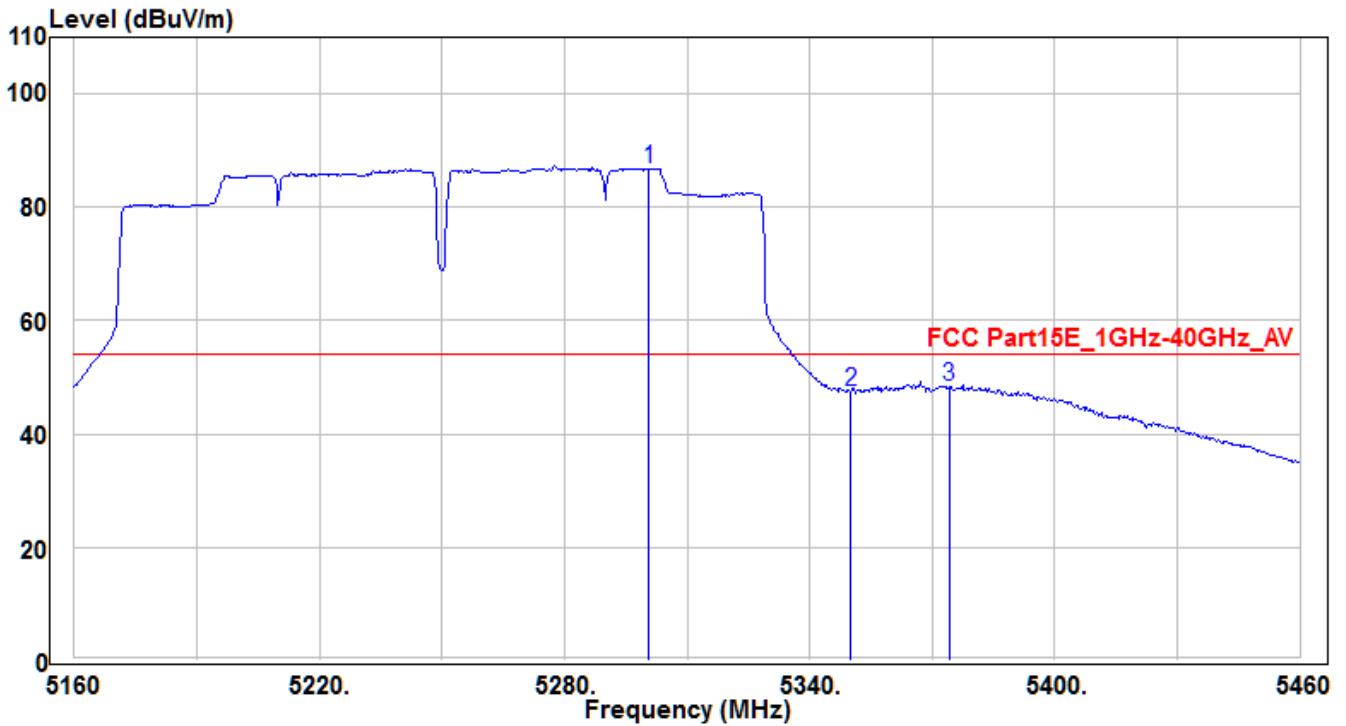


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5300.7	82.81	4	86.81	32.81	54	160	160	Average
2	5350	43.55	4.04	47.59	-6.41	54	160	160	Average
3	* 5374.2	44.25	4.06	48.31	-5.69	54	160	160	Average

Note :

- " * " means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor) °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Horizontal	Site / Engineer	AC1 / Fran
Test Mode	MODE5-CH114_Ant A+B	Test Voltage	AC 120V/60Hz

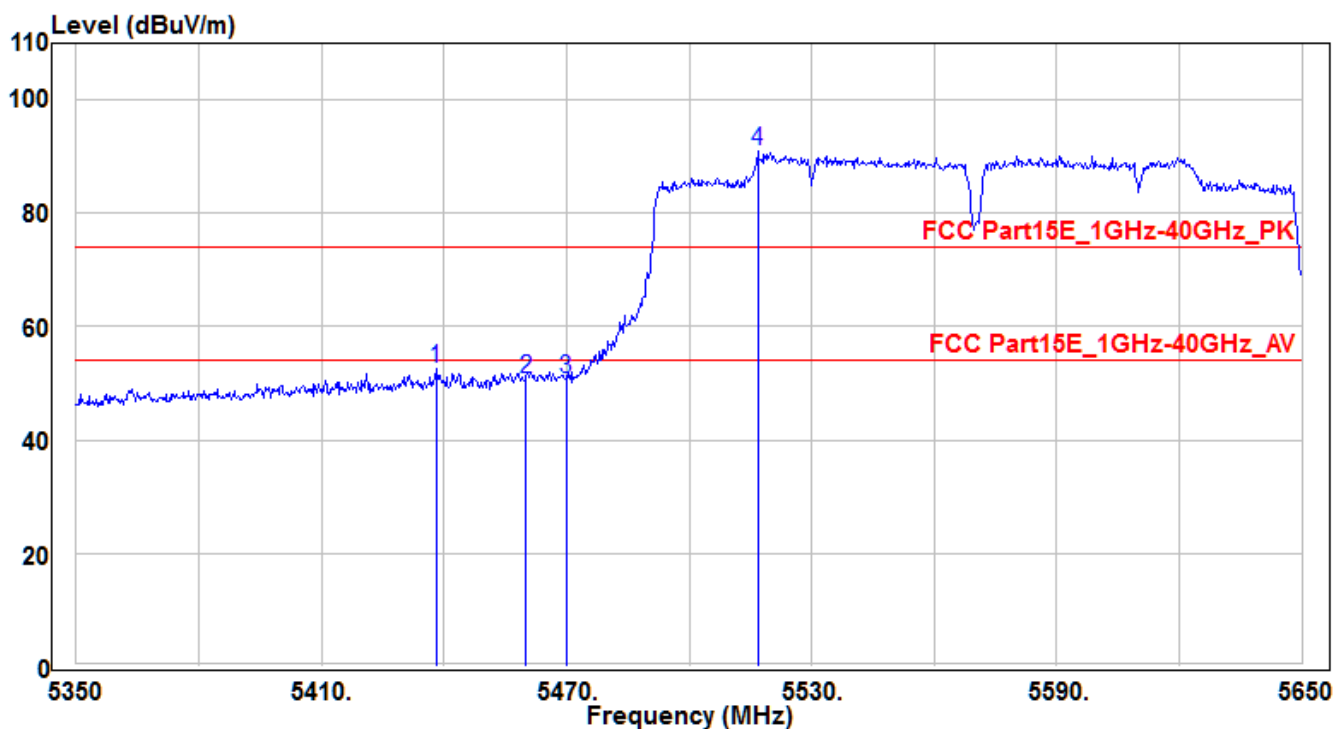


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5438.2	48.35	4.12	52.47	-21.53	74	170	140	Peak
2		5460	46.64	4.14	50.78	-23.22	74	170	140	Peak
3		5470	46.58	4.14	50.72	-23.28	74	170	140	Peak
4		5516.8	86.71	4.23	90.94	16.94	74	170	140	Peak

Note :

- "*" means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor) °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE5-CH114_Ant A+B	Test Voltage	AC 120V/60Hz

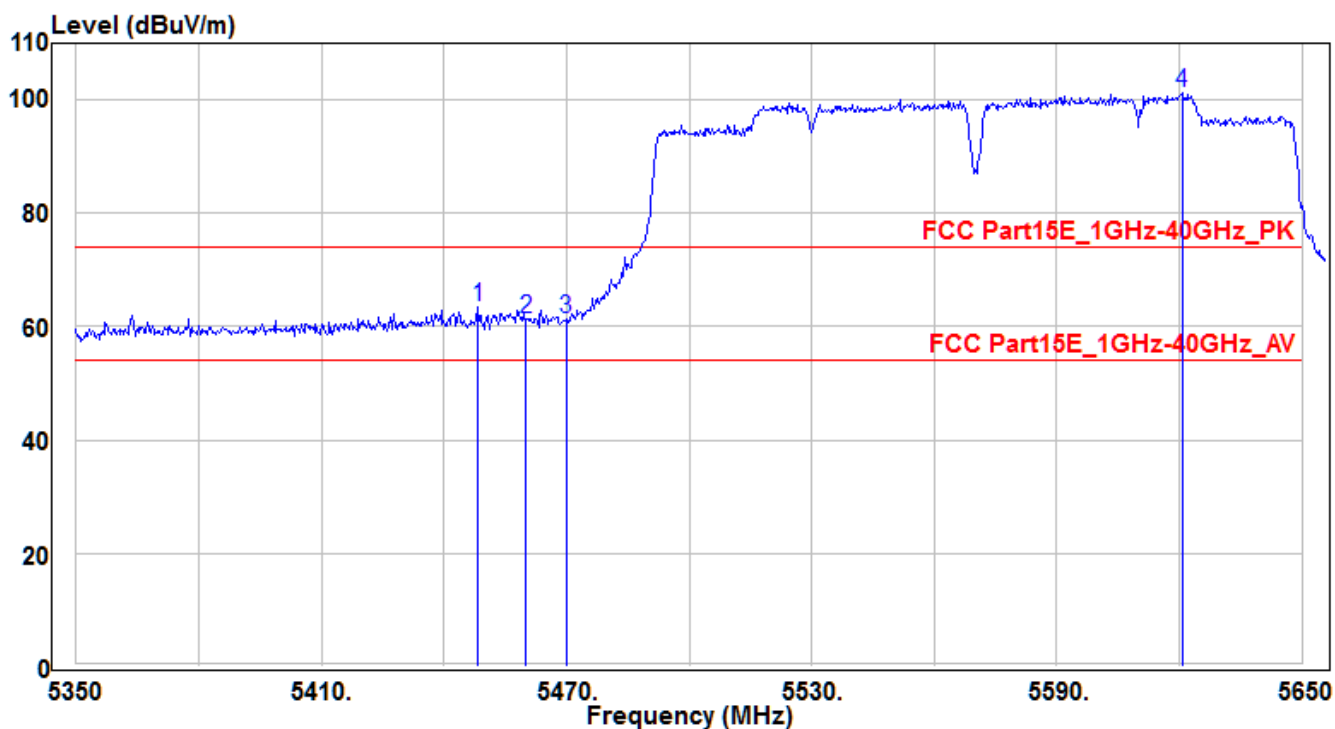


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5448.27	59.24	4.13	63.37	-10.63	74	150	155	Peak
2		5460	57.35	4.14	61.49	-12.51	74	150	155	Peak
3		5470	57.22	4.14	61.36	-12.64	74	150	155	Peak
4		5620.63	96.52	4.63	101.15	27.15	74	150	155	Peak

Note :

- "*" means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor) °

EUT	Wifi/BT Module	Test Date	2019/1/18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21°C / 57%
Polarity	Vertical	Site / Engineer	AC1 / Fran
Test Mode	MODE5-CH114_Ant A+B	Test Voltage	AC 120V/60Hz

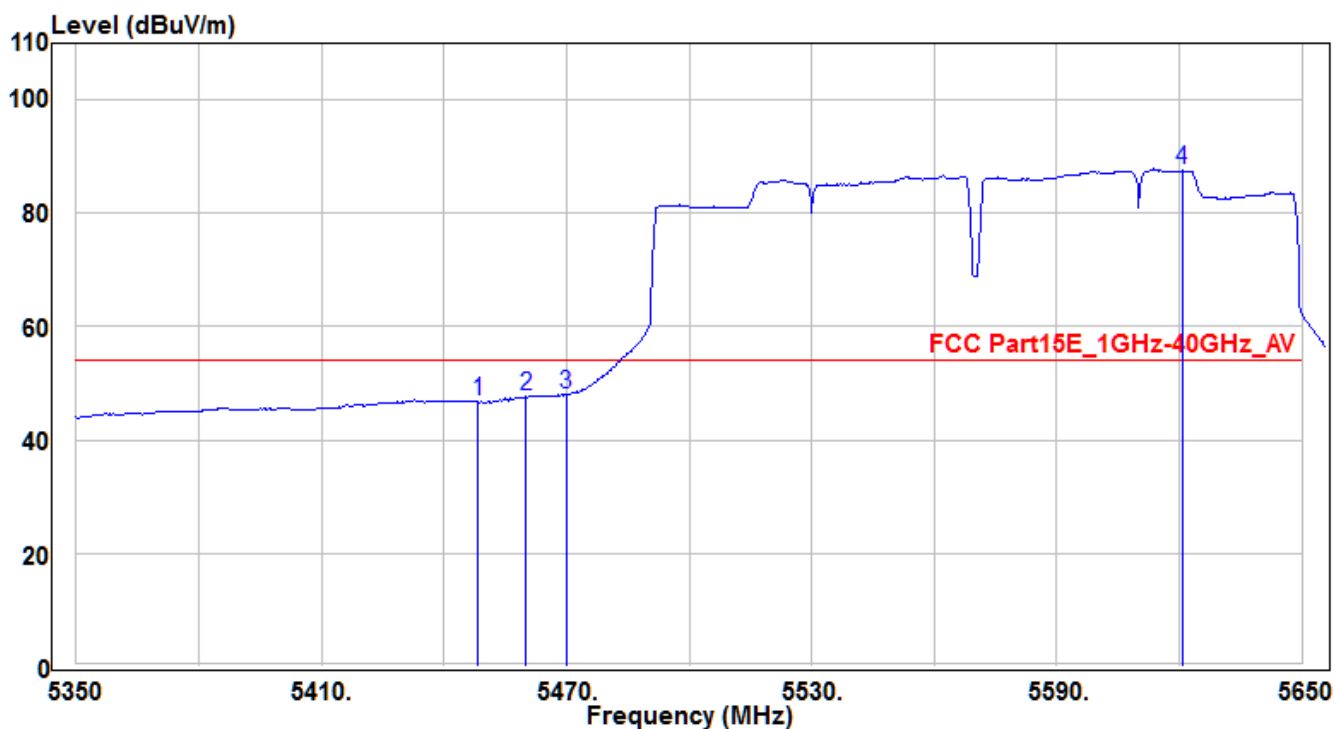

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5448.27	42.6	4.13	46.73	-7.27	54	150	155	Average
2	5460	43.5	4.14	47.64	-6.36	54	150	155	Average
3	* 5470	43.88	4.14	48.02	-5.98	54	150	155	Average
4	5620.63	82.92	4.63	87.55	33.55	54	150	155	Average

Note :

- "*" means the worst value in this measurement data °
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) °
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor) °

7.9. AC Conducted Emissions Measurement

7.9.1. Test Limit

FCC Part 15.207 Limits		
Frequency (MHz)	QP (dB μ V)	AV (dB μ V)
0.15 ~ 0.50	66 ~ 56	56 ~ 46
0.50 ~ 5.0	56	46
5.0 ~ 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.


7.9.2. Test Procedure

The EUT was setup according to ANSI C63.4, 2009 and tested according to KDB 789033 for compliance to FCC 47CFR 15.247 requirements. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs) Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.

The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.


Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.

7.9.3. Test Setup

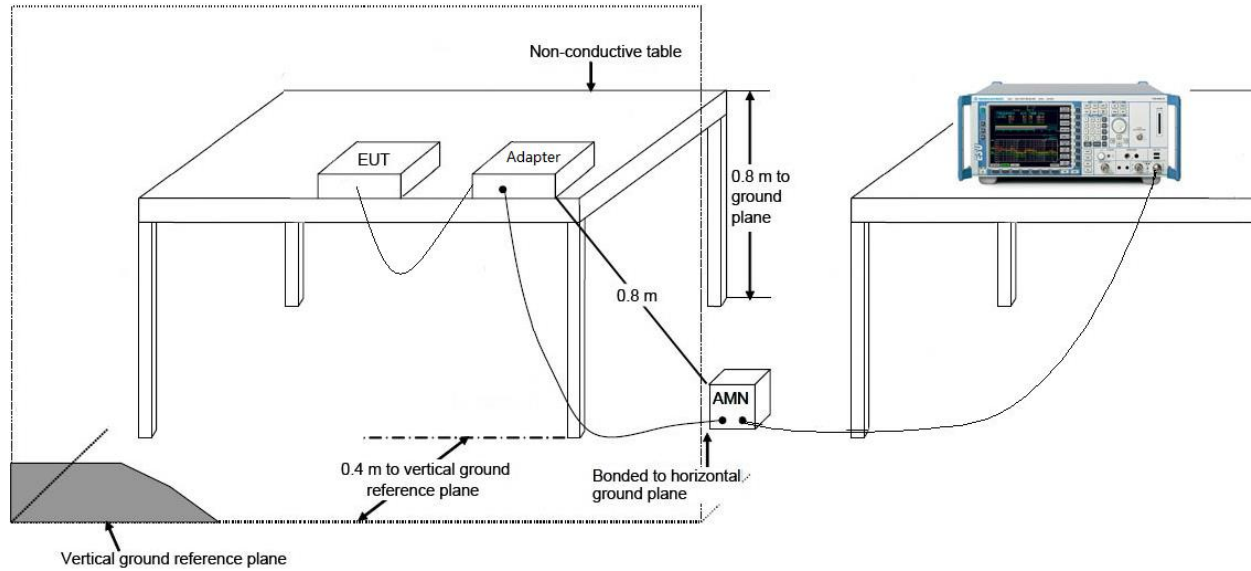

7.9.4. Test Result

EUT	Wifi/BT Module	Test Date	2018/12/16
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	24°C / 55%
Polarity	Line1	Site / Engineer	SR2 / Fran
Test Mode	MODE2	Test Voltage	AC120V/60Hz

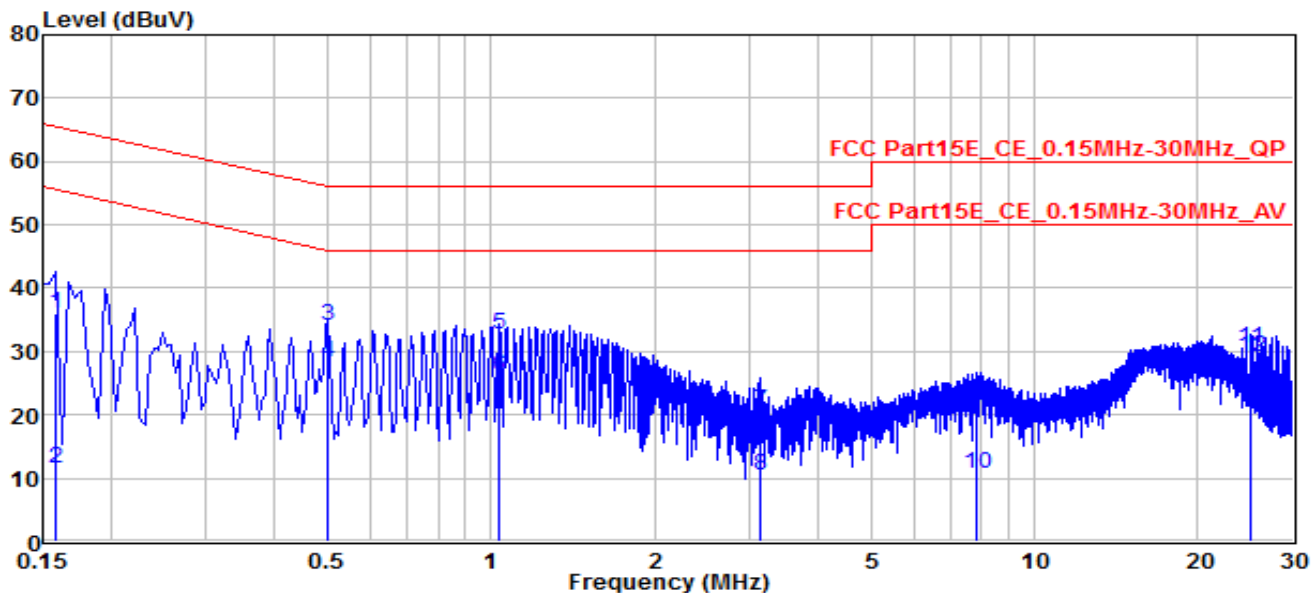


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1		0.159	26.06	10.08	36.14	-29.38	65.52	QP
2		0.159	1.4	10.08	11.48	-44.04	55.52	Average
3	*	0.50096	23.91	10.11	34.02	-21.98	56	QP
4	*	0.50096	18.14	10.11	28.25	-17.75	46	Average
5		1.036	22.77	9.89	32.66	-23.34	56	QP
6		1.036	16.32	9.89	26.21	-19.79	46	Average
7		3.142	10.87	9.82	20.69	-35.31	56	QP
8		3.142	0.64	9.82	10.46	-35.54	46	Average
9		7.867	11.29	9.81	21.1	-38.9	60	QP
10		7.867	1.04	9.81	10.85	-39.15	50	Average
11		24.938	20.41	10.05	30.46	-29.54	60	QP
12		24.938	19.19	10.05	29.24	-20.76	50	Average

Note:

- " * ", means this data is the worst emission level.
- C.F (Correction Factor) = Factor (dB)+ Cable Loss (dB)
- Measurement (dBuV) = Reading(dBuV)+ C.F (Correction Factor)

EUT	Wifi/BT Module	Test Date	2018/12/16
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	24°C / 55%
Polarity	Neutral	Site / Engineer	SR2 / Fran
Test Mode	MODE2	Test Voltage	AC120V/60Hz

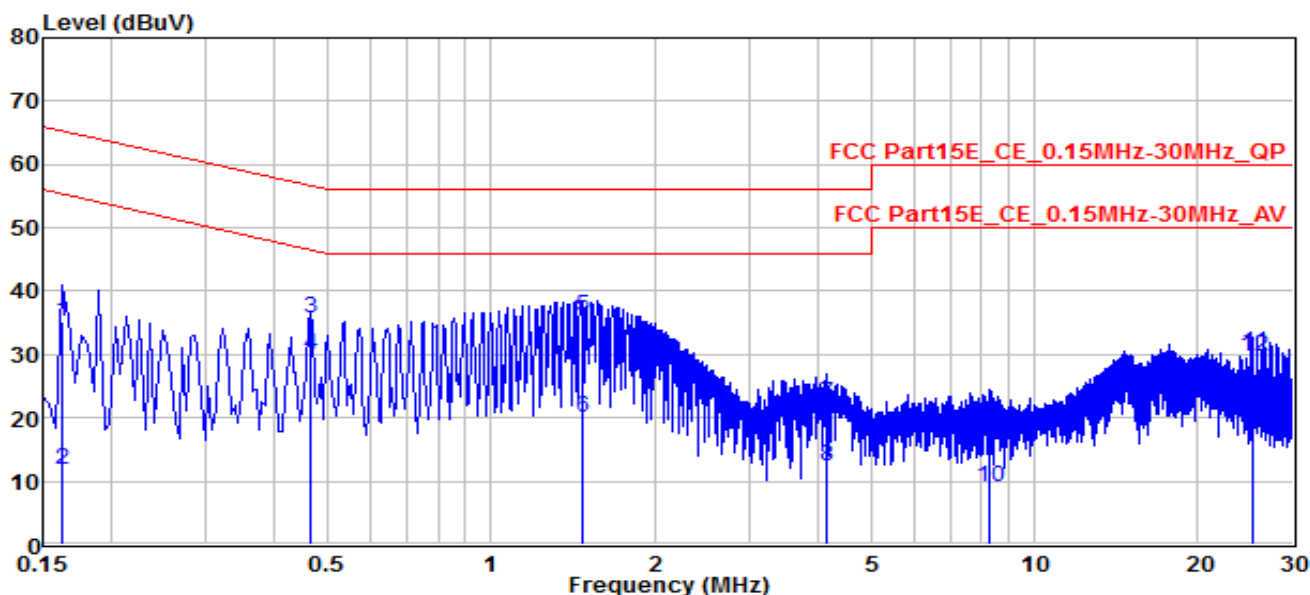

No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1		0.1635	25.08	10.1	35.18	-30.1	65.28	QP
2		0.1635	1.84	10.1	11.94	-43.34	55.28	Average
3	*	0.46497	25.7	10.1	35.8	-20.8	56.6	QP
4	*	0.46497	19.96	10.1	30.06	-16.54	46.6	Average
5		1.473	26.2	9.88	36.08	-19.92	56	QP
6		1.473	10.1	9.88	19.98	-26.02	46	Average
7		4.137	12.41	9.77	22.18	-33.82	56	QP
8		4.137	2.59	9.77	12.36	-33.64	46	Average
9		8.245	8.38	9.81	18.19	-41.81	60	QP
10		8.245	-0.63	9.81	9.18	-40.82	50	Average
11		25.329	20.12	10.11	30.23	-29.77	60	QP
12		25.329	19.5	10.11	29.61	-20.39	50	Average

Note:

- " * ", means this data is the worst emission level.
- C.F (Correction Factor) = Factor (dB)+ Cable Loss (dB)
- Measurement (dBuV) = Reading(dBuV)+ C.F (Correction Factor)

8. CONCLUSION

The data collected relate only the item(s) tested and show that the HPE EL300 Converged Edge System is in compliance with Part 15E of the FCC Rules & IC Rules.

_____ The End _____