


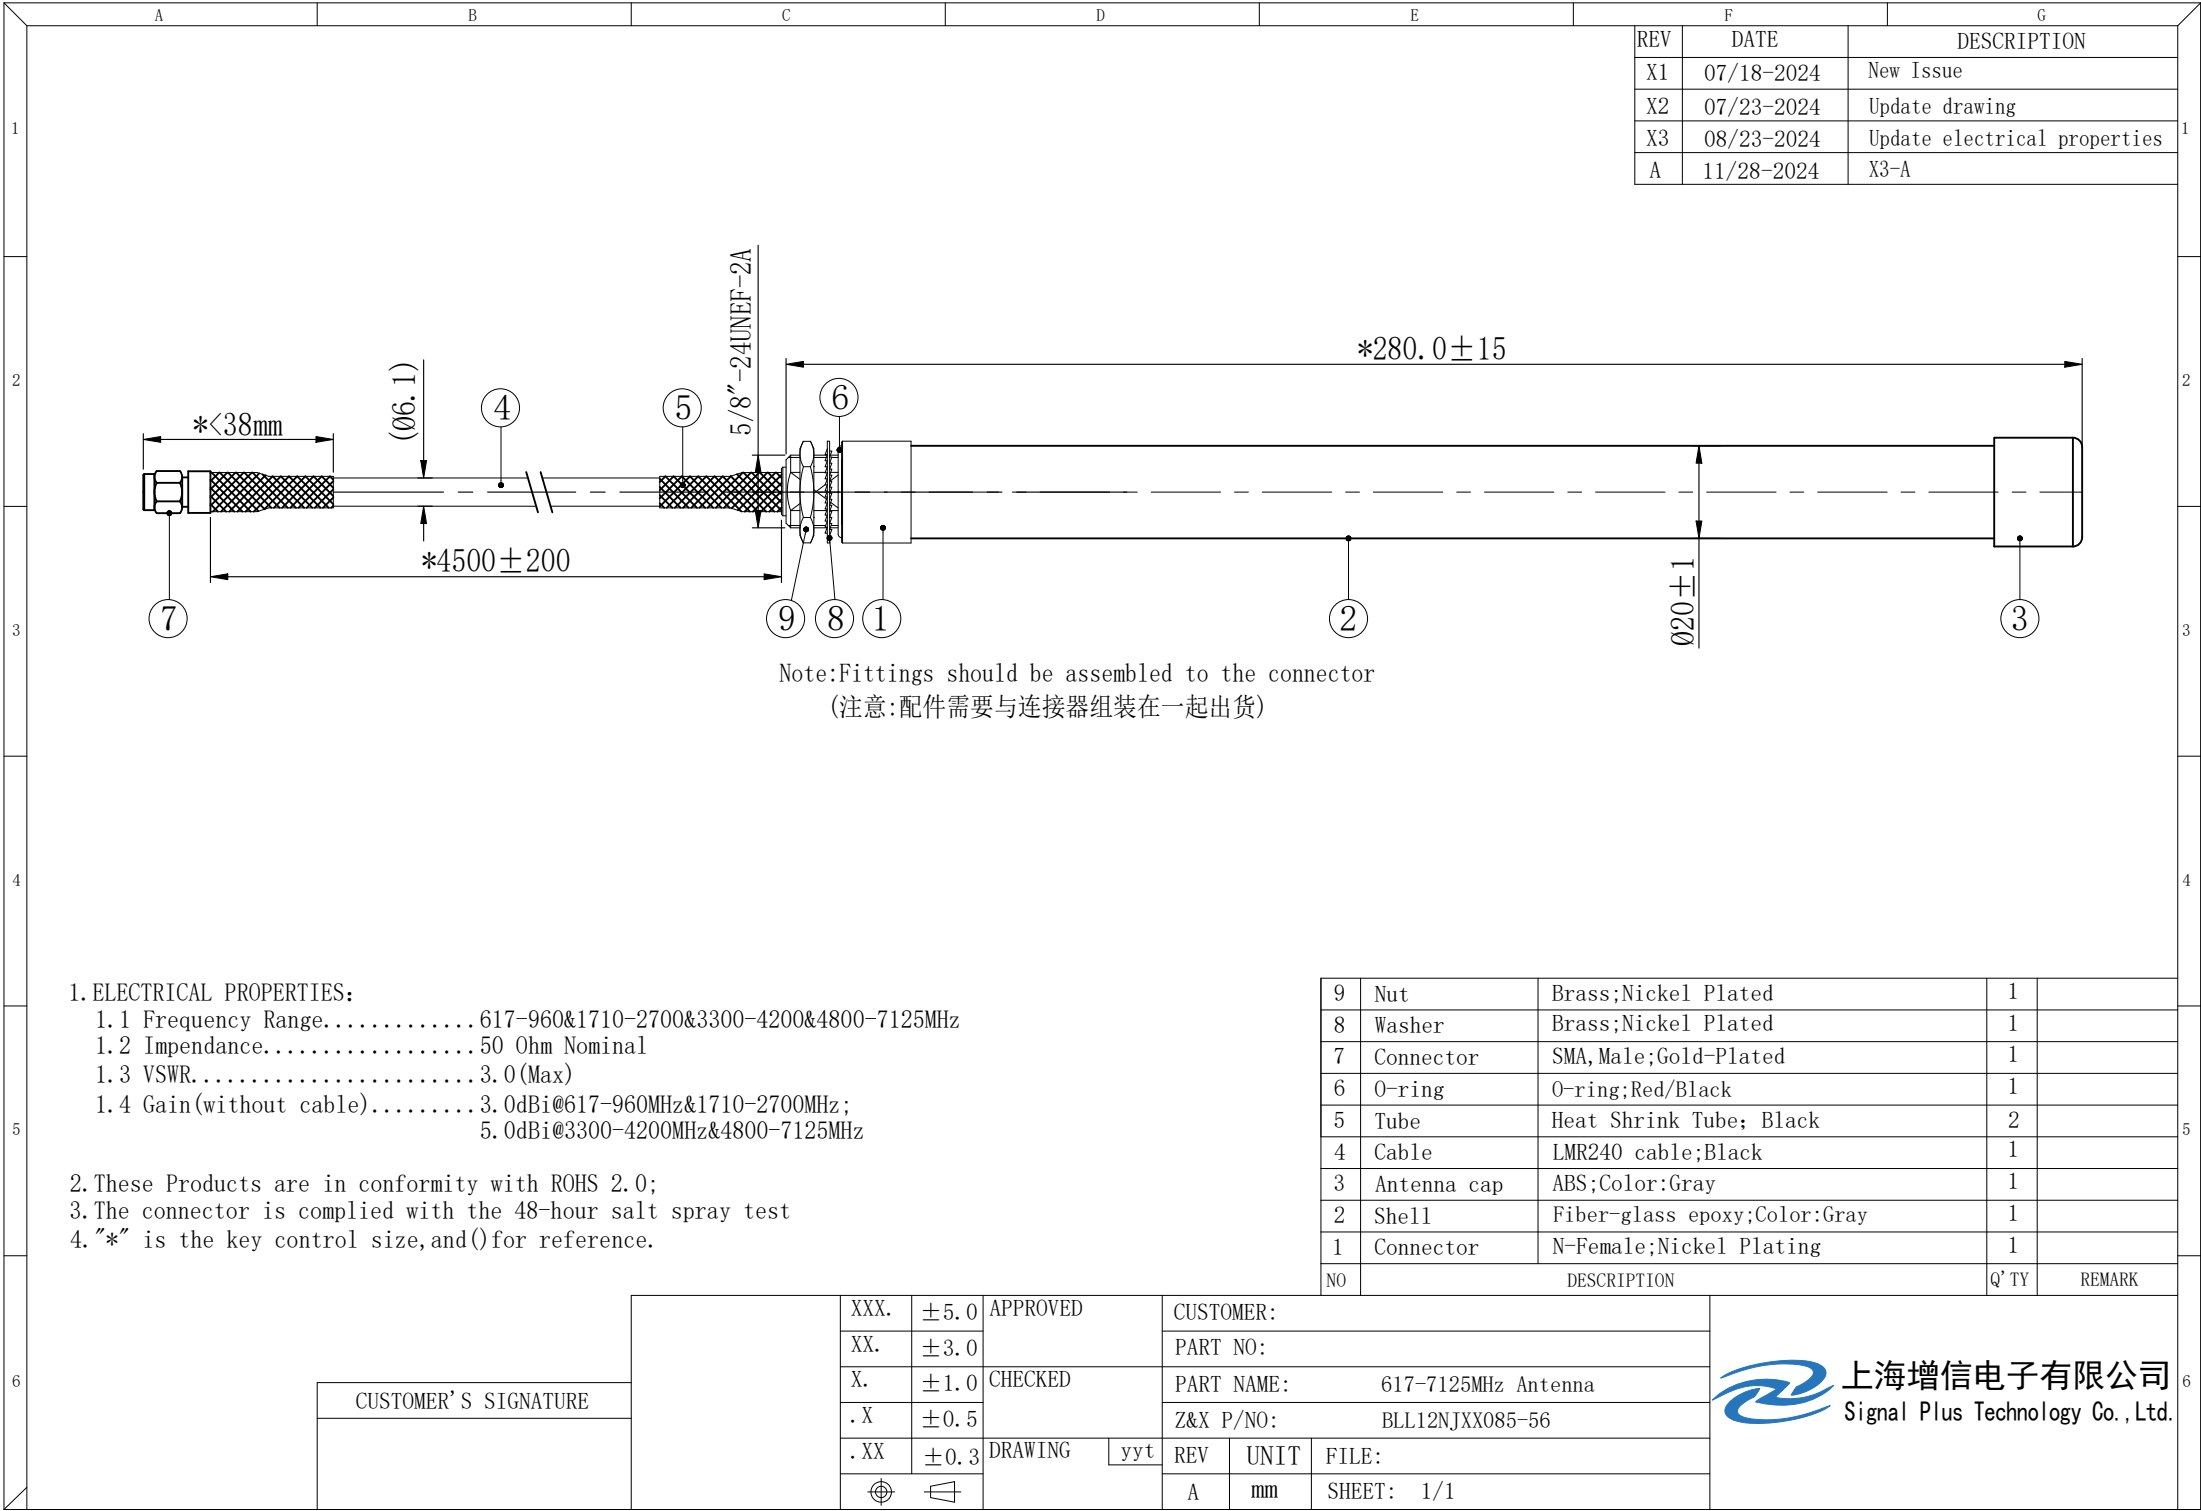

REV	DATE	DESCRIPTION
X1	07/18-2024	New Issue
X2	07/23-2024	Update drawing
X3	08/23-2024	Update electrical properties
A	11/28-2024	X3-A

Note:Fittings should be assembled to the connector
(注意:配件需要与连接器组装在一起出货)

1. ELECTRICAL PROPERTIES:

- 1.1 Frequency Range.....617-960&1710-2700&3300-4200&4800-7125MHz
1.2 Impedance.....50 Ohm Nominal
1.3 VSWR.....3.0(Max)
1.4 Gain(without cable).....3.0dBi@617-960MHz&1710-2700MHz;
5.0dBi@3300-4200MHz&4800-7125MHz

2. These Products are in conformity with ROHS 2.0;
3. The connector is complied with the 48-hour salt spray test
4. "*" is the key control size, and () for reference.

9	Nut	Brass;Nickel Plated	1	
8	Washer	Brass;Nickel Plated	1	
7	Connector	SMA, Male;Gold-Plated	1	
6	O-ring	O-ring;Red/Black	1	
5	Tube	Heat Shrink Tube; Black	2	
4	Cable	LMR240 cable;Black	1	
3	Antenna cap	ABS;Color:Gray	1	
2	Shell	Fiber-glass epoxy;Color:Gray	1	
1	Connector	N-Female;Nickel Plating	1	
NO	DESCRIPTION		Q' TY	REMARK

CUSTOMER'S SIGNATURE	XXX.	± 5.0	APPROVED	CUSTOMER:		
	XX.	± 3.0		PART NO:		
	X.	± 1.0		PART NAME: 617-7125MHz Antenna		
	. X	± 0.5	DRAWING	Z&X P/NO: BLL12NJXX085-56		
	. XX	± 0.3		REV	UNIT	FILE:
				A	mm	SHEET: 1/1

上海增信电子有限公司
Signal Plus Technology Co., Ltd.