

**FCC 47 CFR PART 22 SUBPART H****TEST REPORT****For****Nodegrid****Model No.: SR****Trade Name: ZPE***Issued to*

**ZPE Systems, Inc.**  
**46757 Fremont Blvd., Fremont, CA 94538, USA**

*Issued by*

**Compliance Certification Services Inc.**  
**Wugu Laboratory**  
**No.11, Wugong 6th Rd., Wugu Dist.,**  
**New Taipei City 24891, Taiwan. (R.O.C.)**  
**Issued Date: December 21, 2018**

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部分複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

**Revision History**

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	December 21, 2018	Initial Issue	ALL	Allison Chen

## TABLE OF CONTENTS

<b>1. TEST RESULT CERTIFICATION.....</b>	<b>4</b>
<b>2. EUT DESCRIPTION.....</b>	<b>5</b>
<b>3. TEST SUMMARY.....</b>	<b>6</b>
<b>4. TEST METHODOLOGY.....</b>	<b>7</b>
4.1    EUT CONFIGURATION .....	7
4.2    EUT EXERCISE .....	7
4.3    DESCRIPTION OF TEST MODES.....	7
4.4    THE WORST MODE OF MEASUREMENT.....	8
<b>5. INSTRUMENT CALIBRATION.....</b>	<b>9</b>
5.1    MEASURING INSTRUMENT CALIBRATION.....	9
5.2    MEASUREMENT EQUIPMENT USED.....	9
5.3    MEASUREMENT UNCERTAINTY .....	9
<b>6. FACILITIES AND ACCREDITATIONS.....</b>	<b>10</b>
6.1    FACILITIES.....	10
6.2    EQUIPMENT .....	10
<b>7. SETUP OF EQUIPMENT UNDER TEST.....</b>	<b>11</b>
7.1    SETUP CONFIGURATION OF EUT .....	11
7.2    SUPPORT EQUIPMENT .....	11
<b>8. FCC PART 22 REQUIREMENTS.....</b>	<b>12</b>
8.1    ERP MEASUREMENT .....	12
8.2    FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT .....	16
<b>APPENDIX-A PHOTOGRAPHS OF TEST SETUP .....</b>	<b>A-1</b>
<b>APPENDIX I - PHOTOGRAPHS OF EUT</b>	

Report No.: T180821D09-RP7

Page: 4 / 33  
Rev.: 00

## 1. TEST RESULT CERTIFICATION

**Applicant:** ZPE Systems, Inc.  
46757 Fremont Blvd., Fremont, CA 94538, USA

**Manufacturer:** ZPE Systems, Inc.  
46757 Fremont Blvd., Fremont, CA 94538, USA

**Equipment Under Test:** Nodegrid

**Trade Name:** ZPE

**Model:** SR

**Date of Test:** December 20, 2018

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR PART 22 SUBPART H	No non-compliance noted

### We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in TIA-603-E and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rule FCC PART 22 Subpart H.

The test results of this report relate only to the tested sample identified in this report.

*Approved by:*



---

Sam Chuang  
Manager  
Compliance Certification Services Inc.

*Tested by:*



---

Jerry Chuang  
Engineer  
Compliance Certification Services Inc.

## 2. EUT DESCRIPTION

<b>Product</b>	Nodegrid	
<b>Trade Name</b>	ZPE	
<b>Model</b>	SR	
<b>Model Discrepancy</b>	N/A	
<b>Received Date</b>	August 21, 2018	
<b>Power Supply</b>	Power from AC adapter or internal Power Supply	
<b>Frequency Range</b>	LTE Band 26 Channel Bandwidth: 1.4MHz	824.7MHz ~ 843.3MHz
	LTE Band 26 Channel Bandwidth: 3MHz	825.5MHz ~ 847.5MHz
	LTE Band 26 Channel Bandwidth: 5MHz	826.5MHz ~ 846.5MHz
	LTE Band 26 Channel Bandwidth: 10MHz	829MHz ~ 841MHz
	LTE Band 26 Channel Bandwidth: 15MHz	831.5MHz ~ 841.5MHz
	LTE Band 26	QPSK, 16QAM
<b>Antenna Specification</b>	External Antenna LTE Band 26: 2.6 dBi	
<b>Transmit Power (ERP Power)</b>	LTE Band 26 Channel Bandwidth: 1.4MHz	QPSK: 27.36 dBm 16QAM: 27.99 dBm
	LTE Band 26 Channel Bandwidth: 3MHz	QPSK: 27.26 dBm 16QAM: 28.28 dBm
	LTE Band 26 Channel Bandwidth: 5MHz	QPSK: 27.39 dBm 16QAM: 28.76 dBm
	LTE Band 26 Channel Bandwidth: 10MHz	QPSK: 27.52 dBm 16QAM: 27.99 dBm
	LTE Band 26 Channel Bandwidth: 15MHz	QPSK: 27.96 dBm 16QAM: 28.50 dBm

**Remark:** The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.

### 3. TEST SUMMARY

FCC Standard Section	Report Section	Test Item	Result
-	2	Antenna Requirement	Pass
2.1046	-	Output Power measurement	N/A
22.913(a)	8.1	ERP Measurement	Pass
2.1055, 22.355	-	Frequency Stability v.s. temperature measurement	N/A
2.1049	-	Occupied Bandwidth Measurement	N/A
22.917(a)	-	Conducted Band Edge	N/A
22.913(d)	-	Peak to Average Ratio	N/A
22.917(a)	-	Conducted Spurious Emission	N/A
22.917(a)	8.2	Spurious Radiation Measurement	Pass

## 4. TEST METHODOLOGY

Both conducted and radiated testing were performed according to the procedures document on chapter 13 of TIA-603-E and FCC CFR 47, Part 2 and Part 22 Subpart H, KDB 971168 D01 Power Meas License Digital Systems.

### 4.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### 4.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

### 4.3 DESCRIPTION OF TEST MODES

The EUT had been tested under operating condition.

Software used to control the EUT for staying in continuous transmitting mode was programmed.

#### LTE Band 26: 824 MHz ~ 849 MHz

Three channels had been tested for each channel bandwidth.

Channel Bandwidth	1.4MHz		3MHz		5MHz	
	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
Low channel (L)	26797	824.7	26805	825.5	26815	826.5
Middle channel (M)	26915	836.5	26915	836.5	26915	836.5
High channel (H)	27033	848.3	27025	847.5	27015	846.5
Channel Bandwidth	10MHz		15MHz			
	Channel	Frequency (MHz)	Channel	Frequency (MHz)		
Low channel (L)	26840	829	26865	831.5		
Middle channel (M)	26915	836.5	26915	836.5		
High channel (H)	26960	841	26965	841.5		

For test mode:

The conducted power be measured in 1, 50% and 100% RB allocation, offset to upper edge, centered and lower edge of the channel bandwidth of each required channel.

	QPSK	Worst Mode		16QAM	Worst Mode	
		Band26	1M	3M	5M	10M
		1 RB ALLOCATED AT THE LOWER EDGE				
		1 RB ALLOCATED AT THE LOWER EDGE				
		1 RB ALLOCATED AT THE LOWER EDGE				
		1 RB ALLOCATED AT THE LOWER EDGE				
		1 RB ALLOCATED AT THE LOWER EDGE				

#### 4.4 THE WORST MODE OF MEASUREMENT

Radiated Emission Measurement	
Test Condition	Emission for Unwanted and Fundamental
Power supply Mode	Mode 1: EUT Power by adapter.
Worst Mode	<input checked="" type="checkbox"/> Mode 1 <input type="checkbox"/> Mode 2 <input type="checkbox"/> Mode 3 <input type="checkbox"/> Mode 4
Position	<input type="checkbox"/> Placed in fixed position. <input checked="" type="checkbox"/> Placed in fixed position at X-Plane (E2-Plane) <input type="checkbox"/> Placed in fixed position at Y-Plane (E1-Plane) <input type="checkbox"/> Placed in fixed position at Z-Plane (H-Plane)

*Remark:*

1. The worst mode was record in this test report.
2. The EUT pre-scanned in three axis ,X, Y, Z and two polarity, Horizontal and Vertical for radiated measurement. The worst case (X-Plane) were recorded in this report.

## 5. INSTRUMENT CALIBRATION

### 5.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

### 5.2 MEASUREMENT EQUIPMENT USED

#### Equipment Used for Emissions Measurement

Wugu Fully Chamber					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Bilog Antenna	Sunol Sciences	JB1	A052609	03/14/2018	03/13/2019
Cable	HUBER SUHNER	SUCOFLEX 104PEA	23452	06/29/2018	06/28/2019
Cable	HUBER SUHNER	SUCOFLEX 104PEA	33960	06/29/2018	06/28/2019
Digital Radio Communication Tester	R&S	CMU200	116604	07/19/2018	07/18/2019
Digital Thermo-Hygro Meter	WISEWIND	1110	D06	02/08/2018	02/07/2019
Horn Antenna	SCHWARZBECK	BBHA 9120D	779	03/14/2018	03/13/2019
Pre-Amplifier	Anritsu	MH648A	M89145	06/29/2018	06/28/2019
Pre-Amplifier	EMEC	EM01G26G	060570	06/29/2018	06/28/2019
Signal Analyzer	Agilent	N9010A	MY52220817	03/22/2018	03/21/2019
Wideband Radio Communication Tester	R&S	CMW 500	116875	04/20/2018	04/19/2019
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R	N.C.R
Turn Table	CCS	CC-T-1F	N/A	N.C.R	N.C.R
Software	EZ-EMC (CCS-3A1RE)				

### 5.3 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
Powerline Conducted Emission	N/A
3M Semi Anechoic Chamber / 30M~200M	+/- 4.0138
3M Semi Anechoic Chamber / 200M~1000M	+/- 3.9483
3M Semi Anechoic Chamber / 1G~8G	+/- 2.5975
3M Semi Anechoic Chamber / 8G~18G	+/- 2.6112
3M Semi Anechoic Chamber / 18G~26G	+/- 2.7389
3M Semi Anechoic Chamber / 26G~40G	+/- 2.9683

**Remark:** This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

## 6. FACILITIES AND ACCREDITATIONS

### 6.1 FACILITIES

- No.199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.
- No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan, R.O.C

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

### 6.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

## 7. SETUP OF EQUIPMENT UNDER TEST

### 7.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

### 7.2 SUPPORT EQUIPMENT

No	Equipment	Brand	Model	Series No.	FCC ID	Data Cable
	N/A					

**Remark:**

1. *All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.*
2. *Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.*

Report No.: T180821D09-RP7

## 8. FCC PART 22 REQUIREMENTS

### 8.1 ERP MEASUREMENT


#### LIMIT

According to FCC §2.1046


FCC 22.913(a): The Effective Radiated Power (ERP) of mobile transmitters must not exceed 7 Watts.


#### TEST CONFIGURATION

##### Below 1 GHz

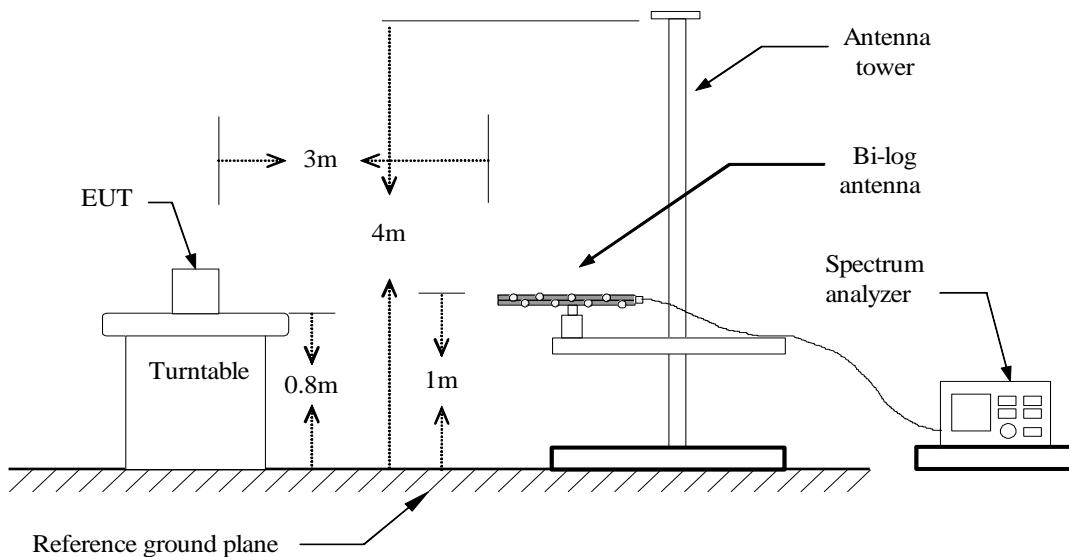

##### Above 1 GHz

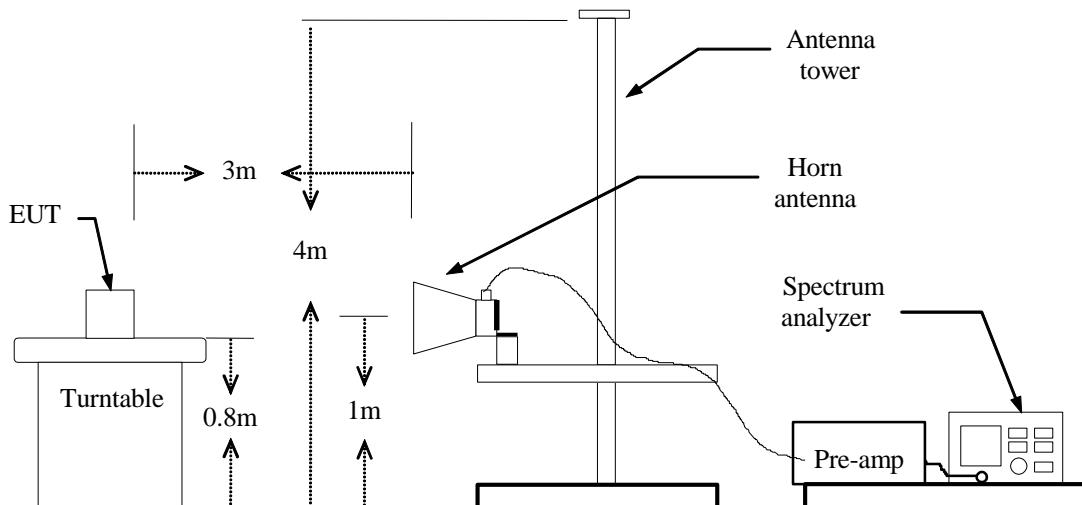

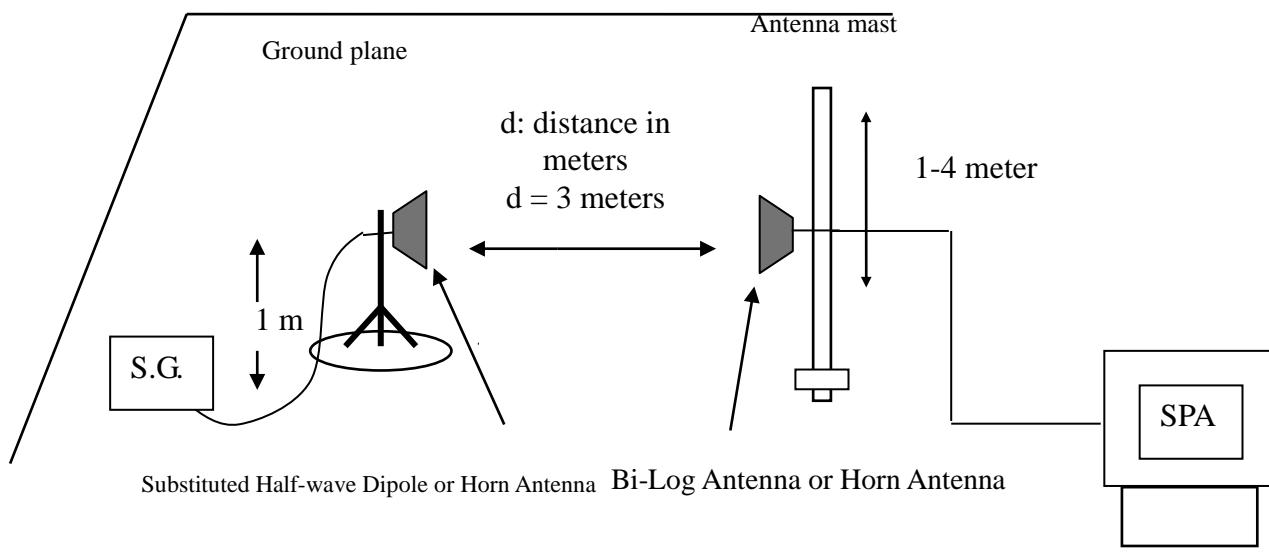**For Substituted Method Test Set-UP****TEST PROCEDURE**

1. The EUT was placed on a non-conductive rotating platform (0.8m for below 1G and above 1G) in a semi-chamber. The radiated emission at the fundamental frequency was measured at 3m and SA with RMS detector per section 5, KDB 971168 D01 Power Meas License Digital Systems.
2. During the measurement, the call box parameters were set to get the maximum output power of the EUT. The maximum emission was recorded from spectrum analyzer power level (LVL) from 360 degrees rotation of turntable and the test antenna raised and lowered over a range from 1m to 4m in both horizontally and vertically polarized orientations.
3. EIRP was measured method according to TIA/EIA-603-E. The EUT was replaced by the substitution antenna at same location, and then record the maximum Analyzer reading through raised and lowered the test antenna.

$$\text{ERP} = \text{S.G. output (dBm)} + \text{Antenna Gain (dBi)} - \text{Cable (dB)} - 2.15$$

$$\text{EIRP} = \text{S.G. output (dBm)} + \text{Antenna Gain (dBi)} - \text{Cable (dB)}$$

**TEST RESULTS**

*No non-compliance noted.*

**LTE Band 26****BW: 1.4MHz / RB=1, RB Offset=0**

Band	BW (MHz)	Channel	Mode	UL RB Allocation	UL RB offset	Vertical		Horizontal	
						EIRP (dBm)	EIRP (W)	EIRP (dBm)	EIRP (W)
26	1.4	Lowest	QPSK	1	0	12.29	0.0169	26.94	0.4943
		Middle		1	0	12.80	0.0191	27.36	0.5445
		Highest		1	0	13.59	0.0229	26.97	0.4977
		Lowest	16 QAM	1	0	13.07	0.0203	27.30	0.5370
		Middle		1	0	13.57	0.0228	27.99	0.6295
		Highest		1	0	13.98	0.0250	26.93	0.4932

**BW: 3MHz / RB=1, RB Offset=0**

Band	BW (MHz)	Channel	Mode	UL RB Allocation	UL RB offset	Vertical		Horizontal	
						EIRP (dBm)	EIRP (W)	EIRP (dBm)	EIRP (W)
26	3	Lowest	QPSK	1	0	11.29	0.0135	27.26	0.5321
		Middle		1	0	11.97	0.0157	27.12	0.5152
		Highest		1	0	11.08	0.0128	27.10	0.5129
		Lowest	16 QAM	1	0	12.68	0.0185	26.92	0.4920
		Middle		1	0	12.95	0.0197	28.28	0.6730
		Highest		1	0	14.45	0.0279	27.38	0.5470

**BW: 5MHz / RB=1, RB Offset=0**

Band	BW (MHz)	Channel	Mode	UL RB Allocation	UL RB offset	Vertical		Horizontal	
						EIRP (dBm)	EIRP (W)	EIRP (dBm)	EIRP (W)
26	5	Lowest	QPSK	1	0	11.05	0.0127	27.39	0.5483
		Middle		1	0	12.09	0.0162	27.21	0.5260
		Highest		1	0	10.85	0.0122	26.98	0.4989
		Lowest	16 QAM	1	0	11.63	0.0146	27.19	0.5236
		Middle		1	0	12.31	0.0170	28.76	0.7516
		Highest		1	0	10.99	0.0126	27.06	0.5082

**BW: 10MHz / RB=1, RB Offset=0**

Band	BW (MHz)	Channel	Mode	UL RB Allocation	UL RB offset	Vertical		Horizontal	
						EIRP (dBm)	EIRP (W)	EIRP (dBm)	EIRP (W)
26	10	Lowest	QPSK	1	0	10.39	0.0109	27.20	0.5248
		Middle		1	0	11.41	0.0138	27.52	0.5649
		Highest		1	0	10.85	0.0122	27.48	0.5598
		Lowest	16 QAM	1	0	11.08	0.0128	26.93	0.4932
		Middle		1	0	11.93	0.0156	27.70	0.5888
		Highest		1	0	11.57	0.0144	27.99	0.6295

**BW: 15MHz / RB=1, RB Offset=0**

Band	BW (MHz)	Channel	Mode	UL RB Allocation	UL RB offset	Vertical		Horizontal	
						EIRP (dBm)	EIRP (W)	EIRP (dBm)	EIRP (W)
26	15	Lowest	QPSK	1	0	10.13	0.0103	27.10	0.5129
		Middle		1	0	10.05	0.0101	27.86	0.6109
		Highest		1	0	11.05	0.0127	27.96	0.6252
		Lowest	16 QAM	1	0	9.87	0.0097	27.44	0.5546
		Middle		1	0	10.49	0.0112	27.90	0.6166
		Highest		1	0	10.88	0.0122	28.50	0.7079


## 8.2 FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT

### LIMIT


The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log_{10}(P)$  dB. The limit of emission equal to  $-13\text{dBm}$


### Test Configuration

#### Below 1 GHz

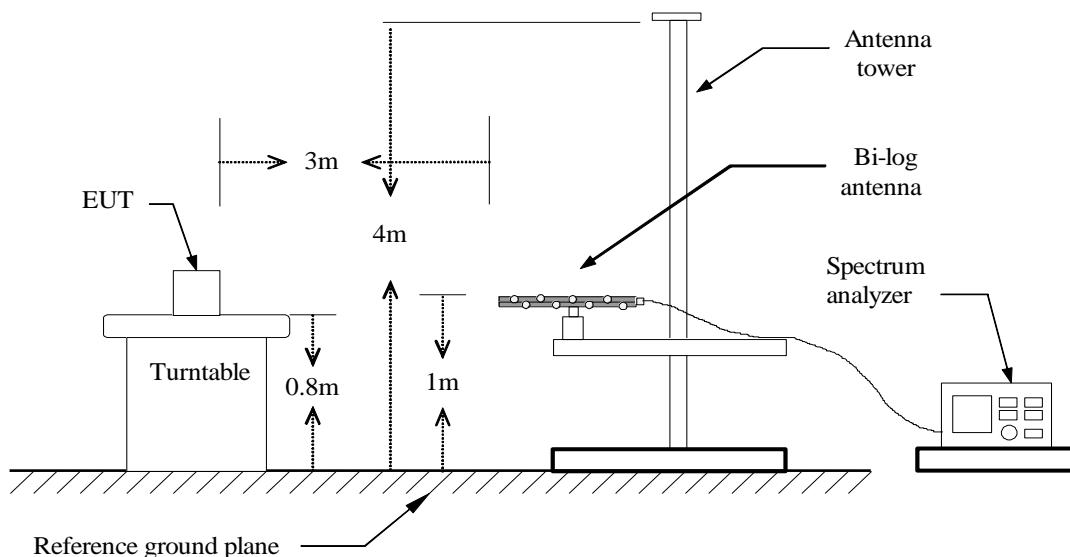

#### Above 1 GHz

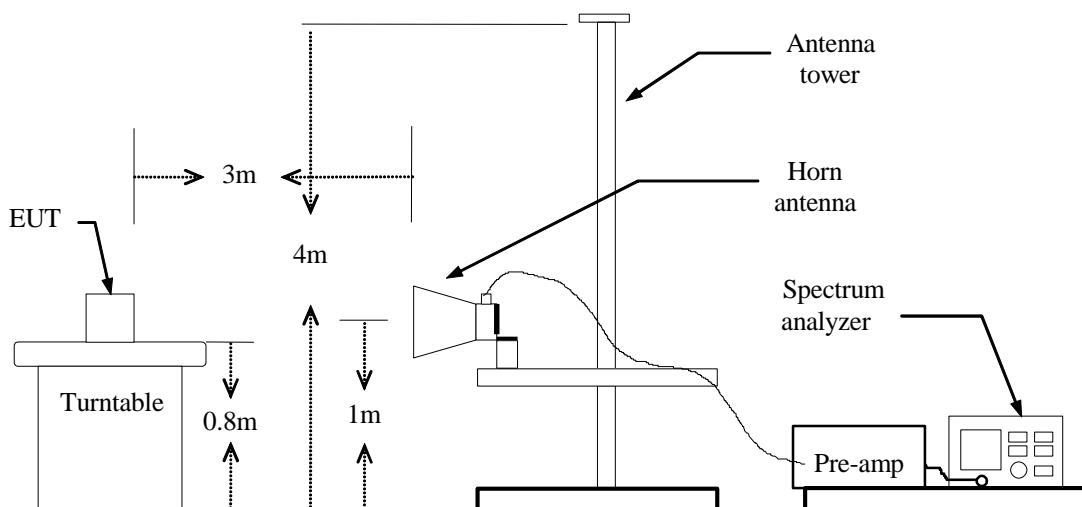

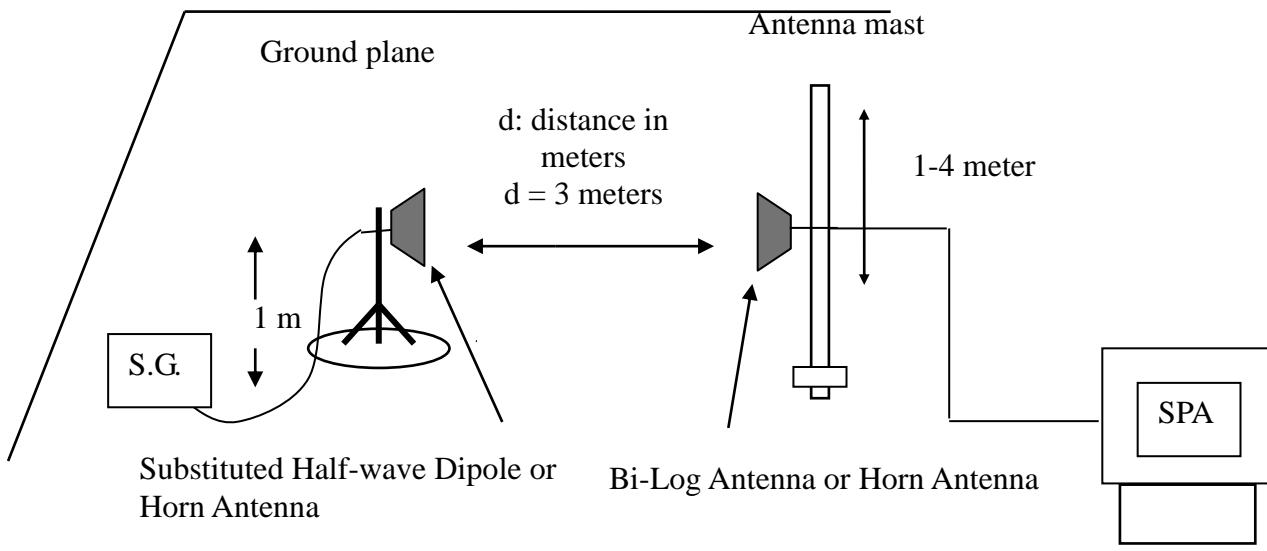**Substituted Method Test Set-up****TEST PROCEDURE**

1. According to KDB 971168 D01 Power Meas License Digital Systems and TIA-603-E Section 2.2.12.
2. The EUT was placed on a turntable
  - (1) Below 1G : 0.8m
  - (2) Above 1G : 0.8m
  - (3) EUT set 3m from the receiving antenna
  - (4) The table was rotated 360 degrees of the highest spurious emission to determine the position.
3. Set the spectrum analyzer , RBW=1MHz, VBW=3MHz.
4. A horn antenna was driven by a signal generator.
5. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission


ERP = S.G. output (dBm) + Antenna Gain (dBi) – Cable (dB) - 2.15

EIRP = S.G. output (dBm) + Antenna Gain (dBi) – Cable (dB)

**TEST RESULTS**

Refer to the attached tabular data sheets.


Report No.: T180821D09-RP7

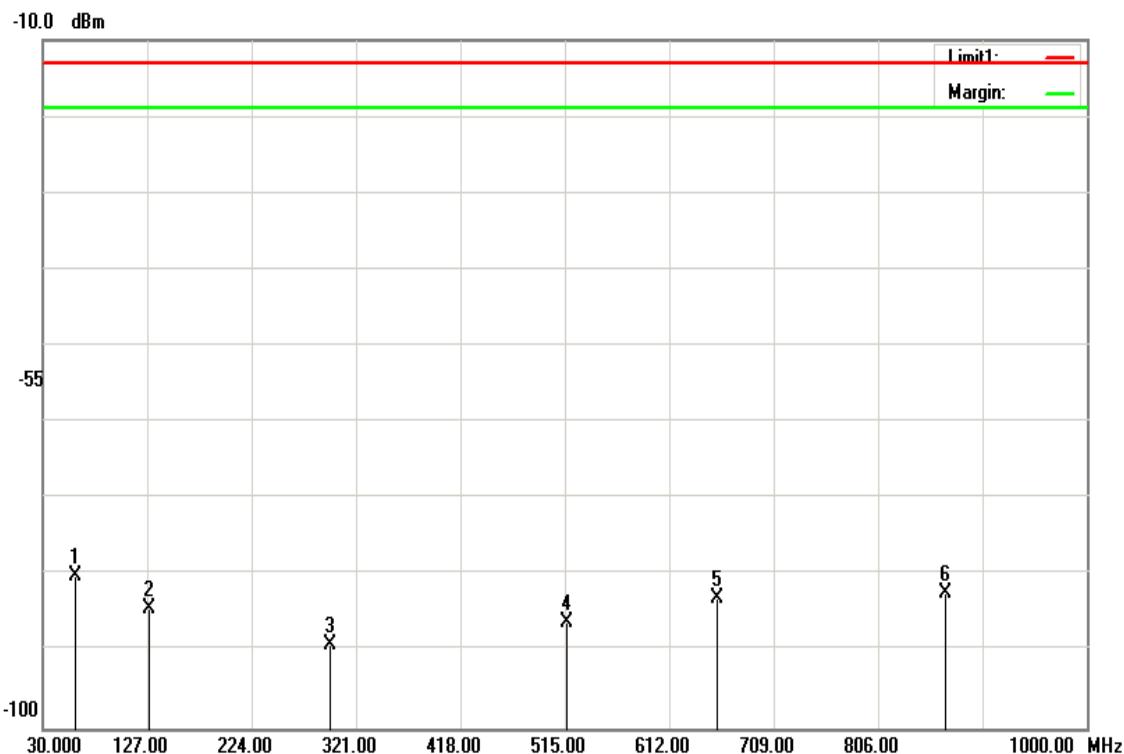Page: 18 / 33  
Rev.: 00**Test Results****Below 1GHz****LTE Band 26 / BW: 15MHz / QPSK / RB =1, RB Offset = 0****Operation Mode:** Tx / Mid CH      **Test Date:** December 20, 2018**Temperature:** 23°C      **Tested by:** Jerry Chuang**Humidity:** 46 %RH      **Polarity:** Ver.

Frequency (MHz)	S.G. (dBm)	Cable loss(dB)	Ant.Gain (dBd)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
60.5550	-77.11	0.77	-2.15	-80.03	-13.00	-67.03	V
128.9400	-81.18	1.13	-2.15	-84.46	-13.00	-71.46	V
296.7500	-85.22	1.72	-2.15	-89.09	-13.00	-76.09	V
516.9400	-81.63	2.29	-2.15	-86.07	-13.00	-73.07	V
656.6200	-78.33	2.58	-2.15	-83.06	-13.00	-70.06	V
868.0800	-77.1	3	-2.15	-82.25	-13.00	-69.25	V

*Note: We selected worst case to performed test, The results can be meet other mode.*

**Operation Mode:** Tx / Mid CH      **Test Date:** December 20, 2018  
**Temperature:** 23°C      **Tested by:** Jerry Chuang  
**Humidity:** 46 %RH      **Polarity:** Hor.

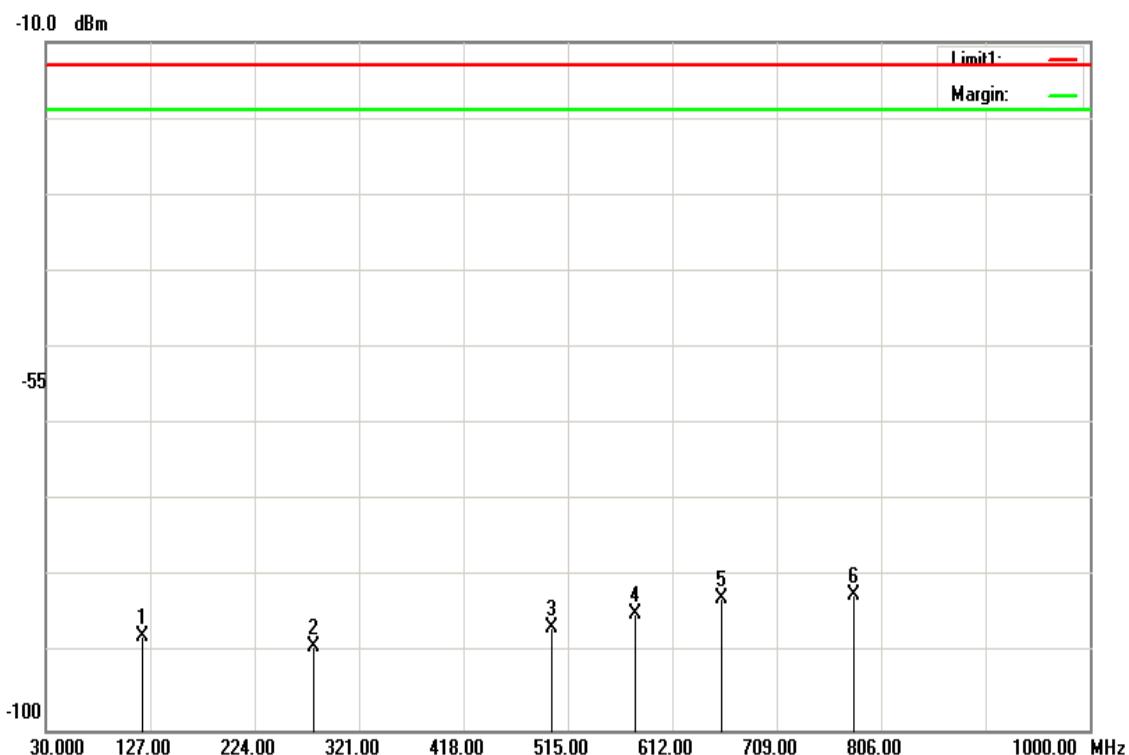

Frequency (MHz)	S.G. (dBm)	Cable loss(dB)	Ant.Gain (dBD)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
120.6950	-84.47	1.09	-2.15	-87.71	-13.00	-74.71	H
279.7750	-85.25	1.66	-2.15	-89.06	-13.00	-76.06	H
500.9350	-82.2	2.25	-2.15	-86.60	-13.00	-73.60	H
577.0800	-80.19	2.42	-2.15	-84.76	-13.00	-71.76	H
658.0750	-78.11	2.59	-2.15	-82.85	-13.00	-69.85	H
780.7800	-77.24	2.84	-2.15	-82.23	-13.00	-69.23	H

*Note: We selected worst case to performed test, The results can be meet other mode.*

**LTE Band 26 / BW: 15MHz / 16QAM / RB =1, RB Offset = 0**

**Operation Mode:** Tx / Mid CH      **Test Date:** December 20, 2018  
**Temperature:** 23°C      **Tested by:** Jerry Chuang  
**Humidity:** 46 %RH      **Polarity:** Ver.




Frequency (MHz)	S.G. (dBm)	Cable loss(dB)	Ant.Gain (dBd)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
129.4250	-81.08	1.13	-2.15	-84.36	-13.00	-71.36	V
305.9650	-85.63	1.75	-2.15	-89.53	-13.00	-76.53	V
351.5550	-85.24	1.87	-2.15	-89.26	-13.00	-76.26	V
552.3450	-81.33	2.37	-2.15	-85.85	-13.00	-72.85	V
655.1650	-78.11	2.58	-2.15	-82.84	-13.00	-69.84	V
981.0850	-76.88	3.2	-2.15	-82.23	-13.00	-69.23	V

*Note: We selected worst case to performed test, The results can be meet other mode.*

Report No.: T180821D09-RP7

**Operation Mode:** Tx / Mid CH      **Test Date:** December 20, 2018  
**Temperature:** 23°C      **Tested by:** Jerry Chuang  
**Humidity:** 46 %RH      **Polarity:** Hor.

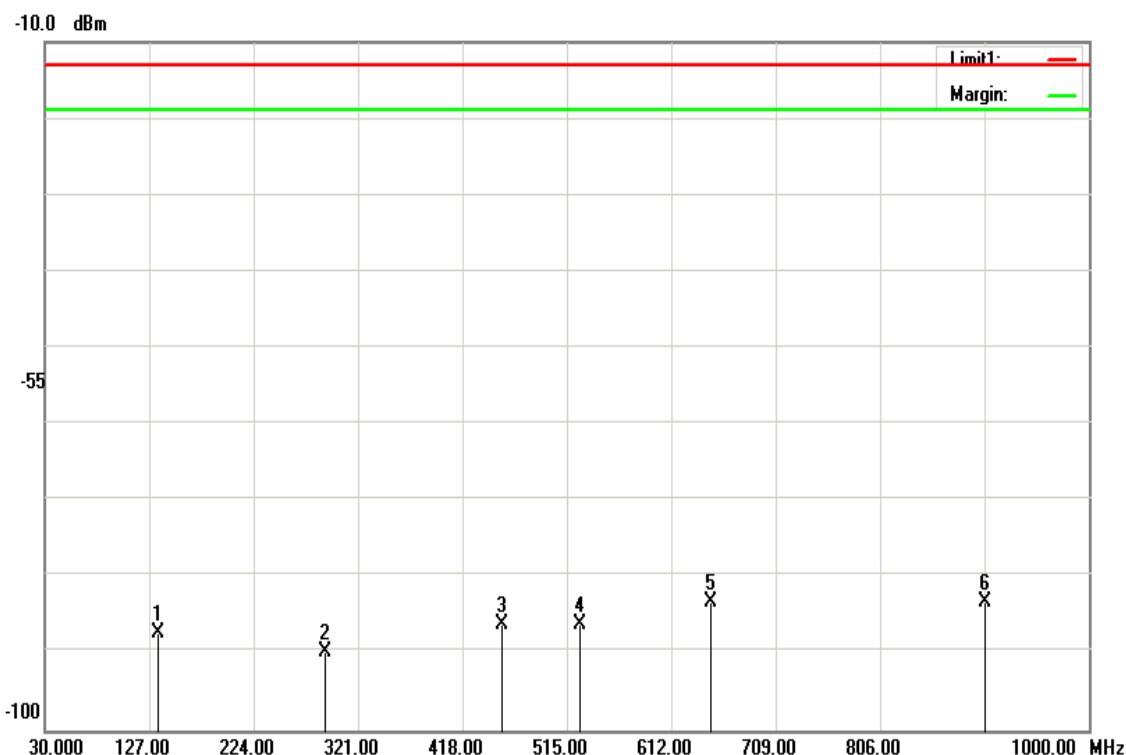


Frequency (MHz)	S.G. (dBm)	Cable loss(dB)	Ant.Gain (dBD)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
136.2150	-83.95	1.15	-2.15	-87.25	-13.00	-74.25	V
289.9600	-85.87	1.69	-2.15	-89.71	-13.00	-76.71	V
455.3450	-81.88	2.14	-2.15	-86.17	-13.00	-73.17	V
527.6100	-81.68	2.31	-2.15	-86.14	-13.00	-73.14	V
649.3450	-78.47	2.57	-2.15	-83.19	-13.00	-70.19	V
903.0000	-78.09	3.06	-2.15	-83.30	-13.00	-70.30	V

*Note: We selected worst case to performed test, The results can be meet other mode.*

Report No.: T180821D09-RP7

**Above 1GHz****LTE Band 26 / BW: 15MHz / QPSK RB =1, RB Offset = 0**

<b>Operation Mode:</b>	Tx / Low CH	<b>Test Date:</b>	December 20, 2018
<b>Temperature:</b>	23°C	<b>Tested by:</b>	Jerry Chuang
<b>Humidity:</b>	46 %RH	<b>Polarity:</b>	Ver.

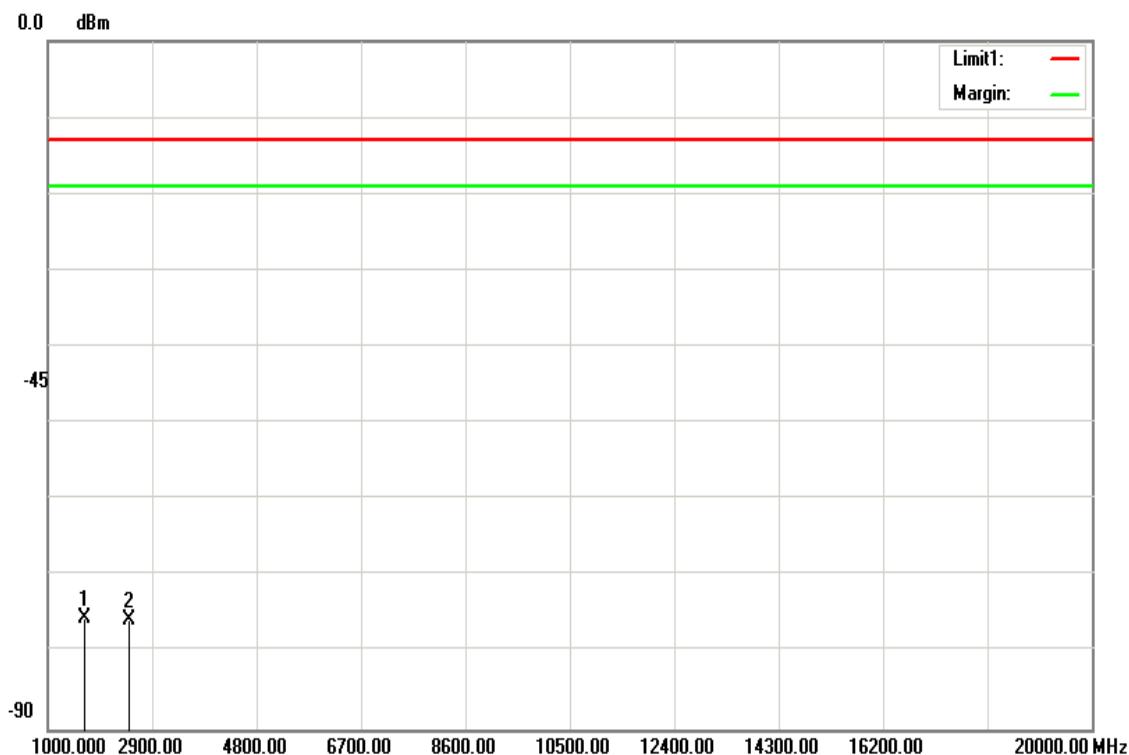


Frequency (MHz)	S.G. (dBm)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
1663.000	-71.32	4.22	-75.54	-13.00	-62.54	V
2494.500	-70.5	5.32	-75.82	-13.00	-62.82	V
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

**Operation Mode:** Tx / Low CH      **Test Date:** December 20, 2018  
**Temperature:** 23°C      **Tested by:** Jerry Chuang  
**Humidity:** 46 %RH      **Polarity:** Hor.

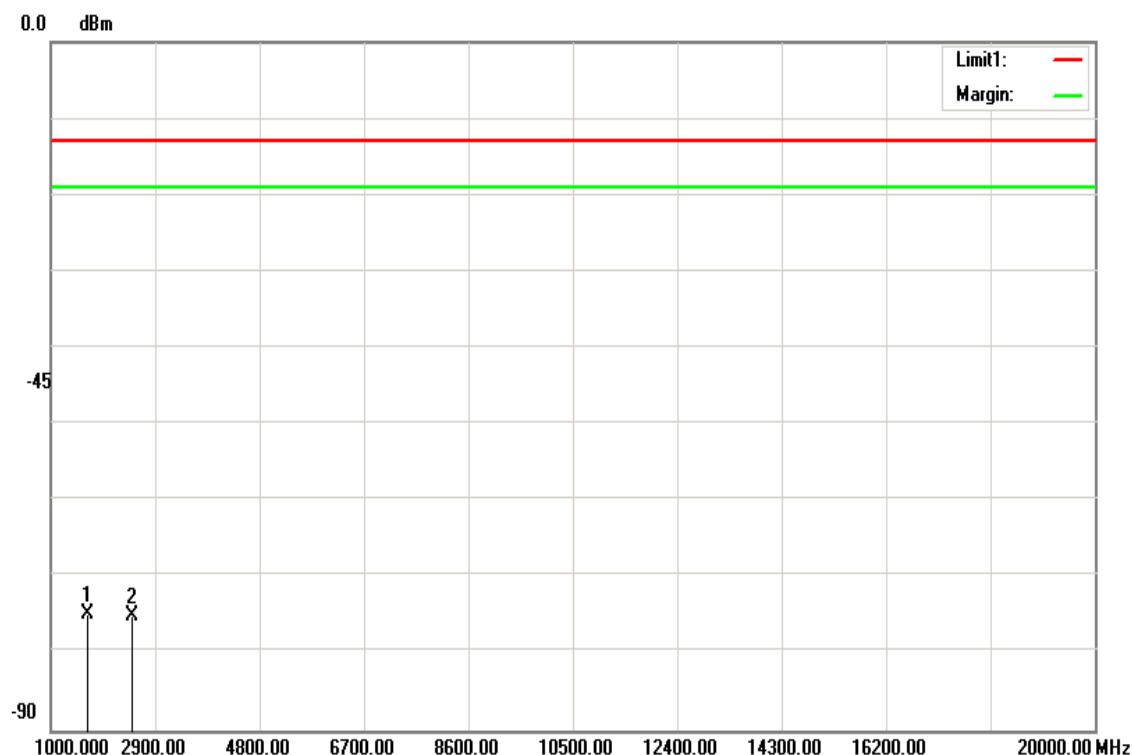


Frequency (MHz)	S.G. (dBm)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
1663.000	-70.54	4.22	-74.76	-13.00	-61.76	H
2494.500	-69.7	5.32	-75.02	-13.00	-62.02	H
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

**Operation Mode:** Tx / Mid CH      **Test Date:** December 20, 2018  
**Temperature:** 23°C      **Tested by:** Jerry Chuang  
**Humidity:** 46 %RH      **Polarity:** Ver.

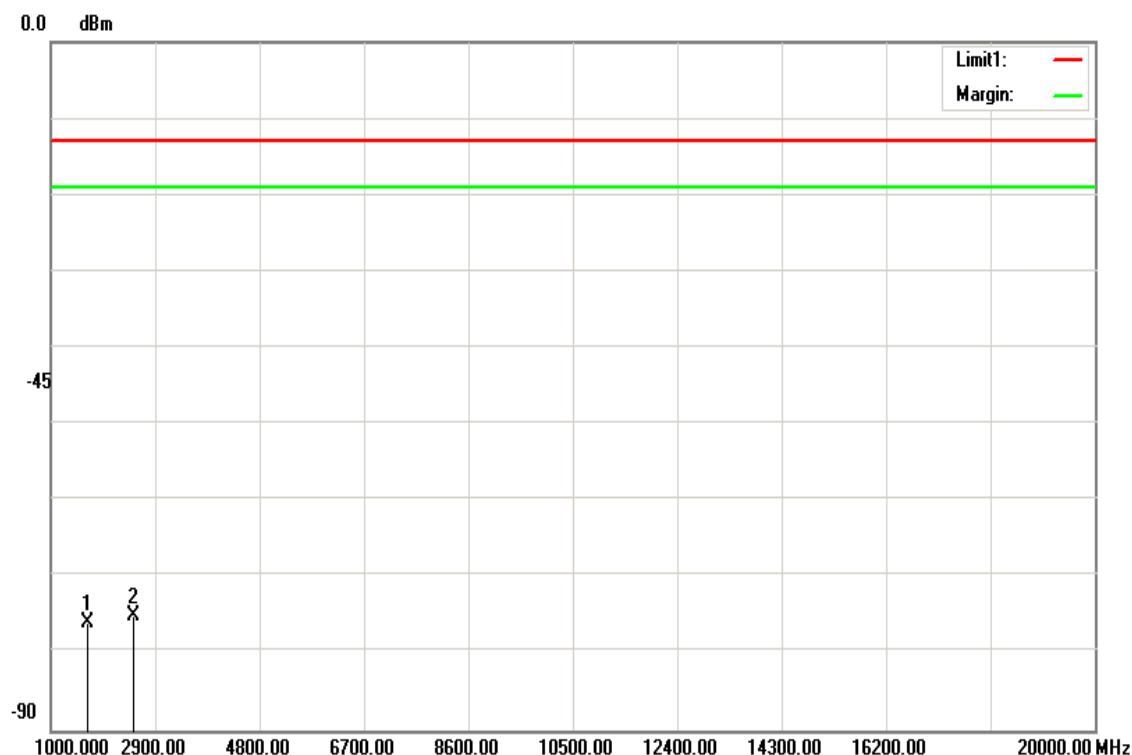


Frequency (MHz)	S.G. (dBm)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
1673.000	-71.78	4.23	-76.01	-13.00	-63.01	V
2509.500	-69.67	5.34	-75.01	-13.00	-62.01	V
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

**Operation Mode:** Tx / Mid CH      **Test Date:** December 20, 2018  
**Temperature:** 23°C      **Tested by:** Jerry Chuang  
**Humidity:** 46 %RH      **Polarity:** Hor.

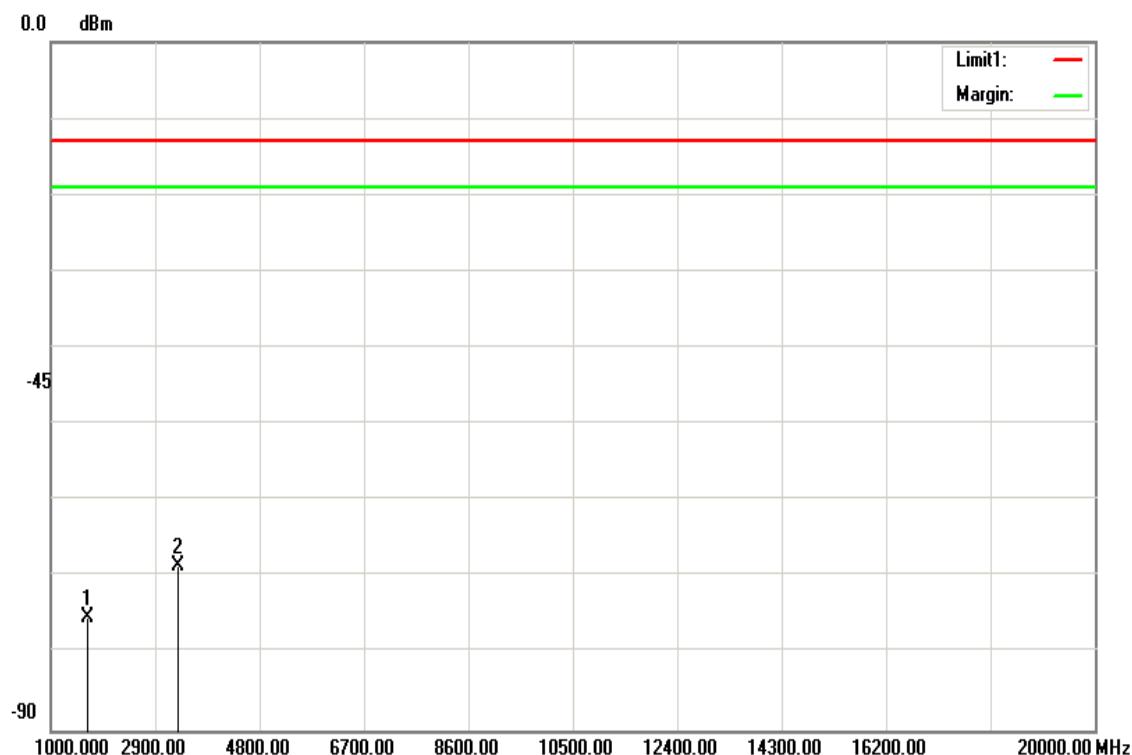


Frequency (MHz)	S.G. (dBm)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
1673.000	-70.99	4.23	-75.22	-13.00	-62.22	H
3320.500	-62.36	6.24	-68.60	-13.00	-55.60	H
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

**Operation Mode:** Tx / High CH      **Test Date:** December 20, 2018  
**Temperature:** 23°C      **Tested by:** Jerry Chuang  
**Humidity:** 46 %RH      **Polarity:** Ver.

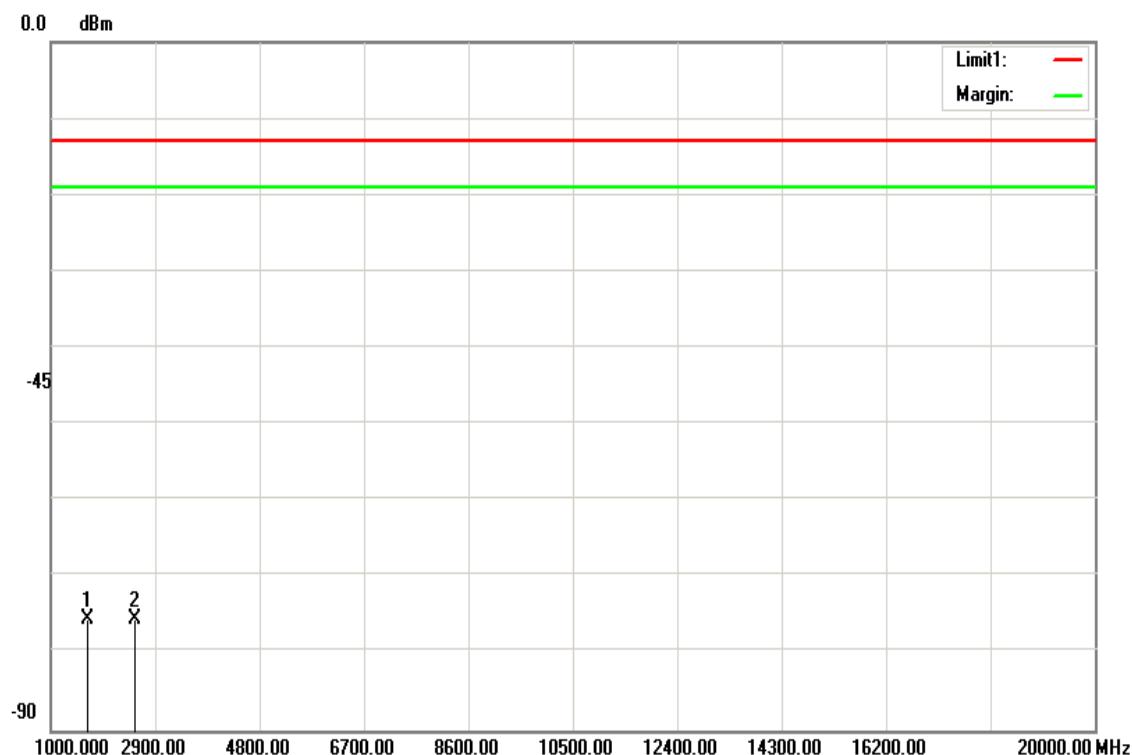


Frequency (MHz)	S.G. (dBm)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
1683.000	-71.23	4.25	-75.48	-13.00	-62.48	V
2524.500	-70.16	5.36	-75.52	-13.00	-62.52	V
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

**Operation Mode:** Tx / High CH      **Test Date:** December 20, 2018  
**Temperature:** 23°C      **Tested by:** Jerry Chuang  
**Humidity:** 46 %RH      **Polarity:** Hor.

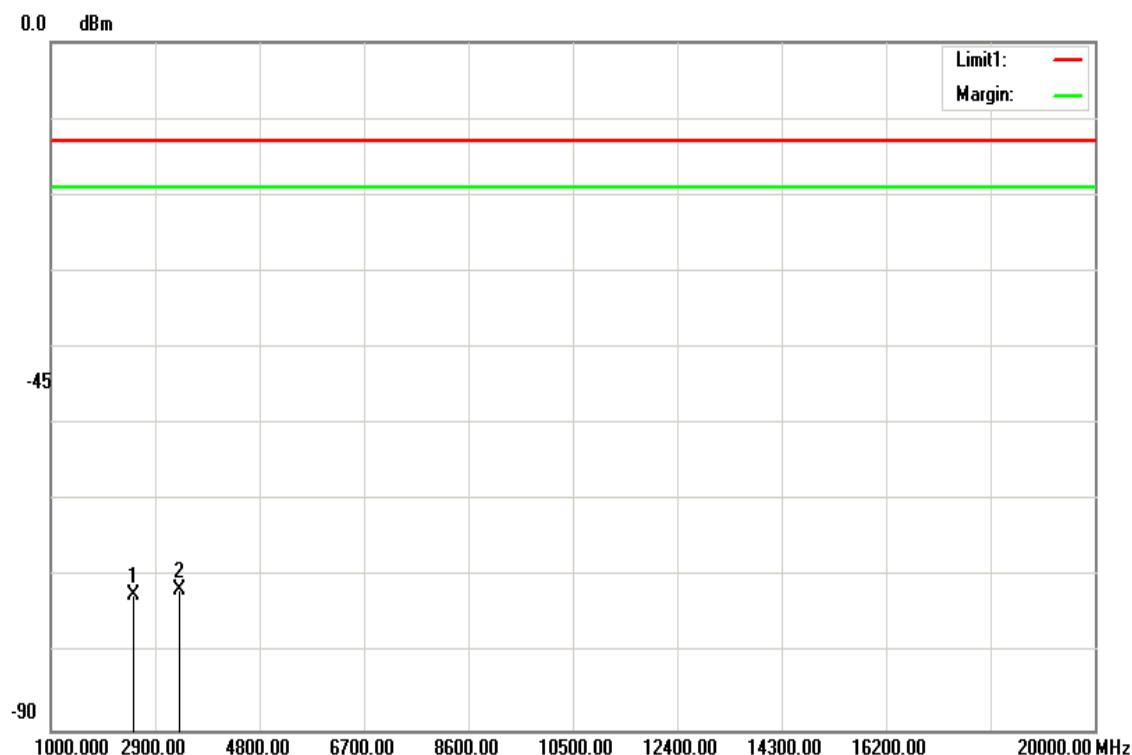


Frequency (MHz)	S.G. (dBm)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
2505.000	-67	5.34	-72.34	-13.00	-59.34	H
3338.000	-65.36	6.26	-71.62	-13.00	-58.62	H
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

**LTE Band 26 / BW: 15MHz / 16QAM / RB =1, RB Offset = 0**

**Operation Mode:** Tx / Low CH      **Test Date:** December 20, 2018  
**Temperature:** 23°C      **Tested by:** Jerry Chuang  
**Humidity:** 46 %RH      **Polarity:** Ver.

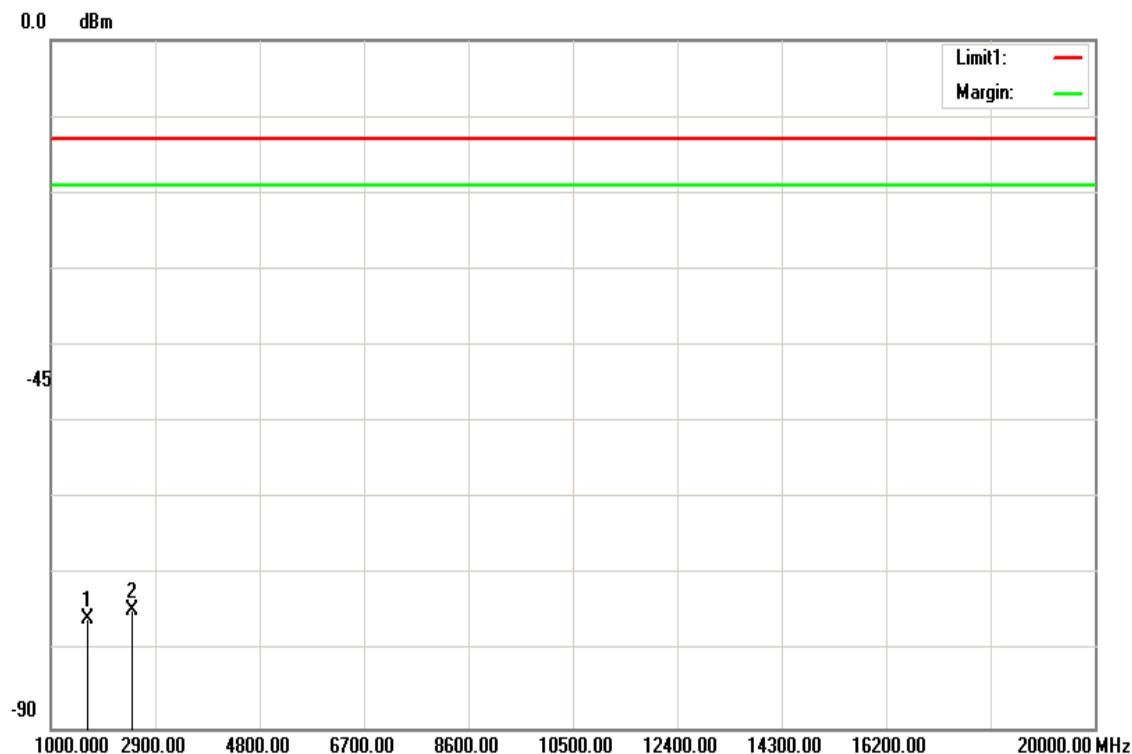


Frequency (MHz)	S.G. (dBm)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
1663.000	-71.39	4.22	-75.61	-13.00	-62.61	V
2494.400	-69.37	5.32	-74.69	-13.00	-61.69	V
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

**Operation Mode:** Tx / Low CH      **Test Date:** December 20, 2018  
**Temperature:** 23°C      **Tested by:** Jerry Chuang  
**Humidity:** 46 %RH      **Polarity:** Hor.

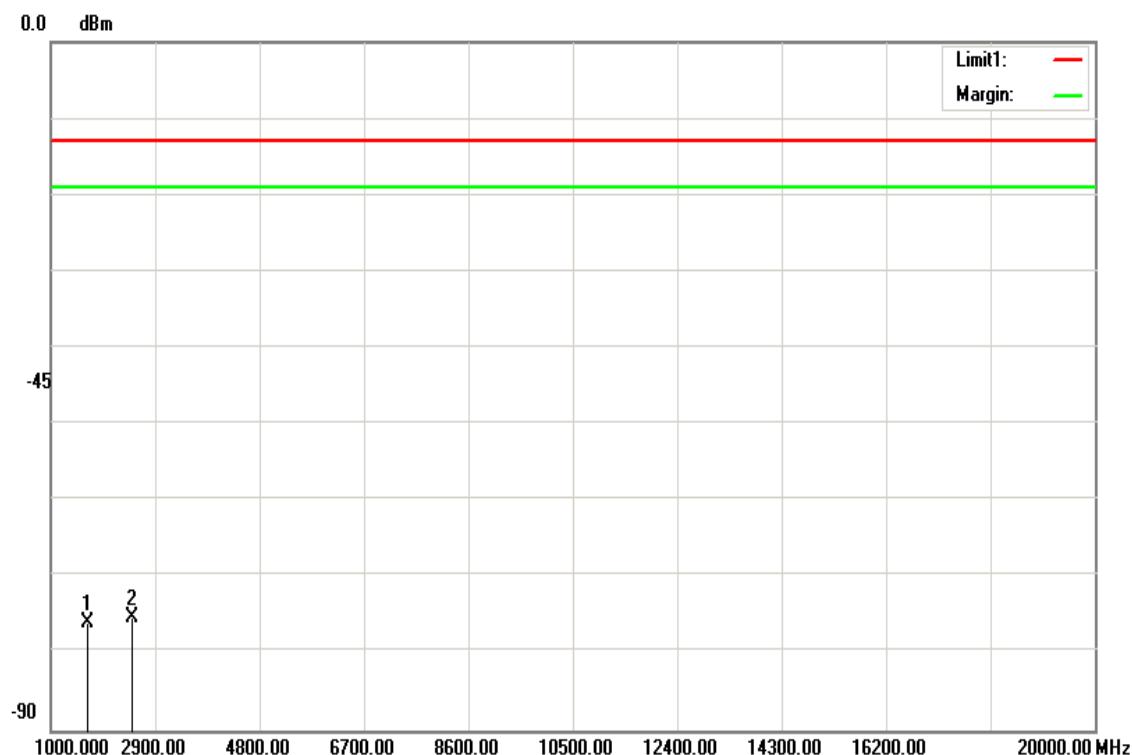


Frequency (MHz)	S.G. (dBm)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
1663.000	-71.68	4.22	-75.90	-13.00	-62.90	H
2494.400	-69.89	5.32	-75.21	-13.00	-62.21	H
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

**Operation Mode:** Tx / Mid CH      **Test Date:** December 20, 2018  
**Temperature:** 23°C      **Tested by:** Jerry Chuang  
**Humidity:** 46 %RH      **Polarity:** Ver.

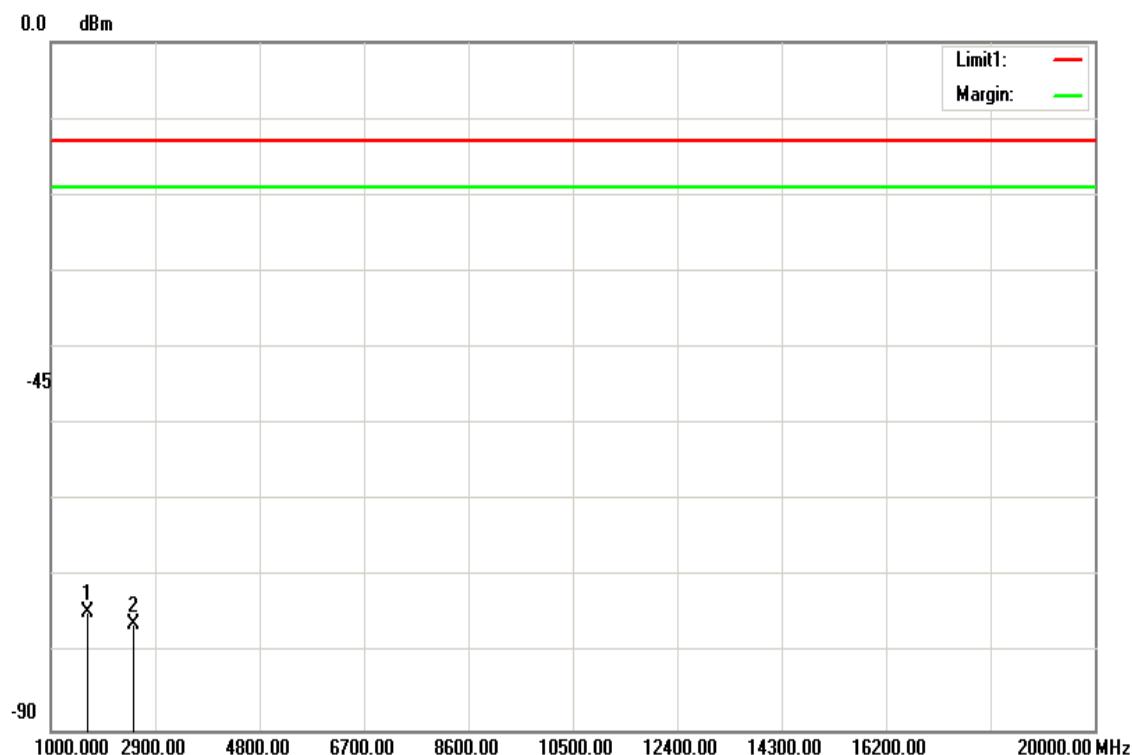


Frequency (MHz)	S.G. (dBm)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
1673.000	-70.37	4.23	-74.60	-13.00	-61.60	V
2509.500	-70.74	5.34	-76.08	-13.00	-63.08	V
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

**Operation Mode:** Tx / Mid CH      **Test Date:** December 20, 2018  
**Temperature:** 23°C      **Tested by:** Jerry Chuang  
**Humidity:** 46 %RH      **Polarity:** Hor.

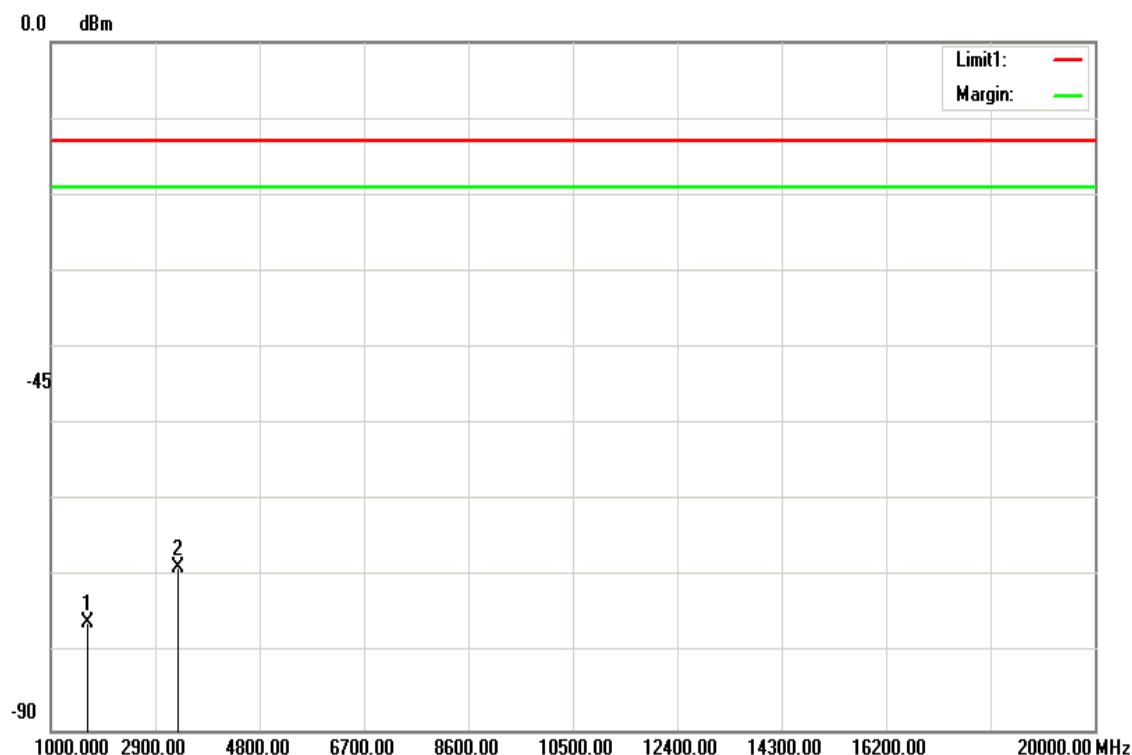


Frequency (MHz)	S.G. (dBm)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
1673.000	-71.82	4.23	-76.05	-13.00	-63.05	H
3320.500	-62.42	6.24	-68.66	-13.00	-55.66	H
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

**Operation Mode:** Tx / High CH      **Test Date:** December 20, 2018  
**Temperature:** 23°C      **Tested by:** Jerry Chuang  
**Humidity:** 46 %RH      **Polarity:** Ver.

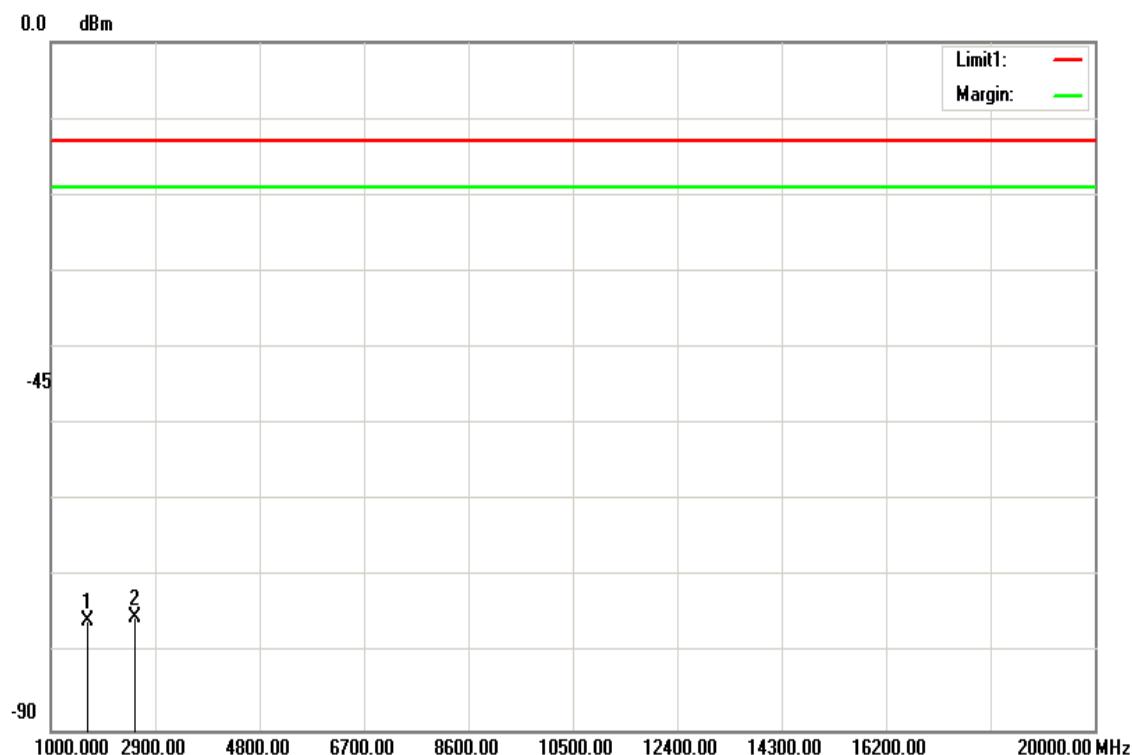


Frequency (MHz)	S.G. (dBm)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
1683.000	-71.41	4.25	-75.66	-13.00	-62.66	V
2524.500	-69.86	5.36	-75.22	-13.00	-62.22	V
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

**Operation Mode:** Tx / High CH      **Test Date:** December 20, 2018  
**Temperature:** 23°C      **Tested by:** Jerry Chuang  
**Humidity:** 46 %RH      **Polarity:** Hor.

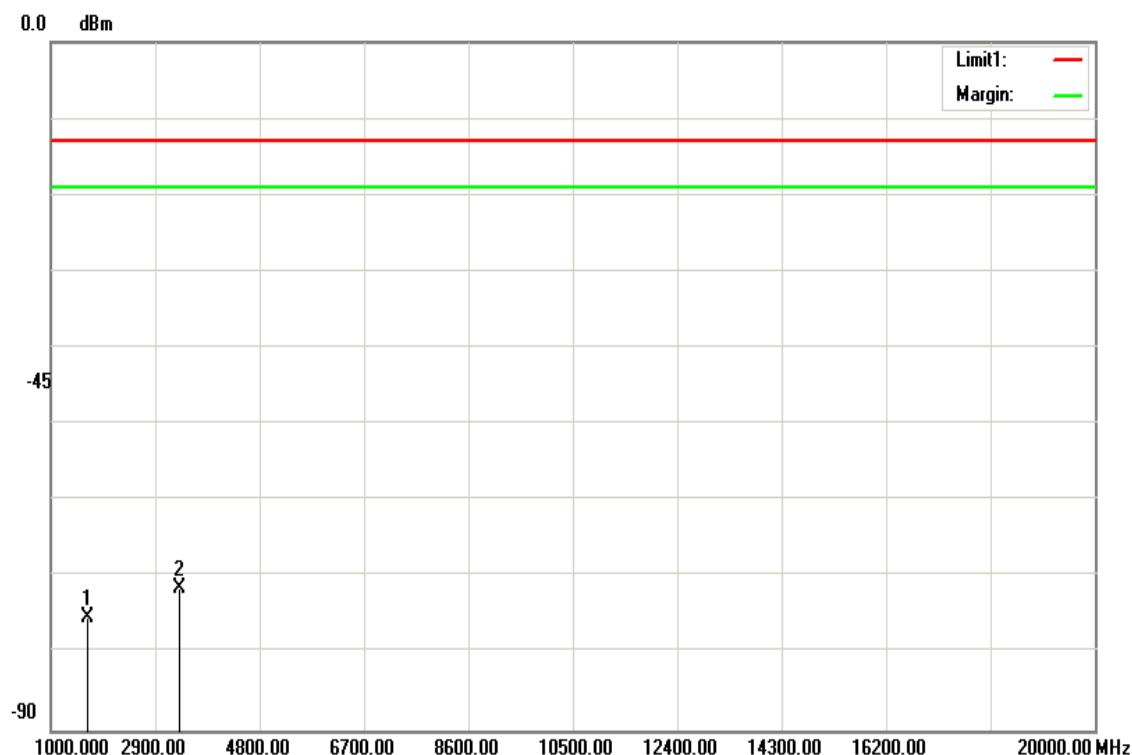

Frequency (MHz)	S.G. (dBm)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
1683.000	-71.1	4.25	-75.35	-13.00	-62.35	H
3338.000	-65.11	6.26	-71.37	-13.00	-58.37	H
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

- End of Test Report -